


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	51%
Test Engineer	YC Chen	Configurations	2.4GHz + 5GHz band 1 + 5GHz band 4

Horizontal

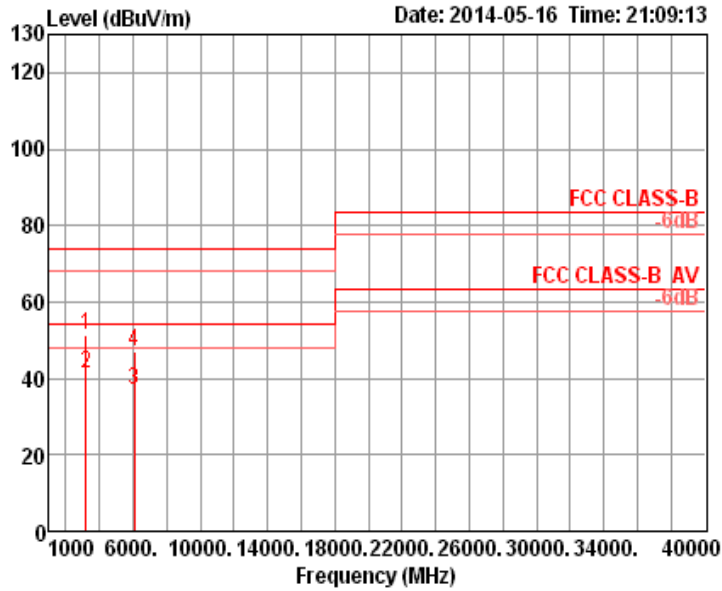

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	3199.98	51.56	74.00	-22.44	53.16	2.64	30.92	35.16	Peak	100	51	HORIZONTAL
2	3200.06	41.31	54.00	-12.69	42.91	2.64	30.92	35.16	Average	100	51	HORIZONTAL
3	6067.72	36.70	54.00	-17.30	33.14	3.70	34.83	34.97	Average	100	95	HORIZONTAL
4	6068.00	47.04	74.00	-26.96	43.48	3.70	34.83	34.97	Peak	100	95	HORIZONTAL

Vertical

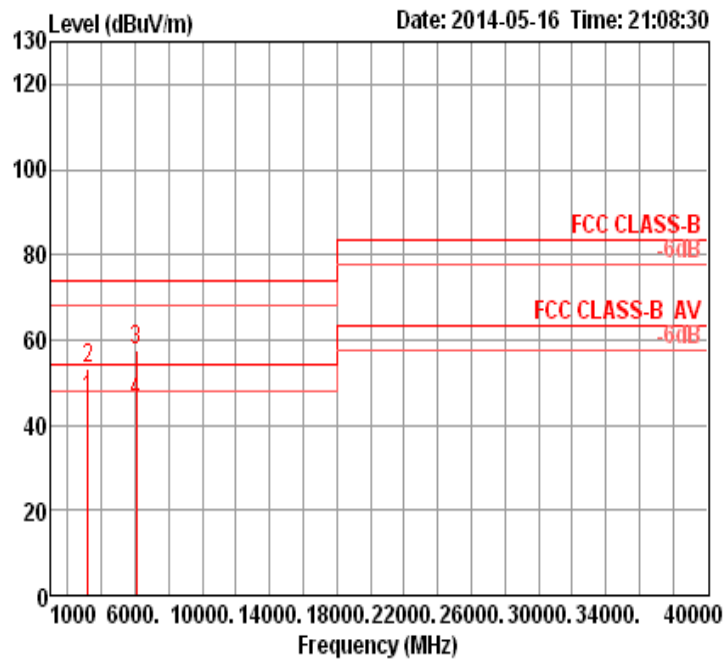

	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos					
Freq	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase				
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB		cm	deg			
1	3199.95	46.03	54.00	-7.97	47.63	2.64	30.92	35.16	Average	100	143	VERTICAL
2	3200.26	53.01	74.00	-20.99	54.61	2.64	30.92	35.16	Peak	100	143	VERTICAL
3	6067.44	57.42	74.00	-16.58	53.86	3.70	34.83	34.97	Peak	100	171	VERTICAL
4	6067.72	45.75	54.00	-8.25	42.19	3.70	34.83	34.97	Average	100	171	VERTICAL