

# FCC Test Report

**FCC ID** : PY314300284  
**Equipment** : 5G Wireless Card  
**Model No.** : N600  
**Brand Name** : NETGEAR  
**Applicant** : NETGEAR, Inc.  
**Address** : 350 East Plumeria Drive, San Jose, California  
95134, USA  
**Standard** : 47 CFR FCC Part 15.407  
**Received Date** : May 21, 2014  
**Tested Date** : May 21 ~ Jul. 18, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	The Equipment List .....	8
1.5	Testing Applied Standards .....	9
1.6	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>10</b>
2.1	Testing Condition .....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>11</b>
3.1	Conducted Emissions.....	11
3.2	Emission Bandwidth .....	14
3.3	RF Output Power .....	16
3.4	Peak Power Spectral Density .....	18
3.5	Transmitter Radiated and Band Edge Emissions .....	20
3.6	Frequency Stability.....	43
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>45</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR462302AN	Rev. 01	Initial issue	Aug. 21, 2014

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.184MHz 47.43 (Margin -6.85dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 15600.00MHz 53.90 (Margin -0.10dB) – AV [dBuV/m at 3m]: 5149.95MHz 53.90 (Margin -0.10dB) - AV	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: 20.16	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5150-5250	a	5180-5240	36-48 [4]	2	6-54 Mbps
5150-5250	n (HT20)	5180-5240	36-48 [4]	2	MCS 0-15
5150-5250	n (HT40)	5190-5230	38-46 [2]	2	MCS 0-15
5150-5250	ac (VHT20)	5180-5240	36-48 [4]	2	MCS 0-8
5150-5250	ac (VHT40)	5190-5230	38-46 [2]	2	MCS 0-9
5150-5250	ac (VHT80)	5210	42 [1]	2	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.  
 Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Antenna Gain (dBi)	
				5150~5250 MHz	5725~5850 MHz
1	90VEAA15 G05	dipole	I-PEX	3.10	4.22
2	90VEAA15 G06	dipole	I-PEX	4.15	4.23

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	3.3Vdc from host
--------------------------	------------------

### 1.1.4 Accessories

N/A

### 1.1.5 Channel List

For Frequency band 5150-5250 MHz			
802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	<b>VHT80</b>	
48	5240	42	5210

### 1.1.6 Test Tool and Duty Cycle

Test Tool	MT7662E, Version 1.0.3.2		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11a	88.16%	0.55
	VHT20	88.00%	0.56
	VHT40	84.33%	0.74
	VHT80	62.33%	2.05


### 1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11a	5180	12/16
11a	5200	12/16
11a	5240	12/16
HT20	5180	12/16
HT20	5200	12/16
HT20	5240	12/16
HT40	5190	12/15
HT40	5230	11/15
VHT20	5180	12/16
VHT20	5200	12/16
VHT20	5240	12/16
VHT40	5190	12/15
VHT40	5230	11/15
VHT80	5210	0E/11

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	E6430	DoC	---

## 1.3 Test Setup Chart

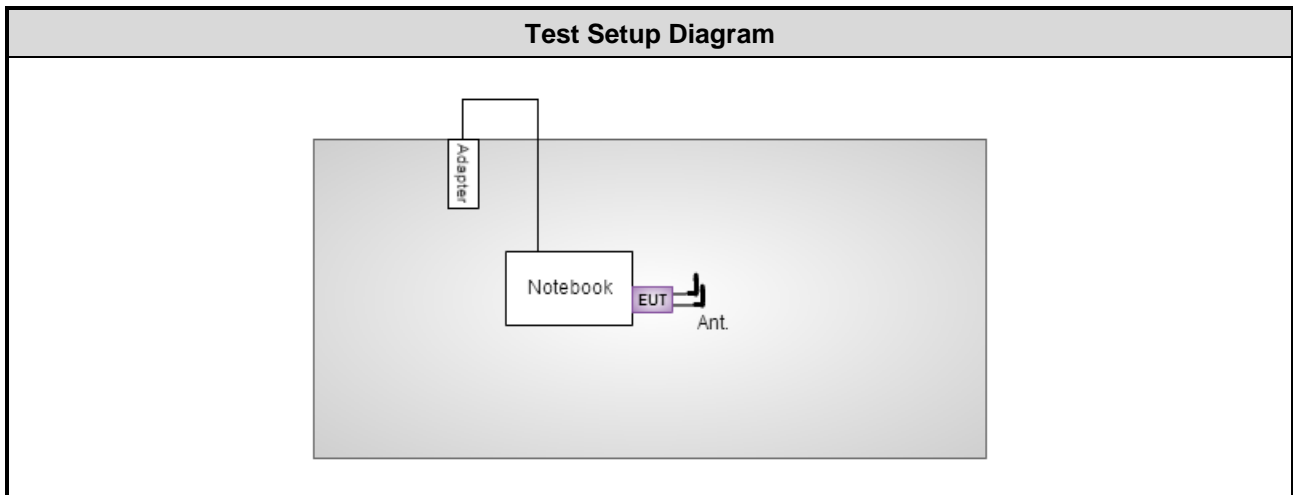

## 1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 23, 2014	Apr. 22, 2015
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Feb. 08, 2014	Feb. 07, 2015
Spectrum Analyzer	Agilent	N9030A	MY52350930	Oct. 19, 2013	Oct. 18, 2014
Receiver	R&S	ESR3	101657	Jan. 18, 2014	Jan. 17, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Jan. 08, 2014	Jan. 07, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Jan. 07, 2014	Jan. 06, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Preamplifier	Burgeon	BPA-530	100218	Dec. 09, 2013	Dec. 08, 2014
Preamplifier	Agilent	83017A	MY39501309	Dec. 09, 2013	Dec. 08, 2014
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 17, 2013	Dec. 16, 2014
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 17, 2013	Dec. 16, 2014
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 17, 2013	Dec. 16, 2014
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Note: Calibration Interval of instruments listed above is two year.					



<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 11, 2013	Dec. 10, 2014
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2009

FCC KDB 412172

FCC 789033 D02 General UNII Test Procedures New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Frequency error	±34.134 Hz
Temperature	±0.6 °C
Conducted emission	±2.670 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.26 dB
Radiated emission > 1GHz	±4.94 dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 63%	Skys Huang
Radiated Emissions	03CH02-WS	20-25°C / 65-68%	Anderson Hong Aska Huang
RF Conducted	TH01-WS	22°C / 64%	Brad Wu

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT40	5230	MCS 0	---
Radiated Emissions ≤1GHz	VHT40	5230	MCS 0	---
RF Output Power	11a	5180 / 5200 / 5240	6 Mbps	---
	HT20	5180 / 5200 / 5240	MCS 0	---
	HT40	5190 / 5230	MCS 0	---
	VHT20	5180 / 5200 / 5240	MCS 0	---
	VHT40	5190 / 5230	MCS 0	---
	VHT80	5210	MCS 0	---
Radiated Emissions >1GHz Emission Bandwidth Peak Power Spectral Density	11a	5180 / 5200 / 5240	6 Mbps	---
	VHT20	5180 / 5200 / 5240	MCS 0	---
	VHT40	5190 / 5230	MCS 0	---
	VHT80	5210	MCS 0	---
Frequency Stability	Un-modulation	5200	---	---

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


#### 3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions


Modulation	VHT40	Test Freq. (MHz)	5230
Power Phase	Line		

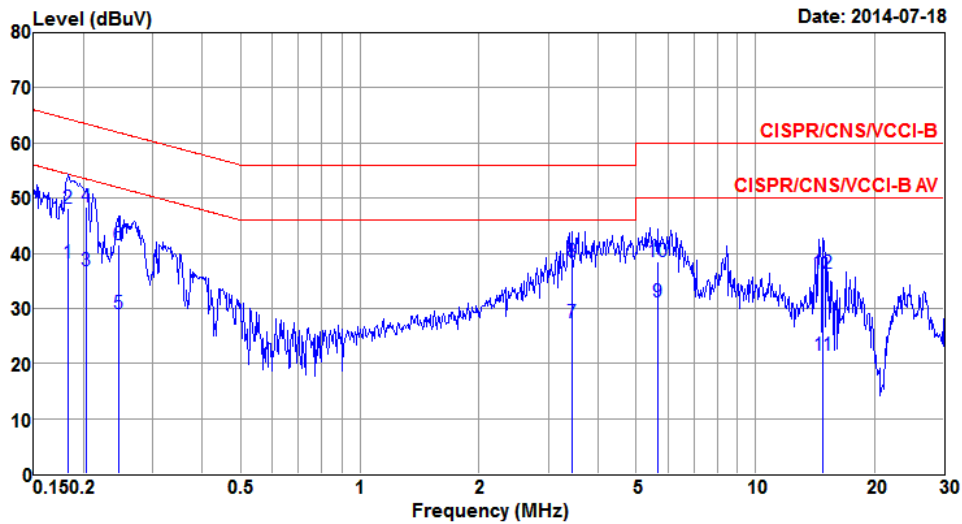

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.182	38.33	54.37	-16.04	37.93	0.39	0.01	Average
2	0.182	48.19	64.37	-16.18	47.79	0.39	0.01	QP
3	0.204	36.75	53.45	-16.70	36.35	0.39	0.01	Average
4*	0.204	48.27	63.45	-15.18	47.87	0.39	0.01	QP
5	0.246	28.98	51.91	-22.93	28.58	0.39	0.01	Average
6	0.246	41.55	61.91	-20.36	41.15	0.39	0.01	QP
7	3.436	27.37	46.00	-18.63	26.80	0.45	0.12	Average
8	3.436	38.38	56.00	-17.62	37.81	0.45	0.12	QP
9	5.653	31.14	50.00	-18.86	30.46	0.49	0.19	Average
10	5.653	38.42	60.00	-21.58	37.74	0.49	0.19	QP
11	14.828	21.48	50.00	-28.52	20.62	0.55	0.31	Average
12	14.828	36.26	60.00	-23.74	35.40	0.55	0.31	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Power Phase</b>	Neutral		

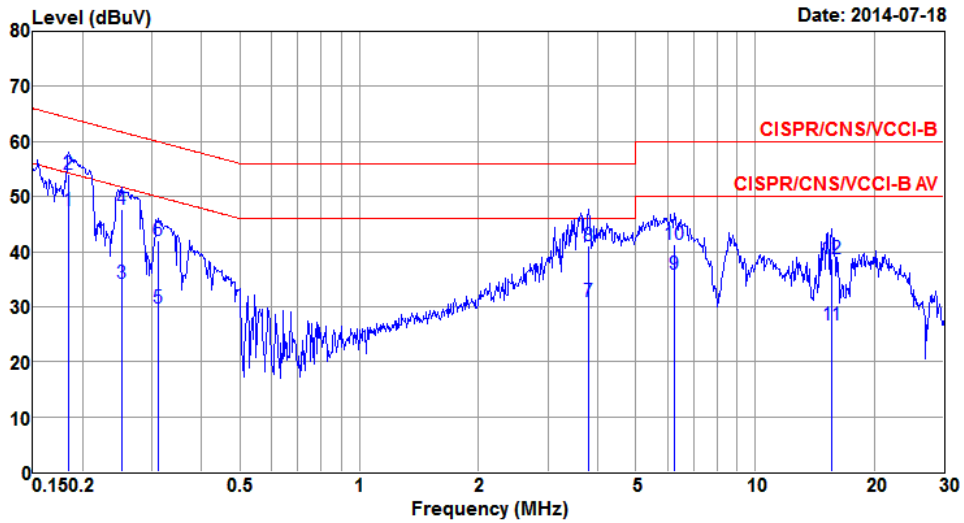

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1*	0.184	47.43	54.28	-6.85	46.94	0.48	0.01	Average
2	0.184	54.12	64.28	-10.16	53.63	0.48	0.01	QP
3	0.251	34.12	51.73	-17.61	33.63	0.48	0.01	Average
4	0.251	47.77	61.73	-13.96	47.28	0.48	0.01	QP
5	0.312	29.86	49.93	-20.07	29.37	0.47	0.02	Average
6	0.312	42.06	59.93	-17.87	41.57	0.47	0.02	QP
7	3.799	30.88	46.00	-15.12	30.22	0.52	0.14	Average
8	3.799	41.03	56.00	-14.97	40.37	0.52	0.14	QP
9	6.252	35.96	50.00	-14.04	35.22	0.54	0.20	Average
10	6.252	41.30	60.00	-18.70	40.56	0.54	0.20	QP
11	15.635	26.77	50.00	-23.23	25.89	0.56	0.32	Average
12	15.635	38.77	60.00	-21.23	37.89	0.56	0.32	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 Emission Bandwidth

### 3.2.1 Test Procedures


#### 26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

#### Occupied Bandwidth


1. Set RBW = 1 % to 5 % of the OBW
2. Set VBW  $\geq$  3 RBW
3. Sample detection and single sweep mode shall be used
4. Use the 99 % power bandwidth function of the instrument

### 3.2.2 Test Setup



### 3.2.3 Test Result of Emission Bandwidth

Emission Bandwidth										
Mode	N <sub>TX</sub>	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
11a	2	5180	26.84	26.32	---	---	17.02	17.02	---	---
11a	2	5200	27.42	23.88	---	---	17.95	17.89	---	---
11a	2	5240	28.99	30.09	---	---	17.19	18.06	---	---
VHT20	2	5180	26.38	26.43	---	---	17.95	17.95	---	---
VHT20	2	5200	25.39	23.88	---	---	17.89	17.83	---	---
VHT20	2	5240	27.19	27.77	---	---	17.95	17.95	---	---
VHT40	2	5190	42.44	41.51	---	---	36.47	36.58	---	---
VHT40	2	5230	80.22	72.65	---	---	37.64	37.51	---	---
VHT80	2	5210	81.16	81.39	---	---	75.02	75.02	---	---

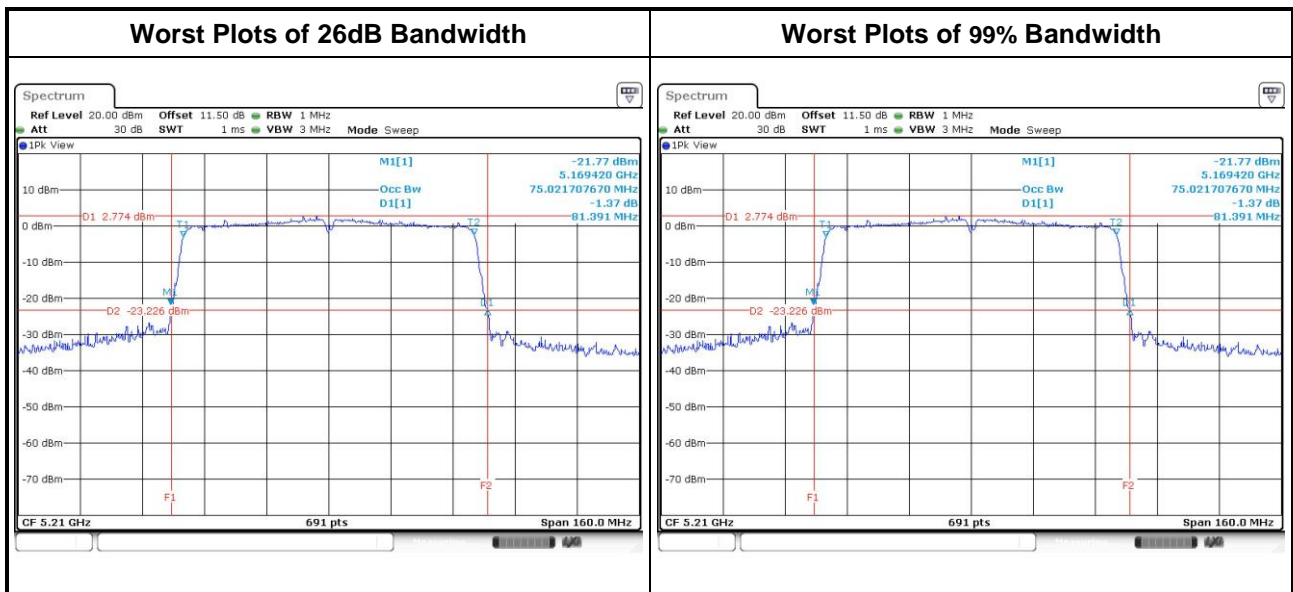

### 3.3 RF Output Power


#### 3.3.1 Limit of RF Output Power

Operating Mode		Limit
<input type="checkbox"/>	Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
<input checked="" type="checkbox"/>	Indoor access point	Conducted Power: 1 W
<input type="checkbox"/>	Fixed point-to-point access points	Conducted Power: 1 W
<input type="checkbox"/>	Mobile and portable client devices	Conducted Power: 250 mW

#### 3.3.2 Test Procedures

- Method PM-G ( Measurement using a gated RF average power meter )**
  - Measurements may is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

#### 3.3.3 Test Setup





### 3.3.4 Test Result of Maximum Conducted Output Power

Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5180	15.68	16.02	---	---	76.977	18.86	30.00
11a	2	5200	15.72	16.15	---	---	78.535	18.95	30.00
11a	2	5240	16.15	16.70	---	---	87.983	19.44	30.00
HT20	2	5180	15.02	15.38	---	---	66.283	18.21	30.00
HT20	2	5200	14.95	15.43	---	---	66.175	18.21	30.00
HT20	2	5240	15.68	16.28	---	---	79.445	19.00	30.00
HT40	2	5190	12.66	12.31	---	---	35.472	15.50	30.00
HT40	2	5230	17.14	17.01	---	---	101.995	20.09	30.00
VHT20	2	5180	15.06	15.42	---	---	66.896	18.25	30.00
VHT20	2	5200	15.01	15.51	---	---	67.259	18.28	30.00
VHT20	2	5240	15.74	16.32	---	---	80.352	19.05	30.00
VHT40	2	5190	12.73	12.42	---	---	36.208	15.59	30.00
VHT40	2	5230	17.22	17.08	---	---	103.773	<b>20.16</b>	30.00
VHT80	2	5210	10.61	10.83	---	---	23.614	13.73	30.00

## 3.4 Peak Power Spectral Density


### 3.4.1 Limit of Peak Power Spectral Density

Operating Mode		Limit
<input type="checkbox"/>	Outdoor access point	17 dBm / MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm / MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm / MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm / MHz

### 3.4.2 Test Procedures

- Method SA-1
  1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
  2. Trace average 100 traces.
  3. Use the peak marker function to determine the maximum amplitude level.
- Method SA-2 Alternative
  1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
  2. Set sweep time  $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$ .
  3. Perform a single sweep.
  4. Use the peak marker function to determine the maximum amplitude level.
  5. Add  $10 \log(1/x)$ , where x is the duty cycle.

### 3.4.3 Test Setup




### 3.4.4 Test Result of Peak Power Spectral Density

For Frequency band 5150-5250 MHz						
Condition			Peak Power Spectral Density (dBm)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm)	Duty Factor (dB)	PPSD with D.F (dBm)	PPSD Limit (dBm)
11a	2	5180	5.77	0.55	6.32	16.35
11a	2	5200	5.95	0.55	6.50	16.35
11a	2	5240	6.80	0.55	7.35	16.35
VHT20	2	5180	4.93	0.56	5.49	16.35
VHT20	2	5200	5.03	0.56	5.59	16.35
VHT20	2	5240	5.43	0.56	5.99	16.35
VHT40	2	5190	-1.37	0.74	-0.63	16.35
VHT40	2	5230	3.35	0.74	4.09	16.35
VHT80	2	5210	-6.82	2.05	-4.77	16.35

**Note:**

1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain =  $10 * \log((10^{3.1720} + 10^{4.15/20})^2 / 2) = 6.65 \text{ dBi} > 6 \text{ dBi}$   
Limit shall be reduced to  $17 \text{ dBm} - (6.65 \text{ dBi} - 6 \text{ dBi}) = 16.35 \text{ dBm}$

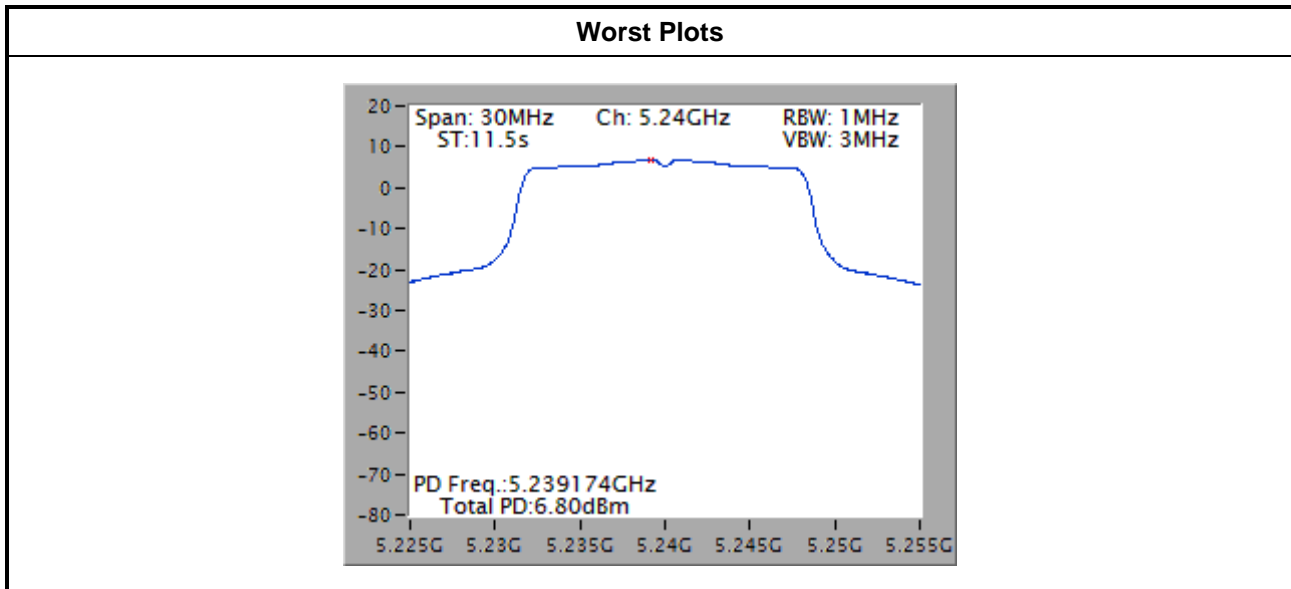

Note: The plot without duty factor

### 3.5 Transmitter Radiated and Band Edge Emissions

#### 3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

**Note 1:** Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup


#### Radiated Emissions below 1 GHz

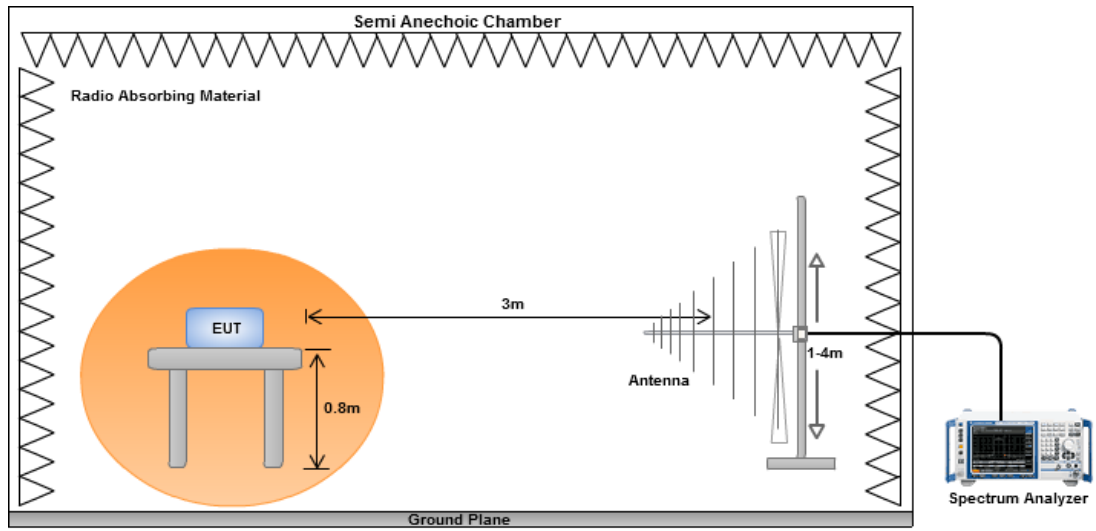


#### Radiated Emissions above 1 GHz

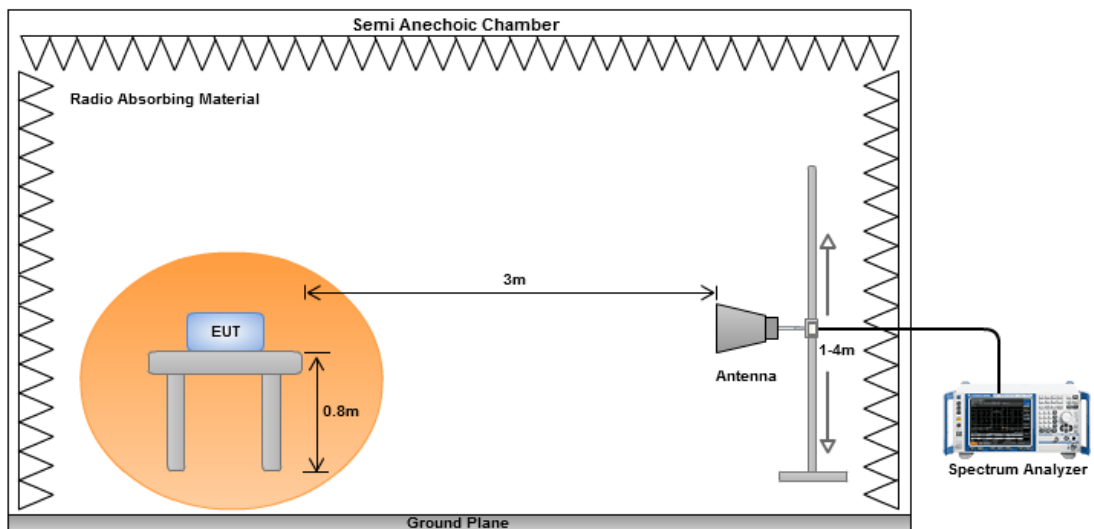

### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

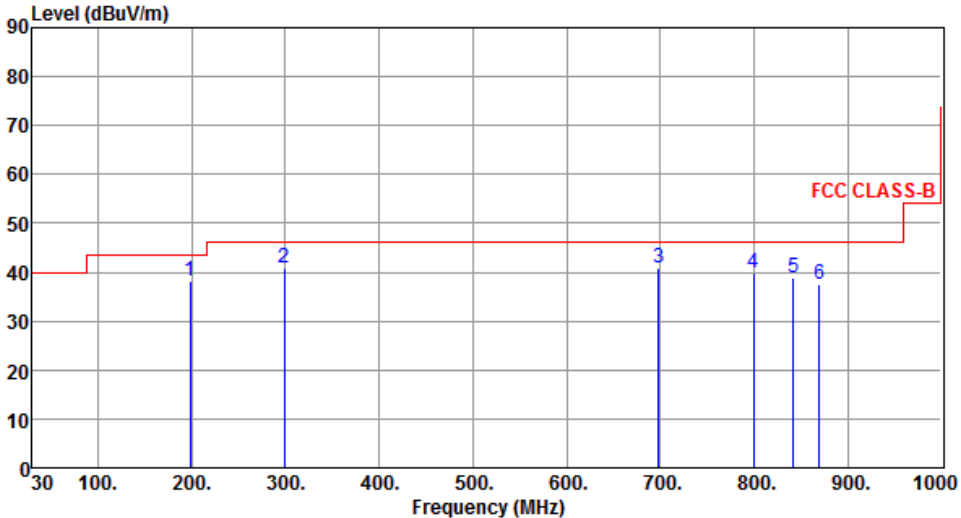Modulation	VHT40	Test Freq. (MHz)	5230																																																																						
Polarization	Horizontal																																																																								
																																																																									
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>38.05</td> <td>43.50</td> <td>-5.45</td> <td>57.88</td> <td>-19.83</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>40.74</td> <td>46.00</td> <td>-5.26</td> <td>56.99</td> <td>-16.25</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>40.82</td> <td>46.00</td> <td>-5.18</td> <td>49.16</td> <td>-8.34</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>39.84</td> <td>46.00</td> <td>-6.16</td> <td>46.53</td> <td>-6.69</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>38.75</td> <td>46.00</td> <td>-7.25</td> <td>45.10</td> <td>-6.35</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>37.40</td> <td>46.00</td> <td>-8.60</td> <td>43.39</td> <td>-5.99</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	38.05	43.50	-5.45	57.88	-19.83	Peak	---	---	2	40.74	46.00	-5.26	56.99	-16.25	Peak	---	---	3	40.82	46.00	-5.18	49.16	-8.34	Peak	---	---	4	39.84	46.00	-6.16	46.53	-6.69	Peak	---	---	5	38.75	46.00	-7.25	45.10	-6.35	Peak	---	---	6	37.40	46.00	-8.60	43.39	-5.99	Peak	---	---
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																	
1	38.05	43.50	-5.45	57.88	-19.83	Peak	---	---																																																																	
2	40.74	46.00	-5.26	56.99	-16.25	Peak	---	---																																																																	
3	40.82	46.00	-5.18	49.16	-8.34	Peak	---	---																																																																	
4	39.84	46.00	-6.16	46.53	-6.69	Peak	---	---																																																																	
5	38.75	46.00	-7.25	45.10	-6.35	Peak	---	---																																																																	
6	37.40	46.00	-8.60	43.39	-5.99	Peak	---	---																																																																	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																									

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Vertical		

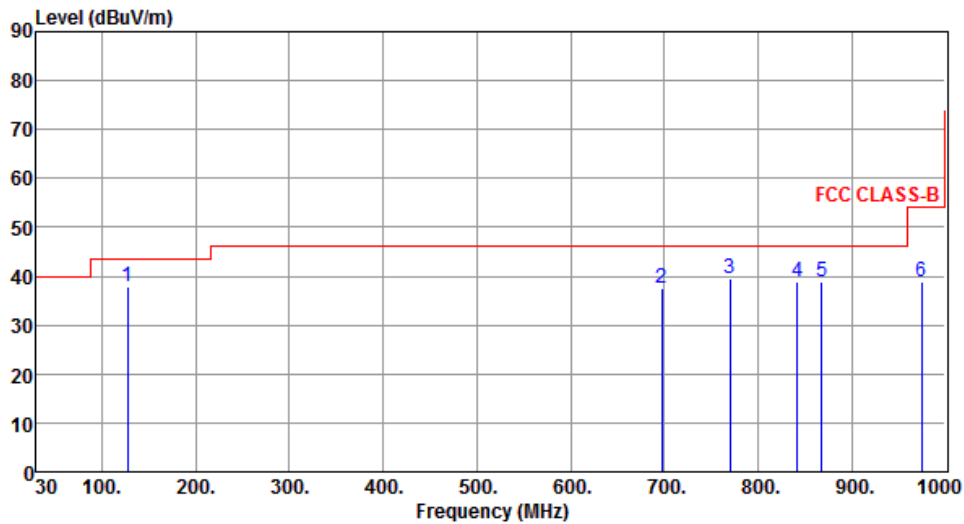

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	127.00	37.88	43.50	-5.62	56.34	-18.46	Peak	---	---
2	697.36	37.57	46.00	-8.43	45.93	-8.36	Peak	---	---
3	770.11	39.40	46.00	-6.60	46.52	-7.12	Peak	---	---
4	841.89	38.73	46.00	-7.27	45.08	-6.35	Peak	---	---
5	868.08	38.82	46.00	-7.18	44.84	-6.02	Peak	---	---
6	974.78	38.96	54.00	-15.04	43.82	-4.86	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

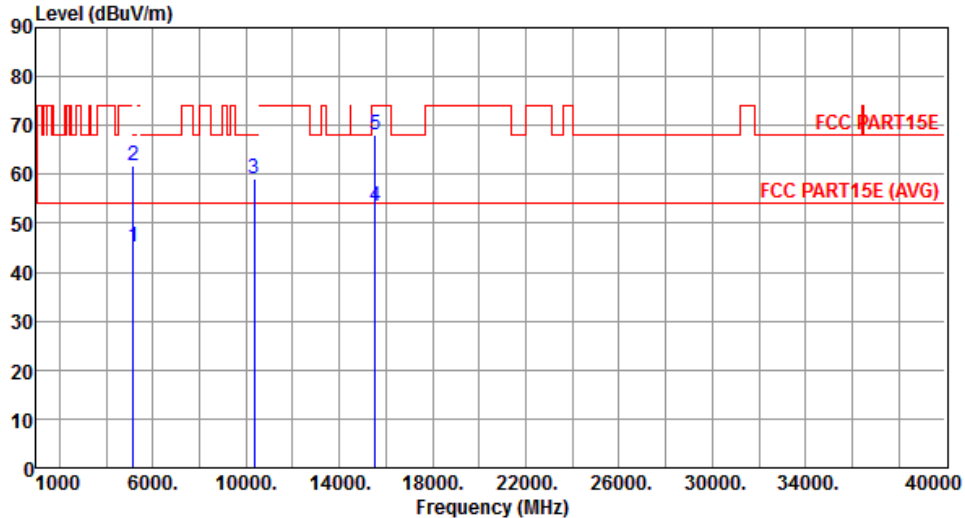Modulation	11a	Test Freq. (MHz)	5180						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.02	54.00	-8.98	39.31	5.71	Average	---	---
2	5150.00	61.71	74.00	-12.29	56.00	5.71	Peak	---	---
3	10360.00	59.27	68.20	-8.93	44.83	14.44	Peak	---	---
4	15540.00	53.61	54.00	-0.39	38.32	15.29	Average	---	---
5	15540.00	68.05	74.00	-5.95	52.76	15.29	Peak	---	---
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5180
<b>Polarization</b>	Vertical		

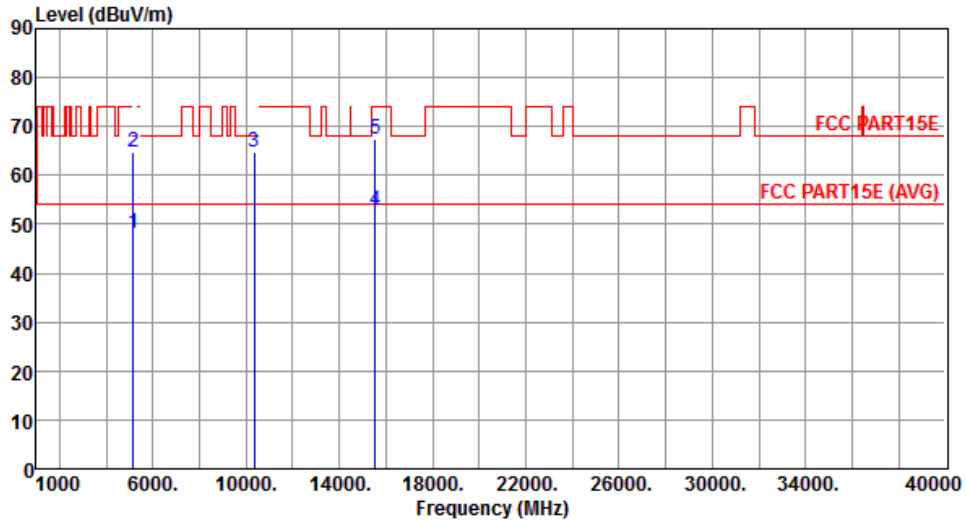


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	48.03	54.00	-5.97	42.32	5.71	Average	---	---
2	5150.00	64.76	74.00	-9.24	59.05	5.71	Peak	---	---
3	10360.00	64.74	68.20	-3.46	50.30	14.44	Peak	---	---
4	15540.00	52.79	54.00	-1.21	37.50	15.29	Average	---	---
5	15540.00	67.42	74.00	-6.58	52.13	15.29	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Horizontal		

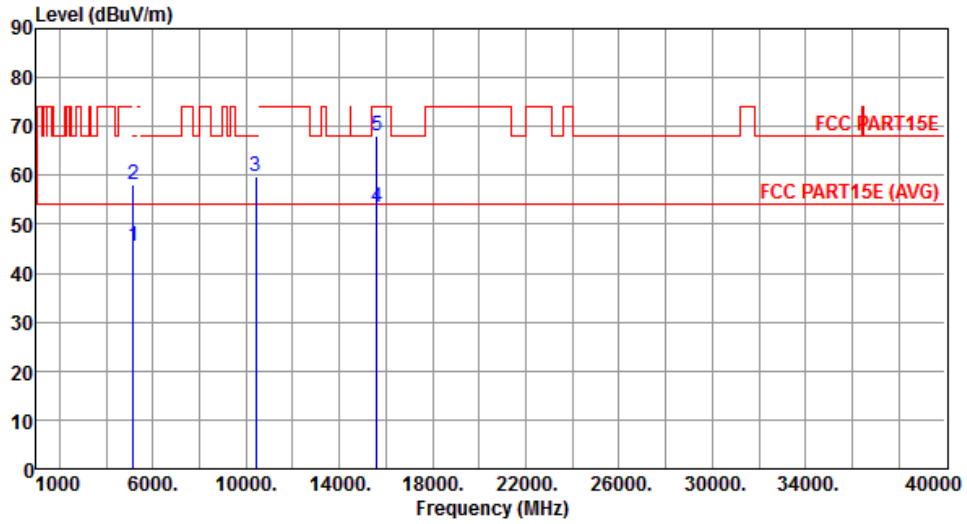


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.66	54.00	-8.34	39.95	5.71	Average	---	---
2	5150.00	58.13	74.00	-15.87	52.42	5.71	Peak	---	---
3	10400.00	59.88	68.20	-8.32	45.38	14.50	Peak	---	---
4	15600.00	53.56	54.00	-0.44	38.39	15.17	Average	---	---
5	15600.00	68.06	74.00	-5.94	52.89	15.17	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Vertical		

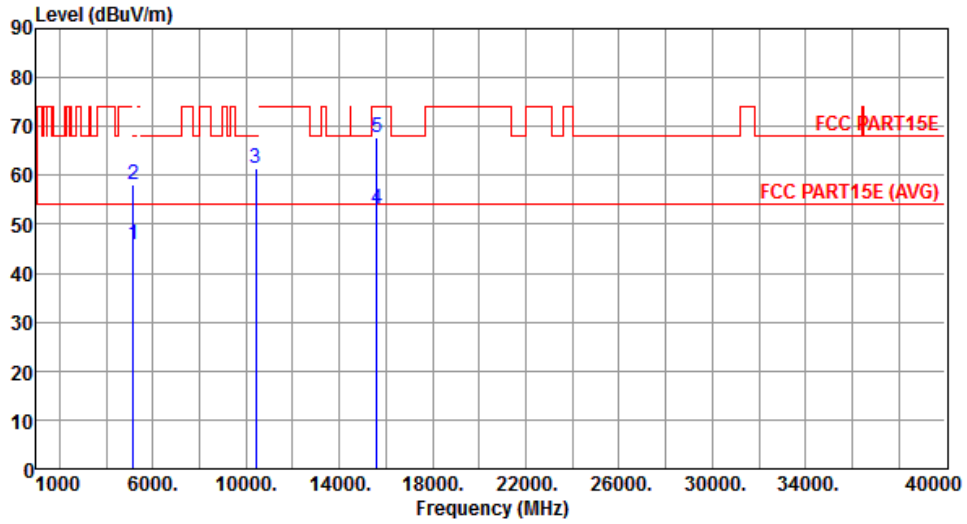


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.83	54.00	-8.17	40.12	5.71	Average	---	---
2	5150.00	58.23	74.00	-15.77	52.52	5.71	Peak	---	---
3	10400.00	61.40	68.20	-6.80	46.90	14.50	Peak	---	---
4	15600.00	53.10	54.00	-0.90	37.93	15.17	Average	---	---
5	15600.00	67.69	74.00	-6.31	52.52	15.17	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Horizontal		

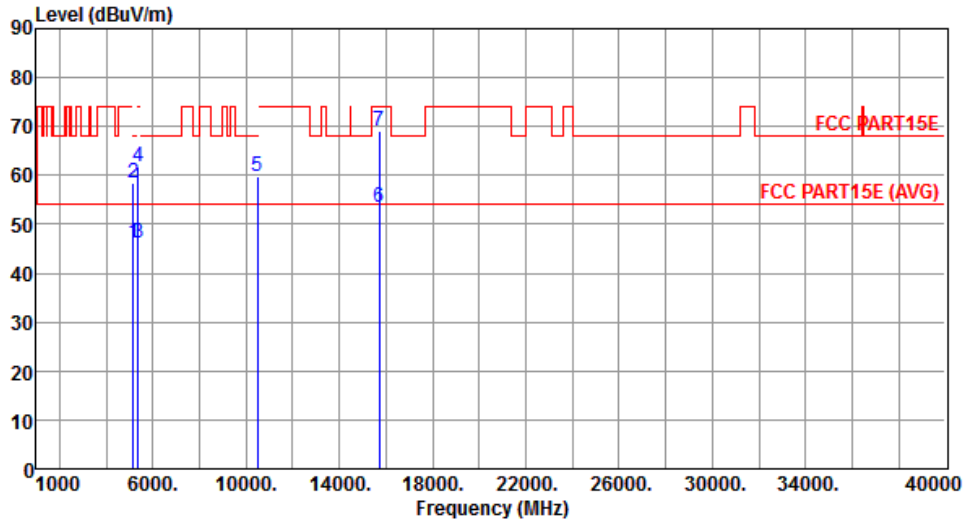


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.22	54.00	-7.78	40.51	5.71	Average	---	---
2	5150.00	58.31	74.00	-15.69	52.60	5.71	Peak	---	---
3	5350.00	46.32	54.00	-7.68	40.33	5.99	Average	---	---
4	5350.00	61.83	74.00	-12.17	55.84	5.99	Peak	---	---
5	10480.00	59.64	68.20	-8.56	45.01	14.63	Peak	---	---
6	15720.00	53.54	54.00	-0.46	38.62	14.92	Average	---	---
7	15720.00	69.11	74.00	-4.89	54.19	14.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Vertical		

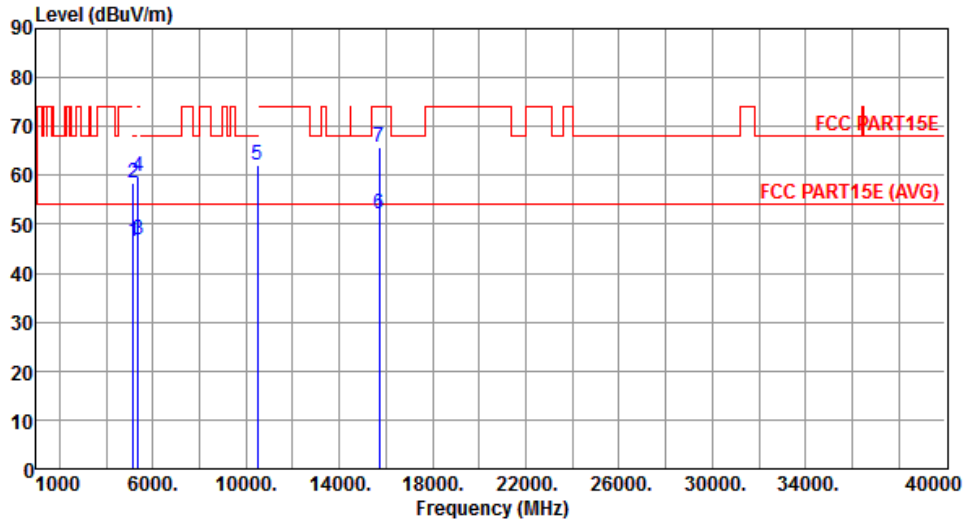


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.51	54.00	-7.49	40.80	5.71	Average	---	---
2	5150.00	58.60	74.00	-15.40	52.89	5.71	Peak	---	---
3	5350.00	46.96	54.00	-7.04	40.97	5.99	Average	---	---
4	5350.00	59.69	74.00	-14.31	53.70	5.99	Peak	---	---
5	10480.00	62.15	68.20	-6.05	47.52	14.63	Peak	---	---
6	15720.00	52.10	54.00	-1.90	37.18	14.92	Average	---	---
7	15720.00	65.76	74.00	-8.24	50.84	14.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

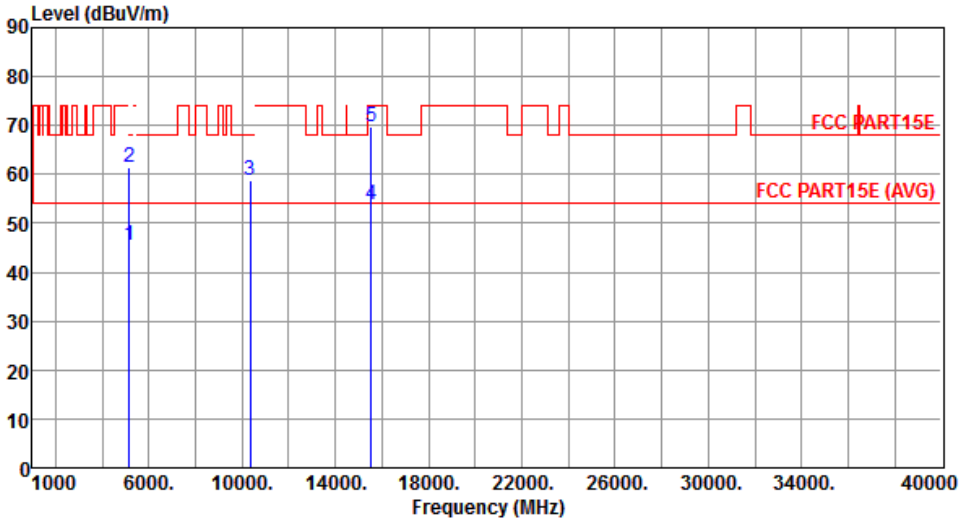Modulation	VHT20	Test Freq. (MHz)	5180																																																																
Polarization	Horizontal																																																																		
																																																																			
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>45.56</td> <td>54.00</td> <td>-8.44</td> <td>39.85</td> <td>5.71</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>61.43</td> <td>74.00</td> <td>-12.57</td> <td>55.72</td> <td>5.71</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>10360.00</td> <td>58.90</td> <td>68.20</td> <td>-9.30</td> <td>44.46</td> <td>14.44</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>15540.00</td> <td>53.76</td> <td>54.00</td> <td>-0.24</td> <td>38.47</td> <td>15.29</td> <td>Average</td> <td>---</td> </tr> <tr> <td>5</td> <td>15540.00</td> <td>69.77</td> <td>74.00</td> <td>-4.23</td> <td>54.48</td> <td>15.29</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	45.56	54.00	-8.44	39.85	5.71	Average	---	2	5150.00	61.43	74.00	-12.57	55.72	5.71	Peak	---	3	10360.00	58.90	68.20	-9.30	44.46	14.44	Peak	---	4	15540.00	53.76	54.00	-0.24	38.47	15.29	Average	---	5	15540.00	69.77	74.00	-4.23	54.48	15.29	Peak	---			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																											
1	5150.00	45.56	54.00	-8.44	39.85	5.71	Average	---																																																											
2	5150.00	61.43	74.00	-12.57	55.72	5.71	Peak	---																																																											
3	10360.00	58.90	68.20	-9.30	44.46	14.44	Peak	---																																																											
4	15540.00	53.76	54.00	-0.24	38.47	15.29	Average	---																																																											
5	15540.00	69.77	74.00	-4.23	54.48	15.29	Peak	---																																																											
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																			

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5180
<b>Polarization</b>	Vertical		

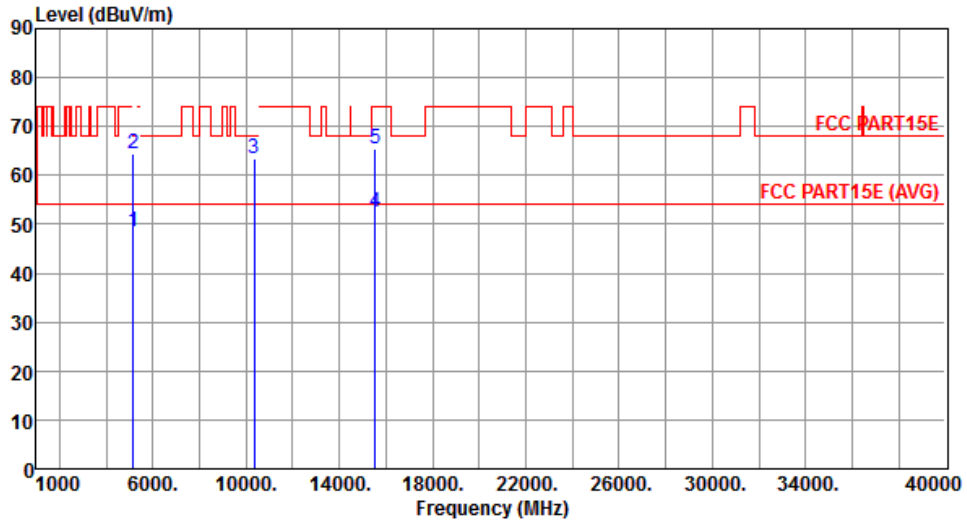

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	48.51	54.00	-5.49	42.80	5.71	Average	---	---
2	5150.00	64.36	74.00	-9.64	58.65	5.71	Peak	---	---
3	10360.00	63.42	68.20	-4.78	48.98	14.44	Peak	---	---
4	15540.00	52.34	54.00	-1.66	37.05	15.29	Average	---	---
5	15540.00	65.52	74.00	-8.48	50.23	15.29	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Horizontal		

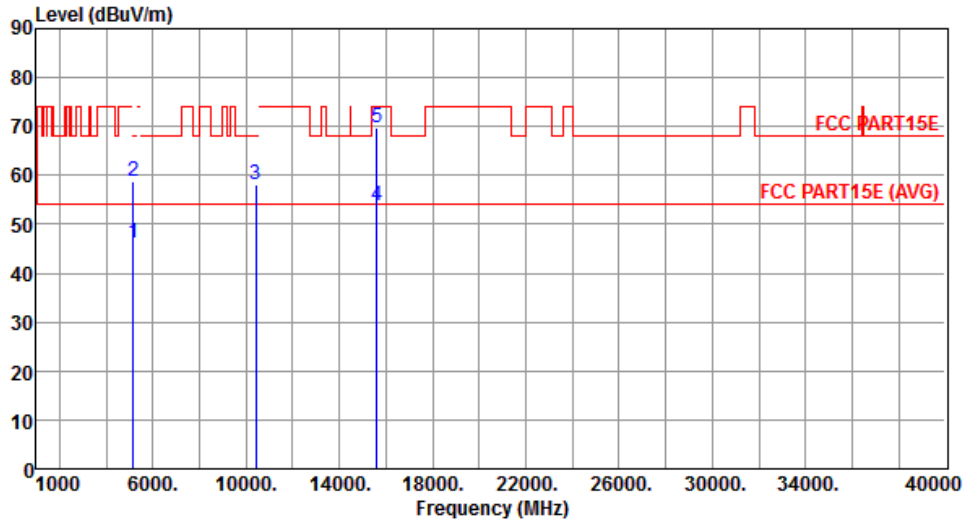


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.24	54.00	-7.76	40.53	5.71	Average	---	---
2	5150.00	58.73	74.00	-15.27	53.02	5.71	Peak	---	---
3	10400.00	58.22	68.20	-9.98	43.72	14.50	Peak	---	---
4	15600.00	53.90	54.00	-0.10	38.73	15.17	Average	---	---
5	15600.00	69.59	74.00	-4.41	54.42	15.17	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Vertical		

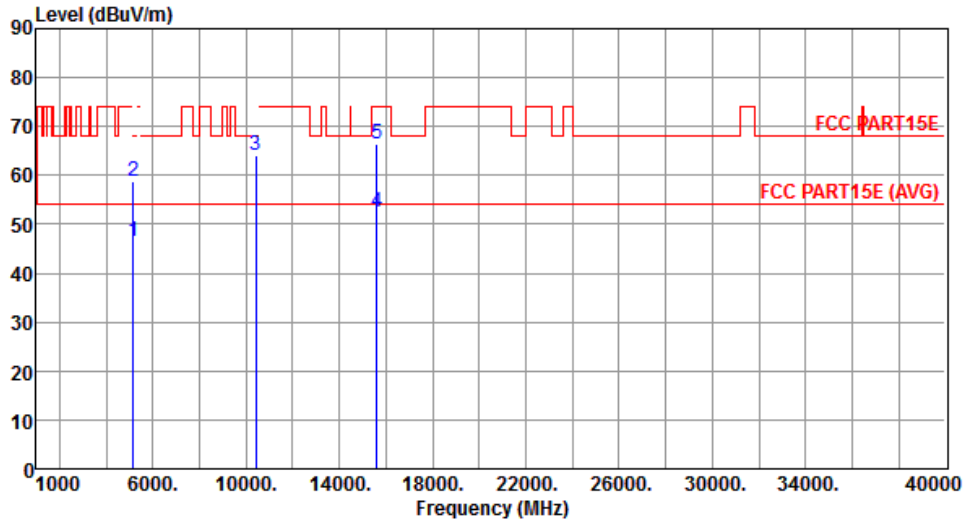


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.40	54.00	-7.60	40.69	5.71	Average	---	---
2	5150.00	58.92	74.00	-15.08	53.21	5.71	Peak	---	---
3	10400.00	64.11	68.20	-4.09	49.61	14.50	Peak	---	---
4	15600.00	52.34	54.00	-1.66	37.17	15.17	Average	---	---
5	15600.00	66.46	74.00	-7.54	51.29	15.17	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Horizontal		

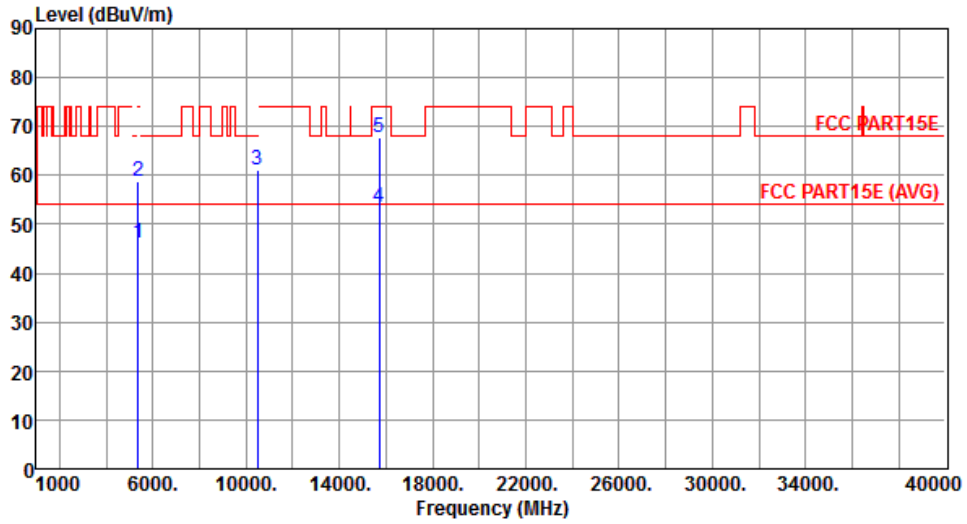


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.11	54.00	-7.89	40.12	5.99	Average	---	---
2	5350.00	58.72	74.00	-15.28	52.73	5.99	Peak	---	---
3	10480.00	61.12	68.20	-7.08	46.49	14.63	Peak	---	---
4	15720.00	53.54	54.00	-0.46	38.62	14.92	Average	---	---
5	15720.00	67.83	74.00	-6.17	52.91	14.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Vertical		

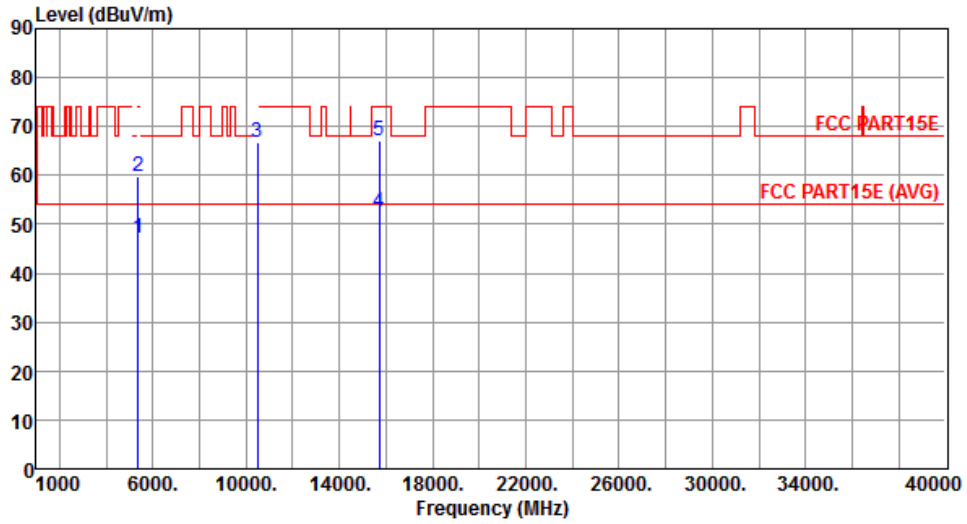


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.27	54.00	-6.73	41.28	5.99	Average	---	---
2	5350.00	59.83	74.00	-14.17	53.84	5.99	Peak	---	---
3	10480.00	66.81	68.20	-1.39	52.18	14.63	Peak	---	---
4	15720.00	52.36	54.00	-1.64	37.44	14.92	Average	---	---
5	15720.00	67.18	74.00	-6.82	52.26	14.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

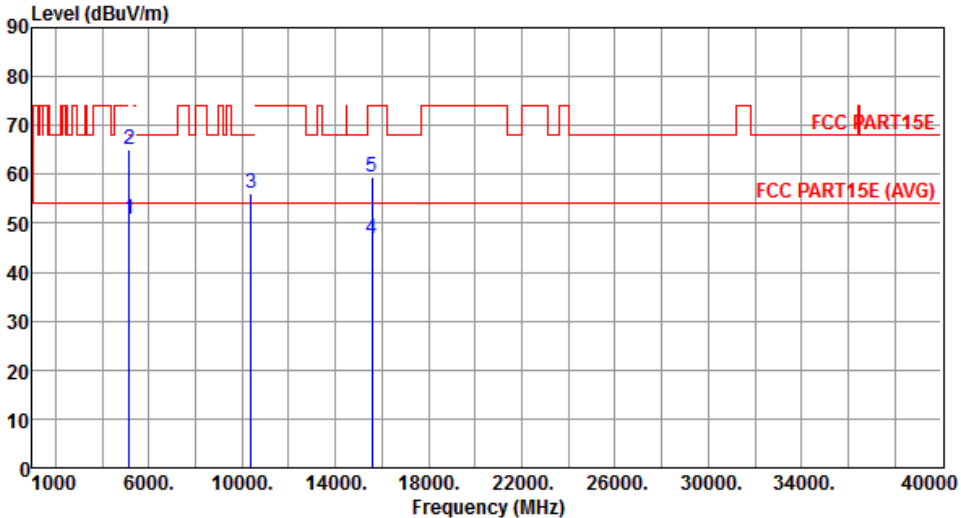Modulation	VHT40	Test Freq. (MHz)	5190																																																																
Polarization	Horizontal																																																																		
																																																																			
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>50.75</td> <td>54.00</td> <td>-3.25</td> <td>45.05</td> <td>5.70</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5149.94</td> <td>65.22</td> <td>74.00</td> <td>-8.78</td> <td>59.52</td> <td>5.70</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>10380.00</td> <td>55.98</td> <td>68.20</td> <td>-12.22</td> <td>41.52</td> <td>14.46</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>15570.00</td> <td>46.84</td> <td>54.00</td> <td>-7.16</td> <td>31.61</td> <td>15.23</td> <td>Average</td> <td>---</td> </tr> <tr> <td>5</td> <td>15570.00</td> <td>59.60</td> <td>74.00</td> <td>-14.40</td> <td>44.37</td> <td>15.23</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				1	5149.94	50.75	54.00	-3.25	45.05	5.70	Average	---	2	5149.94	65.22	74.00	-8.78	59.52	5.70	Peak	---	3	10380.00	55.98	68.20	-12.22	41.52	14.46	Peak	---	4	15570.00	46.84	54.00	-7.16	31.61	15.23	Average	---	5	15570.00	59.60	74.00	-14.40	44.37	15.23	Peak	---			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																														
1	5149.94	50.75	54.00	-3.25	45.05	5.70	Average	---																																																											
2	5149.94	65.22	74.00	-8.78	59.52	5.70	Peak	---																																																											
3	10380.00	55.98	68.20	-12.22	41.52	14.46	Peak	---																																																											
4	15570.00	46.84	54.00	-7.16	31.61	15.23	Average	---																																																											
5	15570.00	59.60	74.00	-14.40	44.37	15.23	Peak	---																																																											
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																			

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5190
<b>Polarization</b>	Vertical		

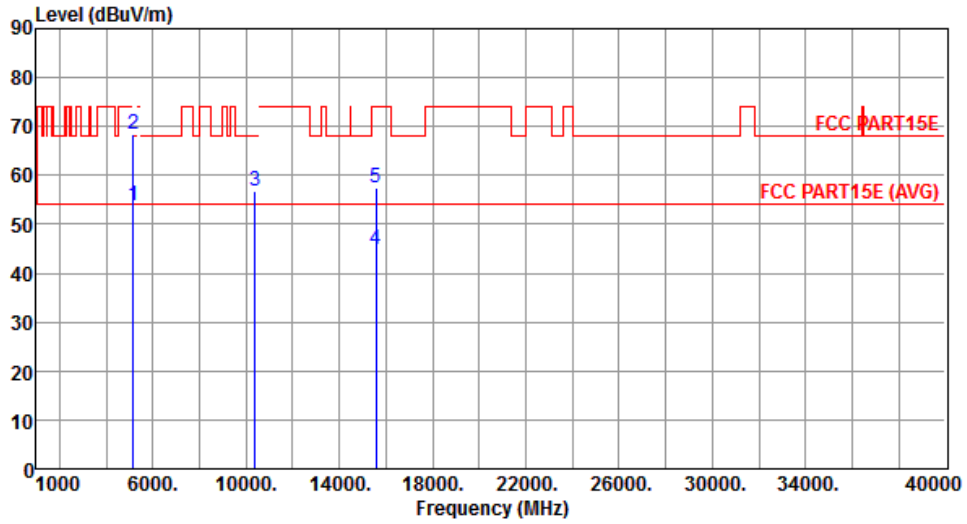


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5149.94	53.81	54.00	-0.19	48.11	5.70	Average	---	---
2	5149.94	68.56	74.00	-5.44	62.86	5.70	Peak	---	---
3	10380.00	56.78	68.20	-11.42	42.32	14.46	Peak	---	---
4	15570.00	44.76	54.00	-9.24	29.53	15.23	Average	---	---
5	15570.00	57.57	74.00	-16.43	42.34	15.23	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Horizontal		

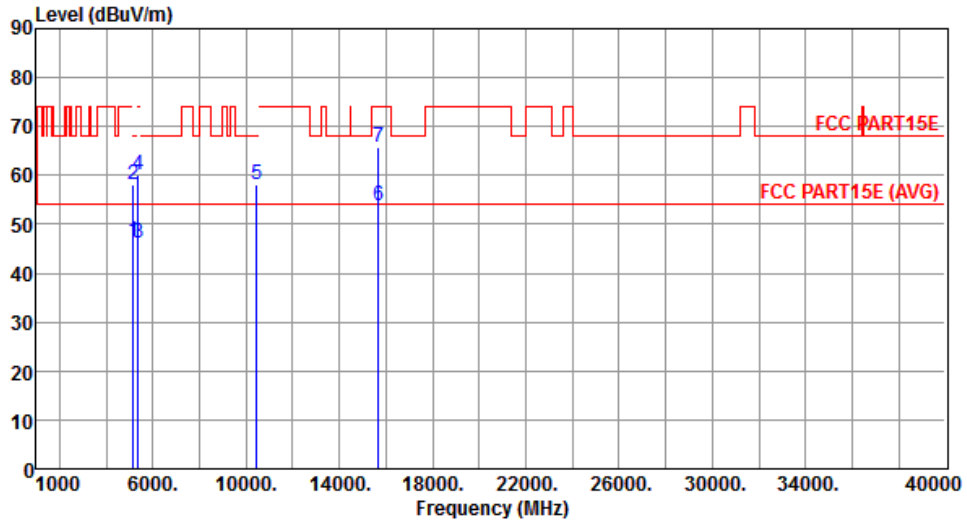


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.36	54.00	-7.64	40.65	5.71	Average	---	---
2	5150.00	58.21	74.00	-15.79	52.50	5.71	Peak	---	---
3	5350.00	46.11	54.00	-7.89	40.12	5.99	Average	---	---
4	5350.00	60.03	74.00	-13.97	54.04	5.99	Peak	---	---
5	10460.00	58.07	68.20	-10.13	43.47	14.60	Peak	---	---
6	15690.00	53.66	54.00	-0.34	38.68	14.98	Average	---	---
7	15690.00	65.91	74.00	-8.09	50.93	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Vertical		

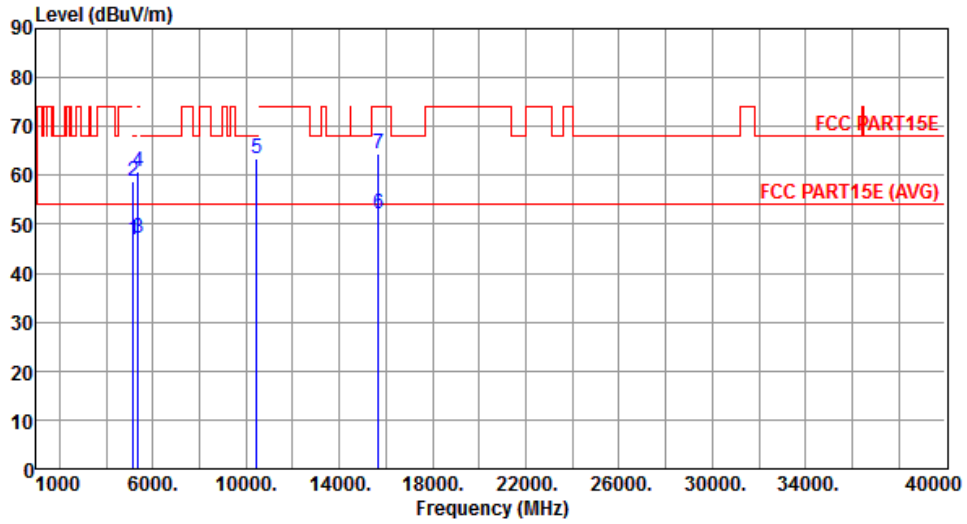

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.74	54.00	-7.26	41.03	5.71	Average	---	---
2	5150.00	58.67	74.00	-15.33	52.96	5.71	Peak	---	---
3	5350.00	47.22	54.00	-6.78	41.23	5.99	Average	---	---
4	5350.00	60.85	74.00	-13.15	54.86	5.99	Peak	---	---
5	10460.00	63.51	68.20	-4.69	48.91	14.60	Peak	---	---
6	15690.00	52.11	54.00	-1.89	37.13	14.98	Average	---	---
7	15690.00	64.36	74.00	-9.64	49.38	14.98	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



### 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

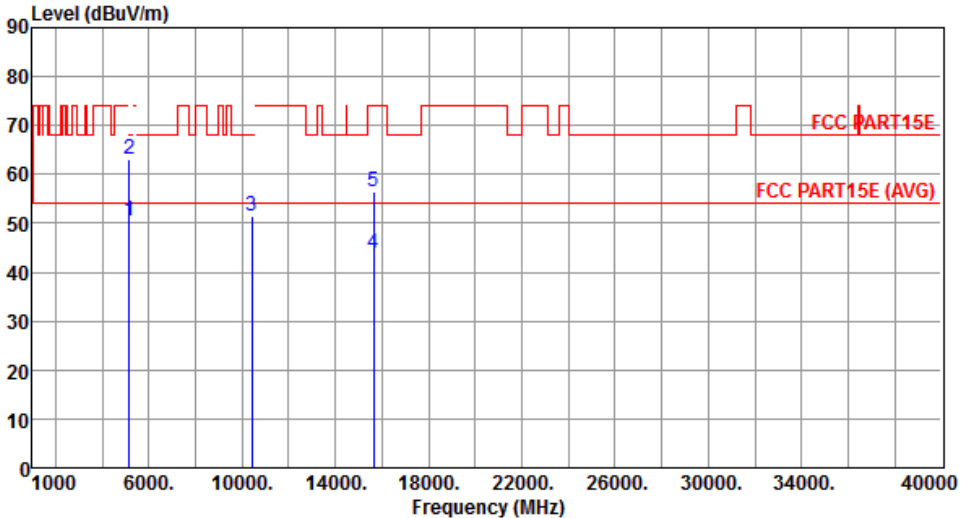Modulation	VHT80	Test Freq. (MHz)	5210																																																													
Polarization	Horizontal																																																															
																																																																
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.95</td> <td>50.45</td> <td>54.00</td> <td>-3.55</td> <td>44.75</td> <td>5.70</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5149.95</td> <td>63.00</td> <td>74.00</td> <td>-11.00</td> <td>57.30</td> <td>5.70</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>10420.00</td> <td>51.55</td> <td>68.20</td> <td>-16.65</td> <td>37.01</td> <td>14.54</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>15630.00</td> <td>43.75</td> <td>54.00</td> <td>-10.25</td> <td>28.64</td> <td>15.11</td> <td>Average</td> <td>---</td> </tr> <tr> <td>5</td> <td>15630.00</td> <td>56.34</td> <td>74.00</td> <td>-17.66</td> <td>41.23</td> <td>15.11</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5149.95	50.45	54.00	-3.55	44.75	5.70	Average	---	2	5149.95	63.00	74.00	-11.00	57.30	5.70	Peak	---	3	10420.00	51.55	68.20	-16.65	37.01	14.54	Peak	---	4	15630.00	43.75	54.00	-10.25	28.64	15.11	Average	---	5	15630.00	56.34	74.00	-17.66	41.23	15.11	Peak	---
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																								
1	5149.95	50.45	54.00	-3.55	44.75	5.70	Average	---																																																								
2	5149.95	63.00	74.00	-11.00	57.30	5.70	Peak	---																																																								
3	10420.00	51.55	68.20	-16.65	37.01	14.54	Peak	---																																																								
4	15630.00	43.75	54.00	-10.25	28.64	15.11	Average	---																																																								
5	15630.00	56.34	74.00	-17.66	41.23	15.11	Peak	---																																																								
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5210
<b>Polarization</b>	Vertical		

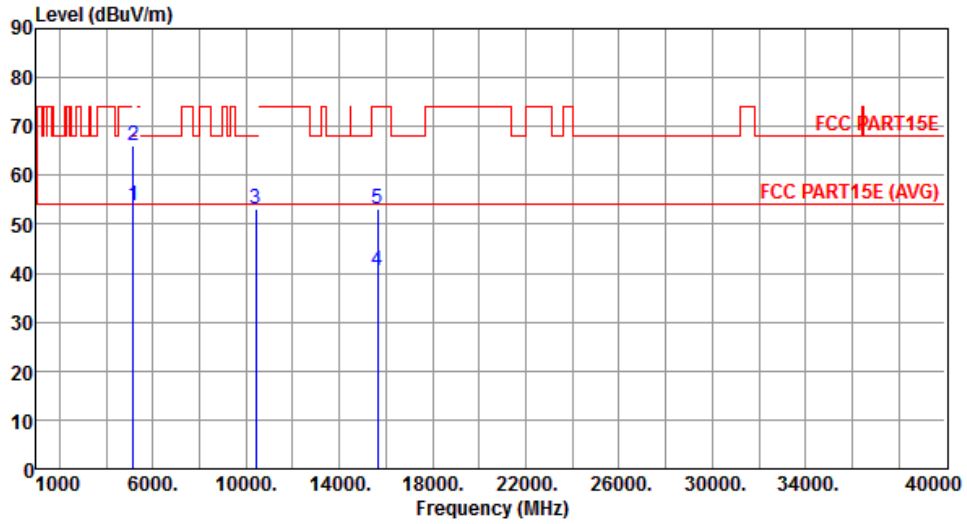

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5149.95	53.90	54.00	-0.10	48.20	5.70	Average	---	---
2	5149.95	66.09	74.00	-7.91	60.39	5.70	Peak	---	---
3	10420.00	53.26	68.20	-14.94	38.72	14.54	Peak	---	---
4	15630.00	40.59	54.00	-13.41	25.48	15.11	Average	---	---
5	15630.00	53.27	74.00	-20.73	38.16	15.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Frequency Stability


### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

### 3.6.3 Test Setup

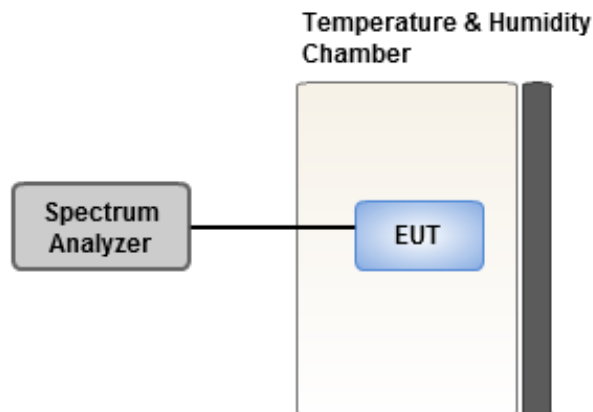

### 3.6.4 Test Result of Frequency Stability

Frequency: 5200 MHz	Frequency Drift (ppm)			
	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	0.34	0.48	0.38	0.76
T20°C Vmin	4.58	4.96	4.79	4.85
T50°C Vnom	4.55	4.08	4.58	4.90
T40°C Vnom	-2.39	-1.57	-2.49	-2.63
T30°C Vnom	0.73	0.77	0.71	1.41
T20°C Vnom	0.97	1.20	1.41	0.85
T10°C Vnom	-0.40	-0.91	0.28	-0.09
T0°C Vnom	-0.46	-0.38	-0.05	-0.34
T-10°C Vnom	-0.33	-0.28	-0.54	-0.18
T-20°C Vnom	-0.93	-0.16	-0.25	-0.32
T-30°C Vnom	-0.01	-0.12	0.03	0.48
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan,  
R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==