

## FCC Test Report

**Report No.:** RF150410E09

**FCC ID:** PY315100300

**Test Model:** R6400

**Received Date:** Apr. 10, 2015

**Test Date:** Apr. 15 to 18, 2015

**Issued Date:** Apr. 28, 2015

**Applicant:** NETGEAR, Inc.

**Address:** 350 East Plumeria Drive San Jose, CA 95134

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.

**Test Lab (A):** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Test Location (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.

**Test Lab (B):** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Test Location (1):** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

## Table of Contents

<b>Release Control Record</b> .....	<b>5</b>
<b>1 Certificate of Conformity</b> .....	<b>6</b>
<b>2 Summary of Test Results</b> .....	<b>7</b>
2.1 Measurement Uncertainty .....	7
2.2 Modification Record .....	7
<b>3 General Information</b> .....	<b>8</b>
3.1 General Description of EUT .....	8
3.2 Description of Test Modes .....	12
3.2.1 Test Mode Applicability and Tested Channel Detail .....	13
3.3 Duty Cycle of Test Signal .....	18
3.4 Description of Support Units .....	20
3.4.1 Configuration of System under Test .....	21
3.5 General Description of Applied Standards .....	22
<b>4 Test Types and Results</b> .....	<b>23</b>
4.1 Radiated Emission and Bandedge Measurement.....	23
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	23
4.1.2 Test Instruments .....	24
4.1.3 Test Procedures.....	26
4.1.4 Deviation from Test Standard .....	26
4.1.5 Test Set Up .....	27
4.1.6 EUT Operating Conditions.....	28
4.1.7 Test Results .....	29
4.2 Conducted Emission Measurement .....	42
4.2.1 Limits of Conducted Emission Measurement .....	42
4.2.2 Test Instruments .....	42
4.2.3 Test Procedures.....	43
4.2.4 Deviation from Test Standard .....	43
4.2.5 Test Setup.....	43
4.2.6 EUT Operating Conditions.....	43
4.2.7 Test Results (MODE 1).....	44
4.2.8 Test Results (MODE 2).....	46
4.2.9 Test Results (MODE 3).....	48
4.2.10 Test Results (MODE 4).....	50
4.3 6dB Bandwidth Measurement .....	52
4.3.1 Limits of 6dB Bandwidth Measurement .....	52
4.3.2 Test Setup.....	52
4.3.3 Test Instruments .....	52
4.3.4 Test Procedure .....	52
4.3.5 Deviation from Test Standard .....	52
4.3.6 EUT Operating Conditions.....	53
4.3.7 Test Result .....	54
4.4 Conducted Output Power Measurement.....	56
4.4.1 Limits of Conducted Output Power Measurement .....	56
4.4.2 Test Setup.....	56
4.4.3 Test Instruments .....	56
4.4.4 Test Procedures.....	56
4.4.5 Deviation from Test Standard .....	56
4.4.6 EUT Operating Conditions.....	56
4.4.7 Test Results .....	57
4.5 Power Spectral Density Measurement.....	58
4.5.1 Limits of Power Spectral Density Measurement .....	58
4.5.2 Test Setup.....	58
4.5.3 Test Instruments .....	58

4.5.4	Test Procedure .....	58
4.5.5	Deviation from Test Standard .....	58
4.5.6	EUT Operating Condition .....	58
4.5.7	Test Results .....	59
4.6	Conducted Out of Band Emission Measurement .....	61
4.6.1	Limits of Conducted Out of Band Emission Measurement .....	61
4.6.2	Test Setup .....	61
4.6.3	Test Instruments .....	61
4.6.4	Test Procedure .....	61
4.6.5	Deviation from Test Standard .....	61
4.6.6	EUT Operating Condition .....	61
4.6.7	Test Results .....	61
<b>5</b>	<b>Test Types and Results (For 5GHz Band).....</b>	<b>74</b>
5.1	Radiated Emission and Bandedge Measurement.....	74
5.1.1	Limits of Radiated Emission and Bandedge Measurement .....	74
5.1.2	Test Instruments .....	74
5.1.3	Test Procedures.....	74
5.1.4	Deviation From Test Standard.....	74
5.1.5	Test Setup.....	74
5.1.6	Eut Operating Conditions .....	74
5.1.7	Test Results .....	75
5.2	Conducted Emission Measurement .....	85
5.2.1	Limits of Conducted Emission Measurement .....	85
5.2.2	Test Instruments .....	85
5.2.3	Test Procedures.....	85
5.2.4	Deviation from Test Standard .....	85
5.2.5	Test Setup.....	85
5.2.6	Eut Operating Conditions .....	85
5.2.7	Test Results (MODE 1).....	86
5.2.8	Test Results (MODE 2).....	88
5.2.9	Test Results (MODE 3).....	90
5.2.10	Test Results (MODE 4).....	92
5.3	6dB Bandwidth Measurement.....	94
5.3.1	Limits of 6dB Bandwidth Measurement.....	94
5.3.2	Test Setup.....	94
5.3.3	Test Instruments .....	94
5.3.4	Test Procedure .....	94
5.3.5	Deviation from Test Standard .....	94
5.3.6	EUT Operating Conditions.....	94
5.3.7	Test Result.....	95
5.4	Conducted Output Power .....	98
5.4.1	Limits of Conducted Output Power Measurement .....	98
5.4.2	Test Setup.....	98
5.4.3	Test Instruments .....	98
5.4.4	Test Procedures.....	98
5.4.5	Deviation from Test Standard .....	98
5.4.6	EUT Operating Conditions.....	98
5.4.7	Test Results .....	99
5.5	Power Spectral Density Measurement.....	100
5.5.1	Limits of Power Spectral Density Measurement .....	100
5.5.2	Test Setup.....	100
5.5.3	Test Instruments .....	100
5.5.4	Test Procedure .....	100
5.5.5	Deviation from Test Standard .....	100
5.5.6	EUT Operating Condition .....	100
5.5.7	Test Results .....	101
5.6	Conducted Out of Band Emission Measurement.....	106



5.6.1	Limits of Conducted Out of Band Emission Measurement .....	106
5.6.2	Test Setup.....	106
5.6.3	Test Instruments .....	106
5.6.4	Test Procedure .....	106
5.6.5	Deviation from Test Standard .....	106
5.6.6	EUT Operating Condition .....	106
5.6.7	Test Results .....	106
<b>6</b>	<b>Pictures of Test Arrangements.....</b>	<b>128</b>
	<b>Appendix – Information on the Testing Laboratories .....</b>	<b>129</b>



A D T

### Release Control Record

Issue No.	Description	Date Issued
RF150410E09	Original release.	Apr. 28, 2015



## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is 7.69dB at 0.28672MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2357.00MHz & 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is R-SMA not a standard connector.

### Note:

- The EUT was operating in 2.400 ~ 2.4835GHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2.400 ~ 2.4835GHz and 5.725~5.850GHz. For the 5.15~5.25GHz RF parameters was recorded in another test report.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.37 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	AC1750 Smart WiFi Router
Brand	NETGEAR
Test Model	R6400
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps
Operating Frequency	<b>For 15.407</b> <b>5GHz:</b> 5.18 ~ 5.24GHz
	<b>For 15.247</b> <b>2.4GHz:</b> 2.412 ~ 2.462GHz <b>5GHz:</b> 5.745 ~ 5.825GHz
Number of Channel	<b>For 15.407</b> 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
	<b>For 15.247 (2.4GHz)</b> 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40) <b>For 15.247 (5GHz)</b> 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)



Output Power	<p><b>For 15.407</b>  <b>CDD Mode:</b>              802.11a: 274.765mW  <b>Beamforming Mode:</b>              802.11ac (VHT20): 331.812mW              802.11ac (VHT40): 278.695mW              802.11ac (VHT80): 103.865mW</p>
	<p><b>For 15.247 (2.4GHz)</b>  <b>CDD Mode:</b>              802.11b: 537.365mW              802.11g: 536.684mW              802.11n (HT20): 435.03mW              802.11n (HT40): 112.913mW  <b>For 15.247 (5GHz)</b>  <b>CDD Mode:</b>              802.11a: 915.893mW              802.11ac (VHT20): 896.802mW              802.11ac (VHT40): 894.191mW              802.11ac (VHT80): 419.248mW  <b>Beamforming Mode:</b>              802.11ac (VHT20): 555.34mW              802.11ac (VHT40): 557.193mW              802.11ac (VHT80): 419.248mW</p>
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

2. 2.4GHz and 5GHz technology can transmit at same time.
3. The emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.
4. The antennas provided to the EUT, please refer to the following table:

Antenna No.	Transmitter Circuit	Ant. Gain(dBi) <Including cable loss>	Frequency range (GHz to GHz)	Ant. Type	Connector Type
98612PIPF003	Chain (0)	3.4	2.4~2.4835	Dipole	R-SMA
		3.94	5.15~5.25		
		3.73	5.725~5.85		
98612PIPF004	Chain (1)	3.23	2.4~2.4835	Dipole	R-SMA
		3.66	5.15~5.25		
		3.77	5.725~5.85		
98612PIPF005	Chain (2)	3.36	2.4~2.4835	Dipole	R-SMA
		3.32	5.15~5.25		
		3.74	5.725~5.85		

5. The EUT must be supplied with a power adapter and following four different models could be chosen as following table:

No	P/N	Brand Name	Model No.	Spec.
1	332-10758-01	NETGEAR	2ABL030F 1 NA	Input: 100-120V, 1.0A, 50/60Hz Output: 12.0V, 2.5A DC output cable: 1.8m, unshielded
2	332-10756-01	NETGEAR	2ABL030F NA	Input: 100-240V, 1.0A, 50/60Hz Output: 12.0V, 2.5A DC output cable: 1.8m, unshielded
3	332-10759-01	NETGEAR	ADS-40FPA-12 12030GPCU-L	Input: 100-120V, 1.0A, 60Hz Output: 12.0V, 2.5A DC output cable: 1.7m, unshielded
4	332-10757-01	NETGEAR	ADS-40FPA-12 12030GPCU	Input: 100-240V, 1.0A, 50/60Hz Output: 12.0V, 2.5A DC output cable: 1.7m, unshielded

From the above adapters, the worst radiated test item was found in Adapter 1. Therefore only the test data of the mode was recorded in this report.

6. The EUT incorporates a MIMO function with beamforming for 5GHz (802.11n & 802.11ac mode).

<b>2.4GHz Band</b>			
<b>MODULATION MODE</b>	<b>DATA RATE (MCS)</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11b</b>	1 ~ 11Mbps	3TX	3RX
<b>802.11g</b>	6 ~ 54Mbps	3TX	3RX
<b>802.11n (HT20)</b>	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
<b>802.11n (HT40)</b>	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
<b>5GHz Band</b>			
<b>MODULATION MODE</b>	<b>DATA RATE (MCS)</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11a</b>	6 ~ 54Mbps	3TX	3RX
<b>802.11n (HT20)</b>	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
<b>802.11n (HT40)</b>	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
<b>802.11ac (VHT20)</b>	MCS0~8 Nss=1	3TX	3RX
	MCS0~8 Nss=2	3TX	3RX
	MCS0~9 Nss=3	3TX	3RX
<b>802.11ac (VHT40)</b>	MCS0~9 Nss=1	3TX	3RX
	MCS0~9 Nss=2	3TX	3RX
	MCS0~9 Nss=3	3TX	3RX
<b>802.11ac (VHT80)</b>	MCS0~9 Nss=1	3TX	3RX
	MCS0~9 Nss=2	3TX	3RX
	MCS0~9 Nss=3	3TX	3RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

7. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

#### For 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

#### For 5GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

### 3.2.1 Test Mode Applicability and Tested Channel Detail For 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
1	√	√	√	√	With adapter 1
2	-	-	√	-	With adapter 2
3	-	-	√	-	With adapter 3
4	-	-	√	-	With adapter 4

Where **RE≥1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** 1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.  
2. "-" means no effect.

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	6	DSSS	DBPSK	1

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	6	DSSS	DBPSK	1

**Bandedge Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>					
<b>MODE</b>	<b>AVAILABLE CHANNEL</b>	<b>TESTED CHANNEL</b>	<b>MODULATION TECHNOLOGY</b>	<b>MODULATION TYPE</b>	<b>DATA RATE (Mbps)</b>
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 9	OFDM	BPSK	13.5

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>					
<b>MODE</b>	<b>AVAILABLE CHANNEL</b>	<b>TESTED CHANNEL</b>	<b>MODULATION TECHNOLOGY</b>	<b>MODULATION TYPE</b>	<b>DATA RATE (Mbps)</b>
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

**Test Condition:**

<b>APPLICABLE TO</b>	<b>ENVIRONMENTAL CONDITIONS</b>	<b>INPUT POWER</b>	<b>TESTED BY</b>
<b>RE<math>\geq</math>1G</b>	24deg. C, 70%RH	120Vac, 60Hz	Gary Cheng
<b>RE<math>&lt;</math>1G</b>	24deg. C, 68%RH	120Vac, 60Hz	Robert Cheng
<b>PLC</b>	26deg. C, 55%RH	120Vac, 60Hz	Jyunchun Lin
<b>APCM</b>	25deg. C, 60%RH	120Vac, 60Hz	Gary Cheng

**For 5 GHz (5745 ~ 5825MHz):**

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
1	√	√	√	√	With adapter 1
2	-	-	√	-	With adapter 2
3	-	-	√	-	With adapter 3
4	-	-	√	-	With adapter 4

Where **RE≥1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.  
**NOTE:** “-” means no effect.

**Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)	149 to 165	149, 165	OFDM	BPSK	6.5
802.11ac (VHT40)	151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

**Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 165	157	OFDM	BPSK	6

**Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>					
<b>MODE</b>	<b>AVAILABLE CHANNEL</b>	<b>TESTED CHANNEL</b>	<b>MODULATION TECHNOLOGY</b>	<b>MODULATION TYPE</b>	<b>DATA RATE (Mbps)</b>
802.11a	149 to 165	157	OFDM	BPSK	6

**Bandedge Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>					
<b>MODE</b>	<b>AVAILABLE CHANNEL</b>	<b>TESTED CHANNEL</b>	<b>MODULATION TECHNOLOGY</b>	<b>MODULATION TYPE</b>	<b>DATA RATE (Mbps)</b>
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)	149 to 165	149, 165	OFDM	BPSK	6.5
802.11ac (VHT40)	151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)	155	155	OFDM	BPSK	29.3
<b>Beamforming MODE</b>					
<b>MODE</b>	<b>AVAILABLE CHANNEL</b>	<b>TESTED CHANNEL</b>	<b>MODULATION TECHNOLOGY</b>	<b>MODULATION TYPE</b>	<b>DATA RATE (Mbps)</b>
802.11ac (VHT20)	149 to 165	149, 165	OFDM	BPSK	6.5
802.11ac (VHT40)	151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)	155	155	OFDM	BPSK	29.3



**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>					
<b>MODE</b>	<b>AVAILABLE CHANNEL</b>	<b>TESTED CHANNEL</b>	<b>MODULATION TECHNOLOGY</b>	<b>MODULATION TYPE</b>	<b>DATA RATE (Mbps)</b>
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)	149 to 165	149, 165	OFDM	BPSK	6.5
802.11ac (VHT40)	151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)	155	155	OFDM	BPSK	29.3
<b>Beamforming MODE</b>					
<b>MODE</b>	<b>AVAILABLE CHANNEL</b>	<b>TESTED CHANNEL</b>	<b>MODULATION TECHNOLOGY</b>	<b>MODULATION TYPE</b>	<b>DATA RATE (Mbps)</b>
802.11ac (VHT20)	149 to 165	149, 165	OFDM	BPSK	6.5
802.11ac (VHT40)	151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

**Test Condition:**

<b>APPLICABLE TO</b>	<b>ENVIRONMENTAL CONDITIONS</b>	<b>INPUT POWER</b>	<b>TESTED BY</b>
<b>RE<math>\geq</math>1G</b>	24deg. C, 70%RH	120Vac, 60Hz	Robert Cheng
<b>RE<math>&lt;</math>1G</b>	24deg. C, 68%RH	120Vac, 60Hz	Robert Cheng
<b>PLC</b>	26deg. C, 55%RH	120Vac, 60Hz	Jyunchun Lin
<b>APCM</b>	25deg. C, 60%RH	120Vac, 60Hz	Gary Cheng

### 3.3 Duty Cycle of Test Signal

**For 2.4GHz:**



Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.

**802.11b:** Duty cycle =  $12.469\text{ ms} / 12.5\text{ ms} = 0.998$

**802.11g:** Duty cycle =  $0.062\text{ ms} / 2.092\text{ ms} = 0.986$

**802.11n (HT20):** Duty cycle =  $1.921\text{ ms} / 1.96\text{ ms} = 0.98$

**802.11n (HT40):** Duty cycle =  $0.945\text{ ms} / 0.962\text{ ms} = 0.982$

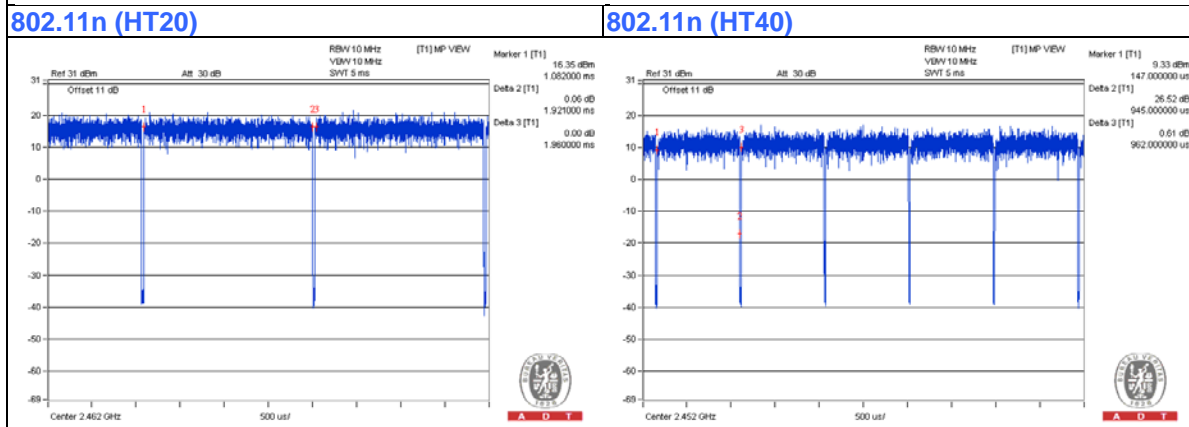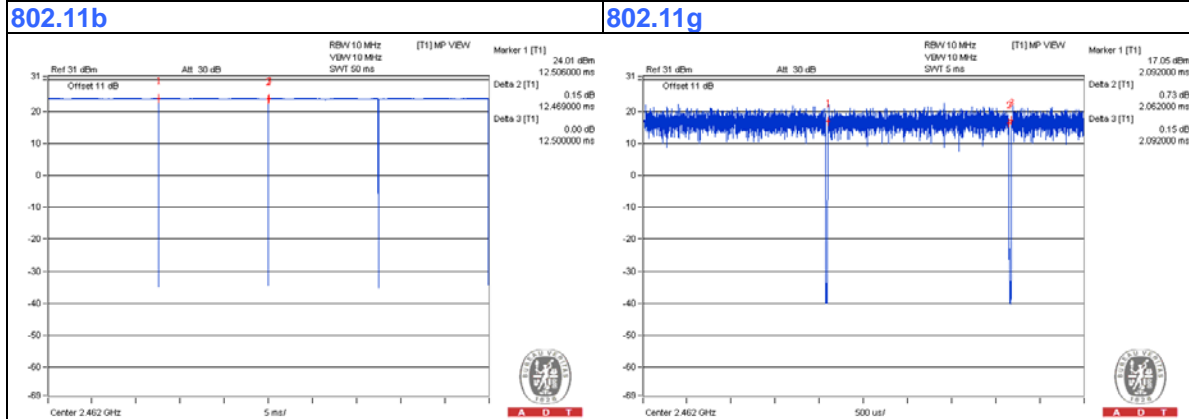

**For 5GHz (5745 ~ 5825MHz):**

If duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.


If duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

**802.11a:** Duty cycle = 2.062 ms/2.095 ms = 0.984

**802.11ac (VHT20):** Duty cycle = 1.928 ms/1.956 ms = 0.986

**802.11ac (VHT40):** Duty cycle = 0.951 ms/0.97 ms = 0.98

**802.11ac (VHT80):** Duty cycle = 0.462 ms/0.48 ms = 0.963, Duty factor =  $10 * \log(1/0.963) = 0.17$

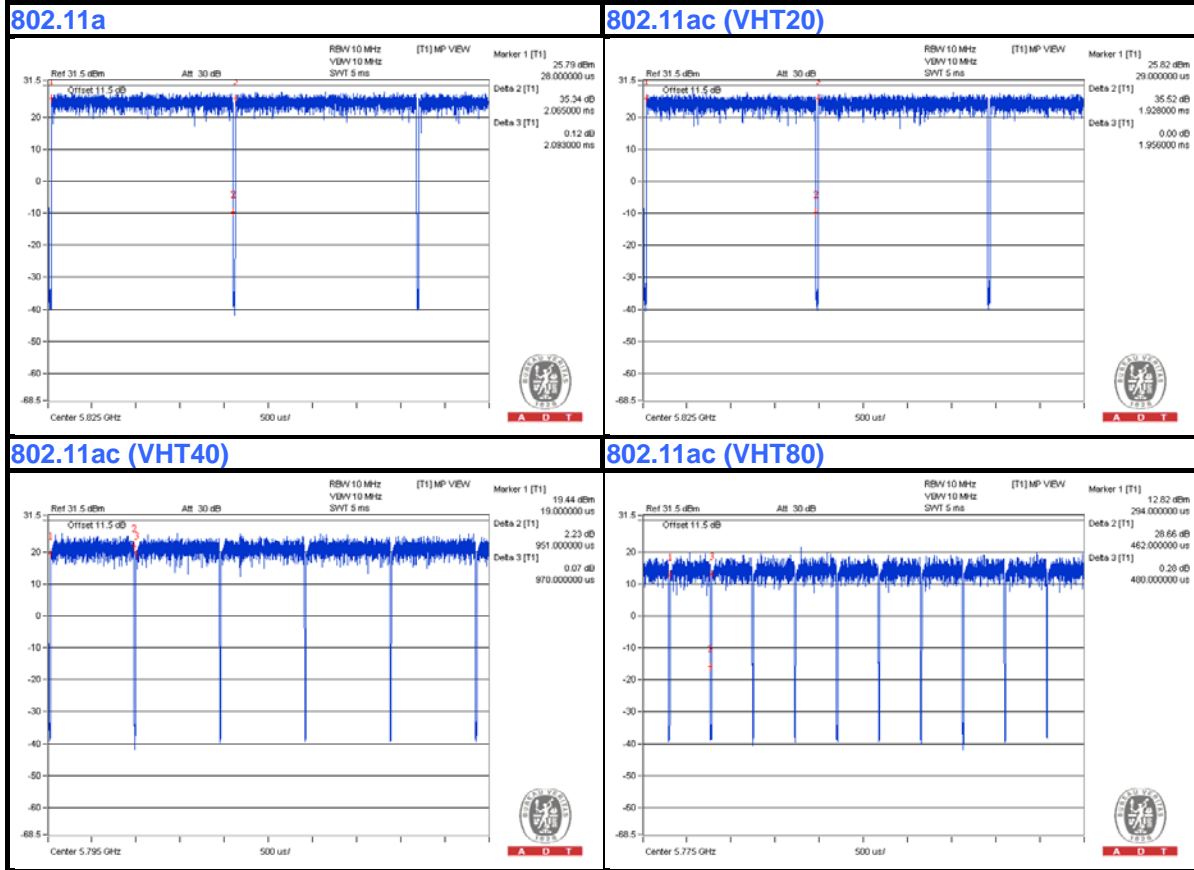

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	iPod shuffle	Apple	MC749TA/A	CC4DN29UDFDM	NA	Provided by Lab
B.	NOTEBOOK COMPUTER	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab
C.	NOTEBOOK COMPUTER	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
D.	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC	Provided by Lab
E.	HDD	WD	WDBACW0010HB K-SESN	WCAZAL625787	FCC DoC	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC	1	1.8	No	0	Supplied by Client
2.	USB	1	0.1	Yes	0	Provided by Lab
3.	RJ-45	1	10	No	0	Provided by Lab
4.	RJ-45	1	10	No	0	Provided by Lab
5.	RJ-45	3	10	No	0	Provided by Lab
6.	USB	1	0.45	Yes	0	Provided by Lab

### 3.4.1 Configuration of System under Test

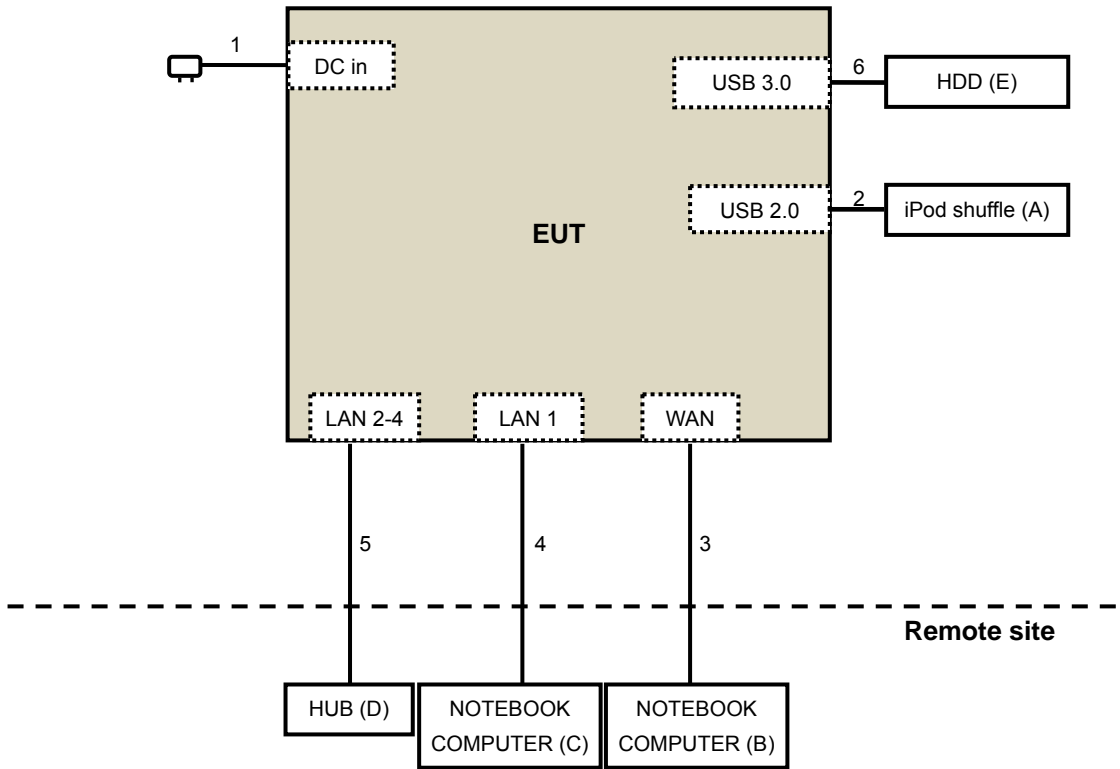

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v03r02**

**662911 D01 Multiple Transmitter Output v02r01**

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

##### For above 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 06, 2014	Oct. 05, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	July 25, 2014	July 24, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 06, 2015	Feb. 05, 2016
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Feb. 05, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 09, 2015	Feb. 08, 2016
Preamplifier Agilent	8449B	3008A01961	Oct. 18, 2014	Oct. 17, 2015
Preamplifier Agilent	8447D	2944A10738	Oct. 18, 2014	Oct. 17, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 09, 2014	Aug. 08, 2015
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table BV ADT	TT100	TT93021704	NA	NA
Turn Table Controller BV ADT	SC100	SC93021704	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2014	Oct. 17, 2015
High Speed Peak Power Meter	ML2495A	0824011	July 26, 2014	July 25, 2015
Power Sensor	MA2411B	0738171	July 26, 2014	July 25, 2015

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC7450F-4.
6. Tested Date: Apr. 18, 2015



**For below 1GHz**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 09, 2015	Feb. 08, 2016
RF Cable	NA	CHGCAB_001	Oct. 04, 2014	Oct. 03, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Aug. 27, 2014	Aug. 26, 2015
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	131205 131216 131217 SNMY23684/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 12, 2014	Dec. 11, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Aug. 26, 2014	Aug. 25, 2015
RF Cable	NA	329751/4 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Apr. 17, 2015

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Note:


1. For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the ground at 3 meter chamber room for test
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
6. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

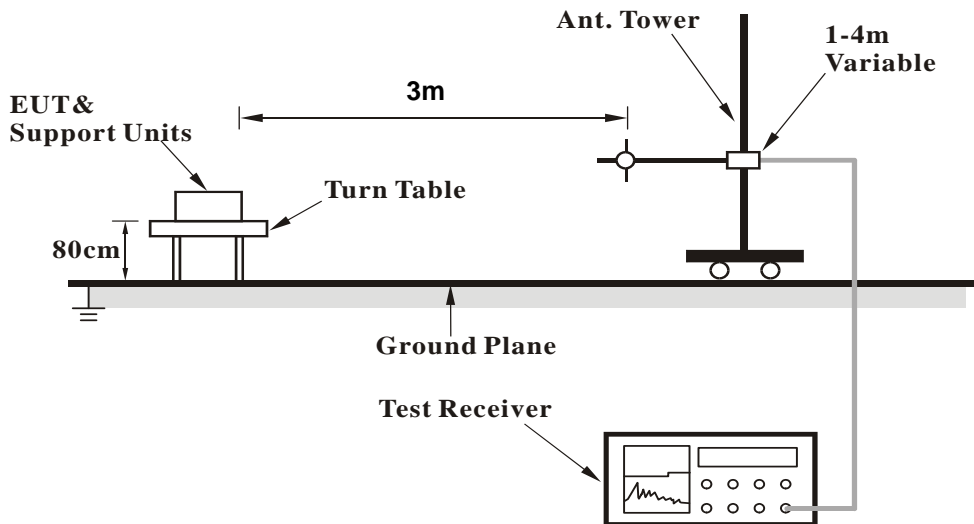

<Frequency Range above 1GHz>

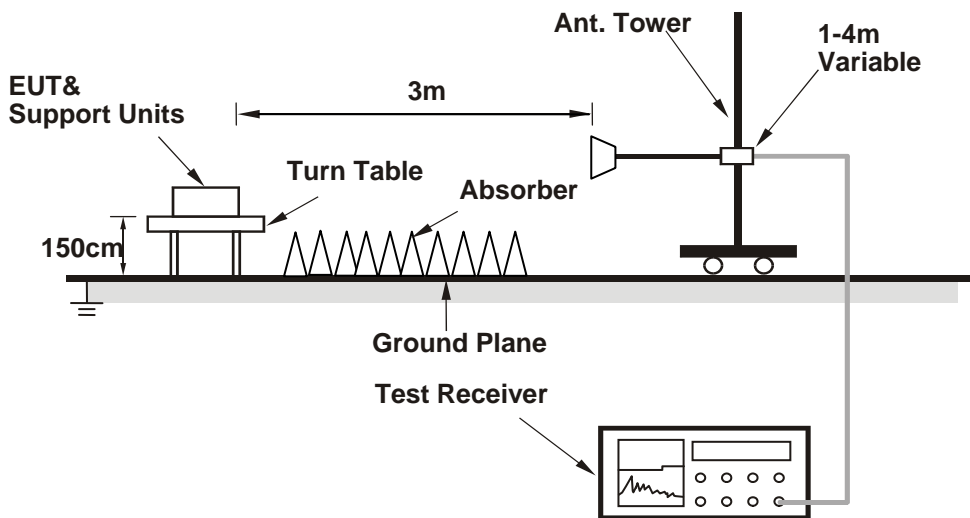

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

1. Connect the EUT with the support units B-C (NOTEBOOK COMPUTER) which is placed on remote site.
2. Controlling software (MTool.exe[2.0.1.8]) has been activated to set the EUT on specific status.

4.1.7 Test Results

**CDD Mode**

**Above 1GHz Data (Subcontract Item)**

**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.8 PK	74.0	-21.2	1.05 H	156	55.69	-2.89
2	2390.00	40.7 AV	54.0	-13.3	1.05 H	156	43.59	-2.89
3	*2412.00	108.3 PK			1.36 H	146	111.15	-2.85
4	*2412.00	104.1 AV			1.36 H	146	106.95	-2.85
5	4824.00	50.7 PK	74.0	-23.3	1.00 H	152	44.48	6.22
6	4824.00	42.6 AV	54.0	-11.4	1.00 H	152	36.38	6.22

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	2.76 V	168	66.39	-2.89
2	2390.00	53.8 AV	54.0	-0.2	2.76 V	168	56.69	-2.89
3	*2412.00	116.5 PK			2.76 V	168	119.35	-2.85
4	*2412.00	112.8 AV			2.76 V	168	115.65	-2.85
5	4824.00	59.4 PK	74.0	-14.6	1.06 V	167	53.18	6.22
6	4824.00	51.0 AV	54.0	-3.0	1.06 V	167	44.78	6.22

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2357.00	51.8 PK	74.0	-22.2	1.00 H	144	54.74	-2.94
2	2357.00	47.5 AV	54.0	-6.5	1.00 H	144	50.44	-2.94
3	*2437.00	111.2 PK			1.40 H	132	113.99	-2.79
4	*2437.00	108.8 AV			1.40 H	132	111.59	-2.79
5	4874.00	50.9 PK	74.0	-23.1	1.00 H	149	44.64	6.26
6	4874.00	46.8 AV	54.0	-7.2	1.00 H	149	40.54	6.26
7	7311.00	56.2 PK	74.0	-17.8	1.49 H	220	45.00	11.20
8	7311.00	45.1 AV	54.0	-8.9	1.49 H	220	33.90	11.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2357.00	64.9 PK	74.0	-9.1	2.58 V	168	67.84	-2.94
2	<b>2357.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>2.58 V</b>	<b>168</b>	<b>56.84</b>	<b>-2.94</b>
3	*2437.00	119.9 PK			2.58 V	168	122.69	-2.79
4	*2437.00	116.3 AV			2.58 V	168	119.09	-2.79
5	4874.00	60.4 PK	74.0	-13.6	1.00 V	131	54.14	6.26
6	4874.00	52.3 AV	54.0	-1.7	1.00 V	131	46.04	6.26
7	7311.00	58.8 PK	74.0	-15.2	1.41 V	219	47.60	11.20
8	7311.00	49.3 AV	54.0	-4.7	1.41 V	219	38.10	11.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.9 PK			1.38 H	161	112.62	-2.72
2	*2462.00	105.9 AV			1.38 H	161	108.62	-2.72
3	2483.50	50.9 PK	74.0	-23.1	1.00 H	143	53.57	-2.67
4	2483.50	42.0 AV	54.0	-12.0	1.00 H	143	44.67	-2.67
5	4924.00	50.7 PK	74.0	-23.3	1.00 H	155	44.45	6.25
6	4924.00	46.7 AV	54.0	-7.3	1.00 H	155	40.45	6.25
7	7386.00	56.8 PK	74.0	-17.2	1.53 H	231	45.19	11.61
8	7386.00	45.5 AV	54.0	-8.5	1.53 H	231	33.89	11.61

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.1 PK			2.01 V	21	120.82	-2.72
2	*2462.00	114.4 AV			2.01 V	21	117.12	-2.72
3	2483.50	63.1 PK	74.0	-10.9	2.01 V	21	65.77	-2.67
4	2483.50	53.8 AV	54.0	-0.2	2.01 V	21	56.47	-2.67
5	4924.00	59.6 PK	74.0	-14.4	1.04 V	176	53.35	6.25
6	4924.00	52.1 AV	54.0	-1.9	1.04 V	176	45.85	6.25
7	7386.00	58.9 PK	74.0	-15.1	1.48 V	230	47.29	11.61
8	7386.00	48.4 AV	54.0	-5.6	1.48 V	230	36.79	11.61

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.27 H	111	59.79	-2.89
2	2390.00	45.2 AV	54.0	-8.8	1.27 H	111	48.09	-2.89
3	*2412.00	108.2 PK			1.31 H	145	111.05	-2.85
4	*2412.00	99.6 AV			1.31 H	145	102.45	-2.85
5	4824.00	51.3 PK	74.0	-22.7	1.11 H	131	45.08	6.22
6	4824.00	41.5 AV	54.0	-12.5	1.11 H	131	35.28	6.22

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	1.69 V	6	74.99	-2.89
2	<b>2390.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.69 V</b>	<b>6</b>	<b>56.79</b>	<b>-2.89</b>
3	*2412.00	115.6 PK			1.69 V	6	118.45	-2.85
4	*2412.00	106.5 AV			1.69 V	6	109.35	-2.85
5	4824.00	53.7 PK	74.0	-20.3	1.09 V	146	47.48	6.22
6	4824.00	43.2 AV	54.0	-10.8	1.09 V	146	36.98	6.22

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.6 PK	74.0	-12.4	1.01 H	143	64.49	-2.89
2	2390.00	44.9 AV	54.0	-9.1	1.01 H	143	47.79	-2.89
3	*2437.00	115.1 PK			1.35 H	138	117.89	-2.79
4	*2437.00	105.3 AV			1.35 H	138	108.09	-2.79
5	2483.50	60.6 PK	74.0	-13.4	1.06 H	330	63.27	-2.67
6	2483.50	43.4 AV	54.0	-10.6	1.06 H	330	46.07	-2.67
7	4874.00	51.0 PK	74.0	-23.0	1.09 H	125	44.74	6.26
8	4874.00	41.1 AV	54.0	-12.9	1.09 H	125	34.84	6.26
9	7311.00	55.6 PK	74.0	-18.4	1.47 H	163	44.40	11.20
10	7311.00	44.9 AV	54.0	-9.1	1.47 H	163	33.70	11.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	2.41 V	181	74.49	-2.89
2	2390.00	53.7 AV	54.0	-0.3	2.41 V	181	56.59	-2.89
3	*2437.00	122.3 PK			2.41 V	181	125.09	-2.79
4	*2437.00	112.4 AV			2.41 V	181	115.19	-2.79
5	2483.50	72.0 PK	74.0	-2.0	2.41 V	181	74.67	-2.67
6	2483.50	53.1 AV	54.0	-0.9	2.41 V	181	55.77	-2.67
7	4874.00	57.6 PK	74.0	-16.4	1.00 V	205	51.34	6.26
8	4874.00	47.3 AV	54.0	-6.7	1.00 V	205	41.04	6.26
9	7311.00	60.3 PK	74.0	-13.7	1.58 V	205	49.10	11.20
10	7311.00	46.7 AV	54.0	-7.3	1.58 V	205	35.50	11.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.1 PK			1.31 H	147	110.82	-2.72
2	*2462.00	98.1 AV			1.31 H	147	100.82	-2.72
3	2483.50	62.0 PK	74.0	-12.0	1.08 H	111	64.67	-2.67
4	2483.50	44.6 AV	54.0	-9.4	1.08 H	111	47.27	-2.67
5	4924.00	51.0 PK	74.0	-23.0	1.11 H	124	44.75	6.25
6	4924.00	41.0 AV	54.0	-13.0	1.11 H	124	34.75	6.25
7	7386.00	53.1 PK	74.0	-20.9	1.43 H	170	41.49	11.61
8	7386.00	42.4 AV	54.0	-11.6	1.43 H	170	30.79	11.61

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.2 PK			1.81 V	5	117.92	-2.72
2	*2462.00	105.6 AV			1.81 V	5	108.32	-2.72
3	2483.50	73.3 PK	74.0	-0.7	1.81 V	5	75.97	-2.67
4	2483.50	53.4 AV	54.0	-0.6	1.81 V	5	56.07	-2.67
5	4924.00	53.2 PK	74.0	-20.8	1.05 V	148	46.95	6.25
6	4924.00	43.0 AV	54.0	-11.0	1.05 V	148	36.75	6.25
7	7386.00	58.6 PK	74.0	-15.4	1.36 V	208	46.99	11.61
8	7386.00	45.6 AV	54.0	-8.4	1.36 V	208	33.99	11.61

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11n (HT20)

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.23 H	106	59.79	-2.89
2	2390.00	45.1 AV	54.0	-8.9	1.23 H	106	47.99	-2.89
3	*2412.00	107.6 PK			1.34 H	124	110.45	-2.85
4	*2412.00	98.4 AV			1.34 H	124	101.25	-2.85
5	4824.00	51.6 PK	74.0	-22.4	1.13 H	124	45.38	6.22
6	4824.00	42.0 AV	54.0	-12.0	1.13 H	124	35.78	6.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.8 PK	74.0	-1.2	2.08 V	1	75.69	-2.89
2	2390.00	53.5 AV	54.0	-0.5	2.08 V	1	56.39	-2.89
3	*2412.00	114.9 PK			2.08 V	1	117.75	-2.85
4	*2412.00	105.0 AV			2.08 V	1	107.85	-2.85
5	4824.00	53.2 PK	74.0	-20.8	1.09 V	150	46.98	6.22
6	4824.00	42.9 AV	54.0	-11.1	1.09 V	150	36.68	6.22

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.3 PK	74.0	-12.7	1.00 H	134	64.19	-2.89
2	2390.00	44.9 AV	54.0	-9.1	1.00 H	134	47.79	-2.89
3	*2437.00	114.2 PK			1.31 H	120	116.99	-2.79
4	*2437.00	104.8 AV			1.31 H	120	107.59	-2.79
5	2483.50	60.7 PK	74.0	-13.3	1.04 H	321	63.37	-2.67
6	2483.50	43.7 AV	54.0	-10.3	1.04 H	321	46.37	-2.67
7	4874.00	50.8 PK	74.0	-23.2	1.09 H	138	44.54	6.26
8	4874.00	41.1 AV	54.0	-12.9	1.09 H	138	34.84	6.26
9	7311.00	55.9 PK	74.0	-18.1	1.53 H	175	44.70	11.20
10	7311.00	45.2 AV	54.0	-8.8	1.53 H	175	34.00	11.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	1.69 V	4	73.89	-2.89
2	2390.00	53.9 AV	54.0	-0.1	1.69 V	4	56.79	-2.89
3	*2437.00	121.9 PK			1.69 V	4	124.69	-2.79
4	*2437.00	112.2 AV			1.69 V	4	114.99	-2.79
5	2483.50	70.7 PK	74.0	-3.3	1.69 V	4	73.37	-2.67
6	2483.50	52.1 AV	54.0	-1.9	1.69 V	4	54.77	-2.67
7	4874.00	57.7 PK	74.0	-16.3	1.00 V	208	51.44	6.26
8	4874.00	47.2 AV	54.0	-6.8	1.00 V	208	40.94	6.26
9	7311.00	60.6 PK	74.0	-13.4	1.56 V	207	49.40	11.20
10	7311.00	47.2 AV	54.0	-6.8	1.56 V	207	36.00	11.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.8 PK			1.29 H	143	111.52	-2.72
2	*2462.00	98.6 AV			1.29 H	143	101.32	-2.72
3	2483.50	61.4 PK	74.0	-12.6	1.12 H	121	64.07	-2.67
4	2483.50	44.2 AV	54.0	-9.8	1.12 H	121	46.87	-2.67
5	4924.00	51.1 PK	74.0	-22.9	1.11 H	126	44.85	6.25
6	4924.00	40.9 AV	54.0	-13.1	1.11 H	126	34.65	6.25
7	7386.00	53.1 PK	74.0	-20.9	1.41 H	156	41.49	11.61
8	7386.00	42.7 AV	54.0	-11.3	1.41 H	156	31.09	11.61

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.7 PK			2.18 V	187	119.42	-2.72
2	*2462.00	106.4 AV			2.18 V	187	109.12	-2.72
3	2483.50	73.5 PK	74.0	-0.5	2.18 V	187	76.17	-2.67
4	2483.50	53.7 AV	54.0	-0.3	2.18 V	187	56.37	-2.67
5	4924.00	53.3 PK	74.0	-20.7	1.00 V	137	47.05	6.25
6	4924.00	43.4 AV	54.0	-10.6	1.00 V	137	37.15	6.25
7	7386.00	58.6 PK	74.0	-15.4	1.33 V	195	46.99	11.61
8	7386.00	45.6 AV	54.0	-8.4	1.33 V	195	33.99	11.61

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11n (HT40)**

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.8 PK	74.0	-17.2	1.34 H	114	59.69	-2.89
2	2390.00	44.8 AV	54.0	-9.2	1.34 H	114	47.69	-2.89
3	*2422.00	101.6 PK			1.26 H	87	104.43	-2.83
4	*2422.00	92.3 AV			1.26 H	87	95.13	-2.83
5	4844.00	50.8 PK	74.0	-23.2	1.08 H	141	44.57	6.23
6	4844.00	41.1 AV	54.0	-12.9	1.08 H	141	34.87	6.23
7	7266.00	57.0 PK	74.0	-17.0	1.39 H	203	45.82	11.18
8	7266.00	40.3 AV	54.0	-13.7	1.39 H	203	29.12	11.18

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.0 PK	74.0	-6.0	2.05 V	2	70.89	-2.89
2	2390.00	53.8 AV	54.0	-0.2	2.05 V	2	56.69	-2.89
3	*2422.00	109.0 PK			2.05 V	2	111.83	-2.83
4	*2422.00	99.6 AV			2.05 V	2	102.43	-2.83
5	4844.00	52.3 PK	74.0	-21.7	1.04 V	129	46.07	6.23
6	4844.00	42.2 AV	54.0	-11.8	1.04 V	129	35.97	6.23
7	7266.00	52.7 PK	74.0	-21.3	1.27 V	223	41.52	11.18
8	7266.00	41.3 AV	54.0	-12.7	1.27 V	223	30.12	11.18

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	1.09 H	134	62.99	-2.89
2	2390.00	42.6 AV	54.0	-11.4	1.09 H	134	45.49	-2.89
3	*2437.00	105.2 PK			1.21 H	95	107.99	-2.79
4	*2437.00	96.2 AV			1.21 H	95	98.99	-2.79
5	2483.50	56.8 PK	74.0	-17.2	1.02 H	128	59.47	-2.67
6	2483.50	40.2 AV	54.0	-13.8	1.02 H	128	42.87	-2.67
7	4874.00	50.7 PK	74.0	-23.3	1.03 H	146	44.44	6.26
8	4874.00	40.7 AV	54.0	-13.3	1.03 H	146	34.44	6.26
9	7311.00	57.0 PK	74.0	-17.0	1.46 H	198	45.80	11.20
10	7311.00	39.7 AV	54.0	-14.3	1.46 H	198	28.50	11.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.0 PK	74.0	-4.0	2.06 V	4	72.89	-2.89
2	2390.00	53.9 AV	54.0	-0.1	2.06 V	4	56.79	-2.89
3	*2437.00	112.7 PK			2.06 V	4	115.49	-2.79
4	*2437.00	103.3 AV			2.06 V	4	106.09	-2.79
5	2483.50	67.7 PK	74.0	-6.3	1.08 V	58	70.37	-2.67
6	2483.50	48.9 AV	54.0	-5.1	1.08 V	58	51.57	-2.67
7	4874.00	52.6 PK	74.0	-21.4	1.08 V	116	46.34	6.26
8	4874.00	42.3 AV	54.0	-11.7	1.08 V	116	36.04	6.26
9	7311.00	53.0 PK	74.0	-21.0	1.32 V	222	41.80	11.20
10	7311.00	41.4 AV	54.0	-12.6	1.32 V	222	30.20	11.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.5 PK			1.20 H	100	106.25	-2.75
2	*2452.00	93.4 AV			1.20 H	100	96.15	-2.75
3	2483.50	53.8 PK	74.0	-20.2	1.08 H	147	56.47	-2.67
4	2483.50	42.8 AV	54.0	-11.2	1.08 H	147	45.47	-2.67
5	4904.00	50.8 PK	74.0	-23.2	1.05 H	124	44.52	6.28
6	4904.00	40.9 AV	54.0	-13.1	1.05 H	124	34.62	6.28
7	7356.00	57.1 PK	74.0	-16.9	1.41 H	218	45.65	11.45
8	7356.00	40.4 AV	54.0	-13.6	1.41 H	218	28.95	11.45

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.8 PK			1.80 V	359	113.55	-2.75
2	*2452.00	100.9 AV			1.80 V	359	103.65	-2.75
3	2483.50	70.1 PK	74.0	-3.9	1.80 V	359	72.77	-2.67
4	2483.50	53.7 AV	54.0	-0.3	1.80 V	359	56.37	-2.67
5	4904.00	52.1 PK	74.0	-21.9	1.01 V	134	45.82	6.28
6	4904.00	41.8 AV	54.0	-12.2	1.01 V	134	35.52	6.28
7	7356.00	52.8 PK	74.0	-21.2	1.30 V	225	41.35	11.45
8	7356.00	41.4 AV	54.0	-12.6	1.30 V	225	29.95	11.45

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



**Below 1GHz Data**

**802.11b**

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	87.52	35.1 QP	40.0	-4.9	1.50 H	75	53.85	-18.75
2	135.05	37.1 QP	43.5	-6.4	1.50 H	291	50.70	-13.64
3	192.77	32.2 QP	43.5	-11.3	1.50 H	239	48.01	-15.80
4	596.97	34.9 QP	46.0	-11.1	1.50 H	192	39.28	-4.42
5	630.04	35.6 QP	46.0	-10.4	1.50 H	182	39.24	-3.64
6	815.65	34.3 QP	46.0	-11.7	1.50 H	110	34.64	-0.31

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	64.97	36.5 QP	40.0	-3.5	1.50 V	184	50.74	-14.26
2	108.81	31.4 QP	43.5	-12.1	1.00 V	359	47.49	-16.07
3	189.52	30.4 QP	43.5	-13.1	1.00 V	286	45.99	-15.55
4	200.87	33.3 QP	43.5	-10.2	1.00 V	281	49.35	-16.06
5	668.70	33.3 QP	46.0	-12.7	1.50 V	337	36.61	-3.30
6	815.70	37.7 QP	46.0	-8.3	1.50 V	182	37.97	-0.31

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 15, 2014	Sep. 14, 2015
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100071	Nov. 10, 2014	Nov. 09, 2015
RF Cable (JYEBAO)	5D-FB	COCCAB-001	Mar. 09, 2015	Mar. 08, 2016
50 ohms Terminator	N/A	EMC-03	Sep. 22, 2014	Sep. 21, 2015
50 ohms Terminator	N/A	EMC-02	Sep. 30, 2014	Sep. 29, 2015
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
- 3 The VCCI Con C Registration No. is C-3611.
- 4 Tested Date: Apr. 15, 2015

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

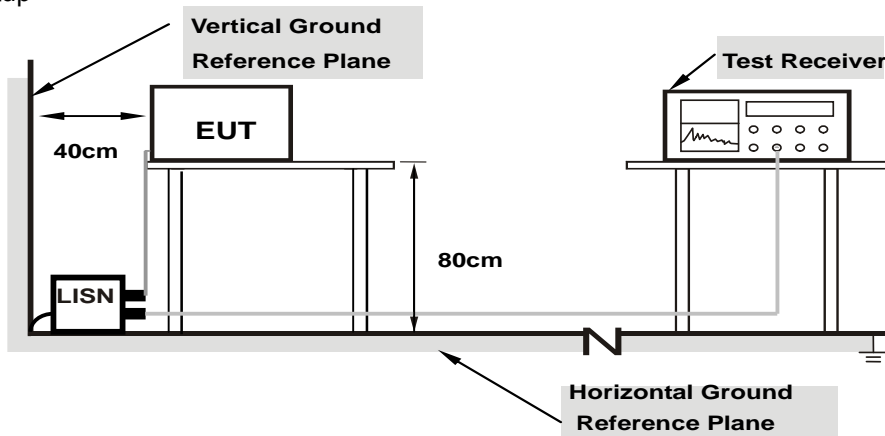

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (MODE 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15391	0.08	50.32	39.04	50.40	39.12	65.79	55.79	-15.39	-16.67
2	0.19297	0.09	47.24	39.82	47.33	39.91	63.91	53.91	-16.58	-14.00
3	0.28672	0.09	46.14	42.74	46.23	42.83	60.62	50.62	-14.38	-7.78
4	0.32969	0.10	43.19	39.24	43.29	39.34	59.46	49.46	-16.17	-10.12
5	0.40391	0.10	30.73	23.65	30.83	23.75	57.77	47.77	-26.94	-24.02
6	9.91016	0.45	23.81	20.07	24.26	20.52	60.00	50.00	-35.74	-29.48

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

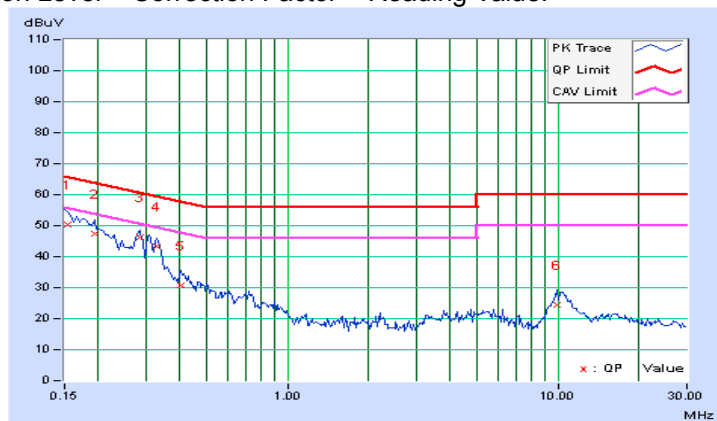


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.16562	0.08	49.16	39.44	49.24	39.52	65.18	55.18	-15.94	-15.66
2	0.19297	0.08	47.30	39.98	47.38	40.06	63.91	53.91	-16.53	-13.85
<b>3</b>	<b>0.28672</b>	<b>0.09</b>	<b>46.05</b>	<b>42.84</b>	<b>46.14</b>	<b>42.93</b>	<b>60.62</b>	<b>50.62</b>	<b>-14.48</b>	<b>-7.69</b>
4	0.41563	0.10	28.93	22.24	29.03	22.34	57.54	47.54	-28.50	-25.19
5	0.73203	0.12	22.04	15.60	22.16	15.72	56.00	46.00	-33.84	-30.28
6	10.19922	0.47	24.40	20.88	24.87	21.35	60.00	50.00	-35.13	-28.65

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

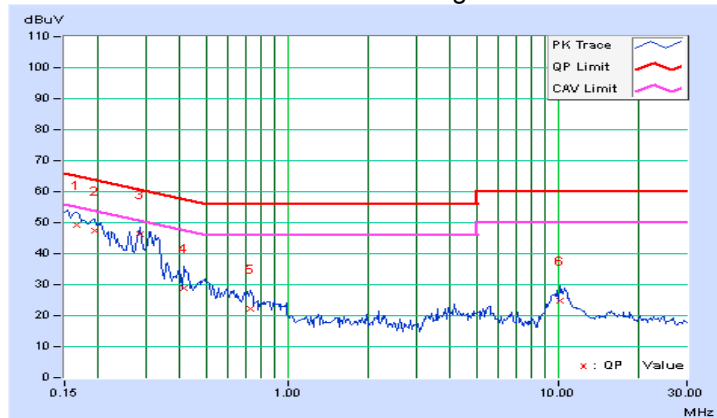


#### 4.2.8 Test Results (MODE 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.16172	0.08	46.99	39.20	47.07	39.28	65.38	55.38	-18.30	-16.09
2	0.19844	0.09	44.57	37.33	44.66	37.42	63.68	53.68	-19.02	-16.26
3	0.31406	0.10	42.22	38.43	42.32	38.53	59.86	49.86	-17.55	-11.34
4	0.70859	0.12	19.37	13.34	19.49	13.46	56.00	46.00	-36.51	-32.54
5	4.15234	0.23	16.15	9.91	16.38	10.14	56.00	46.00	-39.62	-35.86
6	11.53125	0.49	23.15	19.24	23.64	19.73	60.00	50.00	-36.36	-30.27

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

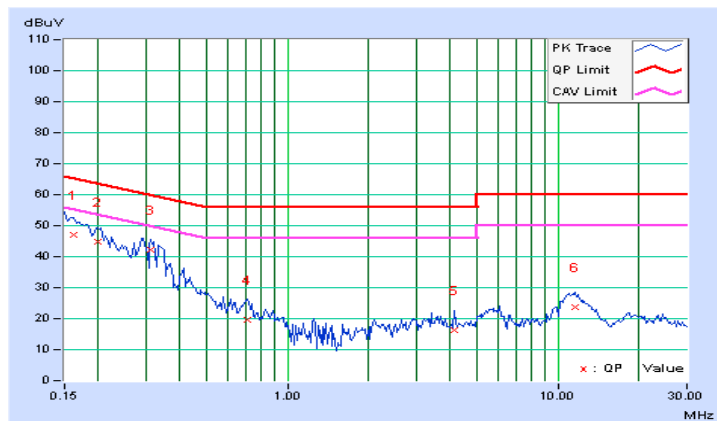


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.08	49.34	39.22	49.42	39.30	65.58	55.58	-16.16	-16.28
2	0.20469	0.08	44.82	36.57	44.90	36.65	63.42	53.42	-18.52	-16.77
3	0.29453	0.09	45.71	42.16	45.80	42.25	60.40	50.40	-14.60	-8.15
4	0.33750	0.09	42.78	37.98	42.87	38.07	59.26	49.26	-16.39	-11.19
5	0.67344	0.11	23.05	15.47	23.16	15.58	56.00	46.00	-32.84	-30.42
6	10.85156	0.48	24.68	21.00	25.16	21.48	60.00	50.00	-34.84	-28.52

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

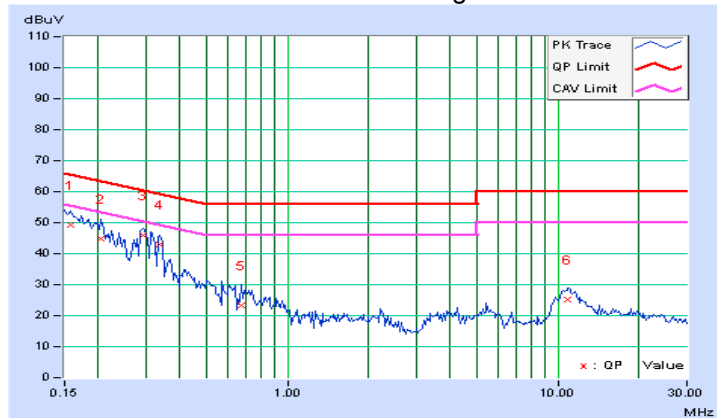


4.2.9 Test Results (MODE 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.16050	0.08	50.76	35.97	50.84	36.05	65.44	55.44	-14.60	-19.39
2	0.20469	0.09	46.94	40.52	47.03	40.61	63.42	53.42	-16.39	-12.81
3	0.27500	0.09	40.48	32.42	40.57	32.51	60.97	50.97	-20.39	-18.45
4	0.38047	0.10	35.31	29.87	35.41	29.97	58.27	48.27	-22.86	-18.30
5	0.68906	0.11	26.20	19.84	26.31	19.95	56.00	46.00	-29.69	-26.05
6	12.15234	0.50	26.24	21.35	26.74	21.85	60.00	50.00	-33.26	-28.15

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

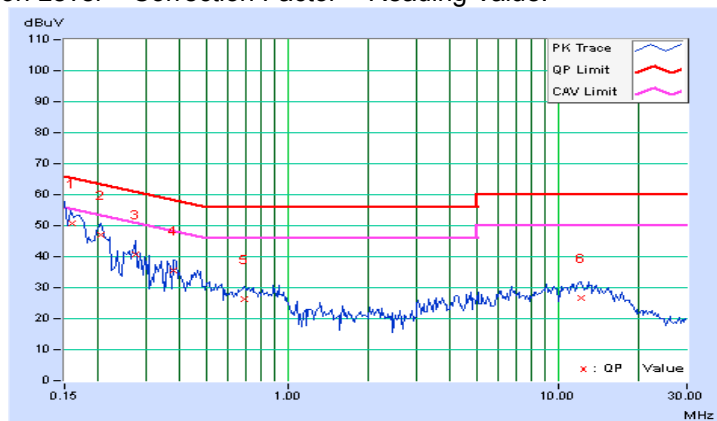




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	0.08	49.39	39.60	49.47	39.68	64.79	54.79	-15.32	-15.11
2	0.20078	0.08	45.49	37.68	45.57	37.76	63.58	53.58	-18.01	-15.82
3	0.26719	0.09	39.85	30.30	39.94	30.39	61.20	51.20	-21.27	-20.82
4	0.34141	0.09	35.61	29.41	35.70	29.50	59.17	49.17	-23.46	-19.66
5	1.14063	0.14	21.72	15.55	21.86	15.69	56.00	46.00	-34.14	-30.31
6	10.07422	0.46	23.71	18.99	24.17	19.45	60.00	50.00	-35.83	-30.55

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

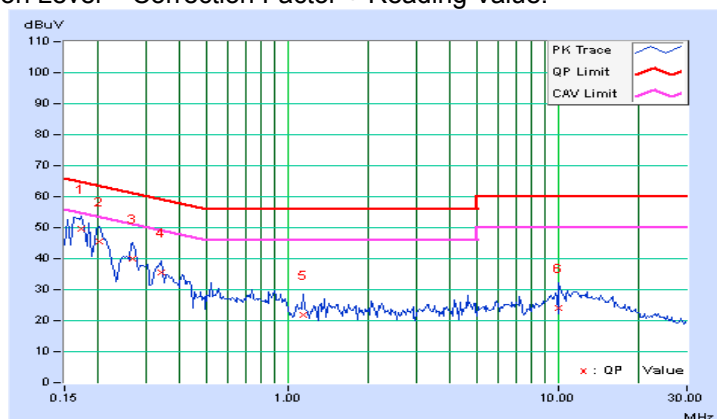


#### 4.2.10 Test Results (MODE 4)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.17344	0.08	53.72	46.00	53.80	46.08	64.79	54.79	-10.99	-8.71
2	0.26719	0.09	40.77	32.72	40.86	32.81	61.20	51.20	-20.34	-18.39
3	0.39609	0.10	37.07	30.64	37.17	30.74	57.93	47.93	-20.77	-17.20
4	3.27734	0.20	23.11	16.79	23.31	16.99	56.00	46.00	-32.69	-29.01
5	9.33594	0.42	27.12	22.21	27.54	22.63	60.00	50.00	-32.46	-27.37
6	14.45313	0.56	26.94	22.25	27.50	22.81	60.00	50.00	-32.50	-27.19

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

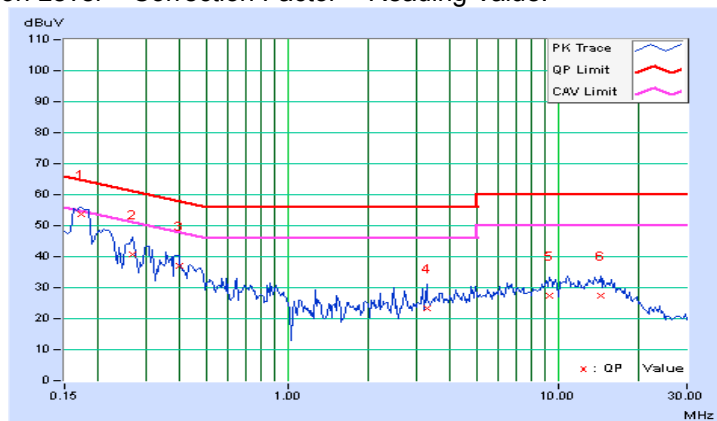


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17638	0.08	52.52	44.16	52.60	44.24	64.65	54.65	-12.05	-10.41
2	0.24375	0.08	38.47	26.09	38.55	26.17	61.97	51.97	-23.41	-25.79
3	0.30234	0.09	38.23	29.99	38.32	30.08	60.18	50.18	-21.86	-20.10
4	0.36094	0.10	33.41	23.42	33.51	23.52	58.71	48.71	-25.20	-25.19
5	1.79297	0.16	22.43	15.57	22.59	15.73	56.00	46.00	-33.41	-30.27
6	11.05078	0.49	25.06	20.55	25.55	21.04	60.00	50.00	-34.45	-28.96

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

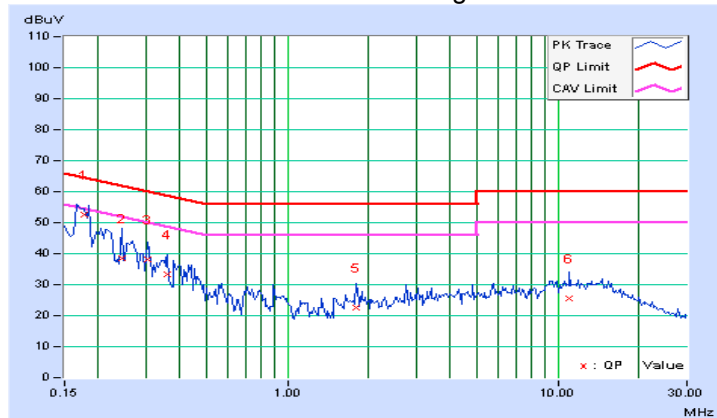


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2014	May 07, 2015
Power meter Anritsu	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power sensor Anritsu	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015
Temperature & Humidity Chamber GIANTFORCE	GTH-150-40-S P-AR	MAA0812-008	Jan. 12, 2015	Jan. 11, 2016

- NOTE:**
1. The test was performed in Oven room B.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: Apr. 17, 2015

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**4.3.7 Test Result**

Channel	Frequency (MHz)	6db Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		CHAIN 0	CHAIN 1	CHAIN 2		
<b>802.11b</b>						
1	2412	8.13	8.13	8.11	0.5	PASS
6	2437	8.59	8.59	8.13	0.5	PASS
11	2462	8.13	8.13	8.14	0.5	PASS
<b>802.11g</b>						
1	2412	16.42	16.43	16.44	0.5	PASS
6	2437	16.41	16.42	16.42	0.5	PASS
11	2462	16.44	16.45	16.46	0.5	PASS
<b>802.11n (HT20)</b>						
1	2412	17.64	17.66	17.65	0.5	PASS
6	2437	17.62	17.66	17.65	0.5	PASS
11	2462	17.65	17.68	17.67	0.5	PASS
<b>802.11n (HT40)</b>						
3	2422	36.15	36.39	36.47	0.5	PASS
6	2437	35.93	36.48	35.91	0.5	PASS
9	2452	36.16	36.46	36.45	0.5	PASS

Spectrum Plot of Worst Value



802.11b – Chain 2: CH1

802.11g – Chain 0: CH6

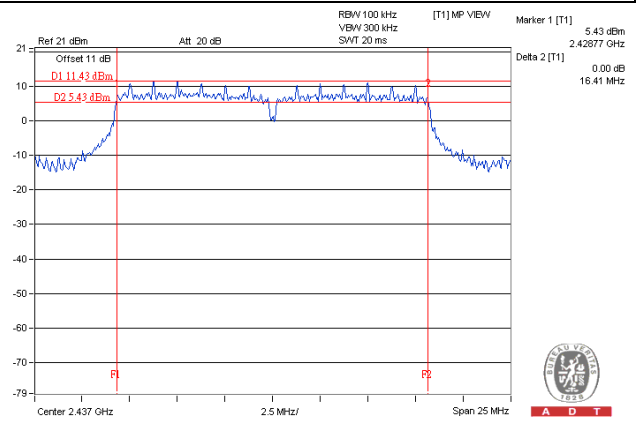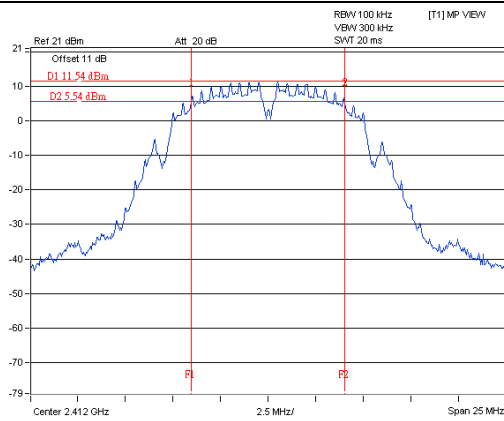

802.11n (HT20) – Chain 0: CH6

802.11n (HT40) – Chain 2: CH6

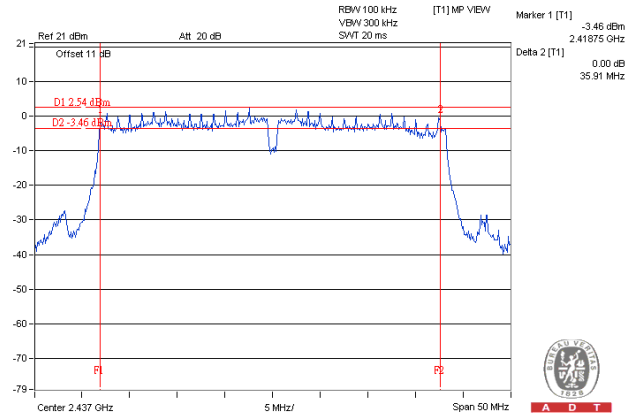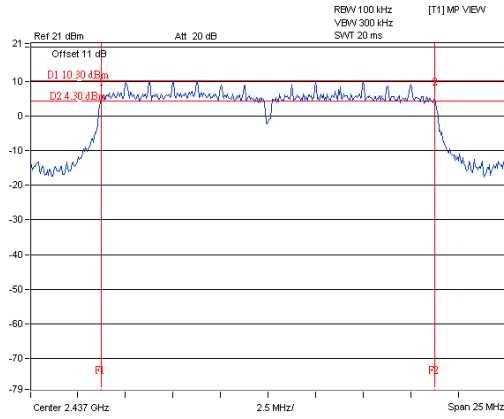

#### 4.4 Conducted Output Power Measurement

##### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

##### 4.4.2 Test Setup



##### 4.4.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

##### 4.4.4 Test Procedures

A average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

##### 4.4.5 Deviation from Test Standard

No deviation.

##### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.



**4.4.7 Test Results**


CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
<b>802.11b</b>								
1	2412	20.22	20.54	20.38	327.58	25.15	30	PASS
6	2437	22.40	22.15	23.00	537.365	27.30	30	PASS
11	2462	21.52	21.67	21.81	440.504	26.44	30	PASS
<b>802.11g</b>								
1	2412	15.65	15.63	15.53	109.014	20.37	30	PASS
6	2437	22.33	22.70	22.54	536.684	27.30	30	PASS
11	2462	16.25	16.73	16.21	131.051	21.17	30	PASS
<b>802.11n (HT20)</b>								
1	2412	14.40	14.94	14.77	88.723	19.48	30	PASS
6	2437	21.35	21.70	21.78	435.03	26.39	30	PASS
11	2462	15.88	16.68	16.16	126.59	21.02	30	PASS
<b>802.11n (HT40)</b>								
3	2422	11.21	10.95	11.58	40.046	16.03	30	PASS
6	2437	15.57	15.52	16.15	112.913	20.53	30	PASS
9	2452	13.64	13.38	13.87	69.276	18.41	30	PASS

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

### 4.5.4 Test Procedure

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
<b>802.11b</b>							
0	1	2412	-8.05	4.77	-3.28	5.90	Pass
	6	2437	-5.62	4.77	-0.85	5.90	Pass
	11	2462	-6.82	4.77	-2.05	5.90	Pass
1	1	2412	-7.90	4.77	-3.13	5.90	Pass
	6	2437	-6.02	4.77	-1.25	5.90	Pass
	11	2462	-6.44	4.77	-1.67	5.90	Pass
2	1	2412	-7.91	4.77	-3.14	5.90	Pass
	6	2437	-5.48	4.77	-0.71	5.90	Pass
	11	2462	-6.58	4.77	-1.81	5.90	Pass

##### 802.11g

0	1	2412	-14.63	4.77	-9.86	5.90	Pass
	6	2437	-8.24	4.77	-3.47	5.90	Pass
	11	2462	-13.78	4.77	-9.01	5.90	Pass
1	1	2412	-15.37	4.77	-10.60	5.90	Pass
	6	2437	-8.46	4.77	-3.69	5.90	Pass
	11	2462	-14.25	4.77	-9.48	5.90	Pass
2	1	2412	-15.20	4.77	-10.43	5.90	Pass
	6	2437	-8.47	4.77	-3.70	5.90	Pass
	11	2462	-14.64	4.77	-9.87	5.90	Pass


##### 802.11n (HT20)

0	1	2412	-16.78	4.77	-12.01	5.90	Pass
	6	2437	-9.23	4.77	-4.46	5.90	Pass
	11	2462	-14.97	4.77	-10.20	5.90	Pass
1	1	2412	-16.44	4.77	-11.67	5.90	Pass
	6	2437	-9.56	4.77	-4.79	5.90	Pass
	11	2462	-14.58	4.77	-9.81	5.90	Pass
2	1	2412	-16.32	4.77	-11.55	5.90	Pass
	6	2437	-9.34	4.77	-4.57	5.90	Pass
	11	2462	-14.72	4.77	-9.95	5.90	Pass

**NOTE:** Directional gain =  $10 \log[(10G1/20 + 10G2/20 + 10G3/20) / 3] = 8.1\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8 - (8.1 - 6) = 5.90\text{dBm}$ .

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
<b>802.11n (HT40)</b>							
0	3	2422	-20.64	4.77	-15.87	5.90	Pass
	6	2437	-16.41	4.77	-11.64	5.90	Pass
	9	2452	-18.50	4.77	-13.73	5.90	Pass
1	3	2422	-21.97	4.77	-17.20	5.90	Pass
	6	2437	-17.01	4.77	-12.24	5.90	Pass
	9	2452	-18.91	4.77	-14.14	5.90	Pass
2	3	2422	-20.79	4.77	-16.02	5.90	Pass
	6	2437	-16.03	4.77	-11.26	5.90	Pass
	9	2452	-18.75	4.77	-13.98	5.90	Pass

**NOTE:** Directional gain =  $10 \log[(10G1/20 + 10G2/20 + 10G3/20)2 / 3] = 8.1\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8-(8.1-6) = 5.90\text{dBm}$ .

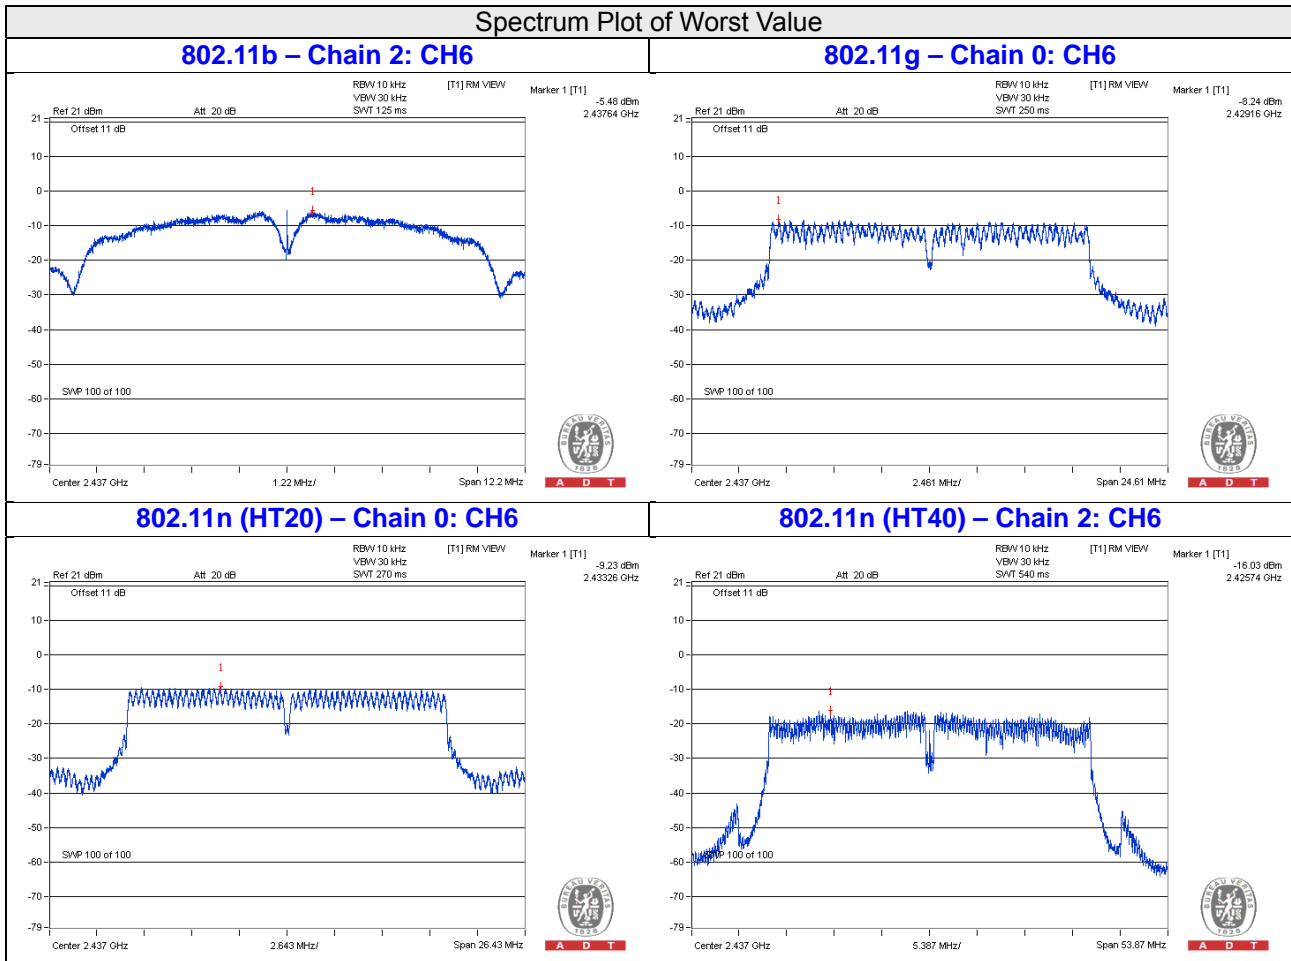


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.


### 4.6.6 EUT Operating Condition

Same as Item 4.3.6

### 4.6.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b

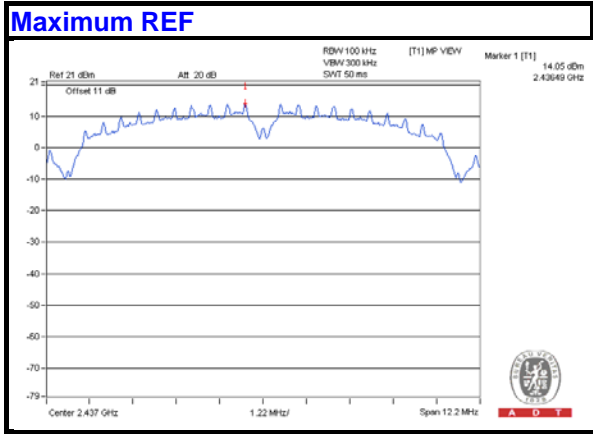


### CHAIN 0



#### CH 1

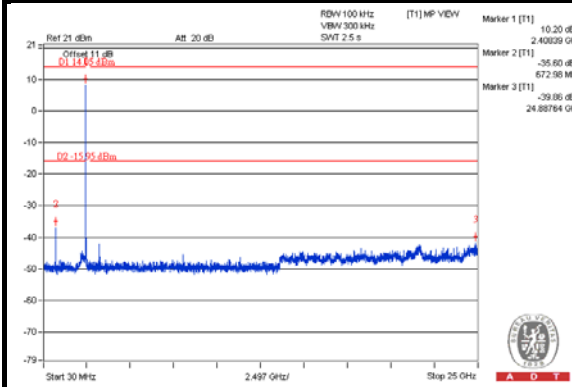


#### CH 6

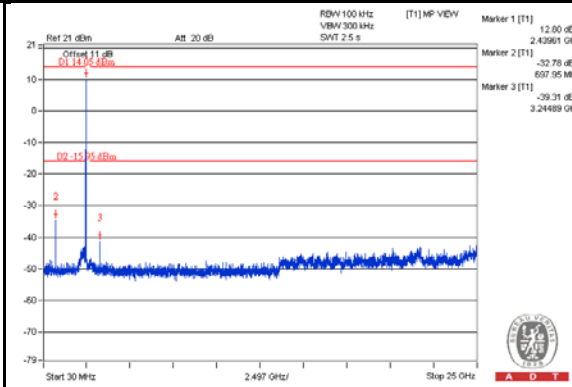


#### CH 11

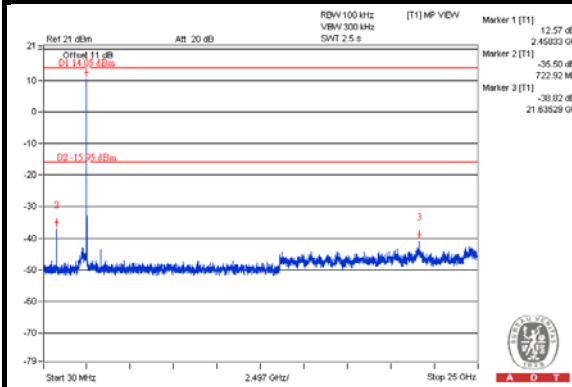

#### CH 1 Band edge

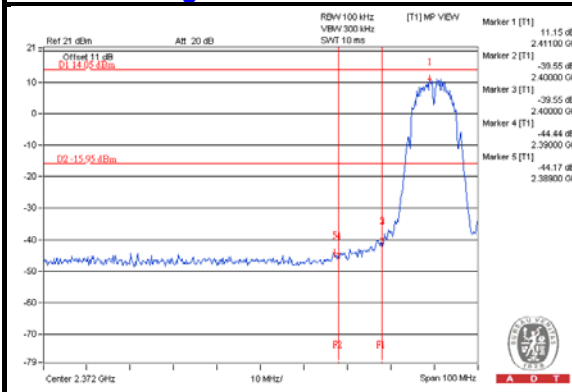


#### CH 11 Band edge

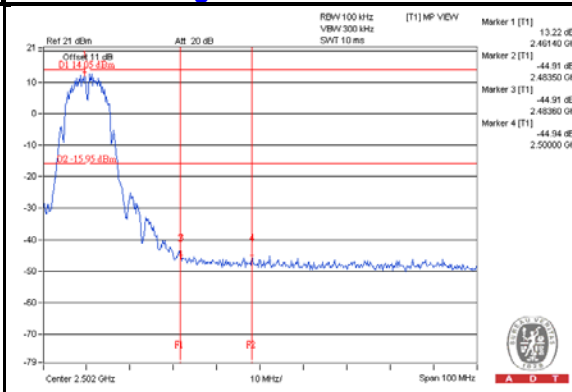


### CHAIN 1


#### CH 1

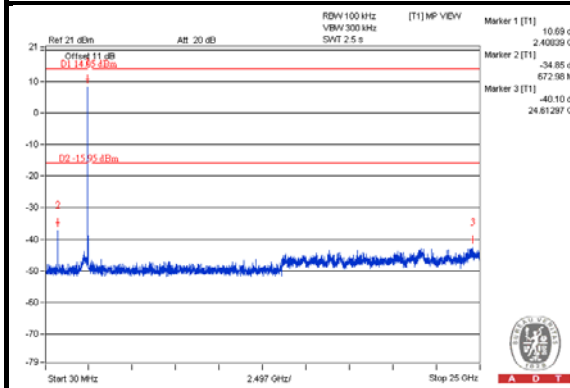


#### CH 6

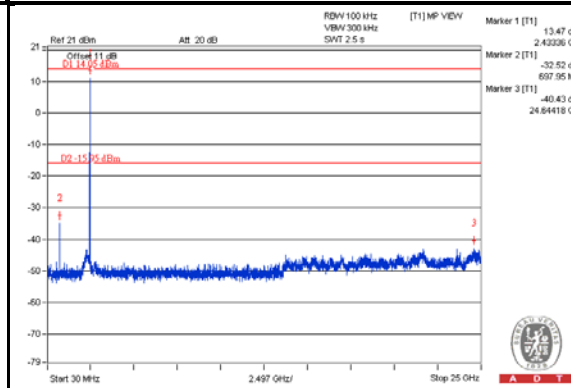


#### CH 11

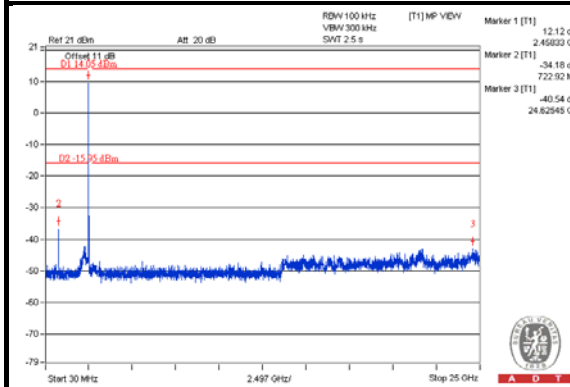

#### CH 1 Band edge

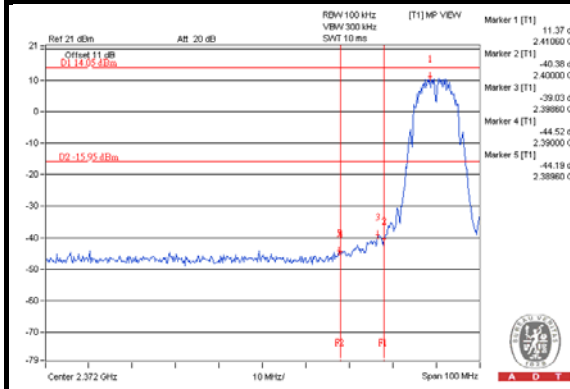


#### CH 11 Band edge

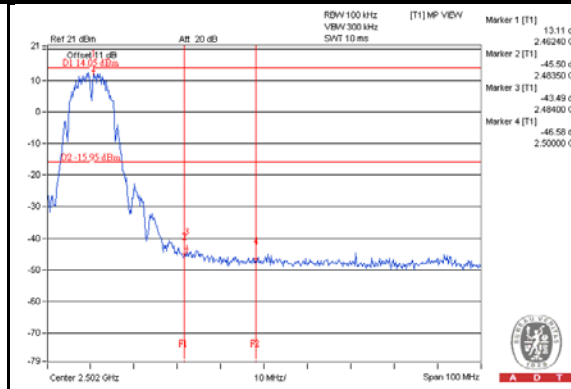


### CHAIN 2


#### CH 1

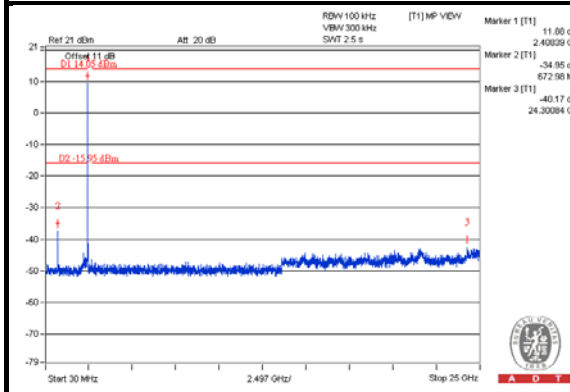


#### CH 6

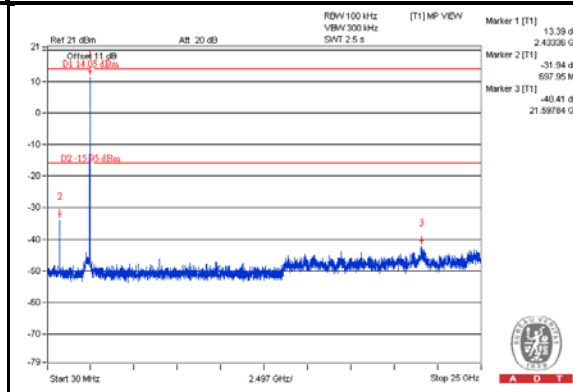


#### CH 11

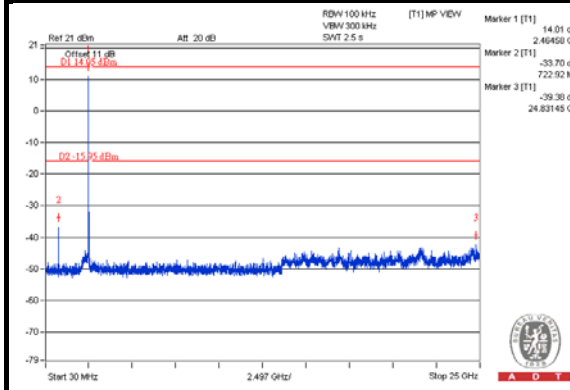

#### CH 1 Band edge

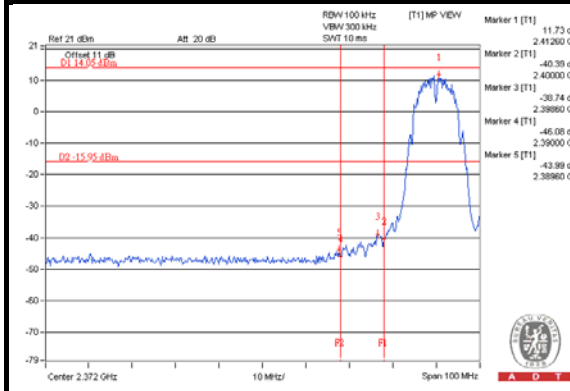


#### CH 11 Band edge

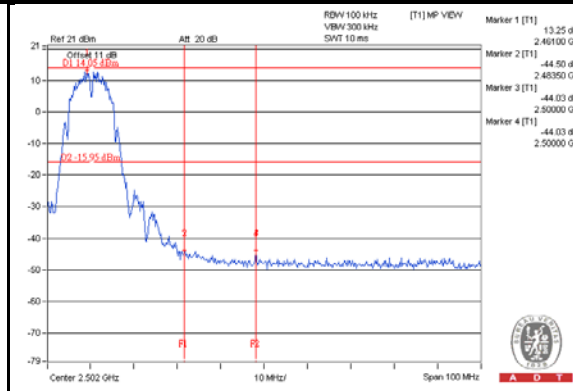




802.11g

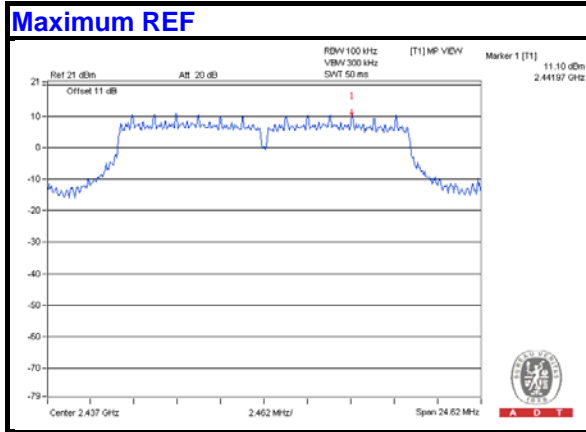


### CHAIN 0



#### CH 1

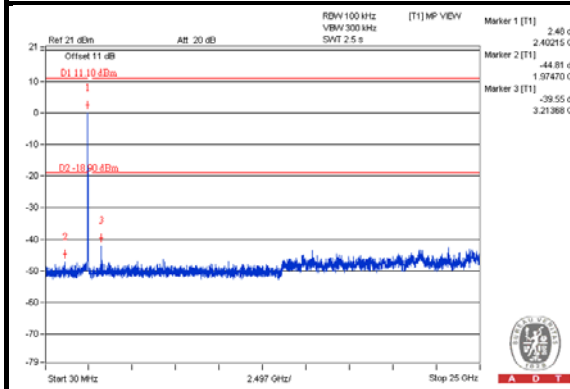


#### CH 6

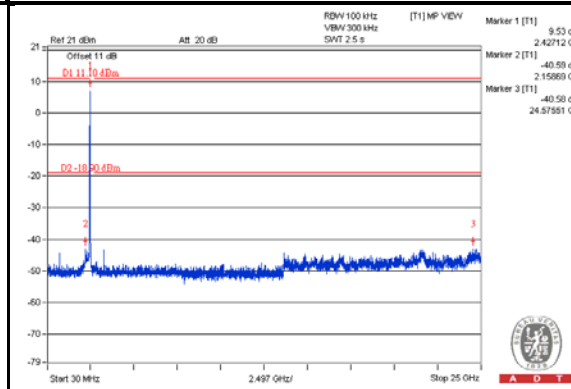


#### CH 11

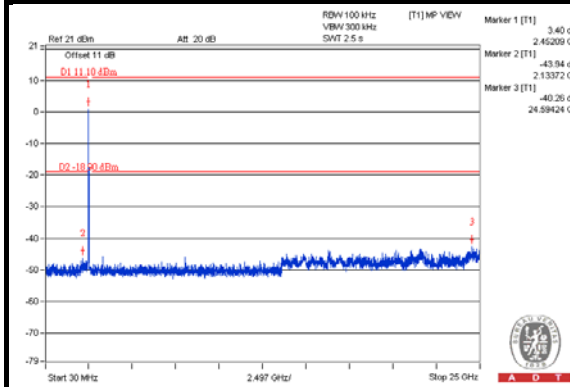

#### CH 1 Band edge

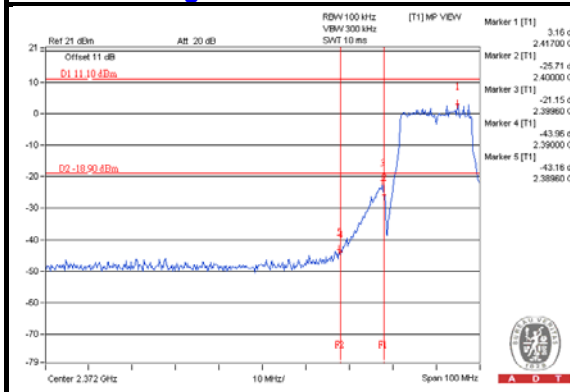


#### CH 11 Band edge

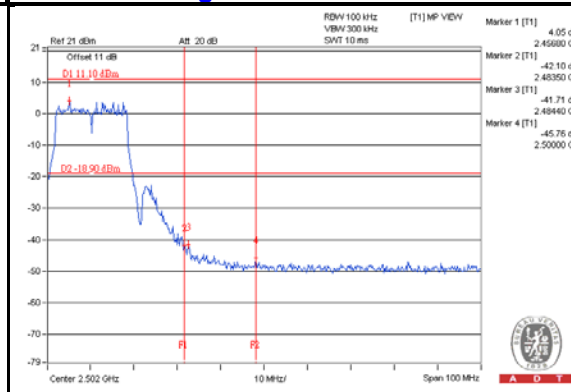


**CHAIN 1**


**CH 1**

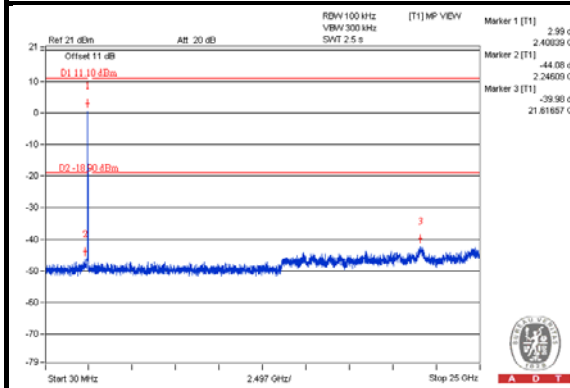


**CH 6**

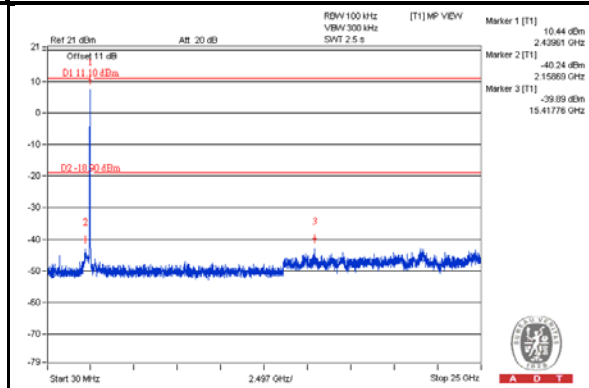


**CH 11**

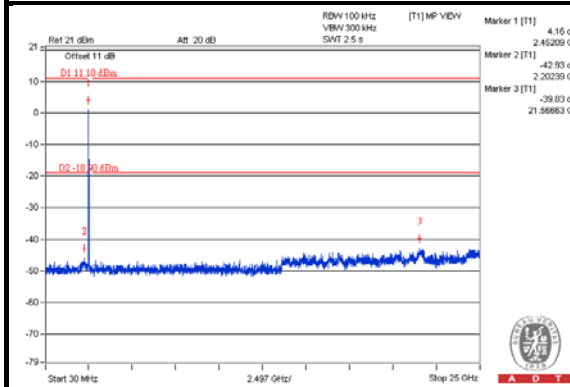

**CH 1 Band edge**

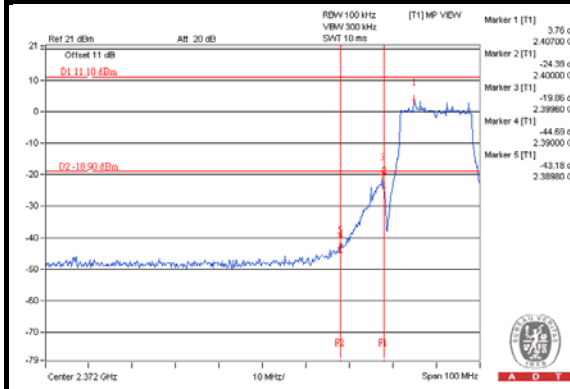


**CH 11 Band edge**

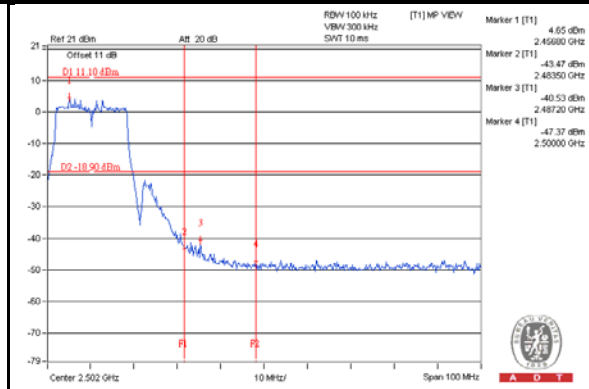


### CHAIN 2


#### CH 1

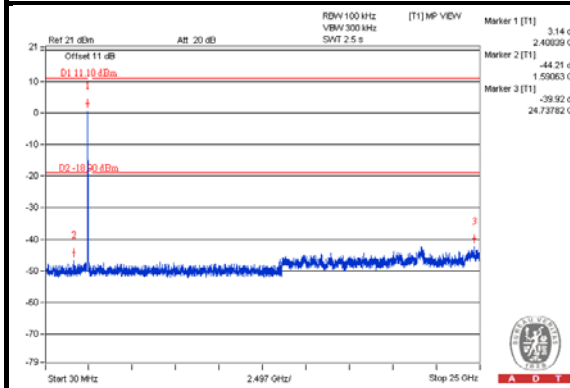


#### CH 6

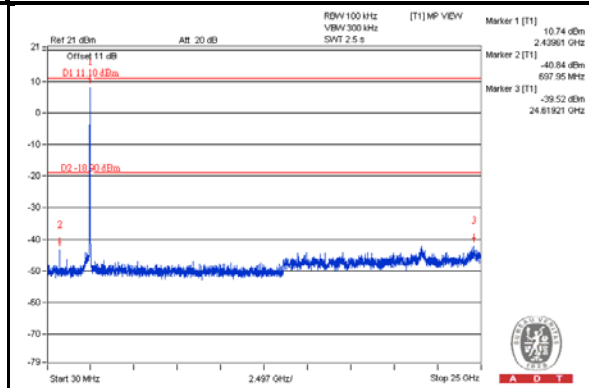


#### CH 11

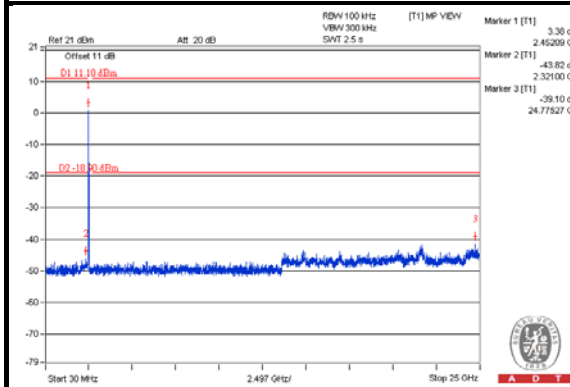


#### CH 1 Band edge

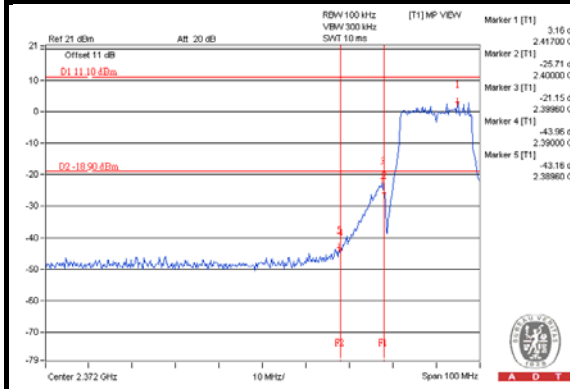

#### CH 11 Band edge

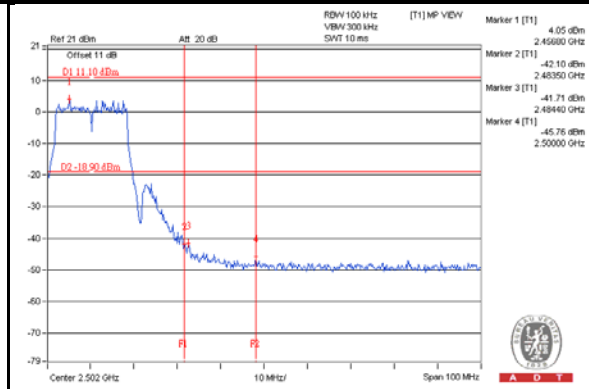


802.11n (HT20)

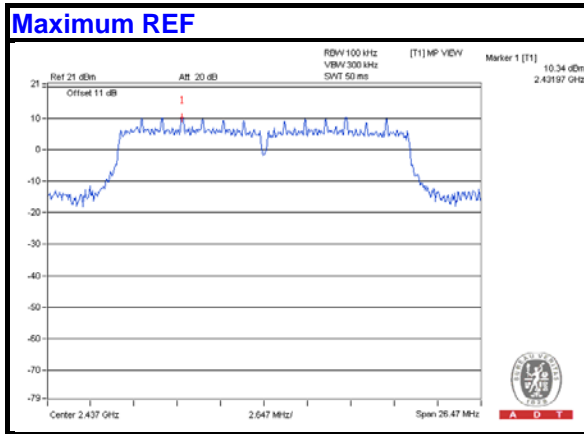


### CHAIN 0



#### CH 1

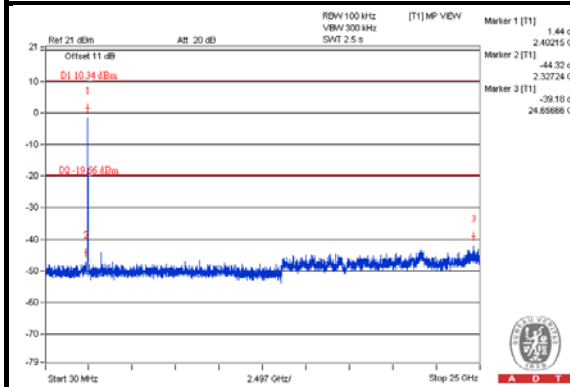


#### CH 6

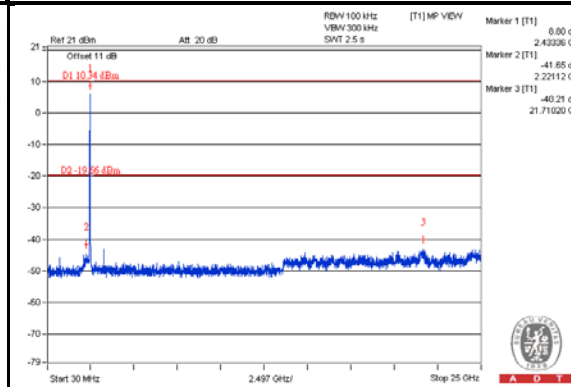


#### CH 11

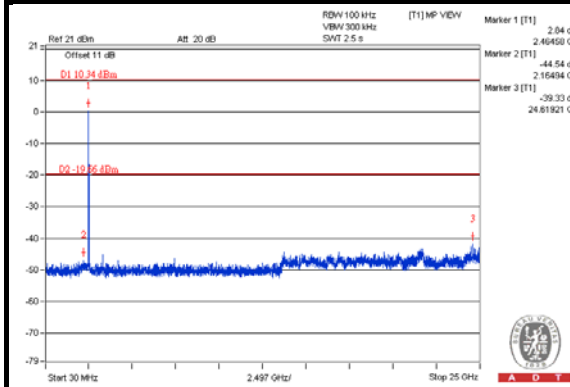

#### CH 1 Band edge

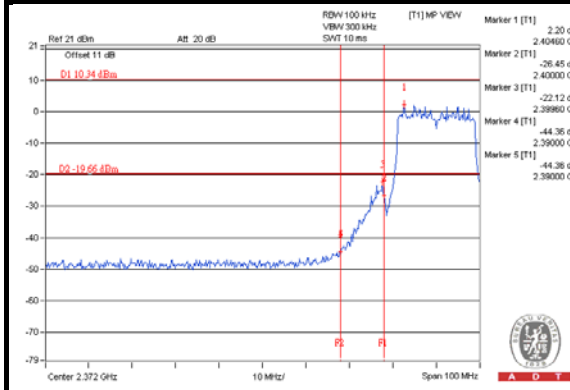


#### CH 11 Band edge

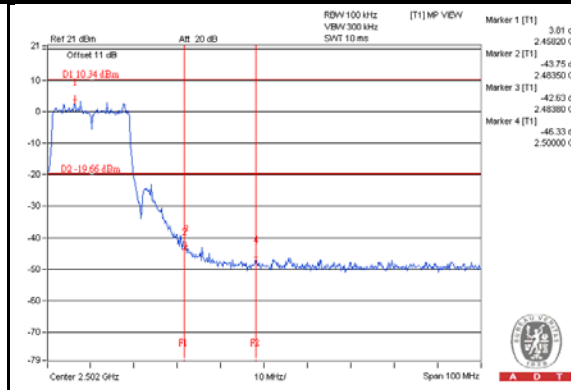


**CHAIN 1**


**CH 1**

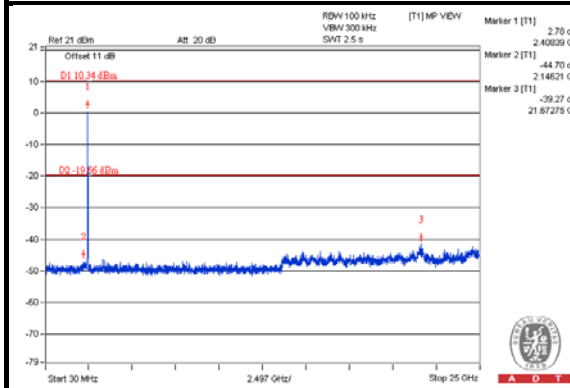


**CH 6**

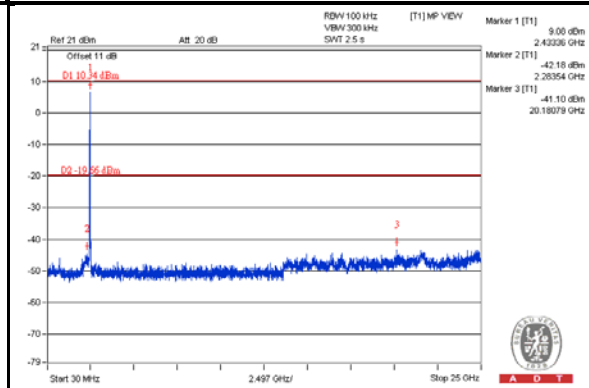


**CH 11**

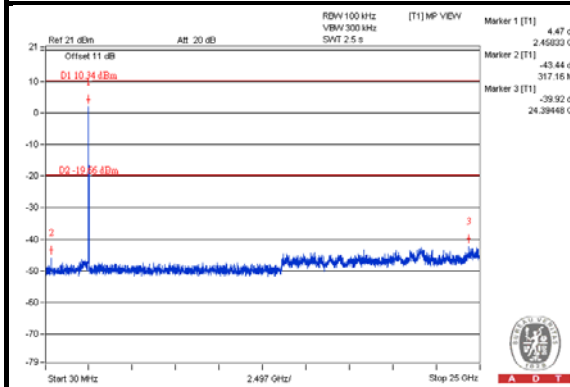

**CH 1 Band edge**

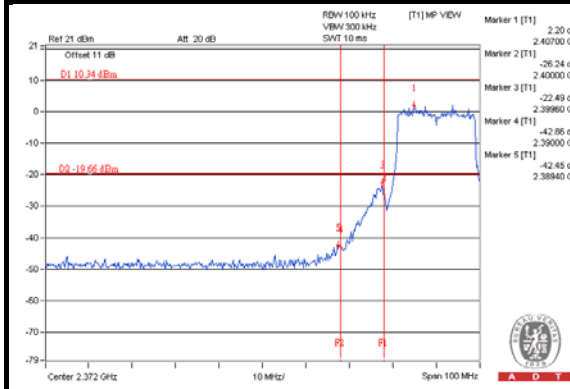


**CH 11 Band edge**

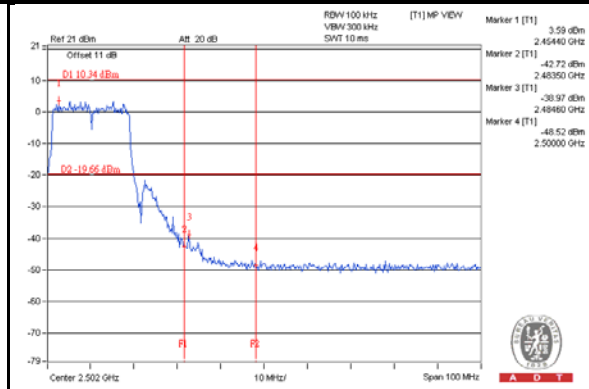


**CHAIN 2**


**CH 1**

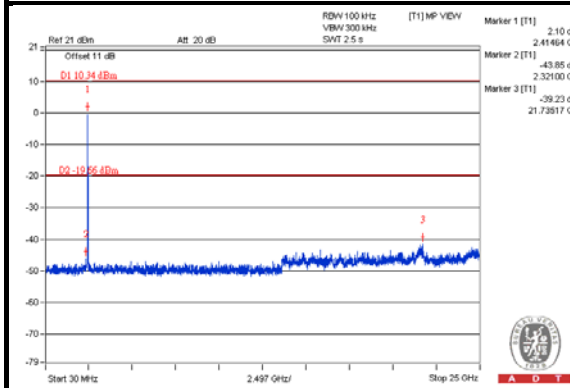


**CH 6**

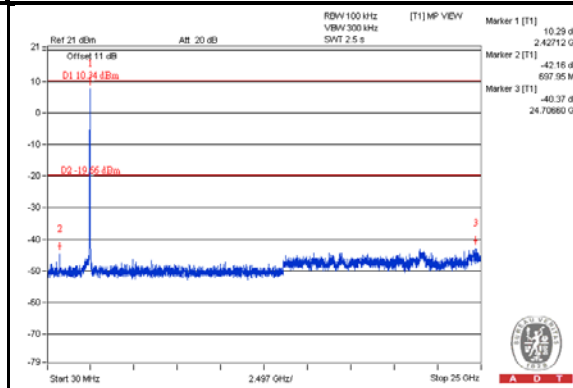


**CH 11**

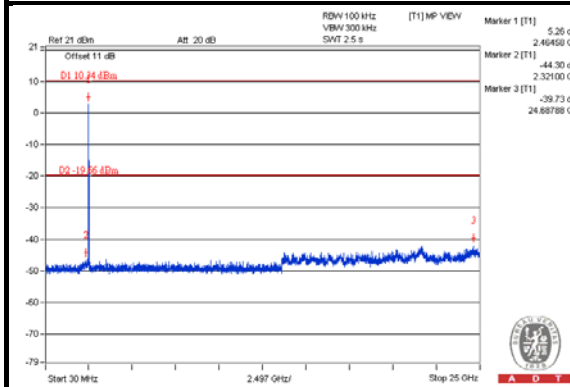


**CH 1 Band edge**

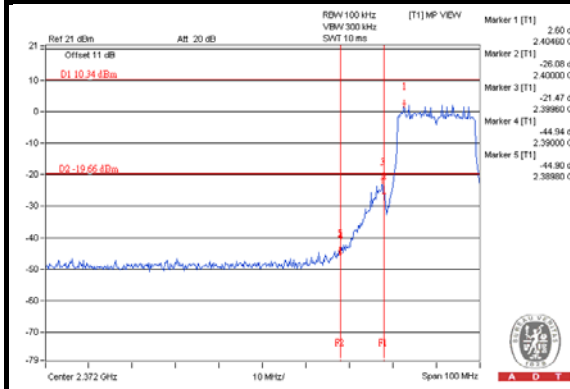

**CH 11 Band edge**

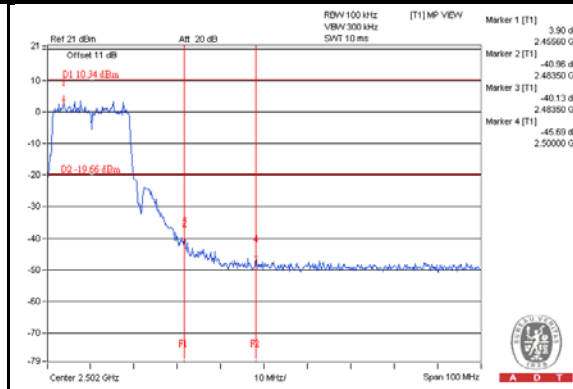


802.11n (HT40)

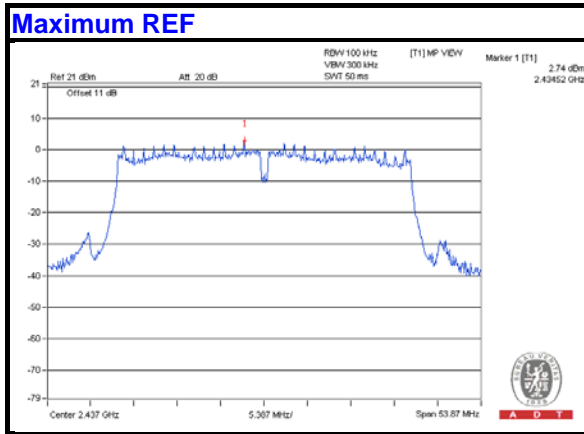


### CHAIN 0



#### CH 3

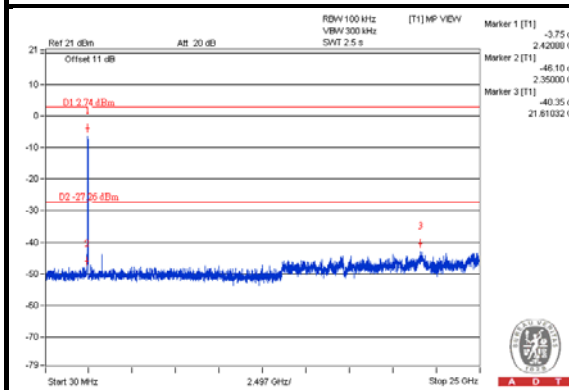


#### CH 6

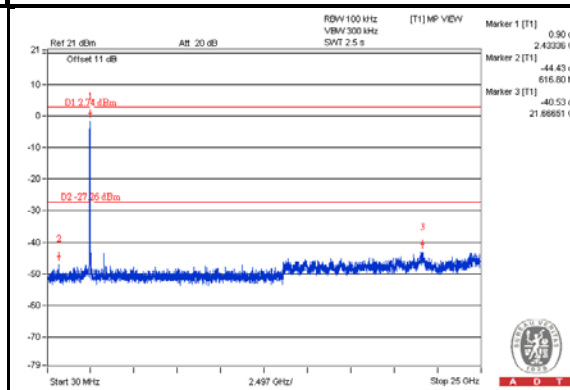


#### CH 9

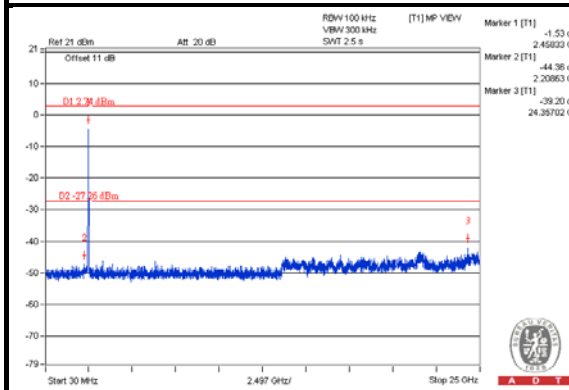

#### CH 3 Band edge

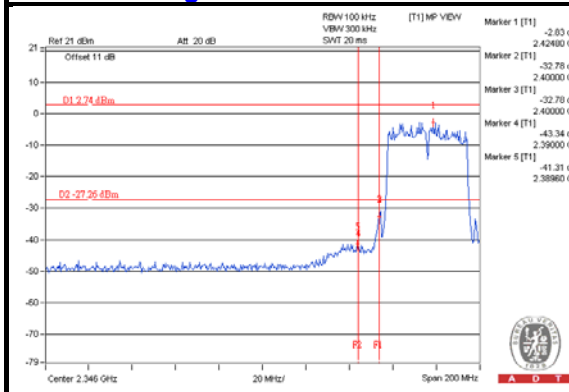


#### CH 9 Band edge

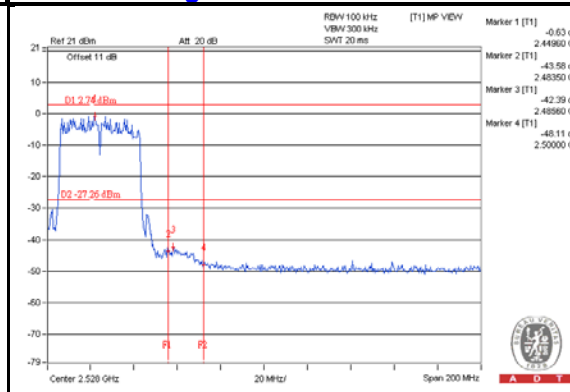


**CHAIN 1**


**CH 3**

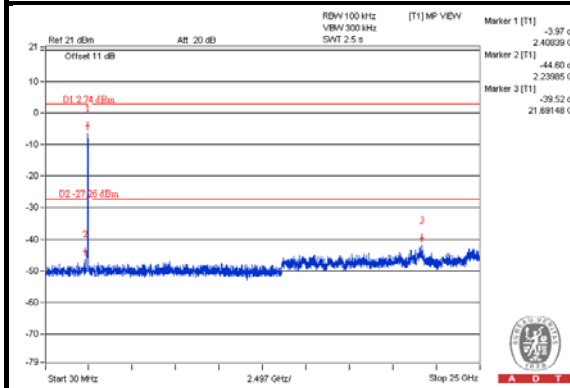


**CH 6**

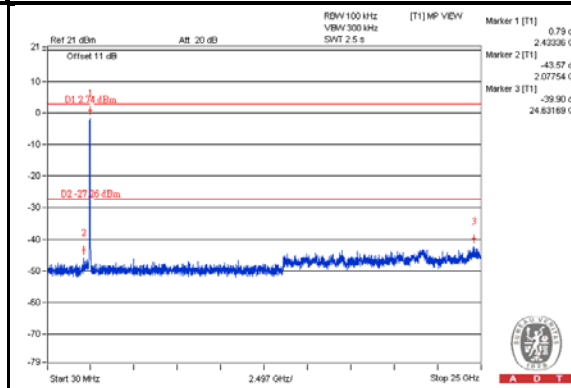


**CH 9**

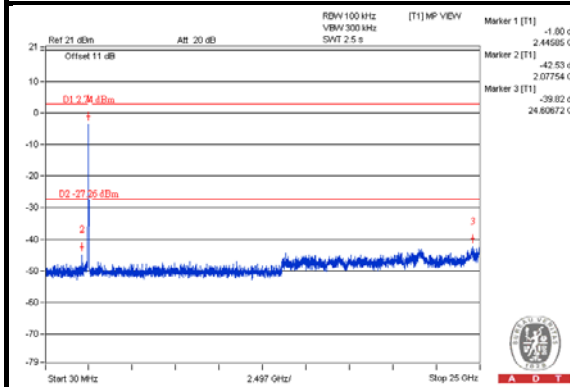

**CH 3 Band edge**

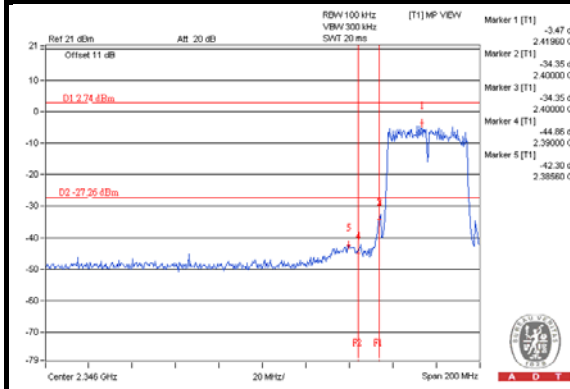


**CH 9 Band edge**

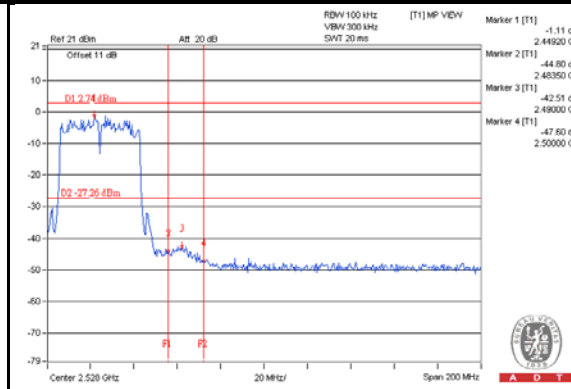




**CHAIN 2**


**CH 3**

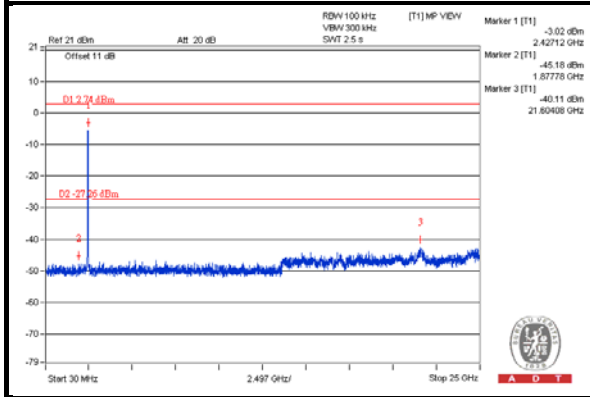


**CH 6**

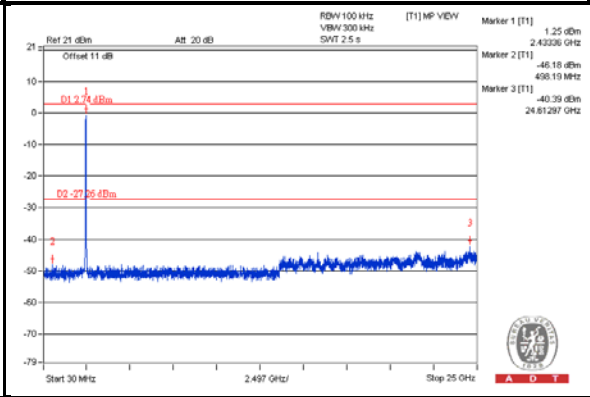


**CH 9**

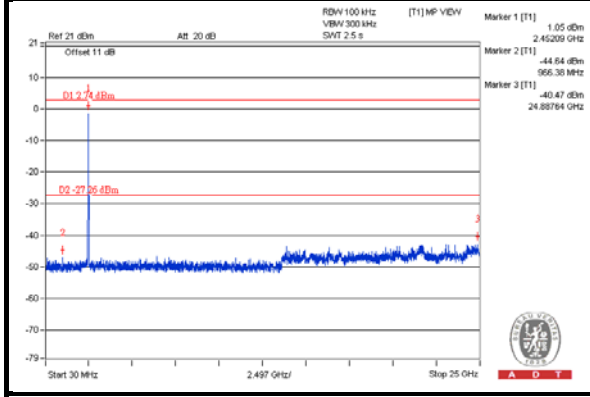

**CH 3 Band edge**

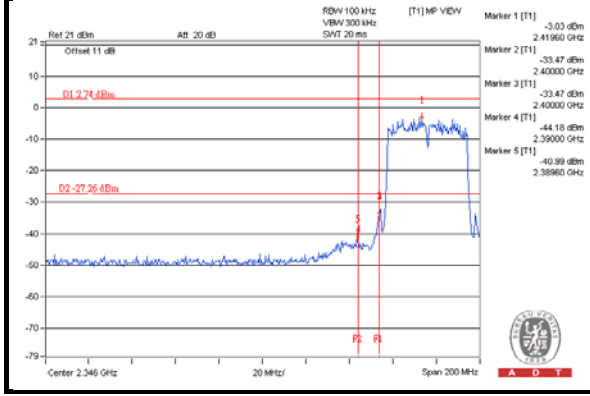

**CH 9 Band edge**

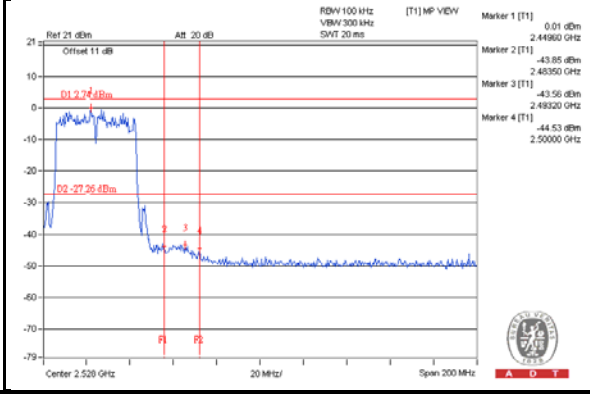

## 5 Test Types and Results (For 5GHz Band)

### 5.1 Radiated Emission and Bandedge Measurement

#### 5.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

4. The lower limit shall apply at the transition frequencies.

5. Emission level (dBuV/m) = 20 log Emission level (uV/m).

For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 5.1.2 Test Instruments

Same as item 4.1.2.

#### 5.1.3 Test Procedures

Same as item 4.1.3.

#### 5.1.4 Deviation From Test Standard

No deviation.

#### 5.1.5 Test Setup

Same as item 4.1.5.

#### 5.1.6 Eut Operating Conditions

Same as item 4.1.6.

5.1.7 Test Results

**CDD Mode**

**ABOVE 1GHz DATA (Subcontract Item)**

**802.11a**

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	112.0 PK			1.08 H	313	104.02	7.98
2	*5745.00	102.7 AV			1.08 H	313	94.72	7.98
3	11490.00	56.8 PK	74.0	-17.2	1.00 H	280	42.76	14.04
4	11490.00	44.4 AV	54.0	-9.6	1.00 H	280	30.36	14.04

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	125.1 PK			1.85 V	6	117.12	7.98
2	*5745.00	115.3 AV			1.85 V	6	107.32	7.98
3	11490.00	62.9 PK	74.0	-11.1	1.50 V	198	48.86	14.04
4	11490.00	50.4 AV	54.0	-3.6	1.50 V	198	36.36	14.04

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.

<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.4 PK			1.00 H	327	104.35	8.05
2	*5785.00	103.4 AV			1.00 H	327	95.35	8.05
3	11570.00	56.4 PK	74.0	-17.6	1.00 H	266	42.19	14.21
4	11570.00	43.9 AV	54.0	-10.1	1.00 H	266	29.69	14.21

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	124.5 PK			1.88 V	6	116.45	8.05
2	*5785.00	114.7 AV			1.88 V	6	106.65	8.05
3	11570.00	63.0 PK	74.0	-11.0	1.48 V	213	48.79	14.21
4	11570.00	50.6 AV	54.0	-3.4	1.48 V	213	36.39	14.21

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.
6. The limit value is defined as per 15.247.

<b>CHANNEL</b>	TX Channel 165	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	111.8 PK			1.09 H	329	103.75	8.05
2	*5825.00	102.5 AV			1.09 H	329	94.45	8.05
3	11650.00	56.5 PK	74.0	-17.5	1.05 H	274	42.05	14.45
4	11650.00	44.2 AV	54.0	-9.8	1.05 H	274	29.75	14.45

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	123.6 PK			1.85 V	7	115.55	8.05
2	*5825.00	113.8 AV			1.85 V	7	105.75	8.05
3	11650.00	63.3 PK	74.0	-10.7	1.48 V	188	48.85	14.45
4	11650.00	50.5 AV	54.0	-3.5	1.48 V	188	36.05	14.45

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.

802.11ac (VHT20)

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	111.9 PK			1.05 H	314	103.92	7.98
2	*5745.00	102.5 AV			1.05 H	314	94.52	7.98
3	11490.00	56.3 PK	74.0	-17.7	1.08 H	283	42.26	14.04
4	11490.00	43.8 AV	54.0	-10.2	1.08 H	283	29.76	14.04

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	123.4 PK			1.87 V	1	115.42	7.98
2	*5745.00	113.2 AV			1.87 V	1	105.22	7.98
3	11490.00	63.2 PK	74.0	-10.8	1.48 V	213	49.16	14.04
4	11490.00	50.6 AV	54.0	-3.4	1.48 V	213	36.56	14.04

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.

<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.1 PK			1.04 H	313	104.05	8.05
2	*5785.00	102.9 AV			1.04 H	313	94.85	8.05
3	11570.00	56.3 PK	74.0	-17.7	1.00 H	259	42.09	14.21
4	11570.00	43.9 AV	54.0	-10.1	1.00 H	259	29.69	14.21

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	123.9 PK			1.86 V	5	115.85	8.05
2	*5785.00	113.9 AV			1.86 V	5	105.85	8.05
3	11570.00	62.3 PK	74.0	-11.7	1.45 V	213	48.09	14.21
4	11570.00	50.0 AV	54.0	-4.0	1.45 V	213	35.79	14.21

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.
6. The limit value is defined as per 15.247.

<b>CHANNEL</b>	TX Channel 165	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	112.1 PK			1.11 H	342	104.05	8.05
2	*5825.00	102.8 AV			1.11 H	342	94.75	8.05
3	11650.00	56.7 PK	74.0	-17.3	1.05 H	279	42.25	14.45
4	11650.00	44.4 AV	54.0	-9.6	1.05 H	279	29.95	14.45

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	123.3 PK			1.83 V	4	115.25	8.05
2	*5825.00	113.4 AV			1.83 V	4	105.35	8.05
3	11650.00	63.5 PK	74.0	-10.5	1.45 V	212	49.05	14.45
4	11650.00	50.8 AV	54.0	-3.2	1.45 V	212	36.35	14.45

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.



802.11ac (VHT40)

<b>CHANNEL</b>	TX Channel 151	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	109.3 PK			1.13 H	281	101.31	7.99
2	*5755.00	99.7 AV			1.13 H	281	91.71	7.99
3	11510.00	57.5 PK	74.0	-16.5	1.49 H	306	43.48	14.02
4	11510.00	44.1 AV	54.0	-9.9	1.49 H	306	30.08	14.02

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	119.0 PK			1.86 V	10	111.01	7.99
2	*5755.00	109.1 AV			1.86 V	10	101.11	7.99
3	11510.00	61.1 PK	74.0	-12.9	1.61 V	204	47.08	14.02
4	11510.00	48.9 AV	54.0	-5.1	1.61 V	204	34.88	14.02

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.

<b>CHANNEL</b>	TX Channel 159	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	110.3 PK			1.04 H	287	102.23	8.07
2	*5795.00	100.8 AV			1.04 H	287	92.73	8.07
3	11590.00	56.4 PK	74.0	-17.6	1.53 H	314	42.11	14.29
4	11590.00	43.4 AV	54.0	-10.6	1.53 H	314	29.11	14.29

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	121.5 PK			1.86 V	6	113.43	8.07
2	*5795.00	111.0 AV			1.86 V	6	102.93	8.07
3	11590.00	62.2 PK	74.0	-11.8	1.51 V	211	47.91	14.29
4	11590.00	49.7 AV	54.0	-4.3	1.51 V	211	35.41	14.29

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.
6. The limit value is defined as per 15.247.

802.11ac (VHT80)

<b>CHANNEL</b>	TX Channel 155	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	103.8 PK			1.13 H	335	95.77	8.03
2	*5775.00	95.3 AV			1.13 H	335	87.27	8.03
3	11550.00	55.4 PK	74.0	-18.6	1.12 H	307	41.25	14.15
4	11550.00	43.7 AV	54.0	-10.3	1.12 H	307	29.55	14.15

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	115.0 PK			1.85 V	2	106.97	8.03
2	*5775.00	105.1 AV			1.85 V	2	97.07	8.03
3	11550.00	59.4 PK	74.0	-14.6	1.49 V	201	45.25	14.15
4	11550.00	46.5 AV	54.0	-7.5	1.49 V	201	32.35	14.15

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.

**BELOW 1GHz DATA**

**802.11a**

<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	87.52	35.1 QP	40.0	-4.9	1.50 H	75	53.85	-18.75
2	135.05	37.1 QP	43.5	-6.4	1.50 H	291	50.70	-13.64
3	192.77	32.2 QP	43.5	-11.3	1.50 H	239	48.01	-15.80
4	596.97	34.9 QP	46.0	-11.1	1.50 H	192	39.28	-4.42
5	630.04	35.6 QP	46.0	-10.4	1.50 H	182	39.24	-3.64
6	815.65	34.3 QP	46.0	-11.7	1.50 H	110	34.64	-0.31

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	64.97	36.5 QP	40.0	-3.5	1.50 V	184	50.74	-14.26
2	108.81	31.4 QP	43.5	-12.1	1.00 V	359	47.49	-16.07
3	189.52	30.4 QP	43.5	-13.1	1.00 V	286	45.99	-15.55
4	200.87	33.3 QP	43.5	-10.2	1.00 V	281	49.35	-16.06
5	668.70	33.3 QP	46.0	-12.7	1.50 V	337	36.61	-3.30
6	815.70	37.7 QP	46.0	-8.3	1.50 V	182	37.97	-0.31

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 5.2 Conducted Emission Measurement

### 5.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.2.2 Test Instruments

Same as item 4.2.2.

### 5.2.3 Test Procedures

Same as item 4.2.3.

### 5.2.4 Deviation from Test Standard

No deviation.

### 5.2.5 Test Setup

Same as item 4.2.5.

### 5.2.6 Eut Operating Conditions

Same as item 4.1.6.


5.2.7 Test Results (MODE 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.16562	0.08	49.46	39.73	49.54	39.81	65.18	55.18	-15.63	-15.36
2	0.19297	0.09	46.80	38.97	46.89	39.06	63.91	53.91	-17.02	-14.85
3	0.28750	0.09	44.55	39.86	44.64	39.95	60.60	50.60	-15.95	-10.64
4	0.32969	0.10	41.71	36.80	41.81	36.90	59.46	49.46	-17.65	-12.56
5	0.40781	0.10	29.42	21.48	29.52	21.58	57.69	47.69	-28.17	-26.11
6	10.70703	0.47	22.74	18.93	23.21	19.40	60.00	50.00	-36.79	-30.60

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

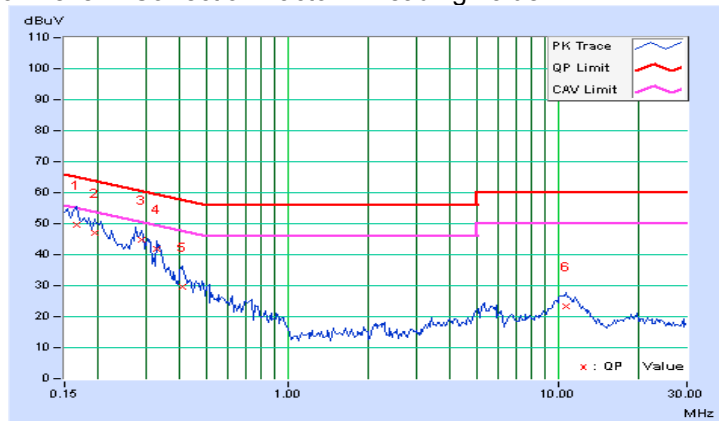


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.16172	0.08	49.08	40.67	49.16	40.75	65.38	55.38	-16.22	-14.63
2	0.18906	0.08	46.91	38.47	46.99	38.55	64.08	54.08	-17.09	-15.53
3	0.28737	0.09	45.75	41.65	45.84	41.74	60.60	50.60	-14.76	-8.86
4	0.40391	0.10	30.75	23.39	30.85	23.49	57.77	47.77	-26.92	-24.28
5	0.72031	0.12	22.04	16.59	22.16	16.71	56.00	46.00	-33.84	-29.29
6	9.83984	0.45	23.06	19.28	23.51	19.73	60.00	50.00	-36.49	-30.27

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

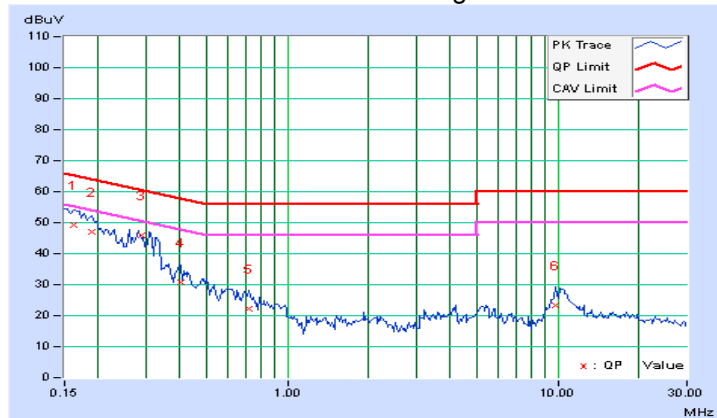


5.2.8 Test Results (MODE 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.17344	0.08	46.50	37.98	46.58	38.06	64.79	54.79	-18.21	-16.73
2	0.26850	0.09	39.18	32.57	39.27	32.66	61.16	51.16	-21.89	-18.50
3	0.29600	0.09	43.57	38.00	43.66	38.09	60.35	50.35	-16.69	-12.26
4	0.41563	0.10	28.62	20.85	28.72	20.95	57.54	47.54	-28.81	-26.58
5	0.71641	0.12	20.16	13.74	20.28	13.86	56.00	46.00	-35.72	-32.14
6	10.97266	0.47	23.79	19.83	24.26	20.30	60.00	50.00	-35.74	-29.70

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

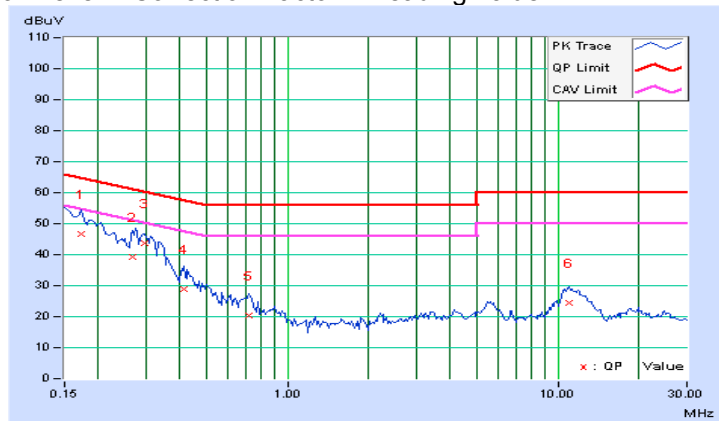




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.08	48.77	40.23	48.85	40.31	65.79	55.79	-16.94	-15.48
2	0.19297	0.08	45.53	37.66	45.61	37.74	63.91	53.91	-18.30	-16.17
3	0.29453	0.09	45.69	42.38	45.78	42.47	60.40	50.40	-14.62	-7.93
4	0.34141	0.09	42.80	39.70	42.89	39.79	59.17	49.17	-16.27	-9.37
5	0.72422	0.12	22.90	16.95	23.02	17.07	56.00	46.00	-32.98	-28.93
6	10.72656	0.48	24.47	20.94	24.95	21.42	60.00	50.00	-35.05	-28.58

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

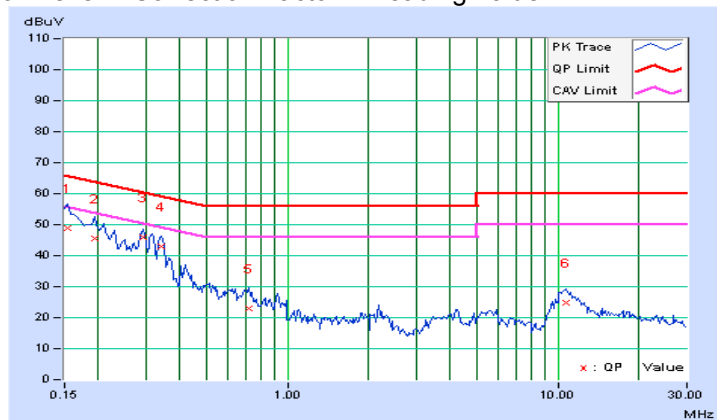


5.2.9 Test Results (MODE 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	0.08	50.01	41.87	50.09	41.95	64.98	54.98	-14.89	-13.03
2	0.20469	0.09	46.82	39.74	46.91	39.83	63.42	53.42	-16.51	-13.59
3	0.26719	0.09	39.57	30.12	39.66	30.21	61.20	51.20	-21.54	-20.99
4	0.65000	0.11	25.21	16.26	25.32	16.37	56.00	46.00	-30.68	-29.63
5	6.37891	0.31	24.17	18.50	24.48	18.81	60.00	50.00	-35.52	-31.19
6	11.95703	0.50	26.79	21.95	27.29	22.45	60.00	50.00	-32.71	-27.55

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

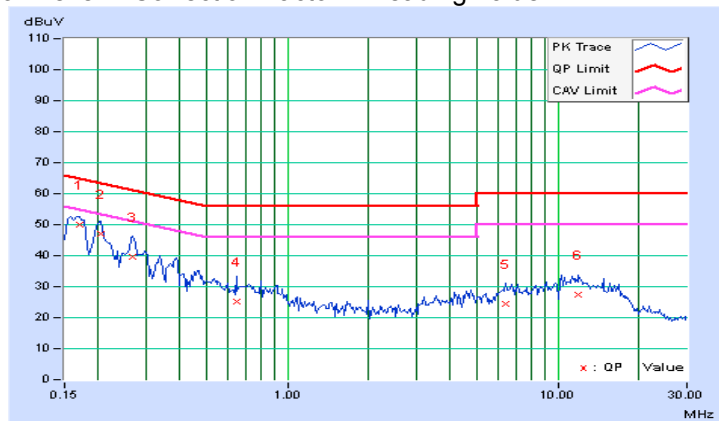


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.08	49.25	35.52	49.33	35.60	65.38	55.38	-16.05	-19.78
2	0.20078	0.08	45.27	37.76	45.35	37.84	63.58	53.58	-18.23	-15.74
3	0.26719	0.09	39.55	29.41	39.64	29.50	61.20	51.20	-21.57	-21.71
4	0.33359	0.09	33.58	25.69	33.67	25.78	59.36	49.36	-25.69	-23.58
5	0.88047	0.12	22.30	14.85	22.42	14.97	56.00	46.00	-33.58	-31.03
6	11.27734	0.50	24.46	19.58	24.96	20.08	60.00	50.00	-35.04	-29.92

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

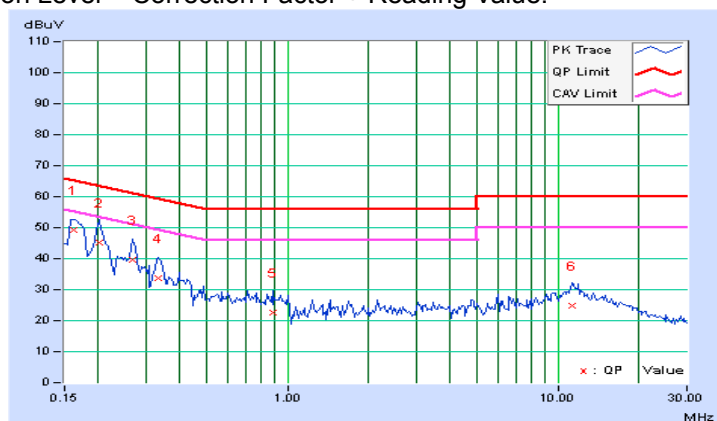


5.2.10 Test Results (MODE 4)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.17344	0.08	53.13	45.37	53.21	45.45	64.79	54.79	-11.58	-9.34
2	0.24375	0.09	39.38	27.60	39.47	27.69	61.97	51.97	-22.50	-24.28
3	0.39219	0.10	37.67	31.99	37.77	32.09	58.02	48.02	-20.25	-15.93
4	0.89609	0.12	24.61	17.57	24.73	17.69	56.00	46.00	-31.27	-28.31
5	3.57813	0.21	23.83	18.46	24.04	18.67	56.00	46.00	-31.96	-27.33
6	10.98047	0.47	27.08	22.29	27.55	22.76	60.00	50.00	-32.45	-27.24

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

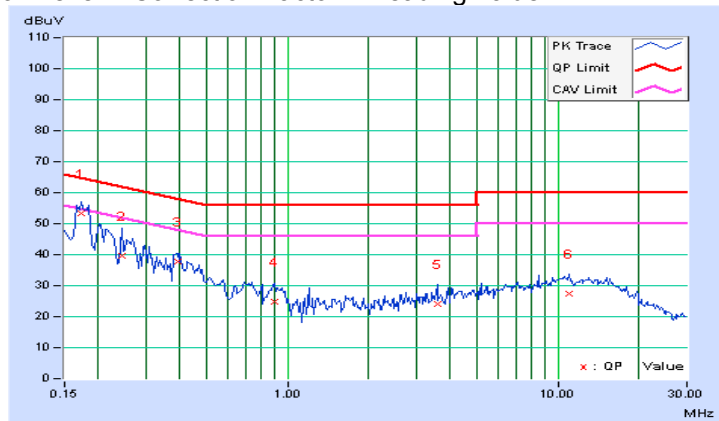


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.18125	0.08	50.49	38.64	50.57	38.72	64.43	54.43	-13.86	-15.71
2	0.20469	0.08	44.90	37.25	44.98	37.33	63.42	53.42	-18.44	-16.09
3	0.26719	0.09	39.57	31.57	39.66	31.66	61.20	51.20	-21.55	-19.55
4	0.36094	0.10	33.02	22.96	33.12	23.06	58.71	48.71	-25.59	-25.65
5	2.17578	0.18	22.08	16.83	22.26	17.01	56.00	46.00	-33.74	-28.99
6	10.62109	0.48	25.75	20.77	26.23	21.25	60.00	50.00	-33.77	-28.75

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

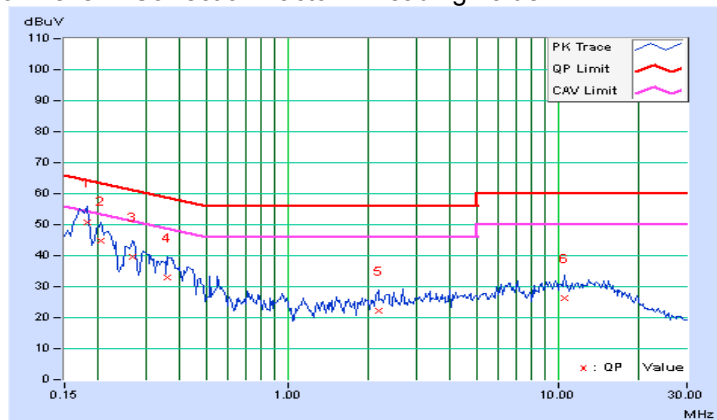

### **5.3 6dB Bandwidth Measurement**

#### 5.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 5.3.2 Test Setup

Same as item 4.3.2.

#### 5.3.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

#### 5.3.4 Test Procedure

Same as item 4.3.4.

#### 5.3.5 Deviation from Test Standard

No deviation.

#### 5.3.6 EUT Operating Conditions

Same as item 4.3.6.


## 5.3.7 Test Result

**CDD MODE**


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHZ)			MINIMUM LIMIT (MHZ)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
<b>802.11a</b>						
149	5745	16.40	16.42	16.44	0.5	PASS
157	5785	16.39	16.41	16.41	0.5	PASS
165	5825	16.40	16.43	16.45	0.5	PASS
<b>802.11ac (VHT20)</b>						
149	5745	17.68	17.69	17.70	0.5	PASS
157	5785	17.63	17.69	17.66	0.5	PASS
165	5825	17.61	17.66	17.65	0.5	PASS
<b>802.11ac (VHT40)</b>						
151	5755	36.45	36.48	36.48	0.5	PASS
159	5795	36.47	36.48	36.46	0.5	PASS
<b>802.11ac (VHT80)</b>						
155	5775	75.90	76.46	76.42	0.5	PASS

**SPECTRUM PLOT OF WORST VALUE**


**802.11a – Chain 0: CH157**

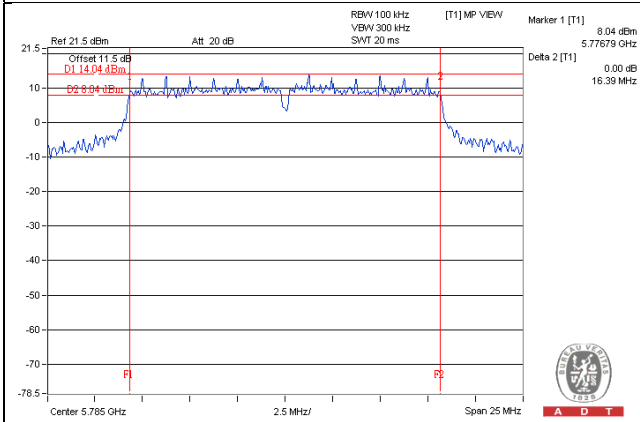


**802.11ac (VHT20) – Chain 0: CH165**

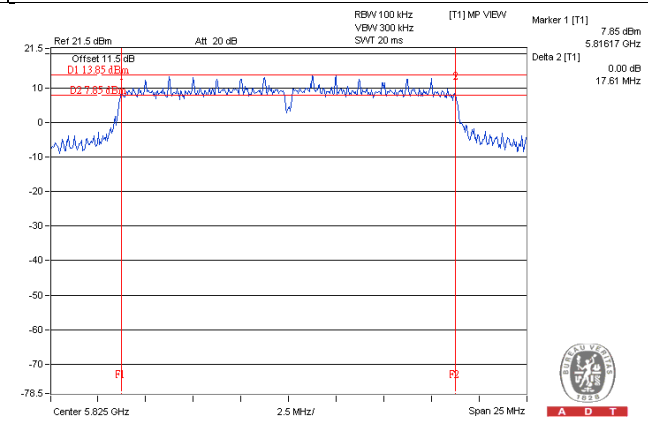

**802.11ac (VHT40) – Chain 0: CH151**

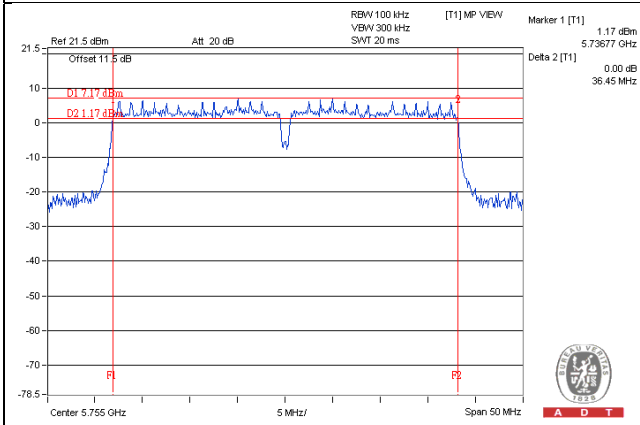

**802.11ac (VHT80) – Chain 0: CH155**

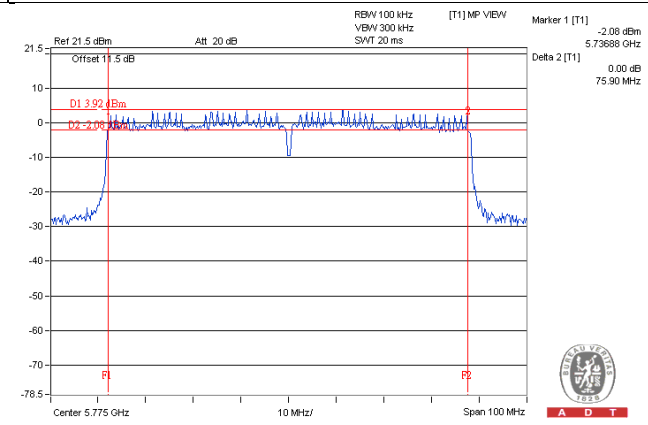




**Beamforming MODE**


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHZ)			MINIMUM LIMIT (MHZ)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
<b>802.11ac (VHT20)</b>						
149	5745	17.67	17.70	17.69	0.5	PASS
157	5785	17.63	17.69	17.68	0.5	PASS
165	5825	17.64	17.69	17.67	0.5	PASS
<b>802.11ac (VHT40)</b>						
151	5755	36.46	36.47	36.46	0.5	PASS
159	5795	36.44	36.47	36.48	0.5	PASS
<b>802.11ac (VHT80)</b>						
155	5775	75.90	76.47	76.02	0.5	PASS

**SPECTRUM PLOT OF WORST VALUE**


**802.11ac (VHT20) – Chain 0: CH157**

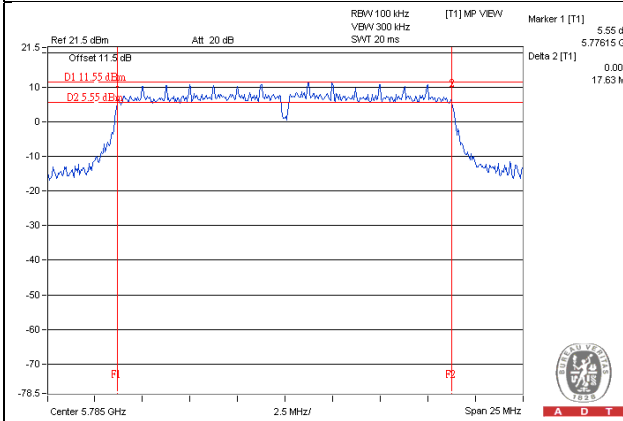

**802.11ac (VHT40) – Chain 0: CH159**

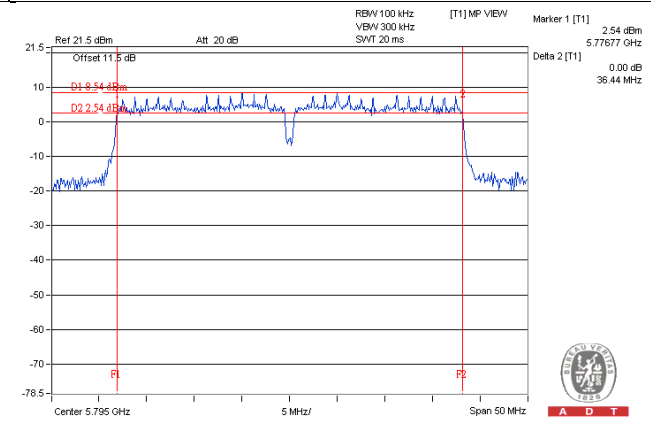

**802.11ac (VHT80) – Chain 0: CH155**

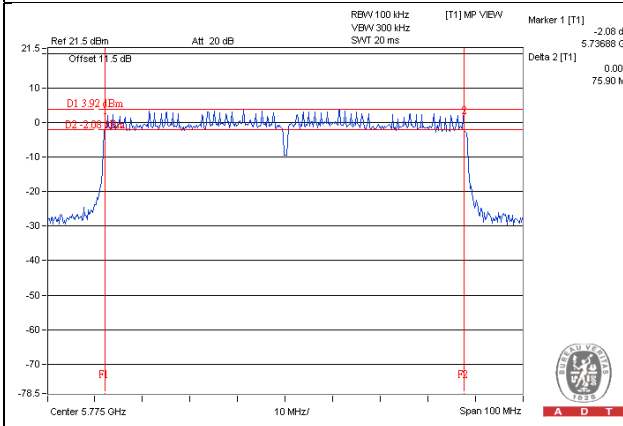

## 5.4 Conducted Output Power

### 5.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v02r01 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

### 5.4.2 Test Setup

Same as Item 4.4.2.

### 5.4.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

### 5.4.4 Test Procedures

Same as Item 4.4.4.

### 5.4.5 Deviation from Test Standard

No deviation.

### 5.4.6 EUT Operating Conditions

Same as Item 4.4.6.

5.4.7 Test Results

**CDD MODE**

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
<b>802.11a</b>								
149	5745	24.73	24.22	24.32	831.804	29.20	30	PASS
157	5785	25.26	24.59	24.66	915.893	29.62	30	PASS
165	5825	25.10	24.63	24.71	909.797	29.59	30	PASS
<b>802.11ac (VHT20)</b>								
149	5745	23.83	23.66	23.43	694.113	28.41	30	PASS
157	5785	24.91	24.79	24.56	896.802	29.53	30	PASS
165	5825	24.82	24.69	24.55	882.933	29.46	30	PASS
<b>802.11ac (VHT40)</b>								
151	5755	21.93	21.60	21.58	444.379	26.48	30	PASS
159	5795	24.97	24.61	24.64	894.191	29.51	30	PASS
<b>802.11ac (VHT80)</b>								
155	5775	21.47	21.40	21.49	419.248	26.22	30	PASS

**Beamforming MODE**

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
<b>802.11ac (VHT20)</b>								
149	5745	22.75	22.60	22.45	546.127	27.37	27.48	PASS
157	5785	22.80	22.65	22.57	555.34	27.45	27.48	PASS
165	5825	22.75	22.54	22.45	543.63	27.35	27.48	PASS
<b>802.11ac (VHT40)</b>								
151	5755	21.93	21.60	21.58	444.379	26.48	27.48	PASS
159	5795	22.88	22.60	22.58	557.193	27.46	27.48	PASS
<b>802.11ac (VHT80)</b>								
155	5775	21.47	21.40	21.49	419.248	26.22	27.48	PASS

**NOTE:** Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20}) / 3] = 8.52\text{dBi} > 6\text{dBi}$ , so the power limit shall be reduced to  $30 - (8.52 - 6) = 27.48\text{dBm}$ .

## 5.5 Power Spectral Density Measurement

### 5.5.1 Limits of Power Spectral Density Measurement

Same as item 4.5.1.

### 5.5.2 Test Setup

Same as item 4.5.2.

### 5.5.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

### 5.5.4 Test Procedure

#### **For 802.11a, 802.11ac (VHT20) & 802.11ac (VHT40) test:**

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.

#### **For 802.11ac (VHT80) test:**

- a) Measure the duty cycle (x).
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least 1.5 times the OBW.
- d) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- e) Set VBW  $\geq 3 \times \text{RBW}$ .
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to "free run".
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 5.5.5 Deviation from Test Standard

No deviation.

### 5.5.6 EUT Operating Condition

Same as Item 4.3.6

**5.5.7 Test Results**
**CDD Mode**

<b>TX chain</b>	<b>Channel</b>	<b>Freq. (MHz)</b>	<b>PSD (dBm)</b>	<b>10 log (N=3) dB</b>	<b>Total PSD (dBm)</b>	<b>Limit (dBm)</b>	<b>PASS /FAIL</b>
<b>802.11a</b>							
0	149	5745	-4.72	4.77	0.05	5.48	PASS
	157	5785	-4.35	4.77	0.42	5.48	PASS
	165	5825	-4.40	4.77	0.37	5.48	PASS
1	149	5745	-4.80	4.77	-0.03	5.48	PASS
	157	5785	-4.47	4.77	0.30	5.48	PASS
	165	5825	-4.38	4.77	0.39	5.48	PASS
2	149	5745	-4.53	4.77	0.24	5.48	PASS
	157	5785	-4.42	4.77	0.35	5.48	PASS
	165	5825	-4.64	4.77	0.13	5.48	PASS
<b>802.11ac (VHT20)</b>							
0	149	5745	-6.05	4.77	-1.28	5.48	PASS
	157	5785	-5.36	4.77	-0.59	5.48	PASS
	165	5825	-6.04	4.77	-1.27	5.48	PASS
1	149	5745	-6.69	4.77	-1.92	5.48	PASS
	157	5785	-5.90	4.77	-1.13	5.48	PASS
	165	5825	-6.08	4.77	-1.31	5.48	PASS
2	149	5745	-7.15	4.77	-2.38	5.48	PASS
	157	5785	-5.69	4.77	-0.92	5.48	PASS
	165	5825	-6.18	4.77	-1.41	5.48	PASS
<b>802.11ac (VHT40)</b>							
0	151	5755	-10.59	4.77	-5.82	5.48	PASS
	159	5795	-8.41	4.77	-3.64	5.48	PASS
1	151	5755	-11.33	4.77	-6.56	5.48	PASS
	159	5795	-7.74	4.77	-2.97	5.48	PASS
2	151	5755	-11.56	4.77	-6.79	5.48	PASS
	159	5795	-8.24	4.77	-3.47	5.48	PASS

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.52\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(8.52-6) = 5.48\text{dBm}$ .


**802.11ac (VHT80)**

TX CHAIN	CHANNEL	FREQ. (MHz)	PSD w/o duty factor (dBm)	10 log (N=3) dB	duty factor (dB)	TOTAL PSD WITH DUTY FACTOR (dBm)	LIMIT (dBm)	PASS /FAIL
0	155	5775	-14.31	4.77	0.17	-9.37	5.48	PASS
1	155	5775	-13.23	4.77	0.17	-8.29	5.48	PASS
2	155	5775	-13.33	4.77	0.17	-8.39	5.48	PASS


- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.52\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(8.52-6) = 5.48\text{dBm}$ .

**SPECTRUM PLOT OF WORST VALUE**


**802.11a – Chain 0: CH157**

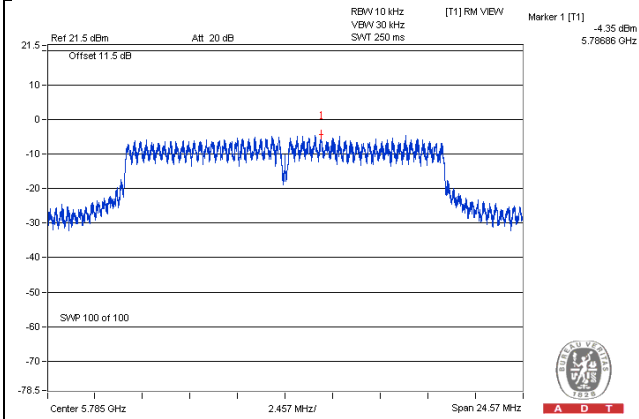


**802.11ac (VHT20) – Chain 0: CH157**

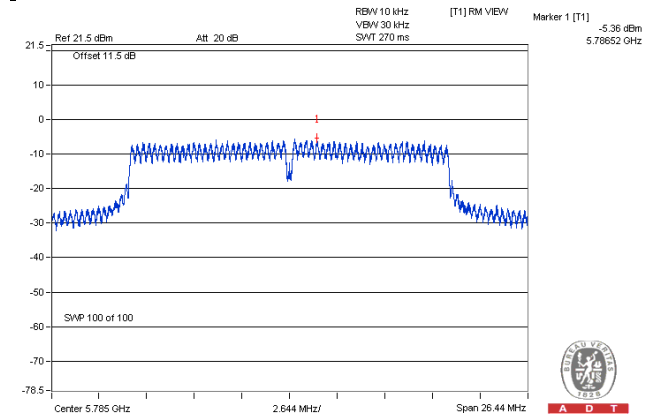

**802.11ac (VHT40) – Chain 1: CH159**

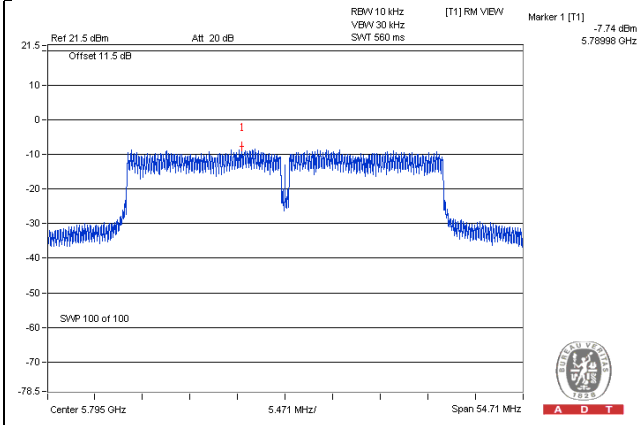

**802.11ac (VHT80) – Chain 1: CH155**

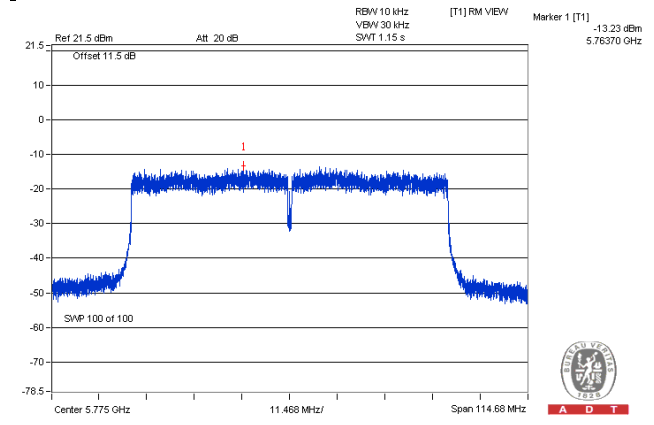

**Beamforming Mode**

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD (dBm)	Limit (dBm)	PASS /FAIL
<b>802.11ac (VHT20)</b>							
0	149	5745	-7.29	4.77	-2.52	5.48	PASS
	157	5785	-7.83	4.77	-3.06	5.48	PASS
	165	5825	-7.57	4.77	-2.80	5.48	PASS
1	149	5745	-7.99	4.77	-3.22	5.48	PASS
	157	5785	-7.60	4.77	-2.83	5.48	PASS
	165	5825	-7.39	4.77	-2.62	5.48	PASS
2	149	5745	-8.13	4.77	-3.36	5.48	PASS
	157	5785	-7.71	4.77	-2.94	5.48	PASS
	165	5825	-7.14	4.77	-2.37	5.48	PASS
<b>802.11ac (VHT40)</b>							
0	151	5755	-11.30	4.77	-6.53	5.48	PASS
	159	5795	-10.21	4.77	-5.44	5.48	PASS
1	151	5755	-11.08	4.77	-6.31	5.48	PASS
	159	5795	-10.22	4.77	-5.45	5.48	PASS
2	151	5755	-11.39	4.77	-6.62	5.48	PASS
	159	5795	-10.29	4.77	-5.52	5.48	PASS

Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.52\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(8.52-6) = 5.48\text{dBm}$ .

TX CHAIN	CHANNEL	FREQ. (MHz)	PSD w/o duty factor (dBm)	10 log (N=3) dB	duty factor (dB)	TOTAL PSD WITH DUTY FACTOR (dBm)	LIMIT (dBm)	PASS /FAIL
0	155	5775	-14.31	4.77	0.17	-9.37	5.48	PASS
1	155	5775	-13.97	4.77	0.17	-9.03	5.48	PASS
2	155	5775	-13.48	4.77	0.17	-8.54	5.48	PASS

Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.



2. Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.52\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(8.52-6) = 5.48\text{dBm}$ .




**SPECTRUM PLOT OF WORST VALUE**

**802.11ac (VHT20) – Chain 2: CH165**

**802.11ac (VHT40) – Chain 0: CH159**

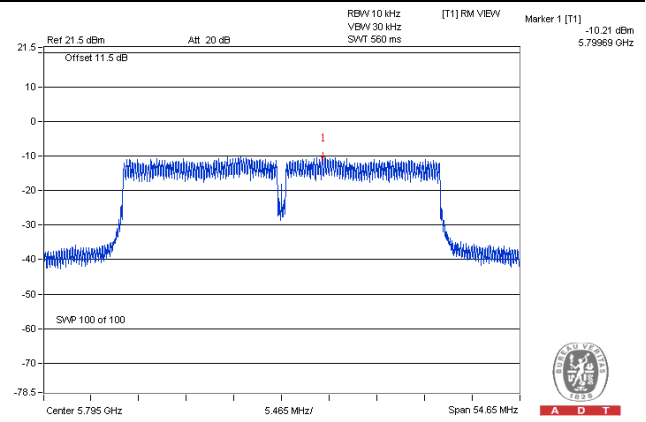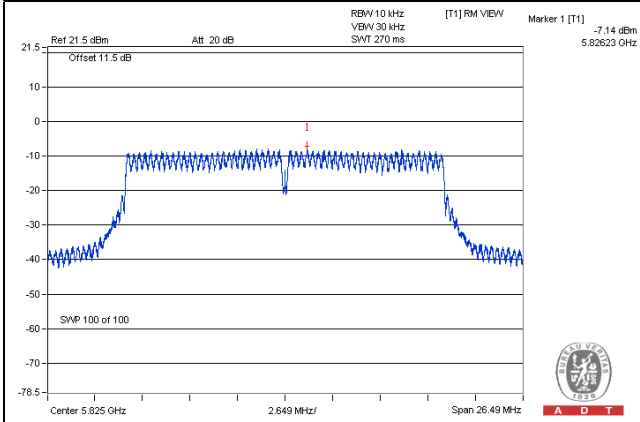

**802.11ac (VHT80) – Chain 2: CH155**

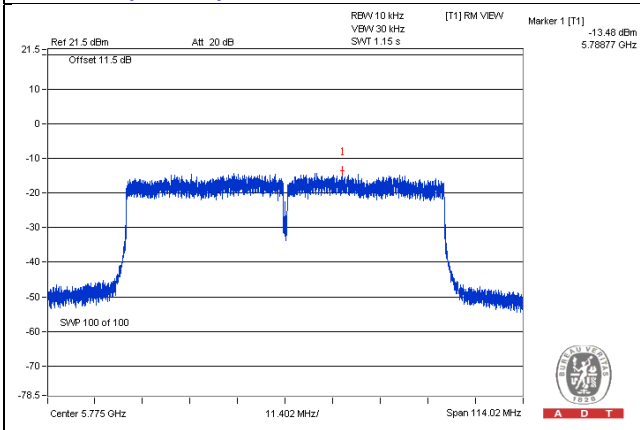

## 5.6 Conducted Out of Band Emission Measurement

### 5.6.1 Limits of Conducted Out of Band Emission Measurement

Below  $-30\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 5.6.2 Test Setup

Same as Item 4.6.2

### 5.6.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

### 5.6.4 Test Procedure

Same as Item 4.6.4

### 5.6.5 Deviation from Test Standard

No deviation.


### 5.6.6 EUT Operating Condition

Same as Item 4.3.6


### 5.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


**CDD Mode**  
802.11a

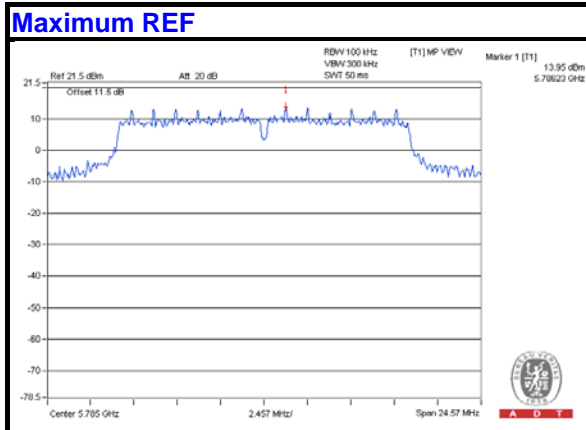


**CHAIN 0**  
**CH 149**

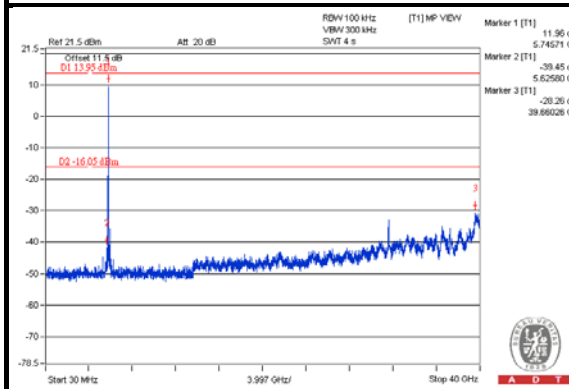


**CH 157**

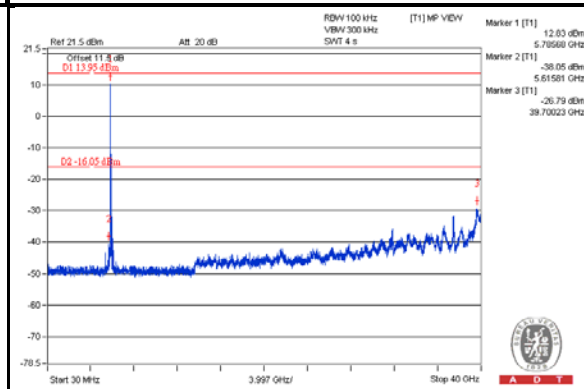


**CH 165**

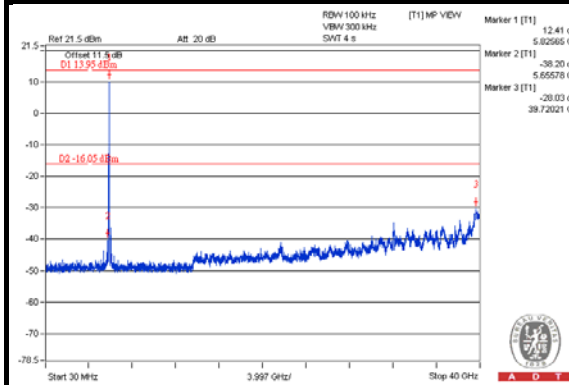


**CH 149 Band edge**

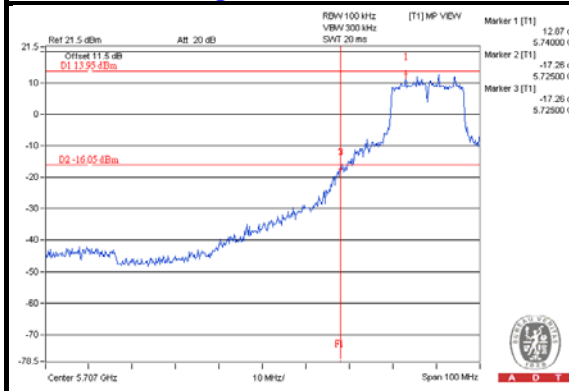


**CH 157 Band edge**

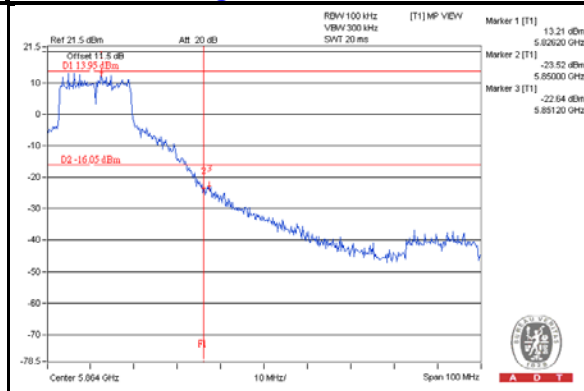



**CHAIN 1**  
**CH 149**

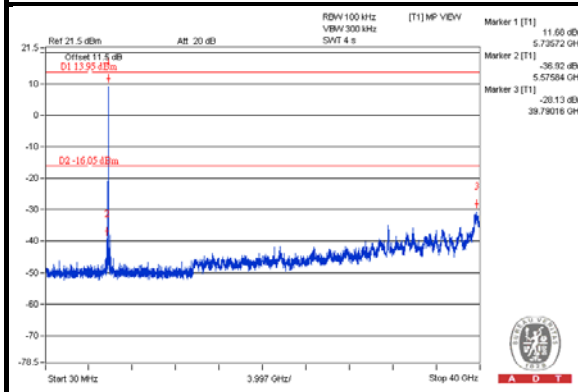


**CH 157**

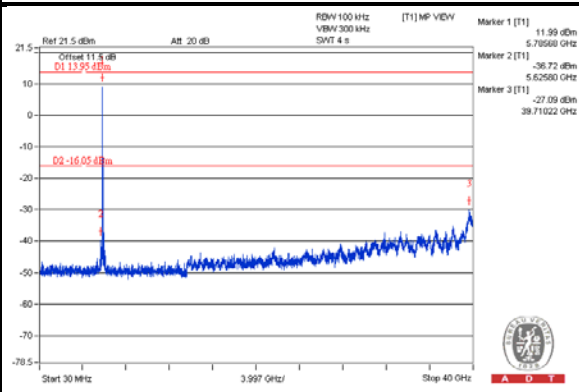


**CH 165**

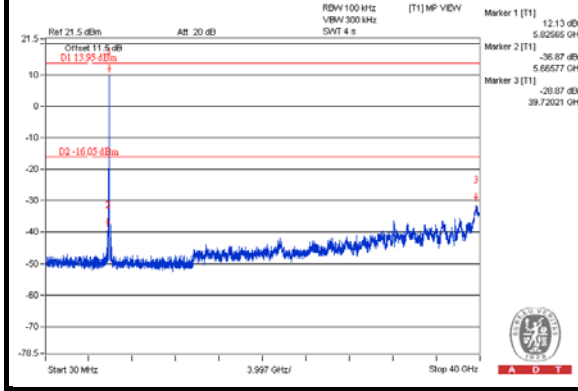

**CH 149 Band edge**

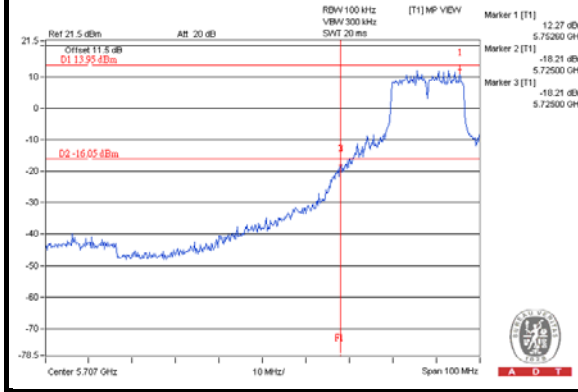


**CH 157 Band edge**

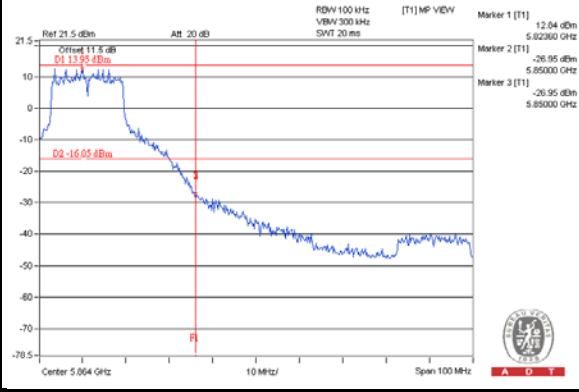


**CHAIN 2**



**CH 149**

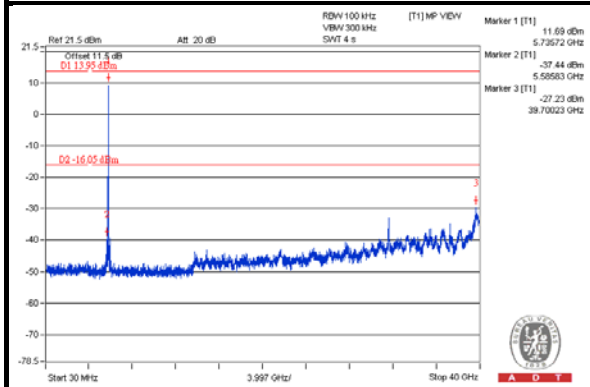


**CH 157**

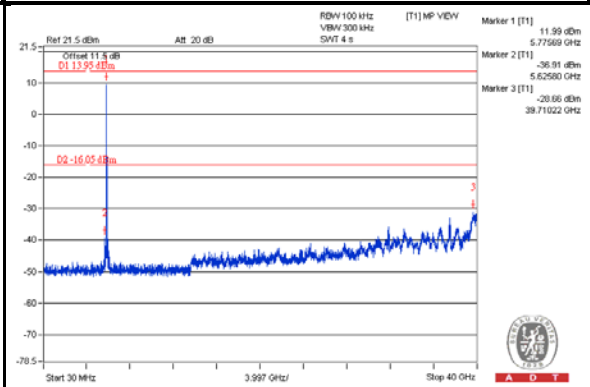


**CH 165**

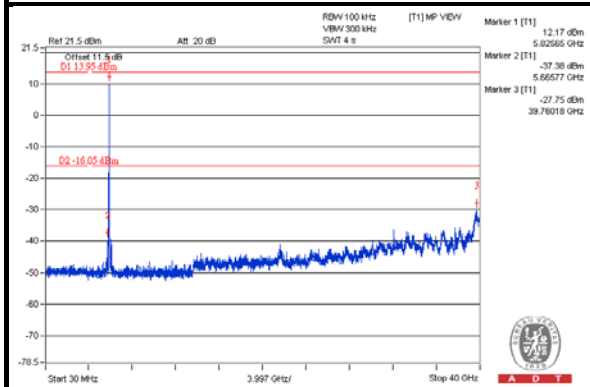


**CH 149 Band edge**

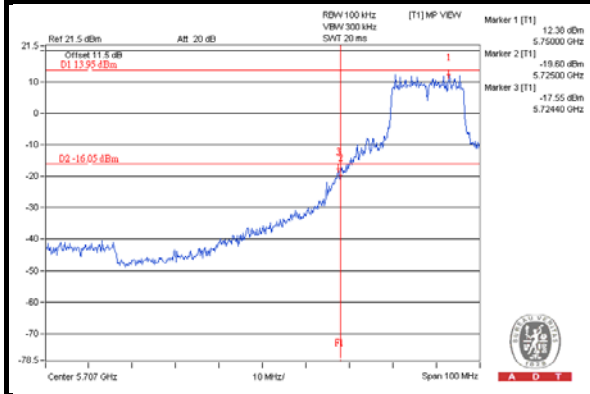

**CH 157 Band edge**

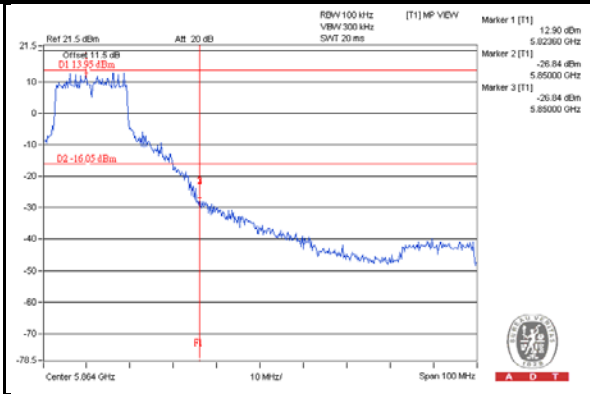


802.11ac (VHT20)

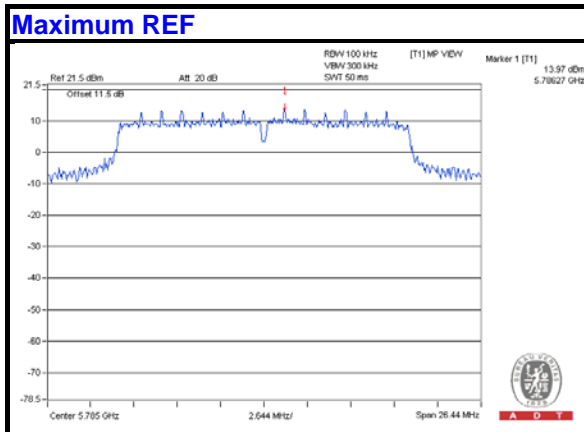


**CHAIN 0**


**CH 149**

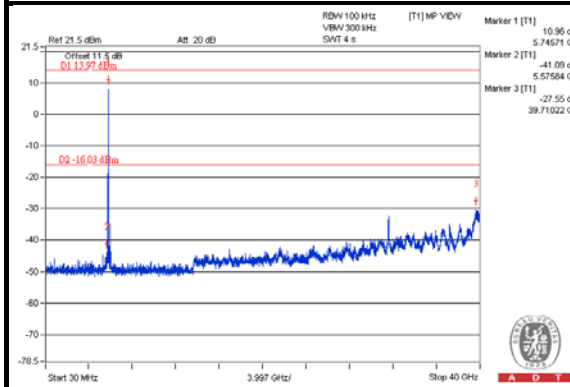


**CH 157**

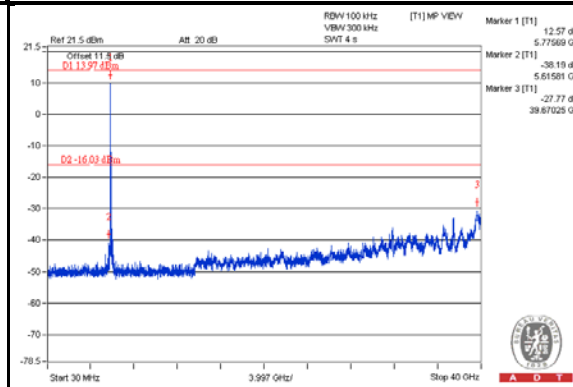


**CH 165**

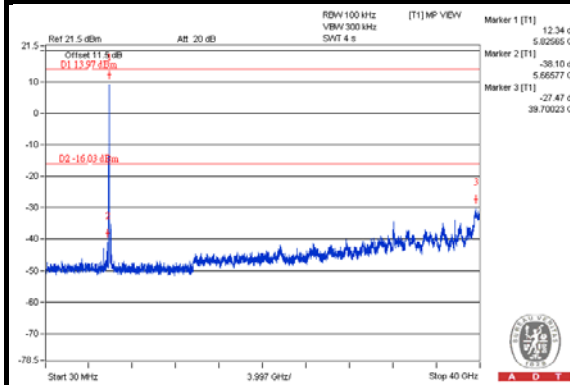


**CH 149 Band edge**

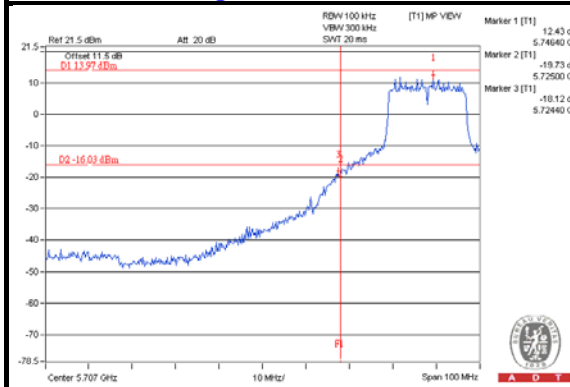


**CH 157 Band edge**

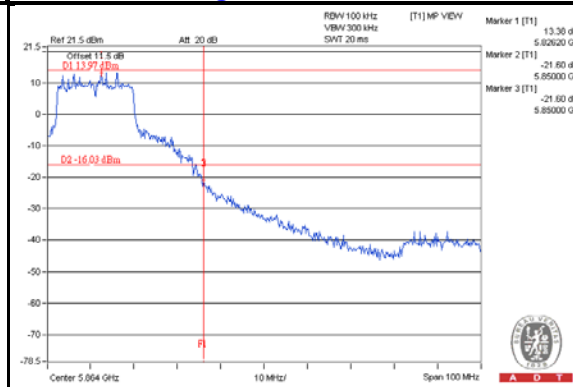


**CHAIN 1**  
**CH 149**

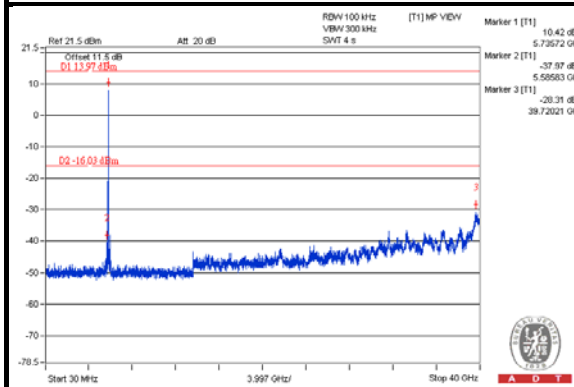


**CH 157**

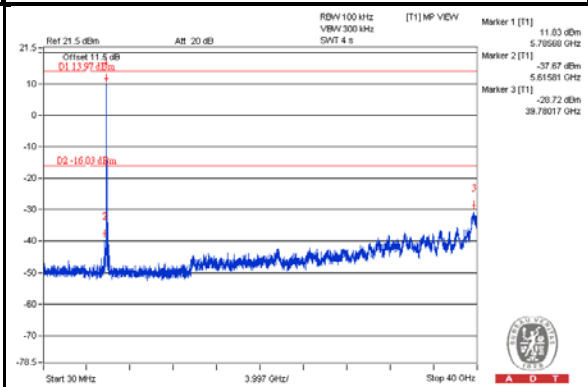


**CH 165**

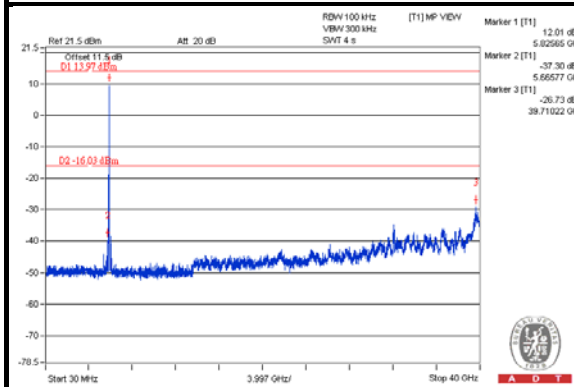

**CH 149 Band edge**

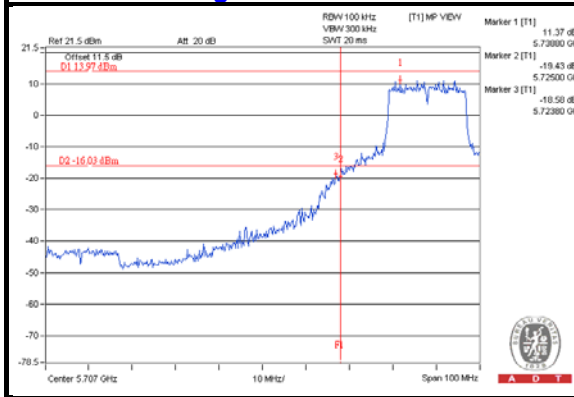


**CH 157 Band edge**

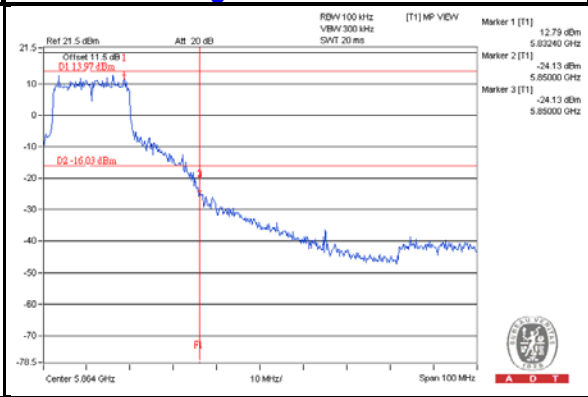


**CHAIN 2**


**CH 149**

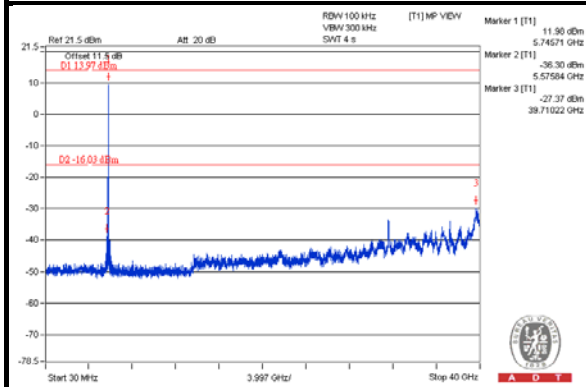


**CH 157**

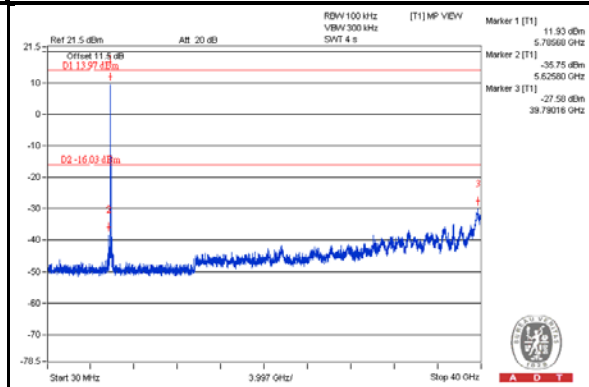


**CH 165**

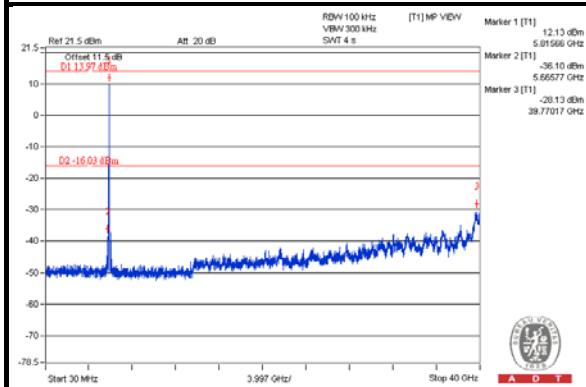

**CH 149 Band edge**

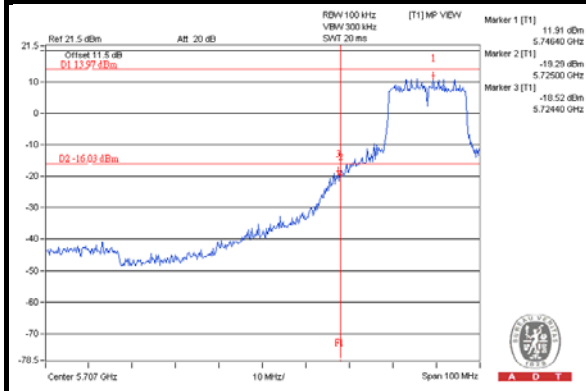


**CH 157 Band edge**

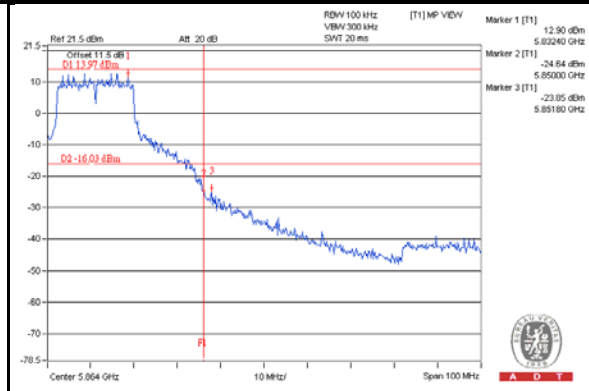





802.11ac (VHT40)

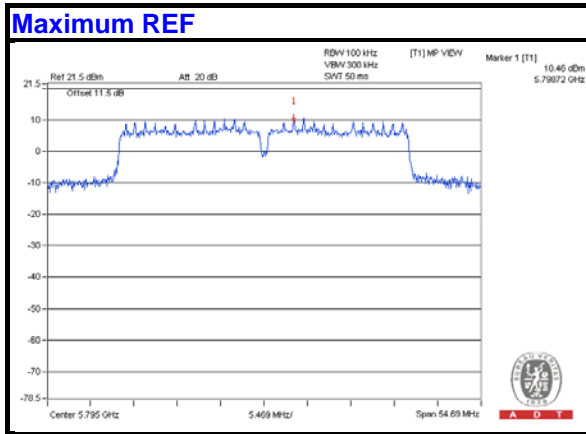


### CHAIN 0 CH 151

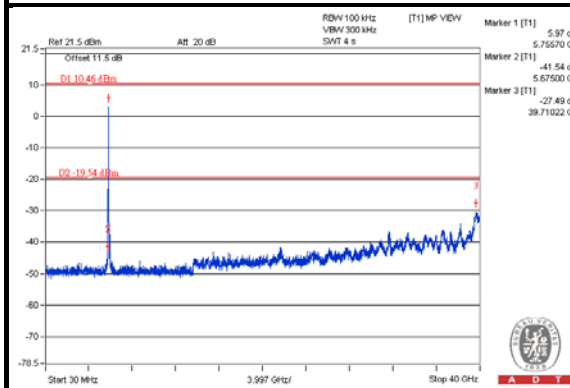


### CH 159

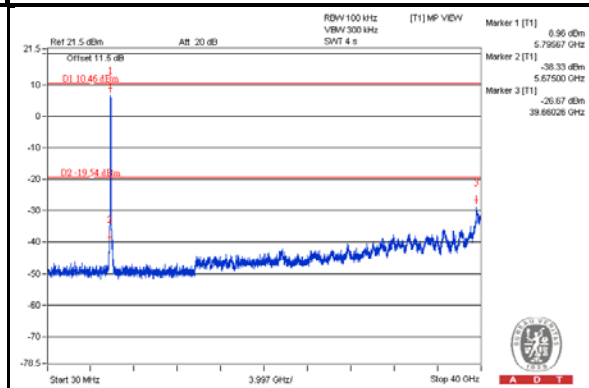


### CH 151 Band edge

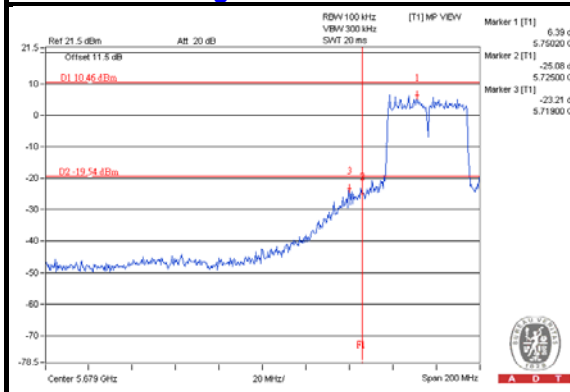


### CH 159 Band edge

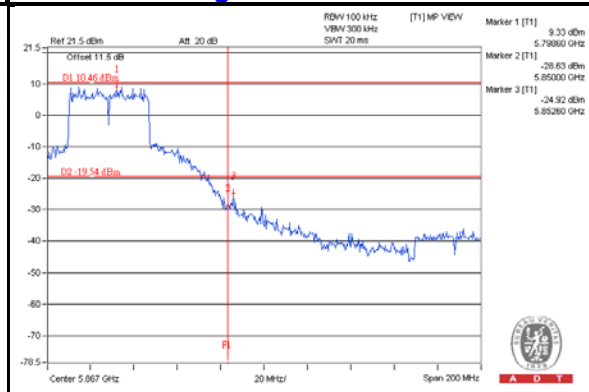


**CHAIN 1**  
**CH 151**

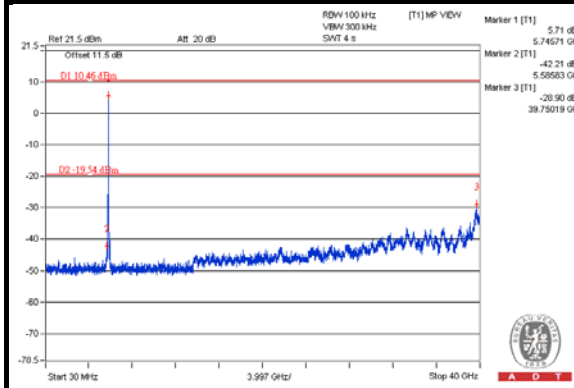


**CH 159**

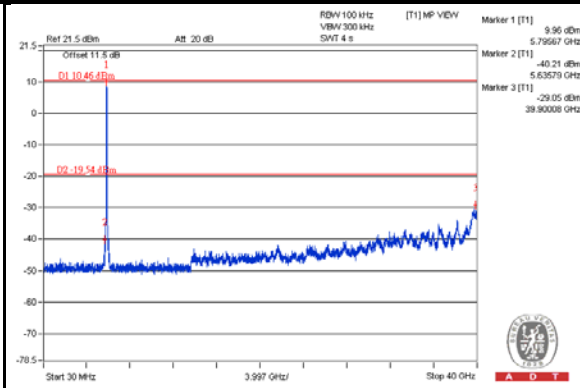

**CH 151 Band edge**

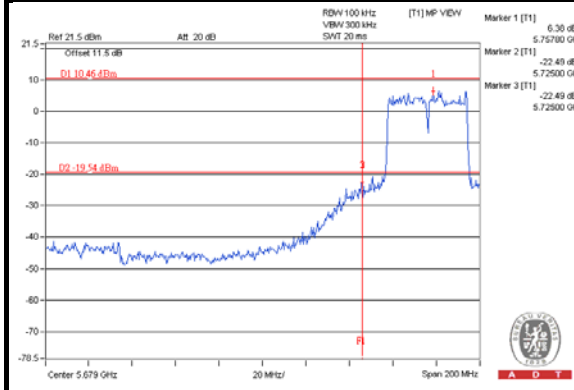


**CH 159 Band edge**

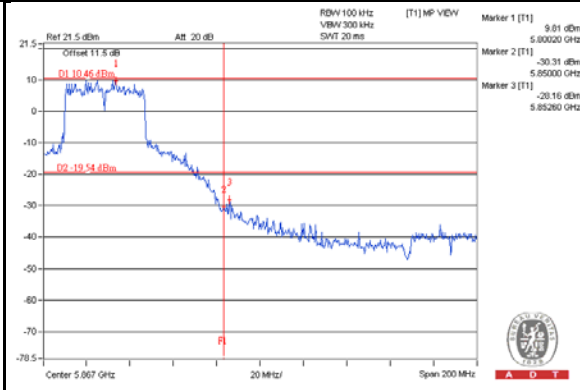


### CHAIN 2


#### CH 151

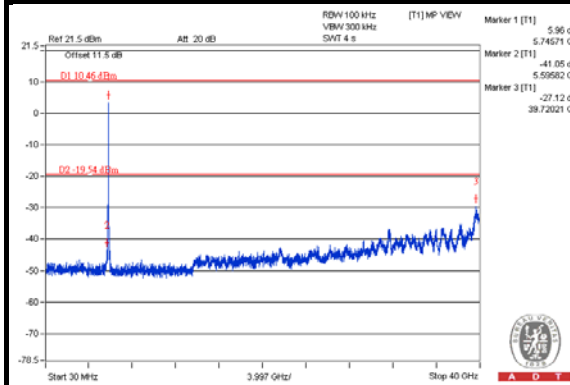


#### CH 159

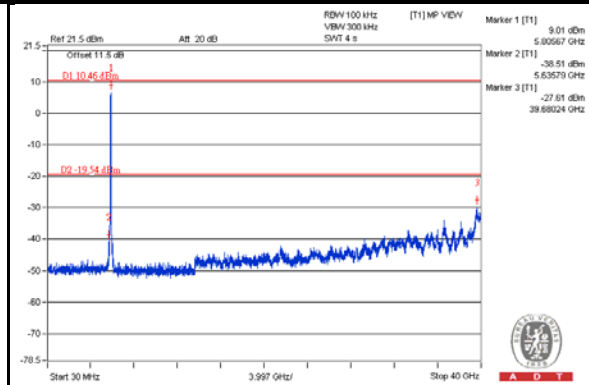


#### CH 151 Band edge

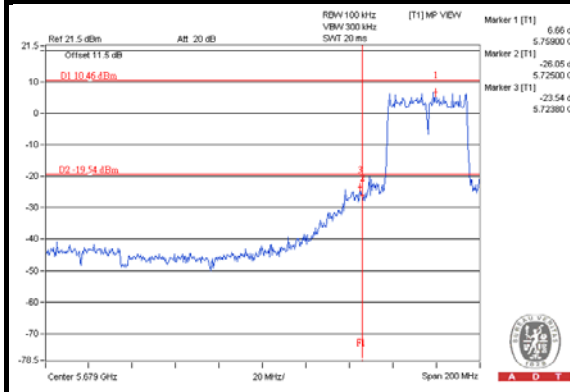


#### CH 159 Band edge

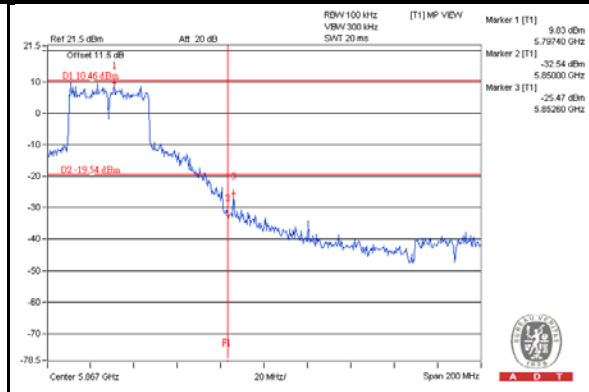


802.11ac (VHT80)

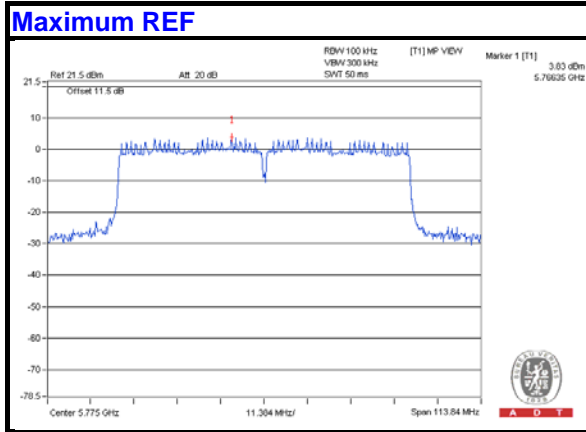


### CHAIN 0 CH 155

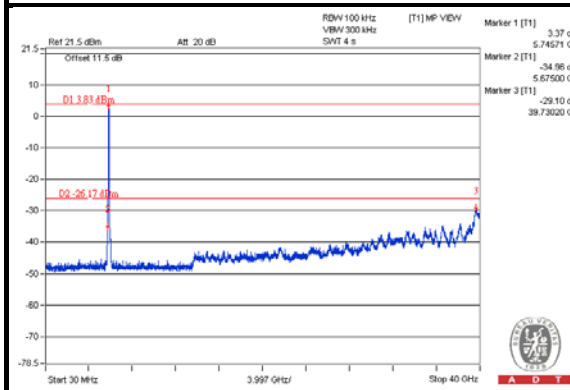



### CH 155 Band edge (Left)

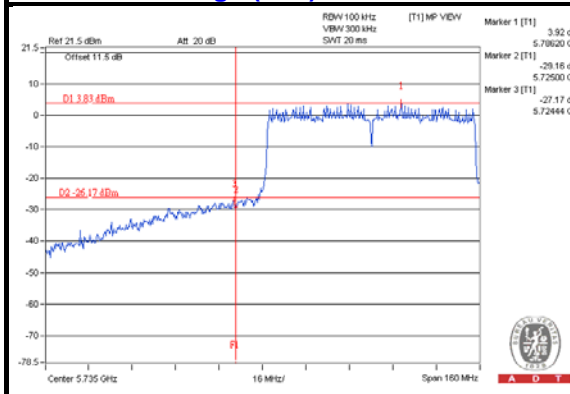


### CH 155 Band edge (Right)

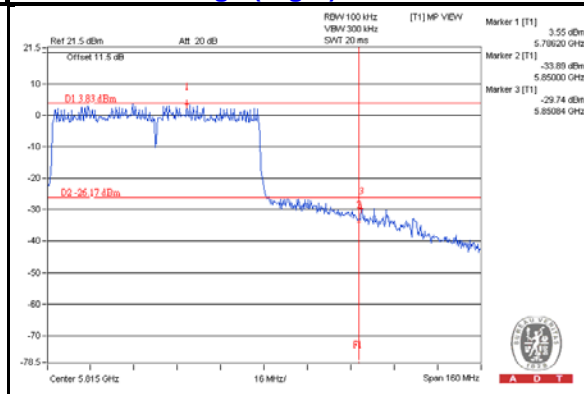


**CHAIN 1**  
**CH 155**

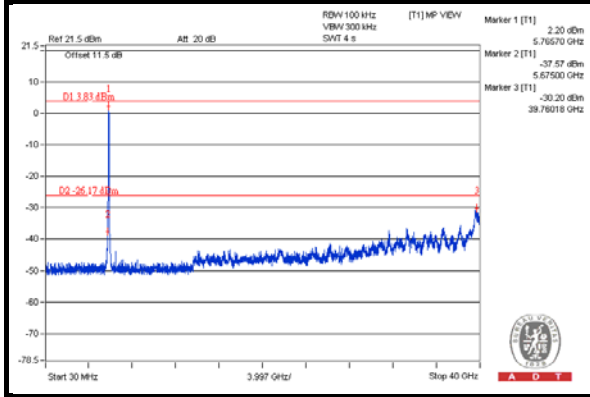



**CH 155 Band edge (Left)**

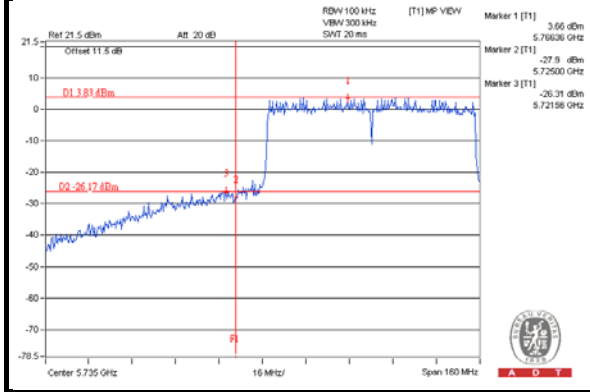


**CH 155 Band edge (Right)**

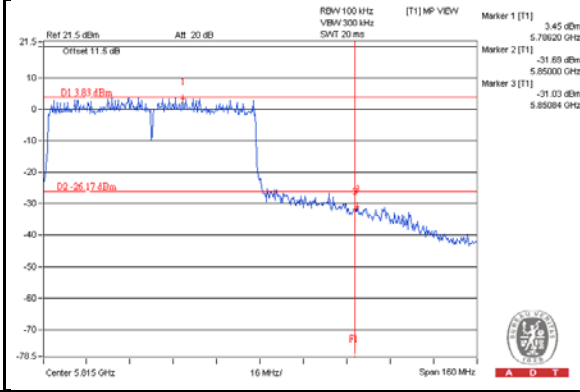


**CHAIN 2**  
**CH 155**

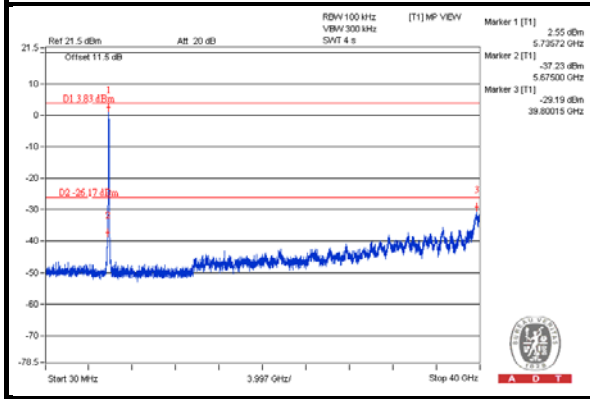


**CH 155 Band edge (Left)**

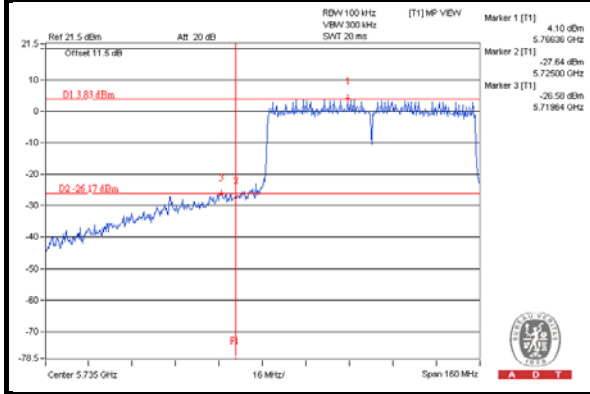

**CH 155 Band edge (Right)**

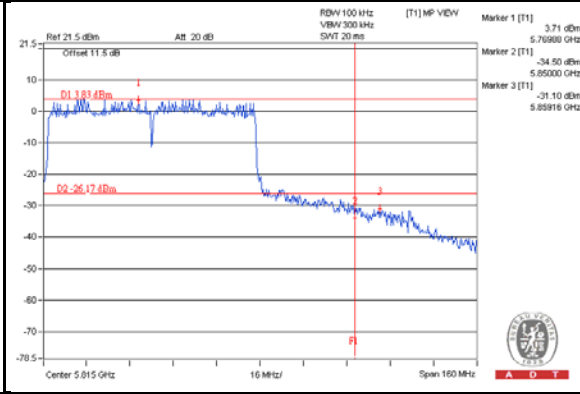


**Beamforming Mode**  
802.11ac (VHT20)

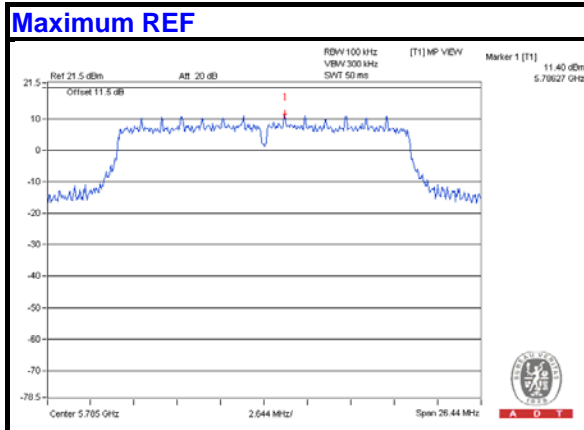


**CHAIN 0**



**CH 149**

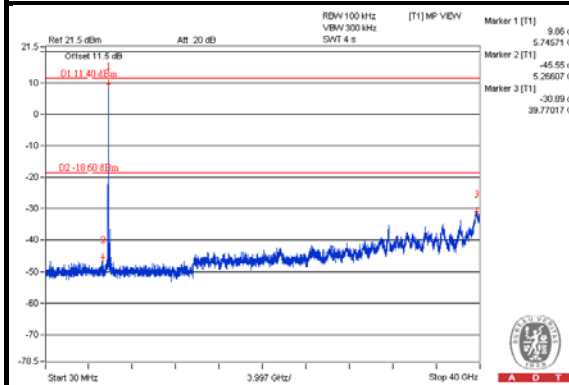


**CH 157**

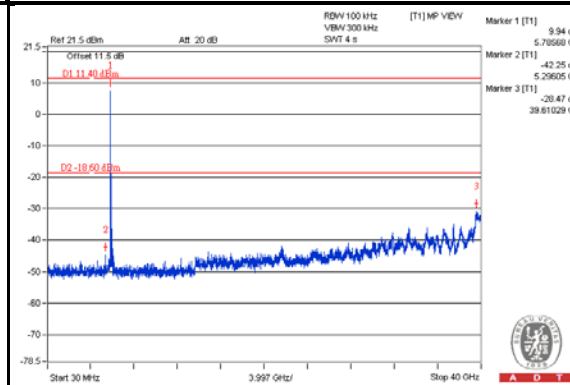


**CH 165**

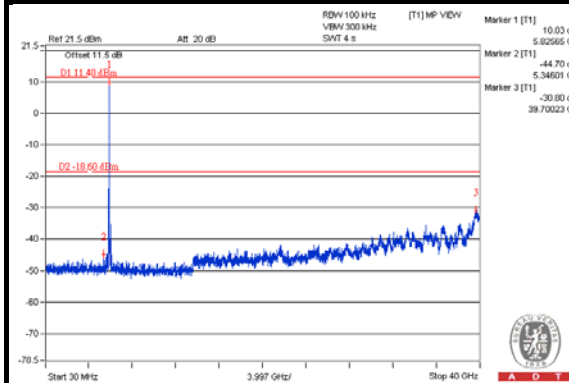

**CH 149 Band edge**

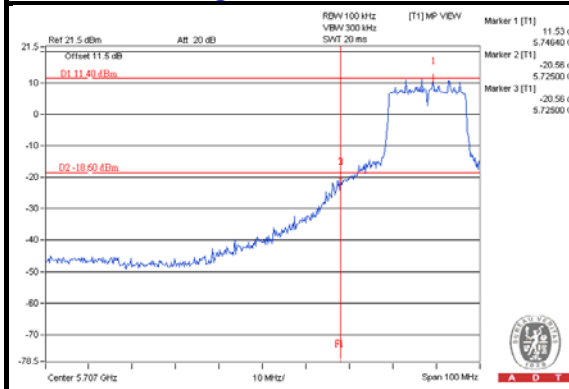


**CH 157 Band edge**

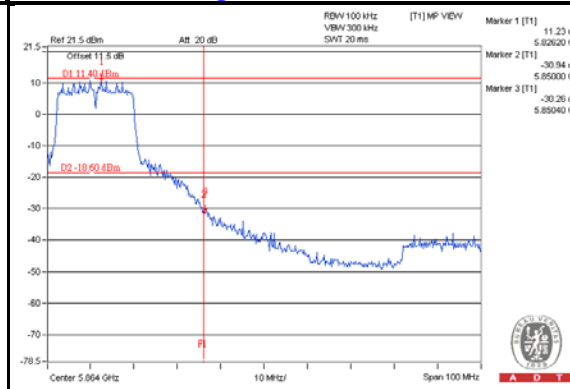


**CHAIN 1**


**CH 149**

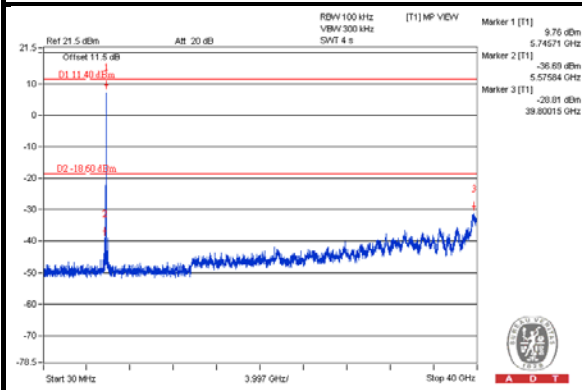


**CH 157**

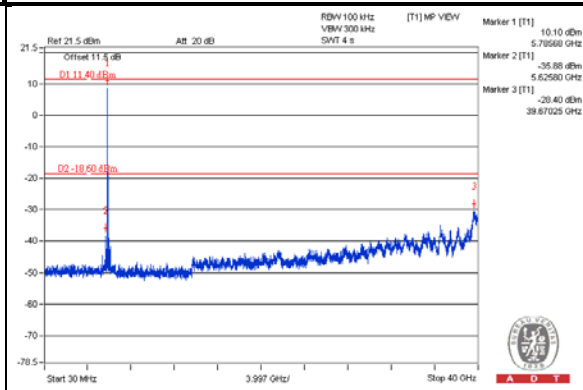


**CH 165**

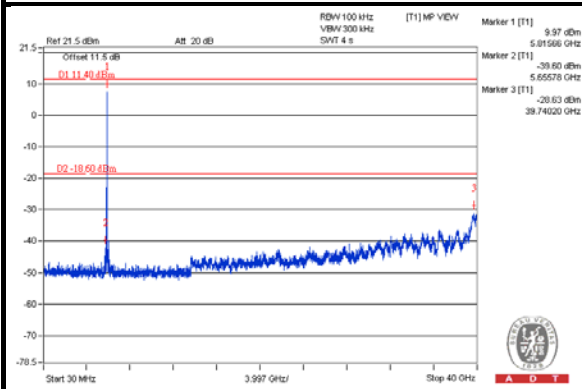

**CH 149 Band edge**

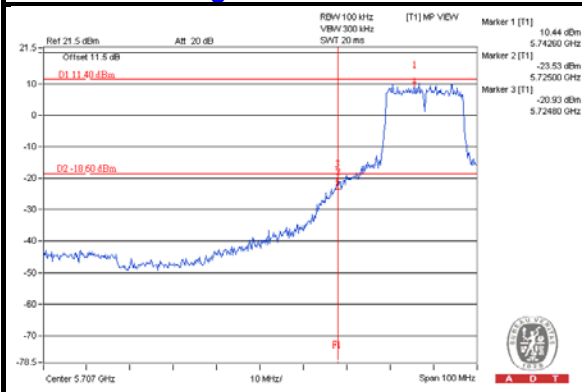


**CH 157 Band edge**

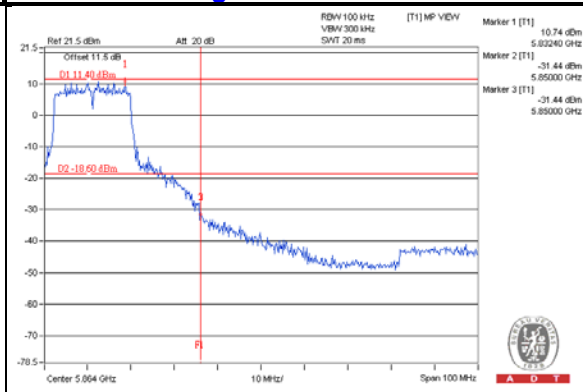




### CHAIN 2



#### CH 149

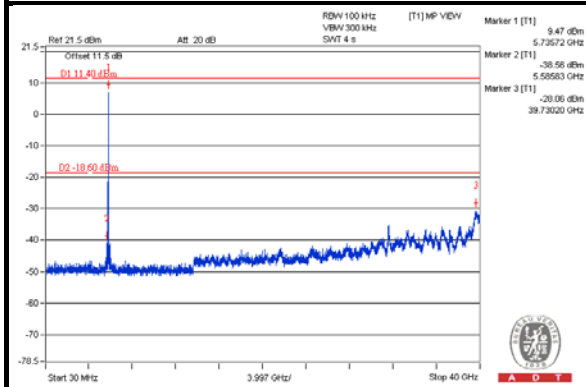


#### CH 157

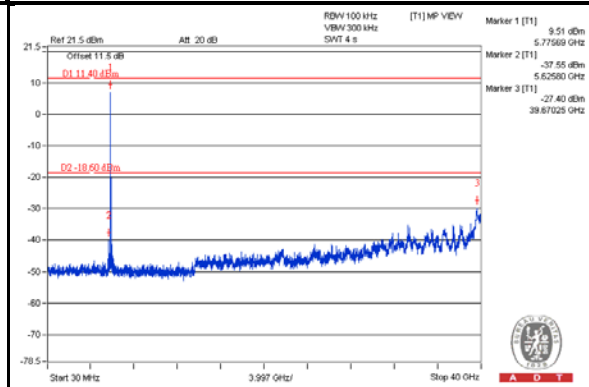


#### CH 165

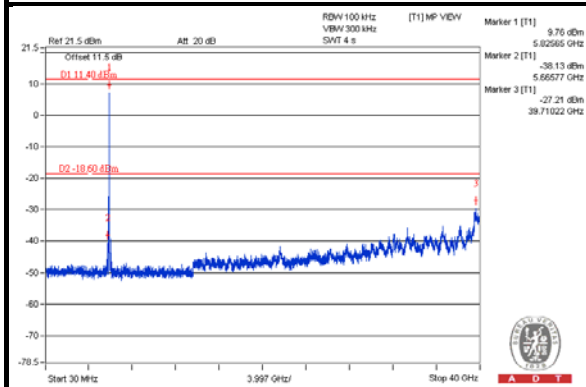


#### CH 149 Band edge

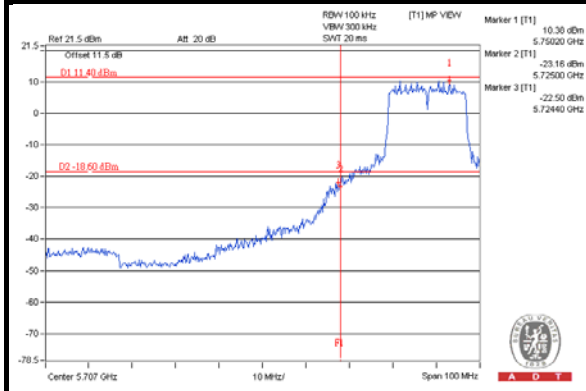


#### CH 157 Band edge

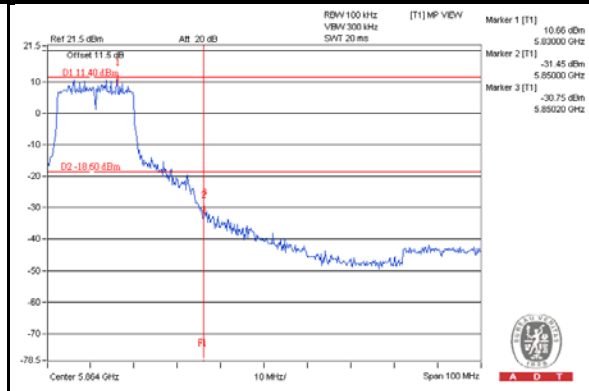


802.11ac (VHT40)

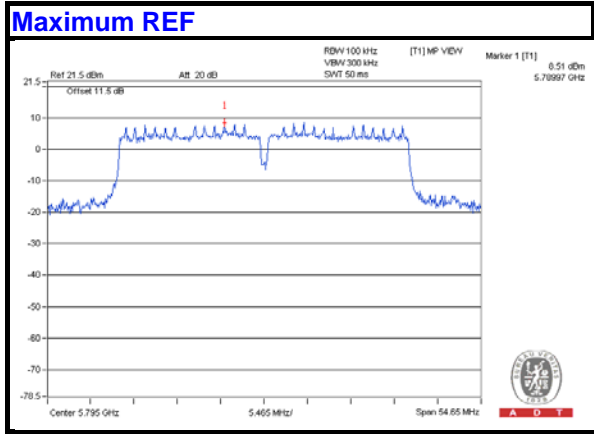


### CHAIN 0 CH 151

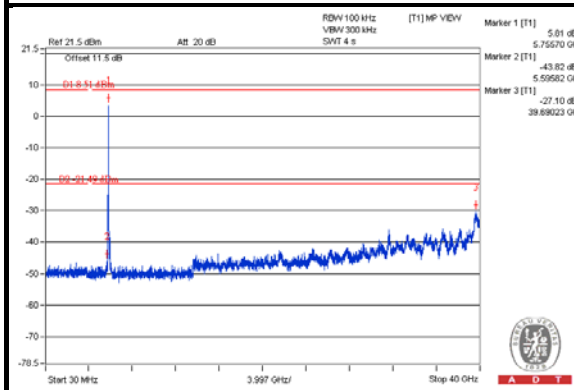


### CH 159

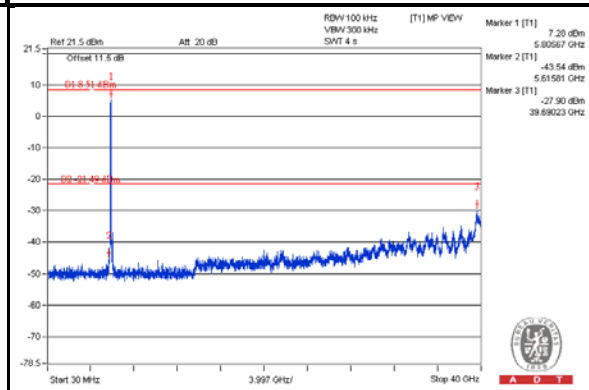


### CH 151 Band edge

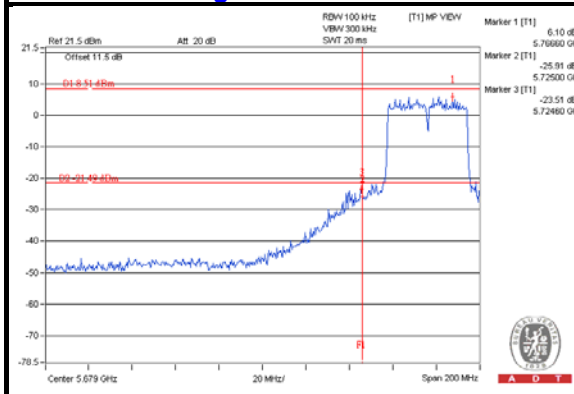


### CH 159 Band edge

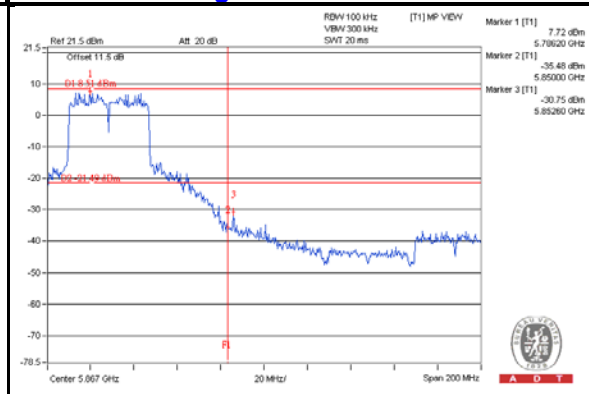


**CHAIN 1**  
**CH 151**

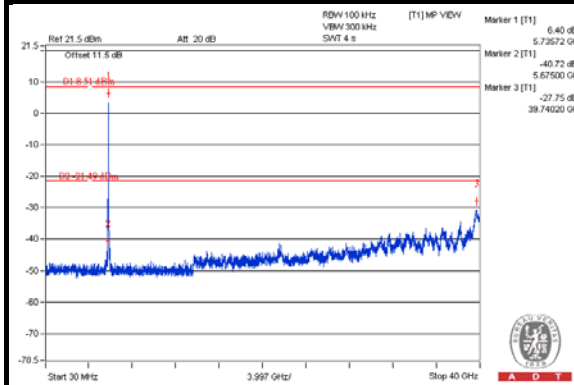


**CH 159**

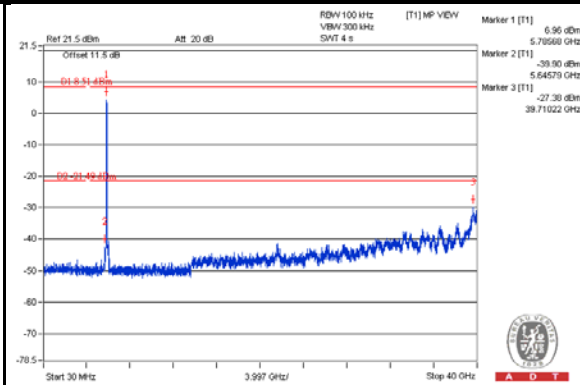

**CH 151 Band edge**

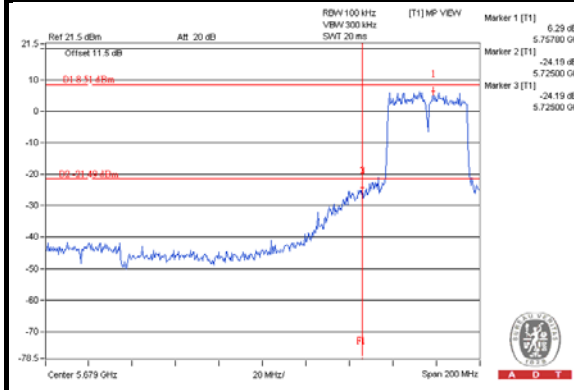


**CH 159 Band edge**

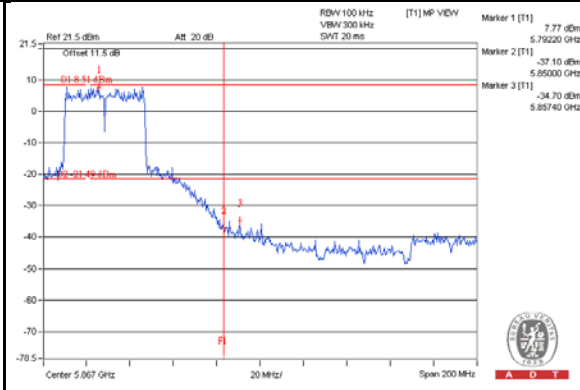


**CHAIN 2**


**CH 151**

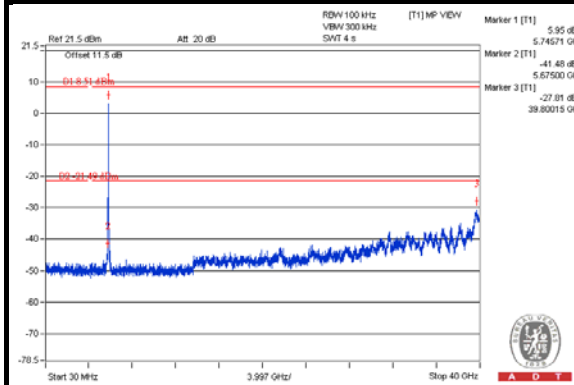


**CH 159**

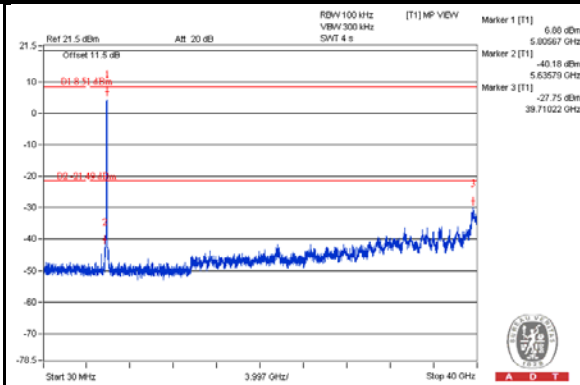


**CH 151 Band edge**

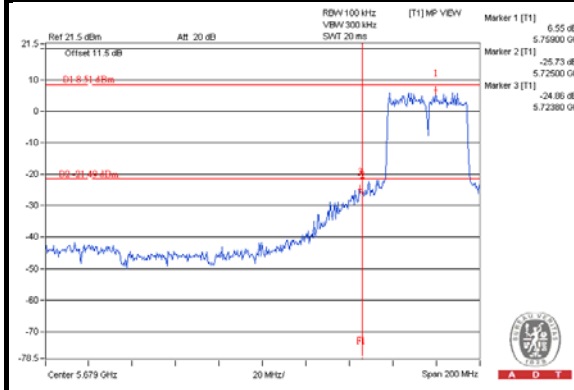


**CH 159 Band edge**

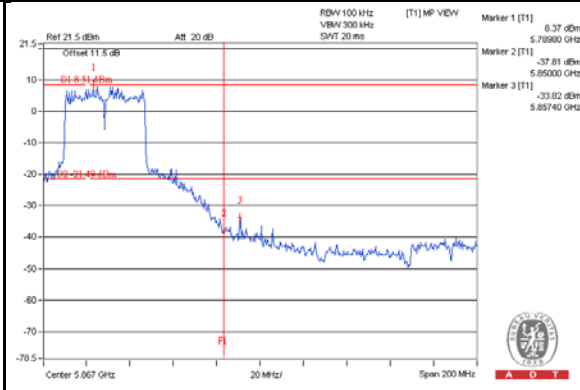


802.11ac (VHT80)

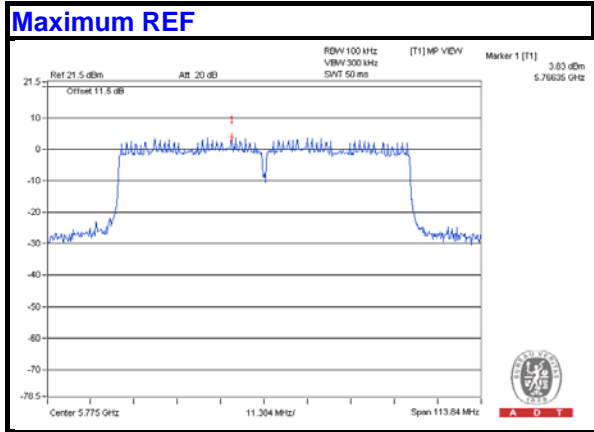


### CHAIN 0 CH 155

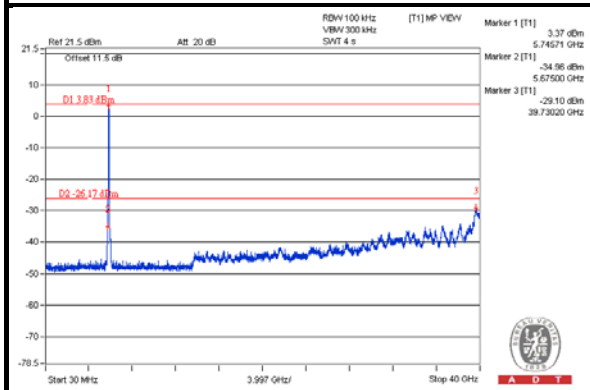



### CH 155 Band edge (Left)

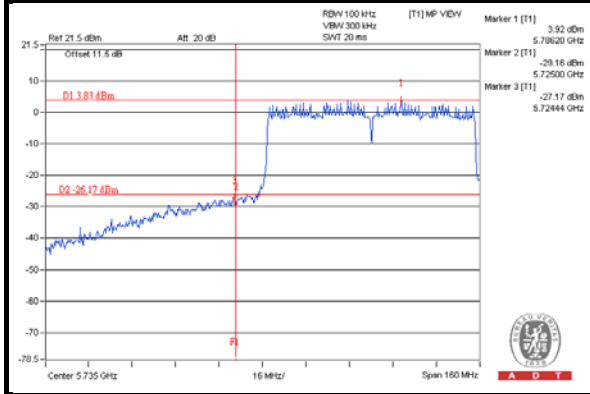


### CH 155 Band edge (Right)

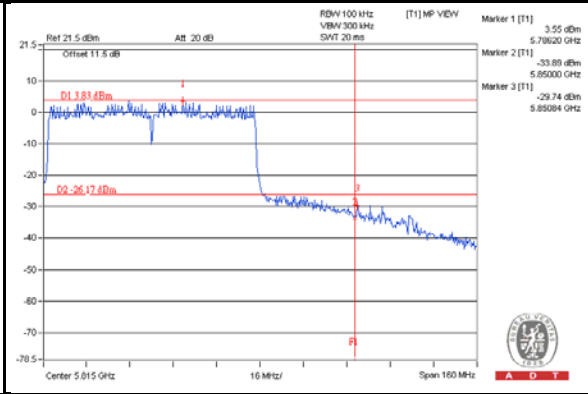


**CHAIN 1**  
**CH 155**

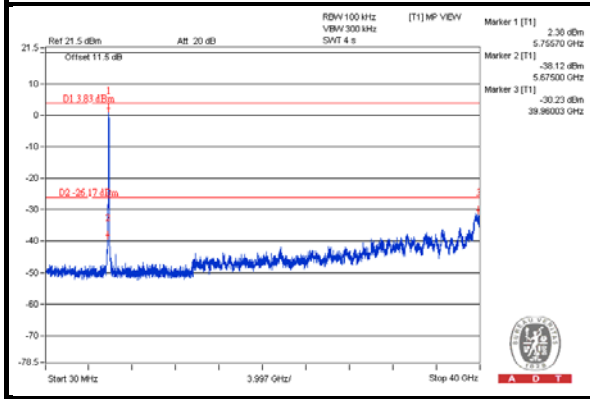



**CH 155 Band edge (Left)**

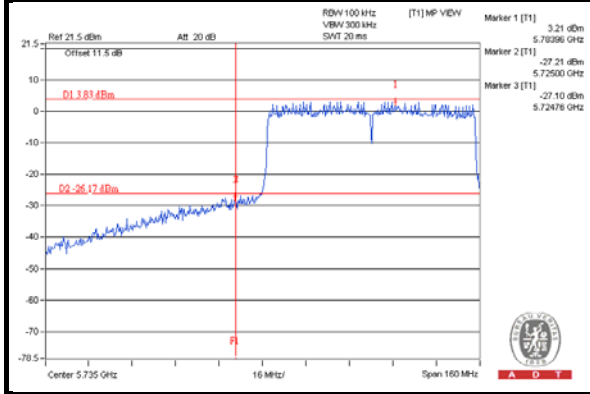


**CH 155 Band edge (Right)**

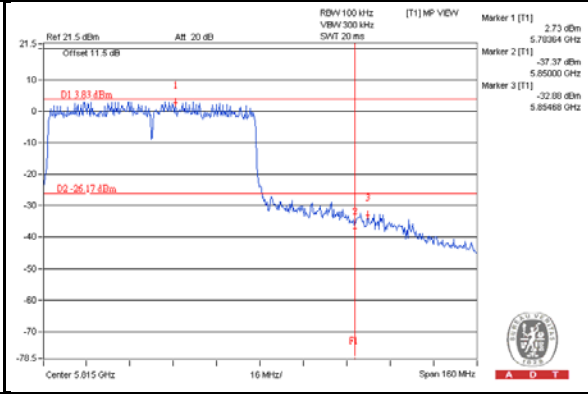


**CHAIN 2**  
**CH 155**

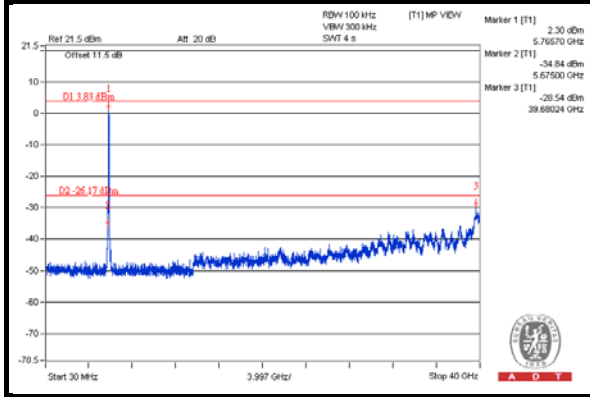

**CH 155 Band edge (Left)**

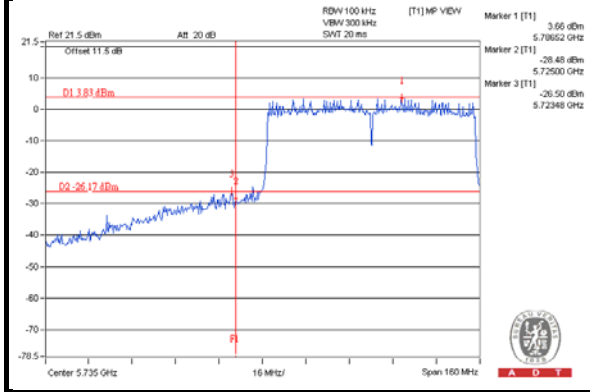

**CH 155 Band edge (Right)**

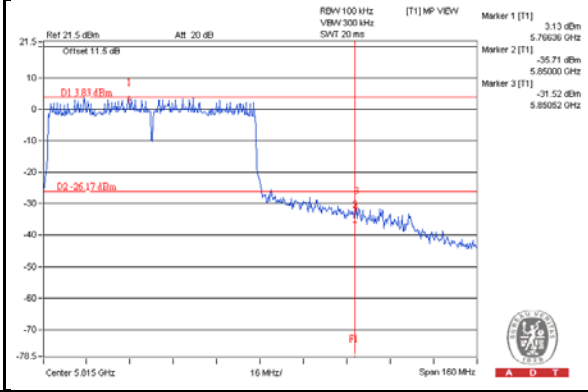

## 6 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).





## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---