Pb Free
Soldering
CAUTION:
FOR CONTINUED PROTECTION
AGAINST RISK OF FIRE REPLACE
ONLY WITH SAME TYPE AND RATING OF FUSE.

Input rating
100-240 V ~
50-60 Hz, 0.3A
Output rating
3.3V ⎓ 2.1A
KTEC
E123150
C-29.
94V-0
400V 15μF
KSP06A03302I0-00
F1
JP1
JP2
U1
D4
BD2
BD3
BD4
C52
C51
505T
560
6.3

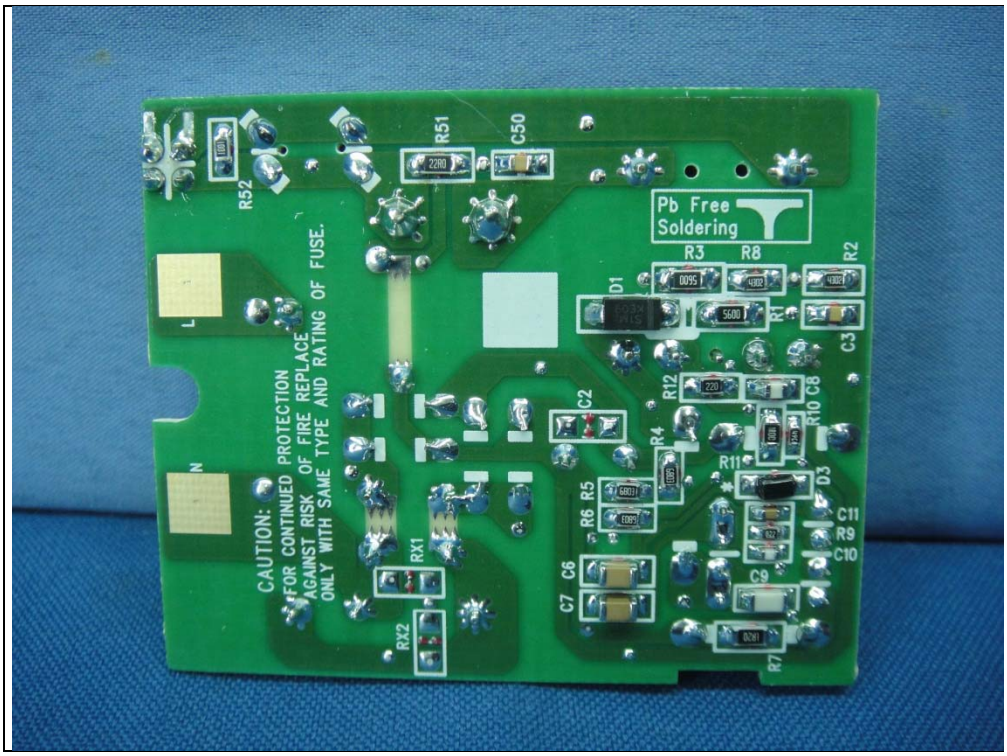
CAUTION: FOR CONTINUED PROTECTION AGAINST RISK OF FIRE REPLACE ONLY WITH SAME TYPE AND RATING OF FUSE.
Pb Free Soldering
R51
C50
R52
R3
R8
R2
D1
R1
C3
R12
C8
R10
C2
R4
R11
D3
R5
R6
C11
R9
C10
C6
C7
C9
R7
RX1
RX2
L
N

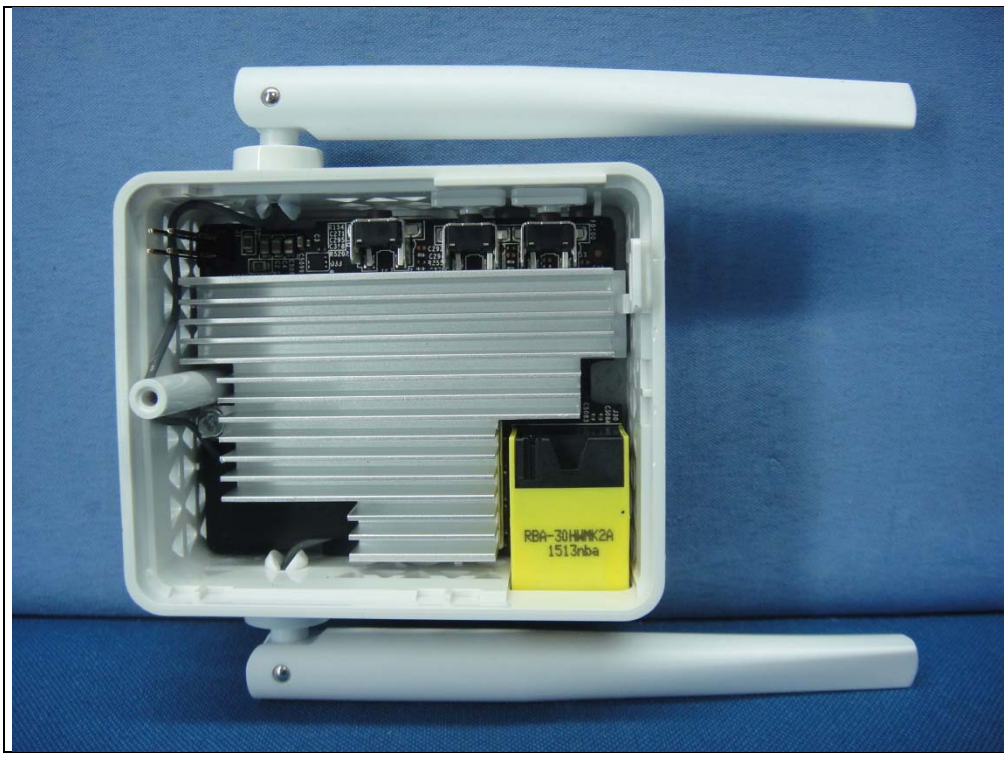
RBA-30HWMK2A
1513nba

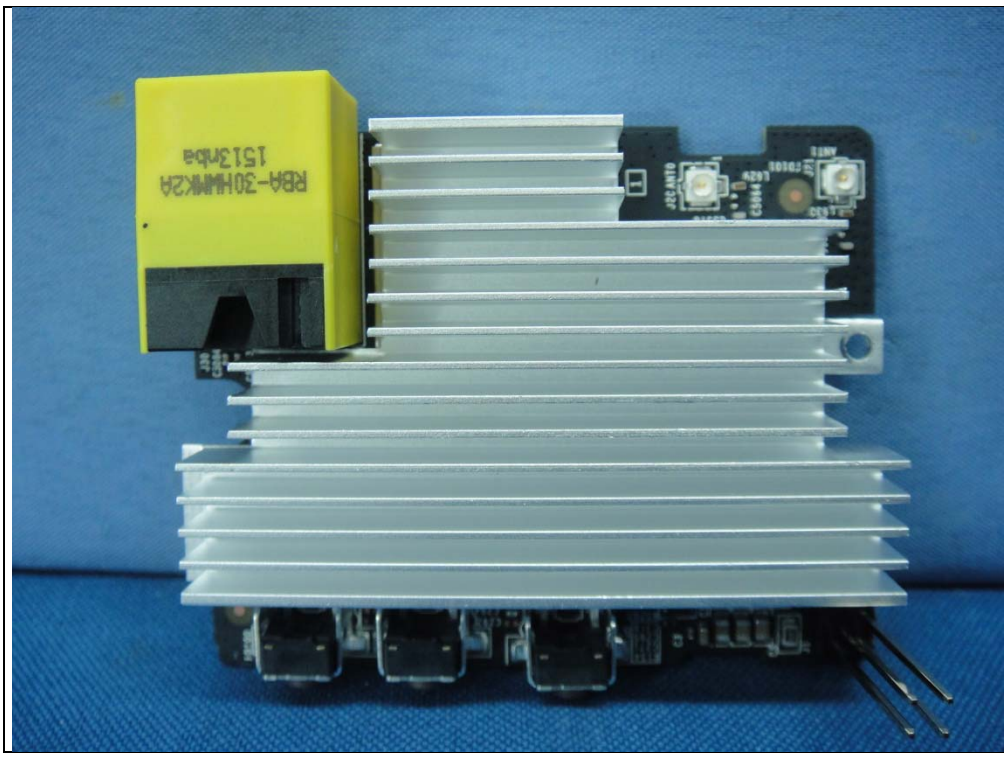
RBA-30HMMK2A
1513nba

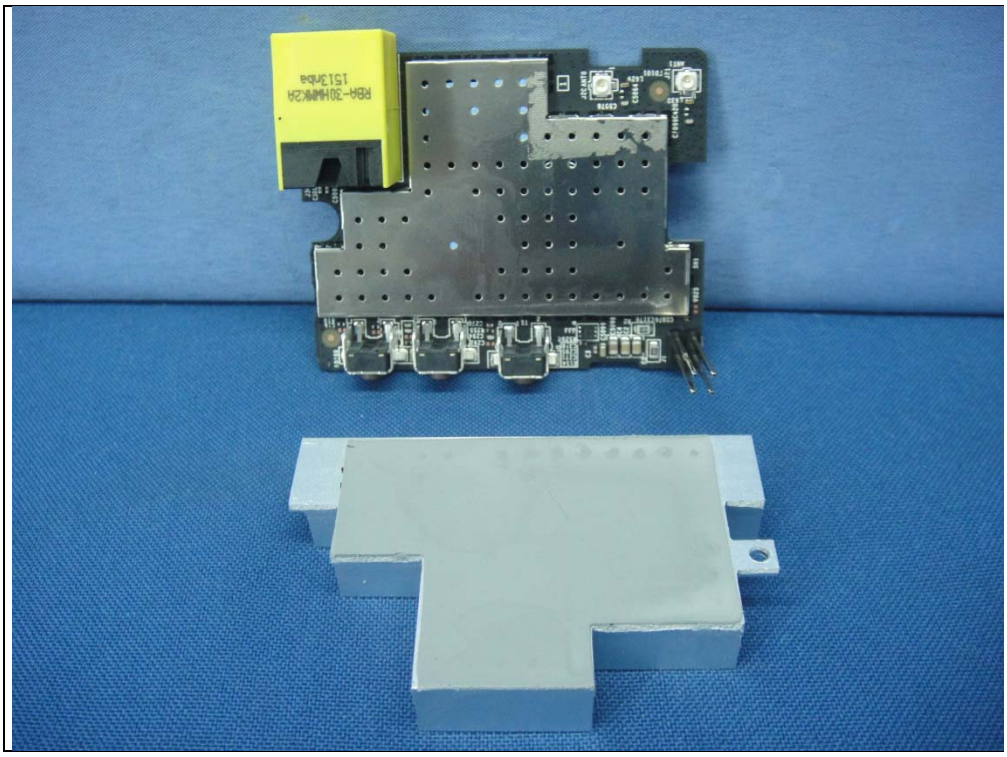
RBA-30HMMK2A
1513nba

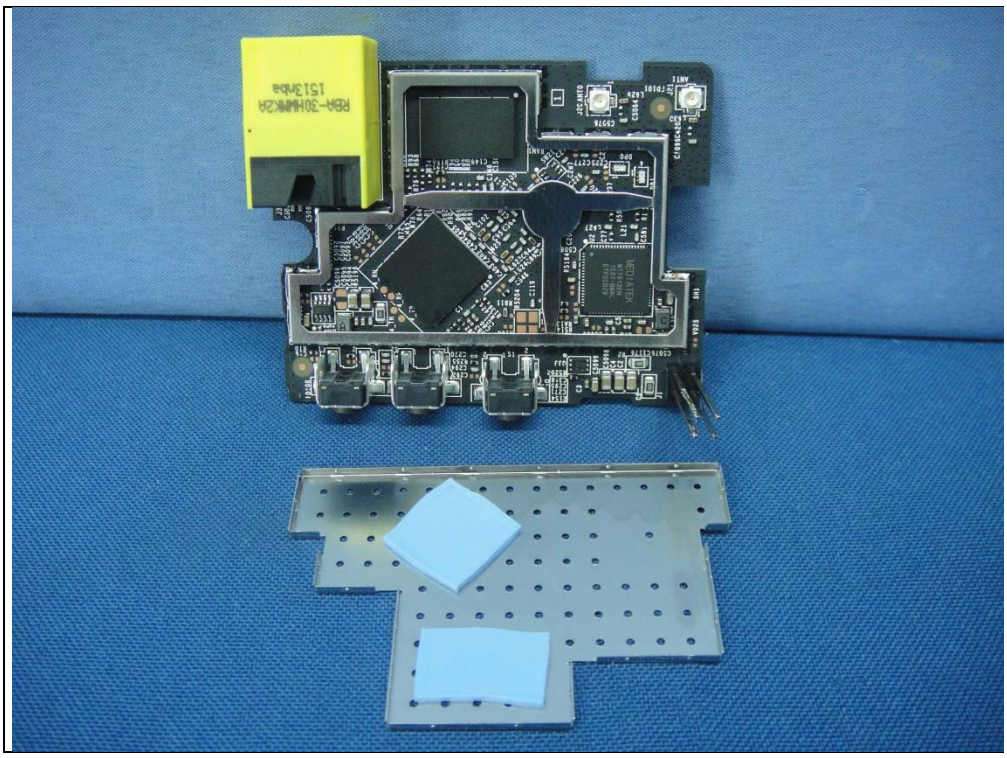

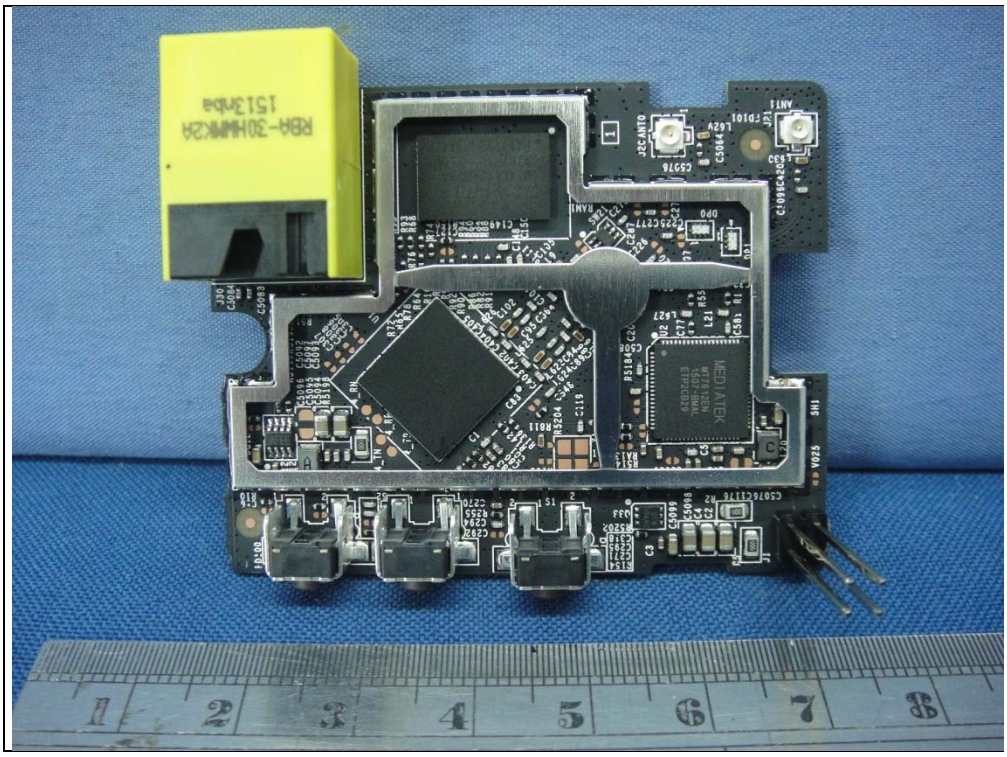

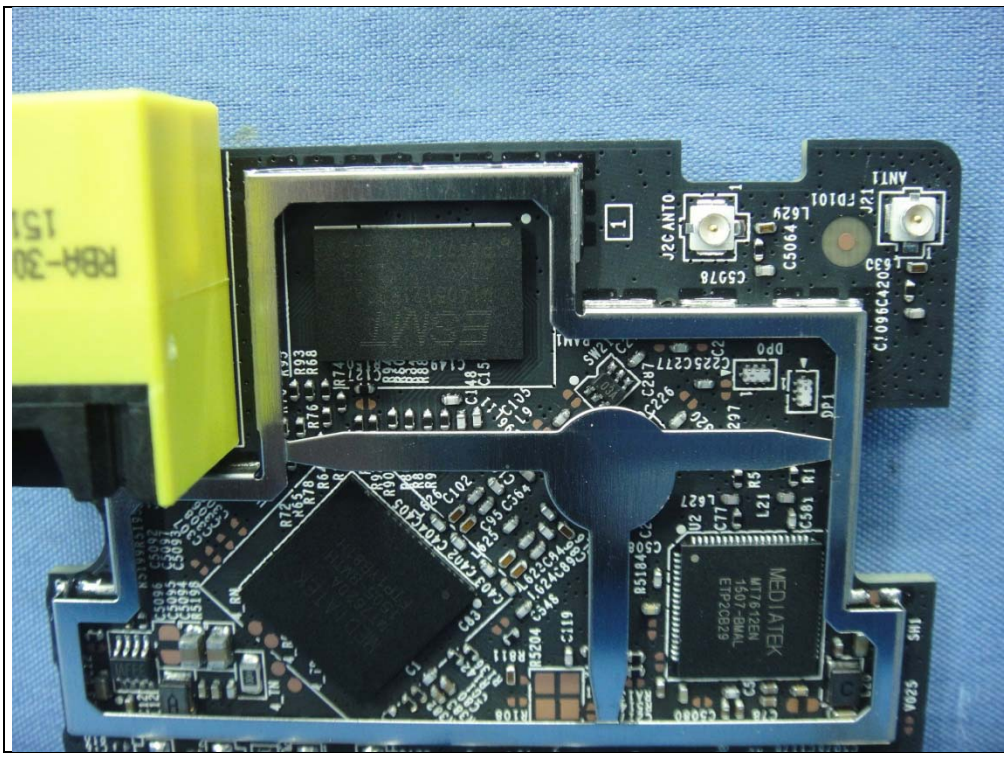
ANT1
J21
FD101
L629
C5064
J22
ANT0
C5076
C1096
C225
C227
DP0
DP1
MEDIATEK
MT7612EN
1507-BMAL
ETP2CB29

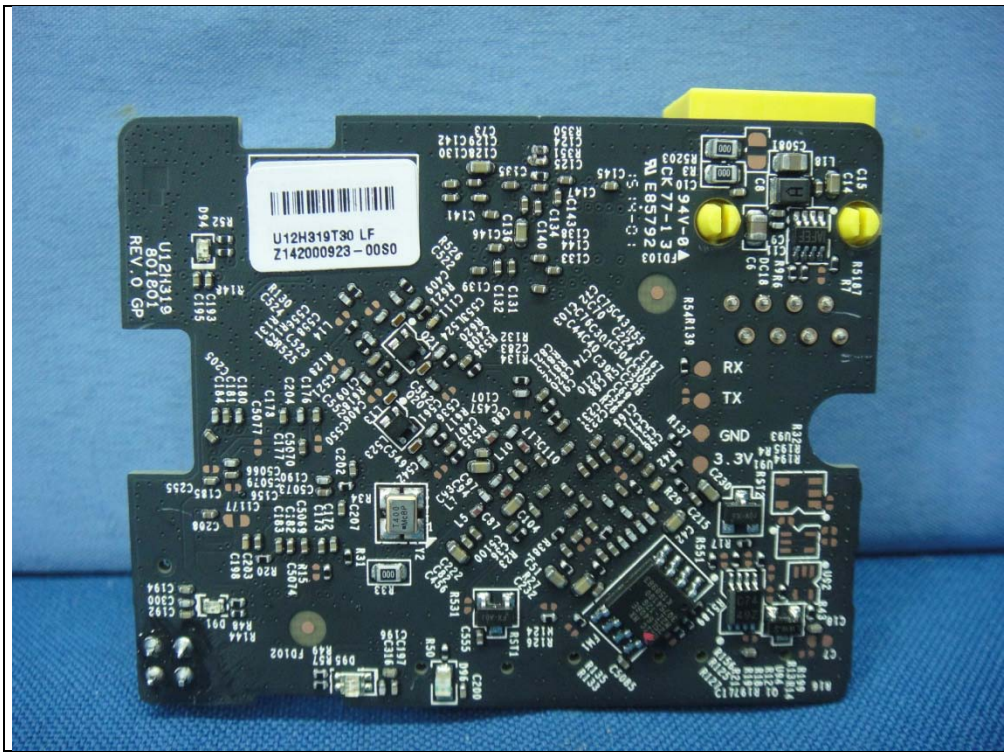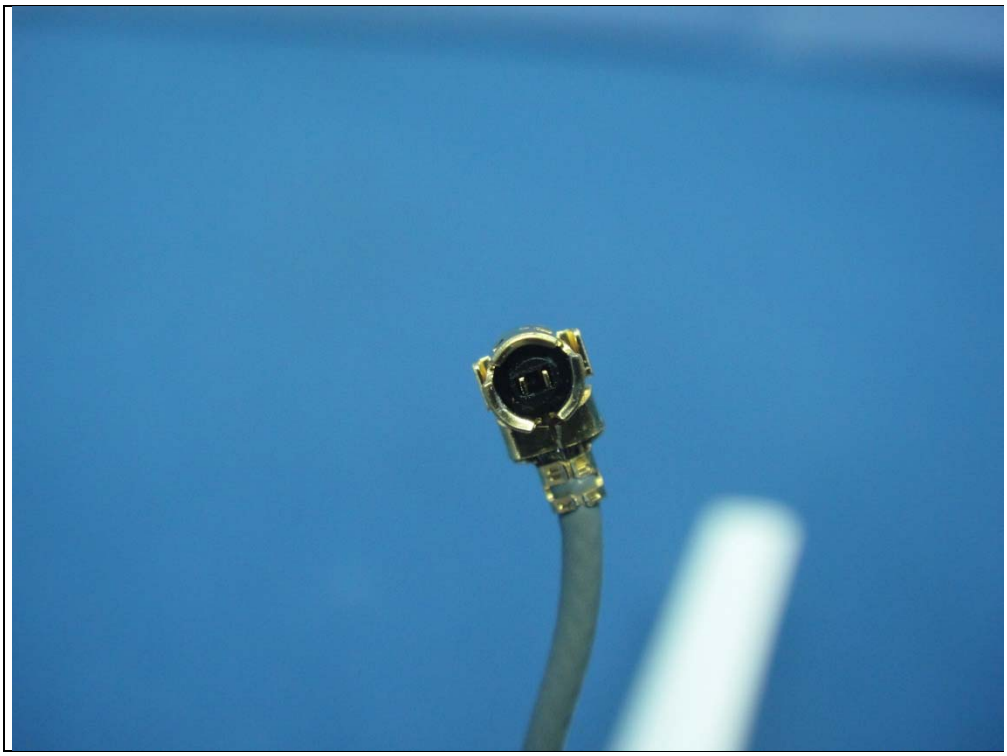
U12H319T30 LF
Z142000923-0050
U12H319
801801
REV.0 GP
RX
TX
GND
3.3V