

## FCC Test Report

**Report No.:** RF160411C02

**FCC ID:** PY316100335

**Test Model:** EX6200v2

**Received Date:** Mar. 31, 2016

**Test Date:** Mar. 31 ~ Jun. 04, 2016

**Issued Date:** Jun. 04, 2016

**Applicant:** NETGEAR, INC.

**Address:** 350 East Plumeria Drive San Jose, CA 95134

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	11
3.4 Description of Support Units.....	13
3.4.1 Configuration of System under Test.....	13
3.5 General Description of Applied Standards.....	14
<b>4 Test Types and Results</b> .....	<b>15</b>
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	15
4.1.2 Test Instruments.....	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard.....	17
4.1.5 Test Set Up.....	18
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results.....	19
4.2 Conducted Emission Measurement.....	32
4.2.1 Limits of Conducted Emission Measurement.....	32
4.2.2 Test Instruments.....	32
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard.....	33
4.2.5 Test Setup.....	33
4.2.6 EUT Operating Conditions.....	33
4.2.7 Test Results.....	34
4.3 6dB Bandwidth Measurement.....	36
4.3.1 Limits of 6dB Bandwidth Measurement.....	36
4.3.2 Test Setup.....	36
4.3.3 Test Instruments.....	36
4.3.4 Test Procedure.....	36
4.3.5 Deviation from Test Standard.....	36
4.3.6 EUT Operating Conditions.....	36
4.3.7 Test Result.....	37
4.4 Conducted Output Power Measurement.....	41
4.4.1 Limits of Conducted Output Power Measurement.....	41
4.4.2 Test Setup.....	41
4.4.3 Test Instruments.....	41
4.4.4 Test Procedures.....	41
4.4.5 Deviation from Test Standard.....	41
4.4.6 EUT Operating Conditions.....	41
4.4.7 Test Results.....	42
4.5 Power Spectral Density Measurement.....	44
4.5.1 Limits of Power Spectral Density Measurement.....	44
4.5.2 Test Setup.....	44
4.5.3 Test Instruments.....	44
4.5.4 Test Procedure.....	44
4.5.5 Deviation from Test Standard.....	44

4.5.6 EUT Operating Condition .....	44
4.5.7 Test Results .....	45
4.6 Conducted Out of Band Emission Measurement.....	50
4.6.1 Limits of Conducted Out of Band Emission Measurement .....	50
4.6.2 Test Setup.....	50
4.6.3 Test Instruments .....	50
4.6.4 Test Procedure .....	50
4.6.5 Deviation from Test Standard .....	50
4.6.6 EUT Operating Condition .....	50
4.6.7 Test Results .....	50
<b>5 Pictures of Test Arrangements.....</b>	<b>63</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>64</b>

### Release Control Record

Issue No.	Description	Date Issued
RF160411C02	Original release.	Jun. 04, 2016

## 1 Certificate of Conformity

**Product:** AC 1200 WiFi Range Extender

**Brand:** Netgear

**Test Model:** EX6200v2

**Sample Status:** Engineering sample

**Applicant:** NETGEAR, INC.

**Test Date:** Mar. 31 ~ Jun. 04, 2016

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Jun. 04, 2016  
Ivy Lin / Specialist

**Approved by :**  , **Date:** Jun. 04, 2016  
Ken Liu / Senior Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.78dB at 0.29351MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RSMA not a standard connector.

### 3 General Information

#### 3.1 General Description of EUT

Product	AC 1200 WiFi Range Extender
Brand	Netgear
Test Model	EX6200v2
Sample Status	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 400Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
Output Power	CDD Mode: 454.281mW Beamforming Mode: 388.208mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter
Cable Supplied	1.45m RJ45 non-shielded cable without core

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Band	Modulation Mode	Beamforming Mode	TX Function
2.4GHz	802.11b	Not Support	2TX
	802.11g	Not Support	2TX
	802.11n (HT20)	Support	2TX
	802.11n (HT40)	Support	2TX
5GHz	802.11a	Not Support	2TX
	802.11n (HT20)	Support	2TX
	802.11n (HT40)	Support	2TX
	802.11ac (VHT20)	Support	2TX
	802.11ac (VHT40)	Support	2TX
	802.11ac (VHT80)	Support	2TX

\* For 802.11n, CDD mode is the worst case for final radiated emission and power line conducted emission tests after pretesting CDD mode and beamforming mode.

2. The EUT uses following antenna.

Antenna Type	Dipole	
Antenna Connector	RSMA	
Antenna Gain (dBi)		
Frequency (MHz)		
2.4GHz Band		5GHz Band
1.78		1.86

3. The EUT uses following adapters.

Adapter 1	
Brand	NETGEAR
Model	2ABB018F 1 NA
P/N	332-10750-01
Input Power	100-120Vac, 50/60Hz, 0.6A
Output Power	12.0Vdc, 1.5A
Power Line	1.8m DC cable without core attached on adapter

Adapter 2	
Brand	NETGEAR
Model	AD2032F10
P/N	332-10751-01
Input Power	100-120Vac, 50/60Hz, 0.56A
Output Power	12Vdc, 1.5A
Power Line	1.8m DC cable without core attached on adapter

\* After pre-testing, adapter 2 was the worst case for final test.

4. Spurious emission of the simultaneous operation (2.4GHz and 5GHz) has been evaluated and no non-compliance was found.



### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE $<$ 1G	PLC	APCM	
-	√	√	√	√	-

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE $<$ 1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
-	802.11b	1 to 11	6	DSSS	DBPSK	1.0

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
-	802.11b	1 to 11	6	DSSS	DBPSK	1.0

#### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

**Test Condition:**

Applicable to	Environmental Conditions	Input Power	Tested by
RE≥1G	22 deg. C, 64% RH	120Vac, 60Hz	Alan Wu
RE<1G	22 deg. C, 64% RH	120Vac, 60Hz	Alan Wu
PLC	24 deg. C, 64% RH	120Vac, 60Hz	Match Tsui
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Chris Lin

**3.3 Duty Cycle of Test Signal**

**CDD Mode**

**802.11b:** Duty cycle of test signal is ≥ 98%, duty factor is not required.


**802.11g, 802.11n (HT20), 802.11n (HT40):** Duty cycle of test signal is < 98%, duty factor shall be considered.

**802.11b:** Duty cycle = 12.404/12.516 = 0.991

**802.11g:** Duty cycle = 2.044/2.147 = 0.952, Duty factor = 10 \* log(1/0.952) = 0.21

**802.11n (HT20):** Duty cycle = 4.968/5.08 = 0.978, Duty factor = 10 \* log(1/0.978) = 0.10

**802.11n (HT40):** Duty cycle = 2.418/2.506 = 0.965, Duty factor = 10 \* log(1/0.965) = 0.16

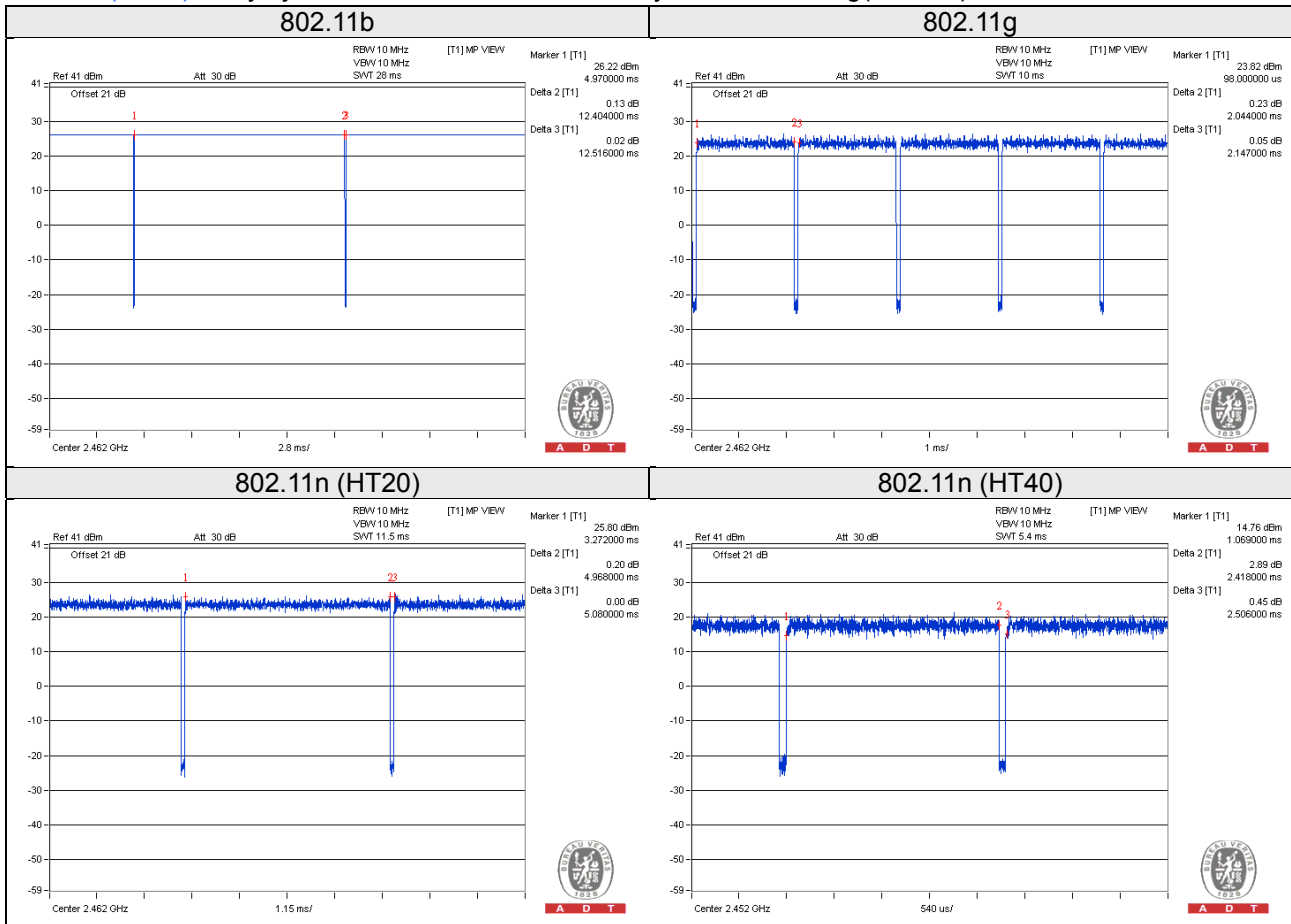


## Beamforming Mode

Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11n (HT20): Duty cycle =  $4.978/5.116 = 0.973$ , Duty factor =  $10 * \log(1/0.973) = 0.12$

802.11n (HT40): Duty cycle =  $2.403/2.506 = 0.959$ , Duty factor =  $10 * \log(1/0.959) = 0.18$

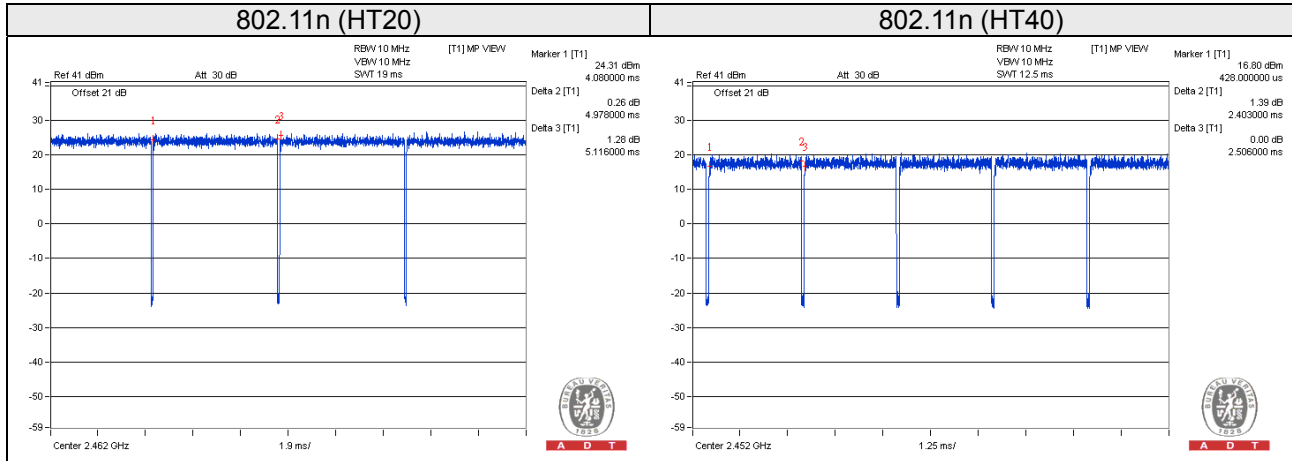

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	6RP2YM1	FCC DoC Approved	-
B.	USB 3.0 FLASH	HP	v250W	01	FCC DoC Approved	-
C.	Load	N/A	N/A	N/A	N/A	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45	4	1.8	N	0	-
2.	RJ45	1	10	N	0	-

#### 3.4.1 Configuration of System under Test

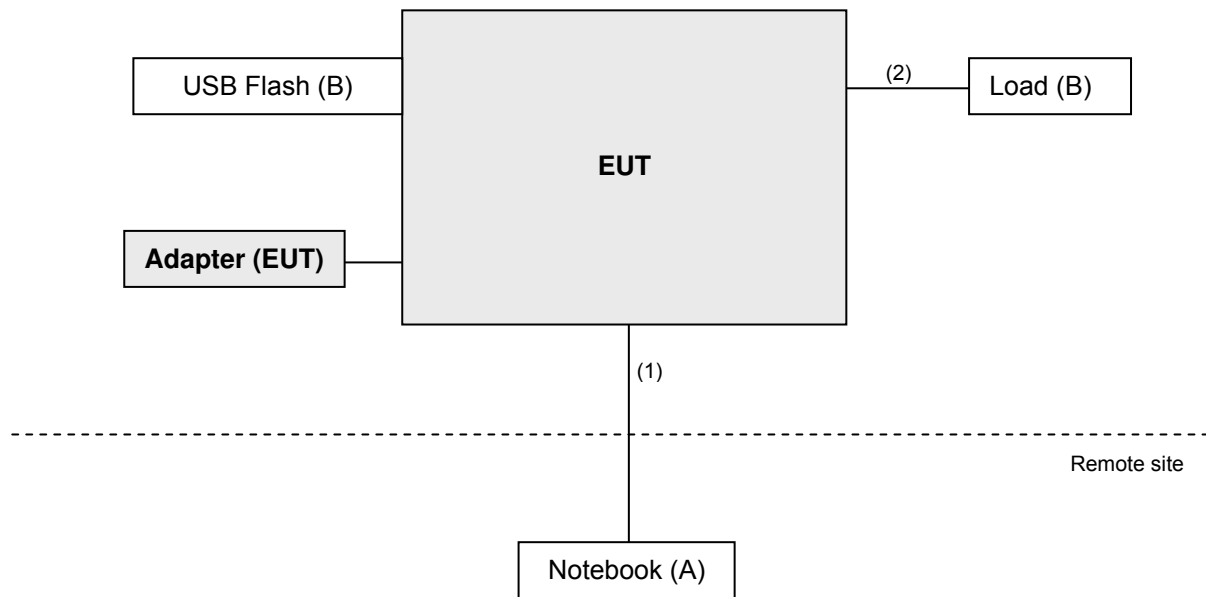

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v03r05**

**662911 D01 Multiple Transmitter Output v02r01**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).  
The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 12, 2015	Oct. 11, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 08, 2015	Jul. 07, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSV40	100979	Feb. 19, 2016	Feb. 18, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 07, 2016	Jan. 06, 2017
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Jan. 08, 2016	Jan. 07, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Jan. 18, 2016	Jan. 17, 2017
Preamplifier Agilent	8449B	3008A01960	Aug. 09, 2015	Aug. 08, 2016
Preamplifier Agilent	8447D	2944A10631	Aug. 09, 2015	Aug. 08, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-02(295012+309220)	Aug. 09, 2015	Aug. 08, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03(250724)	Aug. 09, 2015	Aug. 08, 2016
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021703	NA	NA
High Speed Peak Power Meter	ML2495A	0824011	Jul. 09, 2015	Jul. 08, 2016
Power Sensor	MA2411B	0738171	Jul. 09, 2015	Jul. 08, 2016

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 4.
  3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 460141.
  5. The IC Site Registration No. is IC7450F-4.



#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

<Frequency Range 30MHz~1GHz>

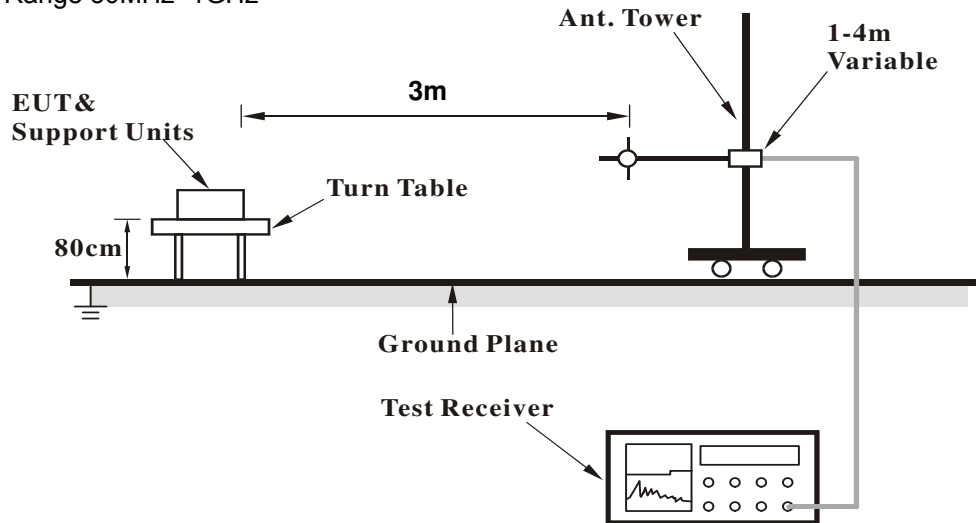

<Frequency Range above 1GHz>

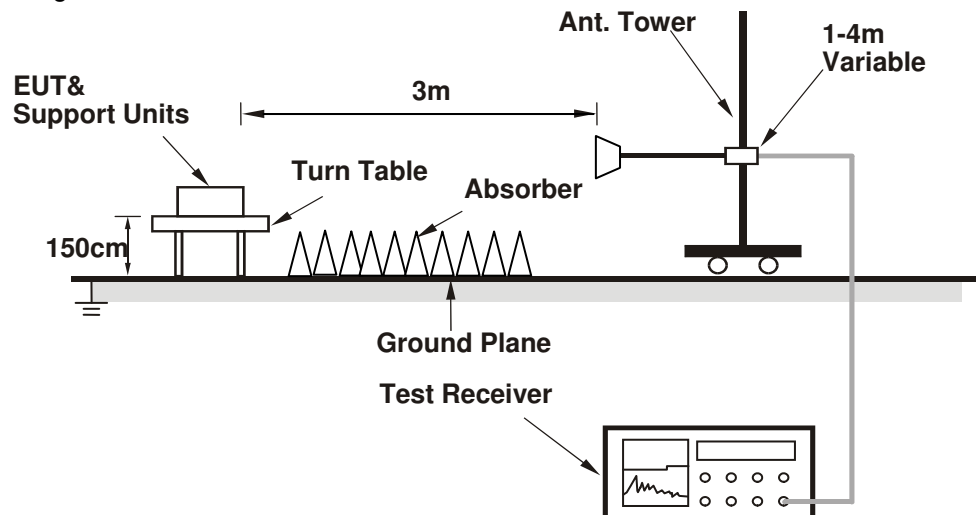

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

#### 4.1.7 Test Results

Above 1GHz Worst-Case Data

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.9 PK			1.26 H	121	74.70	32.20
2	*2437.00	103.2 AV			1.26 H	121	71.00	32.20
3	4874.00	50.8 PK	74.0	-23.2	1.25 H	294	44.20	6.60
4	4874.00	41.2 AV	54.0	-12.8	1.25 H	294	34.60	6.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	116.8 PK			1.58 V	12	84.60	32.20
2	*2437.00	113.1 AV			1.58 V	12	80.90	32.20
3	4874.00	52.0 PK	74.0	-22.0	1.00 V	97	45.40	6.60
4	4874.00	46.7 AV	54.0	-7.3	1.00 V	97	40.10	6.60

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.8 PK			1.45 H	124	73.50	32.30
2	*2462.00	102.6 AV			1.45 H	124	70.30	32.30
3	2483.50	55.2 PK	74.0	-18.8	1.45 H	124	22.80	32.40
4	2483.50	43.2 AV	54.0	-10.8	1.45 H	124	10.80	32.40
5	4924.00	50.6 PK	74.0	-23.4	1.35 H	124	44.00	6.60
6	4924.00	41.0 AV	54.0	-13.0	1.35 H	124	34.40	6.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.9 PK			1.09 V	39	84.60	32.30
2	*2462.00	113.1 AV			1.09 V	39	80.80	32.30
3	2483.50	56.9 PK	74.0	-17.1	1.09 V	39	24.50	32.40
4	2483.50	48.8 AV	54.0	-5.2	1.09 V	39	16.40	32.40
5	4924.00	51.1 PK	74.0	-22.9	1.13 V	101	44.50	6.60
6	4924.00	43.7 AV	54.0	-10.3	1.13 V	101	37.10	6.60

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.7 PK	74.0	-14.3	1.06 H	114	27.80	31.90
2	2390.00	45.8 AV	54.0	-8.2	1.06 H	114	13.90	31.90
3	*2412.00	104.3 PK			1.06 H	114	72.20	32.10
4	*2412.00	94.4 AV			1.06 H	114	62.30	32.10
5	4824.00	47.7 PK	74.0	-26.3	1.06 H	268	41.30	6.40
6	4824.00	35.1 AV	54.0	-18.9	1.06 H	268	28.70	6.40

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.2 PK	74.0	-0.8	1.12 V	30	41.30	31.90
2	2390.00	53.8 AV	54.0	-0.2	1.12 V	30	21.90	31.90
3	*2412.00	113.8 PK			1.12 V	30	81.70	32.10
4	*2412.00	103.9 AV			1.12 V	30	71.80	32.10
5	4824.00	52.1 PK	74.0	-21.9	1.10 V	98	45.70	6.40
6	4824.00	38.2 AV	54.0	-15.8	1.10 V	98	31.80	6.40

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	1.22 H	118	27.30	31.90
2	2390.00	45.2 AV	54.0	-8.8	1.22 H	118	13.30	31.90
3	*2437.00	108.6 PK			1.22 H	118	76.40	32.20
4	*2437.00	98.9 AV			1.22 H	118	66.70	32.20
5	2483.50	57.8 PK	74.0	-16.2	1.22 H	118	25.40	32.40
6	2483.50	44.3 AV	54.0	-9.7	1.22 H	118	11.90	32.40
7	4874.00	49.9 PK	74.0	-24.1	1.23 H	295	43.30	6.60
8	4874.00	37.1 AV	54.0	-16.9	1.23 H	295	30.50	6.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.58 V	27	36.40	31.90
2	2390.00	52.2 AV	54.0	-1.8	1.58 V	27	20.30	31.90
3	*2437.00	119.7 PK			1.58 V	27	87.50	32.20
4	*2437.00	109.9 AV			1.58 V	27	77.70	32.20
5	2483.50	72.1 PK	74.0	-1.9	1.58 V	27	39.70	32.40
6	2483.50	53.5 AV	54.0	-0.5	1.58 V	27	21.10	32.40
7	4874.00	57.2 PK	74.0	-16.8	1.14 V	96	50.60	6.60
8	4874.00	38.8 AV	54.0	-15.2	1.14 V	96	32.20	6.60

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.2 PK			1.17 H	119	71.90	32.30
2	*2462.00	94.7 AV			1.17 H	119	62.40	32.30
3	2483.50	60.4 PK	74.0	-13.6	1.17 H	119	28.00	32.40
4	2483.50	45.2 AV	54.0	-8.8	1.17 H	119	12.80	32.40
5	4924.00	49.0 PK	74.0	-25.0	1.97 H	230	42.40	6.60
6	4924.00	36.1 AV	54.0	-17.9	1.97 H	230	29.50	6.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.3 PK			1.11 V	28	83.00	32.30
2	*2462.00	105.4 AV			1.11 V	28	73.10	32.30
3	2483.50	73.5 PK	74.0	-0.5	1.11 V	28	41.10	32.40
4	2483.50	53.8 AV	54.0	-0.2	1.11 V	28	21.40	32.40
5	4924.00	52.3 PK	74.0	-21.7	1.11 V	93	45.70	6.60
6	4924.00	38.4 AV	54.0	-15.6	1.11 V	93	31.80	6.60

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.0 PK	74.0	-9.0	1.57 H	227	33.10	31.90
2	2390.00	46.8 AV	54.0	-7.2	1.57 H	227	14.90	31.90
3	*2412.00	103.3 PK			1.57 H	227	71.20	32.10
4	*2412.00	92.8 AV			1.57 H	227	60.70	32.10
5	4824.00	47.9 PK	74.0	-26.1	1.00 H	174	41.50	6.40
6	4824.00	35.1 AV	54.0	-18.9	1.00 H	174	28.70	6.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.8 PK	74.0	-1.2	1.42 V	26	40.90	31.90
2	2390.00	53.7 AV	54.0	-0.3	1.42 V	26	21.80	31.90
3	*2412.00	113.2 PK			1.42 V	26	81.10	32.10
4	*2412.00	103.1 AV			1.42 V	26	71.00	32.10
5	4824.00	52.2 PK	74.0	-21.8	1.18 V	90	45.80	6.40
6	4824.00	38.4 AV	54.0	-15.6	1.18 V	90	32.00	6.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.1 PK	74.0	-8.9	1.03 H	79	33.20	31.90
2	2390.00	46.3 AV	54.0	-7.7	1.03 H	79	14.40	31.90
3	*2437.00	108.0 PK			1.03 H	79	75.80	32.20
4	*2437.00	97.5 AV			1.03 H	79	65.30	32.20
5	2483.50	67.1 PK	74.0	-6.9	1.03 H	79	34.70	32.40
6	2483.50	46.6 AV	54.0	-7.4	1.03 H	79	14.20	32.40
7	4874.00	49.0 PK	74.0	-25.0	1.14 H	7	42.40	6.60
8	4874.00	36.3 AV	54.0	-17.7	1.14 H	7	29.70	6.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.5 PK	74.0	-2.5	1.58 V	21	39.60	31.90
2	2390.00	52.6 AV	54.0	-1.4	1.58 V	21	20.70	31.90
3	*2437.00	118.8 PK			1.58 V	21	86.60	32.20
4	*2437.00	108.4 AV			1.58 V	21	76.20	32.20
5	2483.50	73.8 PK	74.0	-0.2	1.58 V	21	41.40	32.40
<b>6</b>	<b>2483.50</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.58 V</b>	<b>21</b>	<b>21.50</b>	<b>32.40</b>
7	4874.00	52.6 PK	74.0	-21.4	1.13 V	98	46.00	6.60
8	4874.00	38.7 AV	54.0	-15.3	1.13 V	98	32.10	6.60

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.2 PK			1.20 H	112	70.90	32.30
2	*2462.00	93.1 AV			1.20 H	112	60.80	32.30
3	2483.50	65.2 PK	74.0	-8.8	1.20 H	112	32.80	32.40
4	2483.50	48.4 AV	54.0	-5.6	1.20 H	112	16.00	32.40
5	4924.00	48.9 PK	74.0	-25.1	1.60 H	126	42.30	6.60
6	4924.00	36.3 AV	54.0	-17.7	1.60 H	126	29.70	6.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.2 PK			1.10 V	27	81.90	32.30
2	*2462.00	104.3 AV			1.10 V	27	72.00	32.30
3	2483.50	70.5 PK	74.0	-3.5	1.10 V	27	38.10	32.40
4	2483.50	53.7 AV	54.0	-0.3	1.10 V	27	21.30	32.40
5	4924.00	52.1 PK	74.0	-21.9	1.10 V	96	45.50	6.60
6	4924.00	38.3 AV	54.0	-15.7	1.10 V	96	31.70	6.60

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.9 PK	74.0	-10.1	1.04 H	124	32.00	31.90
2	2390.00	46.6 AV	54.0	-7.4	1.04 H	124	14.70	31.90
3	*2422.00	98.5 PK			1.04 H	124	66.40	32.10
4	*2422.00	89.2 AV			1.04 H	124	57.10	32.10
5	4844.00	48.1 PK	74.0	-25.9	1.00 H	220	41.60	6.50
6	4844.00	35.3 AV	54.0	-18.7	1.00 H	220	28.80	6.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.11 V	29	37.20	31.90
2	2390.00	53.8 AV	54.0	-0.2	1.11 V	29	21.90	31.90
3	*2422.00	108.5 PK			1.11 V	29	76.40	32.10
4	*2422.00	99.2 AV			1.11 V	29	67.10	32.10
5	4844.00	48.2 PK	74.0	-25.8	1.02 V	94	41.70	6.50
6	4844.00	35.1 AV	54.0	-18.9	1.02 V	94	28.60	6.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.02 H	79	26.70	31.90
2	2390.00	45.8 AV	54.0	-8.2	1.02 H	79	13.90	31.90
3	*2437.00	99.4 PK			1.02 H	79	67.20	32.20
4	*2437.00	90.0 AV			1.02 H	79	57.80	32.20
5	2483.50	63.6 PK	74.0	-10.4	1.02 H	79	31.20	32.40
6	2483.50	48.6 AV	54.0	-5.4	1.02 H	79	16.20	32.40
7	4874.00	48.5 PK	74.0	-25.5	1.82 H	120	41.90	6.60
8	4874.00	35.5 AV	54.0	-18.5	1.82 H	120	28.90	6.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.59 V	23	36.00	31.90
2	2390.00	53.7 AV	54.0	-0.3	1.59 V	23	21.80	31.90
3	*2437.00	110.5 PK			1.59 V	23	78.30	32.20
4	*2437.00	101.1 AV			1.59 V	23	68.90	32.20
5	2483.50	68.3 PK	74.0	-5.7	1.59 V	23	35.90	32.40
6	2483.50	52.4 AV	54.0	-1.6	1.59 V	23	20.00	32.40
7	4874.00	48.5 PK	74.0	-25.5	1.04 V	90	41.90	6.60
8	4874.00	35.7 AV	54.0	-18.3	1.04 V	90	29.10	6.60

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	96.8 PK			1.19 H	121	64.50	32.30
2	*2452.00	87.4 AV			1.19 H	121	55.10	32.30
3	2483.50	61.1 PK	74.0	-12.9	1.19 H	121	28.70	32.40
4	2483.50	45.7 AV	54.0	-8.3	1.19 H	121	13.30	32.40
5	4904.00	48.0 PK	74.0	-26.0	1.23 H	123	41.30	6.70
6	4904.00	35.1 AV	54.0	-18.9	1.23 H	123	28.40	6.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.5 PK			1.09 V	33	76.20	32.30
2	*2452.00	99.4 AV			1.09 V	33	67.10	32.30
3	2483.50	73.0 PK	74.0	-1.0	1.09 V	33	40.60	32.40
<b>4</b>	<b>2483.50</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.09 V</b>	<b>33</b>	<b>21.50</b>	<b>32.40</b>
5	4904.00	48.0 PK	74.0	-26.0	1.02 V	92	41.30	6.70
6	4904.00	34.9 AV	54.0	-19.1	1.02 V	92	28.20	6.70

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

Below 1GHz Worst-Case Data: 802.11b

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.18	23.0 QP	40.0	-17.0	1.99 H	296	36.80	-13.80
2	99.75	25.6 QP	43.5	-17.9	1.50 H	277	44.20	-18.60
3	190.95	35.9 QP	43.5	-7.6	1.50 H	83	52.30	-16.40
4	237.52	32.8 QP	46.0	-13.2	1.24 H	168	48.00	-15.20
5	319.02	36.9 QP	46.0	-9.1	1.24 H	162	49.10	-12.20
6	677.99	33.2 QP	46.0	-12.8	1.24 H	223	38.90	-5.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.84	28.1 QP	40.0	-11.9	1.24 V	209	43.50	-15.40
2	55.13	32.2 QP	40.0	-7.8	1.49 V	296	46.20	-14.00
3	99.75	29.1 QP	43.5	-14.4	1.99 V	320	47.70	-18.60
4	190.95	29.3 QP	43.5	-14.2	1.00 V	20	45.70	-16.40
5	319.02	33.7 QP	46.0	-12.3	1.49 V	6	45.90	-12.20
6	567.39	24.3 QP	46.0	-21.7	1.00 V	110	32.70	-8.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 16, 2015	Nov. 15, 2016
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Dec. 26, 2015	Dec. 25, 2016
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 26, 2016	Feb. 25, 2017
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 24, 2015	Jul. 23, 2016
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1.  
 3. The VCCI Site Registration No. is C-2040.



#### 4.2.3 Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.21170	10.09	29.75	22.36	39.84	32.45	63.14	53.14	-23.30
2	<b>0.29351</b>	<b>10.12</b>	<b>35.38</b>	<b>29.52</b>	<b>45.50</b>	<b>39.64</b>	<b>60.42</b>	<b>50.42</b>	<b>-14.92</b>	<b>-10.78</b>
3	0.38706	10.16	18.93	13.94	29.09	24.10	58.13	48.13	-29.03	-24.02
4	1.02193	10.29	15.34	10.89	25.63	21.18	56.00	46.00	-30.37	-24.82
5	3.76675	10.46	16.46	9.08	26.92	19.54	56.00	46.00	-29.08	-26.46
6	7.17236	10.63	15.34	10.31	25.97	20.94	60.00	50.00	-34.03	-29.06

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

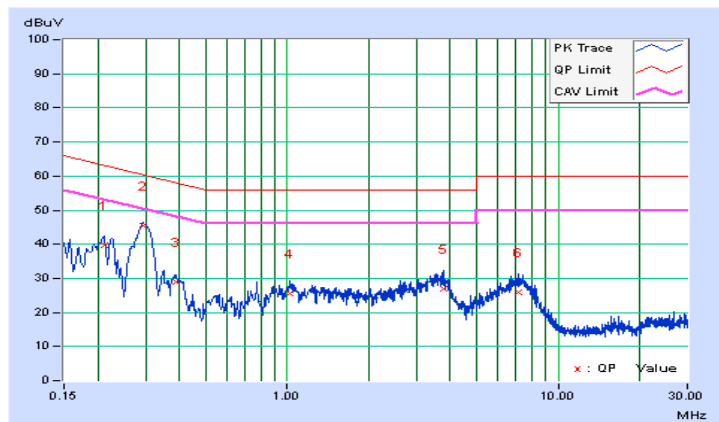


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.20297	10.08	29.12	22.99	39.20	33.07	63.49
2	0.29429	10.16	32.55	26.36	42.71	36.52	60.40	50.40	-17.70	-13.89
3	0.36896	10.22	18.28	12.62	28.50	22.84	58.52	48.52	-30.03	-25.69
4	0.84989	10.28	12.66	8.66	22.94	18.94	56.00	46.00	-33.06	-27.06
5	3.82149	10.57	17.51	9.67	28.08	20.24	56.00	46.00	-27.92	-25.76
6	7.46561	10.74	12.75	7.93	23.49	18.67	60.00	50.00	-36.51	-31.33

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

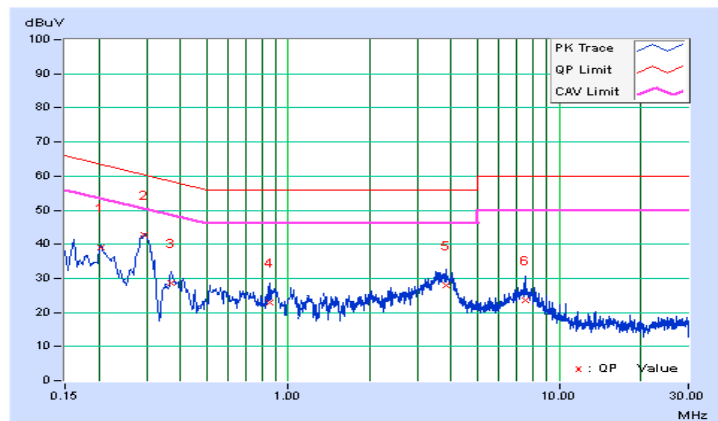


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 4.3.7 Test Result

#### CDD Mode

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.12	8.12	0.5	Pass
6	2437	8.13	8.12	0.5	Pass
11	2462	8.13	7.63	0.5	Pass

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.41	16.42	0.5	Pass
6	2437	16.37	16.37	0.5	Pass
11	2462	16.39	16.40	0.5	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.64	17.64	0.5	Pass
6	2437	17.62	17.63	0.5	Pass
11	2462	17.63	17.63	0.5	Pass



##### 802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	36.42	36.44	0.5	Pass
6	2437	36.37	36.37	0.5	Pass
9	2452	36.38	36.37	0.5	Pass

## Spectrum Plot of Worst Value



### 802.11b

### 802.11g

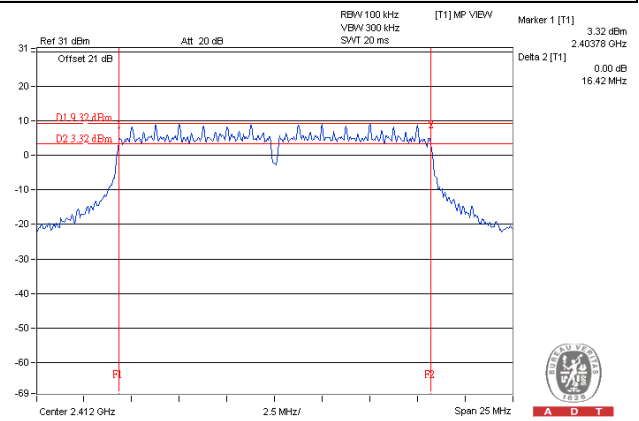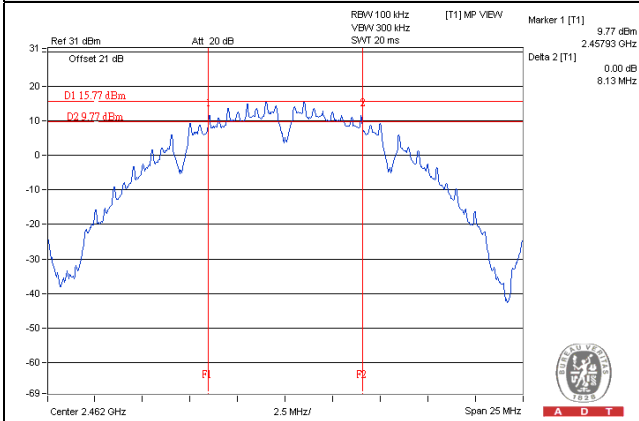

### 802.11n (HT20)

### 802.11n (HT40)

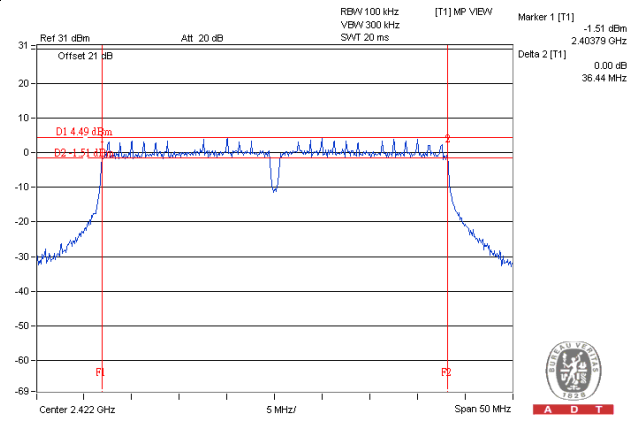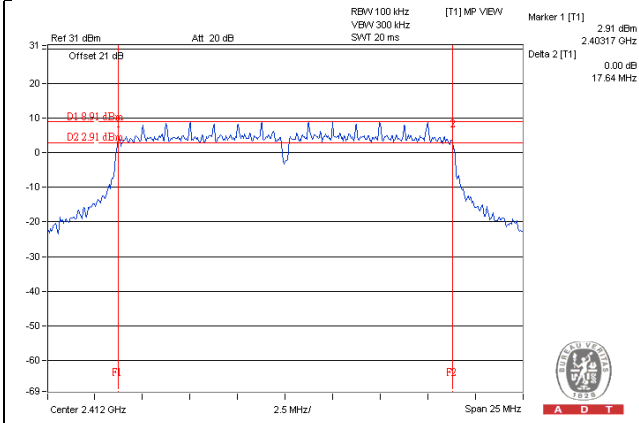

Beamforming Mode

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.63	17.63	0.5	Pass
6	2437	17.62	17.61	0.5	Pass
11	2462	17.63	17.63	0.5	Pass


802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	36.46	36.44	0.5	Pass
6	2437	36.36	36.35	0.5	Pass
9	2452	36.39	36.38	0.5	Pass


### Spectrum Plot of Worst Value

**802.11n (HT20)**

**802.11n (HT40)**

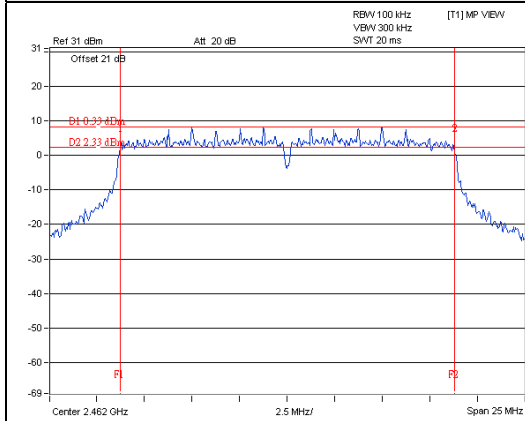

A D T

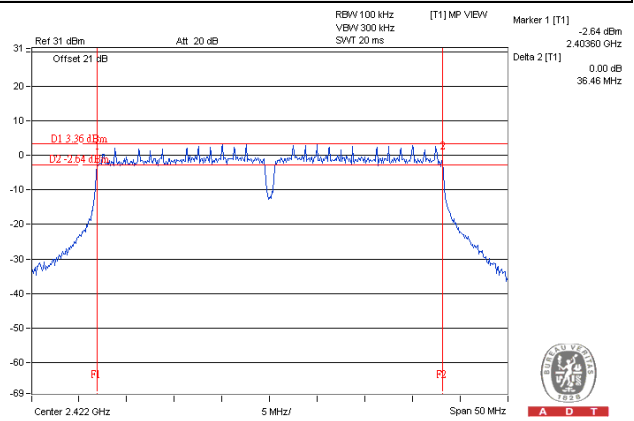

A D T



## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)  
Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as item 4.3.6.

#### 4.4.7 Test Results

##### CDD Mode

##### 802.11b

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	23.79	23.30	453.128	26.56	30	Pass
6	2437	23.72	23.40	<b>454.281</b>	26.57	30	Pass
11	2462	23.77	23.26	450.068	26.53	30	Pass

##### 802.11g

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.93	19.72	192.157	22.84	30	Pass
6	2437	23.08	22.58	384.370	25.85	30	Pass
11	2462	20.24	19.58	196.464	22.93	30	Pass

##### 802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.98	19.80	195.040	22.90	30	Pass
6	2437	23.16	22.52	385.663	25.86	30	Pass
11	2462	20.13	19.72	196.795	22.94	30	Pass

##### 802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	18.14	17.87	126.398	21.02	30	Pass
6	2437	20.16	20.05	204.911	23.12	30	Pass
9	2452	17.53	17.35	110.949	20.45	30	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.05	18.97	159.239	22.02	30	Pass
6	2437	23.17	22.57	<b>388.208</b>	25.89	30	Pass
11	2462	19.69	19.29	178.029	22.50	30	Pass

802.11n (HT40)


Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.15	16.95	101.425	20.06	30	Pass
6	2437	19.17	19.15	164.828	22.17	30	Pass
9	2452	16.58	16.38	88.95	19.49	30	Pass

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

#### For AVG. power (duty cycle $\geq 98\%$ )

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

#### For AVG. power (duty cycle $< 98\%$ )

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to “free run”.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as item 4.3.6

## 4.5.7 Test Results

### CDD Mode

#### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-2.93	3.01	0.08	8.00	Pass
	6	2437	-2.74	3.01	0.27	8.00	Pass
	11	2462	-2.99	3.01	0.02	8.00	Pass
1	1	2412	-2.79	3.01	0.22	8.00	Pass
	6	2437	-3.32	3.01	-0.31	8.00	Pass
	11	2462	-3.17	3.01	-0.16	8.00	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.78\text{dBi} + 10\log(2) = 4.79\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.

#### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-10.07	3.01	0.21	-6.85	8.00	Pass
	6	2437	-6.65	3.01	0.21	-3.43	8.00	Pass
	11	2462	-10.22	3.01	0.21	-7.00	8.00	Pass
1	1	2412	-9.57	3.01	0.21	-6.35	8.00	Pass
	6	2437	-6.69	3.01	0.21	-3.47	8.00	Pass
	11	2462	-9.79	3.01	0.21	-6.57	8.00	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.78\text{dBi} + 10\log(2) = 4.79\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

### 802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-9.64	3.01	0.10	-6.53	8.00	Pass
	6	2437	-5.93	3.01	0.10	-2.82	8.00	Pass
	11	2462	-9.59	3.01	0.10	-6.48	8.00	Pass
1	1	2412	-9.37	3.01	0.10	-6.26	8.00	Pass
	6	2437	-6.22	3.01	0.10	-3.11	8.00	Pass
	11	2462	-9.38	3.01	0.10	-6.27	8.00	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.78\text{dBi} + 10\log(2) = 4.79\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

### 802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	3	2422	-15.00	3.01	0.16	-11.83	8.00	Pass
	6	2437	-12.79	3.01	0.16	-9.62	8.00	Pass
	9	2452	-15.67	3.01	0.16	-12.50	8.00	Pass
1	3	2422	-14.60	3.01	0.16	-11.43	8.00	Pass
	6	2437	-9.39	3.01	0.16	-6.22	8.00	Pass
	9	2452	-15.22	3.01	0.16	-12.05	8.00	Pass



Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.78\text{dBi} + 10\log(2) = 4.79\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

### Spectrum Plot of Worst Value



**802.11b**

**802.11g**

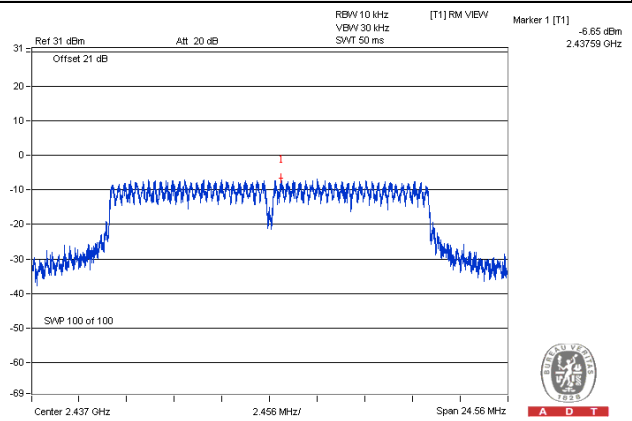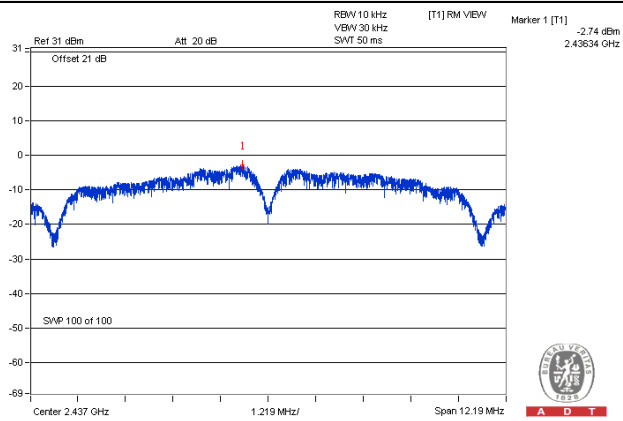

**802.11n (HT20)**

**802.11n (HT40)**

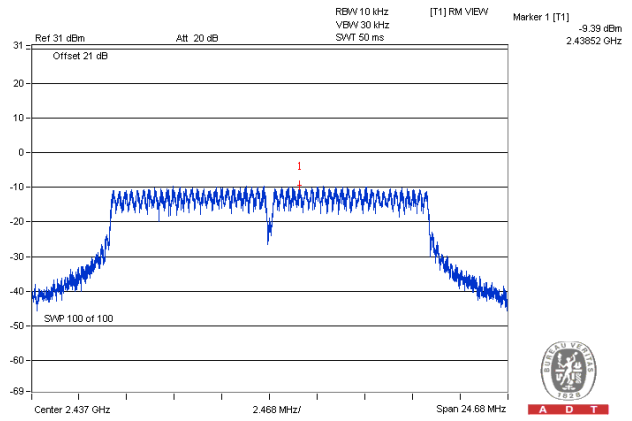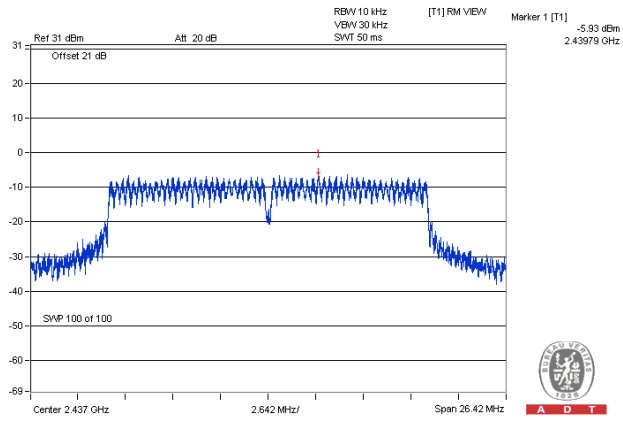

## Beamforming Mode

### 802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-11.68	3.01	0.12	-8.55	8.00	Pass
	6	2437	-6.35	3.01	0.12	-3.22	8.00	Pass
	11	2462	-9.96	3.01	0.12	-6.83	8.00	Pass
1	1	2412	-11.39	3.01	0.12	-8.26	8.00	Pass
	6	2437	-6.27	3.01	0.12	-3.14	8.00	Pass
	11	2462	-9.67	3.01	0.12	-6.54	8.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $1.78\text{dBi} + 10\log(2) = 4.79\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

### 802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	3	2422	-16.53	3.01	0.18	-13.34	8.00	Pass
	6	2437	-13.69	3.01	0.18	-10.50	8.00	Pass
	9	2452	-16.56	3.01	0.18	-13.37	8.00	Pass
1	3	2422	-15.82	3.01	0.18	-12.63	8.00	Pass
	6	2437	-13.34	3.01	0.18	-10.15	8.00	Pass
	9	2452	-16.80	3.01	0.18	-13.61	8.00	Pass

Note:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $1.78\text{dBi} + 10\log(2) = 4.79\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.




Spectrum Plot of Worst Value

802.11n (HT20)

802.11n (HT40)

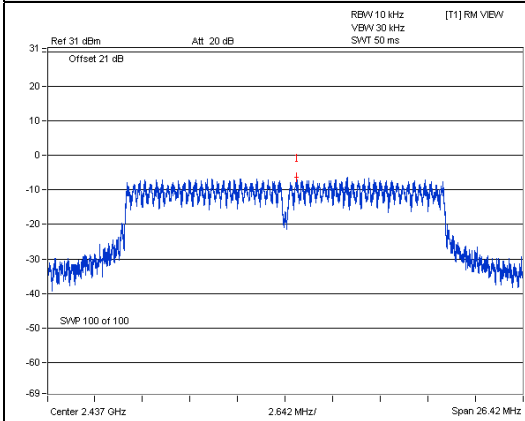

A D T

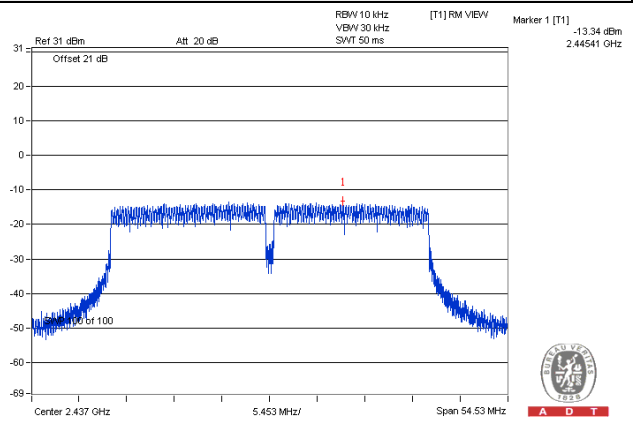


A D T

## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = average.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition

Same as item 4.3.6


### 4.6.7 Test Results

The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

CDD Mode  
802.11b\_Chain 0


CH 1

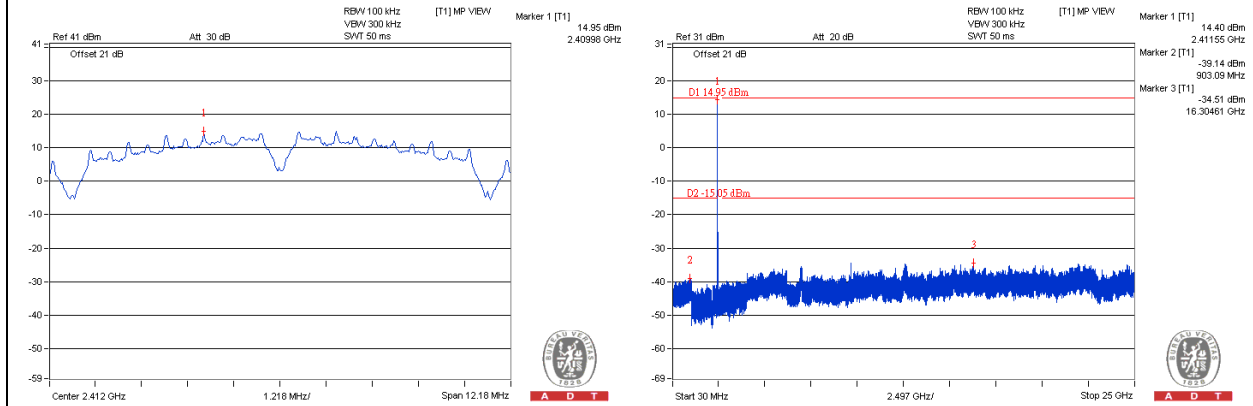




CH 6

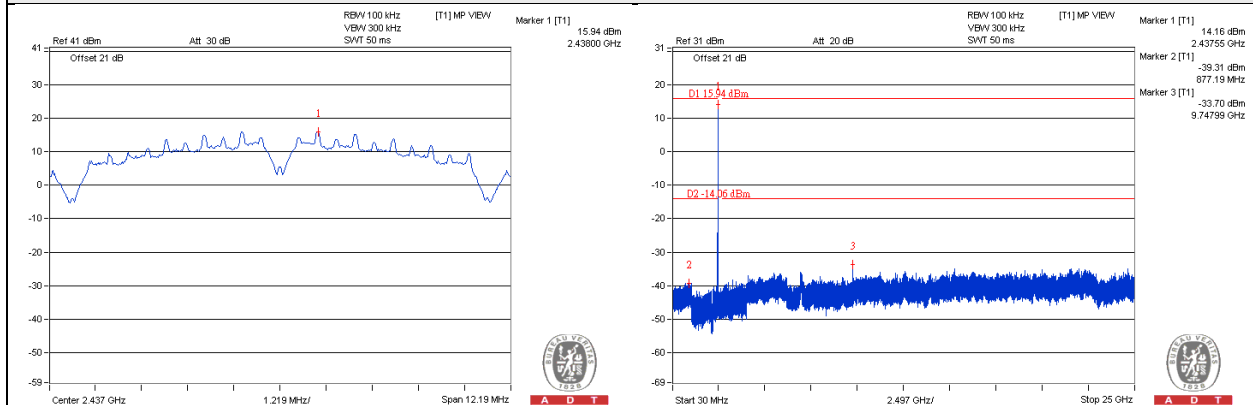

CH 11

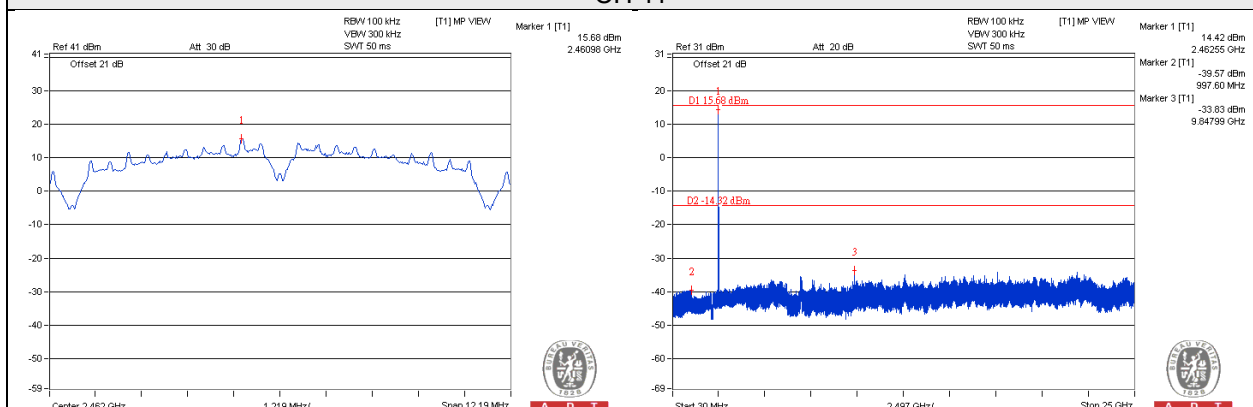


# 802.11b\_Chain 1

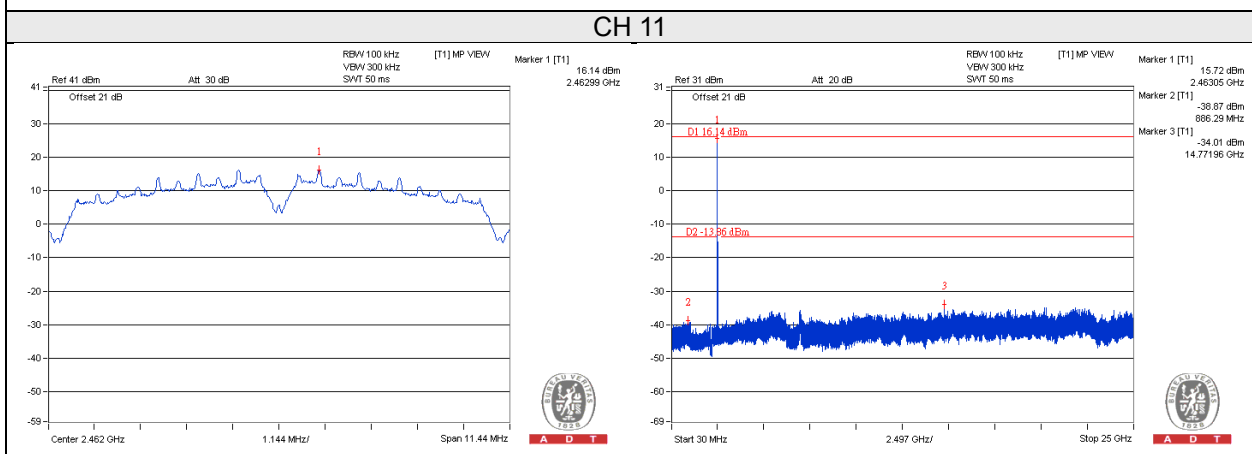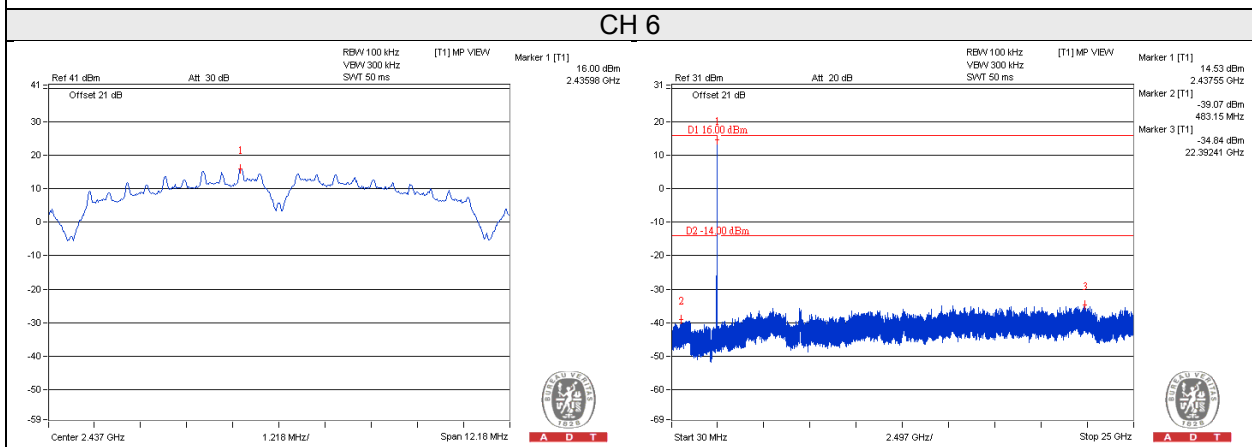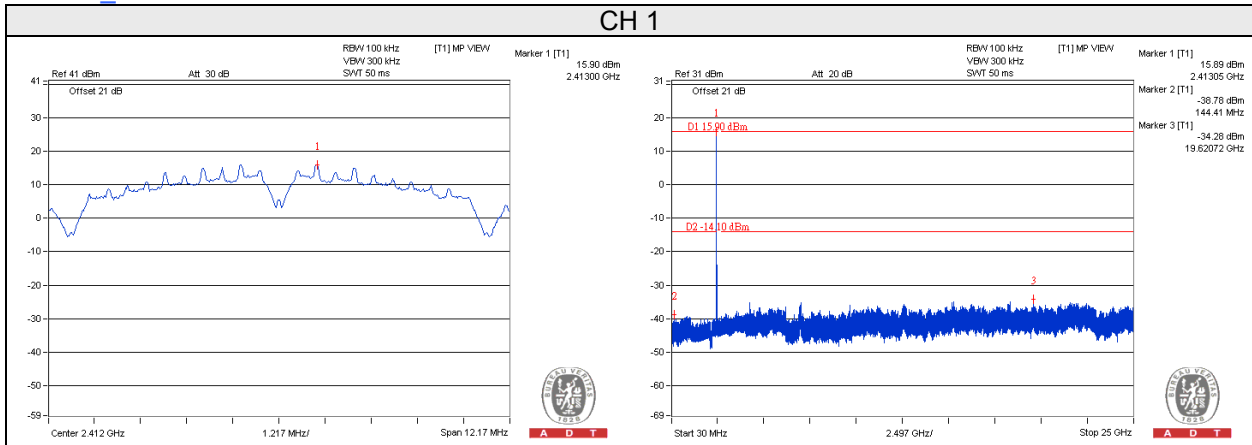


802.11g\_Chain 0


CH 1

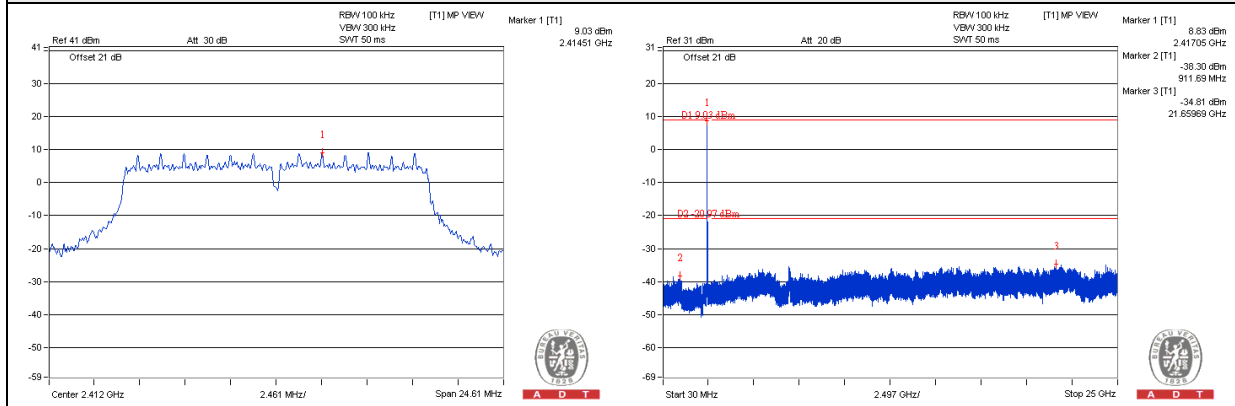

CH 6

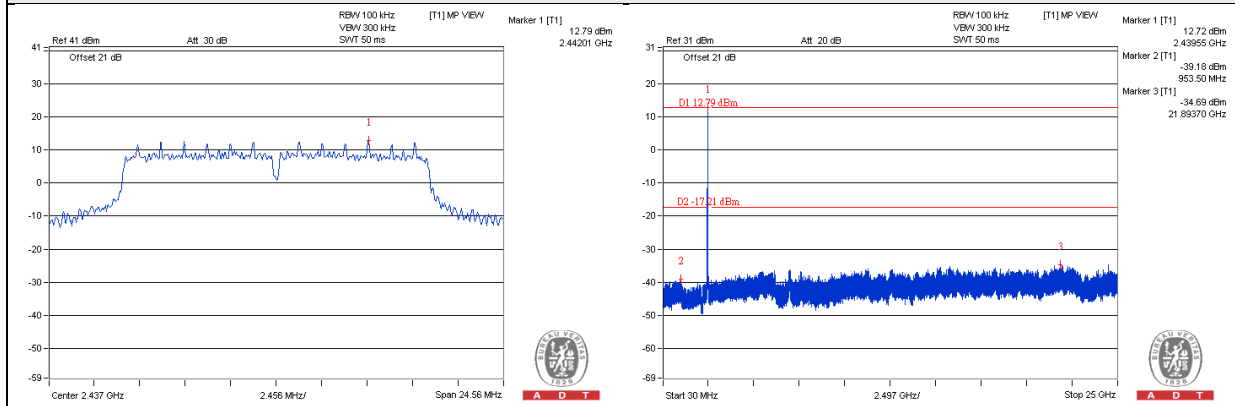


CH 11

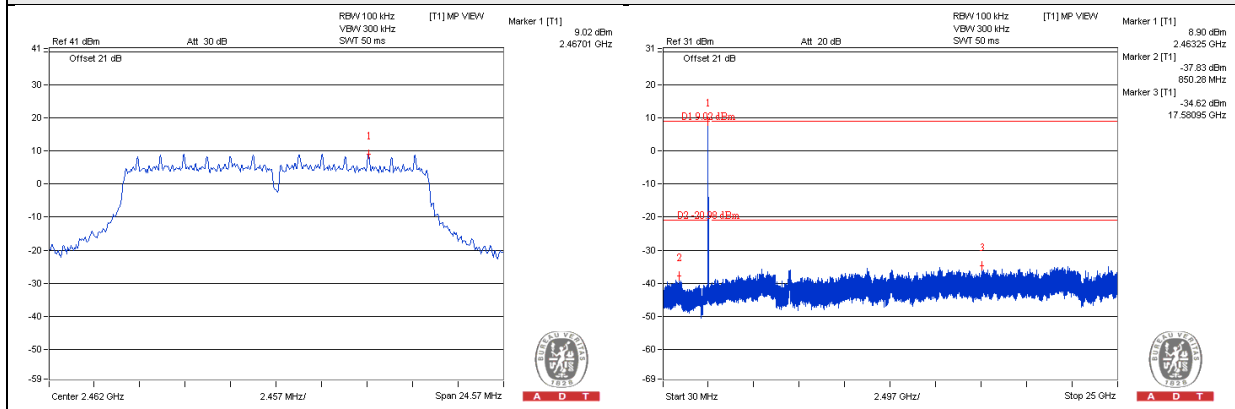


# 802.11g\_Chain 1


## CH 1

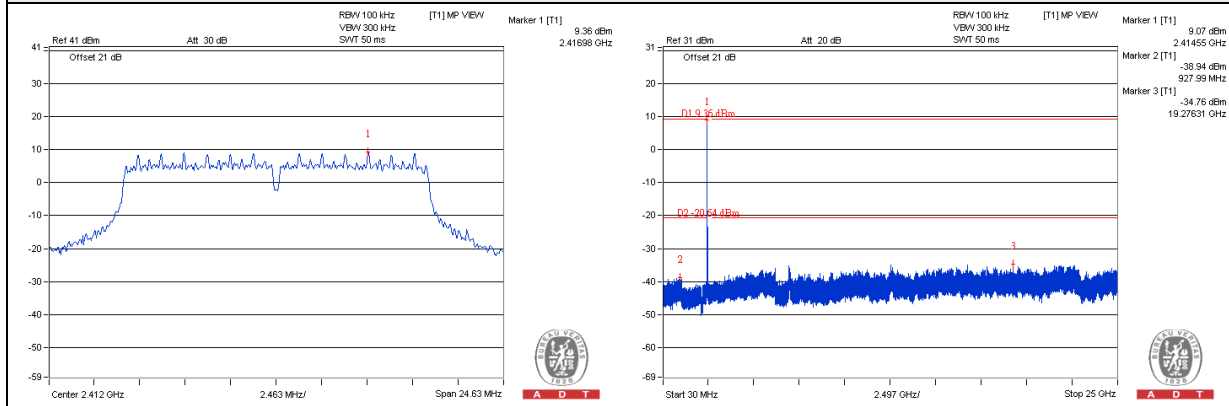

## CH 6

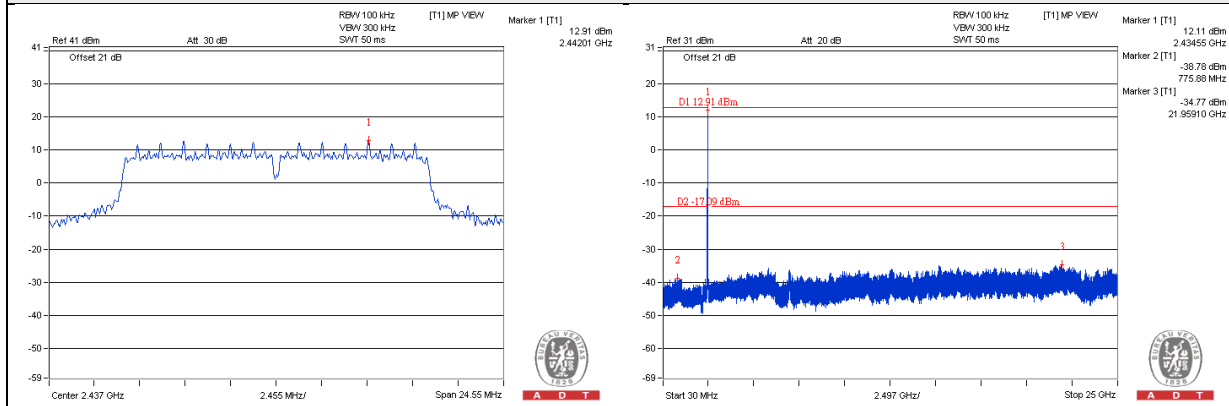


## CH 11

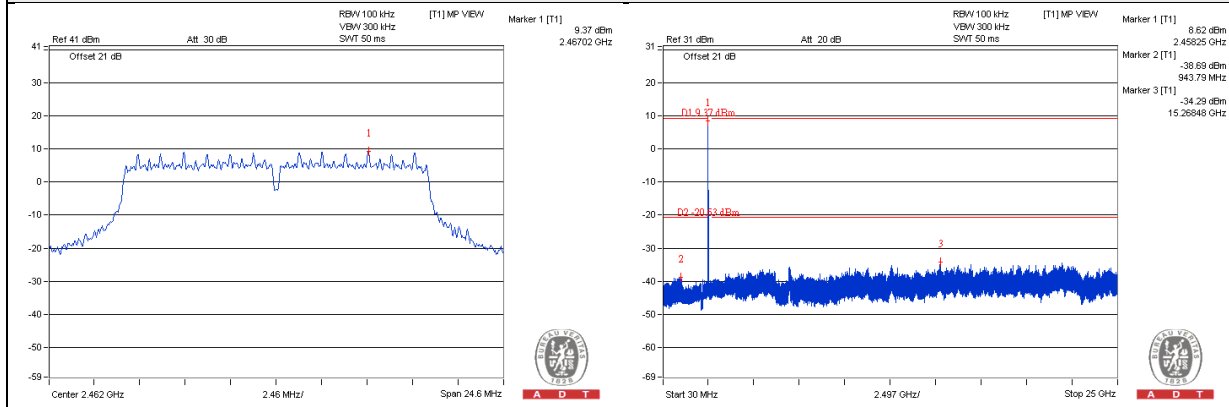


802.11n (HT20)\_Chain 0


CH 1

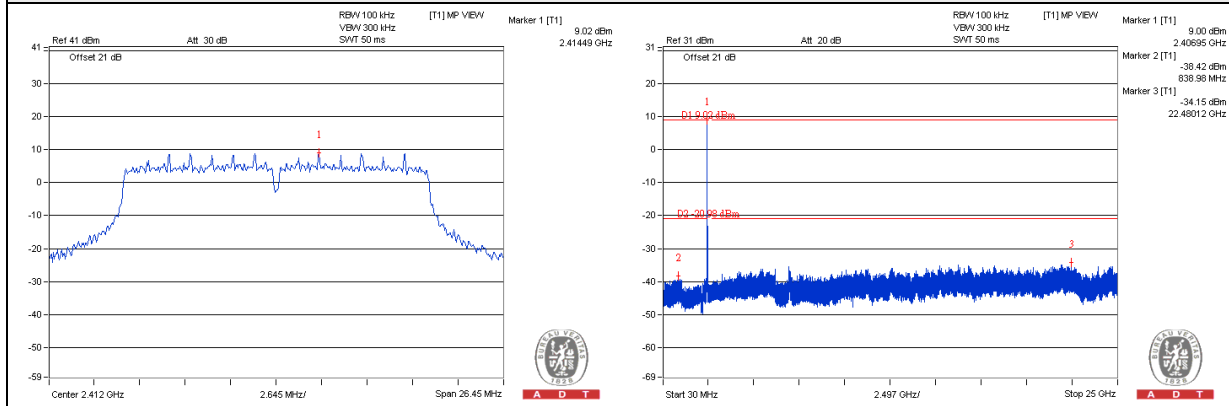

CH 6

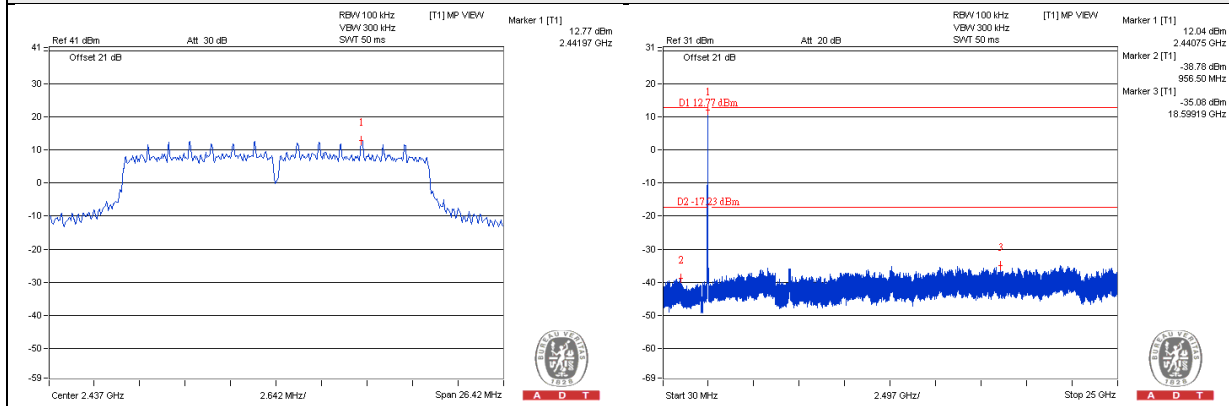


CH 11

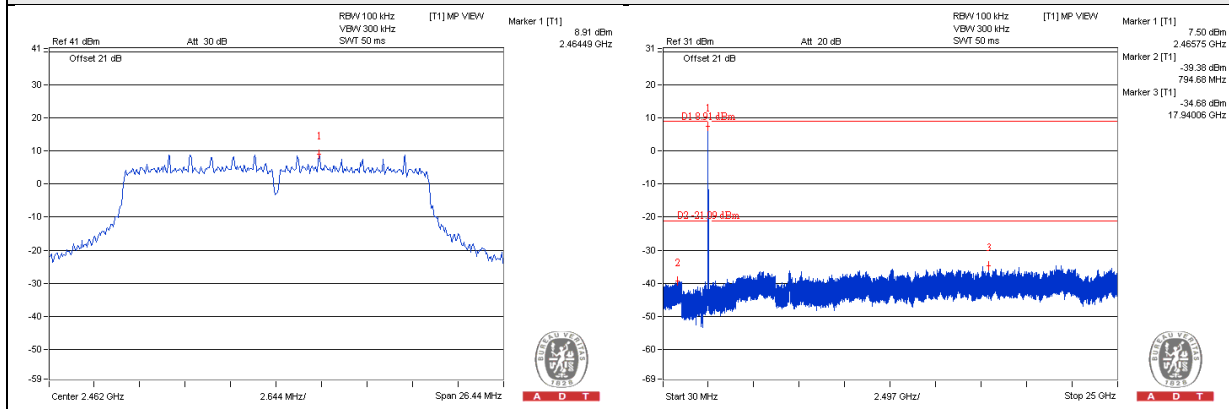


802.11n (HT20)\_Chain 1


CH 1

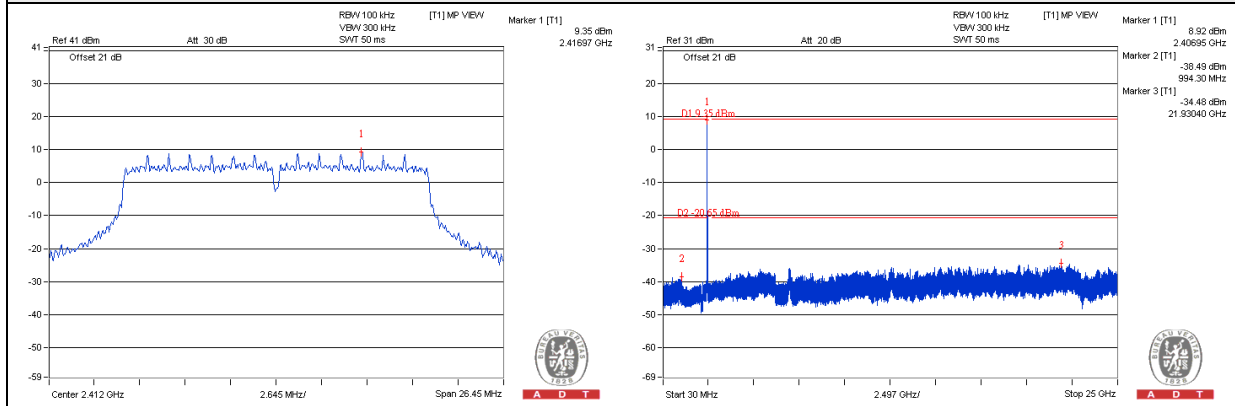

CH 6



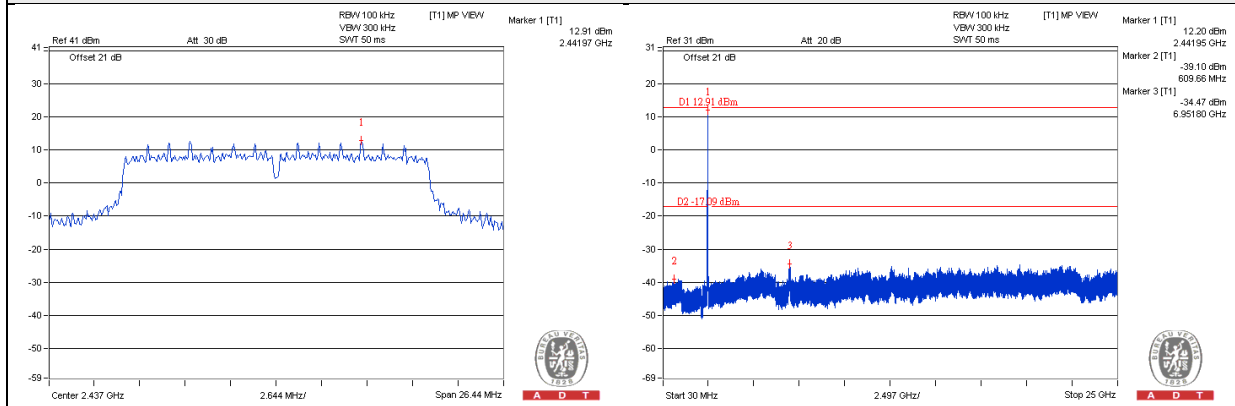


CH 11

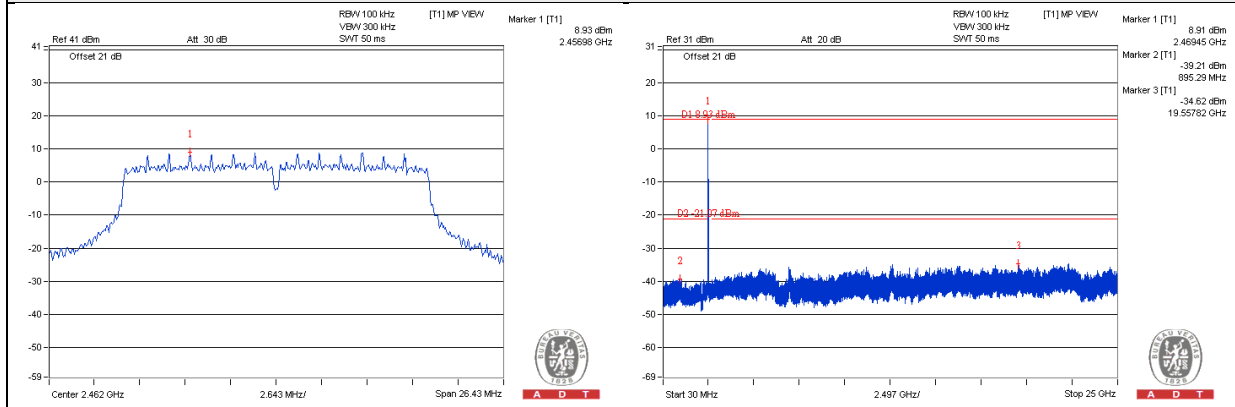





# 802.11n (HT40)\_Chain 0

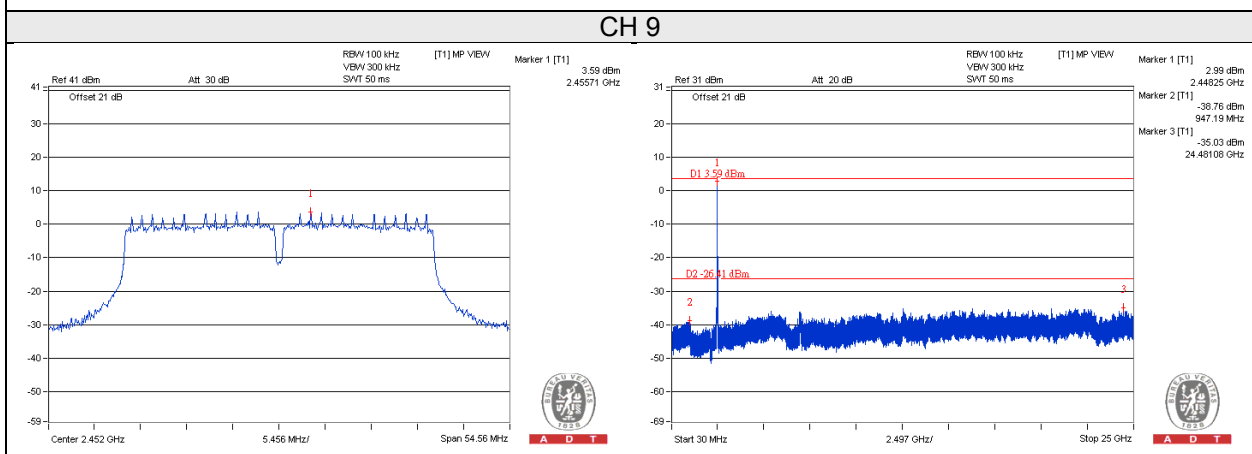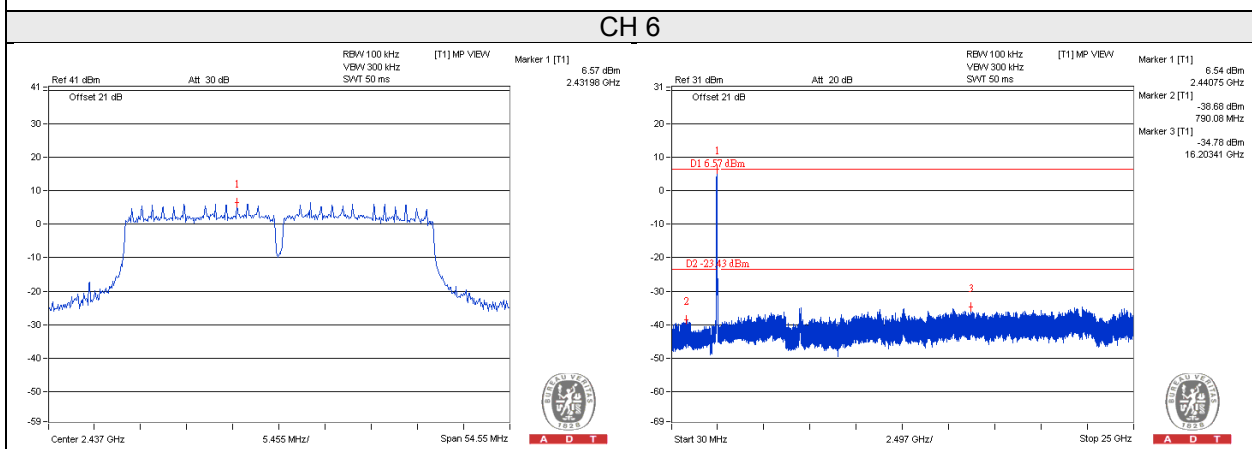
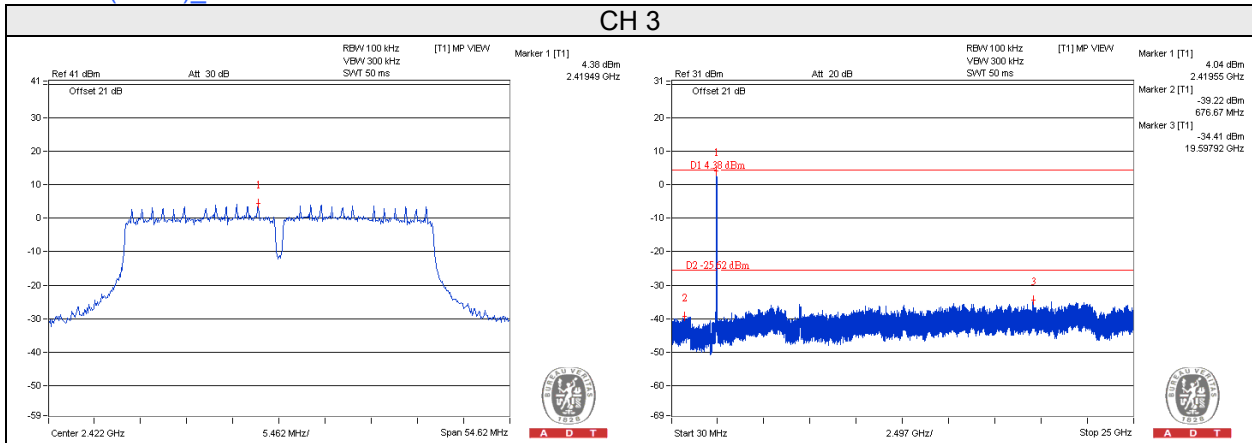


# 802.11n (HT40)\_Chain 1



## CH 3

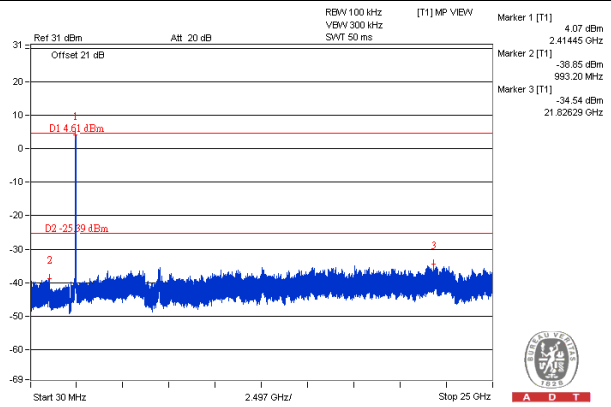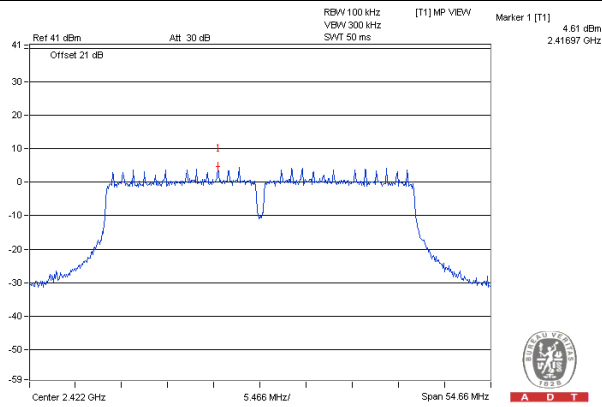

## CH 6

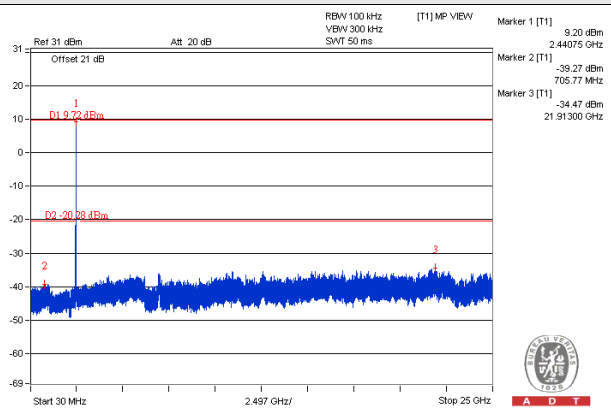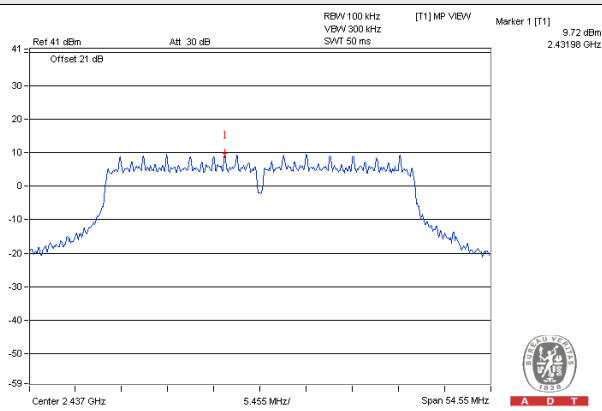


## CH 9

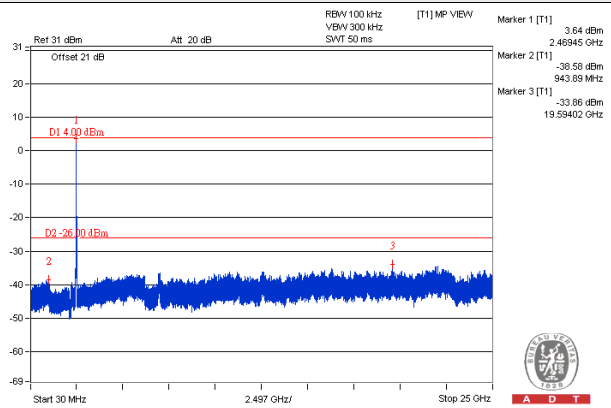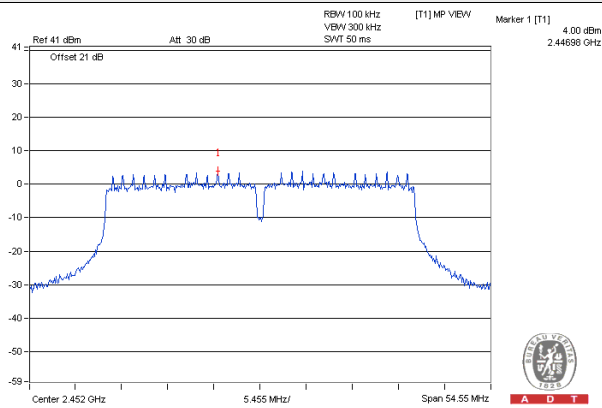


Beamforming Mode  
802.11n (HT20)\_Chain 0


CH 1

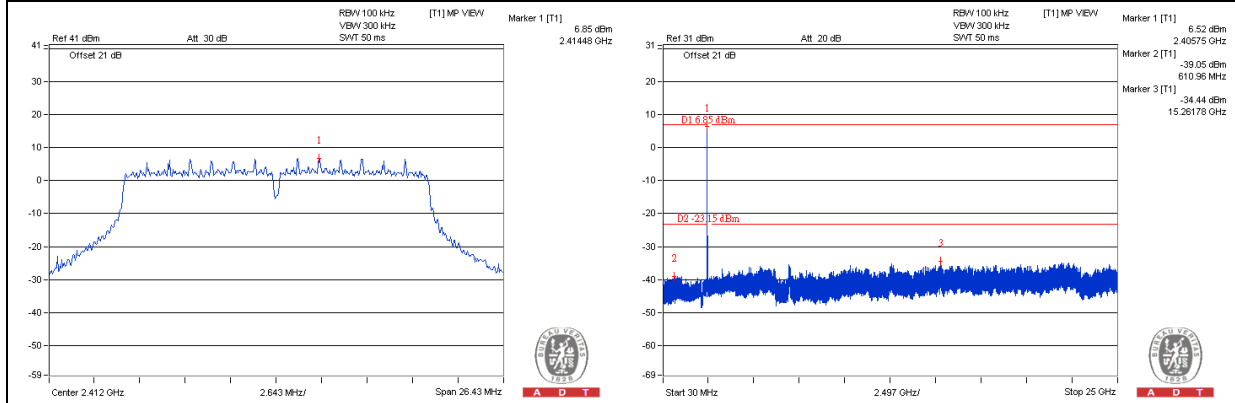

CH 6

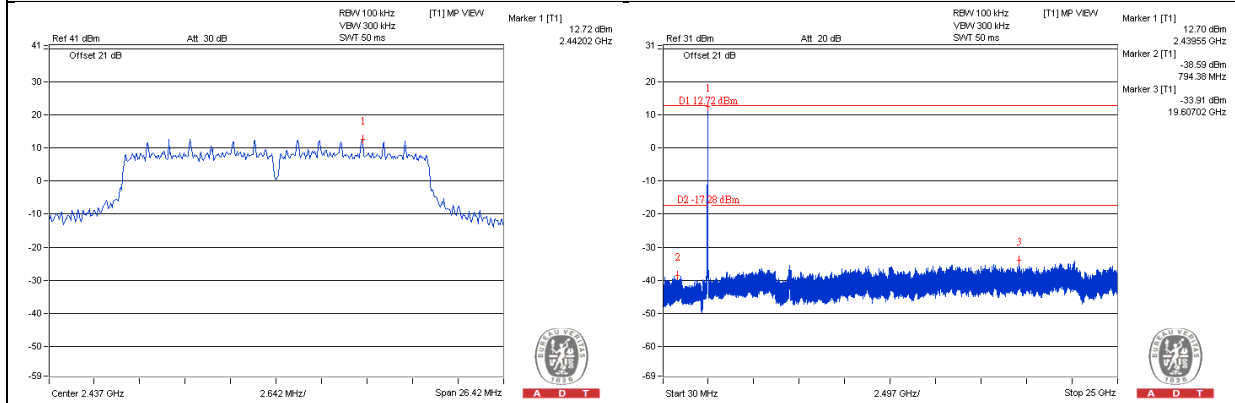


CH 11

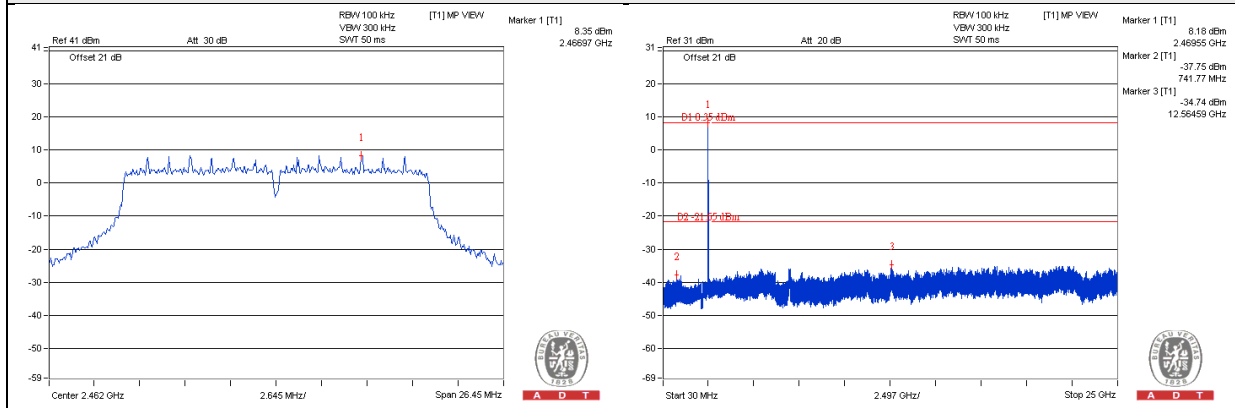


802.11n (HT20)\_Chain 1


CH 1

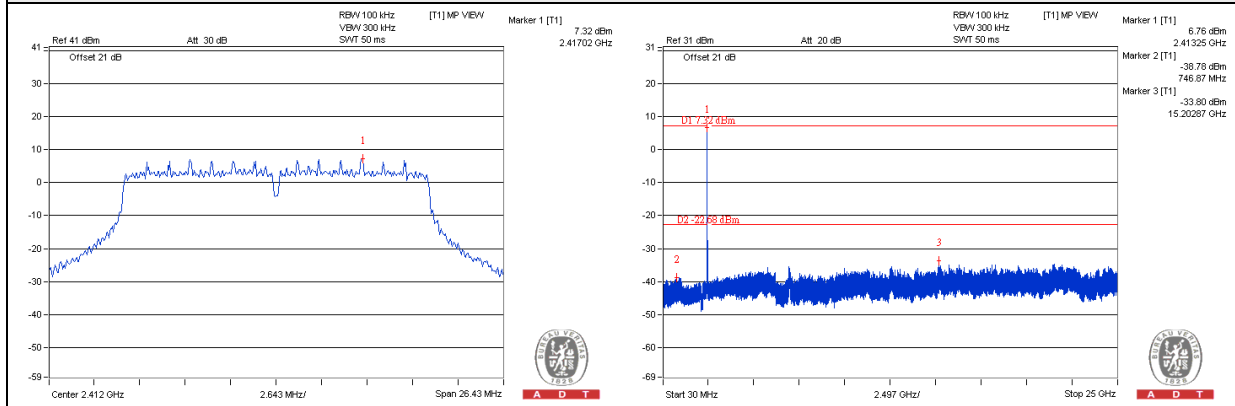

CH 6

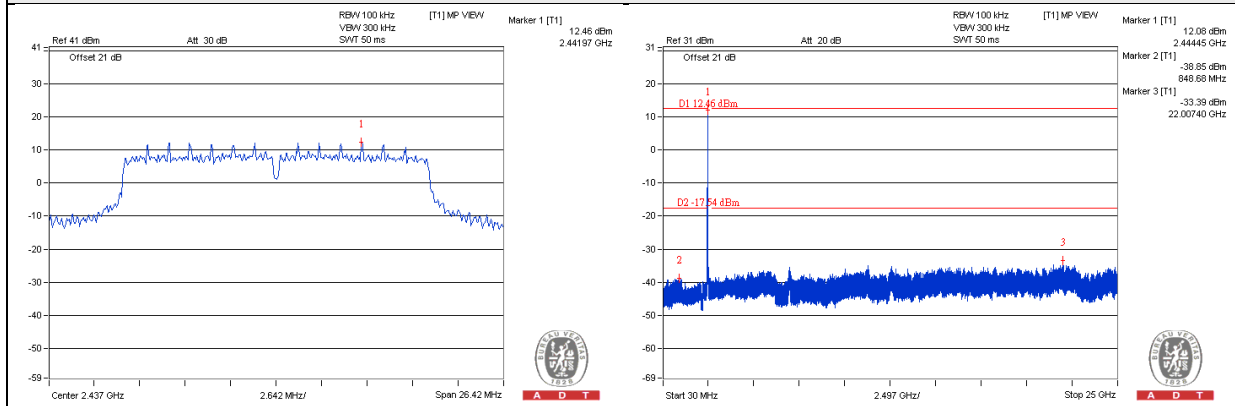


CH 11

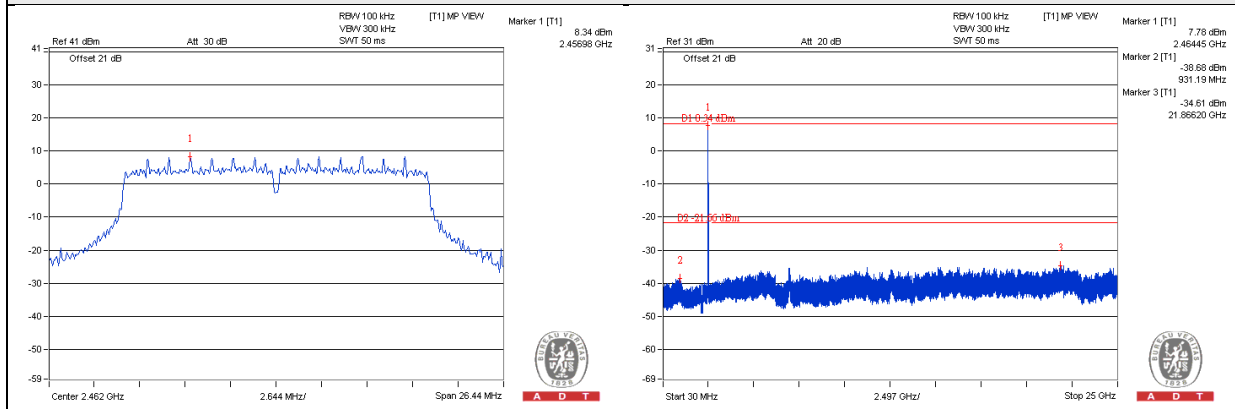


# 802.11n (HT40)\_Chain 0


## CH 3

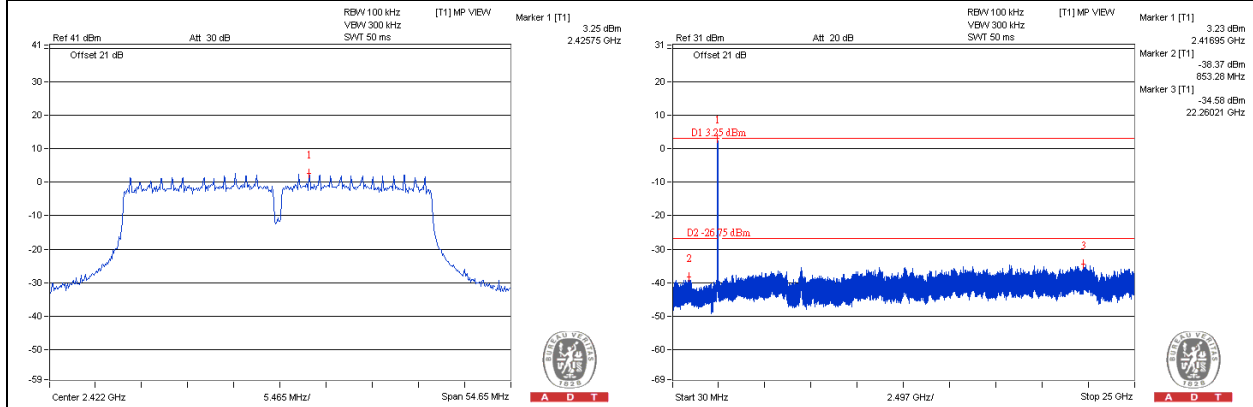

## CH 6

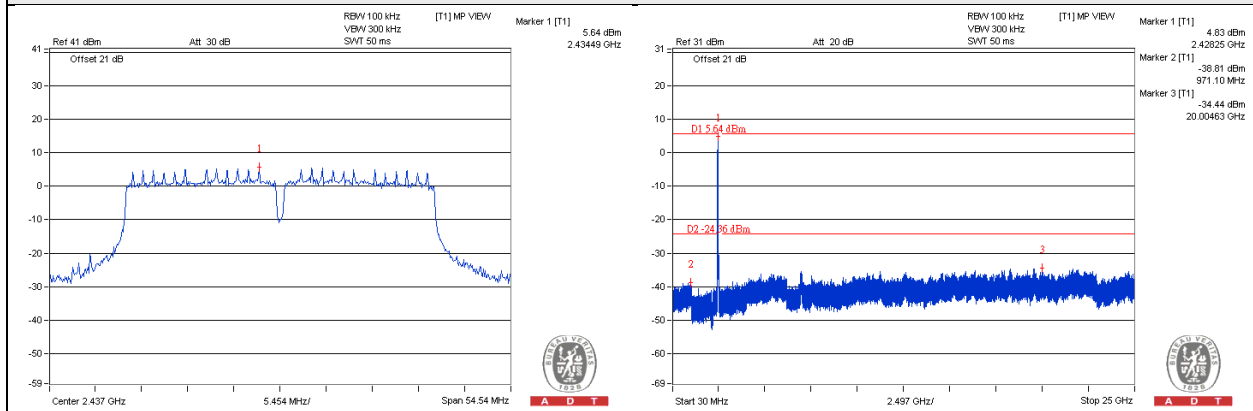


## CH 9

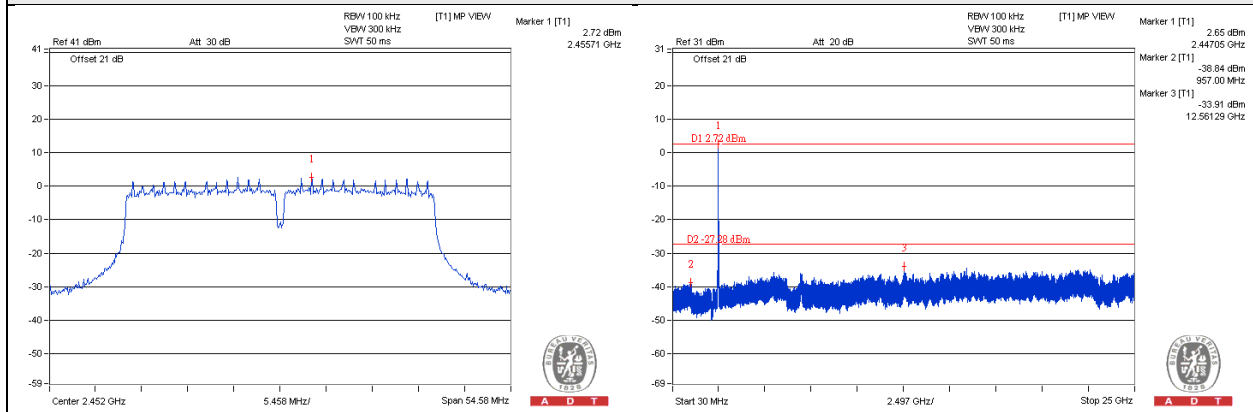


802.11n (HT40)\_Chain 1


CH 3

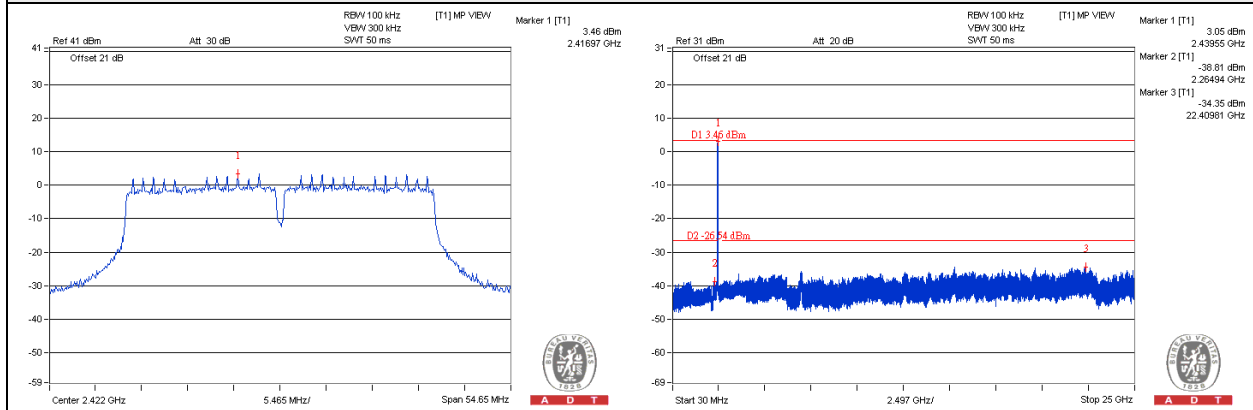

CH 6

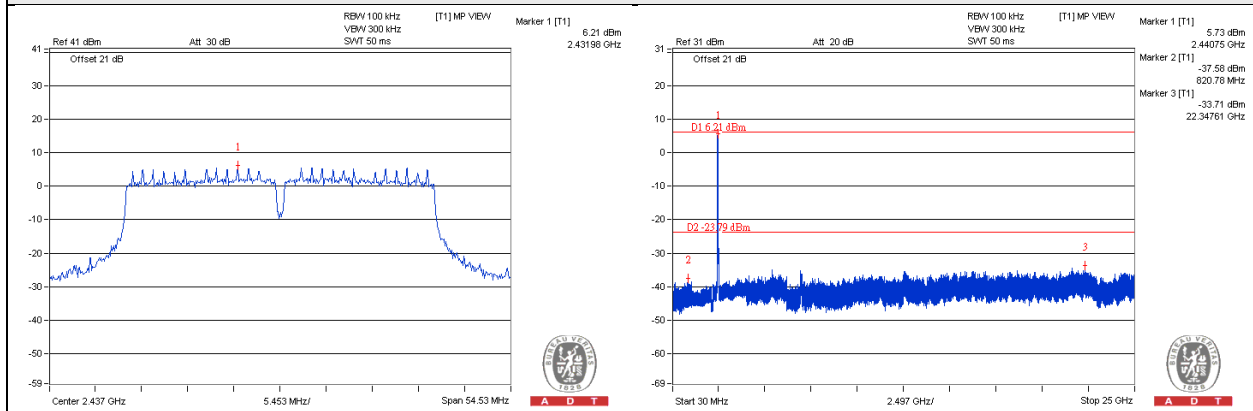

CH 9

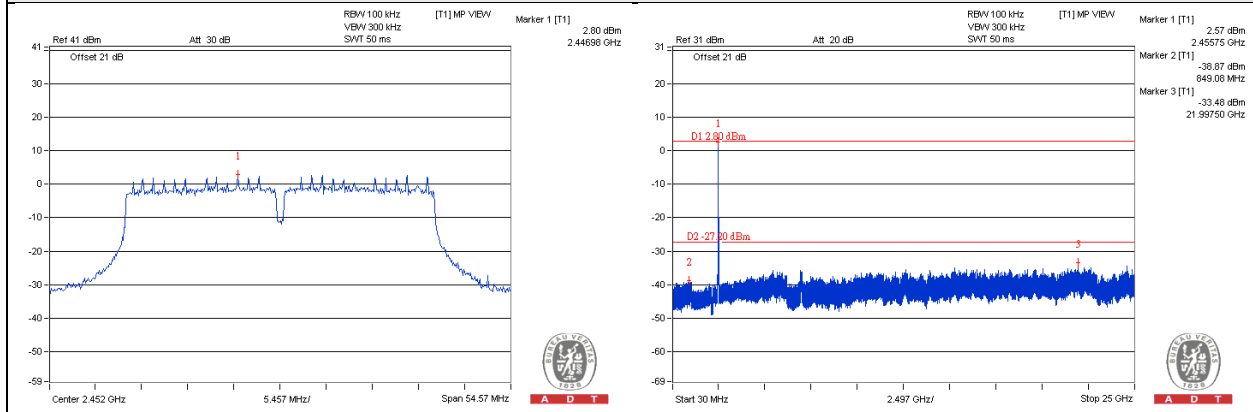

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---