

FCC Test Report

Report No.: RF160930C19-1

FCC ID: PY316200355

Test Model: WAC510

Received Date: Sep. 23, 2016

Test Date: Sep. 23 ~ Nov. 04, 2016

Issued Date: Nov. 08, 2016

Applicant: NETGEAR, INC.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	13
3.4.1 Configuration of System under Test.....	13
3.5 General Description of Applied Standard.....	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	15
4.1.2 Test Instruments.....	16
4.1.3 Test Procedure.....	17
4.1.4 Deviation from Test Standard.....	17
4.1.5 Test Setup.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results.....	20
4.2 Conducted Emission Measurement.....	40
4.2.1 Limits of Conducted Emission Measurement.....	40
4.2.2 Test Instruments.....	40
4.2.3 Test Procedure.....	41
4.2.4 Deviation from Test Standard.....	41
4.2.5 Test Setup.....	41
4.2.6 EUT Operating Conditions.....	41
4.2.7 Test Results.....	42
4.3 Transmit Power Measurement.....	46
4.3.1 Limits of Transmit Power Measurement.....	46
4.3.2 Test Setup.....	46
4.3.3 Test Instruments.....	46
4.3.4 Test Procedure.....	47
4.3.5 Deviation from Test Standard.....	47
4.3.6 EUT Operating Conditions.....	47
4.3.7 Test Result.....	48
4.4 Peak Power Spectral Density Measurement.....	54
4.4.1 Limits of Peak Power Spectral Density Measurement.....	54
4.4.2 Test Setup.....	54
4.4.3 Test Instruments.....	54
4.4.4 Test Procedure.....	54
4.4.5 Deviation from Test Standard.....	55
4.4.6 EUT Operating Condition.....	55
4.4.7 Test Results.....	56
4.5 Frequency Stability.....	62
4.5.1 Limits of Frequency Stability Measurement.....	62
4.5.2 Test Setup.....	62
4.5.3 Test Instruments.....	62
4.5.4 Test Procedure.....	62
4.5.5 Deviation from Test Standard.....	62
4.5.6 EUT Operating Condition.....	62

4.5.7 Test Results	63
4.6 6dB Bandwidth Measurement.....	64
4.6.1 Limits of 6dB Bandwidth Measurement.....	64
4.6.2 Test Setup.....	64
4.6.3 Test Instruments	64
4.6.4 Test Procedure	64
4.6.5 Deviation from Test Standard	64
4.6.6 EUT Operating Condition	64
4.6.7 Test Results	65
5 Pictures of Test Arrangements.....	67
Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band).....	68
Appendix – Information on the Testing Laboratories	71



Release Control Record

Issue No.	Description	Date Issued
RF160930C19-1	Original release.	Nov. 08, 2016

1 Certificate of Conformity

Product: ProSAFE Dual Band Wireless AC Access Point

Brand: NETGEAR

Test Model: WAC510


Sample Status: Engineering sample

Applicant: NETGEAR, INC.

Test Date: Sep. 23 ~ Nov. 04, 2016

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the Conditions specified in this report.

Prepared by : , **Date:** Nov. 08, 2016
Pettie Chen / Senior Specialist

Approved by : , **Date:** Nov. 08, 2016
Ken Liu / Senior Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (SECTION 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -10.05dB at 0.32528MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -0.3dB at 5646.40MHz.
15.407(a) (1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
15.407(a) (1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is IPEX not a standard connector.

*For U-NII-3 band compliance with rule part 15.407(b)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	ProSAFE Dual Band Wireless AC Access Point
Brand	NETGEAR
Test Model	WAC510
Status of EUT	Engineering sample
Power Supply Rating	12Vdc (Adapter) 48Vdc (PoE)
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	5180 ~ 5240MHz & 5745 ~ 5825MHz
Number of Channel	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
Output Power	CDD Mode 5180 ~ 5240MHz: 467.049mW 5745 ~ 5825MHz: 474.912mW Beamforming Mode 5180 ~ 5240MHz: 467.049mW 5745 ~ 5825MHz: 468.605mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	Beamforming Mode	TX Function
802.11a	Not Support	2TX
802.11n (HT20)	Support	2TX
802.11n (HT40)	Support	2TX
802.11ac (VHT20)	Support	2TX
802.11ac (VHT40)	Support	2TX
802.11ac (VHT80)	Support	2TX

*The modulation and bandwidth are similar for 802.11n mode for HT20/HT40 and 802.11ac mode for VHT20/VHT40, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

2. The EUT uses the following adapters and PoE.

Adapter 1	
Brand	NETGEAR
Model	ADS-40FPA-12 12030GPCU/GPC-L
P/N	332-10757-01
Input Power	100-120Vac~60Hz Max. 1.0A
Output Power	12Vdc/ 2.5A
Power Line	1.8m cable without core attached on adapter

Adapter 2	
Brand	NETGEAR
Model	2ABL030F 1 NA
P/N	332-10758-01
Input Power	100-120Vac~60Hz Max. 1.0A
Output Power	12Vdc/ 2.5A
Power Line	1.8m cable without core attached on adapter

*After pretesting, adapter 2 was the worst for the final test.

PoE (Support unit only)	
Brand	YAMAHA
Model	YPS-PoE-AT
Series No.	Z4U00327 VZ
Input Power	100-240Vac, 50/60Hz 0.6A
Output Power	48Vdc, 0.3A
Power Line	1.75m non-shielded cable without core

3. Spurious emission of the simultaneous operation (WLAN 2.4GHz and WLAN 5GHz) has been evaluated and no non-compliance was found.

4. The following antenna was provided to the EUT.

Brand	Model	Antenna Gain(dBi)	Frequency range	Antenna Type	Connecter Type
Ethertronics	1002295	2.91	2.4~2.4835GHz	PIFA	i-pex(MHF)
Ethertronics	1002295	2.56	2.4~2.4835GHz	PIFA	i-pex(MHF)
Ethertronics	1002298	4.83	5180 ~ 5240MHz	PIFA	i-pex(MHF)
Ethertronics	1002298	4.51	5180 ~ 5240MHz	PIFA	i-pex(MHF)
Ethertronics	1002298	4.55	5745 ~ 5825MHz	PIFA	i-pex(MHF)
Ethertronics	1002298	5.48	5745 ~ 5825MHz	PIFA	i-pex(MHF)

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
A	√	√	√	√	Power from adapter 2
B	-	√	√	-	Power from PoE

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE $<$ 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Note: 1. The EUT had been pre-tested on the positioned on Lying & Wall Mount. The worst case was found when positioned on Lying.

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
A	802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	13.5
A	802.11ac (VHT80)		42	42	OFDM	BPSK	58.5
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
A	802.11n (HT40)		151 to 159	151, 159	OFDM	BPSK	13.5
A	802.11ac (VHT80)		155	155	OFDM	BPSK	58.5

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11a	5180-5320 5745-5825	36 to 64 149 to 165	36	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11a	5180-5320 5745-5825	36 to 64 149 to 165	36	OFDM	BPSK	6.0

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
CDD Mode							
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
A	802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	13.5
A	802.11ac (VHT80)		42	42	OFDM	BPSK	58.5
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
A	802.11n (HT40)		151 to 159	151, 159	OFDM	BPSK	13.5
A	802.11ac (VHT80)		155	155	OFDM	BPSK	58.5
Beamforming Mode							
A	802.11n (HT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
A	802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	13.5
A	802.11ac (VHT80)		42	42	OFDM	BPSK	58.5
A	802.11n (HT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
A	802.11n (HT40)		151 to 159	151, 159	OFDM	BPSK	13.5
A	802.11ac (VHT80)		155	155	OFDM	BPSK	58.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25 deg. C, 66% RH	120Vac, 60Hz	Chris Lin Matthew Yang
RE<1G	25 deg. C, 66% RH	120Vac, 60Hz 48Vdc	Chris Lin
PLC	25 deg. C, 60% RH	120Vac, 60Hz 48Vdc	Chris Lin
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Frank Liu

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is > 98%, duty factor is not required

Duty cycle of test signal is < 98 %, duty factor is required

802.11a: Duty cycle = $1.988/2.138 = 0.930$, Duty factor = $10 * \log(1/0.930) = 0.32$

802.11n (HT20): Duty cycle = $4.950/5.062 = 0.978$, Duty factor = $10 * \log(1/0.978) = 0.10$

802.11n (HT40): Duty cycle = $2.313/2.450 = 0.944$, Duty factor = $10 * \log(1/0.944) = 0.25$

802.11ac (VHT80): Duty cycle = $1.088/1.225 = 0.888$, Duty factor = $10 * \log(1/0.888) = 0.52$



3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	6RP2YM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-
C.	PoE	YAMAHA	YPS-PoE-AT	Z4U00327 VZ	NA	Provided by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45	1	10	N	0	-
2.	RJ45	1	1.8	N	0	-
3.	RJ45	1	1.8	N	0	-

3.4.1 Configuration of System under Test

Test Mode A

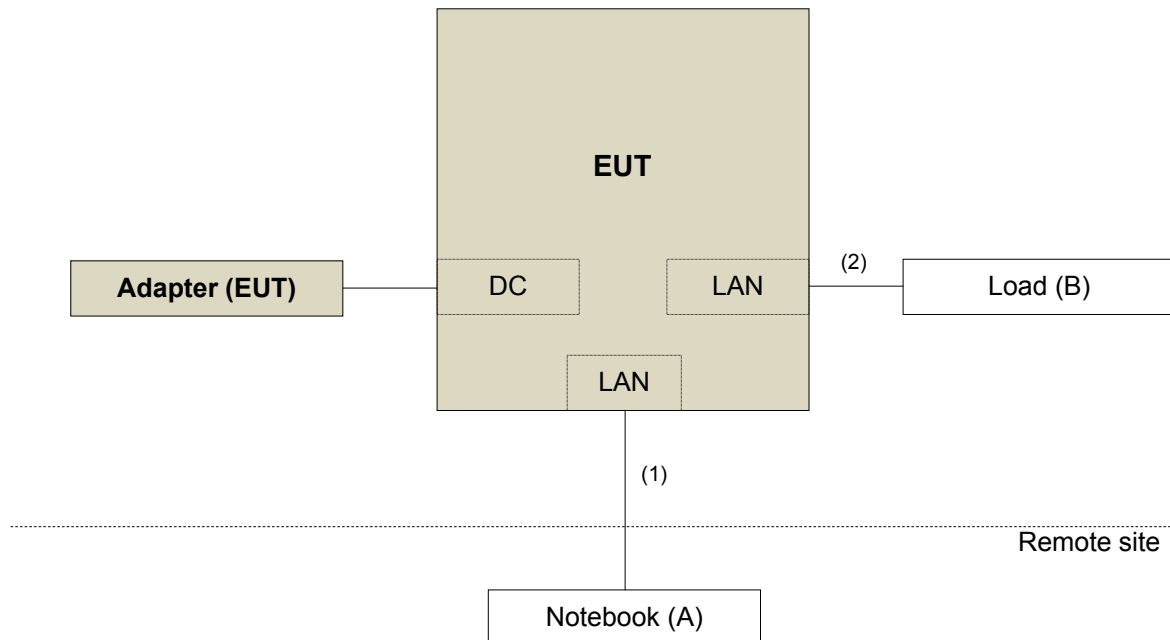

Test Mode B

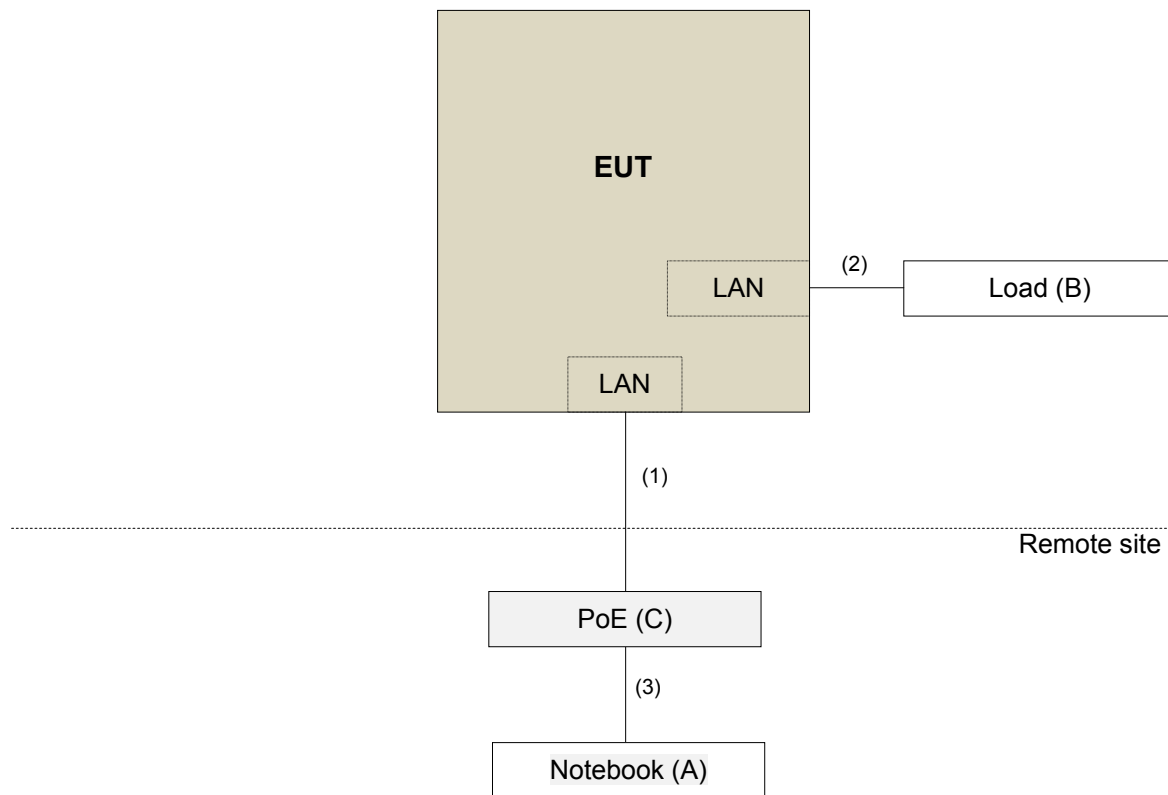

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)
KDB 789033 D02 General UNII Test Procedure New Rules v01r02
KDB 662911 D01 Multiple Transmitter Output v02r01
 ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any Condition of modulation.

Limits of Unwanted Emission Out of the Restricted Bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v01r03		Field Strength at 3m	
		PK:74 (dBuV/m)	AV:54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2 (dBuV/m) ^{*1} PK:105.2 (dBuV/m) ^{*2} PK: 110.8 (dBuV/m) ^{*3} PK:122.2 (dBuV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 23, 2015	Dec. 22, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Aug. 16, 2016	Aug. 15, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 07, 2016	Jan. 06, 2017
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Jan. 08, 2016	Jan. 07, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Jan. 18, 2016	Jan. 17, 2017
Loop Antenna	EM-6879	269	Aug. 11, 2016	Aug. 10, 2017
Preamplifier Agilent	8449B	3008A01960	Aug. 09, 2016	Aug. 08, 2017
Preamplifier Agilent	8447D	2944A10631	Aug. 09, 2016	Aug. 08, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Aug. 09, 2016	Aug. 08, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Aug. 09, 2016	Aug. 08, 2017
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
High Speed Peak Power Meter	ML2495A	0824012	Aug. 11, 2016	Aug. 10, 2017
Power Sensor	MA2411B	0738171	Aug. 11, 2016	Aug. 10, 2017
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2015	Oct. 17, 2016
			Oct. 17, 2016	Oct. 16, 2017

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC7450F-4.

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

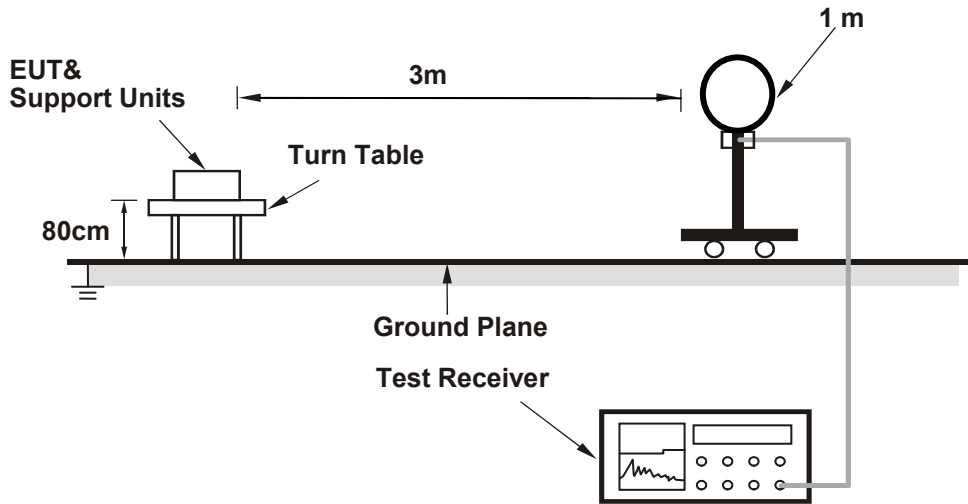

For Radiated emission 30MHz to 1GHz

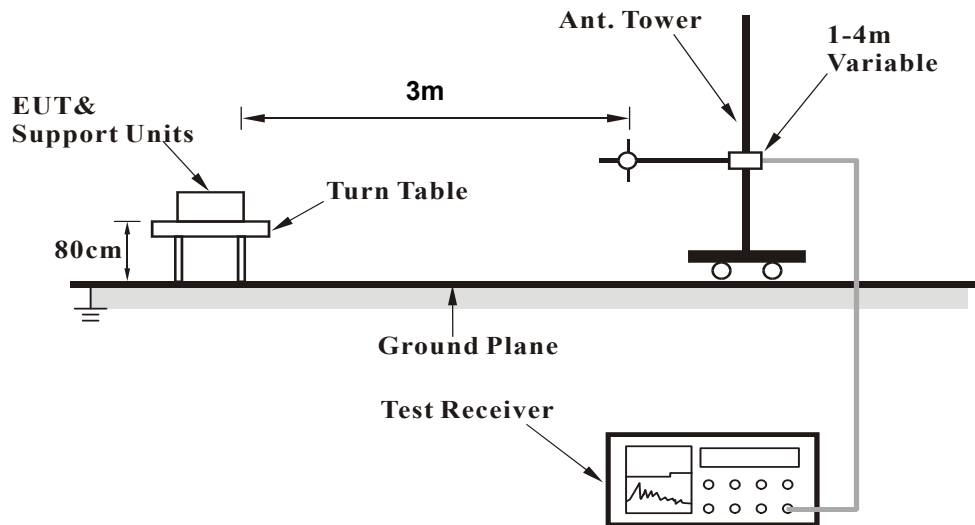

For Radiated emission above 1GHz

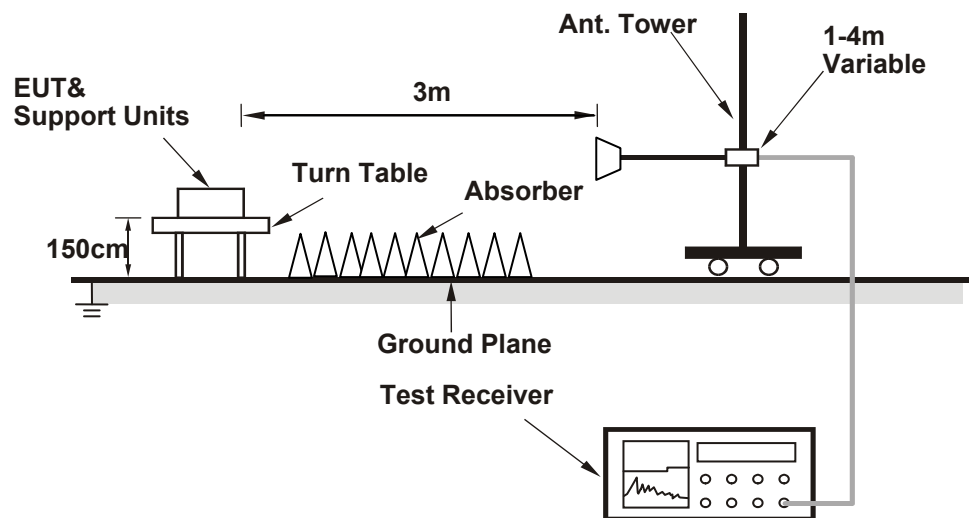

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

ABOVE 1GHz WORST-CASE DATA :

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.9 PK	74.0	-10.1	1.50 H	210	57.9	6.0
2	5150.00	48.5 AV	54.0	-5.5	1.50 H	210	42.5	6.0
3	*5180.00	113.1 PK			1.50 H	210	73.0	40.1
4	*5180.00	103.1 AV			1.50 H	210	63.0	40.1
5	#10360.00	59.1 PK	74.0	-14.9	1.00 H	122	41.4	17.7
6	#10360.00	46.4 AV	54.0	-7.6	1.00 H	122	28.7	17.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.9 PK	74.0	-6.1	1.88 V	332	61.9	6.0
2	5150.00	53.2 AV	54.0	-0.8	1.88 V	332	47.2	6.0
3	*5180.00	116.6 PK			1.88 V	332	76.5	40.1
4	*5180.00	107.3 AV			1.88 V	332	67.2	40.1
5	#10360.00	64.6 PK	74.0	-9.4	1.11 V	93	46.9	17.7
6	#10360.00	51.1 AV	54.0	-2.9	1.11 V	93	33.4	17.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	112.7 PK			1.74 H	212	72.6	40.1
2	*5200.00	103.0 AV			1.74 H	212	62.9	40.1
3	#10400.00	59.2 PK	74.0	-14.8	1.00 H	132	41.2	18.0
4	#10400.00	46.6 AV	54.0	-7.4	1.00 H	132	28.6	18.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	116.8 PK			2.05 V	333	76.7	40.1
2	*5200.00	107.8 AV			2.05 V	333	67.7	40.1
3	#10400.00	63.3 PK	74.0	-10.7	1.10 V	92	45.3	18.0
4	#10400.00	50.6 AV	54.0	-3.4	1.10 V	92	32.6	18.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.9 PK			1.49 H	214	72.7	40.2
2	*5240.00	103.3 AV			1.49 H	214	63.1	40.2
3	5350.00	57.8 PK	74.0	-16.2	1.49 H	214	51.6	6.2
4	5350.00	44.7 AV	54.0	-9.3	1.49 H	214	38.5	6.2
5	#10480.00	59.7 PK	74.0	-14.3	1.00 H	127	41.5	18.2
6	#10480.00	47.1 AV	54.0	-6.9	1.00 H	127	28.9	18.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.0 PK			1.76 V	96	76.8	40.2
2	*5240.00	107.8 AV			1.76 V	96	67.6	40.2
3	5350.00	58.9 PK	74.0	-15.1	1.76 V	96	52.7	6.2
4	5350.00	45.0 AV	54.0	-9.0	1.76 V	96	38.8	6.2
5	#10480.00	63.1 PK	74.0	-10.9	1.03 V	90	44.9	18.2
6	#10480.00	50.8 AV	54.0	-3.2	1.03 V	90	32.6	18.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5622.40	59.0 PK	68.2	-9.2	1.67 H	212	52.6	6.4
2	*5745.00	113.3 PK			1.67 H	212	72.4	40.9
3	*5745.00	102.2 AV			1.67 H	212	61.3	40.9
4	#5956.00	58.6 PK	68.2	-9.6	1.67 H	212	51.4	7.2
5	11490.00	62.4 PK	74.0	-11.6	1.00 H	288	41.9	20.5
6	11490.00	48.6 AV	54.0	-5.4	1.00 H	288	28.1	20.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.20	59.3 PK	68.2	-8.9	1.74 V	130	52.8	6.5
2	*5745.00	116.6 PK			1.74 V	130	75.7	40.9
3	*5745.00	106.9 AV			1.74 V	130	66.0	40.9
4	#5986.40	59.1 PK	68.2	-9.1	1.74 V	130	51.9	7.2
5	11490.00	63.5 PK	74.0	-10.5	1.47 V	85	43.0	20.5
6	11490.00	52.0 AV	54.0	-2.0	1.47 V	85	31.5	20.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5635.20	58.1 PK	68.2	-10.1	1.58 H	212	51.6	6.5
2	*5785.00	112.8 PK			1.58 H	212	71.8	41.0
3	*5785.00	102.4 AV			1.58 H	212	61.4	41.0
4	#5956.80	58.2 PK	68.2	-10.0	1.58 H	212	51.0	7.2
5	11570.00	62.0 PK	74.0	-12.0	1.00 H	275	41.7	20.3
6	11570.00	48.3 AV	54.0	-5.7	1.00 H	275	28.0	20.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5632.80	61.8 PK	68.2	-6.4	1.86 V	163	55.3	6.5
2	*5785.00	116.0 PK			1.86 V	163	75.0	41.0
3	*5785.00	106.5 AV			1.86 V	163	65.5	41.0
4	#5965.60	57.2 PK	68.2	-11.0	1.86 V	163	50.0	7.2
5	11570.00	62.9 PK	74.0	-11.1	1.47 V	85	42.6	20.3
6	11570.00	51.0 AV	54.0	-3.0	1.47 V	85	30.7	20.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.60	57.7 PK	68.2	-10.5	1.69 H	214	51.2	6.5
2	*5825.00	110.7 PK			1.69 H	214	69.5	41.2
3	*5825.00	100.3 AV			1.69 H	214	59.1	41.2
4	#5930.40	58.1 PK	68.2	-10.1	1.69 H	214	51.0	7.1
5	11650.00	61.7 PK	74.0	-12.3	1.00 H	270	41.8	19.9
6	11650.00	47.9 AV	54.0	-6.1	1.00 H	270	28.0	19.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5621.60	59.3 PK	68.2	-8.9	2.09 V	167	52.9	6.4
2	*5825.00	116.3 PK			2.09 V	167	75.1	41.2
3	*5825.00	106.0 AV			2.09 V	167	64.8	41.2
4	#5980.00	58.7 PK	68.2	-9.5	2.09 V	167	51.5	7.2
5	11650.00	62.5 PK	74.0	-11.5	1.24 V	78	42.6	19.9
6	11650.00	50.4 AV	54.0	-3.6	1.24 V	78	30.5	19.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.1 PK	74.0	-9.9	1.49 H	193	58.1	6.0
2	5150.00	48.9 AV	54.0	-5.1	1.49 H	193	42.9	6.0
3	*5180.00	112.1 PK			1.49 H	193	72.0	40.1
4	*5180.00	101.9 AV			1.49 H	193	61.8	40.1
5	#10360.00	59.8 PK	74.0	-14.2	1.00 H	108	42.1	17.7
6	#10360.00	46.7 AV	54.0	-7.3	1.00 H	108	29.0	17.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.9 PK	74.0	-6.1	1.88 V	328	61.9	6.0
2	5150.00	52.6 AV	54.0	-1.4	1.88 V	328	46.6	6.0
3	*5180.00	116.4 PK			1.88 V	328	76.3	40.1
4	*5180.00	105.9 AV			1.88 V	328	65.8	40.1
5	#10360.00	64.2 PK	74.0	-9.8	1.04 V	90	46.5	17.7
6	#10360.00	51.9 AV	54.0	-2.1	1.04 V	90	34.2	17.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	112.2 PK			1.45 H	191	72.1	40.1
2	*5200.00	102.0 AV			1.45 H	191	61.9	40.1
3	#10400.00	60.2 PK	74.0	-13.8	1.00 H	144	42.2	18.0
4	#10400.00	47.2 AV	54.0	-6.8	1.00 H	144	29.2	18.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	117.6 PK			1.96 V	331	77.5	40.1
2	*5200.00	107.3 AV			1.96 V	331	67.2	40.1
3	#10400.00	63.8 PK	74.0	-10.2	1.07 V	90	45.8	18.0
4	#10400.00	51.6 AV	54.0	-2.4	1.07 V	90	33.6	18.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.8 PK			1.44 H	189	72.6	40.2
2	*5240.00	102.6 AV			1.44 H	189	62.4	40.2
3	5350.00	56.8 PK	74.0	-17.2	1.44 H	189	50.6	6.2
4	5350.00	44.7 AV	54.0	-9.3	1.44 H	189	38.5	6.2
5	#10480.00	60.6 PK	74.0	-13.4	1.00 H	150	42.4	18.2
6	#10480.00	47.6 AV	54.0	-6.4	1.00 H	150	29.4	18.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.7 PK			1.69 V	110	77.5	40.2
2	*5240.00	107.2 AV			1.69 V	110	67.0	40.2
3	5350.00	57.4 PK	74.0	-16.6	1.69 V	110	51.2	6.2
4	5350.00	45.1 AV	54.0	-8.9	1.69 V	110	38.9	6.2
5	#10480.00	62.3 PK	74.0	-11.7	1.28 V	19	44.1	18.2
6	#10480.00	50.8 AV	54.0	-3.2	1.28 V	19	32.6	18.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5640.80	58.2 PK	68.2	-10.0	1.57 H	212	51.7	6.5
2	*5745.00	112.4 PK			1.57 H	212	71.5	40.9
3	*5745.00	102.2 AV			1.57 H	212	61.3	40.9
4	#5941.60	57.8 PK	68.2	-10.4	1.57 H	212	50.7	7.1
5	11490.00	61.1 PK	74.0	-12.9	1.00 H	311	40.6	20.5
6	11490.00	48.1 AV	54.0	-5.9	1.00 H	311	27.6	20.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.00	65.5 PK	68.2	-2.7	1.86 V	5	59.0	6.5
2	*5745.00	117.4 PK			1.86 V	5	76.5	40.9
3	*5745.00	107.0 AV			1.86 V	5	66.1	40.9
4	#5986.40	60.4 PK	68.2	-7.8	1.86 V	5	53.2	7.2
5	11490.00	63.5 PK	74.0	-10.5	1.32 V	96	43.0	20.5
6	11490.00	51.4 AV	54.0	-2.6	1.32 V	96	30.9	20.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.40	58.0 PK	68.2	-10.2	1.62 H	213	51.5	6.5
2	*5785.00	112.6 PK			1.62 H	213	71.6	41.0
3	*5785.00	102.4 AV			1.62 H	213	61.4	41.0
4	#5930.40	57.3 PK	68.2	-10.9	1.62 H	213	50.2	7.1
5	11570.00	61.0 PK	74.0	-13.0	1.00 H	306	40.7	20.3
6	11570.00	48.0 AV	54.0	-6.0	1.00 H	306	27.7	20.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5638.40	67.6 PK	68.2	-0.6	1.87 V	177	61.1	6.5
2	*5785.00	118.1 PK			1.87 V	177	77.1	41.0
3	*5785.00	107.8 AV			1.87 V	177	66.8	41.0
4	#5944.80	60.9 PK	68.2	-7.3	1.87 V	177	53.8	7.1
5	11570.00	64.2 PK	74.0	-9.8	1.36 V	97	43.9	20.3
6	11570.00	51.3 AV	54.0	-2.7	1.36 V	97	31.0	20.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5639.20	57.5 PK	68.2	-10.7	1.67 H	213	51.0	6.5
2	*5825.00	110.9 PK			1.69 H	213	69.7	41.2
3	*5825.00	101.1 AV			1.69 H	213	59.9	41.2
4	#5942.40	58.7 PK	68.2	-9.5	1.67 H	213	51.6	7.1
5	11650.00	60.4 PK	74.0	-13.6	1.00 H	321	40.5	19.9
6	11650.00	47.6 AV	54.0	-6.4	1.00 H	321	27.7	19.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.00	65.5 PK	68.2	-2.7	1.85 V	181	59.0	6.5
2	*5825.00	117.5 PK			1.85 V	181	76.3	41.2
3	*5825.00	107.4 AV			1.85 V	181	66.2	41.2
4	#5928.80	63.1 PK	68.2	-5.1	1.85 V	181	56.0	7.1
5	11650.00	62.8 PK	74.0	-11.2	1.32 V	85	42.9	19.9
6	11650.00	51.5 AV	54.0	-2.5	1.32 V	85	31.6	19.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.66 H	191	53.0	6.0
2	5150.00	46.3 AV	54.0	-7.7	1.66 H	191	40.3	6.0
3	*5190.00	105.2 PK			1.66 H	191	65.1	40.1
4	*5190.00	96.0 AV			1.66 H	191	55.9	40.1
5	#10380.00	59.3 PK	74.0	-14.7	1.00 H	246	41.5	17.8
6	#10380.00	46.6 AV	54.0	-7.4	1.00 H	246	28.8	17.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.9 PK	74.0	-7.1	1.78 V	333	60.9	6.0
2	5150.00	53.5 AV	54.0	-0.5	1.78 V	333	47.5	6.0
3	*5190.00	110.8 PK			1.78 V	333	70.7	40.1
4	*5190.00	101.8 AV			1.78 V	333	61.7	40.1
5	#10380.00	61.3 PK	74.0	-12.7	1.36 V	98	43.5	17.8
6	#10380.00	49.7 AV	54.0	-4.3	1.36 V	98	31.9	17.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	110.2 PK			1.67 H	192	70.0	40.2
2	*5230.00	100.8 AV			1.67 H	192	60.6	40.2
3	5350.00	57.4 PK	74.0	-16.6	1.67 H	192	51.2	6.2
4	5350.00	44.4 AV	54.0	-9.6	1.67 H	192	38.2	6.2
5	#10460.00	59.7 PK	74.0	-14.3	1.00 H	251	41.7	18.0
6	#10460.00	47.0 AV	54.0	-7.0	1.00 H	251	29.0	18.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	114.0 PK			1.68 V	110	73.8	40.2
2	*5230.00	104.6 AV			1.68 V	110	64.4	40.2
3	5350.00	57.8 PK	74.0	-16.2	1.68 V	110	51.6	6.2
4	5350.00	45.0 AV	54.0	-9.0	1.68 V	110	38.8	6.2
5	#10460.00	60.5 PK	74.0	-13.5	1.21 V	19	42.5	18.0
6	#10460.00	48.6 AV	54.0	-5.4	1.21 V	19	30.6	18.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.80	58.2 PK	68.2	-10.0	1.51 H	212	51.7	6.5
2	*5755.00	108.9 PK			1.51 H	212	67.9	41.0
3	*5755.00	99.5 AV			1.51 H	212	58.5	41.0
4	#5963.20	58.3 PK	68.2	-9.9	1.51 H	212	51.1	7.2
5	11510.00	62.6 PK	74.0	-11.4	1.00 H	23	42.2	20.4
6	11510.00	48.6 AV	54.0	-5.4	1.00 H	23	28.2	20.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5613.60	66.8 PK	68.2	-1.4	1.80 V	182	60.4	6.4
2	*5755.00	116.2 PK			1.80 V	182	75.2	41.0
3	*5755.00	106.3 AV			1.80 V	182	65.3	41.0
4	#5945.60	60.6 PK	68.2	-7.6	1.80 V	182	53.5	7.1
5	11510.00	62.5 PK	74.0	-11.5	1.32 V	69	42.1	20.4
6	11510.00	51.6 AV	54.0	-2.4	1.32 V	69	31.2	20.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.80	58.0 PK	68.2	-10.2	1.59 H	211	51.5	6.5
2	*5795.00	110.4 PK			1.59 H	211	69.3	41.1
3	*5795.00	100.3 AV			1.59 H	211	59.2	41.1
4	#5970.40	57.8 PK	68.2	-10.4	1.59 H	211	50.6	7.2
5	11590.00	62.5 PK	74.0	-11.5	1.00 H	33	42.3	20.2
6	11590.00	48.6 AV	54.0	-5.4	1.00 H	33	28.4	20.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.00	66.3 PK	68.2	-1.9	1.86 V	175	59.8	6.5
2	*5795.00	116.6 PK			1.86 V	175	75.5	41.1
3	*5795.00	106.5 AV			1.86 V	175	65.4	41.1
4	#5931.20	61.4 PK	68.2	-6.8	1.86 V	175	54.3	7.1
5	11590.00	62.8 PK	74.0	-11.2	1.32 V	85	42.6	20.2
6	11590.00	50.6 AV	54.0	-3.4	1.32 V	85	30.4	20.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.5 PK	74.0	-13.5	1.76 H	190	54.5	6.0
2	5150.00	47.3 AV	54.0	-6.7	1.76 H	190	41.3	6.0
3	*5210.00	102.2 PK			1.76 H	190	62.1	40.1
4	*5210.00	92.0 AV			1.76 H	190	51.9	40.1
5	5350.00	57.6 PK	74.0	-16.4	1.76 H	190	51.4	6.2
6	5350.00	44.4 AV	54.0	-9.6	1.76 H	190	38.2	6.2
7	#10420.00	60.3 PK	74.0	-13.7	1.00 H	234	42.3	18.0
8	#10420.00	47.1 AV	54.0	-6.9	1.00 H	234	29.1	18.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	1.77 V	95	59.7	6.0
2	5150.00	53.5 AV	54.0	-0.5	1.77 V	95	47.5	6.0
3	*5210.00	106.4 PK			1.77 V	95	66.3	40.1
4	*5210.00	97.2 AV			1.77 V	95	57.1	40.1
5	5350.00	59.5 PK	74.0	-14.5	1.77 V	95	53.3	6.2
6	5350.00	48.4 AV	54.0	-5.6	1.77 V	95	42.2	6.2
7	#10420.00	61.0 PK	74.0	-13.0	1.87 V	48	43.0	18.0
8	#10420.00	49.6 AV	54.0	-4.4	1.87 V	48	31.6	18.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.80	61.2 PK	68.2	-7.0	1.49 H	212	54.7	6.5
2	*5775.00	103.4 PK			1.49 H	212	62.4	41.0
3	*5775.00	94.1 AV			1.49 H	212	53.1	41.0
4	#5962.40	57.9 PK	68.2	-10.3	1.49 H	212	50.7	7.2
5	11550.00	62.6 PK	74.0	-11.4	1.00 H	58	42.3	20.3
6	11550.00	48.9 AV	54.0	-5.1	1.00 H	58	28.6	20.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.40	67.9 PK	68.2	-0.3	1.84 V	180	61.4	6.5
2	*5775.00	109.0 PK			1.85 V	3	68.0	41.0
3	*5775.00	99.2 AV			1.85 V	3	58.2	41.0
4	#5930.40	62.6 PK	68.2	-5.6	1.84 V	180	55.5	7.1
5	11550.00	62.1 PK	74.0	-11.9	1.32 V	64	41.8	20.3
6	11550.00	50.3 AV	54.0	-3.7	1.32 V	64	30.0	20.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Worst-Case Data: 802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	21.1 QP	40.0	-18.9	2.00 H	291	35.4	-14.3
2	93.93	21.9 QP	43.5	-21.6	2.00 H	176	41.1	-19.2
3	251.11	17.8 QP	46.0	-28.2	1.50 H	244	32.0	-14.2
4	437.38	21.6 QP	46.0	-24.4	2.00 H	161	31.1	-9.5
5	633.36	31.5 QP	46.0	-14.5	1.24 H	153	36.9	-5.4
6	808.00	29.5 QP	46.0	-16.5	1.00 H	150	31.6	-2.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	64.83	27.8 QP	40.0	-12.2	1.00 V	283	42.8	-15.0
2	142.44	17.7 QP	43.5	-25.8	1.00 V	90	31.8	-14.1
3	431.56	25.5 QP	46.0	-20.5	1.26 V	310	35.1	-9.6
4	633.36	37.9 QP	46.0	-8.1	1.00 V	151	43.3	-5.4
5	827.40	27.7 QP	46.0	-18.3	1.00 V	297	29.6	-1.9
6	934.13	32.8 QP	46.0	-13.2	1.00 V	25	32.8	0.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	144.38	35.2 QP	43.5	-8.3	2.00 H	269	49.2	-14.0
2	249.17	27.2 QP	46.0	-18.8	1.24 H	267	41.4	-14.2
3	499.48	29.8 QP	46.0	-16.2	1.50 H	230	38.3	-8.5
4	635.30	30.4 QP	46.0	-15.6	1.00 H	303	35.8	-5.4
5	798.30	29.3 QP	46.0	-16.7	1.24 H	299	31.5	-2.2
6	936.07	33.4 QP	46.0	-12.6	1.24 H	113	33.5	-0.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.18	35.8 QP	40.0	-4.2	1.26 V	116	49.7	-13.9
2	107.52	35.0 QP	43.5	-8.5	1.01 V	306	52.4	-17.4
3	249.17	26.6 QP	46.0	-19.4	1.01 V	273	40.8	-14.2
4	499.48	27.1 QP	46.0	-18.9	1.01 V	158	35.6	-8.5
5	633.36	33.5 QP	46.0	-12.5	1.01 V	341	38.9	-5.4
6	798.30	28.0 QP	46.0	-18.0	1.51 V	251	30.2	-2.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 16, 2015	Nov. 15, 2016
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Dec. 26, 2015	Dec. 25, 2016
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 26, 2016	Feb. 25, 2017
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 28, 2016	Jul. 27, 2017
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

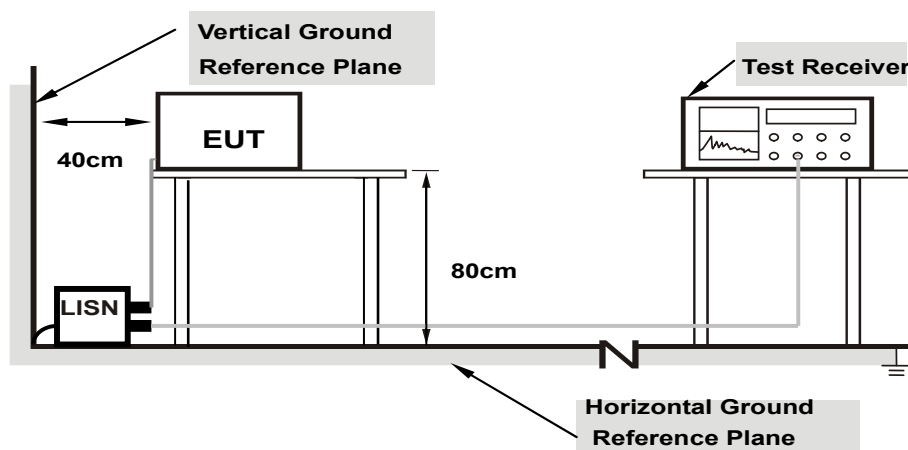

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.07	31.35	17.10	41.42	27.17	66.00	56.00	-24.58	-28.83
2	0.32204	10.13	33.85	27.21	43.98	37.34	59.65	49.65	-15.67	-12.31
3	1.02337	10.29	23.47	19.65	33.76	29.94	56.00	46.00	-22.24	-16.06
4	3.76284	10.46	16.89	15.36	27.35	25.82	56.00	46.00	-28.65	-20.18
5	9.21729	10.73	18.40	14.77	29.13	25.50	60.00	50.00	-30.87	-24.50
6	17.69417	11.26	15.71	13.61	26.97	24.87	60.00	50.00	-33.03	-25.13

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

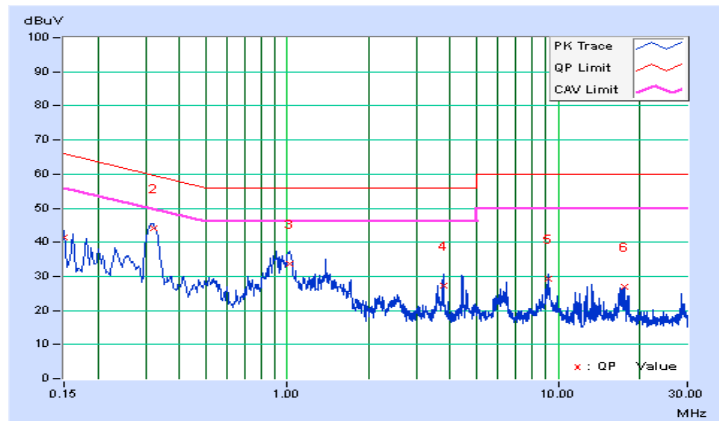


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15000	10.08	30.96	16.51	41.04	26.59	66.00	56.00	-24.96
2	0.32528	10.18	34.78	29.34	44.96	39.52	59.57	49.57	-14.61	-10.05
3	0.52960	10.25	15.99	10.57	26.24	20.82	56.00	46.00	-29.76	-25.18
4	0.93591	10.28	8.14	4.15	18.42	14.43	56.00	46.00	-37.58	-31.57
5	6.27306	10.69	5.20	-0.45	15.89	10.24	60.00	50.00	-44.11	-39.76
6	9.58874	10.83	5.72	1.28	16.55	12.11	60.00	50.00	-43.45	-37.89

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

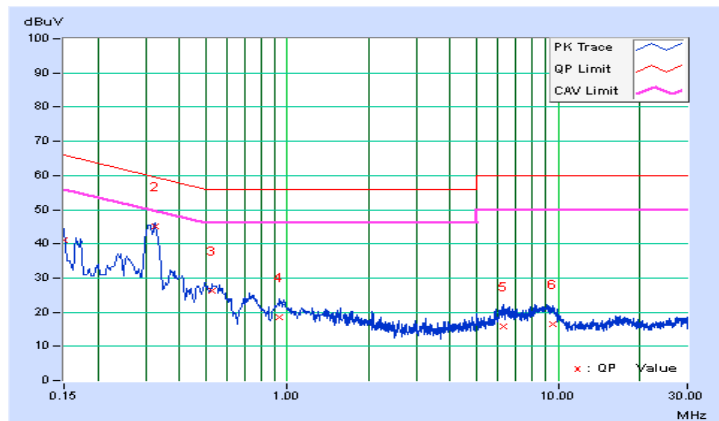


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	10.08	26.73	14.02	36.81	24.10	65.79
2	0.28663	10.12	19.58	11.64	29.70	21.76	60.62	50.62	-30.92	-28.86
3	0.90895	10.27	15.74	11.73	26.01	22.00	56.00	46.00	-29.99	-24.00
4	2.53119	10.40	24.92	12.73	35.32	23.13	56.00	46.00	-20.68	-22.87
5	3.57907	10.45	17.06	8.92	27.51	19.37	56.00	46.00	-28.49	-26.63
6	16.95518	11.20	20.53	14.30	31.73	25.50	60.00	50.00	-28.27	-24.50

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

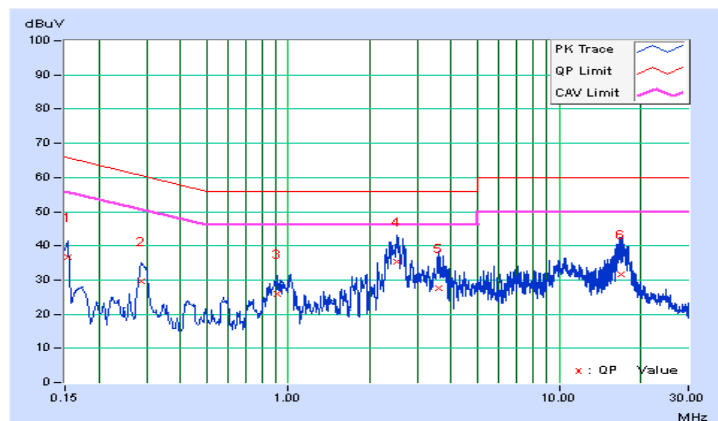


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	10.08	24.26	11.34	34.34	21.42	66.00
2	0.27918	10.14	22.11	17.10	32.25	27.24	60.84	50.84	-28.59	-23.60
3	2.58984	10.45	20.68	3.73	31.13	14.18	56.00	46.00	-24.87	-31.82
4	4.27505	10.60	22.11	18.84	32.71	29.44	56.00	46.00	-23.29	-16.56
5	7.07461	10.72	22.07	19.27	32.79	29.99	60.00	50.00	-27.21	-20.01
6	17.09985	11.35	29.22	23.15	40.57	34.50	60.00	50.00	-19.43	-15.50

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

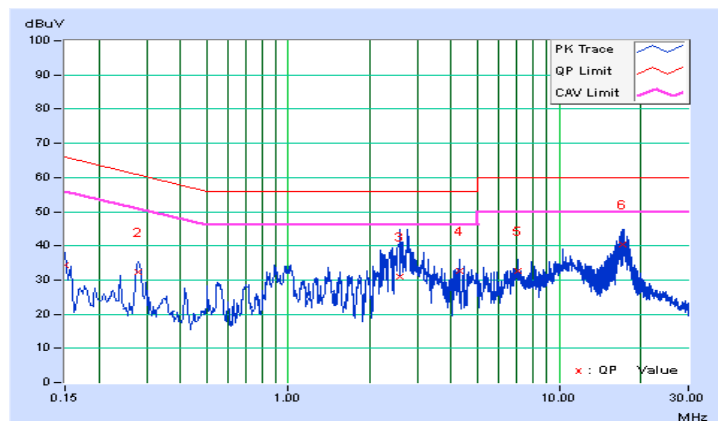

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = 5 log(N_{ANT}/N_{SS}) dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = 10 log(N_{ANT}/N_{SS}) dB.


4.3.2 Test Setup

[For Power Output Measurement](#)


[For 802.11a, 802.11n \(HT20\), 802.11n \(HT40\)](#)

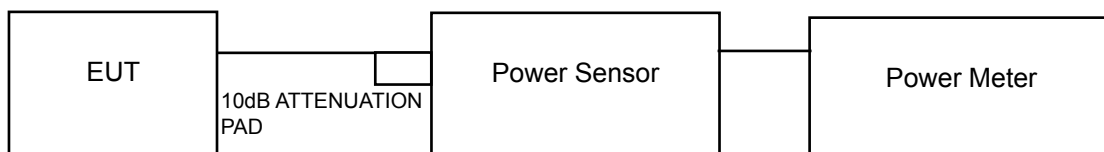

[For 802.11ac \(VHT80\)](#)

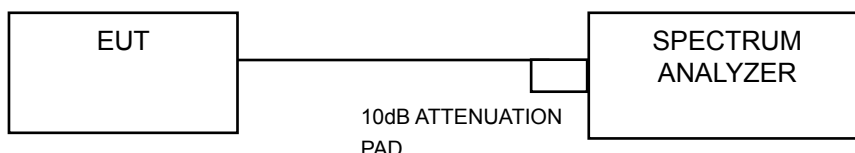

[For 26dB and Occupied Bandwidth](#)

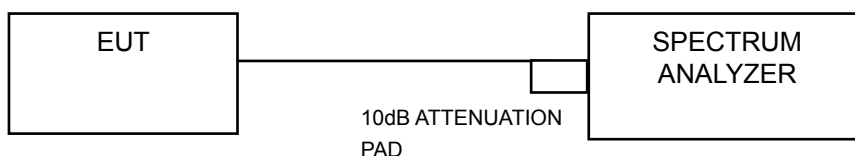

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- 1) Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- 2) Set sweep trigger to "free run".
- 3) Set RBW = 1 MHz.
- 4) Set VBW \geq 3 MHz
- 5) Number of points in sweep \geq 2 Span / RBW.
- 6) Sweep time \leq (number of points in sweep) * T
- 7) Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- 8) Detector = RMS.
- 9) Trace mode = max hold.
- 10) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

For 26dB Bandwidth

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

For Occupied Bandwidth

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300 kHz RBW and 1MHz VBW. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission Condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

POWER OUTPUT:

CDD Mode

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	23.41	23.63	449.955	26.53	30	Pass
40	5200	23.43	23.64	451.499	26.55	30	Pass
48	5240	23.62	23.65	461.883	26.65	30	Pass
149	5745	23.68	23.82	474.337	26.76	30	Pass
157	5785	23.67	23.84	474.912	26.77	30	Pass
165	5825	23.28	23.45	434.123	26.38	30	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	23.24	23.74	447.455	26.51	30	Pass
40	5200	23.51	23.85	467.049	26.69	30	Pass
48	5240	23.71	23.59	463.523	26.66	30	Pass
149	5745	23.45	23.81	461.745	26.64	30	Pass
157	5785	23.32	23.79	454.115	26.57	30	Pass
165	5825	23.08	23.38	421.007	26.24	30	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	20.80	20.17	224.218	23.51	30	Pass
46	5230	23.56	23.68	460.332	26.63	30	Pass
151	5755	23.53	23.25	436.773	26.40	30	Pass
159	5795	23.54	23.85	468.605	26.71	30	Pass

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	20.83	20.19	225.532	23.53	30	Pass
155	5775	20.53	20.75	231.830	23.65	30	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	23.24	23.74	447.455	26.51	28.32	Pass
40	5200	23.51	23.85	467.049	26.69	28.32	Pass
48	5240	23.71	23.59	463.523	26.66	28.32	Pass
149	5745	23.45	23.81	461.745	26.64	27.96	Pass
157	5785	23.32	23.79	454.115	26.57	27.96	Pass
165	5825	23.08	23.38	421.007	26.24	27.96	Pass

Note:

For 5180~5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.68dBi > 6dBi, so the power limit shall be reduced to 30-(7.68-6) = 28.32dBm.

For 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 8.04dBi > 6dBi, so the power limit shall be reduced to 30-(8.04-6) = 27.96dBm.

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	20.80	20.17	224.218	23.51	28.32	Pass
46	5230	23.56	23.68	460.332	26.63	28.32	Pass
151	5755	23.53	23.25	436.773	26.40	27.96	Pass
159	5795	23.54	23.85	468.605	26.71	27.96	Pass

Note:

For 5180~5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.68dBi > 6dBi, so the power limit shall be reduced to 30-(7.68-6) = 28.32dBm.

For 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 8.04dBi > 6dBi, so the power limit shall be reduced to 30-(8.04-6) = 27.96dBm.

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	20.83	20.19	225.532	23.53	28.32	Pass
155	5775	20.53	20.75	231.830	23.65	27.96	Pass

Note:

For 5180~5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.68dBi > 6dBi, so the power limit shall be reduced to 30-(7.68-6) = 28.32dBm.

For 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 8.04dBi > 6dBi, so the power limit shall be reduced to 30-(8.04-6) = 27.96dBm.

26dB Bandwidth:

802.11a

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	31.81	36.85
40	5200	31.02	34.16
48	5240	30.41	31.97

802.11n (HT20)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	36.47	35.66
40	5200	36.29	36.47
48	5240	32.72	40.34

802.11n (HT40)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	46.73	47.30
46	5230	79.25	83.06

802.11ac (VHT80)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	90.23	90.30





BUREAU
VERITAS

SPECTRUM PLOT OF WORST VALUE



802.11a

802.11n (HT20)

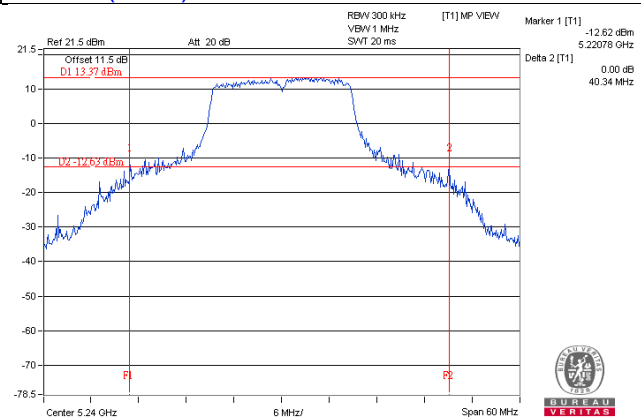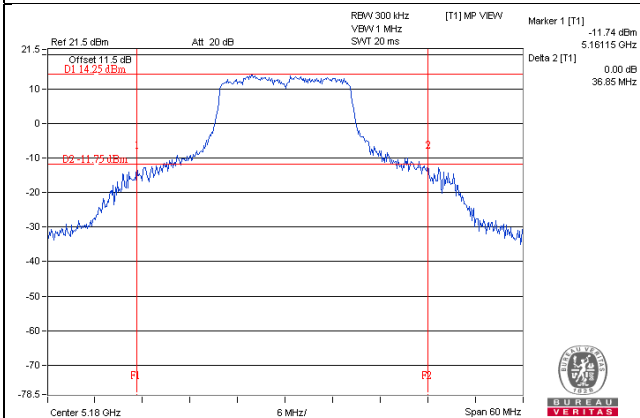

802.11n (HT40)

802.11ac (VHT80)

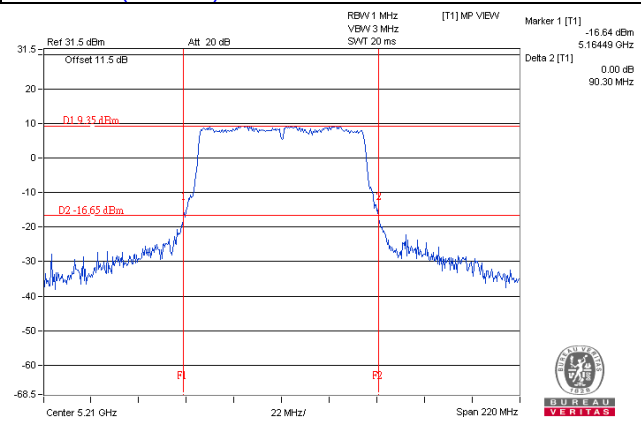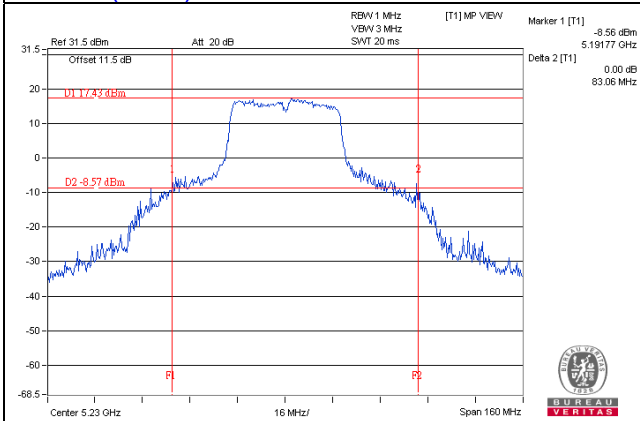

Occupied Bandwidth:

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.04	17.16
40	5200	17.16	17.16
48	5240	17.04	16.92
149	5745	20.16	19.92
157	5785	21.60	20.88
165	5825	19.56	19.80

802.11n (HT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	18.36	18.36
40	5200	18.24	18.24
48	5240	18.12	18.24
149	5745	21.00	21.60
157	5785	21.60	22.08
165	5825	21.12	20.64

802.11n (HT40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.96	36.96
46	5230	37.20	37.20
151	5755	38.52	38.64
159	5795	39.00	39.12

802.11ac (VHT80)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	76.32	76.08
155	5775	76.32	76.56





BUREAU
VERITAS

SPECTRUM PLOT OF WORST VALUE



802.11a

802.11n (HT20)

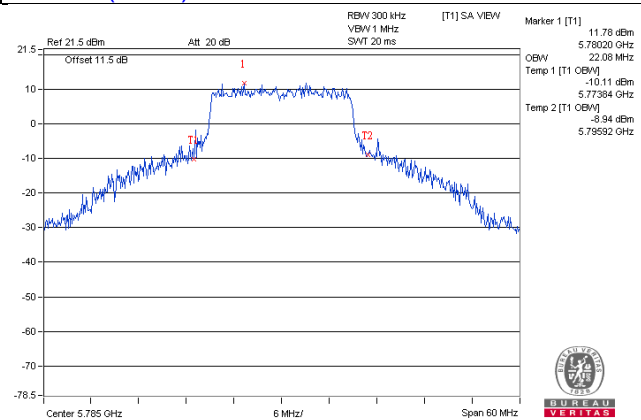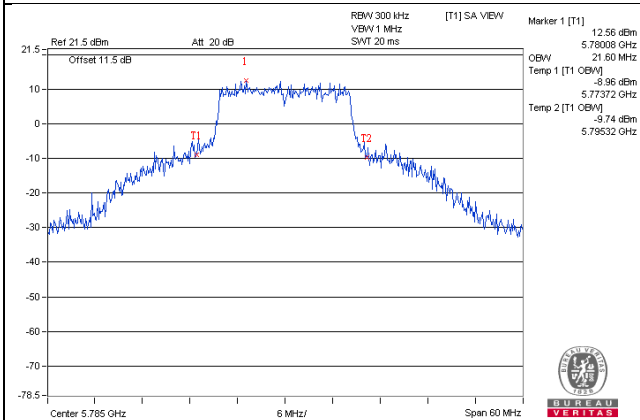

802.11n (HT40)

802.11ac (VHT80)

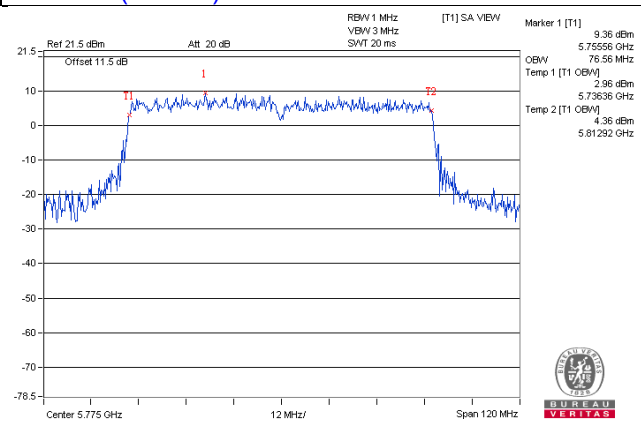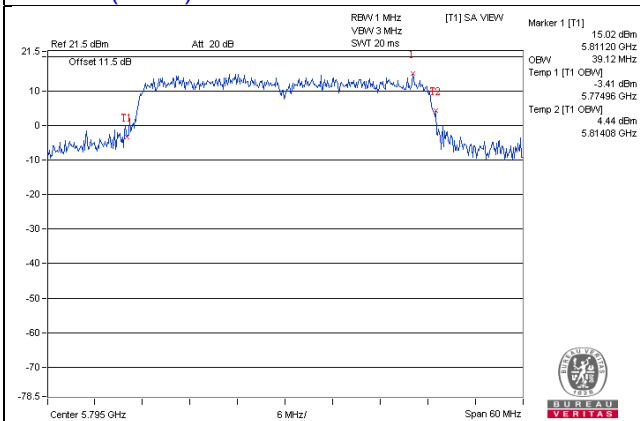


4.4 Peak Power Spectral Density Measurement

4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A	---		11dBm/ MHz
U-NII-2C	---		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.4.2 Test Setup

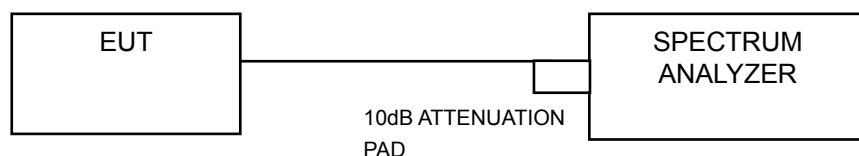

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedure

For U-NII-1 band:

Using method SA-2 alternative

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time =20ms.
- 5) Perform a single sweep.
- 6) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/300\text{kHz})$
- 5) Sweep time = auto, trigger set to "free run".
- 6) Trace average at least 100 traces in power averaging mode.
- 7) Record the max value and add 10 log (1/duty cycle)

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Condition

Same as Item 4.3.6.

4.4.7 Test Results

For U-NII-1 Band

802.11a

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
36	5180	9.15	8.88	12.02	0.32	12.34	15.32	Pass
40	5200	9.11	9.00	12.06	0.32	12.38	15.32	Pass
48	5240	8.97	8.98	11.98	0.32	12.30	15.32	Pass

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.68dBi > 6dBi, therefore the limit shall be reduced to $17-(7.68-6) = 15.32\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
36	5180	8.66	8.67	11.67	0.10	11.77	15.32	Pass
40	5200	8.59	8.56	11.58	0.10	11.68	15.32	Pass
48	5240	8.66	8.59	11.63	0.10	11.73	15.32	Pass

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.68dBi > 6dBi, therefore the limit shall be reduced to $17-(7.68-6) = 15.32\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
38	5190	2.22	2.24	5.24	0.25	5.49	15.32	Pass
46	5230	6.03	5.97	9.01	0.25	9.26	15.32	Pass

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.68dBi > 6dBi, therefore the limit shall be reduced to $17-(7.68-6) = 15.32\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
42	5210	-1.41	-1.81	1.40	0.52	1.92	15.32	Pass



NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.68dBi > 6dBi, therefore the limit shall be reduced to $17-(7.68-6) = 15.32\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

SPECTRUM PLOT OF WORST VALUE



802.11a / CH 36 / Chain 0

802.11n (HT20) / CH 36 / Chain 1

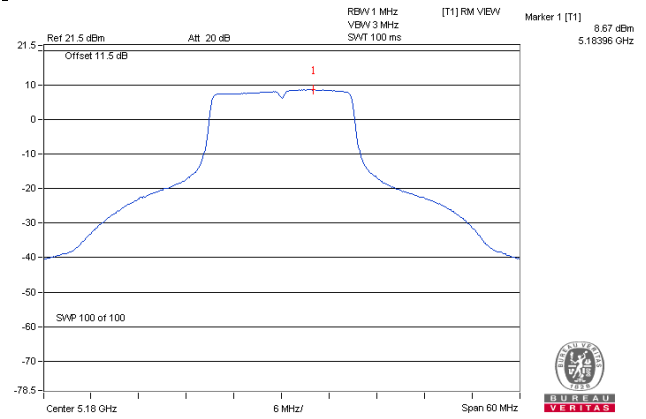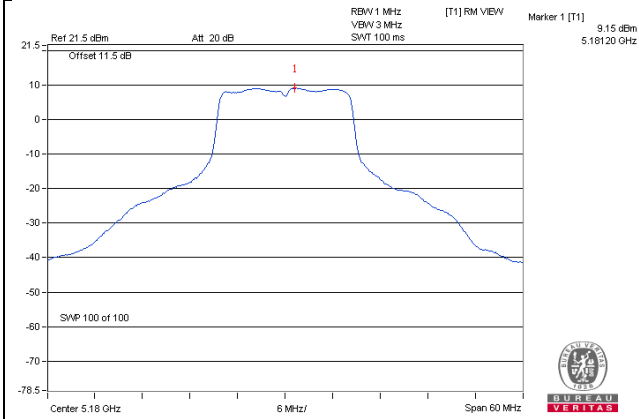

802.11n (HT40) / CH 46 / Chain 0

802.11ac (VHT80) / CH 42 / Chain 0

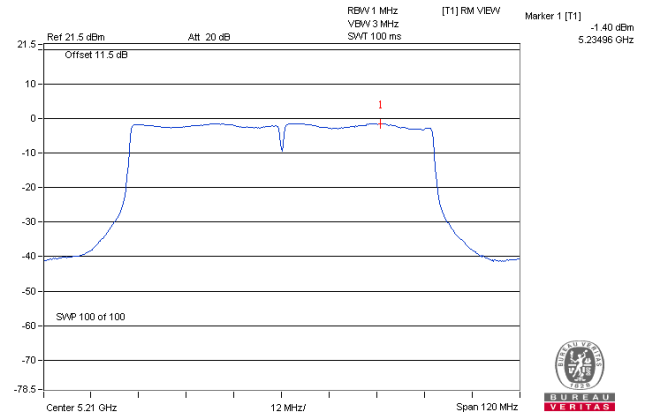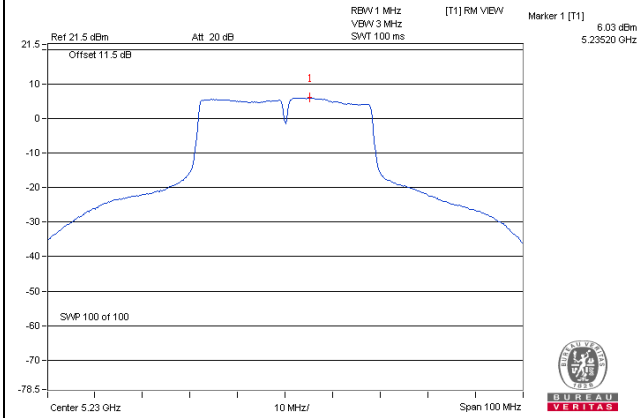

For U-NII-3 Band

802.11a

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	149	5745	0.32	2.54	3.01	0.32	5.87	27.96	Pass
	157	5785	0.04	2.26	3.01	0.32	5.59	27.96	Pass
	165	5825	-0.39	1.83	3.01	0.32	5.16	27.96	Pass
1	149	5745	0.29	2.51	3.01	0.32	5.84	27.96	Pass
	157	5785	0.18	2.40	3.01	0.32	5.73	27.96	Pass
	165	5825	-0.32	1.90	3.01	0.32	5.23	27.96	Pass

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 8.04dBi > 6dBi, so the power density limit shall be reduced to $30-(8.04-6) = 27.96$ dBm.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	149	5745	0.14	2.36	3.01	0.10	5.47	27.96	Pass
	157	5785	-0.06	2.16	3.01	0.10	5.27	27.96	Pass
	165	5825	-0.65	1.57	3.01	0.10	4.68	27.96	Pass
1	149	5745	0.11	2.33	3.01	0.10	5.44	27.96	Pass
	157	5785	-0.12	2.10	3.01	0.10	5.21	27.96	Pass
	165	5825	-0.62	1.60	3.01	0.10	4.71	27.96	Pass

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 8.04dBi > 6dBi, so the power density limit shall be reduced to $30-(8.04-6) = 27.96$ dBm.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	151	5755	-3.02	-0.80	3.01	0.25	2.46	27.96	Pass
	159	5795	-3.40	-1.18	3.01	0.25	2.08	27.96	Pass
1	151	5755	-2.97	-0.75	3.01	0.25	2.51	27.96	Pass
	159	5795	-3.42	-1.20	3.01	0.25	2.06	27.96	Pass

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 8.04dBi > 6dBi, so the power density limit shall be reduced to $30-(8.04-6) = 27.96$ dBm.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	155	5775	-9.78	-7.56	3.01	0.52	-4.03	27.96	Pass
1	155	5775	-9.69	-7.47	3.01	0.52	-3.94	27.96	Pass

NOTE:



- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 8.04dBi > 6dBi, so the power density limit shall be reduced to $30-(8.04-6) = 27.96$ dBm.
- Refer to section 3.3 for duty cycle spectrum plot.



SPECTRUM PLOT OF WORST VALUE



802.11a

802.11n (HT20)

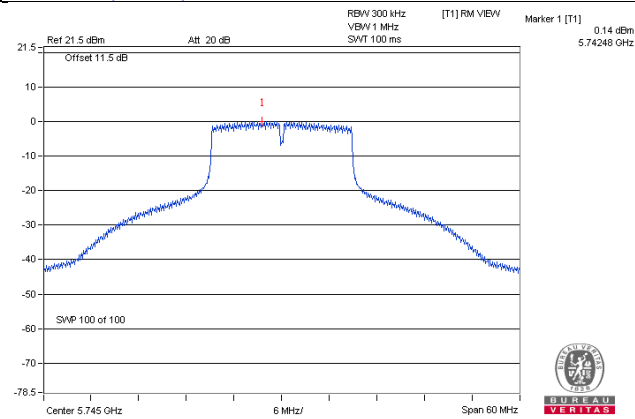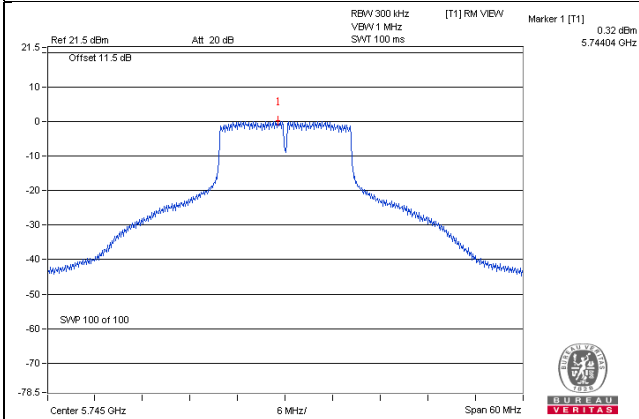

802.11n (HT40)

802.11ac (VHT80)

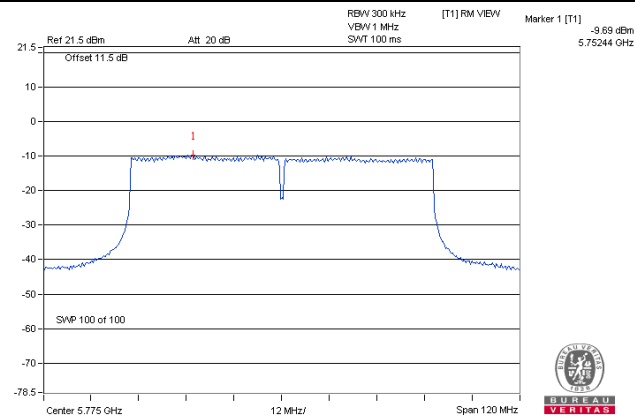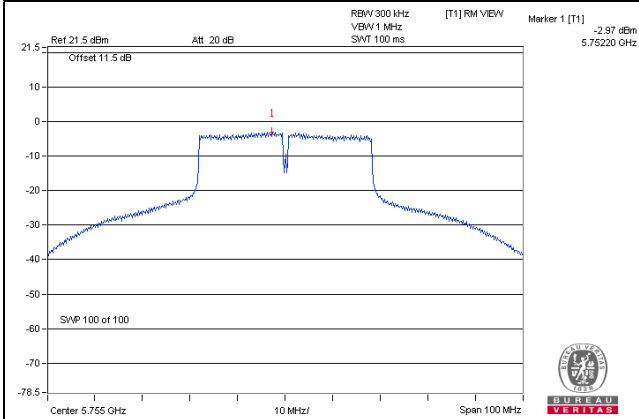


4.5 Frequency Stability

4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 Test Setup

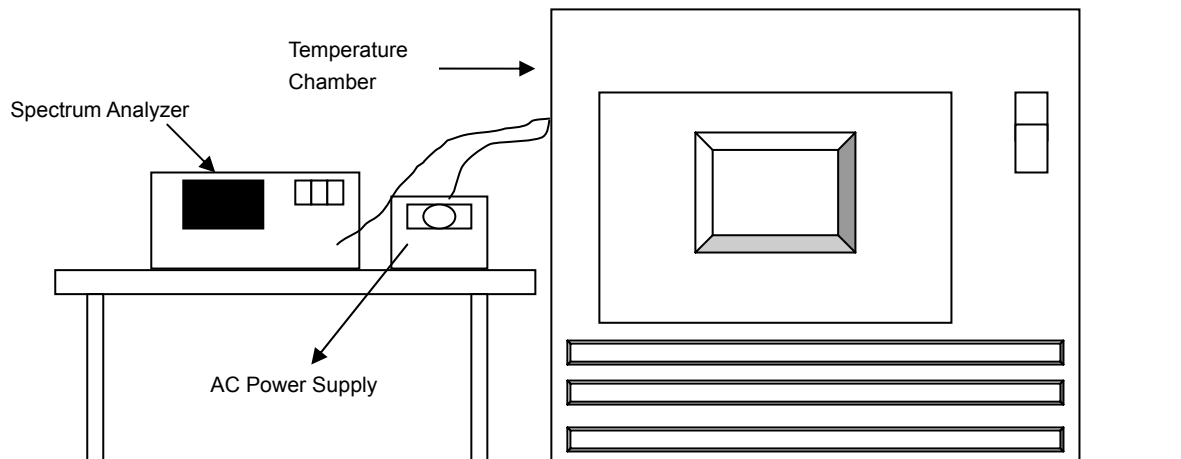

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.5.7 Test Results

802.11a

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5180.0174	0.00034	5180.0178	0.00034	5180.0166	0.00032	5180.0136	0.00026
40	120	5179.9999	0.00000	5180.0015	0.00003	5180.0015	0.00003	5179.9973	-0.00005
30	120	5179.9813	-0.00036	5179.9824	-0.00034	5179.9812	-0.00036	5179.9797	-0.00039
20	120	5180.0007	0.00001	5180.0017	0.00003	5179.9989	-0.00002	5179.9982	-0.00003
10	120	5180.0098	0.00019	5180.0087	0.00017	5180.0093	0.00018	5180.0082	0.00016
0	120	5179.9834	-0.00032	5179.9866	-0.00026	5179.9839	-0.00031	5179.9867	-0.00026
-10	120	5179.9879	-0.00023	5179.9898	-0.00020	5179.9884	-0.00022	5179.9911	-0.00017
-20	120	5180.0042	0.00008	5180.0021	0.00004	5180.0019	0.00004	5180.0038	0.00007
-30	120	5180.0002	0.00000	5180.0027	0.00005	5180.0030	0.00006	5180.0032	0.00006


FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5180.0000	0.00000	5180.0008	0.00002	5179.9996	-0.00001	5179.9972	-0.00005
	120	5180.0007	0.00001	5180.0017	0.00003	5179.9989	-0.00002	5179.9982	-0.00003
	102	5180.0010	0.00002	5180.0025	0.00005	5179.9983	-0.00003	5179.9980	-0.00004

4.6 6dB Bandwidth Measurement

4.6.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission Condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	16.38	16.35	0.5	Pass
157	5785	16.40	16.43	0.5	Pass
165	5825	16.42	16.43	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	17.62	17.63	0.5	Pass
157	5785	17.65	17.66	0.5	Pass
165	5825	17.64	17.66	0.5	Pass

802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	36.45	36.44	0.5	Pass
159	5795	36.50	36.42	0.5	Pass

802.11ac (VHT80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	76.47	76.48	0.5	Pass





BUREAU
VERITAS

SPECTRUM PLOT OF WORST VALUE



802.11a

802.11n (HT20)

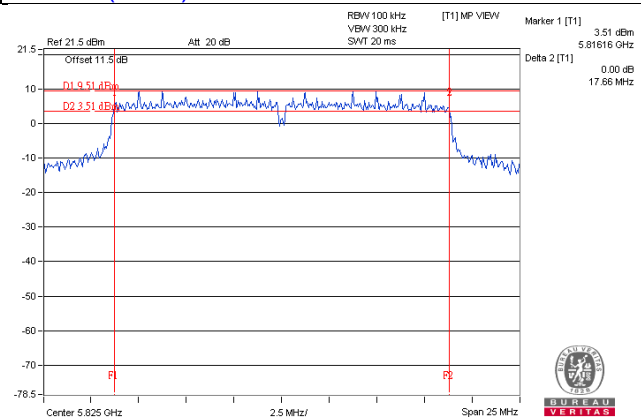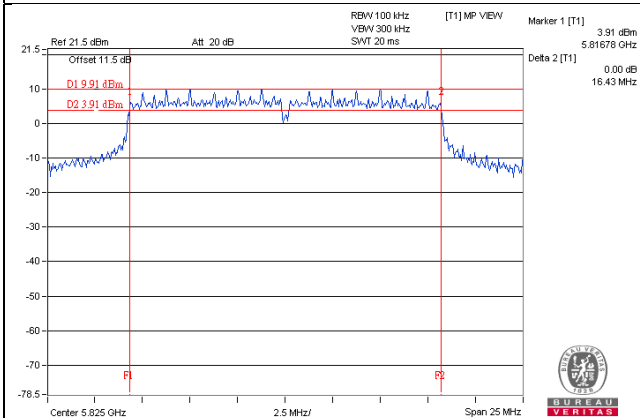

802.11n (HT40)

802.11ac (VHT80)

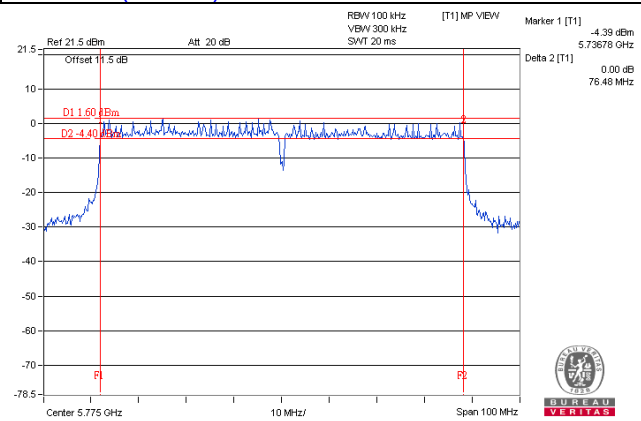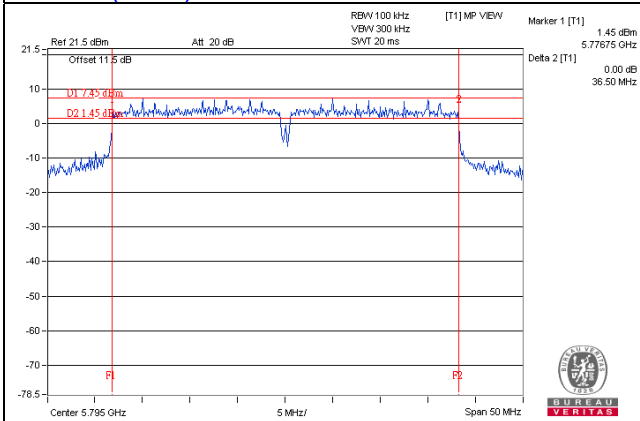

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

CH149

Horizontal

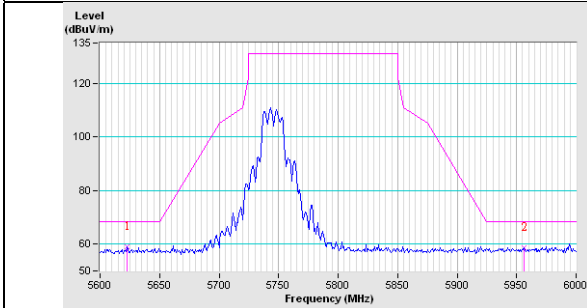


Vertical

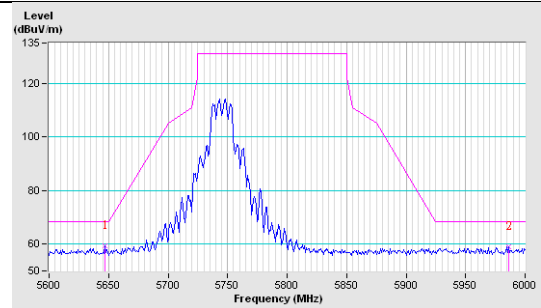


CH157

Horizontal

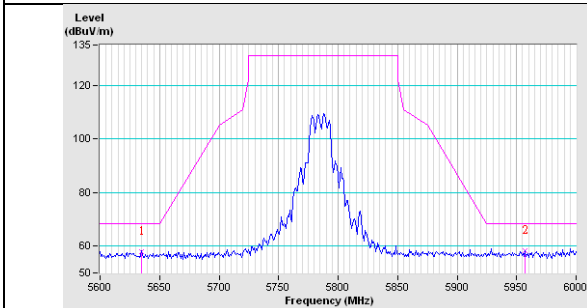


Vertical

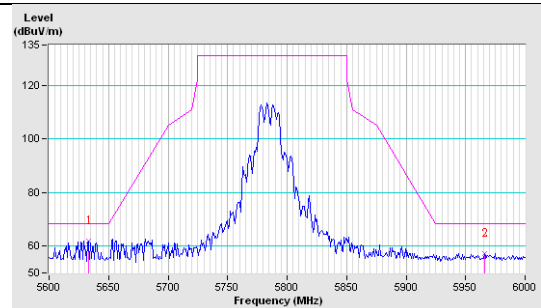


CH165

Horizontal

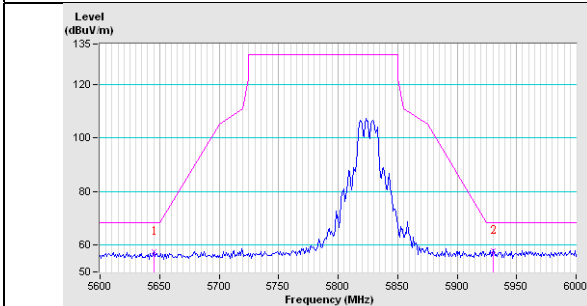


Vertical

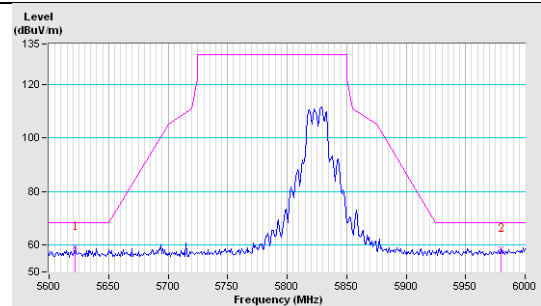


802.11n (HT20)

CH149

Horizontal

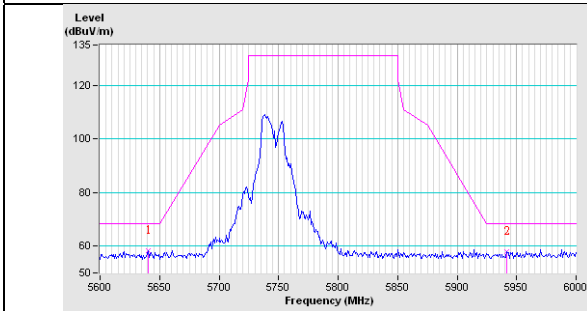


Vertical

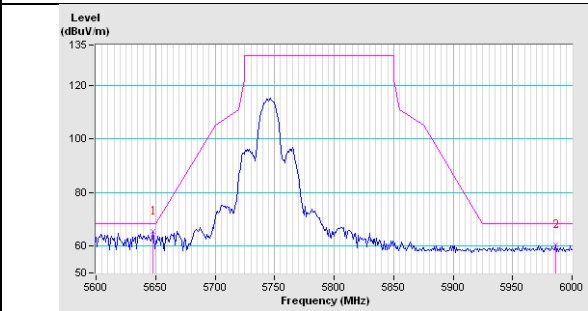


CH157

Horizontal

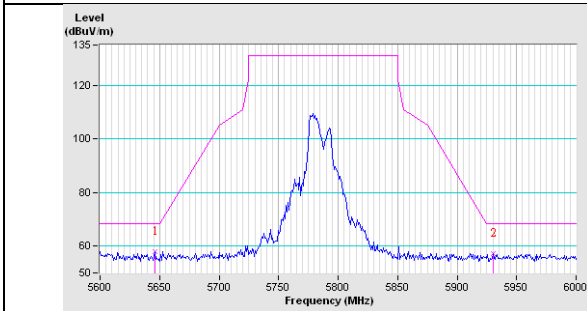


Vertical

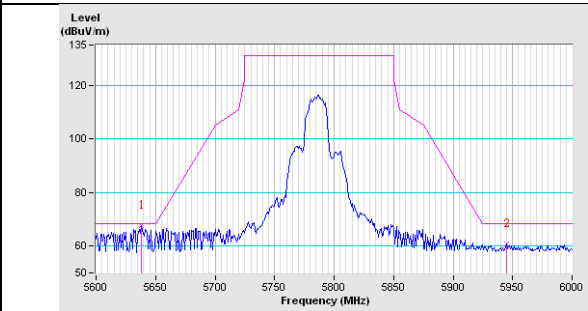


CH165

Horizontal

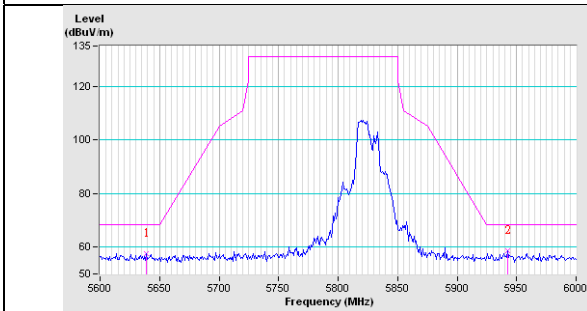


Vertical

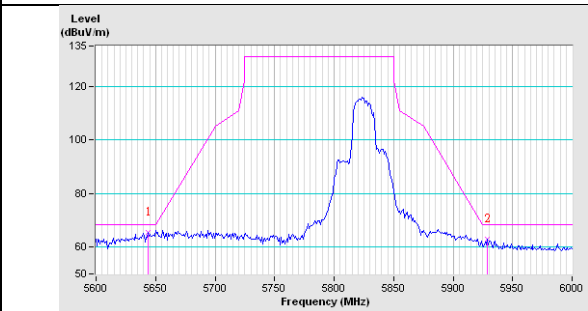


802.11n (HT40)

CH151

Horizontal

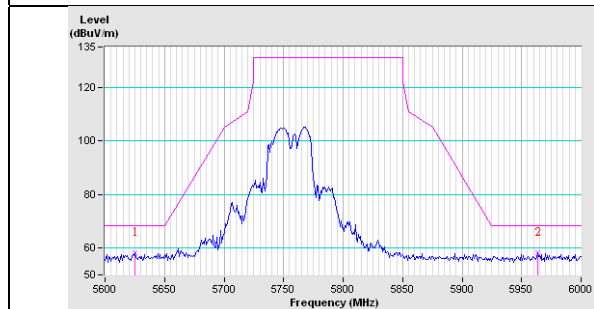


Vertical

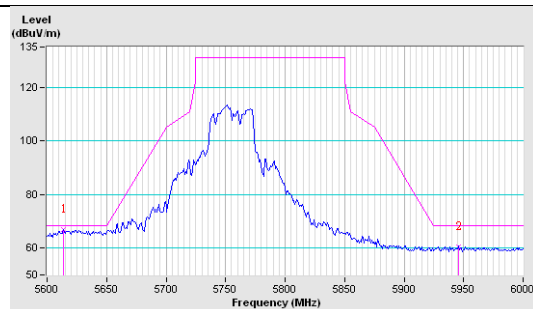


CH159

Horizontal

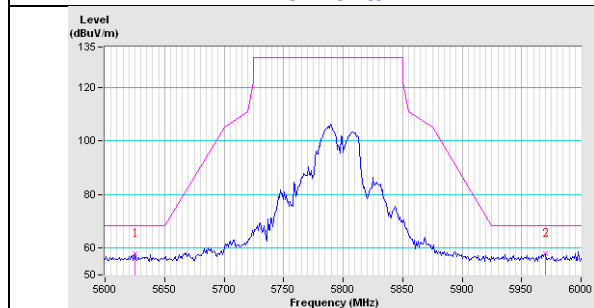


Vertical

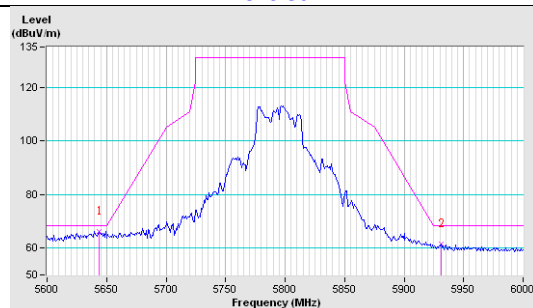


802.11ac (VHT80)

CH155

Horizontal

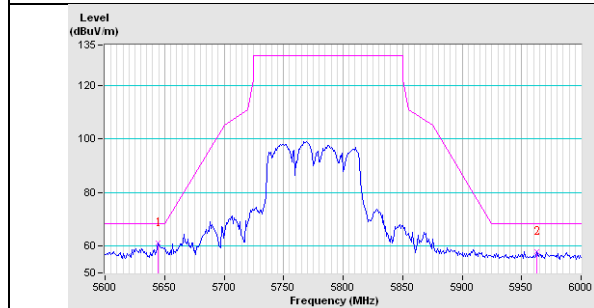

Vertical

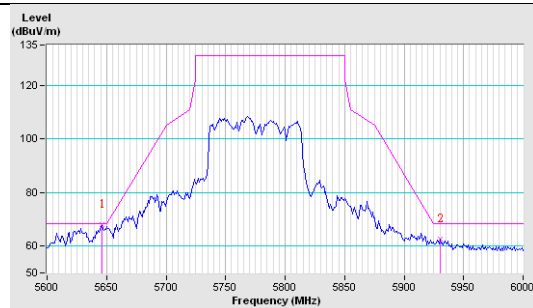

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---