


REV	DESCRIPTION OF REVISION	ENG APPD	DATE
01	INITIAL DOCUMENT CREATION	M HUMPHREY	15JUN17
02	ADD ICES; REMOVE DOUBLE INSULATION, CE, EU ADDRESS, QR	M HUMPHREY	19JUN17
03	ADD DOUBLE INSULATED LOGO	M HUMPHREY	22JUN17
04	SERIAL/MAC/WPS FIELDS ENLARGED	M HUMPHREY	07JUL17
05	FCC LOGO ADDED, EU ADDRESS REMOVED	M HUMPHREY	10JUL17
06	UNDO TYPOGRAPHIC LIGATURE FOR "FI" IN DEFAULT ACCESS	M HUMPHREY	22AUG17
07	INPUT RATING CHANGE, REMOVE DOUBLE INSULATED LOGO	M HUMPHREY	29AUG17

NOTE:

1. REFER TO NETGEAR SPEC. DOC-00093 FOR COLOR TOLERANCES.
2. INK COLOR IS SHOWN TO THE RIGHT.
3. DIE LINES ARE MAGENTA COLOR AND DO NOT PRINT.
4. MAC, SERIAL, AND WPS PIN NUMBERS TO BE PRINTED BY THE ODM IN ARIAL 6PT.
5. See NTGR DOC-00112 for SN standard.
6. NTGR MAC, SERIAL, AND WPS PIN barcode to be encoded QR and include printed characters to the right of the barcode.
7. INSURE COUNTRY OF ORIGIN IS CORRECT.
 - A. IF COUNTRY OF ORIGIN IS PRE-PRINTED, UNHIDE THE APPROPRIATE COUNTRY OF ORIGIN LAYER AND INCLUDE COUNTRY OF ORIGIN ON LABEL.
 - B. IF COUNTRY OF ORIGIN IS POST-PRINTED USING A THERMAL PRINTER (OR EQUIVALENT), OMIT TEXT FROM ARTWORK (USE LAYERS).

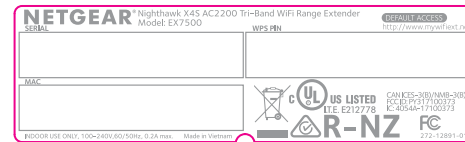

 White

 PANTONE Cool Grey 7C NETGEAR 490-10039-01

AUTHOR: M HUMPHREY	TITLE: AW,PLBL,EX7500NA,V1	NETGEAR	
SHEET: 1 of 1	THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WHEREWITH IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF NETGEAR, INC.	P/N: AW-13806-01	REV: 07