

FCC Test Report

Report No.: RF170410E06

FCC ID: PY317200376

Test Model: WAC505

Received Date: Apr. 10, 2017

Test Date: May 13 to 17, 2017

Issued Date: May 28, 2017

Applicant: NETGEAR, INC.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards	17
4 Test Types and Results	18
4.1 Radiated Emission and Bandedge Measurement	18
4.1.1 Limits of Radiated Emission and Bandedge Measurement	18
4.1.2 Test Instruments	19
4.1.3 Test Procedures	20
4.1.4 Deviation from Test Standard	21
4.1.5 Test Setup	21
4.1.6 EUT Operating Conditions	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	36
4.2.1 Limits of Conducted Emission Measurement	36
4.2.2 Test Instruments	36
4.2.3 Test Procedures	37
4.2.4 Deviation from Test Standard	37
4.2.5 Test Setup	37
4.2.6 EUT Operating Conditions	37
4.2.7 Test Results (Mode 1)	38
4.2.8 Test Results (Mode 2)	40
4.2.9 Test Results (Mode 3)	42
4.3 6dB Bandwidth Measurement	44
4.3.1 Limits of 6dB Bandwidth Measurement	44
4.3.2 Test Setup	44
4.3.3 Test Instruments	44
4.3.4 Test Procedure	44
4.3.5 Deviation from Test Standard	44
4.3.6 EUT Operating Conditions	44
4.3.7 Test Result	45
4.4 Conducted Output Power Measurement	47
4.4.1 Limits of Conducted Output Power Measurement	47
4.4.2 Test Setup	47
4.4.3 Test Instruments	47
4.4.4 Test Procedures	47
4.4.5 Deviation from Test Standard	47
4.4.6 EUT Operating Conditions	47
4.4.7 Test Results	48
4.5 Power Spectral Density Measurement	50
4.5.1 Limits of Power Spectral Density Measurement	50
4.5.2 Test Setup	50
4.5.3 Test Instruments	50
4.5.4 Test Procedure	50

4.5.5	Deviation from Test Standard	50
4.5.6	EUT Operating Condition	50
4.5.7	Test Results	51
4.6	Conducted Out of Band Emission Measurement	54
4.6.1	Limits of Conducted Out of Band Emission Measurement.....	54
4.6.2	Test Setup.....	54
4.6.3	Test Instruments	54
4.6.4	Test Procedure	54
4.6.5	Deviation from Test Standard	54
4.6.6	EUT Operating Condition	54
4.6.7	Test Results	54
5	Pictures of Test Arrangements.....	63
	Appendix – Information on the Testing Laboratories	64

Release Control Record

Issue No.	Description	Date Issued
RF170410E06	Original release.	May 28, 2017

1 Certificate of Conformity

Product: AC WiFi Business Access Point

Brand: NETGEAR

Test Model: WAC505

Sample Status: ENGINEERING SAMPLE

Applicant: NETGEAR, INC.

Test Date: May 13 to 17, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** May 28, 2017
Wendy Wu / Specialist

Approved by : May Chen , **Date:** May 28, 2017
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.12dB at 0.30031MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz, 2483.50MHz, 2490.00MHz, 7311.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.30 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.16 dB
	6GHz ~ 18GHz	4.91 dB
	18GHz ~ 40GHz	5.30 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC WiFi Business Access Point
Brand	NETGEAR
Test Model	WAC505
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 12V from power adapter or DC 48V from POE
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: CDD Mode: 621.974mW Beamforming Mode: 616.913mW 5.18 ~ 5.24GHz CDD Mode: 426.701mW Beamforming Mode: 405.274mW 5.745 ~ 5.825GHz CDD Mode: 557.248mW Beamforming Mode: 527.379mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. The EUT must be supplied with a POE (only for test not for sale) or power adapter and following different models could be chosen as following table:

Adapter				
No.	Brand	Model No.	P/N	Spec.
1	NETGEAR	2ABL030F 1	332-10758-01	AC Input: 100-120Vac, 1A, 50/60Hz DC Output: 12V, 2.5A DC Output cable: Unshielded, 1.8m
2	NETGEAR	ADS-40FPA-12	332-10759-01	AC Input: 100-120Vac, 1A, 60Hz DC Output: 12V, 2.5A DC Output cable: Unshielded, 1.8m

POE (only for test not for sale)

No.	Brand	Model No.	Spec.
1	Microsemi Corp.	PD-3501G/AC	AC Input: 100-240Vac, 0.43A, 50/60Hz DC Output: 48V, 0.35A

Note:

1. From the above adapters and POE, the worse case was found in Adapter 2. Therefore only the test data of the mode was recorded in this report.

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	WLAN 5GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The antennas provided to the EUT, please refer to the following table:

Antenna No.	Brand	Model	Ant. Gain(dBi)	Frequency range (GHz)	Antenna Type	Connector Type	Cable Length
1	Master Wave Technology	98P2JMIPF018	3.07	2.4~2.4835	PCB	i-pex(MHF)	79mm
2	Master Wave Technology	98P2JMIPF018	3.07	2.4~2.4835	PCB	i-pex(MHF)	79mm
3	Master Wave Technology	98P2KUIPF020	4.01	5.15~5.85	PCB	i-pex(MHF)	89mm
4	Master Wave Technology	98P2KUIPF019	3.84	5.15~5.85	PCB	i-pex(MHF)	41mm

4. The EUT incorporates a MIMO function.

For 2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
VHT20	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
VHT40	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
For 5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS 0~8, Nss=1	2TX	2RX
	MCS 0~8, Nss=2	2TX	2RX
802.11ac (VHT40)	MCS 0~9, Nss=1	2TX	2RX
	MCS 0~9, Nss=2	2TX	2RX
802.11ac (VHT80)	MCS 0~9, Nss=1	2TX	2RX
	MCS 0~9, Nss=2	2TX	2RX

Note:

- All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
- The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)
- The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20:

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40:

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
1	-	-	√	-	Power from adapter 1
2	√	√	√	√	Power from adapter 2
3	-	-	√	-	Power from POE

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE $<$ 1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
Beamforming Mode (Output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	22deg. C, 63%RH	120Vac, 60Hz	Rey Chen
RE $<$ 1G	23deg. C, 66%RH	120Vac, 60Hz	Terry Huang
PLC	25deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $12.244/12.35 = 0.991$

802.11g: Duty cycle = $2.062/2.149 = 0.96$, Duty factor = $10 * \log(1/0.96) = 0.18$

802.11n (HT20): Duty cycle = $4.99/5.098 = 0.979$, Duty factor = $10 * \log(1/0.979) = 0.09$

802.11n (HT40): Duty cycle = $2.425/2.522 = 0.962$, Duty factor = $10 * \log(1/0.962) = 0.17$

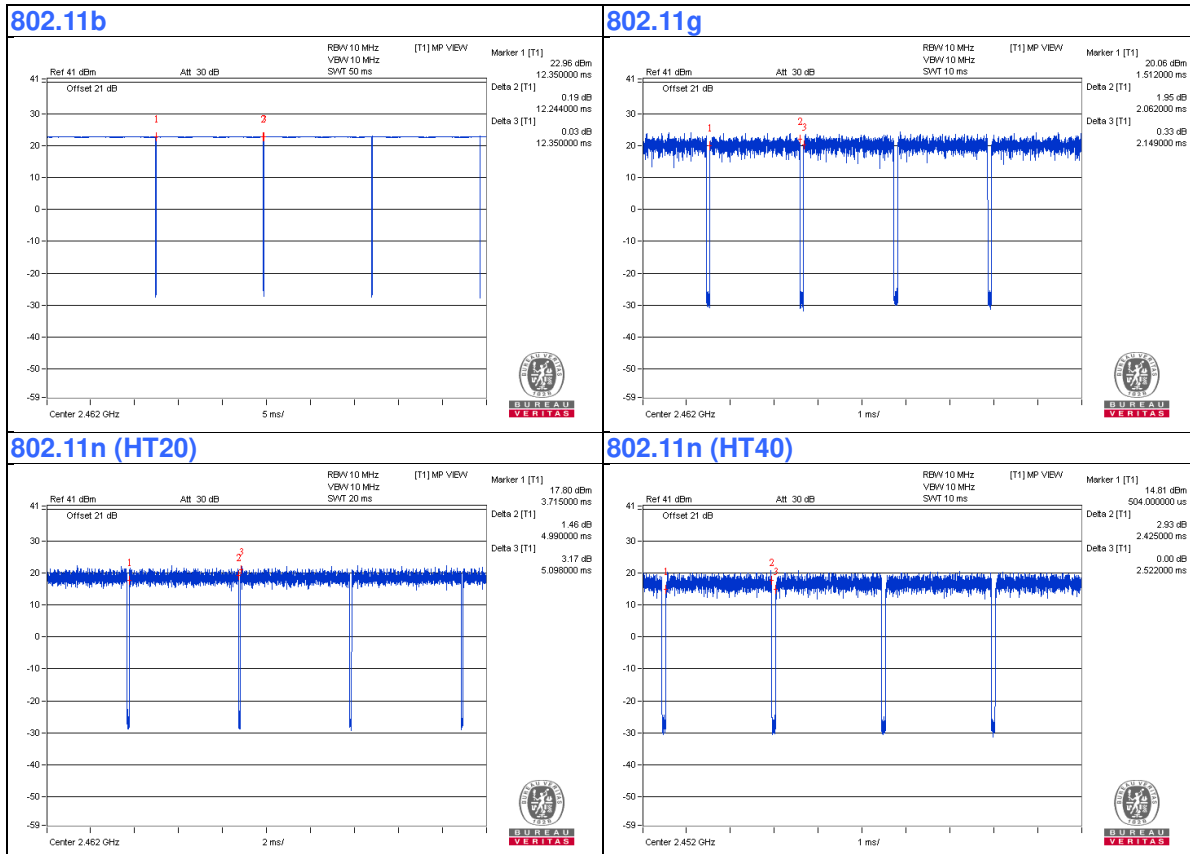

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5440	6FC7F12	FCC DoC	Provided by Lab
B.	POE	Power Dsine	PD-3501	NA	NA	Supplied by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	3	No	0	Provided by Lab

3.4.1 Configuration of System under Test

Mode 1 & Mode 2:

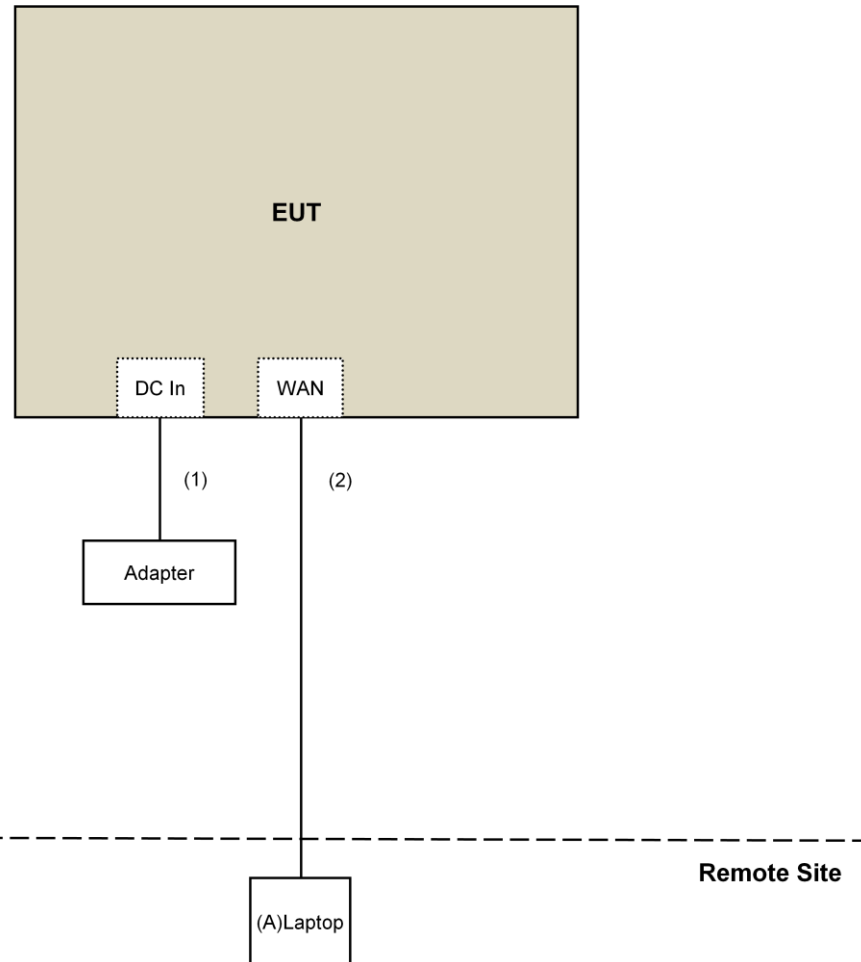

Mode 3:

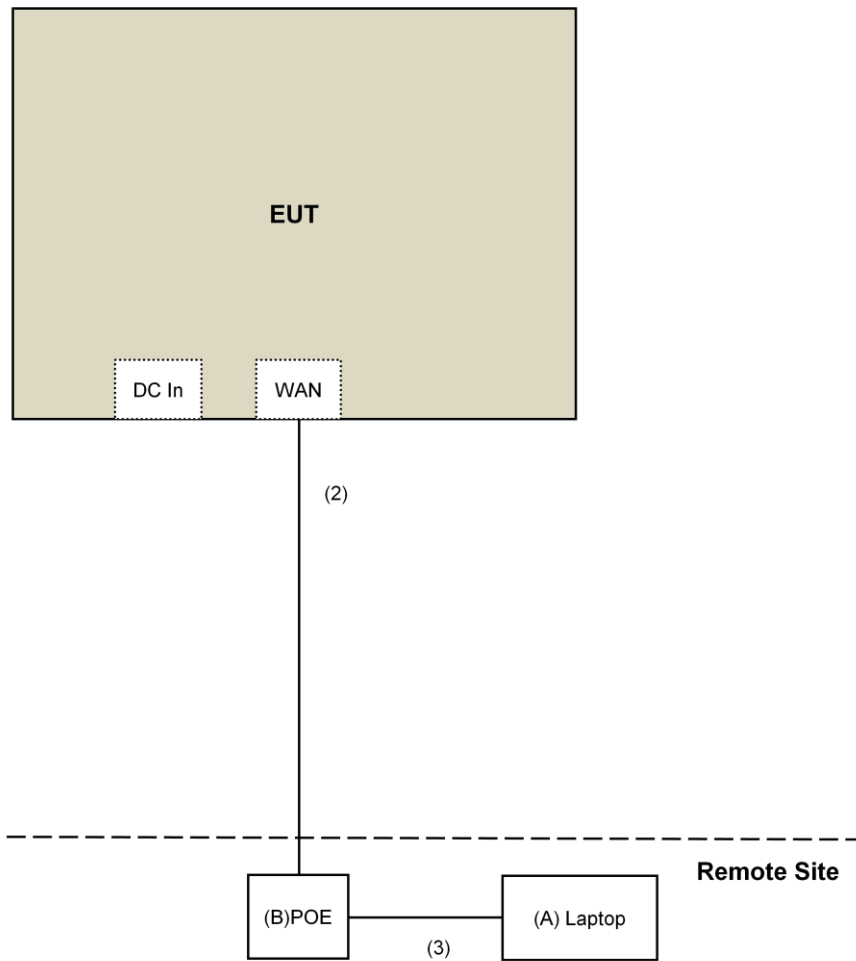

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v04
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 20, 2016	July 19, 2017
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 10, 2016	Nov. 09, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Dec. 13, 2016	Dec. 12, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 05, 2016	Oct. 04, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 27, 2016	Dec. 26, 2017
Pre-Amplifier EMCI	EMC12630SE	980385	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160923 150318 150323	Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017	Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018
Pre-Amplifier EMCI	EMC184045SE	980387	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSv40	100964	June 28, 2016	June 27, 2017
Power meter Anritsu	ML2495A	0824006	May 26, 2016	May 25, 2017
Power sensor Anritsu	MA2411B	0738172	May 26, 2016	May 25, 2017

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The FCC Site Registration No. is 292998
5. The CANADA Site Registration No. is 20331-2
- 6 Loop antenna was used for all emissions below 30 MHz.
7. Tested Date: May 13 to 17, 2017

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

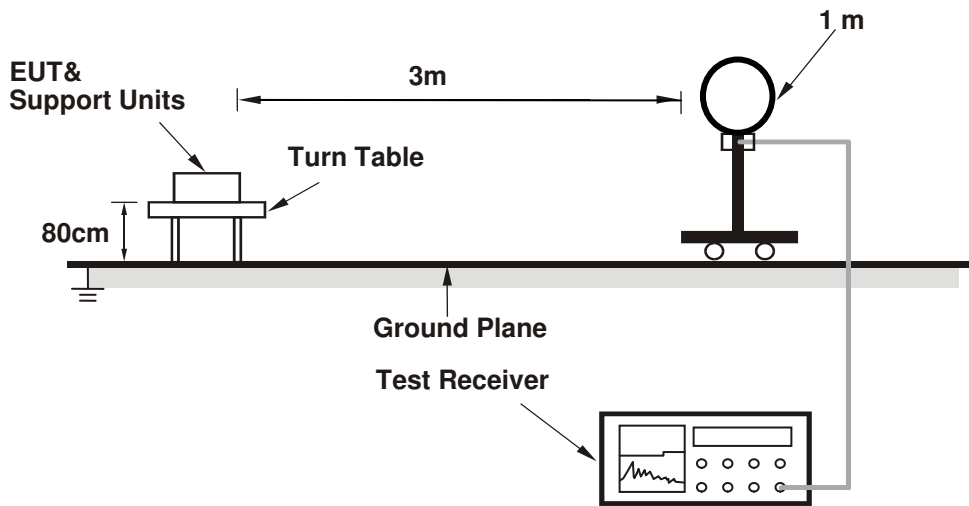

For Radiated emission 30MHz to 1GHz

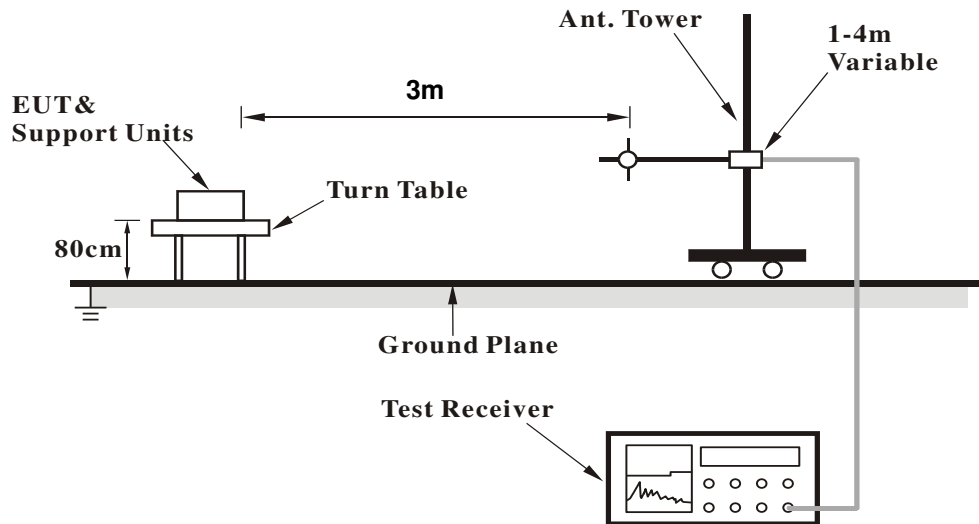

For Radiated emission above 1GHz

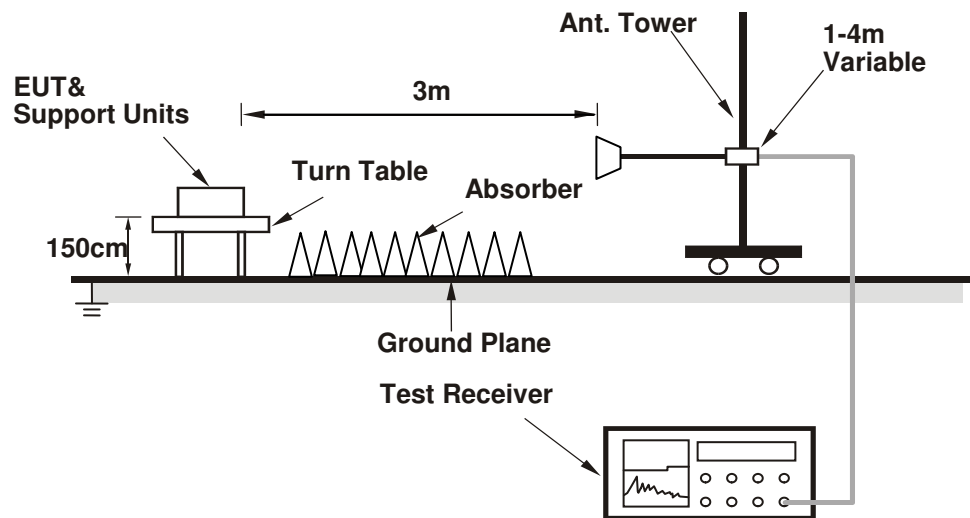

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Contorlling software (QCA Radio Control Toolkit Version3.0187.0) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.0 PK	74.0	-13.0	1.21 H	159	63.1	-2.1
2	2390.00	53.8 AV	54.0	-0.2	1.21 H	159	55.9	-2.1
3	*2412.00	115.0 PK			1.21 H	159	117.0	-2.0
4	*2412.00	112.3 AV			1.21 H	159	114.3	-2.0
5	4824.00	44.8 PK	74.0	-29.2	1.10 H	223	42.6	2.2
6	4824.00	42.4 AV	54.0	-11.6	1.10 H	223	40.2	2.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.7 PK	74.0	-17.3	1.00 V	68	58.8	-2.1
2	2390.00	50.7 AV	54.0	-3.3	1.00 V	68	52.8	-2.1
3	*2412.00	98.2 PK			1.00 V	68	100.2	-2.0
4	*2412.00	95.1 AV			1.00 V	68	97.1	-2.0
5	4824.00	43.6 PK	74.0	-30.4	2.30 V	73	41.4	2.2
6	4824.00	41.2 AV	54.0	-12.8	2.30 V	73	39.0	2.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2378.00	59.5 PK	74.0	-14.5	1.23 H	155	61.7	-2.2
2	2378.00	50.8 AV	54.0	-3.2	1.23 H	155	53.0	-2.2
3	*2437.00	119.2 PK			1.23 H	155	121.2	-2.0
4	*2437.00	116.7 AV			1.23 H	155	118.7	-2.0
5	2483.50	59.2 PK	74.0	-14.8	1.23 H	155	61.0	-1.8
6	2483.50	49.5 AV	54.0	-4.5	1.23 H	155	51.3	-1.8
7	4874.00	48.8 PK	74.0	-25.2	1.18 H	214	46.5	2.3
8	4874.00	46.7 AV	54.0	-7.3	1.18 H	214	44.4	2.3
9	7311.00	57.2 PK	74.0	-16.8	1.36 H	133	48.6	8.6
10	7311.00	53.9 AV	54.0	-0.1	1.36 H	133	45.3	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2378.00	51.6 PK	74.0	-22.4	1.00 V	76	53.8	-2.2
2	2378.00	42.7 AV	54.0	-11.3	1.00 V	76	44.9	-2.2
3	*2437.00	102.3 PK			1.00 V	76	104.3	-2.0
4	*2437.00	99.8 AV			1.00 V	76	101.8	-2.0
5	2483.50	51.3 PK	74.0	-22.7	1.00 V	76	53.1	-1.8
6	2483.50	41.5 AV	54.0	-12.5	1.00 V	76	43.3	-1.8
7	4874.00	48.0 PK	74.0	-26.0	2.23 V	65	45.7	2.3
8	4874.00	45.7 AV	54.0	-8.3	2.23 V	65	43.4	2.3
9	7311.00	55.0 PK	74.0	-19.0	1.04 V	334	46.4	8.6
10	7311.00	51.7 AV	54.0	-2.3	1.04 V	334	43.1	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.1 PK			1.18 H	158	116.0	-1.9
2	*2462.00	111.5 AV			1.18 H	158	113.4	-1.9
3	2488.00	61.3 PK	74.0	-12.7	1.18 H	158	63.1	-1.8
4	2488.00	53.8 AV	54.0	-0.2	1.18 H	158	55.6	-1.8
5	4924.00	43.6 PK	74.0	-30.4	1.14 H	214	41.1	2.5
6	4924.00	41.5 AV	54.0	-12.5	1.14 H	214	39.0	2.5
7	7386.00	52.8 PK	74.0	-21.2	1.35 H	171	44.2	8.6
8	7386.00	48.9 AV	54.0	-5.1	1.35 H	171	40.3	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.3 PK			1.00 V	72	99.2	-1.9
2	*2462.00	94.3 AV			1.00 V	72	96.2	-1.9
3	2488.00	56.6 PK	74.0	-17.4	1.00 V	72	58.4	-1.8
4	2488.00	43.0 AV	54.0	-11.0	1.00 V	72	44.8	-1.8
5	4924.00	43.5 PK	74.0	-30.5	2.24 V	50	41.0	2.5
6	4924.00	40.9 AV	54.0	-13.1	2.24 V	50	38.4	2.5
7	7386.00	50.1 PK	74.0	-23.9	1.06 V	343	41.5	8.6
8	7386.00	46.6 AV	54.0	-7.4	1.06 V	343	38.0	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.4 PK	74.0	-6.6	1.22 H	156	69.5	-2.1
2	2390.00	53.8 AV	54.0	-0.2	1.22 H	156	55.9	-2.1
3	*2412.00	117.2 PK			1.22 H	156	119.2	-2.0
4	*2412.00	104.8 AV			1.22 H	156	106.8	-2.0
5	4824.00	43.8 PK	74.0	-30.2	1.17 H	140	41.6	2.2
6	4824.00	31.4 AV	54.0	-22.6	1.17 H	140	29.2	2.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	3.93 V	76	66.2	-2.1
2	2390.00	47.3 AV	54.0	-6.7	3.93 V	76	49.4	-2.1
3	*2412.00	109.8 PK			3.93 V	76	111.8	-2.0
4	*2412.00	97.4 AV			3.93 V	76	99.4	-2.0
5	4824.00	44.1 PK	74.0	-29.9	1.34 V	243	41.9	2.2
6	4824.00	31.9 AV	54.0	-22.1	1.34 V	243	29.7	2.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.4 PK	74.0	-8.6	1.20 H	154	67.5	-2.1
2	2390.00	51.0 AV	54.0	-3.0	1.20 H	154	53.1	-2.1
3	*2437.00	120.7 PK			1.20 H	154	122.7	-2.0
4	*2437.00	109.0 AV			1.20 H	154	111.0	-2.0
5	2483.50	64.5 PK	74.0	-9.5	1.20 H	154	66.3	-1.8
6	2483.50	50.2 AV	54.0	-3.8	1.20 H	154	52.0	-1.8
7	4874.00	44.1 PK	74.0	-29.9	1.18 H	148	41.8	2.3
8	4874.00	31.5 AV	54.0	-22.5	1.18 H	148	29.2	2.3
9	7311.00	55.9 PK	74.0	-18.1	1.26 H	210	47.3	8.6
10	7311.00	43.7 AV	54.0	-10.3	1.26 H	210	35.1	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	3.92 V	86	64.6	-2.1
2	2390.00	45.1 AV	54.0	-8.9	3.92 V	86	47.2	-2.1
3	*2437.00	113.5 PK			3.92 V	86	115.5	-2.0
4	*2437.00	102.2 AV			3.92 V	86	104.2	-2.0
5	2483.50	61.2 PK	74.0	-12.8	3.92 V	86	63.0	-1.8
6	2483.50	44.4 AV	54.0	-9.6	3.92 V	86	46.2	-1.8
7	4874.00	43.9 PK	74.0	-30.1	1.40 V	242	41.6	2.3
8	4874.00	31.8 AV	54.0	-22.2	1.40 V	242	29.5	2.3
9	7311.00	53.9 PK	74.0	-20.1	1.80 V	159	45.3	8.6
10	7311.00	40.8 AV	54.0	-13.2	1.80 V	159	32.2	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.5 PK			1.21 H	151	116.4	-1.9
2	*2462.00	102.6 AV			1.21 H	151	104.5	-1.9
3	2483.50	66.6 PK	74.0	-7.4	1.21 H	151	68.4	-1.8
4	2483.50	53.9 AV	54.0	-0.1	1.21 H	151	55.7	-1.8
5	4924.00	44.4 PK	74.0	-29.6	1.14 H	145	41.9	2.5
6	4924.00	31.6 AV	54.0	-22.4	1.14 H	145	29.1	2.5
7	7386.00	55.6 PK	74.0	-18.4	1.25 H	195	47.0	8.6
8	7386.00	43.7 AV	54.0	-10.3	1.25 H	195	35.1	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.7 PK			3.91 V	62	109.6	-1.9
2	*2462.00	95.7 AV			3.91 V	62	97.6	-1.9
3	2483.50	63.2 PK	74.0	-10.8	3.91 V	62	65.0	-1.8
4	2483.50	47.5 AV	54.0	-6.5	3.91 V	62	49.3	-1.8
5	4924.00	43.6 PK	74.0	-30.4	1.42 V	249	41.1	2.5
6	4924.00	31.5 AV	54.0	-22.5	1.42 V	249	29.0	2.5
7	7386.00	53.8 PK	74.0	-20.2	1.81 V	173	45.2	8.6
8	7386.00	40.4 AV	54.0	-13.6	1.81 V	173	31.8	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.00 H	153	69.9	-2.1
2	2390.00	53.8 AV	54.0	-0.2	1.00 H	153	55.9	-2.1
3	*2412.00	113.6 PK			1.00 H	153	115.6	-2.0
4	*2412.00	101.9 AV			1.00 H	153	103.9	-2.0
5	4824.00	44.7 PK	74.0	-29.3	1.12 H	145	42.5	2.2
6	4824.00	31.9 AV	54.0	-22.1	1.12 H	145	29.7	2.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.6 PK	74.0	-9.4	3.90 V	47	66.7	-2.1
2	2390.00	47.7 AV	54.0	-6.3	3.90 V	47	49.8	-2.1
3	*2412.00	106.8 PK			3.90 V	47	108.8	-2.0
4	*2412.00	94.7 AV			3.90 V	47	96.7	-2.0
5	4824.00	43.6 PK	74.0	-30.4	1.45 V	239	41.4	2.2
6	4824.00	31.3 AV	54.0	-22.7	1.45 V	239	29.1	2.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.20 H	152	69.3	-2.1
2	2390.00	50.0 AV	54.0	-4.0	1.20 H	152	52.1	-2.1
3	*2437.00	121.6 PK			1.20 H	152	123.6	-2.0
4	*2437.00	109.5 AV			1.20 H	152	111.5	-2.0
5	2483.50	65.4 PK	74.0	-8.6	1.20 H	152	67.2	-1.8
6	2483.50	50.6 AV	54.0	-3.4	1.20 H	152	52.4	-1.8
7	4874.00	44.2 PK	74.0	-29.8	1.20 H	160	41.9	2.3
8	4874.00	31.4 AV	54.0	-22.6	1.20 H	160	29.1	2.3
9	7311.00	55.3 PK	74.0	-18.7	1.29 H	206	46.7	8.6
10	7311.00	43.3 AV	54.0	-10.7	1.29 H	206	34.7	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.3 PK	74.0	-9.7	3.95 V	68	66.4	-2.1
2	2390.00	47.2 AV	54.0	-6.8	3.95 V	68	49.3	-2.1
3	*2437.00	114.7 PK			3.95 V	68	116.7	-2.0
4	*2437.00	102.4 AV			3.95 V	68	104.4	-2.0
5	2483.50	62.7 PK	74.0	-11.3	3.95 V	68	64.5	-1.8
6	2483.50	47.8 AV	54.0	-6.2	3.95 V	68	49.6	-1.8
7	4874.00	44.6 PK	74.0	-29.4	1.41 V	241	42.3	2.3
8	4874.00	32.3 AV	54.0	-21.7	1.41 V	241	30.0	2.3
9	7311.00	53.6 PK	74.0	-20.4	1.85 V	161	45.0	8.6
10	7311.00	40.4 AV	54.0	-13.6	1.85 V	161	31.8	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.9 PK			1.26 H	155	115.8	-1.9
2	*2462.00	101.8 AV			1.26 H	155	103.7	-1.9
3	2483.50	69.4 PK	74.0	-4.6	1.26 H	155	71.2	-1.8
4	2483.50	53.9 AV	54.0	-0.1	1.26 H	155	55.7	-1.8
5	4924.00	44.3 PK	74.0	-29.7	1.20 H	133	41.8	2.5
6	4924.00	31.7 AV	54.0	-22.3	1.20 H	133	29.2	2.5
7	7386.00	56.4 PK	74.0	-17.6	1.27 H	211	47.8	8.6
8	7386.00	44.2 AV	54.0	-9.8	1.27 H	211	35.6	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.8 PK			3.86 V	51	108.7	-1.9
2	*2462.00	94.7 AV			3.86 V	51	96.6	-1.9
3	2483.50	66.5 PK	74.0	-7.5	3.86 V	51	68.3	-1.8
4	2483.50	47.8 AV	54.0	-6.2	3.86 V	51	49.6	-1.8
5	4924.00	44.1 PK	74.0	-29.9	1.44 V	250	41.6	2.5
6	4924.00	32.2 AV	54.0	-21.8	1.44 V	250	29.7	2.5
7	7386.00	53.5 PK	74.0	-20.5	1.75 V	148	44.9	8.6
8	7386.00	40.4 AV	54.0	-13.6	1.75 V	148	31.8	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.26 H	155	70.7	-2.1
2	2390.00	53.9 AV	54.0	-0.1	1.26 H	155	56.0	-2.1
3	*2422.00	107.0 PK			1.26 H	155	109.1	-2.1
4	*2422.00	98.5 AV			1.26 H	155	100.6	-2.1
5	4844.00	43.8 PK	74.0	-30.2	1.21 H	136	41.5	2.3
6	4844.00	31.5 AV	54.0	-22.5	1.21 H	136	29.2	2.3
7	7266.00	55.7 PK	74.0	-18.3	1.23 H	205	47.1	8.6
8	7266.00	43.6 AV	54.0	-10.4	1.23 H	205	35.0	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.7 PK	74.0	-8.3	3.95 V	71	67.8	-2.1
2	2390.00	47.7 AV	54.0	-6.3	3.95 V	71	49.8	-2.1
3	*2422.00	100.3 PK			3.95 V	71	102.4	-2.1
4	*2422.00	91.2 AV			3.95 V	71	93.3	-2.1
5	4844.00	44.6 PK	74.0	-29.4	1.37 V	235	42.3	2.3
6	4844.00	32.3 AV	54.0	-21.7	1.37 V	235	30.0	2.3
7	7266.00	54.4 PK	74.0	-19.6	1.76 V	158	45.8	8.6
8	7266.00	41.2 AV	54.0	-12.8	1.76 V	158	32.6	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	1.19 H	152	71.3	-2.1
2	2390.00	52.0 AV	54.0	-2.0	1.19 H	152	54.1	-2.1
3	*2437.00	112.5 PK			1.19 H	152	114.5	-2.0
4	*2437.00	103.0 AV			1.19 H	152	105.0	-2.0
5	2483.50	67.2 PK	74.0	-6.8	1.19 H	152	69.0	-1.8
6	2483.50	53.8 AV	54.0	-0.2	1.19 H	152	55.6	-1.8
7	4874.00	44.4 PK	74.0	-29.6	1.21 H	143	42.1	2.3
8	4874.00	31.9 AV	54.0	-22.1	1.21 H	143	29.6	2.3
9	7311.00	55.7 PK	74.0	-18.3	1.31 H	211	47.1	8.6
10	7311.00	43.6 AV	54.0	-10.4	1.31 H	211	35.0	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	3.87 V	59	68.4	-2.1
2	2390.00	49.1 AV	54.0	-4.9	3.87 V	59	51.2	-2.1
3	*2437.00	105.6 PK			3.87 V	59	107.6	-2.0
4	*2437.00	97.2 AV			3.87 V	59	99.2	-2.0
5	2483.50	64.4 PK	74.0	-9.6	3.87 V	59	66.2	-1.8
6	2483.50	50.7 AV	54.0	-3.3	3.87 V	59	52.5	-1.8
7	4874.00	43.9 PK	74.0	-30.1	1.41 V	229	41.6	2.3
8	4874.00	31.8 AV	54.0	-22.2	1.41 V	229	29.5	2.3
9	7311.00	53.3 PK	74.0	-20.7	1.75 V	145	44.7	8.6
10	7311.00	40.4 AV	54.0	-13.6	1.75 V	145	31.8	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	109.1 PK			1.25 H	156	111.0	-1.9
2	*2452.00	99.9 AV			1.25 H	156	101.8	-1.9
3	2490.00	69.9 PK	74.0	-4.1	1.25 H	156	71.7	-1.8
4	2490.00	53.9 AV	54.0	-0.1	1.25 H	156	55.7	-1.8
5	4904.00	44.1 PK	74.0	-29.9	1.13 H	157	41.7	2.4
6	4904.00	31.3 AV	54.0	-22.7	1.13 H	157	28.9	2.4
7	7356.00	56.2 PK	74.0	-17.8	1.28 H	201	47.6	8.6
8	7356.00	43.8 AV	54.0	-10.2	1.28 H	201	35.2	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	102.3 PK			3.93 V	62	104.2	-1.9
2	*2452.00	92.8 AV			3.93 V	62	94.7	-1.9
3	2490.00	66.7 PK	74.0	-7.3	3.93 V	62	68.5	-1.8
4	2490.00	47.6 AV	54.0	-6.4	3.93 V	62	49.4	-1.8
5	4904.00	43.8 PK	74.0	-30.2	1.46 V	235	41.4	2.4
6	4904.00	31.5 AV	54.0	-22.5	1.46 V	235	29.1	2.4
7	7356.00	54.0 PK	74.0	-20.0	1.75 V	175	45.4	8.6
8	7356.00	40.9 AV	54.0	-13.1	1.75 V	175	32.3	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.55	36.0 QP	40.0	-4.0	1.50 H	0	45.4	-9.4
2	41.47	26.0 QP	40.0	-14.0	1.00 H	2	34.4	-8.4
3	126.10	28.8 QP	43.5	-14.7	1.00 H	41	38.4	-9.6
4	161.92	31.6 QP	43.5	-11.9	1.00 H	174	39.6	-8.0
5	182.27	30.2 QP	43.5	-13.3	1.00 H	71	40.1	-9.9
6	301.94	26.9 QP	46.0	-19.1	1.50 H	121	34.5	-7.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.31	34.3 QP	40.0	-5.7	1.00 V	130	43.8	-9.5
2	40.45	33.9 QP	40.0	-6.1	1.00 V	283	42.5	-8.6
3	59.80	28.9 QP	40.0	-11.1	1.00 V	26	37.4	-8.5
4	119.99	27.0 QP	43.5	-16.5	1.00 V	209	36.9	-9.9
5	177.83	30.5 QP	43.5	-13.0	1.50 V	151	39.8	-9.3
6	450.11	26.7 QP	46.0	-19.3	1.00 V	129	30.3	-3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2016	Oct. 23, 2017
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 13, 2016	June 12, 2017
50 ohms Terminator	N/A	EMC-02	Sep. 29, 2016	Sep. 28, 2017
RF Cable	5D-FB	COCCAB-001	Sep. 30, 2016	Sep. 29, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 20, 2016	June 19, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
3. Tested Date: May 16, 2017

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

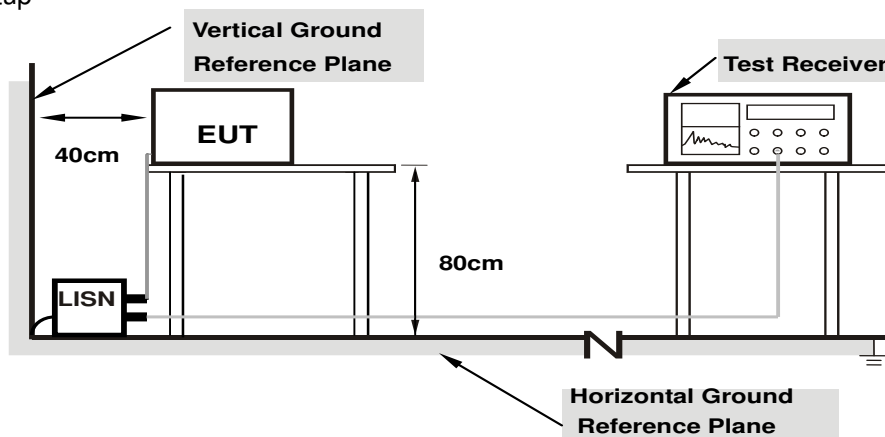

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.20	42.80	29.58	53.00	39.78	66.00	56.00	-13.00	-16.22
2	0.16172	10.20	39.75	26.63	49.95	36.83	65.38	55.38	-15.43	-18.55
3	0.20859	10.20	32.98	25.01	43.18	35.21	63.26	53.26	-20.08	-18.05
4	0.30234	10.22	36.91	34.47	47.13	44.69	60.18	50.18	-13.05	-5.49
5	5.59766	10.42	11.51	3.19	21.93	13.61	60.00	50.00	-38.07	-36.39
6	29.90603	11.85	13.30	11.59	25.15	23.44	60.00	50.00	-34.85	-26.56

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

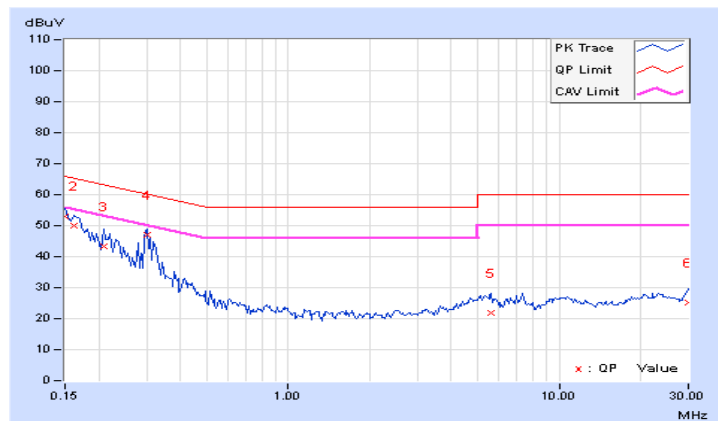


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.19	42.56	29.88	52.75	40.07	66.00	56.00	-13.25	-15.93
2	0.16172	10.19	40.00	27.28	50.19	37.47	65.38	55.38	-15.19	-17.91
3	0.18906	10.17	35.46	27.26	45.63	37.43	64.08	54.08	-18.45	-16.65
4	0.24375	10.19	27.64	15.37	37.83	25.56	61.97	51.97	-24.14	-26.41
5	0.30031	10.21	39.41	36.90	49.62	47.11	60.23	50.23	-10.61	-3.12
6	9.68750	10.61	12.38	6.94	22.99	17.55	60.00	50.00	-37.01	-32.45

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

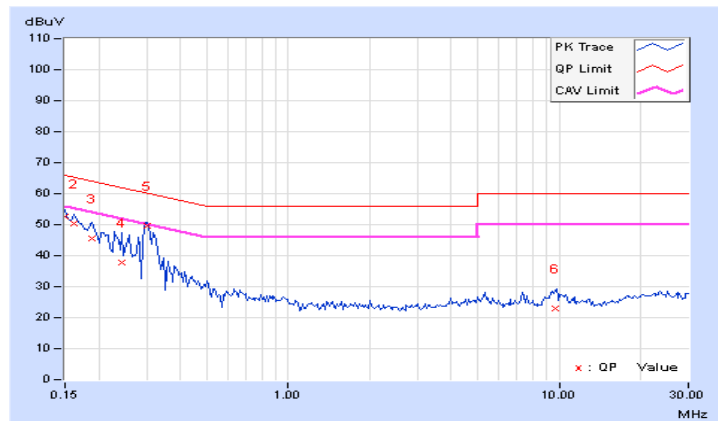


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	10.20	39.03	25.18	49.23	35.38	66.00	56.00	-16.77	-20.62
2	0.16953	10.20	36.11	22.74	46.31	32.94	64.98	54.98	-18.67	-22.04
3	0.30234	10.22	19.86	7.50	30.08	17.72	60.18	50.18	-30.10	-32.46
4	0.43125	10.24	26.97	19.78	37.21	30.02	57.23	47.23	-20.02	-17.21
5	7.34766	10.54	15.62	10.90	26.16	21.44	60.00	50.00	-33.84	-28.56
6	29.11328	11.84	13.47	11.39	25.31	23.23	60.00	50.00	-34.69	-26.77

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

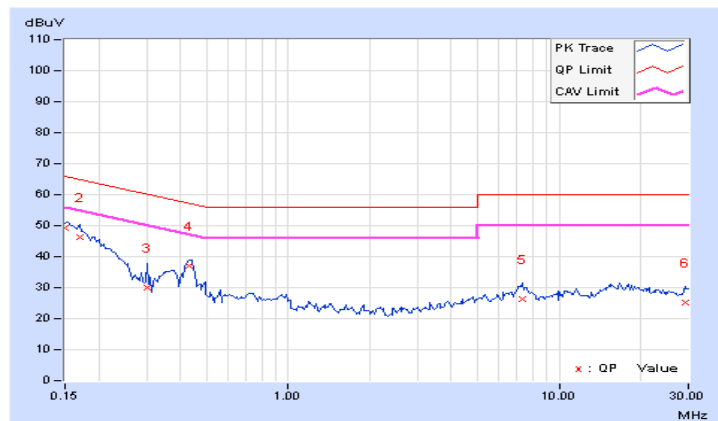


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.19	39.20	24.37	49.39	34.56	66.00	56.00	-16.61	-21.44
2	0.18906	10.17	32.72	19.82	42.89	29.99	64.08	54.08	-21.19	-24.09
3	0.27891	10.20	21.37	9.67	31.57	19.87	60.85	50.85	-29.28	-30.98
4	0.42734	10.24	22.38	14.82	32.62	25.06	57.30	47.30	-24.68	-22.24
5	7.31250	10.45	16.37	12.49	26.82	22.94	60.00	50.00	-33.18	-27.06
6	29.90625	11.40	16.41	14.19	27.81	25.59	60.00	50.00	-32.19	-24.41

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

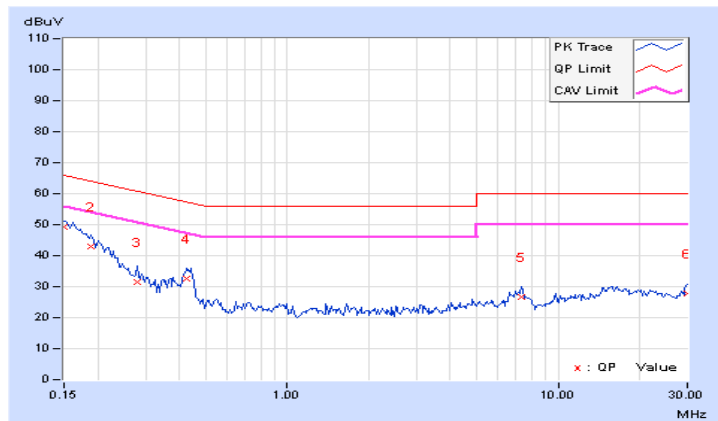


4.2.9 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15000	10.19	28.13	11.67	38.32	21.86	66.00	56.00	-27.68
2	0.17344	10.19	35.21	23.89	45.40	34.08	64.79	54.79	-19.39	-20.71
3	0.21250	10.19	31.42	21.29	41.61	31.48	63.11	53.11	-21.50	-21.63
4	0.50156	10.23	24.36	14.52	34.59	24.75	56.00	46.00	-21.41	-21.25
5	14.22266	10.97	22.84	17.26	33.81	28.23	60.00	50.00	-26.19	-21.77
6	27.82813	11.45	32.93	27.41	44.38	38.86	60.00	50.00	-15.62	-11.14

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

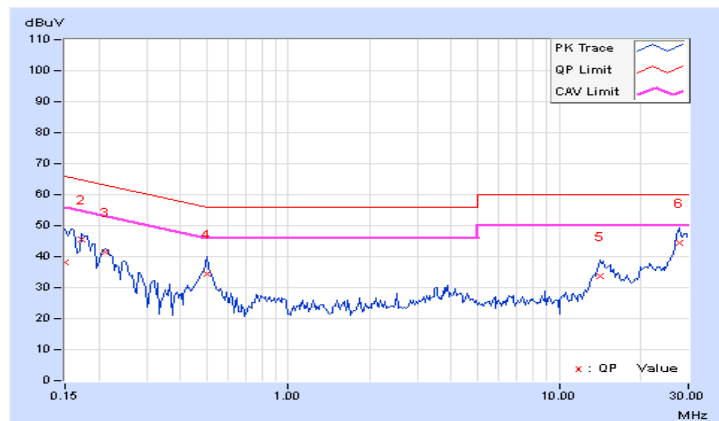


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.18	29.02	12.57	39.20	22.75	66.00	56.00	-26.80	-33.25
2	0.17734	10.17	36.23	26.67	46.40	36.84	64.61	54.61	-18.21	-17.77
3	0.21250	10.16	31.21	21.53	41.37	31.69	63.11	53.11	-21.74	-21.42
4	0.50156	10.21	25.50	17.18	35.71	27.39	56.00	46.00	-20.29	-18.61
5	14.81641	10.87	22.96	17.39	33.83	28.26	60.00	50.00	-26.17	-21.74
6	27.39453	11.06	35.38	30.92	46.44	41.98	60.00	50.00	-13.56	-8.02

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

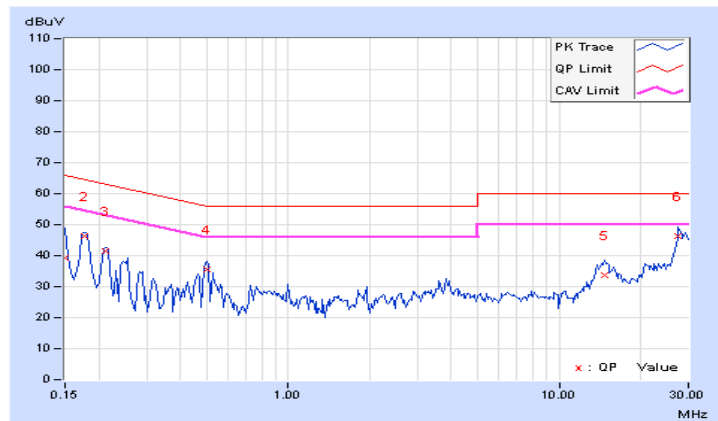


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.14	8.13	0.5	PASS
6	2437	9.09	9.10	0.5	PASS
11	2462	8.09	8.07	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.38	16.41	0.5	PASS
6	2437	16.04	16.33	0.5	PASS
11	2462	16.37	16.39	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.60	17.62	0.5	Pass
6	2437	16.99	17.00	0.5	Pass
11	2462	17.60	17.60	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.38	35.20	0.5	Pass
6	2437	35.22	35.35	0.5	Pass
9	2452	35.41	35.46	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH11

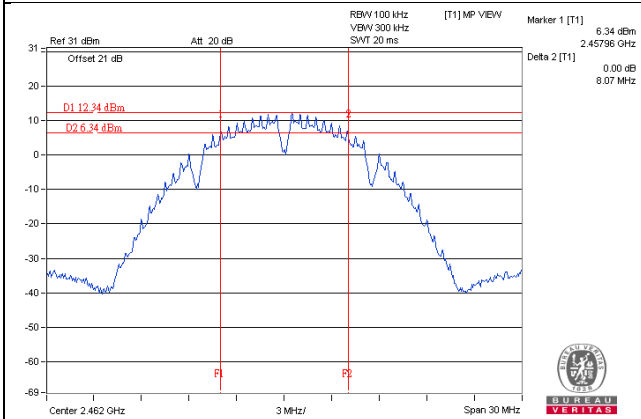


802.11g / Chain 0 : CH6

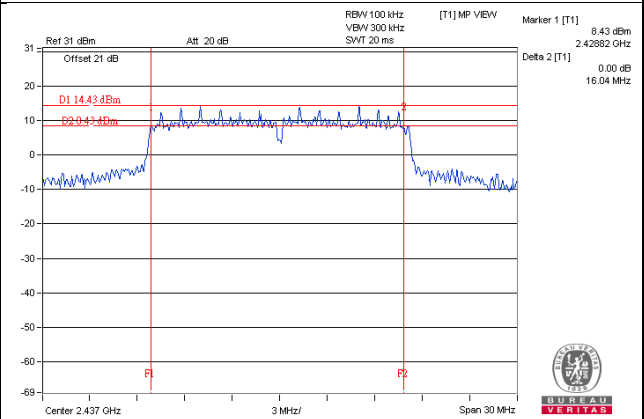

802.11n (HT20) / Chain 0 : CH6

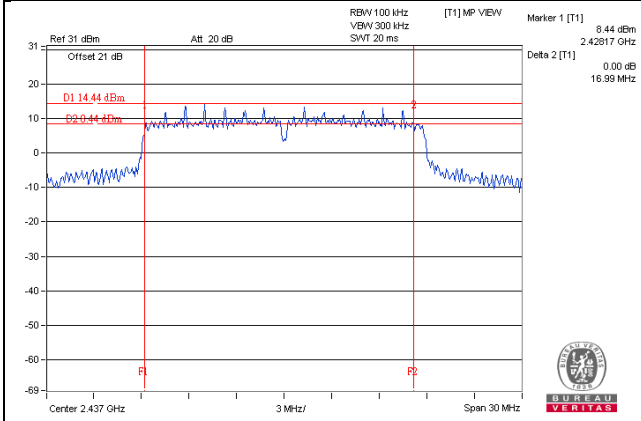

802.11n (HT40) / Chain 1 : CH3

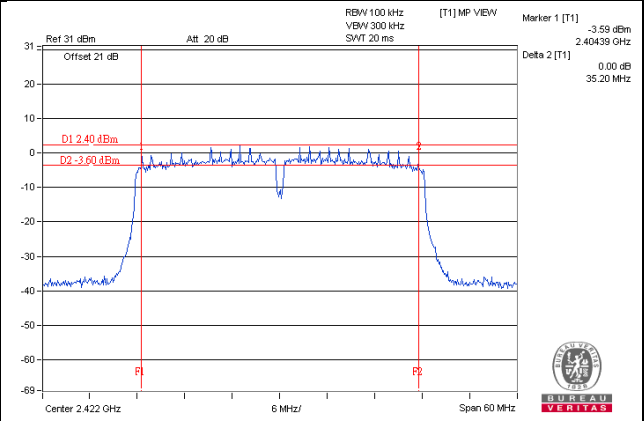

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.71	20.85	239.38	23.79	30	Pass
6	2437	24.66	24.96	605.744	27.82	30	Pass
11	2462	19.51	20.12	192.133	22.84	30	Pass

802.11g

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.72	19.97	193.068	22.86	30	Pass
6	2437	24.78	25.07	621.974	27.94	30	Pass
11	2462	18.11	18.41	134.057	21.27	30	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	16.78	16.82	95.727	19.81	30	Pass
6	2437	24.76	25.02	616.913	27.90	30	Pass
11	2462	16.78	16.93	96.96	19.87	30	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	15.83	15.92	77.366	18.89	30	Pass
6	2437	19.89	20.30	204.651	23.11	30	Pass
9	2452	17.73	18.05	123.119	20.90	30	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	16.78	16.82	95.727	19.81	29.92	Pass
6	2437	24.76	25.02	616.913	27.90	29.92	Pass
11	2462	16.78	16.93	96.96	19.87	29.92	Pass

Note: 1. Directional gain = $3.07\text{dBi} + 10\log(2) = 6.08\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (6.02 - 6) = 29.92\text{dBm}$

802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	15.83	15.92	77.366	18.89	29.92	Pass
6	2437	19.89	20.30	204.651	23.11	29.92	Pass
9	2452	17.73	18.05	123.119	20.90	29.92	Pass


Note: 1. Directional gain = $3.07\text{dBi} + 10\log(2) = 6.08\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (6.02 - 6) = 29.92\text{dBm}$

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For 802.11b

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For 802.11g, 802.11n (HT20), 802.11n (HT40)

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-9.19	3.01	-6.18	7.92	Pass
	6	2437	-7.10	3.01	-4.09	7.92	Pass
	11	2462	-10.89	3.01	-7.88	7.92	Pass
1	1	2412	-9.29	3.01	-6.28	7.92	Pass
	6	2437	-5.19	3.01	-2.18	7.92	Pass
	11	2462	-10.10	3.01	-7.09	7.92	Pass

Note: 1. Directional gain = $3.07\text{dBi} + 10\log(2) = 6.08\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.02-6) = 7.92\text{dBm}$

802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-11.36	3.01	0.18	-8.17	7.92	Pass
	6	2437	-7.90	3.01	0.18	-4.71	7.92	Pass
	11	2462	-13.94	3.01	0.18	-10.75	7.92	Pass
1	1	2412	-12.17	3.01	0.18	-8.98	7.92	Pass
	6	2437	-7.77	3.01	0.18	-4.58	7.92	Pass
	11	2462	-14.19	3.01	0.18	-11.00	7.92	Pass

Note: 1. Directional gain = $3.07\text{dBi} + 10\log(2) = 6.08\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.02-6) = 7.92\text{dBm}$

2. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-11.75	3.01	0.09	-8.65	7.92	Pass
	6	2437	-7.73	3.01	0.09	-4.63	7.92	Pass
	11	2462	-15.79	3.01	0.09	-12.69	7.92	Pass
1	1	2412	-15.77	3.01	0.09	-12.67	7.92	Pass
	6	2437	-7.78	3.01	0.09	-4.68	7.92	Pass
	11	2462	-15.16	3.01	0.09	-12.06	7.92	Pass

Note: 1. Directional gain = $3.07\text{dBi} + 10\log(2) = 6.08\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.02-6) = 7.92\text{dBm}$

2. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)


TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-12.33	3.01	0.17	-9.15	7.92	Pass
	6	2437	-16.06	3.01	0.17	-12.88	7.92	Pass
	11	2462	-17.12	3.01	0.17	-13.94	7.92	Pass
1	1	2412	-19.77	3.01	0.17	-16.59	7.92	Pass
	6	2437	-15.05	3.01	0.17	-11.87	7.92	Pass
	11	2462	-17.48	3.01	0.17	-14.30	7.92	Pass

Note: 1. Directional gain = $3.07\text{dBi} + 10\log(2) = 6.08\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.02-6) = 7.92\text{dBm}$


2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH6

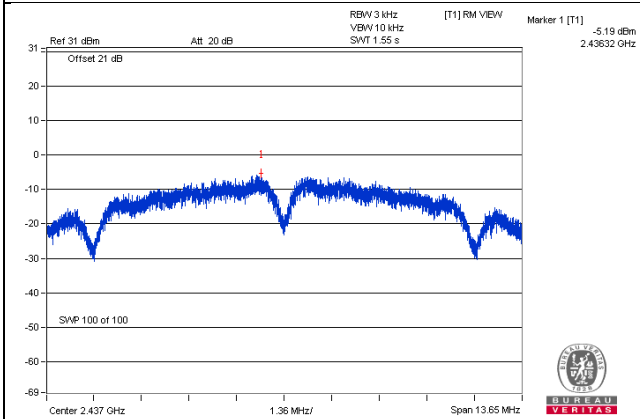


802.11g / Chain 1 : CH6

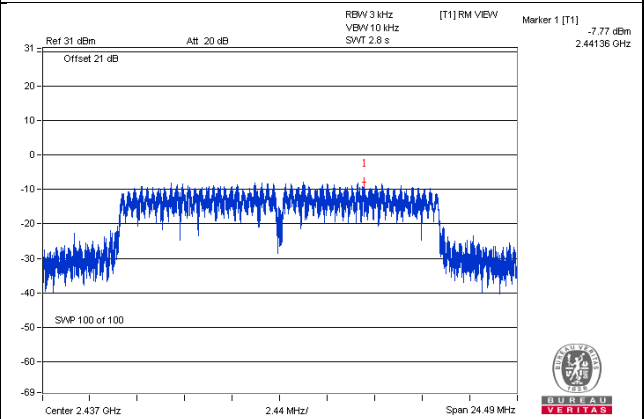

802.11n (HT20) / Chain 0 : CH6

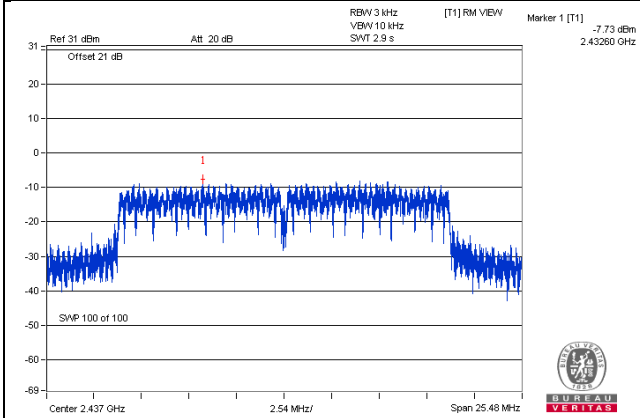

802.11n (HT40) / Chain 0 : CH3

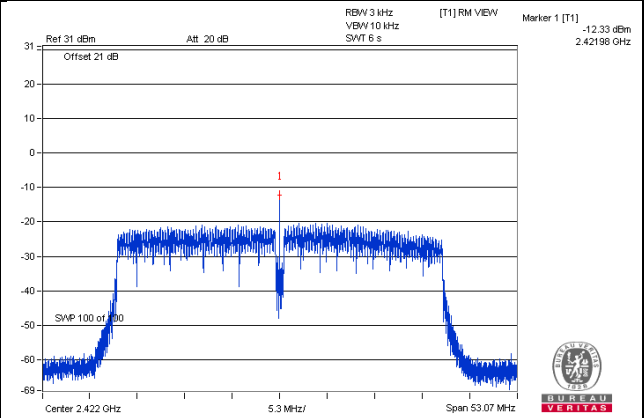


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6




4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.




802.11b

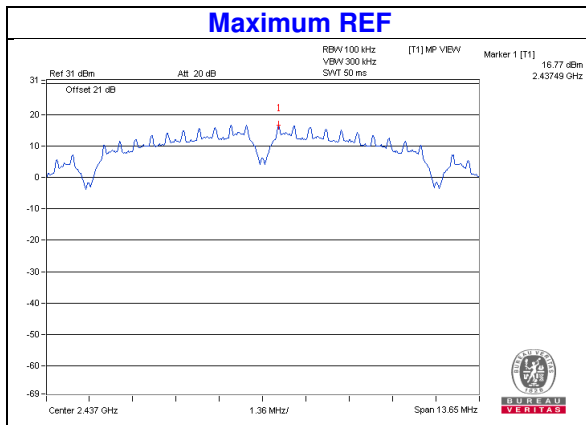


CHAIN 0

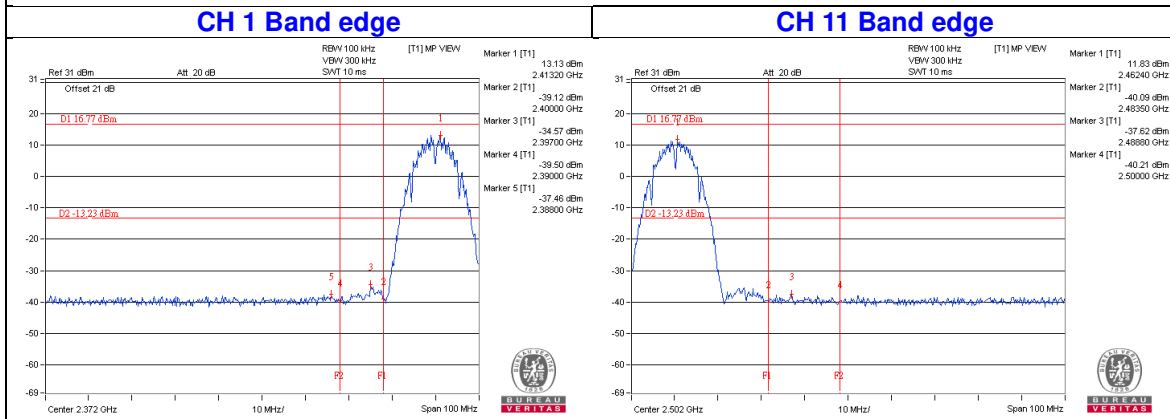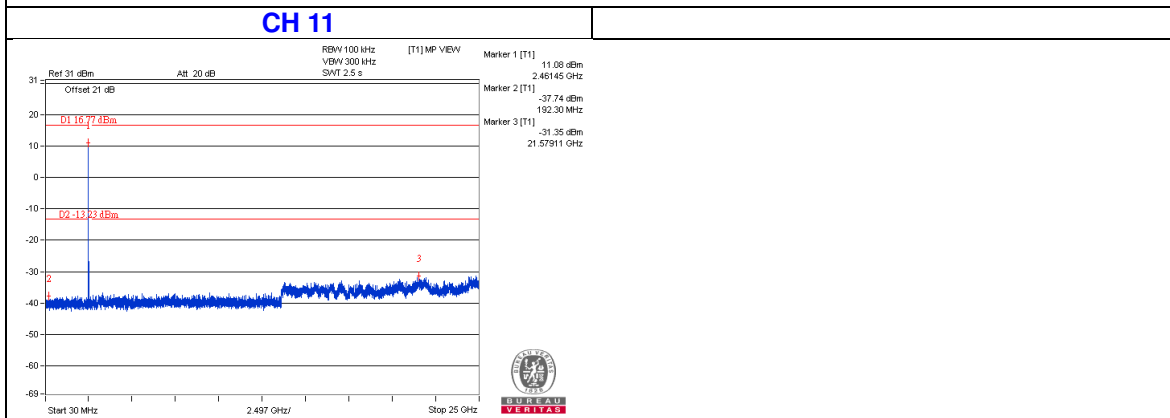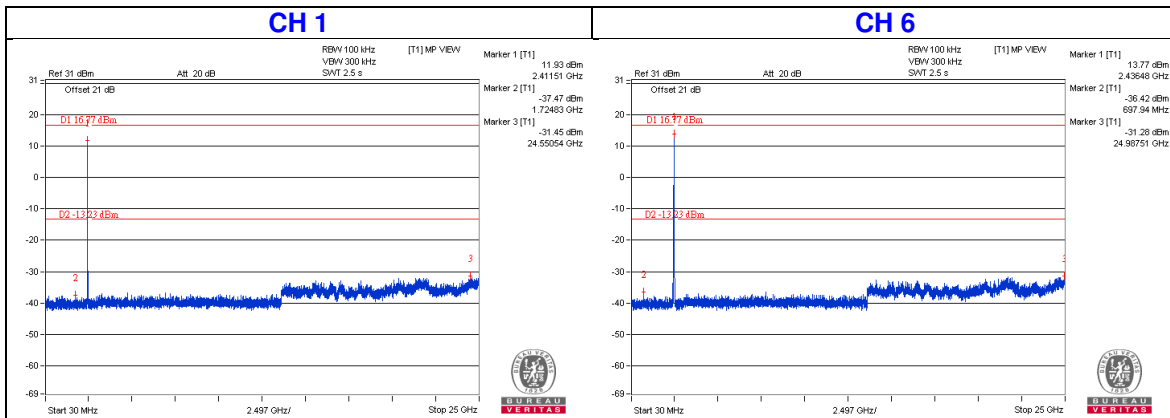




CHAIN 1

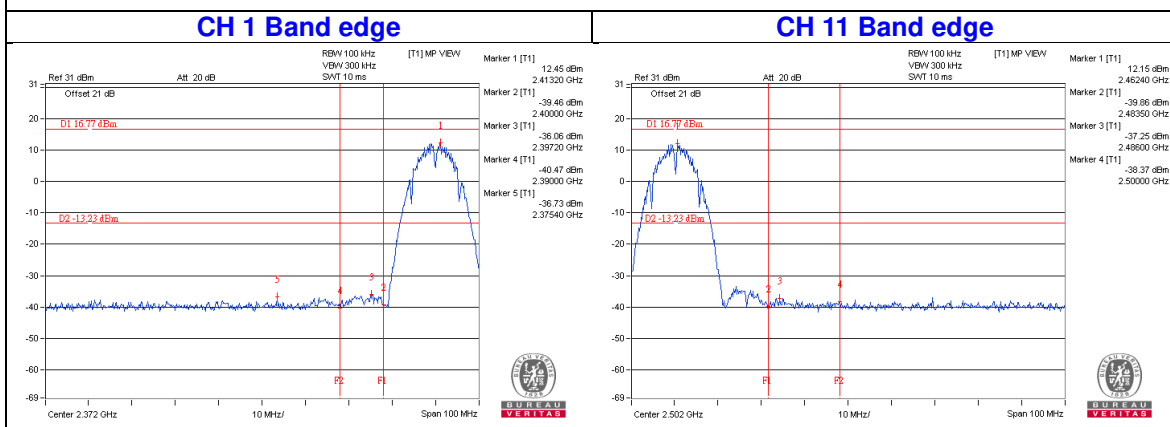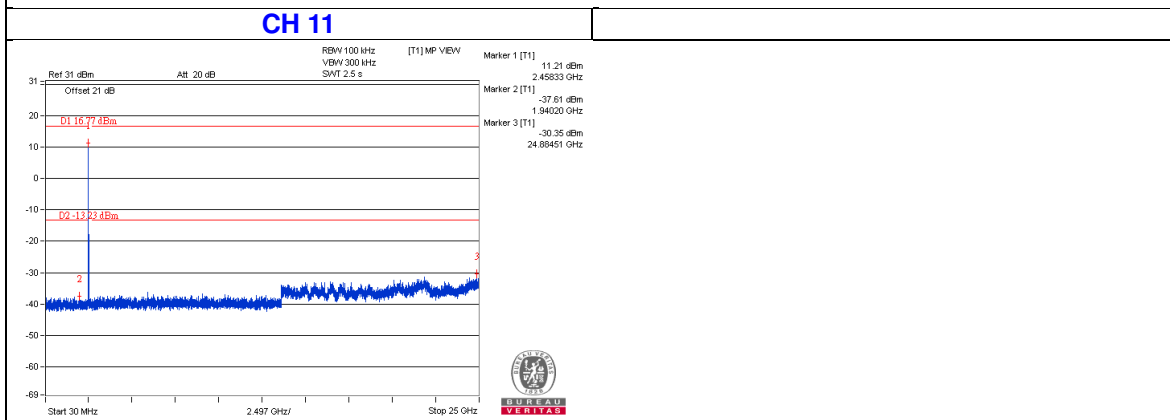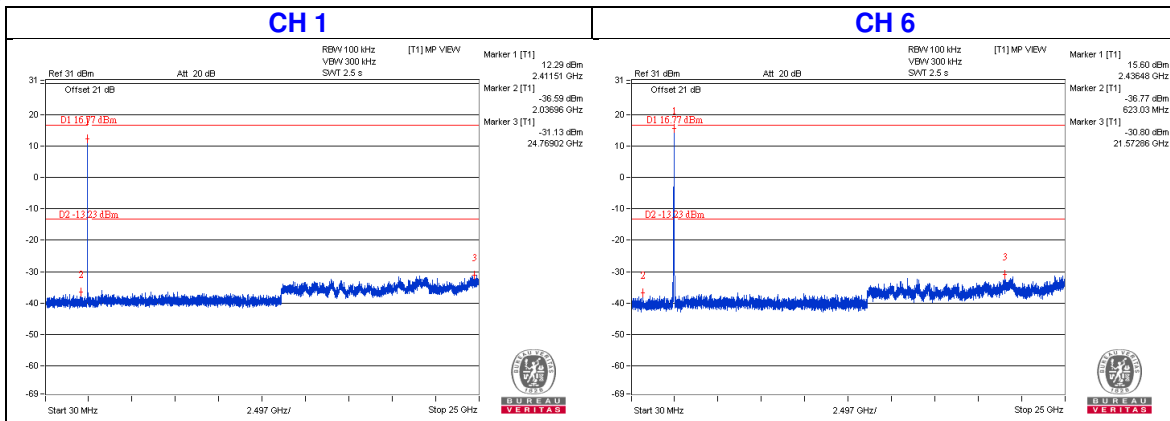




802.11g

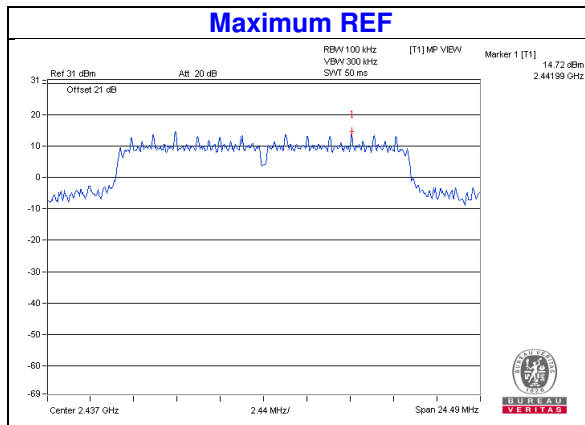


CHAIN 0

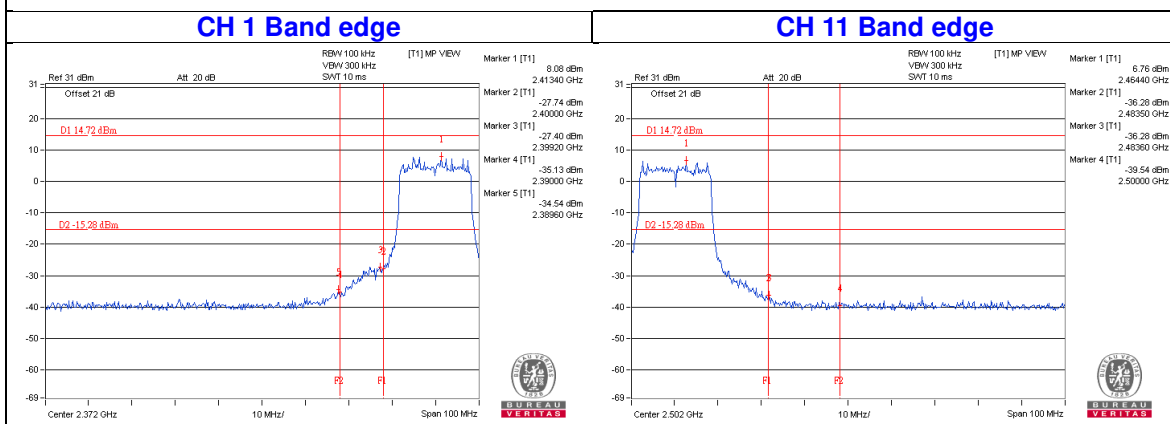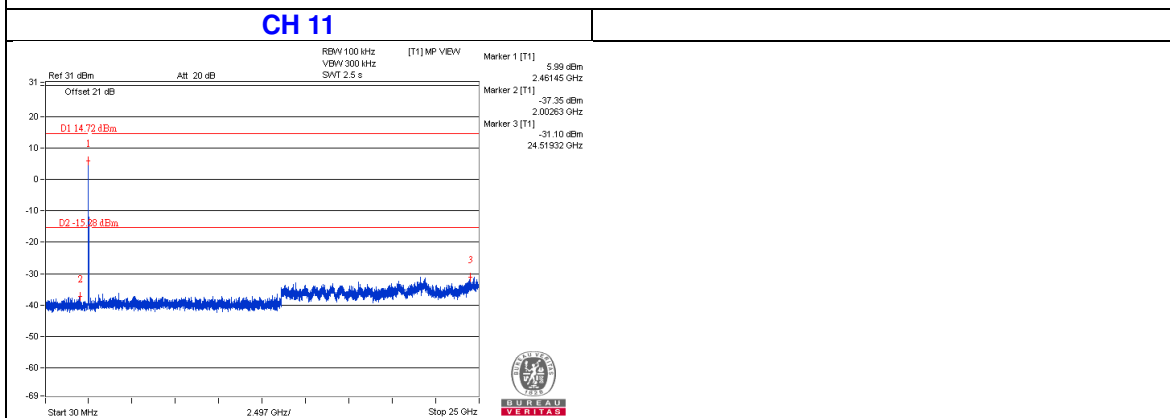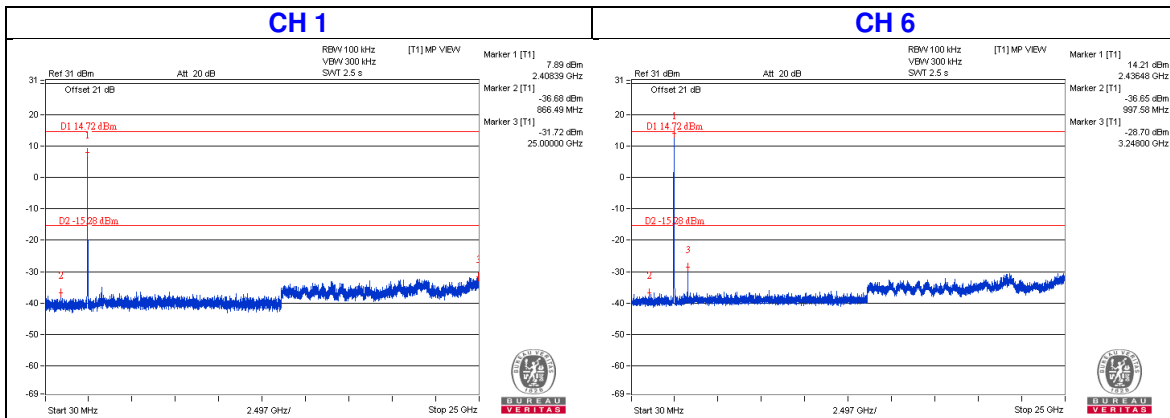




CHAIN 1

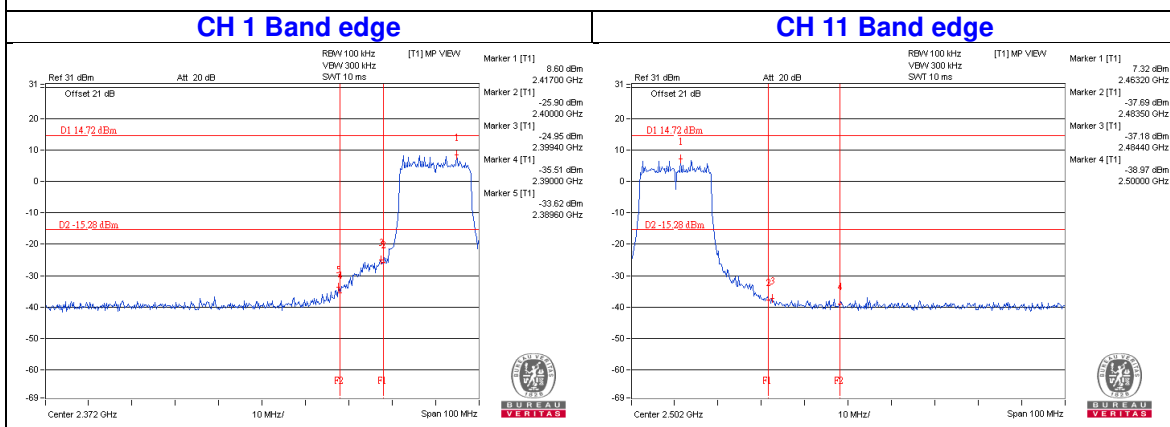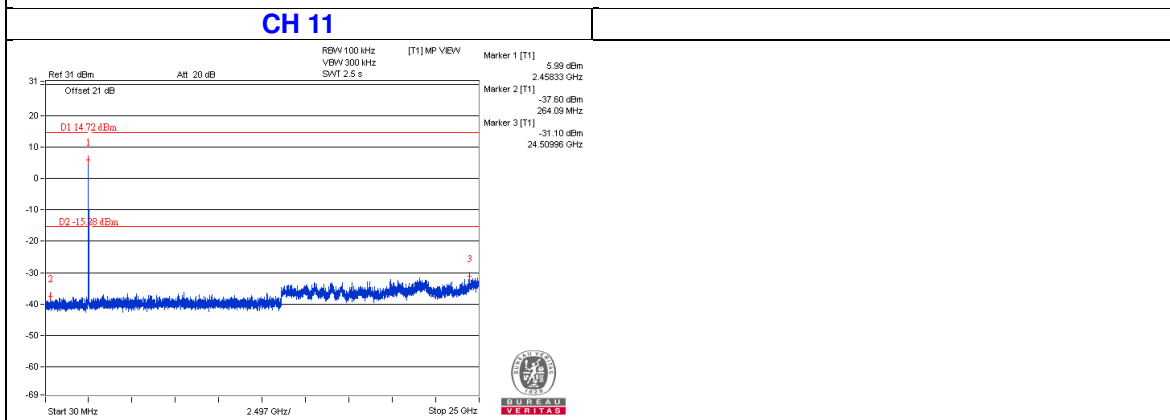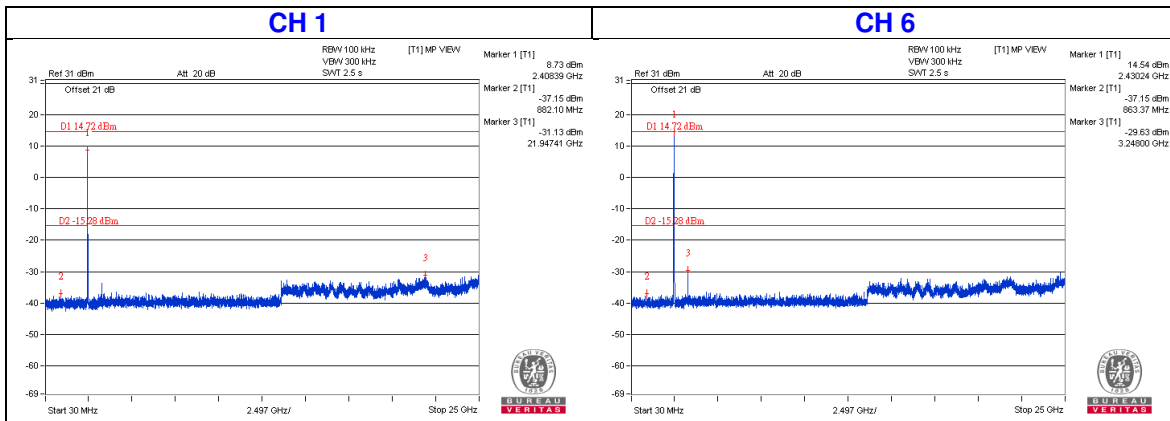




802.11n (HT20)

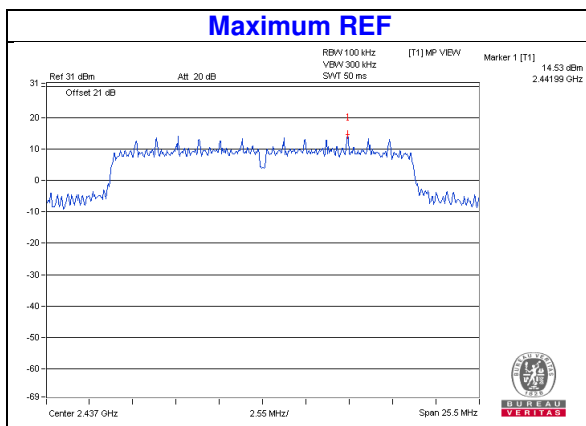


CHAIN 0

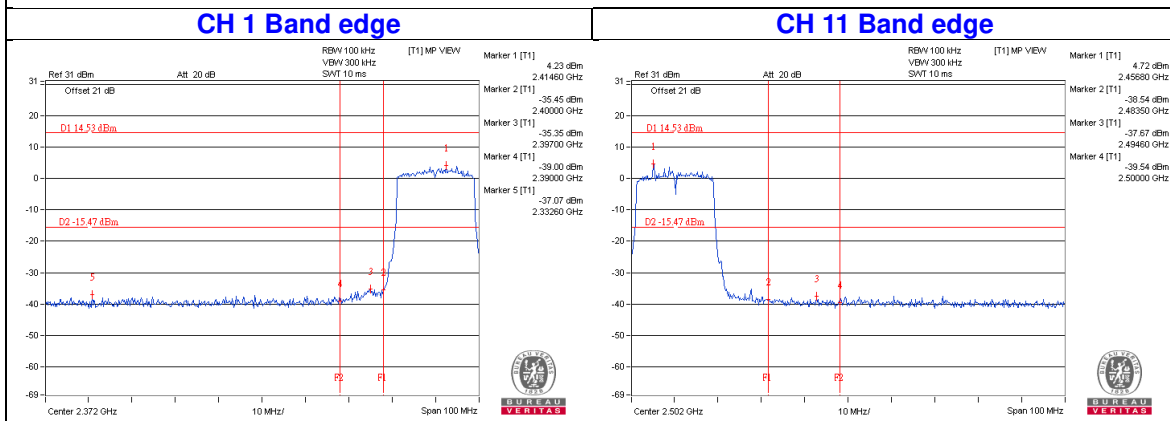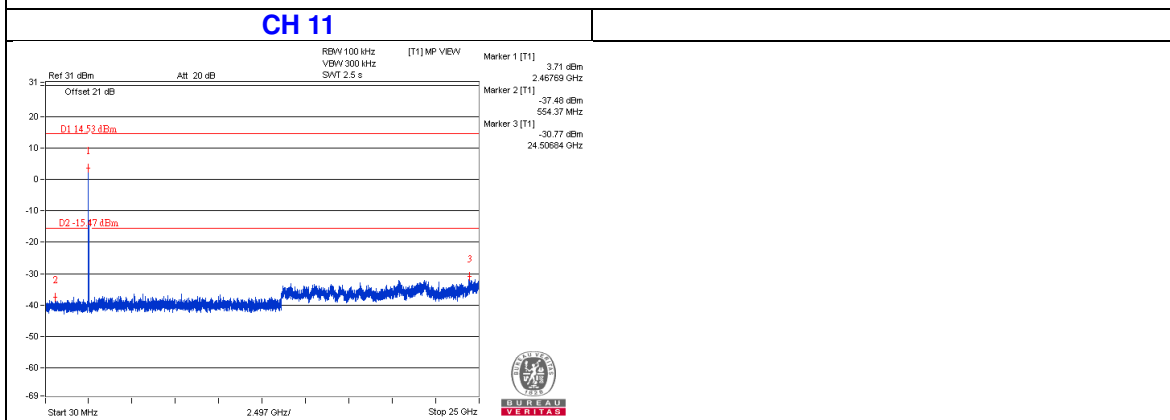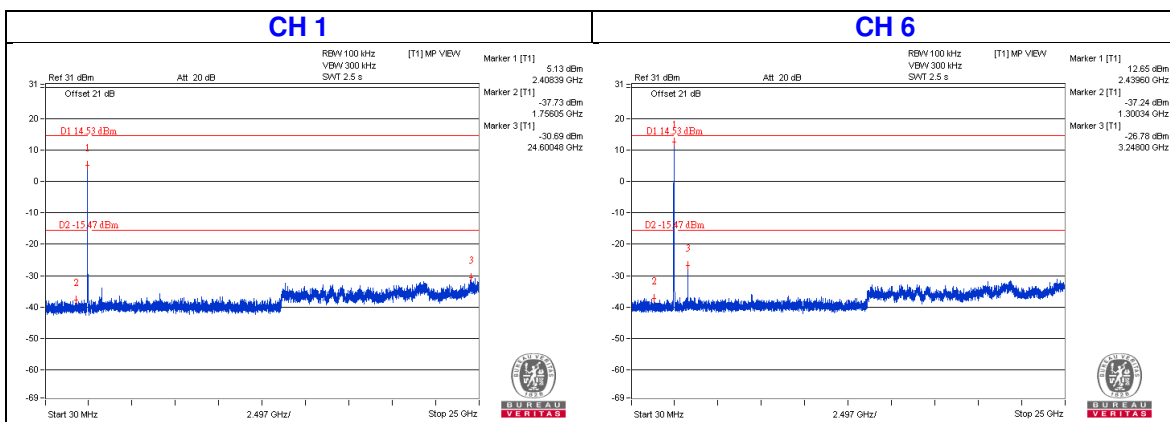




CHAIN 1

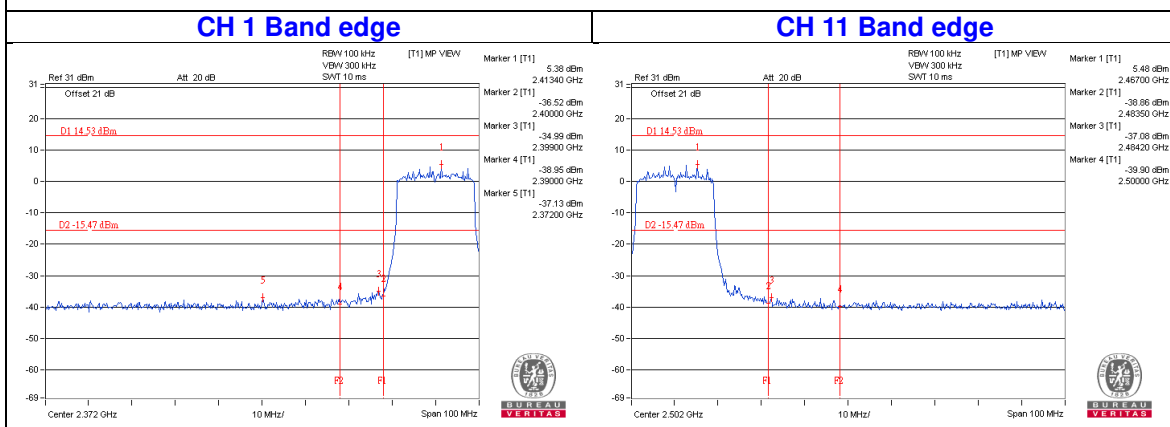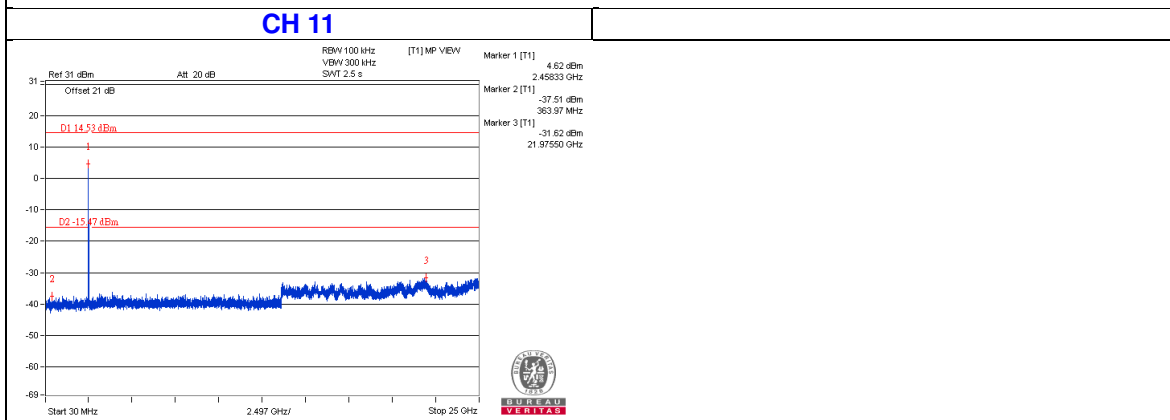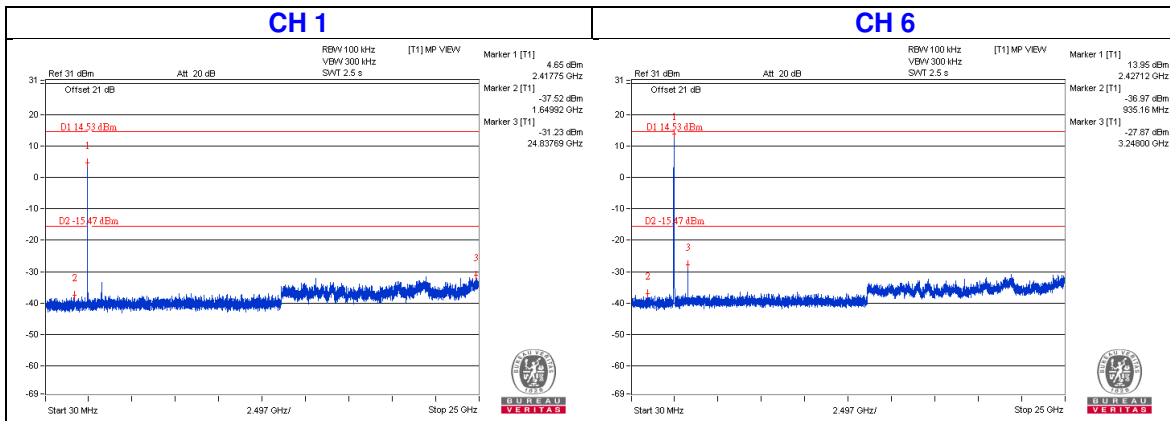





802.11n (HT40)

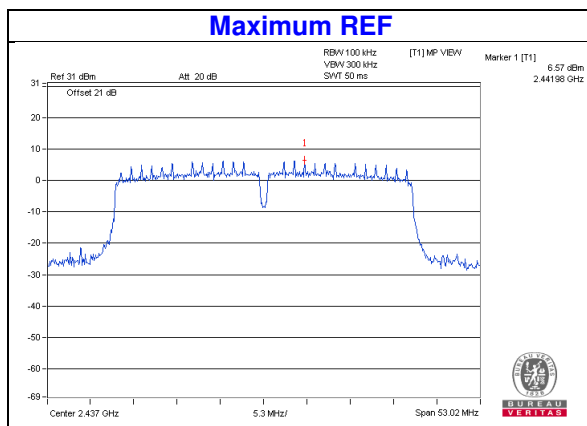

CHAIN 0

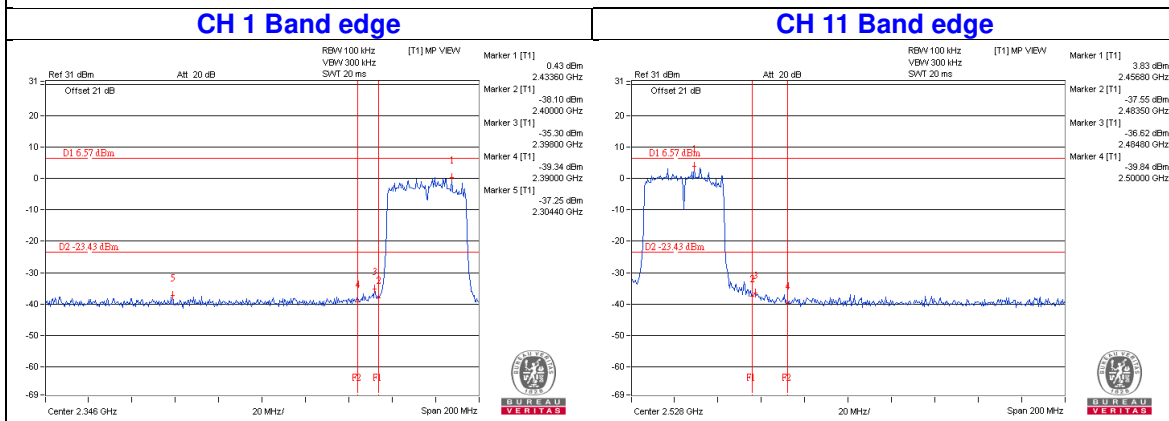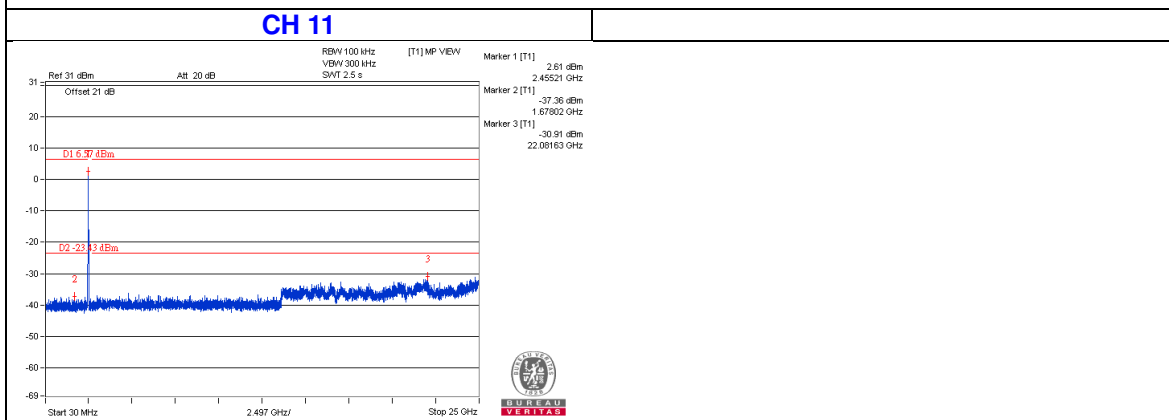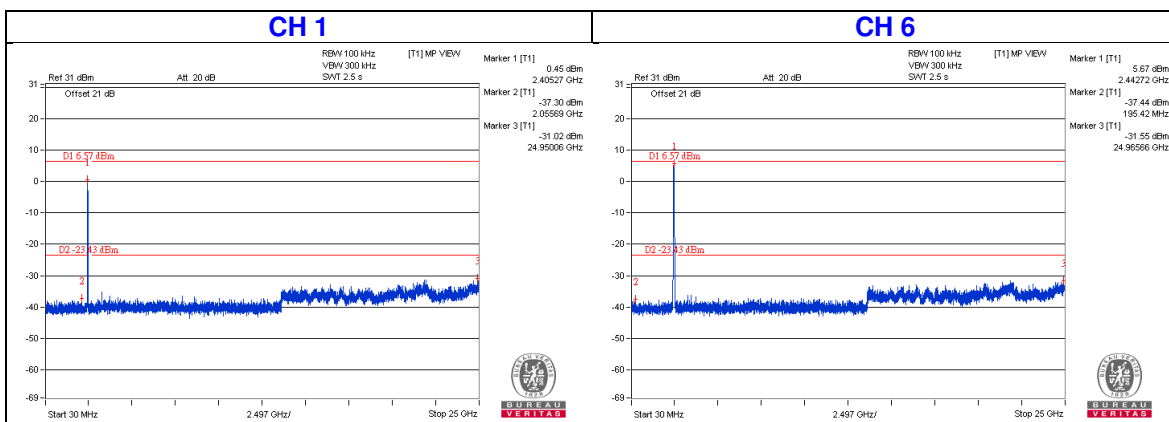

CHAIN 1

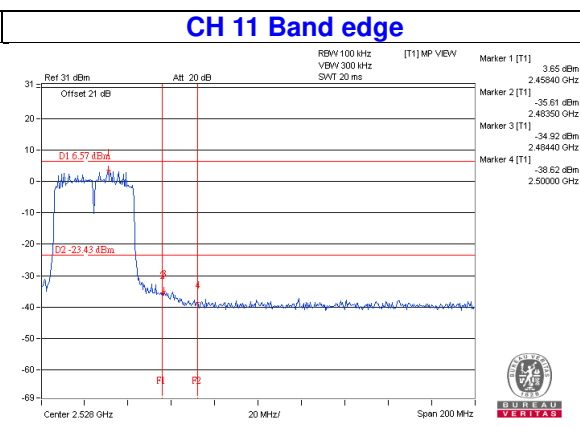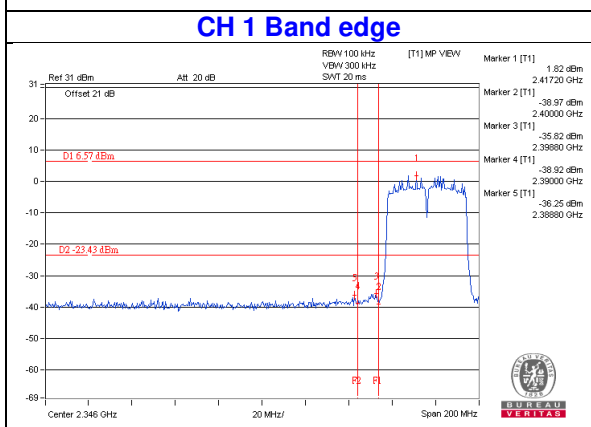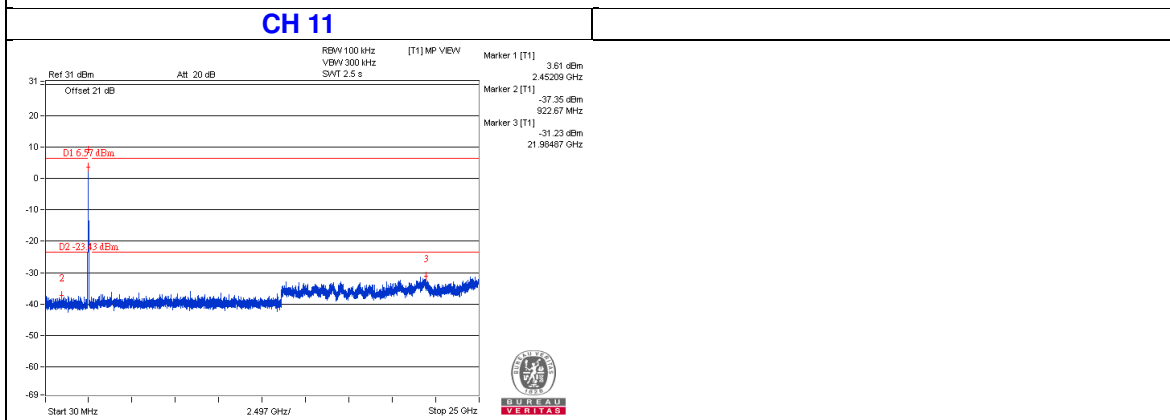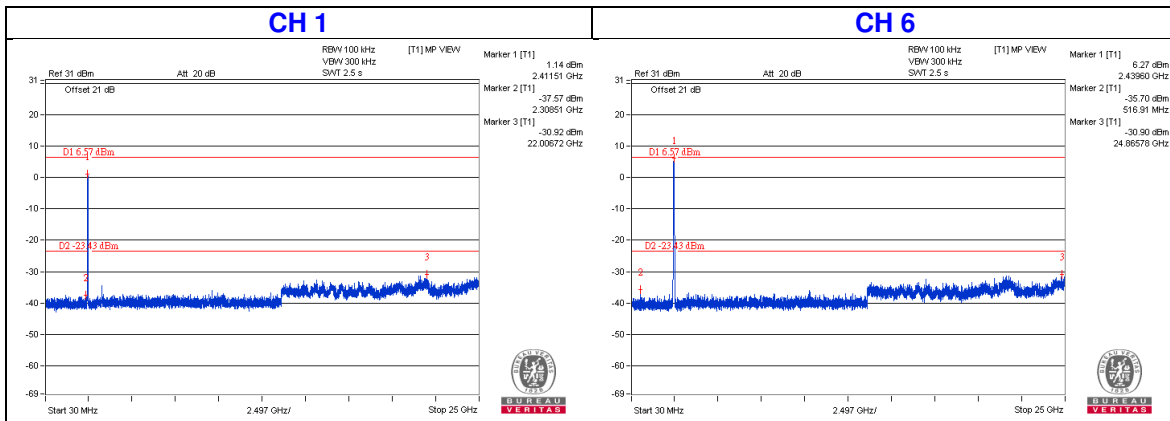

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---