



REV	DESCRIPTION OF REVISION	ENG APPD	DATE
01	INITIAL DOCUMENT CREATION	M HUMPHREY	09AUG18
02	CHANGE PA RATING TO 2.5A	M HUMPHREY	10SEP18

- NOTE:
- 1. REFER TO NETGEAR SPEC. DOC-00093 FOR COLOR TOLERANCES.
 - 2. INK COLOR IS SHOWN TO THE RIGHT.
 - 3. DIE LINES ARE MAGENTA COLOR AND DO NOT PRINT.
 - 4. MAC & SERIAL NUMBERS TO BE PRINTED BY THE ODM.
 - 5. See NTGR DOC-00112 for SN standard.
 - 6. SN, MAC address, SSID and PASSWORD to be encoded QR (2D) barcode.
 - A. EACH DATA ELEMENT IS TO BE SEPARATED BY A SEMICOLON WITH NO SPACE, AND TO BE PRINTED IN THIS EXACT ORDER.
- ELEMENT: WIFI:S:SSID;T:WPA2;P:PASSWORD;SN:SERIAL NUMBER;SK:NETGEAR SKU NAME;MAC:MAC ADDRESS;
EXAMPLE: NETGEAR-08;HEAVYLOTUS141;510789235724097;ORBI BASE STATION;8A:00:27:C5:84:B3
- 7. INSURE COUNTRY OF ORIGIN IS CORRECT.
 - A. IF COUNTRY OF ORIGIN IS PRE-PRINTED, UNHIDE THE APPROPRIATE COUNTRY OF ORIGIN LAYER AND INCLUDE COUNTRY OF ORIGIN ON LABEL.
 - B. IF COUNTRY OF ORIGIN IS POST-PRINTED USING A THERMAL PRINTER (OR EQUIVALENT), OMIT TEXT FROM ARTWORK (USE LAYERS).

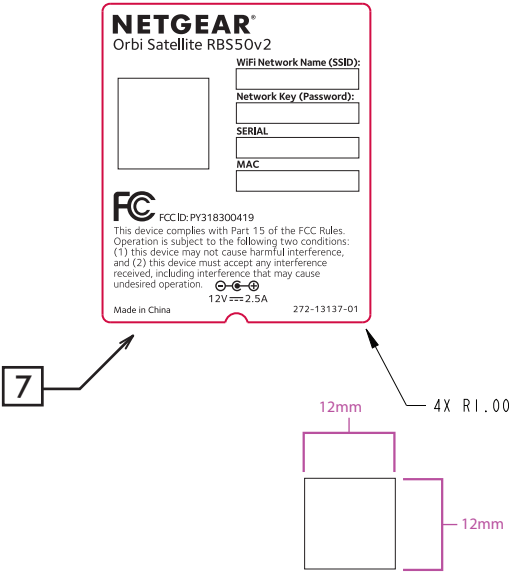

 Pantone Black

AUTHOR: M HUMPHREY	TITLE: AW,RBS50,NAS,PLBL,V2	NETGEAR	
SHEET: 1 of 1	THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WHEREWITH IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF NETGEAR, INC.	P/N: AW-14109-01	REV: 02