

FCC Test Report

Report No.: RF200601E14

FCC ID: PY320100490

Test Model: RAX40v2

Series Model: RAX38v2, RAX35v2

Received Date: June 01, 2020

Test Date: June 09 to 14, 2020

Issued Date: June 23, 2020

Applicant: NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards and References	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement.....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures.....	20
4.1.4 Deviation from Test Standard	21
4.1.5 Test Setup.....	21
4.1.6 EUT Operating Conditions.....	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	37
4.2.1 Limits of Conducted Emission Measurement	37
4.2.2 Test Instruments	37
4.2.3 Test Procedures.....	38
4.2.4 Deviation from Test Standard	38
4.2.5 Test Setup.....	38
4.2.6 EUT Operating Conditions.....	38
4.2.7 Test Results	39
4.3 6dB Bandwidth Measurement	41
4.3.1 Limits of 6dB Bandwidth Measurement	41
4.3.2 Test Setup.....	41
4.3.3 Test Instruments	41
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 EUT Operating Conditions.....	41
4.3.7 Test Result.....	42
4.4 Conducted Output Power Measurement.....	44
4.4.1 Limits of Conducted Output Power Measurement	44
4.4.2 Test Setup.....	44
4.4.3 Test Instruments	44
4.4.4 Test Procedures.....	44
4.4.5 Deviation from Test Standard	44
4.4.6 EUT Operating Conditions.....	44
4.4.7 Test Results	45
4.5 Power Spectral Density Measurement.....	49
4.5.1 Limits of Power Spectral Density Measurement	49
4.5.2 Test Setup.....	49
4.5.3 Test Instruments	49
4.5.4 Test Procedure	49
4.5.5 Deviation from Test Standard	49
4.5.6 EUT Operating Condition	49

4.5.7 Test Results	50
4.6 Conducted Out of Band Emission Measurement	52
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	52
4.6.2 Test Setup.....	52
4.6.3 Test Instruments	52
4.6.4 Test Procedure	52
4.6.5 Deviation from Test Standard	52
4.6.6 EUT Operating Condition	52
4.6.7 Test Results	52
5 Pictures of Test Arrangements	61
Annex A - Band-Edge Measurement	62
Appendix – Information of the Testing Laboratories	66

Release Control Record

Issue No.	Description	Date Issued
RF200601E14	Original release.	June 23, 2020

1 Certificate of Conformity

Product: Nighthawk AX4 AX3000 4-Stream WiFi Router

Brand: NETGEAR

Test Model: RAX40v2

Series Model: RAX38v2, RAX35v2

Sample Status: ENGINEERING SAMPLE

Applicant: NETGEAR, Inc.

Test Date: June 09 to 14, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Vivian Huang , **Date:** June 23, 2020
Vivian Hunag / Specialist

Approved by : Clark Lin , **Date:** June 23, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.65dB at 0.30625MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2483.50MHz and 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is R-SMA not a standard connector.

Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.5 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Nighthawk AX4 AX3000 4-Stream WiFi Router
Brand	NETGEAR
Test Model	RAX40v2
Series Model	RAX38v2, RAX35v2
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18~5.32GHz, 5.50~ 5.72GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 12 802.11ac (VHT80), 802.11ax (HE80): 6 802.11ac (VHT160), 802.11ax (HE160): 2
Output Power	CDD Mode: 2.412 ~ 2.462 GHz: 880.166 mW 5.18 ~ 5.25 GHz: 825.158 mW 5.25 ~ 5.32GHz: 222.375 mW 5.5 ~ 5.72GHz: 222.715 mW 5.745 ~ 5.825 GHz: 895.617 mW Beamforming Mode: 2.412 ~ 2.462 GHz: 815.713 mW 5.18 ~ 5.25 GHz: 825.158 mW 5.25 ~ 5.32GHz: 222.375 mW 5.5 ~ 5.72GHz: 222.715 mW 5.745 ~ 5.825 GHz: 895.617 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable Supplied	NA

Note:

1. The EUT has three model names which are identical to each other in all aspects except for the followings:

Product name	Model Name	Description
Nighthawk AX4 AX3000 4-Stream WiFi Router	RAX40v2	1. RAX38v2 is all the same as RAX40v2, just add model name into the FCC certification. 2. RAX35v2 is all the same as RAX40v2, except RAX40v2 has one USB port, but RAX35v2 removed USB components.
	RAX38v2	
	RAX35v2	

Note: From the above models, model: **RAX40v2** was selected as representative model for the test and its data was recorded in this report.

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	WLAN 5GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter and following different models could be chosen:

No.	Brand	Model No.	P/N	Spec.
1	NETGEAR	2ABL030F 1 NA	332-10758-01	Input: 100-120Vac, 1.0A, 50/60Hz Output: 12Vdc, 2.5A DC Output cable: Unshielded, 1.8m
2	NETGEAR	AD2067F10	332-10797-01	Input: 100-120Vac, 1.0A, 50/60Hz Output: 12Vdc, 2.5A DC Output cable: Unshielded, 1.8m

Note: From the above models, the worst radiated emission test and conducted emission test were found in **Adapter 1**. Therefore only the test data of the model was recorded in this report.

4. The antennas provided to the EUT, please refer to the following table:

Antenna NO.	Chain No.	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length (mm)	Cable Loss (dB)
Dual_Ant0	2.4G_Ant0 5G_Ant1	1.87	2.4~2.4835GHz	Diople	i-pex(MHF)	65	0.4
		2.84	5.15~5.25GHz				0.5
		3.04	5.25~5.35GHz				0.5
		3.23	5.47~5.725GHz				0.5
		2.91	5.725~5.85GHz				0.5
Dual_Ant1	2.4G_Ant1 5G_Ant0	1.87	2.4~2.4835GHz	Diople	i-pex(MHF)	65	0.4
		2.84	5.15~5.25GHz				0.5
		3.04	5.25~5.35GHz				0.5
		3.23	5.47~5.725GHz				0.5
		2.91	5.725~5.85GHz				0.5

5. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ac (VHT160)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
802.11ax (HE160)	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/ VHT mode is the same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)

6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20 and 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40 and 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11g	1 to 11	6	OFDM	BPSK	6Mb/s

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11g	1 to 11	6	OFDM	BPSK	6Mb/s

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
VHT20 (Output power only)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40 (Output power only)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	23deg. C, 68%RH	120Vac, 60Hz	Ryan Du
RE<1G	24deg. C, 68%RH	120Vac, 60Hz	Tom Yang
PLC	23deg. C, 66%RH	120Vac, 60Hz	Nick Lo
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


802.11b: Duty cycle = 2.973 ms / 3.001 ms = 0.991

802.11g: Duty cycle = 2.97 ms / 3.009 ms = 0.987


802.11ax (HE20): Duty cycle = 2.27 ms / 2.311 ms = 0.982

802.11ax (HE40): Duty cycle = 2.359 ms / 2.395 ms = 0.985


802.11b

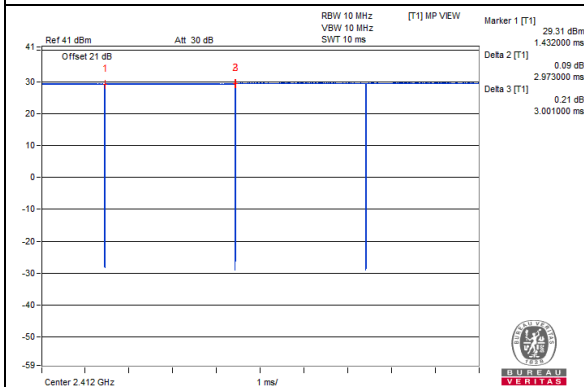


802.11g

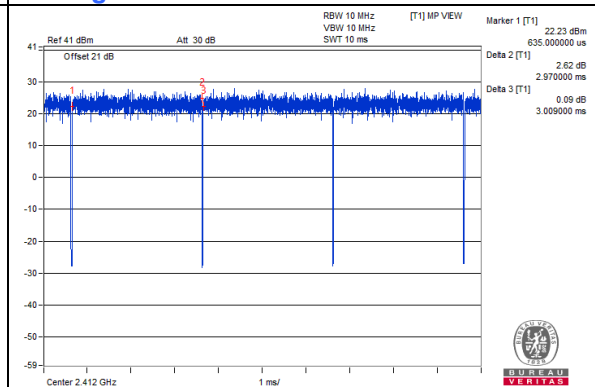

802.11ax (HE20)

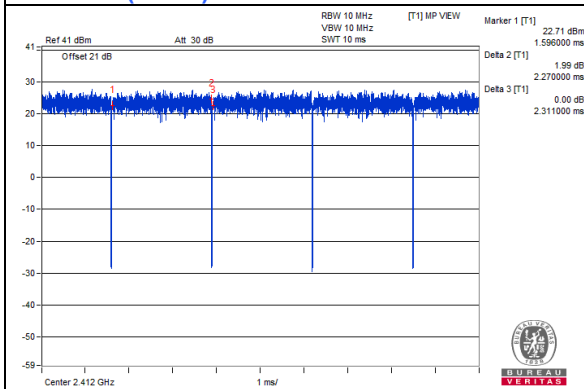

802.11ax (HE40)

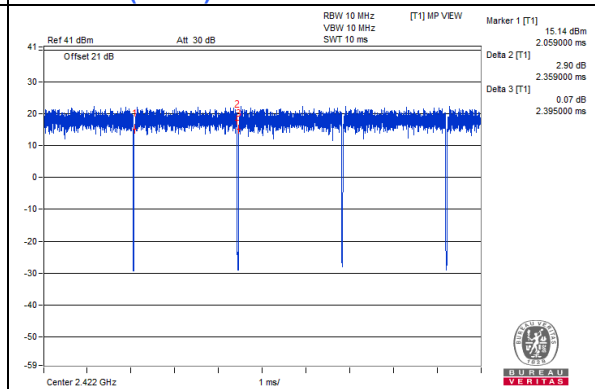

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
C.	HUB	DLinkGreen	D-Link	DGS-1005D	DR8WC92000968	Provided by Lab
D.	USB 3.0 Disk	SanDisk	BM181225896Z	NA	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	3	10	No	0	Provided by Lab
4.	DC Cable	1	1.8	No	0	Supplied by client

3.4.1 Configuration of System under Test

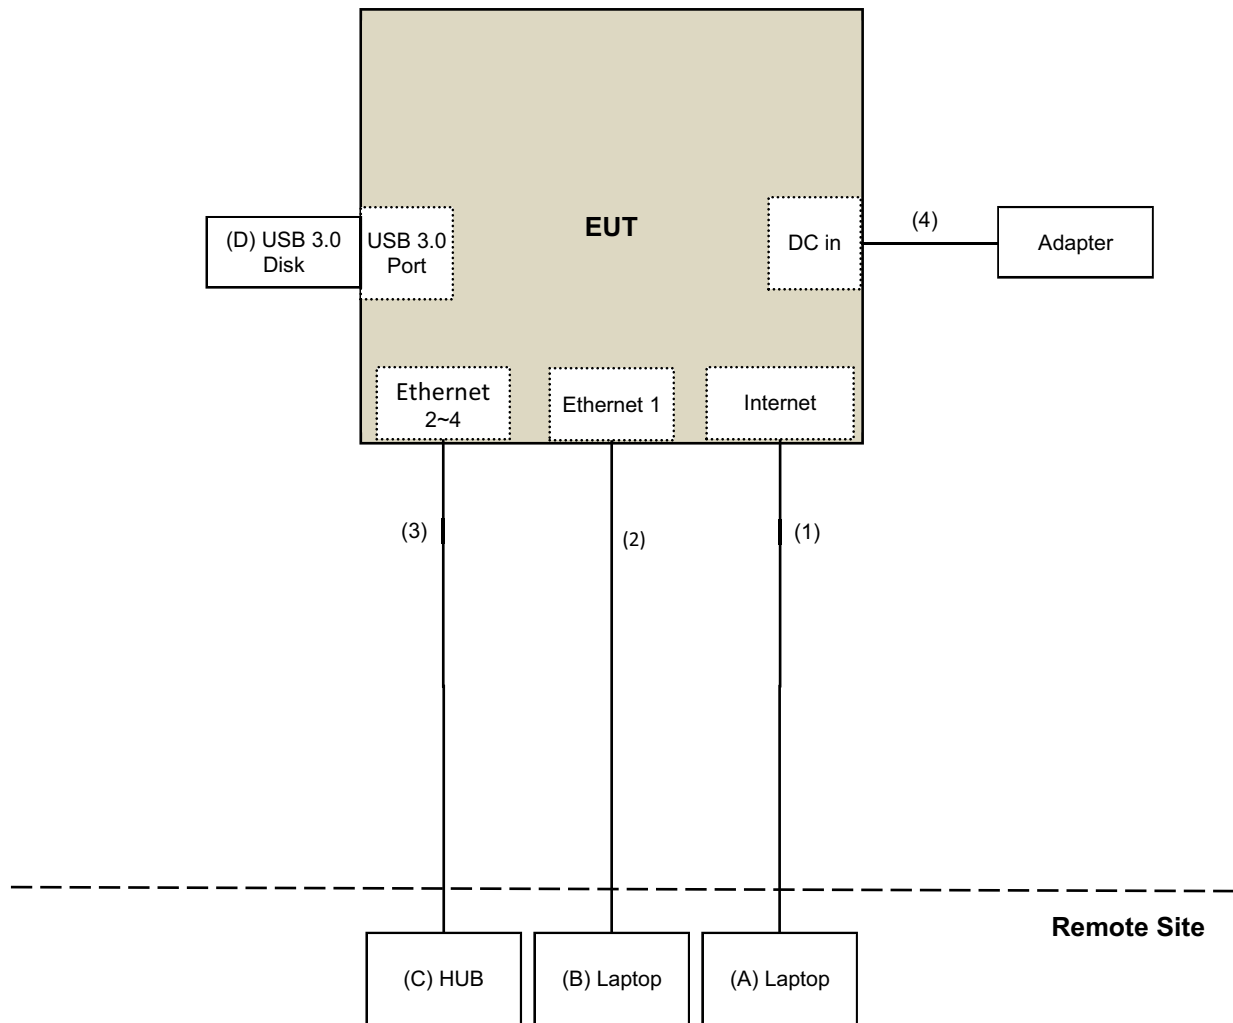

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated emission & Bandedge test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 13, 2019	Dec. 12, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 23, 2019	Oct. 22, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-4-1	Mar. 18, 2020	Mar. 17, 2021
RF Cable	8D	966-4-2	Mar. 18, 2020	Mar. 17, 2021
RF Cable	8D	966-4-3	Mar. 18, 2020	Mar. 17, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 15, 2019	Aug. 14, 2020
RF Cable	EMC104-SM-SM-1200	160923	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180502	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-6000	180418	Apr. 29, 2020	Apr. 28, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: June 09 to 10, 2020

For other test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: June 14, 2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

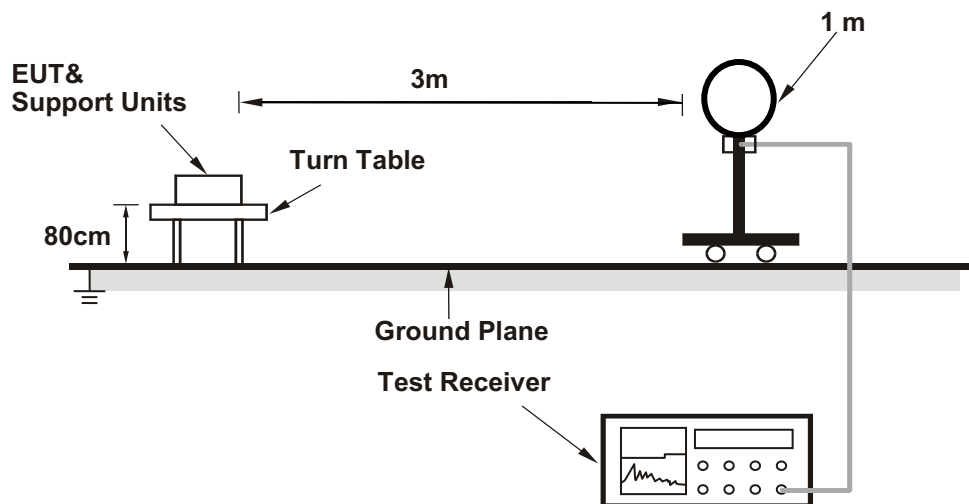

For Radiated emission 30MHz to 1GHz

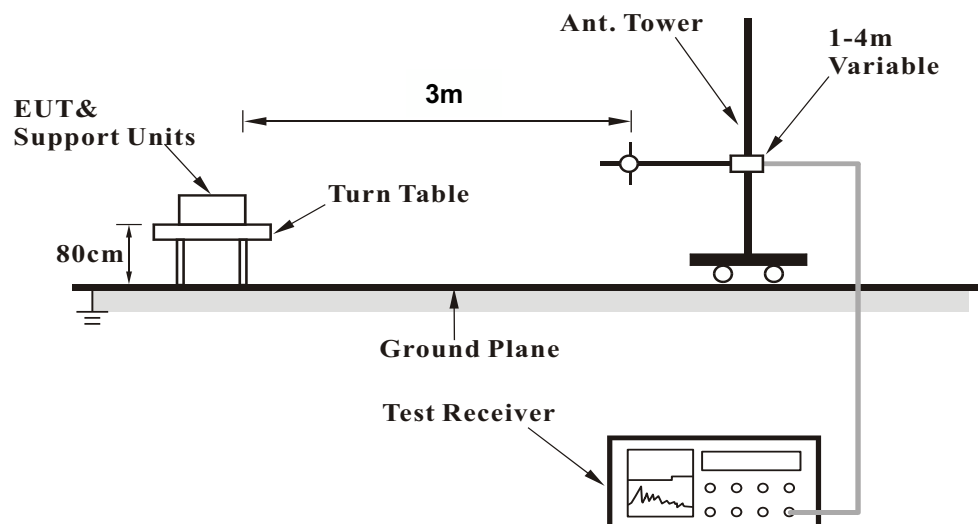

For Radiated emission above 1GHz

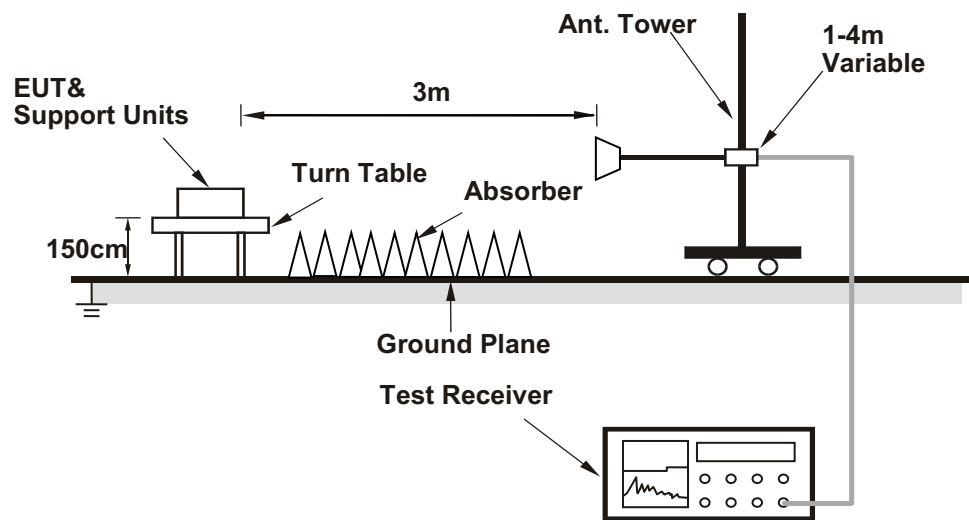

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (Mtool 3.1.0.3) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

802.11b

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.66 H	177	62.4	-1.8
2	2390.00	51.8 AV	54.0	-2.2	1.66 H	177	53.6	-1.8
3	*2412.00	116.8 PK			1.66 H	177	118.6	-1.8
4	*2412.00	114.8 AV			1.66 H	177	116.6	-1.8
5	4824.00	43.7 PK	74.0	-30.3	1.35 H	326	41.5	2.2
6	4824.00	39.3 AV	54.0	-14.7	1.35 H	326	37.1	2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.7 PK	74.0	-10.3	1.97 V	175	65.5	-1.8
2	2390.00	53.9 AV	54.0	-0.1	1.97 V	175	55.7	-1.8
3	*2412.00	124.2 PK			1.97 V	175	126.0	-1.8
4	*2412.00	121.6 AV			1.97 V	175	123.4	-1.8
5	4824.00	47.0 PK	74.0	-27.0	1.46 V	53	44.8	2.2
6	4824.00	42.3 AV	54.0	-11.7	1.46 V	53	40.1	2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.8 PK	74.0	-15.2	2.55 H	355	60.6	-1.8
2	2390.00	46.3 AV	54.0	-7.7	2.55 H	355	48.1	-1.8
3	*2437.00	117.3 PK			2.55 H	355	119.1	-1.8
4	*2437.00	115.2 AV			2.55 H	355	117.0	-1.8
5	2483.50	58.3 PK	74.0	-15.7	2.55 H	355	60.2	-1.9
6	2483.50	44.8 AV	54.0	-9.2	2.55 H	355	46.7	-1.9
7	4874.00	43.9 PK	74.0	-30.1	1.29 H	332	41.8	2.1
8	4874.00	39.6 AV	54.0	-14.4	1.29 H	332	37.5	2.1
9	7311.00	45.3 PK	74.0	-28.7	1.45 H	145	36.2	9.1
10	7311.00	34.2 AV	54.0	-19.8	1.45 H	145	25.1	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	1.72 V	190	62.5	-1.8
2	2390.00	48.8 AV	54.0	-5.2	1.72 V	190	50.6	-1.8
3	*2437.00	124.1 PK			1.72 V	190	125.9	-1.8
4	*2437.00	121.8 AV			1.72 V	190	123.6	-1.8
5	2483.50	62.8 PK	74.0	-11.2	1.72 V	190	64.7	-1.9
6	2483.50	49.7 AV	54.0	-4.3	1.72 V	190	51.6	-1.9
7	4874.00	46.8 PK	74.0	-27.2	1.44 V	64	44.7	2.1
8	4874.00	41.9 AV	54.0	-12.1	1.44 V	64	39.8	2.1
9	7311.00	46.2 PK	74.0	-27.8	1.42 V	28	37.1	9.1
10	7311.00	37.2 AV	54.0	-16.8	1.42 V	28	28.1	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.6 PK			1.58 H	177	117.4	-1.8
2	*2462.00	114.0 AV			1.58 H	177	115.8	-1.8
3	2483.50	59.5 PK	74.0	-14.5	1.58 H	177	61.4	-1.9
4	2483.50	51.0 AV	54.0	-3.0	1.58 H	177	52.9	-1.9
5	4924.00	44.0 PK	74.0	-30.0	1.29 H	311	41.7	2.3
6	4924.00	39.7 AV	54.0	-14.3	1.29 H	311	37.4	2.3
7	7386.00	45.7 PK	74.0	-28.3	1.38 H	160	36.3	9.4
8	7386.00	34.5 AV	54.0	-19.5	1.38 H	160	25.1	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	123.9 PK			1.75 V	174	125.7	-1.8
2	*2462.00	121.3 AV			1.75 V	174	123.1	-1.8
3	2483.50	63.6 PK	74.0	-10.4	1.75 V	174	65.5	-1.9
4	2483.50	53.9 AV	54.0	-0.1	1.75 V	174	55.8	-1.9
5	4924.00	46.1 PK	74.0	-27.9	1.46 V	69	43.8	2.3
6	4924.00	41.4 AV	54.0	-12.6	1.46 V	69	39.1	2.3
7	7386.00	45.9 PK	74.0	-28.1	1.40 V	53	36.5	9.4
8	7386.00	37.1 AV	54.0	-16.9	1.40 V	53	27.7	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.0 PK	74.0	-6.0	2.30 H	173	69.8	-1.8
2	2390.00	47.4 AV	54.0	-6.6	2.30 H	173	49.2	-1.8
3	*2412.00	111.1 PK			2.30 H	173	112.9	-1.8
4	*2412.00	101.6 AV			2.30 H	173	103.4	-1.8
5	4824.00	44.4 PK	74.0	-29.6	1.31 H	305	42.2	2.2
6	4824.00	37.9 AV	54.0	-16.1	1.31 H	305	35.7	2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.9 PK	74.0	-0.1	1.72 V	169	75.7	-1.8
2	2390.00	51.2 AV	54.0	-2.8	1.72 V	169	53.0	-1.8
3	*2412.00	117.9 PK			1.72 V	169	119.7	-1.8
4	*2412.00	108.7 AV			1.72 V	169	110.5	-1.8
5	4824.00	44.8 PK	74.0	-29.2	1.48 V	51	42.6	2.2
6	4824.00	39.3 AV	54.0	-14.7	1.48 V	51	37.1	2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	1.61 H	173	68.5	-1.8
2	2390.00	48.1 AV	54.0	-5.9	1.61 H	173	49.9	-1.8
3	*2437.00	115.9 PK			1.61 H	173	117.7	-1.8
4	*2437.00	106.6 AV			1.61 H	173	108.4	-1.8
5	2483.50	66.9 PK	74.0	-7.1	1.61 H	173	68.8	-1.9
6	2483.50	48.3 AV	54.0	-5.7	1.61 H	173	50.2	-1.9
7	4874.00	45.0 PK	74.0	-29.0	1.26 H	324	42.9	2.1
8	4874.00	38.5 AV	54.0	-15.5	1.26 H	324	36.4	2.1
9	7311.00	46.3 PK	74.0	-27.7	1.38 H	154	37.2	9.1
10	7311.00	34.1 AV	54.0	-19.9	1.38 H	154	25.0	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.5 PK	74.0	-0.5	1.71 V	187	75.3	-1.8
2	2390.00	53.9 AV	54.0	-0.1	1.71 V	187	55.7	-1.8
3	*2437.00	122.7 PK			1.71 V	187	124.5	-1.8
4	*2437.00	113.5 AV			1.71 V	187	115.3	-1.8
5	2483.50	73.9 PK	74.0	-0.1	1.71 V	187	75.8	-1.9
6	2483.50	53.9 AV	54.0	-0.1	1.71 V	187	55.8	-1.9
7	4874.00	45.2 PK	74.0	-28.8	1.43 V	60	43.1	2.1
8	4874.00	40.3 AV	54.0	-13.7	1.43 V	60	38.2	2.1
9	7311.00	45.9 PK	74.0	-28.1	1.38 V	19	36.8	9.1
10	7311.00	35.8 AV	54.0	-18.2	1.38 V	19	26.7	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.2 PK			1.58 H	186	112.0	-1.8
2	*2462.00	101.3 AV			1.58 H	186	103.1	-1.8
3	2483.50	62.6 PK	74.0	-11.4	1.58 H	186	64.5	-1.9
4	2483.50	46.5 AV	54.0	-7.5	1.58 H	186	48.4	-1.9
5	4924.00	45.0 PK	74.0	-29.0	1.27 H	325	42.7	2.3
6	4924.00	38.1 AV	54.0	-15.9	1.27 H	325	35.8	2.3
7	7386.00	46.5 PK	74.0	-27.5	1.39 H	148	37.1	9.4
8	7386.00	34.5 AV	54.0	-19.5	1.39 H	148	25.1	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.1 PK			1.76 V	170	119.9	-1.8
2	*2462.00	108.1 AV			1.76 V	170	109.9	-1.8
3	2483.50	73.9 PK	74.0	-0.1	1.76 V	170	75.8	-1.9
4	2483.50	52.8 AV	54.0	-1.2	1.76 V	170	54.7	-1.9
5	4924.00	44.6 PK	74.0	-29.4	1.48 V	82	42.3	2.3
6	4924.00	39.2 AV	54.0	-14.8	1.48 V	82	36.9	2.3
7	7386.00	45.9 PK	74.0	-28.1	1.45 V	64	36.5	9.4
8	7386.00	35.7 AV	54.0	-18.3	1.45 V	64	26.3	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE20)

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.6 PK	74.0	-1.4	1.59 H	184	74.4	-1.8
2	2390.00	52.0 AV	54.0	-2.0	1.59 H	184	53.8	-1.8
3	*2412.00	114.1 PK			1.59 H	184	115.9	-1.8
4	*2412.00	101.8 AV			1.59 H	184	103.6	-1.8
5	4824.00	43.8 PK	74.0	-30.2	1.27 H	326	41.6	2.2
6	4824.00	37.5 AV	54.0	-16.5	1.27 H	326	35.3	2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.9 PK	74.0	-0.1	1.52 V	172	75.7	-1.8
2	2390.00	53.1 AV	54.0	-0.9	1.52 V	172	54.9	-1.8
3	*2412.00	121.8 PK			1.52 V	172	123.6	-1.8
4	*2412.00	108.6 AV			1.52 V	172	110.4	-1.8
5	4824.00	45.0 PK	74.0	-29.0	1.49 V	48	42.8	2.2
6	4824.00	39.6 AV	54.0	-14.4	1.49 V	48	37.4	2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	1.86 H	182	73.1	-1.8
2	2390.00	51.0 AV	54.0	-3.0	1.86 H	182	52.8	-1.8
3	*2437.00	117.8 PK			1.86 H	182	119.6	-1.8
4	*2437.00	104.6 AV			1.86 H	182	106.4	-1.8
5	2483.50	69.9 PK	74.0	-4.1	1.86 H	182	71.8	-1.9
6	2483.50	50.7 AV	54.0	-3.3	1.86 H	182	52.6	-1.9
7	4874.00	45.3 PK	74.0	-28.7	1.26 H	334	43.2	2.1
8	4874.00	38.9 AV	54.0	-15.1	1.26 H	334	36.8	2.1
9	7311.00	45.9 PK	74.0	-28.1	1.44 H	145	36.8	9.1
10	7311.00	33.7 AV	54.0	-20.3	1.44 H	145	24.6	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.8 PK	74.0	-0.2	1.49 V	156	75.6	-1.8
2	2390.00	53.8 AV	54.0	-0.2	1.49 V	156	55.6	-1.8
3	*2437.00	124.5 PK			1.49 V	156	126.3	-1.8
4	*2437.00	111.8 AV			1.49 V	156	113.6	-1.8
5	2483.50	72.3 PK	74.0	-1.7	1.49 V	156	74.2	-1.9
6	2483.50	53.6 AV	54.0	-0.4	1.49 V	156	55.5	-1.9
7	4874.00	44.6 PK	74.0	-29.4	1.45 V	58	42.5	2.1
8	4874.00	40.0 AV	54.0	-14.0	1.45 V	58	37.9	2.1
9	7311.00	45.5 PK	74.0	-28.5	1.38 V	34	36.4	9.1
10	7311.00	35.5 AV	54.0	-18.5	1.38 V	34	26.4	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.4 PK			1.52 H	220	114.2	-1.8
2	*2462.00	100.3 AV			1.52 H	220	102.1	-1.8
3	2483.50	68.9 PK	74.0	-5.1	1.52 H	220	70.8	-1.9
4	2483.50	49.6 AV	54.0	-4.4	1.52 H	220	51.5	-1.9
5	4924.00	45.3 PK	74.0	-28.7	1.32 H	322	43.0	2.3
6	4924.00	38.3 AV	54.0	-15.7	1.32 H	322	36.0	2.3
7	7386.00	46.6 PK	74.0	-27.4	1.44 H	164	37.2	9.4
8	7386.00	34.7 AV	54.0	-19.3	1.44 H	164	25.3	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	120.6 PK			1.52 V	176	122.4	-1.8
2	*2462.00	107.2 AV			1.52 V	176	109.0	-1.8
3	2483.50	73.8 PK	74.0	-0.2	1.52 V	176	75.7	-1.9
4	2483.50	53.2 AV	54.0	-0.8	1.52 V	176	55.1	-1.9
5	4924.00	44.7 PK	74.0	-29.3	1.52 V	90	42.4	2.3
6	4924.00	39.0 AV	54.0	-15.0	1.52 V	90	36.7	2.3
7	7386.00	45.7 PK	74.0	-28.3	1.49 V	66	36.3	9.4
8	7386.00	35.5 AV	54.0	-18.5	1.49 V	66	26.1	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE40)

Channel	TX Channel 3	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.0 PK	74.0	-10.0	2.31 H	219	65.8	-1.8
2	2390.00	50.5 AV	54.0	-3.5	2.31 H	219	52.3	-1.8
3	*2422.00	108.2 PK			2.31 H	219	110.0	-1.8
4	*2422.00	96.8 AV			2.31 H	219	98.6	-1.8
5	4844.00	44.2 PK	74.0	-29.8	1.33 H	330	42.0	2.2
6	4844.00	37.1 AV	54.0	-16.9	1.33 H	330	34.9	2.2
7	7266.00	44.8 PK	74.0	-29.2	1.44 H	153	35.8	9.0
8	7266.00	33.9 AV	54.0	-20.1	1.44 H	153	24.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	1.68 V	168	73.9	-1.8
2	2390.00	53.7 AV	54.0	-0.3	1.68 V	168	55.5	-1.8
3	*2422.00	117.1 PK			1.68 V	168	118.9	-1.8
4	*2422.00	104.1 AV			1.68 V	168	105.9	-1.8
5	4844.00	44.8 PK	74.0	-29.2	1.51 V	101	42.6	2.2
6	4844.00	38.4 AV	54.0	-15.6	1.51 V	101	36.2	2.2
7	7266.00	45.1 PK	74.0	-28.9	1.51 V	57	36.1	9.0
8	7266.00	34.8 AV	54.0	-19.2	1.51 V	57	25.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	2.08 H	218	62.4	-1.8
2	2390.00	47.1 AV	54.0	-6.9	2.08 H	218	48.9	-1.8
3	*2437.00	109.3 PK			2.08 H	218	111.1	-1.8
4	*2437.00	97.7 AV			2.08 H	218	99.5	-1.8
5	2483.50	62.1 PK	74.0	-11.9	2.08 H	218	64.0	-1.9
6	2483.50	48.7 AV	54.0	-5.3	2.08 H	218	50.6	-1.9
7	4874.00	43.8 PK	74.0	-30.2	1.29 H	327	41.7	2.1
8	4874.00	36.7 AV	54.0	-17.3	1.29 H	327	34.6	2.1
9	7311.00	45.2 PK	74.0	-28.8	1.45 H	148	36.1	9.1
10	7311.00	34.1 AV	54.0	-19.9	1.45 H	148	25.0	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.52 V	186	74.1	-1.8
2	2390.00	50.3 AV	54.0	-3.7	1.52 V	186	52.1	-1.8
3	*2437.00	118.6 PK			1.52 V	186	120.4	-1.8
4	*2437.00	105.6 AV			1.52 V	186	107.4	-1.8
5	2483.50	73.6 PK	74.0	-0.4	1.52 V	186	75.5	-1.9
6	2483.50	53.9 AV	54.0	-0.1	1.52 V	186	55.8	-1.9
7	4874.00	45.1 PK	74.0	-28.9	1.48 V	85	43.0	2.1
8	4874.00	38.8 AV	54.0	-15.2	1.48 V	85	36.7	2.1
9	7311.00	45.7 PK	74.0	-28.3	1.49 V	63	36.6	9.1
10	7311.00	35.1 AV	54.0	-18.9	1.49 V	63	26.0	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 9	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	106.1 PK			1.33 H	220	107.9	-1.8
2	*2452.00	94.0 AV			1.33 H	220	95.8	-1.8
3	2483.50	59.8 PK	74.0	-14.2	1.33 H	220	61.7	-1.9
4	2483.50	47.0 AV	54.0	-7.0	1.33 H	220	48.9	-1.9
5	4904.00	44.6 PK	74.0	-29.4	1.39 H	318	42.5	2.1
6	4904.00	37.2 AV	54.0	-16.8	1.39 H	318	35.1	2.1
7	7356.00	44.6 PK	74.0	-29.4	1.47 H	139	35.4	9.2
8	7356.00	33.6 AV	54.0	-20.4	1.47 H	139	24.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	114.5 PK			1.53 V	162	116.3	-1.8
2	*2452.00	102.2 AV			1.53 V	162	104.0	-1.8
3	2483.50	67.7 PK	74.0	-6.3	1.53 V	162	69.6	-1.9
4	2483.50	53.9 AV	54.0	-0.1	1.53 V	162	55.8	-1.9
5	4904.00	45.5 PK	74.0	-28.5	1.54 V	78	43.4	2.1
6	4904.00	39.2 AV	54.0	-14.8	1.54 V	78	37.1	2.1
7	7356.00	45.4 PK	74.0	-28.6	1.53 V	45	36.2	9.2
8	7356.00	34.8 AV	54.0	-19.2	1.53 V	45	25.6	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:


802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.72	36.9 QP	40.0	-3.1	1.50 H	360	45.9	-9.0
2	61.79	33.4 QP	40.0	-6.6	3.00 H	93	42.0	-8.6
3	95.47	32.8 QP	43.5	-10.7	2.00 H	106	45.6	-12.8
4	125.01	38.3 QP	43.5	-5.2	1.50 H	70	47.5	-9.2
5	157.43	32.3 QP	43.5	-11.2	1.50 H	295	39.6	-7.3
6	215.80	31.9 QP	43.5	-11.6	1.00 H	181	42.6	-10.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

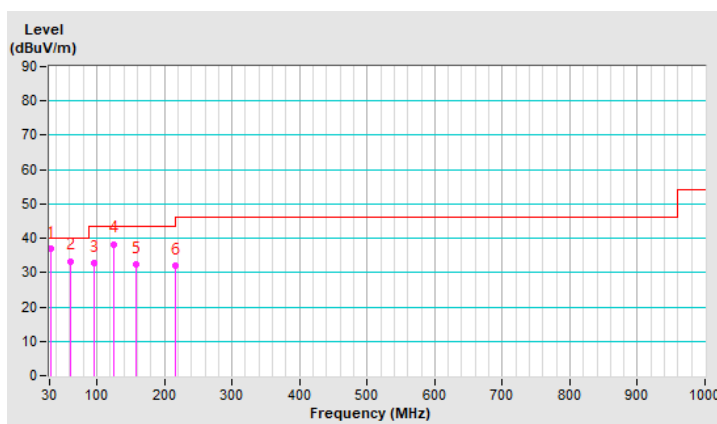


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.12	36.9 QP	40.0	-3.1	1.00 V	136	46.3	-9.4
2	42.08	37.0 QP	40.0	-3.0	1.00 V	132	45.1	-8.1
3	62.49	35.6 QP	40.0	-4.4	2.00 V	360	44.3	-8.7
4	101.73	35.1 QP	43.5	-8.4	1.00 V	267	46.8	-11.7
5	163.62	29.6 QP	43.5	-13.9	1.00 V	279	37.3	-7.7
6	216.07	26.0 QP	46.0	-20.0	2.00 V	231	36.7	-10.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

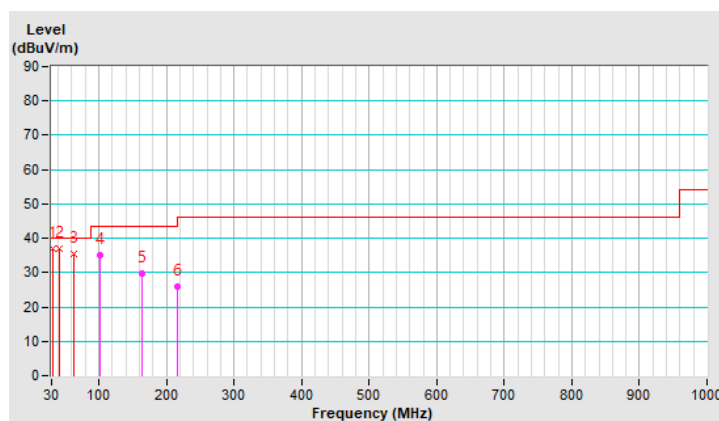

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 30, 2019	Aug. 29, 2020
Software BVADT	BVADT_Conc_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: June 10, 2020

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

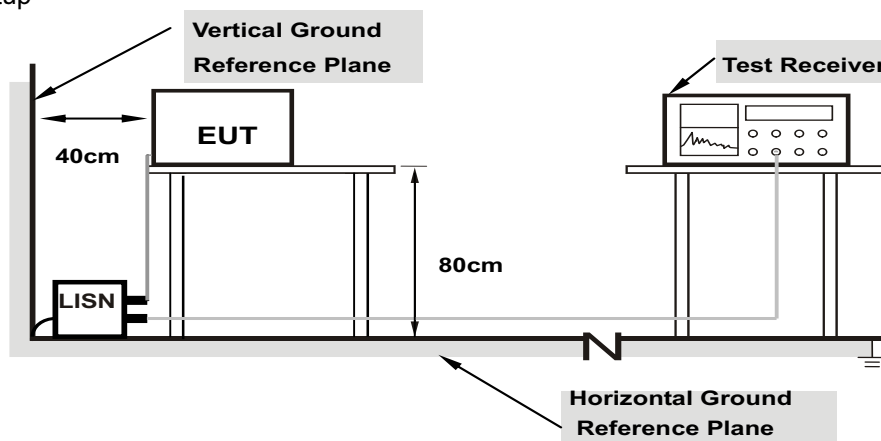

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.03	36.64	28.24	46.67	38.27	65.38	55.38	-18.71	-17.11
2	0.18516	10.04	33.78	25.28	43.82	35.32	64.25	54.25	-20.43	-18.93
3	0.21641	10.04	33.00	23.54	43.04	33.58	62.96	52.96	-19.92	-19.38
4	0.30625	10.05	35.78	27.30	45.83	37.35	60.07	50.07	-14.24	-12.72
5	0.34922	10.05	23.37	13.89	33.42	23.94	58.98	48.98	-25.56	-25.04
6	0.41563	10.05	22.80	14.76	32.85	24.81	57.54	47.54	-24.69	-22.73

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.02	36.60	25.56	46.62	35.58	65.79	55.79	-19.17	-20.21
2	0.18125	10.03	34.52	23.64	44.55	33.67	64.43	54.43	-19.88	-20.76
3	0.20469	10.03	32.86	22.78	42.89	32.81	63.42	53.42	-20.53	-20.61
4	0.30625	10.04	37.36	29.38	47.40	39.42	60.07	50.07	-12.67	-10.65
5	0.37656	10.04	26.20	17.34	36.24	27.38	58.35	48.35	-22.11	-20.97
6	0.41563	10.04	24.48	16.70	34.52	26.74	57.54	47.54	-23.02	-20.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

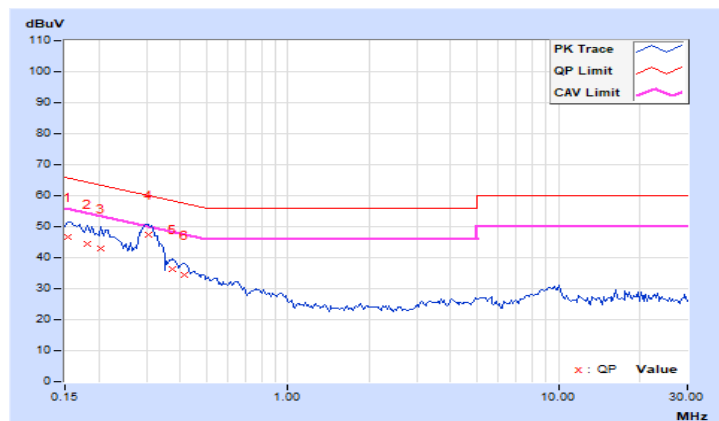


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	7.08	7.09	0.5	PASS
6	2437	7.09	7.11	0.5	PASS
11	2462	7.11	7.09	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.45	16.43	0.5	PASS
6	2437	16.43	16.44	0.5	PASS
11	2462	16.43	16.42	0.5	PASS

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	19.05	19.01	0.5	PASS
6	2437	18.99	18.96	0.5	PASS
11	2462	19.1	19.02	0.5	PASS

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	37.77	37.75	0.5	PASS
6	2437	37.82	37.58	0.5	PASS
9	2452	37.9	37.82	0.5	PASS

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH1

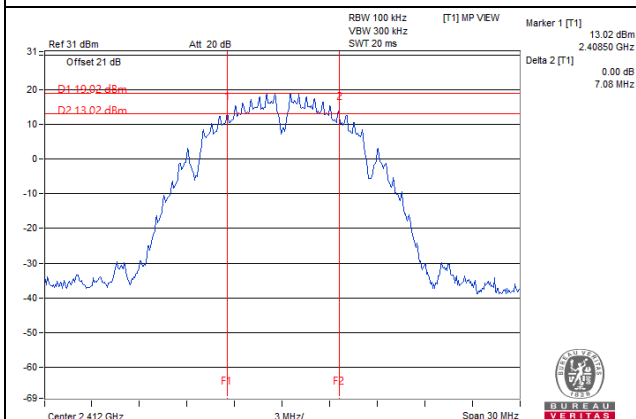


802.11g / Chain 1 : CH11

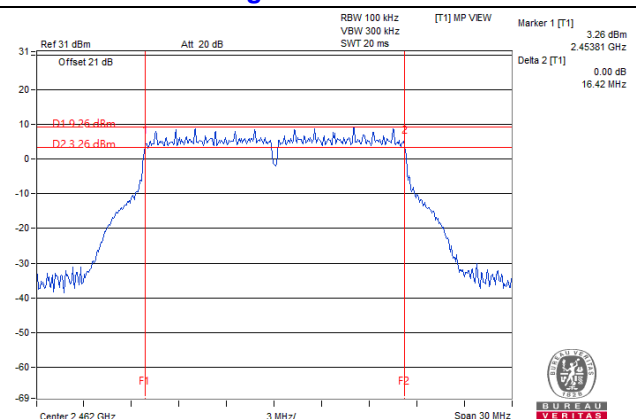

802.11ax (HE20) / Chain 1 : CH6

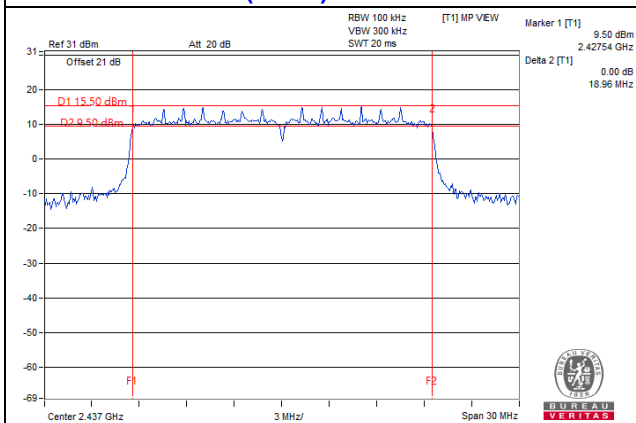

802.11ax (HE40) / Chain 1 : CH6

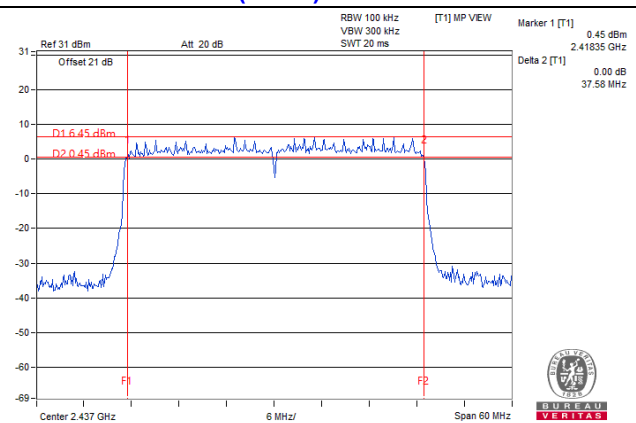

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	26.29	26.44	866.153	29.38	30	Pass
6	2437	26.15	26.61	870.239	29.40	30	Pass
11	2462	26.31	26.38	862.073	29.36	30	Pass

802.11g

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.51	20.72	230.493	23.63	30	Pass
6	2437	26.38	26.49	880.166	29.45	30	Pass
11	2462	20.34	20.21	213.098	23.29	30	Pass

VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	22.01	22.03	318.443	25.03	30	Pass
6	2437	26.02	26.06	803.59	29.05	30	Pass
11	2462	20.05	20.33	209.053	23.20	30	Pass

VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	19.79	19.31	180.59	22.57	30	Pass
6	2437	21.44	21.04	266.373	24.25	30	Pass
9	2452	16.88	17.15	100.633	20.03	30	Pass

802.11ax (HE20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	22.09	22.06	322.502	25.09	30	Pass
6	2437	26.08	26.13	815.713	29.12	30	Pass
11	2462	20.15	20.49	215.458	23.33	30	Pass

802.11ax (HE40)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	19.83	19.47	184.673	22.66	30	Pass
6	2437	21.53	21.22	274.667	24.39	30	Pass
9	2452	17.01	17.30	103.937	20.17	30	Pass

Beamforming Mode

VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	22.01	22.03	318.443	25.03	30	Pass
6	2437	26.02	26.06	803.59	29.05	30	Pass
11	2462	20.05	20.33	209.053	23.20	30	Pass

Note: Directional gain = $1.87\text{dBi} + 10\log(2) = 4.88\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced

VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	19.79	19.31	180.59	22.57	30	Pass
6	2437	21.44	21.04	266.373	24.25	30	Pass
9	2452	16.88	17.15	100.633	20.03	30	Pass

Note: Directional gain = $1.87\text{dBi} + 10\log(2) = 4.88\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced

802.11ax (HE20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	22.09	22.06	322.502	25.09	30	Pass
6	2437	26.08	26.13	815.713	29.12	30	Pass
11	2462	20.15	20.49	215.458	23.33	30	Pass

Note: Directional gain = $1.87\text{dBi} + 10\log(2) = 4.88\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced

802.11ax (HE40)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	19.83	19.47	184.673	22.66	30	Pass
6	2437	21.53	21.22	274.667	24.39	30	Pass
9	2452	17.01	17.30	103.937	20.17	30	Pass


Note: Directional gain = $1.87\text{dBi} + 10\log(2) = 4.88\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1				
1	2412	-3.63	-3.40	0.8913	-0.50	8	PASS
6	2437	-2.79	-1.60	1.219	0.86	8	PASS
11	2462	-3.36	-3.09	0.9528	-0.21	8	PASS

Note: 1. Directional gain = $1.87\text{dBi} + 10\log(2) = 4.88\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1				
1	2412	-10.37	-11.33	0.16558	-7.81	8	PASS
6	2437	-5.29	-4.95	0.6152	-2.11	8	PASS
11	2462	-11.38	-11.26	0.14757	-8.31	8	PASS

Note: 1. Directional gain = $1.87\text{dBi} + 10\log(2) = 4.88\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11ax (HE20)


Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1				
1	2412	-11.24	-10.36	0.16711	-7.77	8	PASS
6	2437	-7.88	-7.10	0.3581	-4.46	8	PASS
11	2462	-12.38	-13.22	0.10544	-9.77	8	PASS

Note: 1. Directional gain = $1.87\text{dBi} + 10\log(2) = 4.88\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1				
3	2422	-16.14	-16.71	0.0456	-13.41	8	PASS
6	2437	-15.42	-14.49	0.06427	-11.92	8	PASS
9	2452	-18.69	-18.42	0.02793	-15.54	8	PASS

Note: 1. Directional gain = $1.87\text{dBi} + 10\log(2) = 4.88\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

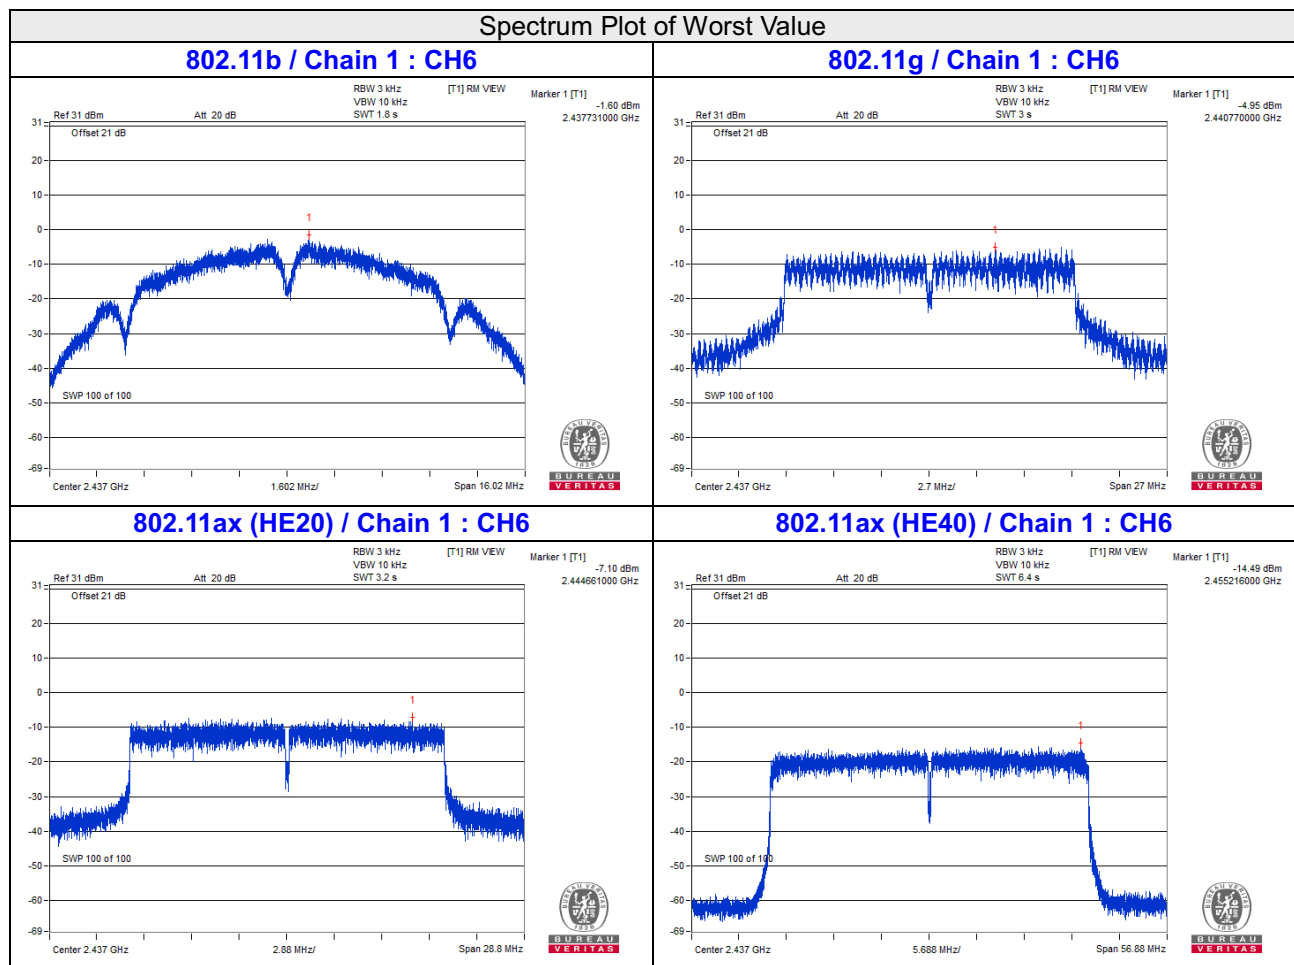


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b

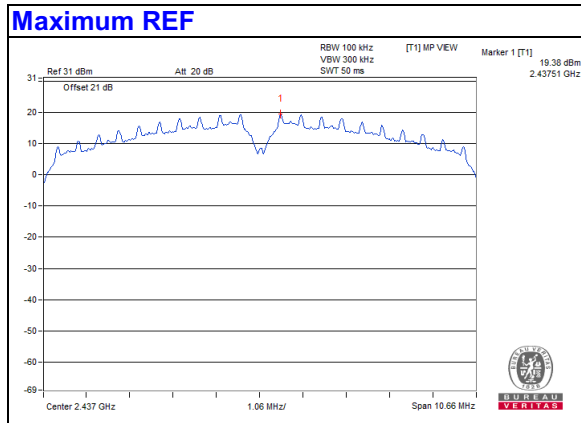


Chain 0


CH 1

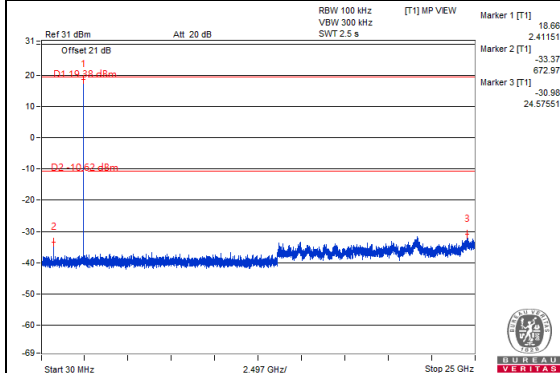


CH 6

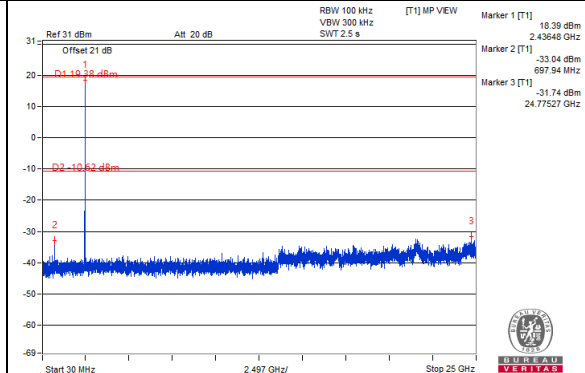


CH 11

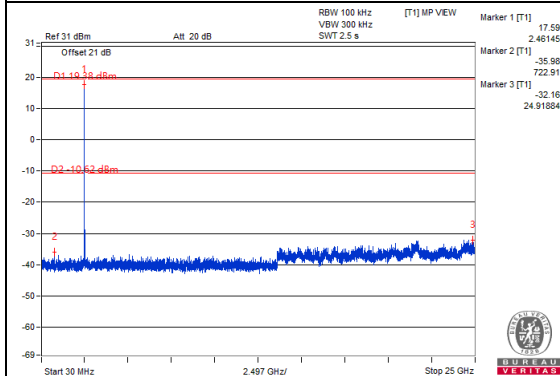

CH 1 Band edge

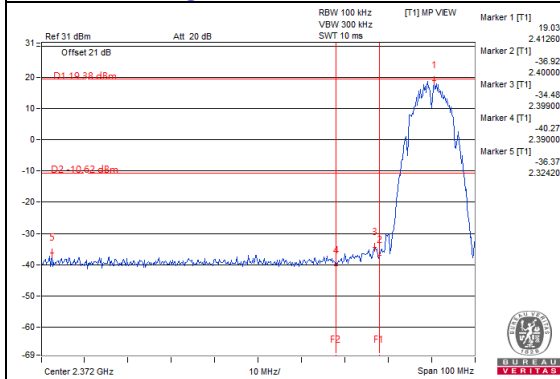


CH 11 Band edge

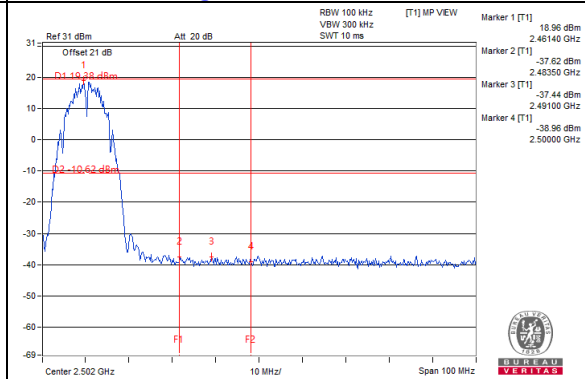


Chain 1


CH 1

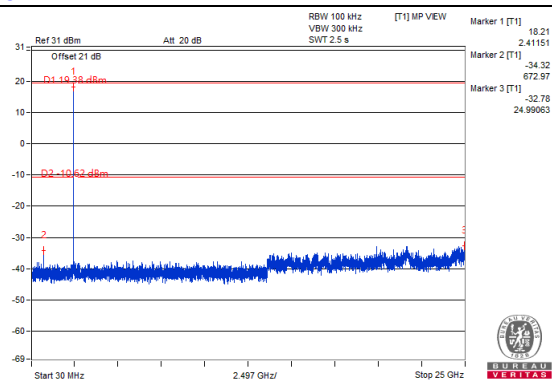


CH 6

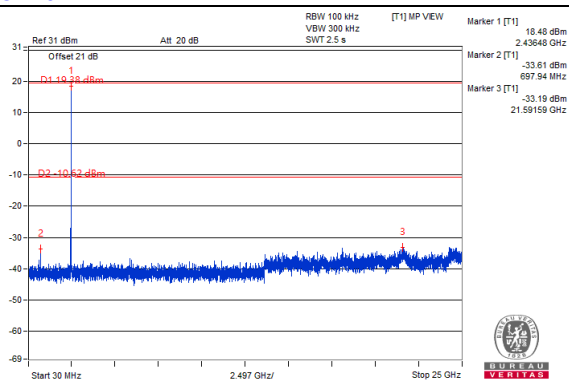


CH 11

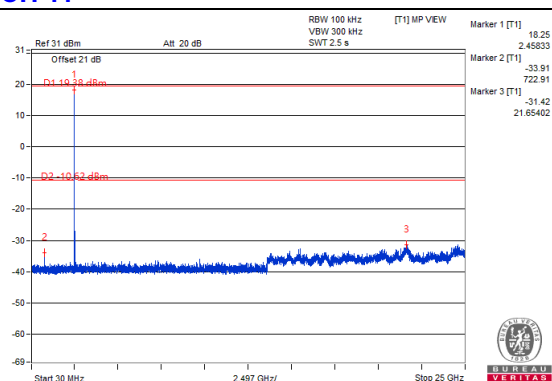

CH 1 Band edge

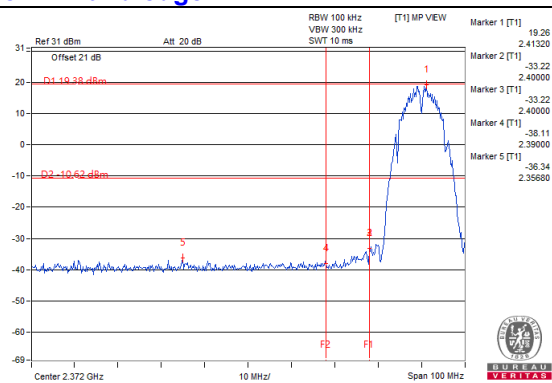


CH 11 Band edge

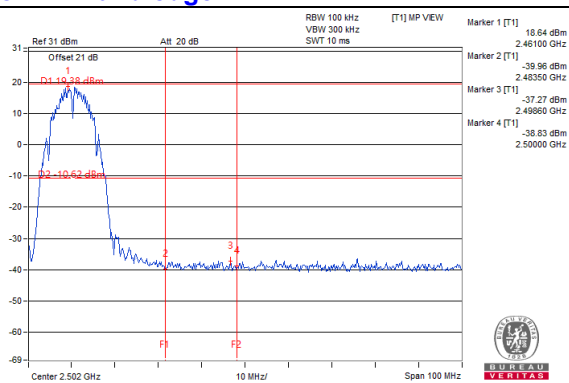


802.11g

Maximum REF

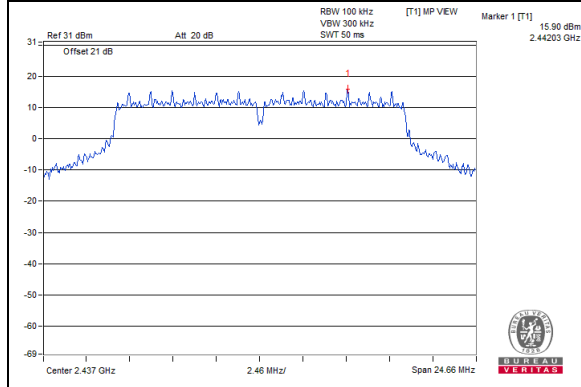


Chain 0


CH 1

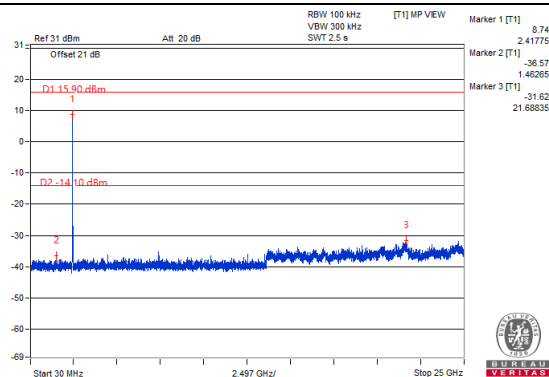


CH 6

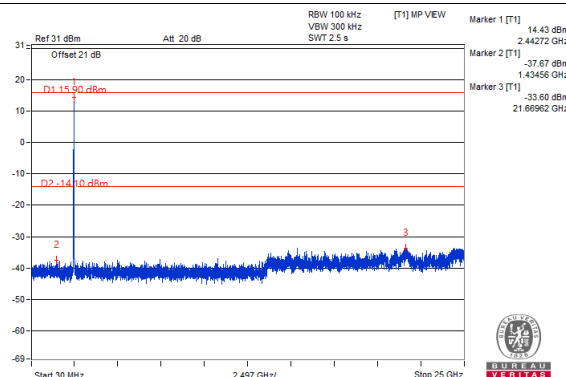


CH 11

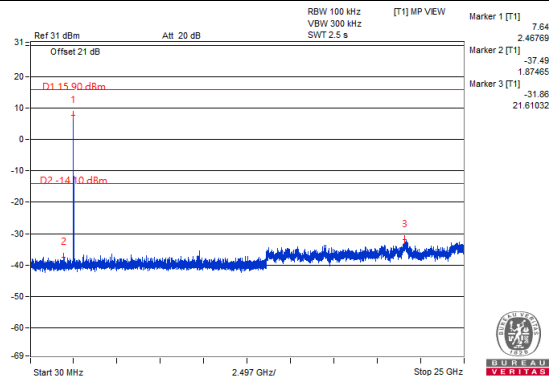


CH 1 Band edge

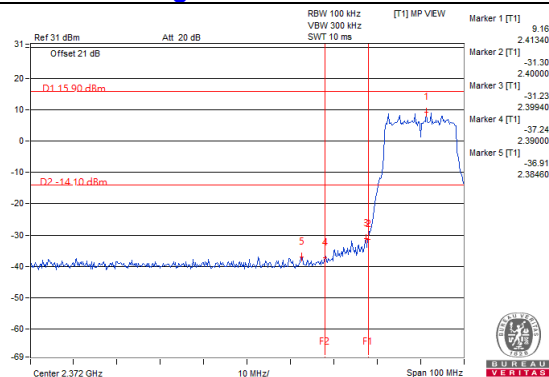

CH 11 Band edge

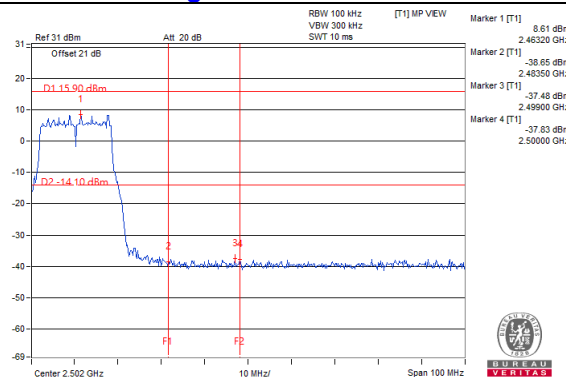


Chain 1

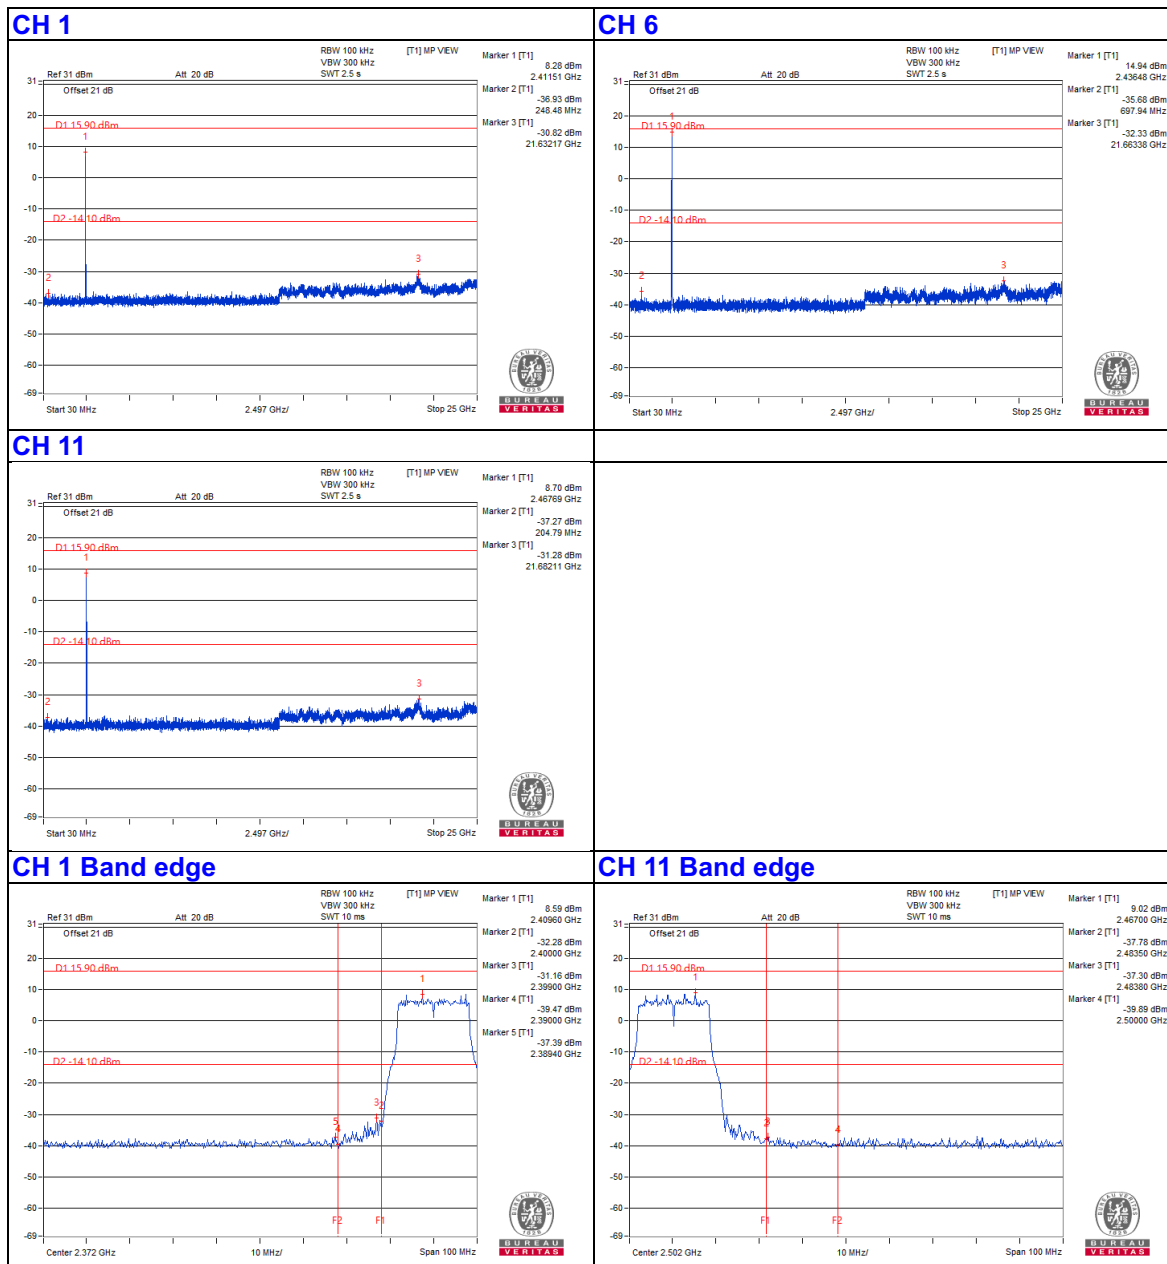


802.11ax (HE20)

Maximum REF

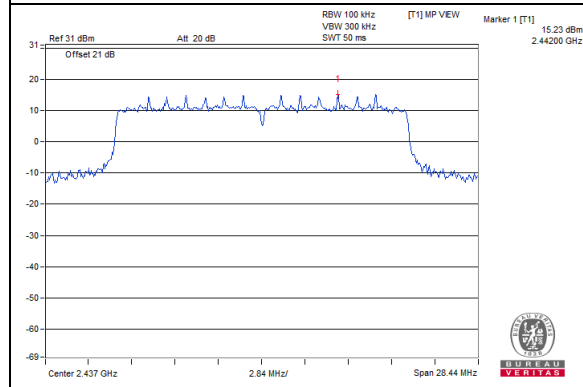


Chain 0


CH 1

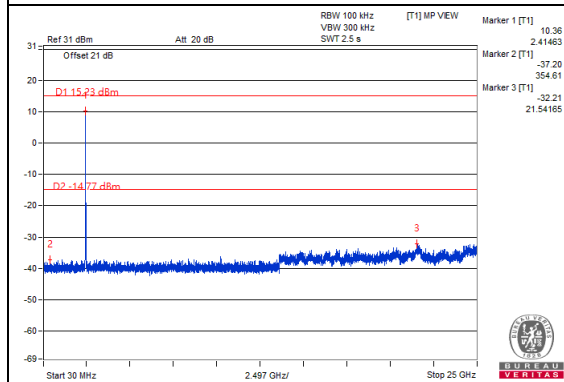


CH 6

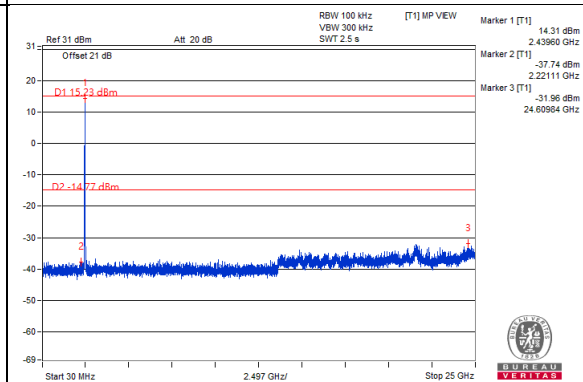


CH 11

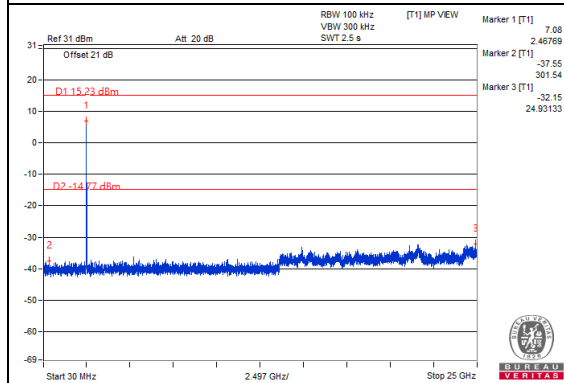


CH 1 Band edge

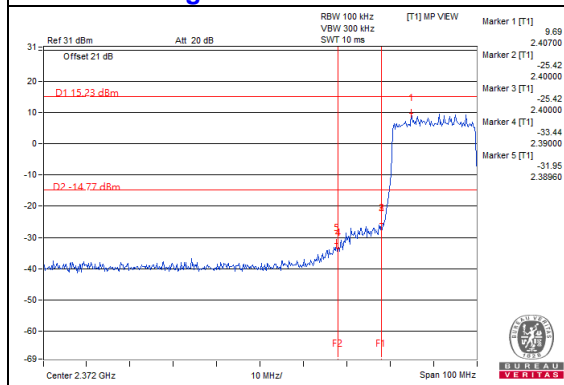

CH 11 Band edge

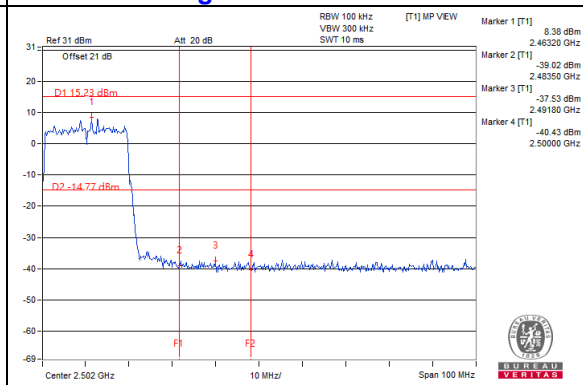


Chain 1

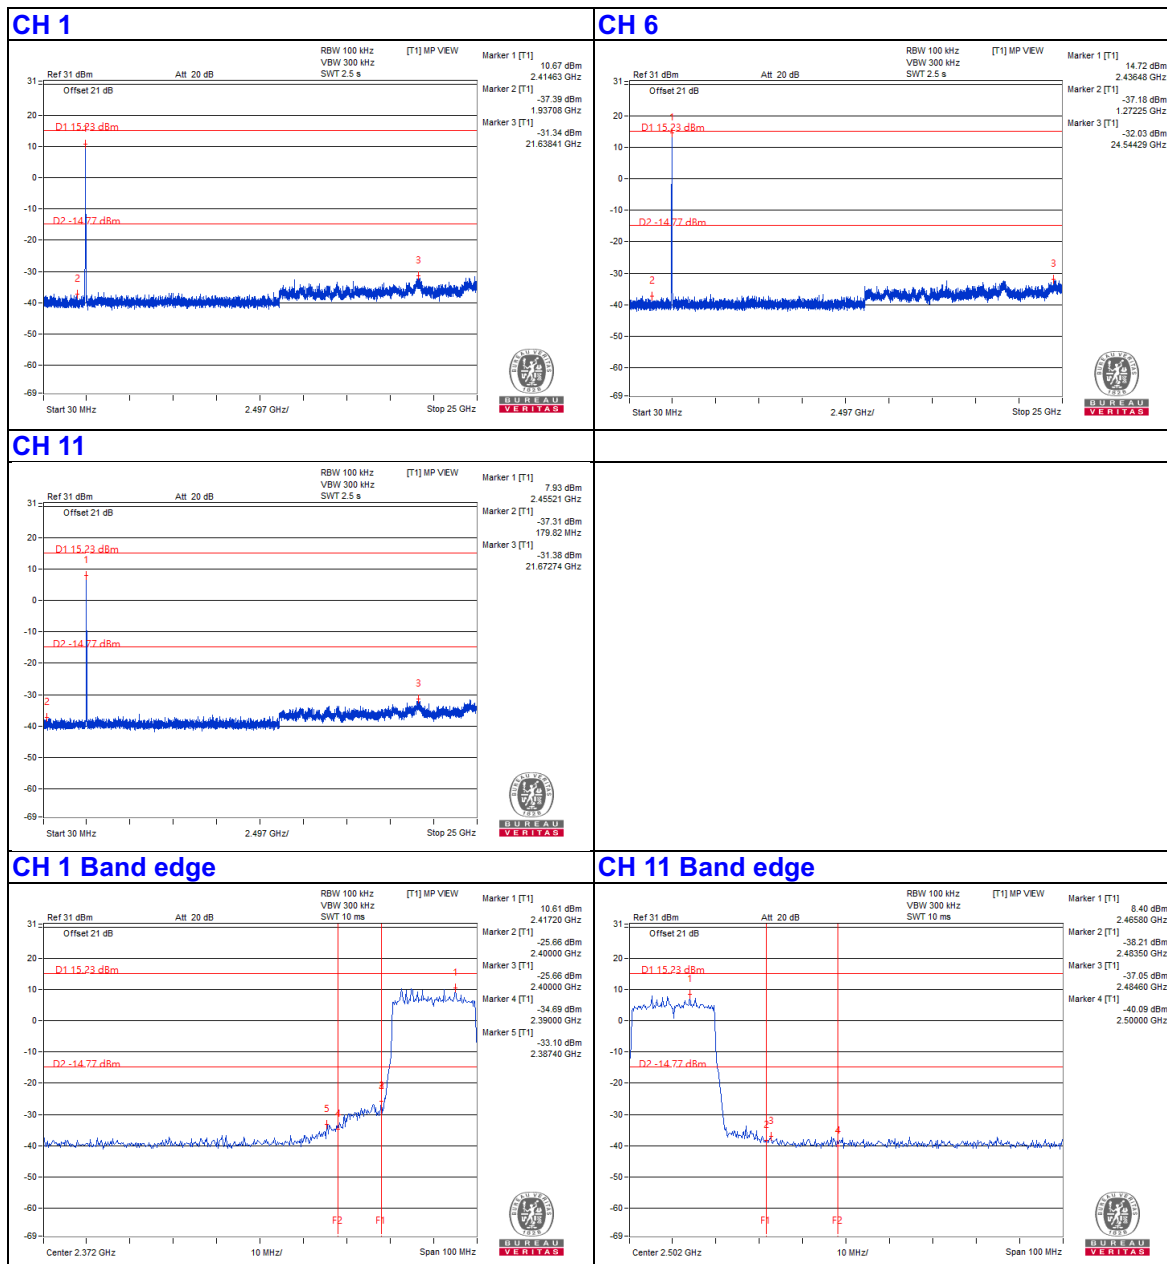


802.11ax (HE40)

Maximum REF

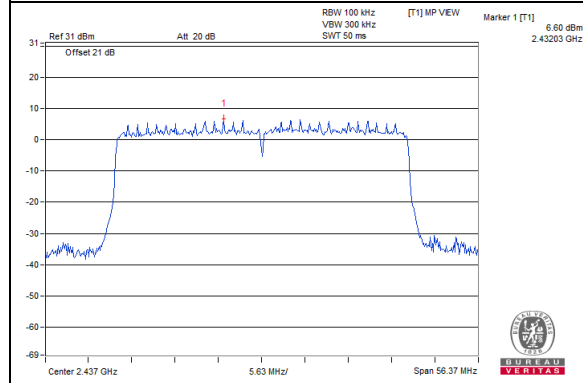


Chain 0


CH 3

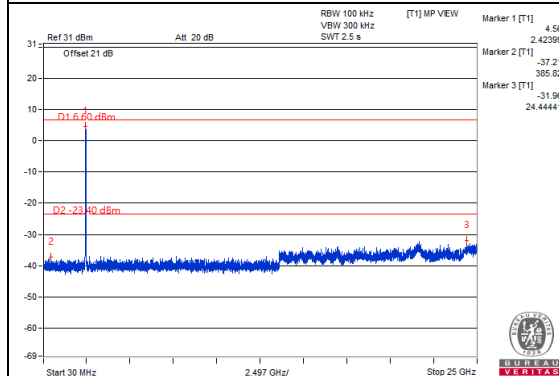


CH 6

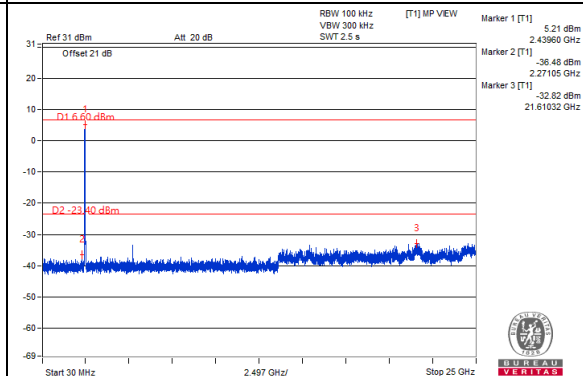


CH 9

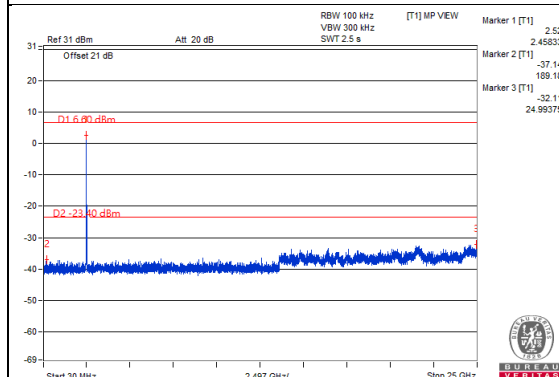

CH 3 Band edge

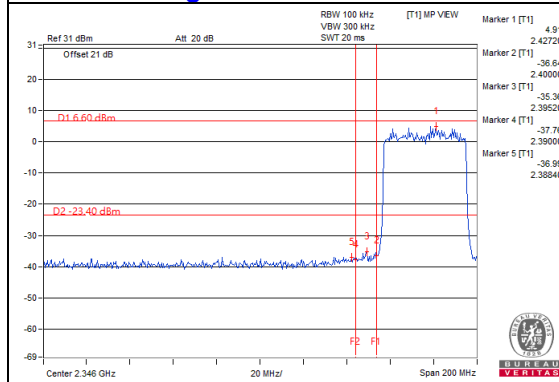


CH 9 Band edge

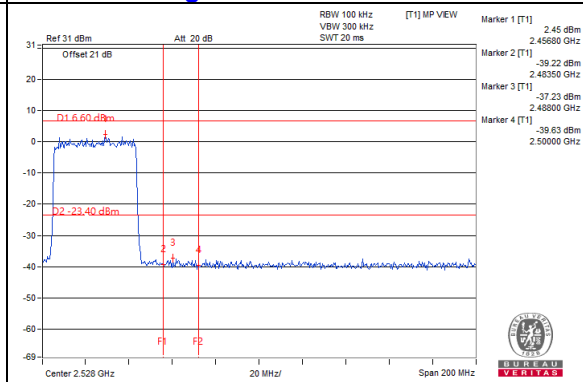


Chain 1



CH 3

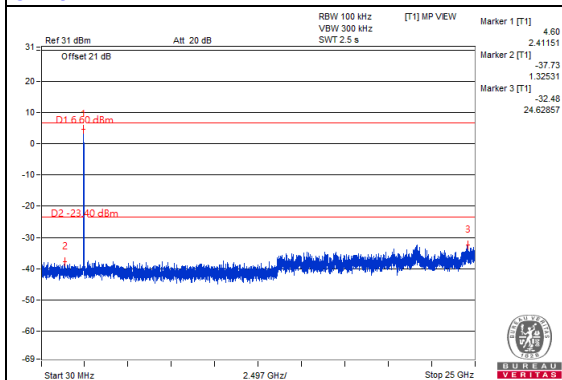


CH 6

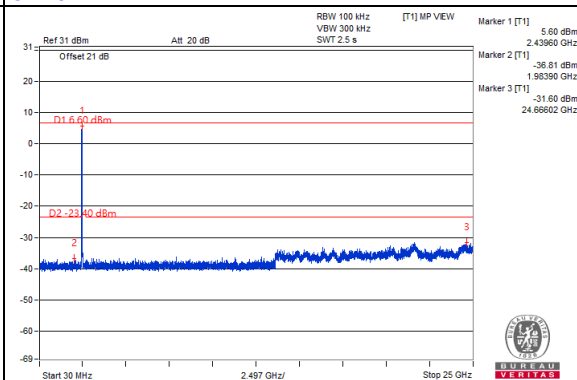


CH 9

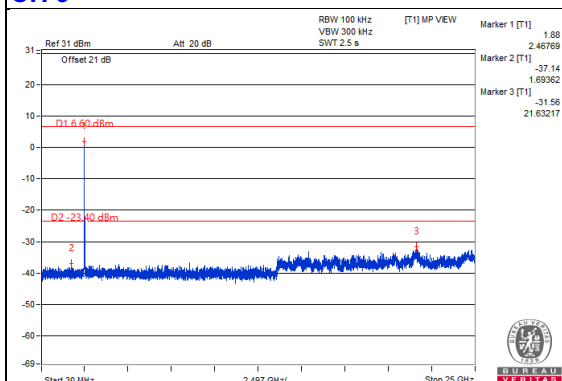

CH 3 Band edge

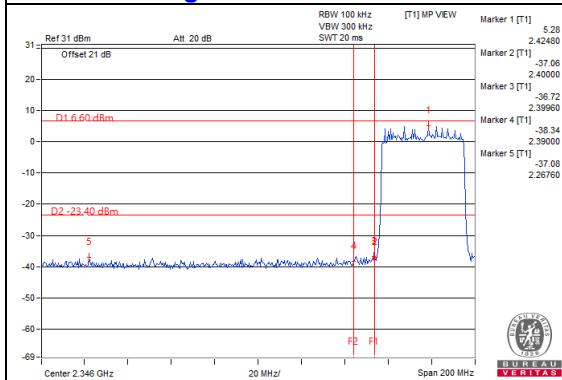

CH 9 Band edge

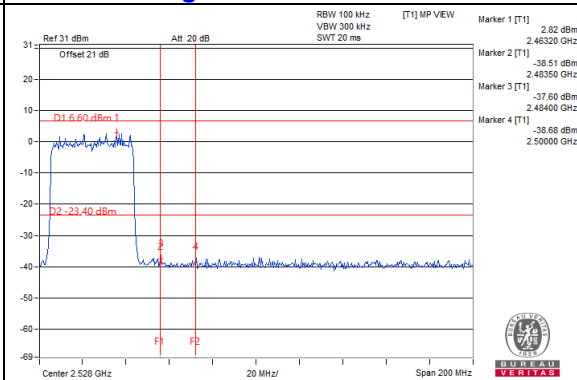


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement


802.11b

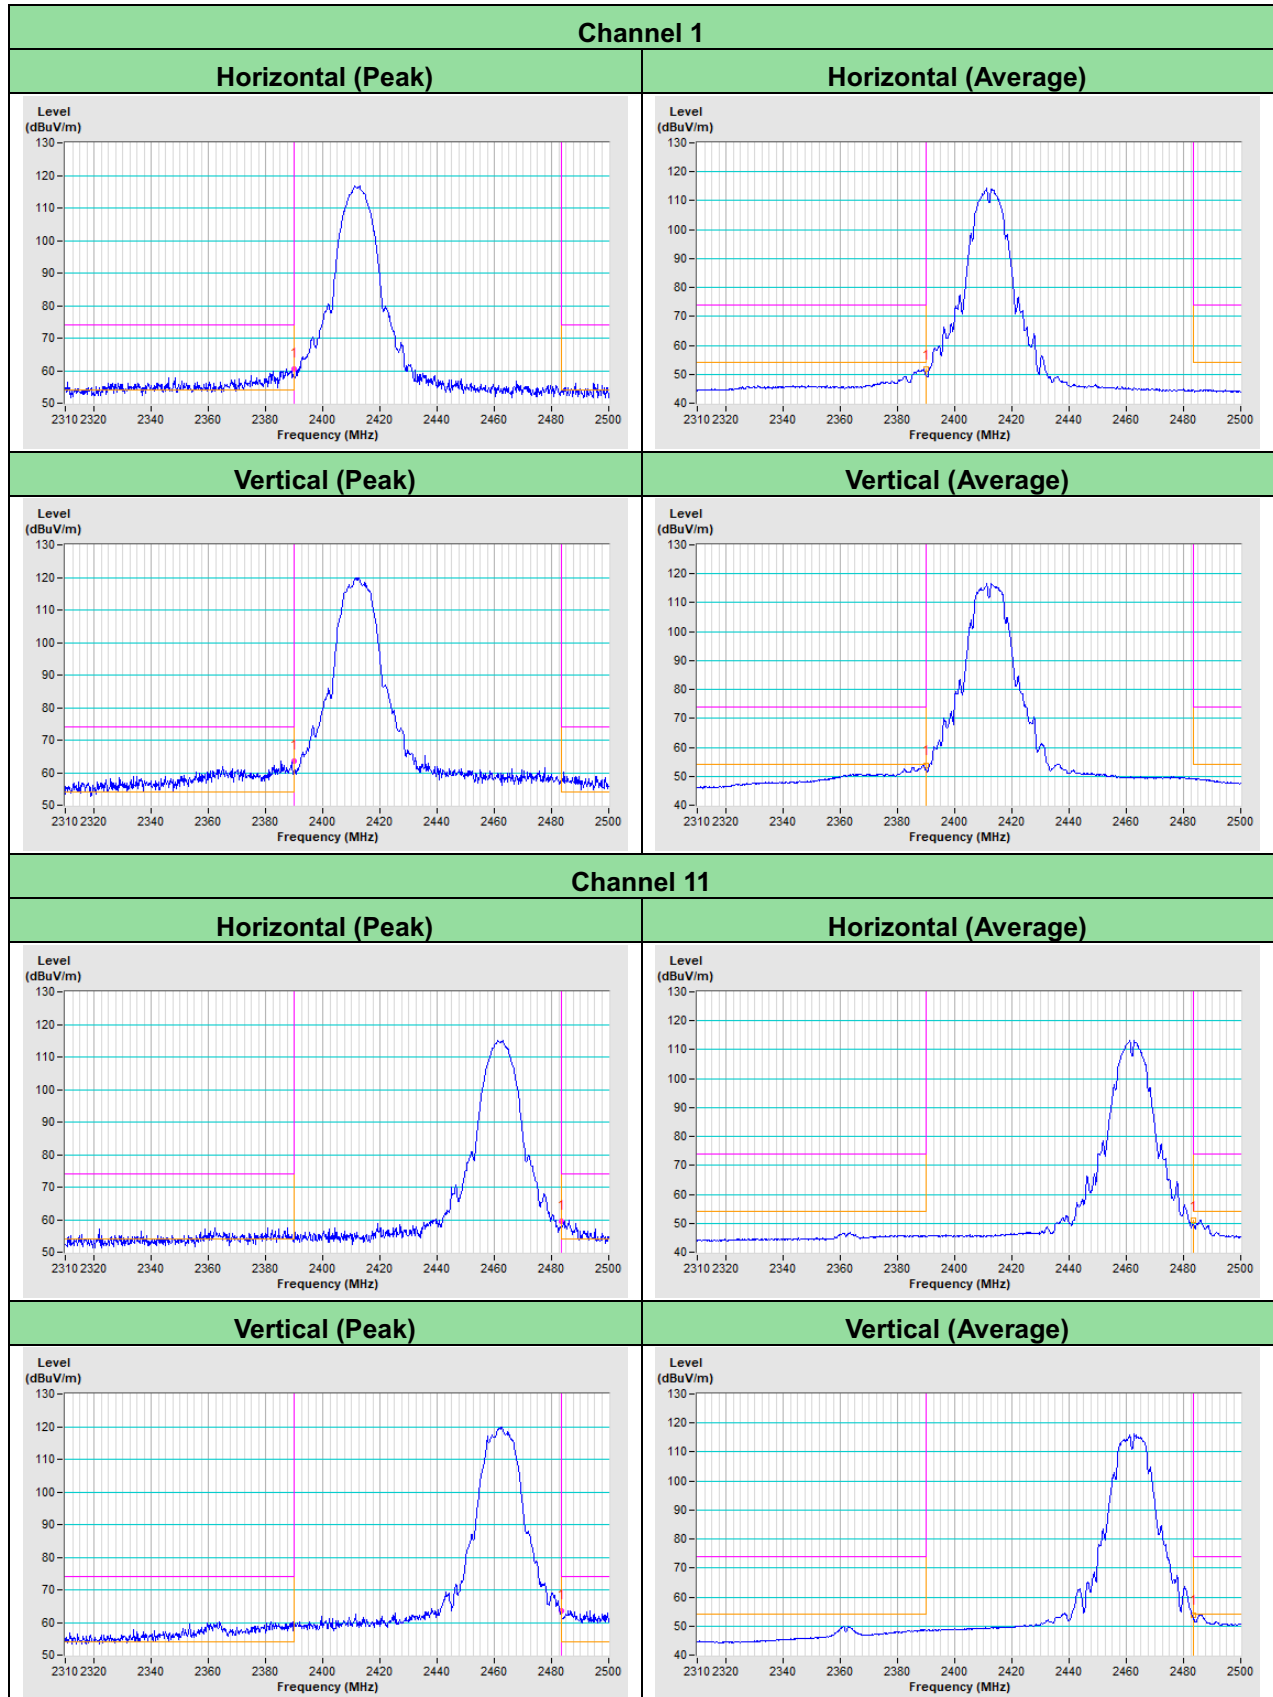


802.11g

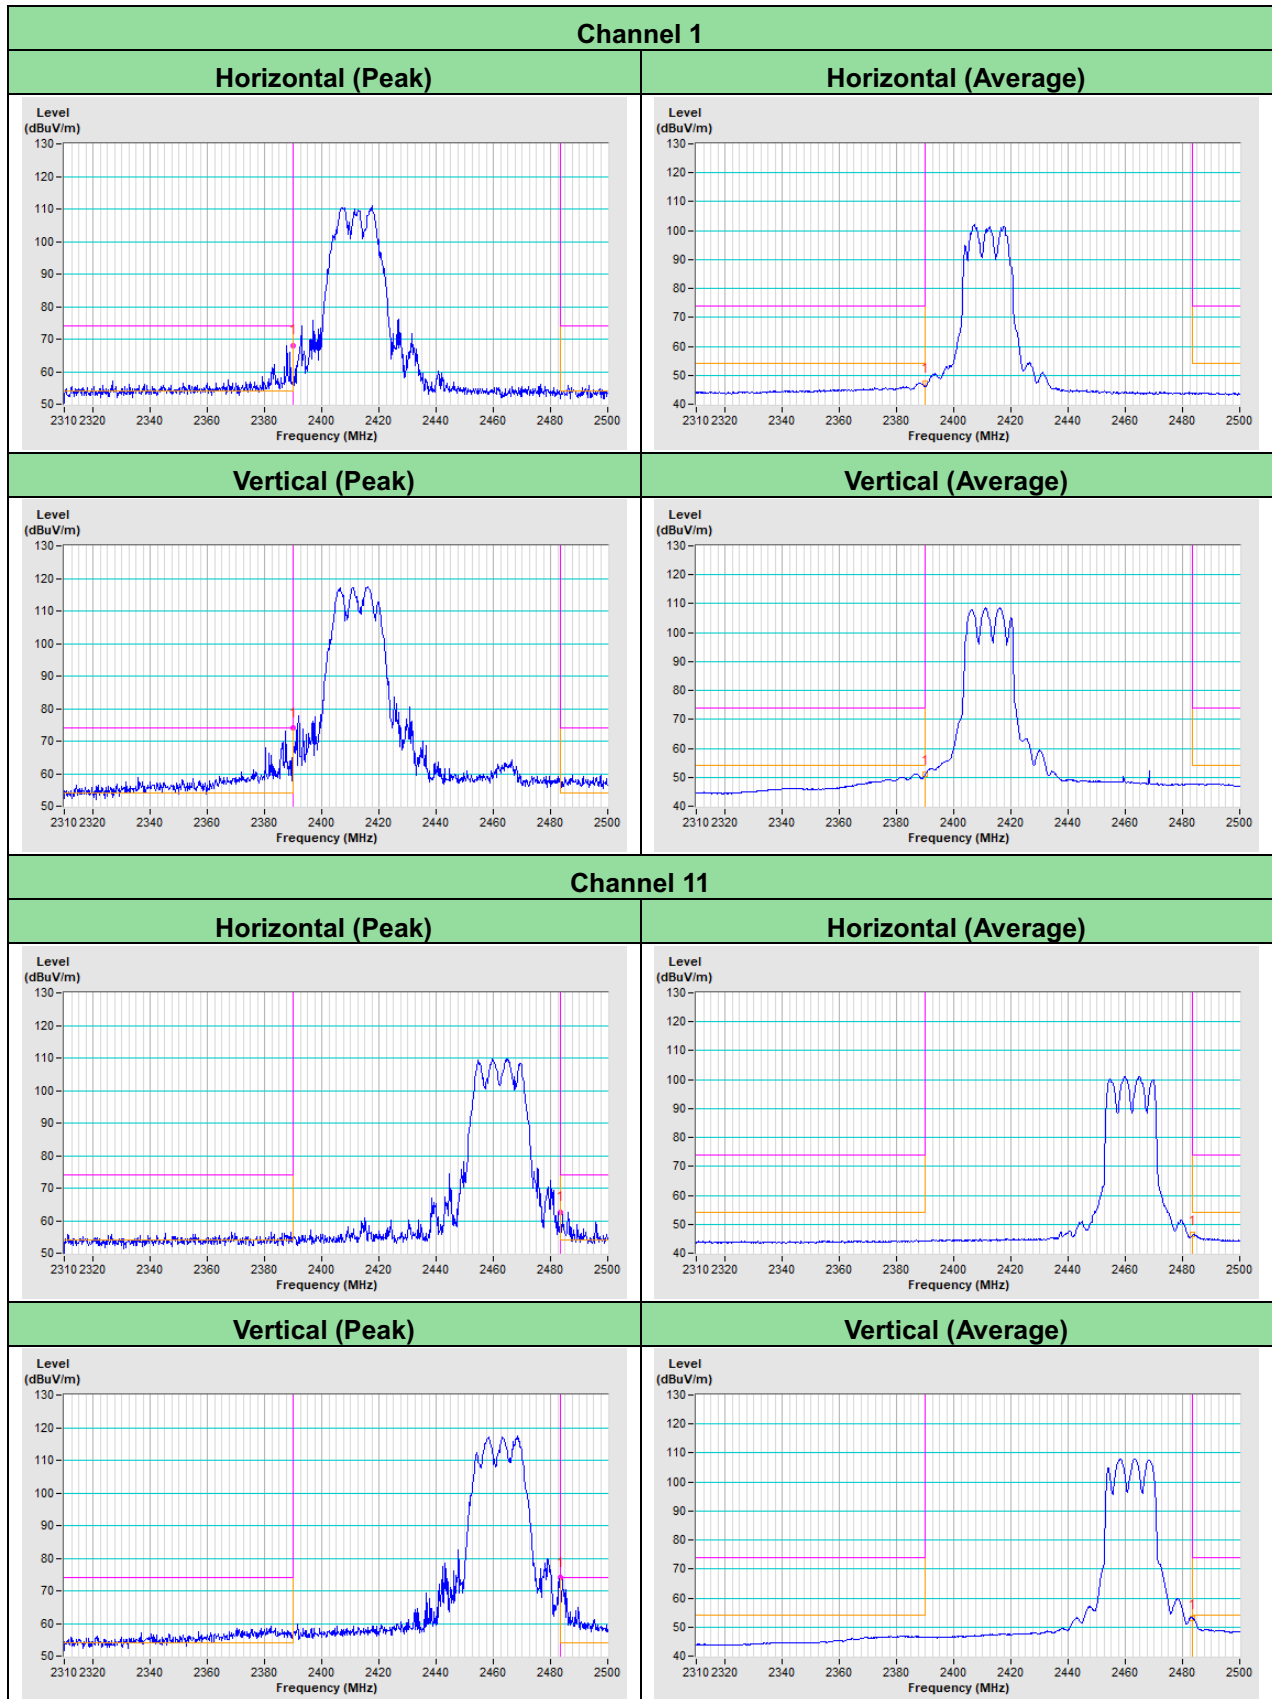

802.11ax (HE20)

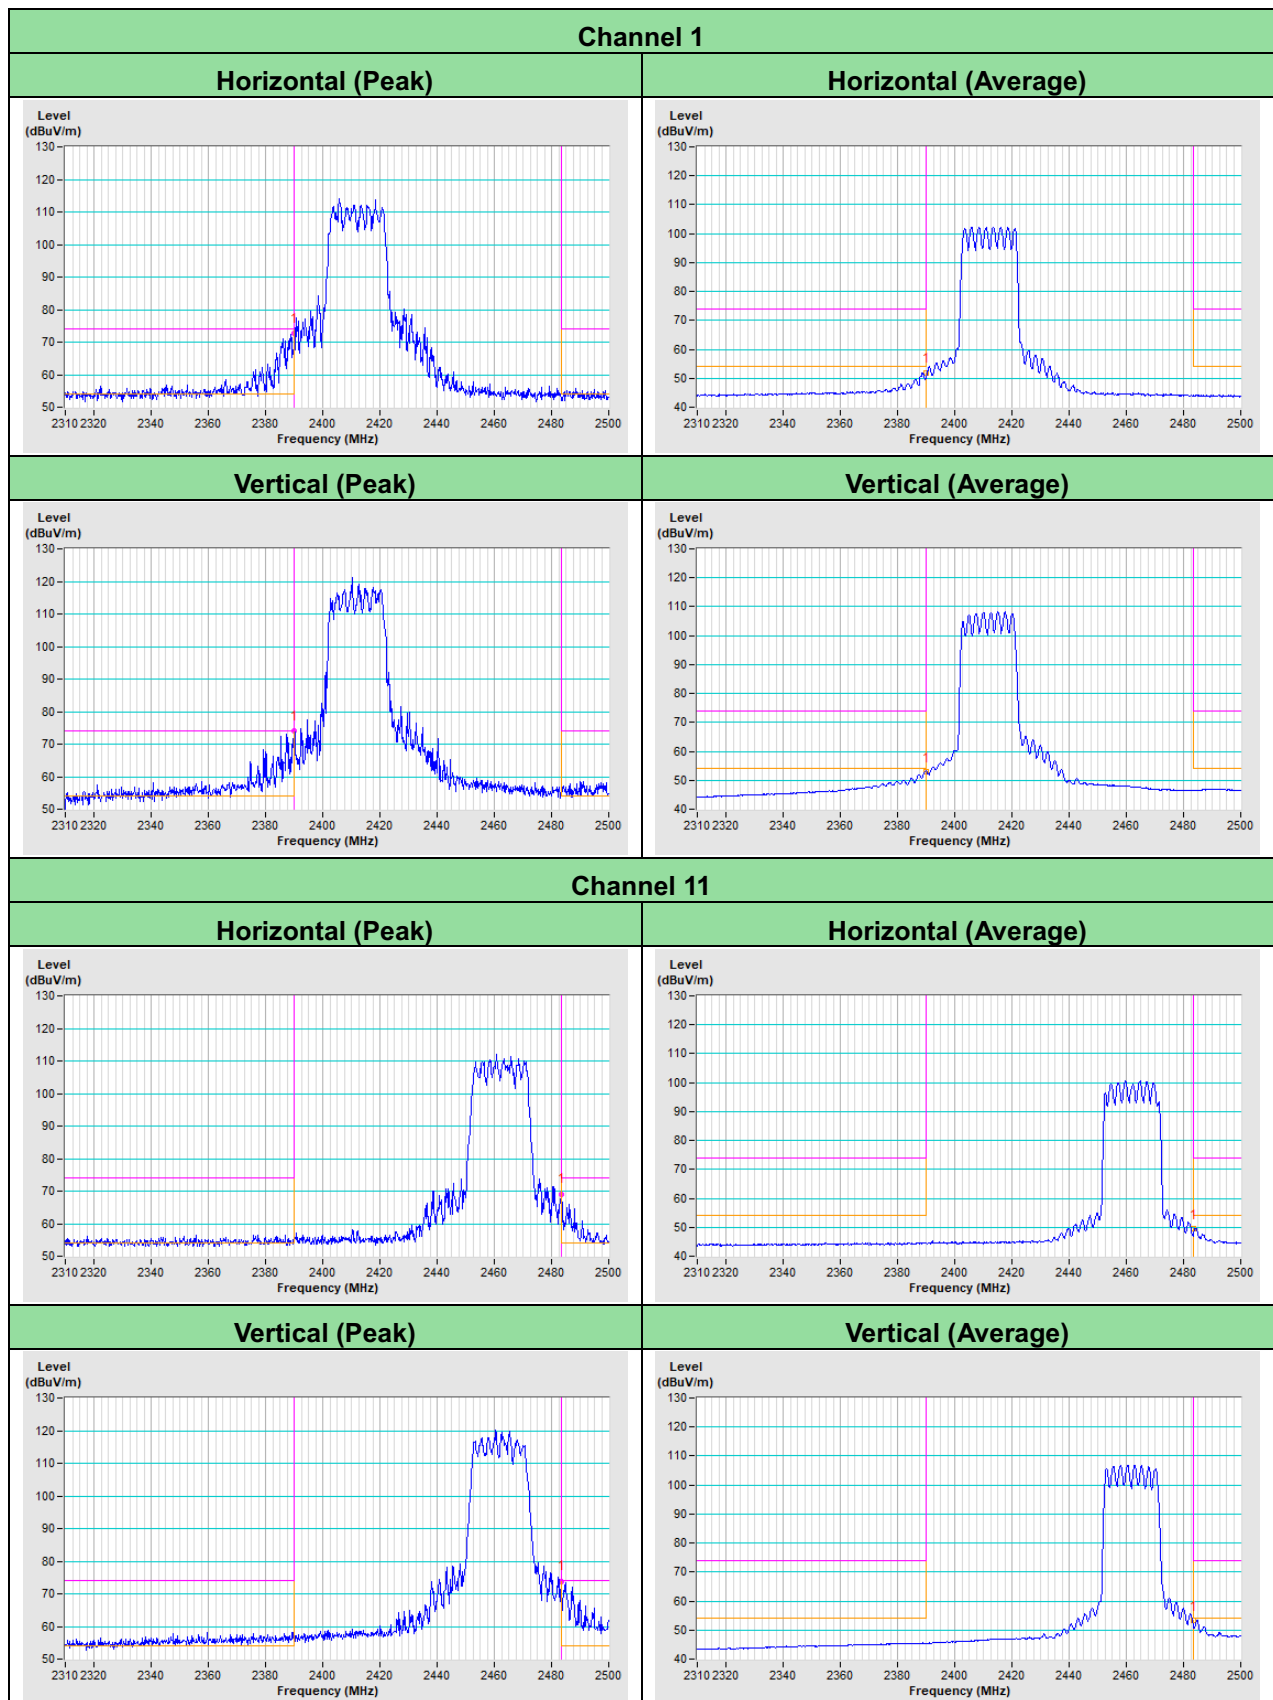

802.11ax (HE40)

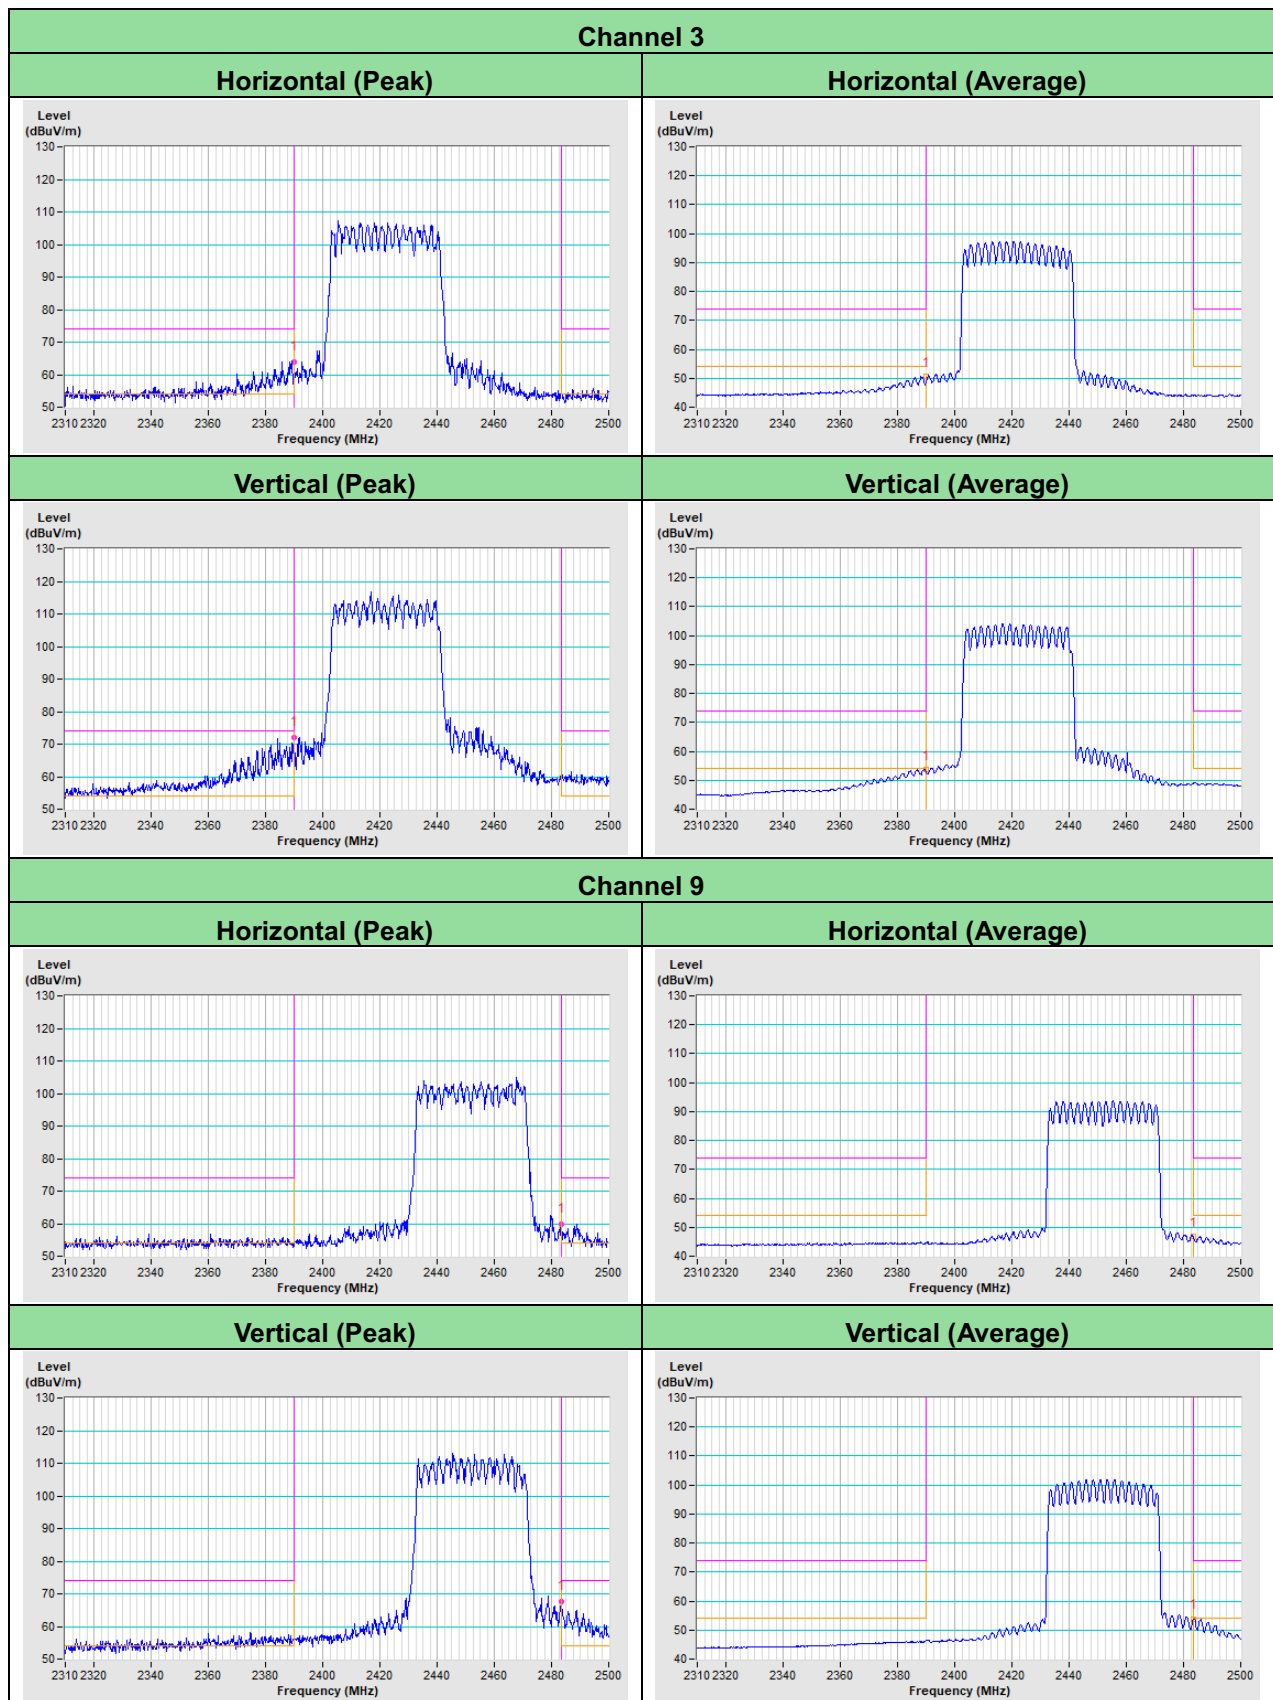

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---