

RF Mode	TX 802.11ax (HE20)	Channel	CH 61 : 6255 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	111.6 PK			3.89 H	122	106.9	4.7
2	*6255.00	101.7 AV			3.89 H	122	97.0	4.7
3	12510.00	48.7 PK	74.0	-25.3	1.61 H	344	36.3	12.4
4	12510.00	40.5 AV	54.0	-13.5	1.61 H	344	28.1	12.4
5	18765.00	48.3 PK	74.0	-25.7	1.21 H	312	55.1	-6.8
6	18765.00	36.2 AV	54.0	-17.8	1.21 H	312	43.0	-6.8
7	#25020.00	46.8 PK	88.2	-41.4	1.35 H	305	48.6	-1.8
8	#25020.00	36.7 AV	68.2	-31.5	1.35 H	305	38.5	-1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	118.2 PK			1.62 V	360	113.5	4.7
2	*6255.00	106.9 AV			1.62 V	360	102.2	4.7
3	12510.00	47.5 PK	74.0	-26.5	1.63 V	325	35.1	12.4
4	12510.00	39.4 AV	54.0	-14.6	1.63 V	325	27.0	12.4
5	18765.00	50.1 PK	74.0	-23.9	1.25 V	341	56.9	-6.8
6	18765.00	41.5 AV	54.0	-12.5	1.25 V	341	48.3	-6.8
7	#25020.00	49.5 PK	88.2	-38.7	1.43 V	331	51.3	-1.8
8	#25020.00	38.8 AV	68.2	-29.4	1.43 V	331	40.6	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.0 PK			3.94 H	134	106.7	5.3
2	*6415.00	101.7 AV			3.94 H	134	96.4	5.3
3	#12830.00	48.0 PK	88.2	-40.2	1.66 H	349	34.6	13.4
4	#12830.00	40.2 AV	68.2	-28.0	1.66 H	349	26.8	13.4
5	19245.00	48.3 PK	74.0	-25.7	1.20 H	307	55.0	-6.7
6	19245.00	36.0 AV	54.0	-18.0	1.20 H	307	42.7	-6.7
7	#25660.00	46.1 PK	88.2	-42.1	1.37 H	326	47.7	-1.6
8	#25660.00	35.9 AV	68.2	-32.3	1.37 H	326	37.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.5 PK			1.65 V	360	113.2	5.3
2	*6415.00	107.0 AV			1.65 V	360	101.7	5.3
3	#12830.00	48.5 PK	88.2	-39.7	1.57 V	309	35.1	13.4
4	#12830.00	40.3 AV	68.2	-27.9	1.57 V	309	26.9	13.4
5	19245.00	50.2 PK	74.0	-23.8	1.31 V	319	56.9	-6.7
6	19245.00	41.8 AV	54.0	-12.2	1.31 V	319	48.5	-6.7
7	#25660.00	49.3 PK	88.2	-38.9	1.32 V	301	50.9	-1.6
8	#25660.00	38.4 AV	68.2	-29.8	1.32 V	301	40.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 97 : 6435 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.4 PK			3.83 H	138	106.0	5.4
2	*6435.00	101.1 AV			3.83 H	138	95.7	5.4
3	#12870.00	48.0 PK	88.2	-40.2	1.67 H	338	34.6	13.4
4	#12870.00	40.3 AV	68.2	-27.9	1.67 H	338	26.9	13.4
5	19305.00	48.3 PK	74.0	-25.7	1.14 H	319	55.0	-6.7
6	19305.00	36.1 AV	54.0	-17.9	1.14 H	319	42.8	-6.7
7	#25740.00	45.8 PK	88.2	-42.4	1.35 H	311	47.2	-1.4
8	#25740.00	36.1 AV	68.2	-32.1	1.35 H	311	37.5	-1.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	117.7 PK			1.66 V	352	112.3	5.4
2	*6435.00	106.6 AV			1.66 V	352	101.2	5.4
3	#12870.00	47.9 PK	88.2	-40.3	1.65 V	328	34.5	13.4
4	#12870.00	39.6 AV	68.2	-28.6	1.65 V	328	26.2	13.4
5	19305.00	49.9 PK	74.0	-24.1	1.23 V	321	56.6	-6.7
6	19305.00	41.6 AV	54.0	-12.4	1.23 V	321	48.3	-6.7
7	#25740.00	48.9 PK	88.2	-39.3	1.44 V	307	50.3	-1.4
8	#25740.00	38.6 AV	68.2	-29.6	1.44 V	307	40.0	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 105 : 6475 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.5 PK			3.94 H	124	105.8	5.7
2	*6475.00	101.3 AV			3.94 H	124	95.6	5.7
3	#12950.00	48.8 PK	88.2	-39.4	1.66 H	334	35.5	13.3
4	#12950.00	40.7 AV	68.2	-27.5	1.66 H	334	27.4	13.3
5	19425.00	48.3 PK	74.0	-25.7	1.20 H	316	55.1	-6.8
6	19425.00	36.0 AV	54.0	-18.0	1.20 H	316	42.8	-6.8
7	#25900.00	46.2 PK	88.2	-42.0	1.28 H	311	48.2	-2.0
8	#25900.00	36.2 AV	68.2	-32.0	1.28 H	311	38.2	-2.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.3 PK			1.63 V	344	112.6	5.7
2	*6475.00	107.0 AV			1.63 V	344	101.3	5.7
3	#12950.00	48.7 PK	88.2	-39.5	1.53 V	300	35.4	13.3
4	#12950.00	40.2 AV	68.2	-28.0	1.53 V	300	26.9	13.3
5	19425.00	50.1 PK	74.0	-23.9	1.23 V	334	56.9	-6.8
6	19425.00	41.9 AV	54.0	-12.1	1.23 V	334	48.7	-6.8
7	#25900.00	49.3 PK	88.2	-38.9	1.42 V	325	51.3	-2.0
8	#25900.00	38.5 AV	68.2	-29.7	1.42 V	325	40.5	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 113 : 6515 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.0 PK			3.87 H	129	105.0	6.0
2	*6515.00	101.0 AV			3.87 H	129	95.0	6.0
3	#13030.00	48.4 PK	88.2	-39.8	1.61 H	331	35.1	13.3
4	#13030.00	40.5 AV	68.2	-27.7	1.61 H	331	27.2	13.3
5	19545.00	49.0 PK	74.0	-25.0	1.13 H	312	55.2	-6.2
6	19545.00	36.6 AV	54.0	-17.4	1.13 H	312	42.8	-6.2
7	#26060.00	45.8 PK	88.2	-42.4	1.35 H	306	47.2	-1.4
8	#26060.00	35.9 AV	68.2	-32.3	1.35 H	306	37.3	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	118.3 PK			1.65 V	356	112.3	6.0
2	*6515.00	106.8 AV			1.65 V	356	100.8	6.0
3	#13030.00	48.6 PK	88.2	-39.6	1.57 V	315	35.3	13.3
4	#13030.00	40.3 AV	68.2	-27.9	1.57 V	315	27.0	13.3
5	19545.00	49.8 PK	74.0	-24.2	1.25 V	316	56.0	-6.2
6	19545.00	41.5 AV	54.0	-12.5	1.25 V	316	47.7	-6.2
7	#26060.00	48.7 PK	88.2	-39.5	1.35 V	308	50.1	-1.4
8	#26060.00	37.9 AV	68.2	-30.3	1.35 V	308	39.3	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.5 PK			3.82 H	126	105.5	6.0
2	*6535.00	101.3 AV			3.82 H	126	95.3	6.0
3	#13070.00	48.1 PK	88.2	-40.1	1.67 H	320	34.7	13.4
4	#13070.00	40.4 AV	68.2	-27.8	1.67 H	320	27.0	13.4
5	19605.00	48.7 PK	74.0	-25.3	1.19 H	307	54.8	-6.1
6	19605.00	36.1 AV	54.0	-17.9	1.19 H	307	42.2	-6.1
7	#26140.00	46.0 PK	88.2	-42.2	1.28 H	326	47.3	-1.3
8	#26140.00	36.1 AV	68.2	-32.1	1.28 H	326	37.4	-1.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.2 PK			1.64 V	360	112.2	6.0
2	*6535.00	106.7 AV			1.64 V	360	100.7	6.0
3	#13070.00	48.3 PK	88.2	-39.9	1.62 V	308	34.9	13.4
4	#13070.00	40.0 AV	68.2	-28.2	1.62 V	308	26.6	13.4
5	19605.00	49.8 PK	74.0	-24.2	1.27 V	321	55.9	-6.1
6	19605.00	41.2 AV	54.0	-12.8	1.27 V	321	47.3	-6.1
7	#26140.00	48.8 PK	88.2	-39.4	1.40 V	331	50.1	-1.3
8	#26140.00	38.2 AV	68.2	-30.0	1.40 V	331	39.5	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 153 : 6715 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6715.00	110.9 PK			3.86 H	110	104.8	6.1
2	*6715.00	100.9 AV			3.86 H	110	94.8	6.1
3	#13430.00	48.9 PK	88.2	-39.3	1.58 H	330	34.0	14.9
4	#13430.00	40.8 AV	68.2	-27.4	1.58 H	330	25.9	14.9
5	20145.00	48.0 PK	74.0	-26.0	1.18 H	308	53.4	-5.4
6	20145.00	35.7 AV	54.0	-18.3	1.18 H	308	41.1	-5.4
7	#26860.00	45.9 PK	88.2	-42.3	1.28 H	306	47.0	-1.1
8	#26860.00	36.1 AV	68.2	-32.1	1.28 H	306	37.2	-1.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6715.00	117.5 PK			1.73 V	360	111.4	6.1
2	*6715.00	106.4 AV			1.73 V	360	100.3	6.1
3	#13430.00	48.1 PK	88.2	-40.1	1.63 V	324	33.2	14.9
4	#13430.00	39.6 AV	68.2	-28.6	1.63 V	324	24.7	14.9
5	20145.00	49.9 PK	74.0	-24.1	1.28 V	340	55.3	-5.4
6	20145.00	41.6 AV	54.0	-12.4	1.28 V	340	47.0	-5.4
7	#26860.00	48.7 PK	88.2	-39.5	1.33 V	303	49.8	-1.1
8	#26860.00	38.0 AV	68.2	-30.2	1.33 V	303	39.1	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.7 PK			3.89 H	133	104.9	6.8
2	*6855.00	101.7 AV			3.89 H	133	94.9	6.8
3	#13710.00	48.0 PK	88.2	-40.2	1.62 H	342	32.3	15.7
4	#13710.00	40.1 AV	68.2	-28.1	1.62 H	342	24.4	15.7
5	20565.00	48.8 PK	74.0	-25.2	1.14 H	320	53.7	-4.9
6	20565.00	36.4 AV	54.0	-17.6	1.14 H	320	41.3	-4.9
7	#27420.00	46.6 PK	88.2	-41.6	1.28 H	316	48.2	-1.6
8	#27420.00	36.7 AV	68.2	-31.5	1.28 H	316	38.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.3 PK			1.64 V	360	111.5	6.8
2	*6855.00	106.8 AV			1.64 V	360	100.0	6.8
3	#13710.00	48.3 PK	88.2	-39.9	1.62 V	329	32.6	15.7
4	#13710.00	40.2 AV	68.2	-28.0	1.62 V	329	24.5	15.7
5	20565.00	50.4 PK	74.0	-23.6	1.29 V	339	55.3	-4.9
6	20565.00	41.8 AV	54.0	-12.2	1.29 V	339	46.7	-4.9
7	#27420.00	49.3 PK	88.2	-38.9	1.38 V	311	50.9	-1.6
8	#27420.00	38.4 AV	68.2	-29.8	1.38 V	311	40.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 185 : 6875 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.2 PK			3.93 H	131	104.2	7.0
2	*6875.00	101.2 AV			3.93 H	131	94.2	7.0
3	#13750.00	48.1 PK	88.2	-40.1	1.63 H	322	32.3	15.8
4	#13750.00	39.9 AV	68.2	-28.3	1.63 H	322	24.1	15.8
5	20625.00	48.1 PK	74.0	-25.9	1.18 H	332	52.9	-4.8
6	20625.00	35.9 AV	54.0	-18.1	1.18 H	332	40.7	-4.8
7	#27500.00	46.2 PK	88.2	-42.0	1.35 H	331	47.4	-1.2
8	#27500.00	35.9 AV	68.2	-32.3	1.35 H	331	37.1	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	118.2 PK			1.72 V	360	111.2	7.0
2	*6875.00	106.8 AV			1.72 V	360	99.8	7.0
3	#13750.00	47.9 PK	88.2	-40.3	1.57 V	325	32.1	15.8
4	#13750.00	39.8 AV	68.2	-28.4	1.57 V	325	24.0	15.8
5	20625.00	50.2 PK	74.0	-23.8	1.19 V	319	55.0	-4.8
6	20625.00	41.5 AV	54.0	-12.5	1.19 V	319	46.3	-4.8
7	#27500.00	49.0 PK	88.2	-39.2	1.36 V	320	50.2	-1.2
8	#27500.00	38.7 AV	68.2	-29.5	1.36 V	320	39.9	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 213 : 7015 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7015.00	111.9 PK			3.83 H	140	104.0	7.9
2	*7015.00	101.8 AV			3.83 H	140	93.9	7.9
3	#14030.00	48.9 PK	88.2	-39.3	1.67 H	346	33.0	15.9
4	#14030.00	40.7 AV	68.2	-27.5	1.67 H	346	24.8	15.9
5	21045.00	48.6 PK	74.0	-25.4	1.15 H	333	53.0	-4.4
6	21045.00	36.5 AV	54.0	-17.5	1.15 H	333	40.9	-4.4
7	#28060.00	46.5 PK	88.2	-41.7	1.37 H	335	47.9	-1.4
8	#28060.00	36.3 AV	68.2	-31.9	1.37 H	335	37.7	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7015.00	118.2 PK			1.68 V	345	110.3	7.9
2	*7015.00	107.0 AV			1.68 V	345	99.1	7.9
3	#14030.00	47.4 PK	88.2	-40.8	1.58 V	322	31.5	15.9
4	#14030.00	39.3 AV	68.2	-28.9	1.58 V	322	23.4	15.9
5	21045.00	50.2 PK	74.0	-23.8	1.22 V	332	54.6	-4.4
6	21045.00	41.6 AV	54.0	-12.4	1.22 V	332	46.0	-4.4
7	#28060.00	49.2 PK	88.2	-39.0	1.42 V	313	50.6	-1.4
8	#28060.00	38.8 AV	68.2	-29.4	1.42 V	313	40.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 229 : 7095 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	112.5 PK			1.57 H	15	104.2	8.3
2	*7095.00	100.5 AV			1.57 H	15	92.2	8.3
3	#7125.00	63.4 PK	88.2	-24.8	1.57 H	15	54.9	8.5
4	#7125.00	50.7 AV	68.2	-17.5	1.57 H	15	42.2	8.5
5	#14190.00	49.1 PK	88.2	-39.1	1.56 H	331	32.1	17.0
6	#14190.00	40.7 AV	68.2	-27.5	1.56 H	331	23.7	17.0
7	21285.00	49.0 PK	74.0	-25.0	1.13 H	334	53.4	-4.4
8	21285.00	36.3 AV	54.0	-17.7	1.13 H	334	40.7	-4.4
9	#28380.00	46.2 PK	88.2	-42.0	1.34 H	350	48.1	-1.9
10	#28380.00	36.1 AV	68.2	-32.1	1.34 H	350	38.0	-1.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	119.0 PK			1.50 V	356	110.7	8.3
2	*7095.00	107.2 AV			1.50 V	356	98.9	8.3
3	#7125.00	72.5 PK	88.2	-15.7	1.50 V	356	64.0	8.5
4	#7125.00	58.7 AV	68.2	-9.5	1.50 V	356	50.2	8.5
5	#14190.00	48.2 PK	88.2	-40.0	1.57 V	314	31.2	17.0
6	#14190.00	40.0 AV	68.2	-28.2	1.57 V	314	23.0	17.0
7	21285.00	50.4 PK	74.0	-23.6	1.20 V	321	54.8	-4.4
8	21285.00	42.0 AV	54.0	-12.0	1.20 V	321	46.4	-4.4
9	#28380.00	48.9 PK	88.2	-39.3	1.36 V	324	50.8	-1.9
10	#28380.00	38.3 AV	68.2	-29.9	1.36 V	324	40.2	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 233 : 7115 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	87.7 PK			2.67 H	247	79.6	8.1
2	*7115.00	77.1 AV			2.67 H	247	69.0	8.1
3	#7125.00	72.7 PK	88.2	-15.5	2.67 H	247	64.5	8.2
4	#7125.00	61.6 AV	68.2	-6.6	2.67 H	247	53.4	8.2
5	#14230.00	48.5 PK	88.2	-39.7	1.66 H	332	31.4	17.1
6	#14230.00	40.5 AV	68.2	-27.7	1.66 H	332	23.4	17.1
7	21345.00	48.2 PK	74.0	-25.8	1.20 H	309	52.4	-4.2
8	21345.00	36.0 AV	54.0	-18.0	1.20 H	309	40.2	-4.2
9	#28460.00	46.4 PK	88.2	-41.8	1.27 H	310	47.8	-1.4
10	#28460.00	36.2 AV	68.2	-32.0	1.27 H	310	37.6	-1.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	91.9 PK			1.72 V	356	83.8	8.1
2	*7115.00	80.1 AV			1.72 V	356	72.0	8.1
3	#7125.00	79.8 PK	88.2	-8.4	1.72 V	356	71.6	8.2
4	#7125.00	68.0 AV	68.2	-0.2	1.72 V	356	59.8	8.2
5	#14230.00	48.4 PK	88.2	-39.8	1.54 V	305	31.3	17.1
6	#14230.00	40.1 AV	68.2	-28.1	1.54 V	305	23.0	17.1
7	21345.00	50.6 PK	74.0	-23.4	1.24 V	323	54.8	-4.2
8	21345.00	41.9 AV	54.0	-12.1	1.24 V	323	46.1	-4.2
9	#28460.00	48.8 PK	88.2	-39.4	1.39 V	324	50.2	-1.4
10	#28460.00	38.1 AV	68.2	-30.1	1.39 V	324	39.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 35 : 6125 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5905.11	52.4 PK	88.2	-35.8	2.13 H	220	48.7	3.7
2	#5905.11	41.6 AV	68.2	-26.6	2.13 H	220	37.9	3.7
3	*6125.00	107.0 PK			2.13 H	220	102.7	4.3
4	*6125.00	97.1 AV			2.13 H	220	92.8	4.3
5	12250.00	48.1 PK	74.0	-25.9	1.67 H	323	34.9	13.2
6	12250.00	40.3 AV	54.0	-13.7	1.67 H	323	27.1	13.2
7	18375.00	49.0 PK	74.0	-25.0	1.16 H	325	56.2	-7.2
8	18375.00	36.6 AV	54.0	-17.4	1.16 H	325	43.8	-7.2
9	#24500.00	46.9 PK	88.2	-41.3	1.27 H	315	49.0	-2.1
10	#24500.00	36.7 AV	68.2	-31.5	1.27 H	315	38.8	-2.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5831.00	51.9 PK	88.2	-36.3	2.56 V	360	48.1	3.8
2	#5831.00	40.4 AV	68.2	-27.8	2.56 V	360	36.6	3.8
3	*6125.00	115.4 PK			2.56 V	360	111.1	4.3
4	*6125.00	103.8 AV			2.56 V	360	99.5	4.3
5	12250.00	48.4 PK	74.0	-25.6	1.55 V	324	35.2	13.2
6	12250.00	39.9 AV	54.0	-14.1	1.55 V	324	26.7	13.2
7	18375.00	50.6 PK	74.0	-23.4	1.30 V	319	57.8	-7.2
8	18375.00	42.1 AV	54.0	-11.9	1.30 V	319	49.3	-7.2
9	#24500.00	49.0 PK	88.2	-39.2	1.39 V	309	51.1	-2.1
10	#24500.00	38.3 AV	68.2	-29.9	1.39 V	309	40.4	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 59 : 6245 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	106.8 PK			2.18 H	211	102.1	4.7
2	*6245.00	96.8 AV			2.18 H	211	92.1	4.7
3	12490.00	49.0 PK	74.0	-25.0	1.64 H	325	36.5	12.5
4	12490.00	40.8 AV	54.0	-13.2	1.64 H	325	28.3	12.5
5	18735.00	49.0 PK	74.0	-25.0	1.24 H	329	55.8	-6.8
6	18735.00	36.4 AV	54.0	-17.6	1.24 H	329	43.2	-6.8
7	#24980.00	46.2 PK	88.2	-42.0	1.34 H	330	48.0	-1.8
8	#24980.00	35.9 AV	68.2	-32.3	1.34 H	330	37.7	-1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	115.3 PK			2.55 V	347	110.6	4.7
2	*6245.00	104.0 AV			2.55 V	347	99.3	4.7
3	12490.00	47.8 PK	74.0	-26.2	1.62 V	314	35.3	12.5
4	12490.00	39.4 AV	54.0	-14.6	1.62 V	314	26.9	12.5
5	18735.00	50.4 PK	74.0	-23.6	1.24 V	336	57.2	-6.8
6	18735.00	41.7 AV	54.0	-12.3	1.24 V	336	48.5	-6.8
7	#24980.00	49.2 PK	88.2	-39.0	1.40 V	316	51.0	-1.8
8	#24980.00	38.4 AV	68.2	-29.8	1.40 V	316	40.2	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.3 PK			2.12 H	235	102.0	5.3
2	*6405.00	97.5 AV			2.12 H	235	92.2	5.3
3	#12810.00	48.4 PK	88.2	-39.8	1.65 H	334	34.9	13.5
4	#12810.00	40.6 AV	68.2	-27.6	1.65 H	334	27.1	13.5
5	19215.00	48.3 PK	74.0	-25.7	1.14 H	331	55.0	-6.7
6	19215.00	36.2 AV	54.0	-17.8	1.14 H	331	42.9	-6.7
7	#25620.00	46.9 PK	88.2	-41.3	1.30 H	324	48.6	-1.7
8	#25620.00	36.8 AV	68.2	-31.4	1.30 H	324	38.5	-1.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.9 PK			2.55 V	353	109.6	5.3
2	*6405.00	103.6 AV			2.55 V	353	98.3	5.3
3	#12810.00	47.7 PK	88.2	-40.5	1.63 V	329	34.2	13.5
4	#12810.00	39.5 AV	68.2	-28.7	1.63 V	329	26.0	13.5
5	19215.00	50.3 PK	74.0	-23.7	1.24 V	340	57.0	-6.7
6	19215.00	41.8 AV	54.0	-12.2	1.24 V	340	48.5	-6.7
7	#25620.00	48.5 PK	88.2	-39.7	1.38 V	302	50.2	-1.7
8	#25620.00	38.0 AV	68.2	-30.2	1.38 V	302	39.7	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 99 : 6445 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	107.0 PK			2.17 H	216	101.5	5.5
2	*6445.00	97.2 AV			2.17 H	216	91.7	5.5
3	#12890.00	48.0 PK	88.2	-40.2	1.65 H	328	34.7	13.3
4	#12890.00	39.9 AV	68.2	-28.3	1.65 H	328	26.6	13.3
5	19335.00	48.8 PK	74.0	-25.2	1.25 H	309	55.6	-6.8
6	19335.00	36.4 AV	54.0	-17.6	1.25 H	309	43.2	-6.8
7	#25780.00	46.6 PK	88.2	-41.6	1.34 H	325	48.0	-1.4
8	#25780.00	36.8 AV	68.2	-31.4	1.34 H	325	38.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	114.9 PK			2.61 V	346	109.4	5.5
2	*6445.00	103.5 AV			2.61 V	346	98.0	5.5
3	#12890.00	48.4 PK	88.2	-39.8	1.58 V	301	35.1	13.3
4	#12890.00	40.0 AV	68.2	-28.2	1.58 V	301	26.7	13.3
5	19335.00	50.1 PK	74.0	-23.9	1.26 V	328	56.9	-6.8
6	19335.00	41.7 AV	54.0	-12.3	1.26 V	328	48.5	-6.8
7	#25780.00	49.1 PK	88.2	-39.1	1.42 V	317	50.5	-1.4
8	#25780.00	38.5 AV	68.2	-29.7	1.42 V	317	39.9	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 107 : 6485 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	106.8 PK			2.09 H	220	101.0	5.8
2	*6485.00	96.8 AV			2.09 H	220	91.0	5.8
3	#12970.00	47.8 PK	88.2	-40.4	1.58 H	331	34.5	13.3
4	#12970.00	40.1 AV	68.2	-28.1	1.58 H	331	26.8	13.3
5	19455.00	48.0 PK	74.0	-26.0	1.16 H	327	54.6	-6.6
6	19455.00	35.7 AV	54.0	-18.3	1.16 H	327	42.3	-6.6
7	#25940.00	45.8 PK	88.2	-42.4	1.29 H	321	47.6	-1.8
8	#25940.00	36.1 AV	68.2	-32.1	1.29 H	321	37.9	-1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	115.3 PK			2.54 V	356	109.5	5.8
2	*6485.00	103.5 AV			2.54 V	356	97.7	5.8
3	#12970.00	48.6 PK	88.2	-39.6	1.64 V	300	35.3	13.3
4	#12970.00	40.1 AV	68.2	-28.1	1.64 V	300	26.8	13.3
5	19455.00	50.0 PK	74.0	-24.0	1.20 V	346	56.6	-6.6
6	19455.00	41.4 AV	54.0	-12.6	1.20 V	346	48.0	-6.6
7	#25940.00	48.7 PK	88.2	-39.5	1.34 V	332	50.5	-1.8
8	#25940.00	37.9 AV	68.2	-30.3	1.34 V	332	39.7	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 115 : 6525 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	106.7 PK			2.10 H	209	100.7	6.0
2	*6525.00	97.1 AV			2.10 H	209	91.1	6.0
3	#13050.00	48.4 PK	88.2	-39.8	1.65 H	319	35.1	13.3
4	#13050.00	40.5 AV	68.2	-27.7	1.65 H	319	27.2	13.3
5	19575.00	49.0 PK	74.0	-25.0	1.22 H	334	55.2	-6.2
6	19575.00	36.5 AV	54.0	-17.5	1.22 H	334	42.7	-6.2
7	#26100.00	46.3 PK	88.2	-41.9	1.32 H	311	47.7	-1.4
8	#26100.00	36.5 AV	68.2	-31.7	1.32 H	311	37.9	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	115.4 PK			2.53 V	360	109.4	6.0
2	*6525.00	103.5 AV			2.53 V	360	97.5	6.0
3	#13050.00	48.5 PK	88.2	-39.7	1.57 V	303	35.2	13.3
4	#13050.00	40.0 AV	68.2	-28.2	1.57 V	303	26.7	13.3
5	19575.00	49.9 PK	74.0	-24.1	1.29 V	339	56.1	-6.2
6	19575.00	41.6 AV	54.0	-12.4	1.29 V	339	47.8	-6.2
7	#26100.00	49.4 PK	88.2	-38.8	1.43 V	330	50.8	-1.4
8	#26100.00	38.6 AV	68.2	-29.6	1.43 V	330	40.0	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	107.1 PK			2.12 H	211	101.0	6.1
2	*6565.00	97.4 AV			2.12 H	211	91.3	6.1
3	#13130.00	47.8 PK	88.2	-40.4	1.68 H	349	34.3	13.5
4	#13130.00	40.1 AV	68.2	-28.1	1.68 H	349	26.6	13.5
5	19695.00	48.3 PK	74.0	-25.7	1.25 H	315	54.3	-6.0
6	19695.00	35.7 AV	54.0	-18.3	1.25 H	315	41.7	-6.0
7	#26260.00	46.7 PK	88.2	-41.5	1.27 H	313	48.1	-1.4
8	#26260.00	36.7 AV	68.2	-31.5	1.27 H	313	38.1	-1.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	116.0 PK			2.50 V	360	109.9	6.1
2	*6565.00	104.3 AV			2.50 V	360	98.2	6.1
3	#13130.00	48.0 PK	88.2	-40.2	1.62 V	316	34.5	13.5
4	#13130.00	39.8 AV	68.2	-28.4	1.62 V	316	26.3	13.5
5	19695.00	49.6 PK	74.0	-24.4	1.21 V	347	55.6	-6.0
6	19695.00	41.4 AV	54.0	-12.6	1.21 V	347	47.4	-6.0
7	#26260.00	49.6 PK	88.2	-38.6	1.36 V	321	51.0	-1.4
8	#26260.00	38.8 AV	68.2	-29.4	1.36 V	321	40.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	107.0 PK			2.18 H	212	100.8	6.2
2	*6725.00	97.1 AV			2.18 H	212	90.9	6.2
3	#13450.00	47.8 PK	88.2	-40.4	1.61 H	348	33.0	14.8
4	#13450.00	40.0 AV	68.2	-28.2	1.61 H	348	25.2	14.8
5	20175.00	48.1 PK	74.0	-25.9	1.13 H	329	53.5	-5.4
6	20175.00	35.7 AV	54.0	-18.3	1.13 H	329	41.1	-5.4
7	#26900.00	46.6 PK	88.2	-41.6	1.30 H	332	47.9	-1.3
8	#26900.00	36.7 AV	68.2	-31.5	1.30 H	332	38.0	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	115.0 PK			2.55 V	348	108.8	6.2
2	*6725.00	103.4 AV			2.55 V	348	97.2	6.2
3	#13450.00	47.8 PK	88.2	-40.4	1.62 V	302	33.0	14.8
4	#13450.00	39.8 AV	68.2	-28.4	1.62 V	302	25.0	14.8
5	20175.00	50.9 PK	74.0	-23.1	1.19 V	317	56.3	-5.4
6	20175.00	42.1 AV	54.0	-11.9	1.19 V	317	47.5	-5.4
7	#26900.00	48.7 PK	88.2	-39.5	1.36 V	305	50.0	-1.3
8	#26900.00	38.0 AV	68.2	-30.2	1.36 V	305	39.3	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	107.3 PK			2.14 H	219	100.6	6.7
2	*6845.00	97.2 AV			2.14 H	219	90.5	6.7
3	#13690.00	47.8 PK	88.2	-40.4	1.58 H	332	32.3	15.5
4	#13690.00	39.9 AV	68.2	-28.3	1.58 H	332	24.4	15.5
5	20535.00	49.1 PK	74.0	-24.9	1.22 H	314	54.0	-4.9
6	20535.00	36.6 AV	54.0	-17.4	1.22 H	314	41.5	-4.9
7	#27380.00	46.5 PK	88.2	-41.7	1.31 H	314	48.2	-1.7
8	#27380.00	36.8 AV	68.2	-31.4	1.31 H	314	38.5	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	115.8 PK			2.58 V	360	109.1	6.7
2	*6845.00	104.2 AV			2.58 V	360	97.5	6.7
3	#13690.00	47.9 PK	88.2	-40.3	1.61 V	303	32.4	15.5
4	#13690.00	39.6 AV	68.2	-28.6	1.61 V	303	24.1	15.5
5	20535.00	49.9 PK	74.0	-24.1	1.30 V	333	54.8	-4.9
6	20535.00	41.4 AV	54.0	-12.6	1.30 V	333	46.3	-4.9
7	#27380.00	49.8 PK	88.2	-38.4	1.34 V	303	51.5	-1.7
8	#27380.00	38.9 AV	68.2	-29.3	1.34 V	303	40.6	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 187 : 6885 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	106.6 PK			2.08 H	213	99.5	7.1
2	*6885.00	96.7 AV			2.08 H	213	89.6	7.1
3	#13770.00	47.9 PK	88.2	-40.3	1.58 H	349	32.1	15.8
4	#13770.00	40.2 AV	68.2	-28.0	1.58 H	349	24.4	15.8
5	20655.00	48.9 PK	74.0	-25.1	1.21 H	306	53.8	-4.9
6	20655.00	36.6 AV	54.0	-17.4	1.21 H	306	41.5	-4.9
7	#27540.00	46.2 PK	88.2	-42.0	1.27 H	325	47.5	-1.3
8	#27540.00	36.2 AV	68.2	-32.0	1.27 H	325	37.5	-1.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	115.2 PK			2.58 V	355	108.1	7.1
2	*6885.00	103.8 AV			2.58 V	355	96.7	7.1
3	#13770.00	48.1 PK	88.2	-40.1	1.62 V	301	32.3	15.8
4	#13770.00	40.0 AV	68.2	-28.2	1.62 V	301	24.2	15.8
5	20655.00	49.9 PK	74.0	-24.1	1.31 V	316	54.8	-4.9
6	20655.00	41.5 AV	54.0	-12.5	1.31 V	316	46.4	-4.9
7	#27540.00	49.4 PK	88.2	-38.8	1.35 V	329	50.7	-1.3
8	#27540.00	38.9 AV	68.2	-29.3	1.35 V	329	40.2	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 211 : 7005 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	107.2 PK			2.13 H	226	99.3	7.9
2	*7005.00	97.2 AV			2.13 H	226	89.3	7.9
3	#14010.00	48.1 PK	88.2	-40.1	1.66 H	324	32.4	15.7
4	#14010.00	40.2 AV	68.2	-28.0	1.66 H	324	24.5	15.7
5	21015.00	48.6 PK	74.0	-25.4	1.21 H	316	53.0	-4.4
6	21015.00	36.3 AV	54.0	-17.7	1.21 H	316	40.7	-4.4
7	#28020.00	46.7 PK	88.2	-41.5	1.35 H	322	48.0	-1.3
8	#28020.00	36.8 AV	68.2	-31.4	1.35 H	322	38.1	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	115.9 PK			2.52 V	348	108.0	7.9
2	*7005.00	104.2 AV			2.52 V	348	96.3	7.9
3	#14010.00	48.0 PK	88.2	-40.2	1.54 V	304	32.3	15.7
4	#14010.00	39.6 AV	68.2	-28.6	1.54 V	304	23.9	15.7
5	21015.00	49.8 PK	74.0	-24.2	1.29 V	335	54.2	-4.4
6	21015.00	41.5 AV	54.0	-12.5	1.29 V	335	45.9	-4.4
7	#28020.00	48.8 PK	88.2	-39.4	1.44 V	315	50.1	-1.3
8	#28020.00	37.9 AV	68.2	-30.3	1.44 V	315	39.2	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 227 : 7085 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.6 PK			2.60 H	247	102.5	8.1
2	*7085.00	99.8 AV			2.60 H	247	91.7	8.1
3	#7125.00	71.1 PK	88.2	-17.1	2.60 H	247	62.9	8.2
4	#7125.00	57.7 AV	68.2	-10.5	2.60 H	247	49.5	8.2
5	#14170.00	48.6 PK	88.2	-39.6	1.57 H	325	31.8	16.8
6	#14170.00	40.6 AV	68.2	-27.6	1.57 H	325	23.8	16.8
7	21255.00	48.8 PK	74.0	-25.2	1.17 H	324	53.0	-4.2
8	21255.00	36.4 AV	54.0	-17.6	1.17 H	324	40.6	-4.2
9	#28340.00	46.2 PK	88.2	-42.0	1.35 H	306	47.5	-1.3
10	#28340.00	36.4 AV	68.2	-31.8	1.35 H	306	37.7	-1.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	115.2 PK			1.60 V	360	107.1	8.1
2	*7085.00	103.6 AV			1.60 V	360	95.5	8.1
3	#7125.00	81.7 PK	88.2	-6.5	1.60 V	360	73.5	8.2
4	#7125.00	67.9 AV	68.2	-0.3	1.60 V	360	59.7	8.2
5	#14170.00	48.2 PK	88.2	-40.0	1.64 V	309	31.4	16.8
6	#14170.00	40.0 AV	68.2	-28.2	1.64 V	309	23.2	16.8
7	21255.00	50.4 PK	74.0	-23.6	1.24 V	339	54.6	-4.2
8	21255.00	41.6 AV	54.0	-12.4	1.24 V	339	45.8	-4.2
9	#28340.00	48.6 PK	88.2	-39.6	1.42 V	307	49.9	-1.3
10	#28340.00	38.2 AV	68.2	-30.0	1.42 V	307	39.5	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 39 : 6145 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5857.00	51.6 PK	88.2	-36.6	1.38 H	149	47.7	3.9
2	#5857.00	40.3 AV	68.2	-27.9	1.38 H	149	36.4	3.9
3	*6145.00	103.8 PK			1.38 H	149	99.5	4.3
4	*6145.00	92.2 AV			1.38 H	149	87.9	4.3
5	12290.00	48.7 PK	74.0	-25.3	1.64 H	335	35.4	13.3
6	12290.00	40.8 AV	54.0	-13.2	1.64 H	335	27.5	13.3
7	18435.00	48.5 PK	74.0	-25.5	1.17 H	305	55.7	-7.2
8	18435.00	36.3 AV	54.0	-17.7	1.17 H	305	43.5	-7.2
9	#24580.00	46.1 PK	88.2	-42.1	1.32 H	323	48.0	-1.9
10	#24580.00	35.9 AV	68.2	-32.3	1.32 H	323	37.8	-1.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5911.00	52.6 PK	88.2	-35.6	2.44 V	360	48.9	3.7
2	#5911.00	40.2 AV	68.2	-28.0	2.44 V	360	36.5	3.7
3	*6145.00	112.2 PK			2.44 V	360	107.9	4.3
4	*6145.00	101.5 AV			2.44 V	360	97.2	4.3
5	12290.00	48.5 PK	74.0	-25.5	1.64 V	303	35.2	13.3
6	12290.00	40.2 AV	54.0	-13.8	1.64 V	303	26.9	13.3
7	18435.00	50.1 PK	74.0	-23.9	1.29 V	327	57.3	-7.2
8	18435.00	41.4 AV	54.0	-12.6	1.29 V	327	48.6	-7.2
9	#24580.00	49.4 PK	88.2	-38.8	1.36 V	321	51.3	-1.9
10	#24580.00	38.8 AV	68.2	-29.4	1.36 V	321	40.7	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 55 : 6225 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	103.8 PK			1.33 H	134	99.2	4.6
2	*6225.00	92.1 AV			1.33 H	134	87.5	4.6
3	12450.00	48.2 PK	74.0	-25.8	1.60 H	343	35.5	12.7
4	12450.00	40.3 AV	54.0	-13.7	1.60 H	343	27.6	12.7
5	18675.00	49.0 PK	74.0	-25.0	1.24 H	325	55.9	-6.9
6	18675.00	36.5 AV	54.0	-17.5	1.24 H	325	43.4	-6.9
7	#24900.00	46.4 PK	88.2	-41.8	1.31 H	308	48.2	-1.8
8	#24900.00	36.2 AV	68.2	-32.0	1.31 H	308	38.0	-1.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.3 PK			2.47 V	354	107.7	4.6
2	*6225.00	101.5 AV			2.47 V	354	96.9	4.6
3	12450.00	47.8 PK	74.0	-26.2	1.61 V	320	35.1	12.7
4	12450.00	39.3 AV	54.0	-14.7	1.61 V	320	26.6	12.7
5	18675.00	50.6 PK	74.0	-23.4	1.28 V	343	57.5	-6.9
6	18675.00	41.8 AV	54.0	-12.2	1.28 V	343	48.7	-6.9
7	#24900.00	48.6 PK	88.2	-39.6	1.43 V	316	50.4	-1.8
8	#24900.00	38.2 AV	68.2	-30.0	1.43 V	316	40.0	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 87 : 6385 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	103.2 PK			1.36 H	151	98.0	5.2
2	*6385.00	91.9 AV			1.36 H	151	86.7	5.2
3	#12770.00	48.2 PK	88.2	-40.0	1.58 H	324	34.9	13.3
4	#12770.00	40.3 AV	68.2	-27.9	1.58 H	324	27.0	13.3
5	19155.00	48.2 PK	74.0	-25.8	1.18 H	304	54.9	-6.7
6	19155.00	36.1 AV	54.0	-17.9	1.18 H	304	42.8	-6.7
7	#25540.00	45.7 PK	88.2	-42.5	1.36 H	316	47.4	-1.7
8	#25540.00	35.9 AV	68.2	-32.3	1.36 H	316	37.6	-1.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.7 PK			2.40 V	360	107.5	5.2
2	*6385.00	101.8 AV			2.40 V	360	96.6	5.2
3	#12770.00	48.1 PK	88.2	-40.1	1.53 V	315	34.8	13.3
4	#12770.00	40.1 AV	68.2	-28.1	1.53 V	315	26.8	13.3
5	19155.00	50.8 PK	74.0	-23.2	1.20 V	345	57.5	-6.7
6	19155.00	42.0 AV	54.0	-12.0	1.20 V	345	48.7	-6.7
7	#25540.00	48.6 PK	88.2	-39.6	1.40 V	320	50.3	-1.7
8	#25540.00	38.3 AV	68.2	-29.9	1.40 V	320	40.0	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 103 : 6465 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	104.1 PK			1.32 H	154	98.5	5.6
2	*6465.00	92.4 AV			1.32 H	154	86.8	5.6
3	#12930.00	48.3 PK	88.2	-39.9	1.63 H	338	35.0	13.3
4	#12930.00	40.5 AV	68.2	-27.7	1.63 H	338	27.2	13.3
5	19395.00	48.4 PK	74.0	-25.6	1.24 H	316	55.2	-6.8
6	19395.00	35.9 AV	54.0	-18.1	1.24 H	316	42.7	-6.8
7	#25860.00	46.0 PK	88.2	-42.2	1.27 H	326	47.7	-1.7
8	#25860.00	36.1 AV	68.2	-32.1	1.27 H	326	37.8	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.9 PK			2.49 V	344	106.3	5.6
2	*6465.00	101.4 AV			2.49 V	344	95.8	5.6
3	#12930.00	47.8 PK	88.2	-40.4	1.64 V	316	34.5	13.3
4	#12930.00	39.3 AV	68.2	-28.9	1.64 V	316	26.0	13.3
5	19395.00	50.1 PK	74.0	-23.9	1.25 V	317	56.9	-6.8
6	19395.00	41.6 AV	54.0	-12.4	1.25 V	317	48.4	-6.8
7	#25860.00	48.5 PK	88.2	-39.7	1.34 V	326	50.2	-1.7
8	#25860.00	38.0 AV	68.2	-30.2	1.34 V	326	39.7	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 119 : 6545 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	103.7 PK			1.41 H	164	97.7	6.0
2	*6545.00	92.0 AV			1.41 H	164	86.0	6.0
3	#13090.00	48.5 PK	88.2	-39.7	1.68 H	342	35.0	13.5
4	#13090.00	40.6 AV	68.2	-27.6	1.68 H	342	27.1	13.5
5	19635.00	49.1 PK	74.0	-24.9	1.22 H	330	55.2	-6.1
6	19635.00	36.5 AV	54.0	-17.5	1.22 H	330	42.6	-6.1
7	#26180.00	46.5 PK	88.2	-41.7	1.33 H	331	47.7	-1.2
8	#26180.00	36.7 AV	68.2	-31.5	1.33 H	331	37.9	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	112.5 PK			2.46 V	360	106.5	6.0
2	*6545.00	101.8 AV			2.46 V	360	95.8	6.0
3	#13090.00	47.8 PK	88.2	-40.4	1.64 V	302	34.3	13.5
4	#13090.00	39.7 AV	68.2	-28.5	1.64 V	302	26.2	13.5
5	19635.00	50.4 PK	74.0	-23.6	1.22 V	339	56.5	-6.1
6	19635.00	41.7 AV	54.0	-12.3	1.22 V	339	47.8	-6.1
7	#26180.00	48.7 PK	88.2	-39.5	1.42 V	315	49.9	-1.2
8	#26180.00	38.1 AV	68.2	-30.1	1.42 V	315	39.3	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 135 : 6625 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	103.6 PK			1.36 H	146	97.4	6.2
2	*6625.00	92.0 AV			1.36 H	146	85.8	6.2
3	13250.00	48.3 PK	74.0	-25.7	1.61 H	339	34.0	14.3
4	13250.00	40.1 AV	54.0	-13.9	1.61 H	339	25.8	14.3
5	19875.00	48.9 PK	74.0	-25.1	1.16 H	329	55.0	-6.1
6	19875.00	36.5 AV	54.0	-17.5	1.16 H	329	42.6	-6.1
7	#26500.00	46.1 PK	88.2	-42.1	1.37 H	332	46.9	-0.8
8	#26500.00	35.9 AV	68.2	-32.3	1.37 H	332	36.7	-0.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.0 PK			2.39 V	354	105.8	6.2
2	*6625.00	101.5 AV			2.39 V	354	95.3	6.2
3	13250.00	48.6 PK	74.0	-25.4	1.60 V	321	34.3	14.3
4	13250.00	40.2 AV	54.0	-13.8	1.60 V	321	25.9	14.3
5	19875.00	50.2 PK	74.0	-23.8	1.22 V	323	56.3	-6.1
6	19875.00	41.8 AV	54.0	-12.2	1.22 V	323	47.9	-6.1
7	#26500.00	49.0 PK	88.2	-39.2	1.44 V	323	49.8	-0.8
8	#26500.00	38.1 AV	68.2	-30.1	1.44 V	323	38.9	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.0 PK			1.37 H	155	96.9	6.1
2	*6705.00	91.7 AV			1.37 H	155	85.6	6.1
3	#13410.00	48.2 PK	88.2	-40.0	1.62 H	342	33.4	14.8
4	#13410.00	40.0 AV	68.2	-28.2	1.62 H	342	25.2	14.8
5	20115.00	48.2 PK	74.0	-25.8	1.22 H	332	53.7	-5.5
6	20115.00	36.1 AV	54.0	-17.9	1.22 H	332	41.6	-5.5
7	#26820.00	46.3 PK	88.2	-41.9	1.35 H	323	47.3	-1.0
8	#26820.00	36.6 AV	68.2	-31.6	1.35 H	323	37.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.9 PK			2.45 V	360	105.8	6.1
2	*6705.00	101.2 AV			2.45 V	360	95.1	6.1
3	#13410.00	48.1 PK	88.2	-40.1	1.58 V	307	33.3	14.8
4	#13410.00	39.5 AV	68.2	-28.7	1.58 V	307	24.7	14.8
5	20115.00	50.2 PK	74.0	-23.8	1.24 V	336	55.7	-5.5
6	20115.00	41.6 AV	54.0	-12.4	1.24 V	336	47.1	-5.5
7	#26820.00	48.4 PK	88.2	-39.8	1.36 V	312	49.4	-1.0
8	#26820.00	38.0 AV	68.2	-30.2	1.36 V	312	39.0	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 167 : 6785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	103.5 PK			1.34 H	161	97.2	6.3
2	*6785.00	92.1 AV			1.34 H	161	85.8	6.3
3	#13570.00	48.5 PK	88.2	-39.7	1.67 H	351	33.6	14.9
4	#13570.00	40.7 AV	68.2	-27.5	1.67 H	351	25.8	14.9
5	20355.00	48.7 PK	74.0	-25.3	1.18 H	314	54.3	-5.6
6	20355.00	36.2 AV	54.0	-17.8	1.18 H	314	41.8	-5.6
7	#27140.00	46.3 PK	88.2	-41.9	1.34 H	309	47.6	-1.3
8	#27140.00	36.6 AV	68.2	-31.6	1.34 H	309	37.9	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.1 PK			2.49 V	360	105.8	6.3
2	*6785.00	101.6 AV			2.49 V	360	95.3	6.3
3	#13570.00	48.0 PK	88.2	-40.2	1.54 V	329	33.1	14.9
4	#13570.00	39.9 AV	68.2	-28.3	1.54 V	329	25.0	14.9
5	20355.00	50.1 PK	74.0	-23.9	1.21 V	317	55.7	-5.6
6	20355.00	41.5 AV	54.0	-12.5	1.21 V	317	47.1	-5.6
7	#27140.00	49.1 PK	88.2	-39.1	1.33 V	318	50.4	-1.3
8	#27140.00	38.5 AV	68.2	-29.7	1.33 V	318	39.8	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 183 : 6865 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	103.9 PK			1.43 H	152	97.0	6.9
2	*6865.00	92.3 AV			1.43 H	152	85.4	6.9
3	#13730.00	48.5 PK	88.2	-39.7	1.65 H	341	32.8	15.7
4	#13730.00	40.7 AV	68.2	-27.5	1.65 H	341	25.0	15.7
5	20595.00	48.6 PK	74.0	-25.4	1.22 H	325	53.3	-4.7
6	20595.00	36.3 AV	54.0	-17.7	1.22 H	325	41.0	-4.7
7	#27460.00	46.0 PK	88.2	-42.2	1.27 H	335	47.4	-1.4
8	#27460.00	35.9 AV	68.2	-32.3	1.27 H	335	37.3	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	112.4 PK			2.39 V	360	105.5	6.9
2	*6865.00	101.9 AV			2.39 V	360	95.0	6.9
3	#13730.00	48.1 PK	88.2	-40.1	1.61 V	330	32.4	15.7
4	#13730.00	39.5 AV	68.2	-28.7	1.61 V	330	23.8	15.7
5	20595.00	50.4 PK	74.0	-23.6	1.28 V	316	55.1	-4.7
6	20595.00	42.1 AV	54.0	-11.9	1.28 V	316	46.8	-4.7
7	#27460.00	49.2 PK	88.2	-39.0	1.43 V	304	50.6	-1.4
8	#27460.00	38.7 AV	68.2	-29.5	1.43 V	304	40.1	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 199 : 6945 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	104.1 PK			1.42 H	142	96.8	7.3
2	*6945.00	92.4 AV			1.42 H	142	85.1	7.3
3	#13890.00	48.6 PK	88.2	-39.6	1.68 H	344	32.8	15.8
4	#13890.00	40.6 AV	68.2	-27.6	1.68 H	344	24.8	15.8
5	20835.00	48.8 PK	74.0	-25.2	1.15 H	323	53.6	-4.8
6	20835.00	36.5 AV	54.0	-17.5	1.15 H	323	41.3	-4.8
7	#27780.00	46.0 PK	88.2	-42.2	1.26 H	320	47.9	-1.9
8	#27780.00	36.3 AV	68.2	-31.9	1.26 H	320	38.2	-1.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.8 PK			2.43 V	360	105.5	7.3
2	*6945.00	101.8 AV			2.43 V	360	94.5	7.3
3	#13890.00	48.0 PK	88.2	-40.2	1.65 V	323	32.2	15.8
4	#13890.00	39.7 AV	68.2	-28.5	1.65 V	323	23.9	15.8
5	20835.00	50.6 PK	74.0	-23.4	1.21 V	330	55.4	-4.8
6	20835.00	42.0 AV	54.0	-12.0	1.21 V	330	46.8	-4.8
7	#27780.00	48.7 PK	88.2	-39.5	1.43 V	306	50.6	-1.9
8	#27780.00	38.3 AV	68.2	-29.9	1.43 V	306	40.2	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 215 : 7025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	104.0 PK			1.38 H	151	96.0	8.0
2	*7025.00	92.0 AV			1.38 H	151	84.0	8.0
3	#7125.00	67.5 PK	88.2	-20.7	1.38 H	151	59.3	8.2
4	#7125.00	54.6 AV	68.2	-13.6	1.38 H	151	46.4	8.2
5	#14050.00	48.7 PK	88.2	-39.5	1.67 H	342	32.6	16.1
6	#14050.00	40.5 AV	68.2	-27.7	1.67 H	342	24.4	16.1
7	21075.00	48.6 PK	74.0	-25.4	1.19 H	329	52.9	-4.3
8	21075.00	36.2 AV	54.0	-17.8	1.19 H	329	40.5	-4.3
9	#28100.00	46.0 PK	88.2	-42.2	1.37 H	330	47.4	-1.4
10	#28100.00	36.0 AV	68.2	-32.2	1.37 H	330	37.4	-1.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	112.9 PK			1.50 V	359	104.9	8.0
2	*7025.00	101.8 AV			1.50 V	359	93.8	8.0
3	#7125.00	68.7 PK	88.2	-19.5	1.50 V	359	60.5	8.2
4	#7125.00	57.8 AV	68.2	-10.4	1.50 V	359	49.6	8.2
5	#14050.00	48.1 PK	88.2	-40.1	1.56 V	326	32.0	16.1
6	#14050.00	39.6 AV	68.2	-28.6	1.56 V	326	23.5	16.1
7	21075.00	50.1 PK	74.0	-23.9	1.31 V	318	54.4	-4.3
8	21075.00	41.4 AV	54.0	-12.6	1.31 V	318	45.7	-4.3
9	#28100.00	48.7 PK	88.2	-39.5	1.43 V	303	50.1	-1.4
10	#28100.00	38.0 AV	68.2	-30.2	1.43 V	303	39.4	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5835.00	52.4 PK	88.2	-35.8	2.16 H	224	48.6	3.8
2	#5835.00	40.5 AV	68.2	-27.7	2.16 H	224	36.7	3.8
3	*6185.00	102.9 PK			2.16 H	224	98.4	4.5
4	*6185.00	91.3 AV			2.16 H	224	86.8	4.5
5	12370.00	48.5 PK	74.0	-25.5	1.60 H	343	35.5	13.0
6	12370.00	40.5 AV	54.0	-13.5	1.60 H	343	27.5	13.0
7	18555.00	48.8 PK	74.0	-25.2	1.15 H	317	56.0	-7.2
8	18555.00	36.4 AV	54.0	-17.6	1.15 H	317	43.6	-7.2
9	#24740.00	47.1 PK	88.2	-41.1	1.31 H	309	48.8	-1.7
10	#24740.00	36.9 AV	68.2	-31.3	1.31 H	309	38.6	-1.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5828.40	52.2 PK	88.2	-36.0	2.24 V	358	48.4	3.8
2	#5828.40	40.2 AV	68.2	-28.0	2.24 V	358	36.4	3.8
3	*6185.00	110.7 PK			2.24 V	358	106.2	4.5
4	*6185.00	98.5 AV			2.24 V	358	94.0	4.5
5	12370.00	48.2 PK	74.0	-25.8	1.58 V	315	35.2	13.0
6	12370.00	39.8 AV	54.0	-14.2	1.58 V	315	26.8	13.0
7	18555.00	50.0 PK	74.0	-24.0	1.20 V	327	57.2	-7.2
8	18555.00	41.7 AV	54.0	-12.3	1.20 V	327	48.9	-7.2
9	#24740.00	48.9 PK	88.2	-39.3	1.37 V	324	50.6	-1.7
10	#24740.00	38.3 AV	68.2	-29.9	1.37 V	324	40.0	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	102.5 PK			2.11 H	221	97.3	5.2
2	*6345.00	91.1 AV			2.11 H	221	85.9	5.2
3	12690.00	48.4 PK	74.0	-25.6	1.66 H	347	35.7	12.7
4	12690.00	40.6 AV	54.0	-13.4	1.66 H	347	27.9	12.7
5	19035.00	48.8 PK	74.0	-25.2	1.17 H	314	55.7	-6.9
6	19035.00	36.3 AV	54.0	-17.7	1.17 H	314	43.2	-6.9
7	#25380.00	46.6 PK	88.2	-41.6	1.29 H	313	48.4	-1.8
8	#25380.00	36.4 AV	68.2	-31.8	1.29 H	313	38.2	-1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.0 PK			2.25 V	360	105.8	5.2
2	*6345.00	98.7 AV			2.25 V	360	93.5	5.2
3	12690.00	47.9 PK	74.0	-26.1	1.58 V	319	35.2	12.7
4	12690.00	39.8 AV	54.0	-14.2	1.58 V	319	27.1	12.7
5	19035.00	50.9 PK	74.0	-23.1	1.29 V	323	57.8	-6.9
6	19035.00	42.1 AV	54.0	-11.9	1.29 V	323	49.0	-6.9
7	#25380.00	48.8 PK	88.2	-39.4	1.39 V	302	50.6	-1.8
8	#25380.00	38.0 AV	68.2	-30.2	1.39 V	302	39.8	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 111 : 6505 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	102.6 PK			2.18 H	240	96.6	6.0
2	*6505.00	91.0 AV			2.18 H	240	85.0	6.0
3	#13010.00	47.9 PK	88.2	-40.3	1.57 H	343	34.6	13.3
4	#13010.00	40.1 AV	68.2	-28.1	1.57 H	343	26.8	13.3
5	19515.00	48.7 PK	74.0	-25.3	1.15 H	320	55.0	-6.3
6	19515.00	36.3 AV	54.0	-17.7	1.15 H	320	42.6	-6.3
7	#26020.00	46.2 PK	88.2	-42.0	1.33 H	330	47.6	-1.4
8	#26020.00	36.3 AV	68.2	-31.9	1.33 H	330	37.7	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.6 PK			2.30 V	360	104.6	6.0
2	*6505.00	98.3 AV			2.30 V	360	92.3	6.0
3	#13010.00	48.6 PK	88.2	-39.6	1.60 V	330	35.3	13.3
4	#13010.00	40.1 AV	68.2	-28.1	1.60 V	330	26.8	13.3
5	19515.00	50.2 PK	74.0	-23.8	1.30 V	338	56.5	-6.3
6	19515.00	41.9 AV	54.0	-12.1	1.30 V	338	48.2	-6.3
7	#26020.00	48.5 PK	88.2	-39.7	1.39 V	313	49.9	-1.4
8	#26020.00	38.2 AV	68.2	-30.0	1.39 V	313	39.6	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.3 PK			2.11 H	229	96.2	6.1
2	*6665.00	91.0 AV			2.11 H	229	84.9	6.1
3	13330.00	48.8 PK	74.0	-25.2	1.60 H	333	34.0	14.8
4	13330.00	40.7 AV	54.0	-13.3	1.60 H	333	25.9	14.8
5	19995.00	47.7 PK	74.0	-26.3	1.19 H	325	53.4	-5.7
6	19995.00	35.7 AV	54.0	-18.3	1.19 H	325	41.4	-5.7
7	#26660.00	46.7 PK	88.2	-41.5	1.30 H	323	47.3	-0.6
8	#26660.00	36.8 AV	68.2	-31.4	1.30 H	323	37.4	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.5 PK			2.23 V	358	104.4	6.1
2	*6665.00	98.4 AV			2.23 V	358	92.3	6.1
3	13330.00	47.7 PK	74.0	-26.3	1.55 V	311	32.9	14.8
4	13330.00	39.6 AV	54.0	-14.4	1.55 V	311	24.8	14.8
5	19995.00	49.7 PK	74.0	-24.3	1.28 V	318	55.4	-5.7
6	19995.00	41.4 AV	54.0	-12.6	1.28 V	318	47.1	-5.7
7	#26660.00	49.2 PK	88.2	-39.0	1.39 V	327	49.8	-0.6
8	#26660.00	38.8 AV	68.2	-29.4	1.39 V	327	39.4	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 175 : 6825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	102.7 PK			2.21 H	230	96.2	6.5
2	*6825.00	91.4 AV			2.21 H	230	84.9	6.5
3	#13650.00	48.0 PK	88.2	-40.2	1.66 H	331	32.7	15.3
4	#13650.00	40.2 AV	68.2	-28.0	1.66 H	331	24.9	15.3
5	20475.00	49.0 PK	74.0	-25.0	1.22 H	332	54.1	-5.1
6	20475.00	36.6 AV	54.0	-17.4	1.22 H	332	41.7	-5.1
7	#27300.00	46.6 PK	88.2	-41.6	1.31 H	316	48.4	-1.8
8	#27300.00	36.8 AV	68.2	-31.4	1.31 H	316	38.6	-1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.4 PK			2.21 V	360	103.9	6.5
2	*6825.00	98.1 AV			2.21 V	360	91.6	6.5
3	#13650.00	48.9 PK	88.2	-39.3	1.59 V	317	33.6	15.3
4	#13650.00	40.3 AV	68.2	-27.9	1.59 V	317	25.0	15.3
5	20475.00	49.9 PK	74.0	-24.1	1.31 V	341	55.0	-5.1
6	20475.00	41.5 AV	54.0	-12.5	1.31 V	341	46.6	-5.1
7	#27300.00	49.3 PK	88.2	-38.9	1.38 V	330	51.1	-1.8
8	#27300.00	38.4 AV	68.2	-29.8	1.38 V	330	40.2	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 207 : 6985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.4 PK			2.18 H	225	94.7	7.7
2	*6985.00	90.9 AV			2.18 H	225	83.2	7.7
3	#7125.00	66.5 PK	88.2	-21.7	2.18 H	225	58.3	8.2
4	#7125.00	55.0 AV	68.2	-13.2	2.18 H	225	46.8	8.2
5	#13970.00	48.5 PK	88.2	-39.7	1.61 H	324	32.7	15.8
6	#13970.00	40.4 AV	68.2	-27.8	1.61 H	324	24.6	15.8
7	20955.00	48.3 PK	74.0	-25.7	1.24 H	308	52.8	-4.5
8	20955.00	36.0 AV	54.0	-18.0	1.24 H	308	40.5	-4.5
9	#27940.00	46.0 PK	88.2	-42.2	1.26 H	335	47.2	-1.2
10	#27940.00	36.2 AV	68.2	-32.0	1.26 H	335	37.4	-1.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.2 PK			1.67 V	358	102.5	7.7
2	*6985.00	98.7 AV			1.67 V	358	91.0	7.7
3	#7125.00	81.4 PK	88.2	-6.8	1.67 V	358	73.2	8.2
4	#7125.00	62.0 AV	68.2	-6.2	1.67 V	358	53.8	8.2
5	#13970.00	48.7 PK	88.2	-39.5	1.61 V	316	32.9	15.8
6	#13970.00	40.2 AV	68.2	-28.0	1.61 V	316	24.4	15.8
7	20955.00	50.3 PK	74.0	-23.7	1.26 V	342	54.8	-4.5
8	20955.00	42.1 AV	54.0	-11.9	1.26 V	342	46.6	-4.5
9	#27940.00	48.7 PK	88.2	-39.5	1.37 V	316	49.9	-1.2
10	#27940.00	38.4 AV	68.2	-29.8	1.37 V	316	39.6	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:

RF Mode	TX 802.11ax (HE160)	Channel	CH 207 : 6985 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.40	26.3 QP	40.0	-13.7	4.00 H	222	35.2	-8.9
2	105.40	32.6 QP	43.5	-10.9	2.00 H	151	43.6	-11.0
3	152.10	28.4 QP	43.5	-15.1	2.00 H	335	35.8	-7.4
4	272.41	25.6 QP	46.0	-20.4	1.00 H	90	33.0	-7.4
5	521.00	35.8 QP	46.0	-10.2	2.00 H	5	36.4	-0.6
6	805.00	35.6 QP	46.0	-10.4	1.00 H	5	30.4	5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

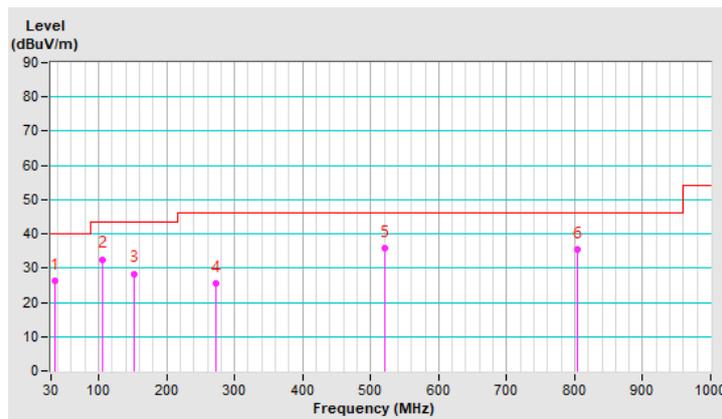


RF Mode	TX 802.11ax (HE160)	Channel	CH 207 : 6985 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.40	33.6 QP	40.0	-6.4	1.00 V	312	42.1	-8.5
2	61.41	29.8 QP	40.0	-10.2	2.00 V	313	38.6	-8.8
3	98.11	28.0 QP	43.5	-15.5	3.00 V	244	40.4	-12.4
4	151.11	26.2 QP	43.5	-17.3	1.00 V	111	33.7	-7.5
5	530.74	35.0 QP	46.0	-11.0	1.00 V	15	35.4	-0.4
6	554.31	35.1 QP	46.0	-10.9	1.00 V	41	35.1	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

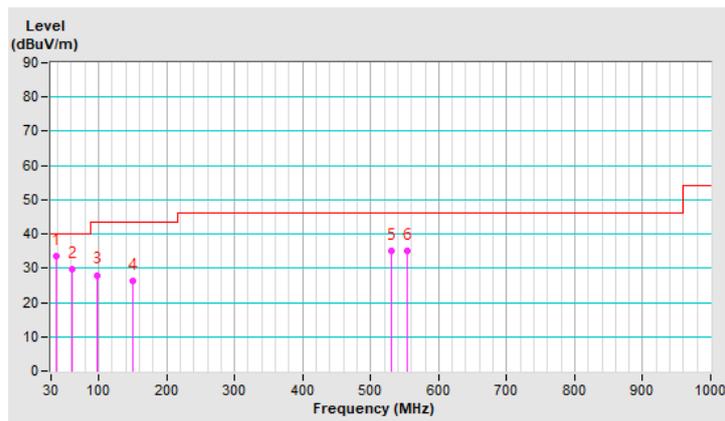

4.2 In-Ban Emission (Mask) Measurement

4.2.1 Limits of In-Band Emission (Mask) Measurement

Test Item	Frequencies (MHz)	(X) dBc ^{*1}
Emission Mask	At 1 MHz outside of channel edge	20
	At one channel bandwidth from the channel center ^{*2}	28
	At one- and one-half times the channel bandwidth away from channel center ^{*3}	40
	More than one- and one-half times the channel bandwidth	40

*1 :The power spectral density must be suppressed by “x” dB

*2 : At frequencies between one megahertz outside an unlicensed device’s channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression,

*3 : At frequencies between one and one- and one-half times an unlicensed device’s channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression.

4.2.2 Test Setup



4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedure

- a. Connect output of the antenna port to a spectrum analyzer and adjust appropriate attenuation.
- b. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (Determine the channel edge.)
- c. Measure the power spectral density (for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
- d. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
- e. Adjust the span to encompass the entire mask as necessary and clear trace.
- f. Trace average at least 100 traces in power averaging (rms) mode.
- g. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask


4.2.5 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.2.6 Test Results (Mode 1)

CDD Mode:


802.11a

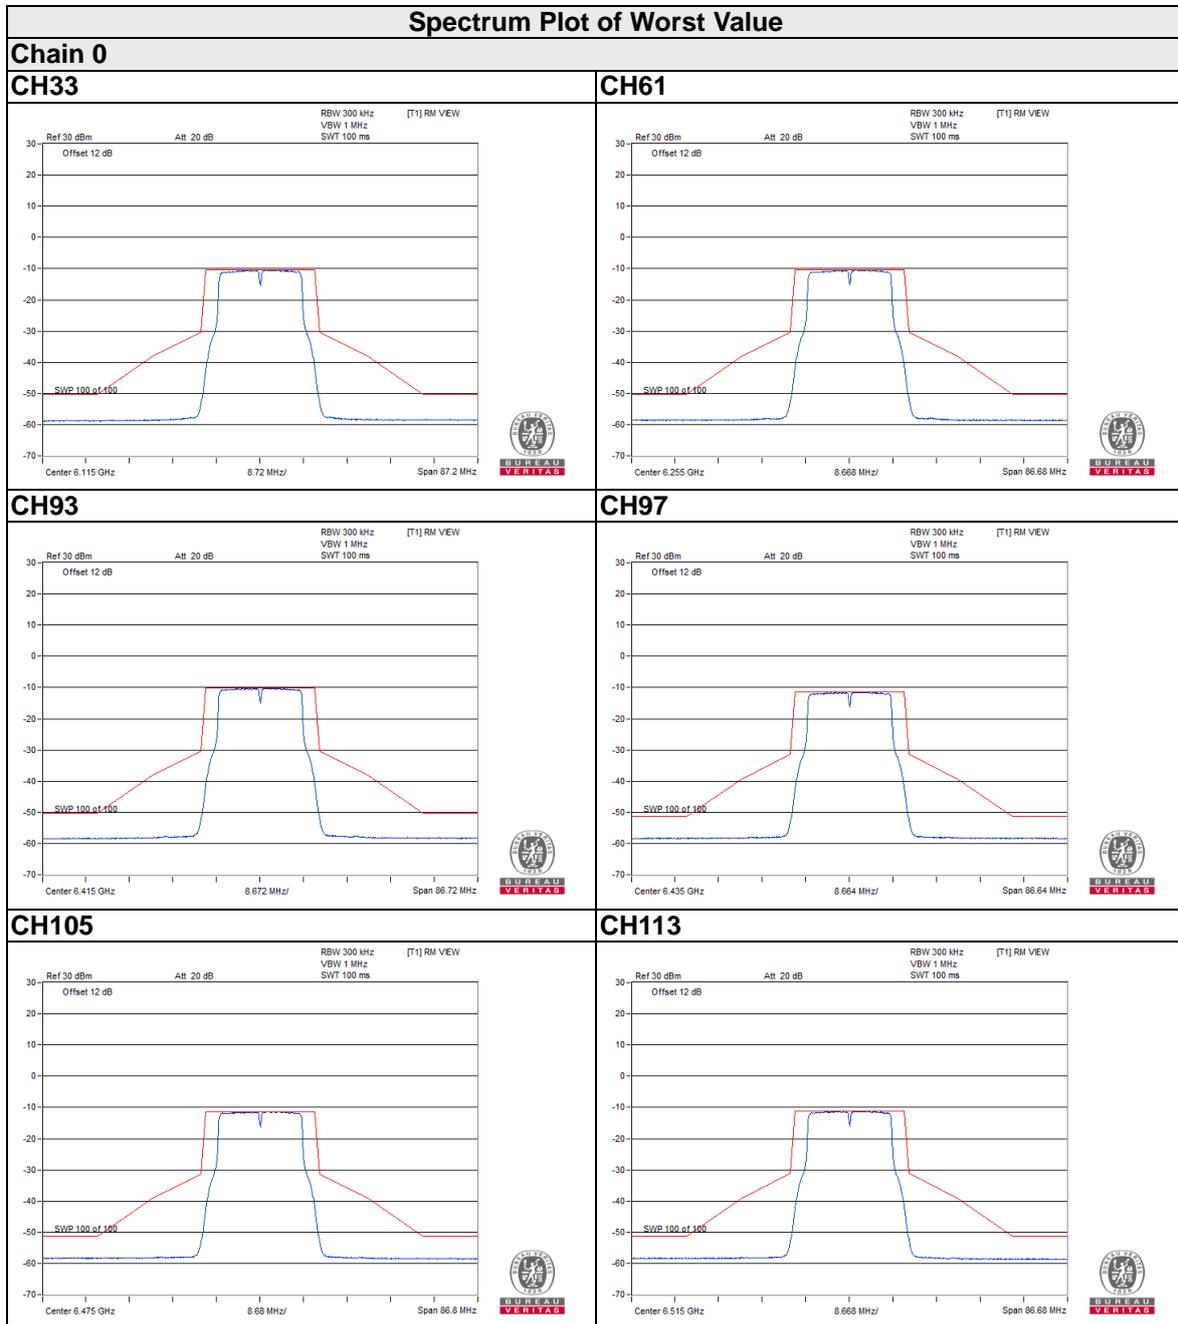

CH117

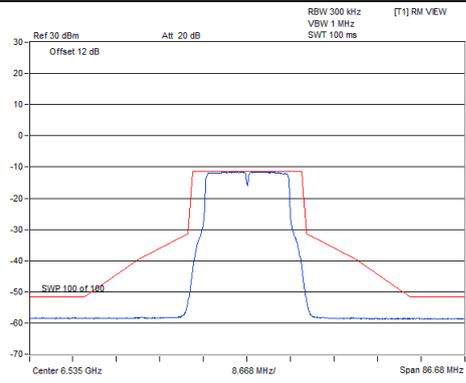


CH153

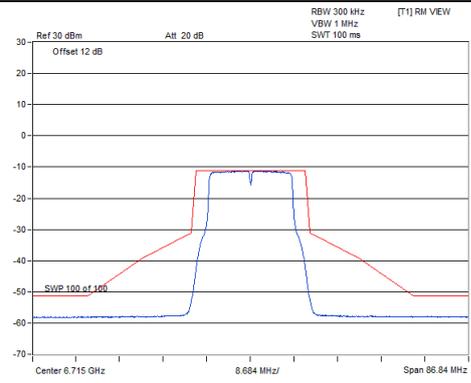


Spectrum Plot of Worst Value

Chain 0


CH181

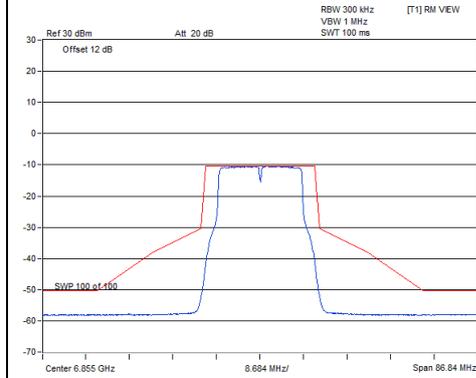

CH185

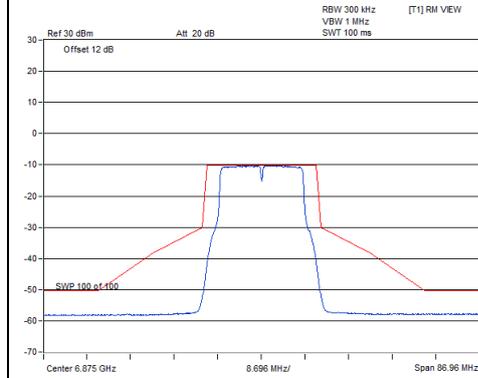

CH213

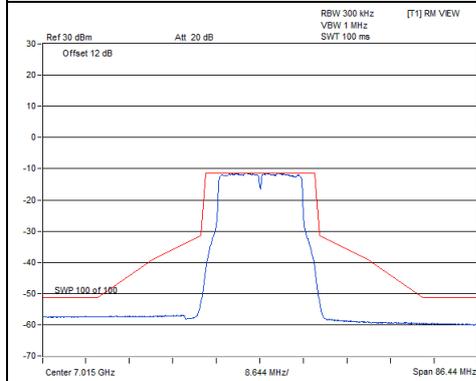

CH233

