

# SAR Test Report

**Report No.** : SFBBQZ-WTW-P20120749

**Applicant** : NETGEAR INC.

**Address** : 350 East Plumeria Drive, San Jose, CA 95134, USA

**Product** : 5G MHS Travel Router

**FCC ID** : PY320400515

**Brand** : Netgear

**Model No.** : MR5100C

**Standards** : FCC 47 CFR Part 2 (2.1093), IEEE C95.1:1992, IEEE Std 1528:2013  
KDB 865664 D01 v01r04, KDB 865664 D02 v01r02, KDB 248227 D01 v02r02, KDB 447498 D01 v06,  
KDB 941225 D01 v03r01, KDB 941225 D05 v02r05, KDB 941225 D05A v01r02 ,  
KDB 941225 D06 v02r01

**Sample Received Date** : Dec. 23, 2020

**Date of Testing** : Jan. 04, 2021 ~ Jan. 21, 2021

**Lab Address** : No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location** : No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City, Taiwan

**CERTIFICATION:** The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch—Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

**Prepared By :**   
Vera Huang / Specialist

**Approved By :**   
Gordon Lin / Manager



FCC Accredited No.: TW0003

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1. Summary of Maximum SAR Value .....</b>	<b>4</b>
<b>2. Description of Equipment Under Test .....</b>	<b>5</b>
<b>3. SAR Measurement System .....</b>	<b>6</b>
3.1 Definition of Specific Absorption Rate (SAR) .....	6
3.2 SPEAG DASY6 System .....	6
3.2.1 Robot .....	7
3.2.2 Probes .....	8
3.2.3 Data Acquisition Electronics (DAE) .....	8
3.2.4 Phantoms .....	8
3.2.5 Device Holder .....	9
3.2.6 System Validation Dipoles .....	10
3.2.7 Power Source .....	10
3.2.8 Tissue Simulating Liquids .....	11
3.3 SAR System Verification .....	13
3.4 SAR Measurement Procedure .....	14
3.4.1 Area Scan and Zoom Scan Procedure .....	14
3.4.2 Volume Scan Procedure .....	15
3.4.3 Power Drift Monitoring .....	16
3.4.4 Spatial Peak SAR Evaluation .....	16
3.4.5 SAR Averaged Methods .....	16
<b>4. SAR Measurement Evaluation .....</b>	<b>17</b>
4.1 EUT Configuration and Setting .....	17
4.2 EUT Testing Position .....	23
4.2.1 Hotspot Mode Exposure Conditions .....	23
4.3 Tissue Verification .....	24
4.4 System Validation .....	25
4.5 System Verification .....	26
4.6 Maximum Output Power .....	26
4.6.1 Maximum Target Conducted Power .....	26
4.6.2 Measured Conducted Power Result .....	26
4.7 SAR Testing Results .....	27
4.7.1 SAR Test Reduction Considerations .....	27
4.7.2 SAR Results for Hotspot Exposure Condition (Test Separation Distance is 10 mm) .....	29
4.7.3 SAR Measurement Variability .....	55
4.7.4 Simultaneous Multi-band Transmission Evaluation .....	56
<b>5. Calibration of Test Equipment .....</b>	<b>58</b>
<b>6. Measurement Uncertainty .....</b>	<b>59</b>
<b>7. Information of the Testing Laboratories .....</b>	<b>60</b>
<b>Appendix A. SAR Plots of System Verification</b>	
<b>Appendix B. SAR Plots of SAR Measurement</b>	
<b>Appendix C. Calibration Certificate for Probe and Dipole</b>	
<b>Appendix D. Photographs of EUT and Setup</b>	
<b>Appendix E. Maximum Target Conducted Power</b>	
<b>Appendix F. Measured Conducted Power</b>	
<b>Appendix G. SAR Summation Analysis</b>	



## Release Control Record

Report No.	Reason for Change	Date Issued
SFBBQZ-WTW-P20120749	Initial release	Feb. 23, 2021

**1. Summary of Maximum SAR Value**

Equipment Class	Mode	Highest SAR <sub>1g</sub> Hotspot Tested at 10 mm (W/kg)
PCB	WCDMA II	1.19
	WCDMA V	0.92
	LTE 2	1.08
	LTE 4	0.92
	LTE 5	0.80
	LTE 7	1.17
	LTE 12	0.86
	LTE 13	1.01
	LTE 17	0.89
	LTE 25	1.18
	LTE 30	0.88
	LTE 38	0.63
	LTE 41	0.72
	LTE 66	1.06
	LTE 71	0.93
	DTS	5G NR-n5
5G NR-n25		0.57
5G NR-n66		0.52
5G NR-n71		0.43
NII	2.4G WLAN	0.17
	5.2G WLAN	0.13
	5.8G WLAN	0.22
Highest Simultaneous Transmission SAR		1.58

**Note:**

- The SAR criteria (**Head & Body: SAR-1g1.6 W/kg, and Extremity: SAR-10g 4.0 W/kg**) for general population/uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.

**2. Description of Equipment Under Test**

<b>EUT Type</b>	5G MHS Travel Router
<b>FCC ID</b>	PY320400515
<b>Brand Name</b>	Netgear
<b>Model Name</b>	MR5100C
<b>Tx Frequency Bands (Unit: MHz)</b>	WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band V : 826.4 ~ 846.6 LTE Band 2 : 1850.7 ~ 1909.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 4 : 1710.7 ~ 1754.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 5 : 824.7 ~ 848.3 (BW: 1.4M, 3M, 5M, 10M) LTE Band 7 : 2502.5 ~ 2567.5 (BW: 5M, 10M, 15M, 20M) LTE Band 12 : 699.7 ~ 715.3 (BW: 1.4M, 3M, 5M, 10M) LTE Band 13 : 779.5 ~ 784.5 (BW: 5M, 10M) LTE Band 17 : 706.5 ~ 713.5 (BW: 5M, 10M) LTE Band 25 : 1850.7 ~ 1914.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 29 : 717 ~ 728(Rx only) LTE Band 30 : 2307.5 ~ 2312.5 (BW: 5M, 10M) LTE Band 38 : 2572.5 ~ 2617.5 (BW: 5M, 10M, 15M, 20M) LTE Band 41 : 2498.5 ~ 2687.5 (BW: 5M, 10M, 15M, 20M) LTE Band 66 : 1710.7 ~ 1779.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 71 : 663 ~ 698 (BW: 5M, 10M, 15M, 20M) 5G NR n5 : 826.5 ~ 846.5 (BW: 5M, 10M, 15M, 20M) 5G NR n25 : 1850.7 ~ 1914.3 (BW: 5M, 10M, 15M, 20M) 5G NR n66 : 1712.5 ~ 1777.5 (BW: 5M, 10M, 15M, 20M, 30M, 40M) 5G NR n71 : 663 ~ 698 (BW: 5M, 10M, 15M, 20M) WLAN : 2412 ~ 2462, 5180 ~ 5240, 5745 ~ 5825
<b>Uplink Modulations</b>	WCDMA : QPSK LTE : QPSK, 16QAM, 64QAM, 256QAM 5G NR : DFT-s-OFDM / CP-OFDM_PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11b : DSSS 802.11a/g/n/ac : OFDM 802.11ax : OFDMA
<b>5G NR FR1 SCS</b>	15 kHz
<b>EN-DC Uplink Combinations</b>	2A-n5A, 66A-n5A, 12A-n25A, 66A-n25A, 2A-n66A, 5A-n66A, 7A-n66A, 12A-n66A, 13A-n66A, 2A-n71A, 7A-n71A, 66A-n71A
<b>Maximum Tune-up Conducted Power (Unit: dBm)</b>	Please refer to section 4.6.1 of this report
<b>Antenna Type</b>	Monopole Antenna
<b>EUT Stage</b>	Engineering Sample

**Note:**

1. The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.
2. The 5G NR are only support NSA mode. The test results complied with 3GPP 38.521-3 chapter 5.2B.4 for inter band EN-DC within FR1. Please refer to the chapter 4.6 and 4.7 for the detail in the report.

**List of Accessory:**

<b>Battery</b>	<b>Brand Name</b>	NETGEAR
	<b>Model Name</b>	W-20
	<b>Power Rating</b>	3.85Vdc, 19.4 Wh
	<b>Type</b>	Li-ion

### **3. SAR Measurement System**

#### **3.1 Definition of Specific Absorption Rate (SAR)**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### **3.2 SPEAG DASY6 System**

DASY6 system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY6 software defined. The DASY6 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

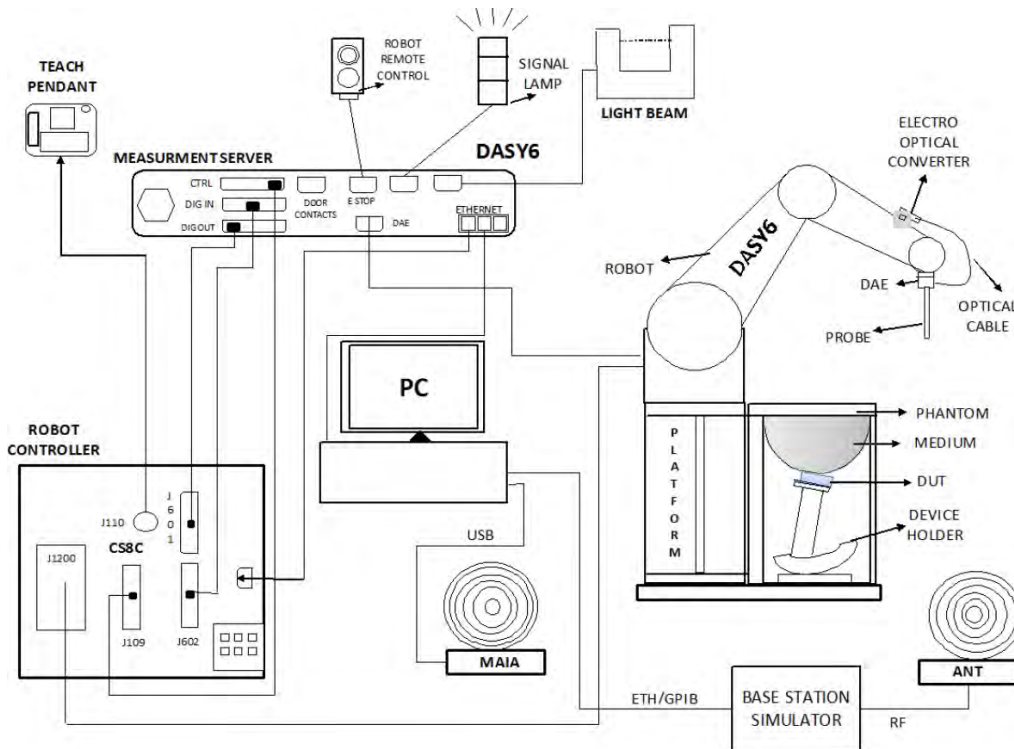


**Fig-3.1 SPEAG DASY6 System Setup**

**3.2.1 Robot**

The DASY6 systems use the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version of CS8c from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

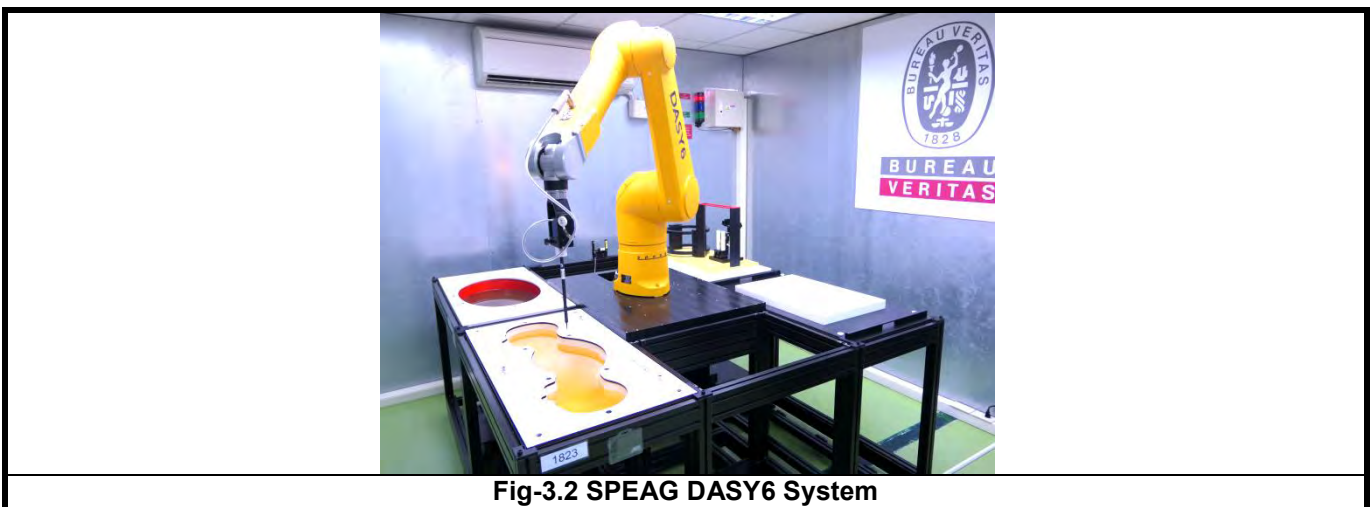


**Fig-3.2 SPEAG DASY6 System**


## SAR Test Report

### 3.2.2 Probes


The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

<b>Model</b>	EX3DV4	
<b>Construction</b>	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
<b>Frequency</b>	4 MHz to 10 GHz Linearity: $\pm 0.2$ dB	
<b>Directivity</b>	$\pm 0.1$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

### 3.2.3 Data Acquisition Electronics (DAE)


<b>Model</b>	DAE3, DAE4	
<b>Construction</b>	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
<b>Measurement Range</b>	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
<b>Input Offset Voltage</b>	$< 5$ $\mu$ V (with auto zero)	
<b>Input Bias Current</b>	$< 50$ fA	
<b>Dimensions</b>	60 x 60 x 68 mm	

### 3.2.4 Phantoms


<b>Model</b>	SAM-Twin Phantom	
<b>Construction</b>	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE Std 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
<b>Material</b>	Vinylester, fiberglass reinforced (VE-GF)	
<b>Shell Thickness</b>	$2 \pm 0.2$ mm ( $6 \pm 0.2$ mm at ear point)	
<b>Dimensions</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet	
<b>Filling Volume</b>	approx. 25 liters	



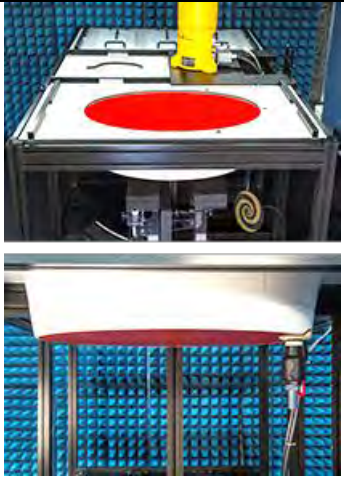

## SAR Test Report

<b>Model</b>	ELI	
<b>Construction</b>	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
<b>Material</b>	Vinylester, fiberglass reinforced (VE-GF)	
<b>Shell Thickness</b>	2.0 ± 0.2 mm (bottom plate)	
<b>Dimensions</b>	Major axis: 600 mm Minor axis: 400 mm	
<b>Filling Volume</b>	approx. 30 liters	


### 3.2.5 Device Holder

<b>Model</b>	MD4HHTV5 - Mounting Device for Hand-Held Transmitters	
<b>Construction</b>	In combination with the Twin SAM or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
<b>Material</b>	Polyoxymethylene (POM)	


<b>Model</b>	MDA4WTV5 - Mounting Device Adaptor for Ultra Wide Transmitters	
<b>Construction</b>	An upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.	
<b>Material</b>	Polyoxymethylene (POM)	

<b>Model</b>	MDA4SPV6 - Mounting Device Adaptor for Smart Phones	
<b>Construction</b>	The solid low-density MDA4SPV6 adaptor assuring no impact on the DUT radiation performance and is conform with any DUT design and shape.	
<b>Material</b>	ROHACELL	


## SAR Test Report

<b>Model</b>	MD4LAPV5 - Mounting Device for Laptops and other Body-Worn Transmitters	
<b>Construction</b>	In combination with the Twin SAM or ELI phantoms, the Mounting Device (Body-Worn) enables testing of transmitter devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at a flat phantom section.	
<b>Material</b>	Polyoxymethylene (POM), PET-G, Foam	

### 3.2.6 System Validation Dipoles


<b>Model</b>	D-Serial	
<b>Construction</b>	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
<b>Frequency</b>	750 MHz to 5800 MHz	
<b>Return Loss</b>	> 20 dB	
<b>Power Capability</b>	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

### 3.2.7 Power Source

<b>Model</b>	Powersource1	
<b>Signal Type</b>	Continuous Wave	
<b>Operating Frequencies</b>	600 MHz to 5850 MHz	
<b>Output Power</b>	-5.0 dBm to +17.0 dBm	
<b>Power Supply</b>	5V DC, via USB jack	
<b>Power Consumption</b>	<3 W	
<b>Applications</b>	System performance check and validation with a CW signal.	

**3.2.8 Tissue Simulating Liquids**

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 10 % are listed in Table-3.1.

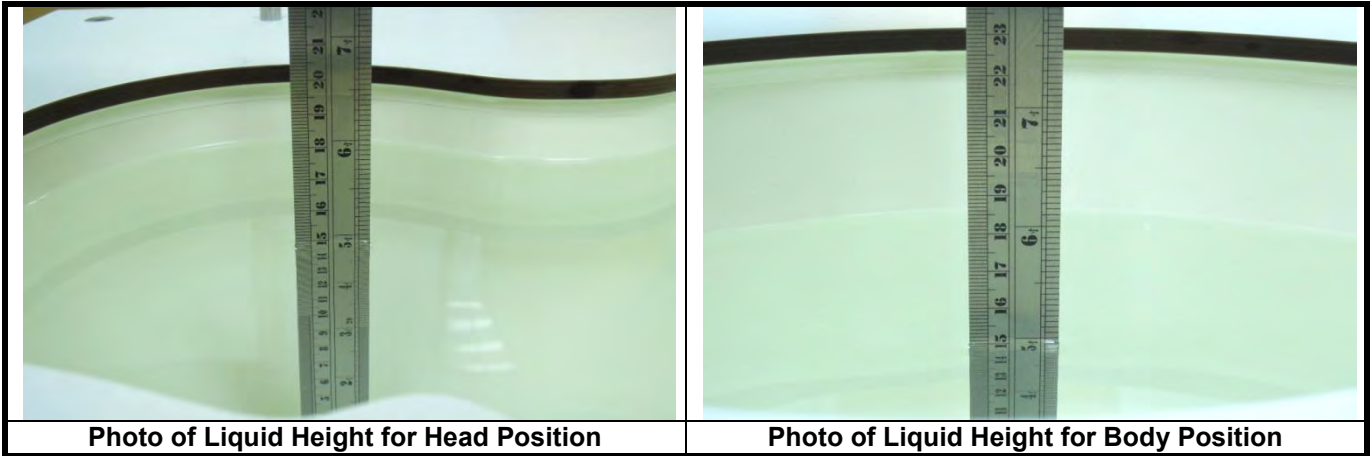

**Table-3.1 Targets of Tissue Simulating Liquid**

Frequency (MHz)	Target Permittivity	Range of $\pm 10\%$	Target Conductivity	Range of $\pm 10\%$
450	43.5	39.2 ~ 47.9	0.87	0.78 ~ 0.96
750	41.9	37.7 ~ 46.1	0.89	0.80 ~ 0.98
835	41.5	37.4 ~ 45.7	0.90	0.81 ~ 0.99
900	41.5	37.4 ~ 45.7	0.97	0.87 ~ 1.07
1450	40.5	36.5 ~ 44.6	1.20	1.08 ~ 1.32
1500	40.4	36.4 ~ 44.4	1.23	1.11 ~ 1.35
1640	40.2	36.2 ~ 44.2	1.31	1.18 ~ 1.44
1750	40.1	36.1 ~ 44.1	1.37	1.23 ~ 1.51
1800	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
1900	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
2000	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
2100	39.8	35.8 ~ 43.8	1.49	1.34 ~ 1.64
2300	39.5	35.6 ~ 43.5	1.67	1.50 ~ 1.84
2450	39.2	35.3 ~ 43.1	1.80	1.62 ~ 1.98
2600	39.0	35.1 ~ 42.9	1.96	1.76 ~ 2.16
3000	38.5	34.7 ~ 42.4	2.40	2.16 ~ 2.64
3500	37.9	34.1 ~ 41.7	2.91	2.62 ~ 3.20
4000	37.4	33.7 ~ 41.1	3.43	3.09 ~ 3.77
4500	36.8	33.1 ~ 40.5	3.94	3.55 ~ 4.33
5000	36.2	32.6 ~ 39.8	4.45	4.01 ~ 4.90
5200	36.0	32.4 ~ 39.6	4.66	4.19 ~ 5.13
5400	35.8	32.2 ~ 39.4	4.86	4.37 ~ 5.35
5600	35.5	32.0 ~ 39.1	5.07	4.56 ~ 5.58
5800	35.3	31.8 ~ 38.8	5.27	4.74 ~ 5.80
6000	35.1	31.6 ~ 38.6	5.48	4.93 ~ 6.03

## SAR Test Report

The dielectric properties of the tissue simulating liquids are defined in IEC 62209-1 and IEC 62209-2. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

Since the range of  $\pm 10\%$  of the required target values is used to measure relative permittivity and conductivity, the SAR correction procedure is applied to correct measured SAR for the deviations in permittivity and conductivity. Only positive correction has been used to scale up the measured SAR, and SAR result would not be corrected if the correction  $\Delta$  SAR has a negative sign.


The following table gives the recipes for tissue simulating liquids.

**Table-3.2 Recipes of Tissue Simulating Liquid**

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3

**3.3 SAR System Verification**

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

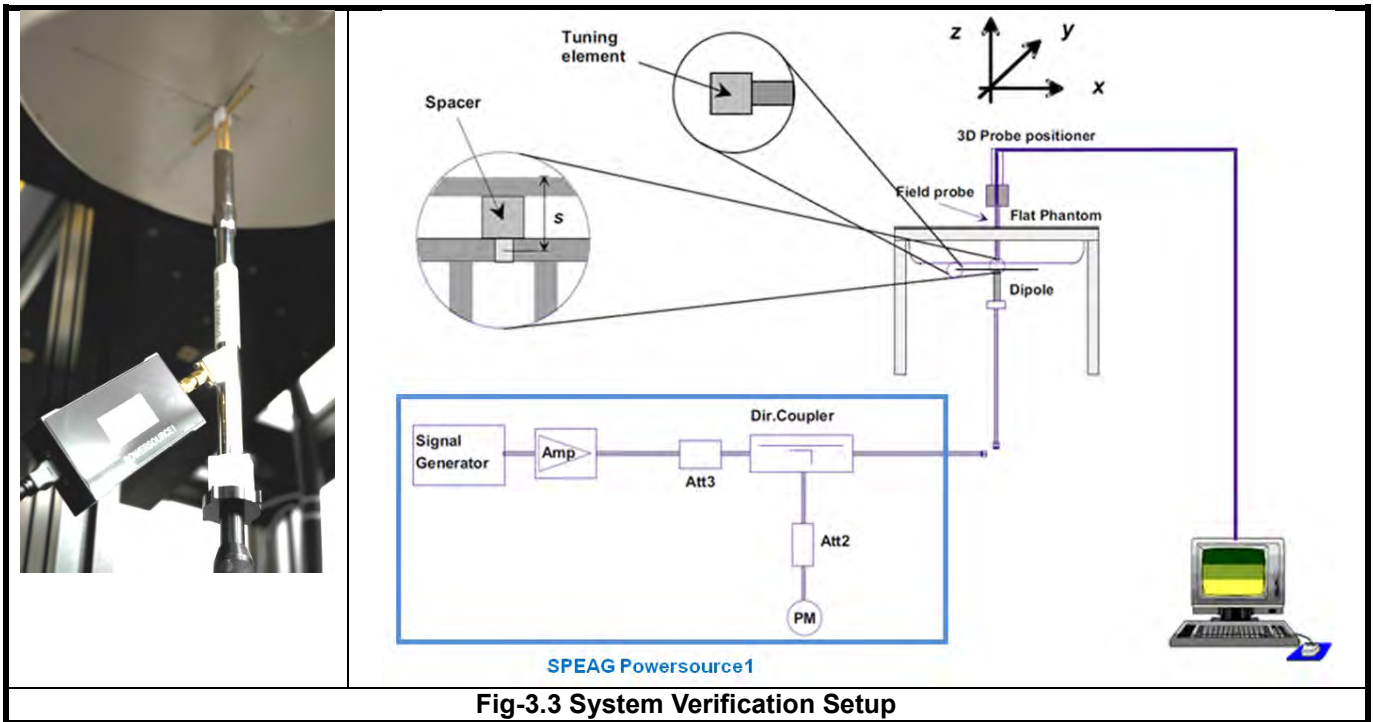

**Fig-3.3 System Verification Setup**

The SPEAG Powersource1 is a portable and very stable RF source providing a continuous wave (CW) signal. It is designed for conducting SAR system checks and SAR system validation of DASY and is compatible with IEC 62209-1, IEC 62209-2 and IEEE Std 1528 standards. The Powersource1 has been calibrated by SPEAG's ISO/IEC 17025-accredited calibration center. When using Powersource1, the setup can be simplified, as shown in Fig-3.3. The signal purity is warranted by design. Since the Powersource1 is calibrated, no additional equipment is needed and the Powersource1 can directly be connected to the SMA connector of the dipole without a cable as all separate components (signal generator, amplifier, coupler and power meter) are built into the unit.

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The Powersource1 is adjusted for the desired forward power of 17 dBm at the dipole connector and the RF output power would be turned on. After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

## 3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

### 3.4.1 Area Scan and Zoom Scan Procedure

First area scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an area scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, zoom scan is required. The zoom scan is performed around the highest E-field value to determine the averaged SAR-distribution.

Measure the local SAR at a test point at 1.4 mm of the inner surface of the phantom recommended by SEPAG. The area scan (two-dimensional SAR distribution) is performed cover at least an area larger than the projection of the EUT or antenna. The measurement resolution and spatial resolution for interpolation shall be chosen to allow identification of the local peak locations to within one-half of the linear dimension of the corresponding side of the zoom scan volume. Following table provides the measurement parameters required for the area scan.

Parameter	$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 6 \text{ GHz}$
Maximum distance from closest measurement point to phantom surface	$5 \pm 1$	$\delta \ln(2)/2 \pm 0.5$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks. Additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g. 1 W/kg for 1.6 W/kg, 1 g limit; or 1.26 W/kg for 2 W/kg, 10 g limit).

The zoom scan (three-dimensional SAR distribution) is performed at the local maxima locations identified in previous area scan procedure. The zoom scan volume must be larger than the required minimum dimensions. When graded grids are used, which only applies in the direction normal to the phantom surface, the initial grid separation closest to the phantom surface and subsequent graded grid increment ratios must satisfy the required protocols. The 1-g SAR averaging volume must be fully contained within the zoom scan measurement volume boundaries; otherwise, the measurement must be repeated by shifting or expanding the zoom scan volume. The similar requirements also apply to 10-g SAR measurements. Following table provides the measurement parameters required for the zoom scan.

Parameter		$f \leq 3$ GHz	$3 \text{ GHz} < f \leq 6$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm	3 – 4 GHz: $\leq 5$ mm 4 – 6 GHz: $\leq 4$ mm
Maximum zoom scan spatial resolution, normal to phantom surface	<i>uniform grid:</i> $\Delta z_{\text{zoom}}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	<i>graded grids:</i> $\Delta z_{\text{zoom}}(1)$	$\leq 4$ mm	3 – 4 GHz: $\leq 3.0$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2.0$ mm
	$\Delta z_{\text{zoom}}(n>1)$	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$ mm	
Minimum zoom scan volume (x, y, z)		$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm

Per IEC 62209-2 AMD1, the successively higher resolution zoom scan is required if the zoom scan measured as defined above complies with both of the following criteria, or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed:

- (1) The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions ( $\Delta x, \Delta y$ ). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance  $z_{M1}$ .
- (2) The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum SAR value shall be at least 30 %.

If one or both of the above criteria are not met, the zoom scan measurement shall be repeated using a finer resolution. New horizontal and vertical grid steps shall be determined from the measured SAR distribution so that the above criteria are met. Compliance with the above two criteria shall be demonstrated for the new measured zoom scan.

### 3.4.2 Volume Scan Procedure

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

### 3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.



## 4. SAR Measurement Evaluation

### 4.1 EUT Configuration and Setting

#### <Connections between EUT and System Simulator>

For WWAN SAR testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

#### <Considerations Related to WCDMA for Setup and Testing>

##### Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors ( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}^{(1)(2)}$	CM <sup>(3)</sup> (dB)	MPR <sup>(3)</sup> (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	12/15 <sup>(4)</sup>	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

# SAR Test Report

## Release 6 HSPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the  $\beta$  values indicated in below.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}^{(1)}$	$\beta_{ec}$	$\beta_{ed}^{(4)(5)}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM <sup>(2)</sup> (dB)	MPR <sup>(2)(6)</sup> (dB)	AG <sup>(5)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{HS} = 5/15 * \beta_c$ .  
 Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.  
 Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .  
 Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.  
 Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.  
 Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

## HSPA+ SAR Guidance

The 3G SAR test reduction procedure is applied to HSPA+(uplink) with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 6 HSPA, SAR is required for Rel. 7 HSPA+. Power is measured for HSPA+ that supports uplink 16QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

Sub-test	$\beta_c^{(3)}$	$\beta_d$	$\beta_{HS}^{(1)}$	$\beta_{ec}$	$\beta_{ed}^{(4)}$ (2xSF2)	$\beta_{ed}^{(4)}$ (2xSF4)	CM <sup>(2)</sup> (dB)	MPR <sup>(2)</sup> (dB)	AG <sup>(4)</sup> Index	E-TFCI <sup>(5)</sup>	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}$ : 30/15 $\beta_{ed2}$ : 30/15	$\beta_{ed3}$ : 24/15 $\beta_{ed4}$ : 24/15	3.5	2.5	14	105	105

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .  
 Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).  
 Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d = 0$  by default.  
 Note 4:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.  
 Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

## DC-HSDPA SAR Guidance

The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 5 HSDPA, SAR is required for Rel. 8 DC-HSDPA. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

## <Considerations Related to LTE for Setup and Testing>

This device contains LTE transmitter which follows 3GPP standards, is category 3, supports both QPSK and QAM modulations, and supported LTE band and channel bandwidth is listed in below. The output power was tested per 3GPP TS 36.521-1 maximum transmit procedures for both QPSK and QAM modulation. The results please refer to section 4.6 of this report.

EUT Supported LTE Band and Channel Bandwidth						
LTE Band	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz
2	V	V	V	V	V	V
4	V	V	V	V	V	V
5	V	V	V	V		
7			V	V	V	V
12	V	V	V	V		
13			V	V		
17			V	V		
25	V	V	V	V	V	V
30			V	V		
38			V	V	V	V
41			V	V	V	V
48			V	V	V	V
66	V	V	V	V	V	V
71			V	V	V	V

The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power is specified in below.

Modulation	Channel Bandwidth / RB Configurations						LTE MPR Setting (dB)
	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2
64QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	2
64QAM	> 5	> 4	> 8	> 12	> 16	> 18	3
256QAM	>= 1						5

**Note:** MPR is according to the standard and implemented in the circuit (mandatory).


In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.

# SAR Test Report

During LTE SAR testing, the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB was set in base station simulator. When the EUT has registered and communicated to base station simulator, the simulator set to make EUT transmitting the maximum radiated power.

## TDD-LTE Setup Configurations

According to KDB 941225 D05, SAR testing for TDD-LTE device must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD-LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be referred to below.

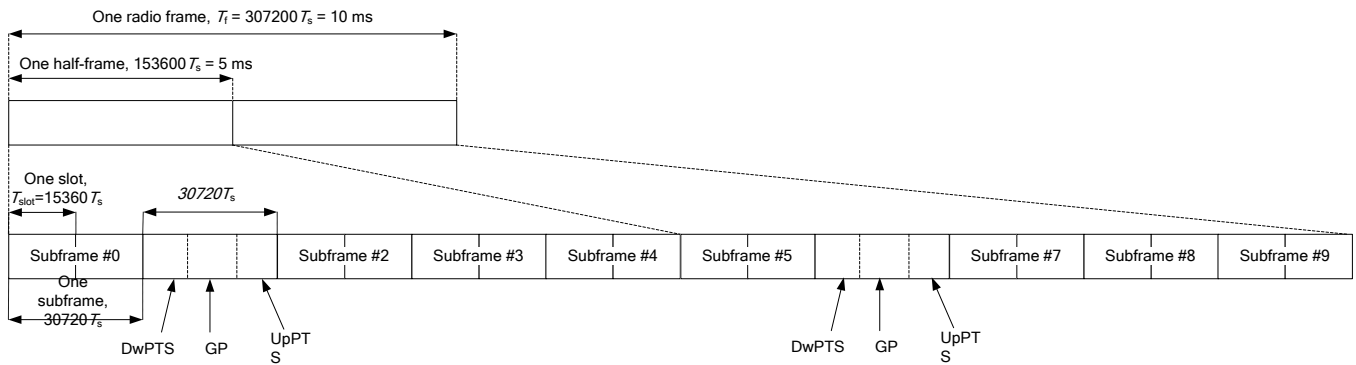

3GPP TS 36.211 Figure 4.2-1: Frame Structure Type 2

Special Subframe Configuration	Normal Cyclic Prefix in Downlink			Extended Cyclic Prefix in Downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts
1	19760 · Ts			20480 · Ts		
2	21952 · Ts			23040 · Ts		
3	24144 · Ts			25600 · Ts		
4	26336 · Ts			7680 · Ts		
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts	4384 · Ts	5120 · Ts
6	19760 · Ts			23040 · Ts		
7	21952 · Ts			12800 · Ts		
8	24144 · Ts			-		
9	13168 · Ts	-	-	-	-	-

3GPP TS 36.211 Table 4.2-1: Configuration of Special Subframe

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-Point Periodicity	Subframe Number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

3GPP TS 36.211 Table 4.2-2: Uplink-Downlink Configurations

## SAR Test Report

The variety of different TD-LTE uplink-downlink configurations allows a network operator to allocate the network's capacity between uplink and downlink traffic to meet the needs of the network. The uplink duty cycle of these seven configurations can readily be computed and shown in below.

UL-DL Configuration	0	1	2	3	4	5	6
Highest Duty-Cycle	63.33%	43.33%	23.33%	31.67%	21.67%	11.67%	53.33%

Considering the highest transmission duty cycle, TDD-LTE was tested using Uplink-Downlink Configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 7 using extended cyclic prefix uplink. Therefore, SAR testing for TDD-LTE was performed at the maximum output power with highest transmission duty cycle of 63.33%.

### <Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

### Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

### Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.

### SAR Test Configuration and Channel Selection


When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

**4.2 EUT Testing Position**

**4.2.1 Hotspot Mode Exposure Conditions**

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225 D06. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

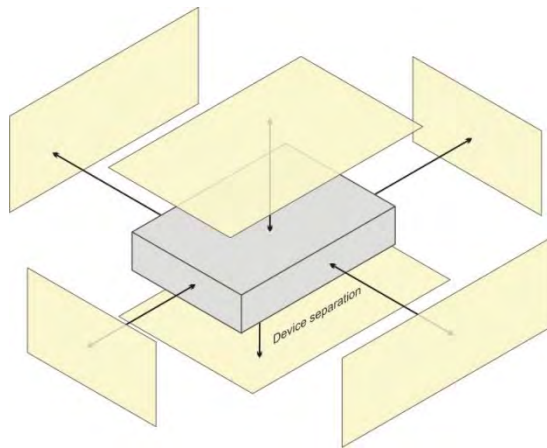

Based on the antenna location shown on appendix D of this report, the SAR testing required for hotspot mode is listed as below.

Antenna	Front Face	Rear Face	Left Side	Right Side	Top Side	Bottom Side
Ant 1 (for WWAN)	V	V	V	V	V	V
Ant 2 (for WWAN)	V	V	V	V	V	V
Ant 3 (for WLAN)	V	V	V	V	V	V
Ant 4 (for WLAN)	V	V	V	V	V	V

The supported bands of antenna is listed as below.

Ant 1 : WCDMA II/V, LTE 2/4/5/7/12/13/17/25/30/38/41/66/71, FR1 n5/n66/n71

Ant 2 : LTE 2/7/66 (No standalone mode only for EN-DC and CA UL mode ), FR1 n5/n25/n66

Ant 3 : WLAN 2.4G, WLAN 5G

Ant 4 : WLAN 2.4G, WLAN 5G

## 4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Plot	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity ( $\sigma$ )	Measured Permittivity ( $\epsilon_r$ )	Target Conductivity ( $\sigma$ )	Target Permittivity ( $\epsilon_r$ )	Conductivity Deviation (%)	Permittivity Deviation (%)	Test Date
1	1900	23.1	1.452	39.117	1.4	40	3.71	-2.21	Jan. 21, 2021
2	835	23.2	0.928	42.022	0.9	41.5	3.11	1.26	Jan. 04, 2021
3	1900	23.2	1.46	39.237	1.4	40	4.29	-1.91	Jan. 04, 2021
4	1900	23.1	1.457	39.727	1.4	40	4.07	-0.68	Jan. 08, 2021
5	1750	23.2	1.329	39.813	1.37	40.1	-2.99	-0.72	Jan. 05, 2021
7	835	23.2	0.928	42.022	0.9	41.5	3.11	1.26	Jan. 04, 2021
8	2600	23.2	2.029	38.503	1.96	39	3.52	-1.27	Jan. 05, 2021
9	2600	23.1	2.032	39.412	1.96	39	3.67	1.06	Jan. 08, 2021
10	750	23.2	0.901	42.724	0.89	41.9	1.24	1.97	Jan. 06, 2021
11	750	23.2	0.901	42.724	0.89	41.9	1.24	1.97	Jan. 06, 2021
13	750	23.2	0.901	42.724	0.89	41.9	1.24	1.97	Jan. 06, 2021
14	1900	23.2	1.46	39.237	1.4	40	4.29	-1.91	Jan. 04, 2021
15	2300	23.1	1.706	38.923	1.67	39.5	2.16	-1.46	Jan. 07, 2021
16	2600	23.1	2.011	37.859	1.96	39	2.60	-2.93	Jan. 07, 2021
17	2600	23.1	2.011	37.859	1.96	39	2.60	-2.93	Jan. 07, 2021
19	1750	23.1	1.332	39.524	1.37	40.1	-2.77	-1.44	Jan. 07, 2021
20	1750	23.1	1.319	40.236	1.37	40.1	-3.72	0.34	Jan. 08, 2021
21	750	23.1	0.9	42.446	0.89	41.9	1.12	1.30	Jan. 07, 2021
22	835	23.1	0.946	43.065	0.9	41.5	5.11	3.77	Jan. 15, 2021
23	835	23.1	0.946	43.065	0.9	41.5	5.11	3.77	Jan. 15, 2021
24	1900	23.1	1.452	39.117	1.4	40	3.71	-2.21	Jan. 21, 2021
25	1750	23.1	1.328	40.493	1.37	40.1	-3.07	0.98	Jan. 15, 2021
26	1750	23.1	1.323	41.001	1.37	40.1	-3.43	2.25	Jan. 19, 2021
27	750	23.1	0.892	43.357	0.89	41.9	0.22	3.48	Jan. 15, 2021
30	2450	23.1	1.871	39.9	1.8	39.2	3.94	1.79	Jan. 15, 2021
31	5250	23.1	4.658	37.1	4.71	35.9	-1.10	3.34	Jan. 15, 2021
32	5750	23.1	5.138	36.444	5.22	35.4	-1.57	2.95	Jan. 15, 2021

**Note:**

The dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within  $\pm 10\%$  of the target values. Liquid temperature during the SAR testing has kept within  $\pm 2^\circ\text{C}$ .



# SAR Test Report

## 4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.

Plot	Test Date	Probe S/N	Calibration Point	Measured Conductivity ( $\sigma$ )	Measured Permittivity ( $\epsilon_r$ )	Validation for CW			Validation for Modulation		
						Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR
1	Jan. 21, 2021	7537	1900	1.452	39.117	Pass	Pass	Pass	N/A	N/A	N/A
2	Jan. 04, 2021	7555	835	0.928	42.022	Pass	Pass	Pass	N/A	N/A	N/A
3	Jan. 04, 2021	7555	1900	1.46	39.237	Pass	Pass	Pass	N/A	N/A	N/A
4	Jan. 08, 2021	7537	1900	1.457	39.727	Pass	Pass	Pass	N/A	N/A	N/A
5	Jan. 05, 2021	7555	1750	1.329	39.813	Pass	Pass	Pass	N/A	N/A	N/A
7	Jan. 04, 2021	7555	835	0.928	42.022	Pass	Pass	Pass	N/A	N/A	N/A
8	Jan. 05, 2021	7555	2600	2.029	38.503	Pass	Pass	Pass	N/A	N/A	N/A
9	Jan. 08, 2021	7537	2600	2.032	39.412	Pass	Pass	Pass	N/A	N/A	N/A
10	Jan. 06, 2021	7555	750	0.901	42.724	Pass	Pass	Pass	N/A	N/A	N/A
11	Jan. 06, 2021	7555	750	0.901	42.724	Pass	Pass	Pass	N/A	N/A	N/A
13	Jan. 06, 2021	7555	750	0.901	42.724	Pass	Pass	Pass	N/A	N/A	N/A
14	Jan. 04, 2021	7555	1900	1.46	39.237	Pass	Pass	Pass	N/A	N/A	N/A
15	Jan. 07, 2021	7537	2300	1.706	38.923	Pass	Pass	Pass	N/A	N/A	N/A
16	Jan. 07, 2021	7537	2600	2.011	37.859	Pass	Pass	Pass	N/A	N/A	N/A
17	Jan. 07, 2021	7537	2600	2.011	37.859	Pass	Pass	Pass	N/A	N/A	N/A
19	Jan. 07, 2021	7537	1750	1.332	39.524	Pass	Pass	Pass	N/A	N/A	N/A
20	Jan. 08, 2021	7537	1750	1.319	40.236	Pass	Pass	Pass	N/A	N/A	N/A
21	Jan. 07, 2021	7537	750	0.9	42.446	Pass	Pass	Pass	N/A	N/A	N/A
22	Jan. 15, 2021	7537	835	0.946	43.065	Pass	Pass	Pass	N/A	N/A	N/A
23	Jan. 15, 2021	7537	835	0.946	43.065	Pass	Pass	Pass	N/A	N/A	N/A
24	Jan. 21, 2021	7537	1900	1.452	39.117	Pass	Pass	Pass	N/A	N/A	N/A
25	Jan. 15, 2021	7537	1750	1.328	40.493	Pass	Pass	Pass	N/A	N/A	N/A
26	Jan. 19, 2021	7537	1750	1.323	41.001	Pass	Pass	Pass	N/A	N/A	N/A
27	Jan. 15, 2021	7537	750	0.892	43.357	Pass	Pass	Pass	N/A	N/A	N/A
30	Jan. 15, 2021	7537	2450	1.871	39.9	Pass	Pass	Pass	OFDM	N/A	Pass
31	Jan. 15, 2021	7537	5250	4.658	37.1	Pass	Pass	Pass	OFDM	N/A	Pass
32	Jan. 15, 2021	7537	5750	5.138	36.444	Pass	Pass	Pass	OFDM	N/A	Pass

**4.5 System Verification**

The measuring result for system verification is tabulated as below.

Plot	Test Date	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
1	Jan. 21, 2021	1900	39.40	1.93	38.60	-2.03	5d018	7537	1431
2	Jan. 04, 2021	835	9.52	0.486	9.72	2.10	4d121	7555	1589
3	Jan. 04, 2021	1900	40.30	2.03	40.60	0.74	5d036	7555	1589
4	Jan. 08, 2021	1900	40.30	2.03	40.60	0.74	5d036	7537	1277
5	Jan. 05, 2021	1750	36.00	1.79	35.80	-0.56	1055	7555	1589
7	Jan. 04, 2021	835	9.52	0.486	9.72	2.10	4d121	7555	1589
8	Jan. 05, 2021	2600	55.50	2.83	56.60	1.98	1020	7555	1589
9	Jan. 08, 2021	2600	55.50	2.73	54.60	-1.62	1020	7537	1277
10	Jan. 06, 2021	750	8.48	0.436	8.72	2.83	1013	7555	1589
11	Jan. 06, 2021	750	8.48	0.436	8.72	2.83	1013	7555	1589
13	Jan. 06, 2021	750	8.48	0.436	8.72	2.83	1013	7555	1589
14	Jan. 04, 2021	1900	40.30	2.03	40.60	0.74	5d036	7555	1589
15	Jan. 07, 2021	2300	48.80	2.28	45.60	-6.56	1004	7537	1277
16	Jan. 07, 2021	2600	55.50	2.77	55.40	-0.18	1020	7537	1277
17	Jan. 07, 2021	2600	55.50	2.77	55.40	-0.18	1020	7537	1277
19	Jan. 07, 2021	1750	36.00	1.76	35.20	-2.22	1055	7537	1277
20	Jan. 08, 2021	1750	36.00	1.76	35.20	-2.22	1055	7537	1277
21	Jan. 07, 2021	750	8.48	0.397	7.94	-6.37	1013	7537	1277
22	Jan. 15, 2021	835	9.52	0.472	9.44	-0.84	4d121	7537	1431
23	Jan. 15, 2021	835	9.52	0.472	9.44	-0.84	4d121	7537	1431
24	Jan. 21, 2021	1900	39.40	1.93	38.60	-2.03	5d018	7537	1431
25	Jan. 15, 2021	1750	36.00	1.77	35.40	-1.67	1055	7537	1431
26	Jan. 19, 2021	1750	36.00	1.77	35.40	-1.67	1055	7537	1431
27	Jan. 15, 2021	750	8.48	0.395	7.90	-6.84	1013	7537	1431
30	Jan. 15, 2021	2450	51.60	2.51	50.20	-2.71	737	7537	1431
31	Jan. 15, 2021	5250	79.70	3.86	77.20	-3.14	1019	7537	1431
32	Jan. 15, 2021	5750	80.40	3.91	78.20	-2.74	1019	7537	1431

**Note:**

Comparing to the reference SAR value provided by SPEAG in dipole calibration certificate, the deviation of system check results is within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots please refer to Appendix A of this report.

**4.6 Maximum Output Power**

**4.6.1 Maximum Target Conducted Power**

Refer to Appendix E.

**4.6.2 Measured Conducted Power Result**

Refer to Appendix F.

## **4.7 SAR Testing Results**

### **4.7.1 SAR Test Reduction Considerations**

#### **<KDB 447498 D01, General RF Exposure Guidance>**

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1)  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- (2)  $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3)  $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

When SAR is not measured at the maximum power level allowed for production units, the measured SAR will be scaled to the maximum tune-up tolerance limit to determine compliance. The scaling factor for the tune-up power is defined as maximum tune-up limit (mW) / measured conducted power (mW). The reported SAR would be calculated by measured SAR x tune-up power scaling factor.

The SAR has been measured with highest transmission duty factor supported by the test mode tools for WLAN and/or Bluetooth. When the transmission duty factor could not achieve 100%, the reported SAR will be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up power. The scaling factor for the duty factor is defined as 100% / transmission duty cycle (%). The reported SAR would be calculated by measured SAR x tune-up power scaling factor x duty cycle scaling factor.

#### **<KDB 941225 D01, 3G SAR Measurement Procedures>**

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

### <KDB 941225 D05, SAR Evaluation Considerations for LTE Devices>

#### (1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

#### (2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

#### (3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> 1/2$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

#### (4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is  $> 1/2$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

### <KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is  $\leq 0.8$  W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is  $\leq 1.2$  W/kg.
- (2) For WLAN 5GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is  $> 0.8$  W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is  $\leq 1.2$  W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is  $\leq 1.2$  W/kg.
- (3) For WLAN MIMO mode, the power-based standalone SAR test exclusion or the sum of SAR provision in KDB 447498 to determine simultaneous transmission SAR test exclusion should be applied. Otherwise, SAR for MIMO mode will be measured with all applicable antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

# SAR Test Report

## 4.7.2 SAR Results for Hotspot Exposure Condition (Test Separation Distance is 10 mm)

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WCDMA II	RMC12.2K	Front Face	9538	Ant 1	24.00	23.41	1.15	-0.03	0.815	0.94
	WCDMA II	RMC12.2K	Rear Face	9538	Ant 1	24.00	23.41	1.15	-0.14	0.799	0.92
	WCDMA II	RMC12.2K	Left Side	9538	Ant 1	24.00	23.41	1.15	0.08	0.601	0.69
	WCDMA II	RMC12.2K	Right Side	9538	Ant 1	24.00	23.41	1.15	0.17	0.049	0.06
	WCDMA II	RMC12.2K	Top Side	9538	Ant 1	24.00	23.41	1.15	0.06	0.576	0.66
	WCDMA II	RMC12.2K	Bottom Side	9538	Ant 1	24.00	23.41	1.15	-0.1	0.052	0.06
	WCDMA II	RMC12.2K	Front Face	9262	Ant 1	24.00	23.34	1.16	0	0.807	0.94
	WCDMA II	RMC12.2K	Front Face	9400	Ant 1	24.00	23.37	1.16	0.09	0.969	1.12
	WCDMA II	RMC12.2K	Rear Face	9262	Ant 1	24.00	23.34	1.16	-0.13	0.815	0.95
1	WCDMA II	RMC12.2K	Rear Face	9400	Ant 1	24.00	23.37	1.16	-0.02	1.03	1.19
	WCDMA II	RMC12.2K	Rear Face	9400	Ant 1	24.00	23.37	1.16	0.04	1.02	1.18
	WCDMA V	RMC12.2K	Front Face	4233	Ant 1	24.00	23.12	1.22	-0.02	0.689	0.84
	WCDMA V	RMC12.2K	Rear Face	4233	Ant 1	24.00	23.12	1.22	-0.16	0.651	0.79
	WCDMA V	RMC12.2K	Left Side	4233	Ant 1	24.00	23.12	1.22	-0.08	0.314	0.38
	WCDMA V	RMC12.2K	Right Side	4233	Ant 1	24.00	23.12	1.22	-0.17	0.051	0.06
	WCDMA V	RMC12.2K	Top Side	4233	Ant 1	24.00	23.12	1.22	-0.16	0.178	0.22
	WCDMA V	RMC12.2K	Bottom Side	4233	Ant 1	24.00	23.12	1.22	0.06	0.086	0.10
	WCDMA V	RMC12.2K	Front Face	4132	Ant 1	24.00	22.87	1.30	0.11	0.698	0.91
2	WCDMA V	RMC12.2K	Front Face	4182	Ant 1	24.00	22.96	1.27	-0.06	0.721	0.92

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
3	LTE 2	QPSK20M	Front Face	18700	1	0	Ant 1	23.00	21.50	1.41	0.06	0.747	1.05
	LTE 2	QPSK20M	Rear Face	18700	1	0	Ant 1	23.00	21.50	1.41	-0.03	0.767	1.08
	LTE 2	QPSK20M	Left Side	18700	1	0	Ant 1	23.00	21.50	1.41	0	0.563	0.79
	LTE 2	QPSK20M	Right Side	18700	1	0	Ant 1	23.00	21.50	1.41	0.16	0.059	0.08
	LTE 2	QPSK20M	Top Side	18700	1	0	Ant 1	23.00	21.50	1.41	-0.16	0.538	0.76
	LTE 2	QPSK20M	Bottom Side	18700	1	0	Ant 1	23.00	21.50	1.41	-0.04	0.052	0.07
	LTE 2	QPSK20M	Front Face	18700	50	0	Ant 1	22.00	20.50	1.41	0.15	0.561	0.79
	LTE 2	QPSK20M	Rear Face	18700	50	0	Ant 1	22.00	20.50	1.41	-0.16	0.575	0.81
	LTE 2	QPSK20M	Left Side	18700	50	0	Ant 1	22.00	20.50	1.41	-0.1	0.522	0.74
	LTE 2	QPSK20M	Right Side	18700	50	0	Ant 1	22.00	20.50	1.41	0.04	0.044	0.06
	LTE 2	QPSK20M	Top Side	18700	50	0	Ant 1	22.00	20.50	1.41	-0.01	0.461	0.65
	LTE 2	QPSK20M	Bottom Side	18700	50	0	Ant 1	22.00	20.50	1.41	-0.15	0.039	0.05
	LTE 2	QPSK20M	Front Face	18700	100	0	Ant 1	22.00	20.49	1.42	-0.04	0.729	1.04
	LTE 2	QPSK20M	Rear Face	18700	100	0	Ant 1	22.00	20.49	1.42	-0.01	0.741	1.05
	LTE 2	QPSK20M	Front Face	18900	1	0	Ant 1	23.00	21.40	1.45	-0.19	0.701	1.02
	LTE 2	QPSK20M	Front Face	19100	1	0	Ant 1	23.00	21.47	1.42	-0.07	0.663	0.94
	LTE 2	QPSK20M	Rear Face	18900	1	0	Ant 1	23.00	21.40	1.45	-0.12	0.695	1.01
	LTE 2	QPSK20M	Rear Face	19100	1	0	Ant 1	23.00	21.47	1.42	-0.19	0.628	0.89
	LTE 2	QPSK20M	Rear Face	18900	50	0	Ant 1	22.00	20.41	1.44	0.17	0.521	0.75
	LTE 2	QPSK20M	Rear Face	19100	50	0	Ant 1	22.00	20.45	1.43	0.01	0.472	0.67
<b>For EN-DC</b>													
	LTE 2	QPSK20M	Front Face	18700	1	0	Ant 1	20.00	21.50	0.71	0.06	0.747	0.53
	LTE 2	QPSK20M	Rear Face	18700	1	0	Ant 1	20.00	21.50	0.71	-0.03	0.767	0.54
	LTE 2	QPSK20M	Left Side	18700	1	0	Ant 1	20.00	21.50	0.71	0	0.563	0.40
	LTE 2	QPSK20M	Right Side	18700	1	0	Ant 1	20.00	21.50	0.71	0.16	0.059	0.04
	LTE 2	QPSK20M	Top Side	18700	1	0	Ant 1	20.00	21.50	0.71	-0.16	0.538	0.38
	LTE 2	QPSK20M	Bottom Side	18700	1	0	Ant 1	20.00	21.50	0.71	-0.04	0.052	0.04
	LTE 2	QPSK20M	Front Face	18700	50	0	Ant 1	19.00	20.50	0.71	0.15	0.561	0.40
	LTE 2	QPSK20M	Rear Face	18700	50	0	Ant 1	19.00	20.50	0.71	-0.16	0.575	0.41
	LTE 2	QPSK20M	Left Side	18700	50	0	Ant 1	19.00	20.50	0.71	-0.1	0.522	0.37
	LTE 2	QPSK20M	Right Side	18700	50	0	Ant 1	19.00	20.50	0.71	0.04	0.044	0.03
	LTE 2	QPSK20M	Top Side	18700	50	0	Ant 1	19.00	20.50	0.71	-0.01	0.461	0.33
	LTE 2	QPSK20M	Bottom Side	18700	50	0	Ant 1	19.00	20.50	0.71	-0.15	0.039	0.03
	LTE 2	QPSK20M	Front Face	18700	100	0	Ant 1	19.00	20.49	0.71	-0.04	0.729	0.52
	LTE 2	QPSK20M	Rear Face	18700	100	0	Ant 1	19.00	20.49	0.71	-0.01	0.741	0.53
	LTE 2	QPSK20M	Front Face	18900	1	0	Ant 1	20.00	21.40	0.72	-0.19	0.701	0.50
	LTE 2	QPSK20M	Front Face	19100	1	0	Ant 1	20.00	21.47	0.71	-0.07	0.663	0.47
	LTE 2	QPSK20M	Rear Face	18900	1	0	Ant 1	20.00	21.40	0.72	-0.12	0.695	0.50
	LTE 2	QPSK20M	Rear Face	19100	1	0	Ant 1	20.00	21.47	0.71	-0.19	0.628	0.45
	LTE 2	QPSK20M	Rear Face	18900	50	0	Ant 1	19.00	20.41	0.72	0.17	0.521	0.38
	LTE 2	QPSK20M	Rear Face	19100	50	0	Ant 1	19.00	20.45	0.72	0.01	0.472	0.34

Note : The Standalone of LTE 2 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of LTE 2 is 20dBm in NSA mode.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 2	QPSK20M	Front Face	18700	1	0	Ant 2	23.00	21.50	1.41	0.18	0.798	1.13
	LTE 2	QPSK20M	Rear Face	18700	1	0	Ant 2	23.00	21.50	1.41	-0.03	0.718	1.01
	LTE 2	QPSK20M	Left Side	18700	1	0	Ant 2	23.00	21.50	1.41	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	18700	1	0	Ant 2	23.00	21.50	1.41	-0.07	0.557	0.79
	LTE 2	QPSK20M	Top Side	18700	1	0	Ant 2	23.00	21.50	1.41	0.07	0.547	0.77
	LTE 2	QPSK20M	Bottom Side	18700	1	0	Ant 2	23.00	21.50	1.41	0	<0.001	0.00
	LTE 2	QPSK20M	Front Face	18700	50	0	Ant 2	22.00	20.50	1.41	0.17	0.646	0.91
	LTE 2	QPSK20M	Rear Face	18700	50	0	Ant 2	22.00	20.50	1.41	0.07	0.579	0.82
	LTE 2	QPSK20M	Left Side	18700	50	0	Ant 2	22.00	20.50	1.41	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	18700	50	0	Ant 2	22.00	20.50	1.41	0.02	0.461	0.65
	LTE 2	QPSK20M	Top Side	18700	50	0	Ant 2	22.00	20.50	1.41	-0.18	0.443	0.62
	LTE 2	QPSK20M	Bottom Side	18700	50	0	Ant 2	22.00	20.50	1.41	0	<0.001	0.00
	LTE 2	QPSK20M	Front Face	18700	100	0	Ant 2	22.00	20.49	1.42	0.11	0.659	0.94
	LTE 2	QPSK20M	Rear Face	18700	100	0	Ant 2	22.00	20.49	1.42	-0.07	0.603	0.86
	LTE 2	QPSK20M	Front Face	18900	1	0	Ant 2	23.00	21.40	1.45	-0.13	0.854	1.24
	LTE 2	QPSK20M	Front Face	19100	1	0	Ant 2	23.00	21.47	1.42	0.03	0.738	1.05
	LTE 2	QPSK20M	Rear Face	18900	1	0	Ant 2	23.00	21.40	1.45	0.01	0.763	1.11
	LTE 2	QPSK20M	Rear Face	19100	1	0	Ant 2	23.00	21.47	1.42	0.17	0.683	0.97
	LTE 2	QPSK20M	Front Face	18900	50	0	Ant 2	22.00	20.41	1.44	0.1	0.658	0.95
	LTE 2	QPSK20M	Front Face	19100	50	0	Ant 2	22.00	20.45	1.43	-0.05	0.595	0.85
	LTE 2	QPSK20M	Rear Face	18900	50	0	Ant 2	22.00	20.41	1.44	0.01	0.587	0.85
	LTE 2	QPSK20M	Rear Face	19100	50	0	Ant 2	22.00	20.45	1.43	-0.15	0.534	0.76
	LTE 2	QPSK20M	Front Face	18900	1	0	Ant 2	23.00	21.40	1.45	-0.13	0.831	1.20
For EN-DC													
	LTE 2	QPSK20M	Front Face	18700	1	0	Ant 2	20.00	21.50	0.71	0.18	0.798	0.57
	LTE 2	QPSK20M	Rear Face	18700	1	0	Ant 2	20.00	21.50	0.71	-0.03	0.718	0.51
	LTE 2	QPSK20M	Left Side	18700	1	0	Ant 2	20.00	21.50	0.71	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	18700	1	0	Ant 2	20.00	21.50	0.71	-0.07	0.557	0.40
	LTE 2	QPSK20M	Top Side	18700	1	0	Ant 2	20.00	21.50	0.71	0.07	0.547	0.39
	LTE 2	QPSK20M	Bottom Side	18700	1	0	Ant 2	20.00	21.50	0.71	0	<0.001	0.00
	LTE 2	QPSK20M	Front Face	18700	50	0	Ant 2	19.00	20.50	0.71	0.17	0.646	0.46
	LTE 2	QPSK20M	Rear Face	18700	50	0	Ant 2	19.00	20.50	0.71	0.07	0.579	0.41
	LTE 2	QPSK20M	Left Side	18700	50	0	Ant 2	19.00	20.50	0.71	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	18700	50	0	Ant 2	19.00	20.50	0.71	0.02	0.461	0.33
	LTE 2	QPSK20M	Top Side	18700	50	0	Ant 2	19.00	20.50	0.71	-0.18	0.443	0.31
	LTE 2	QPSK20M	Bottom Side	18700	50	0	Ant 2	19.00	20.50	0.71	0	<0.001	0.00
	LTE 2	QPSK20M	Front Face	18700	100	0	Ant 2	19.00	20.49	0.71	0.11	0.659	0.47
	LTE 2	QPSK20M	Rear Face	18700	100	0	Ant 2	19.00	20.49	0.71	-0.07	0.603	0.43
4	LTE 2	QPSK20M	Front Face	18900	1	0	Ant 2	20.00	21.40	0.72	-0.13	0.854	0.61
	LTE 2	QPSK20M	Front Face	19100	1	0	Ant 2	20.00	21.47	0.71	0.03	0.738	0.52
	LTE 2	QPSK20M	Rear Face	18900	1	0	Ant 2	20.00	21.40	0.72	0.01	0.763	0.55
	LTE 2	QPSK20M	Rear Face	19100	1	0	Ant 2	20.00	21.47	0.71	0.17	0.683	0.48
	LTE 2	QPSK20M	Front Face	18900	50	0	Ant 2	19.00	20.41	0.72	0.1	0.658	0.47
	LTE 2	QPSK20M	Front Face	19100	50	0	Ant 2	19.00	20.45	0.72	-0.05	0.595	0.43
	LTE 2	QPSK20M	Rear Face	18900	50	0	Ant 2	19.00	20.41	0.72	0.01	0.587	0.42
	LTE 2	QPSK20M	Rear Face	19100	50	0	Ant 2	19.00	20.45	0.72	-0.15	0.534	0.38
	LTE 2	QPSK20M	Front Face	18900	1	0	Ant 2	20.00	21.40	0.72	-0.13	0.831	0.60

Note :

1. The "< 0.001" means there is no SAR value or the SAR is too low to be measured.
2. The Standalone of LTE 2 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of LTE 2 is 20dBm in NSA mode.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	
5	LTE 4	QPSK20M	Front Face	20300	1	0	Ant 1	24.00	23.00	1.26	-0.05	0.693	0.87	
	LTE 4	QPSK20M	Rear Face	20300	1	0	Ant 1	24.00	23.00	1.26	0.02	0.732	0.92	
	LTE 4	QPSK20M	Left Side	20300	1	0	Ant 1	24.00	23.00	1.26	-0.1	0.513	0.65	
	LTE 4	QPSK20M	Right Side	20300	1	0	Ant 1	24.00	23.00	1.26	0.11	0.081	0.10	
	LTE 4	QPSK20M	Top Side	20300	1	0	Ant 1	24.00	23.00	1.26	-0.19	0.605	0.76	
	LTE 4	QPSK20M	Bottom Side	20300	1	0	Ant 1	24.00	23.00	1.26	-0.12	0.111	0.14	
	LTE 4	QPSK20M	Front Face	20300	50	0	Ant 1	23.00	22.00	1.26	0.06	0.582	0.73	
	LTE 4	QPSK20M	Rear Face	20300	50	0	Ant 1	23.00	22.00	1.26	-0.03	0.595	0.75	
	LTE 4	QPSK20M	Left Side	20300	50	0	Ant 1	23.00	22.00	1.26	0.01	0.441	0.56	
	LTE 4	QPSK20M	Right Side	20300	50	0	Ant 1	23.00	22.00	1.26	0.19	0.066	0.08	
	LTE 4	QPSK20M	Top Side	20300	50	0	Ant 1	23.00	22.00	1.26	0.05	0.499	0.63	
	LTE 4	QPSK20M	Bottom Side	20300	50	0	Ant 1	23.00	22.00	1.26	0.09	0.093	0.12	
	LTE 4	QPSK20M	Front Face	20300	100	0	Ant 1	23.00	21.99	1.26	0.01	0.521	0.66	
	LTE 4	QPSK20M	Rear Face	20300	100	0	Ant 1	23.00	21.99	1.26	0.01	0.582	0.73	
	LTE 4	QPSK20M	Front Face	20050	1	0	Ant 1	24.00	22.80	1.32	0.07	0.594	0.78	
	LTE 4	QPSK20M	Front Face	20175	1	0	Ant 1	24.00	22.90	1.29	-0.04	0.635	0.82	
	LTE 4	QPSK20M	Rear Face	20050	1	0	Ant 1	24.00	22.80	1.32	0.12	0.658	0.87	
	LTE 4	QPSK20M	Rear Face	20175	1	0	Ant 1	24.00	22.90	1.29	-0.13	0.666	0.86	
	7	LTE 5	QPSK10M	Front Face	20600	1	0	Ant 1	24.00	22.88	1.29	-0.04	0.592	0.76
		LTE 5	QPSK10M	Rear Face	20600	1	0	Ant 1	24.00	22.88	1.29	-0.03	0.619	0.80
LTE 5		QPSK10M	Left Side	20600	1	0	Ant 1	24.00	22.88	1.29	0.1	0.286	0.37	
LTE 5		QPSK10M	Right Side	20600	1	0	Ant 1	24.00	22.88	1.29	-0.09	0.053	0.07	
LTE 5		QPSK10M	Top Side	20600	1	0	Ant 1	24.00	22.88	1.29	-0.07	0.171	0.22	
LTE 5		QPSK10M	Bottom Side	20600	1	0	Ant 1	24.00	22.88	1.29	-0.01	0.082	0.11	
LTE 5		QPSK10M	Front Face	20600	25	0	Ant 1	23.00	21.95	1.27	0.18	0.513	0.65	
LTE 5		QPSK10M	Rear Face	20600	25	0	Ant 1	23.00	21.95	1.27	0.19	0.491	0.62	
LTE 5		QPSK10M	Left Side	20600	25	0	Ant 1	23.00	21.95	1.27	0.14	0.232	0.29	
LTE 5		QPSK10M	Right Side	20600	25	0	Ant 1	23.00	21.95	1.27	0	<0.001	0.00	
	LTE 5	QPSK10M	Top Side	20600	25	0	Ant 1	23.00	21.95	1.27	0.01	0.137	0.17	
	LTE 5	QPSK10M	Bottom Side	20600	25	0	Ant 1	23.00	21.95	1.27	-0.15	0.071	0.09	
	LTE 5	QPSK10M	Rear Face	20600	50	0	Ant 1	23.00	21.89	1.29	0.03	0.577	0.74	
	LTE 5	QPSK10M	Rear Face	20450	1	0	Ant 1	24.00	22.78	1.32	0.09	0.486	0.64	
	LTE 5	QPSK10M	Rear Face	20525	1	0	Ant 1	24.00	22.66	1.36	-0.09	0.479	0.65	
	<b>For EN-DC</b>													
	LTE 5	QPSK10M	Front Face	20600	1	0	Ant 1	21.00	22.88	0.65	-0.04	0.592	0.38	
	LTE 5	QPSK10M	Rear Face	20600	1	0	Ant 1	21.00	22.88	0.65	-0.03	0.619	0.40	
	LTE 5	QPSK10M	Left Side	20600	1	0	Ant 1	21.00	22.88	0.65	0.1	0.286	0.19	
	LTE 5	QPSK10M	Right Side	20600	1	0	Ant 1	21.00	22.88	0.65	-0.09	0.053	0.03	
LTE 5	QPSK10M	Top Side	20600	1	0	Ant 1	21.00	22.88	0.65	-0.07	0.171	0.11		
LTE 5	QPSK10M	Bottom Side	20600	1	0	Ant 1	21.00	22.88	0.65	-0.01	0.082	0.05		
LTE 5	QPSK10M	Front Face	20600	25	0	Ant 1	20.00	21.95	0.64	0.18	0.513	0.33		
LTE 5	QPSK10M	Rear Face	20600	25	0	Ant 1	20.00	21.95	0.64	0.19	0.491	0.31		
LTE 5	QPSK10M	Left Side	20600	25	0	Ant 1	20.00	21.95	0.64	0.14	0.232	0.15		
LTE 5	QPSK10M	Right Side	20600	25	0	Ant 1	20.00	21.95	0.64	0	<0.001	0.00		
LTE 5	QPSK10M	Top Side	20600	25	0	Ant 1	20.00	21.95	0.64	0.01	0.137	0.09		
LTE 5	QPSK10M	Bottom Side	20600	25	0	Ant 1	20.00	21.95	0.64	-0.15	0.071	0.05		
LTE 5	QPSK10M	Rear Face	20600	50	0	Ant 1	20.00	21.89	0.65	0.03	0.577	0.38		
LTE 5	QPSK10M	Rear Face	20450	1	0	Ant 1	21.00	22.78	0.66	0.09	0.486	0.32		
LTE 5	QPSK10M	Rear Face	20525	1	0	Ant 1	21.00	22.66	0.68	-0.09	0.479	0.33		

**Note :**

- 1.The "< 0.001" means there is no SAR value or the SAR is too low to be measured.
- 2.The Standalone of LTE 5 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of LTE 5 is 21dBm in NSA mode.





# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
8	LTE 7	QPSK20M	Front Face	21100	1	0	Ant 1	24.00	23.98	1.00	0.05	0.943	0.94
	LTE 7	QPSK20M	Rear Face	21100	1	0	Ant 1	24.00	23.98	1.00	-0.01	1.17	1.17
	LTE 7	QPSK20M	Left Side	21100	1	0	Ant 1	24.00	23.98	1.00	-0.13	0.881	0.88
	LTE 7	QPSK20M	Right Side	21100	1	0	Ant 1	24.00	23.98	1.00	0	0.053	0.05
	LTE 7	QPSK20M	Top Side	21100	1	0	Ant 1	24.00	23.98	1.00	0.16	0.495	0.50
	LTE 7	QPSK20M	Bottom Side	21100	1	0	Ant 1	24.00	23.98	1.00	0.13	0.049	0.05
	LTE 7	QPSK20M	Front Face	21100	50	0	Ant 1	23.00	22.99	1.00	0.19	0.709	0.71
	LTE 7	QPSK20M	Rear Face	21100	50	0	Ant 1	23.00	22.99	1.00	-0.02	0.775	0.78
	LTE 7	QPSK20M	Left Side	21100	50	0	Ant 1	23.00	22.99	1.00	-0.14	0.708	0.71
	LTE 7	QPSK20M	Right Side	21100	50	0	Ant 1	23.00	22.99	1.00	0.02	0.042	0.04
	LTE 7	QPSK20M	Top Side	21100	50	0	Ant 1	23.00	22.99	1.00	0.02	0.425	0.43
	LTE 7	QPSK20M	Bottom Side	21100	50	0	Ant 1	23.00	22.99	1.00	0.01	0.042	0.04
	LTE 7	QPSK20M	Front Face	21100	100	0	Ant 1	23.00	22.90	1.02	-0.07	0.690	0.70
	LTE 7	QPSK20M	Rear Face	21100	100	0	Ant 1	23.00	22.90	1.02	0.17	0.771	0.79
	LTE 7	QPSK20M	Left Side	21100	100	0	Ant 1	23.00	22.90	1.02	0.02	0.644	0.66
	LTE 7	QPSK20M	Front Face	20850	1	0	Ant 1	24.00	23.86	1.03	0.06	0.99	1.02
	LTE 7	QPSK20M	Front Face	21350	1	0	Ant 1	24.00	23.93	1.02	-0.12	0.998	1.02
	LTE 7	QPSK20M	Rear Face	20850	1	0	Ant 1	24.00	23.86	1.03	0.15	1.13	1.16
	LTE 7	QPSK20M	Rear Face	21350	1	0	Ant 1	24.00	23.93	1.02	0.01	1.02	1.04
	LTE 7	QPSK20M	Left Side	20850	1	0	Ant 1	24.00	23.86	1.03	0.01	0.92	0.95
LTE 7	QPSK20M	Left Side	21350	1	0	Ant 1	24.00	23.93	1.02	0.19	0.834	0.85	
LTE 7	QPSK20M	Rear Face	21100	1	0	Ant 1	24.00	23.98	1.00	-0.01	1.11	1.11	
<b>For EN-DC</b>													
LTE 7	QPSK20M	Front Face	21100	1	0	Ant 1	21.00	23.98	0.50	0.05	0.943	0.47	
LTE 7	QPSK20M	Rear Face	21100	1	0	Ant 1	21.00	23.98	0.50	-0.01	1.17	0.59	
LTE 7	QPSK20M	Left Side	21100	1	0	Ant 1	21.00	23.98	0.50	-0.13	0.881	0.44	
LTE 7	QPSK20M	Right Side	21100	1	0	Ant 1	21.00	23.98	0.50	0	0.053	0.03	
LTE 7	QPSK20M	Top Side	21100	1	0	Ant 1	21.00	23.98	0.50	0.16	0.495	0.25	
LTE 7	QPSK20M	Bottom Side	21100	1	0	Ant 1	21.00	23.98	0.50	0.13	0.049	0.02	
LTE 7	QPSK20M	Front Face	21100	50	0	Ant 1	20.00	22.99	0.50	0.19	0.709	0.35	
LTE 7	QPSK20M	Rear Face	21100	50	0	Ant 1	20.00	22.99	0.50	-0.02	0.775	0.39	
LTE 7	QPSK20M	Left Side	21100	50	0	Ant 1	20.00	22.99	0.50	-0.14	0.708	0.35	
LTE 7	QPSK20M	Right Side	21100	50	0	Ant 1	20.00	22.99	0.50	0.02	0.042	0.02	
LTE 7	QPSK20M	Top Side	21100	50	0	Ant 1	20.00	22.99	0.50	0.02	0.425	0.21	
LTE 7	QPSK20M	Bottom Side	21100	50	0	Ant 1	20.00	22.99	0.50	0.01	0.042	0.02	
LTE 7	QPSK20M	Front Face	21100	100	0	Ant 1	20.00	22.90	0.51	-0.07	0.690	0.35	
LTE 7	QPSK20M	Rear Face	21100	100	0	Ant 1	20.00	22.90	0.51	0.17	0.771	0.39	
LTE 7	QPSK20M	Left Side	21100	100	0	Ant 1	20.00	22.90	0.51	0.02	0.644	0.33	
LTE 7	QPSK20M	Front Face	20850	1	0	Ant 1	21.00	23.86	0.52	0.06	0.99	0.51	
LTE 7	QPSK20M	Front Face	21350	1	0	Ant 1	21.00	23.93	0.51	-0.12	0.998	0.51	
LTE 7	QPSK20M	Rear Face	20850	1	0	Ant 1	21.00	23.86	0.52	0.15	1.13	0.59	
LTE 7	QPSK20M	Rear Face	21350	1	0	Ant 1	21.00	23.93	0.51	0.01	1.02	0.52	
LTE 7	QPSK20M	Left Side	20850	1	0	Ant 1	21.00	23.86	0.52	0.01	0.92	0.48	
LTE 7	QPSK20M	Left Side	21350	1	0	Ant 1	21.00	23.93	0.51	0.19	0.834	0.43	
LTE 7	QPSK20M	Rear Face	21100	1	0	Ant 1	21.00	23.98	0.50	-0.01	1.11	0.56	

Note : The Standalone of LTE 7 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of LTE 7 is 21dBm in NSA mode.



# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 7	QPSK20M	Front Face	21100	1	0	Ant 2	24.00	23.98	1.00	-0.02	1.19	1.19
	LTE 7	QPSK20M	Rear Face	21100	1	0	Ant 2	24.00	23.98	1.00	-0.01	0.968	0.97
	LTE 7	QPSK20M	Left Side	21100	1	0	Ant 2	24.00	23.98	1.00	-0.13	0.054	0.05
	LTE 7	QPSK20M	Right Side	21100	1	0	Ant 2	24.00	23.98	1.00	-0.16	0.968	0.97
	LTE 7	QPSK20M	Top Side	21100	1	0	Ant 2	24.00	23.98	1.00	-0.05	0.485	0.49
	LTE 7	QPSK20M	Bottom Side	21100	1	0	Ant 2	24.00	23.98	1.00	-0.01	0.057	0.06
	LTE 7	QPSK20M	Front Face	21100	50	0	Ant 2	23.00	22.99	1.00	0.06	0.538	0.54
	LTE 7	QPSK20M	Rear Face	21100	50	0	Ant 2	23.00	22.99	1.00	-0.1	0.548	0.55
	LTE 7	QPSK20M	Left Side	21100	50	0	Ant 2	23.00	22.99	1.00	-0.18	0.034	0.03
	LTE 7	QPSK20M	Right Side	21100	50	0	Ant 2	23.00	22.99	1.00	-0.09	0.546	0.55
	LTE 7	QPSK20M	Top Side	21100	50	0	Ant 2	23.00	22.99	1.00	0.07	0.275	0.28
	LTE 7	QPSK20M	Bottom Side	21100	50	0	Ant 2	23.00	22.99	1.00	-0.12	0.033	0.03
	LTE 7	QPSK20M	Front Face	21100	100	0	Ant 2	23.00	22.90	1.02	-0.14	0.593	0.60
	LTE 7	QPSK20M	Rear Face	21100	100	0	Ant 2	23.00	22.90	1.02	0.03	0.487	0.50
	LTE 7	QPSK20M	Right Side	21100	100	0	Ant 2	23.00	22.90	1.02	0.08	0.477	0.49
	LTE 7	QPSK20M	Front Face	20850	1	0	Ant 2	24.00	23.86	1.03	-0.09	1.07	1.10
	LTE 7	QPSK20M	Front Face	21350	1	0	Ant 2	24.00	23.93	1.02	0.02	0.98	1.00
	LTE 7	QPSK20M	Rear Face	20850	1	0	Ant 2	24.00	23.86	1.03	-0.02	1.06	1.09
	LTE 7	QPSK20M	Rear Face	21350	1	0	Ant 2	24.00	23.93	1.02	-0.01	1.08	1.10
	LTE 7	QPSK20M	Right Side	20850	1	0	Ant 2	24.00	23.86	1.03	-0.17	0.82	0.84
	LTE 7	QPSK20M	Right Side	21350	1	0	Ant 2	24.00	23.93	1.02	-0.16	1.08	1.10
	LTE 7	QPSK20M	Front Face	21100	1	0	Ant 2	24.00	23.98	1.00	-0.11	1.16	1.16
<b>For EN-DC</b>													
9	LTE 7	QPSK20M	Front Face	21100	1	0	Ant 2	21.00	23.98	0.50	-0.02	1.19	0.60
	LTE 7	QPSK20M	Rear Face	21100	1	0	Ant 2	21.00	23.98	0.50	-0.01	0.968	0.48
	LTE 7	QPSK20M	Left Side	21100	1	0	Ant 2	21.00	23.98	0.50	-0.13	0.054	0.03
	LTE 7	QPSK20M	Right Side	21100	1	0	Ant 2	21.00	23.98	0.50	-0.16	0.968	0.48
	LTE 7	QPSK20M	Top Side	21100	1	0	Ant 2	21.00	23.98	0.50	-0.05	0.485	0.24
	LTE 7	QPSK20M	Bottom Side	21100	1	0	Ant 2	21.00	23.98	0.50	-0.01	0.057	0.03
	LTE 7	QPSK20M	Front Face	21100	50	0	Ant 2	20.00	22.99	0.50	0.06	0.538	0.27
	LTE 7	QPSK20M	Rear Face	21100	50	0	Ant 2	20.00	22.99	0.50	-0.1	0.548	0.27
	LTE 7	QPSK20M	Left Side	21100	50	0	Ant 2	20.00	22.99	0.50	-0.18	0.034	0.02
	LTE 7	QPSK20M	Right Side	21100	50	0	Ant 2	20.00	22.99	0.50	-0.09	0.546	0.27
	LTE 7	QPSK20M	Top Side	21100	50	0	Ant 2	20.00	22.99	0.50	0.07	0.275	0.14
	LTE 7	QPSK20M	Bottom Side	21100	50	0	Ant 2	20.00	22.99	0.50	-0.12	0.033	0.02
	LTE 7	QPSK20M	Front Face	21100	100	0	Ant 2	20.00	22.90	0.52	-0.14	0.593	0.31
	LTE 7	QPSK20M	Rear Face	21100	100	0	Ant 2	20.00	22.90	0.51	0.03	0.487	0.25
	LTE 7	QPSK20M	Right Side	21100	100	0	Ant 2	20.00	22.90	0.51	0.08	0.477	0.24
	LTE 7	QPSK20M	Front Face	20850	1	0	Ant 2	21.00	23.86	0.52	-0.09	1.07	0.56
	LTE 7	QPSK20M	Front Face	21350	1	0	Ant 2	21.00	23.93	0.51	0.02	0.98	0.50
	LTE 7	QPSK20M	Rear Face	20850	1	0	Ant 2	21.00	23.86	0.52	-0.02	1.06	0.55
	LTE 7	QPSK20M	Rear Face	21350	1	0	Ant 2	21.00	23.93	0.51	-0.01	1.08	0.55
	LTE 7	QPSK20M	Right Side	20850	1	0	Ant 2	21.00	23.86	0.52	-0.17	0.82	0.43
	LTE 7	QPSK20M	Right Side	21350	1	0	Ant 2	21.00	23.93	0.51	-0.16	1.08	0.55
	LTE 7	QPSK20M	Front Face	21100	1	0	Ant 2	21.00	23.98	0.50	-0.11	1.16	0.58

Note : The Standalone of LTE 7 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of LTE 7 is 21dBm in NSA mode.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
10	LTE 12	QPSK10M	Front Face	23130	1	0	Ant 1	24.00	23.00	1.26	0.02	0.683	<b>0.86</b>
	LTE 12	QPSK10M	Rear Face	23130	1	0	Ant 1	24.00	23.00	1.26	0.07	0.629	0.79
	LTE 12	QPSK10M	Left Side	23130	1	0	Ant 1	24.00	23.00	1.26	-0.04	0.184	0.23
	LTE 12	QPSK10M	Right Side	23130	1	0	Ant 1	24.00	23.00	1.26	-0.15	0.047	0.06
	LTE 12	QPSK10M	Top Side	23130	1	0	Ant 1	24.00	23.00	1.26	0.05	0.342	0.43
	LTE 12	QPSK10M	Bottom Side	23130	1	0	Ant 1	24.00	23.00	1.26	0.17	0.081	0.10
	LTE 12	QPSK10M	Front Face	23130	25	0	Ant 1	23.00	22.00	1.26	0.18	0.569	0.72
	LTE 12	QPSK10M	Rear Face	23130	25	0	Ant 1	23.00	22.00	1.26	0.03	0.524	0.66
	LTE 12	QPSK10M	Left Side	23130	25	0	Ant 1	23.00	22.00	1.26	-0.03	0.171	0.22
	LTE 12	QPSK10M	Right Side	23130	25	0	Ant 1	23.00	22.00	1.26	0.14	0.043	0.05
	LTE 12	QPSK10M	Top Side	23130	25	0	Ant 1	23.00	22.00	1.26	-0.17	0.266	0.34
	LTE 12	QPSK10M	Bottom Side	23130	25	0	Ant 1	23.00	22.00	1.26	0.09	0.063	0.08
	LTE 12	QPSK10M	Front Face	23130	50	0	Ant 1	23.00	21.98	1.26	0.06	0.629	0.79
	LTE 12	QPSK10M	Front Face	23060	1	0	Ant 1	24.00	22.87	1.30	0.03	0.651	0.85
	LTE 12	QPSK10M	Front Face	23095	1	0	Ant 1	24.00	22.95	1.27	0.17	0.644	0.82
<b>For EN-DC</b>													
	LTE 12	QPSK10M	Front Face	23130	1	0	Ant 1	21.00	23.00	0.63	0.02	0.683	0.43
	LTE 12	QPSK10M	Rear Face	23130	1	0	Ant 1	21.00	23.00	0.63	0.07	0.629	0.40
	LTE 12	QPSK10M	Left Side	23130	1	0	Ant 1	21.00	23.00	0.63	-0.04	0.184	0.12
	LTE 12	QPSK10M	Right Side	23130	1	0	Ant 1	21.00	23.00	0.63	-0.15	0.047	0.03
	LTE 12	QPSK10M	Top Side	23130	1	0	Ant 1	21.00	23.00	0.63	0.05	0.342	0.22
	LTE 12	QPSK10M	Bottom Side	23130	1	0	Ant 1	21.00	23.00	0.63	0.17	0.081	0.05
	LTE 12	QPSK10M	Front Face	23130	25	0	Ant 1	20.00	22.00	0.63	0.18	0.569	0.36
	LTE 12	QPSK10M	Rear Face	23130	25	0	Ant 1	20.00	22.00	0.63	0.03	0.524	0.33
	LTE 12	QPSK10M	Left Side	23130	25	0	Ant 1	20.00	22.00	0.63	-0.03	0.171	0.11
	LTE 12	QPSK10M	Right Side	23130	25	0	Ant 1	20.00	22.00	0.63	0.14	0.043	0.03
	LTE 12	QPSK10M	Top Side	23130	25	0	Ant 1	20.00	22.00	0.63	-0.17	0.266	0.17
	LTE 12	QPSK10M	Bottom Side	23130	25	0	Ant 1	20.00	22.00	0.63	0.09	0.063	0.04
	LTE 12	QPSK10M	Front Face	23130	50	0	Ant 1	20.00	21.98	0.63	0.06	0.629	0.40
	LTE 12	QPSK10M	Front Face	23060	1	0	Ant 1	21.00	22.87	0.65	0.03	0.651	0.42
	LTE 12	QPSK10M	Front Face	23095	1	0	Ant 1	21.00	22.95	0.64	0.17	0.644	0.41

Note : The Standalone of LTE 12 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of LTE 12 is 21dBm in NSA mode.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
11	LTE 13	QPSK10M	Front Face	23230	1	0	Ant 1	24.00	22.97	1.27	0.04	0.792	1.01
	LTE 13	QPSK10M	Rear Face	23230	1	0	Ant 1	24.00	22.97	1.27	0.1	0.753	0.96
	LTE 13	QPSK10M	Left Side	23230	1	0	Ant 1	24.00	22.97	1.27	0.16	0.297	0.38
	LTE 13	QPSK10M	Right Side	23230	1	0	Ant 1	24.00	22.97	1.27	0.13	0.049	0.06
	LTE 13	QPSK10M	Top Side	23230	1	0	Ant 1	24.00	22.97	1.27	0.08	0.229	0.29
	LTE 13	QPSK10M	Bottom Side	23230	1	0	Ant 1	24.00	22.97	1.27	0.02	0.078	0.10
	LTE 13	QPSK10M	Front Face	23230	25	0	Ant 1	23.00	21.93	1.28	0.19	0.641	0.82
	LTE 13	QPSK10M	Rear Face	23230	25	0	Ant 1	23.00	21.93	1.28	0.13	0.592	0.76
	LTE 13	QPSK10M	Left Side	23230	25	0	Ant 1	23.00	21.93	1.28	0.09	0.244	0.31
	LTE 13	QPSK10M	Right Side	23230	25	0	Ant 1	23.00	21.93	1.28	0	<0.001	0.00
	LTE 13	QPSK10M	Top Side	23230	25	0	Ant 1	23.00	21.93	1.28	-0.04	0.179	0.23
	LTE 13	QPSK10M	Bottom Side	23230	25	0	Ant 1	23.00	21.93	1.28	0.07	0.057	0.07
	LTE 13	QPSK10M	Front Face	23230	50	0	Ant 1	23.00	21.80	1.32	0.03	0.747	0.99
	LTE 13	QPSK10M	Rear Face	23230	50	0	Ant 1	23.00	21.80	1.32	-0.01	0.729	0.96
<b>For EN-DC</b>													
	LTE 13	QPSK10M	Front Face	23230	1	0	Ant 1	21.00	22.97	0.64	0.04	0.792	0.51
	LTE 13	QPSK10M	Rear Face	23230	1	0	Ant 1	21.00	22.97	0.64	0.1	0.753	0.48
	LTE 13	QPSK10M	Left Side	23230	1	0	Ant 1	21.00	22.97	0.64	0.16	0.297	0.19
	LTE 13	QPSK10M	Right Side	23230	1	0	Ant 1	21.00	22.97	0.64	0.13	0.049	0.03
	LTE 13	QPSK10M	Top Side	23230	1	0	Ant 1	21.00	22.97	0.64	0.08	0.229	0.15
	LTE 13	QPSK10M	Bottom Side	23230	1	0	Ant 1	21.00	22.97	0.64	0.02	0.078	0.05
	LTE 13	QPSK10M	Front Face	23230	25	0	Ant 1	20.00	21.93	0.64	0.19	0.641	0.41
	LTE 13	QPSK10M	Rear Face	23230	25	0	Ant 1	20.00	21.93	0.64	0.13	0.592	0.38
	LTE 13	QPSK10M	Left Side	23230	25	0	Ant 1	20.00	21.93	0.64	0.09	0.244	0.16
	LTE 13	QPSK10M	Right Side	23230	25	0	Ant 1	20.00	21.93	0.64	0	<0.001	0.00
	LTE 13	QPSK10M	Top Side	23230	25	0	Ant 1	20.00	21.93	0.64	-0.04	0.179	0.11
	LTE 13	QPSK10M	Bottom Side	23230	25	0	Ant 1	20.00	21.93	0.64	0.07	0.057	0.04
	LTE 13	QPSK10M	Front Face	23230	50	0	Ant 1	20.00	21.80	0.66	0.03	0.747	0.49
	LTE 13	QPSK10M	Rear Face	23230	50	0	Ant 1	20.00	21.80	0.66	-0.01	0.729	0.48

**Note :**

- 1.The "< 0.001" means there is no SAR value or the SAR is too low to be measured.
- 2.The Standalone of LTE 13 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of LTE 13 is 21dBm in NSA mode.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 17	QPSK10M	Front Face	23800	1	0	Ant 1	24.00	22.90	1.29	0.02	0.679	0.88
	LTE 17	QPSK10M	Rear Face	23800	1	0	Ant 1	24.00	22.90	1.29	-0.01	0.645	0.83
	LTE 17	QPSK10M	Left Side	23800	1	0	Ant 1	24.00	22.90	1.29	0.18	0.197	0.25
	LTE 17	QPSK10M	Right Side	23800	1	0	Ant 1	24.00	22.90	1.29	0	<0.001	0.00
	LTE 17	QPSK10M	Top Side	23800	1	0	Ant 1	24.00	22.90	1.29	-0.1	0.344	0.44
	LTE 17	QPSK10M	Bottom Side	23800	1	0	Ant 1	24.00	22.90	1.29	0.16	0.083	0.11
	LTE 17	QPSK10M	Front Face	23800	25	0	Ant 1	23.00	21.97	1.27	-0.18	0.558	0.71
	LTE 17	QPSK10M	Rear Face	23800	25	0	Ant 1	23.00	21.97	1.27	0.12	0.528	0.67
	LTE 17	QPSK10M	Left Side	23800	25	0	Ant 1	23.00	21.97	1.27	0.18	0.169	0.21
	LTE 17	QPSK10M	Right Side	23800	25	0	Ant 1	23.00	21.97	1.27	0	<0.001	0.00
	LTE 17	QPSK10M	Top Side	23800	25	0	Ant 1	23.00	21.97	1.27	-0.09	0.259	0.33
	LTE 17	QPSK10M	Bottom Side	23800	25	0	Ant 1	23.00	21.97	1.27	0.14	0.066	0.08
	LTE 17	QPSK10M	Front Face	23800	50	0	Ant 1	23.00	21.95	1.27	-0.01	0.609	0.77
	LTE 17	QPSK10M	Rear Face	23800	50	0	Ant 1	23.00	21.95	1.27	0.14	0.597	0.76
	LTE 17	QPSK10M	Front Face	23780	1	0	Ant 1	24.00	22.88	1.29	-0.18	0.675	0.87
13	LTE 17	QPSK10M	Front Face	23790	1	0	Ant 1	24.00	22.83	1.31	-0.03	0.681	0.89
	LTE 17	QPSK10M	Rear Face	23780	1	0	Ant 1	24.00	22.88	1.29	0.06	0.643	0.83
	LTE 17	QPSK10M	Rear Face	23790	1	0	Ant 1	24.00	22.83	1.31	0.01	0.637	0.83
	LTE 25	QPSK20M	Front Face	26590	1	0	Ant 1	24.00	23.66	1.08	0.08	1.07	1.16
14	LTE 25	QPSK20M	Rear Face	26590	1	0	Ant 1	24.00	23.66	1.08	-0.02	1.09	1.18
	LTE 25	QPSK20M	Left Side	26590	1	0	Ant 1	24.00	23.66	1.08	0.11	0.771	0.83
	LTE 25	QPSK20M	Right Side	26590	1	0	Ant 1	24.00	23.66	1.08	-0.08	0.067	0.07
	LTE 25	QPSK20M	Top Side	26590	1	0	Ant 1	24.00	23.66	1.08	0.08	0.764	0.83
	LTE 25	QPSK20M	Bottom Side	26590	1	0	Ant 1	24.00	23.66	1.08	0.13	0.074	0.08
	LTE 25	QPSK20M	Front Face	26590	50	0	Ant 1	23.00	22.39	1.15	-0.18	0.85	0.98
	LTE 25	QPSK20M	Rear Face	26590	50	0	Ant 1	23.00	22.39	1.15	0.13	0.846	0.97
	LTE 25	QPSK20M	Left Side	26590	50	0	Ant 1	23.00	22.39	1.15	0.01	0.599	0.69
	LTE 25	QPSK20M	Right Side	26590	50	0	Ant 1	23.00	22.39	1.15	-0.01	0.054	0.06
	LTE 25	QPSK20M	Top Side	26590	50	0	Ant 1	23.00	22.39	1.15	-0.14	0.577	0.66
	LTE 25	QPSK20M	Bottom Side	26590	50	0	Ant 1	23.00	22.39	1.15	0.02	0.055	0.06
	LTE 25	QPSK20M	Rear Face	26590	100	0	Ant 1	23.00	22.42	1.14	-0.11	0.838	0.96
	LTE 25	QPSK20M	Front Face	26140	1	0	Ant 1	24.00	23.51	1.12	-0.11	0.787	0.88
	LTE 25	QPSK20M	Front Face	26365	1	0	Ant 1	24.00	23.54	1.11	0.09	0.881	0.98
	LTE 25	QPSK20M	Rear Face	26140	1	0	Ant 1	24.00	23.51	1.12	0.02	0.822	0.92
	LTE 25	QPSK20M	Rear Face	26365	1	0	Ant 1	24.00	23.54	1.11	0.08	0.943	1.05
	LTE 25	QPSK20M	Left Side	26140	1	0	Ant 1	24.00	23.51	1.12	-0.09	0.675	0.76
	LTE 25	QPSK20M	Left Side	26365	1	0	Ant 1	24.00	23.54	1.11	0.08	0.729	0.81
	LTE 25	QPSK20M	Top Side	26140	1	0	Ant 1	24.00	23.51	1.12	-0.09	0.613	0.69
	LTE 25	QPSK20M	Top Side	26365	1	0	Ant 1	24.00	23.54	1.11	0.07	0.686	0.76
	LTE 25	QPSK20M	Front Face	26140	50	0	Ant 1	23.00	22.34	1.16	-0.11	0.9	1.04
	LTE 25	QPSK20M	Front Face	26365	50	0	Ant 1	23.00	22.24	1.19	0.15	0.791	0.94
	LTE 25	QPSK20M	Rear Face	26140	50	0	Ant 1	23.00	22.34	1.16	0.15	0.808	0.94
	LTE 25	QPSK20M	Rear Face	26365	50	0	Ant 1	23.00	22.24	1.19	0.18	0.943	1.12
	LTE 25	QPSK20M	Rear Face	26590	1	0	Ant 1	24.00	23.66	1.08	-0.11	1.07	1.16

Note : The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
15	LTE 30	QPSK10M	Front Face	27710	1	0	Ant 1	23.00	22.42	1.14	0.15	0.652	0.74
	LTE 30	QPSK10M	Rear Face	27710	1	0	Ant 1	23.00	22.42	1.14	-0.01	0.77	0.88
	LTE 30	QPSK10M	Left Side	27710	1	0	Ant 1	23.00	22.42	1.14	-0.14	0.361	0.41
	LTE 30	QPSK10M	Right Side	27710	1	0	Ant 1	23.00	22.42	1.14	0.15	0.038	0.04
	LTE 30	QPSK10M	Top Side	27710	1	0	Ant 1	23.00	22.42	1.14	-0.1	0.415	0.47
	LTE 30	QPSK10M	Bottom Side	27710	1	0	Ant 1	23.00	22.42	1.14	0	<0.001	0.00
	LTE 30	QPSK10M	Front Face	27710	25	0	Ant 1	22.00	21.46	1.13	-0.13	0.637	0.72
	LTE 30	QPSK10M	Rear Face	27710	25	0	Ant 1	22.00	21.46	1.13	0.11	0.763	0.86
	LTE 30	QPSK10M	Left Side	27710	25	0	Ant 1	22.00	21.46	1.13	0.1	0.366	0.41
	LTE 30	QPSK10M	Right Side	27710	25	0	Ant 1	22.00	21.46	1.13	0.16	0.038	0.04
	LTE 30	QPSK10M	Top Side	27710	25	0	Ant 1	22.00	21.46	1.13	-0.04	0.409	0.46
	LTE 30	QPSK10M	Bottom Side	27710	25	0	Ant 1	22.00	21.46	1.13	0	<0.001	0.00
LTE 30	QPSK10M	Rear Face	27710	50	0	Ant 1	22.00	21.48	1.13	-0.11	0.632	0.71	
16	LTE 38	QPSK20M	Front Face	37850	1	0	Ant 1	24.00	23.50	1.12	-0.01	0.536	0.60
	LTE 38	QPSK20M	Rear Face	37850	1	0	Ant 1	24.00	23.50	1.12	-0.02	0.564	0.63
	LTE 38	QPSK20M	Left Side	37850	1	0	Ant 1	24.00	23.50	1.12	-0.14	0.453	0.51
	LTE 38	QPSK20M	Right Side	37850	1	0	Ant 1	24.00	23.50	1.12	0	<0.001	0.00
	LTE 38	QPSK20M	Top Side	37850	1	0	Ant 1	24.00	23.50	1.12	-0.1	0.292	0.33
	LTE 38	QPSK20M	Bottom Side	37850	1	0	Ant 1	24.00	23.50	1.12	-0.09	0.034	0.04
	LTE 38	QPSK20M	Front Face	37850	50	0	Ant 1	23.00	22.49	1.12	-0.13	0.41	0.46
	LTE 38	QPSK20M	Rear Face	37850	50	0	Ant 1	23.00	22.49	1.12	0.11	0.464	0.52
	LTE 38	QPSK20M	Left Side	37850	50	0	Ant 1	23.00	22.49	1.12	0.1	0.383	0.43
	LTE 38	QPSK20M	Right Side	37850	50	0	Ant 1	23.00	22.49	1.12	0	<0.001	0.00
	LTE 38	QPSK20M	Top Side	37850	50	0	Ant 1	23.00	22.49	1.12	-0.09	0.232	0.26
	LTE 38	QPSK20M	Bottom Side	37850	50	0	Ant 1	23.00	22.49	1.12	0	<0.001	0.00
LTE 38	QPSK20M	Rear Face	38000	1	0	Ant 1	24.00	23.46	1.13	0.11	0.553	0.62	
LTE 38	QPSK20M	Rear Face	38150	1	0	Ant 1	24.00	23.45	1.14	0.1	0.486	0.55	
17	LTE 41	QPSK20M	Front Face	40185	1	0	Ant 1	24.00	23.49	1.12	-0.13	0.565	0.63
	LTE 41	QPSK20M	Rear Face	40185	1	0	Ant 1	24.00	23.49	1.12	-0.01	0.641	0.72
	LTE 41	QPSK20M	Left Side	40185	1	0	Ant 1	24.00	23.49	1.12	-0.01	0.378	0.42
	LTE 41	QPSK20M	Right Side	40185	1	0	Ant 1	24.00	23.49	1.12	-0.04	0.032	0.04
	LTE 41	QPSK20M	Top Side	40185	1	0	Ant 1	24.00	23.49	1.12	-0.06	0.313	0.35
	LTE 41	QPSK20M	Bottom Side	40185	1	0	Ant 1	24.00	23.49	1.12	0	<0.001	0.00
	LTE 41	QPSK20M	Front Face	40185	50	0	Ant 1	23.00	22.44	1.14	0.08	0.439	0.50
	LTE 41	QPSK20M	Rear Face	40185	50	0	Ant 1	23.00	22.44	1.14	0.08	0.462	0.53
	LTE 41	QPSK20M	Left Side	40185	50	0	Ant 1	23.00	22.44	1.14	-0.07	0.323	0.37
	LTE 41	QPSK20M	Right Side	40185	50	0	Ant 1	23.00	22.44	1.14	0	<0.001	0.00
	LTE 41	QPSK20M	Top Side	40185	50	0	Ant 1	23.00	22.44	1.14	0.13	0.287	0.33
	LTE 41	QPSK20M	Bottom Side	40185	50	0	Ant 1	23.00	22.44	1.14	0	<0.001	0.00
LTE 41	QPSK20M	Rear Face	39750	1	0	Ant 1	24.00	23.42	1.14	-0.03	0.552	0.63	
LTE 41	QPSK20M	Rear Face	40620	1	0	Ant 1	24.00	23.31	1.17	0.06	0.505	0.59	
LTE 41	QPSK20M	Rear Face	41055	1	0	Ant 1	24.00	23.20	1.20	0.19	0.344	0.41	
LTE 41	QPSK20M	Rear Face	41490	1	0	Ant 1	24.00	23.45	1.14	-0.08	0.272	0.31	

Note : The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
19	LTE 66	QPSK20M	Front Face	132572	1	0	Ant 1	24.00	22.91	1.29	0.01	0.821	1.06
	LTE 66	QPSK20M	Rear Face	132572	1	0	Ant 1	24.00	22.91	1.29	-0.05	0.794	1.02
	LTE 66	QPSK20M	Left Side	132572	1	0	Ant 1	24.00	22.91	1.29	0.18	0.592	0.76
	LTE 66	QPSK20M	Right Side	132572	1	0	Ant 1	24.00	22.91	1.29	-0.16	0.076	0.10
	LTE 66	QPSK20M	Top Side	132572	1	0	Ant 1	24.00	22.91	1.29	0.09	0.652	0.84
	LTE 66	QPSK20M	Bottom Side	132572	1	0	Ant 1	24.00	22.91	1.29	-0.07	0.098	0.13
	LTE 66	QPSK20M	Front Face	132572	50	0	Ant 1	23.00	21.94	1.28	-0.03	0.693	0.89
	LTE 66	QPSK20M	Rear Face	132572	50	0	Ant 1	23.00	21.94	1.28	0.14	0.69	0.88
	LTE 66	QPSK20M	Left Side	132572	50	0	Ant 1	23.00	21.94	1.28	-0.14	0.513	0.66
	LTE 66	QPSK20M	Right Side	132572	50	0	Ant 1	23.00	21.94	1.28	-0.08	0.07	0.09
	LTE 66	QPSK20M	Top Side	132572	50	0	Ant 1	23.00	21.94	1.28	0.18	0.542	0.69
	LTE 66	QPSK20M	Bottom Side	132572	50	0	Ant 1	23.00	21.94	1.28	0.05	0.069	0.09
	LTE 66	QPSK20M	Front Face	132572	100	0	Ant 1	23.00	21.90	1.29	-0.15	0.708	0.91
	LTE 66	QPSK20M	Rear Face	132572	100	0	Ant 1	23.00	21.90	1.29	-0.05	0.689	0.89
	LTE 66	QPSK20M	Top Side	132572	100	0	Ant 1	23.00	21.90	1.29	-0.01	0.552	0.71
	LTE 66	QPSK20M	Front Face	132072	1	0	Ant 1	24.00	22.89	1.29	-0.18	0.695	0.90
	LTE 66	QPSK20M	Front Face	132322	1	0	Ant 1	24.00	22.83	1.31	0.14	0.596	0.78
	LTE 66	QPSK20M	Rear Face	132072	1	0	Ant 1	24.00	22.89	1.29	-0.15	0.542	0.70
	LTE 66	QPSK20M	Rear Face	132322	1	0	Ant 1	24.00	22.83	1.31	0.07	0.594	0.78
	LTE 66	QPSK20M	Top Side	132072	1	0	Ant 1	24.00	22.89	1.29	-0.1	0.553	0.71
	LTE 66	QPSK20M	Top Side	132322	1	0	Ant 1	24.00	22.83	1.31	-0.07	0.539	0.71
	LTE 66	QPSK20M	Front Face	132072	50	0	Ant 1	23.00	21.84	1.31	0.04	0.588	0.77
	LTE 66	QPSK20M	Front Face	132322	50	0	Ant 1	23.00	21.80	1.32	0.16	0.521	0.69
	LTE 66	QPSK20M	Rear Face	132072	50	0	Ant 1	23.00	21.84	1.31	-0.01	0.576	0.75
	LTE 66	QPSK20M	Rear Face	132322	50	0	Ant 1	23.00	21.80	1.32	-0.03	0.519	0.69
	LTE 66	QPSK20M	Front Face	132572	1	0	Ant 1	24.00	22.91	1.29	0.01	0.805	1.04
<b>For EN-DC</b>													
	LTE 66	QPSK20M	Front Face	132572	1	0	Ant 1	21.00	22.91	0.64	0.01	0.821	0.53
	LTE 66	QPSK20M	Rear Face	132572	1	0	Ant 1	21.00	22.91	0.64	-0.05	0.794	0.51
	LTE 66	QPSK20M	Left Side	132572	1	0	Ant 1	21.00	22.91	0.64	0.18	0.592	0.38
	LTE 66	QPSK20M	Right Side	132572	1	0	Ant 1	21.00	22.91	0.64	-0.16	0.076	0.05
	LTE 66	QPSK20M	Top Side	132572	1	0	Ant 1	21.00	22.91	0.64	0.09	0.652	0.42
	LTE 66	QPSK20M	Bottom Side	132572	1	0	Ant 1	21.00	22.91	0.64	-0.07	0.098	0.06
	LTE 66	QPSK20M	Front Face	132572	50	0	Ant 1	20.00	21.94	0.64	-0.03	0.693	0.44
	LTE 66	QPSK20M	Rear Face	132572	50	0	Ant 1	20.00	21.94	0.64	0.14	0.69	0.44
	LTE 66	QPSK20M	Left Side	132572	50	0	Ant 1	20.00	21.94	0.64	-0.14	0.513	0.33
	LTE 66	QPSK20M	Right Side	132572	50	0	Ant 1	20.00	21.94	0.64	-0.08	0.07	0.04
	LTE 66	QPSK20M	Top Side	132572	50	0	Ant 1	20.00	21.94	0.64	0.18	0.542	0.35
	LTE 66	QPSK20M	Bottom Side	132572	50	0	Ant 1	20.00	21.94	0.64	0.05	0.069	0.04
	LTE 66	QPSK20M	Front Face	132572	100	0	Ant 1	20.00	21.90	0.65	-0.15	0.708	0.46
	LTE 66	QPSK20M	Rear Face	132572	100	0	Ant 1	20.00	21.90	0.65	-0.05	0.689	0.45
	LTE 66	QPSK20M	Top Side	132572	100	0	Ant 1	20.00	21.90	0.65	-0.01	0.552	0.36
	LTE 66	QPSK20M	Front Face	132072	1	0	Ant 1	21.00	22.89	0.65	-0.18	0.695	0.45
	LTE 66	QPSK20M	Front Face	132322	1	0	Ant 1	21.00	22.83	0.66	0.14	0.596	0.39
	LTE 66	QPSK20M	Rear Face	132072	1	0	Ant 1	21.00	22.89	0.65	-0.15	0.542	0.35
	LTE 66	QPSK20M	Rear Face	132322	1	0	Ant 1	21.00	22.83	0.66	0.07	0.594	0.39
	LTE 66	QPSK20M	Top Side	132072	1	0	Ant 1	21.00	22.89	0.65	-0.1	0.553	0.36
	LTE 66	QPSK20M	Top Side	132322	1	0	Ant 1	21.00	22.83	0.66	-0.07	0.539	0.36
	LTE 66	QPSK20M	Front Face	132072	50	0	Ant 1	20.00	21.84	0.65	0.04	0.588	0.38
	LTE 66	QPSK20M	Front Face	132322	50	0	Ant 1	20.00	21.80	0.66	0.16	0.521	0.34
	LTE 66	QPSK20M	Rear Face	132072	50	0	Ant 1	20.00	21.84	0.65	-0.01	0.576	0.37
	LTE 66	QPSK20M	Rear Face	132322	50	0	Ant 1	20.00	21.80	0.66	-0.03	0.519	0.34
	LTE 66	QPSK20M	Front Face	132572	1	0	Ant 1	21.00	22.91	0.64	0.01	0.805	0.52

Note : The Standalone of LTE 66 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of LTE 66 is 21dBm in NSA mode.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 66	QPSK20M	Front Face	132572	1	0	Ant 2	24.00	22.91	1.29	-0.04	0.883	1.14
	LTE 66	QPSK20M	Rear Face	132572	1	0	Ant 2	24.00	22.91	1.29	0.04	0.875	1.13
	LTE 66	QPSK20M	Left Side	132572	1	0	Ant 2	24.00	22.91	1.29	-0.12	0.052	0.07
	LTE 66	QPSK20M	Right Side	132572	1	0	Ant 2	24.00	22.91	1.29	0.17	0.658	0.85
	LTE 66	QPSK20M	Top Side	132572	1	0	Ant 2	24.00	22.91	1.29	-0.01	0.715	0.92
	LTE 66	QPSK20M	Bottom Side	132572	1	0	Ant 2	24.00	22.91	1.29	0.06	0.050	0.06
	LTE 66	QPSK20M	Front Face	132572	50	0	Ant 2	23.00	21.94	1.28	-0.16	0.721	0.92
	LTE 66	QPSK20M	Rear Face	132572	50	0	Ant 2	23.00	21.94	1.28	0.12	0.716	0.92
	LTE 66	QPSK20M	Left Side	132572	50	0	Ant 2	23.00	21.94	1.28	0.13	0.04	0.05
	LTE 66	QPSK20M	Right Side	132572	50	0	Ant 2	23.00	21.94	1.28	0.13	0.51	0.65
	LTE 66	QPSK20M	Top Side	132572	50	0	Ant 2	23.00	21.94	1.28	0.01	0.575	0.74
	LTE 66	QPSK20M	Bottom Side	132572	50	0	Ant 2	23.00	21.94	1.28	-0.08	0.039	0.05
	LTE 66	QPSK20M	Front Face	132572	100	0	Ant 2	23.00	21.90	1.29	0.18	0.762	0.98
	LTE 66	QPSK20M	Rear Face	132572	100	0	Ant 2	23.00	21.90	1.29	0.16	0.612	0.79
	LTE 66	QPSK20M	Right Side	132572	100	0	Ant 2	23.00	21.90	1.29	0.11	0.501	0.65
	LTE 66	QPSK20M	Top Side	132572	100	0	Ant 2	23.00	21.90	1.29	-0.04	0.543	0.70
	LTE 66	QPSK20M	Front Face	132072	1	0	Ant 2	24.00	22.89	1.29	0.06	0.830	1.07
	LTE 66	QPSK20M	Front Face	132322	1	0	Ant 2	24.00	22.83	1.31	-0.04	0.784	1.03
	LTE 66	QPSK20M	Rear Face	132072	1	0	Ant 2	24.00	22.89	1.29	0.15	0.845	1.09
	LTE 66	QPSK20M	Rear Face	132322	1	0	Ant 2	24.00	22.83	1.31	-0.1	0.807	1.06
	LTE 66	QPSK20M	Right Side	132072	1	0	Ant 2	24.00	22.89	1.29	0.12	0.679	0.88
	LTE 66	QPSK20M	Right Side	132322	1	0	Ant 2	24.00	22.83	1.31	0.13	0.635	0.83
	LTE 66	QPSK20M	Top Side	132072	1	0	Ant 2	24.00	22.89	1.29	-0.11	0.807	1.04
	LTE 66	QPSK20M	Top Side	132322	1	0	Ant 2	24.00	22.83	1.31	-0.17	0.713	0.93
	LTE 66	QPSK20M	Front Face	132072	50	0	Ant 2	23.00	21.84	1.31	0.18	0.711	0.93
	LTE 66	QPSK20M	Front Face	132322	50	0	Ant 2	23.00	21.80	1.32	0	0.712	0.94
	LTE 66	QPSK20M	Rear Face	132072	50	0	Ant 2	23.00	21.84	1.31	-0.19	0.742	0.97
	LTE 66	QPSK20M	Rear Face	132322	50	0	Ant 2	23.00	21.80	1.32	-0.03	0.705	0.93
	LTE 66	QPSK20M	Front Face	132572	1	0	Ant 2	24.00	22.91	1.29	-0.04	0.873	1.13



# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
<b>For EN-DC</b>													
20	LTE 66	QPSK20M	Front Face	132572	1	0	Ant 2	21.00	22.91	0.64	-0.04	0.883	<b>0.57</b>
	LTE 66	QPSK20M	Rear Face	132572	1	0	Ant 2	21.00	22.91	0.64	0.04	0.875	0.56
	LTE 66	QPSK20M	Left Side	132572	1	0	Ant 2	21.00	22.91	0.64	-0.12	0.052	0.03
	LTE 66	QPSK20M	Right Side	132572	1	0	Ant 2	21.00	22.91	0.64	0.17	0.658	0.42
	LTE 66	QPSK20M	Top Side	132572	1	0	Ant 2	21.00	22.91	0.64	-0.01	0.715	0.46
	LTE 66	QPSK20M	Bottom Side	132572	1	0	Ant 2	21.00	22.91	0.64	0.06	0.050	0.03
	LTE 66	QPSK20M	Front Face	132572	50	0	Ant 2	20.00	21.94	0.64	-0.16	0.721	0.46
	LTE 66	QPSK20M	Rear Face	132572	50	0	Ant 2	20.00	21.94	0.64	0.12	0.716	0.46
	LTE 66	QPSK20M	Left Side	132572	50	0	Ant 2	20.00	21.94	0.64	0.13	0.04	0.03
	LTE 66	QPSK20M	Right Side	132572	50	0	Ant 2	20.00	21.94	0.64	0.13	0.51	0.33
	LTE 66	QPSK20M	Top Side	132572	50	0	Ant 2	20.00	21.94	0.64	0.01	0.575	0.37
	LTE 66	QPSK20M	Bottom Side	132572	50	0	Ant 2	20.00	21.94	0.64	-0.08	0.039	0.02
	LTE 66	QPSK20M	Front Face	132572	100	0	Ant 2	20.00	21.90	0.65	0.18	0.762	0.50
	LTE 66	QPSK20M	Rear Face	132572	100	0	Ant 2	20.00	21.90	0.65	0.16	0.612	0.40
	LTE 66	QPSK20M	Right Side	132572	100	0	Ant 2	20.00	21.90	0.65	0.11	0.501	0.33
	LTE 66	QPSK20M	Top Side	132572	100	0	Ant 2	20.00	21.90	0.65	-0.04	0.543	0.35
	LTE 66	QPSK20M	Front Face	132072	1	0	Ant 2	21.00	22.89	0.65	0.06	0.830	0.54
	LTE 66	QPSK20M	Front Face	132322	1	0	Ant 2	21.00	22.83	0.66	-0.04	0.784	0.52
	LTE 66	QPSK20M	Rear Face	132072	1	0	Ant 2	21.00	22.89	0.65	0.15	0.845	0.55
	LTE 66	QPSK20M	Rear Face	132322	1	0	Ant 2	21.00	22.83	0.66	-0.1	0.807	0.53
	LTE 66	QPSK20M	Right Side	132072	1	0	Ant 2	21.00	22.89	0.65	0.12	0.679	0.44
	LTE 66	QPSK20M	Right Side	132322	1	0	Ant 2	21.00	22.83	0.66	0.13	0.635	0.42
	LTE 66	QPSK20M	Top Side	132072	1	0	Ant 2	21.00	22.89	0.65	-0.11	0.807	0.52
	LTE 66	QPSK20M	Top Side	132322	1	0	Ant 2	21.00	22.83	0.66	-0.17	0.713	0.47
	LTE 66	QPSK20M	Front Face	132072	50	0	Ant 2	20.00	21.84	0.65	0.18	0.711	0.46
	LTE 66	QPSK20M	Front Face	132322	50	0	Ant 2	20.00	21.80	0.66	0	0.712	0.47
	LTE 66	QPSK20M	Rear Face	132072	50	0	Ant 2	20.00	21.84	0.65	-0.19	0.742	0.48
	LTE 66	QPSK20M	Rear Face	132322	50	0	Ant 2	20.00	21.80	0.66	-0.03	0.705	0.47
	LTE 66	QPSK20M	Front Face	132572	1	0	Ant 2	21.00	22.91	0.64	-0.04	0.873	0.56

Note : The Standalone of LTE 66 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of LTE 66 is 21dBm in NSA mode.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
21	LTE 71	QPSK20M	Front Face	133222	1	0	Ant 1	24.00	22.85	1.30	-0.01	0.713	<b>0.93</b>
	LTE 71	QPSK20M	Rear Face	133222	1	0	Ant 1	24.00	22.85	1.30	0.13	0.611	0.79
	LTE 71	QPSK20M	Left Side	133222	1	0	Ant 1	24.00	22.85	1.30	0.05	0.239	0.31
	LTE 71	QPSK20M	Right Side	133222	1	0	Ant 1	24.00	22.85	1.30	-0.17	0.164	0.21
	LTE 71	QPSK20M	Top Side	133222	1	0	Ant 1	24.00	22.85	1.30	0.09	0.358	0.47
	LTE 71	QPSK20M	Bottom Side	133222	1	0	Ant 1	24.00	22.85	1.30	0.19	0.053	0.07
	LTE 71	QPSK20M	Front Face	133222	50	0	Ant 1	23.00	21.71	1.35	0.17	0.55	0.74
	LTE 71	QPSK20M	Rear Face	133222	50	0	Ant 1	23.00	21.71	1.35	-0.1	0.477	0.64
	LTE 71	QPSK20M	Left Side	133222	50	0	Ant 1	23.00	21.71	1.35	0.08	0.15	0.20
	LTE 71	QPSK20M	Right Side	133222	50	0	Ant 1	23.00	21.71	1.35	-0.17	0.134	0.18
	LTE 71	QPSK20M	Top Side	133222	50	0	Ant 1	23.00	21.71	1.35	-0.02	0.313	0.42
	LTE 71	QPSK20M	Bottom Side	133222	50	0	Ant 1	23.00	21.71	1.35	-0.1	0.047	0.06
	LTE 71	QPSK20M	Front Face	133222	100	0	Ant 1	23.00	21.80	1.32	0.19	0.524	0.69
	LTE 71	QPSK20M	Front Face	133297	1	0	Ant 1	24.00	22.75	1.33	0.03	0.515	0.68
	LTE 71	QPSK20M	Front Face	133372	1	0	Ant 1	24.00	22.69	1.35	-0.09	0.51	0.69

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5G NR-n5	DFT-S QPSK20M	Front Face	167800	1	1	Ant 1	24.00	23.15	1.22	0.03	0.732	0.89
	5G NR-n5	DFT-S QPSK20M	Rear Face	167800	1	1	Ant 1	24.00	23.15	1.22	-0.12	0.679	0.83
	5G NR-n5	DFT-S QPSK20M	Left Side	167800	1	1	Ant 1	24.00	23.15	1.22	0.05	0.319	0.39
	5G NR-n5	DFT-S QPSK20M	Right Side	167800	1	1	Ant 1	24.00	23.15	1.22	-0.01	0.059	0.07
	5G NR-n5	DFT-S QPSK20M	Top Side	167800	1	1	Ant 1	24.00	23.15	1.22	0.06	0.204	0.25
	5G NR-n5	DFT-S QPSK20M	Bottom Side	167800	1	1	Ant 1	24.00	23.15	1.22	-0.09	0.091	0.11
	5G NR-n5	DFT-S QPSK20M	Front Face	167800	50	25	Ant 1	24.00	23.14	1.22	0.12	0.712	0.87
	5G NR-n5	DFT-S QPSK20M	Rear Face	167800	50	25	Ant 1	24.00	23.14	1.22	-0.04	0.676	0.82
	5G NR-n5	DFT-S QPSK20M	Left Side	167800	50	25	Ant 1	24.00	23.14	1.22	-0.05	0.319	0.39
	5G NR-n5	DFT-S QPSK20M	Right Side	167800	50	25	Ant 1	24.00	23.14	1.22	0.13	0.063	0.08
	5G NR-n5	DFT-S QPSK20M	Top Side	167800	50	25	Ant 1	24.00	23.14	1.22	0.07	0.219	0.27
	5G NR-n5	DFT-S QPSK20M	Bottom Side	167800	50	25	Ant 1	24.00	23.14	1.22	-0.01	0.076	0.09
	5G NR-n5	DFT-S QPSK20M	Front Face	167800	100	0	Ant 1	23.00	22.11	1.23	0.03	0.638	0.78
	5G NR-n5	DFT-S QPSK20M	Rear Face	167800	100	0	Ant 1	23.00	22.11	1.23	0.17	0.611	0.75
	5G NR-n5	DFT-S QPSK20M	Front Face	166800	1	1	Ant 1	24.00	23.08	1.24	-0.06	0.749	0.93
	5G NR-n5	DFT-S QPSK20M	Front Face	167300	1	1	Ant 1	24.00	23.14	1.22	0.08	0.741	0.90
	5G NR-n5	DFT-S QPSK20M	Rear Face	166800	1	1	Ant 1	24.00	23.08	1.24	-0.06	0.688	0.85
	5G NR-n5	DFT-S QPSK20M	Rear Face	167300	1	1	Ant 1	24.00	23.14	1.22	0.08	0.679	0.83
	5G NR-n5	DFT-S QPSK20M	Front Face	166800	50	25	Ant 1	24.00	23.07	1.24	-0.06	0.703	0.87
	5G NR-n5	DFT-S QPSK20M	Front Face	167300	50	25	Ant 1	24.00	23.13	1.22	0.08	0.694	0.85
	5G NR-n5	DFT-S QPSK20M	Rear Face	166800	50	25	Ant 1	24.00	23.07	1.24	-0.06	0.651	0.81
	5G NR-n5	DFT-S QPSK20M	Rear Face	167300	50	25	Ant 1	24.00	23.13	1.22	0.08	0.648	0.79

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
<b>For EN-DC</b>													
	5G NR-n5	DFT-S QPSK20M	Front Face	167800	1	1	Ant 1	21.00	23.15	0.61	0.03	0.732	0.45
	5G NR-n5	DFT-S QPSK20M	Rear Face	167800	1	1	Ant 1	21.00	23.15	0.61	-0.12	0.679	0.41
	5G NR-n5	DFT-S QPSK20M	Left Side	167800	1	1	Ant 1	21.00	23.15	0.61	0.05	0.319	0.19
	5G NR-n5	DFT-S QPSK20M	Right Side	167800	1	1	Ant 1	21.00	23.15	0.61	-0.01	0.059	0.04
	5G NR-n5	DFT-S QPSK20M	Top Side	167800	1	1	Ant 1	21.00	23.15	0.61	0.06	0.204	0.12
	5G NR-n5	DFT-S QPSK20M	Bottom Side	167800	1	1	Ant 1	21.00	23.15	0.61	-0.09	0.091	0.06
	5G NR-n5	DFT-S QPSK20M	Front Face	167800	50	25	Ant 1	21.00	23.14	0.61	0.12	0.712	0.43
	5G NR-n5	DFT-S QPSK20M	Rear Face	167800	50	25	Ant 1	21.00	23.14	0.61	-0.04	0.676	0.41
	5G NR-n5	DFT-S QPSK20M	Left Side	167800	50	25	Ant 1	21.00	23.14	0.61	-0.05	0.319	0.19
	5G NR-n5	DFT-S QPSK20M	Right Side	167800	50	25	Ant 1	21.00	23.14	0.61	0.13	0.063	0.04
	5G NR-n5	DFT-S QPSK20M	Top Side	167800	50	25	Ant 1	21.00	23.14	0.61	0.07	0.219	0.13
	5G NR-n5	DFT-S QPSK20M	Bottom Side	167800	50	25	Ant 1	21.00	23.14	0.61	-0.01	0.076	0.05
	5G NR-n5	DFT-S QPSK20M	Front Face	167800	100	0	Ant 1	20.00	22.11	0.62	0.03	0.638	0.40
	5G NR-n5	DFT-S QPSK20M	Rear Face	167800	100	0	Ant 1	20.00	22.11	0.62	0.17	0.611	0.38
22	5G NR-n5	DFT-S QPSK20M	Front Face	166800	1	1	Ant 1	21.00	23.08	0.62	-0.06	0.749	0.46
	5G NR-n5	DFT-S QPSK20M	Front Face	167300	1	1	Ant 1	21.00	23.14	0.61	0.08	0.741	0.45
	5G NR-n5	DFT-S QPSK20M	Rear Face	166800	1	1	Ant 1	21.00	23.08	0.62	-0.06	0.688	0.43
	5G NR-n5	DFT-S QPSK20M	Rear Face	167300	1	1	Ant 1	21.00	23.14	0.61	0.08	0.679	0.41
	5G NR-n5	DFT-S QPSK20M	Front Face	166800	50	25	Ant 1	21.00	23.07	0.62	-0.06	0.703	0.44
	5G NR-n5	DFT-S QPSK20M	Front Face	167300	50	25	Ant 1	21.00	23.13	0.61	0.08	0.694	0.42
	5G NR-n5	DFT-S QPSK20M	Rear Face	166800	50	25	Ant 1	21.00	23.07	0.62	-0.06	0.651	0.40
	5G NR-n5	DFT-S QPSK20M	Rear Face	167300	50	25	Ant 1	21.00	23.13	0.61	0.08	0.648	0.40
	5G NR-n5	DFT-S QPSK20M	Front Face	167800	100	0	Ant 1	20.00	22.11	0.62	0.03	0.638	0.40

Note : The Standalone of 5G NR-n5 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of 5G NR-n5 is 21dBm in NSA mode.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5G NR-n5	DFT-S QPSK20M	Front Face	167800	1	1	Ant 2	24.00	23.15	1.22	0.03	0.694	0.85
	5G NR-n5	DFT-S QPSK20M	Rear Face	167800	1	1	Ant 2	24.00	23.15	1.22	-0.12	0.642	0.78
	5G NR-n5	DFT-S QPSK20M	Left Side	167800	1	1	Ant 2	24.00	23.15	1.22	0.05	0.059	0.07
	5G NR-n5	DFT-S QPSK20M	Right Side	167800	1	1	Ant 2	24.00	23.15	1.22	0.16	0.296	0.36
	5G NR-n5	DFT-S QPSK20M	Top Side	167800	1	1	Ant 2	24.00	23.15	1.22	-0.03	0.254	0.31
	5G NR-n5	DFT-S QPSK20M	Bottom Side	167800	1	1	Ant 2	24.00	23.15	1.22	0.07	0.051	0.06
	5G NR-n5	DFT-S QPSK20M	Front Face	167800	50	25	Ant 2	24.00	23.14	1.22	-0.09	0.695	0.85
	5G NR-n5	DFT-S QPSK20M	Rear Face	167800	50	25	Ant 2	24.00	23.14	1.22	0.11	0.638	0.78
	5G NR-n5	DFT-S QPSK20M	Left Side	167800	50	25	Ant 2	24.00	23.14	1.22	-0.04	0.053	0.06
	5G NR-n5	DFT-S QPSK20M	Right Side	167800	50	25	Ant 2	24.00	23.14	1.22	0.03	0.311	0.38
	5G NR-n5	DFT-S QPSK20M	Top Side	167800	50	25	Ant 2	24.00	23.14	1.22	-0.05	0.191	0.23
	5G NR-n5	DFT-S QPSK20M	Bottom Side	167800	50	25	Ant 2	24.00	23.14	1.22	-0.11	0.045	0.05
	5G NR-n5	DFT-S QPSK20M	Front Face	167800	100	0	Ant 2	23.00	22.11	1.23	0.03	0.638	0.78
	5G NR-n5	DFT-S QPSK20M	Front Face	166800	1	1	Ant 2	24.00	23.08	1.24	-0.01	0.728	0.90
	5G NR-n5	DFT-S QPSK20M	Front Face	167300	1	1	Ant 2	24.00	23.14	1.22	0.06	0.715	0.87
	5G NR-n5	DFT-S QPSK20M	Front Face	166800	50	25	Ant 2	24.00	23.07	1.24	-0.01	0.678	0.84
	5G NR-n5	DFT-S QPSK20M	Front Face	167300	50	25	Ant 2	24.00	23.13	1.22	0.06	0.669	0.82

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
<b>For EN-DC</b>													
	5GNR-n5	DFT-S QPSK20M	Front Face	167800	1	1	Ant 2	21.00	23.15	0.61	0.03	0.694	0.42
	5GNR-n5	DFT-S QPSK20M	Rear Face	167800	1	1	Ant 2	21.00	23.15	0.61	-0.12	0.642	0.39
	5GNR-n5	DFT-S QPSK20M	Left Side	167800	1	1	Ant 2	21.00	23.15	0.61	0.05	0.059	0.04
	5GNR-n5	DFT-S QPSK20M	Right Side	167800	1	1	Ant 2	21.00	23.15	0.61	0.16	0.296	0.18
	5GNR-n5	DFT-S QPSK20M	Top Side	167800	1	1	Ant 2	21.00	23.15	0.61	-0.03	0.254	0.15
	5GNR-n5	DFT-S QPSK20M	Bottom Side	167800	1	1	Ant 2	21.00	23.15	0.61	0.07	0.051	0.03
	5GNR-n5	DFT-S QPSK20M	Front Face	167800	50	25	Ant 2	21.00	23.14	0.61	-0.09	0.695	0.42
	5GNR-n5	DFT-S QPSK20M	Rear Face	167800	50	25	Ant 2	21.00	23.14	0.61	0.11	0.638	0.39
	5GNR-n5	DFT-S QPSK20M	Left Side	167800	50	25	Ant 2	21.00	23.14	0.61	-0.04	0.053	0.03
	5GNR-n5	DFT-S QPSK20M	Right Side	167800	50	25	Ant 2	21.00	23.14	0.61	0.03	0.311	0.19
	5GNR-n5	DFT-S QPSK20M	Top Side	167800	50	25	Ant 2	21.00	23.14	0.61	-0.05	0.191	0.12
	5GNR-n5	DFT-S QPSK20M	Bottom Side	167800	50	25	Ant 2	21.00	23.14	0.61	-0.11	0.045	0.03
	5GNR-n5	DFT-S QPSK20M	Front Face	167800	100	0	Ant 2	20.00	22.11	0.62	0.03	0.638	0.40
23	5GNR-n5	DFT-S QPSK20M	Front Face	166800	1	1	Ant 2	21.00	23.08	0.62	-0.01	0.728	0.45
	5GNR-n5	DFT-S QPSK20M	Front Face	167300	1	1	Ant 2	21.00	23.14	0.61	0.06	0.715	0.44
	5GNR-n5	DFT-S QPSK20M	Front Face	166800	50	25	Ant 2	21.00	23.07	0.62	-0.01	0.678	0.42
	5GNR-n5	DFT-S QPSK20M	Front Face	167300	50	25	Ant 2	21.00	23.13	0.61	0.06	0.669	0.41

Note : The Standalone of 5GNR-n5 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of 5GNR-n5 is 21dBm in NSA mode.



# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n25	DFT-S QPSK20M	Front Face	372000	1	1	Ant 2	24.00	23.68	1.08	0.15	0.892	0.96
	5GNR-n25	DFT-S QPSK20M	Rear Face	372000	1	1	Ant 2	24.00	23.68	1.08	0.12	0.800	0.86
	5GNR-n25	DFT-S QPSK20M	Left Side	372000	1	1	Ant 2	24.00	23.68	1.08	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Right Side	372000	1	1	Ant 2	24.00	23.68	1.08	-0.09	0.624	0.67
	5GNR-n25	DFT-S QPSK20M	Top Side	372000	1	1	Ant 2	24.00	23.68	1.08	0.14	0.594	0.64
	5GNR-n25	DFT-S QPSK20M	Bottom Side	372000	1	1	Ant 2	24.00	23.68	1.08	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Front Face	372000	50	25	Ant 2	24.00	23.24	1.19	-0.17	0.904	1.08
	5GNR-n25	DFT-S QPSK20M	Rear Face	372000	50	25	Ant 2	24.00	23.24	1.19	0.11	0.892	1.06
	5GNR-n25	DFT-S QPSK20M	Left Side	372000	50	25	Ant 2	24.00	23.24	1.19	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Right Side	372000	50	25	Ant 2	24.00	23.24	1.19	-0.19	0.668	0.79
	5GNR-n25	DFT-S QPSK20M	Top Side	372000	50	25	Ant 2	24.00	23.24	1.19	-0.13	0.651	0.77
	5GNR-n25	DFT-S QPSK20M	Bottom Side	372000	50	25	Ant 2	24.00	23.24	1.19	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Front Face	372000	100	0	Ant 2	23.00	22.98	1.00	-0.04	0.874	0.87
	5GNR-n25	DFT-S QPSK20M	Rear Face	372000	100	0	Ant 2	23.00	22.98	1.00	0.1	0.775	0.78
	5GNR-n25	DFT-S QPSK20M	Front Face	376500	1	1	Ant 2	24.00	23.08	1.24	-0.18	0.920	1.14
	5GNR-n25	DFT-S QPSK20M	Front Face	381000	1	1	Ant 2	24.00	23.38	1.15	0.05	0.549	0.63
	5GNR-n25	DFT-S QPSK20M	Rear Face	376500	1	1	Ant 2	24.00	23.08	1.24	-0.01	0.787	0.98
	5GNR-n25	DFT-S QPSK20M	Rear Face	381000	1	1	Ant 2	24.00	23.38	1.15	-0.16	0.508	0.58
	5GNR-n25	DFT-S QPSK20M	Front Face	376500	50	25	Ant 2	24.00	22.64	1.37	0.02	0.763	1.05
	5GNR-n25	DFT-S QPSK20M	Front Face	381000	50	25	Ant 2	24.00	22.94	1.28	-0.08	0.894	1.14
	5GNR-n25	DFT-S QPSK20M	Rear Face	376500	50	25	Ant 2	24.00	22.64	1.37	0.06	0.653	0.89
	5GNR-n25	DFT-S QPSK20M	Rear Face	381000	50	25	Ant 2	24.00	22.94	1.28	0.07	0.801	1.03
	5GNR-n25	DFT-S QPSK20M	Front Face	376500	1	1	Ant 2	24.00	23.08	1.24	0.03	0.913	1.13

Note :The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
<b>For EN-DC</b>													
	5GNR-n25	DFT-S QPSK20M	Front Face	372000	1	1	Ant 2	21.00	23.68	0.54	0.15	0.892	0.48
	5GNR-n25	DFT-S QPSK20M	Rear Face	372000	1	1	Ant 2	21.00	23.68	0.54	0.12	0.800	0.43
	5GNR-n25	DFT-S QPSK20M	Left Side	372000	1	1	Ant 2	21.00	23.68	0.54	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Right Side	372000	1	1	Ant 2	21.00	23.68	0.54	-0.09	0.624	0.34
	5GNR-n25	DFT-S QPSK20M	Top Side	372000	1	1	Ant 2	21.00	23.68	0.54	0.14	0.594	0.32
	5GNR-n25	DFT-S QPSK20M	Bottom Side	372000	1	1	Ant 2	21.00	23.68	0.54	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Front Face	372000	50	25	Ant 2	21.00	23.24	0.60	-0.17	0.904	0.54
	5GNR-n25	DFT-S QPSK20M	Rear Face	372000	50	25	Ant 2	21.00	23.24	0.60	0.11	0.892	0.54
	5GNR-n25	DFT-S QPSK20M	Left Side	372000	50	25	Ant 2	21.00	23.24	0.60	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Right Side	372000	50	25	Ant 2	21.00	23.24	0.60	-0.19	0.668	0.40
	5GNR-n25	DFT-S QPSK20M	Top Side	372000	50	25	Ant 2	21.00	23.24	0.60	-0.13	0.651	0.39
	5GNR-n25	DFT-S QPSK20M	Bottom Side	372000	50	25	Ant 2	21.00	23.24	0.60	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Front Face	372000	100	0	Ant 2	20.00	22.98	0.50	-0.04	0.874	0.44
	5GNR-n25	DFT-S QPSK20M	Rear Face	372000	100	0	Ant 2	20.00	22.98	0.50	0.1	0.775	0.39
24	5GNR-n25	DFT-S QPSK20M	Front Face	376500	1	1	Ant 2	21.00	23.08	0.62	-0.18	0.920	0.57
	5GNR-n25	DFT-S QPSK20M	Front Face	381000	1	1	Ant 2	21.00	23.38	0.58	0.05	0.549	0.32
	5GNR-n25	DFT-S QPSK20M	Rear Face	376500	1	1	Ant 2	21.00	23.08	0.62	-0.01	0.787	0.49
	5GNR-n25	DFT-S QPSK20M	Rear Face	381000	1	1	Ant 2	21.00	23.38	0.58	-0.16	0.508	0.29
	5GNR-n25	DFT-S QPSK20M	Front Face	376500	50	25	Ant 2	21.00	22.64	0.69	0.02	0.763	0.53
	5GNR-n25	DFT-S QPSK20M	Front Face	381000	50	25	Ant 2	21.00	22.94	0.64	-0.08	0.894	0.57
	5GNR-n25	DFT-S QPSK20M	Rear Face	376500	50	25	Ant 2	21.00	22.64	0.69	0.06	0.653	0.45
	5GNR-n25	DFT-S QPSK20M	Rear Face	381000	50	25	Ant 2	21.00	22.94	0.64	0.07	0.801	0.51
	5GNR-n25	DFT-S QPSK20M	Front Face	376500	1	1	Ant 2	21.00	23.08	0.62	0.03	0.913	0.57

**Note :**

1. The “< 0.001” means there is no SAR value or the SAR is too low to be measured.
2. The Standalone of 5GNR-n25 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of 5GNR-n25 is 21dBm in NSA mode.



# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	1	1	Ant 1	24.00	23.99	1.00	-0.08	1.03	1.03
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	1	1	Ant 1	24.00	23.99	1.00	0.11	0.942	0.94
	5GNR-n66	DFT-S QPSK40M	Left Side	352000	1	1	Ant 1	24.00	23.99	1.00	-0.03	0.763	0.76
	5GNR-n66	DFT-S QPSK40M	Right Side	352000	1	1	Ant 1	24.00	23.99	1.00	0.12	0.101	0.10
	5GNR-n66	DFT-S QPSK40M	Top Side	352000	1	1	Ant 1	24.00	23.99	1.00	-0.05	0.782	0.78
	5GNR-n66	DFT-S QPSK40M	Bottom Side	352000	1	1	Ant 1	24.00	23.99	1.00	0.03	0.116	0.12
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	108	54	Ant 1	24.00	23.98	1.00	0.07	1.01	1.01
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	108	54	Ant 1	24.00	23.98	1.00	-0.09	0.944	0.94
	5GNR-n66	DFT-S QPSK40M	Left Side	352000	108	54	Ant 1	24.00	23.98	1.00	0.12	0.736	0.74
	5GNR-n66	DFT-S QPSK40M	Right Side	352000	108	54	Ant 1	24.00	23.98	1.00	-0.03	0.111	0.11
	5GNR-n66	DFT-S QPSK40M	Top Side	352000	108	54	Ant 1	24.00	23.98	1.00	-0.06	0.741	0.74
	5GNR-n66	DFT-S QPSK40M	Bottom Side	352000	108	54	Ant 1	24.00	23.98	1.00	0.12	0.108	0.11
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	216	0	Ant 1	23.00	22.97	1.01	-0.08	0.823	0.83
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	216	0	Ant 1	23.00	22.97	1.01	-0.07	0.803	0.81
	5GNR-n66	DFT-S QPSK40M	Front Face	346000	1	1	Ant 1	24.00	23.61	1.09	0.05	0.859	0.94
	5GNR-n66	DFT-S QPSK40M	Front Face	349000	1	1	Ant 1	24.00	23.82	1.04	-0.04	0.925	0.96
	5GNR-n66	DFT-S QPSK40M	Rear Face	346000	1	1	Ant 1	24.00	23.61	1.09	-0.11	0.934	1.02
	5GNR-n66	DFT-S QPSK40M	Rear Face	349000	1	1	Ant 1	24.00	23.82	1.04	0.03	0.912	0.95
	5GNR-n66	DFT-S QPSK40M	Front Face	346000	108	54	Ant 1	24.00	23.45	1.14	-0.04	0.848	0.97
	5GNR-n66	DFT-S QPSK40M	Front Face	349000	108	54	Ant 1	24.00	23.86	1.03	-0.12	0.906	0.93
	5GNR-n66	DFT-S QPSK40M	Rear Face	346000	108	54	Ant 1	24.00	23.45	1.14	0.09	0.899	1.02
	5GNR-n66	DFT-S QPSK40M	Rear Face	349000	108	54	Ant 1	24.00	23.86	1.03	0.05	0.953	0.98
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	1	1	Ant 1	24.00	23.99	1.00	-0.08	1.01	1.01

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
<b>For EN-DC</b>													
25	5GNR-n66	DFT-S QPSK40M	Front Face	352000	1	1	Ant 1	21.00	23.99	0.50	-0.08	1.03	0.52
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	1	1	Ant 1	21.00	23.99	0.50	0.11	0.942	0.47
	5GNR-n66	DFT-S QPSK40M	Left Side	352000	1	1	Ant 1	21.00	23.99	0.50	-0.03	0.763	0.38
	5GNR-n66	DFT-S QPSK40M	Right Side	352000	1	1	Ant 1	21.00	23.99	0.50	0.12	0.101	0.05
	5GNR-n66	DFT-S QPSK40M	Top Side	352000	1	1	Ant 1	21.00	23.99	0.50	-0.05	0.782	0.39
	5GNR-n66	DFT-S QPSK40M	Bottom Side	352000	1	1	Ant 1	21.00	23.99	0.50	0.03	0.116	0.06
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	108	54	Ant 1	21.00	23.98	0.50	0.07	1.01	0.51
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	108	54	Ant 1	21.00	23.98	0.50	-0.09	0.944	0.47
	5GNR-n66	DFT-S QPSK40M	Left Side	352000	108	54	Ant 1	21.00	23.98	0.50	0.12	0.736	0.37
	5GNR-n66	DFT-S QPSK40M	Right Side	352000	108	54	Ant 1	21.00	23.98	0.50	-0.03	0.111	0.06
	5GNR-n66	DFT-S QPSK40M	Top Side	352000	108	54	Ant 1	21.00	23.98	0.50	-0.06	0.741	0.37
	5GNR-n66	DFT-S QPSK40M	Bottom Side	352000	108	54	Ant 1	21.00	23.98	0.50	0.12	0.108	0.05
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	216	0	Ant 1	20.00	22.97	0.50	-0.08	0.823	0.41
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	216	0	Ant 1	20.00	22.97	0.50	-0.07	0.803	0.40
	5GNR-n66	DFT-S QPSK40M	Front Face	346000	1	1	Ant 1	21.00	23.61	0.55	0.05	0.859	0.47
	5GNR-n66	DFT-S QPSK40M	Front Face	349000	1	1	Ant 1	21.00	23.82	0.52	-0.04	0.925	0.48
	5GNR-n66	DFT-S QPSK40M	Rear Face	346000	1	1	Ant 1	21.00	23.61	0.55	-0.11	0.934	0.51
	5GNR-n66	DFT-S QPSK40M	Rear Face	349000	1	1	Ant 1	21.00	23.82	0.52	0.03	0.912	0.47
	5GNR-n66	DFT-S QPSK40M	Front Face	346000	108	54	Ant 1	21.00	23.45	0.57	-0.04	0.848	0.48
	5GNR-n66	DFT-S QPSK40M	Front Face	349000	108	54	Ant 1	21.00	23.86	0.52	-0.12	0.906	0.47
	5GNR-n66	DFT-S QPSK40M	Rear Face	346000	108	54	Ant 1	21.00	23.45	0.57	0.09	0.899	0.51
	5GNR-n66	DFT-S QPSK40M	Rear Face	349000	108	54	Ant 1	21.00	23.86	0.52	0.05	0.953	0.50
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	1	1	Ant 1	21.00	23.99	0.50	-0.08	1.01	0.51

Note : The Standalone of 5GNR-n66 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of 5GNR-n66 is 21dBm in NSA mode.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	1	1	Ant 2	24.00	23.99	1.00	-0.09	0.749	0.75
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	1	1	Ant 2	24.00	23.99	1.00	0.06	0.747	0.75
	5GNR-n66	DFT-S QPSK40M	Left Side	352000	1	1	Ant 2	24.00	23.99	1.00	0.18	0.047	0.05
	5GNR-n66	DFT-S QPSK40M	Right Side	352000	1	1	Ant 2	24.00	23.99	1.00	0.06	0.557	0.56
	5GNR-n66	DFT-S QPSK40M	Top Side	352000	1	1	Ant 2	24.00	23.99	1.00	-0.11	0.606	0.61
	5GNR-n66	DFT-S QPSK40M	Bottom Side	352000	1	1	Ant 2	24.00	23.99	1.00	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	108	54	Ant 2	24.00	23.98	1.00	0.1	0.913	0.91
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	108	54	Ant 2	24.00	23.98	1.00	-0.03	0.887	0.89
	5GNR-n66	DFT-S QPSK40M	Left Side	352000	108	54	Ant 2	24.00	23.98	1.00	-0.11	0.050	0.05
	5GNR-n66	DFT-S QPSK40M	Right Side	352000	108	54	Ant 2	24.00	23.98	1.00	-0.13	0.655	0.66
	5GNR-n66	DFT-S QPSK40M	Top Side	352000	108	54	Ant 2	24.00	23.98	1.00	-0.09	0.759	0.76
	5GNR-n66	DFT-S QPSK40M	Bottom Side	352000	108	54	Ant 2	24.00	23.98	1.00	0.12	0.056	0.06
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	216	0	Ant 2	23.00	22.97	1.01	-0.02	0.644	0.65
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	216	0	Ant 2	23.00	22.97	1.01	-0.1	0.637	0.64
	5GNR-n66	DFT-S QPSK40M	Front Face	346000	108	54	Ant 2	24.00	23.45	1.14	0	0.772	0.88
	5GNR-n66	DFT-S QPSK40M	Front Face	349000	108	54	Ant 2	24.00	23.86	1.03	-0.13	0.910	0.94
	5GNR-n66	DFT-S QPSK40M	Rear Face	346000	108	54	Ant 2	24.00	23.45	1.14	-0.08	0.780	0.89
	5GNR-n66	DFT-S QPSK40M	Rear Face	349000	108	54	Ant 2	24.00	23.86	1.03	0.19	0.879	0.91
	5GNR-n66	DFT-S QPSK40M	Front Face	349000	108	54	Ant 2	24.00	23.86	1.03	0.03	0.900	0.93
<b>For EN-DC</b>													
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	1	1	Ant 2	21.00	23.99	0.50	-0.09	0.749	0.37
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	1	1	Ant 2	21.00	23.99	0.50	0.06	0.747	0.37
	5GNR-n66	DFT-S QPSK40M	Left Side	352000	1	1	Ant 2	21.00	23.99	0.50	0.18	0.047	0.02
	5GNR-n66	DFT-S QPSK40M	Right Side	352000	1	1	Ant 2	21.00	23.99	0.50	0.06	0.557	0.28
	5GNR-n66	DFT-S QPSK40M	Top Side	352000	1	1	Ant 2	21.00	23.99	0.50	-0.11	0.606	0.30
	5GNR-n66	DFT-S QPSK40M	Bottom Side	352000	1	1	Ant 2	21.00	23.99	0.50	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	108	54	Ant 2	21.00	23.98	0.50	0.1	0.913	0.46
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	108	54	Ant 2	21.00	23.98	0.50	-0.03	0.887	0.44
	5GNR-n66	DFT-S QPSK40M	Left Side	352000	108	54	Ant 2	21.00	23.98	0.50	-0.11	0.050	0.03
	5GNR-n66	DFT-S QPSK40M	Right Side	352000	108	54	Ant 2	21.00	23.98	0.50	-0.13	0.655	0.33
	5GNR-n66	DFT-S QPSK40M	Top Side	352000	108	54	Ant 2	21.00	23.98	0.50	-0.09	0.759	0.38
	5GNR-n66	DFT-S QPSK40M	Bottom Side	352000	108	54	Ant 2	21.00	23.98	0.50	0.12	0.056	0.03
	5GNR-n66	DFT-S QPSK40M	Front Face	352000	216	0	Ant 2	20.00	22.97	0.50	-0.02	0.644	0.32
	5GNR-n66	DFT-S QPSK40M	Rear Face	352000	216	0	Ant 2	20.00	22.97	0.50	-0.1	0.637	0.32
	5GNR-n66	DFT-S QPSK40M	Front Face	346000	108	54	Ant 2	21.00	23.45	0.57	0	0.772	0.44
26	5GNR-n66	DFT-S QPSK40M	Front Face	349000	108	54	Ant 2	21.00	23.86	0.52	-0.13	0.910	0.47
	5GNR-n66	DFT-S QPSK40M	Rear Face	346000	108	54	Ant 2	21.00	23.45	0.57	-0.08	0.780	0.44
	5GNR-n66	DFT-S QPSK40M	Rear Face	349000	108	54	Ant 2	21.00	23.86	0.52	0.19	0.879	0.46
	5GNR-n66	DFT-S QPSK40M	Front Face	349000	108	54	Ant 2	21.00	23.86	0.52	0.03	0.900	0.47

Note :

- 1.The “< 0.001” means there is no SAR value or the SAR is too low to be measured.
- 2.The Standalone of 5GNR-n66 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of 5GNR-n66 is 21dBm in NSA mode.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n71	DFT-S QPSK20M	Front Face	134600	1	1	Ant 1	24.00	23.93	1.02	0.03	0.841	0.86
	5GNR-n71	DFT-S QPSK20M	Rear Face	134600	1	1	Ant 1	24.00	23.93	1.02	0.11	0.664	0.68
	5GNR-n71	DFT-S QPSK20M	Left Side	134600	1	1	Ant 1	24.00	23.93	1.02	-0.05	0.243	0.25
	5GNR-n71	DFT-S QPSK20M	Right Side	134600	1	1	Ant 1	24.00	23.93	1.02	0.12	0.178	0.18
	5GNR-n71	DFT-S QPSK20M	Top Side	134600	1	1	Ant 1	24.00	23.93	1.02	0.03	0.416	0.42
	5GNR-n71	DFT-S QPSK20M	Bottom Side	134600	1	1	Ant 1	24.00	23.93	1.02	0	<0.001	0.00
	5GNR-n71	DFT-S QPSK20M	Front Face	134600	50	25	Ant 1	24.00	23.67	1.08	0.13	0.649	0.70
	5GNR-n71	DFT-S QPSK20M	Rear Face	134600	50	25	Ant 1	24.00	23.67	1.08	-0.05	0.576	0.62
	5GNR-n71	DFT-S QPSK20M	Left Side	134600	50	25	Ant 1	24.00	23.67	1.08	0.09	0.211	0.23
	5GNR-n71	DFT-S QPSK20M	Right Side	134600	50	25	Ant 1	24.00	23.67	1.08	-0.04	0.162	0.17
	5GNR-n71	DFT-S QPSK20M	Top Side	134600	50	25	Ant 1	24.00	23.67	1.08	-0.12	0.447	0.48
	5GNR-n71	DFT-S QPSK20M	Bottom Side	134600	50	25	Ant 1	24.00	23.67	1.08	0	<0.001	0.00
	5GNR-n71	DFT-S QPSK20M	Front Face	134600	100	0	Ant 1	23.00	22.59	1.10	0.03	0.628	0.69
	5GNR-n71	DFT-S QPSK20M	Front Face	136100	1	1	Ant 1	24.00	23.40	1.15	-0.11	0.587	0.68
	5GNR-n71	DFT-S QPSK20M	Front Face	137600	1	1	Ant 1	24.00	23.12	1.22	0.03	0.545	0.66
	5GNR-n71	DFT-S QPSK20M	Front Face	134600	1	1	Ant 1	24.00	23.93	1.02	0.03	0.825	0.84
<b>For EN-DC</b>													
27	5GNR-n71	DFT-S QPSK20M	Front Face	134600	1	1	Ant 1	21.00	23.93	0.51	0.03	0.841	<b>0.43</b>
	5GNR-n71	DFT-S QPSK20M	Rear Face	134600	1	1	Ant 1	21.00	23.93	0.51	0.11	0.664	0.34
	5GNR-n71	DFT-S QPSK20M	Left Side	134600	1	1	Ant 1	21.00	23.93	0.51	-0.05	0.243	0.12
	5GNR-n71	DFT-S QPSK20M	Right Side	134600	1	1	Ant 1	21.00	23.93	0.51	0.12	0.178	0.09
	5GNR-n71	DFT-S QPSK20M	Top Side	134600	1	1	Ant 1	21.00	23.93	0.51	0.03	0.416	0.21
	5GNR-n71	DFT-S QPSK20M	Bottom Side	134600	1	1	Ant 1	21.00	23.93	0.51	0	<0.001	0.00
	5GNR-n71	DFT-S QPSK20M	Front Face	134600	50	25	Ant 1	21.00	23.67	0.54	0.13	0.649	0.35
	5GNR-n71	DFT-S QPSK20M	Rear Face	134600	50	25	Ant 1	21.00	23.67	0.54	-0.05	0.576	0.31
	5GNR-n71	DFT-S QPSK20M	Left Side	134600	50	25	Ant 1	21.00	23.67	0.54	0.09	0.211	0.11
	5GNR-n71	DFT-S QPSK20M	Right Side	134600	50	25	Ant 1	21.00	23.67	0.54	-0.04	0.162	0.09
	5GNR-n71	DFT-S QPSK20M	Top Side	134600	50	25	Ant 1	21.00	23.67	0.54	-0.12	0.447	0.24
	5GNR-n71	DFT-S QPSK20M	Bottom Side	134600	50	25	Ant 1	21.00	23.67	0.54	0	<0.001	0.00
	5GNR-n71	DFT-S QPSK20M	Front Face	134600	100	0	Ant 1	21.00	22.59	0.69	0.03	0.628	0.43
	5GNR-n71	DFT-S QPSK20M	Front Face	136100	1	1	Ant 1	21.00	23.40	0.58	-0.11	0.587	0.34
	5GNR-n71	DFT-S QPSK20M	Front Face	137600	1	1	Ant 1	21.00	23.12	0.61	0.03	0.545	0.33
	5GNR-n71	DFT-S QPSK20M	Front Face	134600	1	1	Ant 1	21.00	23.93	0.51	0.03	0.825	0.42

**Note :**

1. The “< 0.001” means there is no SAR value or the SAR is too low to be measured.
2. The Standalone of 5GNR-n71 SAR had been tested and the results had been scaled to the EN-DC mode power level, the tune up of 5GNR-n71 is 21dBm in NSA mode.



# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	External Antenna	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Front Face	1	Ant 4		100.00	1.00	10.00	9.98	1.00	0.03	0.084	0.08
	WLAN2.4G	802.11b	Rear Face	1	Ant 4		100.00	1.00	10.00	9.98	1.00	-0.11	0.058	0.06
	WLAN2.4G	802.11b	Left Side	1	Ant 4		100.00	1.00	10.00	9.98	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	1	Ant 4		100.00	1.00	10.00	9.98	1.00	0.05	0.135	0.14
	WLAN2.4G	802.11b	Top Side	1	Ant 4		100.00	1.00	10.00	9.98	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side	1	Ant 4		100.00	1.00	10.00	9.98	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Front Face	6	Ant 3		100.00	1.00	10.00	9.97	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Rear Face	6	Ant 3		100.00	1.00	10.00	9.97	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Left Side	6	Ant 3		100.00	1.00	10.00	9.97	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	6	Ant 3		100.00	1.00	10.00	9.97	1.01	0.08	0.059	0.06
	WLAN2.4G	802.11b	Top Side	6	Ant 3		100.00	1.00	10.00	9.97	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side	6	Ant 3		100.00	1.00	10.00	9.97	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	6	Ant 4		100.00	1.00	10.00	9.87	1.03	0.11	0.148	0.15
30	WLAN2.4G	802.11b	Right Side	11	Ant 4		100.00	1.00	10.00	9.93	1.02	-0.09	0.162	0.17
	WLAN2.4G	802.11b	Right Side	11	Ant 4	v	100.00	1.00	10.00	9.93	1.02	0.02	0.153	0.16

Note:

- 1.The "< 0.001" means there is no SAR value or the SAR is too low to be measured.
- 2.To achieve the 13 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 10 dBm.

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	External Antenna	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
31	WLAN5.2G	802.11ac VHT80	Front Face	42	Ant 4		99.80	1.00	10.00	9.88	1.03	0.13	0.127	0.13
	WLAN5.2G	802.11ac VHT80	Rear Face	42	Ant 4		99.80	1.00	10.00	9.88	1.03	0	<0.001	0.00
	WLAN5.2G	802.11ac VHT80	Left Side	42	Ant 4		99.80	1.00	10.00	9.88	1.03	0	<0.001	0.00
	WLAN5.2G	802.11ac VHT80	Right Side	42	Ant 4		99.80	1.00	10.00	9.88	1.03	0.03	0.068	0.07
	WLAN5.2G	802.11ac VHT80	Top Side	42	Ant 4		99.80	1.00	10.00	9.88	1.03	0	<0.001	0.00
	WLAN5.2G	802.11ac VHT80	Bottom Side	42	Ant 4		99.80	1.00	10.00	9.88	1.03	0	<0.001	0.00
	WLAN5.2G	802.11ac VHT80	Front Face	42	Ant 3		99.80	1.00	10.00	9.58	1.10	0.11	0.075	0.08
	WLAN5.2G	802.11ac VHT80	Rear Face	42	Ant 3		99.80	1.00	10.00	9.58	1.10	-0.05	0.031	0.03
	WLAN5.2G	802.11ac VHT80	Left Side	42	Ant 3		99.80	1.00	10.00	9.58	1.10	0	<0.001	0.00
	WLAN5.2G	802.11ac VHT80	Right Side	42	Ant 3		99.80	1.00	10.00	9.58	1.10	0	<0.001	0.00
	WLAN5.2G	802.11ac VHT80	Top Side	42	Ant 3		99.80	1.00	10.00	9.58	1.10	0	<0.001	0.00
	WLAN5.2G	802.11ac VHT80	Bottom Side	42	Ant 3		99.80	1.00	10.00	9.58	1.10	0	<0.001	0.00
	WLAN5.2G	802.11ac VHT80	Front Face	42	Ant 4	v	99.80	1.00	10.00	9.88	1.03	0.06	0.115	0.12

Note:

- 1.The "< 0.001" means there is no SAR value or the SAR is too low to be measured.
- 2.To achieve the 13 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 10 dBm

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	External Antenna	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
32	WLAN5.8G	802.11ac VHT80	Front Face	155	Ant 4		99.80	1.00	10.00	9.83	1.04	-0.02	0.216	<b>0.22</b>
	WLAN5.8G	802.11ac VHT80	Rear Face	155	Ant 4		99.80	1.00	10.00	9.83	1.04	0.12	0.063	0.07
	WLAN5.8G	802.11ac VHT80	Left Side	155	Ant 4		99.80	1.00	10.00	9.83	1.04	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side	155	Ant 4		99.80	1.00	10.00	9.83	1.04	0.04	0.131	0.14
	WLAN5.8G	802.11ac VHT80	Top Side	155	Ant 4		99.80	1.00	10.00	9.83	1.04	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	155	Ant 4		99.80	1.00	10.00	9.83	1.04	0	<0.001	0.00
-	WLAN5.8G	802.11ac VHT80	Front Face	155	Ant 3		99.80	1.00	10.00	9.98	1.00	0.01	0.083	0.08
	WLAN5.8G	802.11ac VHT80	Rear Face	155	Ant 3		99.80	1.00	10.00	9.98	1.00	0.07	0.064	0.06
	WLAN5.8G	802.11ac VHT80	Left Side	155	Ant 3		99.80	1.00	10.00	9.98	1.00	-0.05	0.084	0.08
	WLAN5.8G	802.11ac VHT80	Right Side	155	Ant 3		99.80	1.00	10.00	9.98	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	155	Ant 3		99.80	1.00	10.00	9.98	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	155	Ant 3		99.80	1.00	10.00	9.98	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Front Face	155	Ant 4	v	99.80	1.00	10.00	9.98	1.00	0.03	0.196	0.20

**Note:**

- 1.The "< 0.001" means there is no SAR value or the SAR is too low to be measured.
- 2.To achieve the 13 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 10 dBm

### 4.7.3 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium maybe used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
WCDMA II	RMC12.2K	Rear Face	9400	1.03	1.02	1.01	N/A	N/A	N/A	N/A
LTE 2	QPSK20M	Front Face	18900	0.846	0.831	1.02	N/A	N/A	N/A	N/A
LTE 7	QPSK20M	Rear Face	21100	1.17	1.11	1.05	N/A	N/A	N/A	N/A
LTE 25	QPSK20M	Rear Face	26590	1.09	1.07	1.02	N/A	N/A	N/A	N/A
LTE 66	QPSK20M	Front Face	132572	0.821	0.805	1.02	N/A	N/A	N/A	N/A
LTE 66	QPSK20M	Front Face	132572	0.883	0.873	1.01	N/A	N/A	N/A	N/A
5G NR-n25	DFT-S QPSK20M	Front Face	376500	0.92	0.913	1.01	N/A	N/A	N/A	N/A
5G NR-n66	DFT-S QPSK40M	Front Face	352000	1.03	1.01	1.02	N/A	N/A	N/A	N/A
5G NR-n66	DFT-S QPSK40M	Front Face	349000	0.910	0.900	1.01	N/A	N/A	N/A	N/A
5G NR-n71	DFT-S QPSK20M	Front Face	134600	0.841	0.825	1.02	N/A	N/A	N/A	N/A

## SAR Test Report

### 4.7.4 Simultaneous Multi-band Transmission Evaluation

#### <Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
1	WWAN + WLAN 2.4G_Ant 3	Yes
2	WWAN + WLAN 5G_Ant 3	Yes
3	WWAN + WLAN 2.4G_Ant 4	Yes
4	WWAN + WLAN 5G_Ant 4	Yes
5	WLAN 2.4G_Ant 3 + WLAN 5G_Ant 4	Yes
6	WLAN 2.4G_Ant 4 + WLAN 5G_Ant 3	Yes
7	EN-DC (LTE+FR1)	Yes
8	WWAN + WLAN 2.4G_Ant 3 + WLAN 5G_Ant 4	Yes
9	WWAN + WLAN 2.4G_Ant 4 + WLAN 5G_Ant 3	Yes
10	WWAN+ WLAN 2.4G_Ant 4+3 (MIMO)	Yes
11	WWAN+ WLAN 5G_Ant 4+3 (MIMO)	Yes
12	EN-DC (LTE+FR1) +WLAN 2.4G_Ant 3	Yes
13	EN-DC (LTE+FR1) +WLAN 2.4G_Ant 4	Yes
14	EN-DC (LTE+FR1) +WLAN 5G_Ant 3	Yes
15	EN-DC (LTE+FR1) +WLAN 5G_Ant 4	Yes
16	EN-DC (LTE+FR1) + WLAN 2.4G_Ant 3 + WLAN 5G_Ant 4	Yes
17	EN-DC (LTE+FR1) + WLAN 2.4G_Ant 4 + WLAN 5G_Ant 3	Yes
18	EN-DC (LTE+FR1) + WLAN 2.4G_Ant 4+3 (MIMO)	Yes
19	EN-DC (LTE+FR1) + WLAN 5G_Ant 4+3 (MIMO)	Yes

#### Note :

- Configuration 1 is covered by Configuration 8.
- Configuration 2 is covered by Configuration 9.
- Configuration 3 is covered by Configuration 9.
- Configuration 4 is covered by Configuration 8.
- Configuration 5 is covered by Configuration 8.
- Configuration 6 is covered by Configuration 9.
- Configuration 7 is covered by Configuration 12.
- Configuration 12 is covered by Configuration 16.
- Configuration 13 is covered by Configuration 16.
- Configuration 14 is covered by Configuration 17.
- Configuration 15 is covered by Configuration 17.



## SAR Test Report

---

### <SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR<sub>1g</sub> of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit(SAR<sub>1g</sub> 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR<sub>1g</sub> is greater than the SAR limit (SAR<sub>1g</sub> 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

Refer to Appendix G for SAR Summation Analysis.

**Test Engineer** : Gary Chao, and Chienlun Huang

## 5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D750V3	1013	Aug. 13, 2020	1 Year
System Validation Dipole	SPEAG	D835V2	4d121	Aug. 13, 2020	1 Year
System Validation Dipole	SPEAG	D1750V2	1055	Aug. 14, 2020	1 Year
System Validation Dipole	SPEAG	D1900V2	5d018	Jun. 18, 2020	1 Year
System Validation Dipole	SPEAG	D1900V2	5d036	Jan. 21, 2020	1 Year
System Validation Dipole	SPEAG	D2300V2	1004	Jan. 21, 2020	1 Year
System Validation Dipole	SPEAG	D2450V2	737	Aug. 13, 2020	1 Year
System Validation Dipole	SPEAG	D2600V2	1020	Aug. 13, 2020	1 Year
System Validation Dipole	SPEAG	D3500V2	1007	Feb. 25, 2020	1 Year
System Validation Dipole	SPEAG	D3700V2	1074	May 04, 2020	1 Year
System Validation Dipole	SPEAG	D5GHzV2	1019	Mar. 13, 2020	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7537	May 29, 2020	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7555	Sep. 28, 2020	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1277	Jan. 24, 2020	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1431	Mar. 18, 2020	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1589	Sep. 15, 2020	1 Year
Spectrum Analyzer	R&S	FSL6	102006	Mar. 26, 2020	1 Year
Universal Wireless Test Set	Anritsu	MT8870A/MU8 87000A	6201699387	Sep. 28, 2020	1 Year
Thermometer	YFE	YF-160A	150601220	May 25, 2020	1 Year
Dielectric Assessment Kit	SPEAG	DAKS-3.5	1092	May 26, 2020	1 Year
Powersource1	SPEAG	SE_UMS_160 BA	4010	Aug. 13, 2020	1 Year

## **6. Measurement Uncertainty**

According to KDB 865664 D01, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is  $\geq 1.5$  W/kg for 1-g SAR, and  $\geq 3.75$  W/kg for 10-g SAR. The procedures described in IEEE Std 1528-2013 should be applied. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . When the highest measured SAR within a frequency band is  $< 1.5$  W/kg for 1-g and  $< 3.75$  W/kg for 10-g, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. Hence, the measurement uncertainty analysis is not required in this SAR report because the test result met the condition.

### 7. Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Taiwan Huaya Lab:**

Add: No. 19, Huaya 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan

Tel: +886-(0)3-318-3232

Fax: +886-(0)3-211-5834

**Taiwan Linkou Lab:**

Add: No. 47-2, Baodoucuokeng, Linkou Dist., New Taipei City 244, Taiwan

Tel: +886-(0)2-2605-2180

Fax: +886-(0)2-2605-2943

**Taiwan Hsinchu Lab1:**

Add: E-2, No. 1, Lixing 1st Rd., East Dist., Hsinchu City 300, Taiwan

Tel: +886-(0)3-666-8565

Fax: +886-(0)3-666-8323

**Taiwan Hsinchu Lab2:**

Add: No. 49, Ln. 206, Wende Rd., Qionglin Township, Hsinchu County 307, Taiwan

Tel: +886-(0)3-512-0595

Fax: +886-(0)3-512-0568

**Taiwan Xindian Lab:**

Add: B2F., No. 215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

Tel: +886-(0)2-8914-5882

Fax: +886-(0)2-8914-5840

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** <https://ee.bureauveritas.com.tw/BVInternet/Default>

The road map of all our labs can be found in our web site also.

---END---

## Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

## S01 System Check\_H1900\_210121

**DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d018**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0121 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.452$  S/m;  $\epsilon_r = 39.117$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.02, 8.02, 8.02) @ 1900 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.06 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.91 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.59 W/kg

**SAR(1 g) = 1.93 W/kg; SAR(10 g) = 1.02 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.06 W/kg

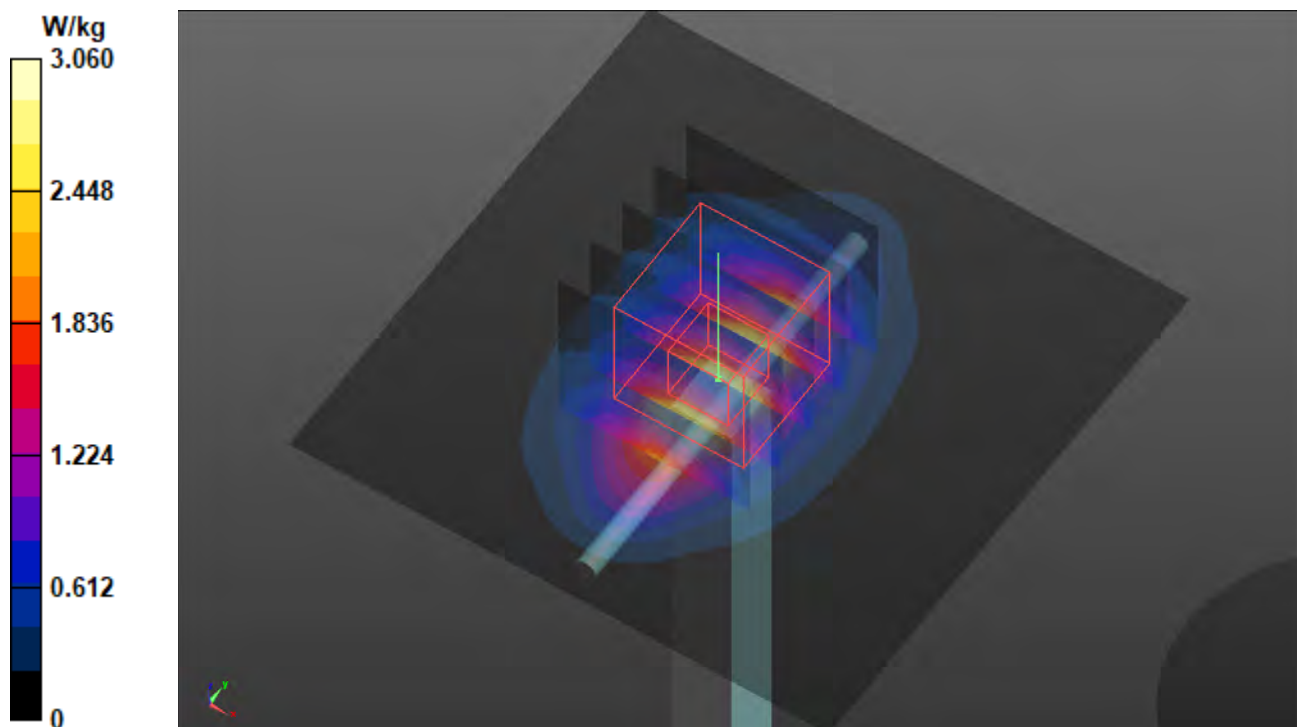

## S02 System Check\_H835\_210104

**DUT: Dipole 835 MHz; Type: D835V2; SN: 4d121**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1\_0104 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.928$  S/m;  $\epsilon_r = 42.022$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(9.69, 9.69, 9.69) @ 835 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.660 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 27.82 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.755 W/kg

**SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.317 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.666 W/kg

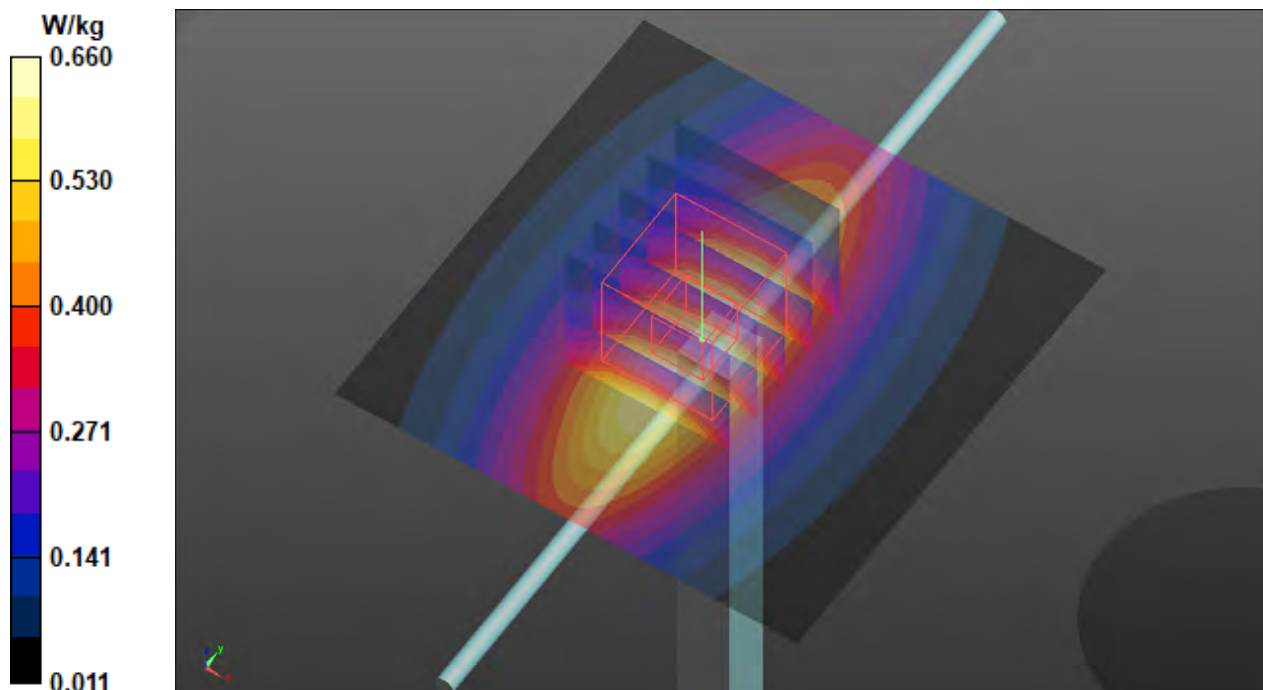

### S03 System Check\_H1900\_210104

**DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036**


Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: H16T20N1\_0104 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.46$  S/m;  $\epsilon_r = 39.237$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(8.42, 8.42, 8.42) @ 1900 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.25 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 47.56 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 3.95 W/kg  
**SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.06 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 3.30 W/kg

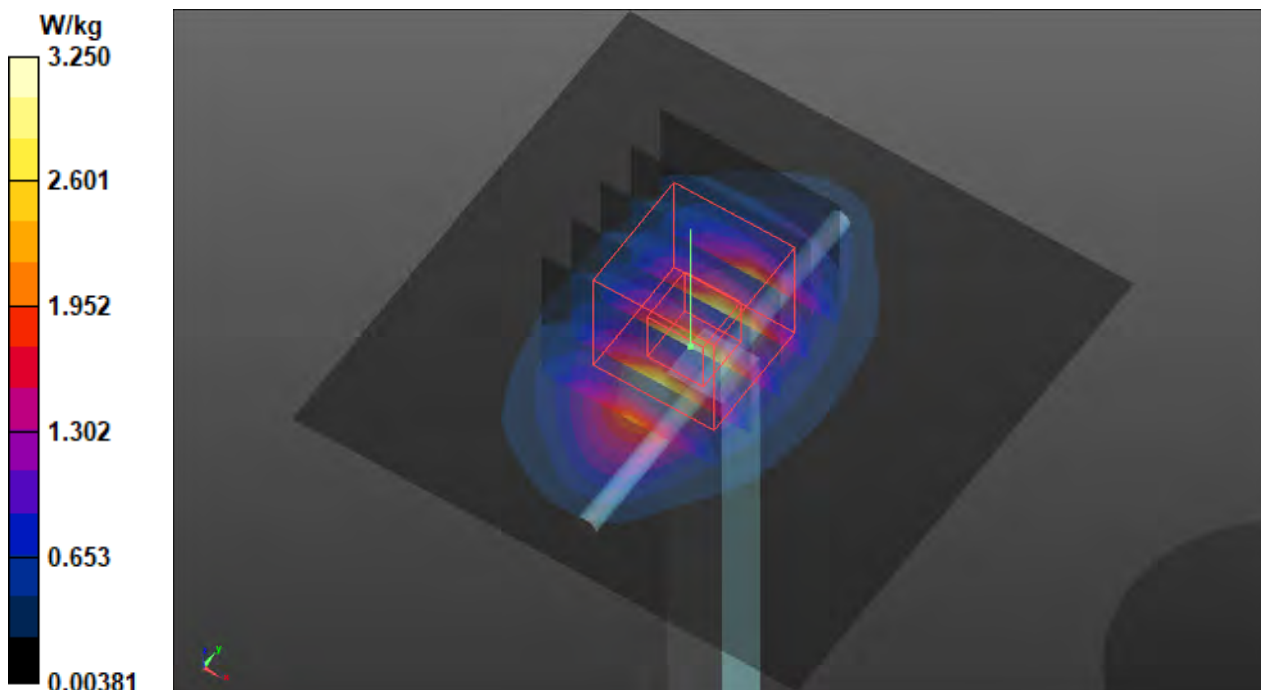



## S04 System Check\_H1900\_210108

**DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0108 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.457$  S/m;  $\epsilon_r = 39.727$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.02, 8.02, 8.02) @ 1900 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.24 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.53 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.94 W/kg

**SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.06 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.29 W/kg

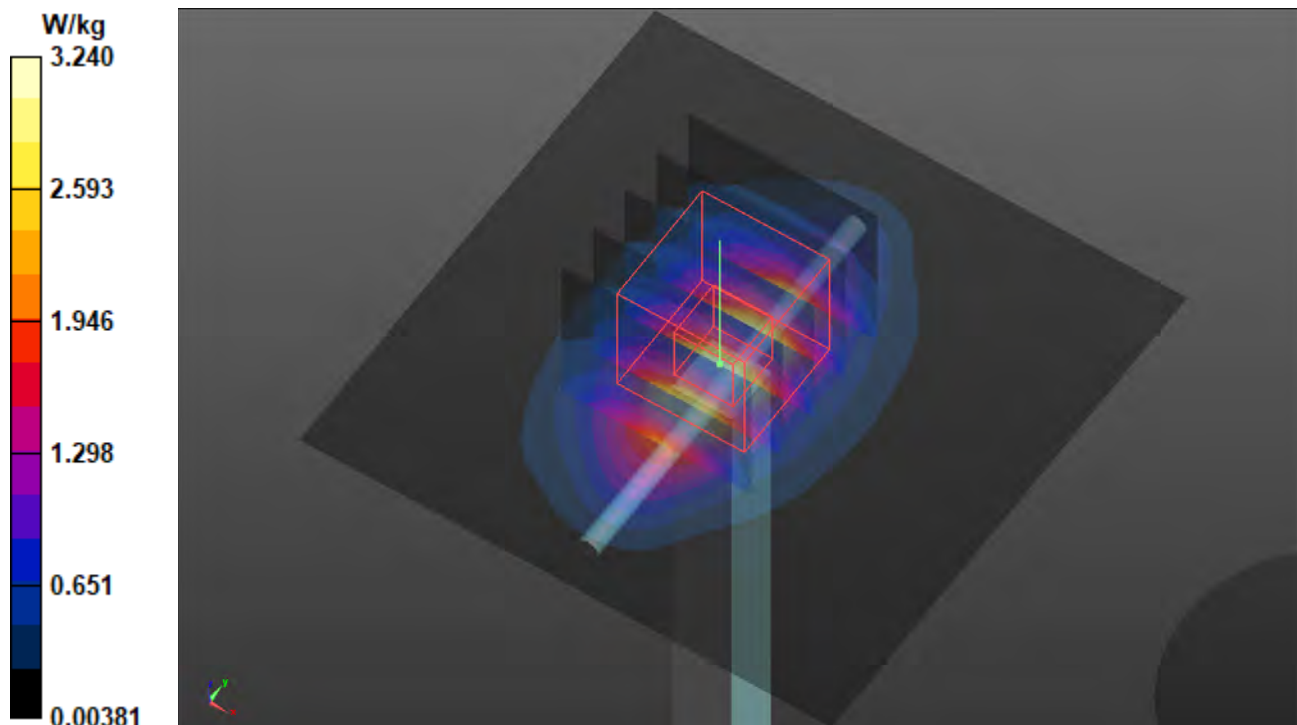

## S05 System Check\_H1750\_210105

**DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0105 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.329$  S/m;  $\epsilon_r = 39.813$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(8.6, 8.6, 8.6) @ 1750 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.67 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 45.14 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.24 W/kg

**SAR(1 g) = 1.79 W/kg; SAR(10 g) = 0.941 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.72 W/kg

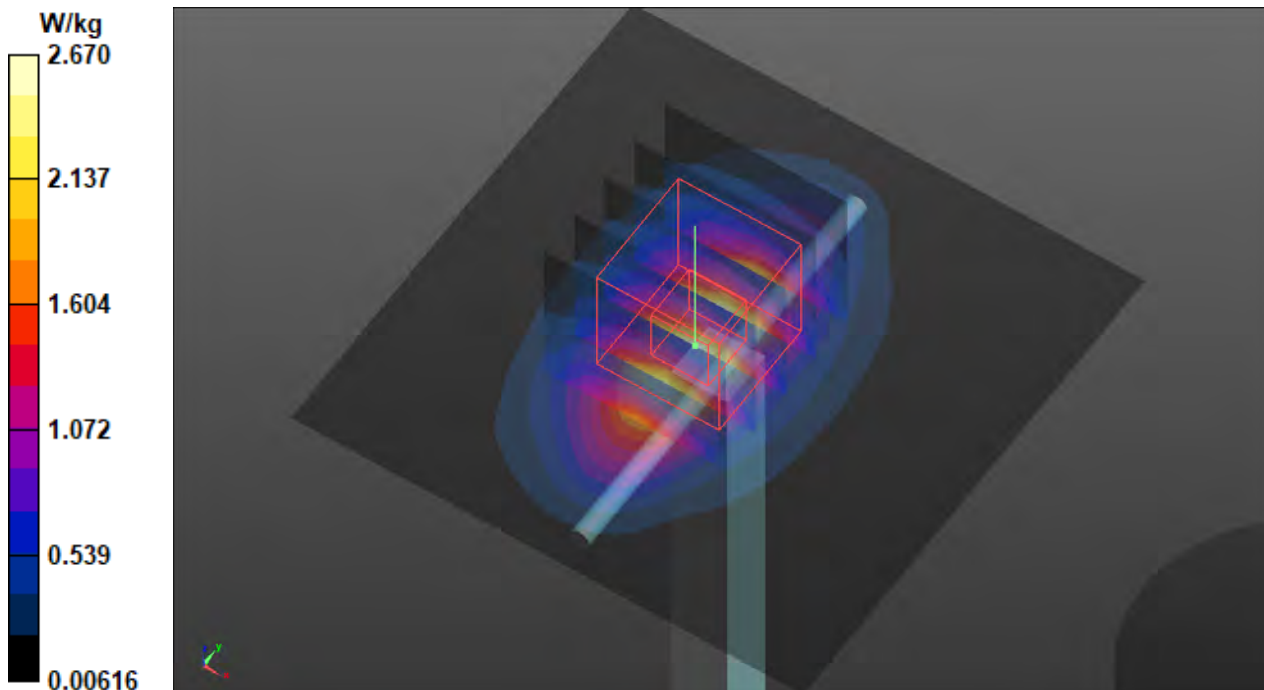

### S07 System Check\_H835\_210104

**DUT: Dipole 835 MHz; Type: D835V2; SN: 4d121**


Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium: H07T10N1\_0104 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.928$  S/m;  $\epsilon_r = 42.022$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(9.69, 9.69, 9.69) @ 835 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.660 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 27.82 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.755 W/kg  
**SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.317 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 0.666 W/kg

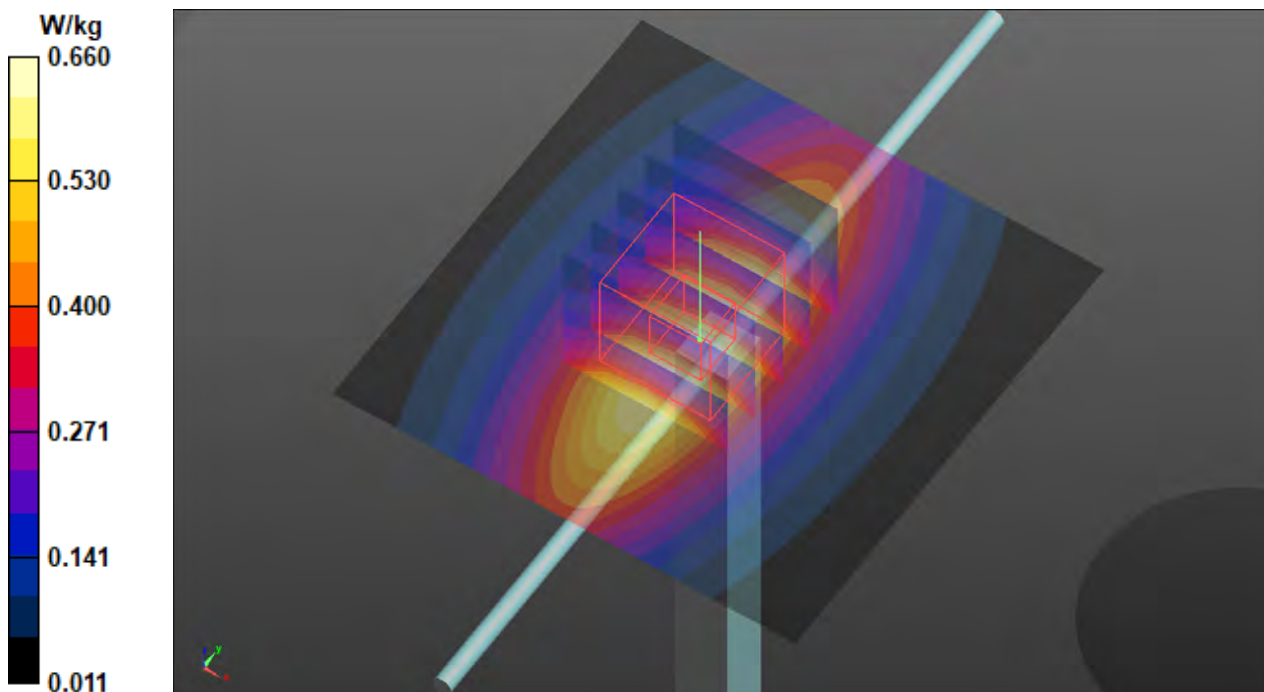

## S08 System Check\_H2600\_210105

**DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1\_0105 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.029$  S/m;  $\epsilon_r = 38.503$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(7.36, 7.36, 7.36) @ 2600 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 4.87 W/kg


**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.87 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 6.10 W/kg

**SAR(1 g) = 2.83 W/kg; SAR(10 g) = 1.28 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.93 W/kg

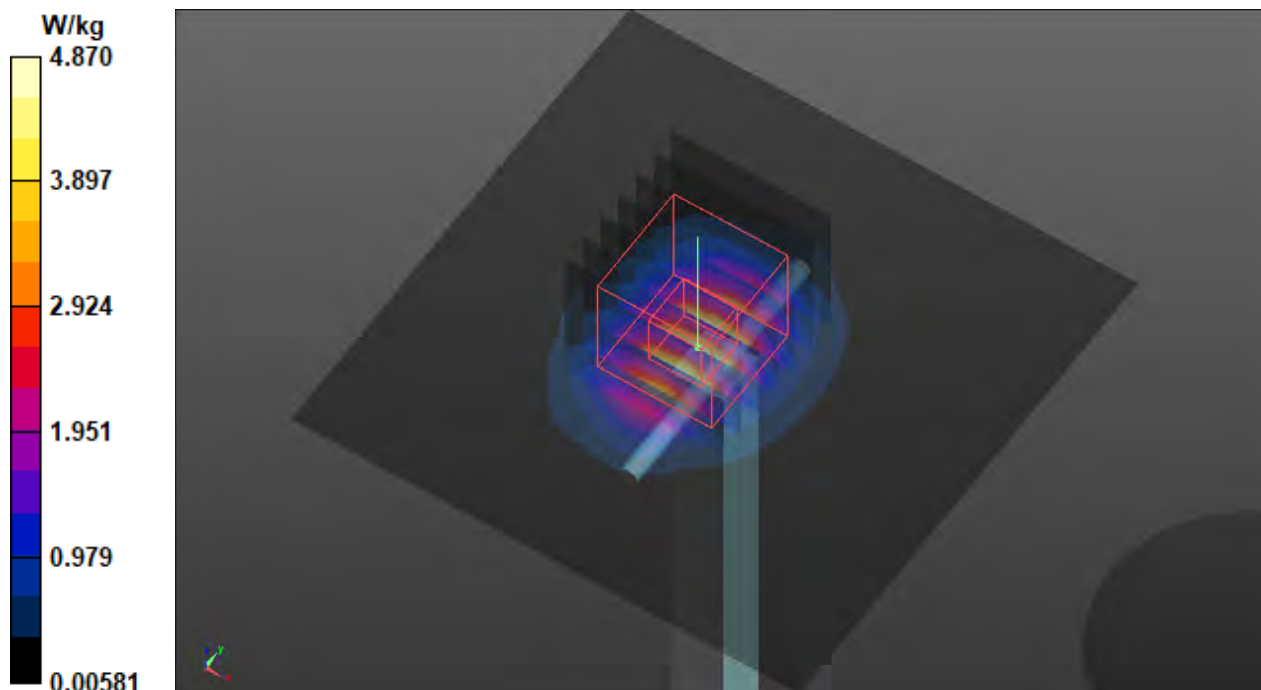

## S09 System Check\_H2600\_210108

**DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1\_0108 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.032$  S/m;  $\epsilon_r = 39.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.18, 7.18, 7.18) @ 2600 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.51 W/kg


**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.65 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 5.55 W/kg

**SAR(1 g) = 2.73 W/kg; SAR(10 g) = 1.29 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.55 W/kg

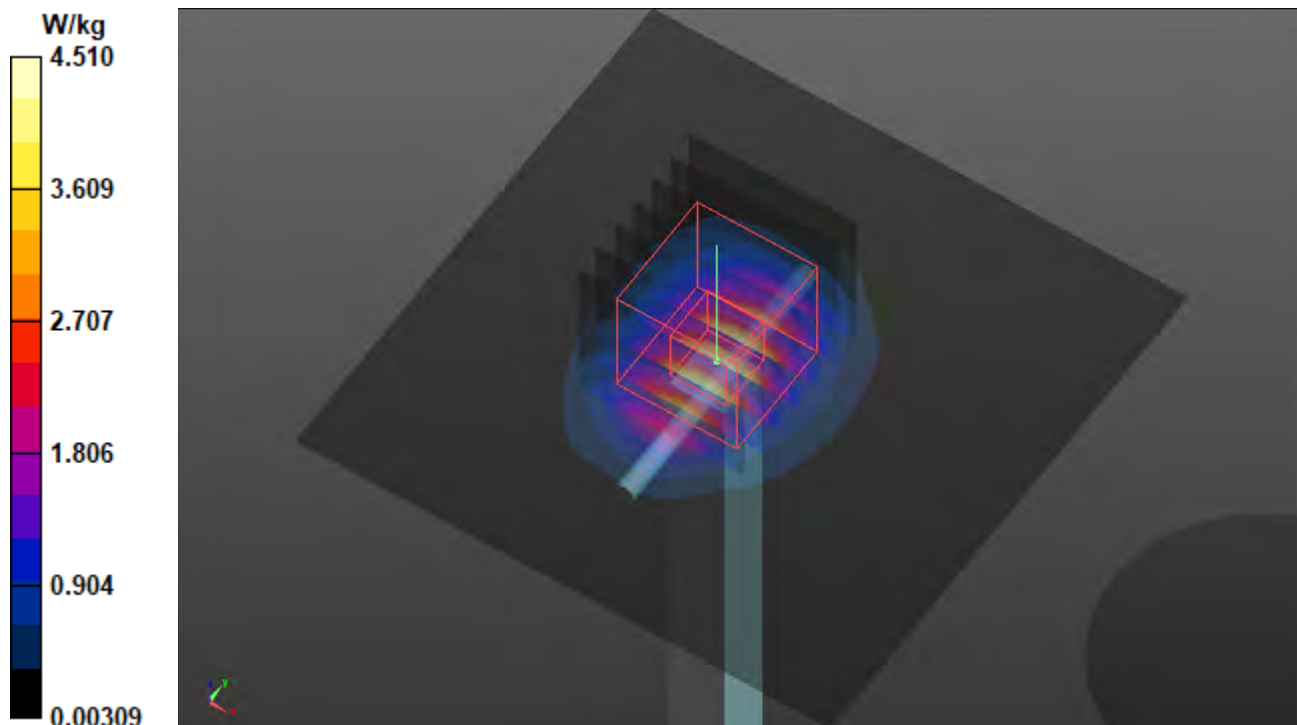

## S10 System Check\_H750\_210106

**DUT: Dipole 750 MHz; Type: D750V2; SN: 1013**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1\_0106 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.901$  S/m;  $\epsilon_r = 42.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(10, 10, 10) @ 750 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.587 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.56 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.671 W/kg

**SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.286 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.591 W/kg

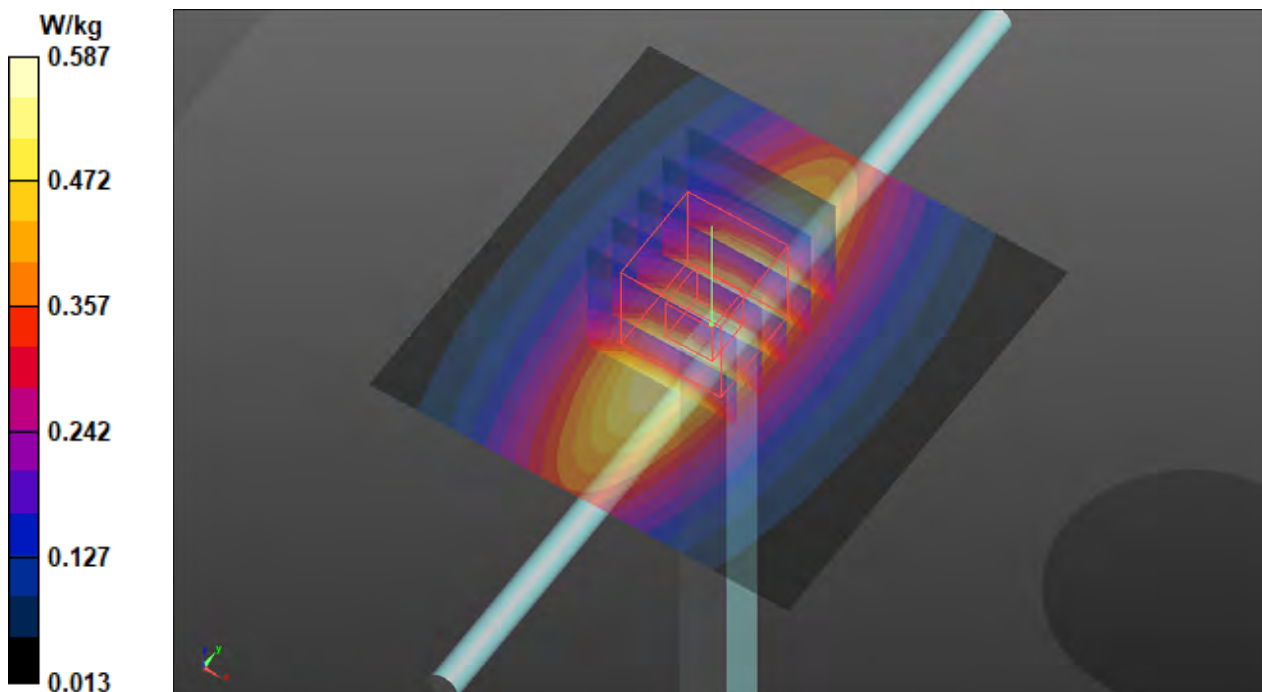

## S11 System Check\_H750\_210106

**DUT: Dipole 750 MHz; Type: D750V2; SN: 1013**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1\_0106 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.901$  S/m;  $\epsilon_r = 42.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(10, 10, 10) @ 750 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.587 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.56 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.671 W/kg

**SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.286 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.591 W/kg

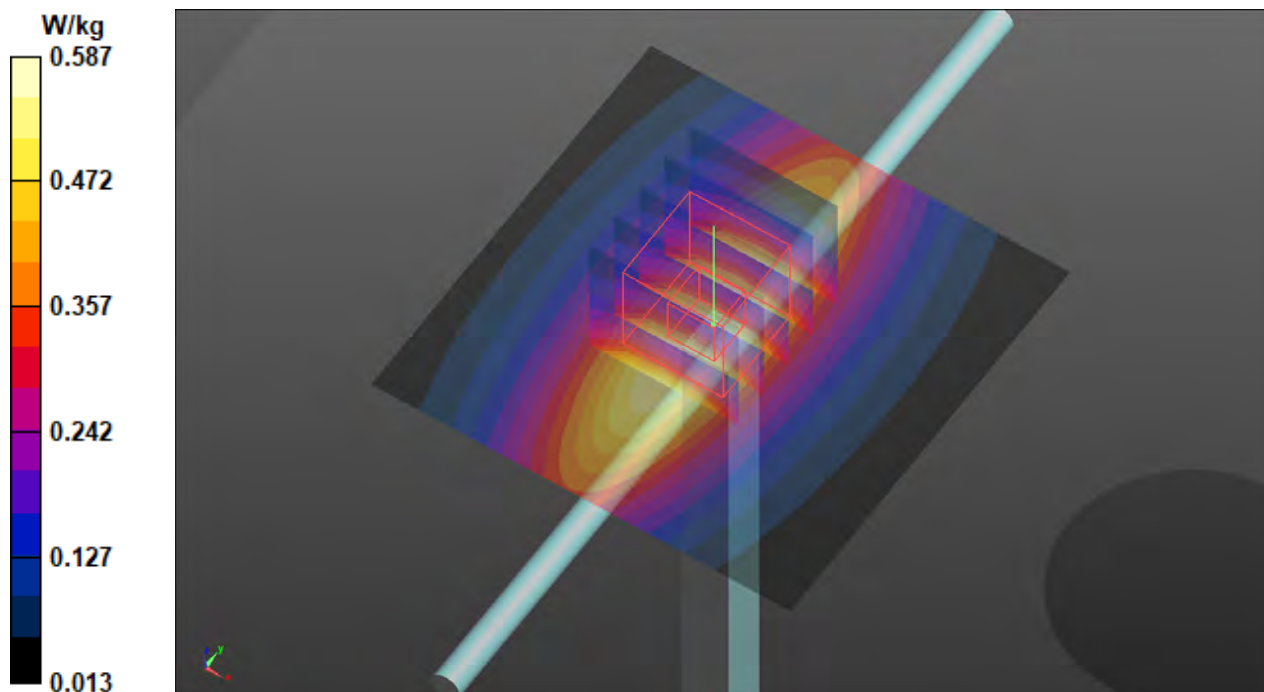

### S13 System Check\_H750\_210106

**DUT: Dipole 750 MHz; Type: D750V2; SN: 1013**


Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1  
Medium: H06T09N1\_0106 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.901$  S/m;  $\epsilon_r = 42.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(10, 10, 10) @ 750 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.587 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 26.56 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.671 W/kg  
**SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.286 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 0.591 W/kg

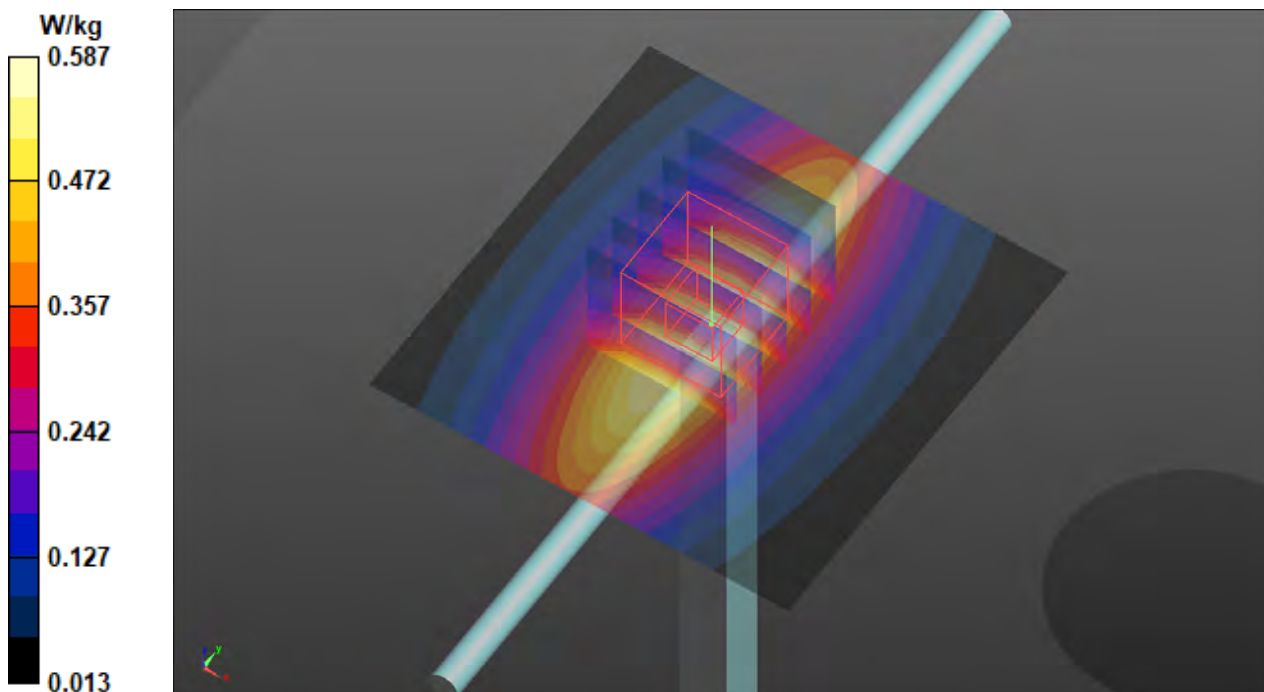



## S14 System Check\_H1900\_210104

**DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0104 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.46$  S/m;  $\epsilon_r = 39.237$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(8.42, 8.42, 8.42) @ 1900 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 3.25 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.56 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.95 W/kg

**SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.06 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.30 W/kg

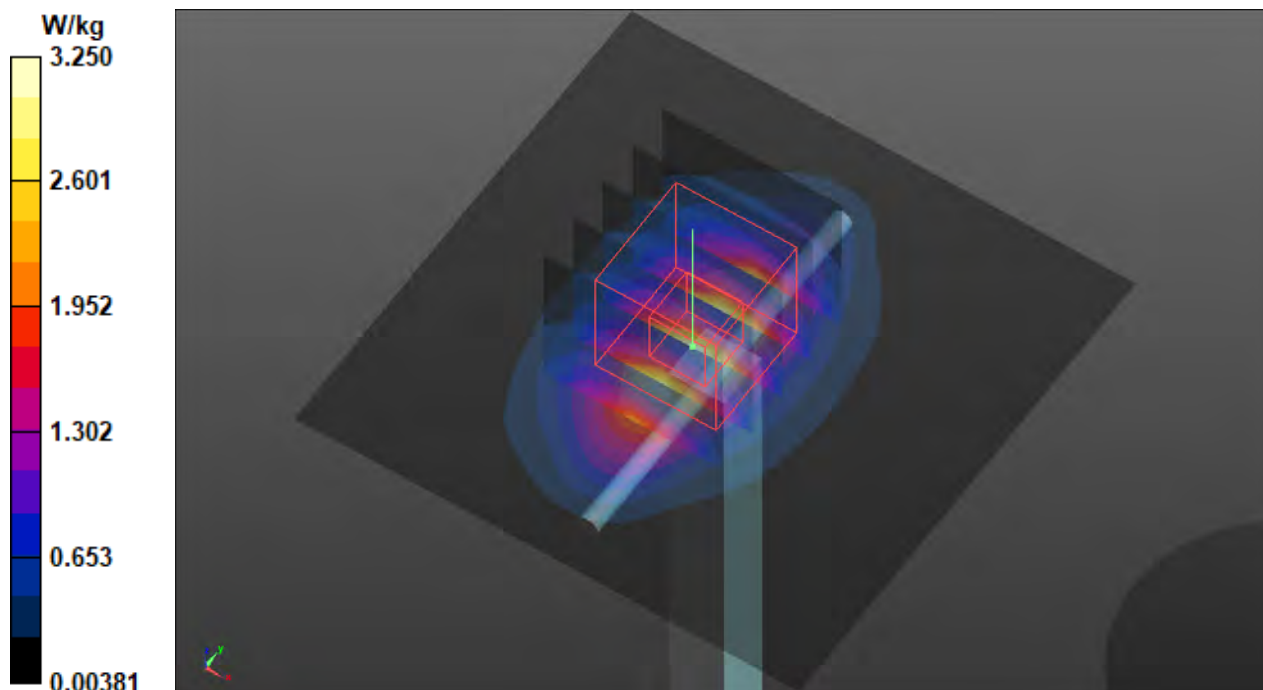

## S15 System Check\_H2300\_210107

**DUT: Dipole 2300 MHz; Type: D2300V2; SN: 1004**

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: H19T27N1\_0107 Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.706$  S/m;  $\epsilon_r = 38.923$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.72, 7.72, 7.72) @ 2300 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/1/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.71 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 41.36 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.30 W/kg

**SAR(1 g) = 2.28 W/kg; SAR(10 g) = 1.12 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.75 W/kg

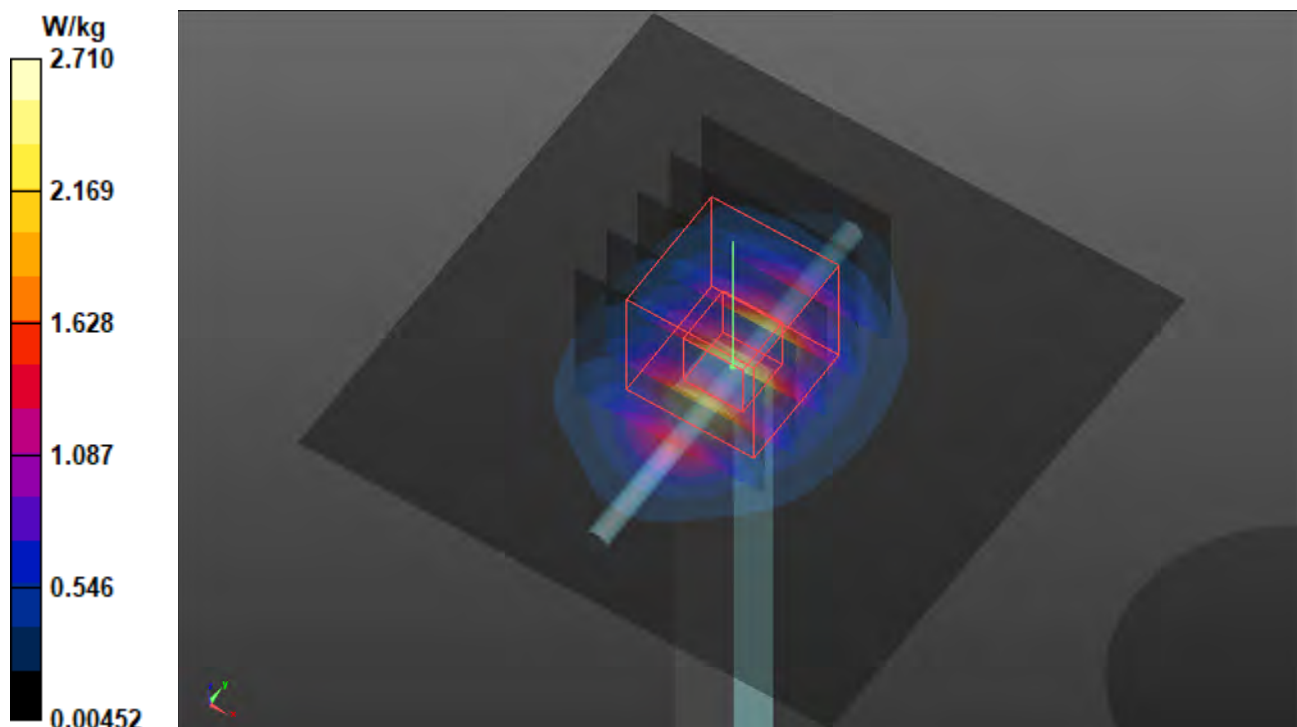

## S16 System Check\_H2600\_210107

**DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1\_0107 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.011$  S/m;  $\epsilon_r = 37.859$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.18, 7.18, 7.18) @ 2600 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/1/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.78 W/kg


**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.52 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 6.00 W/kg

**SAR(1 g) = 2.77 W/kg; SAR(10 g) = 1.25 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.83 W/kg

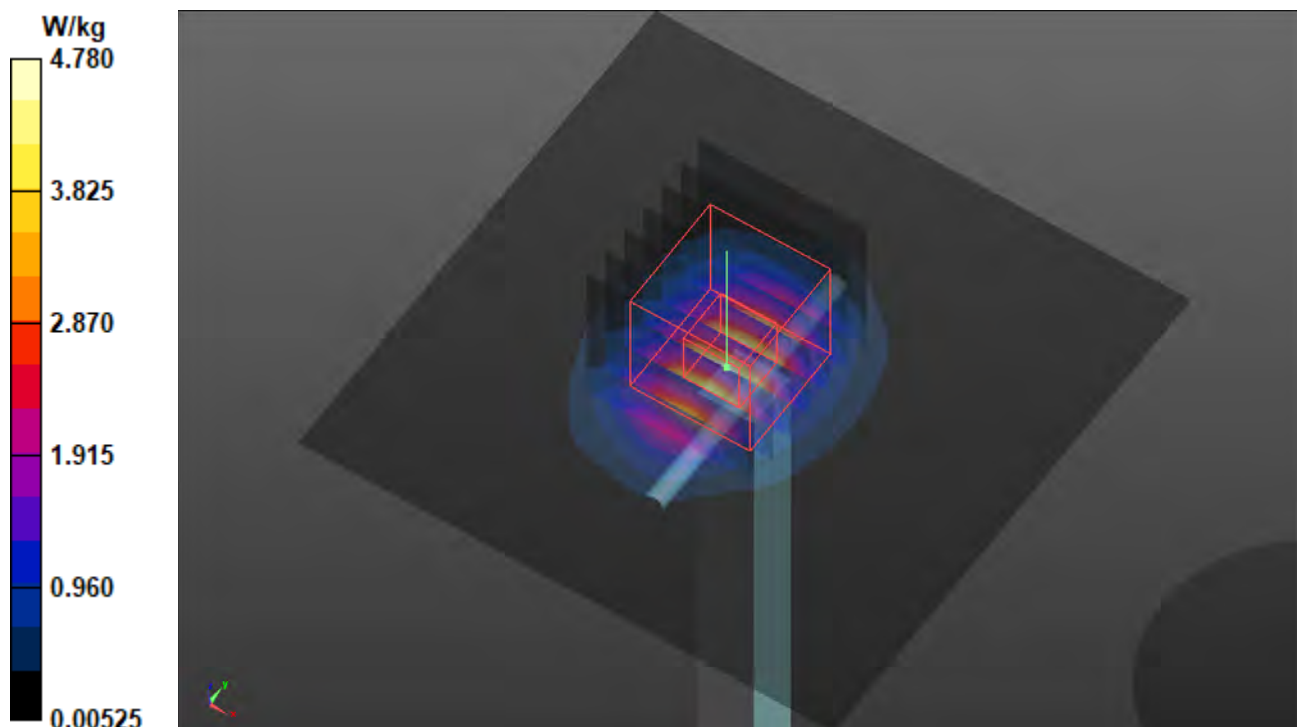

## S17 System Check\_H2600\_210107

**DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1\_0107 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.011$  S/m;  $\epsilon_r = 37.859$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.18, 7.18, 7.18) @ 2600 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/1/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 4.78 W/kg

**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 49.52 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 6.00 W/kg  
**SAR(1 g) = 2.77 W/kg; SAR(10 g) = 1.25 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 4.83 W/kg

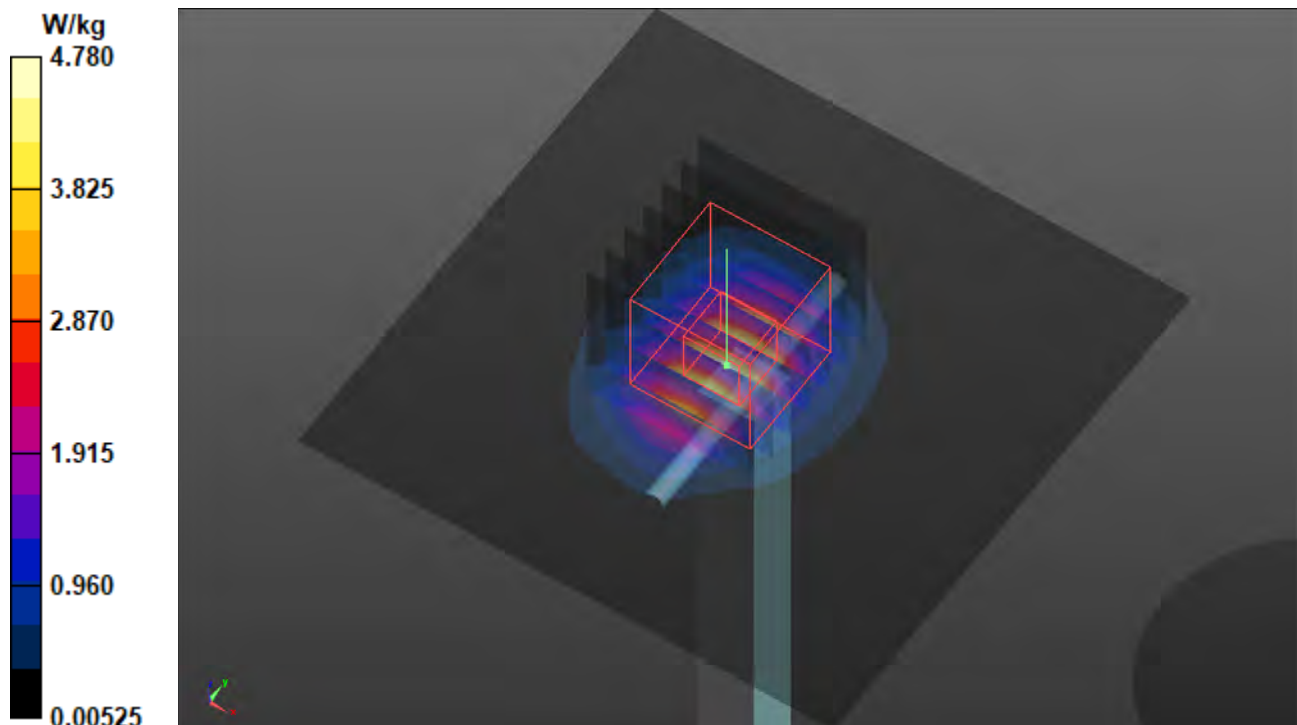

## S19 System Check\_H1750\_210107

**DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0107 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.332$  S/m;  $\epsilon_r = 39.524$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1750 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.65 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.85 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.20 W/kg

**SAR(1 g) = 1.76 W/kg; SAR(10 g) = 0.929 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.69 W/kg

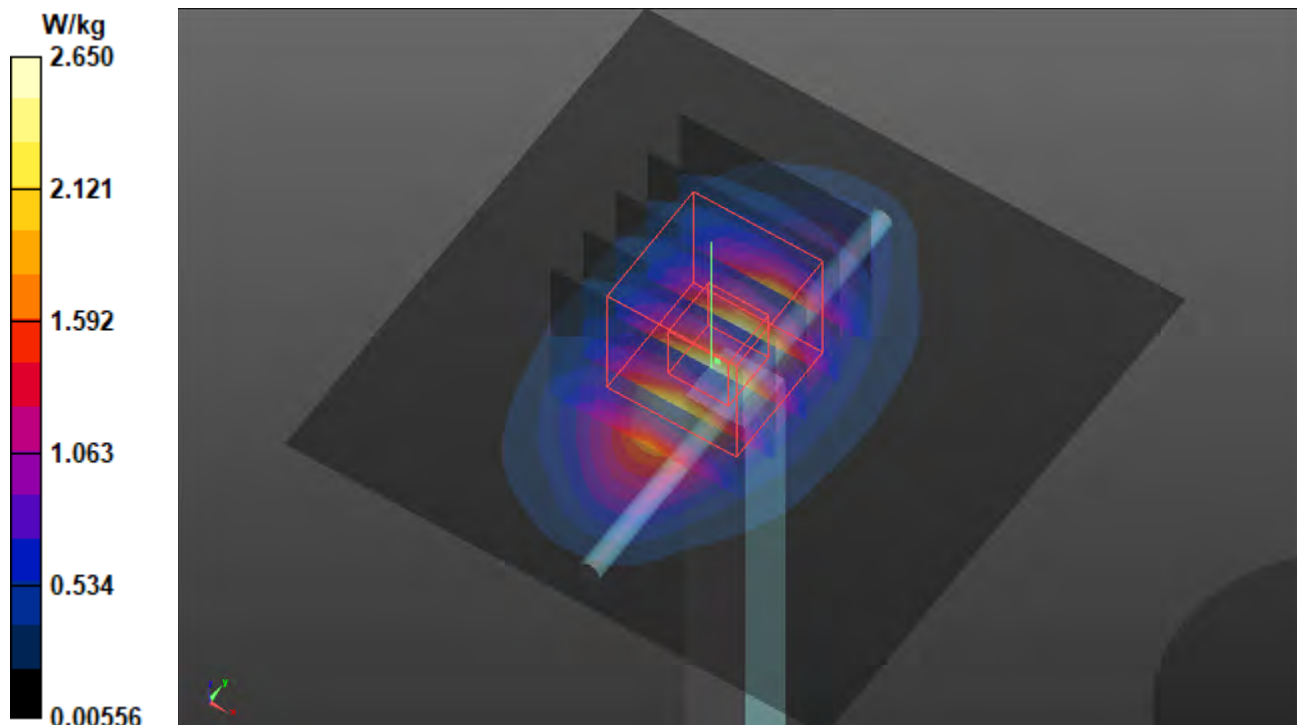

## S20 System Check\_H1750\_210108

**DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0108 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.319$  S/m;  $\epsilon_r = 40.236$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1750 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.65 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 45.77 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 3.06 W/kg  
**SAR(1 g) = 1.76 W/kg; SAR(10 g) = 0.939 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 2.59 W/kg

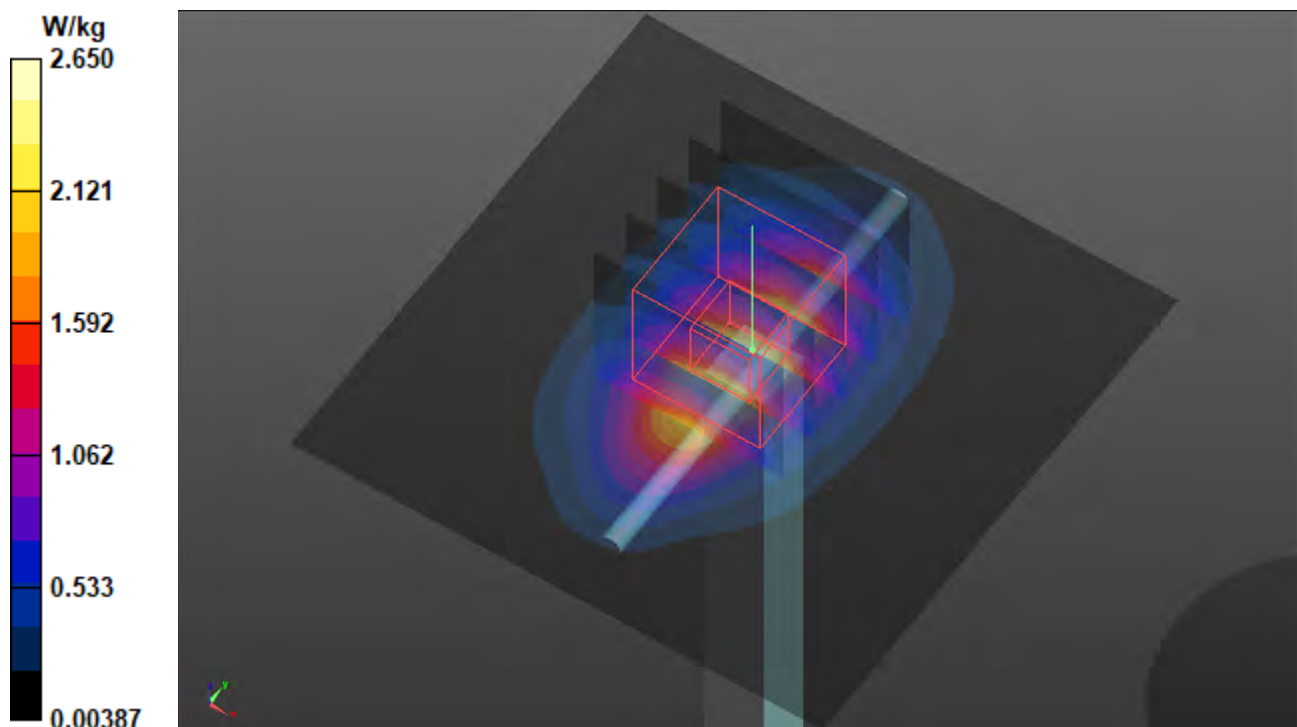

## S21 System Check\_H750\_210107

**DUT: Dipole 750 MHz; Type: D750V3; SN: 1013**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1\_0107 Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 42.446$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.66, 10.66, 10.66) @ 750 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/1/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.526 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 25.16 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.603 W/kg

**SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.262 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.533 W/kg

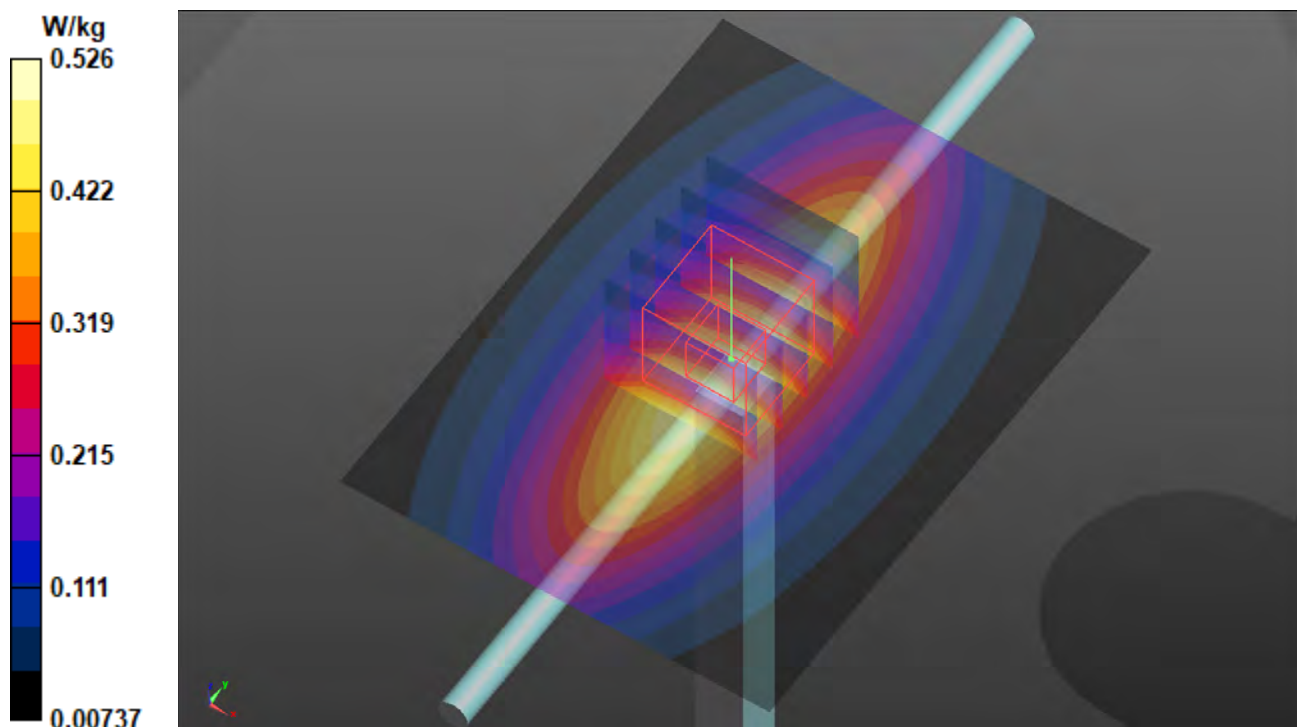

## S22 System Check\_H835\_210115

**DUT: Dipole 835 MHz; Type: D835V2; SN: 4d121**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1\_0115 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.946$  S/m;  $\epsilon_r = 43.065$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.34, 10.34, 10.34) @ 835 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.621 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.54 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.714 W/kg

**SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.293 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.626 W/kg

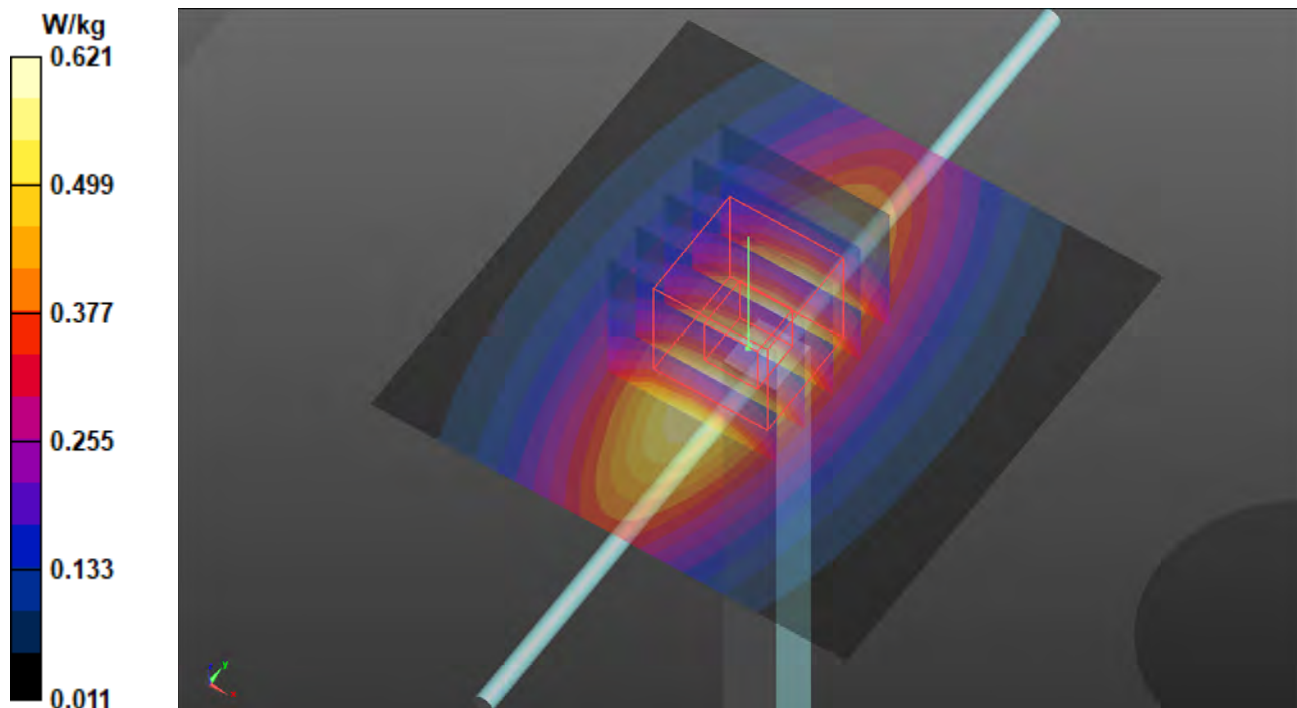



## S23 System Check\_H835\_210115

**DUT: Dipole 835 MHz; Type: D835V2; SN: 4d121**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1\_0115 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.946$  S/m;  $\epsilon_r = 43.065$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.34, 10.34, 10.34) @ 835 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.621 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.54 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.714 W/kg

**SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.293 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.626 W/kg

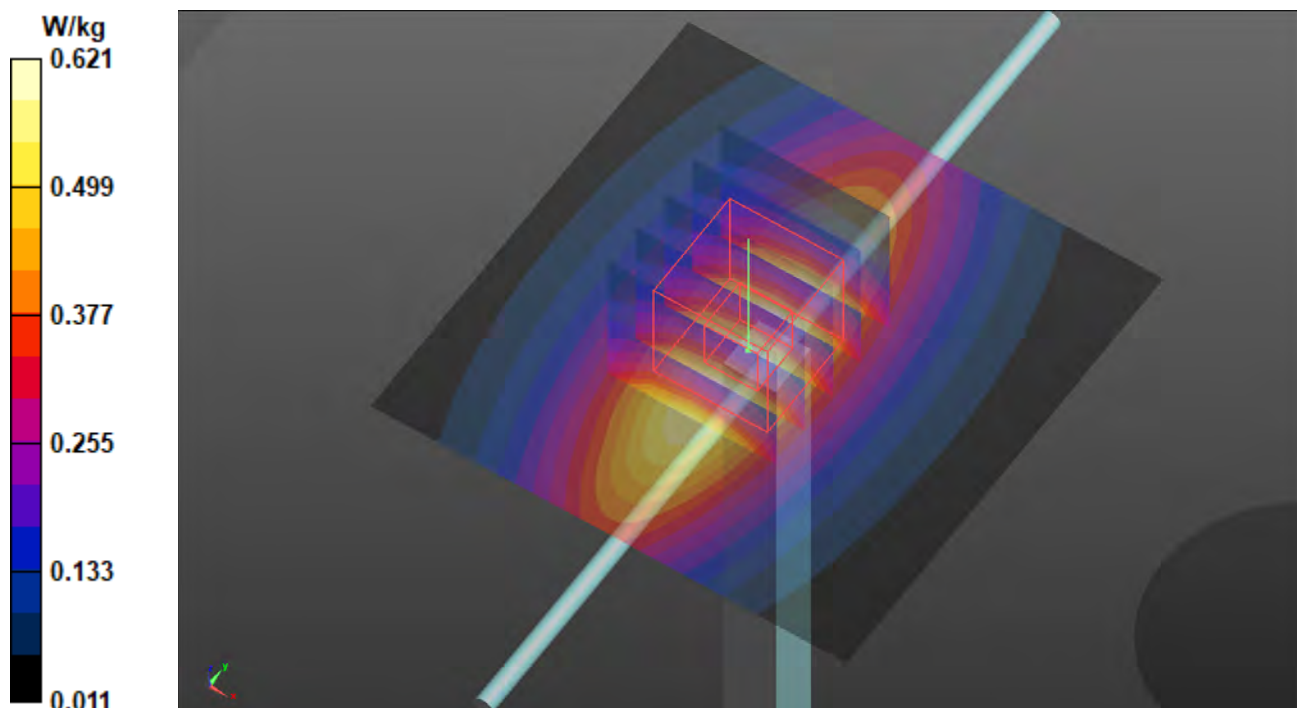

## S24 System Check\_H1900\_210121

**DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d018**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0121 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.452$  S/m;  $\epsilon_r = 39.117$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.02, 8.02, 8.02) @ 1900 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.06 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.91 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.59 W/kg

**SAR(1 g) = 1.93 W/kg; SAR(10 g) = 1.02 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.06 W/kg

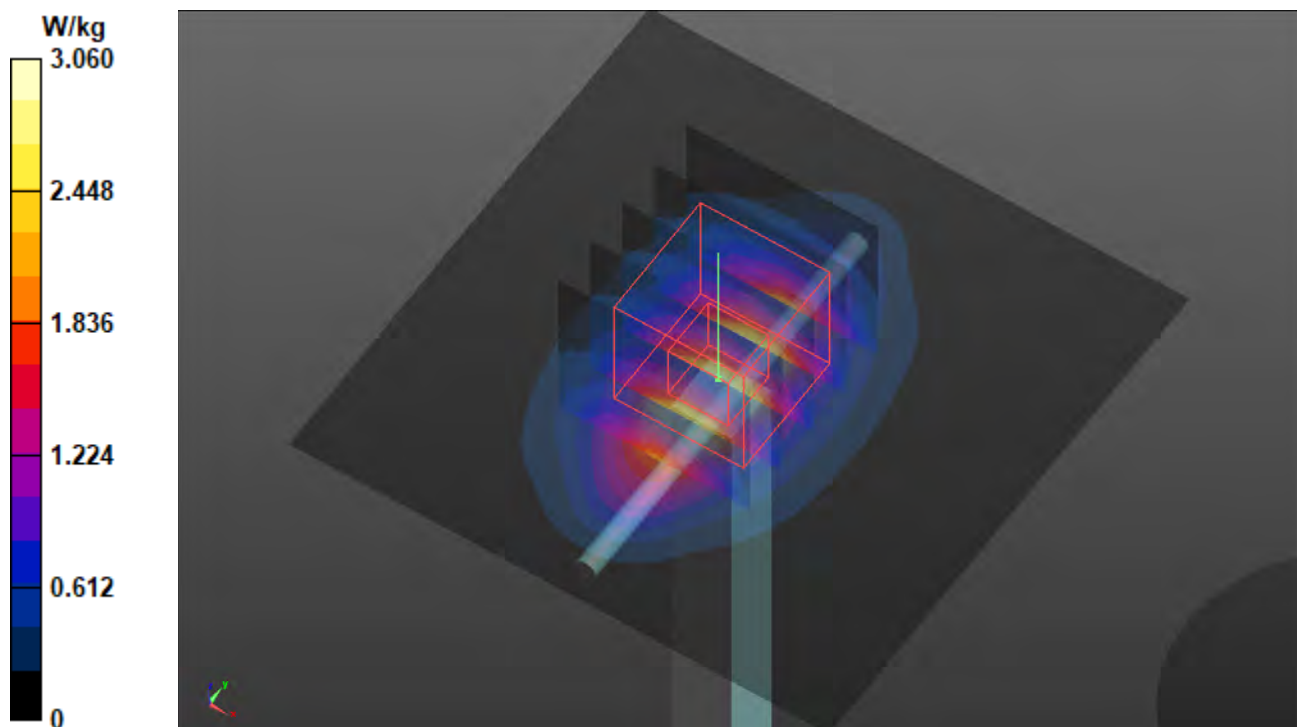

## S25 System Check\_H1750\_210115

**DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0115 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.328$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1750 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.64 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 44.82 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 3.18 W/kg  
**SAR(1 g) = 1.77 W/kg; SAR(10 g) = 0.932 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 2.67 W/kg

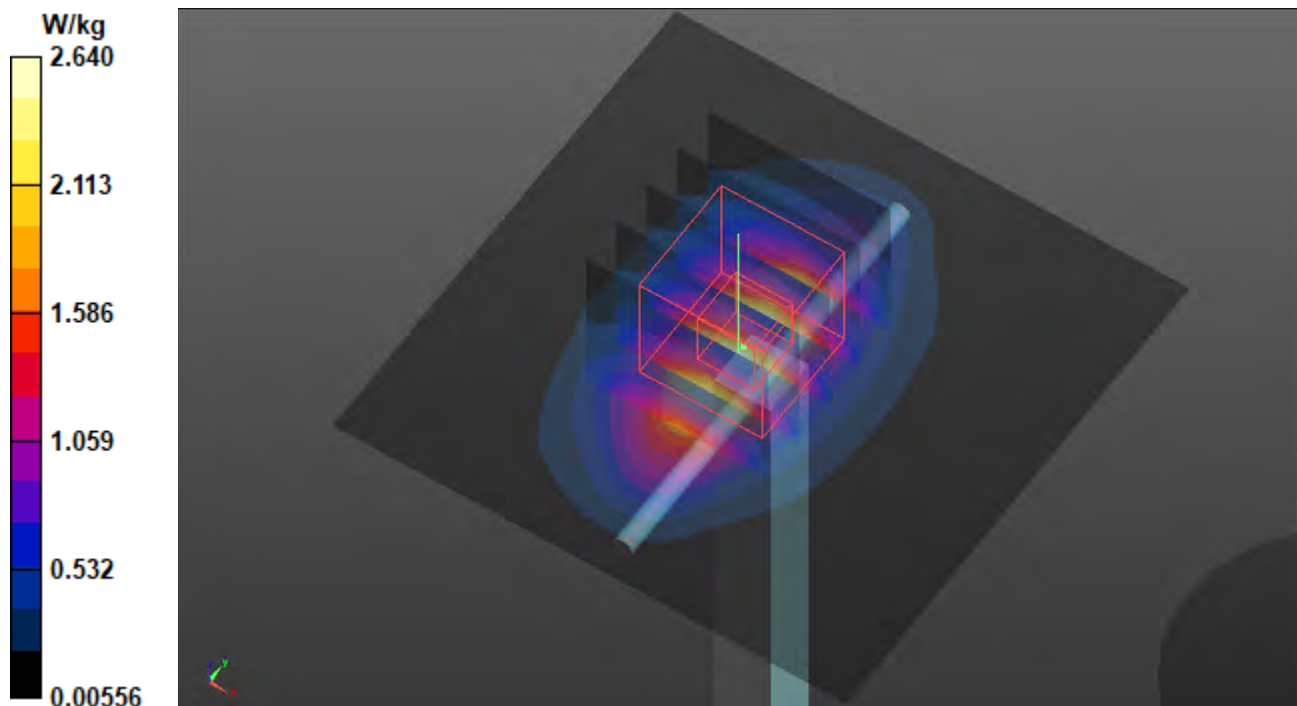

## S26 System Check\_H1750\_210119

**DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0119 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 41.001$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1750 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.63 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.82 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.17 W/kg

**SAR(1 g) = 1.77 W/kg; SAR(10 g) = 0.932 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.66 W/kg

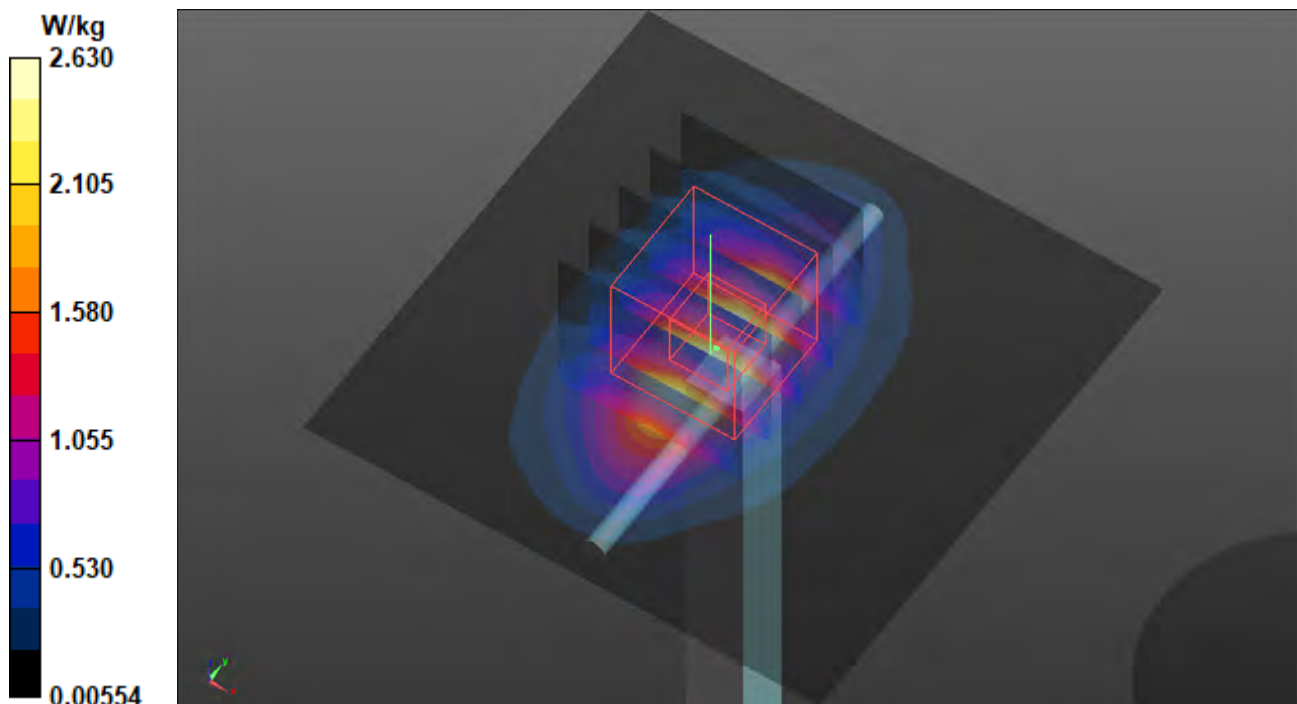

## S27 System Check\_H750\_210115

**DUT: Dipole 1750 MHz; Type: D750V3; SN: 1013**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1\_0115 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.892$  S/m;  $\epsilon_r = 43.357$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.66, 10.66, 10.66) @ 750 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.524 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.30 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.595 W/kg

**SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.259 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.527 W/kg

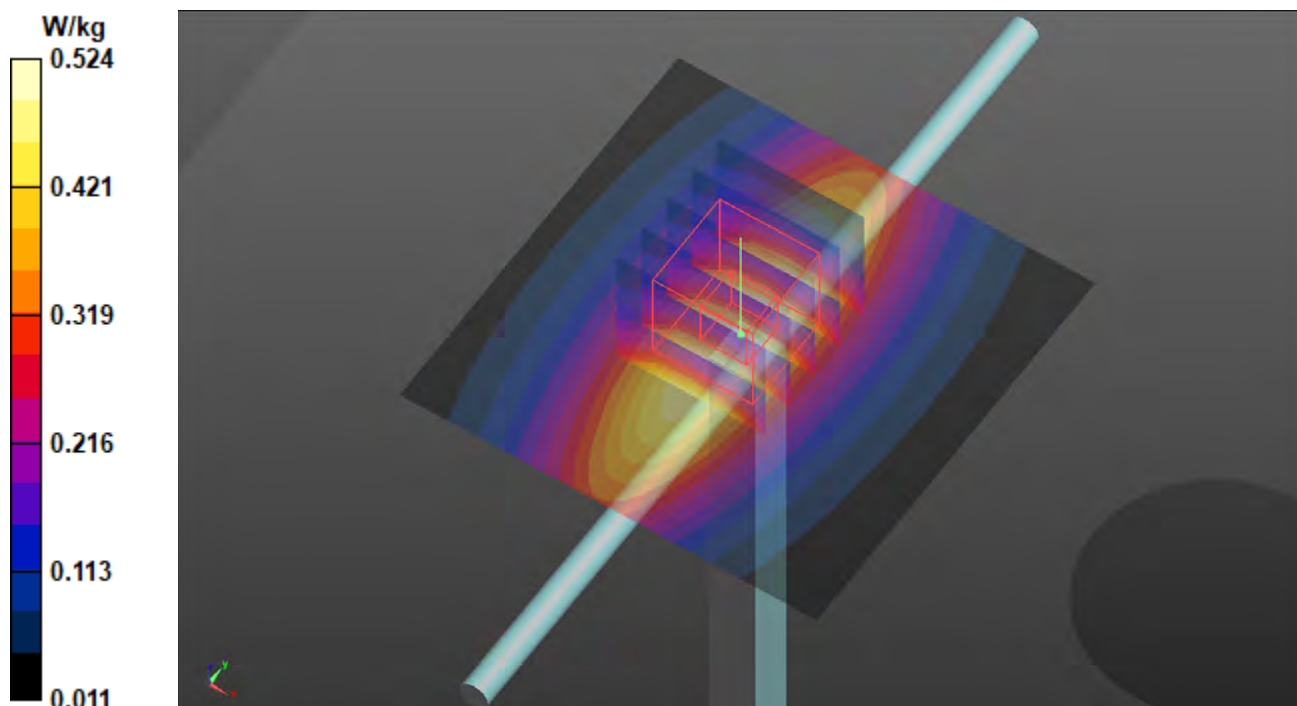

## S30 System Check\_H2450\_210115

**DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1\_0115 Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.871$  S/m;  $\epsilon_r = 39.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.4, 7.4, 7.4) @ 2450 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.56 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 42.41 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 3.78 W/kg  
**SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.19 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 3.13 W/kg

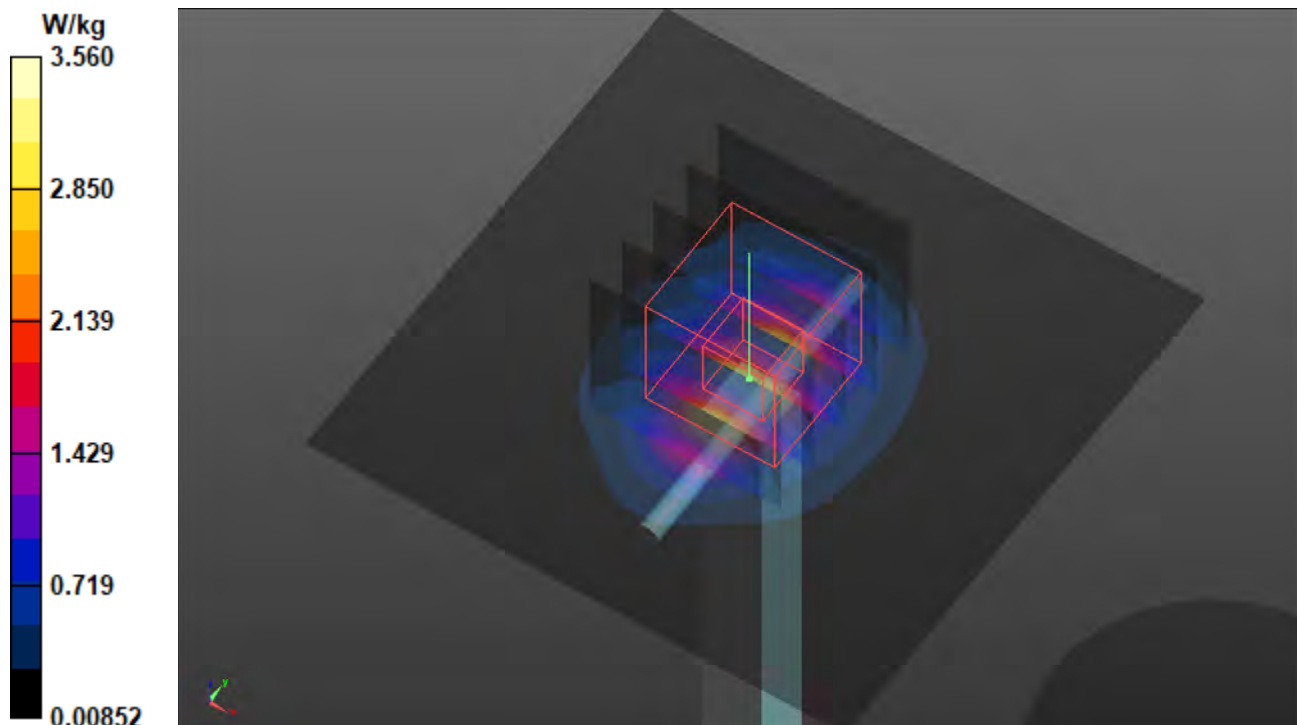

## S31 System Check\_H5250\_210115

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: H34T60N1\_0115 Medium parameters used (interpolated):  $f = 5250$  MHz;  $\sigma = 4.658$  S/m;  $\epsilon_r = 37.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(5.35, 5.35, 5.35) @ 5250 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.40 W/kg


**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.13 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 10.6 W/kg

**SAR(1 g) = 3.86 W/kg; SAR(10 g) = 1.28 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.85 W/kg

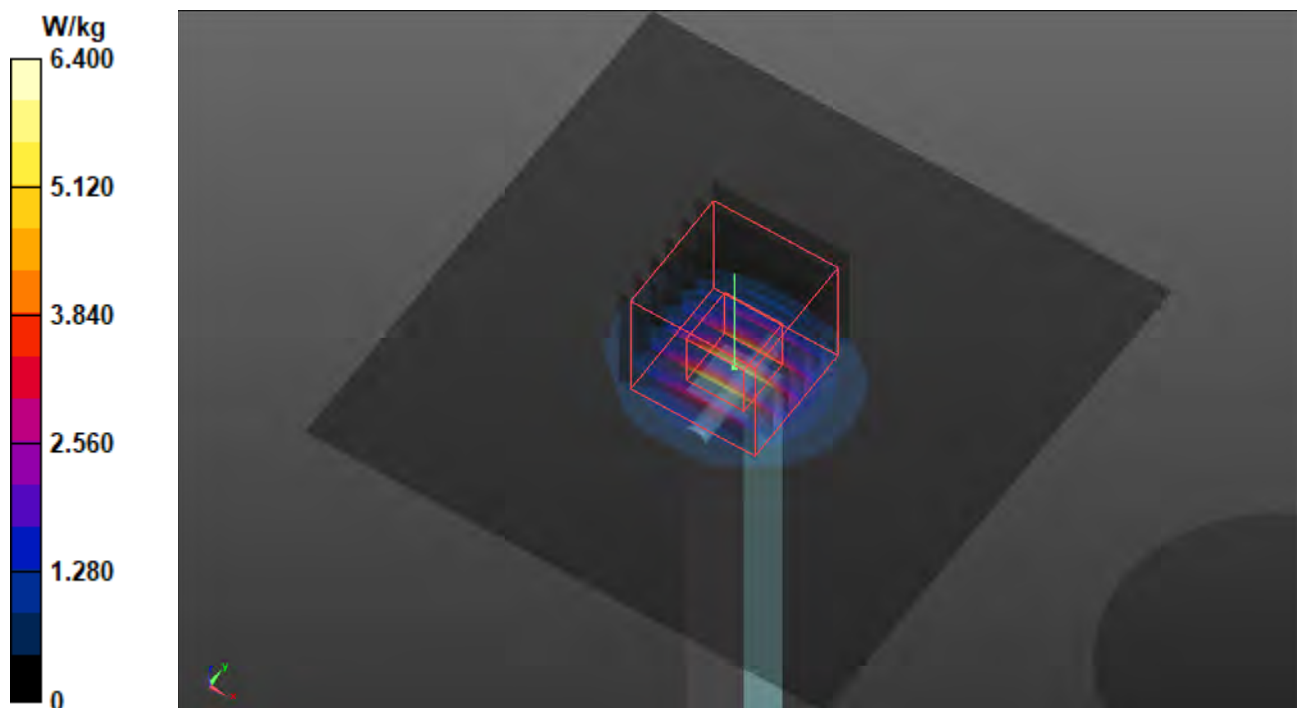

## S32 System Check\_H5750\_210115

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: H34T60N1\_0115 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.138$  S/m;  $\epsilon_r = 36.444$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(4.95, 4.95, 4.95) @ 5750 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.42 W/kg


**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.02 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 11.8 W/kg

**SAR(1 g) = 3.91 W/kg; SAR(10 g) = 1.31 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.85 W/kg

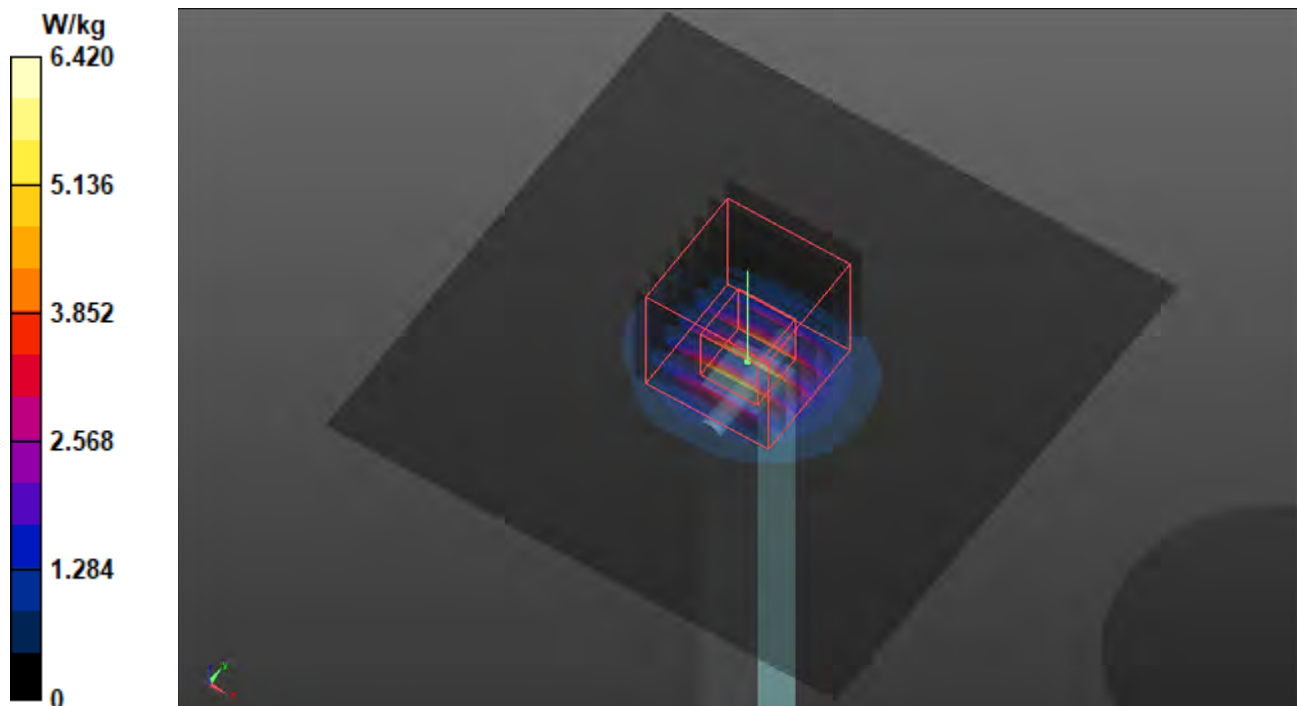



### Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

### P01 WCDMA II\_RMC12.2K\_Rear Face\_10mm\_Ch9400\_Ant1

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1.95

Medium: H16T20N1\_0121 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.43$  S/m;  $\epsilon_r = 39.196$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.02, 8.02, 8.02) @ 1880 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.53 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.74 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.646 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 62.2%

Maximum value of SAR (measured) = 1.51 W/kg

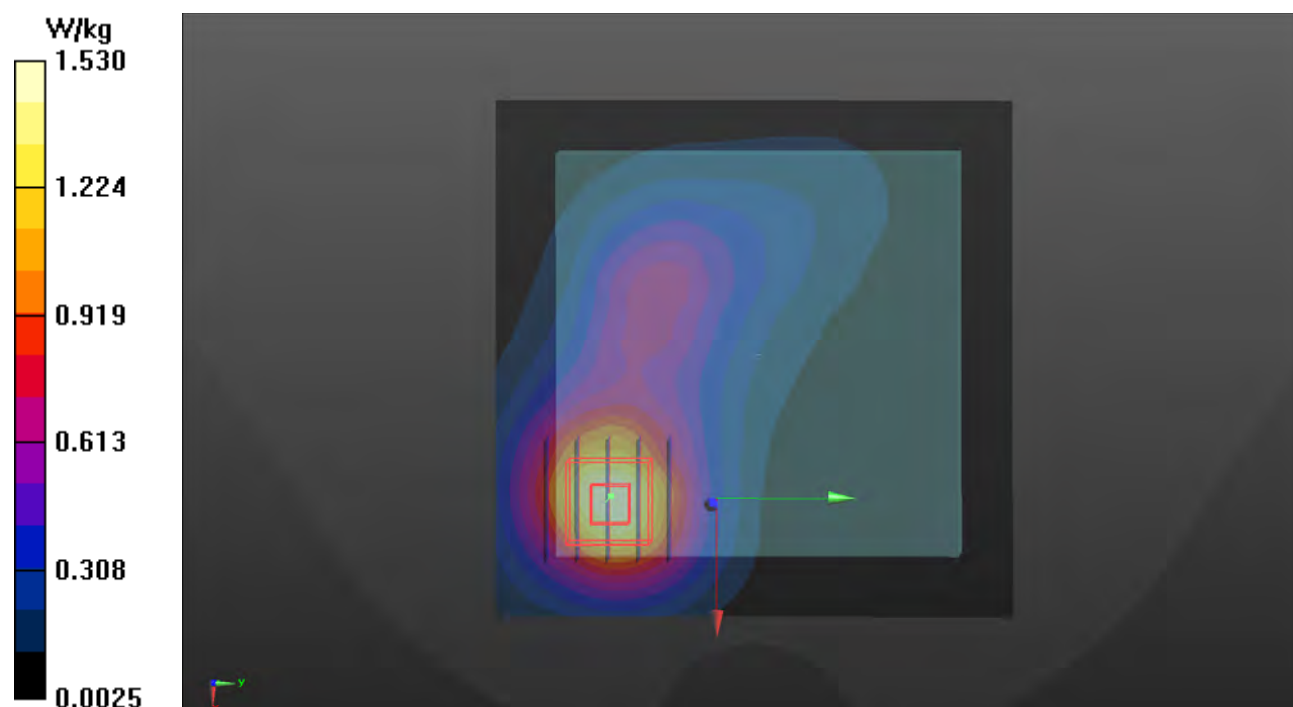

## P02 WCDMA V\_RMC12.2K\_Front Face\_10mm\_Ch4182\_Ant1

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1.95

Medium: H07T10N1\_0104 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.929$  S/m;  $\epsilon_r = 42.003$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(9.69, 9.69, 9.69) @ 836.4 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.951 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.04 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.497 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 23.8 mm

Ratio of SAR at M2 to SAR at M1 = 66.8%

Maximum value of SAR (measured) = 0.960 W/kg

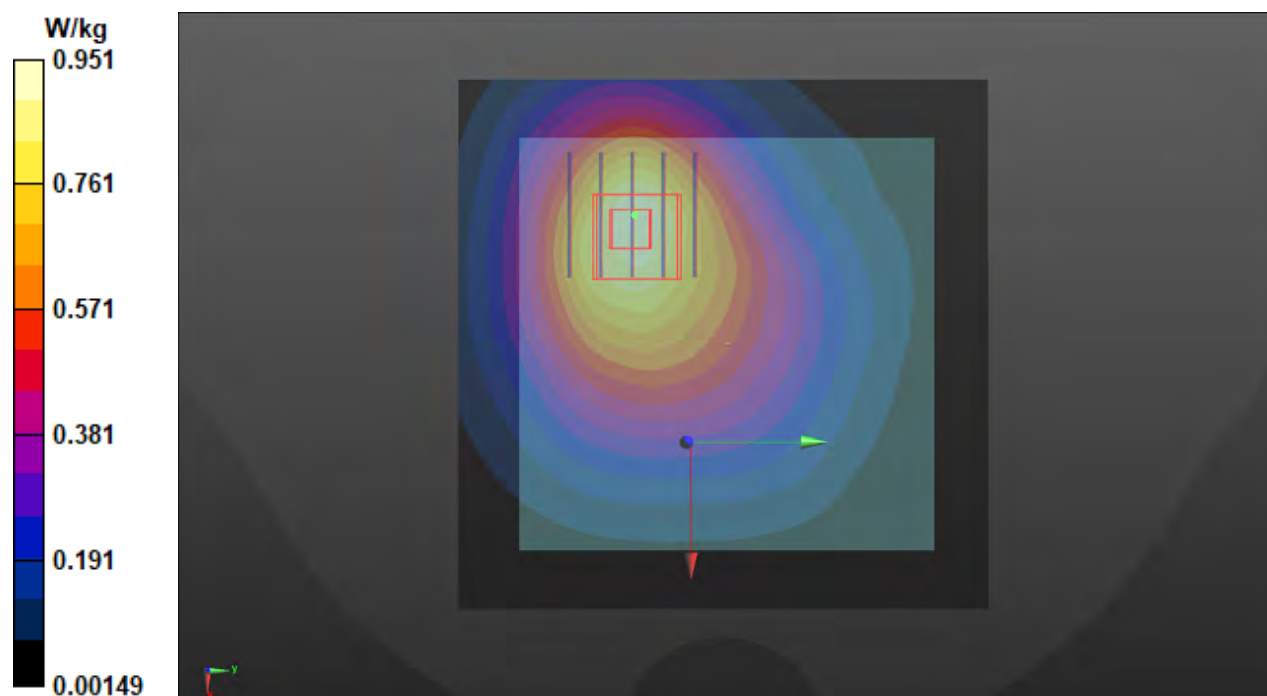

### P03 LTE 2\_QPSK20M\_Rear Face\_10mm\_Ch18700\_1RB\_OS0\_Ant1

**DUT: BBQZ-WTW-P20120750**


Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);  
Frequency: 1860 MHz; Duty Cycle: 1:3.74  
Medium: H16T20N1\_0104 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.426$  S/m;  $\epsilon_r = 39.38$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(8.42, 8.42, 8.42) @ 1860 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.07 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 27.63 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 1.29 W/kg  
**SAR(1 g) = 0.767 W/kg; SAR(10 g) = 0.460 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 17 mm  
Ratio of SAR at M2 to SAR at M1 = 60.7%  
Maximum value of SAR (measured) = 1.10 W/kg

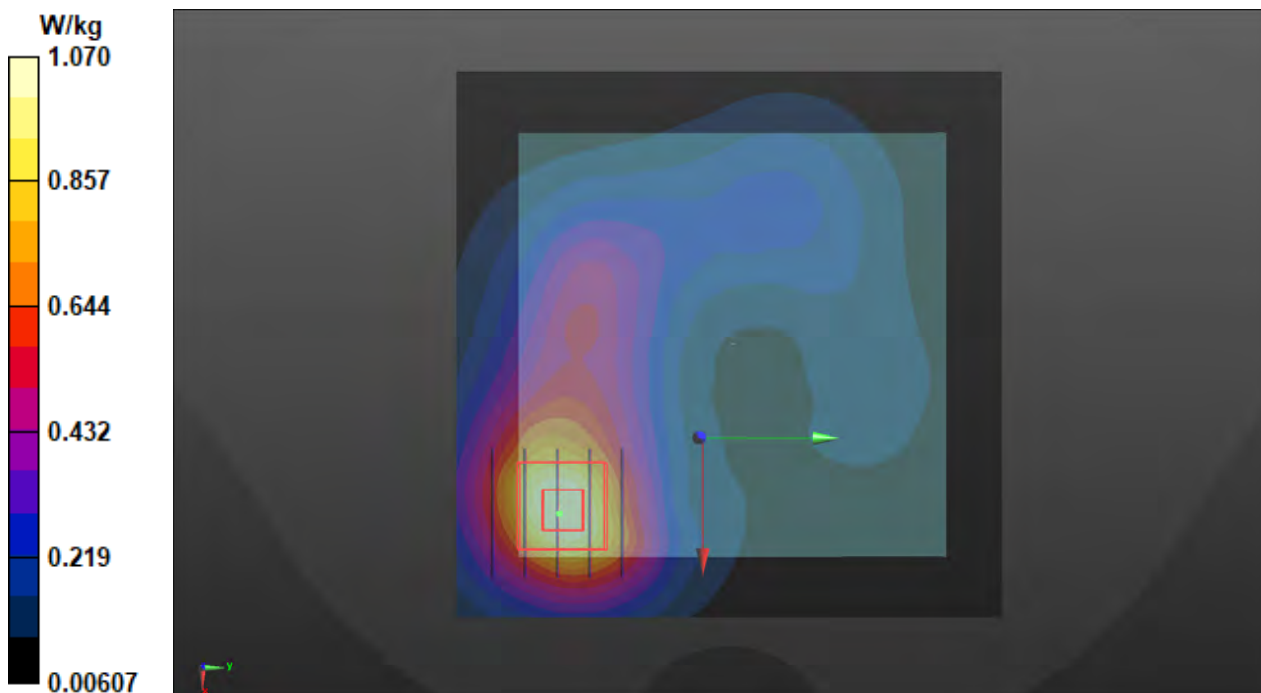

**P04 LTE 2\_QPSK20M\_Front Face\_10mm\_Ch18900\_1RB\_OS0\_Ant2**

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1880 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1\_0108 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.438$  S/m;  $\epsilon_r = 39.803$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.02, 8.02, 8.02) @ 1880 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.28 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.48 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.854 W/kg; SAR(10 g) = 0.488 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 1.27 W/kg

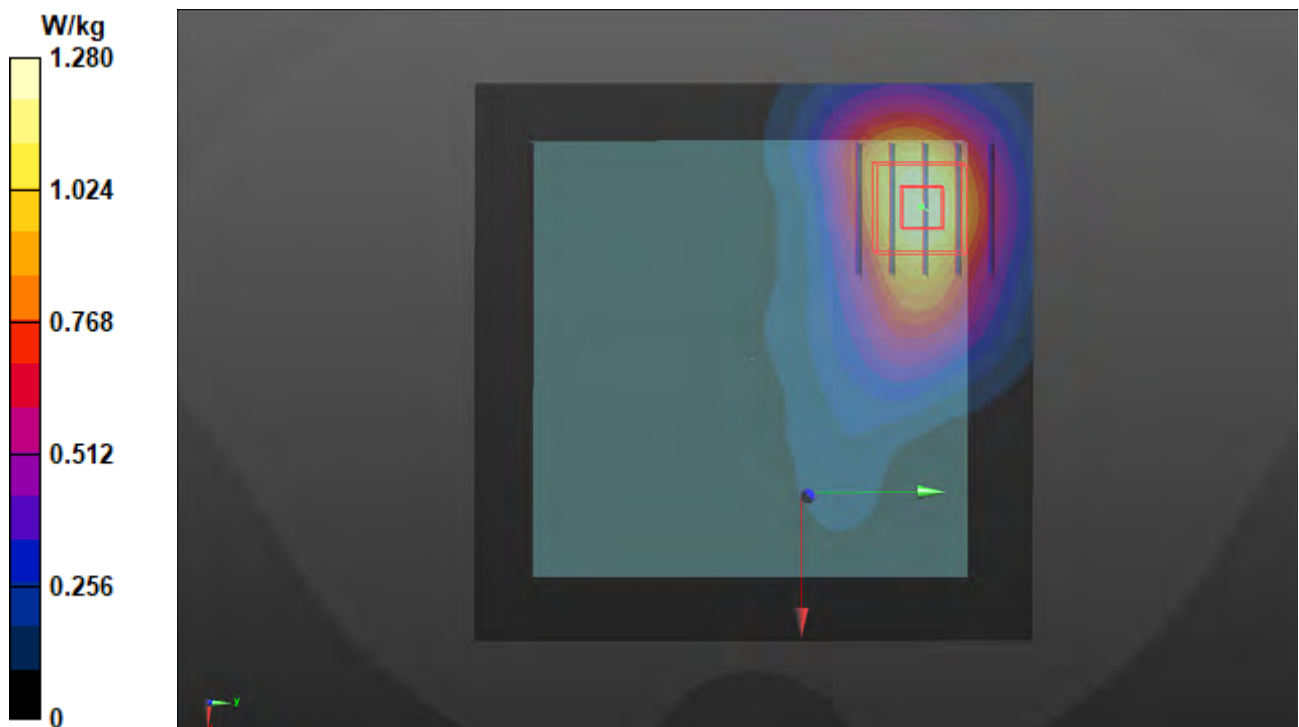

### P05 LTE 4\_QPSK20M\_Rear Face\_10mm\_Ch20300\_1RB\_OS0\_Ant1

**DUT: BBQZ-WTW-P20120750**


Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);  
Frequency: 1745 MHz; Duty Cycle: 1:3.74  
Medium: H16T20N1\_0105 Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.324$  S/m;  
 $\epsilon_r = 39.834$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(8.6, 8.6, 8.6) @ 1745 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.01 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 26.45 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 1.17 W/kg  
**SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.436 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 15.1 mm  
Ratio of SAR at M2 to SAR at M1 = 61.7%  
Maximum value of SAR (measured) = 0.996 W/kg

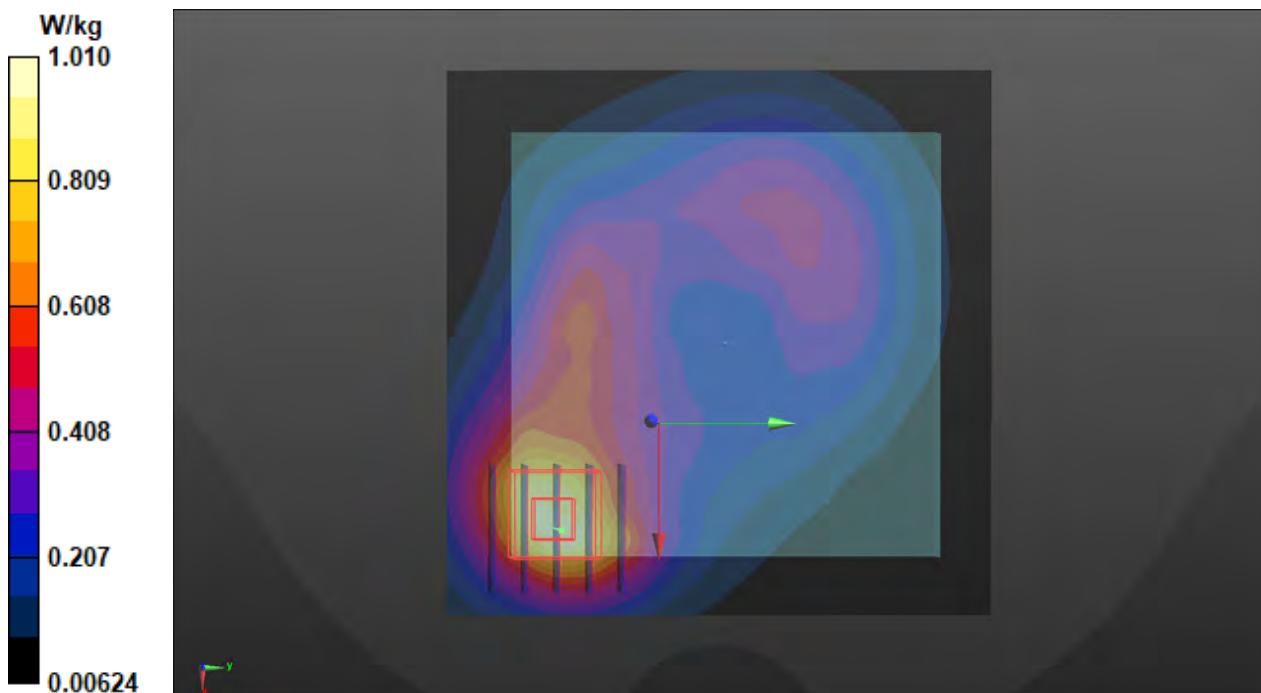

### P07 LTE 5\_QPSK10M\_Rear Face\_10mm\_Ch20600\_1RB\_OS0\_Ant1

**DUT: BBQZ-WTW-P20120750**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 844 MHz; Duty Cycle: 1:3.74  
Medium: H07T10N1\_0104 Medium parameters used:  $f = 844 \text{ MHz}$ ;  $\sigma = 0.936 \text{ S/m}$ ;  $\epsilon_r = 41.912$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(9.69, 9.69, 9.69) @ 844 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.814 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 30.87 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.919 W/kg  
**SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.431 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 68.2%  
Maximum value of SAR (measured) = 0.803 W/kg

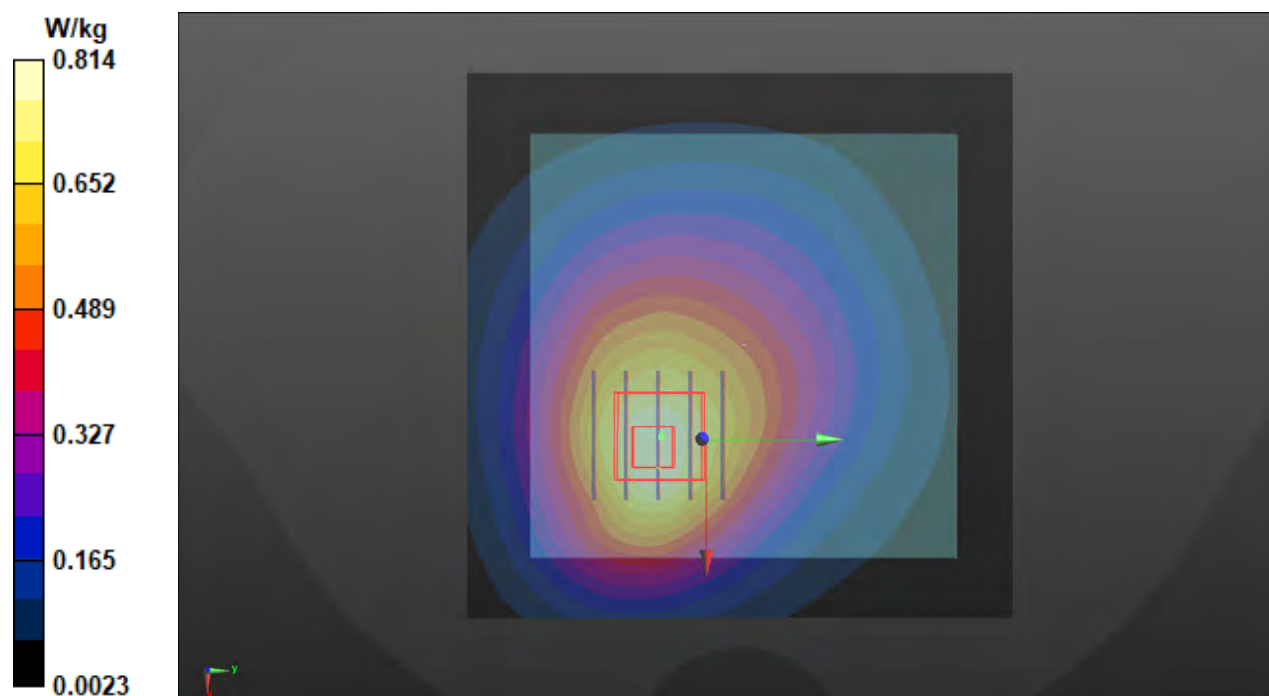

### P08 LTE 7\_QPSK20M\_Rear Face\_10mm\_Ch21100\_1RB\_OS0\_Ant1

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);  
Frequency: 2535 MHz; Duty Cycle: 1:3.74

Medium: H19T27N1\_0105 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.955$  S/m;  $\epsilon_r = 38.729$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(7.36, 7.36, 7.36) @ 2535 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (131x131x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.80 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.39 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.19 W/kg

**SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.630 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 1.82 W/kg

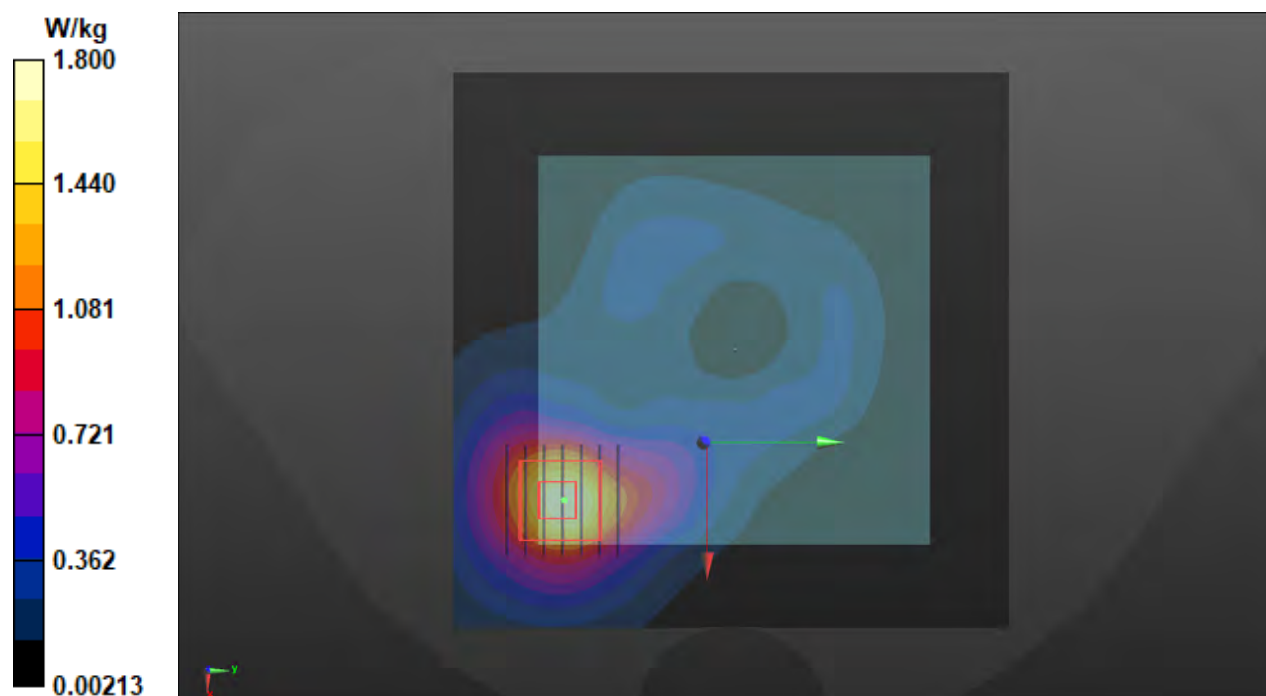



## P09 LTE 7\_QPSK20M\_Front Face\_10mm\_Ch21100\_1RB\_OS0\_Ant2

### DUT: BBQZ-WTW-P20120750

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 2535 MHz; Duty Cycle: 1:3.74

Medium: H19T27N1\_0108 Medium parameters used (interpolated):  $f = 2535$  MHz;  $\sigma = 1.958$  S/m;  $\epsilon_r = 39.65$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.18, 7.18, 7.18) @ 2535 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (131x131x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.01 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.06 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 2.31 W/kg

**SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.607 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 1.96 W/kg

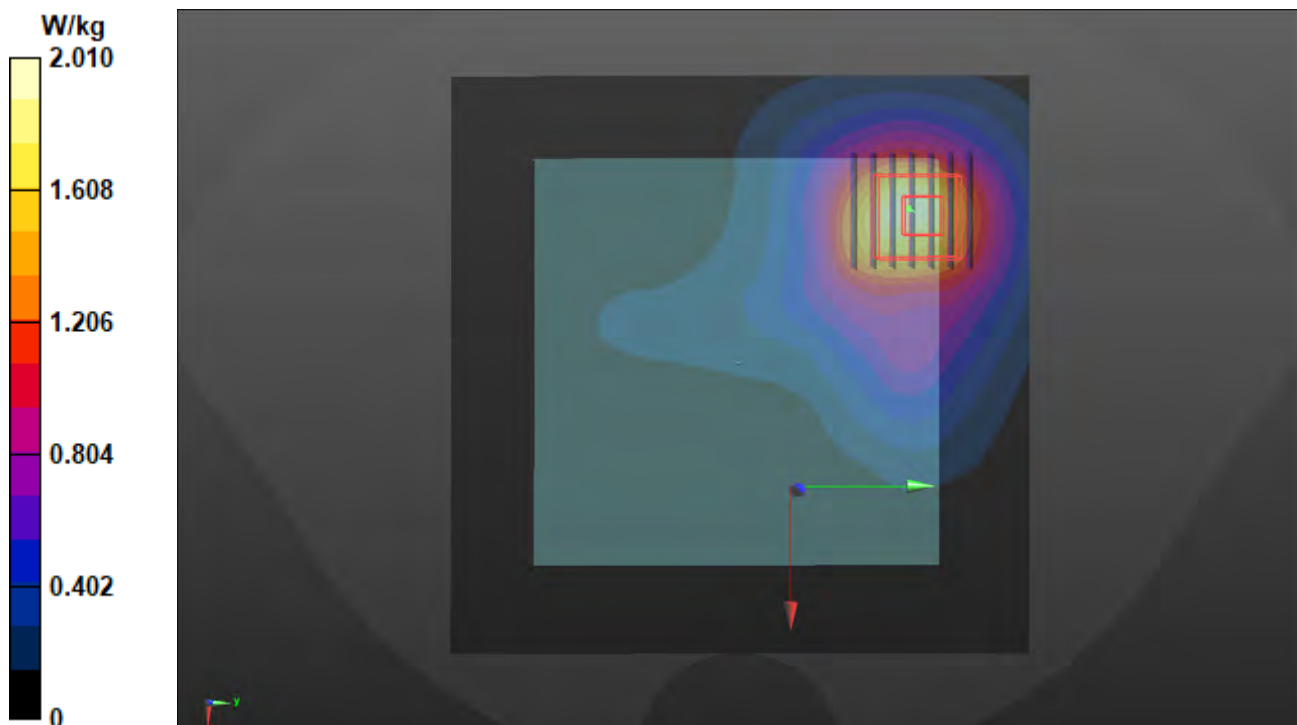

## P10 LTE 12\_QPSK10M\_Fron Face\_10mm\_Ch23130\_1RB\_OS0\_Ant1

### DUT: BBQZ-WTW-P20120750


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 711 MHz; Duty Cycle: 1:3.74  
Medium: H06T09N1\_0106 Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.862$  S/m;  $\epsilon_r = 43.206$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(10, 10, 10) @ 711 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.861 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 31.76 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.968 W/kg  
**SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.468 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 22.7 mm  
Ratio of SAR at M2 to SAR at M1 = 69.2%  
Maximum value of SAR (measured) = 0.855 W/kg

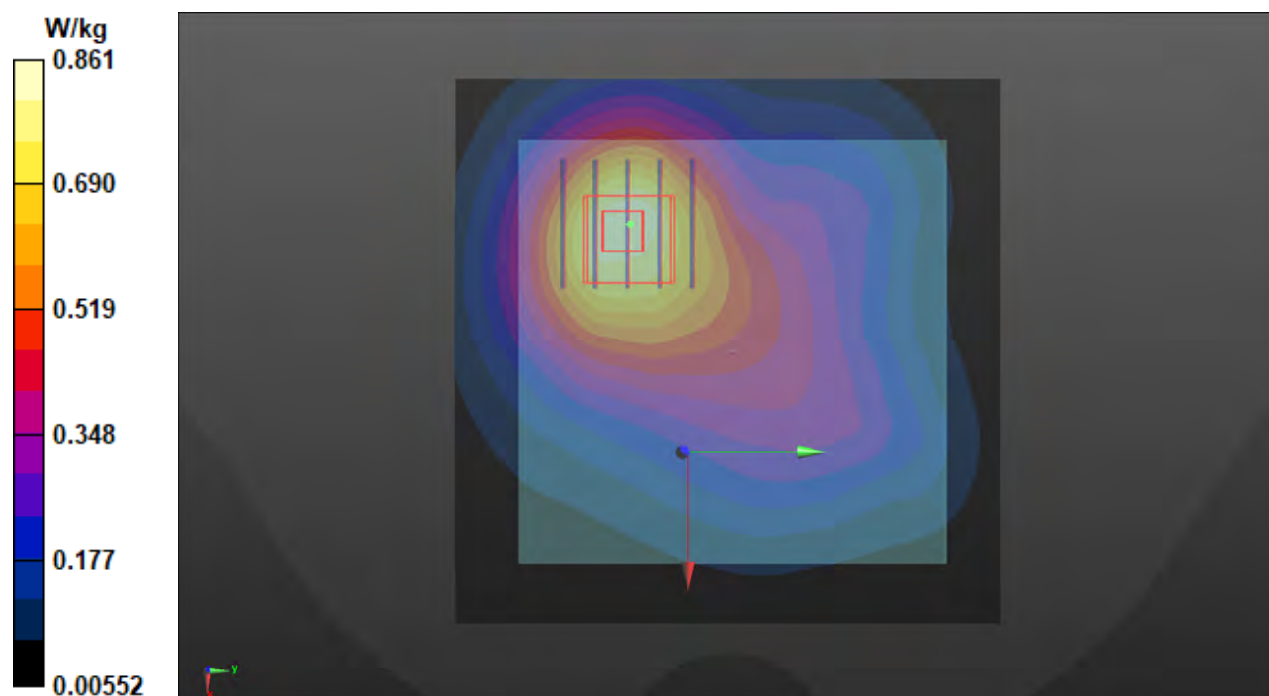

## P11 LTE 13\_QPSK10M\_Fron Face\_10mm\_Ch23230\_1RB\_OS0\_Ant1

### DUT: BBQZ-WTW-P20120750

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);

Frequency: 782 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1\_0106 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.928 \text{ S/m}$ ;  $\epsilon_r = 42.298$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(10, 10, 10) @ 782 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.05 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 34.23 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.553 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 21.5 mm

Ratio of SAR at M2 to SAR at M1 = 68.4%

Maximum value of SAR (measured) = 1.05 W/kg

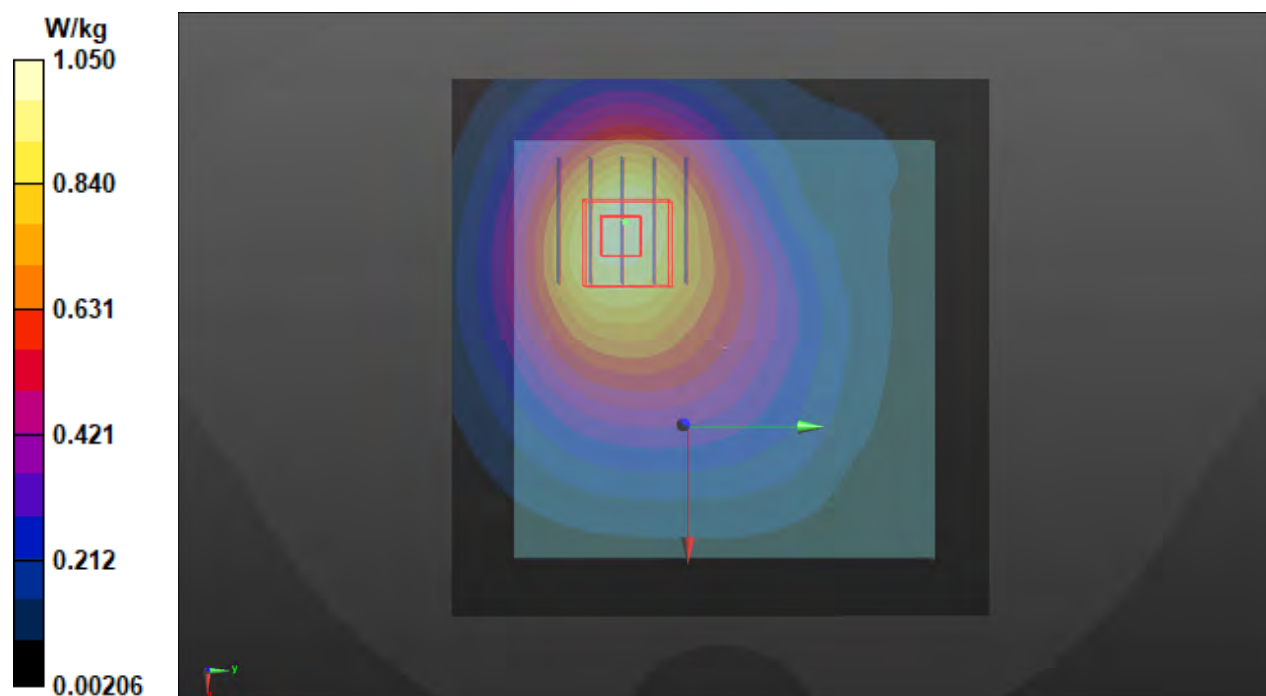

### P13 LTE 17\_QPSK10M\_Fron Face\_10mm\_Ch23790\_1RB\_OS0\_Ant1

**DUT: BBQZ-WTW-P20120750**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 710 MHz; Duty Cycle: 1:3.74  
Medium: H06T09N1\_0106 Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.86$  S/m;  $\epsilon_r = 43.221$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(10, 10, 10) @ 710 MHz; Calibrated: 2020/09/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15
- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.857 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 31.86 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.972 W/kg  
**SAR(1 g) = 0.681 W/kg; SAR(10 g) = 0.465 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 21.5 mm  
Ratio of SAR at M2 to SAR at M1 = 68.4%  
Maximum value of SAR (measured) = 0.854 W/kg

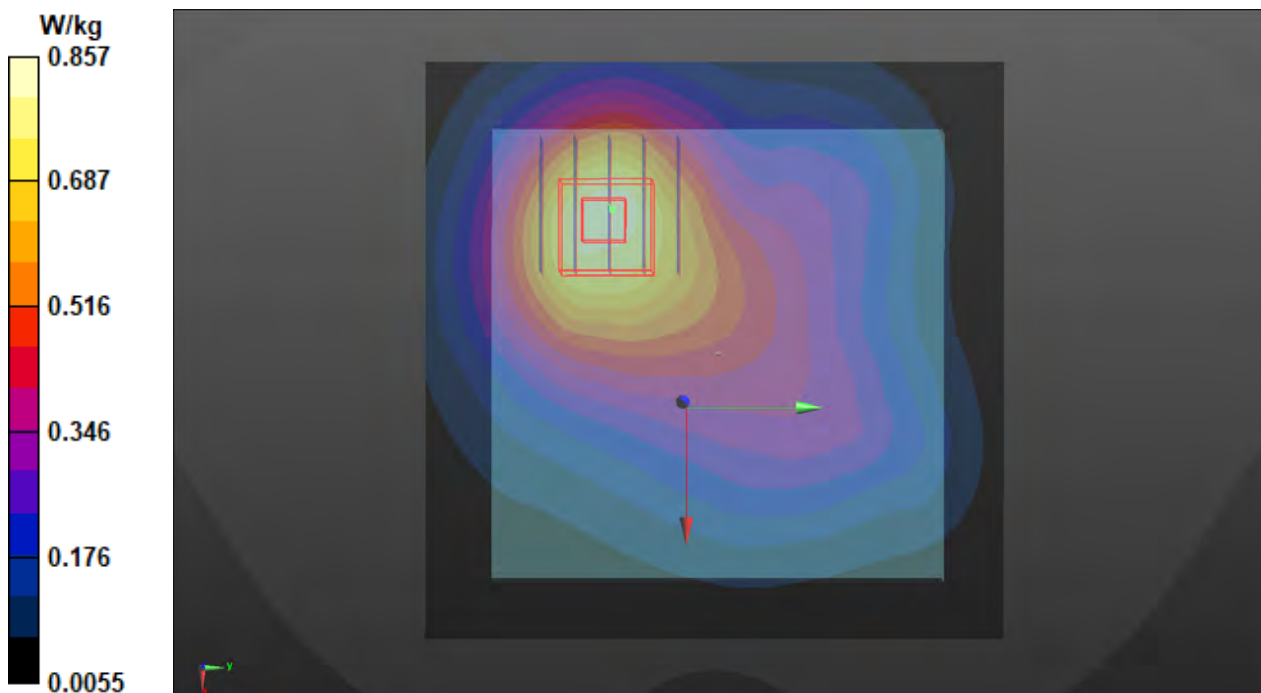

### P14 LTE 25\_QPSK20M\_Rear Face\_10mm\_Ch26590\_1RB\_OS0\_Ant1

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1905 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1\_0104 Medium parameters used:  $f = 1905$  MHz;  $\sigma = 1.465$  S/m;  $\epsilon_r = 39.214$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(8.42, 8.42, 8.42) @ 1905 MHz; Calibrated: 2020/09/28

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1589; Calibrated: 2020/09/15

- Phantom: SAM Phantom\_1987; Type: QD 000 P41 AA;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.56 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.54 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.88 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.661 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.7%

Maximum value of SAR (measured) = 1.60 W/kg

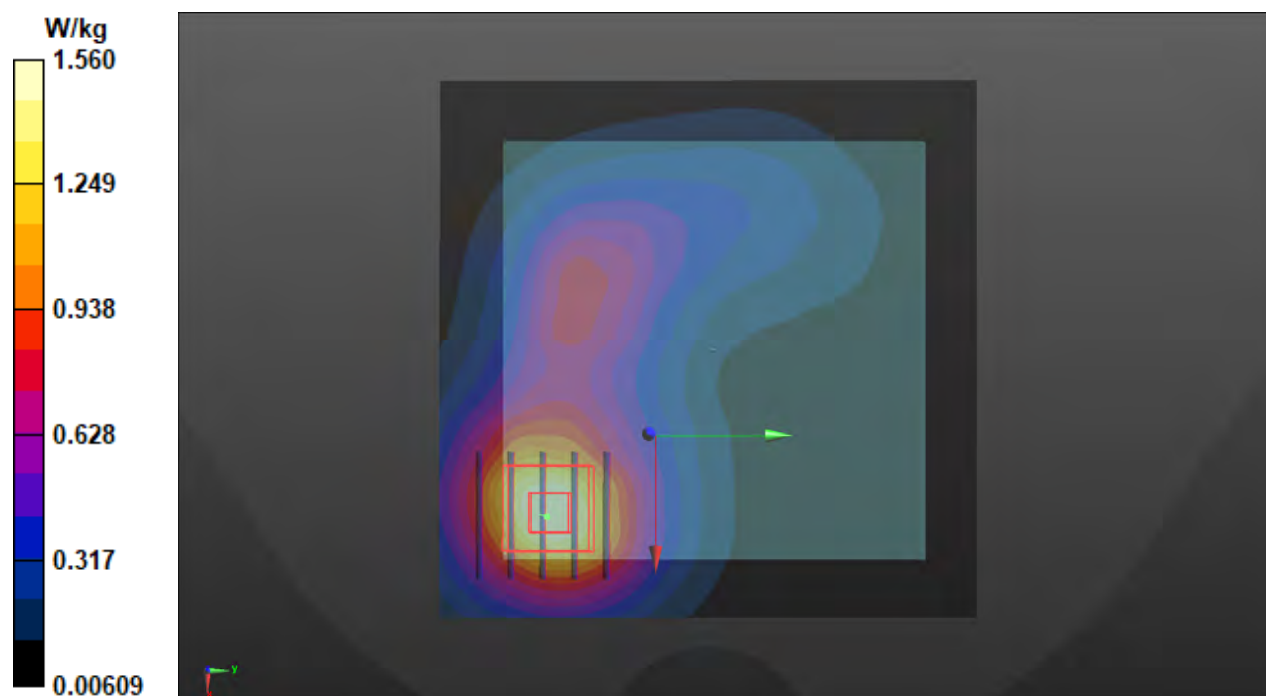

## P15 LTE 30\_QPSK10M\_Rear Face\_10mm\_Ch27710\_1RB\_OS0\_Ant1

### DUT: BBQZ-WTW-P20120750

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);

Frequency: 2310 MHz; Duty Cycle: 1:3.74

Medium: H19T27N1\_0107 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 38.884$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.72, 7.72, 7.72) @ 2310 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (111x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.50 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.770 W/kg; SAR(10 g) = 0.451 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 1.11 W/kg

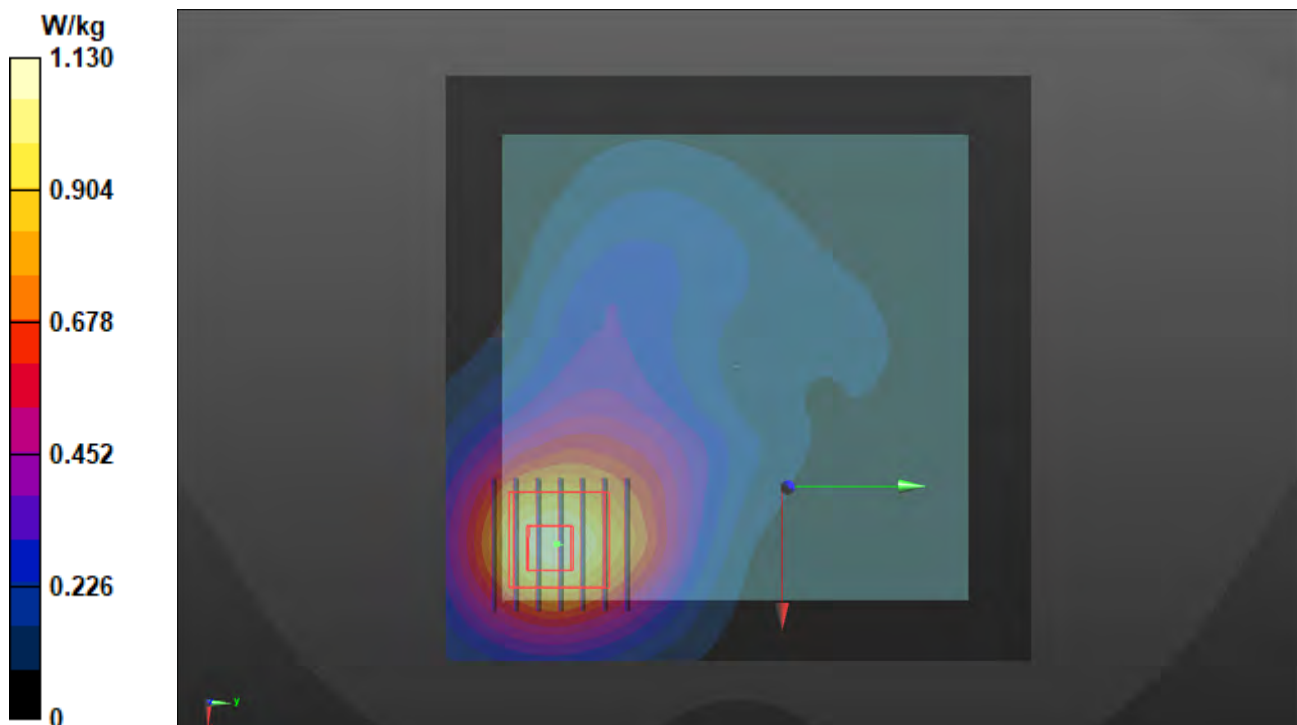

## P16 LTE 38\_QPSK20M\_Rear Face\_10mm\_Ch37850\_1RB\_OS0\_Ant1

### DUT: BBQZ-WTW-P20120750

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 2580 MHz; Duty Cycle: 1:8.33

Medium: H19T27N1\_0107 Medium parameters used:  $f = 2580$  MHz;  $\sigma = 1.988$  S/m;  $\epsilon_r = 37.93$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.18, 7.18, 7.18) @ 2580 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (111x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.854 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.32 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.302 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 0.865 W/kg

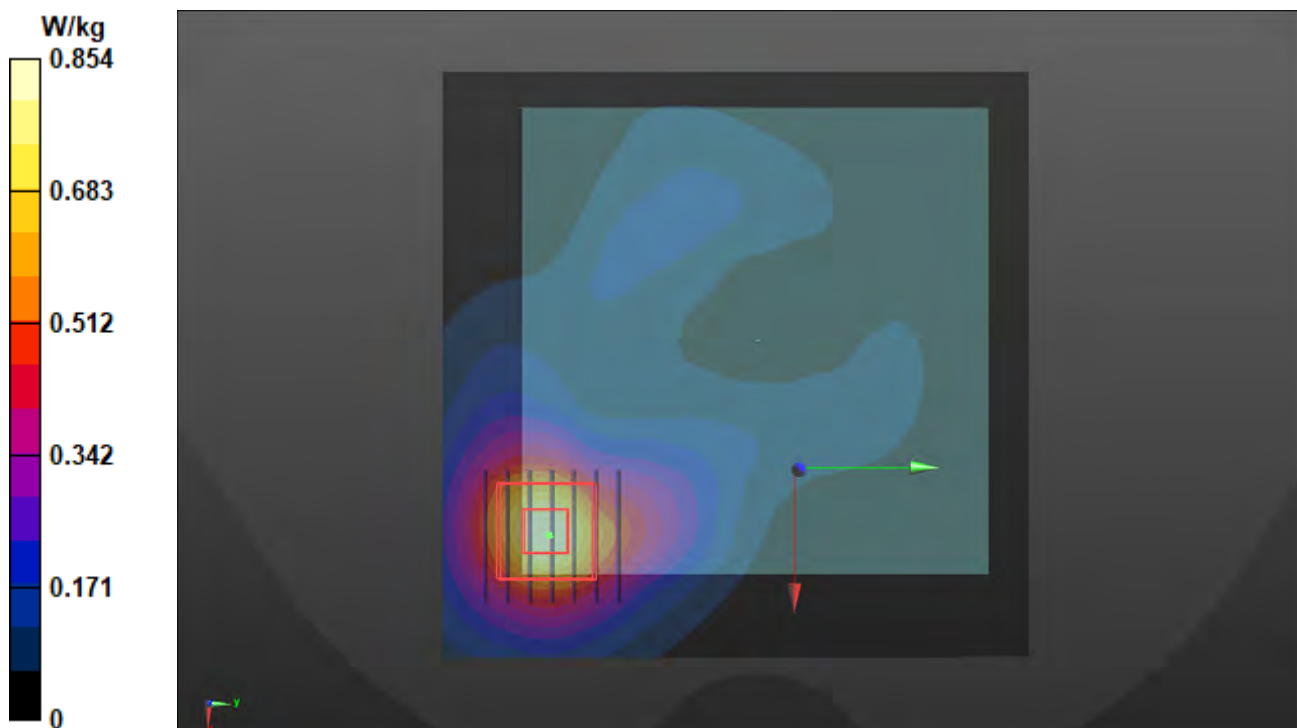

## P17 LTE 41\_QPSK20M\_Rear Face\_10mm\_Ch40185\_1RB\_OS0\_Ant1

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 2549.5 MHz; Duty Cycle: 1:8.33

Medium: H19T27N1\_0107 Medium parameters used:  $f = 2550$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.045$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.18, 7.18, 7.18) @ 2549.5 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (111x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.967 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.91 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.348 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.5 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.975 W/kg

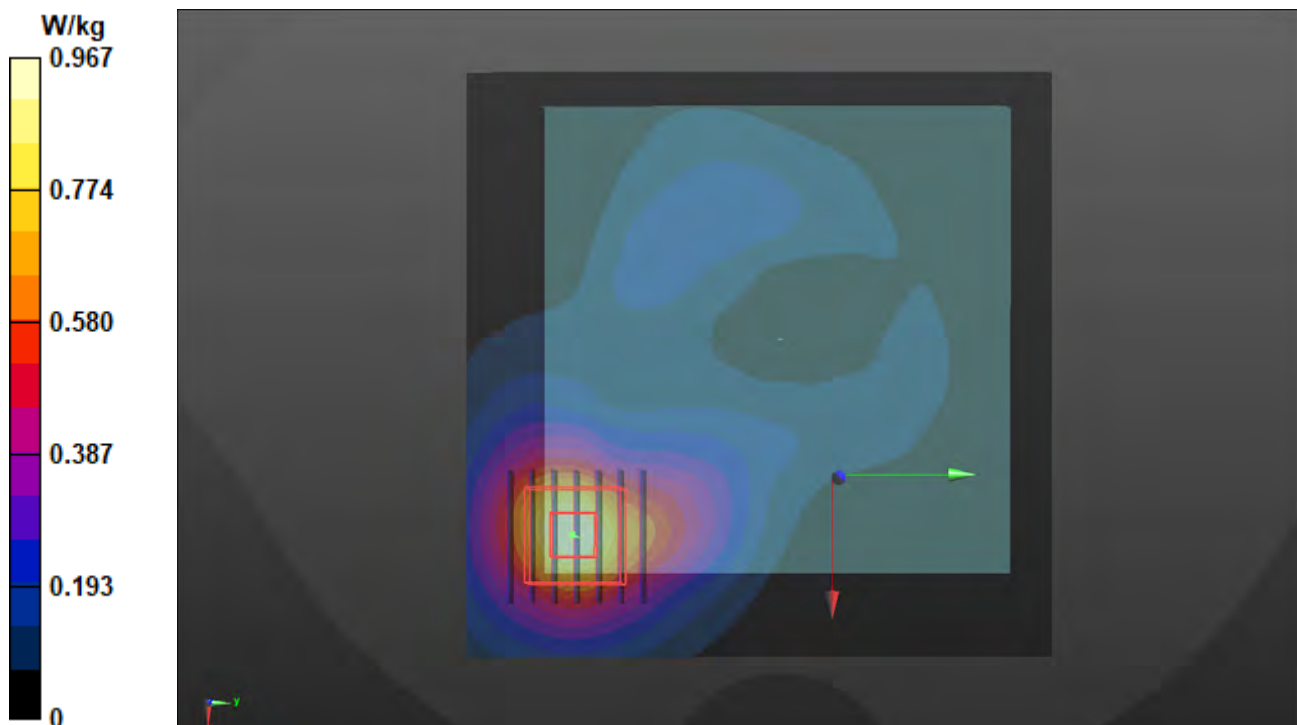



## P19 LTE 66\_QPSK20M\_Fron Face\_10mm\_Ch132572\_1RB\_OS0\_Ant1

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1770 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1\_0107 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 39.435$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1770 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.48 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.501 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 1.11 W/kg

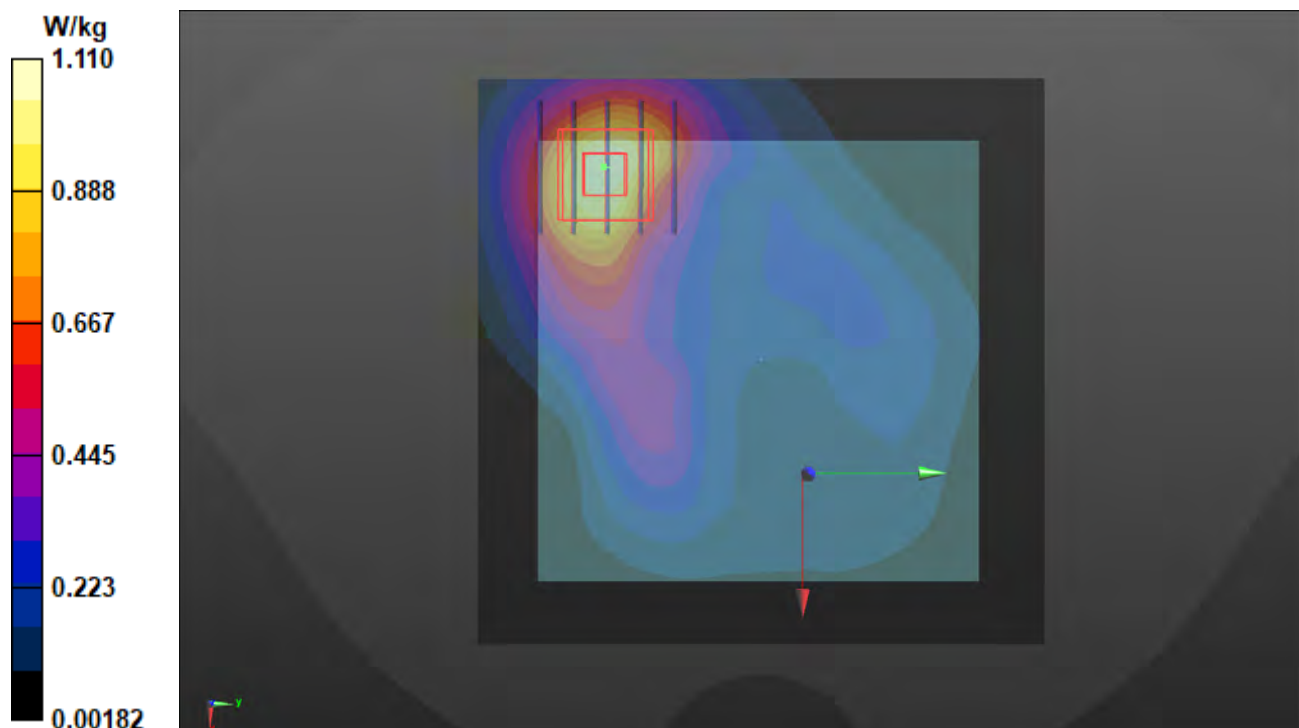

## P20 LTE 66\_QPSK20M\_Fron Face\_10mm\_Ch132572\_1RB\_OS0\_Ant2

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1770 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1\_0108 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.336$  S/m;  $\epsilon_r = 40.174$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1770 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.07 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.883 W/kg; SAR(10 g) = 0.547 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 66.1%

Maximum value of SAR (measured) = 1.15 W/kg

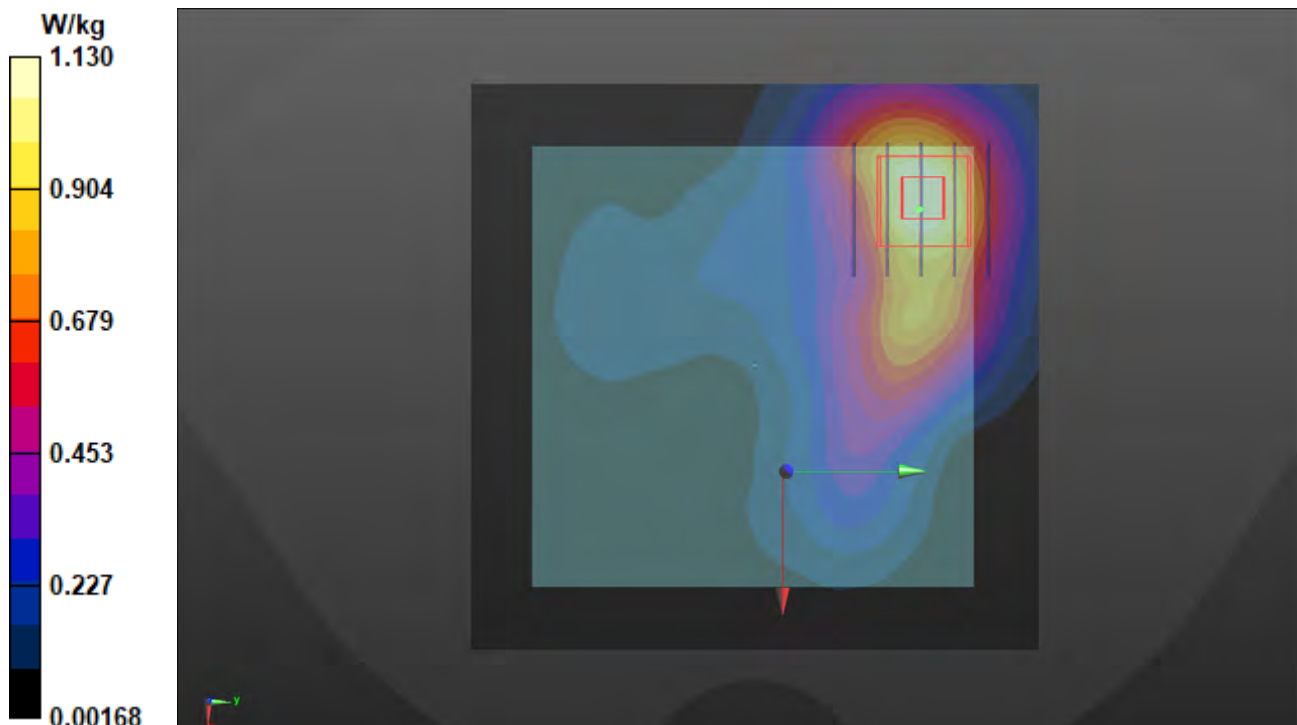

## P21 LTE 71\_QPSK20M\_Fron Face\_10mm\_Ch133222\_1RB\_OS0\_Ant1

### DUT: BBQZ-WTW-P20120750

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 673 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1\_0107 Medium parameters used:  $f = 673$  MHz;  $\sigma = 0.875$  S/m;  $\epsilon_r = 42.667$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.66, 10.66, 10.66) @ 673 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.879 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.21 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.971 W/kg

**SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.506 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.7%

Maximum value of SAR (measured) = 0.877 W/kg

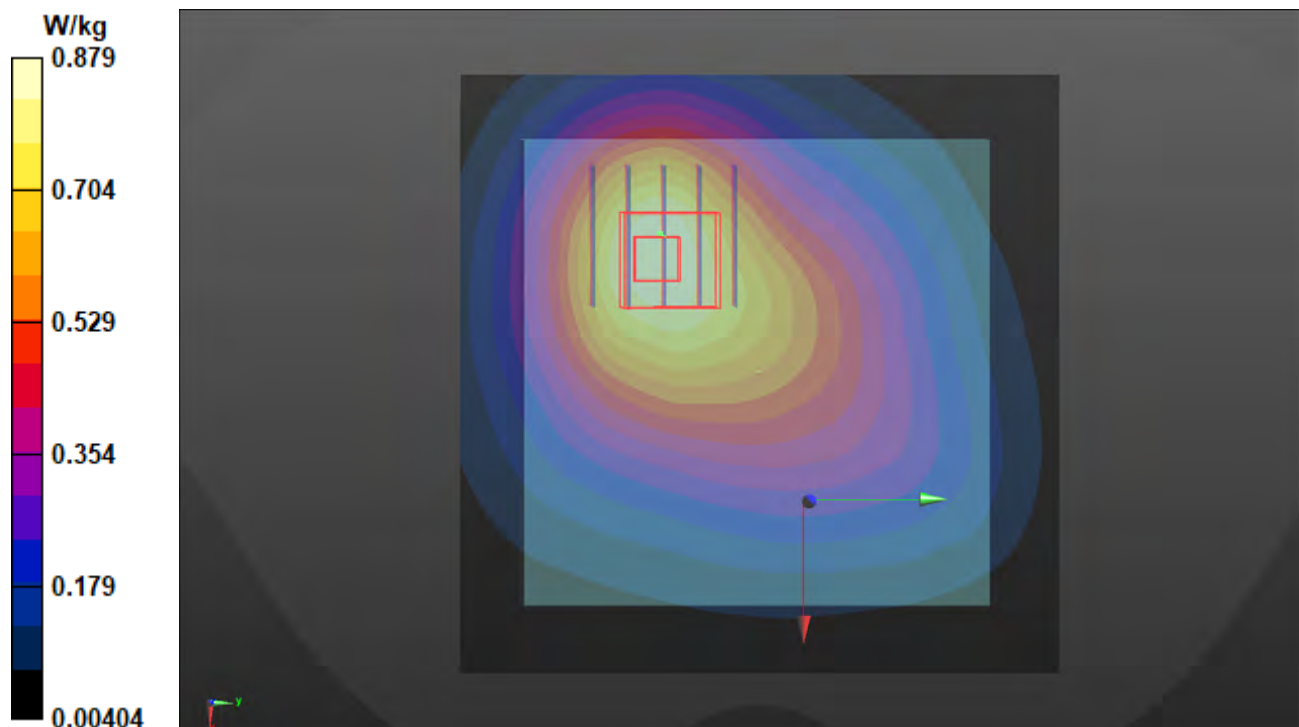

**P22 5GNR-n5\_DFT-S QPSK20M\_Front Face\_10mm\_Ch166800\_1RB\_OS1\_Ant1**

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10931 - AAB, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz);  
 Frequency: 834 MHz; Duty Cycle: 1:3.56

Medium: H07T10N1\_0115 Medium parameters used:  $f = 834 \text{ MHz}$ ;  $\sigma = 0.945 \text{ S/m}$ ;  $\epsilon_r = 43.078$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.34, 10.34, 10.34) @ 834 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.02 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 33.27 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.749 W/kg; SAR(10 g) = 0.509 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 19.3 mm

Ratio of SAR at M2 to SAR at M1 = 67.3%

Maximum value of SAR (measured) = 1.02 W/kg

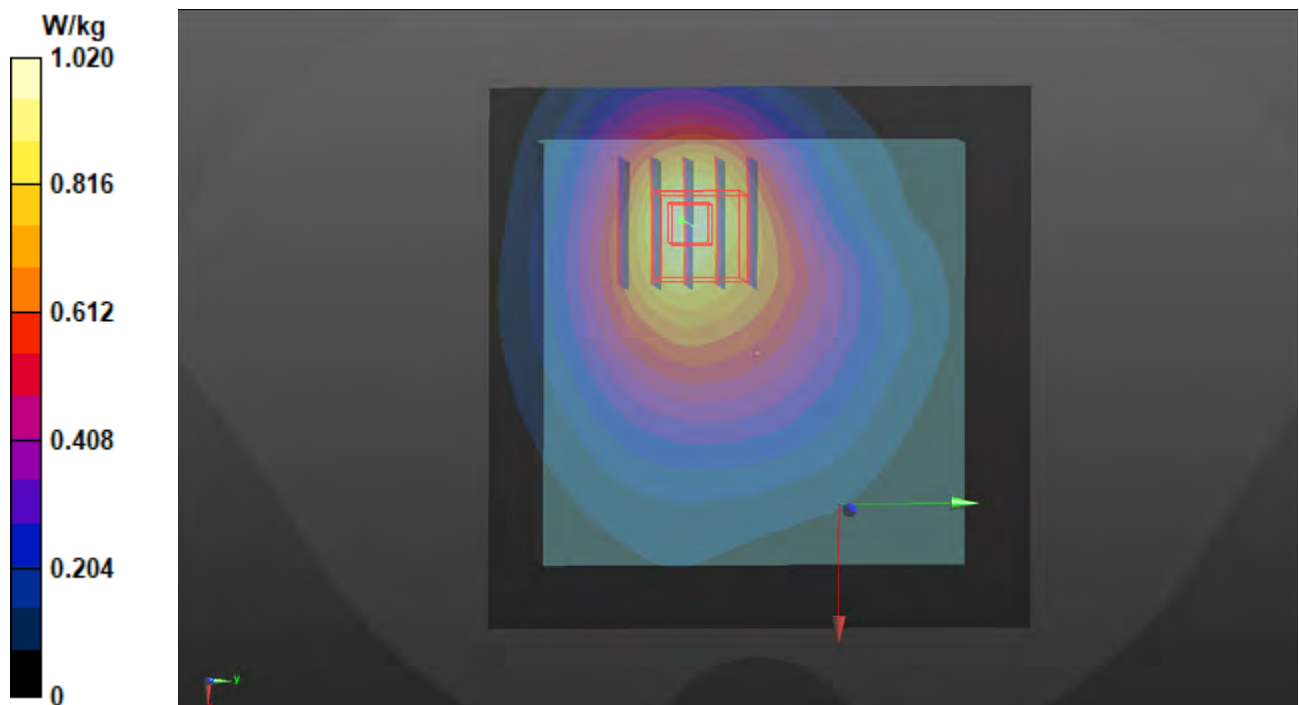

**P23 5GNR-n5\_DFT-S QPSK20M\_Front Face\_10mm\_Ch166800\_1RB\_OS1\_Ant2**

**DUT: BBQZ-WTW-P20120750**


Communication System: UID 10931 - AAB, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz);  
 Frequency: 834 MHz; Duty Cycle: 1:3.56  
 Medium: H07T10N1\_0115 Medium parameters used:  $f = 834 \text{ MHz}$ ;  $\sigma = 0.945 \text{ S/m}$ ;  $\epsilon_r = 43.078$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.7 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $23.1 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7537; ConvF(10.34, 10.34, 10.34) @ 834 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.955 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $31.51 \text{ V/m}$ ; Power Drift =  $-0.01 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.11 \text{ W/kg}$   
**SAR(1 g) =  $0.728 \text{ W/kg}$ ; SAR(10 g) =  $0.497 \text{ W/kg}$**  (SAR corrected for target medium)  
 Smallest distance from peaks to all points 3 dB below =  $20 \text{ mm}$   
 Ratio of SAR at M2 to SAR at M1 =  $67.1\%$   
 Maximum value of SAR (measured) =  $0.983 \text{ W/kg}$

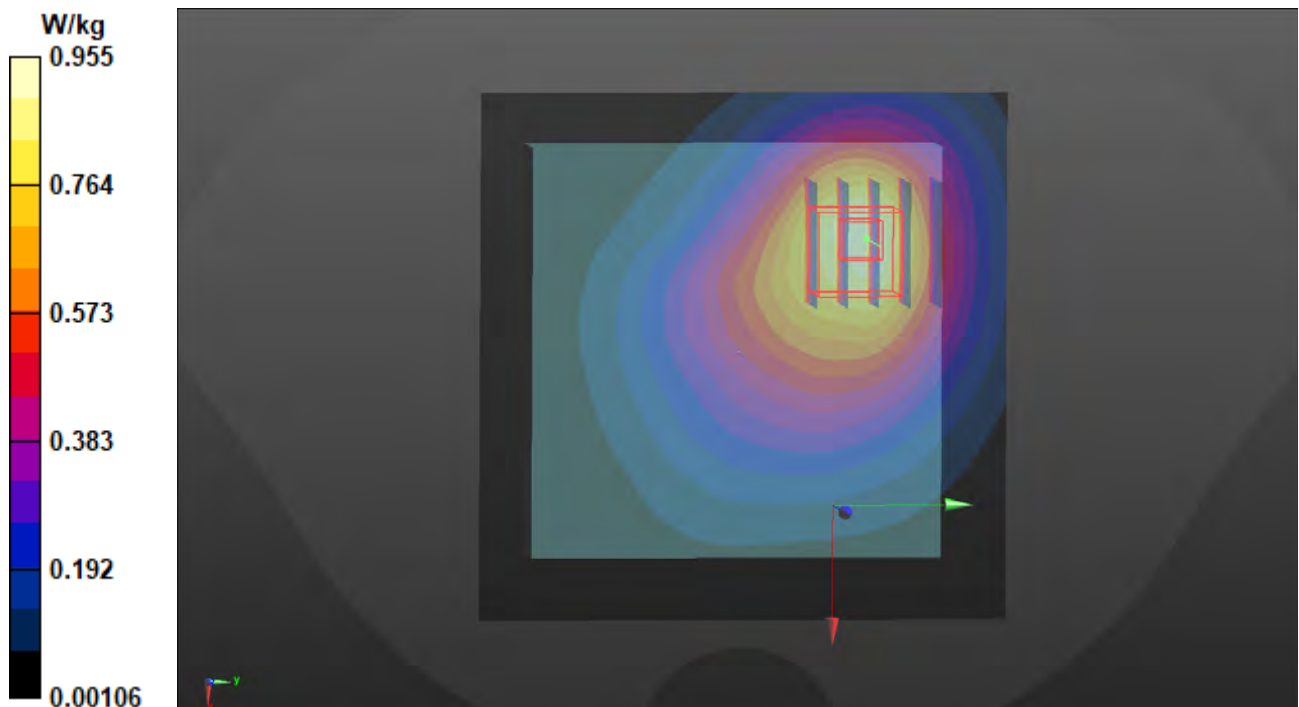

**P24 5GNR-25\_DFT-S QPSK20M\_Front Face\_10mm\_Ch376500\_1RB\_OS1\_Ant2**

**DUT: BBQZ-WTW-P20120750**


Communication System: UID 10931 - AAB, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz);  
 Frequency: 1882.5 MHz; Duty Cycle: 1:3.56  
 Medium: H16T20N1\_0121 Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.433$  S/m;  
 $\epsilon_r = 39.19$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.02, 8.02, 8.02) @ 1882.5 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (101x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.29 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 29.01 V/m; Power Drift = -0.18 dB  
 Peak SAR (extrapolated) = 1.49 W/kg  
**SAR(1 g) = 0.920 W/kg; SAR(10 g) = 0.567 W/kg** (SAR corrected for target medium)  
 Smallest distance from peaks to all points 3 dB below = 16.3 mm  
 Ratio of SAR at M2 to SAR at M1 = 62.9%  
 Maximum value of SAR (measured) = 1.28 W/kg

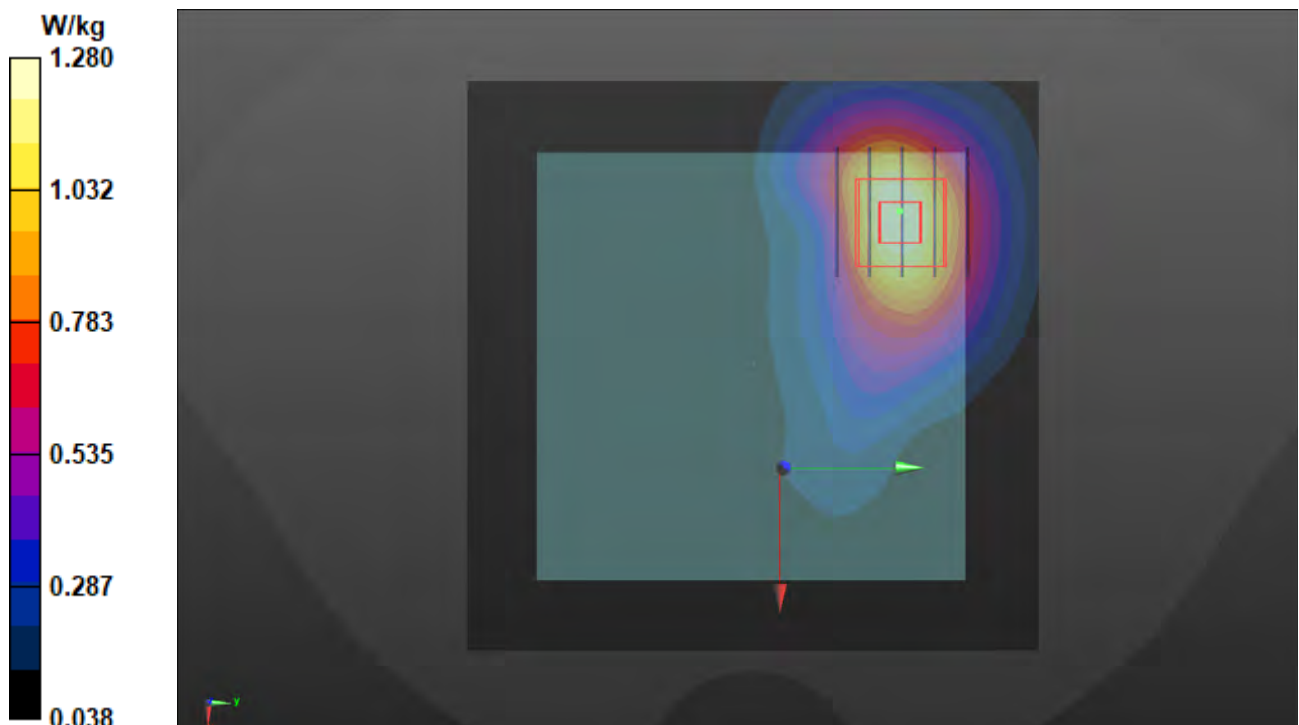

## P25 5GNR-n66\_DFT-S QPSK40M\_Front Face\_10mm\_Ch352000\_1RB\_OS1\_Ant1

### DUT: BBQZ-WTW-P20120750

Communication System: UID 10934 - AAB, 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz);  
Frequency: 1760 MHz; Duty Cycle: 1:3.56

Medium: H16T20N1\_0115 Medium parameters used:  $f = 1760$  MHz;  $\sigma = 1.335$  S/m;  $\epsilon_r = 40.441$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1760 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (101x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.47 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.32 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.620 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.8%

Maximum value of SAR (measured) = 1.35 W/kg

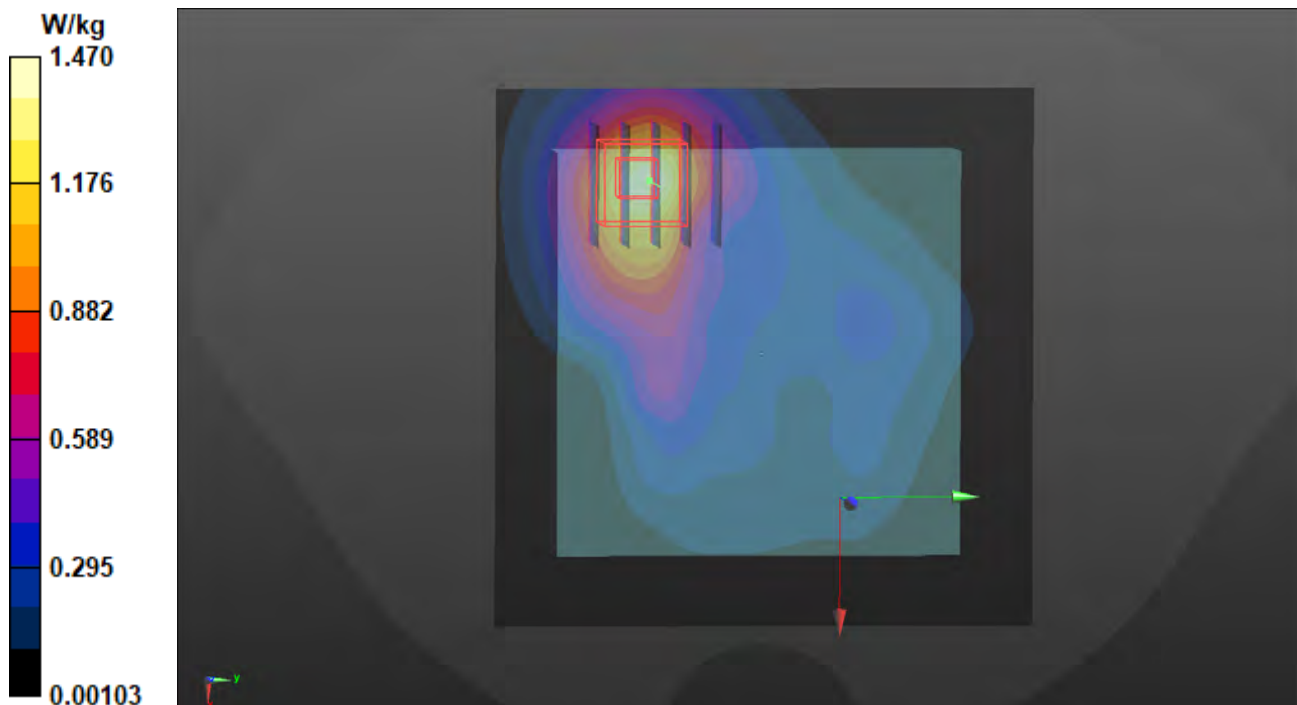

### P26 5GNR-n66\_DFT-S QPSK40M\_Front Face\_10mm\_Ch349000\_108RB\_OS54\_Ant2

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10942 - AAB, 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz); Frequency: 1745 MHz; Duty Cycle: 1:3.85

Medium: H16T20N1\_0119 Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.319$  S/m;  $\epsilon_r = 41.018$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1745 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (101x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.20 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.53 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.561 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 65.3%

Maximum value of SAR (measured) = 1.16 W/kg

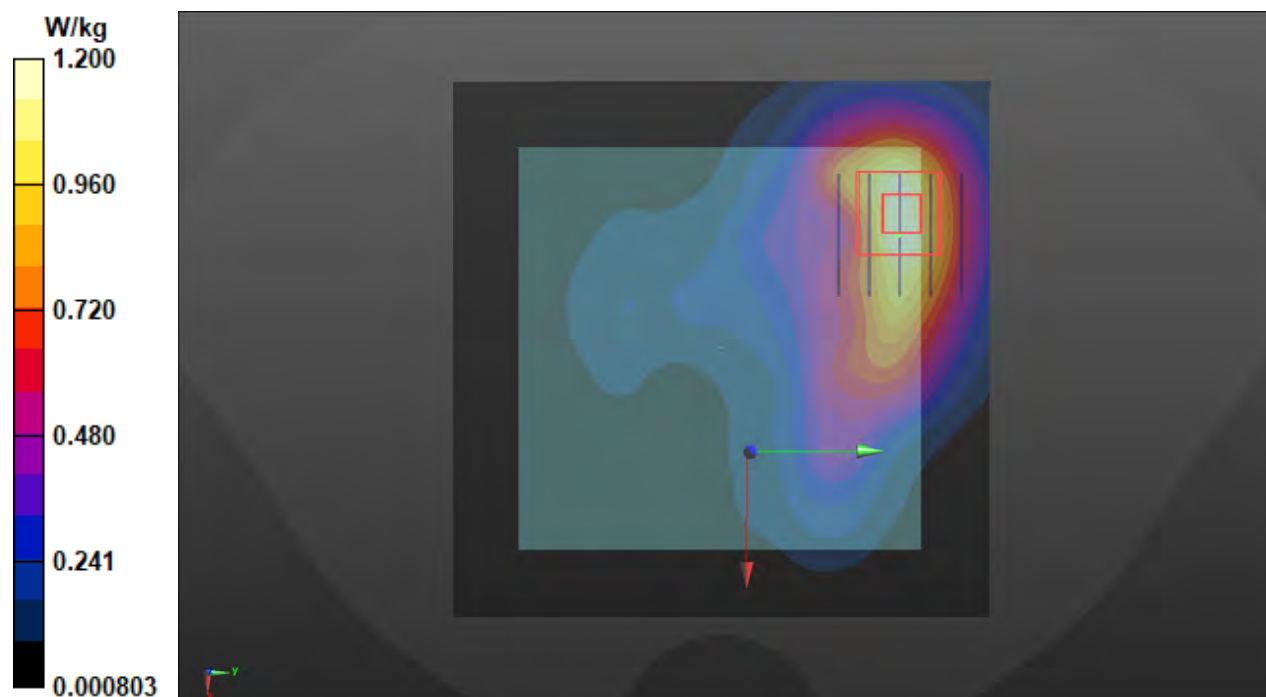



## P27 5GNR-n71\_DFT-S QPSK20M\_Front Face\_10mm\_Ch134600\_1RB\_OS1\_Ant1

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10931 - AAB, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz);  
Frequency: 673 MHz; Duty Cycle: 1:3.56

Medium: H06T09N1\_0115 Medium parameters used (extrapolated):  $f = 673$  MHz;  $\sigma = 0.822$  S/m;  $\epsilon_r = 44.361$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.66, 10.66, 10.66) @ 673 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.02 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.05 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.585 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 69.8%

Maximum value of SAR (measured) = 1.01 W/kg

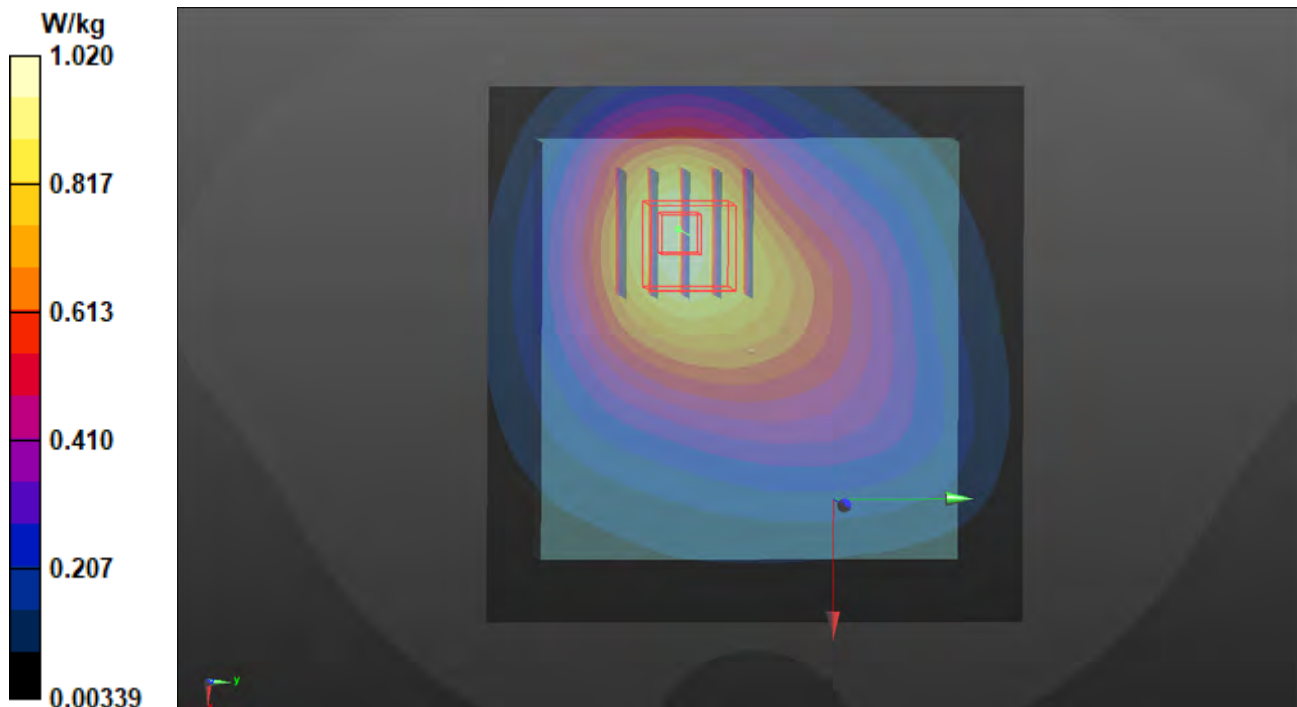

## P30 WLAN2.4G\_802.11b\_Right Side\_10mm\_Ch11\_Ant4

### DUT: BBQZ-WTW-P20120750

Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H19T27N1\_0115 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.885$  S/m;  $\epsilon_r = 39.869$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.4, 7.4, 7.4) @ 2462 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.244 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.75 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.322 W/kg

**SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.080 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.251 W/kg

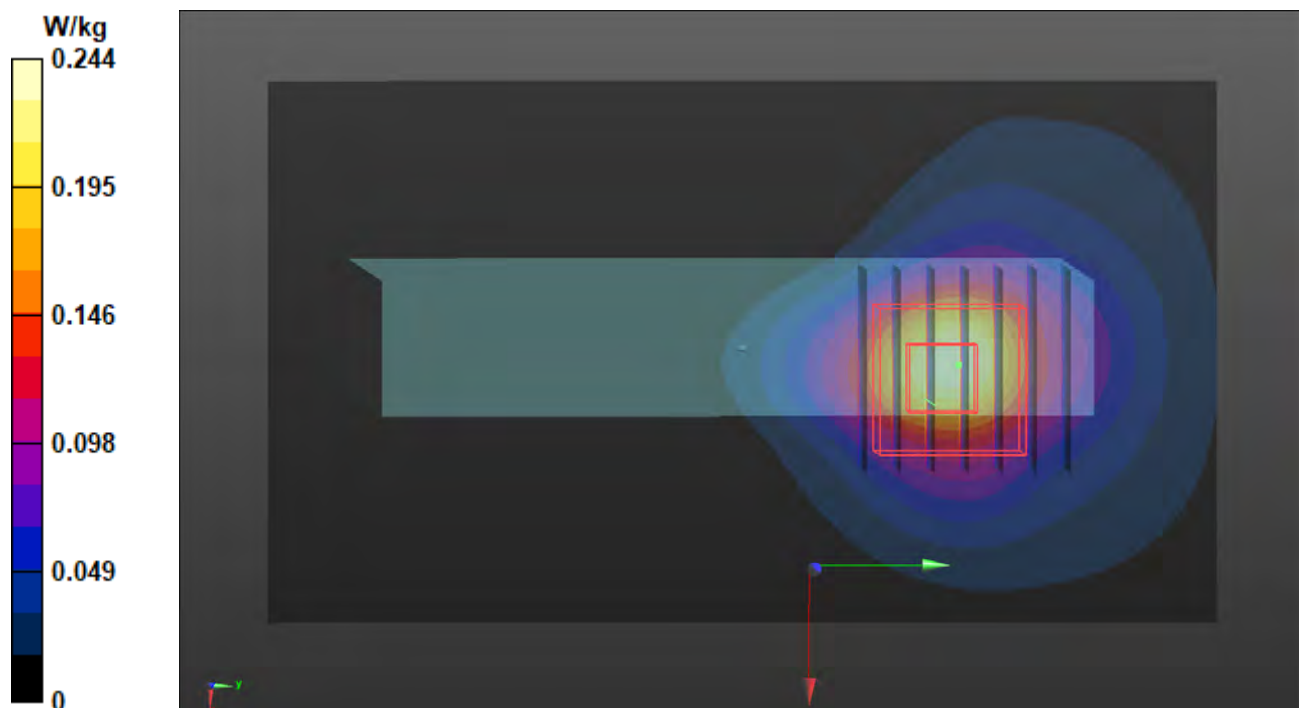

## P31 WLAN5.2G\_802.11ac VHT80\_Front Face\_10mm\_Ch42\_Ant4

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5210 MHz; Duty Cycle: 1:1

Medium: H34T60N1\_0115 Medium parameters used (interpolated):  $f = 5210$  MHz;  $\sigma = 4.62$  S/m;  $\epsilon_r = 37.142$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(5.35, 5.35, 5.35) @ 5210 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (141x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.236 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.823 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.421 W/kg

**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.044 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 66.9%

Maximum value of SAR (measured) = 0.269 W/kg

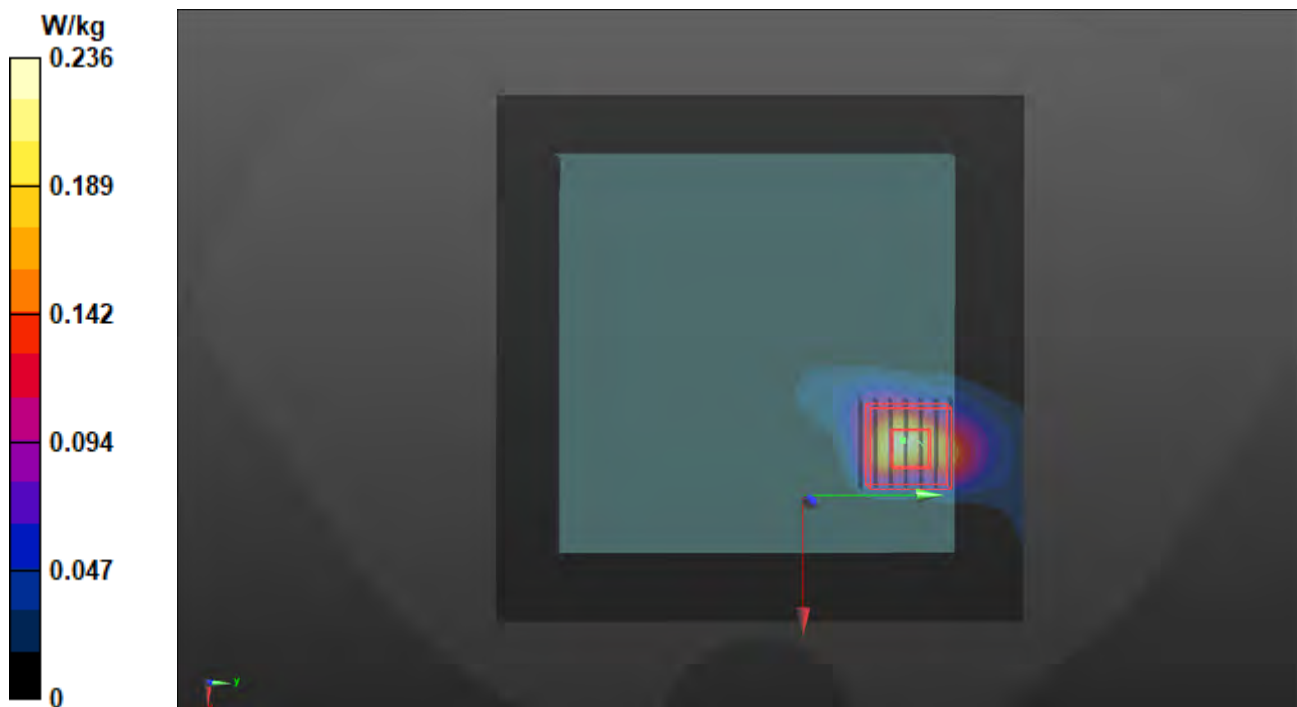

## P32 WLAN5.8G\_802.11ac VHT80\_Front Face\_10mm\_Ch155\_Ant4

**DUT: BBQZ-WTW-P20120750**

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: H34T60N1\_0115 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.167$  S/m;  $\epsilon_r = 36.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(4.95, 4.95, 4.95) @ 5775 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2020/03/18
- Phantom: SAM Phantom\_1982; Type: QD 000 P41 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (141x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.380 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.538 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.832 W/kg

**SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.073 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 0.506 W/kg

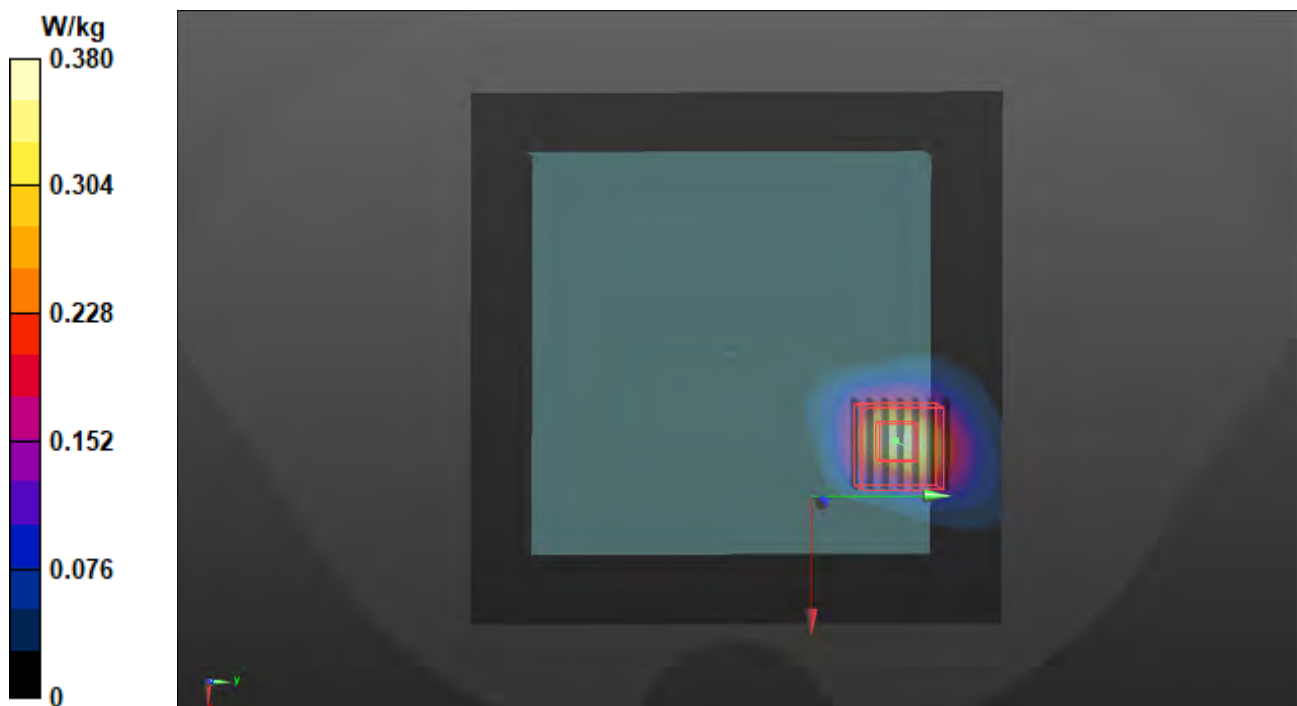

## **Appendix C. Calibration Certificate for Probe and Dipole**

The SPEAG calibration certificates are shown as follows.



Accreditation No.: **SCS 0108**

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **B.V. ADT (Auden)**

Certificate No: **D750V3-1013\_Aug20**

## CALIBRATION CERTIFICATE

Object **D750V3 - SN:1013**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **August 13, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: BH9394 (20k)	31-Mar-20 (No. 217-03106)	Apr-21
Type-N mismatch combination	SN: 310982 / 06327	31-Mar-20 (No. 217-03104)	Apr-21
Reference Probe EX3DV4	SN: 7349	29-Jun-20 (No. EX3-7349_Jun20)	Jun-21
DAE4	SN: 601	27-Dec-19 (No. DAE4-601_Dec19)	Dec-20

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

	Name	Function	Signature
Calibrated by:	Jeffrey Katzman	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: August 14, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	750 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	41.9	0.89 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	42.4 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>8.48 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	1.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>5.53 W/kg <math>\pm</math> 16.5 % (k=2)</b>



## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.0 $\Omega$ - 0.8 j $\Omega$
Return Loss	- 30.5 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.036 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 13.08.2020

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1013**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.97, 9.97, 9.97) @ 750 MHz; Calibrated: 29.06.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.14 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 3.22 W/kg

**SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.4 W/kg**

Smallest distance from peaks to all points 3 dB below = 17 mm


Ratio of SAR at M2 to SAR at M1 = 66.8%

Maximum value of SAR (measured) = 2.83 W/kg

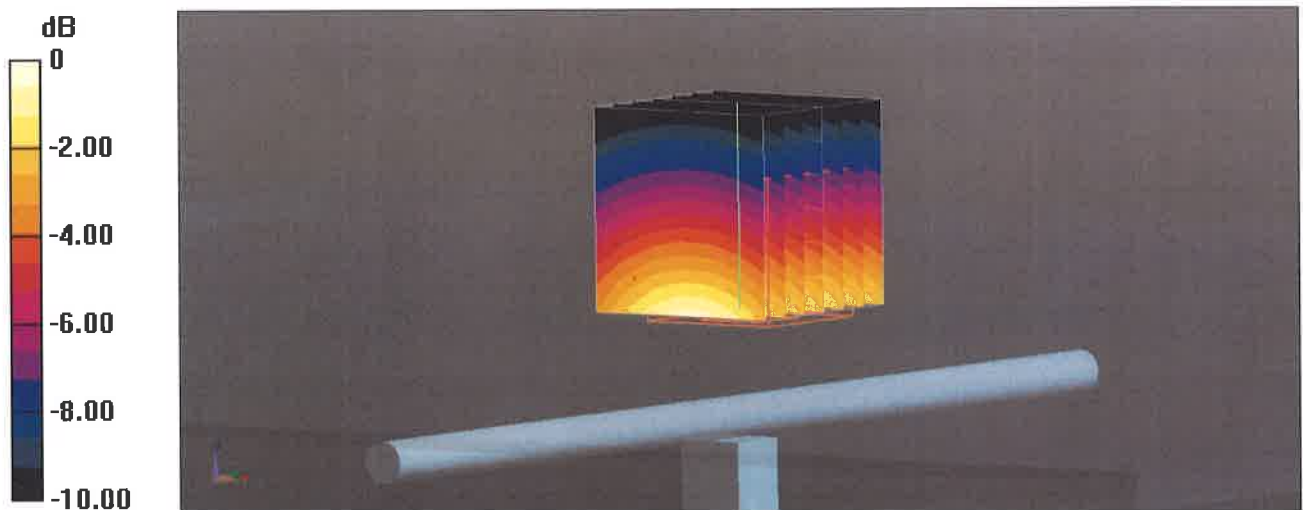

0 dB = 2.83 W/kg = 4.52 dBW/kg

# Impedance Measurement Plot for Head TSL

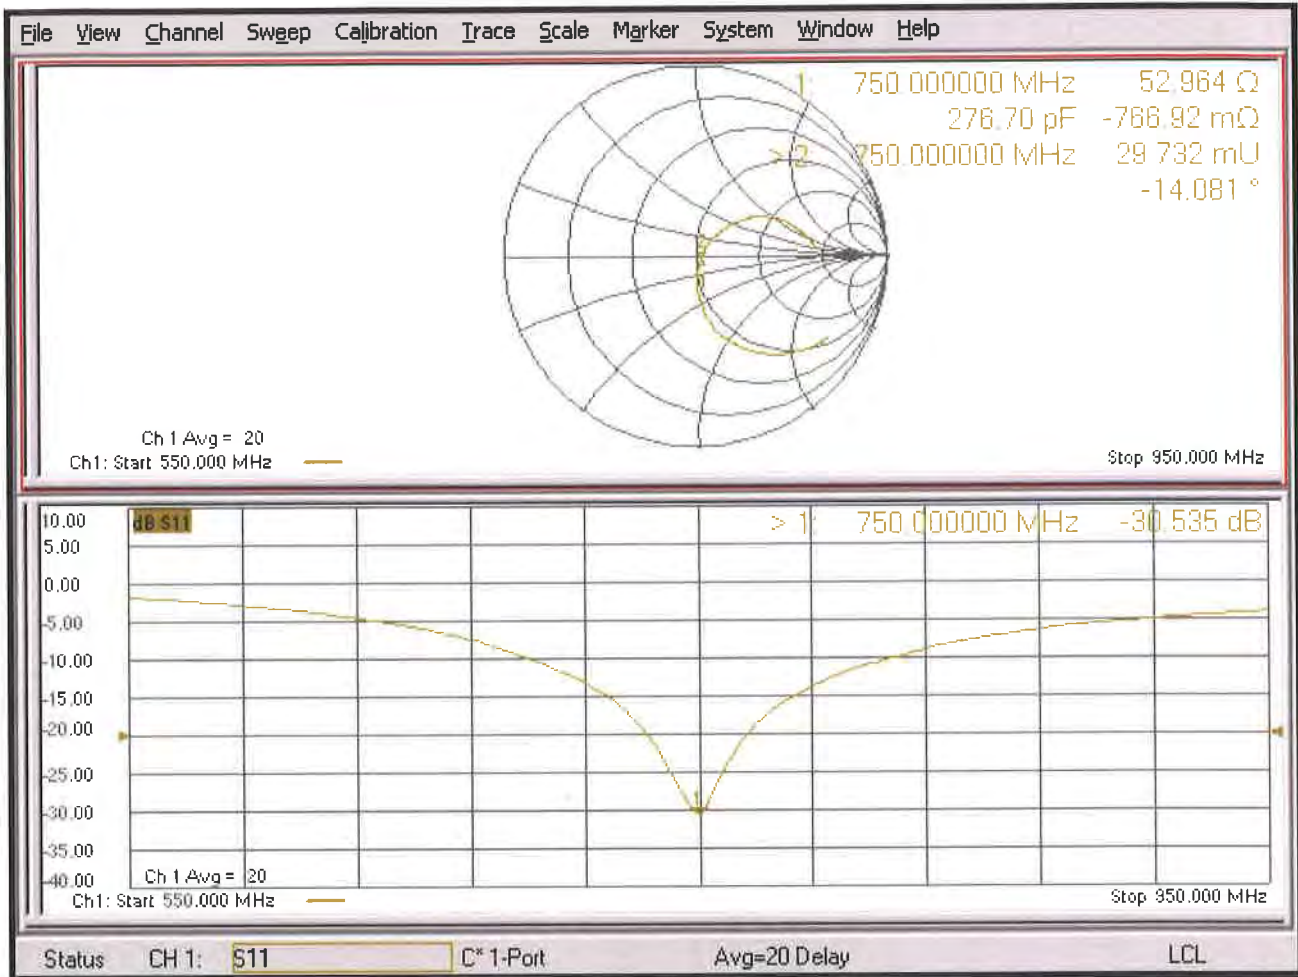



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **D835V2-4d121\_Aug20**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d121**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **August 13, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: BH9394 (20k)	31-Mar-20 (No. 217-03106)	Apr-21
Type-N mismatch combination	SN: 310982 / 06327	31-Mar-20 (No. 217-03104)	Apr-21
Reference Probe EX3DV4	SN: 7349	29-Jun-20 (No. EX3-7349_Jun20)	Jun-21
DAE4	SN: 601	27-Dec-19 (No. DAE4-601_Dec19)	Dec-20

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

Calibrated by: **Jeffrey Katzman**      **Jeffrey Katzman**      **Laboratory Technician**

Approved by: **Katja Pokovic**      **Katja Pokovic**      **Technical Manager**

Signature  
*J. Katzman*  
*K. Pokovic*

Issued: August 14, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	835 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.0 °C	41.5	0.90 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	42.2 $\pm$ 6 %	0.93 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.43 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>9.52 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>6.21 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.8 $\Omega$ - 3.4 j $\Omega$
Return Loss	- 29.4 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.394 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 13.08.2020

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d121**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.93$  S/m;  $\epsilon_r = 42.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.69, 9.69, 9.69) @ 835 MHz; Calibrated: 29.06.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 62.61 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.60 W/kg

**SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.58 W/kg**

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 67.5%


Maximum value of SAR (measured) = 3.21 W/kg



0 dB = 3.21 W/kg = 5.07 dBW/kg



# Impedance Measurement Plot for Head TSL

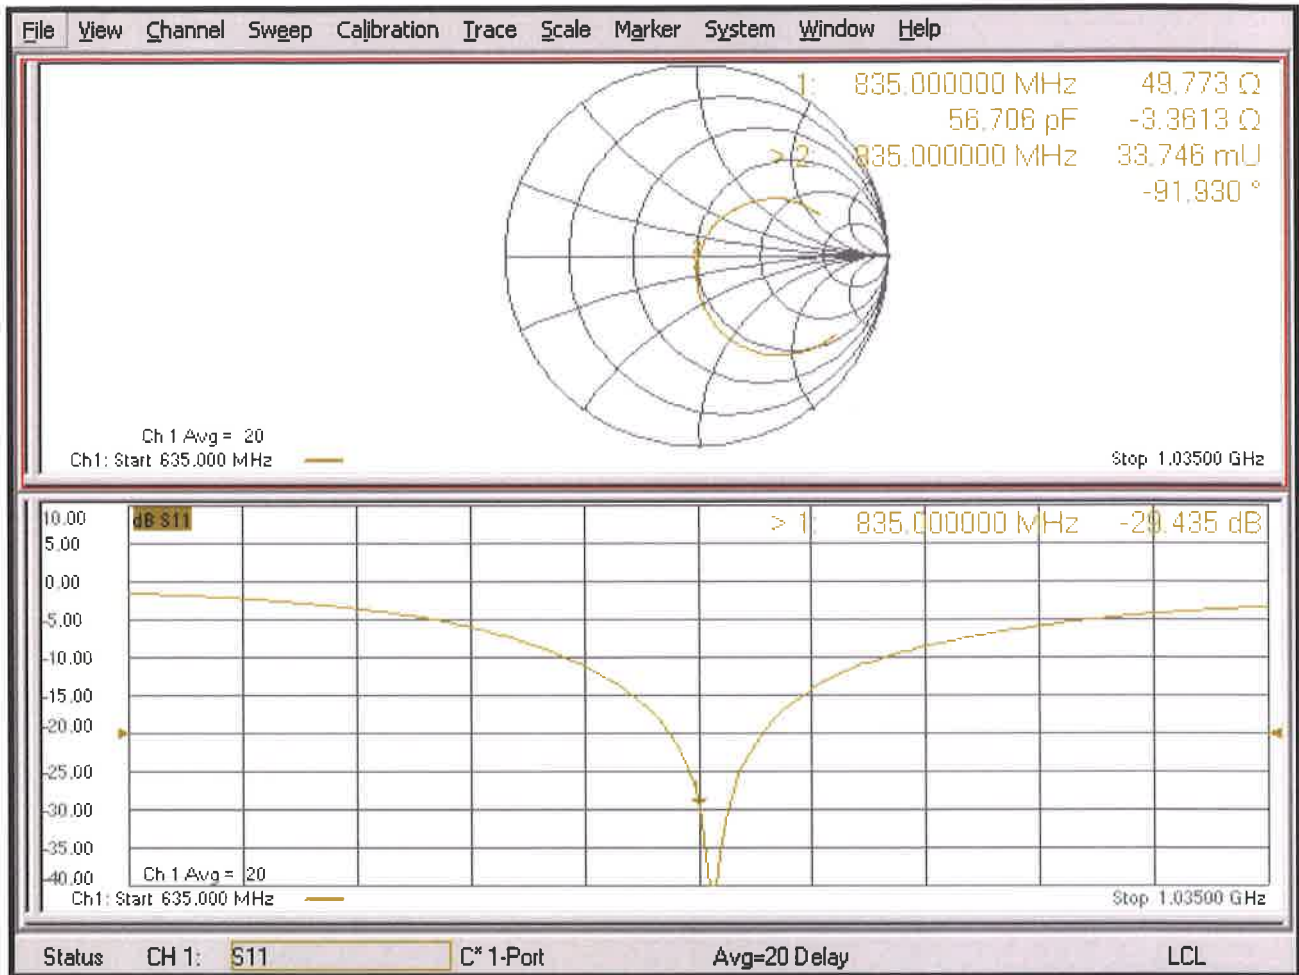



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **D1750V2-1055\_Aug20**

## CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1055**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **August 14, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: BH9394 (20k)	31-Mar-20 (No. 217-03106)	Apr-21
Type-N mismatch combination	SN: 310982 / 06327	31-Mar-20 (No. 217-03104)	Apr-21
Reference Probe EX3DV4	SN: 7349	29-Jun-20 (No. EX3-7349_Jun20)	Jun-21
DAE4	SN: 601	27-Dec-19 (No. DAE4-601_Dec19)	Dec-20

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

Calibrated by: **Claudio Leubler**      **Laboratory Technician**

Signature

Approved by: **Katja Pokovic**      **Technical Manager**

Issued: August 14, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	1750 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.0 °C	40.1	1.37 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	40.4 $\pm$ 6 %	1.35 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	8.89 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>36.0 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	4.69 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>18.9 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.3 $\Omega$ + 0.8 j $\Omega$
Return Loss	- 41.5 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.223 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 14.08.2020

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1055**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.35$  S/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.58, 8.58, 8.58) @ 1750 MHz; Calibrated: 29.06.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.6 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 16.6 W/kg

**SAR(1 g) = 8.89 W/kg; SAR(10 g) = 4.69 W/kg**

Smallest distance from peaks to all points 3 dB below = 10 mm


Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 13.9 W/kg

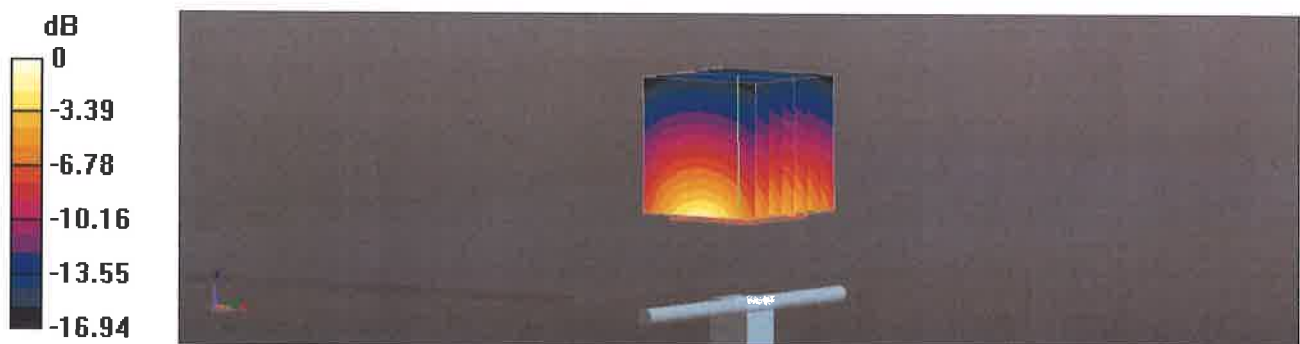

0 dB = 13.9 W/kg = 11.43 dBW/kg

# Impedance Measurement Plot for Head TSL

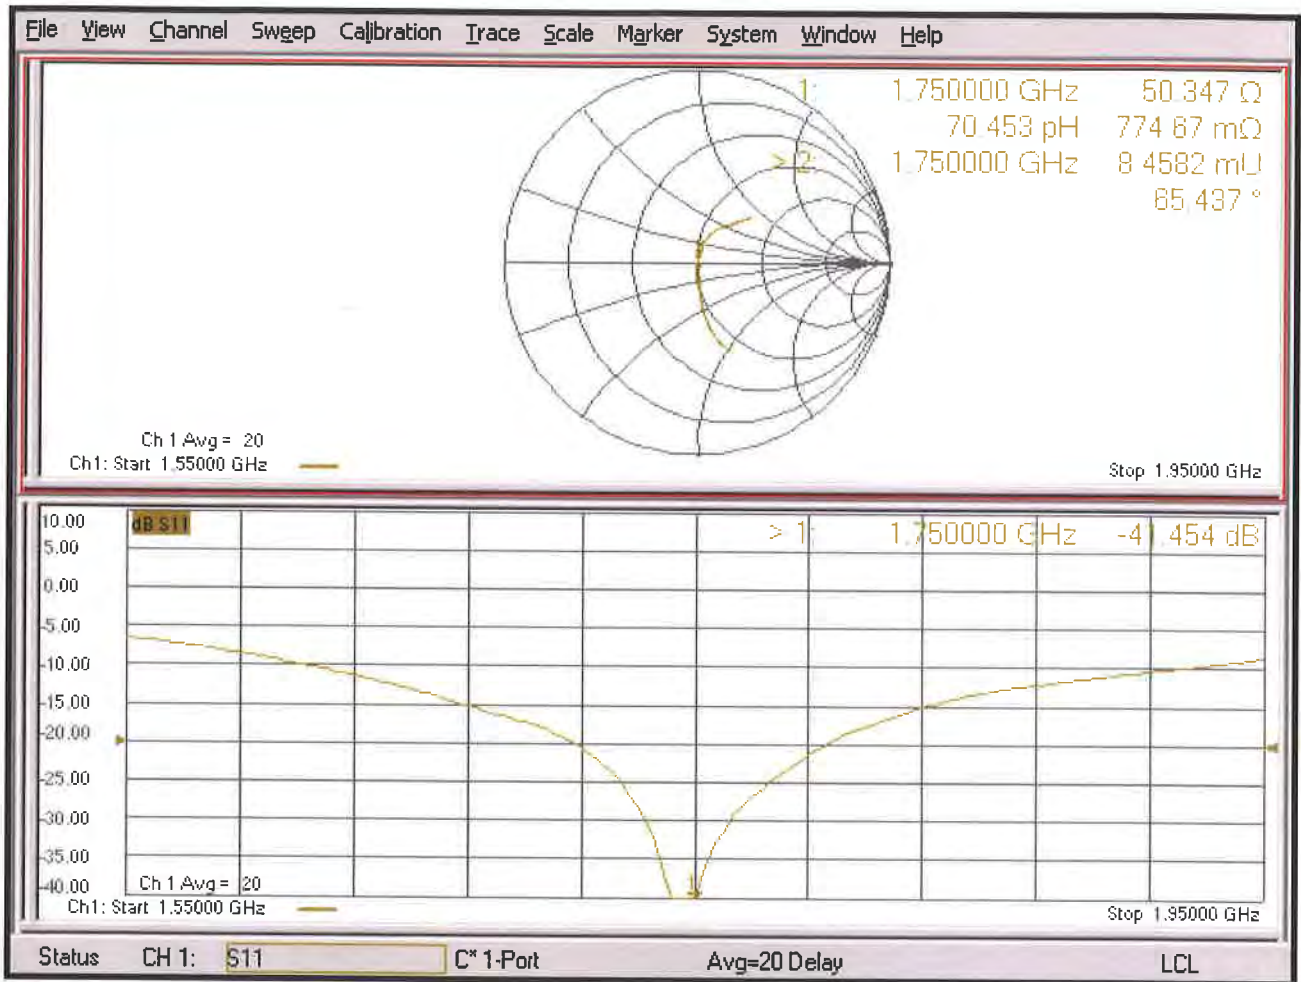



In Collaboration with  
**s p e a g**  
 CALIBRATION LABORATORY



中国认可  
 国际互认  
 校准  
 CALIBRATION  
 CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **AUDEN**

Certificate No: **Z20-60222**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d018**

Calibration Procedure(s) **FF-Z11-003-01**  
**Calibration Procedures for dipole validation kits**

Calibration date: **June 18, 2020**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	04-Sep-19 (CTTL, No.J19X07825)	Sep-20
Power sensor NRP8S	104291	04-Sep-19 (CTTL, No.J19X07825)	Sep-20
ReferenceProbe EX3DV4	SN 7514	27-Sep-19(CTTL-SPEAG,No.Z19-60306)	Sep-20
DAE4	SN 1555	22-Aug-19(CTTL-SPEAG,No.Z19-60295)	Aug-20
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	25-Feb-20 (CTTL, No.J20X00516)	Feb-21
NetworkAnalyzer E5071C	MY46110673	10-Feb-20 (CTTL, No.J20X00515)	Feb-21

	Name	Function
Calibrated by:	Zhao Jing	SAR Test Engineer
Reviewed by:	Lin Hao	SAR Test Engineer
Approved by:	Qi Dianyuan	SAR Project Leader

Signature

Issued: June 26, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





### lossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com http://www.chinattl.cn

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY52	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Triple Flat Phantom 5.1C	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	1900 MHz ± 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	40.0	1.40 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	38.9 ± 6 %	1.39 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	<1.0 °C	----	----

### SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	9.88 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>39.4 W/kg ± 18.8 % (k=2)</b>
<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	5.06 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>20.2 W/kg ± 18.7 % (k=2)</b>



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.3Ω+ 2.59jΩ
Return Loss	- 29.5dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.058 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## DASY5 Validation Report for Head TSL

Date: 06.18.2020

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d018**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.39$  S/m;  $\epsilon_r = 38.92$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7514; ConvF(7.83, 7.83, 7.83) @ 1900 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1555; Calibrated: 2019-08-22
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 100.0 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 19.3 W/kg

**SAR(1 g) = 9.88 W/kg; SAR(10 g) = 5.06 W/kg**

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%


Maximum value of SAR (measured) = 15.8 W/kg

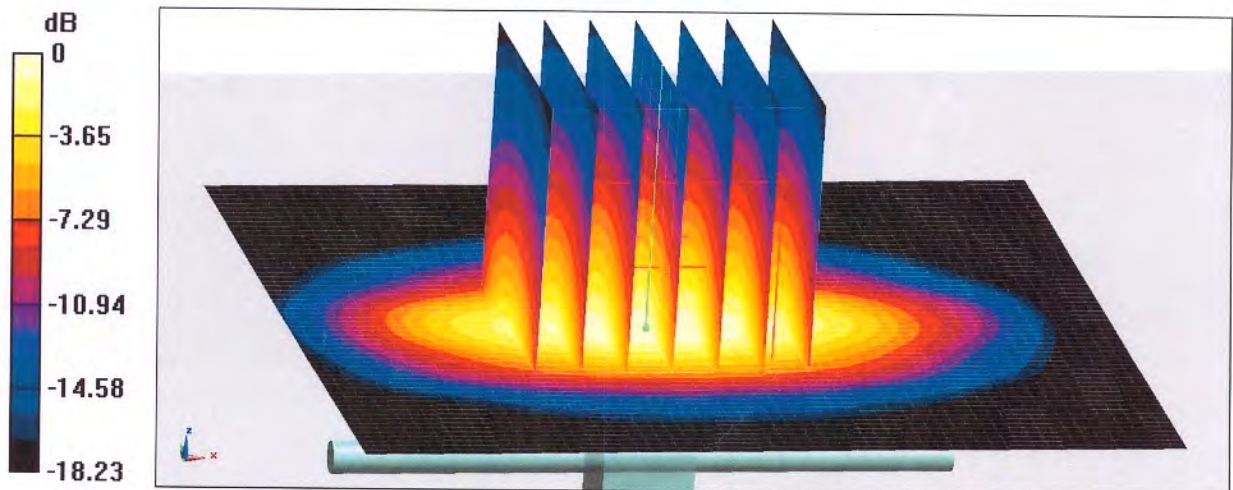



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Impedance Measurement Plot for Head TSL

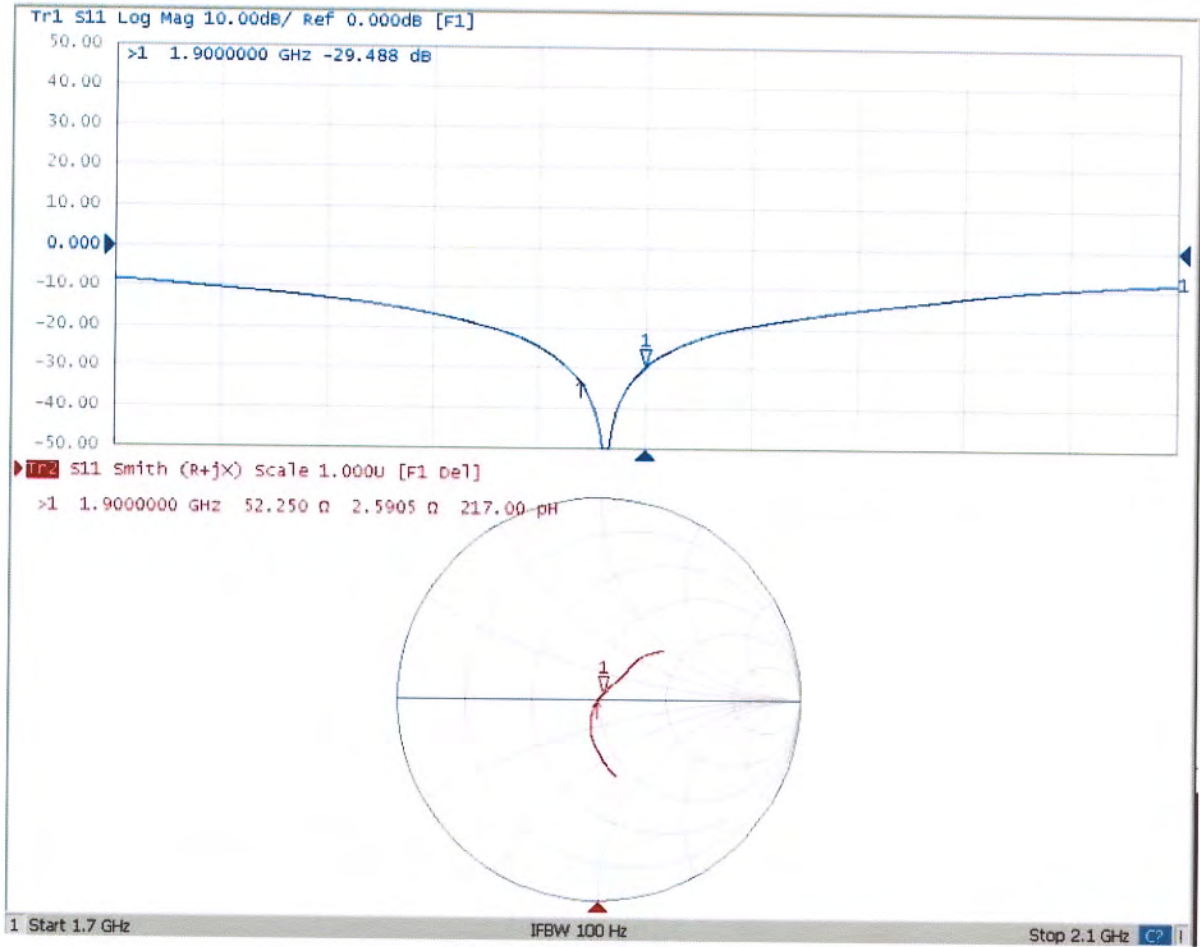



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **D1900V2-5d036\_Jan20**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d036**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **January 21, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-19 (No. 217-02894)	Apr-20
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-19 (No. 217-02895)	Apr-20
Reference Probe EX3DV4	SN: 7349	31-Dec-19 (No. EX3-7349_Dec19)	Dec-20
DAE4	SN: 601	27-Dec-19 (No. DAE4-601_Dec19)	Dec-20

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

Calibrated by: **Claudio Leubler**      **Laboratory Technician**

Approved by: **Katja Pokovic**      **Technical Manager**

Signature

Issued: January 22, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.3
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	1900 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	40.0	1.40 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	41.4 $\pm$ 6 %	1.39 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	9.95 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>40.3 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	5.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>20.9 W/kg <math>\pm</math> 16.5 % (k=2)</b>



## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.8 $\Omega$ + 5.4 j $\Omega$
Return Loss	- 25.3 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.195 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 21.01.2020

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d036**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.39$  S/m;  $\epsilon_r = 41.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.6, 8.6, 8.6) @ 1900 MHz; Calibrated: 31.12.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.0 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 18.6 W/kg

**SAR(1 g) = 9.95 W/kg; SAR(10 g) = 5.18 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.8 mm


Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 15.5 W/kg

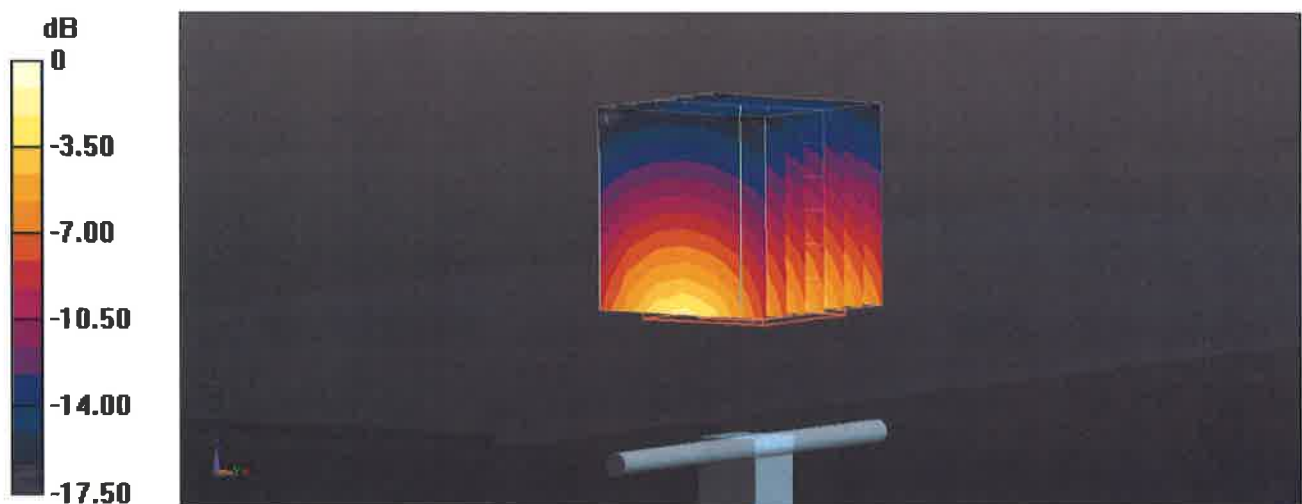

0 dB = 15.5 W/kg = 11.90 dBW/kg

# Impedance Measurement Plot for Head TSL

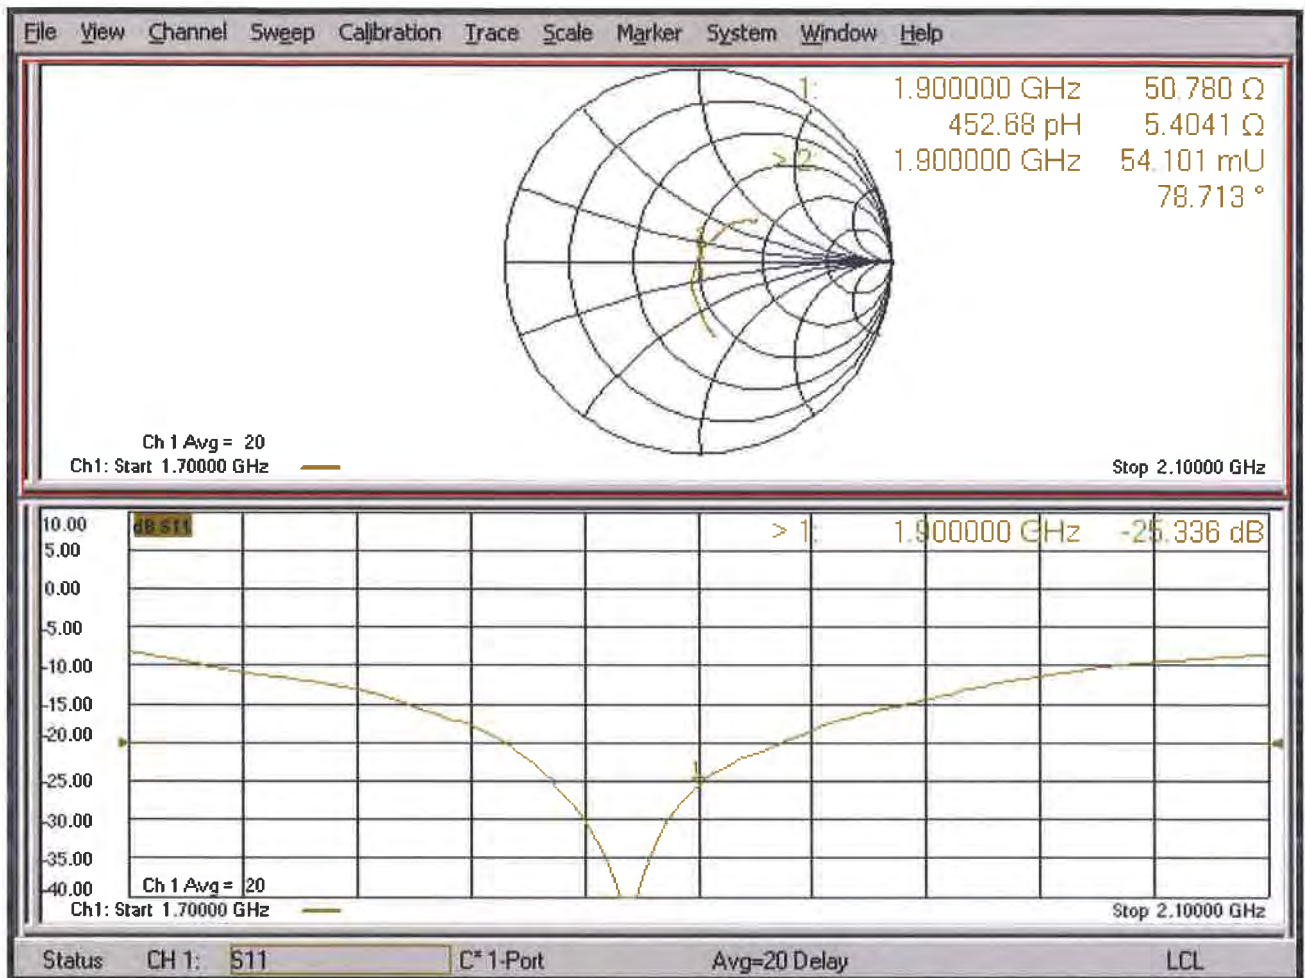



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client **B.V. ADT (Auden)**

Certificate No: **D2300V2-1004\_Jan20**

## CALIBRATION CERTIFICATE

Object **D2300V2 - SN:1004**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **January 21, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-19 (No. 217-02894)	Apr-20
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-19 (No. 217-02895)	Apr-20
Reference Probe EX3DV4	SN: 7349	31-Dec-19 (No. EX3-7349_Dec19)	Dec-20
DAE4	SN: 601	27-Dec-19 (No. DAE4-601_Dec19)	Dec-20
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

Calibrated by: **Claudio Leubler** Laboratory Technician

Signature

Approved by: **Katja Pokovic** Technical Manager

Issued: January 22, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.3
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	2300 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.0 °C	39.5	1.67 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	39.8 $\pm$ 6 %	1.70 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	12.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>48.8 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	5.85 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>23.3 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	47.3 $\Omega$ - 2.6 j $\Omega$
Return Loss	- 28.2 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.162 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 21.01.2020

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN:1004**

Communication System: UID 0 - CW; Frequency: 2300 MHz

Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.7$  S/m;  $\epsilon_r = 39.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.15, 8.15, 8.15) @ 2300 MHz; Calibrated: 31.12.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.8 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 23.8 W/kg

**SAR(1 g) = 12.3 W/kg; SAR(10 g) = 5.85 W/kg**

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 20.0 W/kg

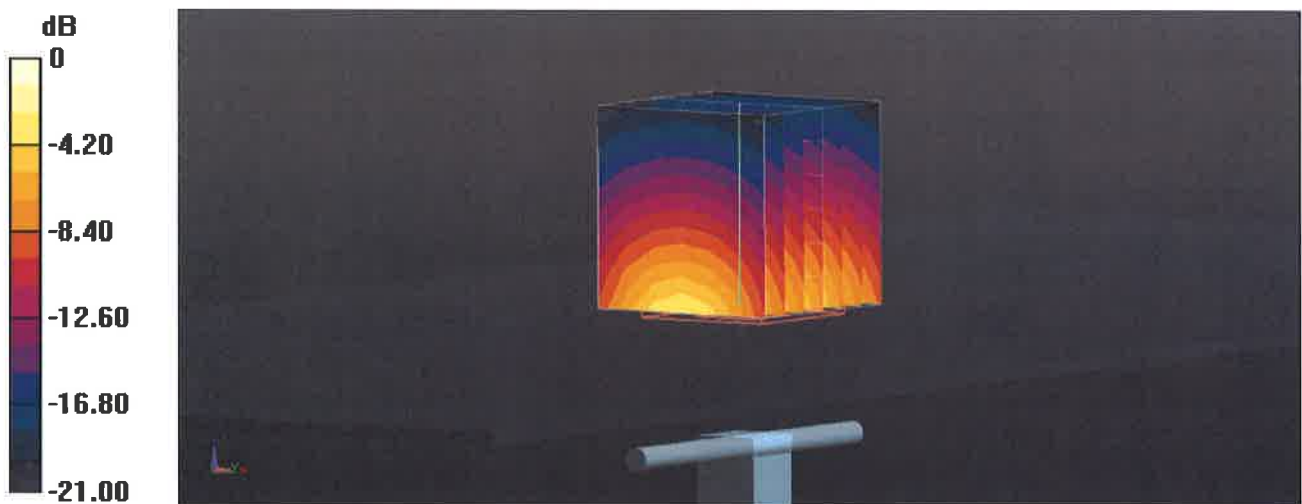

0 dB = 20.0 W/kg = 13.01 dBW/kg



# Impedance Measurement Plot for Head TSL

