

FCC SAR TEST REPORT

FCC ID : PY321300542
Equipment : Netgear 5G MHS Travel Router
Brand Name : Netgear
Model Name : MR6110
Applicant : Netgear Inc.
350 E. Plumeria Drive, San
Jose, CA 95134, United States
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Dec. 21, 2021 and testing was started from Jan. 03, 2022 and completed on Jan. 05, 2022. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. Statement of Compliance 4

2. Data Reuse Approach 4

3. Model Difference Information 5

4. Reference detail Section 5

5. Guidance Applied 5

6. Equipment Under Test (EUT) Information 6

 6.1 General Information 6

7. RF Exposure Limits 7

 7.1 Uncontrolled Environment 7

 7.2 Controlled Environment 7

8. Specific Absorption Rate (SAR) 8

 8.1 Introduction 8

 8.2 SAR Definition 8

9. System Description and Setup 9

 9.1 Test Site Location 9

 9.2 E-Field Probe 10

 9.3 Data Acquisition Electronics (DAE) 10

 9.4 Phantom 11

 9.5 Device Holder 12

10. Measurement Procedures 13

 10.1 Spatial Peak SAR Evaluation 13

 10.2 Power Reference Measurement 14

 10.3 Area Scan 14

 10.4 Zoom Scan 15

 10.5 Volume Scan Procedures 15

 10.6 Power Drift Monitoring 15

11. Test Equipment List 16

12. System Verification 17

 12.1 Tissue Verification 17

 12.2 System Performance Check Results 18

13. Antenna Location 19

14. Spot Check SAR Results 20

15. Simultaneous Transmission Analysis 23

16. Uncertainty Assessment 27

17. References 29

Appendix A. Plots of SAR System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASYS Calibration Certificate

Appendix D. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
FA190614-01B	01	Initial issue of report	Jan. 28, 2022



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Netgear Inc., Netgear 5G MHS Travel Router, MR6110, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
			Hotspot (Separation 10mm)	
			1g SAR (W/kg)	
Licensed	LTE	LTE Band 2	1.17	1.44
		LTE Band 5	0.87	
		LTE Band 7	1.29	
		LTE Band 12	0.80	
		LTE Band 14	0.98	
		LTE Band 30	1.29	
		LTE Band 4 / 66	1.08	
	FR1	LTE Band 48	0.91	
		FR1 n2	1.13	
		FR1 n5	0.92	
		FR1 n12	0.68	
		FR1 n14	0.98	
		FR1 n30	1.24	
		FR1 n66	0.95	
		FR1 n77	1.29	
DTS	WLAN	2.4GHz WLAN	0.09	1.42
NII		5GHz WLAN	0.10	1.44
Date of Testing:			2022/1/3 ~ 2022/1/5	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No.TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) and power density for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Paula Chen

2. Data Reuse Approach

FCC ID: PY321100529 (parent model) and FCC ID: PY321300542 (variant model) use the same identical internal printed circuit board layouts, while the variant model depopulates mmWave related components and SW , details are available in the operational description

Due to the same design of the antenna 1/2/3/4/5/6, SAR data reuse is requested and spot check data in this report is used to justify the SAR data reuse.

The applicant should take full responsibility that the test data as referenced in this report represent compliance for this FCC ID: PY321300542



3. Model Difference Information

PY321100529 and PY321300542 use the identical internal printed circuit board layout, and the major differences which may relate to RF are listed below:

- Removal of FR2 related components.
- Less CA combination supported.
- Smaller size of the display.
- Software implementation does not support WiFi 6E.

The details of similarity and difference can be found in the confidential documents.

4. Reference detail Section

Rule Part	Equipment Class	Wireless Technology	Frequency Band (MHz)	Reference FCC ID (Parent)	Type Grant/ Permissive Change	Reference Title	FCC ID Filling (Variant)	Spot Check Required
Part 2.1093 SAR	DTS	Wi-Fi	2400~2483.5	PY321100529	Original Grant	FA190614D	PY321300542	Spot check Ant 3 / 4
	NII	Wi-Fi	5150~5250 5250~5350 5470~5725 5725~5850	PY321100529	Original Grant	FA190614D	PY321300542	Spot check Ant 3 / 4
	PCB CBE	LTE	B2 /4 /5 /7 /12 /14 /30 /48 /66	PY321100529	Original Grant	FA190614D	PY321300542	Spot check at Ant 1 for LTE 2/5/12/14/48/66 Spot check at Ant 2 for LTE 2/4/7/30/66
		5G FR1	n2/ 5/ 12/ 14/ 30/ 66/ 77	PY321100529	Original Grant	FA190614D	PY321300542	Spot check at Ant 1 for NR n2/5/12/14/66/77 Spot Check at Ant 2 for NR n2/5/30/66/77 Spot Check at Ant 5 / 6 NR n77

5. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



6. Equipment Under Test (EUT) Information

6.1 General Information

Product Feature & Specification	
Equipment Name	Netgear 5G MHS Travel Router
Brand Name	Netgear
Model Name	MR6110
FCC ID	PY321300542
Wireless Technology and Frequency Range	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n77: 3700 MHz ~ 3980 MHz, 3450MHz ~ 3550MHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz
Mode	LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160
EUT Stage	Identical Prototype



7. RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

9. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

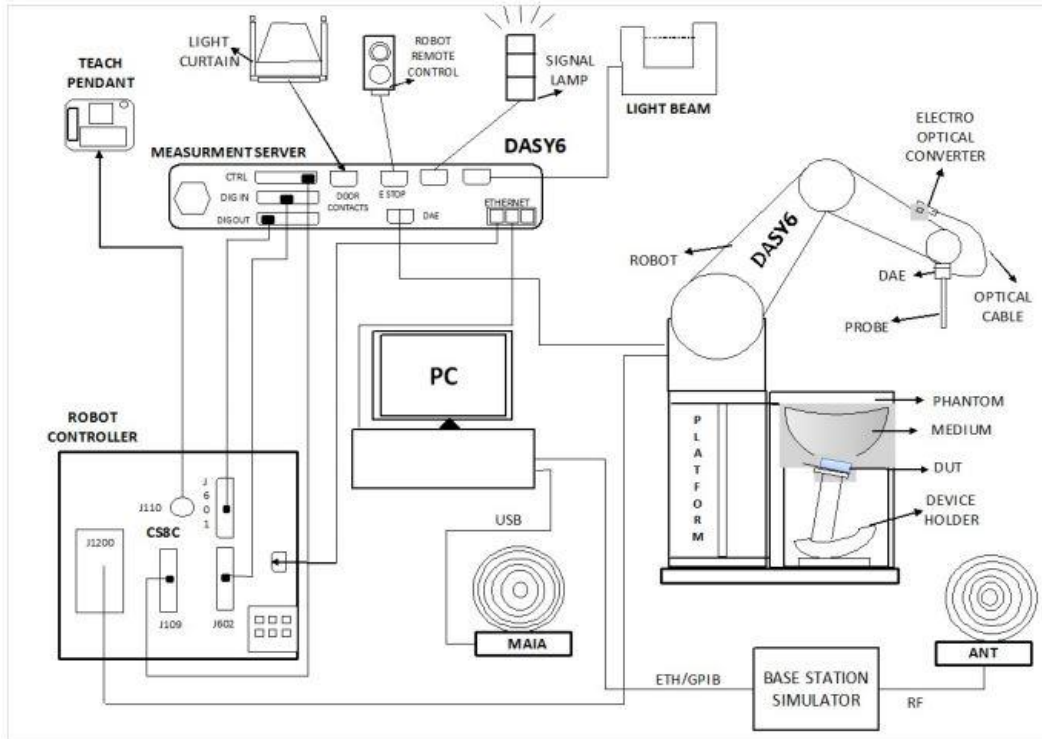

- The DASY system in DASY6/DASY5 V5.2 SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY5/DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

9.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No.TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory TW1190		Wensan Laboratory TW3786		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	


9.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

9.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


9.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

9.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN power measurement, use engineering software to configure EUT WLAN continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

10.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

10.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

10.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



11. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Mar. 08, 2019	Mar. 05, 2022
SPEAG	835MHz System Validation Kit ⁽²⁾	D835V2	4d167	Nov. 25, 2019	Nov. 22, 2022
SPEAG	1750MHz System Validation Kit ⁽²⁾	D1750V2	1112	Mar. 07, 2019	Mar. 04, 2022
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d185	Mar. 07, 2019	Mar. 04, 2022
SPEAG	2300MHz System Validation Kit	D2300V2	1088	Jul. 13, 2021	Jul. 12, 2022
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2019	Nov. 18, 2022
SPEAG	2600MHz System Validation Kit ⁽²⁾	D2600V2	1078	Mar. 06, 2019	Mar. 03, 2022
SPEAG	3500MHz System Validation Kit ⁽²⁾	D3500V2	1014	Jan. 29, 2019	Jan. 26, 2022
SPEAG	3900MHz System Validation Kit ⁽²⁾	D3900V2	1017	Apr. 29, 2019	Apr. 26, 2022
SPEAG	5GHz System Validation Kit	D5GHzV2	1171	Apr. 20, 2021	Apr. 19, 2022
SPEAG	Data Acquisition Electronics	DAE3	528	Jul. 26, 2021	Jul. 25, 2022
SPEAG	Data Acquisition Electronics	DAE4	376	Nov. 22, 2021	Nov. 21, 2022
SPEAG	Data Acquisition Electronics	DAE4	778	May. 21, 2021	May. 20, 2022
SPEAG	Dosimetric E-Field Probe	ES3DV3	3115	Nov. 23, 2021	Nov. 22, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	3578	Jun. 23, 2021	Jun. 22, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Apr. 23, 2021	Apr. 22, 2022
RCPTWN	Thermometer	HTC-1	TM685-1	Oct. 28, 2021	Oct. 27, 2022
RCPTWN	Thermometer	HTC-1	TM560-2	Oct. 28, 2021	Oct. 27, 2022
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 21, 2021	Oct. 20, 2022
Keysight	Wireless Communication Test Set	E5515C	MY50267236	Mar. 21, 2021	Mar. 20, 2022
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 24, 2021	Oct. 23, 2022
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 07, 2021	Sep. 06, 2022
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 24, 2021	Sep. 23, 2022
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Oct. 26, 2021	Oct. 25, 2022
Anritsu	Power Meter	ML2495A	1419002	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Meter	ML2496A	2119003	Jun. 09, 2021	Jun. 08, 2022
Anritsu	Power Sensor	MA2411B	1726150	Oct. 09, 2021	Oct. 08, 2022
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 16, 2021	Jul. 15, 2022
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 15, 2021	Jan. 14, 2022
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Sep. 06, 2021	Sep. 05, 2022
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 11, 2021	May. 10, 2022
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

12. System Verification

12.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing.

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	22.6	0.890	43.137	0.89	41.90	0.00	2.95	±5	2022/1/3
835	22.6	0.920	42.721	0.90	41.50	2.22	2.94	±5	2022/1/3
1750	22.6	1.358	40.513	1.37	40.10	-0.88	1.03	±5	2022/1/3
1900	22.6	1.372	40.260	1.40	40.00	-2.00	0.65	±5	2022/1/3
2300	22.6	1.646	40.055	1.67	39.50	-1.44	1.41	±5	2022/1/3
2450	22.6	1.804	39.726	1.80	39.20	0.22	1.34	±5	2022/1/3
2600	22.6	1.948	39.271	1.96	39.00	-0.61	0.69	±5	2022/1/3
3500	22.5	2.990	38.420	2.91	37.90	2.75	1.37	±5	2022/1/4
3500	22.2	3.004	38.497	2.91	37.90	3.23	1.58	±5	2022/1/5
3900	22.5	3.416	38.030	3.33	37.51	2.58	1.39	±5	2022/1/4
3900	22.2	3.439	38.117	3.33	37.51	3.27	1.62	±5	2022/1/5
5250	22.2	4.632	36.213	4.71	35.95	-1.66	0.73	±5	2022/1/5
5600	22.2	4.964	35.773	5.07	35.50	-2.09	0.77	±5	2022/1/5
5750	22.2	5.132	35.491	5.22	35.35	-1.69	0.40	±5	2022/1/5

12.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR04	2022/1/3	750	50	D750V3-1107	ES3DV3 - SN3115	DAE4 Sn376	0.378	8.32	7.56	-9.13
SAR04	2022/1/3	835	50	D835V2-4d167	ES3DV3 - SN3115	DAE4 Sn376	0.508	9.55	10.16	6.39
SAR04	2022/1/3	1750	50	D1750V2-1112	ES3DV3 - SN3115	DAE4 Sn376	1.91	36.70	38.2	4.09
SAR04	2022/1/3	1900	250	D1900V2-5d185	ES3DV3 - SN3115	DAE4 Sn376	9.87	39.40	39.48	0.20
SAR04	2022/1/3	2300	50	D2300V2-1088	ES3DV3 - SN3115	DAE4 Sn376	2.25	49.70	45	-9.46
SAR04	2022/1/3	2450	250	D2450V2-929	ES3DV3 - SN3115	DAE4 Sn376	12.20	53.10	48.8	-8.10
SAR04	2022/1/3	2600	250	D2600V2-1078	ES3DV3 - SN3115	DAE4 Sn376	13.00	57.60	52	-9.72
SAR05	2022/1/4	3500	50	D3500V2-1014	EX3DV4 - SN3578	DAE3 Sn528	3.26	67.90	65.2	-3.98
SAR06	2022/1/5	3500	50	D3500V2-1014	EX3DV4 - SN3925	DAE4 Sn778	3.47	67.90	69.4	2.21
SAR05	2022/1/4	3900	50	D3900V2-1017-3900	EX3DV4 - SN3578	DAE3 Sn528	3.64	69.50	72.8	4.75
SAR06	2022/1/5	3900	50	D3900V2-1017-3900	EX3DV4 - SN3925	DAE4 Sn778	3.42	69.50	68.4	-1.58
SAR06	2022/1/5	5250	50	D5GHzV2-1171-5250	EX3DV4 - SN3925	DAE4 Sn778	3.81	80.30	76.2	-5.11
SAR06	2022/1/5	5600	50	D5GHzV2-1171-5600	EX3DV4 - SN3925	DAE4 Sn778	4.17	83.40	83.4	0.00
SAR06	2022/1/5	5750	50	D5GHzV2-1171-5750	EX3DV4 - SN3925	DAE4 Sn778	3.89	80.40	77.8	-3.23


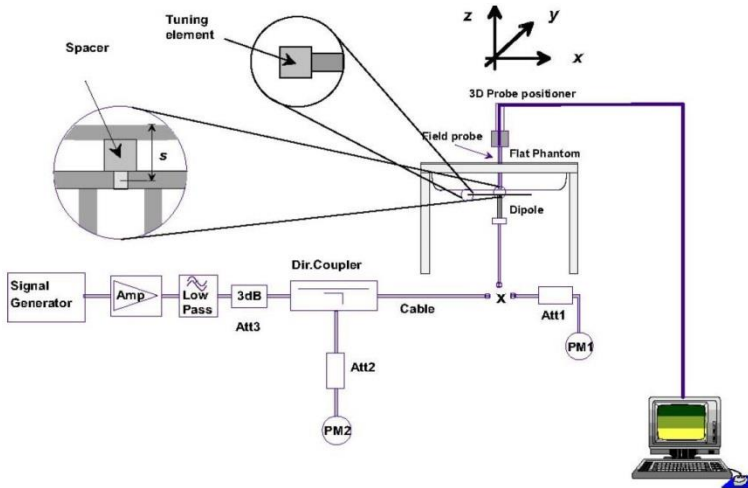


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

13. Antenna Location

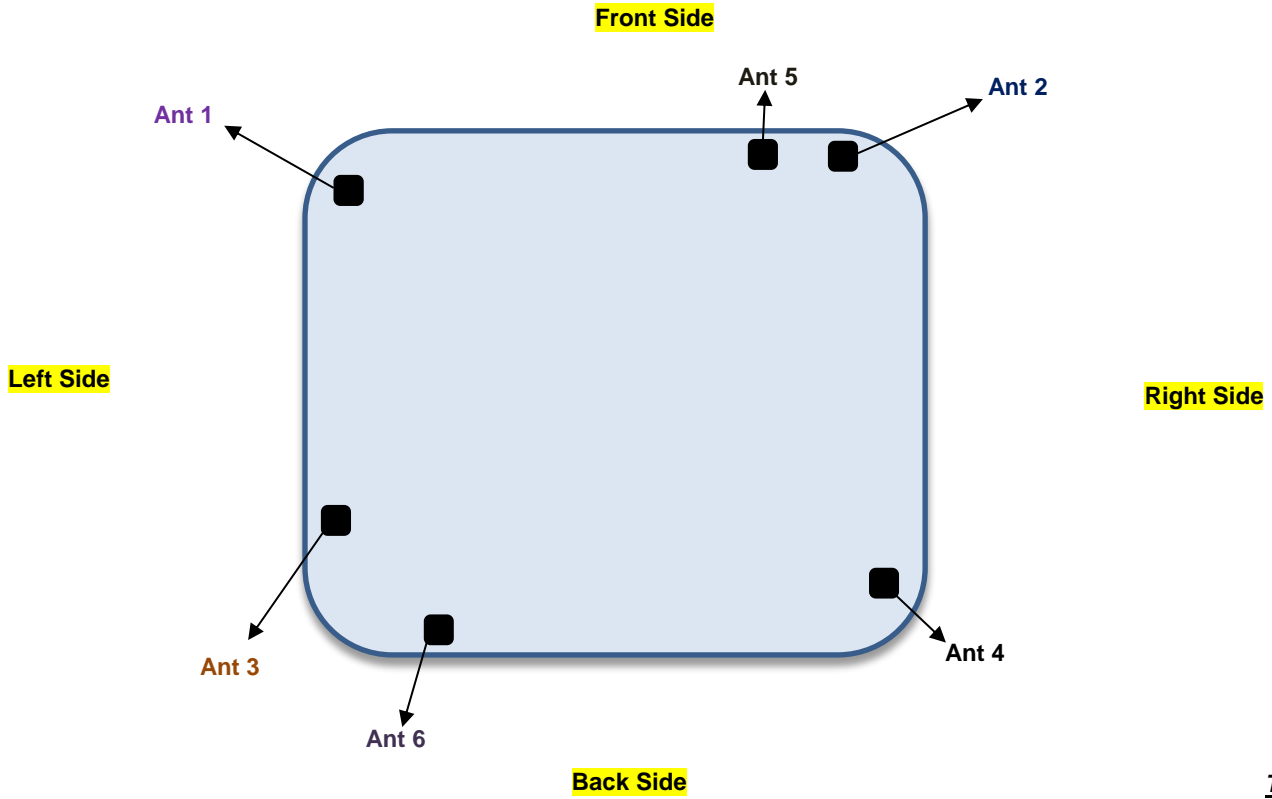

Antenna	Support Band
Ant 1	Ant. Tx: LTE:2/5/12/14/48/66 FR1:2/5/12/14/66/77
Ant 2	Ant. Tx: LTE 2/4/7/30/66 FR1:2/5/30/66/77
Ant 3	WLAN2.4G & WLAN5G & 6E
Ant 4	WLAN2.4G & WLAN5G & 6E
Ant 5	FR1:n77(SRS only)
Ant 6	FR1:n77(SRS only)



14. Spot Check SAR Results

General Note:

- SAR spot check verification on the worst cases from the original model was performed to demonstrate the test data from original model remains representative for the variant model.
- If the 1-g SAR spot check result "does not exceed 30%, but larger than 1.2 W/kg", more spot check on the next-higher exposure position until the spot check result does not exceed 1.2 W/kg.
- The spot check results don't show the SAR increase more than 30%, therefore referring to the guidance in the KDB inquiry, SAR data reuse is justified.

1st as parent model
2nd as variant model

<FDD LTE SAR>

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation %
	1st	LTE Band 2_Ant 1	20M	QPSK	1	0	Top Surface	10mm	18900	1880	23.48	23.50	1.005	-0.11	0.899	0.903	-10.39%
	2nd	LTE Band 2_Ant 1	20M	QPSK	1	0	Top Surface	10mm	18900	1880	22.78	23.50	1.180	0.16	0.693	0.818	
01	1st	LTE Band 2_Ant 2	20M	QPSK	1	0	Top Surface	10mm	19100	1900	23.13	24.00	1.222	-0.19	0.956	1.168	-3.64%
	2nd	LTE Band 2_Ant 2	20M	QPSK	1	0	Top Surface	10mm	19100	1900	22.51	24.00	1.409	-0.03	0.800	1.127	
02	1st	LTE Band 5_Ant 1	10M	QPSK	1	0	Top Surface	10mm	20525	836.5	23.27	24.00	1.183	-0.13	0.607	0.718	17.19%
	2nd	LTE Band 5_Ant 1	10M	QPSK	1	0	Top Surface	10mm	20525	836.5	23.04	24.00	1.247	-0.05	0.695	0.867	
03	1st	LTE Band 7_Ant 2	20M	QPSK	1	49	Right Side	10mm	21100	2535	22.94	23.50	1.138	0.07	1.020	1.160	9.94%
	2nd	LTE Band 7_Ant 2	20M	QPSK	1	49	Right Side	10mm	21100	2535	22.97	23.50	1.130	-0.14	1.140	1.288	
	2nd	LTE Band 7_Ant 2	20M	QPSK	1	0	Top Surface	10mm	21350	2560	22.88	23.50	1.153	-0.01	0.386	0.445	
04	1st	LTE Band 12_Ant 1	10M	QPSK	1	25	Top Surface	10mm	23095	707.5	23.07	24.00	1.239	0.13	0.575	0.712	10.89%
	2nd	LTE Band 12_Ant 1	10M	QPSK	1	25	Top Surface	10mm	23095	707.5	22.51	24.00	1.409	-0.06	0.567	0.799	
05	1st	LTE Band 14_Ant 1	10M	QPSK	1	0	Top Surface	10mm	23330	793	23.09	24.00	1.233	-0.18	0.632	0.779	20.18%
	2nd	LTE Band 14_Ant 1	10M	QPSK	1	0	Top Surface	10mm	23330	793	22.92	24.00	1.282	-0.04	0.761	0.976	
06	1st	LTE Band 30_Ant 2	10M	QPSK	1	0	Right Side	10mm	27710	2310	21.97	23.00	1.268	-0.18	1.020	1.293	-2.46%
	2nd	LTE Band 30_Ant 2	10M	QPSK	1	0	Right Side	10mm	27710	2310	21.98	23.00	1.265	-0.11	0.998	1.262	
	2nd	LTE Band 30_Ant 2	10M	QPSK	1	0	Bottom Surface	10mm	27710	2310	21.98	23.00	1.265	-0.04	0.971	1.228	
	1st	LTE Band 66_Ant 1	20M	QPSK	1	0	Top Surface	10mm	132072	1720	23.63	24.00	1.089	-0.11	0.797	0.868	0.57%
	2nd	LTE Band 66_Ant 1	20M	QPSK	1	0	Top Surface	10mm	132072	1720	23.08	24.00	1.236	-0.05	0.706	0.873	
07	1st	LTE Band 66_Ant 2	20M	QPSK	1	0	Top Surface	10mm	132572	1770	23.22	24.00	1.197	-0.09	0.830	0.993	7.97%
	2nd	LTE Band 66_Ant 2	20M	QPSK	1	0	Top Surface	10mm	132572	1770	22.93	24.00	1.279	-0.04	0.843	1.079	

<TDD LTE SAR>

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation %
08	1st	LTE Band 48_Ant 1	20M	QPSK	1	49	Top Surface	10mm	55340	3560	22.48	23.00	1.127	62.9	1.006	0.07	0.799	0.906	-25.66%
	2nd	LTE Band 48_Ant 1	20M	QPSK	1	49	Top Surface	10mm	55340	3560	21.55	23.00	1.396	62.9	1.006	-0.03	0.513	0.721	



<5G NR SAR>

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation %
	1st	FR1 n2_Ant 1	20M	BPSK	50	28	Top Surface	10mm	380000	1900	23.25	23.50	1.059	0.05	0.876	0.928	-0.32%
	2nd	FR1 n2_Ant 1	20M	BPSK	50	28	Top Surface	10mm	380000	1900	22.72	23.50	1.197	0.05	0.773	0.925	
	1st	FR1 n2_Ant 2	20M	BPSK	1	1	Top Surface	10mm	380000	1900	23.41	24.00	1.146	-0.04	0.984	1.127	0.0%
09	2nd	FR1 n2_Ant 2	20M	BPSK	1	1	Top Surface	10mm	380000	1900	23.32	24.00	1.169	-0.07	0.964	1.127	
	1st	FR1 n5_Ant 1	20M	BPSK	50	28	Top Surface	10mm	167300	836.5	23.50	24.00	1.122	-0.17	0.673	0.755	18.02%
10	2nd	FR1 n5_Ant 1	20M	BPSK	50	28	Top Surface	10mm	167300	836.5	23.40	24.00	1.148	-0.03	0.802	0.921	
	1st	FR1 n5_Ant 2	20M	BPSK	1	1	Top Surface	10mm	167300	836.5	23.60	24.00	1.096	-0.1	0.541	0.593	13.30%
	2nd	FR1 n5_Ant 2	20M	BPSK	1	1	Top Surface	10mm	167300	836.5	23.50	24.00	1.122	-0.02	0.610	0.684	
	1st	FR1 n12_Ant 1	15M	BPSK	36	22	Top Surface	10mm	141500	707.5	23.42	24.00	1.143	0.02	0.591	0.675	0.88%
11	2nd	FR1 n12_Ant 1	15M	BPSK	36	22	Top Surface	10mm	141500	707.5	23.30	24.00	1.175	-0.03	0.580	0.681	
	1st	FR1 n14_Ant 1	10M	BPSK	1	1	Top Surface	10mm	158600	793	23.17	24.00	1.211	0.16	0.680	0.823	15.85%
12	2nd	FR1 n14_Ant 1	10M	BPSK	1	1	Top Surface	10mm	158600	793	23.10	24.00	1.230	-0.15	0.795	0.978	
	1st	FR1 n30_Ant 2	10M	BPSK	25	14	Right Side	10mm	462000	2310	22.21	23.00	1.199	-0.16	0.986	1.183	4.83%
13	2nd	FR1 n30_Ant 2	10M	BPSK	25	14	Right Side	10mm	462000	2310	22.31	23.00	1.172	0.03	1.060	1.243	
	2nd	FR1 n30_Ant 2	10M	BPSK	25	14	Bottom Surface	10mm	462000	2310	22.31	23.00	1.172	0.01	0.897	1.051	
	1st	FR1 n66_Ant 1	40M	BPSK	1	1	Top Surface	10mm	349000	1745	23.88	24.00	1.028	-0.17	0.897	0.922	2.43%
14	2nd	FR1 n66_Ant 1	40M	BPSK	1	1	Top Surface	10mm	349000	1745	23.20	24.00	1.202	0.04	0.786	0.945	
	1st	FR1 n66_Ant 2	40M	BPSK	1	1	Top Surface	10mm	349000	1745	23.75	24.00	1.059	0.02	0.643	0.681	16.75%
	2nd	FR1 n66_Ant 2	40M	BPSK	1	1	Top Surface	10mm	349000	1745	22.05	24.00	1.567	0.04	0.522	0.818	
	1st	FR1 n77_Ant 1	100M	BPSK	1	1	Top Surface	10mm	656000	3840	21.38	22.30	1.236	-0.12	0.766	0.947	14.38%
	2nd	FR1 n77_Ant 1	100M	BPSK	1	1	Top Surface	10mm	656000	3840	21.69	22.30	1.151	-0.15	0.961	1.106	
	1st	FR1 n77_Ant 1	100M	BPSK	1	1	Top Surface	10mm	633332	3499.98	21.48	22.30	1.208	-0.12	0.954	1.152	7.17%
	2nd	FR1 n77_Ant 1	100M	BPSK	1	1	Top Surface	10mm	633332	3499.98	22.08	22.30	1.052	-0.19	1.180	1.241	
	2nd	FR1 n77_Ant 1	100M	BPSK	1	1	Bottom Surface	10mm	633332	3499.98	22.08	22.30	1.052	0	0.395	0.416	
	1st	FR1 n77_Ant 2	100M	BPSK	135	69	Top Surface	10mm	656000	3840	21.66	22.20	1.132	-0.19	0.724	0.820	13.77%
	2nd	FR1 n77_Ant 2	100M	BPSK	135	69	Top Surface	10mm	656000	3840	22.20	22.20	1.000	-0.15	0.951	0.951	
	1st	FR1 n77_Ant 2	100M	BPSK	135	69	Top Surface	10mm	633332	3499.98	21.18	22.20	1.265	-0.14	0.991	1.253	0.24%
15	2nd	FR1 n77_Ant 2	100M	BPSK	135	69	Top Surface	10mm	633332	3499.98	22.18	22.20	1.005	-0.16	1.250	1.256	
	2nd	FR1 n77_Ant 2	100M	BPSK	135	69	Bottom Surface	10mm	633332	3499.98	22.18	22.20	1.005	-0.01	0.649	0.652	
	1st	FR1 n77_Ant 5	-	CW	-	-	Top Surface	10mm	656000	3840	20.33	21.50	1.309	-0.13	0.723	0.947	14.07%
	2nd	FR1 n77_Ant 5	-	CW	-	-	Top Surface	10mm	656000	3840	20.87	21.50	1.156	0.02	0.953	1.102	
	1st	FR1 n77_Ant 5	-	CW	-	-	Top Surface	10mm	633332	3499.98	21.12	21.50	1.091	-0.11	0.569	0.621	5.05%
	2nd	FR1 n77_Ant 5	-	CW	-	-	Top Surface	10mm	633332	3499.98	21.34	21.50	1.038	-0.06	0.630	0.654	
	1st	FR1 n77_Ant 6	-	CW	-	-	Back Side	10mm	656000	3840	19.08	20.50	1.387	-0.15	0.932	1.292	-6.08%
	2nd	FR1 n77_Ant 6	-	CW	-	-	Back Side	10mm	656000	3840	19.22	20.50	1.343	-0.05	0.907	1.218	
	2nd	FR1 n77_Ant 6	-	CW	-	-	Top Surface	10mm	656000	3840	19.22	20.50	1.343	0.08	0.586	0.787	
	1st	FR1 n77_Ant 6	-	CW	-	-	Top Surface	10mm	633332	3499.98	20.06	20.50	1.107	-0.03	1.160	1.284	-3.30%
	2nd	FR1 n77_Ant 6	-	CW	-	-	Top Surface	10mm	633332	3499.98	19.60	20.50	1.230	-0.09	1.010	1.243	
	2nd	FR1 n77_Ant 6	-	CW	-	-	Back Side	10mm	633332	3499.98	19.60	20.50	1.230	0.04	0.538	0.662	



<WLAN SAR>

Plot No.	No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation %
16	1st	WLAN2.4GHz_Ant 3	802.11b 1Mbps	Left Side	10mm	6	2437	9.90	10.00	1.023	98.2	1.018	-0.19	0.087	0.091	-15.19%
	2nd	WLAN2.4GHz_Ant 3	802.11b 1Mbps	Left Side	10mm	6	2437	9.80	10.00	1.047	98.3	1.017	0.05	0.074	0.079	
	1st	WLAN2.4GHz_Ant 4	802.11b 1Mbps	Top Surface	10mm	6	2437	9.50	10.00	1.122	98.2	1.018	-0.06	0.056	0.064	-12.28%
	2nd	WLAN2.4GHz_Ant 4	802.11b 1Mbps	Top Surface	10mm	6	2437	9.20	10.00	1.202	98.3	1.017	0.1	0.047	0.057	
17	1st	WLAN5GHz_Ant 3	802.11ac-VHT160 MCS0	Left Side	10mm	50	5250	9.70	10.00	1.072	99.5	1.005	-0.13	0.075	0.081	-12.50%
	2nd	WLAN5GHz_Ant 3	802.11ac-VHT160 MCS0	Left Side	10mm	50	5250	9.30	10.00	1.175	99.3	1.007	0.15	0.061	0.072	
	1st	WLAN5GHz_Ant 4	802.11ac-VHT160 MCS0	Right Side	10mm	50	5250	9.60	10.00	1.096	99.3	1.007	-0.02	0.039	0.043	14%
	2nd	WLAN5GHz_Ant 4	802.11ac-VHT160 MCS0	Right Side	10mm	50	5250	9.30	10.00	1.175	99.3	1.007	-0.02	0.042	0.050	
	1st	WLAN5GHz_Ant 3	802.11ac-VHT160 MCS0	Left Side	10mm	114	5570	9.70	10.00	1.072	99.3	1.007	-0.03	0.063	0.068	0.0%
	2nd	WLAN5GHz_Ant 3	802.11ac-VHT160 MCS0	Left Side	10mm	114	5570	9.40	10.00	1.148	99.3	1.007	0.03	0.059	0.068	
18	1st	WLAN5GHz_Ant 4	802.11ac-VHT160 MCS0	Back Side	10mm	114	5570	9.50	10.00	1.122	99.3	1.007	-0.17	0.073	0.082	11.83%
	2nd	WLAN5GHz_Ant 4	802.11ac-VHT160 MCS0	Back Side	10mm	114	5570	9.20	10.00	1.202	99.3	1.007	0.04	0.077	0.093	
	1st	WLAN5GHz_Ant 3	802.11ac-VHT80 MCS0	Left Side	10mm	155	5775	9.70	10.00	1.072	99.5	1.005	0.13	0.070	0.075	-11.94%
	2nd	WLAN5GHz_Ant 3	802.11ac-VHT80 MCS0	Left Side	10mm	155	5775	9.60	10.00	1.096	99.5	1.005	-0.06	0.061	0.067	
19	1st	WLAN5GHz_Ant 4	802.11ac-VHT80 MCS0	Back Side	10mm	155	5775	9.30	10.00	1.175	99.5	1.005	-0.11	0.072	0.085	12.37%
	2nd	WLAN5GHz_Ant 4	802.11ac-VHT80 MCS0	Back Side	10mm	155	5775	9.20	10.00	1.202	99.5	1.005	0.1	0.080	0.097	

15. Simultaneous Transmission Analysis

Exposure condition	NO.	Simultaneous Transmission Configurations	Support
Body condition	1	WWAN + 2.4GHz Ant3 + 2.4GHz Ant4	V
	2	WWAN + 5GHz Ant3 + 5GHz Ant4	V
	3	WWAN + 2.4GHz Ant3 + 5GHz Ant4	V
	4	WWAN + 2.4GHz Ant4 + 5GHz Ant3	V
	5	LTE + FR1 + 2.4GHz Ant3 + 2.4GHz Ant4	V
	6	LTE + FR1+ 5GHz Ant3 + 5GHz Ant4	V
	7	LTE + FR1+ 2.4GHz Ant3 + 5GHz Ant4	V
	8	LTE + FR1+ 2.4GHz Ant4 + 5GHz Ant3	V
	9 ^(f)	2.4GHz Ant3 (client) + 5GHz Ant4(AP)	V
	10 ^(f)	5GHz Ant3 (Client) + 2.4GHz Ant4 (AP)	V

General Note:

- When the WWAN operation is offloading which the WiFi 2.4GHz/5GHz at ant3 only operate client and WiFi 2.4GHz/5GHz ant4 operate AP mode.
- The data reuse results from FCC ID: PY321100529 are used for Sim-Tx analysis, if the spot check result for FCC ID: PY321300542 is higher than original result, for that exposure configuration will using the worst SAR to be evaluation.
- The 1g SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g SAR summation SAR summation < 1.6W/kg.
 - SPLSR = (SAR1 + SAR2)^{1.5} / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x1-x2)² + (y1-y2)² + (z1-z2)²], where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4	5GHz WLAN Ant 3	5GHz WLAN Ant 4				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
LTE Band 2_Ant 1	Top Surface	0.903	0.041	0.064	0.071	0.066	1.008	1.040	1.010	1.038
	Bottom Surface	0.677	0.052	0.035	0.058	0.062	0.764	0.797	0.791	0.770
	Left Side	0.656	0.091		0.081		0.747	0.737	0.747	0.737
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.400					0.400	0.400	0.400	0.400
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
LTE Band 5_Ant 1	Top Surface	0.867	0.041	0.064	0.071	0.066	0.972	1.004	0.974	1.002
	Bottom Surface	0.687	0.052	0.035	0.058	0.062	0.774	0.807	0.801	0.780
	Left Side	0.334	0.091		0.081		0.425	0.415	0.425	0.415
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.182					0.182	0.182	0.182	0.182
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
LTE Band 12_Ant 1	Top Surface	0.799	0.041	0.064	0.071	0.066	0.904	0.936	0.906	0.934
	Bottom Surface	0.508	0.052	0.035	0.058	0.062	0.595	0.628	0.622	0.601
	Left Side	0.344	0.091		0.081		0.435	0.425	0.435	0.425
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.263					0.263	0.263	0.263	0.263
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
LTE Band 14_Ant 1	Top Surface	0.976	0.041	0.064	0.071	0.066	1.081	1.113	1.083	1.111
	Bottom Surface	0.769	0.052	0.035	0.058	0.062	0.856	0.889	0.883	0.862
	Left Side	0.292	0.091		0.081		0.383	0.373	0.383	0.373
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.291					0.291	0.291	0.291	0.291
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
LTE Band 48_Ant 1	Top Surface	0.906	0.041	0.064	0.071	0.066	1.011	1.043	1.013	1.041
	Bottom Surface	0.423	0.052	0.035	0.058	0.062	0.510	0.543	0.537	0.516
	Left Side	0.432	0.091		0.081		0.523	0.513	0.523	0.513
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042



	Front Side	0.160					0.160	0.160	0.160	0.160
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
LTE Band 66_Ant 1	Top Surface	0.868	0.041	0.064	0.071	0.066	0.973	1.005	0.975	1.003
	Bottom Surface	0.700	0.052	0.035	0.058	0.062	0.787	0.820	0.814	0.793
	Left Side	0.524	0.091		0.081		0.615	0.605	0.615	0.605
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.403					0.403	0.403	0.403	0.403
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n2_Ant 1	Top Surface	0.928	0.041	0.064	0.071	0.066	1.033	1.065	1.035	1.063
	Bottom Surface	0.671	0.052	0.035	0.058	0.062	0.758	0.791	0.785	0.764
	Left Side	0.663	0.091		0.081		0.754	0.744	0.754	0.744
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.405					0.405	0.405	0.405	0.405
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n5_Ant 1	Top Surface	0.921	0.041	0.064	0.071	0.066	1.026	1.058	1.028	1.056
	Bottom Surface	0.741	0.052	0.035	0.058	0.062	0.828	0.861	0.855	0.834
	Left Side	0.349	0.091		0.081		0.440	0.430	0.440	0.430
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.184					0.184	0.184	0.184	0.184
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n12_Ant 1	Top Surface	0.681	0.041	0.064	0.071	0.066	0.786	0.818	0.788	0.816
	Bottom Surface	0.513	0.052	0.035	0.058	0.062	0.600	0.633	0.627	0.606
	Left Side	0.358	0.091		0.081		0.449	0.439	0.449	0.439
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.255					0.255	0.255	0.255	0.255
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n14_Ant 1	Top Surface	0.978	0.041	0.064	0.071	0.066	1.083	1.115	1.085	1.113
	Bottom Surface	0.722	0.052	0.035	0.058	0.062	0.809	0.842	0.836	0.815
	Left Side	0.305	0.091		0.081		0.396	0.386	0.396	0.386
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.301					0.301	0.301	0.301	0.301
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n66_Ant 1	Top Surface	0.945	0.041	0.064	0.071	0.066	1.050	1.082	1.052	1.080
	Bottom Surface	0.790	0.052	0.035	0.058	0.062	0.877	0.910	0.904	0.883
	Left Side	0.591	0.091		0.081		0.682	0.672	0.682	0.672
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.472					0.472	0.472	0.472	0.472
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n77_Ant 1	Top Surface	1.241	0.041	0.064	0.071	0.066	1.346	1.378	1.348	1.376
	Bottom Surface	0.724	0.052	0.035	0.058	0.062	0.811	0.844	0.838	0.817
	Left Side	0.596	0.091		0.081		0.687	0.677	0.687	0.677
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.284					0.284	0.284	0.284	0.284
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076



WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 3 1g SAR (W/kg)	2.4GHz WLAN Ant 4 1g SAR (W/kg)	5GHz WLAN Ant 3 1g SAR (W/kg)	5GHz WLAN Ant 4 1g SAR (W/kg)				
LTE Band 2_Ant 2	Top Surface	1.168	0.041	0.064	0.071	0.066	1.273	1.305	1.275	1.303
	Bottom Surface	1.156	0.052	0.035	0.058	0.062	1.243	1.276	1.270	1.249
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	1.024		0.042		0.073	1.066	1.097	1.097	1.066
	Front Side	0.550					0.550	0.550	0.550	0.550
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
LTE Band 7_Ant 2	Top Surface	0.665	0.041	0.064	0.071	0.066	0.770	0.802	0.772	0.800
	Bottom Surface	0.419	0.052	0.035	0.058	0.062	0.506	0.539	0.533	0.512
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	1.288		0.042		0.073	1.330	1.361	1.361	1.330
	Front Side	0.309					0.309	0.309	0.309	0.309
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
LTE Band 30_Ant 2	Top Surface	0.924	0.041	0.064	0.071	0.066	1.029	1.061	1.031	1.059
	Bottom Surface	1.066	0.052	0.035	0.058	0.062	1.153	1.186	1.180	1.159
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	1.293		0.042		0.073	1.335	1.366	1.366	1.335
	Front Side	0.389					0.389	0.389	0.389	0.389
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
LTE Band 66_Ant 2	Top Surface	1.079	0.041	0.064	0.071	0.066	1.184	1.216	1.186	1.214
	Bottom Surface	0.895	0.052	0.035	0.058	0.062	0.982	1.015	1.009	0.988
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.689		0.042		0.073	0.731	0.762	0.762	0.731
	Front Side	0.410					0.410	0.410	0.410	0.410
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n2_Ant 2	Top Surface	1.127	0.041	0.064	0.071	0.066	1.232	1.264	1.234	1.262
	Bottom Surface	1.105	0.052	0.035	0.058	0.062	1.192	1.225	1.219	1.198
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.710		0.042		0.073	0.752	0.783	0.783	0.752
	Front Side	0.419					0.419	0.419	0.419	0.419
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n5_Ant 2	Top Surface	0.684	0.041	0.064	0.071	0.066	0.789	0.821	0.791	0.819
	Bottom Surface	0.568	0.052	0.035	0.058	0.062	0.655	0.688	0.682	0.661
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.255		0.042		0.073	0.297	0.328	0.328	0.297
	Front Side	0.204					0.204	0.204	0.204	0.204
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n30_Ant 2	Top Surface	0.848	0.041	0.064	0.071	0.066	0.953	0.985	0.955	0.983
	Bottom Surface	0.991	0.052	0.035	0.058	0.062	1.078	1.111	1.105	1.084
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	1.243		0.042		0.073	1.285	1.316	1.316	1.285
	Front Side	0.363					0.363	0.363	0.363	0.363
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n66_Ant 2	Top Surface	0.818	0.041	0.064	0.071	0.066	0.923	0.955	0.925	0.953
	Bottom Surface	0.616	0.052	0.035	0.058	0.062	0.703	0.736	0.730	0.709
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.540		0.042		0.073	0.582	0.613	0.613	0.582
	Front Side	0.373					0.373	0.373	0.373	0.373
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n77_Ant 2	Top Surface	1.256	0.041	0.064	0.071	0.066	1.361	1.393	1.363	1.391
	Bottom Surface	0.911	0.052	0.035	0.058	0.062	0.998	1.031	1.025	1.004
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.641		0.042		0.073	0.683	0.714	0.714	0.683
	Front Side	0.195					0.195	0.195	0.195	0.195
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076



FR1 n77_Ant 5	Top Surface	1.102	0.041	0.064	0.071	0.066	1.207	1.239	1.209	1.237
	Bottom Surface	0.496	0.052	0.035	0.058	0.062	0.583	0.616	0.610	0.589
	Left Side	0.052	0.091		0.081		0.143	0.133	0.143	0.133
	Right Side	0.107		0.042		0.073	0.149	0.180	0.180	0.149
	Front Side	0.628					0.628	0.628	0.628	0.628
	Back Side		0.018	0.024	0.052	0.097	0.042	0.149	0.115	0.076
FR1 n77_Ant 6	Top Surface	1.284	0.041	0.064	0.071	0.066	1.389	1.421	1.391	1.419
	Bottom Surface	0.397	0.052	0.035	0.058	0.062	0.484	0.517	0.511	0.490
	Left Side	0.164	0.091		0.081		0.255	0.245	0.255	0.245
	Right Side	0.033		0.042		0.073	0.075	0.106	0.106	0.075
	Front Side						0.000	0.000	0.000	0.000
	Back Side	1.292	0.018	0.024	0.052	0.097	1.334	1.441	1.407	1.368

<WWAN is offloading>

Exposure Position	2	3	4	5	2+5 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)
	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4	5GHz WLAN Ant 3	5GHz WLAN Ant 4		
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
Top Surface	0.041	0.064	0.071	0.066	0.107	0.135
Bottom Surface	0.052	0.035	0.058	0.062	0.114	0.093
Left Side	0.091		0.081		0.091	0.081
Right Side		0.042		0.073	0.073	0.042
Front Side					0.000	0.000
Back Side	0.018	0.024	0.052	0.097	0.115	0.076

Test Engineer : Charles Shen and Jordar Jhuang

16. Uncertainty Assessment

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.



Applicable for SAR Measurements:

Uncertainty Budget (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	18.60	N	2	1	1	9.3	9.3
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Linearity	4.70	R	1.732	1	1	2.7	2.7
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Post-processing	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Holder	3.60	N	1	1	1	3.6	3.6
Test sample Positioning	3.03	N	1	1	1	3.0	3.0
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Phantom and Setup							
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						14.5%	14.2%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.4%



17. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [8] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [9] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.