



Plots of Injected signal (AWGN) level

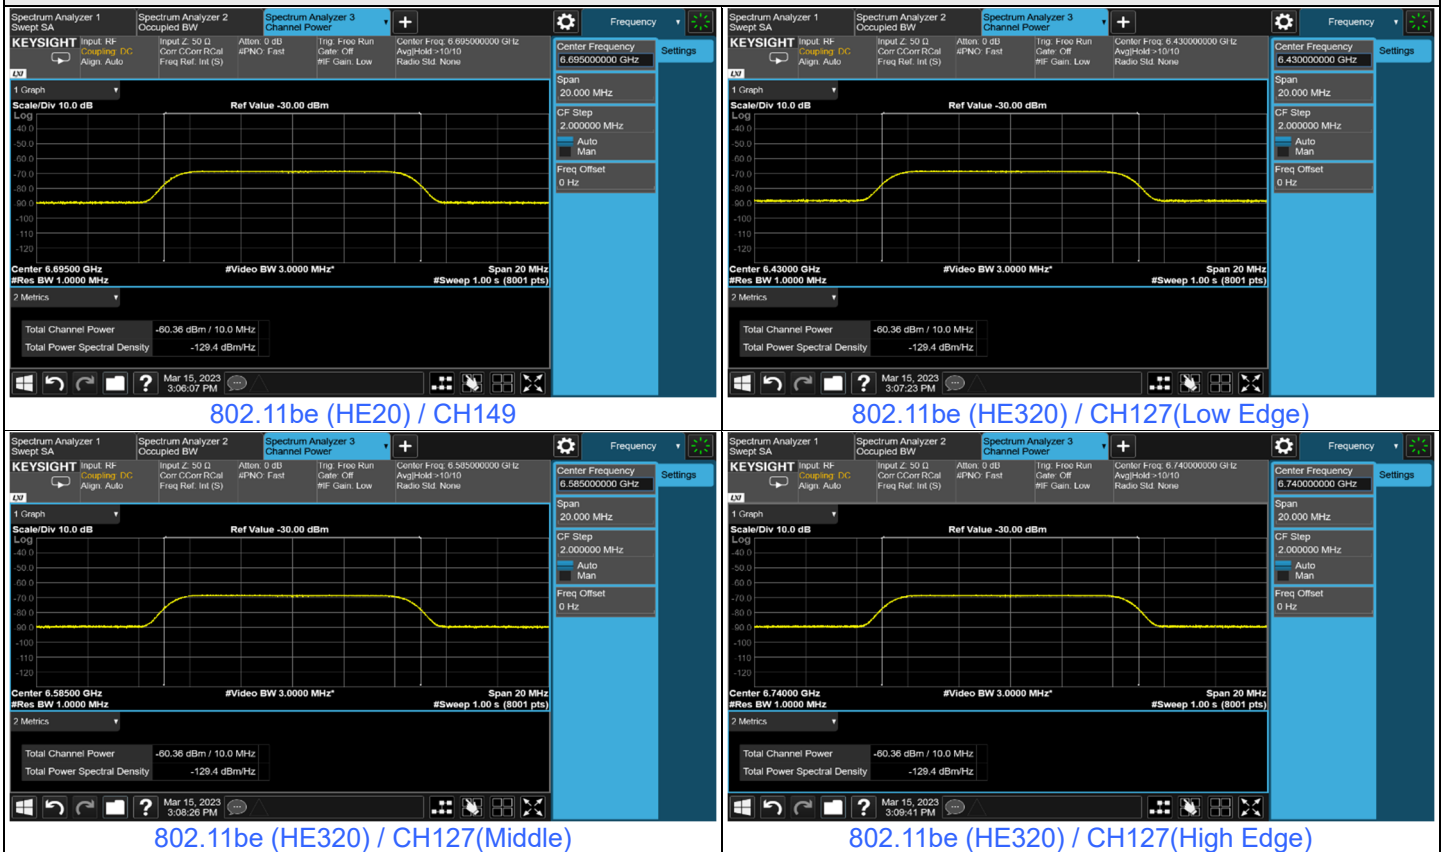

Plots of EUT ceased transmission in the time domain

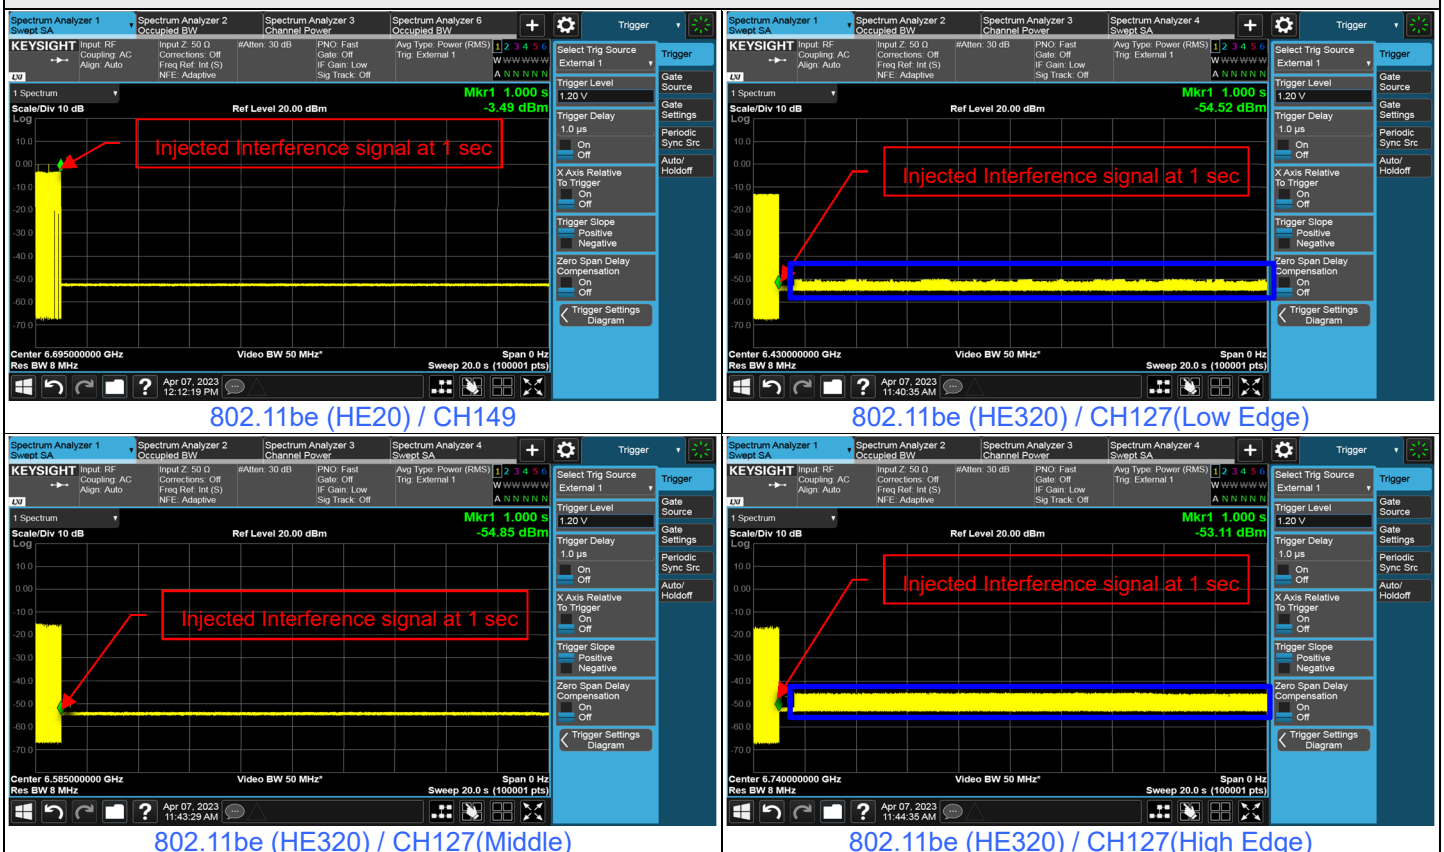

*That shall be EUT's channel hopping behavior and signal coupling issue, we've verified it several times internally and found that the data transmission will be hopped to adjacent channels after the interference signal is detected and confirmed that the data transmission marked in blue comes from adjacent channels(signal coupling).




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-60.61	2.22	0	-62.83	-62	OFF
					-71.61	2.22	0	-73.83	-62	Minimal
					-79.78	2.22	0	-82	-62	ON
	320	191	6905	6750	-60.61	2.22	0	-62.83	-62	OFF
					-66.61	2.22	0	-68.83	-62	Minimal
					-79.78	2.22	0	-82	-62	ON
	320	191	6905	6905	-60.61	2.22	0	-62.83	-62	OFF
					-66.61	2.22	0	-68.83	-62	Minimal
					-79.78	2.22	0	-82	-62	ON
	320	191	6905	7060	-60.61	2.22	0	-62.83	-62	OFF
					-66.61	2.22	0	-68.83	-62	Minimal
					-79.78	2.22	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss), the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6750	v	v	v	x	v	v	v	v	v	v	90%	90%	Pass
	320	6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	x	v	90%	90%	Pass

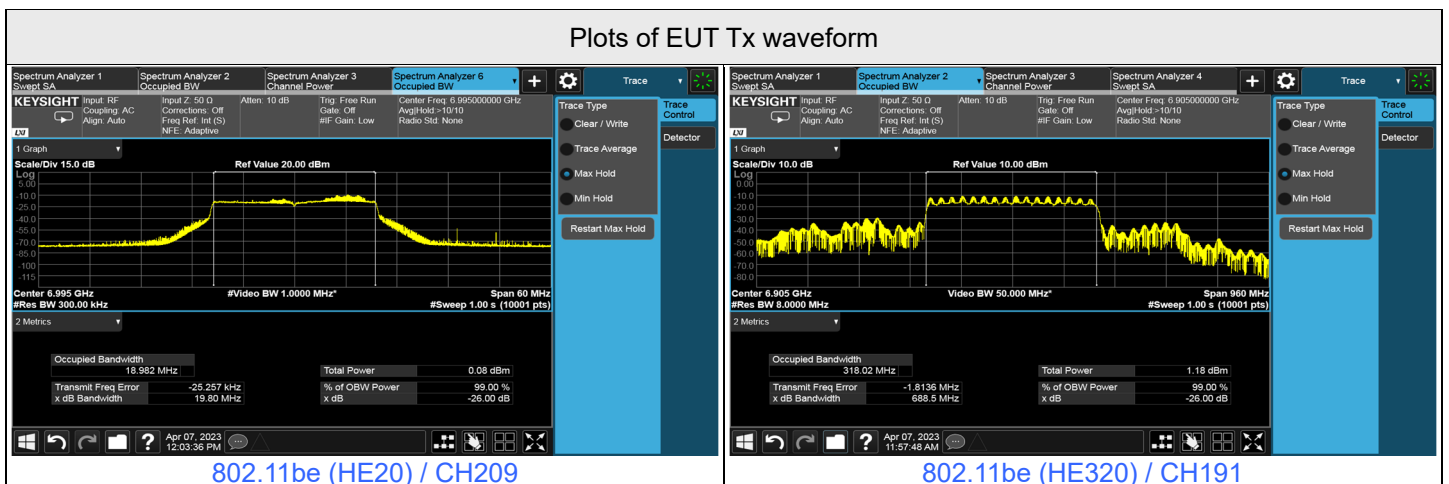


Plots of Injected signal (AWGN) level

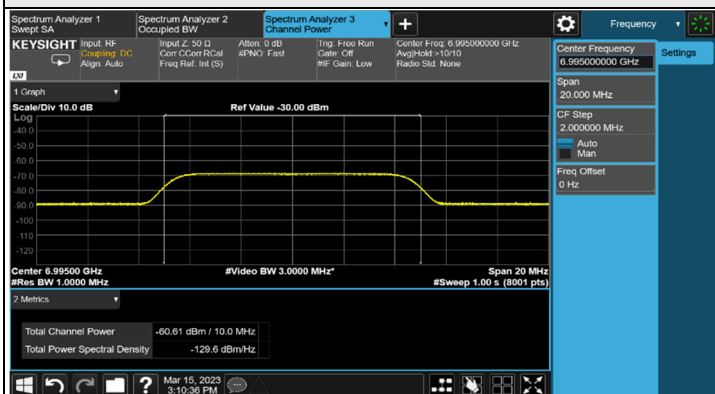


802.11be (HE20) / CH209

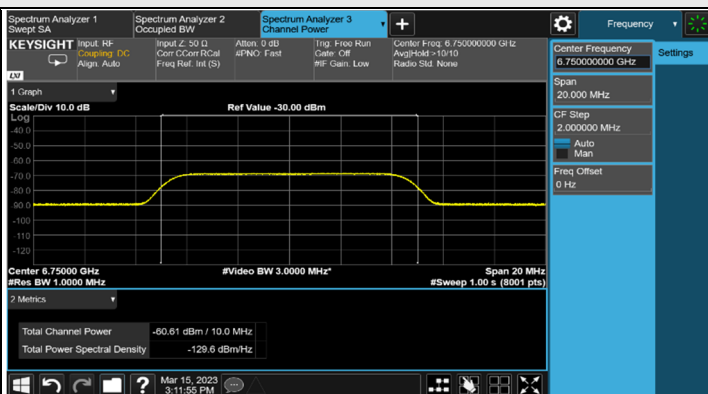

802.11be (HE320) / CH191(Low Edge)

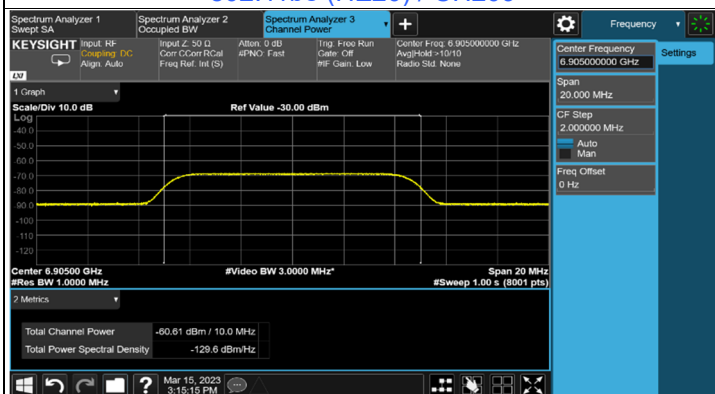


802.11be (HE320) / CH191(Middle)

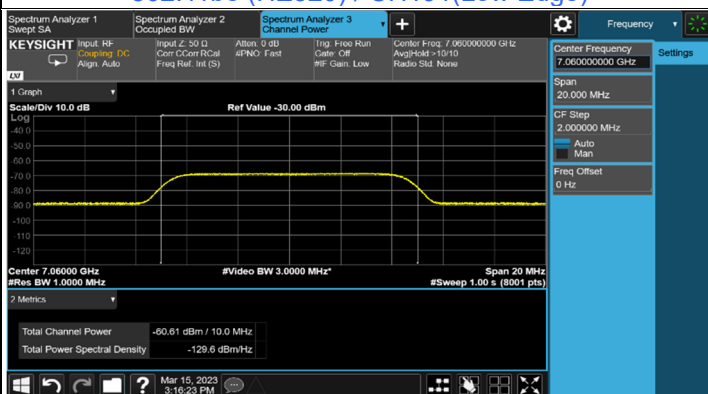


802.11be (HE320) / CH191(High Edge)


Plots of EUT ceased transmission in the time domain

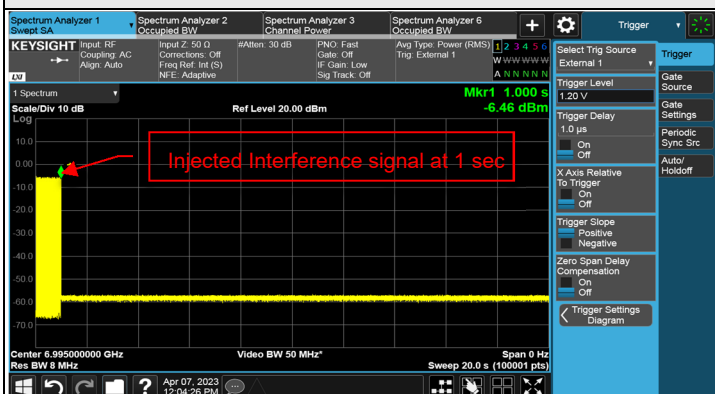


802.11be (HE20) / CH209

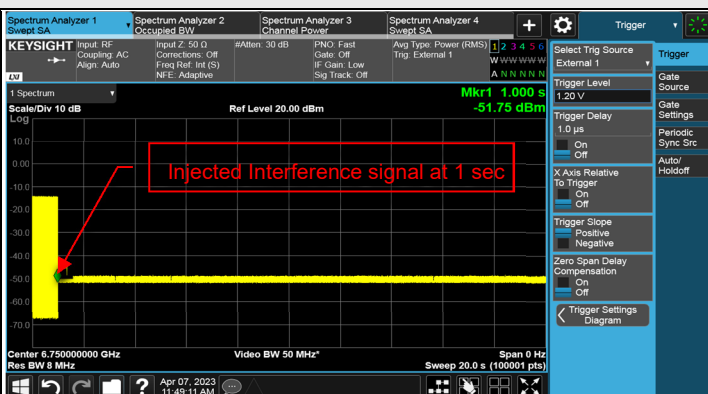

802.11be (HE320) / CH191(Low Edge)

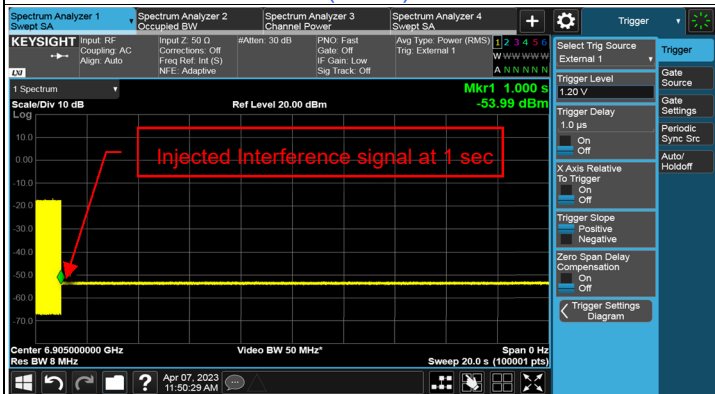

802.11be (HE320) / CH191(Middle)

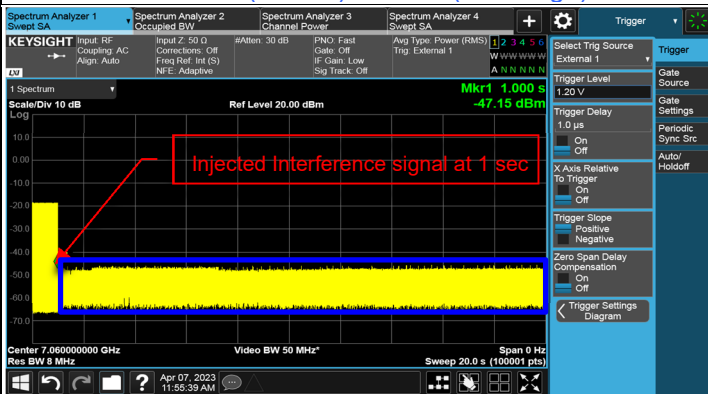

802.11be (HE320) / CH191(High Edge)

*That shall be EUT's channel hopping behavior and signal coupling issue, we've verified it several times internally and found that the data transmission will be hopped to adjacent channels after the interference signal is detected and confirmed that the data transmission marked in blue comes from adjacent channels(signal coupling).

7.8 AC Power Conducted Emissions

Mode A


RF Mode	802.11be (EHT320)	Channel	CH 95: 6425 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 70% RH
Tested By	Luis Lee		

Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	0.20	35.77	24.55	35.97	24.75	65.36	55.36	-29.39	-30.61
2	0.18600	0.22	31.31	13.43	31.53	13.65	64.21	54.21	-32.68	-40.56
3	0.21000	0.23	28.88	8.68	29.11	8.91	63.21	53.21	-34.10	-44.30
4	0.23400	0.25	27.16	12.92	27.41	13.17	62.31	52.31	-34.90	-39.14
5	0.25800	0.26	24.76	9.82	25.02	10.08	61.50	51.50	-36.48	-41.42
6	14.85800	1.08	25.58	19.87	26.66	20.95	60.00	50.00	-33.34	-29.05

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

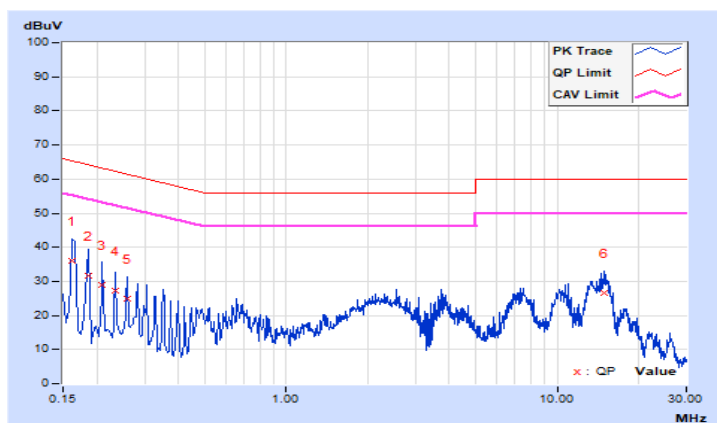


RF Mode	802.11be (EHT320)	Channel	CH 95: 6425 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 70% RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	0.23	35.52	24.71	35.75	24.94	65.36	55.36	-29.61	-30.42
2	0.18600	0.25	32.16	11.89	32.41	12.14	64.21	54.21	-31.80	-42.07
3	0.21000	0.26	29.06	8.37	29.32	8.63	63.21	53.21	-33.89	-44.58
4	0.23400	0.27	26.84	13.01	27.11	13.28	62.31	52.31	-35.20	-39.03
5	0.26992	0.29	24.33	9.59	24.62	9.88	61.12	51.12	-36.50	-41.24
6	14.27400	0.91	23.41	16.72	24.32	17.63	60.00	50.00	-35.68	-32.37

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

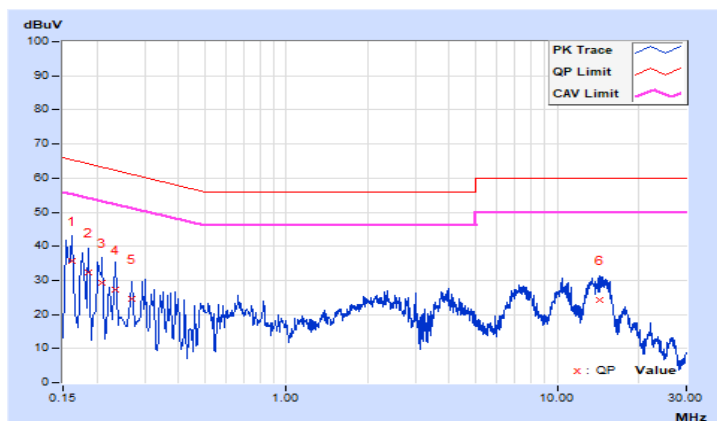


Mode B

RF Mode	802.11be (EHT320)	Channel	CH 95: 6425 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Luis Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.66	36.27	25.49	45.93	35.15	66.00	56.00	-20.07	-20.85
2	0.18600	9.69	29.85	11.57	39.54	21.26	64.21	54.21	-24.67	-32.95
3	0.20600	9.70	28.39	13.79	38.09	23.49	63.37	53.37	-25.28	-29.88
4	0.23000	9.71	24.73	6.87	34.44	16.58	62.45	52.45	-28.01	-35.87
5	0.25800	9.73	22.74	7.37	32.47	17.10	61.50	51.50	-29.03	-34.40
6	0.28200	9.74	20.98	9.82	30.72	19.56	60.76	50.76	-30.04	-31.20

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

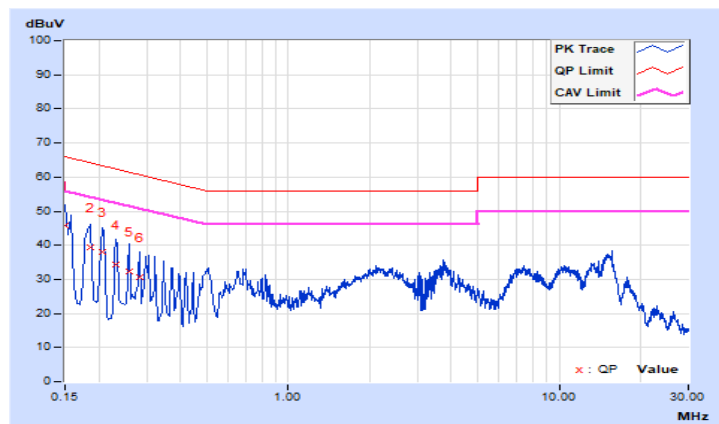


RF Mode	802.11be (EHT320)	Channel	CH 95: 6425 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	9.67	33.13	20.47	42.80	30.14	65.36	55.36	-22.56	-25.22
2	0.17384	9.68	31.33	17.78	41.01	27.46	64.77	54.77	-23.76	-27.31
3	0.18600	9.69	29.95	11.22	39.64	20.91	64.21	54.21	-24.57	-33.30
4	0.21000	9.70	27.53	12.42	37.23	22.12	63.21	53.21	-25.98	-31.09
5	0.22200	9.71	26.55	15.74	36.26	25.45	62.74	52.74	-26.48	-27.29
6	0.24600	9.72	24.27	12.20	33.99	21.92	61.89	51.89	-27.90	-29.97

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

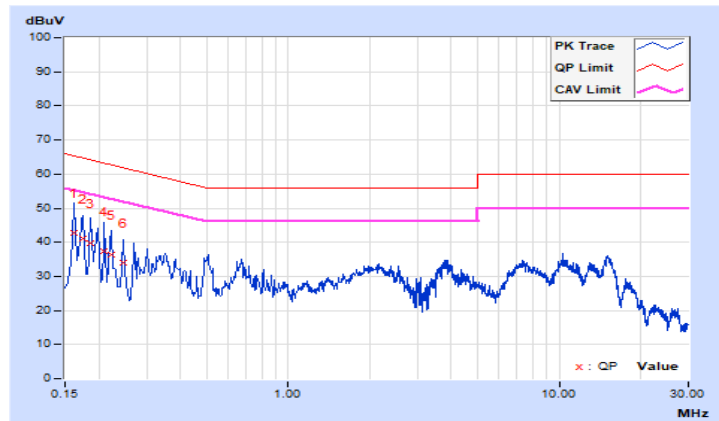

7.9 Unwanted Emissions below 1 GHz

Mode A


RF Mode	802.11be (EHT320)	Channel	CH 95: 6425 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 70% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.24	28.9 QP	43.5	-14.6	1.49 H	306	39.9	-11.0
2	159.98	31.0 QP	43.5	-12.5	1.49 H	252	39.6	-8.6
3	250.19	35.3 QP	46.0	-10.7	1.00 H	193	44.5	-9.2
4	399.57	30.4 QP	46.0	-15.6	1.49 H	6	36.3	-5.9
5	493.66	35.7 QP	46.0	-10.3	1.49 H	333	40.1	-4.4
6	614.91	30.8 QP	46.0	-15.2	1.00 H	197	32.1	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

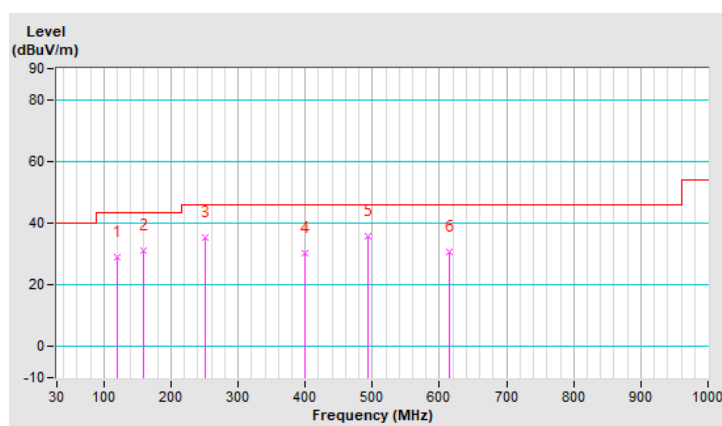


RF Mode	802.11be (EHT320)	Channel	CH 95: 6425 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 70% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.58	35.2 QP	40.0	-4.8	1.00 V	305	44.4	-9.2
2	117.30	28.7 QP	43.5	-14.8	1.00 V	15	39.9	-11.2
3	159.98	35.1 QP	43.5	-8.4	1.00 V	234	43.7	-8.6
4	250.19	33.1 QP	46.0	-12.9	1.00 V	73	42.3	-9.2
5	312.27	26.8 QP	46.0	-19.2	1.49 V	87	33.8	-7.0
6	500.45	34.2 QP	46.0	-11.8	1.00 V	116	38.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

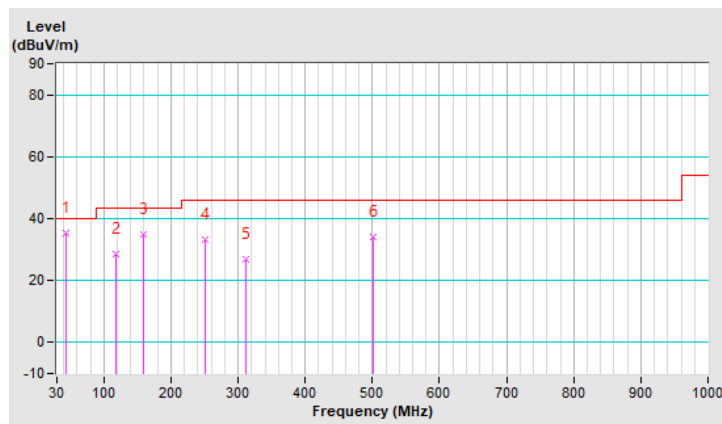

Mode B


RF Mode	802.11be (EHT320)	Channel	CH 95: 6425 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 70% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.61	22.6 QP	40.0	-17.4	1.49 H	127	31.8	-9.2
2	104.69	27.2 QP	43.5	-16.3	1.00 H	163	39.8	-12.6
3	172.59	25.6 QP	43.5	-17.9	1.49 H	282	34.7	-9.1
4	258.92	27.8 QP	46.0	-18.2	1.00 H	253	36.7	-8.9
5	435.46	28.6 QP	46.0	-17.4	1.49 H	173	33.6	-5.0
6	680.87	30.5 QP	46.0	-15.5	1.00 H	123	31.0	-0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

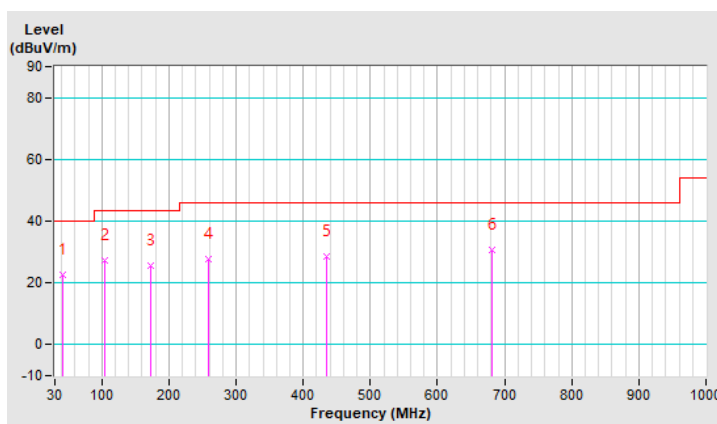


RF Mode	802.11be (EHT320)	Channel	CH 95: 6425 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 70% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	97.90	24.5 QP	43.5	-19.0	1.49 V	16	38.2	-13.7
2	123.12	25.8 QP	43.5	-17.7	1.00 V	6	36.3	-10.5
3	379.20	26.1 QP	46.0	-19.9	1.49 V	269	32.0	-5.9
4	511.12	28.3 QP	46.0	-17.7	1.00 V	8	32.2	-3.9
5	586.78	29.4 QP	46.0	-16.6	1.49 V	16	31.6	-2.2
6	675.05	29.5 QP	46.0	-16.5	1.49 V	194	30.2	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

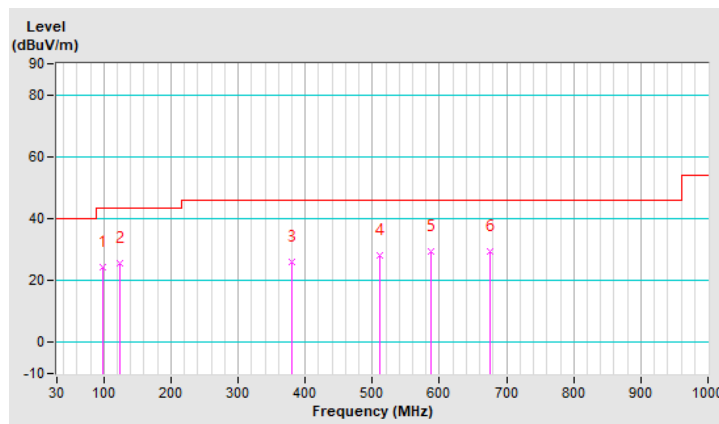

7.10 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.1 PK	88.2	-26.1	1.38 H	30	48.5	13.6
2	#5925.00	47.7 AV	68.2	-20.5	1.38 H	30	34.1	13.6
3	*6115.00	100.2 PK			1.38 H	30	55.9	44.3
4	*6115.00	91.0 AV			1.38 H	30	46.7	44.3
5	12230.00	63.3 PK	74.0	-10.7	1.88 H	216	41.5	21.8
6	12230.00	50.1 AV	54.0	-3.9	1.88 H	216	28.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.4 PK	88.2	-24.8	1.35 V	120	49.8	13.6
2	#5925.00	48.3 AV	68.2	-19.9	1.35 V	120	34.7	13.6
3	*6115.00	107.8 PK			1.35 V	120	63.5	44.3
4	*6115.00	98.4 AV			1.35 V	120	54.1	44.3
5	12230.00	63.9 PK	74.0	-10.1	1.49 V	179	42.1	21.8
6	12230.00	50.4 AV	54.0	-3.6	1.49 V	179	28.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	99.3 PK			1.33 H	35	54.6	44.7
2	*6255.00	90.1 AV			1.33 H	35	45.4	44.7
3	12510.00	63.1 PK	74.0	-10.9	1.91 H	234	41.6	21.5
4	12510.00	49.7 AV	54.0	-4.3	1.91 H	234	28.2	21.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	107.4 PK			1.38 V	120	62.7	44.7
2	*6255.00	97.9 AV			1.38 V	120	53.2	44.7
3	12510.00	63.8 PK	74.0	-10.2	1.50 V	183	42.3	21.5
4	12510.00	49.5 AV	54.0	-4.5	1.50 V	183	28.0	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	101.5 PK			1.34 H	28	56.0	45.5
2	*6415.00	92.4 AV			1.34 H	28	46.9	45.5
3	#12830.00	64.8 PK	88.2	-23.4	1.89 H	208	42.0	22.8
4	#12830.00	51.2 AV	68.2	-17.0	1.89 H	208	28.4	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.9 PK			1.36 V	128	63.4	45.5
2	*6415.00	99.3 AV			1.36 V	128	53.8	45.5
3	#12830.00	65.1 PK	88.2	-23.1	1.46 V	182	42.3	22.8
4	#12830.00	51.3 AV	68.2	-16.9	1.46 V	182	28.5	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.9 PK			1.33 H	36	54.3	45.6
2	*6435.00	90.1 AV			1.33 H	36	44.5	45.6
3	12690.00	63.6 PK	74.0	-10.4	1.78 H	207	41.2	22.4
4	12690.00	50.5 AV	54.0	-3.5	1.78 H	207	28.1	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	106.2 PK			1.38 V	122	60.6	45.6
2	*6435.00	96.9 AV			1.38 V	122	51.3	45.6
3	12690.00	64.6 PK	74.0	-9.4	1.55 V	178	42.2	22.4
4	12690.00	51.0 AV	54.0	-3.0	1.55 V	178	28.6	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 107 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	99.4 PK			1.30 H	30	53.6	45.8
2	*6475.00	89.3 AV			1.30 H	30	43.5	45.8
3	#12950.00	64.8 PK	88.2	-23.4	1.91 H	210	41.8	23.0
4	#12950.00	51.1 AV	68.2	-17.1	1.91 H	210	28.1	23.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	106.3 PK			1.20 V	124	60.5	45.8
2	*6475.00	96.1 AV			1.20 V	124	50.3	45.8
3	#12950.00	65.1 PK	88.2	-23.1	1.50 V	176	42.1	23.0
4	#12950.00	51.4 AV	68.2	-16.8	1.50 V	176	28.4	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	99.2 PK			1.36 H	32	53.1	46.1
2	*6515.00	89.3 AV			1.36 H	32	43.2	46.1
3	#13030.00	64.2 PK	88.2	-24.0	1.79 H	203	41.4	22.8
4	#13030.00	51.0 AV	68.2	-17.2	1.79 H	203	28.2	22.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	106.2 PK			1.76 V	122	60.1	46.1
2	*6515.00	96.8 AV			1.76 V	122	50.7	46.1
3	#13030.00	65.0 PK	88.2	-23.2	1.49 V	177	42.2	22.8
4	#13030.00	51.5 AV	68.2	-16.7	1.49 V	177	28.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	99.7 PK			1.44 H	39	53.5	46.2
2	*6535.00	89.5 AV			1.44 H	39	43.3	46.2
3	#13070.00	64.6 PK	88.2	-23.6	1.90 H	211	41.8	22.8
4	#13070.00	51.0 AV	68.2	-17.2	1.90 H	211	28.2	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.9 PK			1.75 V	125	60.7	46.2
2	*6535.00	96.3 AV			1.75 V	125	50.1	46.2
3	#13070.00	65.1 PK	88.2	-23.1	1.50 V	174	42.3	22.8
4	#13070.00	51.5 AV	68.2	-16.7	1.50 V	174	28.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	100.4 PK			1.45 H	37	54.5	45.9
2	*6695.00	90.5 AV			1.45 H	37	44.6	45.9
3	13390.00	65.7 PK	74.0	-8.3	1.84 H	211	41.5	24.2
4	13390.00	52.4 AV	54.0	-1.6	1.84 H	211	28.2	24.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.6 PK			1.69 V	163	61.7	45.9
2	*6695.00	97.5 AV			1.69 V	163	51.6	45.9
3	13390.00	66.4 PK	74.0	-7.6	1.49 V	179	42.2	24.2
4	13390.00	52.8 AV	54.0	-1.2	1.49 V	179	28.6	24.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	99.3 PK			1.31 H	26	53.1	46.2
2	*6855.00	89.5 AV			1.31 H	26	43.3	46.2
3	#13710.00	66.2 PK	88.2	-22.0	1.91 H	203	41.6	24.6
4	#13710.00	52.8 AV	68.2	-15.4	1.91 H	203	28.2	24.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.4 PK			1.57 V	134	60.2	46.2
2	*6855.00	96.3 AV			1.57 V	134	50.1	46.2
3	#13710.00	66.9 PK	88.2	-21.3	1.44 V	180	42.3	24.6
4	#13710.00	53.1 AV	68.2	-15.1	1.44 V	180	28.5	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.6 PK			1.42 H	29	53.2	46.4
2	*6875.00	89.7 AV			1.42 H	29	43.3	46.4
3	#13750.00	66.4 PK	88.2	-21.8	1.89 H	224	41.7	24.7
4	#13750.00	52.9 AV	68.2	-15.3	1.89 H	224	28.2	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	106.8 PK			1.60 V	163	60.4	46.4
2	*6875.00	96.8 AV			1.60 V	163	50.4	46.4
3	#13750.00	66.9 PK	88.2	-21.3	1.44 V	178	42.2	24.7
4	#13750.00	53.4 AV	68.2	-14.8	1.44 V	178	28.7	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.6 PK			1.33 H	26	53.2	47.4
2	*6995.00	90.7 AV			1.33 H	26	43.3	47.4
3	#13990.00	67.2 PK	88.2	-21.0	1.96 H	201	41.7	25.5
4	#13990.00	53.8 AV	68.2	-14.4	1.96 H	201	28.3	25.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.8 PK			1.83 V	174	60.4	47.4
2	*6995.00	97.8 AV			1.83 V	174	50.4	47.4
3	#13990.00	67.7 PK	88.2	-20.5	1.48 V	175	42.2	25.5
4	#13990.00	54.2 AV	68.2	-14.0	1.48 V	175	28.7	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	100.0 PK			1.42 H	35	52.3	47.7
2	*7095.00	90.1 AV			1.42 H	35	42.4	47.7
3	#14190.00	67.5 PK	88.2	-20.7	1.99 H	201	41.6	25.9
4	#14190.00	54.1 AV	68.2	-14.1	1.99 H	201	28.2	25.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.0 PK			1.31 V	128	59.3	47.7
2	*7095.00	97.3 AV			1.31 V	128	49.6	47.7
3	#14190.00	68.1 PK	88.2	-20.1	1.44 V	173	42.2	25.9
4	#14190.00	54.6 AV	68.2	-13.6	1.44 V	173	28.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.4 PK			1.36 H	47	52.5	47.9
2	*7115.00	90.3 AV			1.36 H	47	42.4	47.9
3	#7125.00	71.2 PK	88.2	-17.0	1.36 H	47	55.0	16.2
4	#7125.00	51.8 AV	68.2	-16.4	1.36 H	47	35.6	16.2
5	#14250.00	67.5 PK	88.2	-20.7	1.89 H	214	41.6	25.9
6	#14250.00	54.1 AV	68.2	-14.1	1.89 H	214	28.2	25.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.4 PK			1.78 V	166	59.5	47.9
2	*7115.00	97.4 AV			1.78 V	166	49.5	47.9
3	#7125.00	77.2 PK	88.2	-11.0	1.78 V	166	61.0	16.2
4	#7125.00	54.7 AV	68.2	-13.5	1.78 V	166	38.5	16.2
5	#14250.00	68.2 PK	88.2	-20.0	1.52 V	180	42.3	25.9
6	#14250.00	54.4 AV	68.2	-13.8	1.52 V	180	28.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Beamforming (4T1S)

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.2 PK	88.2	-26.0	1.46 H	27	48.6	13.6
2	#5925.00	47.8 AV	68.2	-20.4	1.46 H	27	34.2	13.6
3	*6115.00	103.3 PK			1.46 H	27	59.0	44.3
4	*6115.00	91.8 AV			1.46 H	27	47.5	44.3
5	12230.00	63.2 PK	74.0	-10.8	1.89 H	220	41.4	21.8
6	12230.00	50.0 AV	54.0	-4.0	1.89 H	220	28.2	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.3 PK	88.2	-24.9	1.35 V	120	49.7	13.6
2	#5925.00	48.5 AV	68.2	-19.7	1.35 V	120	34.9	13.6
3	*6115.00	109.9 PK			1.35 V	120	65.6	44.3
4	*6115.00	97.3 AV			1.35 V	120	53.0	44.3
5	12230.00	64.1 PK	74.0	-9.9	1.44 V	176	42.3	21.8
6	12230.00	50.3 AV	54.0	-3.7	1.44 V	176	28.5	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	103.7 PK			1.13 H	56	59.0	44.7
2	*6255.00	91.9 AV			1.13 H	56	47.2	44.7
3	12510.00	63.2 PK	74.0	-10.8	1.96 H	216	41.7	21.5
4	12510.00	49.2 AV	54.0	-4.8	1.96 H	216	27.7	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	109.2 PK			1.56 V	51	64.5	44.7
2	*6255.00	96.9 AV			1.56 V	51	52.2	44.7
3	12510.00	63.5 PK	74.0	-10.5	1.45 V	182	42.0	21.5
4	12510.00	49.7 AV	54.0	-4.3	1.45 V	182	28.2	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	101.6 PK			1.25 H	50	56.1	45.5
2	*6415.00	91.0 AV			1.25 H	50	45.5	45.5
3	#12830.00	64.6 PK	88.2	-23.6	1.95 H	225	41.8	22.8
4	#12830.00	50.6 AV	68.2	-17.6	1.95 H	225	27.8	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.9 PK			1.61 V	349	62.4	45.5
2	*6415.00	95.3 AV			1.61 V	349	49.8	45.5
3	#12830.00	64.9 PK	88.2	-23.3	1.45 V	175	42.1	22.8
4	#12830.00	51.2 AV	68.2	-17.0	1.45 V	175	28.4	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.6 PK			1.36 H	63	56.0	45.6
2	*6435.00	90.2 AV			1.36 H	63	44.6	45.6
3	#12870.00	64.8 PK	88.2	-23.4	1.95 H	208	41.7	23.1
4	#12870.00	50.7 AV	68.2	-17.5	1.95 H	208	27.6	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	107.1 PK			1.71 V	345	61.5	45.6
2	*6435.00	94.5 AV			1.71 V	345	48.9	45.6
3	#12870.00	65.0 PK	88.2	-23.2	1.46 V	182	41.9	23.1
4	#12870.00	51.3 AV	68.2	-16.9	1.46 V	182	28.2	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 107 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.3 PK			2.36 H	21	56.5	45.8
2	*6475.00	91.4 AV			2.36 H	21	45.6	45.8
3	#12950.00	64.5 PK	88.2	-23.7	1.95 H	221	41.5	23.0
4	#12950.00	50.7 AV	68.2	-17.5	1.95 H	221	27.7	23.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.3 PK			1.67 V	344	61.5	45.8
2	*6475.00	95.5 AV			1.67 V	344	49.7	45.8
3	#12950.00	64.8 PK	88.2	-23.4	1.48 V	182	41.8	23.0
4	#12950.00	51.2 AV	68.2	-17.0	1.48 V	182	28.2	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.4 PK			2.32 H	25	56.3	46.1
2	*6515.00	92.1 AV			2.32 H	25	46.0	46.1
3	#13030.00	64.3 PK	88.2	-23.9	1.82 H	221	41.5	22.8
4	#13030.00	50.6 AV	68.2	-17.6	1.82 H	221	27.8	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.1 PK			1.64 V	343	62.0	46.1
2	*6515.00	96.2 AV			1.64 V	343	50.1	46.1
3	#13030.00	64.6 PK	88.2	-23.6	1.55 V	188	41.8	22.8
4	#13030.00	51.0 AV	68.2	-17.2	1.55 V	188	28.2	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	102.4 PK			2.36 H	23	56.2	46.2
2	*6535.00	92.0 AV			2.36 H	23	45.8	46.2
3	#13070.00	64.5 PK	88.2	-23.7	1.88 H	216	41.7	22.8
4	#13070.00	50.5 AV	68.2	-17.7	1.88 H	216	27.7	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.8 PK			1.77 V	275	61.6	46.2
2	*6535.00	96.3 AV			1.77 V	275	50.1	46.2
3	#13070.00	64.8 PK	88.2	-23.4	1.52 V	182	42.0	22.8
4	#13070.00	51.1 AV	68.2	-17.1	1.52 V	182	28.3	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.1 PK			2.38 H	19	56.2	45.9
2	*6695.00	90.9 AV			2.38 H	19	45.0	45.9
3	13390.00	65.7 PK	74.0	-8.3	1.94 H	216	41.5	24.2
4	13390.00	52.0 AV	54.0	-2.0	1.94 H	216	27.8	24.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.5 PK			1.82 V	277	61.6	45.9
2	*6695.00	95.6 AV			1.82 V	277	49.7	45.9
3	13390.00	66.0 PK	74.0	-8.0	1.45 V	182	41.8	24.2
4	13390.00	52.4 AV	54.0	-1.6	1.45 V	182	28.2	24.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	102.5 PK			2.28 H	6	56.3	46.2
2	*6855.00	90.3 AV			2.28 H	6	44.1	46.2
3	#13710.00	66.1 PK	88.2	-22.1	1.87 H	219	41.5	24.6
4	#13710.00	52.2 AV	68.2	-16.0	1.87 H	219	27.6	24.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.9 PK			1.81 V	36	62.7	46.2
2	*6855.00	96.2 AV			1.81 V	36	50.0	46.2
3	#13710.00	66.5 PK	88.2	-21.7	1.44 V	182	41.9	24.6
4	#13710.00	52.6 AV	68.2	-15.6	1.44 V	182	28.0	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.8 PK			1.49 H	8	56.4	46.4
2	*6875.00	90.2 AV			1.49 H	8	43.8	46.4
3	#13750.00	66.2 PK	88.2	-22.0	1.95 H	215	41.5	24.7
4	#13750.00	52.5 AV	68.2	-15.7	1.95 H	215	27.8	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.7 PK			2.02 V	37	62.3	46.4
2	*6875.00	96.6 AV			2.02 V	37	50.2	46.4
3	#13750.00	66.6 PK	88.2	-21.6	1.47 V	186	41.9	24.7
4	#13750.00	52.8 AV	68.2	-15.4	1.47 V	186	28.1	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.3 PK			2.29 H	21	55.9	47.4
2	*6995.00	92.9 AV			2.29 H	21	45.5	47.4
3	#13990.00	67.0 PK	88.2	-21.2	1.78 H	218	41.5	25.5
4	#13990.00	53.7 AV	68.2	-14.5	1.78 H	218	28.2	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.6 PK			2.20 V	275	60.2	47.4
2	*6995.00	96.5 AV			2.20 V	275	49.1	47.4
3	#13990.00	67.3 PK	88.2	-20.9	1.55 V	187	41.8	25.5
4	#13990.00	53.7 AV	68.2	-14.5	1.55 V	187	28.2	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	101.3 PK			1.56 H	38	53.6	47.7
2	*7095.00	90.1 AV			1.56 H	38	42.4	47.7
3	#14190.00	67.4 PK	88.2	-20.8	1.85 H	215	41.5	25.9
4	#14190.00	53.7 AV	68.2	-14.5	1.85 H	215	27.8	25.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.5 PK			1.99 V	279	59.8	47.7
2	*7095.00	95.1 AV			1.99 V	279	47.4	47.7
3	#14190.00	67.7 PK	88.2	-20.5	1.55 V	187	41.8	25.9
4	#14190.00	54.1 AV	68.2	-14.1	1.55 V	187	28.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	90.1 PK			1.50 H	35	42.2	47.9
2	*7115.00	78.2 AV			1.50 H	35	30.3	47.9
3	#7125.00	75.2 PK	88.2	-13.0	1.50 H	35	59.0	16.2
4	#7125.00	62.8 AV	68.2	-5.4	1.50 H	35	46.6	16.2
5	#14230.00	67.2 PK	88.2	-21.0	1.95 H	221	41.2	26.0
6	#14230.00	53.5 AV	68.2	-14.7	1.95 H	221	27.5	26.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.6 PK			1.82 V	279	46.7	47.9
2	*7115.00	83.0 AV			1.82 V	279	35.1	47.9
3	#7125.00	79.4 PK	88.2	-8.8	1.82 V	279	63.2	16.2
4	#7125.00	68.0 AV	68.2	-0.2	1.82 V	279	51.8	16.2
5	#14230.00	67.6 PK	88.2	-20.6	1.49 V	178	41.6	26.0
6	#14230.00	53.8 AV	68.2	-14.4	1.49 V	178	27.8	26.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.2 PK	88.2	-26.0	1.61 H	325	48.6	13.6
2	#5925.00	47.8 AV	68.2	-20.4	1.61 H	325	34.2	13.6
3	*6125.00	101.0 PK			1.61 H	325	56.7	44.3
4	*6125.00	88.8 AV			1.61 H	325	44.5	44.3
5	12250.00	63.3 PK	74.0	-10.7	1.85 H	210	41.6	21.7
6	12250.00	50.0 AV	54.0	-4.0	1.85 H	210	28.3	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.4 PK	88.2	-24.8	1.53 V	51	49.8	13.6
2	#5925.00	48.4 AV	68.2	-19.8	1.53 V	51	34.8	13.6
3	*6125.00	105.5 PK			1.53 V	51	61.2	44.3
4	*6125.00	93.1 AV			1.53 V	51	48.8	44.3
5	12250.00	64.0 PK	74.0	-10.0	1.46 V	179	42.3	21.7
6	12250.00	50.4 AV	54.0	-3.6	1.46 V	179	28.7	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	101.4 PK			1.63 H	328	56.8	44.6
2	*6245.00	88.9 AV			1.63 H	328	44.3	44.6
3	12490.00	63.0 PK	74.0	-11.0	1.90 H	218	41.5	21.5
4	12490.00	49.7 AV	54.0	-4.3	1.90 H	218	28.2	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	105.3 PK			1.52 V	47	60.7	44.6
2	*6245.00	93.1 AV			1.52 V	47	48.5	44.6
3	12490.00	63.9 PK	74.0	-10.1	1.43 V	181	42.4	21.5
4	12490.00	50.4 AV	54.0	-3.6	1.43 V	181	28.9	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	101.9 PK			1.66 H	329	56.5	45.4
2	*6405.00	89.7 AV			1.66 H	329	44.3	45.4
3	#12810.00	64.6 PK	88.2	-23.6	1.79 H	212	41.9	22.7
4	#12810.00	51.0 AV	68.2	-17.2	1.79 H	212	28.3	22.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	105.6 PK			2.25 V	85	60.2	45.4
2	*6405.00	93.4 AV			2.25 V	85	48.0	45.4
3	#12810.00	65.2 PK	88.2	-23.0	1.47 V	180	42.5	22.7
4	#12810.00	51.4 AV	68.2	-16.8	1.47 V	180	28.7	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	101.1 PK			1.69 H	315	55.4	45.7
2	*6445.00	88.9 AV			1.69 H	315	43.2	45.7
3	#12890.00	63.2 PK	88.2	-25.0	1.86 H	211	40.1	23.1
4	#12890.00	49.8 AV	68.2	-18.4	1.86 H	211	26.7	23.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	105.2 PK			2.14 V	84	59.5	45.7
2	*6445.00	93.2 AV			2.14 V	84	47.5	45.7
3	#12890.00	65.3 PK	88.2	-22.9	1.49 V	188	42.2	23.1
4	#12890.00	51.7 AV	68.2	-16.5	1.49 V	188	28.6	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	101.2 PK			1.63 H	328	55.3	45.9
2	*6485.00	88.8 AV			1.63 H	328	42.9	45.9
3	#12970.00	63.4 PK	88.2	-24.8	1.79 H	208	40.5	22.9
4	#12970.00	50.2 AV	68.2	-18.0	1.79 H	208	27.3	22.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	105.0 PK			2.13 V	84	59.1	45.9
2	*6485.00	92.7 AV			2.13 V	84	46.8	45.9
3	#12970.00	65.4 PK	88.2	-22.8	1.42 V	174	42.5	22.9
4	#12970.00	51.5 AV	68.2	-16.7	1.42 V	174	28.6	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	101.0 PK			1.58 H	323	54.9	46.1
2	*6525.00	88.6 AV			1.58 H	323	42.5	46.1
3	#13050.00	63.2 PK	88.2	-25.0	1.89 H	211	40.4	22.8
4	#13050.00	50.0 AV	68.2	-18.2	1.89 H	211	27.2	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	105.4 PK			2.18 V	85	59.3	46.1
2	*6525.00	93.2 AV			2.18 V	85	47.1	46.1
3	#13050.00	64.2 PK	88.2	-24.0	1.44 V	184	41.4	22.8
4	#13050.00	50.5 AV	68.2	-17.7	1.44 V	184	27.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	100.9 PK			1.66 H	326	54.6	46.3
2	*6565.00	88.6 AV			1.66 H	326	42.3	46.3
3	#13130.00	63.2 PK	88.2	-25.0	1.87 H	215	40.2	23.0
4	#13130.00	50.1 AV	68.2	-18.1	1.87 H	215	27.1	23.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	105.1 PK			2.18 V	91	58.8	46.3
2	*6565.00	92.8 AV			2.18 V	91	46.5	46.3
3	#13130.00	64.2 PK	88.2	-24.0	1.45 V	176	41.2	23.0
4	#13130.00	51.1 AV	68.2	-17.1	1.45 V	176	28.1	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	100.8 PK			1.56 H	328	54.9	45.9
2	*6725.00	88.4 AV			1.56 H	328	42.5	45.9
3	#13450.00	63.5 PK	88.2	-24.7	1.92 H	214	39.2	24.3
4	#13450.00	50.2 AV	68.2	-18.0	1.92 H	214	25.9	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	105.2 PK			2.11 V	86	59.3	45.9
2	*6725.00	93.2 AV			2.11 V	86	47.3	45.9
3	#13450.00	64.4 PK	88.2	-23.8	1.45 V	177	40.1	24.3
4	#13450.00	51.2 AV	68.2	-17.0	1.45 V	177	26.9	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	101.0 PK			1.63 H	322	54.8	46.2
2	*6845.00	88.5 AV			1.63 H	322	42.3	46.2
3	#13690.00	63.4 PK	88.2	-24.8	1.88 H	210	39.0	24.4
4	#13690.00	50.1 AV	68.2	-18.1	1.88 H	210	25.7	24.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	105.3 PK			2.16 V	85	59.1	46.2
2	*6845.00	92.8 AV			2.16 V	85	46.6	46.2
3	#13690.00	64.1 PK	88.2	-24.1	1.44 V	182	39.7	24.4
4	#13690.00	51.2 AV	68.2	-17.0	1.44 V	182	26.8	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	101.2 PK			1.74 H	328	54.7	46.5
2	*6885.00	88.9 AV			1.74 H	328	42.4	46.5
3	#13770.00	63.5 PK	88.2	-24.7	1.78 H	236	38.7	24.8
4	#13770.00	50.2 AV	68.2	-18.0	1.78 H	236	25.4	24.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	105.6 PK			2.10 V	86	59.1	46.5
2	*6885.00	93.4 AV			2.10 V	86	46.9	46.5
3	#13770.00	64.4 PK	88.2	-23.8	1.45 V	177	39.6	24.8
4	#13770.00	51.1 AV	68.2	-17.1	1.45 V	177	26.3	24.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	101.5 PK			1.65 H	321	54.0	47.5
2	*7005.00	89.3 AV			1.65 H	321	41.8	47.5
3	#14010.00	63.4 PK	88.2	-24.8	1.92 H	215	37.8	25.6
4	#14010.00	50.3 AV	68.2	-17.9	1.92 H	215	24.7	25.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	105.9 PK			2.10 V	84	58.4	47.5
2	*7005.00	93.6 AV			2.10 V	84	46.1	47.5
3	#14010.00	64.2 PK	88.2	-24.0	1.44 V	172	38.6	25.6
4	#14010.00	51.3 AV	68.2	-16.9	1.44 V	172	25.7	25.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*7085.00	101.2 PK			1.66 H	329	53.6	47.6
2	*7085.00	88.6 AV			1.66 H	329	41.0	47.6
3	#7125.00	64.9 PK	88.2	-23.3	1.66 H	329	48.7	16.2
4	#7125.00	52.2 AV	68.2	-16.0	1.66 H	329	36.0	16.2
5	#14170.00	64.5 PK	88.2	-23.7	1.99 H	247	38.8	25.7
6	#14170.00	51.4 AV	68.2	-16.8	1.99 H	247	25.7	25.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*7085.00	105.8 PK			1.76 V	33	58.2	47.6
2	*7085.00	93.0 AV			1.76 V	33	45.4	47.6
3	#7125.00	65.2 PK	88.2	-23.0	1.76 V	33	49.0	16.2
4	#7125.00	52.7 AV	68.2	-15.5	1.76 V	33	36.5	16.2
5	#14170.00	65.0 PK	88.2	-23.2	1.45 V	180	39.3	25.7
6	#14170.00	51.4 AV	68.2	-16.8	1.45 V	180	25.7	25.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.1 PK	88.2	-26.1	1.78 H	325	48.5	13.6
2	#5925.00	47.7 AV	68.2	-20.5	1.78 H	325	34.1	13.6
3	*6145.00	101.2 PK			1.78 H	325	57.0	44.2
4	*6145.00	88.9 AV			1.78 H	325	44.7	44.2
5	12290.00	63.3 PK	74.0	-10.7	1.88 H	216	41.6	21.7
6	12290.00	50.2 AV	54.0	-3.8	1.88 H	216	28.5	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.4 PK	88.2	-24.8	1.62 V	50	49.8	13.6
2	#5925.00	48.3 AV	68.2	-19.9	1.62 V	50	34.7	13.6
3	*6145.00	105.8 PK			1.62 V	50	61.6	44.2
4	*6145.00	92.4 AV			1.62 V	50	48.2	44.2
5	12290.00	64.2 PK	74.0	-9.8	1.44 V	173	42.5	21.7
6	12290.00	50.6 AV	54.0	-3.4	1.44 V	173	28.9	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	101.3 PK			1.57 H	319	56.8	44.5
2	*6225.00	88.9 AV			1.57 H	319	44.4	44.5
3	12450.00	63.1 PK	74.0	-10.9	1.93 H	211	41.7	21.4
4	12450.00	50.0 AV	54.0	-4.0	1.93 H	211	28.6	21.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	105.8 PK			1.69 V	55	61.3	44.5
2	*6225.00	93.4 AV			1.69 V	55	48.9	44.5
3	12450.00	64.3 PK	74.0	-9.7	1.42 V	190	42.9	21.4
4	12450.00	51.1 AV	54.0	-2.9	1.42 V	190	29.7	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	101.3 PK			1.64 H	320	56.0	45.3
2	*6385.00	89.4 AV			1.64 H	320	44.1	45.3
3	#12770.00	63.7 PK	88.2	-24.5	1.94 H	214	41.1	22.6
4	#12770.00	50.1 AV	68.2	-18.1	1.94 H	214	27.5	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	105.4 PK			1.69 V	55	60.1	45.3
2	*6385.00	93.0 AV			1.69 V	55	47.7	45.3
3	#12770.00	64.3 PK	88.2	-23.9	1.40 V	188	41.7	22.6
4	#12770.00	51.2 AV	68.2	-17.0	1.40 V	188	28.6	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	101.2 PK			1.65 H	308	55.4	45.8
2	*6465.00	89.4 AV			1.65 H	308	43.6	45.8
3	#12930.00	63.0 PK	88.2	-25.2	1.99 H	204	39.9	23.1
4	#12930.00	50.2 AV	68.2	-18.0	1.99 H	204	27.1	23.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	105.8 PK			1.66 V	54	60.0	45.8
2	*6465.00	93.4 AV			1.66 V	54	47.6	45.8
3	#12930.00	63.8 PK	88.2	-24.4	1.38 V	159	40.7	23.1
4	#12930.00	50.9 AV	68.2	-17.3	1.38 V	159	27.8	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	101.5 PK			1.60 H	322	55.3	46.2
2	*6545.00	89.6 AV			1.60 H	322	43.4	46.2
3	#13090.00	63.3 PK	88.2	-24.9	1.74 H	225	40.5	22.8
4	#13090.00	50.0 AV	68.2	-18.2	1.74 H	225	27.2	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	105.3 PK			1.55 V	56	59.1	46.2
2	*6545.00	93.0 AV			1.55 V	56	46.8	46.2
3	#13090.00	64.3 PK	88.2	-23.9	1.44 V	167	41.5	22.8
4	#13090.00	50.2 AV	68.2	-18.0	1.44 V	167	27.4	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	101.2 PK			1.72 H	330	55.0	46.2
2	*6625.00	88.9 AV			1.72 H	330	42.7	46.2
3	13250.00	63.5 PK	74.0	-10.5	1.74 H	218	40.0	23.5
4	13250.00	50.3 AV	54.0	-3.7	1.74 H	218	26.8	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	105.8 PK			1.63 V	55	59.6	46.2
2	*6625.00	93.3 AV			1.63 V	55	47.1	46.2
3	13250.00	64.3 PK	74.0	-9.7	1.44 V	180	40.8	23.5
4	13250.00	51.2 AV	54.0	-2.8	1.44 V	180	27.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	101.3 PK			1.66 H	317	55.4	45.9
2	*6705.00	89.5 AV			1.66 H	317	43.6	45.9
3	#13410.00	63.2 PK	88.2	-25.0	1.88 H	217	38.8	24.4
4	#13410.00	50.4 AV	68.2	-17.8	1.88 H	217	26.0	24.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.7 PK			1.60 V	51	59.8	45.9
2	*6705.00	93.4 AV			1.60 V	51	47.5	45.9
3	#13410.00	64.0 PK	88.2	-24.2	1.55 V	162	39.6	24.4
4	#13410.00	51.2 AV	68.2	-17.0	1.55 V	162	26.8	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	101.1 PK			1.60 H	328	55.1	46.0
2	*6785.00	89.4 AV			1.60 H	328	43.4	46.0
3	#13570.00	63.2 PK	88.2	-25.0	1.88 H	216	38.9	24.3
4	#13570.00	50.3 AV	68.2	-17.9	1.88 H	216	26.0	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	105.8 PK			1.68 V	49	59.8	46.0
2	*6785.00	93.6 AV			1.68 V	49	47.6	46.0
3	#13570.00	64.2 PK	88.2	-24.0	1.41 V	177	39.9	24.3
4	#13570.00	51.0 AV	68.2	-17.2	1.41 V	177	26.7	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	101.4 PK			1.66 H	315	55.1	46.3
2	*6865.00	89.5 AV			1.66 H	315	43.2	46.3
3	#13730.00	63.2 PK	88.2	-25.0	1.92 H	211	38.7	24.5
4	#13730.00	50.4 AV	68.2	-17.8	1.92 H	211	25.9	24.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	105.8 PK			1.70 V	58	59.5	46.3
2	*6865.00	93.4 AV			1.70 V	58	47.1	46.3
3	#13730.00	64.1 PK	88.2	-24.1	1.40 V	172	39.6	24.5
4	#13730.00	51.3 AV	68.2	-16.9	1.40 V	172	26.8	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	101.4 PK			1.52 H	314	54.5	46.9
2	*6945.00	89.6 AV			1.52 H	314	42.7	46.9
3	#13890.00	63.5 PK	88.2	-24.7	1.91 H	214	38.0	25.5
4	#13890.00	50.3 AV	68.2	-17.9	1.91 H	214	24.8	25.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	105.9 PK			1.63 V	56	59.0	46.9
2	*6945.00	93.8 AV			1.63 V	56	46.9	46.9
3	#13890.00	64.2 PK	88.2	-24.0	1.42 V	177	38.7	25.5
4	#13890.00	50.9 AV	68.2	-17.3	1.42 V	177	25.4	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	101.2 PK			1.58 H	320	53.7	47.5
2	*7025.00	89.2 AV			1.58 H	320	41.7	47.5
3	#7125.00	65.0 PK	68.2	-3.2	1.58 H	320	48.8	16.2
4	#7125.00	52.0 AV	54.0	-2.0	1.58 H	320	35.8	16.2
5	#14050.00	65.2 PK	68.2	-3.0	1.79 H	210	39.9	25.3
6	#14050.00	52.0 AV	54.0	-2.0	1.79 H	210	26.7	25.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	105.5 PK			1.80 V	33	58.0	47.5
2	*7025.00	94.0 AV			1.80 V	33	46.5	47.5
3	#7125.00	65.4 PK	88.2	-22.8	1.80 V	33	49.2	16.2
4	#7125.00	52.6 AV	68.2	-15.6	1.80 V	33	36.4	16.2
5	#14050.00	66.5 PK	88.2	-21.7	1.44 V	183	41.2	25.3
6	#14050.00	52.8 AV	68.2	-15.4	1.44 V	183	27.5	25.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.1 PK	88.2	-27.1	1.54 H	322	47.5	13.6
2	#5925.00	48.1 AV	68.2	-20.1	1.54 H	322	34.5	13.6
3	*6185.00	100.0 PK			1.54 H	322	55.7	44.3
4	*6185.00	88.9 AV			1.54 H	322	44.6	44.3
5	12370.00	61.6 PK	74.0	-12.4	1.89 H	213	40.2	21.4
6	12370.00	48.4 AV	54.0	-5.6	1.89 H	213	27.0	21.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.6 PK	88.2	-26.6	1.75 V	49	48.0	13.6
2	#5925.00	48.3 AV	68.2	-19.9	1.75 V	49	34.7	13.6
3	*6185.00	105.3 PK			1.75 V	49	61.0	44.3
4	*6185.00	93.1 AV			1.75 V	49	48.8	44.3
5	12370.00	62.2 PK	74.0	-11.8	1.54 V	185	40.8	21.4
6	12370.00	48.6 AV	54.0	-5.4	1.54 V	185	27.2	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	101.0 PK			1.86 H	321	56.0	45.0
2	*6345.00	88.5 AV			1.86 H	321	43.5	45.0
3	12690.00	62.6 PK	74.0	-11.4	1.99 H	211	40.2	22.4
4	12690.00	49.4 AV	54.0	-4.6	1.99 H	211	27.0	22.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.9 PK			1.93 V	46	59.9	45.0
2	*6345.00	92.5 AV			1.93 V	46	47.5	45.0
3	12690.00	63.1 PK	74.0	-10.9	1.55 V	198	40.7	22.4
4	12690.00	49.7 AV	54.0	-4.3	1.55 V	198	27.3	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	101.5 PK			1.87 H	319	55.5	46.0
2	*6505.00	89.5 AV			1.87 H	319	43.5	46.0
3	#13010.00	63.0 PK	88.2	-25.2	1.92 H	216	40.2	22.8
4	#13010.00	49.6 AV	68.2	-18.6	1.92 H	216	26.8	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.2 PK			2.06 V	344	59.2	46.0
2	*6505.00	92.8 AV			2.06 V	344	46.8	46.0
3	#13010.00	63.3 PK	88.2	-24.9	1.54 V	197	40.5	22.8
4	#13010.00	49.8 AV	68.2	-18.4	1.54 V	197	27.0	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	100.7 PK			1.82 H	323	54.7	46.0
2	*6665.00	89.5 AV			1.82 H	323	43.5	46.0
3	13330.00	63.8 PK	74.0	-10.2	1.82 H	211	40.0	23.8
4	13330.00	50.7 AV	54.0	-3.3	1.82 H	211	26.9	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.9 PK			2.04 V	87	58.9	46.0
2	*6665.00	92.8 AV			2.04 V	87	46.8	46.0
3	13330.00	64.3 PK	74.0	-9.7	1.47 V	193	40.5	23.8
4	13330.00	51.0 AV	54.0	-3.0	1.47 V	193	27.2	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	100.9 PK			1.68 H	315	54.7	46.2
2	*6825.00	88.3 AV			1.68 H	315	42.1	46.2
3	#13650.00	64.6 PK	88.2	-23.6	1.89 H	211	40.2	24.4
4	#13650.00	51.2 AV	68.2	-17.0	1.89 H	211	26.8	24.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.4 PK			1.80 V	34	59.2	46.2
2	*6825.00	92.4 AV			1.80 V	34	46.2	46.2
3	#13650.00	65.0 PK	88.2	-23.2	1.48 V	198	40.6	24.4
4	#13650.00	51.7 AV	68.2	-16.5	1.48 V	198	27.3	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.3 PK			1.96 H	313	55.0	47.3
2	*6985.00	89.4 AV			1.96 H	313	42.1	47.3
3	#7125.00	64.9 PK	88.2	-23.3	1.96 H	313	48.7	16.2
4	#7125.00	52.5 AV	68.2	-15.7	1.96 H	313	36.3	16.2
5	#13970.00	65.6 PK	88.2	-22.6	1.88 H	215	40.1	25.5
6	#13970.00	52.3 AV	68.2	-15.9	1.88 H	215	26.8	25.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.1 PK			1.91 V	35	59.8	47.3
2	*6985.00	94.5 AV			1.91 V	35	47.2	47.3
3	#7125.00	66.8 PK	88.2	-21.4	1.91 V	35	50.6	16.2
4	#7125.00	53.2 AV	68.2	-15.0	1.91 V	35	37.0	16.2
5	#13970.00	66.2 PK	88.2	-22.0	1.55 V	195	40.7	25.5
6	#13970.00	52.8 AV	68.2	-15.4	1.55 V	195	27.3	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.6 PK	88.2	-26.6	1.89 H	324	48.0	13.6
2	#5925.00	47.9 AV	68.2	-20.3	1.89 H	324	34.3	13.6
3	*6265.00	100.4 PK			1.89 H	324	55.7	44.7
4	*6265.00	88.7 AV			1.89 H	324	44.0	44.7
5	12530.00	61.4 PK	74.0	-12.6	1.82 H	209	39.7	21.7
6	12530.00	48.3 AV	54.0	-5.7	1.82 H	209	26.6	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.1 PK	88.2	-26.1	1.92 V	49	48.5	13.6
2	#5925.00	48.1 AV	68.2	-20.1	1.92 V	49	34.5	13.6
3	*6265.00	104.8 PK			1.92 V	49	60.1	44.7
4	*6265.00	92.7 AV			1.92 V	49	48.0	44.7
5	12530.00	61.7 PK	74.0	-12.3	1.44 V	187	40.0	21.7
6	12530.00	48.6 AV	54.0	-5.4	1.44 V	187	26.9	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	99.8 PK			1.91 H	319	54.3	45.5
2	*6425.00	89.7 AV			1.91 H	319	44.2	45.5
3	#12850.00	62.6 PK	88.2	-25.6	1.88 H	215	39.6	23.0
4	#12850.00	49.5 AV	68.2	-18.7	1.88 H	215	26.5	23.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	104.7 PK			1.76 V	268	59.2	45.5
2	*6425.00	92.8 AV			1.76 V	268	47.3	45.5
3	#12850.00	63.2 PK	88.2	-25.0	1.58 V	199	40.2	23.0
4	#12850.00	50.0 AV	68.2	-18.2	1.58 V	199	27.0	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	101.4 PK			1.95 H	321	55.1	46.3
2	*6585.00	90.5 AV			1.95 H	321	44.2	46.3
3	#13170.00	63.0 PK	88.2	-25.2	1.89 H	224	39.7	23.3
4	#13170.00	49.8 AV	68.2	-18.4	1.89 H	224	26.5	23.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.0 PK			1.78 V	271	59.7	46.3
2	*6585.00	94.0 AV			1.78 V	271	47.7	46.3
3	#13170.00	63.3 PK	88.2	-24.9	1.54 V	197	40.0	23.3
4	#13170.00	50.2 AV	68.2	-18.0	1.54 V	197	26.9	23.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	100.6 PK			1.81 H	320	54.7	45.9
2	*6745.00	88.6 AV			1.81 H	320	42.7	45.9
3	#13490.00	64.1 PK	88.2	-24.1	1.89 H	224	39.7	24.4
4	#13490.00	50.9 AV	68.2	-17.3	1.89 H	224	26.5	24.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	104.4 PK			1.82 V	272	58.5	45.9
2	*6745.00	92.9 AV			1.82 V	272	47.0	45.9
3	#13490.00	64.5 PK	88.2	-23.7	1.42 V	189	40.1	24.4
4	#13490.00	51.3 AV	68.2	-16.9	1.42 V	189	26.9	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	102.0 PK			1.70 H	320	55.3	46.7
2	*6905.00	90.5 AV			1.70 H	320	43.8	46.7
3	#7125.00	67.1 PK	88.2	-21.1	1.70 H	320	50.9	16.2
4	#7125.00	53.8 AV	68.2	-14.4	1.70 H	320	37.6	16.2
5	#13810.00	64.9 PK	88.2	-23.3	1.82 H	228	40.0	24.9
6	#13810.00	51.6 AV	68.2	-16.6	1.82 H	228	26.7	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.4 PK			1.83 V	37	58.7	46.7
2	*6905.00	94.2 AV			1.83 V	37	47.5	46.7
3	#7125.00	71.4 PK	88.2	-16.8	1.83 V	37	55.2	16.2
4	#7125.00	57.0 AV	68.2	-11.2	1.83 V	37	40.8	16.2
5	#13810.00	65.1 PK	88.2	-23.1	1.45 V	197	40.2	24.9
6	#13810.00	51.8 AV	68.2	-16.4	1.45 V	197	26.9	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Beamforming (4T4S)

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.1 PK	88.2	-27.1	1.96 H	329	47.5	13.6
2	#5925.00	48.1 AV	68.2	-20.1	1.96 H	329	34.5	13.6
3	*6115.00	103.8 PK			1.96 H	329	59.5	44.3
4	*6115.00	91.3 AV			1.96 H	329	47.0	44.3
5	12230.00	63.3 PK	74.0	-10.7	1.89 H	207	41.5	21.8
6	12230.00	49.1 AV	54.0	-4.9	1.89 H	207	27.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.6 PK	88.2	-26.6	2.25 V	27	48.0	13.6
2	#5925.00	48.4 AV	68.2	-19.8	2.25 V	27	34.8	13.6
3	*6115.00	107.3 PK			2.25 V	27	63.0	44.3
4	*6115.00	94.5 AV			2.25 V	27	50.2	44.3
5	12230.00	63.6 PK	74.0	-10.4	1.45 V	192	41.8	21.8
6	12230.00	49.6 AV	54.0	-4.4	1.45 V	192	27.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	103.2 PK			2.00 H	320	58.5	44.7
2	*6255.00	91.7 AV			2.00 H	320	47.0	44.7
3	12510.00	63.0 PK	74.0	-11.0	1.85 H	209	41.5	21.5
4	12510.00	48.7 AV	54.0	-5.3	1.85 H	209	27.2	21.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	107.2 PK			2.15 V	27	62.5	44.7
2	*6255.00	95.6 AV			2.15 V	27	50.9	44.7
3	12510.00	63.2 PK	74.0	-10.8	1.44 V	195	41.7	21.5
4	12510.00	49.2 AV	54.0	-4.8	1.44 V	195	27.7	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	104.0 PK			1.88 H	319	58.5	45.5
2	*6415.00	91.0 AV			1.88 H	319	45.5	45.5
3	#12830.00	64.3 PK	88.2	-23.9	1.92 H	218	41.5	22.8
4	#12830.00	50.3 AV	68.2	-17.9	1.92 H	218	27.5	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.6 PK			2.51 V	24	62.1	45.5
2	*6415.00	94.0 AV			2.51 V	24	48.5	45.5
3	#12830.00	64.5 PK	88.2	-23.7	1.45 V	182	41.7	22.8
4	#12830.00	50.8 AV	68.2	-17.4	1.45 V	182	28.0	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	103.1 PK			1.84 H	318	57.5	45.6
2	*6435.00	90.8 AV			1.84 H	318	45.2	45.6
3	#12870.00	64.6 PK	88.2	-23.6	1.89 H	205	41.5	23.1
4	#12870.00	50.6 AV	68.2	-17.6	1.89 H	205	27.5	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	106.6 PK			2.51 V	2	61.0	45.6
2	*6435.00	93.9 AV			2.51 V	2	48.3	45.6
3	#12870.00	64.9 PK	88.2	-23.3	1.55 V	189	41.8	23.1
4	#12870.00	50.8 AV	68.2	-17.4	1.55 V	189	27.7	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 107 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.3 PK			1.85 H	317	57.5	45.8
2	*6475.00	91.5 AV			1.85 H	317	45.7	45.8
3	#12950.00	64.5 PK	88.2	-23.7	1.89 H	215	41.5	23.0
4	#12950.00	50.2 AV	68.2	-18.0	1.89 H	215	27.2	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	106.9 PK			2.56 V	21	61.1	45.8
2	*6475.00	94.5 AV			2.56 V	21	48.7	45.8
3	#12950.00	65.0 PK	88.2	-23.2	1.44 V	187	42.0	23.0
4	#12950.00	50.8 AV	68.2	-17.4	1.44 V	187	27.8	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.1 PK			1.85 H	318	58.0	46.1
2	*6515.00	92.6 AV			1.85 H	318	46.5	46.1
3	#13030.00	64.3 PK	88.2	-23.9	1.95 H	211	41.5	22.8
4	#13030.00	49.3 AV	68.2	-18.9	1.95 H	211	26.5	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.1 PK			2.63 V	22	61.0	46.1
2	*6515.00	95.1 AV			2.63 V	22	49.0	46.1
3	#13030.00	64.6 PK	88.2	-23.6	1.45 V	185	41.8	22.8
4	#13030.00	49.8 AV	68.2	-18.4	1.45 V	185	27.0	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	103.7 PK			1.85 H	319	57.5	46.2
2	*6535.00	92.2 AV			1.85 H	319	46.0	46.2
3	#13070.00	64.3 PK	88.2	-23.9	1.92 H	208	41.5	22.8
4	#13070.00	49.7 AV	68.2	-18.5	1.92 H	208	26.9	22.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.6 PK			2.61 V	19	61.4	46.2
2	*6535.00	95.2 AV			2.61 V	19	49.0	46.2
3	#13070.00	64.6 PK	88.2	-23.6	1.58 V	192	41.8	22.8
4	#13070.00	49.9 AV	68.2	-18.3	1.58 V	192	27.1	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	103.0 PK			1.74 H	322	57.1	45.9
2	*6695.00	90.9 AV			1.74 H	322	45.0	45.9
3	13390.00	65.7 PK	74.0	-8.3	1.92 H	209	41.5	24.2
4	13390.00	51.4 AV	54.0	-2.6	1.92 H	209	27.2	24.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.7 PK			2.06 V	39	60.8	45.9
2	*6695.00	94.0 AV			2.06 V	39	48.1	45.9
3	13390.00	65.9 PK	74.0	-8.1	1.45 V	192	41.7	24.2
4	13390.00	51.9 AV	54.0	-2.1	1.45 V	192	27.7	24.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	103.2 PK			1.70 H	322	57.0	46.2
2	*6855.00	91.4 AV			1.70 H	322	45.2	46.2
3	#13710.00	66.1 PK	88.2	-22.1	1.89 H	225	41.5	24.6
4	#13710.00	51.1 AV	68.2	-17.1	1.89 H	225	26.5	24.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.9 PK			2.38 V	36	60.7	46.2
2	*6855.00	94.5 AV			2.38 V	36	48.3	46.2
3	#13710.00	66.4 PK	88.2	-21.8	1.52 V	195	41.8	24.6
4	#13710.00	51.6 AV	68.2	-16.6	1.52 V	195	27.0	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	103.9 PK			1.73 H	320	57.5	46.4
2	*6875.00	92.1 AV			1.73 H	320	45.7	46.4
3	#13750.00	66.4 PK	88.2	-21.8	1.92 H	206	41.7	24.7
4	#13750.00	51.4 AV	68.2	-16.8	1.92 H	206	26.7	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.4 PK			2.48 V	37	61.0	46.4
2	*6875.00	94.8 AV			2.48 V	37	48.4	46.4
3	#13750.00	66.7 PK	88.2	-21.5	1.51 V	188	42.0	24.7
4	#13750.00	51.8 AV	68.2	-16.4	1.51 V	188	27.1	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.9 PK			1.64 H	319	56.5	47.4
2	*6995.00	92.6 AV			1.64 H	319	45.2	47.4
3	#13990.00	67.0 PK	88.2	-21.2	1.87 H	205	41.5	25.5
4	#13990.00	52.2 AV	68.2	-16.0	1.87 H	205	26.7	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.3 PK			2.38 V	32	59.9	47.4
2	*6995.00	95.4 AV			2.38 V	32	48.0	47.4
3	#13990.00	67.3 PK	88.2	-20.9	1.44 V	187	41.8	25.5
4	#13990.00	52.5 AV	68.2	-15.7	1.44 V	187	27.0	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	103.7 PK			1.68 H	317	56.0	47.7
2	*7095.00	90.6 AV			1.68 H	317	42.9	47.7
3	#14190.00	67.4 PK	88.2	-20.8	1.89 H	221	41.5	25.9
4	#14190.00	52.6 AV	68.2	-15.6	1.89 H	221	26.7	25.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.0 PK			1.76 V	34	59.3	47.7
2	*7095.00	94.9 AV			1.76 V	34	47.2	47.7
3	#14190.00	67.7 PK	88.2	-20.5	1.51 V	197	41.8	25.9
4	#14190.00	53.1 AV	68.2	-15.1	1.51 V	197	27.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	85.9 PK			1.64 H	320	38.0	47.9
2	*7115.00	74.0 AV			1.64 H	320	26.1	47.9
3	#7125.00	70.7 PK	88.2	-17.5	1.64 H	320	54.5	16.2
4	#7125.00	63.4 AV	68.2	-4.8	1.64 H	320	47.2	16.2
5	#14230.00	67.5 PK	88.2	-20.7	1.95 H	228	41.5	26.0
6	#14230.00	52.5 AV	68.2	-15.7	1.95 H	228	26.5	26.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.7 PK			1.77 V	33	41.8	47.9
2	*7115.00	77.1 AV			1.77 V	33	29.2	47.9
3	#7125.00	74.9 PK	88.2	-13.3	1.77 V	33	58.7	16.2
4	#7125.00	68.1 AV	68.2	-0.1	1.77 V	33	51.9	16.2
5	#14230.00	67.8 PK	88.2	-20.4	1.55 V	185	41.8	26.0
6	#14230.00	52.8 AV	68.2	-15.4	1.55 V	185	26.8	26.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.8 PK	88.2	-27.4	1.71 H	321	47.2	13.6
2	#5925.00	47.8 AV	68.2	-20.4	1.71 H	321	34.2	13.6
3	*6125.00	103.1 PK			1.71 H	321	58.8	44.3
4	*6125.00	91.4 AV			1.71 H	321	47.1	44.3
5	12250.00	62.9 PK	74.0	-11.1	1.93 H	214	41.2	21.7
6	12250.00	49.0 AV	54.0	-5.0	1.93 H	214	27.3	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.1 PK	88.2	-27.1	1.53 V	46	47.5	13.6
2	#5925.00	48.2 AV	68.2	-20.0	1.53 V	46	34.6	13.6
3	*6125.00	108.2 PK			1.53 V	46	63.9	44.3
4	*6125.00	95.1 AV			1.53 V	46	50.8	44.3
5	12250.00	63.5 PK	74.0	-10.5	1.58 V	199	41.8	21.7
6	12250.00	49.3 AV	54.0	-4.7	1.58 V	199	27.6	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	103.5 PK			1.77 H	325	58.9	44.6
2	*6245.00	91.6 AV			1.77 H	325	47.0	44.6
3	12490.00	62.8 PK	74.0	-11.2	1.86 H	214	41.3	21.5
4	12490.00	49.0 AV	54.0	-5.0	1.86 H	214	27.5	21.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	108.6 PK			1.51 V	26	64.0	44.6
2	*6245.00	95.8 AV			1.51 V	26	51.2	44.6
3	12490.00	63.4 PK	74.0	-10.6	1.62 V	185	41.9	21.5
4	12490.00	49.3 AV	54.0	-4.7	1.62 V	185	27.8	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	103.4 PK			1.67 H	318	58.0	45.4
2	*6405.00	91.5 AV			1.67 H	318	46.1	45.4
3	#12810.00	62.5 PK	88.2	-25.7	1.89 H	226	39.8	22.7
4	#12810.00	48.6 AV	68.2	-19.6	1.89 H	226	25.9	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	108.5 PK			1.55 V	49	63.1	45.4
2	*6405.00	95.3 AV			1.55 V	49	49.9	45.4
3	#12810.00	63.5 PK	88.2	-24.7	1.43 V	196	40.8	22.7
4	#12810.00	49.8 AV	68.2	-18.4	1.43 V	196	27.1	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	103.8 PK			1.77 H	319	58.1	45.7
2	*6445.00	91.9 AV			1.77 H	319	46.2	45.7
3	#12890.00	62.2 PK	88.2	-26.0	1.96 H	220	39.1	23.1
4	#12890.00	48.6 AV	68.2	-19.6	1.96 H	220	25.5	23.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	108.3 PK			1.51 V	29	62.6	45.7
2	*6445.00	95.2 AV			1.51 V	29	49.5	45.7
3	#12890.00	63.8 PK	88.2	-24.4	1.60 V	185	40.7	23.1
4	#12890.00	49.5 AV	68.2	-18.7	1.60 V	185	26.4	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	103.4 PK			1.74 H	319	57.5	45.9
2	*6485.00	91.6 AV			1.74 H	319	45.7	45.9
3	#12970.00	62.8 PK	88.2	-25.4	1.81 H	228	39.9	22.9
4	#12970.00	49.3 AV	68.2	-18.9	1.81 H	228	26.4	22.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	108.5 PK			1.60 V	48	62.6	45.9
2	*6485.00	95.2 AV			1.60 V	48	49.3	45.9
3	#12970.00	64.1 PK	88.2	-24.1	1.73 V	190	41.2	22.9
4	#12970.00	49.6 AV	68.2	-18.6	1.73 V	190	26.7	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	103.8 PK			1.77 H	326	57.7	46.1
2	*6525.00	91.8 AV			1.77 H	326	45.7	46.1
3	#13050.00	62.8 PK	88.2	-25.4	1.82 H	236	40.0	22.8
4	#13050.00	49.0 AV	68.2	-19.2	1.82 H	236	26.2	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.9 PK			1.63 V	37	62.8	46.1
2	*6525.00	95.4 AV			1.63 V	37	49.3	46.1
3	#13050.00	64.2 PK	88.2	-24.0	1.50 V	189	41.4	22.8
4	#13050.00	49.5 AV	68.2	-18.7	1.50 V	189	26.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	103.8 PK			1.68 H	322	57.5	46.3
2	*6565.00	91.5 AV			1.68 H	322	45.2	46.3
3	#13130.00	63.0 PK	88.2	-25.2	1.96 H	210	40.0	23.0
4	#13130.00	49.1 AV	68.2	-19.1	1.96 H	210	26.1	23.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	108.7 PK			1.59 V	39	62.4	46.3
2	*6565.00	95.6 AV			1.59 V	39	49.3	46.3
3	#13130.00	63.8 PK	88.2	-24.4	1.62 V	203	40.8	23.0
4	#13130.00	49.5 AV	68.2	-18.7	1.62 V	203	26.5	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	103.6 PK			1.69 H	315	57.7	45.9
2	*6725.00	91.2 AV			1.69 H	315	45.3	45.9
3	#13450.00	63.3 PK	88.2	-24.9	1.99 H	201	39.0	24.3
4	#13450.00	49.2 AV	68.2	-19.0	1.99 H	201	24.9	24.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	108.5 PK			1.41 V	35	62.6	45.9
2	*6725.00	95.3 AV			1.41 V	35	49.4	45.9
3	#13450.00	65.8 PK	88.2	-22.4	1.55 V	193	41.5	24.3
4	#13450.00	51.9 AV	68.2	-16.3	1.55 V	193	27.6	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	103.2 PK			1.74 H	323	57.0	46.2
2	*6845.00	91.2 AV			1.74 H	323	45.0	46.2
3	#13690.00	63.3 PK	88.2	-24.9	1.94 H	218	38.9	24.4
4	#13690.00	49.2 AV	68.2	-19.0	1.94 H	218	24.8	24.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	108.3 PK			1.53 V	44	62.1	46.2
2	*6845.00	95.0 AV			1.53 V	44	48.8	46.2
3	#13690.00	64.3 PK	88.2	-23.9	1.63 V	182	39.9	24.4
4	#13690.00	50.4 AV	68.2	-17.8	1.63 V	182	26.0	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	103.7 PK			1.78 H	334	57.2	46.5
2	*6885.00	91.8 AV			1.78 H	334	45.3	46.5
3	#13770.00	62.5 PK	88.2	-25.7	1.85 H	214	37.7	24.8
4	#13770.00	49.3 AV	68.2	-18.9	1.85 H	214	24.5	24.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	108.9 PK			1.56 V	44	62.4	46.5
2	*6885.00	95.7 AV			1.56 V	44	49.2	46.5
3	#13770.00	63.8 PK	88.2	-24.4	1.59 V	192	39.0	24.8
4	#13770.00	49.5 AV	68.2	-18.7	1.59 V	192	24.7	24.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	103.5 PK			1.62 H	345	56.0	47.5
2	*7005.00	91.7 AV			1.62 H	345	44.2	47.5
3	#14010.00	63.3 PK	88.2	-24.9	1.79 H	222	37.7	25.6
4	#14010.00	49.8 AV	68.2	-18.4	1.79 H	222	24.2	25.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	108.7 PK			1.46 V	39	61.2	47.5
2	*7005.00	95.6 AV			1.46 V	39	48.1	47.5
3	#14010.00	64.2 PK	88.2	-24.0	1.66 V	182	38.6	25.6
4	#14010.00	50.3 AV	68.2	-17.9	1.66 V	182	24.7	25.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	103.5 PK			1.71 H	322	55.9	47.6
2	*7085.00	91.8 AV			1.71 H	322	44.2	47.6
3	#7125.00	67.8 PK	88.2	-20.4	1.71 H	322	51.6	16.2
4	#7125.00	54.2 AV	68.2	-14.0	1.71 H	322	38.0	16.2
5	#14170.00	64.9 PK	88.2	-23.3	1.99 H	210	39.2	25.7
6	#14170.00	50.3 AV	68.2	-17.9	1.99 H	210	24.6	25.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.6 PK			1.73 V	32	61.0	47.6
2	*7085.00	95.4 AV			1.73 V	32	47.8	47.6
3	#7125.00	68.2 PK	88.2	-20.0	1.73 V	32	52.0	16.2
4	#7125.00	54.9 AV	68.2	-13.3	1.73 V	32	38.7	16.2
5	#14170.00	66.2 PK	88.2	-22.0	1.52 V	193	40.5	25.7
6	#14170.00	52.7 AV	68.2	-15.5	1.52 V	193	27.0	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.6 PK	88.2	-27.6	1.77 H	325	47.0	13.6
2	#5925.00	47.2 AV	68.2	-21.0	1.77 H	325	33.6	13.6
3	*6145.00	103.5 PK			1.77 H	325	59.3	44.2
4	*6145.00	91.6 AV			1.77 H	325	47.4	44.2
5	12290.00	62.2 PK	74.0	-11.8	1.89 H	224	40.5	21.7
6	12290.00	48.6 AV	54.0	-5.4	1.89 H	224	26.9	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.0 PK	88.2	-27.2	1.61 V	27	47.4	13.6
2	#5925.00	47.9 AV	68.2	-20.3	1.61 V	27	34.3	13.6
3	*6145.00	108.1 PK			1.61 V	27	63.9	44.2
4	*6145.00	94.5 AV			1.61 V	27	50.3	44.2
5	12290.00	62.5 PK	74.0	-11.5	1.54 V	192	40.8	21.7
6	12290.00	49.0 AV	54.0	-5.0	1.54 V	192	27.3	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	103.9 PK			1.78 H	329	59.4	44.5
2	*6225.00	91.4 AV			1.78 H	329	46.9	44.5
3	12450.00	62.1 PK	74.0	-11.9	1.82 H	236	40.7	21.4
4	12450.00	49.0 AV	54.0	-5.0	1.82 H	236	27.6	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	108.3 PK			1.66 V	28	63.8	44.5
2	*6225.00	94.6 AV			1.66 V	28	50.1	44.5
3	12450.00	62.9 PK	74.0	-11.1	1.48 V	169	41.5	21.4
4	12450.00	49.5 AV	54.0	-4.5	1.48 V	169	28.1	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	103.9 PK			1.70 H	314	58.6	45.3
2	*6385.00	92.0 AV			1.70 H	314	46.7	45.3
3	#12770.00	62.3 PK	88.2	-25.9	1.72 H	236	39.7	22.6
4	#12770.00	49.1 AV	68.2	-19.1	1.72 H	236	26.5	22.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	108.8 PK			1.62 V	37	63.5	45.3
2	*6385.00	94.7 AV			1.62 V	37	49.4	45.3
3	#12770.00	62.8 PK	88.2	-25.4	1.58 V	196	40.2	22.6
4	#12770.00	49.8 AV	68.2	-18.4	1.58 V	196	27.2	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.9 PK			1.73 H	305	58.1	45.8
2	*6465.00	91.8 AV			1.73 H	305	46.0	45.8
3	#12930.00	62.9 PK	88.2	-25.3	1.97 H	236	39.8	23.1
4	#12930.00	49.2 AV	68.2	-19.0	1.97 H	236	26.1	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.7 PK			1.73 V	46	62.9	45.8
2	*6465.00	95.1 AV			1.73 V	46	49.3	45.8
3	#12930.00	63.0 PK	88.2	-25.2	1.55 V	193	39.9	23.1
4	#12930.00	49.7 AV	68.2	-18.5	1.55 V	193	26.6	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	103.3 PK			1.84 H	312	57.1	46.2
2	*6545.00	91.5 AV			1.84 H	312	45.3	46.2
3	#13090.00	62.8 PK	88.2	-25.4	1.82 H	215	40.0	22.8
4	#13090.00	48.3 AV	68.2	-19.9	1.82 H	215	25.5	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	108.2 PK			1.65 V	30	62.0	46.2
2	*6545.00	94.2 AV			1.65 V	30	48.0	46.2
3	#13090.00	62.9 PK	88.2	-25.3	1.59 V	183	40.1	22.8
4	#13090.00	49.7 AV	68.2	-18.5	1.59 V	183	26.9	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	103.8 PK			1.79 H	333	57.6	46.2
2	*6625.00	91.9 AV			1.79 H	333	45.7	46.2
3	13250.00	62.5 PK	74.0	-11.5	1.90 H	217	39.0	23.5
4	13250.00	48.9 AV	54.0	-5.1	1.90 H	217	25.4	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	108.7 PK			1.52 V	29	62.5	46.2
2	*6625.00	94.9 AV			1.52 V	29	48.7	46.2
3	13250.00	63.8 PK	74.0	-10.2	1.63 V	190	40.3	23.5
4	13250.00	50.1 AV	54.0	-3.9	1.63 V	190	26.6	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.2 PK			1.86 H	341	57.3	45.9
2	*6705.00	91.5 AV			1.86 H	341	45.6	45.9
3	#13410.00	62.9 PK	88.2	-25.3	1.73 H	205	38.5	24.4
4	#13410.00	49.2 AV	68.2	-19.0	1.73 H	205	24.8	24.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	108.9 PK			1.66 V	48	63.0	45.9
2	*6705.00	94.8 AV			1.66 V	48	48.9	45.9
3	#13410.00	63.2 PK	88.2	-25.0	1.63 V	188	38.8	24.4
4	#13410.00	49.9 AV	68.2	-18.3	1.63 V	188	25.5	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	103.8 PK			1.75 H	323	57.8	46.0
2	*6785.00	91.9 AV			1.75 H	323	45.9	46.0
3	#13570.00	63.9 PK	88.2	-24.3	1.82 H	236	39.6	24.3
4	#13570.00	50.2 AV	68.2	-18.0	1.82 H	236	25.9	24.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.9 PK			1.73 V	36	61.9	46.0
2	*6785.00	93.2 AV			1.73 V	36	47.2	46.0
3	#13570.00	63.1 PK	88.2	-25.1	1.56 V	199	38.8	24.3
4	#13570.00	50.6 AV	68.2	-17.6	1.56 V	199	26.3	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	103.2 PK			1.76 H	349	56.9	46.3
2	*6865.00	91.4 AV			1.76 H	349	45.1	46.3
3	#13730.00	62.8 PK	88.2	-25.4	1.90 H	217	38.3	24.5
4	#13730.00	49.9 AV	68.2	-18.3	1.90 H	217	25.4	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.6 PK			1.66 V	35	61.3	46.3
2	*6865.00	94.2 AV			1.66 V	35	47.9	46.3
3	#13730.00	63.8 PK	88.2	-24.4	1.51 V	197	39.3	24.5
4	#13730.00	50.2 AV	68.2	-18.0	1.51 V	197	25.7	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	103.3 PK			1.69 H	338	56.4	46.9
2	*6945.00	91.2 AV			1.69 H	338	44.3	46.9
3	#13890.00	62.8 PK	88.2	-25.4	1.80 H	247	37.3	25.5
4	#13890.00	49.9 AV	68.2	-18.3	1.80 H	247	24.4	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	108.0 PK			1.78 V	41	61.1	46.9
2	*6945.00	94.5 AV			1.78 V	41	47.6	46.9
3	#13890.00	63.5 PK	88.2	-24.7	1.56 V	190	38.0	25.5
4	#13890.00	51.2 AV	68.2	-17.0	1.56 V	190	25.7	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	103.7 PK			1.75 H	326	56.2	47.5
2	*7025.00	91.9 AV			1.75 H	326	44.4	47.5
3	#7125.00	72.3 PK	88.2	-15.9	1.75 H	326	56.1	16.2
4	#7125.00	53.1 AV	68.2	-15.1	1.75 H	326	36.9	16.2
5	#14050.00	63.4 PK	88.2	-24.8	1.87 H	216	38.1	25.3
6	#14050.00	50.6 AV	68.2	-17.6	1.87 H	216	25.3	25.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.8 PK			1.80 V	35	61.3	47.5
2	*7025.00	96.1 AV			1.80 V	35	48.6	47.5
3	#7125.00	77.0 PK	88.2	-11.2	1.80 V	35	60.8	16.2
4	#7125.00	55.3 AV	68.2	-12.9	1.80 V	35	39.1	16.2
5	#14050.00	64.1 PK	88.2	-24.1	1.52 V	193	38.8	25.3
6	#14050.00	51.3 AV	68.2	-16.9	1.52 V	193	26.0	25.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.3 PK	88.2	-26.9	1.79 H	336	47.7	13.6
2	#5925.00	47.5 AV	68.2	-20.7	1.79 H	336	33.9	13.6
3	*6185.00	103.5 PK			1.79 H	336	59.2	44.3
4	*6185.00	92.1 AV			1.79 H	336	47.8	44.3
5	12370.00	62.2 PK	74.0	-11.8	1.81 H	236	40.8	21.4
6	12370.00	49.0 AV	54.0	-5.0	1.81 H	236	27.6	21.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.7 PK	88.2	-26.5	2.31 V	26	48.1	13.6
2	#5925.00	48.0 AV	68.2	-20.2	2.31 V	26	34.4	13.6
3	*6185.00	109.4 PK			2.31 V	26	65.1	44.3
4	*6185.00	96.9 AV			2.31 V	26	52.6	44.3
5	12370.00	62.9 PK	74.0	-11.1	1.49 V	183	41.5	21.4
6	12370.00	49.8 AV	54.0	-4.2	1.49 V	183	28.4	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	103.9 PK			1.80 H	326	58.9	45.0
2	*6345.00	92.8 AV			1.80 H	326	47.8	45.0
3	12690.00	62.4 PK	74.0	-11.6	1.89 H	243	40.0	22.4
4	12690.00	49.3 AV	54.0	-4.7	1.89 H	243	26.9	22.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	108.8 PK			2.20 V	18	63.8	45.0
2	*6345.00	96.7 AV			2.20 V	18	51.7	45.0
3	12690.00	62.8 PK	74.0	-11.2	1.51 V	190	40.4	22.4
4	12690.00	49.9 AV	54.0	-4.1	1.51 V	190	27.5	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.8 PK			1.89 H	345	57.8	46.0
2	*6505.00	92.5 AV			1.89 H	345	46.5	46.0
3	#13010.00	62.4 PK	88.2	-25.8	1.80 H	211	39.6	22.8
4	#13010.00	49.3 AV	68.2	-18.9	1.80 H	211	26.5	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.2 PK			2.20 V	34	63.2	46.0
2	*6505.00	96.7 AV			2.20 V	34	50.7	46.0
3	#13010.00	62.8 PK	88.2	-25.4	1.56 V	170	40.0	22.8
4	#13010.00	49.5 AV	68.2	-18.7	1.56 V	170	26.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.9 PK			1.77 H	315	57.9	46.0
2	*6665.00	92.5 AV			1.77 H	315	46.5	46.0
3	13330.00	62.0 PK	74.0	-12.0	1.74 H	230	38.2	23.8
4	13330.00	49.0 AV	54.0	-5.0	1.74 H	230	25.2	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.1 PK			2.36 V	17	63.1	46.0
2	*6665.00	96.6 AV			2.36 V	17	50.6	46.0
3	13330.00	62.8 PK	74.0	-11.2	1.41 V	189	39.0	23.8
4	13330.00	49.9 AV	54.0	-4.1	1.41 V	189	26.1	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	104.1 PK			1.73 H	329	57.9	46.2
2	*6825.00	92.8 AV			1.73 H	329	46.6	46.2
3	#13650.00	62.4 PK	88.2	-25.8	1.84 H	217	38.0	24.4
4	#13650.00	49.2 AV	68.2	-19.0	1.84 H	217	24.8	24.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.1 PK			2.31 V	43	62.9	46.2
2	*6825.00	97.0 AV			2.31 V	43	50.8	46.2
3	#13650.00	63.1 PK	88.2	-25.1	1.35 V	189	38.7	24.4
4	#13650.00	50.8 AV	68.2	-17.4	1.35 V	189	26.4	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.1 PK			1.86 H	316	56.8	47.3
2	*6985.00	93.0 AV			1.86 H	316	45.7	47.3
3	#7125.00	80.5 PK	88.2	-7.7	1.86 H	316	64.3	16.2
4	#7125.00	58.8 AV	68.2	-9.4	1.86 H	316	42.6	16.2
5	#13970.00	63.8 PK	88.2	-24.4	1.74 H	218	38.3	25.5
6	#13970.00	50.5 AV	68.2	-17.7	1.74 H	218	25.0	25.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	109.4 PK			1.58 V	35	62.1	47.3
2	*6985.00	96.6 AV			1.58 V	35	49.3	47.3
3	#7125.00	81.8 PK	88.2	-6.4	1.58 V	35	65.6	16.2
4	#7125.00	64.4 AV	68.2	-3.8	1.58 V	35	48.2	16.2
5	#13970.00	64.4 PK	88.2	-23.8	1.53 V	188	38.9	25.5
6	#13970.00	51.5 AV	68.2	-16.7	1.53 V	188	26.0	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.1 PK	88.2	-27.1	1.86 H	327	47.5	13.6
2	#5925.00	47.8 AV	68.2	-20.4	1.86 H	327	34.2	13.6
3	*6265.00	102.2 PK			1.86 H	327	57.5	44.7
4	*6265.00	89.2 AV			1.86 H	327	44.5	44.7
5	12530.00	62.9 PK	74.0	-11.1	1.77 H	236	41.2	21.7
6	12530.00	50.0 AV	54.0	-4.0	1.77 H	236	28.3	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.2 PK	88.2	-27.0	2.33 V	26	47.6	13.6
2	#5925.00	48.1 AV	68.2	-20.1	2.33 V	26	34.5	13.6
3	*6265.00	106.5 PK			2.33 V	26	61.8	44.7
4	*6265.00	93.3 AV			2.33 V	26	48.6	44.7
5	12530.00	63.2 PK	74.0	-10.8	1.46 V	188	41.5	21.7
6	12530.00	50.3 AV	54.0	-3.7	1.46 V	188	28.6	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	102.3 PK			1.75 H	323	56.8	45.5
2	*6425.00	89.5 AV			1.75 H	323	44.0	45.5
3	#12850.00	62.7 PK	88.2	-25.5	1.67 H	214	39.7	23.0
4	#12850.00	50.0 AV	68.2	-18.2	1.67 H	214	27.0	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.8 PK			2.18 V	34	61.3	45.5
2	*6425.00	93.7 AV			2.18 V	34	48.2	45.5
3	#12850.00	63.3 PK	88.2	-24.9	1.49 V	185	40.3	23.0
4	#12850.00	50.6 AV	68.2	-17.6	1.49 V	185	27.6	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	102.4 PK			1.73 H	341	56.1	46.3
2	*6585.00	89.5 AV			1.73 H	341	43.2	46.3
3	#13170.00	62.8 PK	88.2	-25.4	1.69 H	217	39.5	23.3
4	#13170.00	50.1 AV	68.2	-18.1	1.69 H	217	26.8	23.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.8 PK			2.36 V	41	60.5	46.3
2	*6585.00	93.7 AV			2.36 V	41	47.4	46.3
3	#13170.00	63.0 PK	88.2	-25.2	1.45 V	180	39.7	23.3
4	#13170.00	50.5 AV	68.2	-17.7	1.45 V	180	27.2	23.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	102.6 PK			1.90 H	336	56.7	45.9
2	*6745.00	89.9 AV			1.90 H	336	44.0	45.9
3	#13490.00	62.8 PK	88.2	-25.4	1.79 H	242	38.4	24.4
4	#13490.00	50.5 AV	68.2	-17.7	1.79 H	242	26.1	24.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	106.7 PK			2.30 V	38	60.8	45.9
2	*6745.00	93.5 AV			2.30 V	38	47.6	45.9
3	#13490.00	63.8 PK	88.2	-24.4	1.55 V	193	39.4	24.4
4	#13490.00	51.1 AV	68.2	-17.1	1.55 V	193	26.7	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	101.7 PK			1.70 H	322	55.0	46.7
2	*6905.00	90.4 AV			1.70 H	322	43.7	46.7
3	#7125.00	73.2 PK	88.2	-15.0	1.70 H	322	57.0	16.2
4	#7125.00	54.0 AV	68.2	-14.2	1.70 H	322	37.8	16.2
5	7250.00	61.0 PK	74.0	-13.0	1.70 H	322	44.8	16.2
6	7250.00	46.4 AV	54.0	-7.6	1.70 H	322	30.2	16.2
7	#13810.00	62.9 PK	88.2	-25.3	1.95 H	227	38.0	24.9
8	#13810.00	50.9 AV	68.2	-17.3	1.95 H	227	26.0	24.9

Antenna Polarity & Test Distance : Vertical at 3 m


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.6 PK			1.68 V	36	59.9	46.7
2	*6905.00	94.0 AV			1.68 V	36	47.3	46.7
3	#7125.00	83.2 PK	88.2	-5.0	1.68 V	36	67.0	16.2
4	#7125.00	61.6 AV	68.2	-6.6	1.68 V	36	45.4	16.2
5	7250.00	70.2 PK	74.0	-3.8	1.68 V	36	54.0	16.2
6	7250.00	53.9 AV	54.0	-0.1	1.68 V	36	37.7	16.2
7	#13810.00	63.2 PK	88.2	-25.0	1.48 V	192	38.3	24.9
8	#13810.00	51.2 AV	68.2	-17.0	1.48 V	192	26.3	24.9

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


802.11a Channel 33

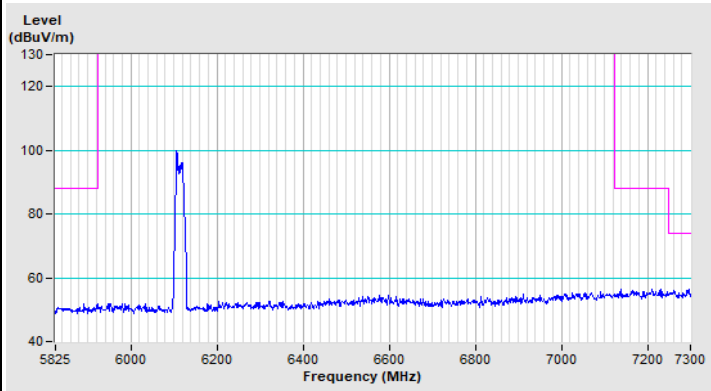


Horizontal (Peak)

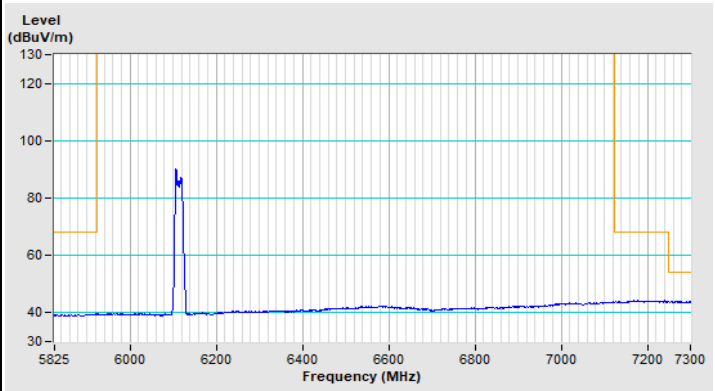

Horizontal (Average)

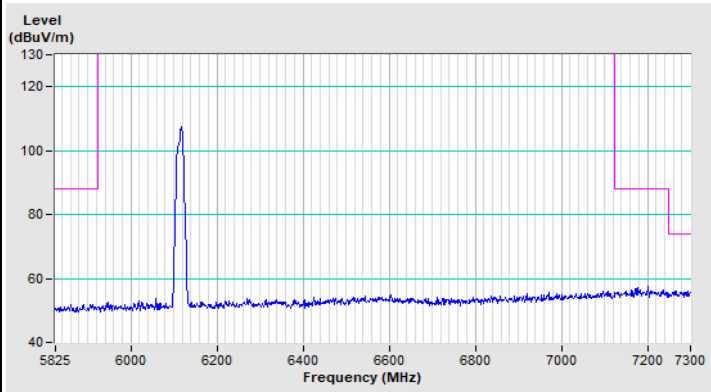


Vertical (Peak)

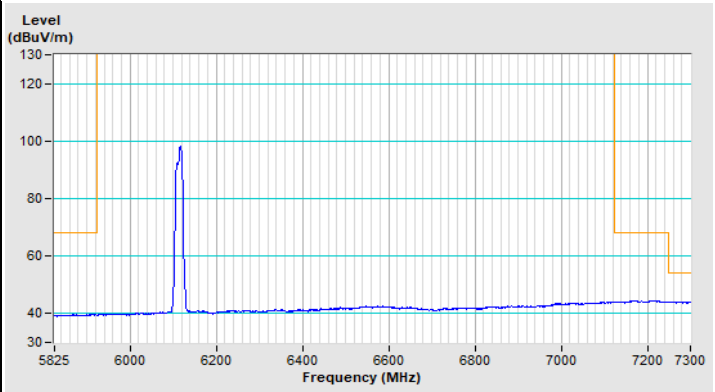


Vertical (Average)


802.11a Channel 233

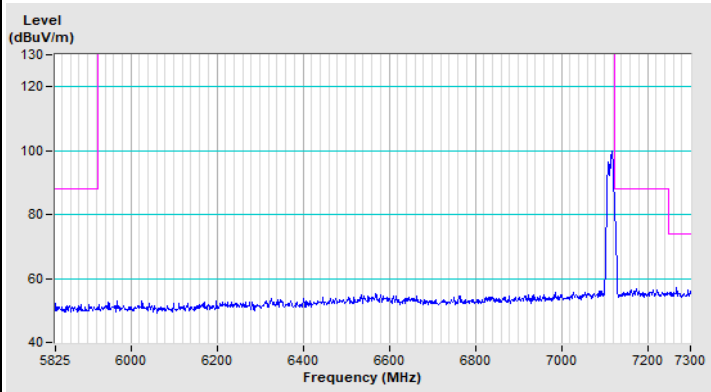


Horizontal (Peak)

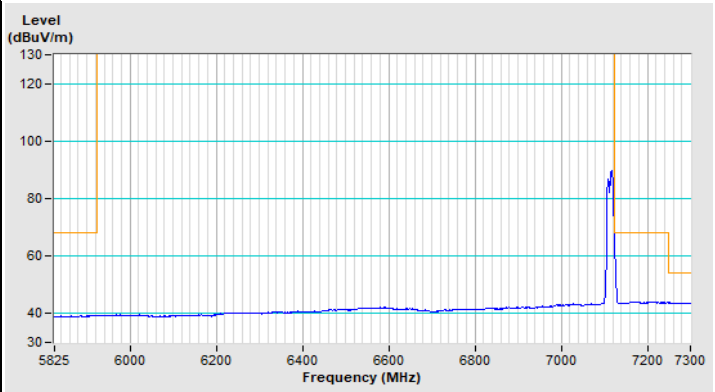

Horizontal (Average)

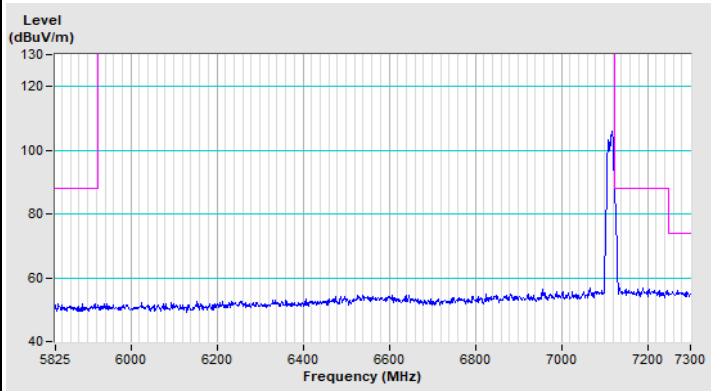


Vertical (Peak)

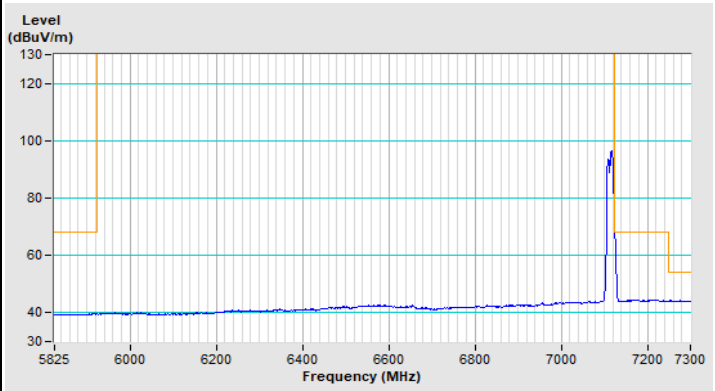


Vertical (Average)

Beamforming (4T1S)


802.11be (EHT20) Channel 33

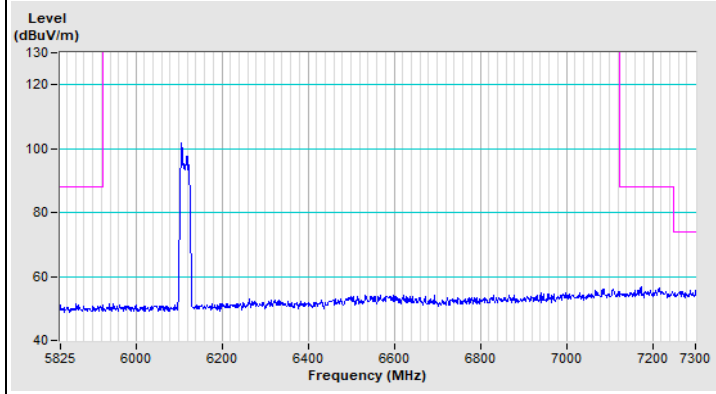


Horizontal (Peak)

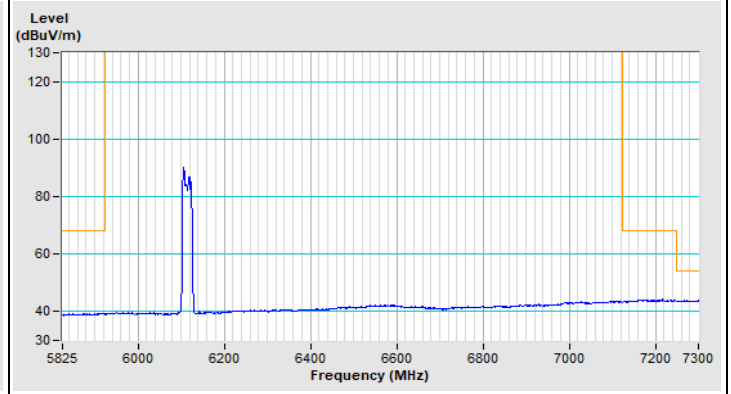

Horizontal (Average)

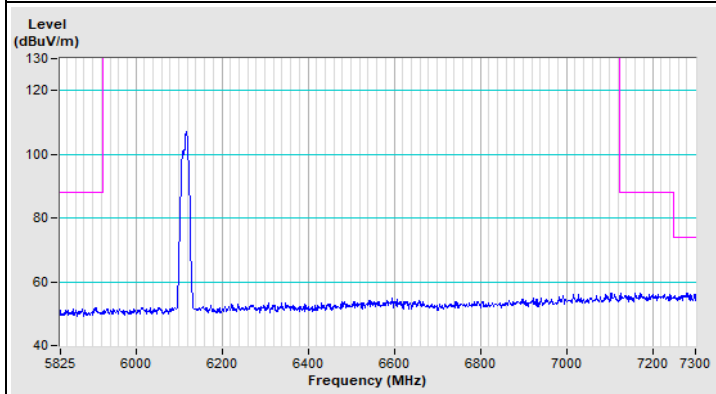


Vertical (Peak)

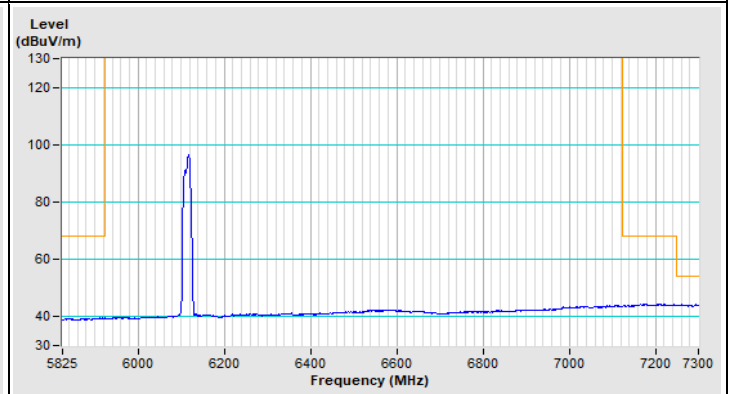


Vertical (Average)


802.11be (EHT20) Channel 233

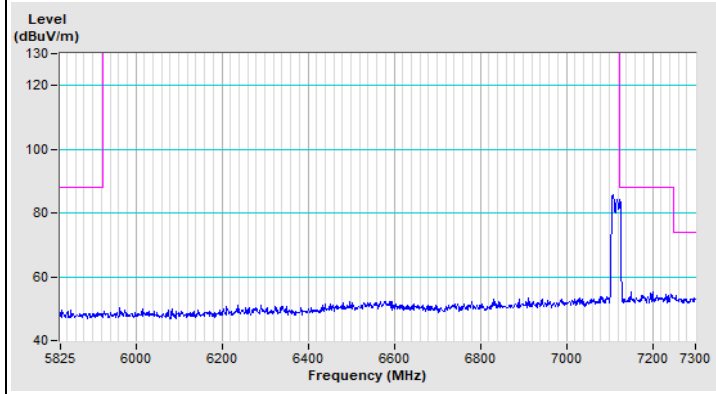


Horizontal (Peak)

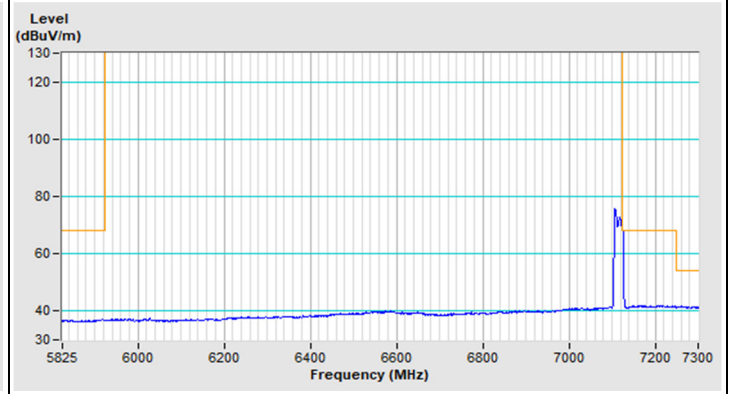

Horizontal (Average)

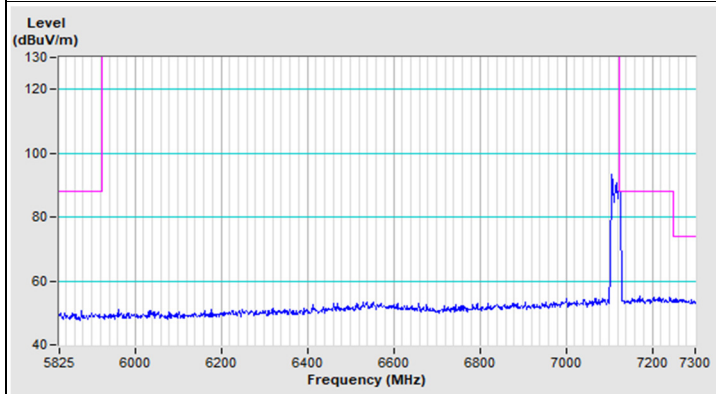


Vertical (Peak)

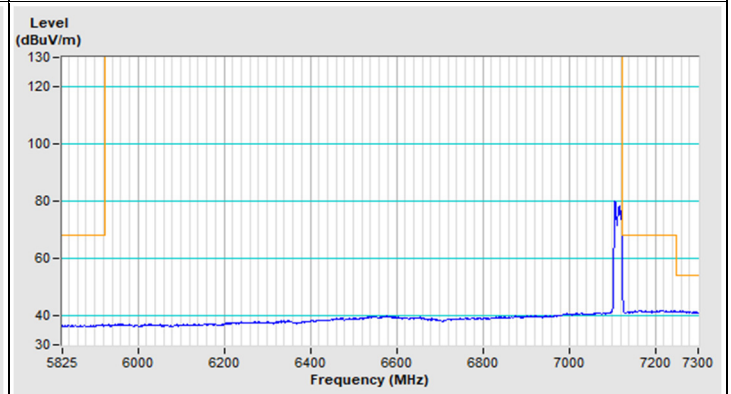


Vertical (Average)


802.11be (EHT40) Channel 35

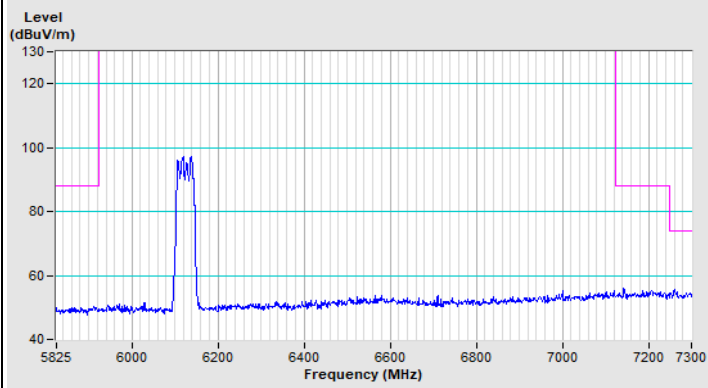


Horizontal (Peak)

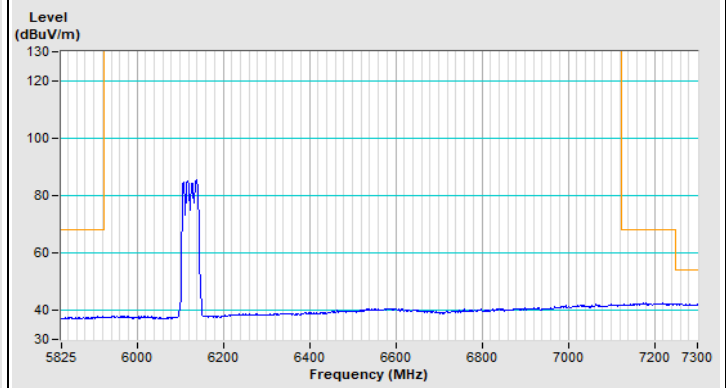

Horizontal (Average)

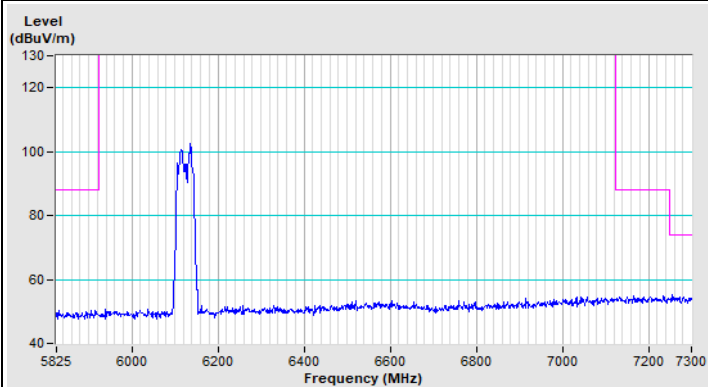


Vertical (Peak)

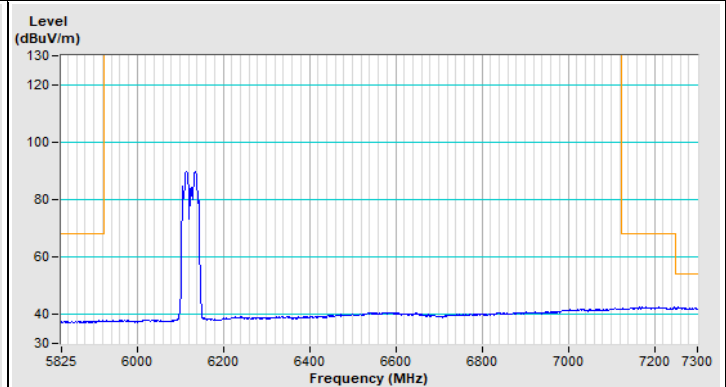


Vertical (Average)


802.11be (EHT40) Channel 227

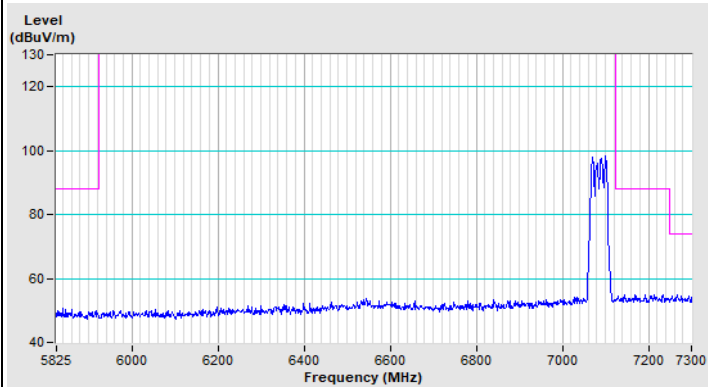


Horizontal (Peak)

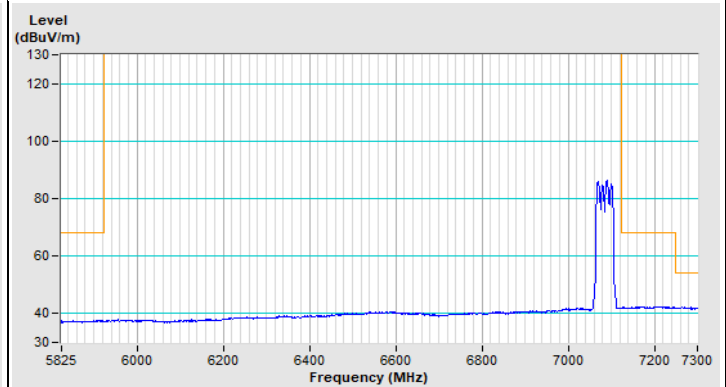

Horizontal (Average)

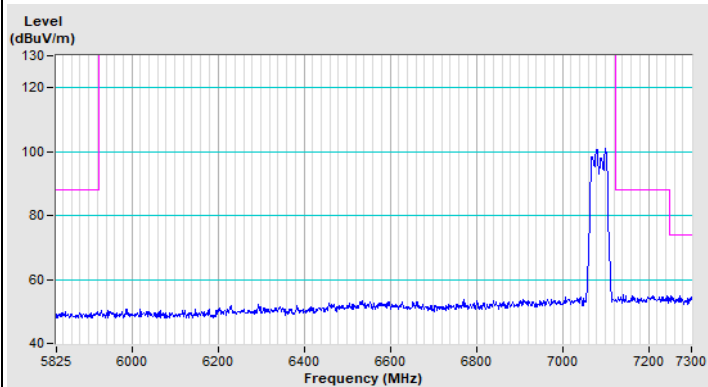


Vertical (Peak)

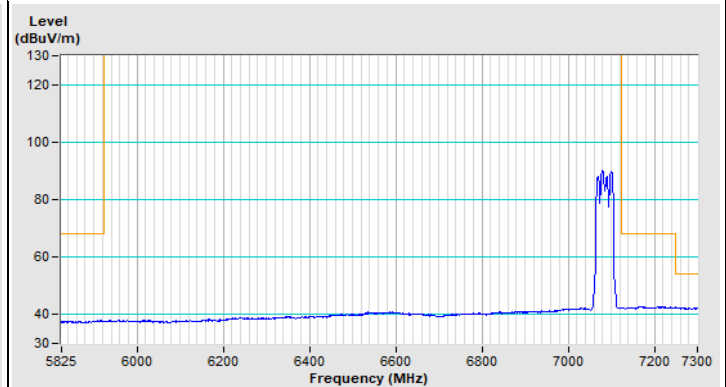


Vertical (Average)


802.11be (EHT80) Channel 39

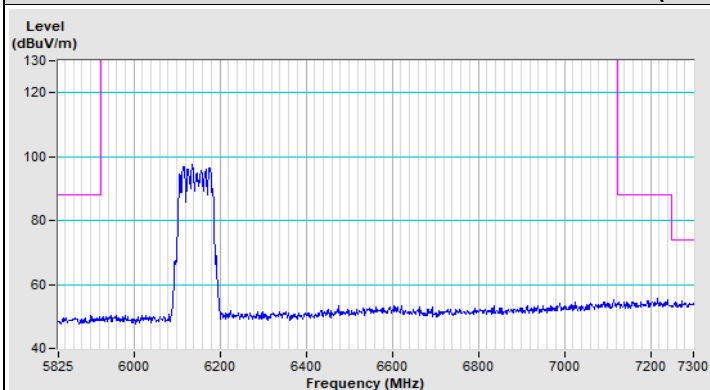


Horizontal (Peak)

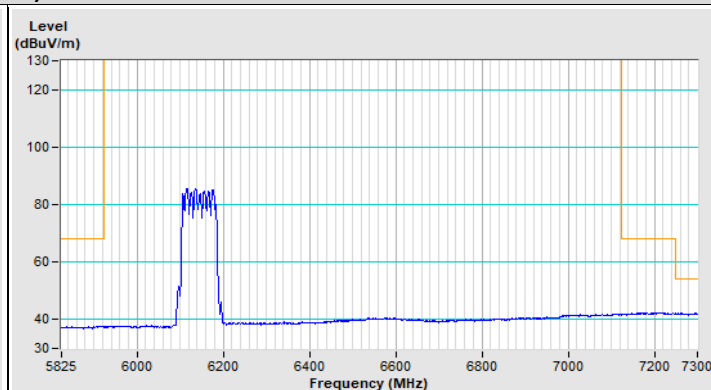

Horizontal (Average)

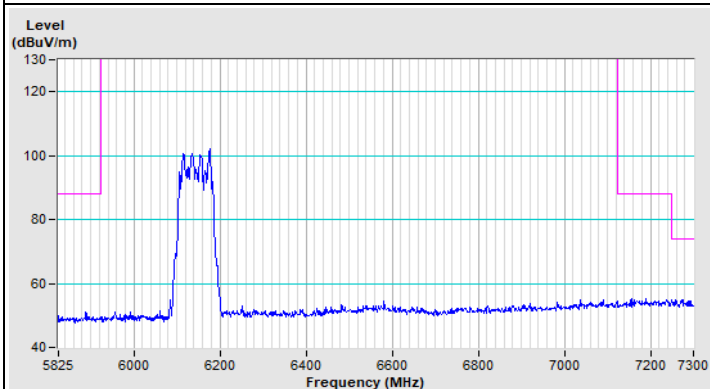


Vertical (Peak)

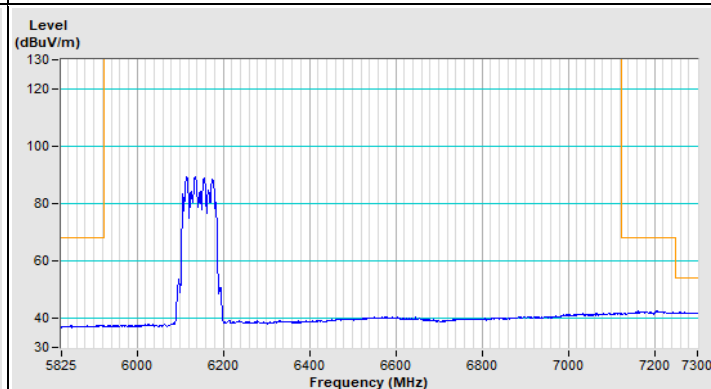


Vertical (Average)


802.11be (EHT80) Channel 215

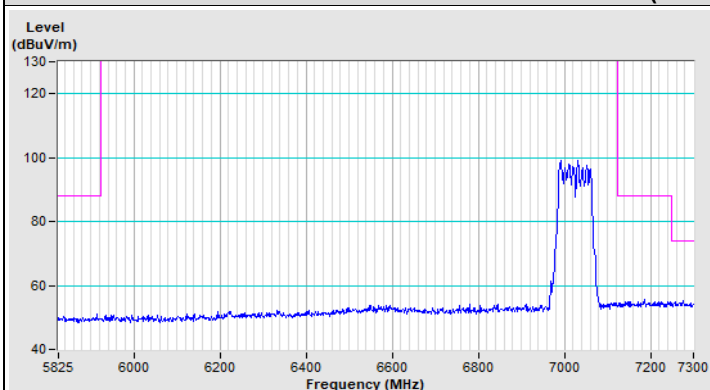


Horizontal (Peak)

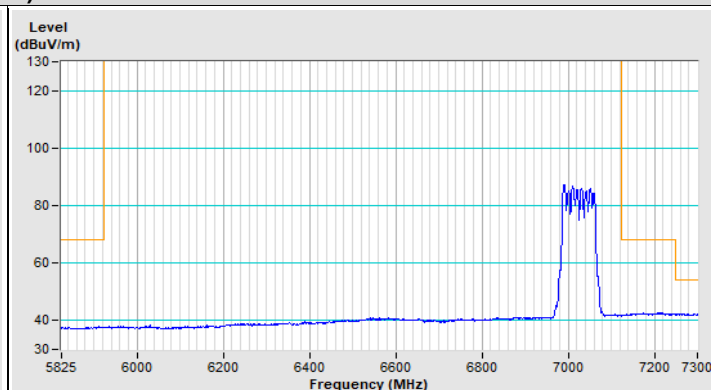

Horizontal (Average)

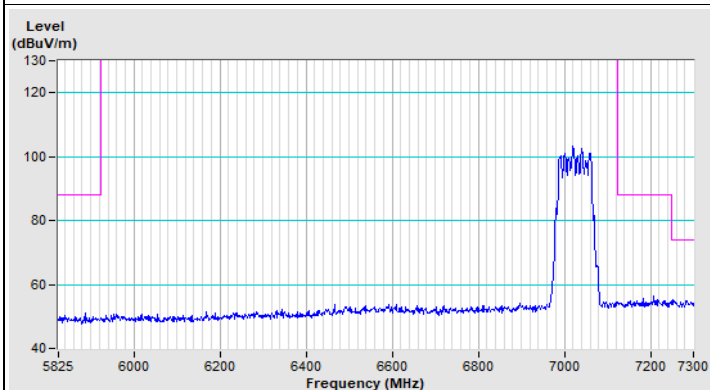


Vertical (Peak)

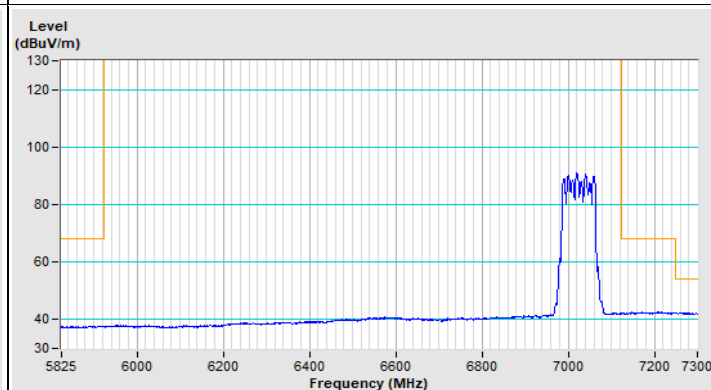


Vertical (Average)


802.11be (EHT160) Channel 47

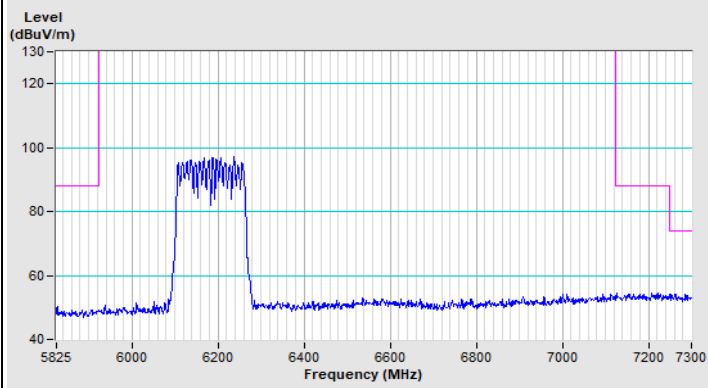


Horizontal (Peak)

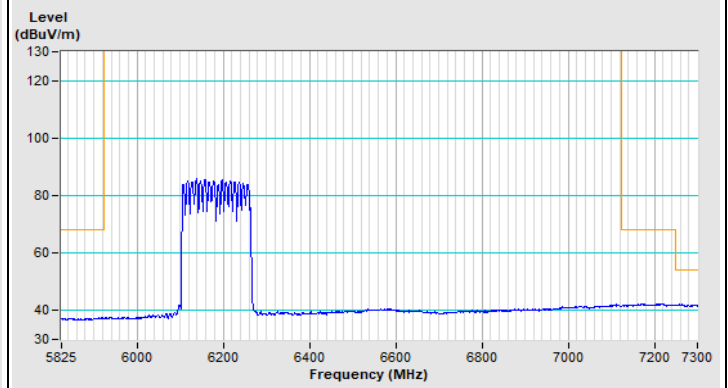

Horizontal (Average)

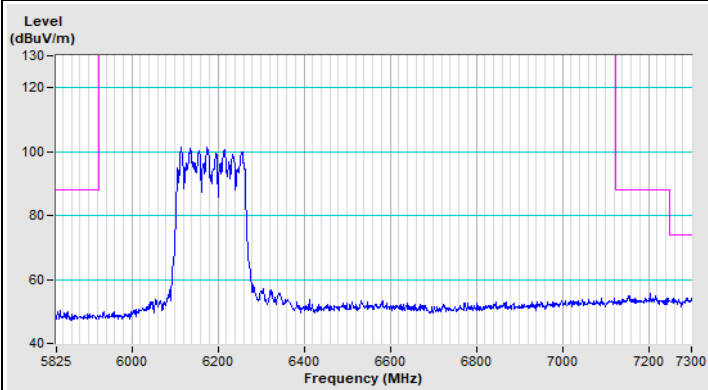


Vertical (Peak)

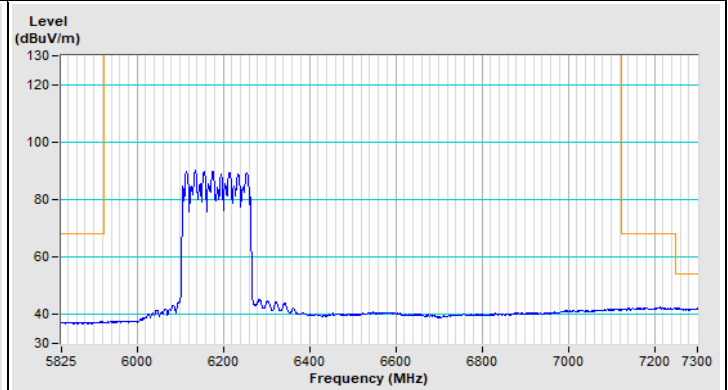


Vertical (Average)


802.11be (EHT160) Channel 207

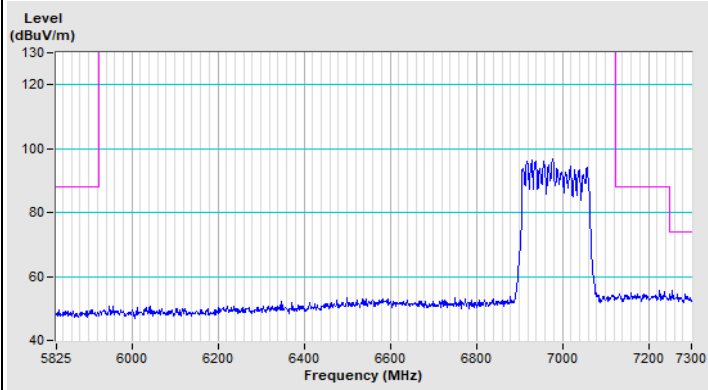


Horizontal (Peak)

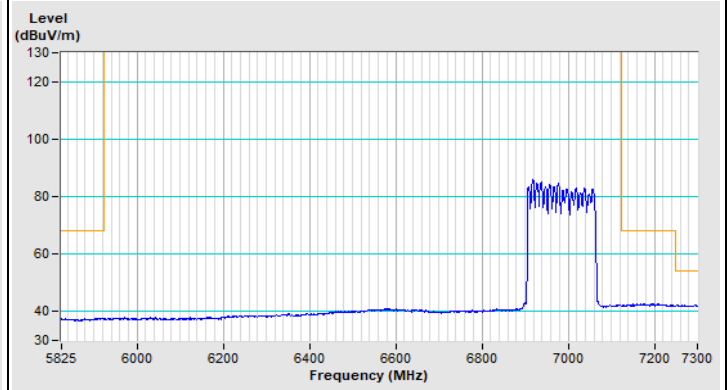

Horizontal (Average)

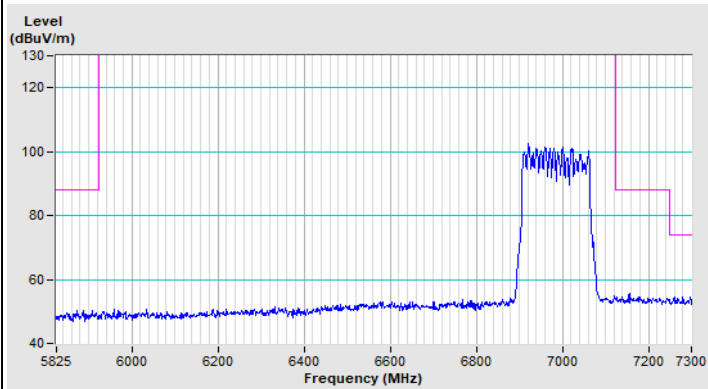


Vertical (Peak)

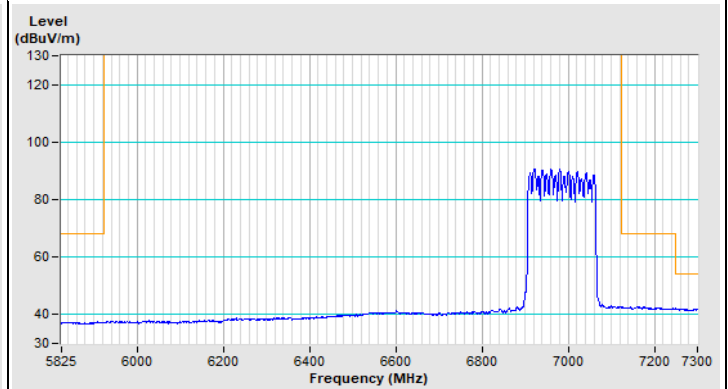


Vertical (Average)


802.11be (EHT320) Channel 63

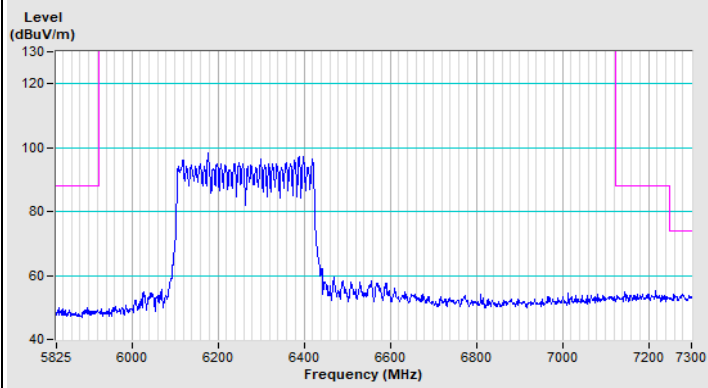


Horizontal (Peak)

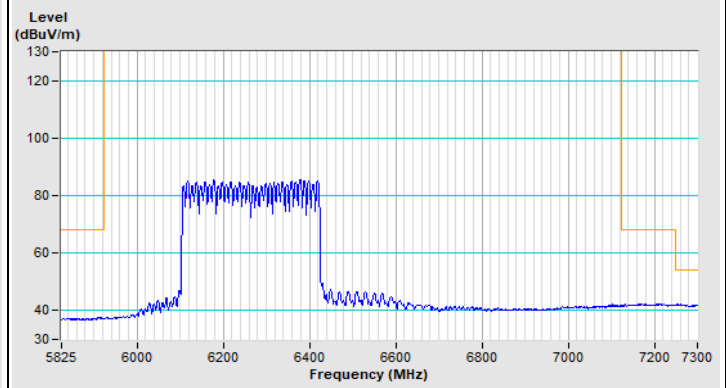

Horizontal (Average)

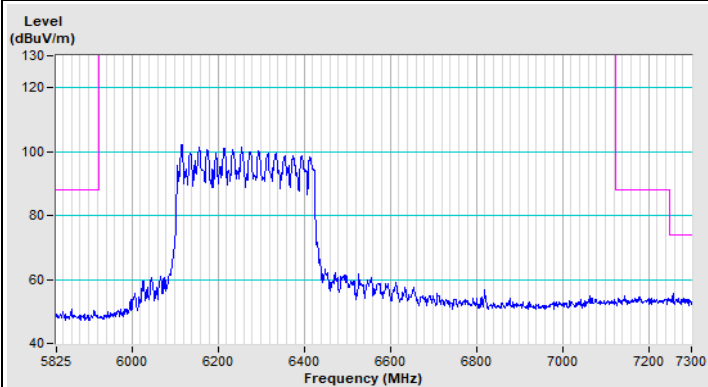


Vertical (Peak)

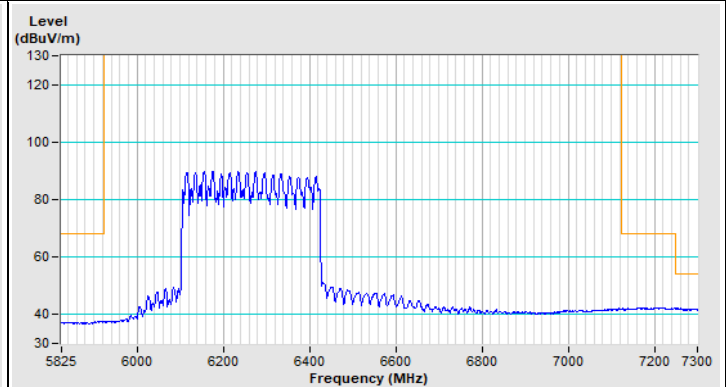


Vertical (Average)


802.11be (EHT320) Channel 191

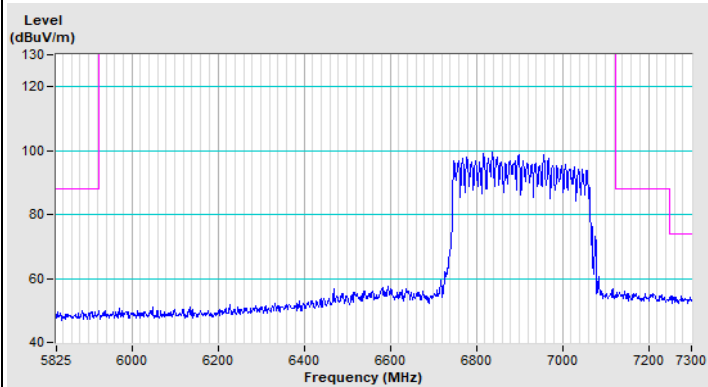


Horizontal (Peak)

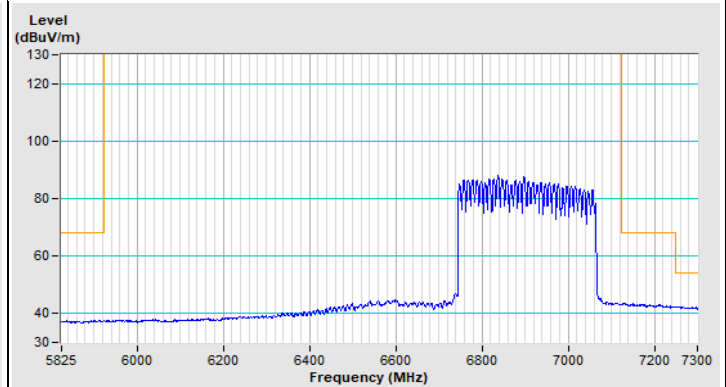

Horizontal (Average)

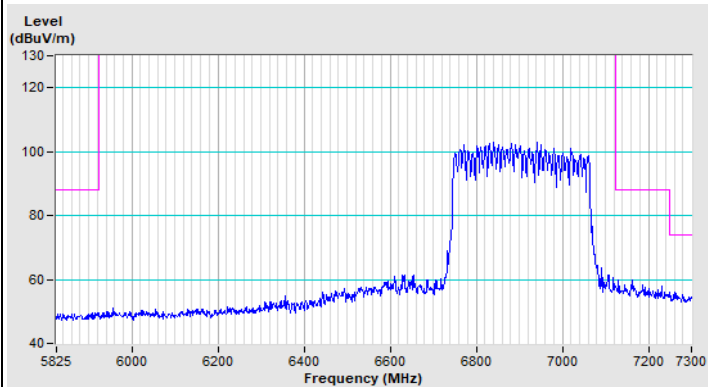


Vertical (Peak)

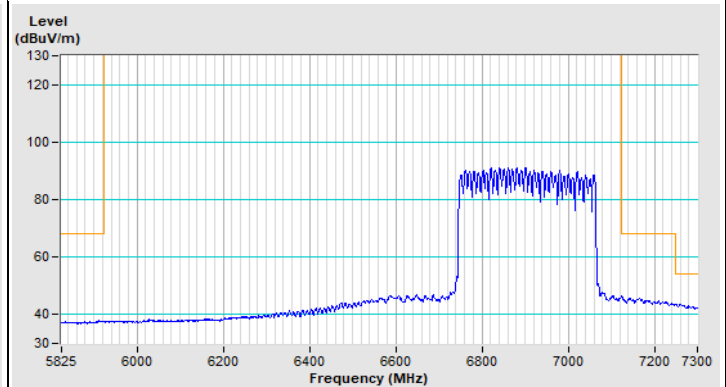


Vertical (Average)

Beamforming (4T4S)


802.11be (EHT20) Channel 33

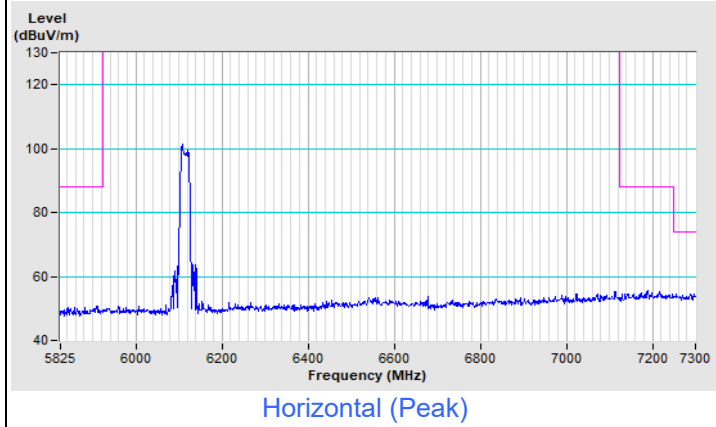


Horizontal (Peak)

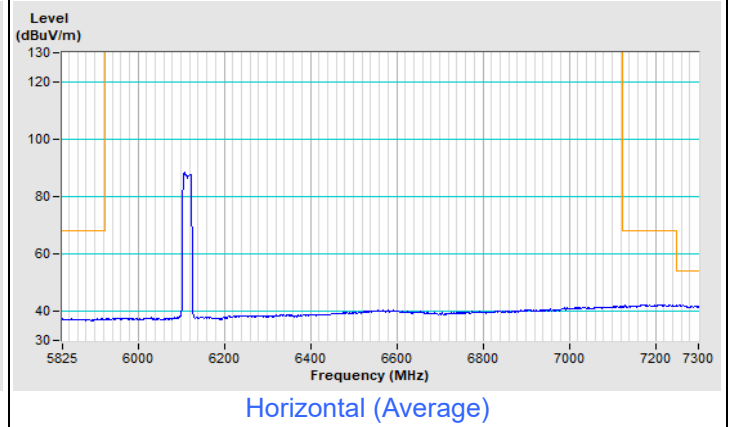

Horizontal (Average)

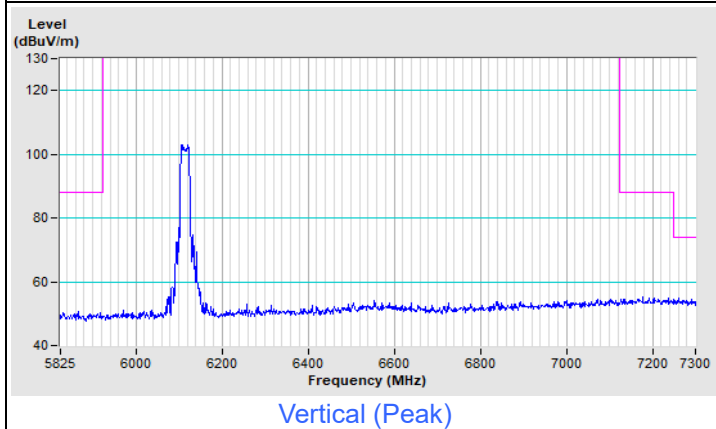


Vertical (Peak)

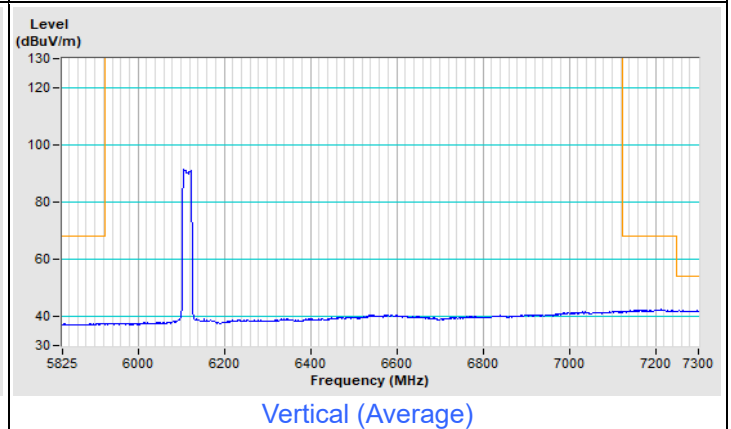


Vertical (Average)


802.11be (EHT20) Channel 233

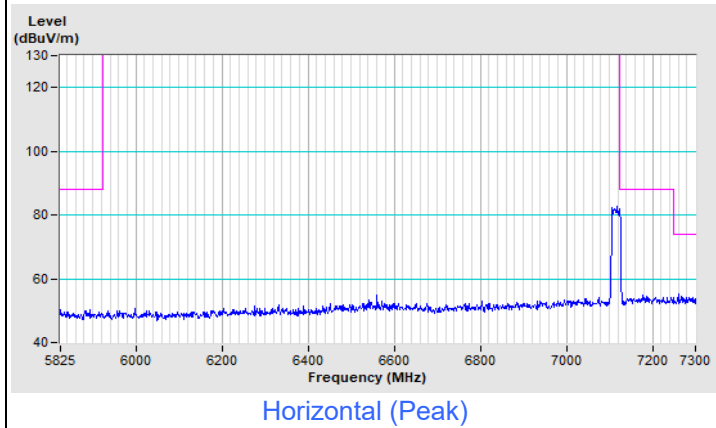


Horizontal (Peak)

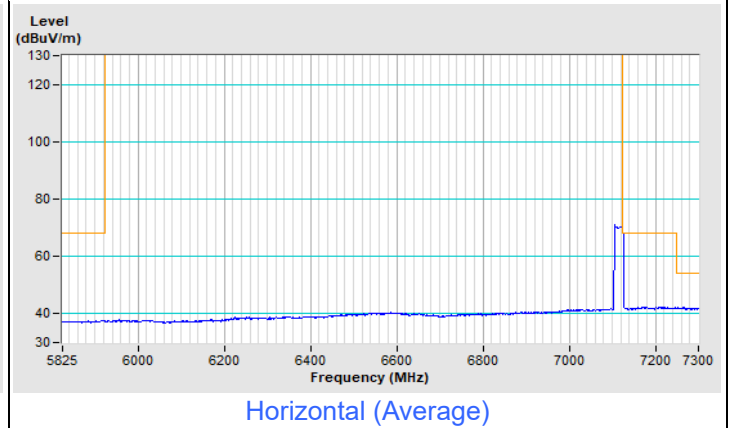

Horizontal (Average)

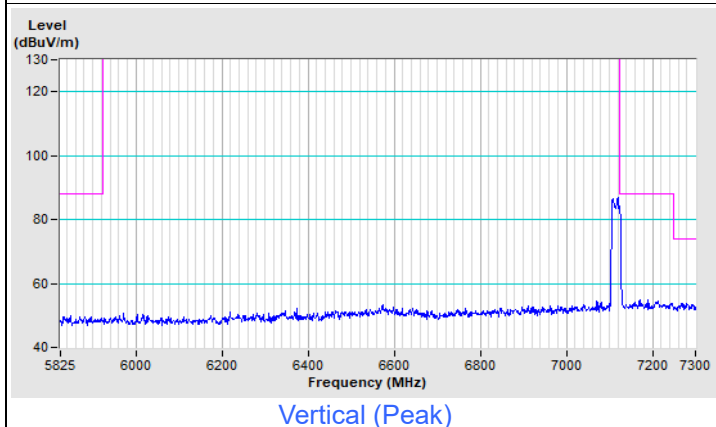


Vertical (Peak)

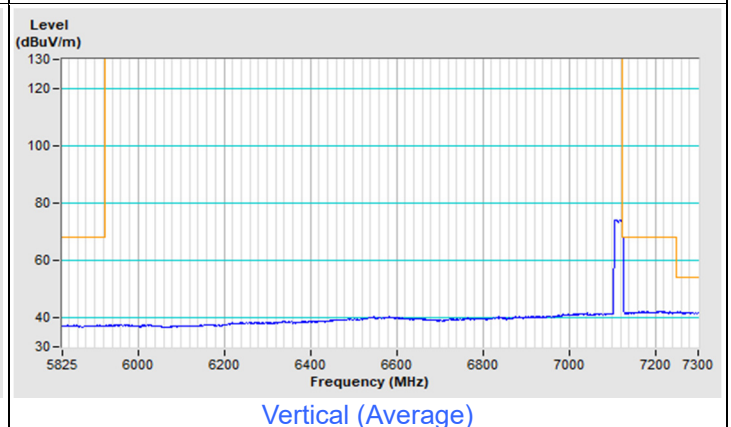


Vertical (Average)


802.11be (EHT40) Channel 35

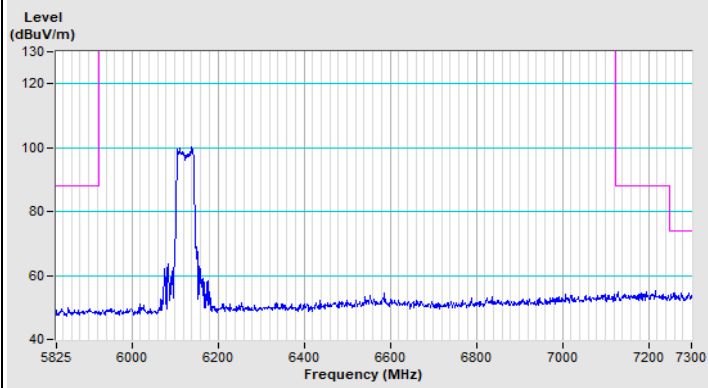


Horizontal (Peak)

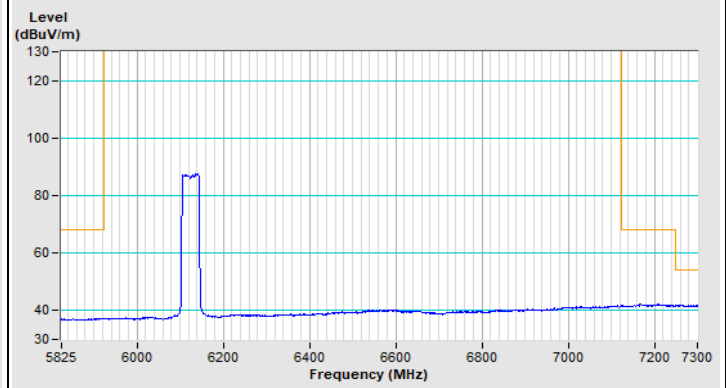

Horizontal (Average)

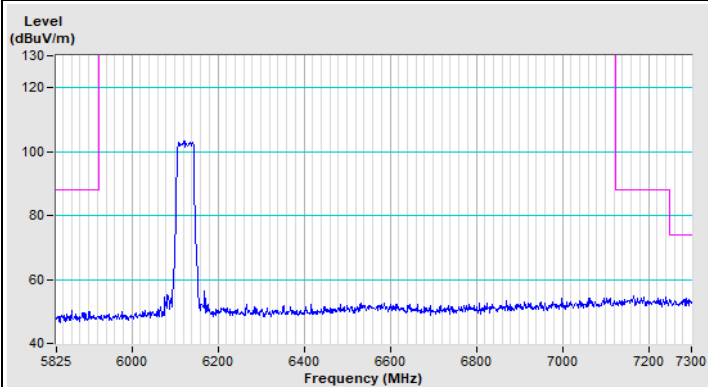


Vertical (Peak)

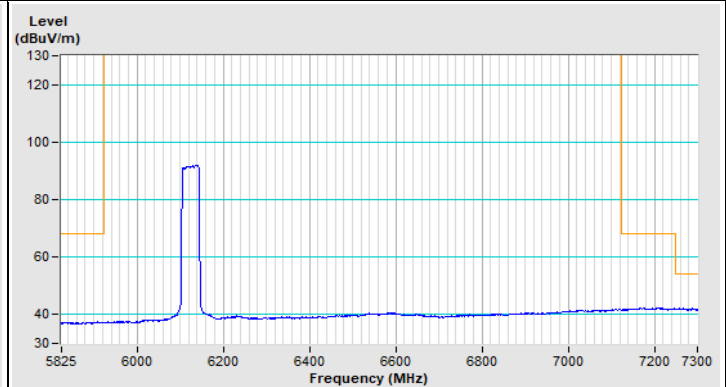


Vertical (Average)


802.11be (EHT40) Channel 227

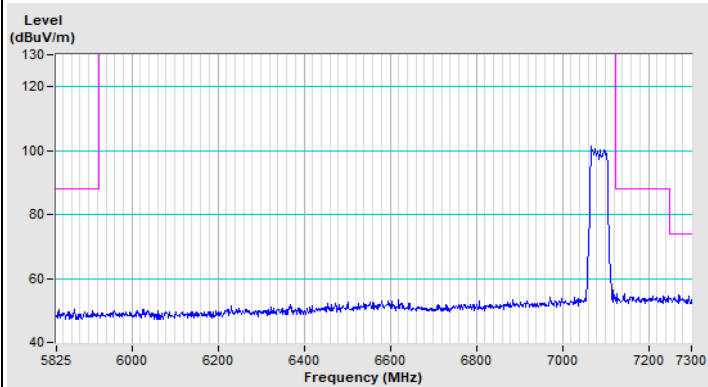


Horizontal (Peak)

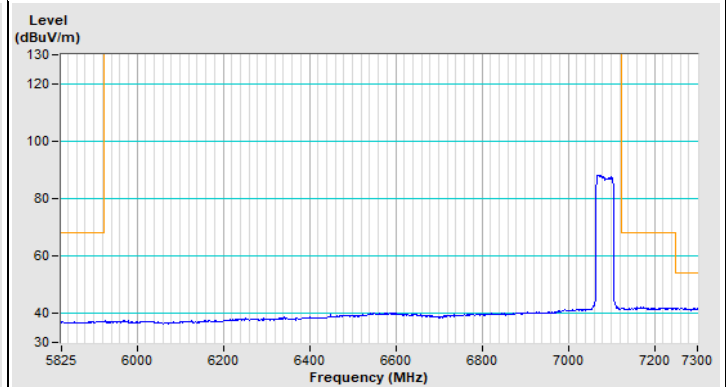

Horizontal (Average)

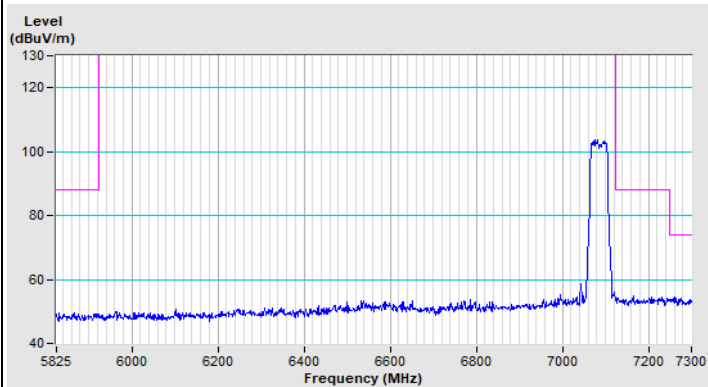


Vertical (Peak)

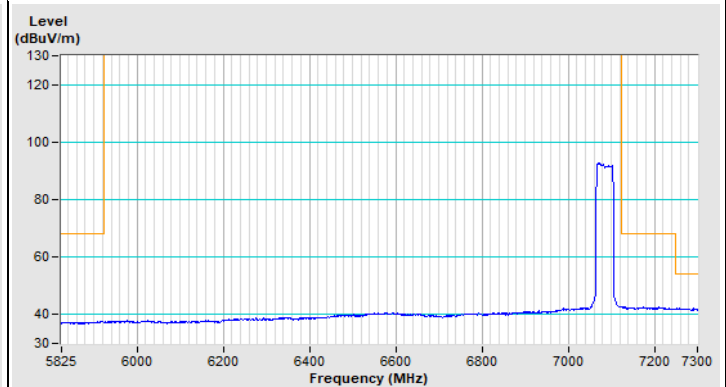


Vertical (Average)


802.11be (EHT80) Channel 39

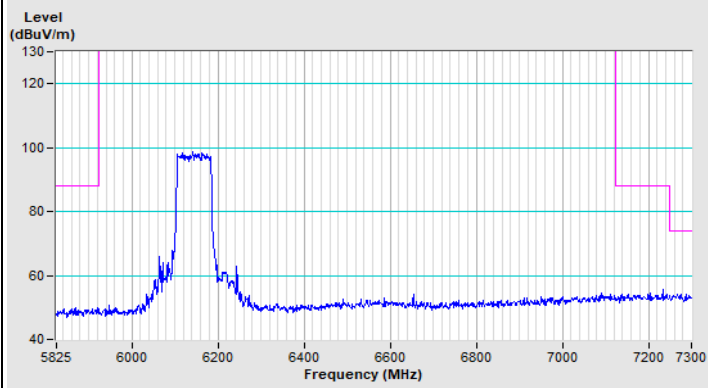


Horizontal (Peak)

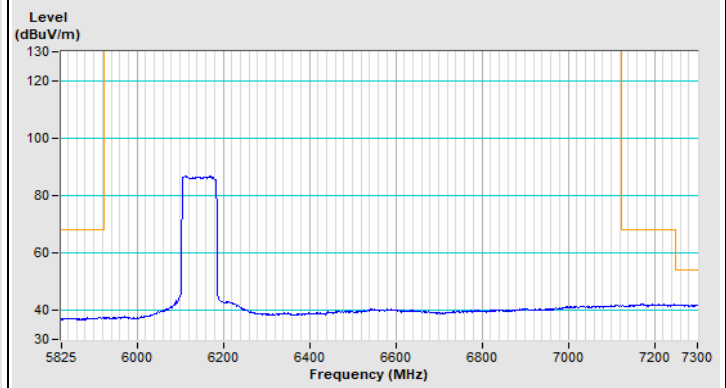

Horizontal (Average)

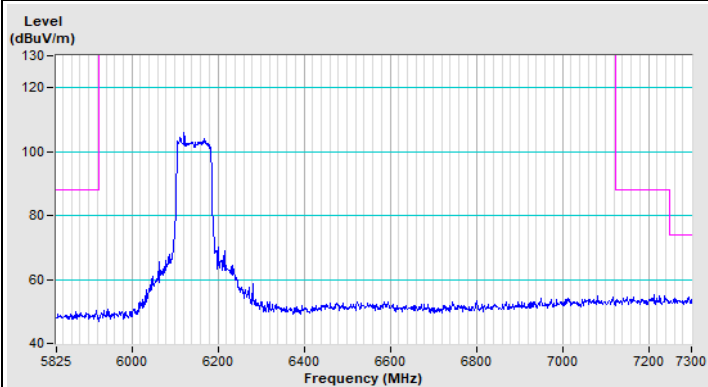


Vertical (Peak)

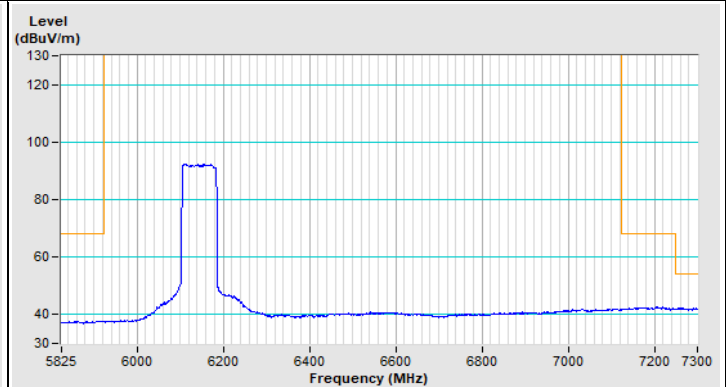


Vertical (Average)


802.11be (EHT80) Channel 215

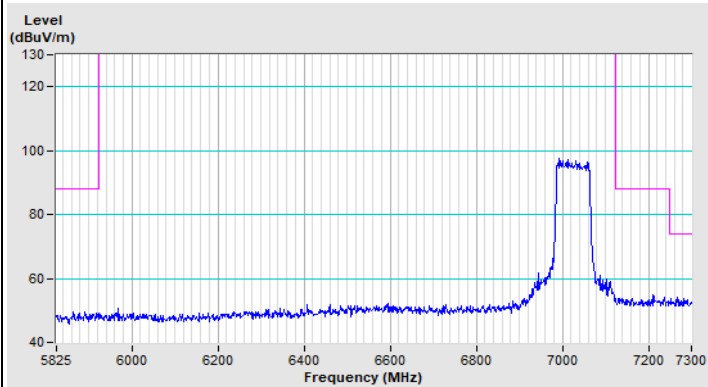


Horizontal (Peak)

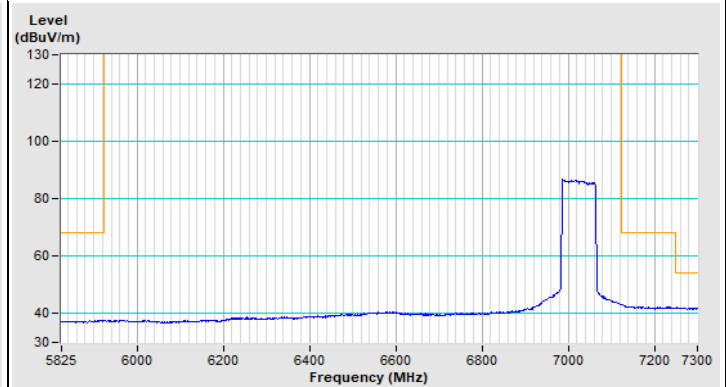

Horizontal (Average)

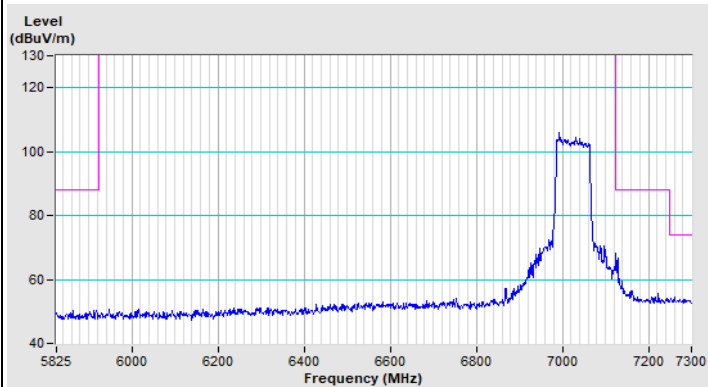


Vertical (Peak)

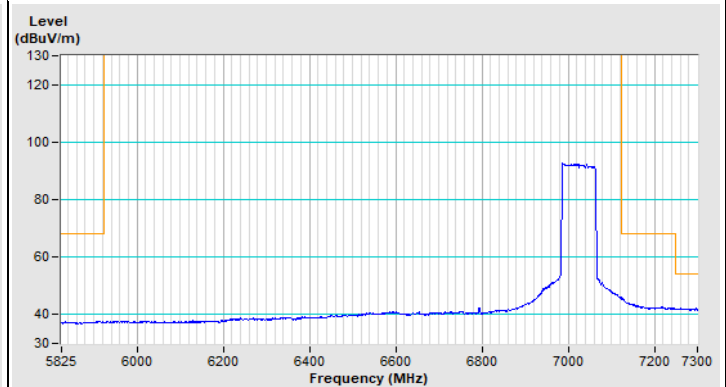


Vertical (Average)


802.11be (EHT160) Channel 47

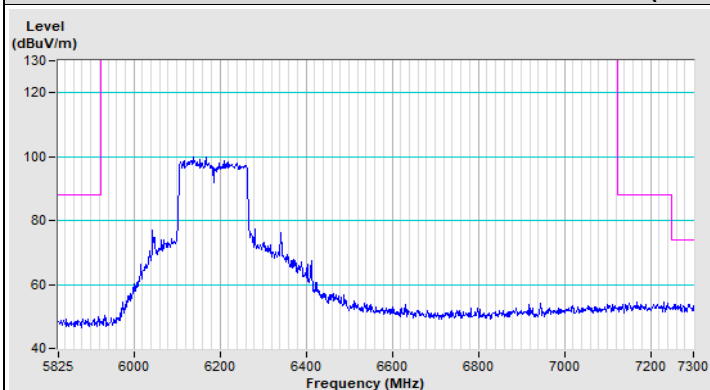


Horizontal (Peak)

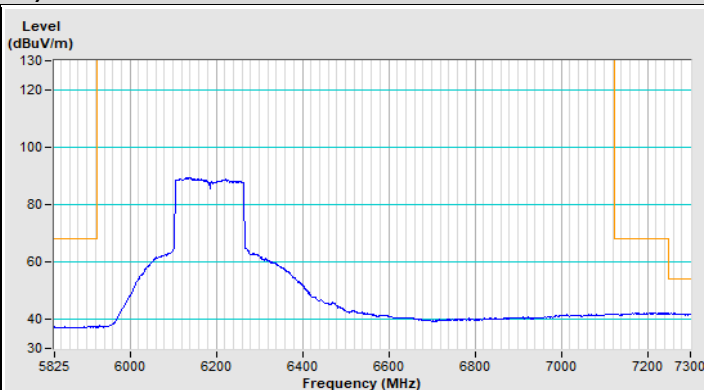

Horizontal (Average)

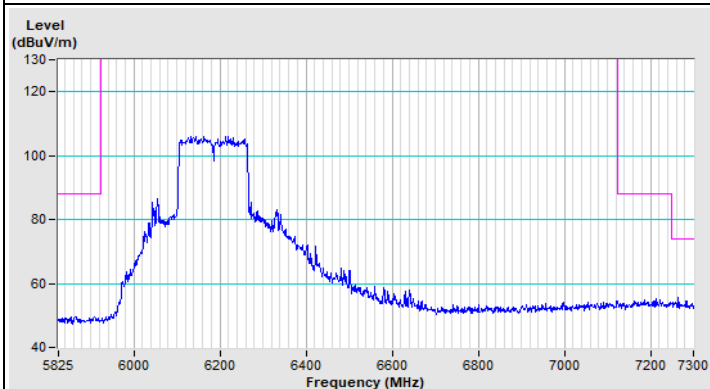


Vertical (Peak)

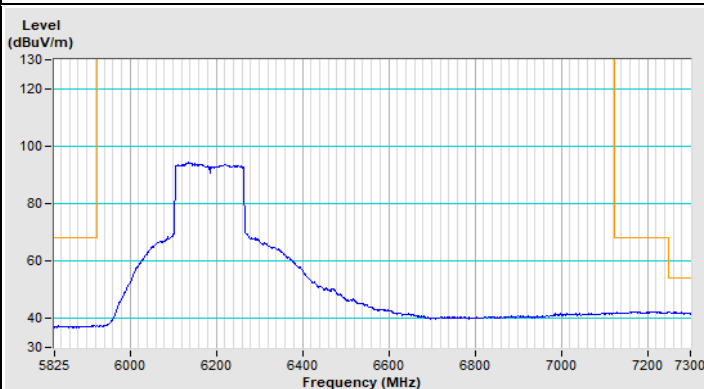


Vertical (Average)


802.11be (EHT160) Channel 207

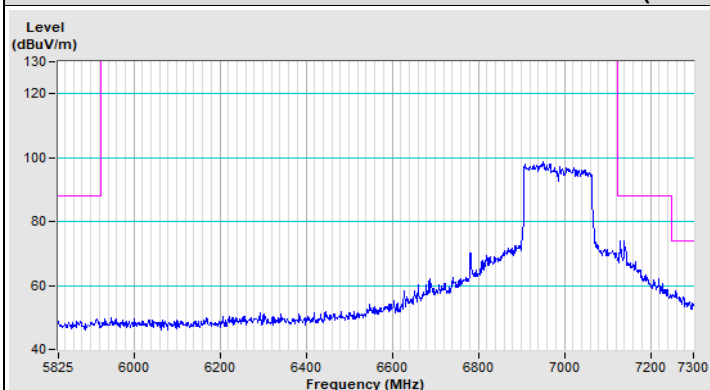


Horizontal (Peak)

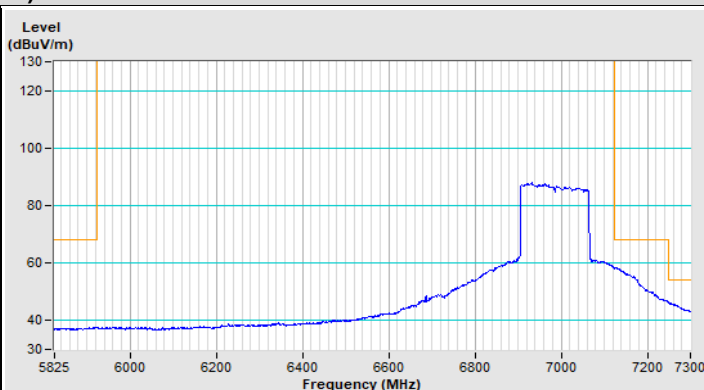

Horizontal (Average)

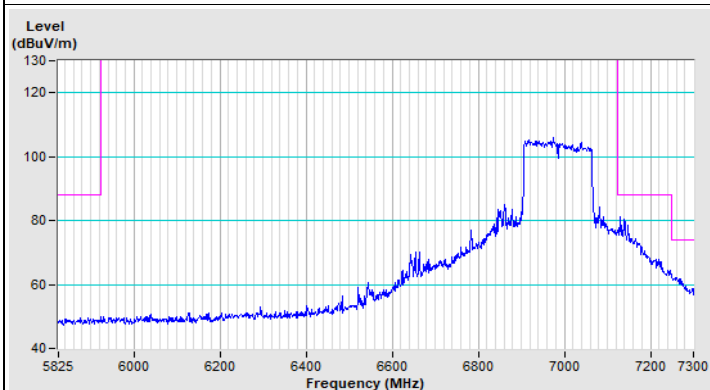


Vertical (Peak)

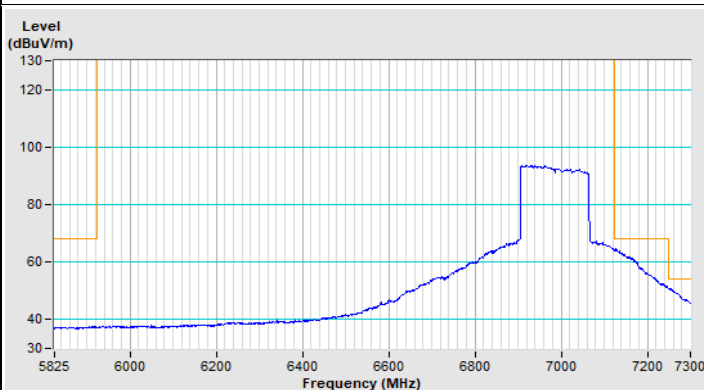


Vertical (Average)


802.11be (EHT320) Channel 63

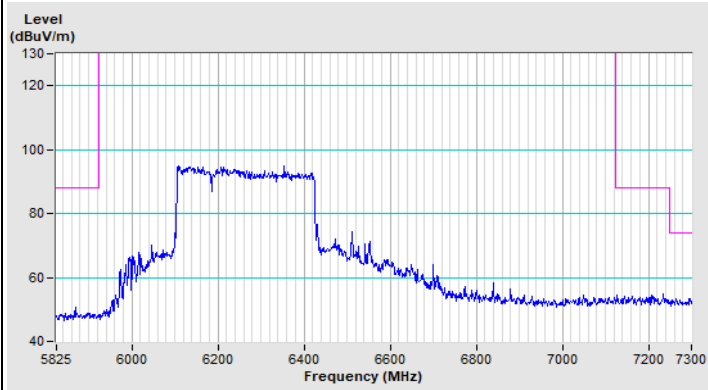


Horizontal (Peak)

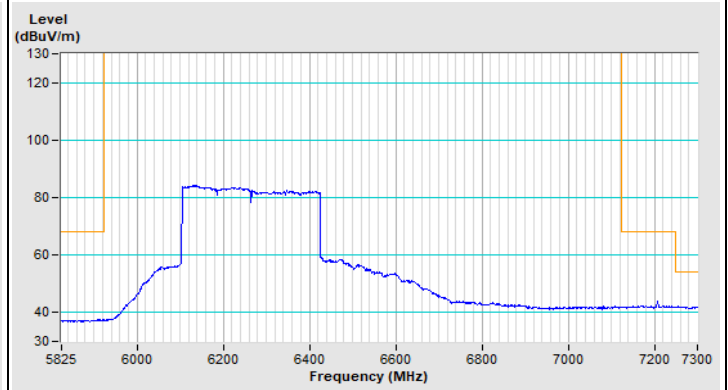

Horizontal (Average)

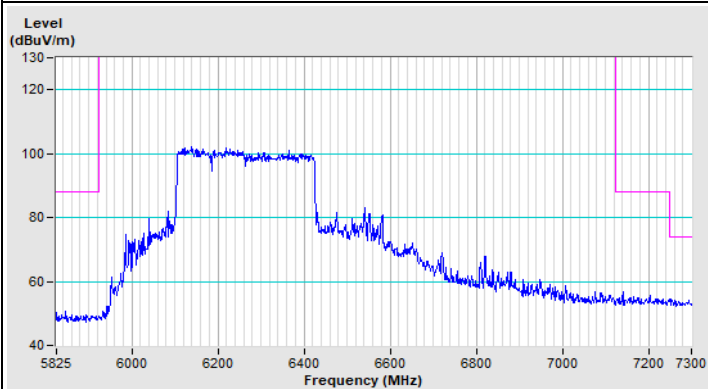


Vertical (Peak)

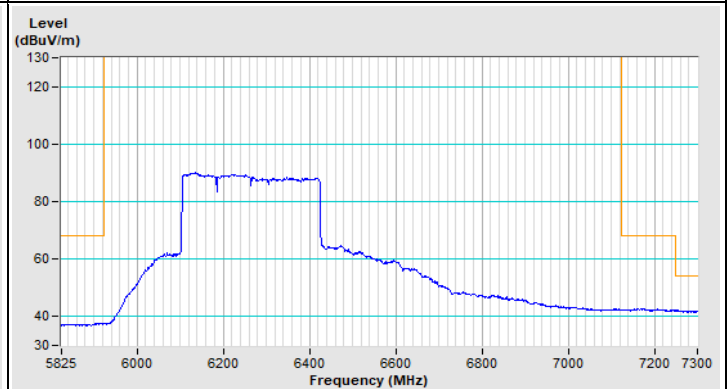


Vertical (Average)


802.11be (EHT320) Channel 191

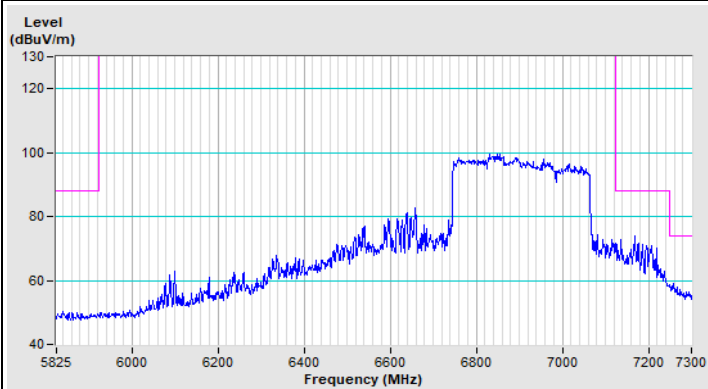


Horizontal (Peak)

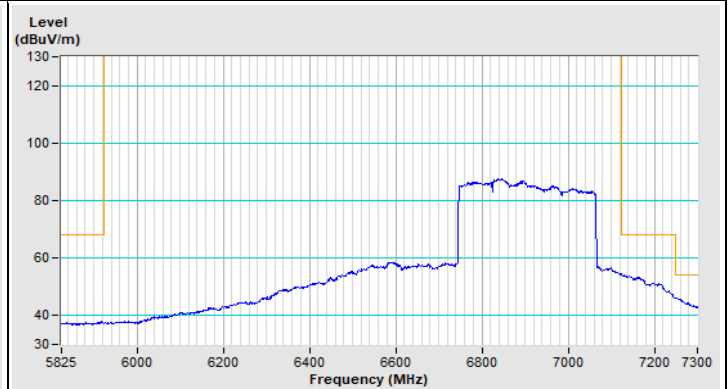

Horizontal (Average)

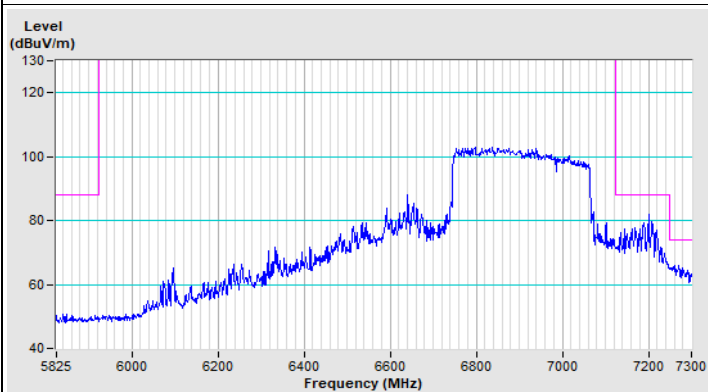

Vertical (Peak)

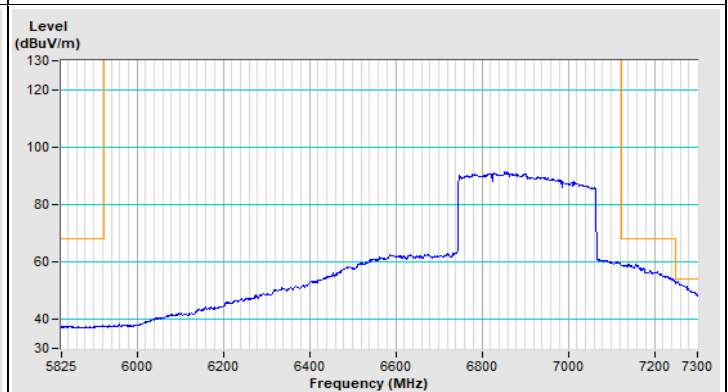

Vertical (Average)

8 Operational Restrictions for 6 GHz U-NII Devices

- (1) Operation of indoor access points in the 5.925-7.125 GHz band is prohibited on oil platforms, cars, trains, boats, and aircraft, except that indoor access points are permitted to operate in the 5.925-6.425 GHz bands in large aircraft while flying above 10,000 feet.
- (2) Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.
- (3) Transmitters operating under indoor access points / subordinate modes are limited to indoor locations.
- (4) In the 5.925-7.125 GHz band, indoor access points must bear the following statement in a conspicuous location on the device and in the user's manual: FCC regulations restrict operation of this device to indoor use only. The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.
- (5) In the 5.925-7.125 GHz band, Access points may connect to other access points or subordinate devices.
- (6) Indoor access points / subordinate modes, operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Device is a Indoor AP / subordinate modes, all restrictions are meet the §15.407 (d) requirements. Please refer to the Attestation letter exhibit supplied within this application.

9 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---