

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart E (Section 15.407)

**Report No.:** RFBBQZ-WTW-P23040162-1

**FCC ID:** PY323200595

**Product:** BE18400 Tri-Band PoE 10G Insight Managed WiFi 7 Access Point

**Brand:** NETGEAR

**Model No.:** WBE750

**Series Model:** WBE758

**Received Date:** 2023/6/13

**Test Date:** 2023/9/12 ~ 2023/12/11

**Issued Date:** 2024/1/22

**Applicant and Manufacturer:** NETGEAR, INC.

**Address:** 350 East Plumeria Drive San Jose CA 95134

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

**FCC Registration / Designation Number:** 788550 / TW0003

**Approved by:** Jeremy Lin, **Date:** 2024/1/22  
Jeremy Lin / Project Engineer

This test report consists of 148 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Celine Chou / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Supplementary Information .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Antenna Description of EUT .....	9
3.3 Channel List .....	10
3.4 Test Mode Applicability and Tested Channel Detail .....	12
3.5 Duty Cycle of Test Signal .....	14
3.6 Test Program Used and Operation Descriptions .....	16
3.7 Connection Diagram of EUT and Peripheral Devices .....	16
3.8 Configuration of Peripheral Devices and Cable Connections .....	17
<b>4 Test Instruments</b> .....	<b>18</b>
4.1 26 dB Bandwidth .....	18
4.2 RF Output Power .....	18
4.3 Power Spectral Density .....	18
4.4 6 dB Bandwidth .....	18
4.5 Occupied Bandwidth .....	18
4.6 Frequency Stability .....	19
4.7 AC Power Conducted Emissions .....	19
4.8 Unwanted Emissions below 1 GHz .....	20
4.9 Unwanted Emissions above 1 GHz .....	21
<b>5 Limits of Test Items</b> .....	<b>22</b>
5.1 26 dB Bandwidth .....	22
5.2 RF Output Power .....	22
5.3 Power Spectral Density .....	22
5.4 6 dB Bandwidth .....	22
5.5 Occupied Bandwidth .....	22
5.6 Frequency Stability .....	22
5.7 AC Power Conducted Emissions .....	23
5.8 Unwanted Emissions below 1 GHz .....	23
5.9 Unwanted Emissions above 1 GHz .....	24
<b>6 Test Arrangements</b> .....	<b>25</b>
6.1 26 dB Bandwidth .....	25
6.1.1 Test Setup .....	25
6.1.2 Test Procedure .....	25
6.2 RF Output Power .....	25
6.2.1 Test Setup .....	25
6.2.2 Test Procedure .....	25
6.3 Power Spectral Density .....	26
6.3.1 Test Setup .....	26
6.3.2 Test Procedure .....	26
6.4 6 dB Bandwidth .....	26
6.4.1 Test Setup .....	26
6.4.2 Test Procedure .....	26
6.5 Occupied Bandwidth .....	27
6.5.1 Test Setup .....	27
6.5.2 Test Procedure .....	27
6.6 Frequency Stability .....	27
6.6.1 Test Setup .....	27
6.6.2 Test Procedure .....	27
6.7 AC Power Conducted Emissions .....	28



6.7.1	Test Setup .....	28
6.7.2	Test Procedure .....	28
6.8	Unwanted Emissions below 1 GHz .....	29
6.8.1	Test Setup .....	29
6.8.2	Test Procedure .....	30
6.9	Unwanted Emissions above 1 GHz .....	31
6.9.1	Test Setup .....	31
6.9.2	Test Procedure .....	31
<b>7</b>	<b>Test Results of Test Item .....</b>	<b>32</b>
7.1	26 dB Bandwidth .....	32
7.2	RF Output Power .....	37
7.3	Power Spectral Density .....	51
7.4	6 dB Bandwidth .....	58
7.5	Occupied Bandwidth .....	60
7.6	Frequency Stability .....	69
7.7	AC Power Conducted Emissions .....	70
7.8	Unwanted Emissions below 1 GHz .....	74
7.9	Unwanted Emissions above 1 GHz .....	78
<b>8</b>	<b>Pictures of Test Arrangements .....</b>	<b>147</b>
<b>9</b>	<b>Information of the Testing Laboratories .....</b>	<b>148</b>



## Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P23040162-1	Original release.	2024/1/22

## 1 Certificate

**Product:** BE18400 Tri-Band PoE 10G Insight Managed WiFi 7 Access Point

**Brand:** NETGEAR

**Test Model:** WBE750

**Series Model:** WBE758

**Sample Status:** Engineering sample

**Applicant and  
Manufacturer:** NETGEAR, INC.

**Test Date:** 2023/9/12 ~ 2023/12/11

**Standard:** 47 CFR FCC Part 15, Subpart E (Section 15.407)

**Measurement  
procedure:** ANSI C63.10-2013  
KDB 789033 D02 General UNII Test Procedure New Rules v02r01  
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(2)	26 dB Bandwidth	Pass	For U-NII-2A U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
---	Occupied Bandwidth	-	Reference only.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -11.42 dB at 0.51200 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -4.8 dB at 226.91 MHz
15.407(b) (1/10) 15.407(b) (2/10) 15.407(b) (3/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.1 dB at 5150.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is ipex(MHF) not a standard connector.

### Notes:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. The "Dynamic Frequency Selection measurement" was recorded in DFS test report.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.88 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1 GHz	3.64 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	BE18400 Tri-Band PoE 10G Insight Managed WiFi 7 Access Point
Brand	NETGEAR
Test Model	WBE750
Series Model	WBE758
Status of EUT	Engineering sample
Power Supply Rating	12Vdc for adapter 56Vdc for POE
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only 1024QAM for OFDMA in 11ax mode only 4096QAM for OFDMA in 11be EHT mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 3466.7 Mbps 802.11ax: up to 4803.9 Mbps 802.11be: up to 5764.8 Mbps
Operating Frequency	5.18 GHz ~ 5.25 GHz 5.25 GHz ~ 5.32 GHz 5.50 GHz ~ 5.72 GHz 5.745 GHz ~ 5.825 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):12 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):6 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):2
Output Power	CDD Mode: 5.18 GHz ~ 5.25 GHz: 866.837 mW (29.38 dBm) 5.25 GHz ~ 5.32 GHz: 207.031 mW (23.16 dBm) 5.50 GHz ~ 5.72 GHz: 216.385 mW (23.35 dBm) 5.745 GHz ~ 5.825 GHz: 863.496 mW (29.36 dBm) Beamforming Mode: 5.18 GHz ~ 5.25 GHz: 863.413 mW (29.36 dBm) 5.25 GHz ~ 5.32 GHz: 207.031 mW (23.16 dBm) 5.50 GHz ~ 5.72 GHz: 216.385 mW (23.35 dBm) 5.745 GHz ~ 5.825 GHz: 863.496 mW (29.36 dBm)
EUT Category	Indoor Access Point

Note:

1. All models are listed as below. Model WBE750 is the representative for final test.

Brand	Model	Difference
NETGEAR	WBE750	Same HW, SW just changes model name
	WBE758	

2. The EUT uses following accessories.

AC Adapter (Support unit)			
Brand	Model	Part Number	Specification
NETGEAR	ADS-45FIC-12 12042E	332-11665-02	AC Input: 100-240Vdc, 50/60 Hz DC Output: 12.0Vdc, 3.5A, 42.0W DC Output Cable: 1.77m / without core

POE (Support unit)		
Brand	Model	Specification
PHIHONG	POE60U-BTA	AC Input: 100-240Vac, 1.5A DC Output: 56Vdc, 0.535A, 30W PIN 3,6+ PIN 1,2 Return DC Output: 56Vdc, 0.535A, 30W PIN 4,5 + PIN 7,8 Return

3. Simultaneously transmission condition.

Condition	Technology		
1	WLAN (2.4GHz)	WLAN (5GHz)	WLAN (6GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Type	PIFA
Connector Type	ipex(MHF)
Antenna Gain	Directional Gain (dBi)
2400~2483.5 MHz	6.80
5150~5250 MHz	6.47
5250~5350 MHz	6.16
5470~5725 MHz	6.13
5725~5850 MHz	6.07

\*The detailed antenna information, please refer to the BV CPS Directional Gain Measurement Report no.: RFBBQZ-WTW-P23040162-5.

2. The EUT incorporates a MIMO function:

Modulation Mode	Beamforming Mode	Tx & Rx Configuration	
802.11a	Not Support	4TX	4RX
802.11n (HT20)	Support	4TX	4RX
802.11n (HT40)	Support	4TX	4RX
802.11ac (VHT20)	Support	4TX	4RX
802.11ac (VHT40)	Support	4TX	4RX
802.11ac (VHT80)	Support	4TX	4RX
802.11ac (VHT160)	Support	4TX	4RX
802.11ax (HE20)	Support	4TX	4RX
802.11ax (HE40)	Support	4TX	4RX
802.11ax (HE80)	Support	4TX	4RX
802.11ax (HE160)	Support	4TX	4RX
802.11be (EHT20)	Support	4TX	4RX
802.11be (EHT40)	Support	4TX	4RX
802.11be (EHT80)	Support	4TX	4RX
802.11be (EHT160)	Support	4TX	4RX

Note:

1. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
2. The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz, 80 MHz, 160MHz), 802.11ax mode for 20 MHz (40 MHz, 80 MHz, 160MHz), and 802.11be mode for 20 MHz (40 MHz, 80 MHz, 160MHz), therefore the manufacturer will control the power for 802.11n/ac/ax mode is the same as the 802.11be or lower than it and investigated worst case to representative mode in test report.
3. For 802.11ax and 802.11be, the EUT not support Partial RU (resource unit) and channel puncturing/bandwidth reduction mechanisms.

### 3.3 Channel List

#### FOR 5180 ~ 5320 MHz

8 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	54	5270 MHz
46	5230 MHz	62	5310 MHz

2 channels are provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz

1 straddle channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
50	5250 MHz

#### FOR 5500 ~ 5720 MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

1 straddle channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
114	5570 MHz

**FOR 5745 ~ 5825 MHz:**

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
155	5775 MHz

### 3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition. 2. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Worst Case:	X-axis/ Y-axis/ Z-axis Worst Condition: Z-axis

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
26 dB Bandwidth	A	802.11a	CDD	52, 60, 64, 100, 116, 140, 144	BPSK	6Mb/s
		802.11be (EHT20)	CDD	52, 60, 64, 100, 116, 140, 144	BPSK	MCS0
		802.11be (EHT40)	CDD	54, 62, 102, 110, 134, 142	BPSK	MCS0
		802.11be (EHT80)	CDD	58, 106, 122, 138	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
RF Output Power	A	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD & Beamforming	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD & Beamforming	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD & Beamforming	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD & Beamforming	50, 114	BPSK	MCS0
Power Spectral Density	A	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
6 dB Bandwidth	A	802.11a	CDD	144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	138, 155	BPSK	MCS0

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
Occupied Bandwidth	A	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
Frequency Stability	A	802.11a	-	36	unmodulated	-
AC Power Conducted Emissions	A, B	802.11a	CDD	40	BPSK	6Mb/s
Unwanted Emissions below 1 GHz	A, B	802.11a	CDD	40	BPSK	6Mb/s
Unwanted Emissions above 1 GHz	A	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
		802.11be (EHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0
EUT Configure Mode:	A	Powered by adapter				
	B	Powered by POE				

### 3.5 Duty Cycle of Test Signal


**802.11a:** Duty cycle = 1.98 ms / 1.99 ms x 100% = 99.5%

**802.11be (EHT20):** Duty cycle = 5.145 ms / 5.205 ms x 100% = 98.8%


**802.11be (EHT40):** Duty cycle = 4.575 ms / 4.59 ms x 100% = 99.7%

**802.11be (EHT80):** Duty cycle = 5.37 ms / 5.445 ms x 100% = 98.6%


**802.11be (EHT160):** Duty cycle = 4.38 ms / 4.425 ms x 100% = 99.0%

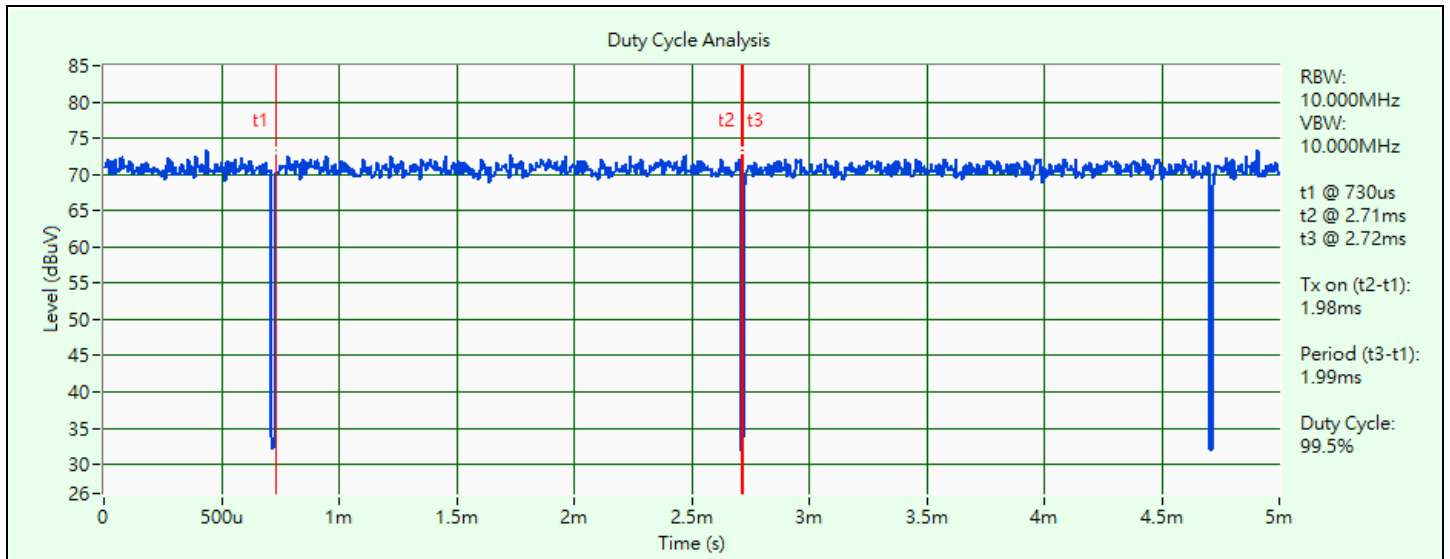


802.11a

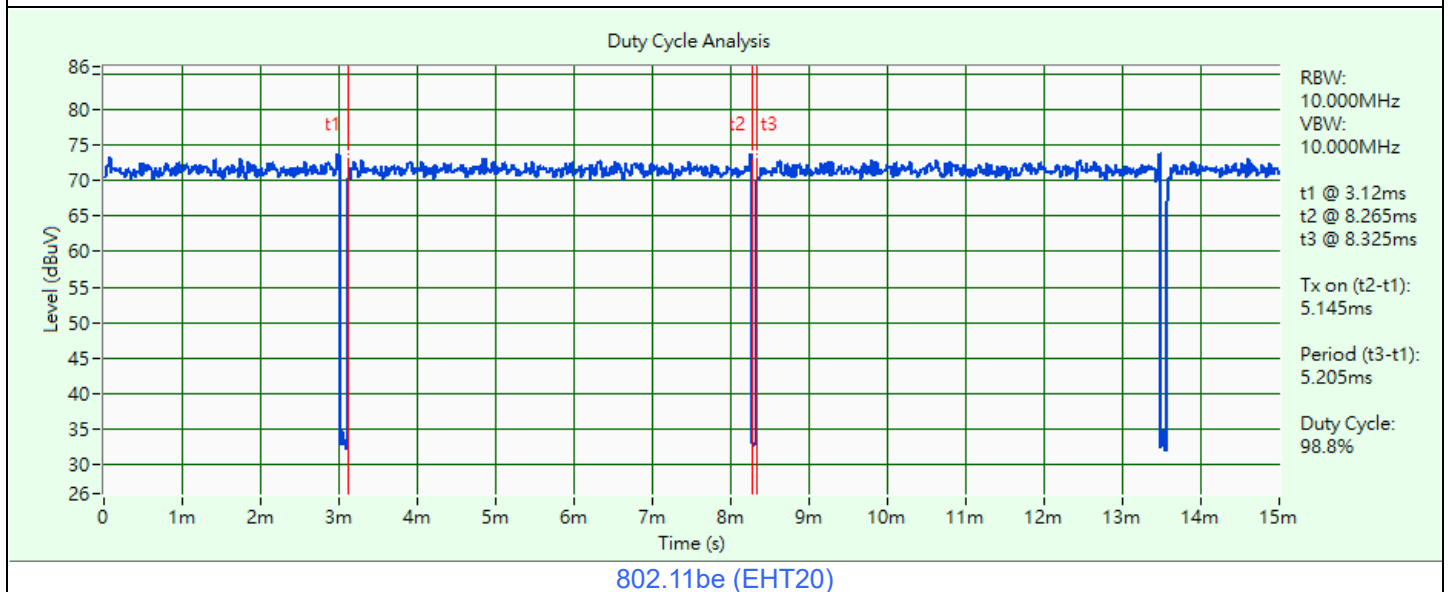


802.11be (EHT20)

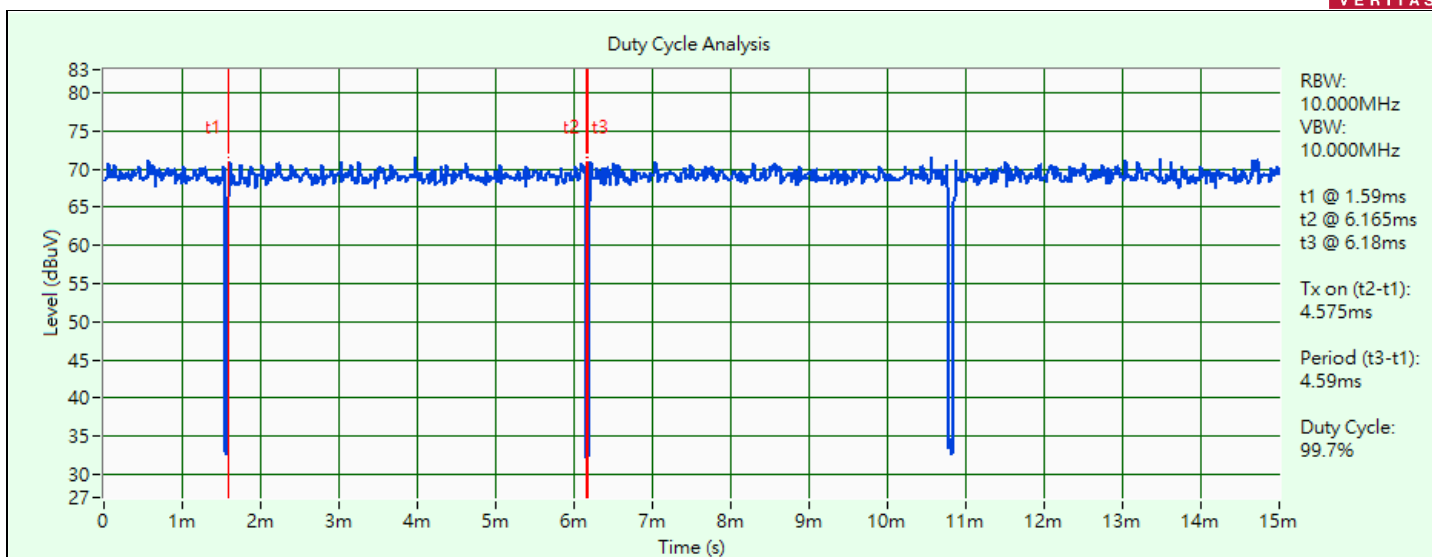

802.11be (EHT40)

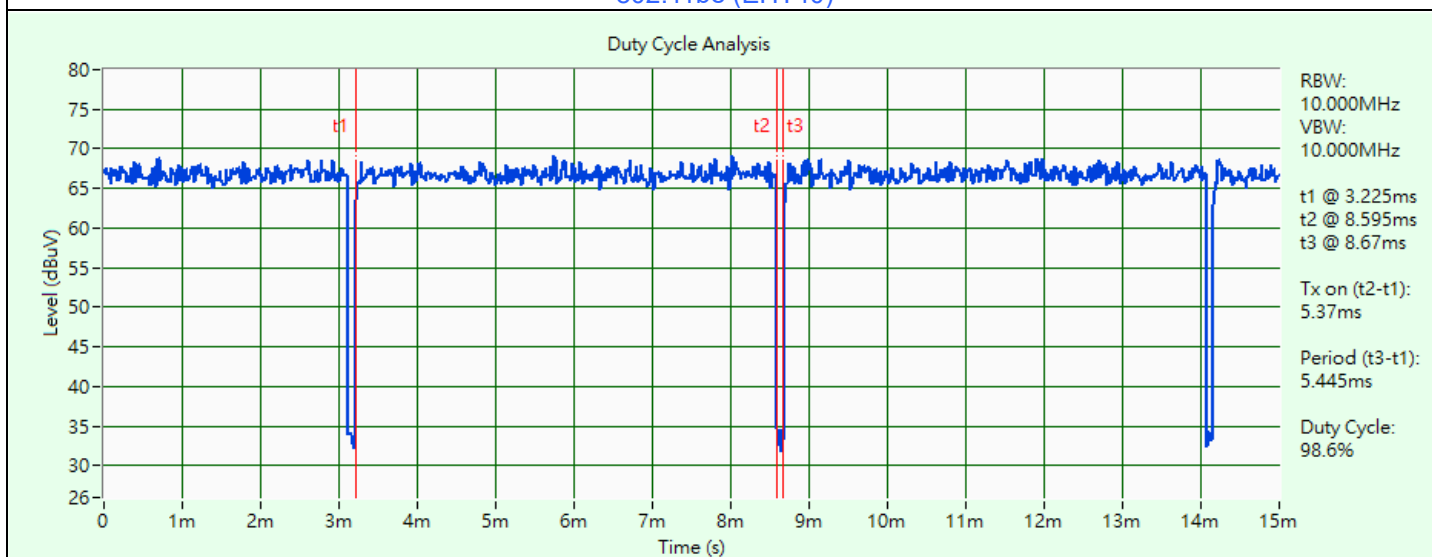

802.11be (EHT80)

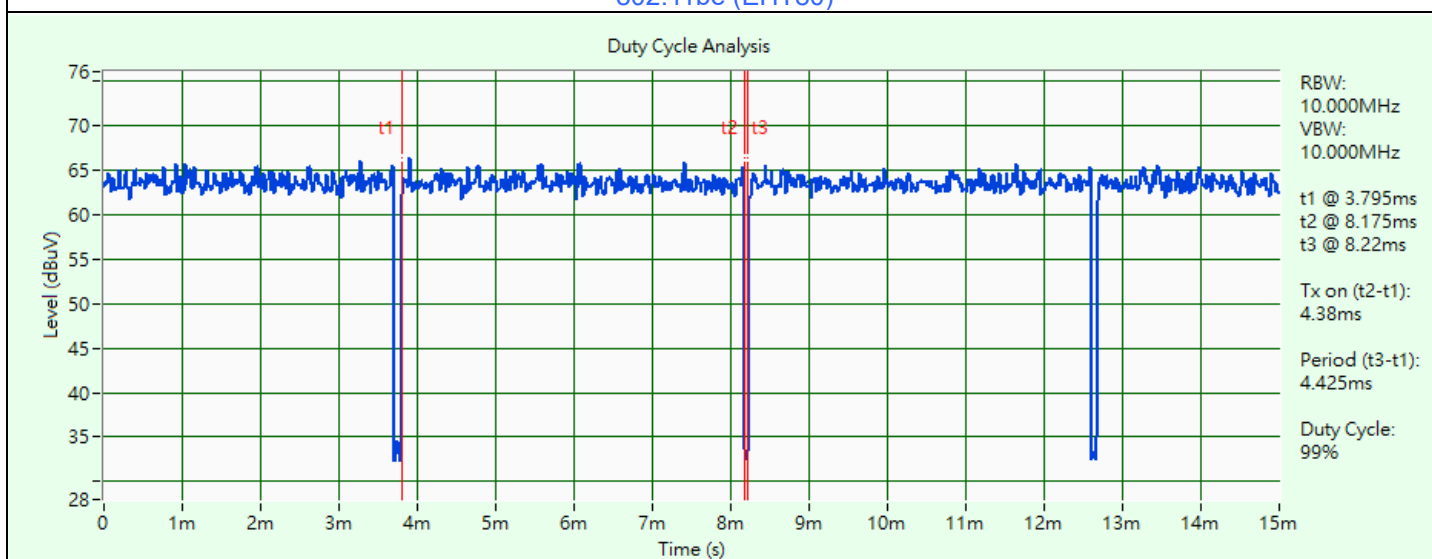


802.11be (EHT160)

### 3.6 Test Program Used and Operation Descriptions

Controlling software QSPR Version 5.0-00202 has been activated to set the EUT under transmission condition continuously at specific channel frequency.


### 3.7 Connection Diagram of EUT and Peripheral Devices

Test Mode A

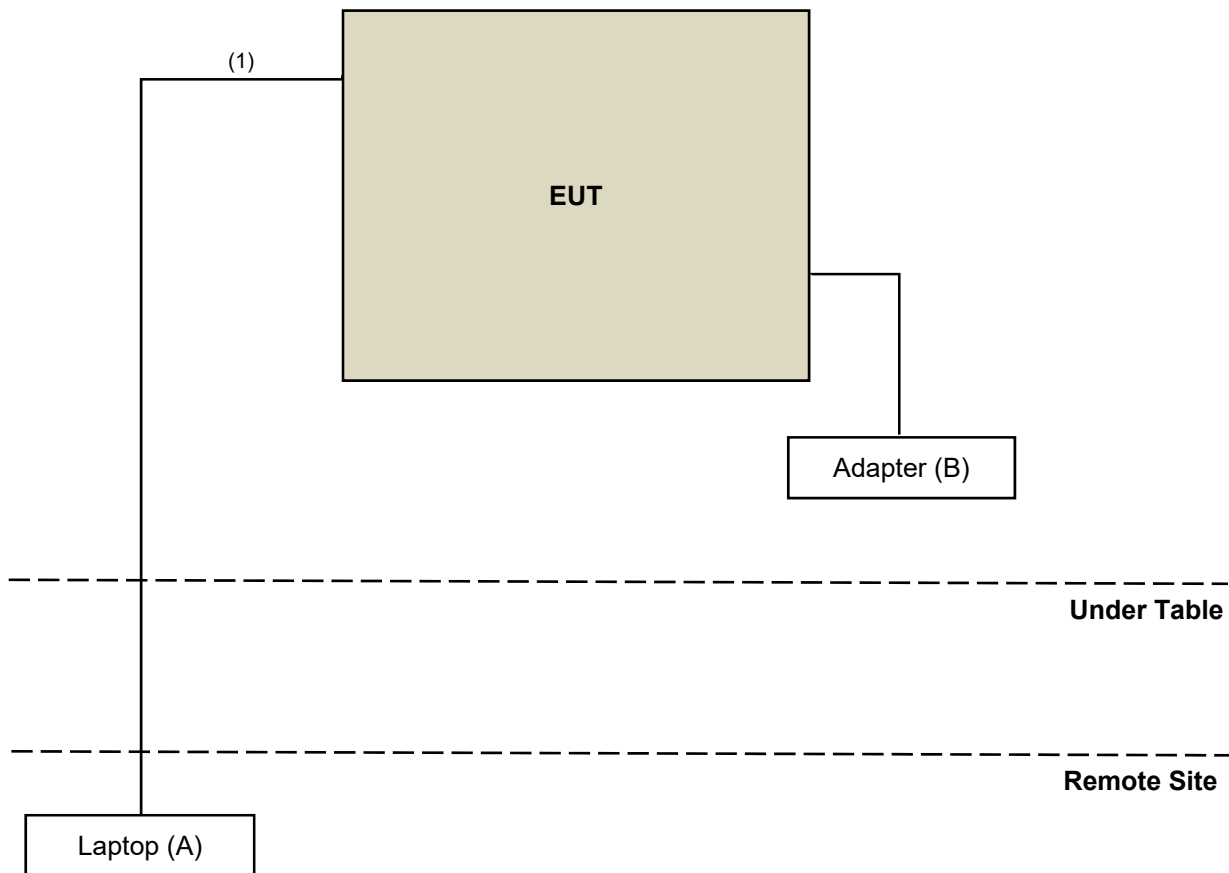



Test Mode B

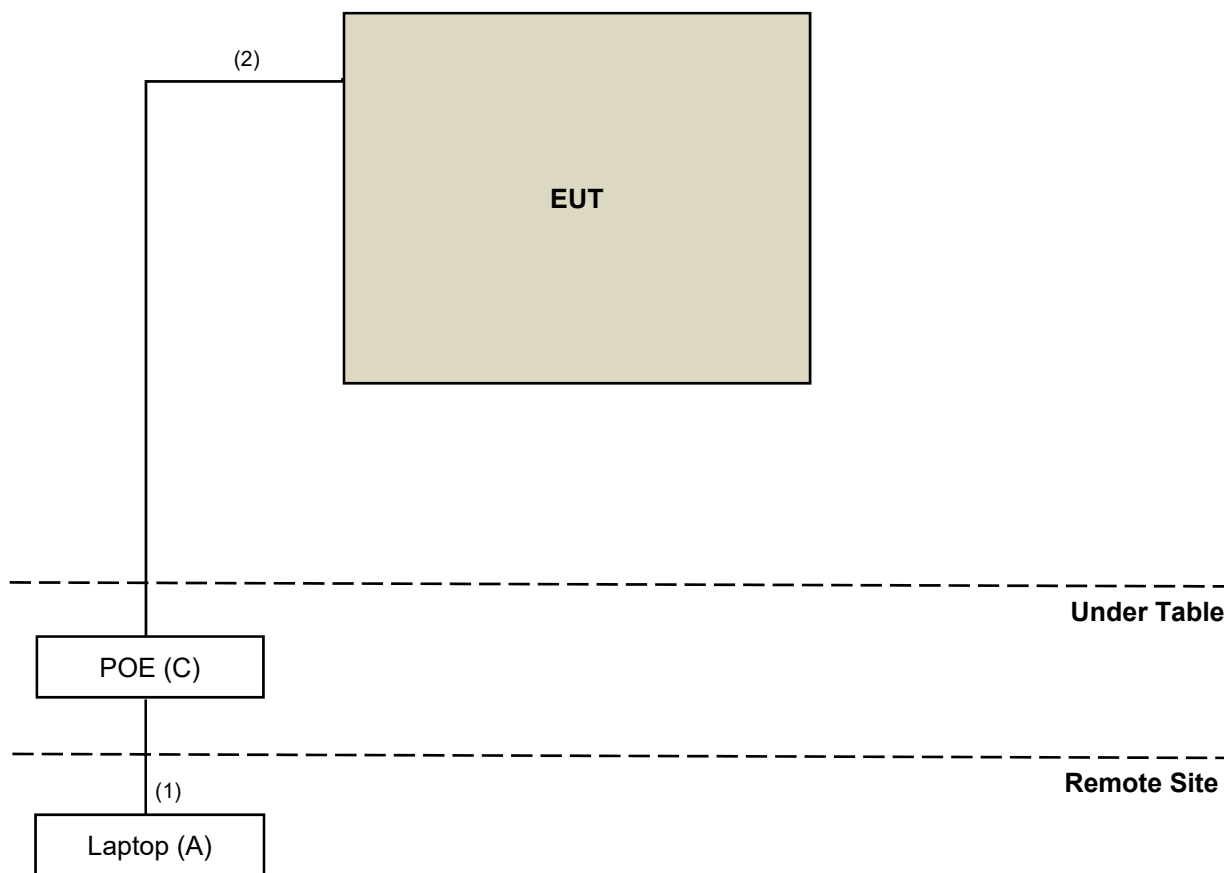

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	DELL	E5430	2RL3YW1	N/A	Provided by Lab
B	Adapter	NETGEAR	ADS-45FIC-12 12042E	N/A	N/A	Supplied by applicant
C	POE	PHIHONG	POE60U-BTA	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	RJ-45 Cable	1	10	N	0	Provided by Lab
2	RJ-45 Cable	1	1.5	N	0	Provided by Lab

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 26 dB Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Signal & Spectrum Analyzer R&S	FSV3044	101504	2023/6/5	2024/6/4
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/11/22

### 4.2 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer Keysight	8990B	MY51000485	2023/1/19	2024/1/18
Signal & Spectrum Analyzer R&S	FSV3044	101504	2023/6/5	2024/6/4
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Wideband Power Sensor Keysight	N1923A	MY58020002	2023/1/18	2024/1/17
		MY58140009	2023/1/18	2024/1/17

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/11/22

### 4.3 Power Spectral Density

Refer to section 4.1 to get information of the instruments.

### 4.4 6 dB Bandwidth

Refer to section 4.1 to get information of the instruments.

### 4.5 Occupied Bandwidth

Refer to section 4.1 to get information of the instruments.

#### 4.6 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
AC Power Supply JIN YIH Technology	6905S	1720444	N/A	N/A
Digital Multimeter Fluke	87-III	70360742	2023/7/6	2024/7/5
Signal & Spectrum Analyzer R&S	FSV3044	101504	2023/6/5	2024/6/4
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Temperature & Humidity Chamber Terchy	HRM-120RF	931022	2022/12/27	2023/12/26

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/11/22

#### 4.7 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance HUBER+SUHNER	E1-011276	01	2023/2/1	2024/1/31
	E1-011312	10	2023/1/30	2024/1/29
	E1-011591	17	2023/2/1	2024/1/31
DC-LISN Schwarzbeck	NNBM 8126G	8126G-069	2023/11/7	2024/11/6
EMI Test Receiver R&S	ESCI	100613	2023/12/4	2024/12/3
Fixed Attenuator Mini-Circuits	HAT-10+	PAD-COND1-01	2023/1/7	2024/1/6
LISN R&S	ENV216	101826	2023/3/23	2024/3/22
	ESH3-Z5	100311	2023/9/6	2024/9/5
RF Coaxial Cable Woken	5D-FB	Cable-cond1-01	2023/1/7	2024/1/6
Software BVADT	BVADT_Cond_ V7.3.7.4	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2023/8/31	2024/8/30

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2023/12/11

#### 4.8 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-155	2023/10/13	2024/10/12
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Loop Antenna Electro-Metrics	EM-6879	269	2023/9/23	2024/9/22
Loop Antenna TESEQ	HLA 6121	45745	2023/8/8	2024/8/7
Preamplifier Agilent	8447D	2944A10631	2023/5/7	2024/5/6
Preamplifier EMCI	EMC001340	980201	2023/9/27	2024/9/26
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2023/1/7	2024/1/6
RF Coaxial Cable Woken	8D-FB	Cable-CH4-01	2023/7/8	2024/7/7
Signal & Spectrum Analyzer R&S	FSW43	101866	2023/1/10	2024/1/9
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3.
2. Tested Date: 2023/12/8 ~ 2023/12/11

#### 4.9 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
EMI Test Receiver R&S	ESR3	102782	2022/12/12	2023/12/11
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-408	2022/11/13	2023/11/12
	BBHA 9170	9170-480	2022/11/13	2023/11/12
		BBHA9170241	2022/10/20 2023/10/16	2023/10/19 2024/10/15
		BBHA9170243	2022/11/13	2023/11/12
Preamplifier EMCI	EMC 184045	980116	2022/10/1 2023/9/27	2023/9/30 2024/9/26
Preamplifier Keysight	83017A	MY53270295	2023/5/7	2024/5/6
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2023/7/8	2024/7/7
	EMC102-KM-KM-3000	150929	2023/7/8	2024/7/7
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03(250724)	2023/5/7	2024/5/6
	Sucoflex 104	MY 13380+295012/04	2023/5/7	2024/5/6
Signal & Spectrum Analyzer R&S	FSW43	101866	2023/1/10	2024/1/9
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3.
2. Tested Date: 2023/9/12 ~ 2023/10/23

## 5 Limits of Test Items

### 5.1 26 dB Bandwidth

The results are for reference only.

### 5.2 RF Output Power

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250mW (24 dBm)

Operation Band	Limit
U-NII-2A	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	1 Watt (30 dBm)

\*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 5.3 Power Spectral Density

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	17 dBm/MHz
	Fixed point-to-point Access Point	
	Indoor Access Point	
	Mobile and Portable client device	11 dBm/MHz

Operation Band	Limit
U-NII-2A	11 dBm/MHz
U-NII-2C	11 dBm/MHz
U-NII-3	30 dBm/500 kHz

### 5.4 6 dB Bandwidth

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 5.5 Occupied Bandwidth

The results are for reference only.

### 5.6 Frequency Stability

The frequency of the carrier signal shall be maintained within band of operation.

## 5.7 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

## 5.8 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

## 5.9 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

For transmitters operating in the 5.15-5.25 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.25-5.35 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(2)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.47-5.725 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) <sup>*1</sup>	PK: 68.2 (dBμV/m) <sup>*1</sup>
	PK: 10 (dBm/MHz) <sup>*2</sup>	PK: 105.2 (dBμV/m) <sup>*2</sup>
	PK: 15.6 (dBm/MHz) <sup>*3</sup>	PK: 110.8 (dBμV/m) <sup>*3</sup>
	PK: 27 (dBm/MHz) <sup>*4</sup>	PK: 122.2 (dBμV/m) <sup>*4</sup>

<sup>\*1</sup> beyond 75 MHz or more above of the band edge.

<sup>\*2</sup> below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

<sup>\*3</sup> below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

<sup>\*4</sup> from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$



## 6 Test Arrangements

### 6.1 26 dB Bandwidth

#### 6.1.1 Test Setup




#### 6.1.2 Test Procedure


- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 6.2 RF Output Power

#### 6.2.1 Test Setup



#### For channel straddling:



#### 6.2.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

#### For channel straddling:


##### Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Sweep points ≥  $[2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing ≤ RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

## 6.3 Power Spectral Density

### 6.3.1 Test Setup



### 6.3.2 Test Procedure

#### For specified measurement bandwidth 1 MHz:

##### Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
- Sweep points  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq$  RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value


#### For specified measurement bandwidth 500 kHz:

##### Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW  $\geq$  1 MHz, Detector = RMS
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where  $\text{BWCF} = 10\log(500 \text{ kHz}/300 \text{ kHz})$
- Sweep points  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq$  RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

## 6.4 6 dB Bandwidth

### 6.4.1 Test Setup




### 6.4.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW)  $\geq$  3 x RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 6.5 Occupied Bandwidth

### 6.5.1 Test Setup

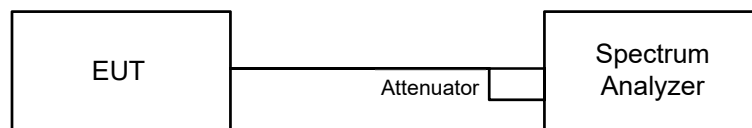


### 6.5.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

## 6.6 Frequency Stability

### 6.6.1 Test Setup

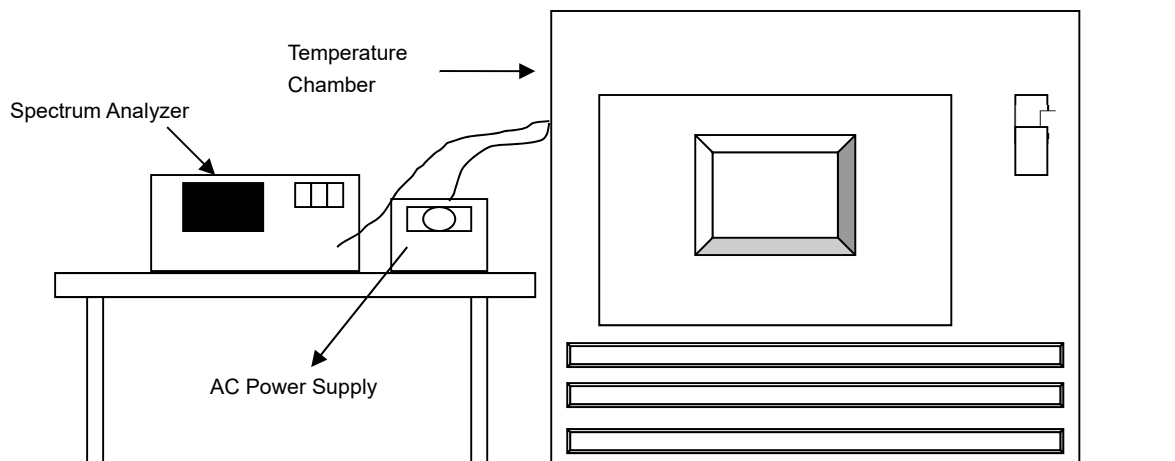


### 6.6.2 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

## 6.7 AC Power Conducted Emissions

### 6.7.1 Test Setup

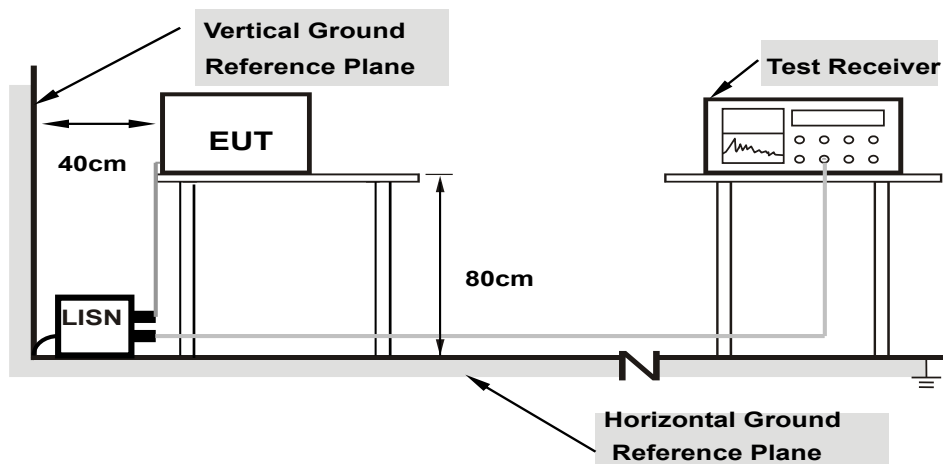

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


## 6.8 Unwanted Emissions below 1 GHz

### 6.8.1 Test Setup

#### For Radiated emission below 30 MHz

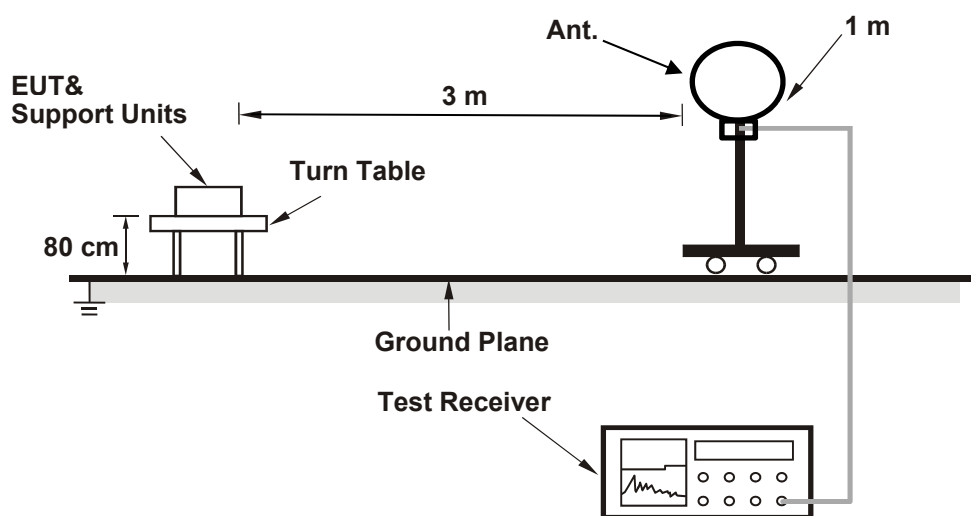

#### For Radiated emission above 30 MHz

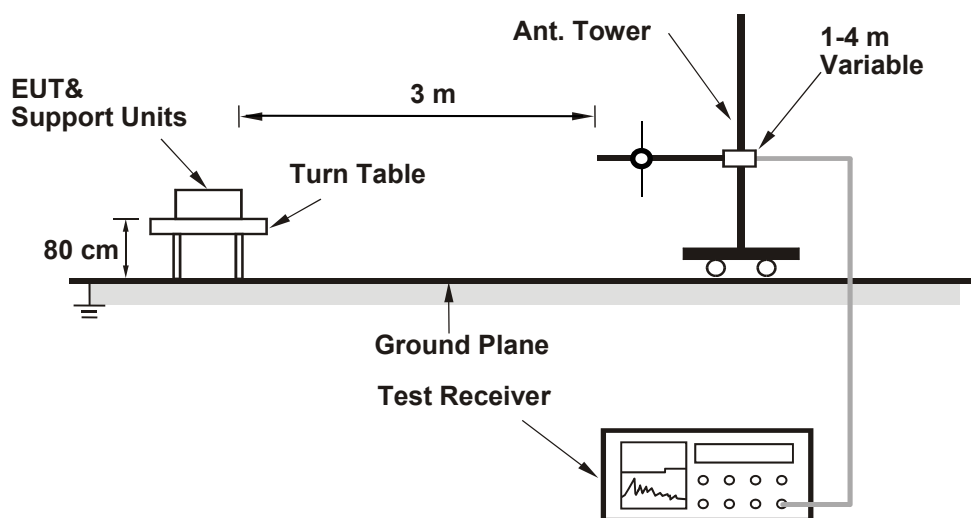

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 6.8.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.9 Unwanted Emissions above 1 GHz

### 6.9.1 Test Setup

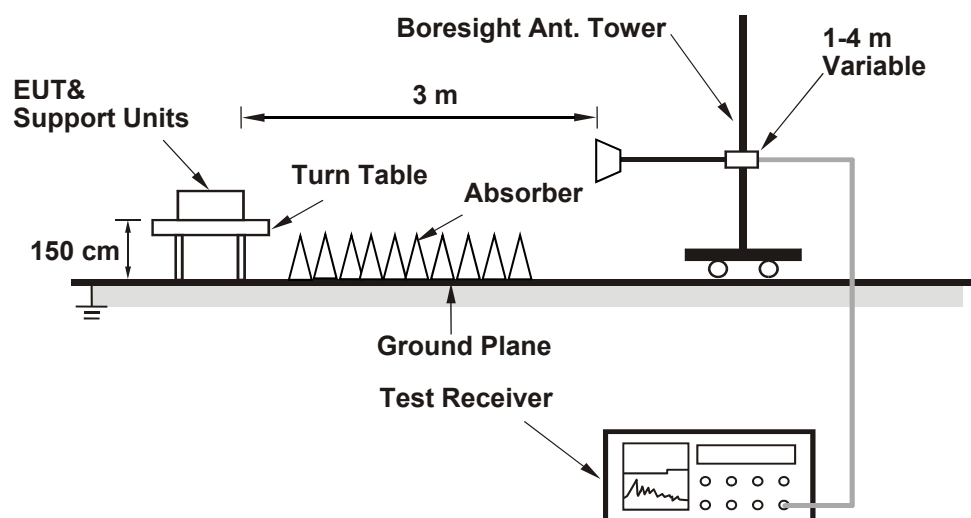

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.9.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 26 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chris Lin
--------------	----------------	---------------------------	--------------	------------	-----------

#### 802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
52	5260	23.30	22.78	22.78	23.06
60	5300	23.08	22.76	22.73	22.76
64	5320	23.18	22.78	22.80	22.81
100	5500	22.90	22.82	22.78	22.78
116	5580	22.88	23.27	22.85	22.94
140	5700	23.00	22.88	22.88	22.66
144 (U-NII-2C)	5720	16.45	16.46	16.89	16.48
144 (U-NII-3)	5720	6.61	6.39	6.35	6.37

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
52	5260	22.78	24.57 > 24
60	5300	22.73	24.56 > 24
64	5320	22.78	24.57 > 24
100	5500	22.78	24.57 > 24
116	5580	22.85	24.58 > 24
140	5700	22.66	24.55 > 24
144 (U-NII-2C)	5720	16.45	23.16 < 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.



**802.11be (EHT20)**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
52	5260	23.30	23.55	23.44	23.52
60	5300	23.80	23.55	23.89	23.90
64	5320	23.93	23.50	23.59	23.83
100	5500	23.87	23.87	23.81	23.70
116	5580	23.82	23.91	23.67	23.74
140	5700	23.90	23.64	23.73	23.69
144 (U-NII-2C)	5720	16.73	16.53	16.67	16.73
144 (U-NII-3)	5720	7.14	7.03	7.21	7.21

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
52	5260	23.30	24.67 > 24
60	5300	23.55	24.71 > 24
64	5320	23.50	24.71 > 24
100	5500	23.70	24.74 > 24
116	5580	23.67	24.74 > 24
140	5700	23.64	24.73 > 24
144 (U-NII-2C)	5720	16.53	23.18 < 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

**802.11be (EHT40)**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
54	5270	44.70	45.65	44.46	45.36
62	5310	44.55	44.78	45.12	45.44
102	5510	44.99	44.35	44.87	44.53
110	5550	44.77	45.26	44.42	44.74
134	5670	44.44	44.52	45.22	44.35
142 (U-NII-2C)	5710	37.48	37.44	37.84	37.33
142 (U-NII-3)	5710	7.56	7.37	7.57	7.23

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
54	5270	44.46	27.47 > 24
62	5310	44.55	27.48 > 24
102	5510	44.35	27.46 > 24
110	5550	44.42	27.47 > 24
134	5670	44.35	27.46 > 24
142 (U-NII-2C)	5710	37.33	26.72 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

**802.11be (EHT80)**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
58	5290	90.95	90.73	91.07	91.78
106	5530	90.73	91.54	90.07	91.30
122	5610	92.39	91.97	90.86	90.94
138 (U-NII-2C)	5690	80.93	80.83	81.21	80.88
138 (U-NII-3)	5690	10.23	10.81	10.39	10.01

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
58	5290	90.73	30.57 > 24
106	5530	90.07	30.54 > 24
122	5610	90.86	30.58 > 24
138 (U-NII-2C)	5690	80.83	30.07 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.


**802.11be (EHT160)**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
50 (U-NII-1)	5250	87.33	86.67	86.68	86.58
50 (U-NII-2A)	5250	86.84	87.11	87.20	87.30
114	5570	174.42	172.45	172.13	174.63


Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
50 (U-NII-2A)	5250	86.84	30.38 > 24
114	5570	172.13	33.35 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.


### Spectrum Plot of Minimum Value

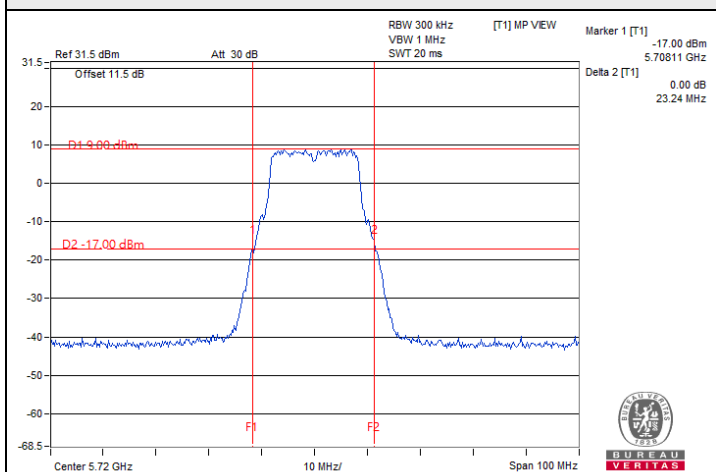


802.11a / Chain 2 : CH 144 (U-NII-3)

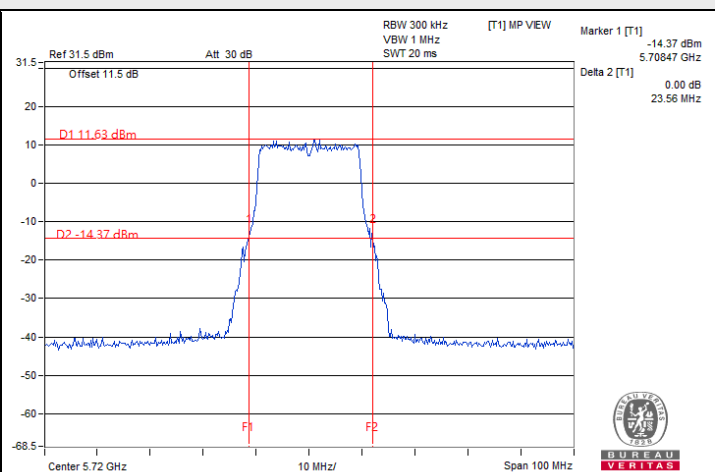


802.11be (EHT20) / Chain 1 : CH 144 (U-NII-3)

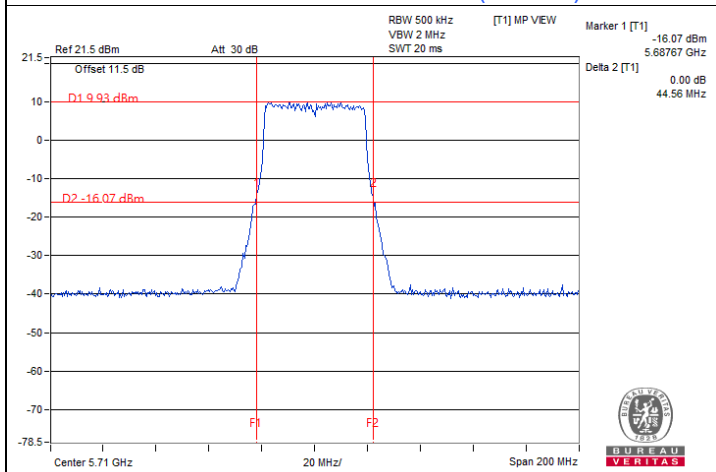

802.11be (EHT40) / Chain 3 : CH 142 (U-NII-3)

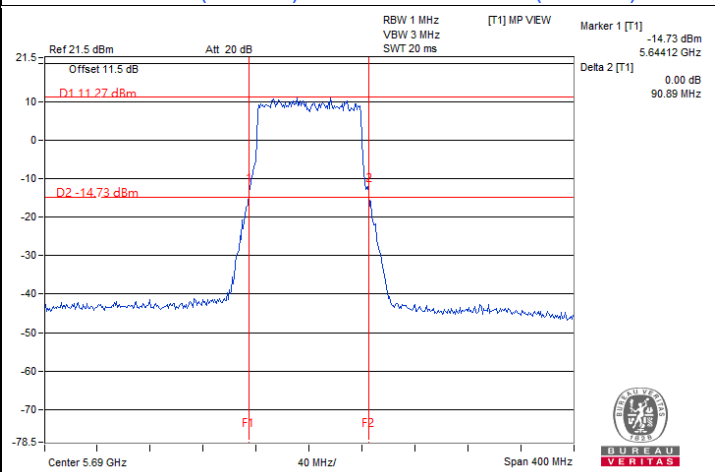

802.11be (EHT80) / Chain 3 : CH 138 (U-NII-3)

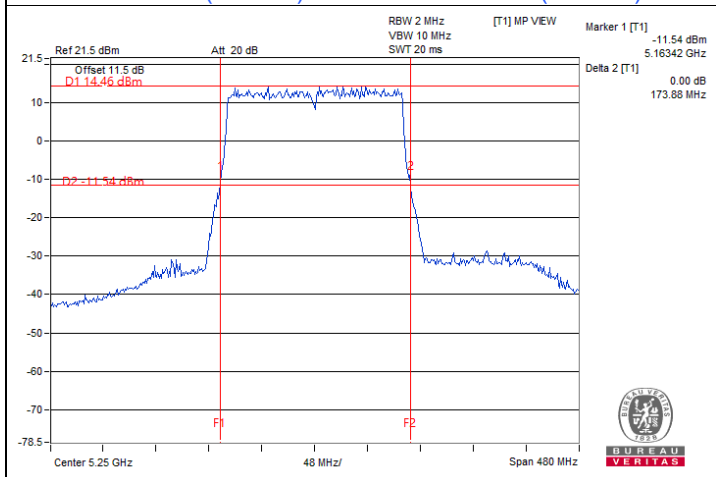

802.11be (EHT160) / Chain 3 : CH 50 (U-NII-1)

Notes:

1. For U-NII-2C straddle channel = 5725 MHz - Marker 1
2. For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz
3. For U-NII-1 straddle channel = 5250 MHz - Marker 1
4. For U-NII-2A straddle channel = Marker 1 + Delta 2 - 5250 MHz

## 7.2 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chris Lin
--------------	----------------	---------------------------	--------------	------------	-----------

### 802.11a CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	22.61	22.55	22.62	22.62	727.897	28.62	30	Pass
40	5200	23.23	23.36	23.32	23.52	866.837	29.38	30	Pass
48	5240	23.21	23.34	23.29	23.47	860.821	29.35	30	Pass
52	5260	17.04	17.07	16.92	17.22	203.442	23.08	24	Pass
60	5300	17.14	16.97	16.92	17.35	205.063	23.12	24	Pass
64	5320	17.15	16.98	16.92	17.36	205.423	23.13	24	Pass
100	5500	16.98	17.05	16.93	17.16	201.904	23.05	24	Pass
116	5580	17.31	17.22	17.15	17.35	212.755	23.28	24	Pass
140	5700	17.07	16.92	17.11	17.13	203.183	23.08	24	Pass
*144 (U-NII-2C)	5720	16.05	16.64	16.50	16.46	175.331	22.44	23.16	Pass
*144 (U-NII-3)	5720	10.10	10.61	10.46	10.43	43.899	16.42	30	Pass
149	5745	23.15	23.17	23.26	23.59	854.425	29.32	30	Pass
157	5785	23.11	23.05	23.28	23.32	834.078	29.21	30	Pass
165	5825	23.05	23.02	23.15	23.19	817.271	29.12	30	Pass

#### Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 5.41 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 5.33 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 5.27 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 5.33 dBi < 6 dBi, so the output power limit shall not be reduced.

**802.11be (EHT20) CDD**

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	22.47	22.57	22.65	22.87	735.041	28.66	30	Pass
40	5200	23.18	23.28	23.48	23.42	863.413	29.36	30	Pass
48	5240	23.05	23.05	23.15	23.42	829.997	29.19	30	Pass
52	5260	17.02	17.05	17.02	17.15	203.279	23.08	24	Pass
60	5300	17.05	16.98	17.05	17.22	204.010	23.10	24	Pass
64	5320	17.12	17.04	17.02	17.37	207.031	23.16	24	Pass
100	5500	16.98	17.05	16.95	17.35	204.458	23.11	24	Pass
116	5580	17.35	17.19	17.22	17.55	216.293	23.35	24	Pass
140	5700	17.09	17.12	17.14	17.32	208.403	23.19	24	Pass
*144 (U-NII-2C)	5720	16.64	16.62	16.36	16.38	178.754	22.52	23.18	Pass
*144 (U-NII-3)	5720	11.62	11.68	11.37	11.42	56.821	17.55	30	Pass
149	5745	23.22	23.16	23.28	23.65	861.461	29.35	30	Pass
157	5785	23.15	23.17	23.35	23.37	847.571	29.28	30	Pass
165	5825	23.02	23.03	23.05	23.25	814.542	29.11	30	Pass

**Notes:**

1. \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
2. Directional gain is the maximum gain of antennas.
3. For U-NII-1, the maximum gain is 5.41 dBi < 6 dBi, so the output power limit shall not be reduced.
4. For U-NII-2A, the maximum gain is 5.33 dBi < 6 dBi, so the output power limit shall not be reduced.
5. For U-NII-2C, the maximum gain is 5.27 dBi < 6 dBi, so the output power limit shall not be reduced.
6. For U-NII-3, the maximum gain is 5.33 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11be (EHT40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	20.43	20.23	20.52	20.44	439.229	26.43	30	Pass
46	5230	23.05	22.95	23.19	23.22	817.422	29.12	30	Pass
54	5270	17.05	17.02	17.04	17.21	204.233	23.10	24	Pass
62	5310	17.15	17.07	17.02	17.21	205.765	23.13	24	Pass
102	5510	17.05	17.02	17.05	17.22	204.471	23.11	24	Pass
110	5550	17.16	17.12	17.05	17.31	208.049	23.18	24	Pass
134	5670	17.05	17.16	17.22	17.24	208.388	23.19	24	Pass
*142 (U-NII-2C)	5710	17.10	17.04	16.82	16.82	198.036	22.97	24	Pass
*142 (U-NII-3)	5710	7.79	7.69	7.46	7.43	22.992	13.62	30	Pass
151	5755	23.25	23.21	23.35	23.55	863.496	29.36	30	Pass
159	5795	22.86	22.81	23.32	23.35	815.237	29.11	30	Pass

Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 5.41 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 5.33 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 5.27 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 5.33 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11be (EHT80) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	19.92	19.93	19.98	20.02	396.578	25.98	30	Pass
58	5290	17.08	16.95	17.02	17.25	204.034	23.10	24	Pass
106	5530	17.22	17.11	17.05	17.28	208.283	23.19	24	Pass
122	5610	17.18	17.08	17.19	17.28	209.107	23.20	24	Pass
*138 (U-NII-2C)	5690	17.12	17.19	16.98	17.04	204.354	23.10	24	Pass
*138 (U-NII-3)	5690	4.37	4.26	3.96	4.09	10.455	10.19	30	Pass
155	5775	22.21	22.15	22.56	22.58	691.836	28.40	30	Pass

Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 5.41 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 5.33 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 5.27 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 5.33 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11be (EHT160) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
*50 (U-NII-1)	5250	17.02	17.03	16.84	16.90	198.100	22.97	30	Pass
*50 (U-NII-2A)	5250	17.32	17.36	17.15	17.21	212.883	23.28	24	Pass
114	5570	17.41	17.25	17.18	17.48	216.385	23.35	24	Pass

Notes:

1. \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
2. Directional gain is the maximum gain of antennas.
3. For U-NII-1, the maximum gain is 5.41 dBi < 6 dBi, so the output power limit shall not be reduced.
4. For U-NII-2A, the maximum gain is 5.33 dBi < 6 dBi, so the output power limit shall not be reduced.
5. For U-NII-2C, the maximum gain is 5.27 dBi < 6 dBi, so the output power limit shall not be reduced.



## 802.11be (EHT20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	22.47	22.57	22.65	22.87	735.041	28.66	29.53	Pass
40	5200	23.18	23.28	23.48	23.42	863.413	29.36	29.53	Pass
48	5240	23.05	23.05	23.15	23.42	829.997	29.19	29.53	Pass
52	5260	17.02	17.05	17.02	17.15	203.279	23.08	23.84	Pass
60	5300	17.05	16.98	17.05	17.22	204.010	23.10	23.84	Pass
64	5320	17.12	17.04	17.02	17.37	207.031	23.16	23.84	Pass
100	5500	16.98	17.05	16.95	17.35	204.458	23.11	23.87	Pass
116	5580	17.35	17.19	17.22	17.55	216.293	23.35	23.87	Pass
140	5700	17.09	17.12	17.14	17.32	208.403	23.19	23.87	Pass
*144 (U-NII-2C)	5720	16.64	16.62	16.36	16.38	178.754	22.52	23.05	Pass
*144 (U-NII-3)	5720	11.62	11.68	11.37	11.42	56.821	17.55	29.93	Pass
149	5745	23.22	23.16	23.28	23.65	861.461	29.35	29.93	Pass
157	5785	23.15	23.17	23.35	23.37	847.571	29.28	29.93	Pass
165	5825	23.02	23.03	23.05	23.25	814.542	29.11	29.93	Pass

### Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 6.47 dBi > 6 dBi, so the output power limit shall be reduced to  $30 - (6.47 - 6) = 29.53$  dBm.
- For U-NII-2A, the directional gain is 6.16 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit - (6.16 - 6)].
- For U-NII-2C, the directional gain is 6.13 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit - (6.13 - 6)].
- For U-NII-3, the directional gain is 6.07 dBi > 6 dBi, so the output power limit shall be reduced to  $30 - (6.07 - 6) = 29.93$  dBm.

### 802.11be (EHT40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	20.43	20.23	20.52	20.44	439.229	26.43	29.53	Pass
46	5230	23.05	22.95	23.19	23.22	817.422	29.12	29.53	Pass
54	5270	17.05	17.02	17.04	17.21	204.233	23.10	23.84	Pass
62	5310	17.15	17.07	17.02	17.21	205.765	23.13	23.84	Pass
102	5510	17.05	17.02	17.05	17.22	204.471	23.11	23.87	Pass
110	5550	17.16	17.12	17.05	17.31	208.049	23.18	23.87	Pass
134	5670	17.05	17.16	17.22	17.24	208.388	23.19	23.87	Pass
*142 (U-NII-2C)	5710	17.10	17.04	16.82	16.82	198.036	22.97	23.87	Pass
*142 (U-NII-3)	5710	7.79	7.69	7.46	7.43	22.992	13.62	29.93	Pass
151	5755	23.25	23.21	23.35	23.55	863.496	29.36	29.93	Pass
159	5795	22.86	22.81	23.32	23.35	815.237	29.11	29.93	Pass

**Notes:**

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 6.47 dBi > 6 dBi, so the output power limit shall be reduced to  $30-(6.47-6) = 29.53$  dBm.
- For U-NII-2A, the directional gain is 6.16 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.16-6)].
- For U-NII-2C, the directional gain is 6.13 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.13-6)].
- For U-NII-3, the directional gain is 6.07 dBi > 6 dBi, so the output power limit shall be reduced to  $30-(6.07-6) = 29.93$  dBm.

### 802.11be (EHT80) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	19.92	19.93	19.98	20.02	396.578	25.98	29.53	Pass
58	5290	17.08	16.95	17.02	17.25	204.034	23.10	23.84	Pass
106	5530	17.22	17.11	17.05	17.28	208.283	23.19	23.87	Pass
122	5610	17.18	17.08	17.19	17.28	209.107	23.20	23.87	Pass
*138 (U-NII-2C)	5690	17.12	17.19	16.98	17.04	204.354	23.10	23.87	Pass
*138 (U-NII-3)	5690	4.37	4.26	3.96	4.09	10.455	10.19	29.93	Pass
155	5775	22.21	22.15	22.56	22.58	691.836	28.40	29.93	Pass

**Notes:**

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 6.47 dBi > 6 dBi, so the output power limit shall be reduced to  $30-(6.47-6) = 29.53$  dBm.
- For U-NII-2A, the directional gain is 6.16 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.16-6)].
- For U-NII-2C, the directional gain is 6.13 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.13-6)].
- For U-NII-3, the directional gain is 6.07 dBi > 6 dBi, so the output power limit shall be reduced to  $30-(6.07-6) = 29.93$  dBm.

### 802.11be (EHT160) Beamforming


Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
*50 (U-NII-1)	5250	17.02	17.03	16.84	16.90	198.100	22.97	29.53	Pass
*50 (U-NII-2A)	5250	17.32	17.36	17.15	17.21	212.883	23.28	23.84	Pass
114	5570	17.41	17.25	17.18	17.48	216.385	23.35	23.87	Pass

**Notes:**


- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 6.47 dBi > 6 dBi, so the output power limit shall be reduced to  $30-(6.47-6) = 29.53$  dBm.
- For U-NII-2A, the directional gain is 6.16 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.16-6)].
- For U-NII-2C, the directional gain is 6.13 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.13-6)].




### Spectrum Plot for channel straddling

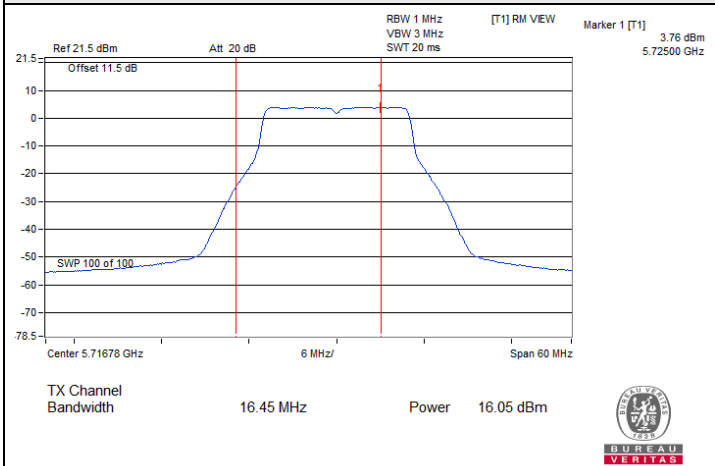


802.11a / Chain 0 : CH 144 (U-NII-2C)

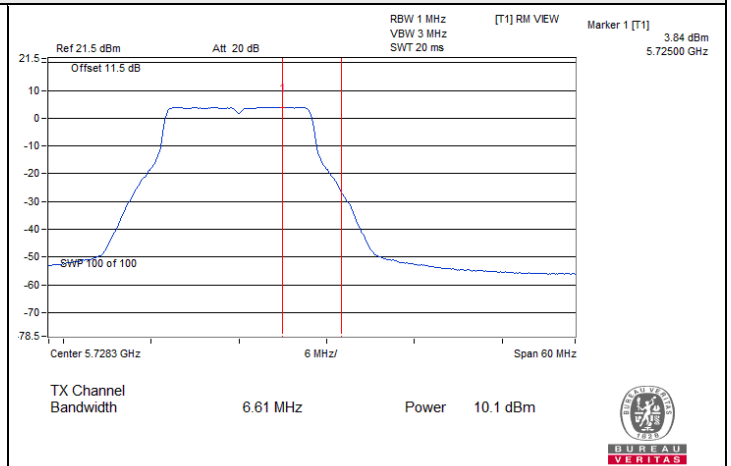


802.11a / Chain 0 : CH 144 (U-NII-3)

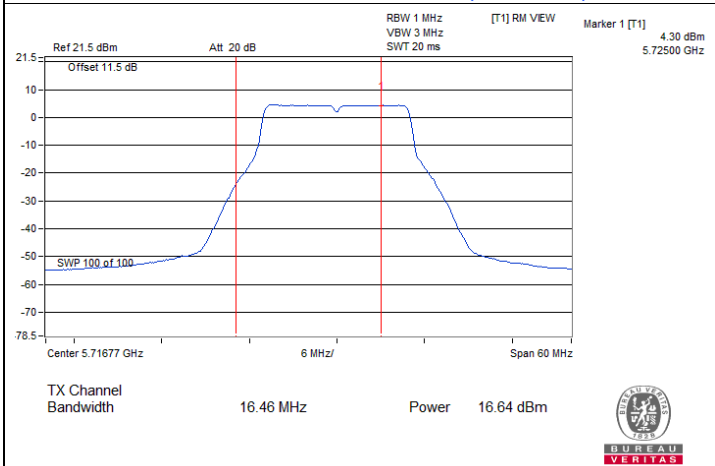


802.11a / Chain 1 : CH 144 (U-NII-2C)

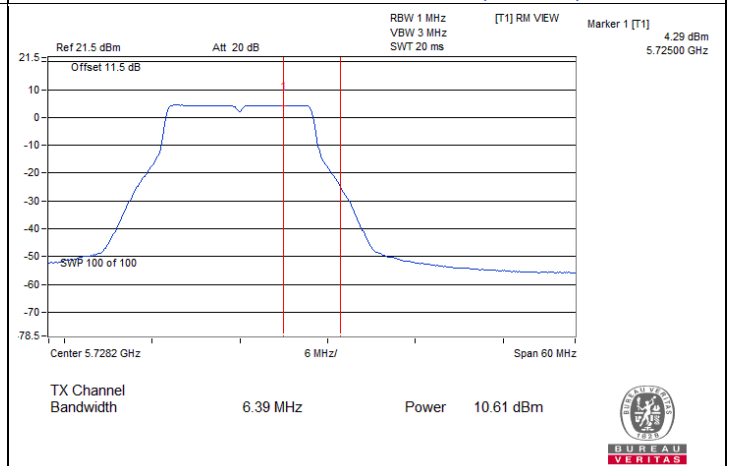

802.11a / Chain 1 : CH 144 (U-NII-3)

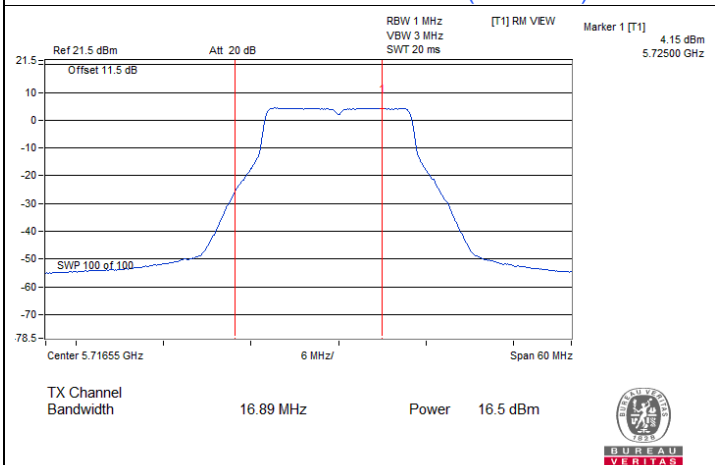


802.11a / Chain 2 : CH 144 (U-NII-2C)

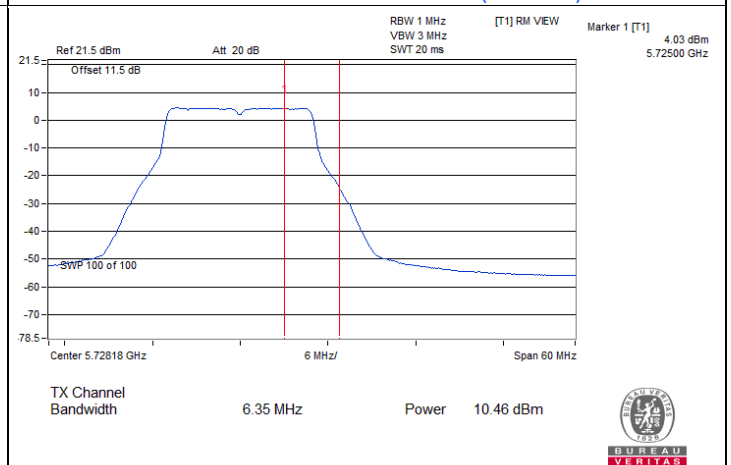


802.11a / Chain 2 : CH 144 (U-NII-3)




### Spectrum Plot for channel straddling

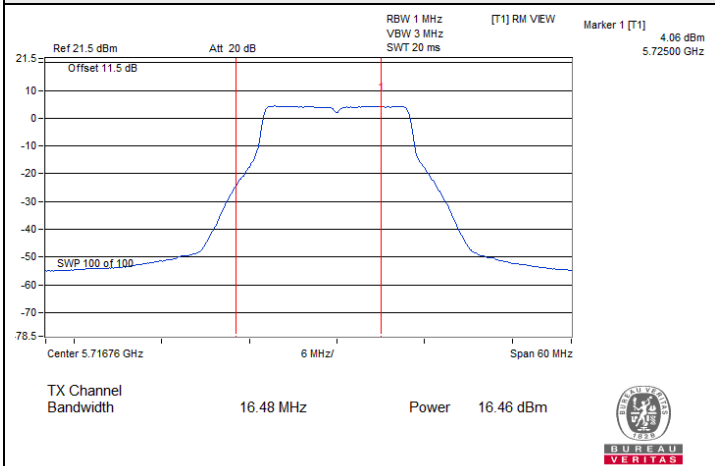


802.11a / Chain 3 : CH 144 (U-NII-2C)

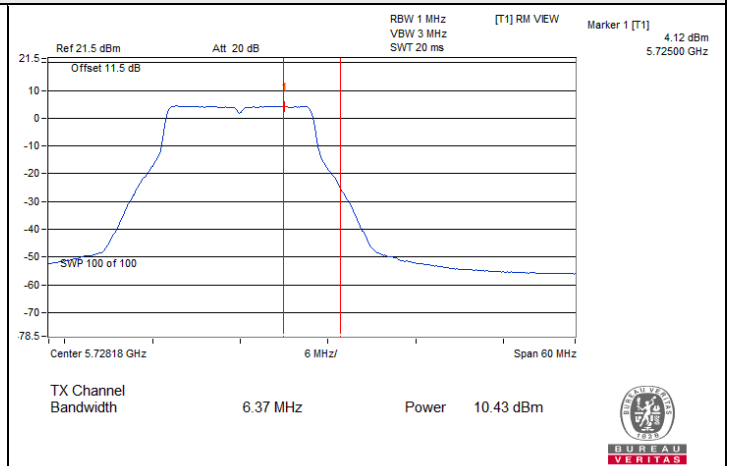


802.11a / Chain 3 : CH 144 (U-NII-3)

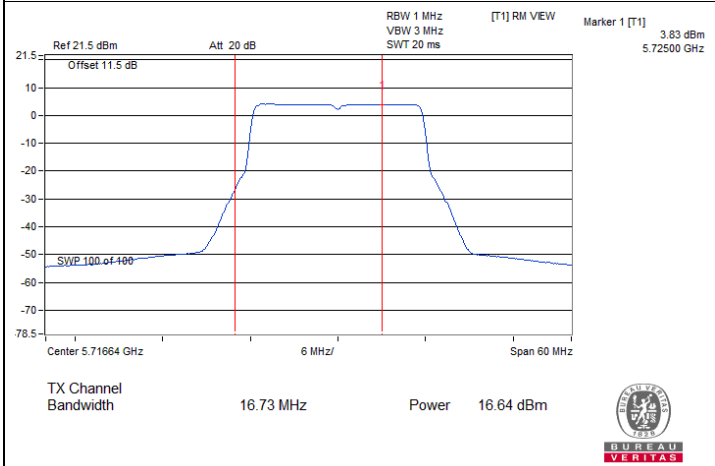


802.11be (EHT20) / Chain 0 : CH 144 (U-NII-2C)

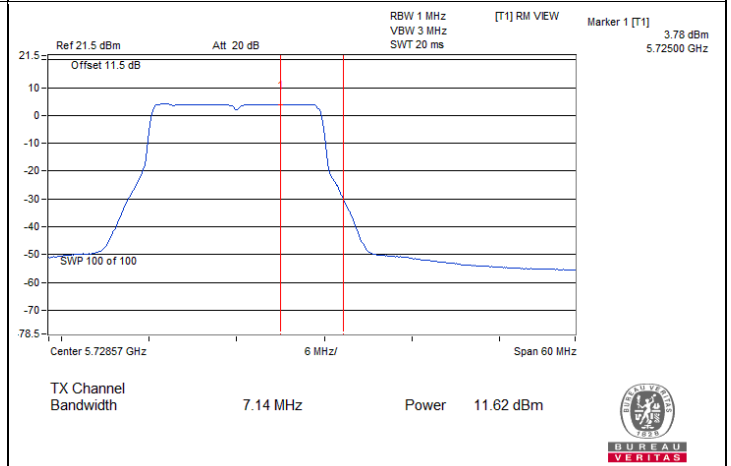

802.11be (EHT20) / Chain 0 : CH 144 (U-NII-3)

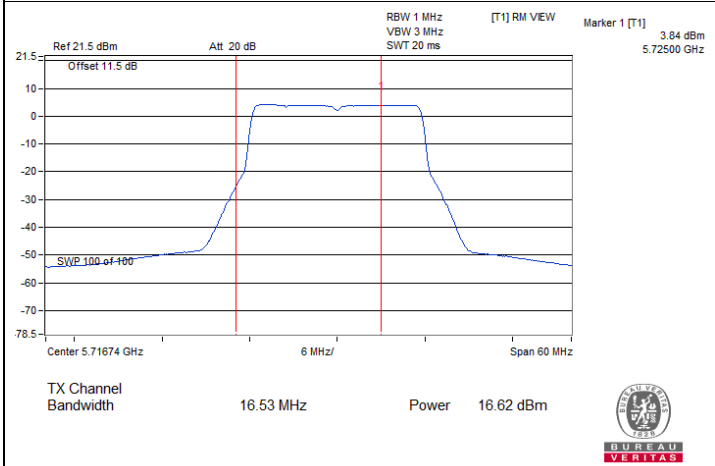


802.11be (EHT20) / Chain 1 : CH 144 (U-NII-2C)

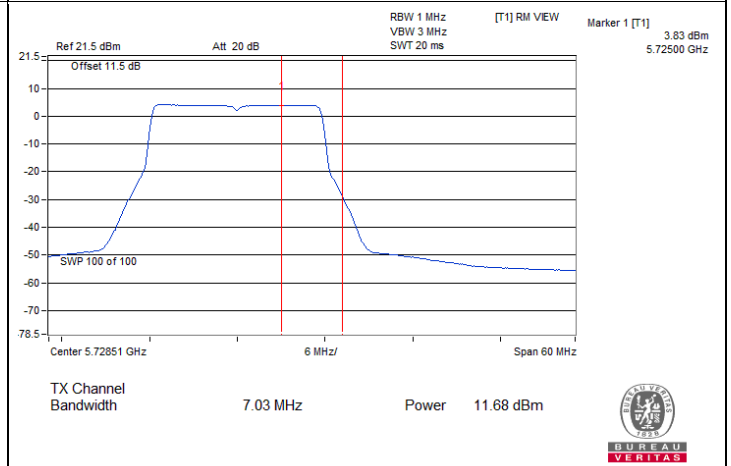


802.11be (EHT20) / Chain 1 : CH 144 (U-NII-3)




### Spectrum Plot for channel straddling

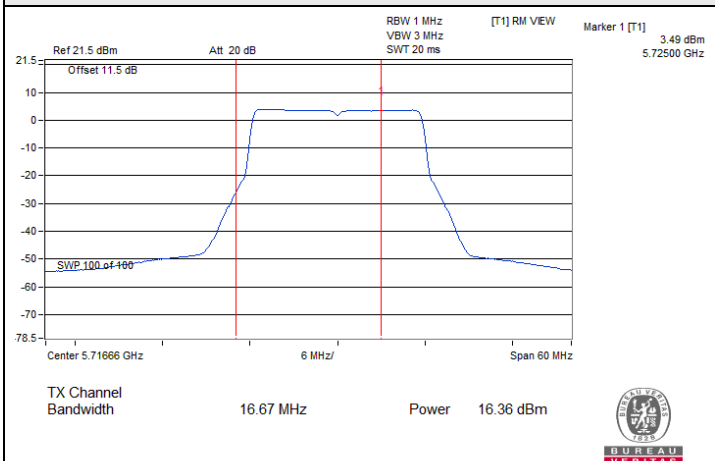


802.11be (EHT20) / Chain 2 : CH 144 (U-NII-2C)

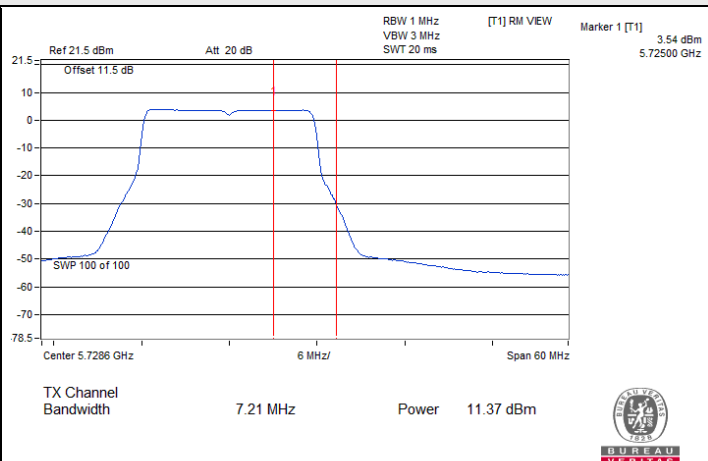


802.11be (EHT20) / Chain 2 : CH 144 (U-NII-3)

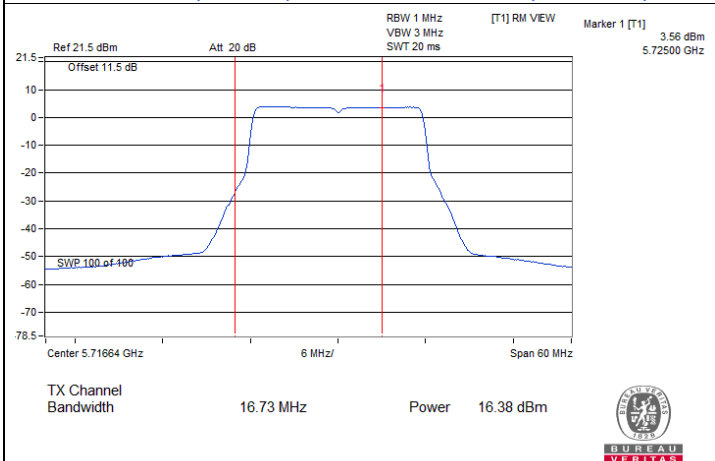


802.11be (EHT20) / Chain 3 : CH 144 (U-NII-2C)

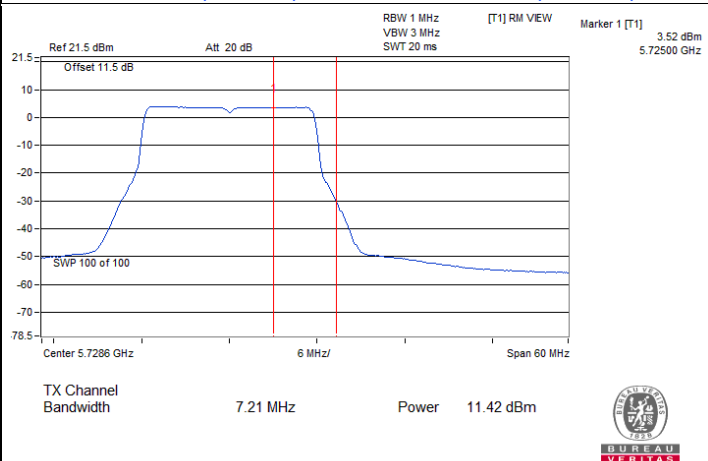

802.11be (EHT20) / Chain 3 : CH 144 (U-NII-3)

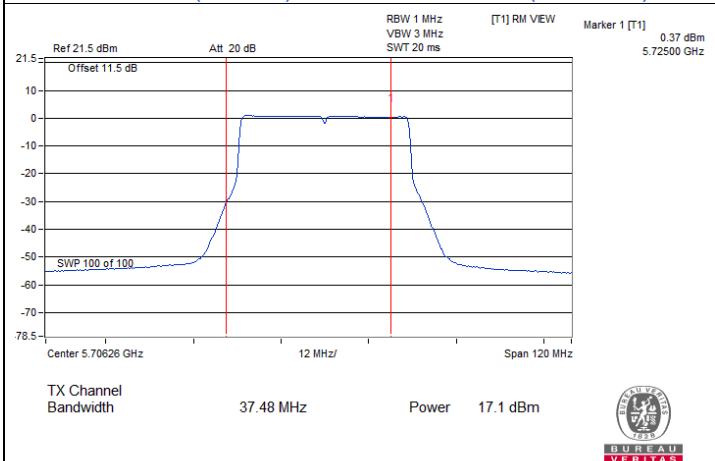


802.11be (EHT40) / Chain 0 : CH 142 (U-NII-2C)

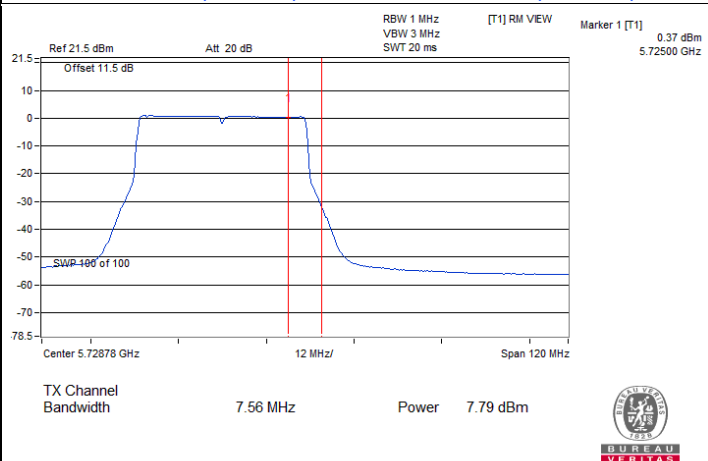


802.11be (EHT40) / Chain 0 : CH 142 (U-NII-3)




### Spectrum Plot for channel straddling

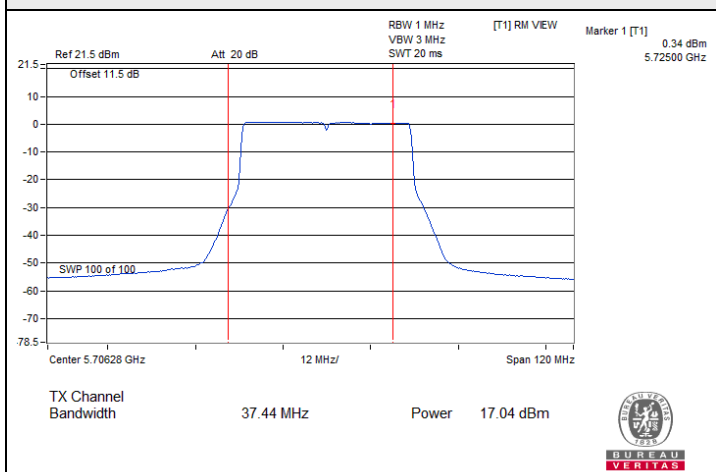


802.11be (EHT40) / Chain 1 : CH 142 (U-NII-2C)

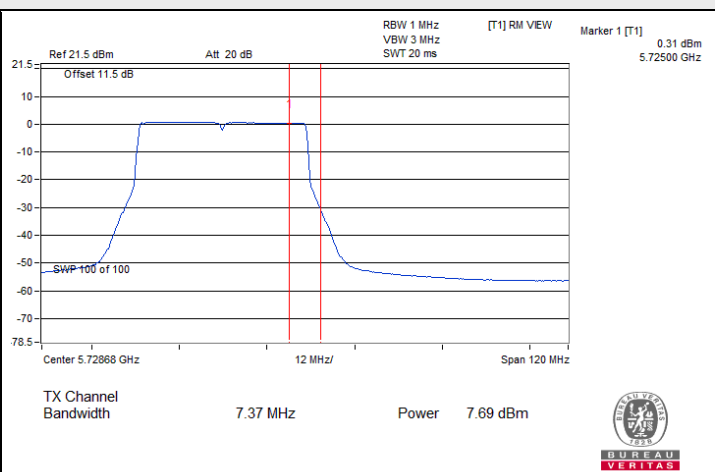


802.11be (EHT40) / Chain 1 : CH 142 (U-NII-3)

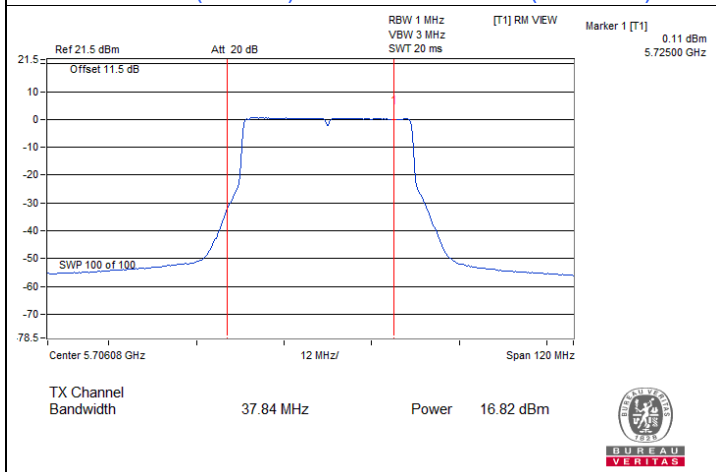


802.11be (EHT40) / Chain 2 : CH 142 (U-NII-2C)

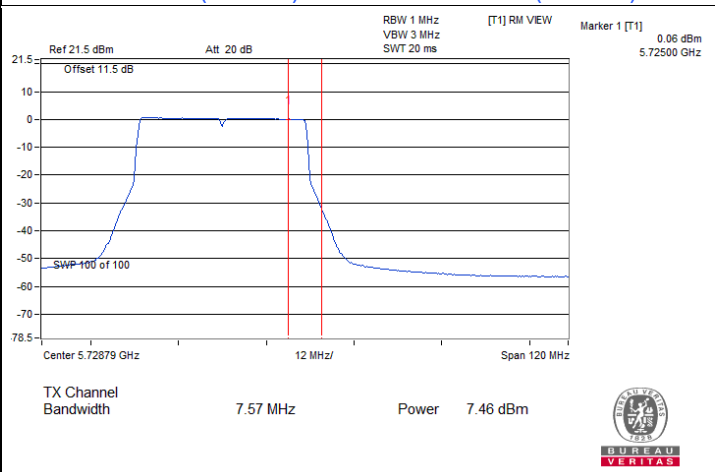

802.11be (EHT40) / Chain 2 : CH 142 (U-NII-3)

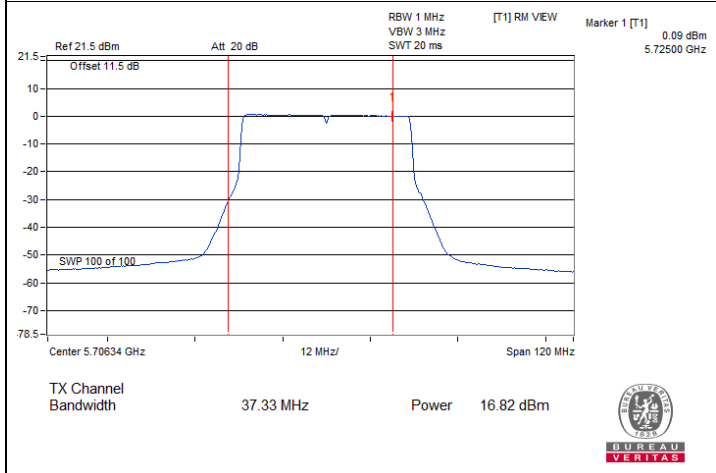


802.11be (EHT40) / Chain 3 : CH 142 (U-NII-2C)

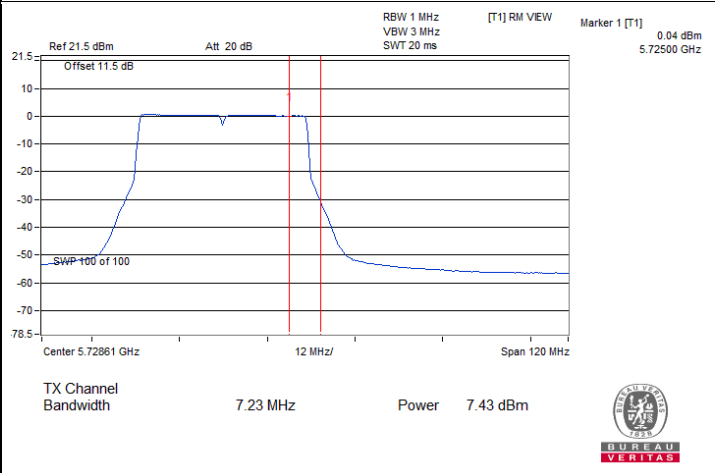


802.11be (EHT40) / Chain 3 : CH 142 (U-NII-3)


### Spectrum Plot for channel straddling

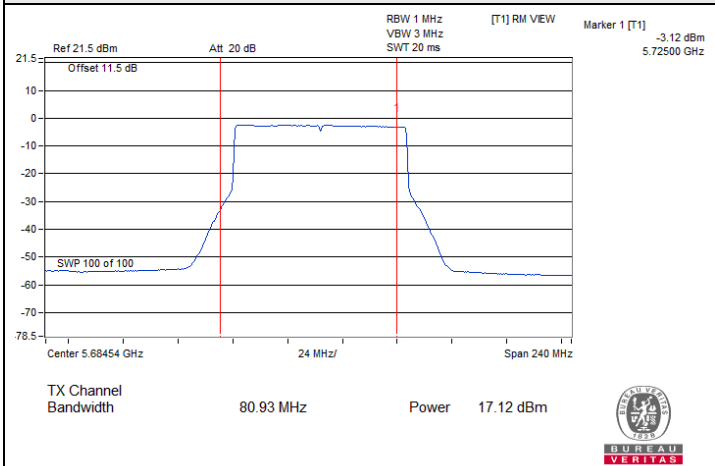


802.11be (EHT80) / Chain 0 : CH 138 (U-NII-2C)

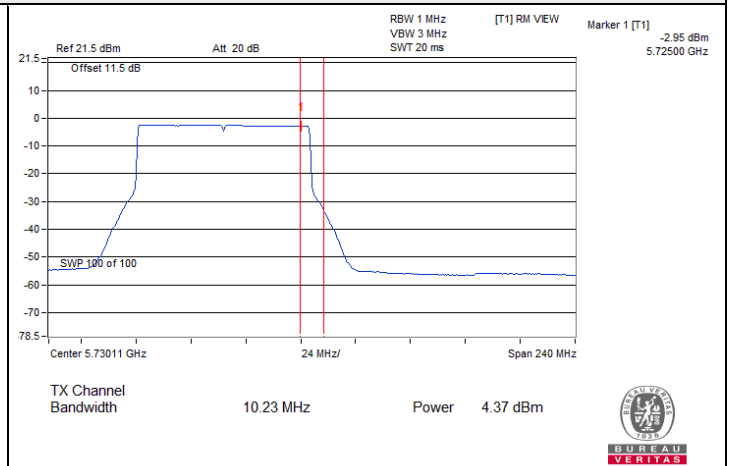


802.11be (EHT80) / Chain 0 : CH 138 (U-NII-3)

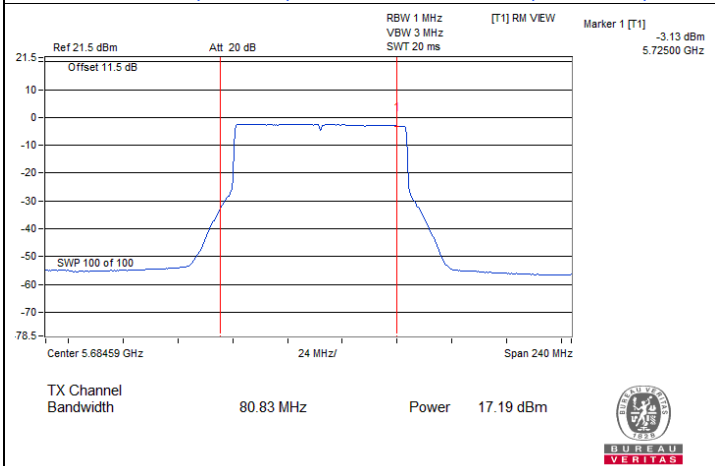


802.11be (EHT80) / Chain 1 : CH 138 (U-NII-2C)

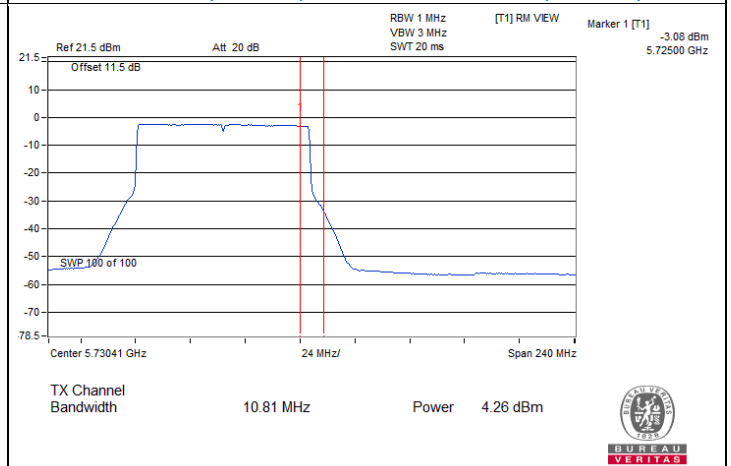

802.11be (EHT80) / Chain 1 : CH 138 (U-NII-3)

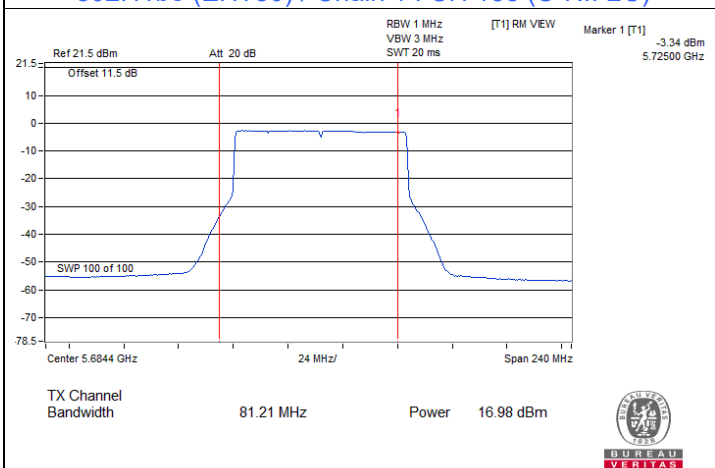

802.11be (EHT80) / Chain 2 : CH 138 (U-NII-2C)

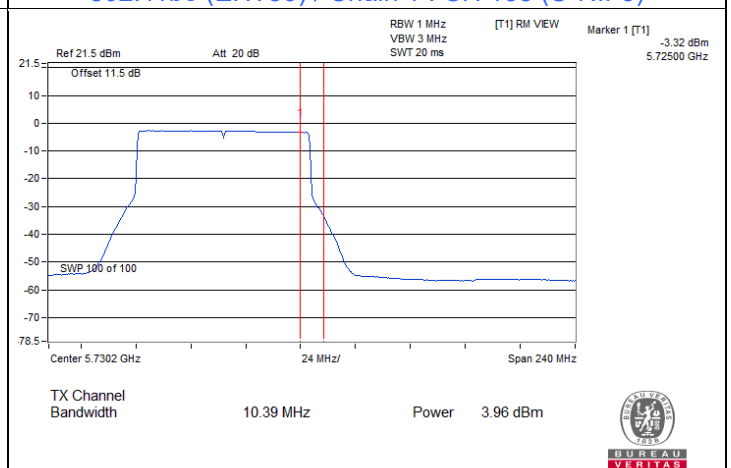


802.11be (EHT80) / Chain 2 : CH 138 (U-NII-3)







### Spectrum Plot for channel straddling

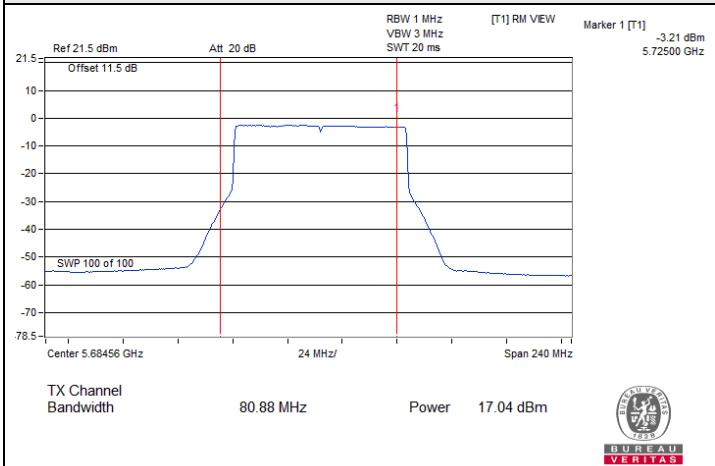


802.11be (EHT80) / Chain 3 : CH 138 (U-NII-2C)

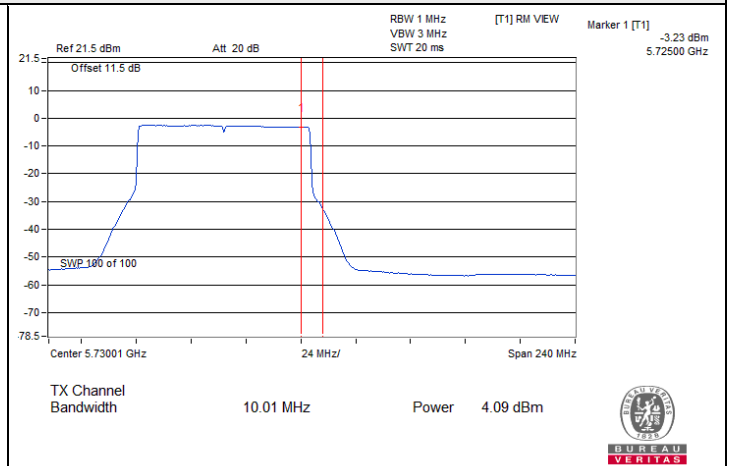


802.11be (EHT80) / Chain 3 : CH 138 (U-NII-3)

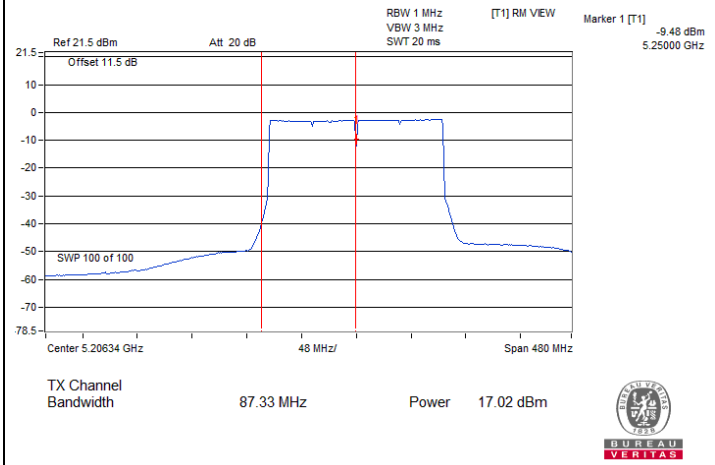


802.11be (EHT160) / Chain 0 : CH 50 (U-NII-1)

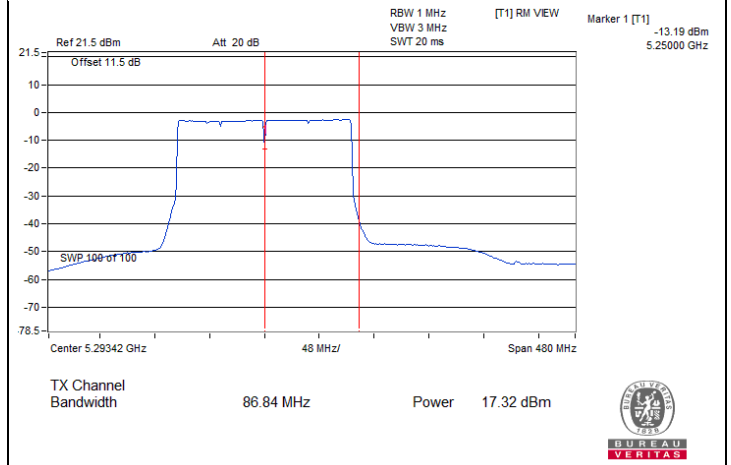

802.11be (EHT160) / Chain 0 : CH 50 (U-NII-2A)

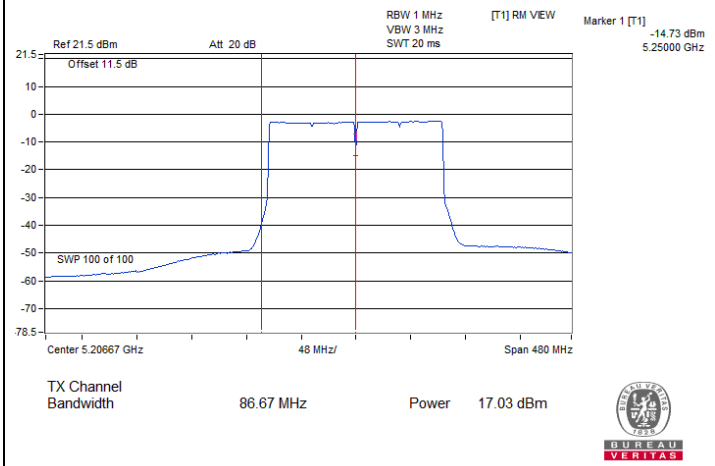


802.11be (EHT160) / Chain 1 : CH 50 (U-NII-1)

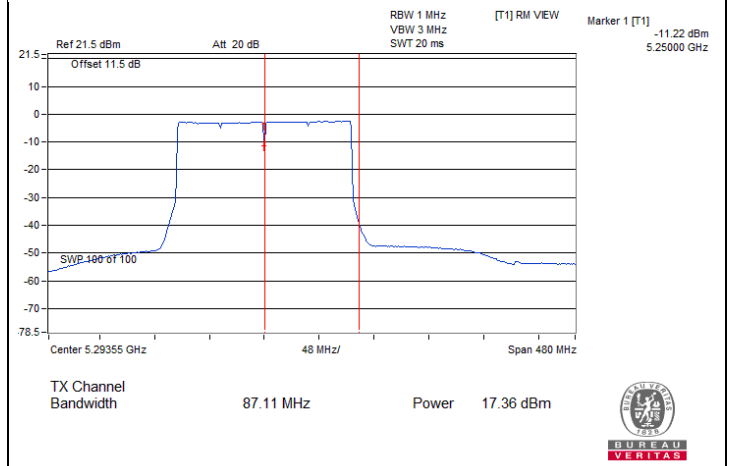


802.11be (EHT160) / Chain 1 : CH 50 (U-NII-2A)




### Spectrum Plot for channel straddling

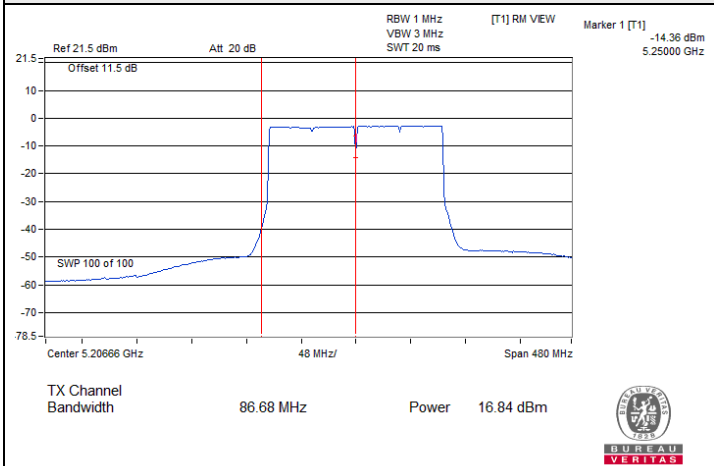


802.11be (EHT160) / Chain 2 : CH 50 (U-NII-1)

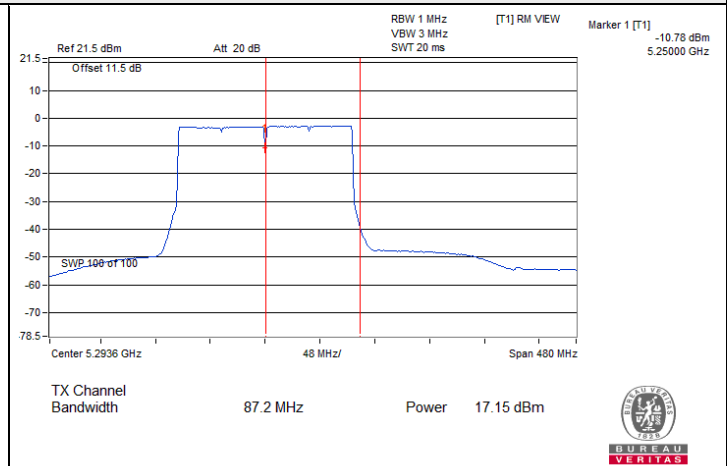

802.11be (EHT160) / Chain 2 : CH 50 (U-NII-2A)

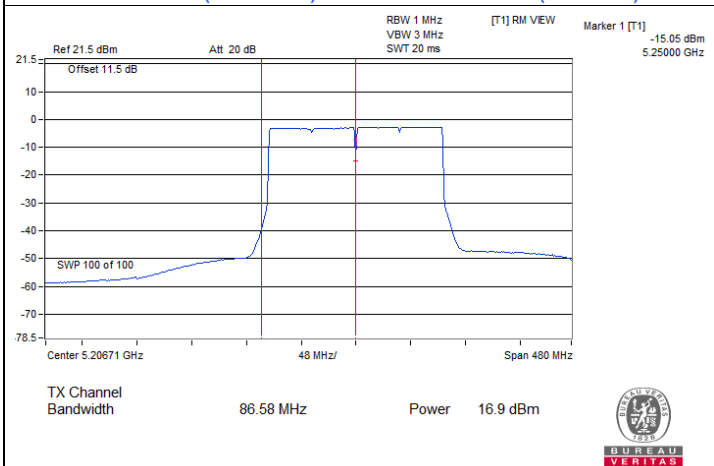

802.11be (EHT160) / Chain 3 : CH 50 (U-NII-1)

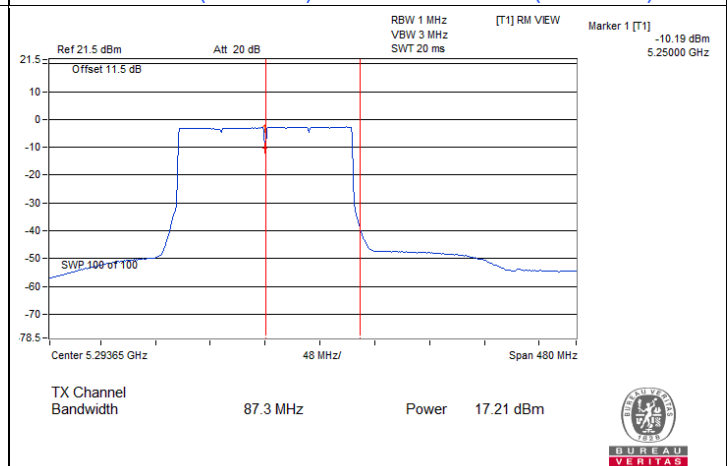

802.11be (EHT160) / Chain 3 : CH 50 (U-NII-2A)

### 7.3 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chris Lin
--------------	----------------	---------------------------	--------------	------------	-----------

#### 802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
36	5180	9.48	9.52	9.53	9.58	15.55	16.53	Pass
40	5200	10.22	10.35	10.28	10.56	16.38	16.53	Pass
48	5240	10.21	10.35	10.24	10.46	16.34	16.53	Pass
52	5260	3.99	4.03	3.92	4.18	10.05	10.84	Pass
60	5300	3.87	3.96	3.89	4.21	10.01	10.84	Pass
64	5320	4.09	3.90	3.92	4.34	10.09	10.84	Pass
100	5500	3.89	4.10	3.92	4.14	10.03	10.87	Pass
116	5580	4.34	4.26	4.02	4.31	10.25	10.87	Pass
140	5700	4.19	3.95	4.16	4.08	10.12	10.87	Pass
144 (U-NII-2C)	5720	4.01	4.07	4.20	4.36	10.18	10.87	Pass

#### Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 6.47 dBi > 6dBi, so the power density limit shall be reduced to  $17-(6.47-6) = 16.53$  dBm/MHz.
- For U-NII-2A, the directional gain is 6.16 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.16-6) = 10.84$  dBm/MHz.
- For U-NII-2C, the directional gain is 6.13 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.13-6) = 10.87$  dBm/MHz.

**802.11be (EHT20)**

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
36	5180	9.44	9.56	9.55	9.91	15.64	16.53	Pass
40	5200	10.11	10.18	10.38	10.41	16.29	16.53	Pass
48	5240	9.94	10.01	10.08	10.40	16.13	16.53	Pass
52	5260	3.99	4.00	4.04	4.06	10.04	10.84	Pass
60	5300	4.10	3.89	4.09	4.13	10.07	10.84	Pass
64	5320	4.09	3.91	4.07	4.20	10.09	10.84	Pass
100	5500	3.87	4.06	3.90	4.30	10.06	10.87	Pass
116	5580	4.25	4.14	4.14	4.42	10.26	10.87	Pass
140	5700	4.08	4.06	4.17	4.35	10.19	10.87	Pass
144 (U-NII-2C)	5720	3.93	4.05	4.05	4.22	10.08	10.87	Pass

**Notes:**

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 6.47 dBi > 6dBi, so the power density limit shall be reduced to  $17-(6.47-6) = 16.53$  dBm/MHz.
- For U-NII-2A, the directional gain is 6.16 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.16-6) = 10.84$  dBm/MHz.
- For U-NII-2C, the directional gain is 6.13 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.13-6) = 10.87$  dBm/MHz.

### 802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
38	5190	4.24	4.19	4.40	4.36	10.32	16.53	Pass
46	5230	7.03	6.87	7.03	7.17	13.05	16.53	Pass
54	5270	0.98	0.95	0.99	1.15	7.04	10.84	Pass
62	5310	1.10	0.94	0.94	1.26	7.08	10.84	Pass
102	5510	0.95	0.86	1.00	1.10	7.00	10.87	Pass
110	5550	1.12	1.01	0.97	1.05	7.06	10.87	Pass
134	5670	1.01	1.02	1.23	1.20	7.14	10.87	Pass
142 (U-NII-2C)	5710	0.93	0.97	1.15	1.02	7.04	10.87	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 6.47 dBi > 6dBi, so the power density limit shall be reduced to  $17-(6.47-6) = 16.53$  dBm/MHz.
- For U-NII-2A, the directional gain is 6.16 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.16-6) = 10.84$  dBm/MHz.
- For U-NII-2C, the directional gain is 6.13 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.13-6) = 10.87$  dBm/MHz.

### 802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
42	5210	0.93	0.88	0.91	0.94	6.94	16.53	Pass
58	5290	-1.96	-2.18	-1.90	-1.75	4.08	10.84	Pass
106	5530	-1.73	-2.03	-1.88	-1.81	4.16	10.87	Pass
122	5610	-1.73	-2.07	-1.78	-1.77	4.19	10.87	Pass
138 (U-NII-2C)	5690	-1.97	-2.05	-1.88	-1.91	4.07	10.87	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 6.47 dBi > 6dBi, so the power density limit shall be reduced to  $17-(6.47-6) = 16.53$  dBm/MHz.
- For U-NII-2A, the directional gain is 6.16 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.16-6) = 10.84$  dBm/MHz.
- For U-NII-2C, the directional gain is 6.13 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.13-6) = 10.87$  dBm/MHz.






**802.11be (EHT160)**

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
50 (U-NII-1)	5250	-2.87	-3.03	-2.79	-2.57	3.21	16.53	Pass
50 (U-NII-2A)	5250	-2.59	-2.72	-2.48	-2.29	3.50	10.84	Pass
114	5570	-4.66	-4.91	-4.81	-4.45	1.32	10.87	Pass

**Notes:**

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 6.47 dBi > 6dBi, so the power density limit shall be reduced to  $17-(6.47-6) = 16.53$  dBm/MHz.
- For U-NII-2A, the directional gain is 6.16 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.16-6) = 10.84$  dBm/MHz.
- For U-NII-2C, the directional gain is 6.13 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.13-6) = 10.87$  dBm/MHz.

### Spectrum Plot of Maximum Value

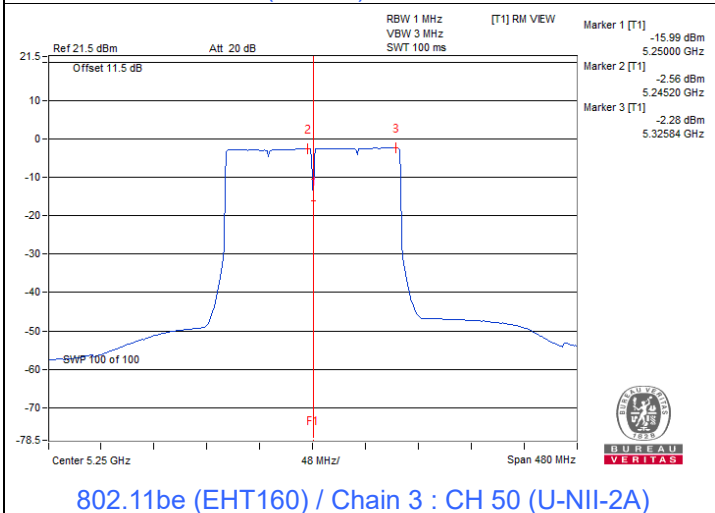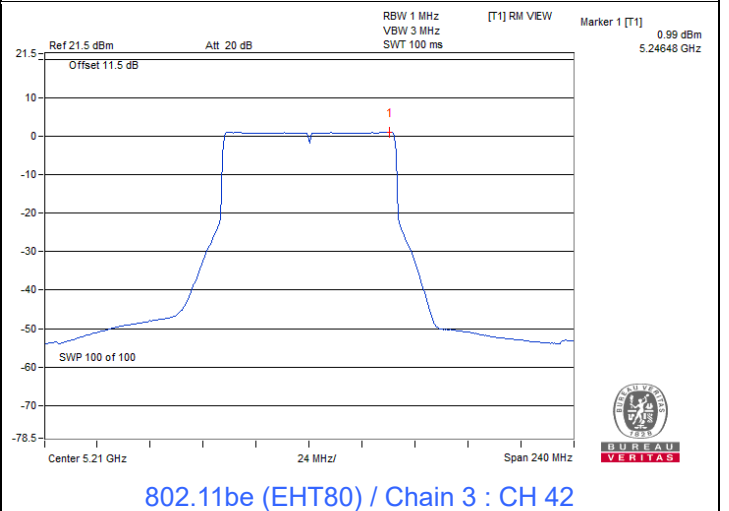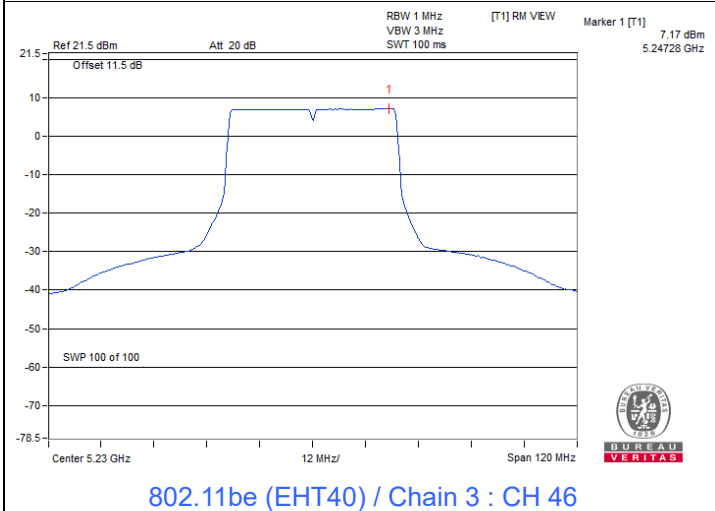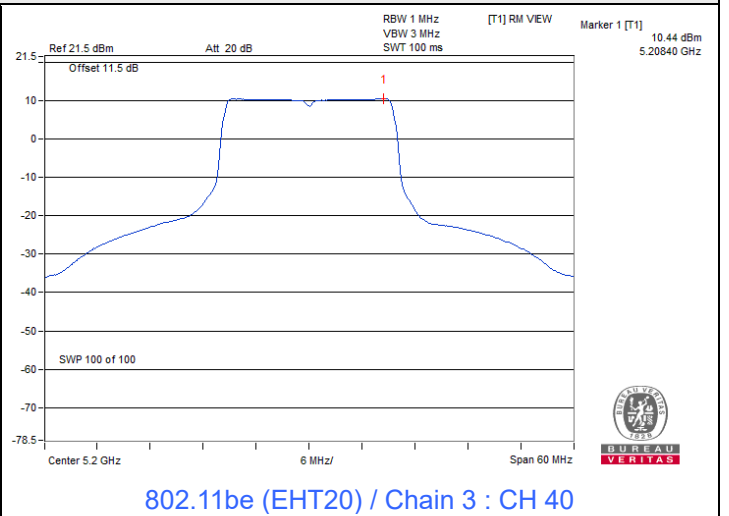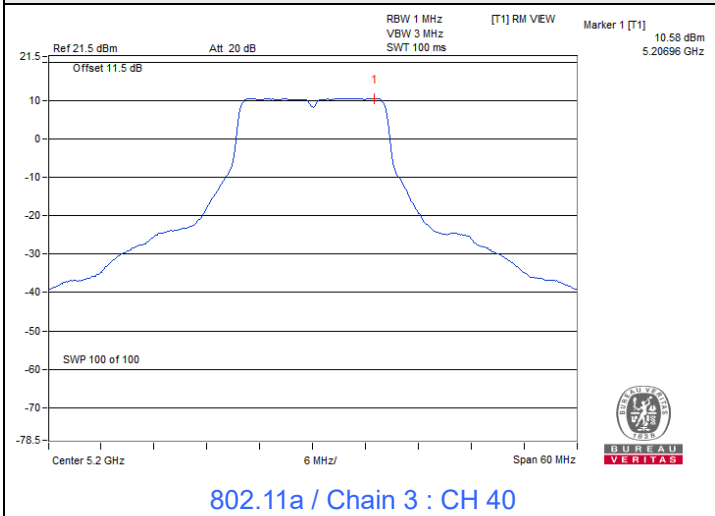

**802.11a**

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
144 (U-NII-3)	5720	-4.40	-3.97	-4.09	-4.07	1.89	4.11	29.93	Pass
149	5745	1.70	2.11	2.09	1.96	7.99	10.21	29.93	Pass
157	5785	1.54	1.73	1.75	1.69	7.7	9.92	29.93	Pass
165	5825	1.25	1.60	1.63	1.61	7.55	9.77	29.93	Pass

**Notes:**

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-3, the directional gain is 6.07 dBi > 6 dBi, so the power density limit shall be reduced to  $30-(6.07-6) = 29.93$  dBm/500kHz.

**802.11be (EHT20)**

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
144 (U-NII-3)	5720	-5.36	-5.28	-5.47	-5.51	0.62	2.84	29.93	Pass
149	5745	0.80	0.82	0.61	0.62	6.73	8.95	29.93	Pass
157	5785	0.41	0.43	0.22	0.22	6.34	8.56	29.93	Pass
165	5825	0.13	0.15	0.00	-0.02	6.09	8.31	29.93	Pass

**Notes:**

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-3, the directional gain is 6.07 dBi > 6 dBi, so the power density limit shall be reduced to  $30-(6.07-6) = 29.93$  dBm/500kHz.

**802.11be (EHT40)**

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
142 (U-NII-3)	5710	-8.72	-8.77	-9.09	-8.97	-2.86	-0.64	29.93	Pass
151	5755	-2.07	-2.10	-2.45	-2.36	3.78	6.00	29.93	Pass
159	5795	-2.34	-2.96	-3.32	-2.75	3.19	5.41	29.93	Pass

**Notes:**

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-3, the directional gain is 6.07 dBi > 6 dBi, so the power density limit shall be reduced to  $30-(6.07-6) = 29.93$  dBm/500kHz.




802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
138 (U-NII-3)	5690	-12.24	-12.26	-12.52	-12.36	-6.32	-4.10	29.93	Pass
155	5775	-6.38	-6.35	-6.72	-6.68	-0.51	1.71	29.93	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-3, the directional gain is 6.07 dBi > 6 dBi, so the power density limit shall be reduced to 30-(6.07-6) = 29.93 dBm/500kHz.

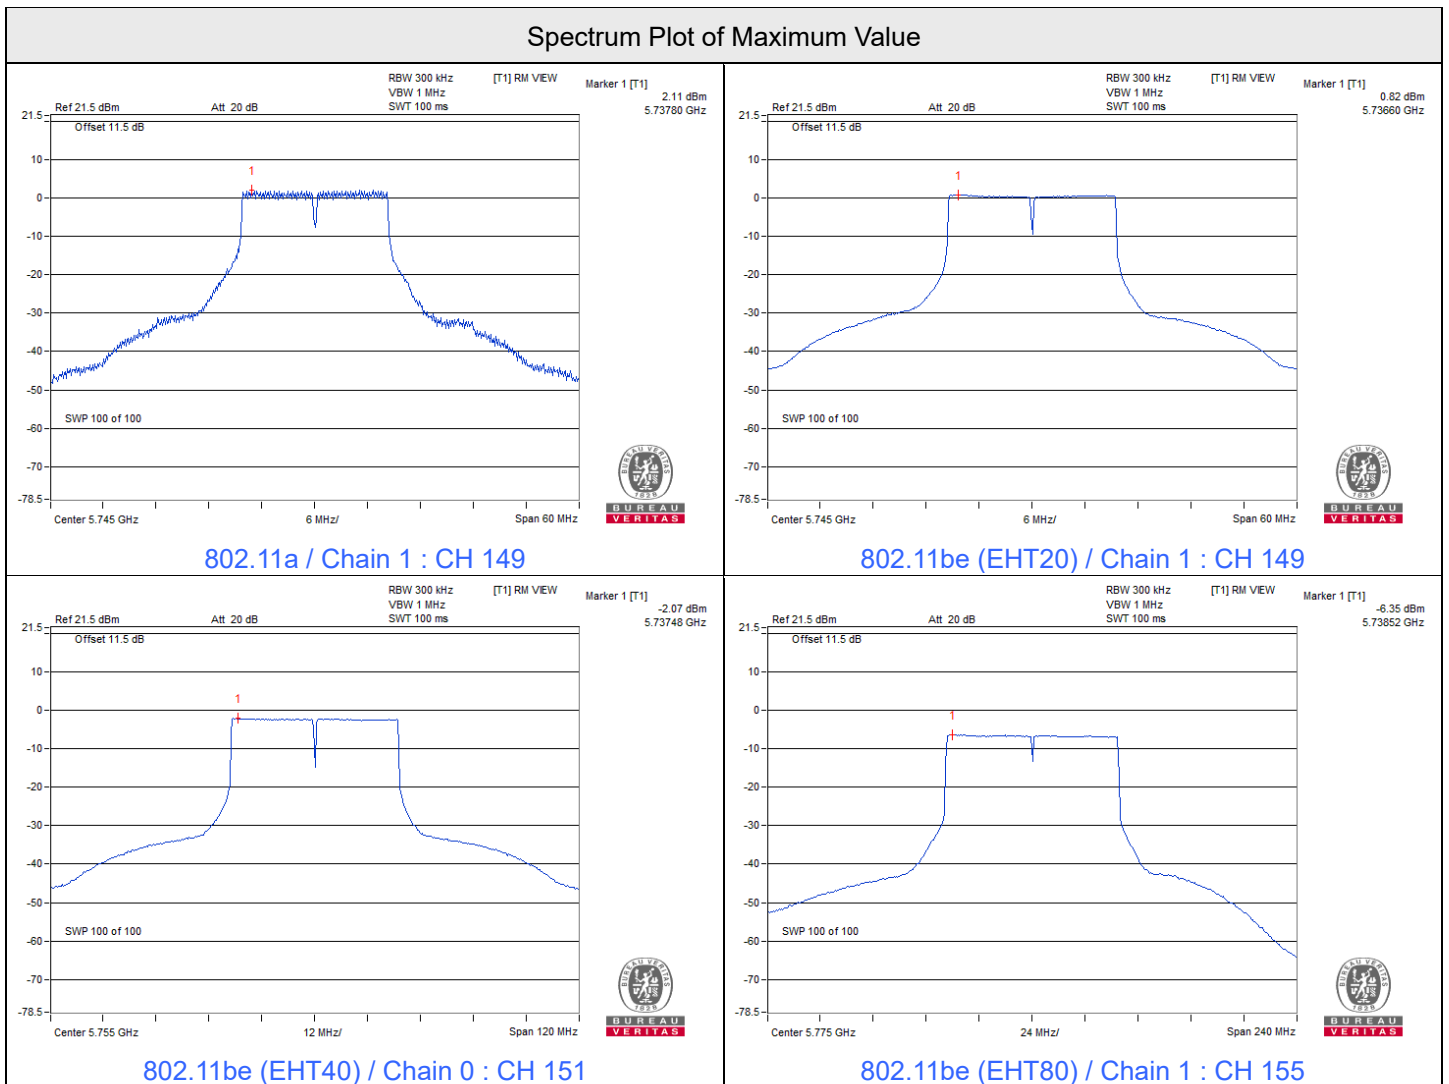

#### 7.4 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chris Lin
--------------	----------------	---------------------------	--------------	------------	-----------

#### 802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
144 (U-NII-3)	5720	3.17	3.18	3.18	3.18	0.5	Pass
149	5745	16.41	16.42	16.41	16.41	0.5	Pass
157	5785	16.40	16.41	16.40	16.37	0.5	Pass
165	5825	16.39	16.40	16.41	16.41	0.5	Pass

#### 802.11be (EHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
144 (U-NII-3)	5720	4.52	4.51	4.50	4.54	0.5	Pass
149	5745	19.03	19.05	19.07	19.05	0.5	Pass
157	5785	19.04	19.08	19.05	19.06	0.5	Pass
165	5825	19.04	19.01	19.06	19.06	0.5	Pass


#### 802.11be (EHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
142 (U-NII-3)	5710	4.07	4.14	4.14	4.13	0.5	Pass
151	5755	38.26	38.32	38.33	38.35	0.5	Pass
159	5795	38.31	38.36	38.32	38.25	0.5	Pass


#### 802.11be (EHT80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
138 (U-NII-3)	5690	4.16	4.21	4.14	4.15	0.5	Pass
155	5775	78.43	78.43	78.41	78.39	0.5	Pass


### Spectrum Plot of Minimum Value

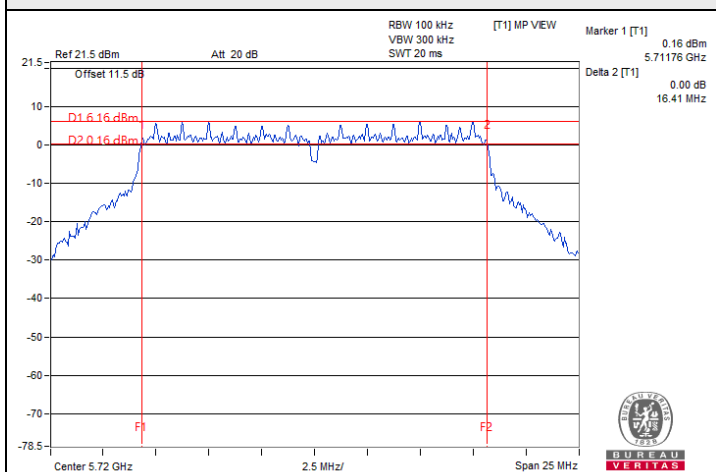


802.11a / Chain 0 : CH 144 (U-NII-3)

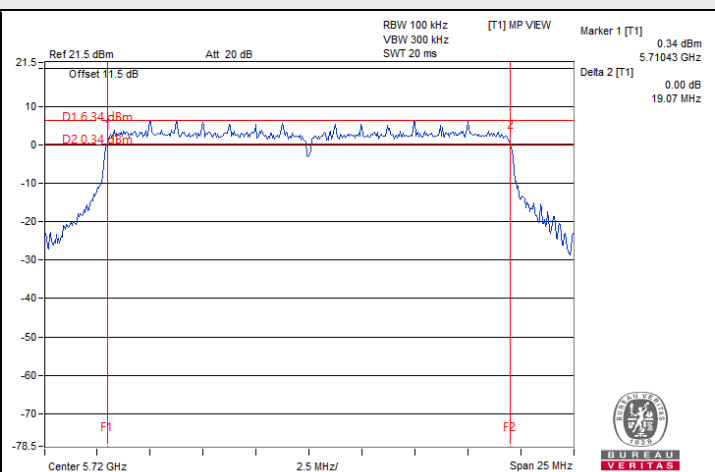

802.11be (EHT20) / Chain 2 : CH 144 (U-NII-3)

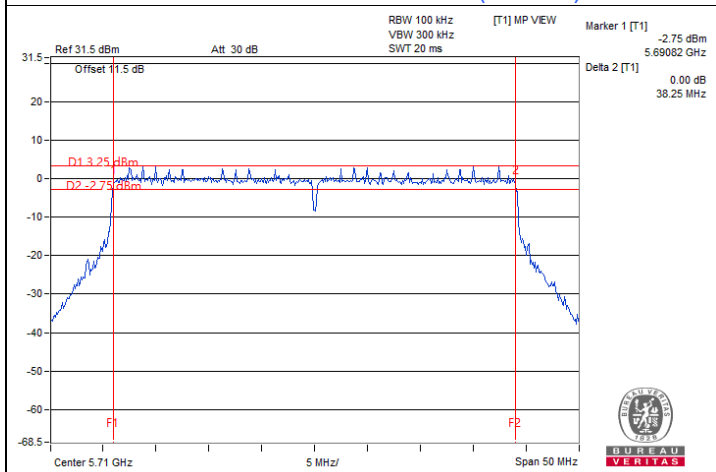

802.11be (EHT40) / Chain 0 : CH 142 (U-NII-3)

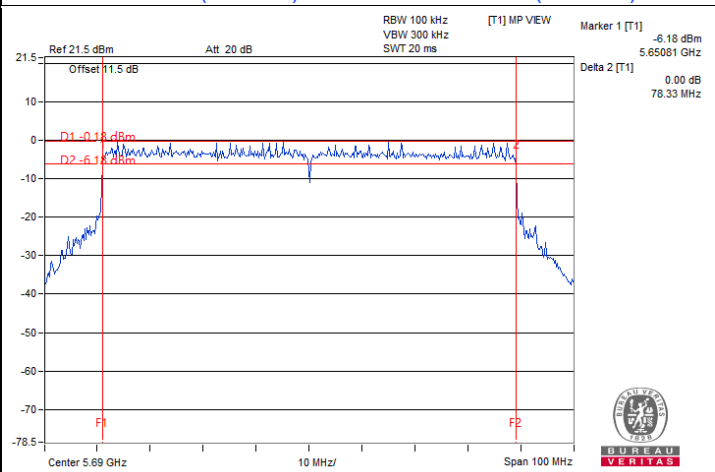

802.11be (EHT80) / Chain 2 : CH 138 (U-NII-3)

Note: For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

## 7.5 Occupied Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chris Lin
--------------	----------------	---------------------------	--------------	------------	-----------

### 802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
36	5180	17.16	17.16	17.16	17.04
40	5200	17.16	17.04	17.16	17.16
48	5240	17.16	17.16	17.04	17.04
52	5260	17.04	17.04	16.92	16.92
60	5300	17.04	17.04	16.92	16.92
64	5320	16.92	17.04	16.92	16.92
100	5500	17.16	17.04	17.04	17.04
116	5580	16.92	17.04	17.04	17.04
140	5700	16.92	16.92	17.04	17.04
144 (U-NII-2C)	5720	13.64	13.64	13.64	13.64
144 (U-NII-3)	5720	3.40	3.40	3.40	3.40
149	5745	17.16	17.28	17.16	17.16
157	5785	17.28	17.16	17.16	17.16
165	5825	17.64	18.00	18.00	18.12

### 802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
36	5180	19.32	19.20	19.20	19.20
40	5200	19.32	19.32	19.32	19.32
48	5240	19.32	19.20	19.20	19.32
52	5260	19.20	19.20	19.20	19.32
60	5300	19.20	19.20	19.20	19.32
64	5320	19.20	19.20	19.20	19.20
100	5500	19.08	19.08	19.20	19.20
116	5580	19.20	19.20	19.20	19.20
140	5700	19.20	19.20	19.32	19.20
144 (U-NII-2C)	5720	14.72	14.72	14.60	14.60
144 (U-NII-3)	5720	4.48	4.48	4.48	4.48
149	5745	19.32	19.32	19.32	19.32
157	5785	19.32	19.20	19.32	19.32
165	5825	19.56	19.56	19.68	19.56

**802.11be (EHT40)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
38	5190	38.64	38.40	38.64	38.40
46	5230	38.64	38.64	38.64	38.64
54	5270	38.64	38.64	38.40	38.40
62	5310	38.40	38.40	38.40	38.40
102	5510	38.64	38.40	38.64	38.64
110	5550	38.64	38.64	38.64	38.64
134	5670	38.40	38.16	38.40	38.40
142 (U-NII-2C)	5710	34.44	34.44	34.20	34.44
142 (U-NII-3)	5710	3.96	3.96	4.20	4.20
151	5755	38.64	38.64	38.64	38.40
159	5795	38.64	38.64	38.64	38.88






**802.11be (EHT80)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
42	5210	78.24	78.24	77.76	78.24
58	5290	77.76	77.76	78.24	77.76
106	5530	78.24	78.24	77.76	78.24
122	5610	77.76	78.24	77.76	78.24
138 (U-NII-2C)	5690	74.36	73.88	73.88	74.36
138 (U-NII-3)	5690	3.88	3.88	3.88	3.88
155	5775	78.24	78.24	78.24	78.24







**802.11be (EHT160)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
50 (U-NII-1)	5250	79.68	79.68	78.72	78.72
50 (U-NII-2A)	5250	78.72	78.72	78.72	78.72
114	5570	158.40	158.40	158.40	157.44

### Spectrum Plot of Maximum Value

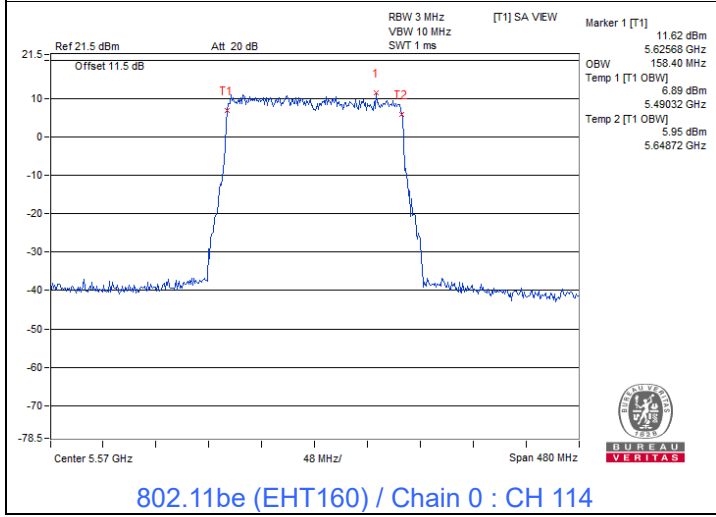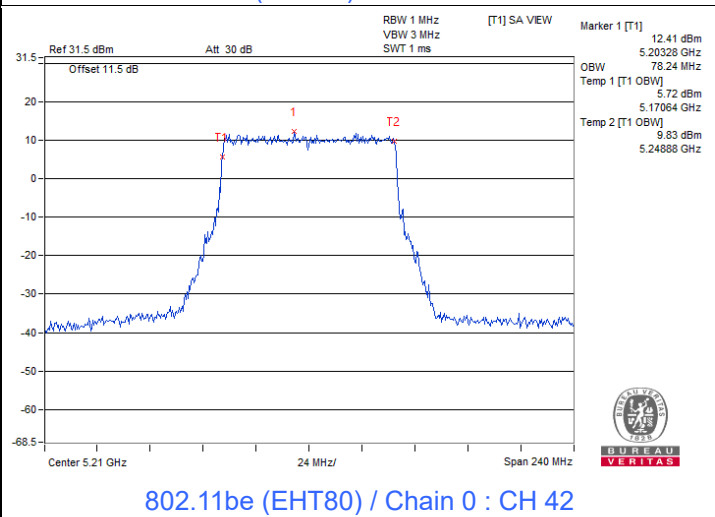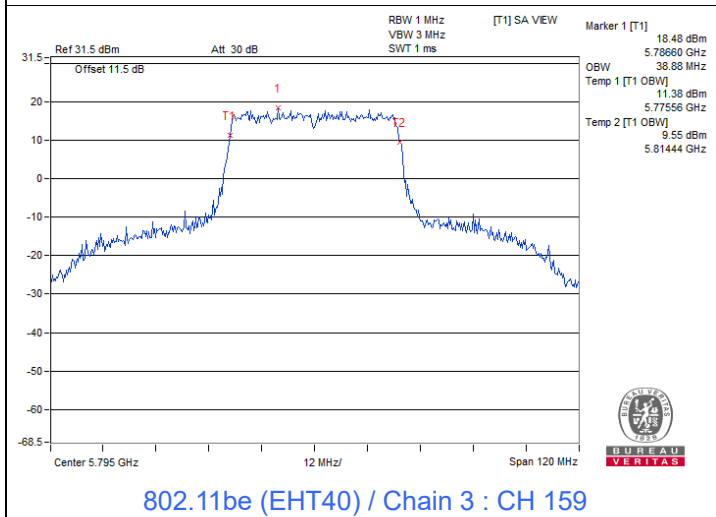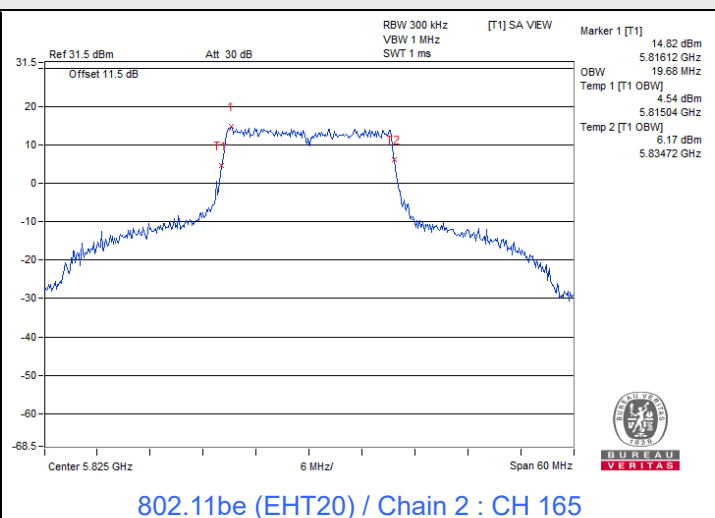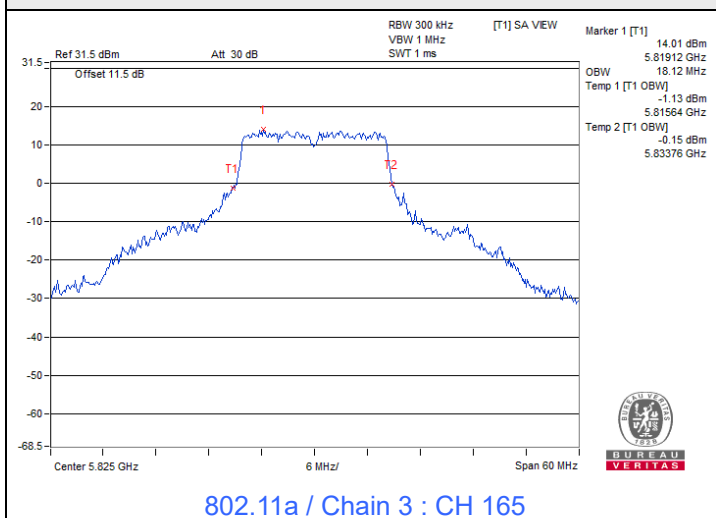


### Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

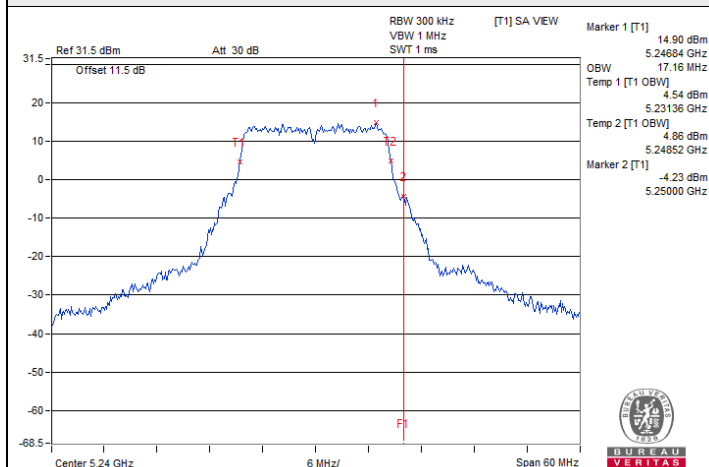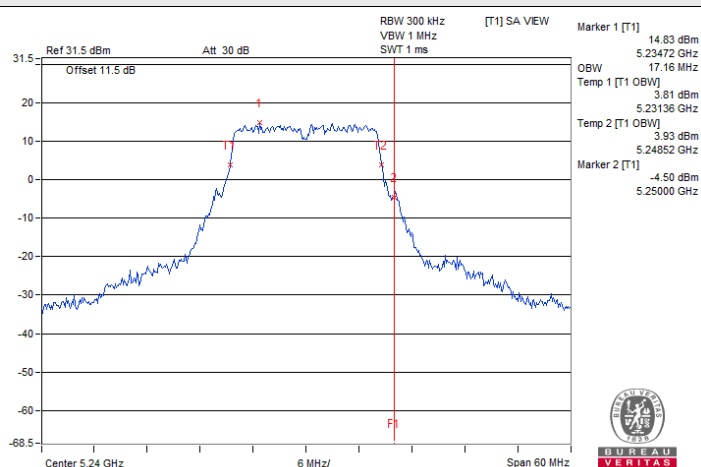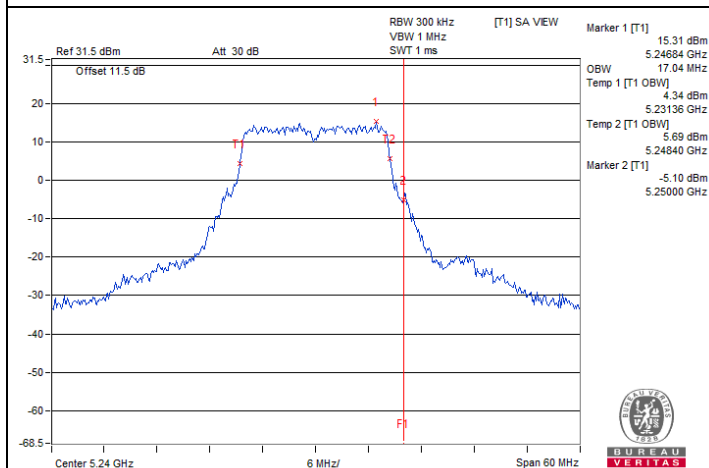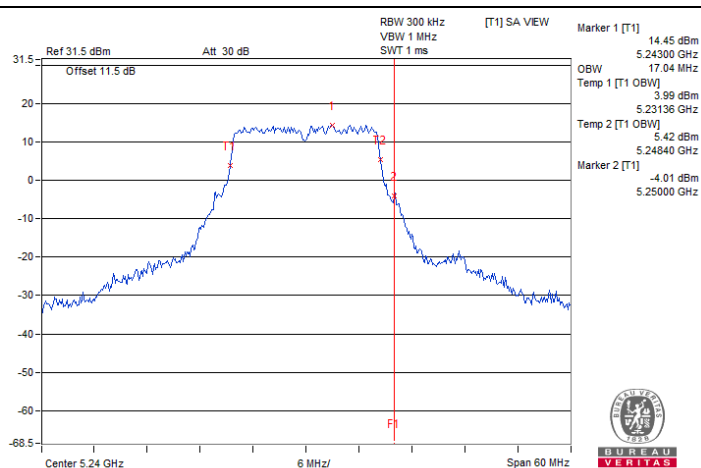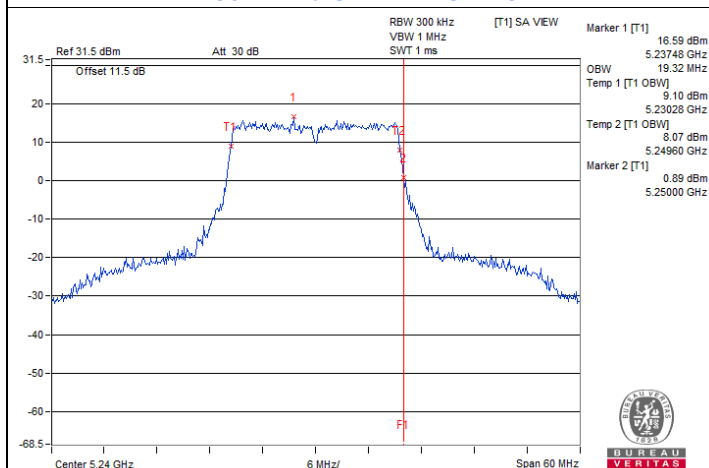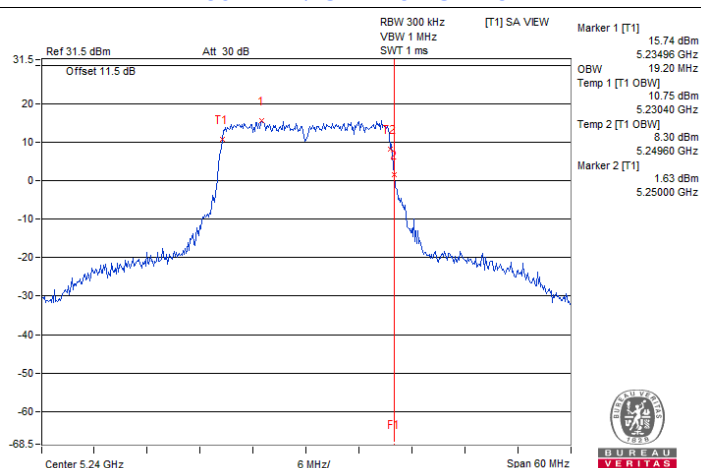
**802.11a / Chain 0 : CH 48****802.11a / Chain 1 : CH 48****802.11a / Chain 2 : CH 48****802.11a / Chain 3 : CH 48****802.11be (EHT20) / Chain 0 : CH 48****802.11be (EHT20) / Chain 1 : CH 48**




### Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

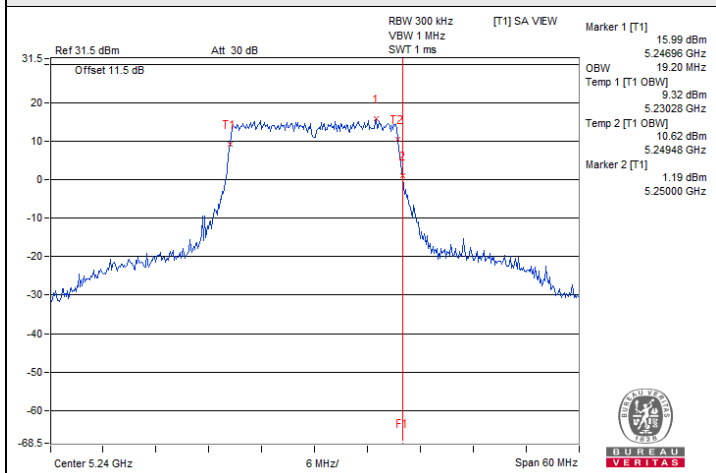


802.11be (EHT20) / Chain 2 : CH 48

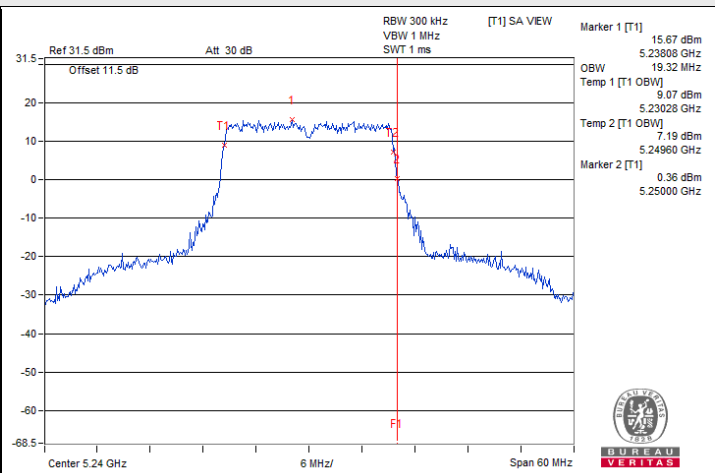


802.11be (EHT20) / Chain 3 : CH 48

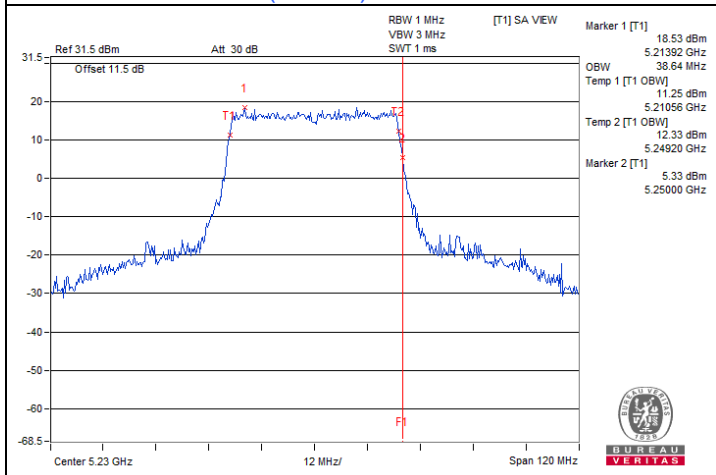


802.11be (EHT40) / Chain 0 : CH 46

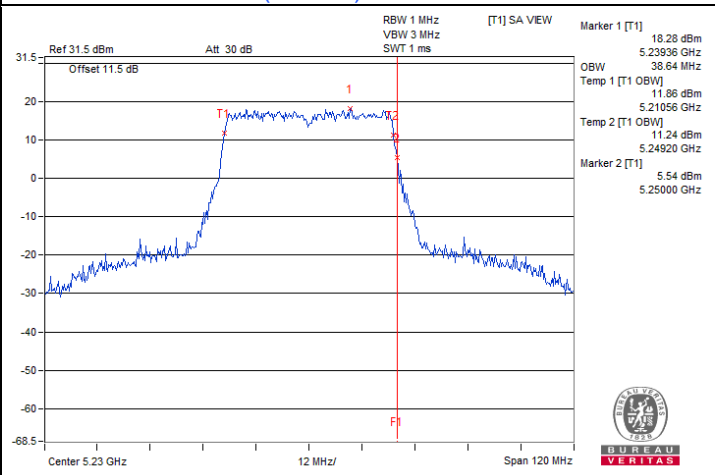

802.11be (EHT40) / Chain 1 : CH 46

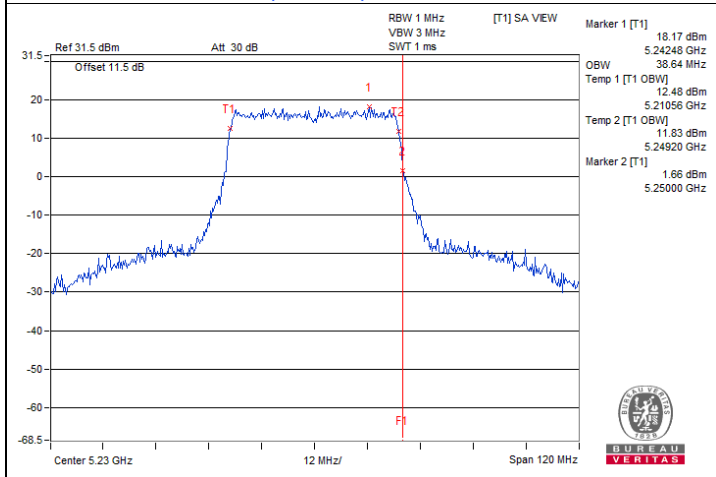


802.11be (EHT40) / Chain 2 : CH 46

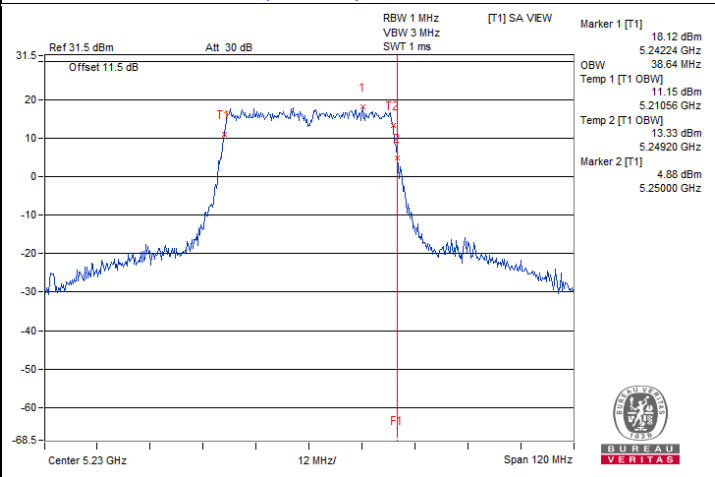


802.11be (EHT40) / Chain 3 : CH 46




### Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

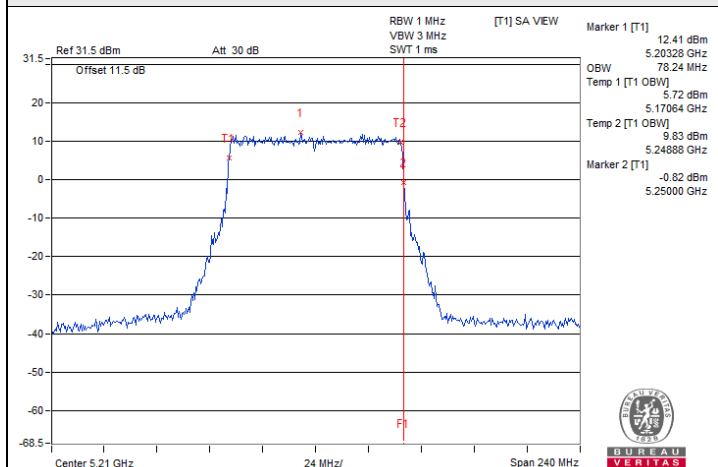


802.11be (EHT80) / Chain 0 : CH 42

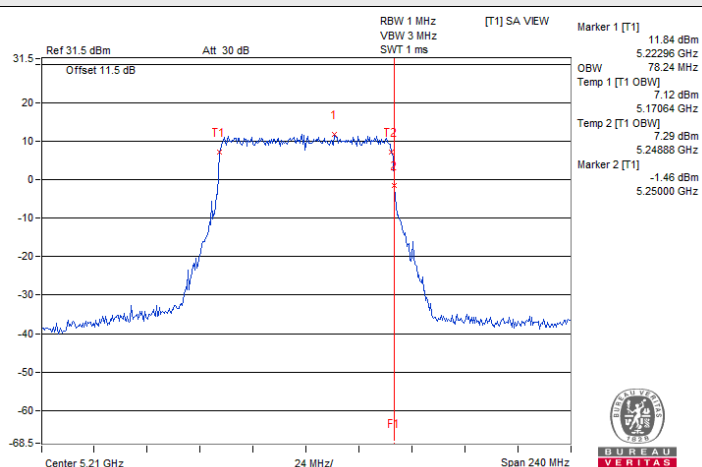

802.11be (EHT80) / Chain 1 : CH 42

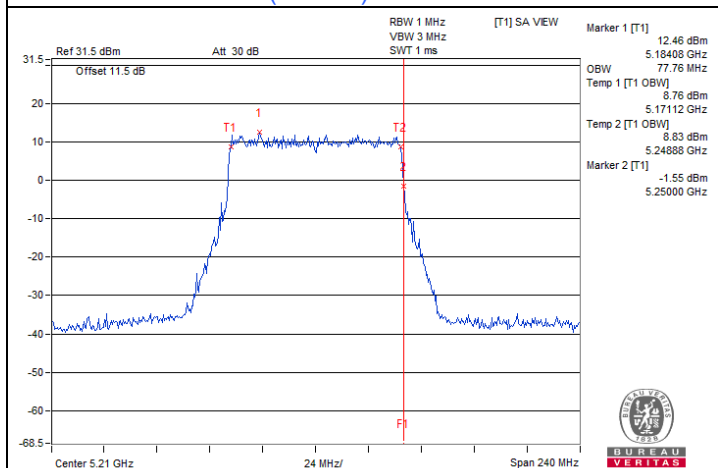


802.11be (EHT80) / Chain 2 : CH 42

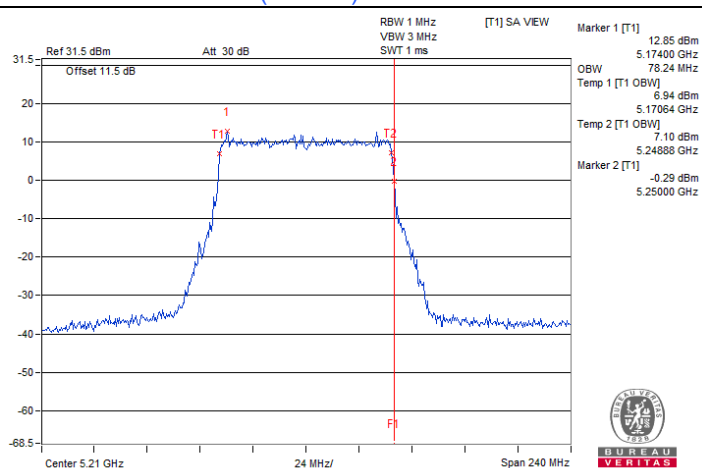


802.11be (EHT80) / Chain 3 : CH 42




### Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

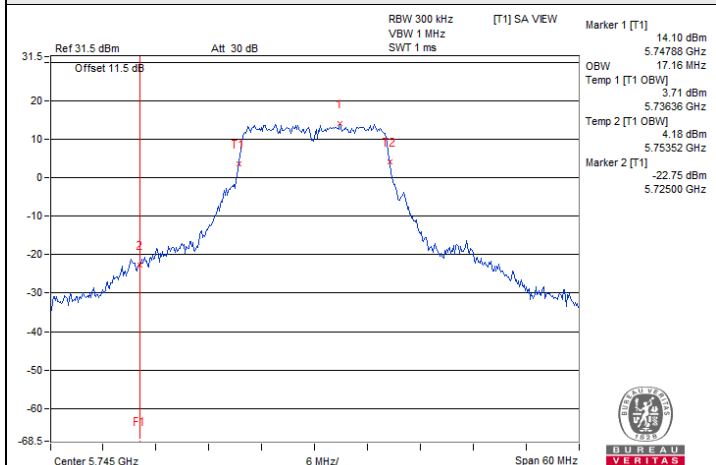


802.11a / Chain 0 : CH 149

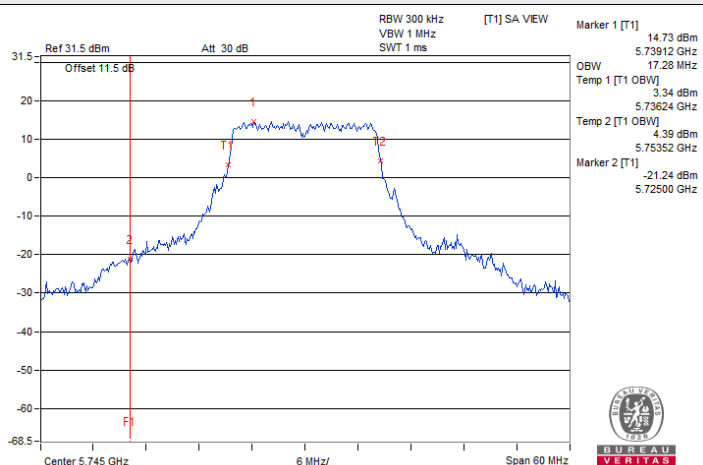


802.11a / Chain 1 : CH 149

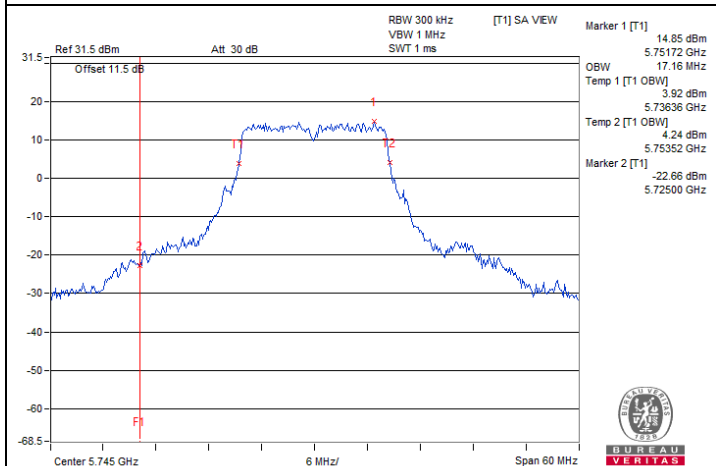


802.11a / Chain 2 : CH 149

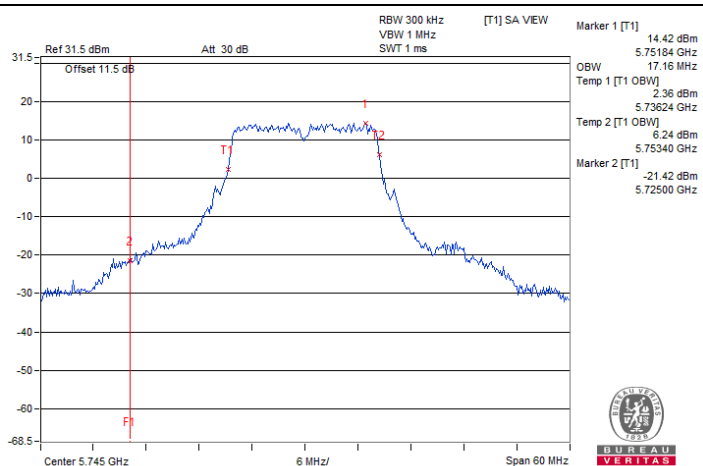

802.11a / Chain 3 : CH 149

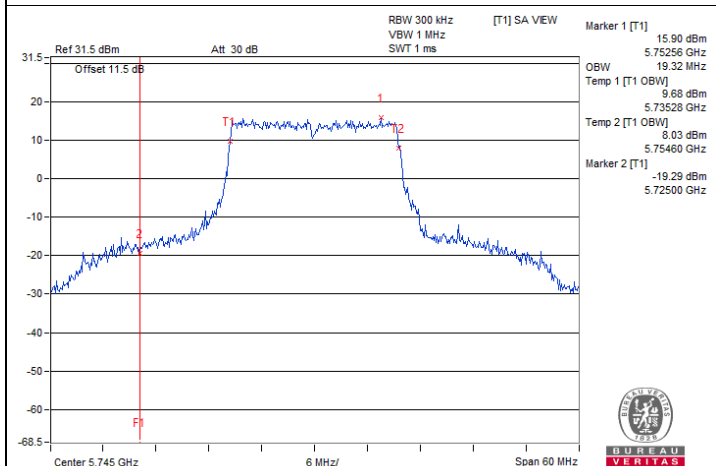


802.11be (EHT20) / Chain 0 : CH 149

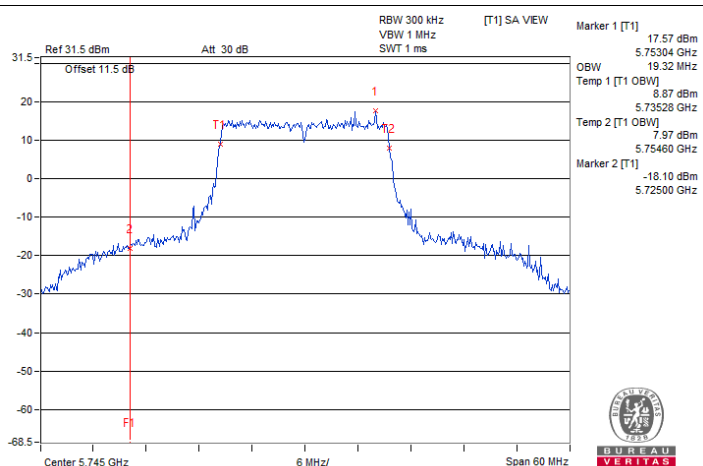


802.11be (EHT20) / Chain 1 : CH 149


**Spectrum Plot for nearby DFS band  
(DFS is required, if 99% OCP straddle into U-NII-2C)**

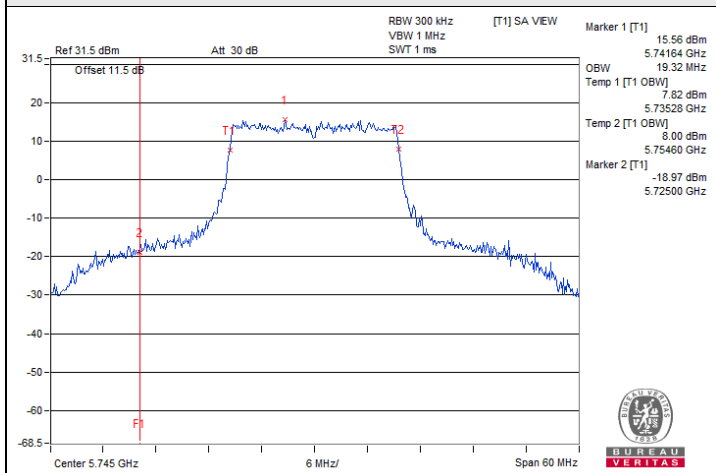


**802.11be (EHT20) / Chain 2 : CH 149**

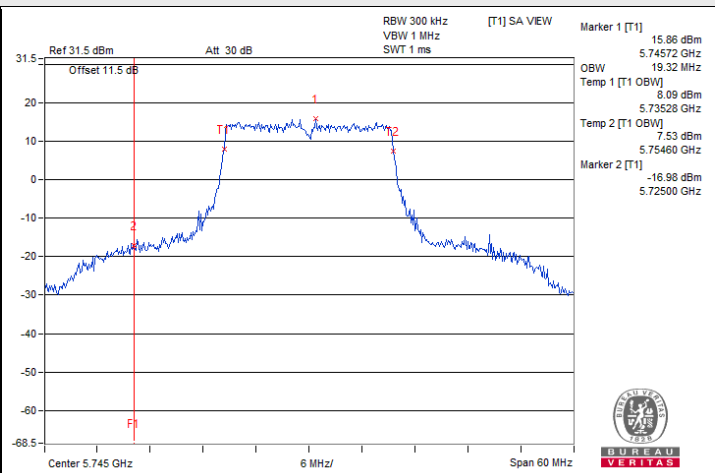


**802.11be (EHT20) / Chain 3 : CH 149**

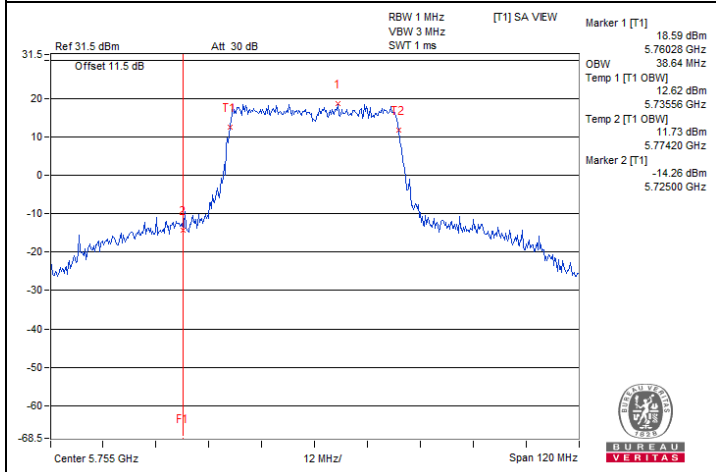


**802.11be (EHT40) / Chain 0 : CH 151**

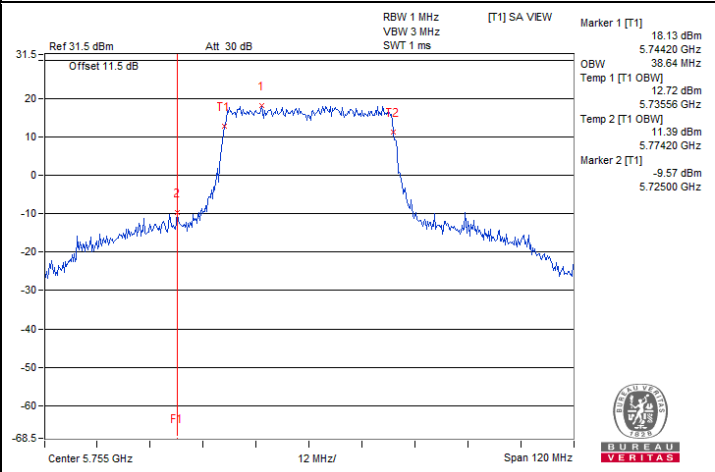

**802.11be (EHT40) / Chain 1 : CH 151**

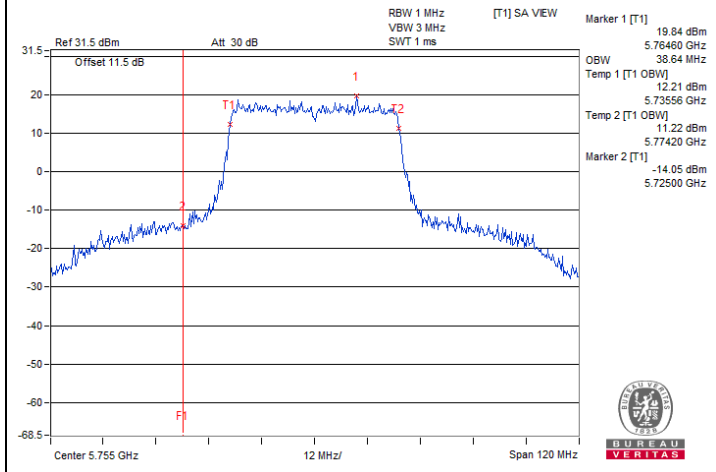


**802.11be (EHT40) / Chain 2 : CH 151**

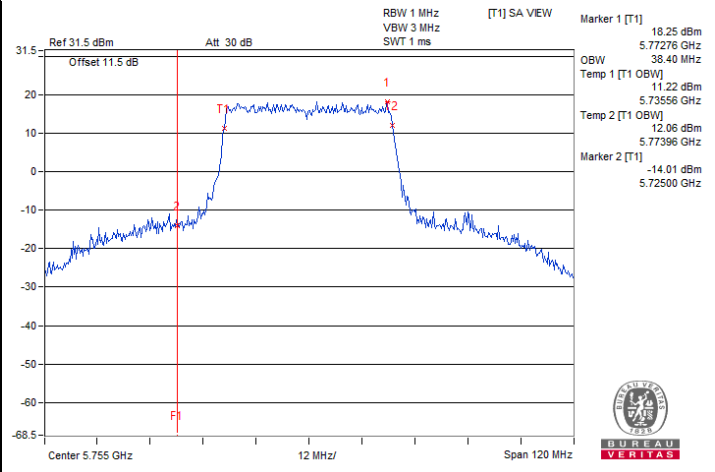


**802.11be (EHT40) / Chain 3 : CH 151**




### Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

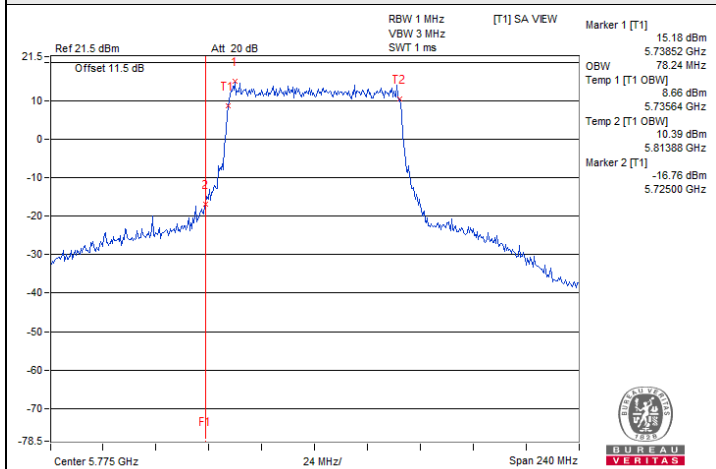


802.11be (EHT80) / Chain 0 : CH 155

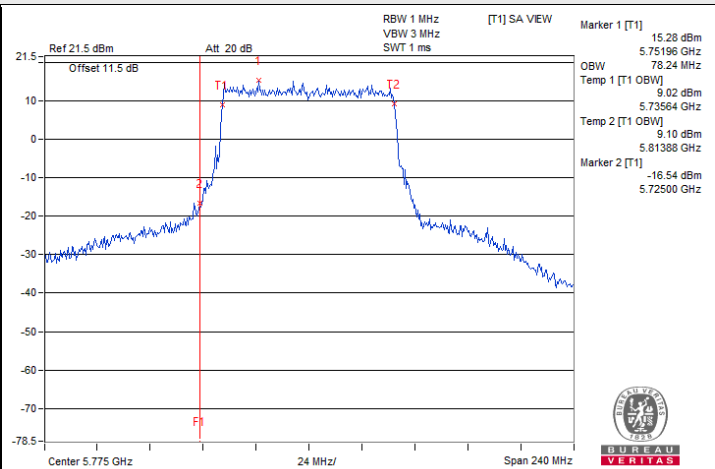

802.11be (EHT80) / Chain 1 : CH 155

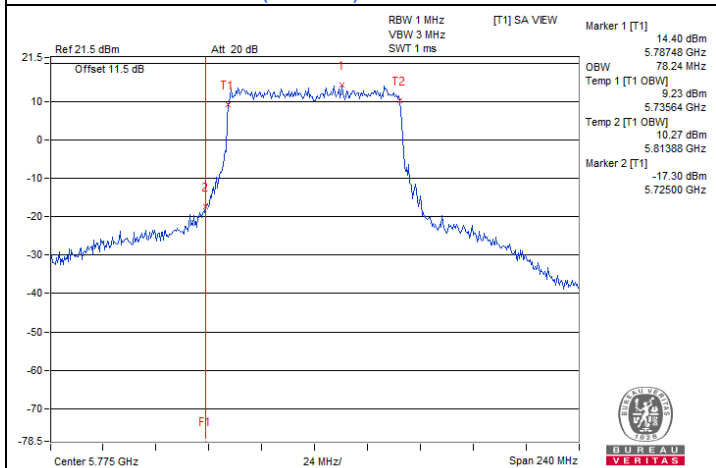

802.11be (EHT80) / Chain 2 : CH 155

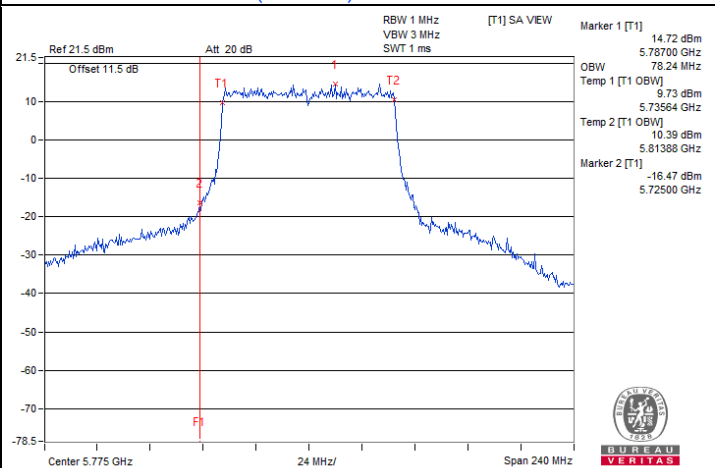

802.11be (EHT80) / Chain 3 : CH 155

## 7.6 Frequency Stability

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chris Lin
--------------	----------------	---------------------------	--------------	------------	-----------

### Frequency Stability Versus Temperature

Operating Frequency: 5180 MHz

Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
40	120	5180.0185	Pass	5180.0195	Pass	5180.019	Pass	5180.0219	Pass
30	120	5179.9906	Pass	5179.9875	Pass	5179.9894	Pass	5179.9899	Pass
20	120	5179.9925	Pass	5179.9882	Pass	5179.9896	Pass	5179.9895	Pass
10	120	5180.0135	Pass	5180.0128	Pass	5180.0159	Pass	5180.0138	Pass
0	120	5180.0159	Pass	5180.0137	Pass	5180.014	Pass	5180.0143	Pass

### Frequency Stability Versus Voltage

Operating Frequency: 5180 MHz

Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	138	5179.992	Pass	5179.9883	Pass	5179.9876	Pass	5179.9912	Pass
	120	5179.9925	Pass	5179.9882	Pass	5179.9896	Pass	5179.9895	Pass
	102	5179.996	Pass	5179.9928	Pass	5179.9957	Pass	5179.9961	Pass

## 7.7 AC Power Conducted Emissions


### Test Mode A

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.66	41.74	23.48	51.40	33.14	66.00	56.00	-14.60	-22.86
2	0.18200	9.69	36.45	21.25	46.14	30.94	64.39	54.39	-18.25	-23.45
3	0.19728	9.70	33.45	18.88	43.15	28.58	63.72	53.72	-20.57	-25.14
4	0.21400	9.71	30.13	15.45	39.84	25.16	63.05	53.05	-23.21	-27.89
5	0.23400	9.72	27.70	16.60	37.42	26.32	62.31	52.31	-24.89	-25.99
6	0.44177	9.79	25.73	13.20	35.52	22.99	57.03	47.03	-21.51	-24.04

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

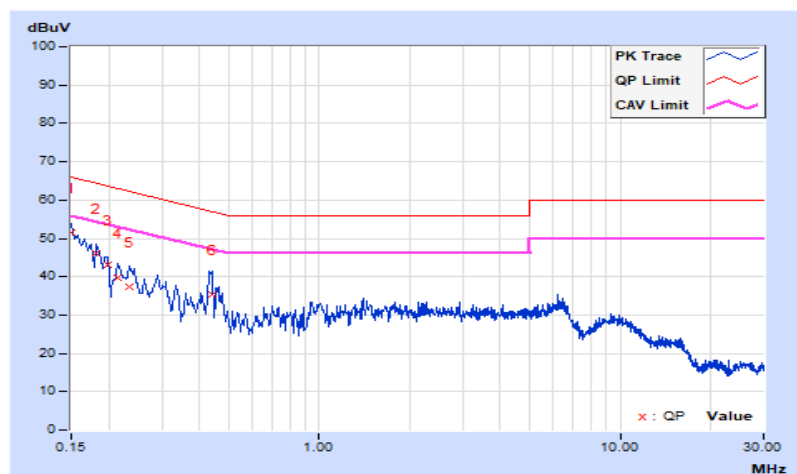


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.66	41.40	23.94	51.06	33.60	65.78	55.78	-14.72	-22.18
2	0.16600	9.67	40.47	24.32	50.14	33.99	65.16	55.16	-15.02	-21.17
3	0.17800	9.68	36.11	22.62	45.79	32.30	64.58	54.58	-18.79	-22.28
4	0.30389	9.74	27.60	20.76	37.34	30.50	60.14	50.14	-22.80	-19.64
5	0.40179	9.77	31.83	22.81	41.60	32.58	57.82	47.82	-16.22	-15.24
6	0.44600	9.78	33.50	21.64	43.28	31.42	56.95	46.95	-13.67	-15.53

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

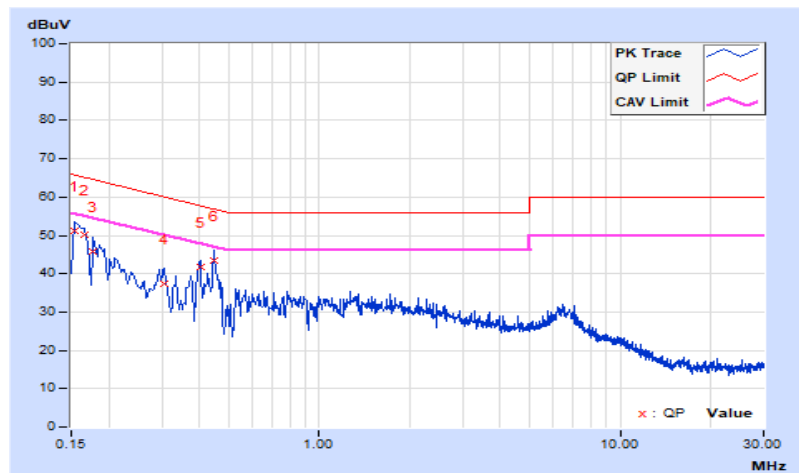


### Test Mode B

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.62	32.57	24.25	42.19	33.87	66.00	56.00	-23.81	-22.13
2	0.16600	9.63	29.15	17.14	38.78	26.77	65.16	55.16	-26.38	-28.39
3	0.18600	9.63	26.86	17.56	36.49	27.19	64.21	54.21	-27.72	-27.02
4	0.21400	9.64	22.96	13.44	32.60	23.08	63.05	53.05	-30.45	-29.97
5	0.27400	9.65	19.34	11.90	28.99	21.55	61.00	51.00	-32.01	-29.45
6	0.51742	9.67	30.19	24.33	39.86	34.00	56.00	46.00	-16.14	-12.00

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

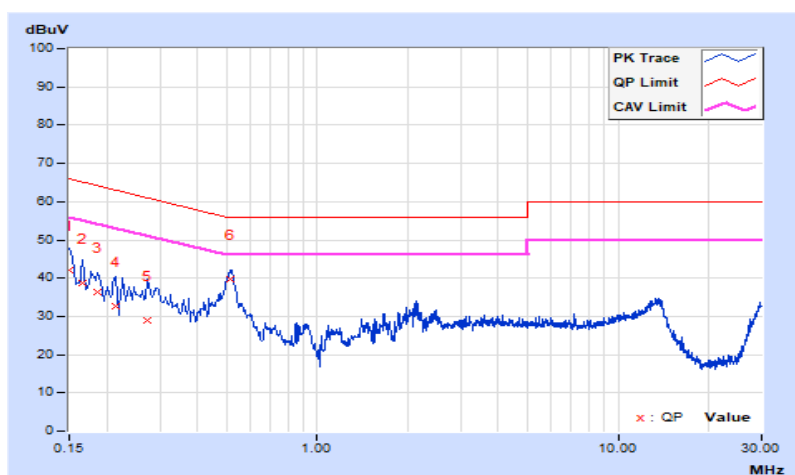




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.62	35.87	25.50	45.49	35.12	65.78	55.78	-20.29	-20.66
2	0.16600	9.63	32.36	20.18	41.99	29.81	65.16	55.16	-23.17	-25.35
3	0.19000	9.64	29.03	19.55	38.67	29.19	64.04	54.04	-25.37	-24.85
4	0.21400	9.64	26.61	19.40	36.25	29.04	63.05	53.05	-26.80	-24.01
5	0.24164	9.65	24.48	17.02	34.13	26.67	62.04	52.04	-27.91	-25.37
<b>6</b>	<b>0.51200</b>	<b>9.68</b>	<b>31.70</b>	<b>24.90</b>	<b>41.38</b>	<b>34.58</b>	<b>56.00</b>	<b>46.00</b>	<b>-14.62</b>	<b>-11.42</b>

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

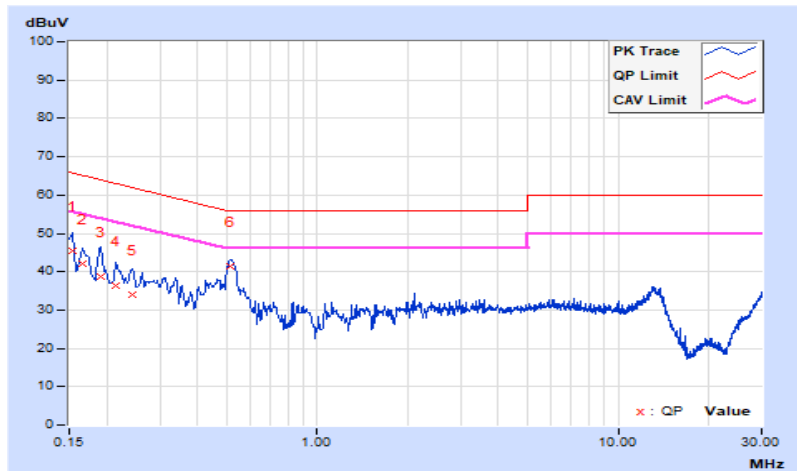

## 7.8 Unwanted Emissions below 1 GHz

### Test Mode A


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.61	25.6 QP	40.0	-14.4	1.50 H	13	34.6	-9.0
2	76.56	28.0 QP	40.0	-12.0	1.50 H	176	40.1	-12.1
3	110.51	30.1 QP	43.5	-13.4	1.50 H	107	41.9	-11.8
4	216.24	35.1 QP	46.0	-10.9	1.00 H	273	46.4	-11.3
5	270.56	32.7 QP	46.0	-13.3	1.00 H	247	40.9	-8.2
6	719.67	39.0 QP	46.0	-7.0	1.50 H	7	38.3	0.7

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

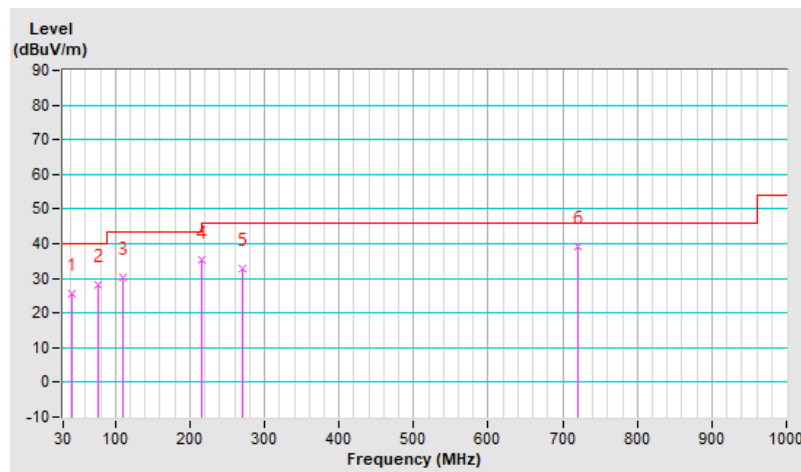


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	33.2 QP	40.0	-6.8	1.00 V	166	43.5	-10.3
2	97.90	27.5 QP	43.5	-16.0	1.50 V	110	41.0	-13.5
3	208.48	30.0 QP	43.5	-13.5	1.00 V	155	41.4	-11.4
4	320.03	31.9 QP	46.0	-14.1	1.50 V	206	38.8	-6.9
5	427.70	33.1 QP	46.0	-12.9	1.00 V	352	38.3	-5.2
6	782.72	36.6 QP	46.0	-9.4	1.00 V	221	34.1	2.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

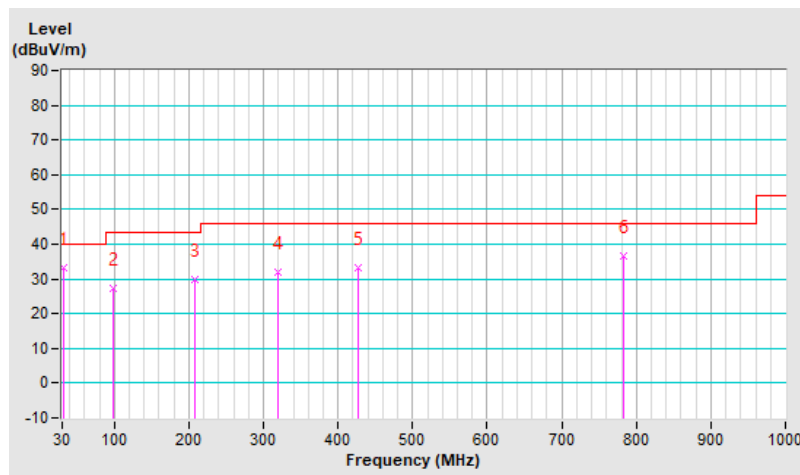


**Test Mode B**

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	114.39	32.7 QP	43.5	-10.8	1.49 H	205	44.1	-11.4
2	138.64	35.1 QP	43.5	-8.4	1.00 H	284	44.3	-9.2
3	168.71	34.9 QP	43.5	-8.6	1.49 H	238	43.8	-8.9
<b>4</b>	<b>226.91</b>	<b>41.2 QP</b>	<b>46.0</b>	<b>-4.8</b>	<b>1.00 H</b>	<b>258</b>	<b>52.4</b>	<b>-11.2</b>
5	371.44	32.8 QP	46.0	-13.2	1.00 H	151	38.9	-6.1
6	450.01	35.2 QP	46.0	-10.8	1.49 H	27	39.9	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

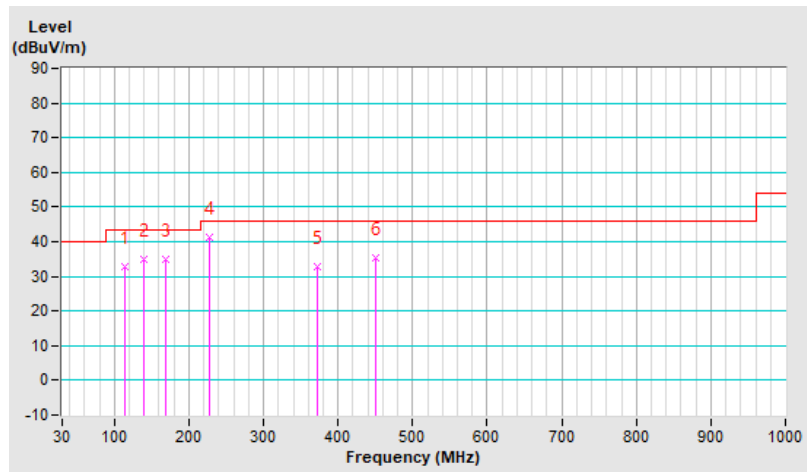


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	34.9 QP	40.0	-5.1	1.01 V	222	45.1	-10.2
2	113.42	34.7 QP	43.5	-8.8	1.01 V	318	46.2	-11.5
3	135.73	36.6 QP	43.5	-6.9	1.01 V	205	46.1	-9.5
4	219.15	35.8 QP	46.0	-10.2	1.49 V	228	47.1	-11.3
5	371.44	34.3 QP	46.0	-11.7	1.49 V	113	40.4	-6.1
6	780.78	35.4 QP	46.0	-10.6	1.01 V	62	33.0	2.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

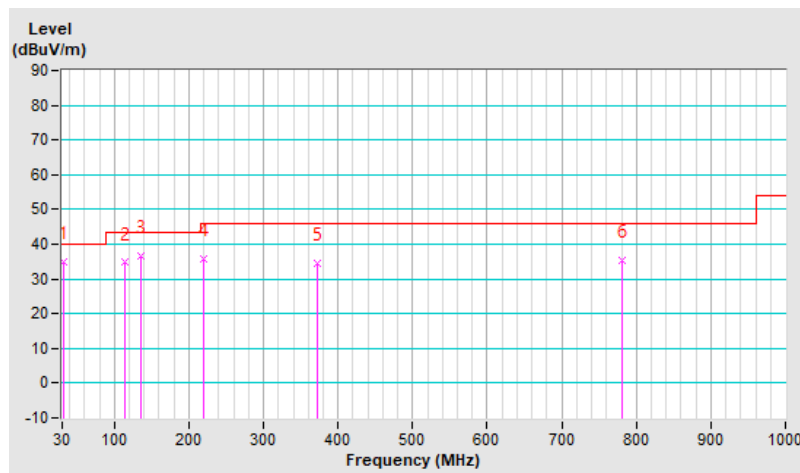

## 7.9 Unwanted Emissions above 1 GHz

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.6 PK	74.0	-4.4	1.37 H	18	56.9	12.7
2	5150.00	53.6 AV	54.0	-0.4	1.37 H	18	40.9	12.7
3	*5180.00	123.2 PK			1.37 H	18	80.1	43.1
4	*5180.00	113.8 AV			1.37 H	18	70.7	43.1
5	#10360.00	61.2 PK	68.2	-7.0	1.95 H	225	39.5	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.1 PK	74.0	-4.9	1.50 V	339	56.4	12.7
2	5150.00	52.3 AV	54.0	-1.7	1.50 V	339	39.6	12.7
3	*5180.00	122.8 PK			1.50 V	339	79.7	43.1
4	*5180.00	113.5 AV			1.50 V	339	70.4	43.1
5	#10360.00	60.9 PK	68.2	-7.3	2.25 V	315	39.2	21.7

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	124.2 PK			1.45 H	18	81.2	43.0
2	*5200.00	114.7 AV			1.45 H	18	71.7	43.0
3	#10400.00	61.7 PK	68.2	-6.5	1.92 H	229	39.7	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	123.8 PK			1.55 V	344	80.8	43.0
2	*5200.00	114.2 AV			1.55 V	344	71.2	43.0
3	#10400.00	61.4 PK	68.2	-6.8	2.14 V	313	39.4	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	1.37 H	20	47.4	12.7
2	5150.00	48.0 AV	54.0	-6.0	1.37 H	20	35.3	12.7
3	*5240.00	124.2 PK			1.37 H	20	81.2	43.0
4	*5240.00	114.8 AV			1.37 H	20	71.8	43.0
5	#10480.00	61.7 PK	68.2	-6.5	1.89 H	228	39.8	21.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.8 PK	74.0	-14.2	1.53 V	343	47.1	12.7
2	5150.00	47.7 AV	54.0	-6.3	1.53 V	343	35.0	12.7
3	*5240.00	123.8 PK			1.53 V	343	80.8	43.0
4	*5240.00	114.4 AV			1.53 V	343	71.4	43.0
5	#10480.00	61.5 PK	68.2	-6.7	2.31 V	316	39.6	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.9 PK	74.0	-13.1	1.36 H	21	48.2	12.7
2	5150.00	48.1 AV	54.0	-5.9	1.36 H	21	35.4	12.7
3	*5260.00	119.2 PK			1.36 H	21	76.2	43.0
4	*5260.00	109.8 AV			1.36 H	21	66.8	43.0
5	#10520.00	61.5 PK	68.2	-6.7	1.91 H	217	39.6	21.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.8 PK	74.0	-13.2	1.55 V	344	48.1	12.7
2	5150.00	47.9 AV	54.0	-6.1	1.55 V	344	35.2	12.7
3	*5260.00	117.7 PK			1.55 V	344	74.7	43.0
4	*5260.00	108.6 AV			1.55 V	344	65.6	43.0
5	#10520.00	61.3 PK	68.2	-6.9	2.31 V	332	39.4	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.3 PK			1.40 H	20	75.2	43.1
2	*5300.00	109.2 AV			1.40 H	20	66.1	43.1
3	10600.00	61.6 PK	74.0	-12.4	1.88 H	210	39.6	22.0
4	10600.00	48.0 AV	54.0	-6.0	1.88 H	210	26.0	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.1 PK			1.51 V	343	75.0	43.1
2	*5300.00	108.9 AV			1.51 V	343	65.8	43.1
3	10600.00	61.3 PK	74.0	-12.7	2.21 V	308	39.3	22.0
4	10600.00	47.8 AV	54.0	-6.2	2.21 V	308	25.8	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.5 PK			1.34 H	20	75.3	43.2
2	*5320.00	108.8 AV			1.34 H	20	65.6	43.2
3	5350.00	60.1 PK	74.0	-13.9	1.34 H	20	47.2	12.9
4	5350.00	48.4 AV	54.0	-5.6	1.34 H	20	35.5	12.9
5	10640.00	61.7 PK	74.0	-12.3	1.91 H	213	39.4	22.3
6	10640.00	48.2 AV	54.0	-5.8	1.91 H	213	25.9	22.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.1 PK			1.51 V	346	74.9	43.2
2	*5320.00	108.3 AV			1.51 V	346	65.1	43.2
3	5350.00	59.9 PK	74.0	-14.1	1.51 V	346	47.0	12.9
4	5350.00	48.1 AV	54.0	-5.9	1.51 V	346	35.2	12.9
5	10640.00	61.5 PK	74.0	-12.5	2.29 V	317	39.2	22.3
6	10640.00	48.0 AV	54.0	-6.0	2.29 V	317	25.7	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.7 PK	74.0	-14.3	1.45 H	347	46.7	13.0
2	5460.00	47.2 AV	54.0	-6.8	1.45 H	347	34.2	13.0
3	#5470.00	61.5 PK	68.2	-6.7	1.45 H	347	48.5	13.0
4	*5500.00	117.6 PK			1.45 H	347	74.1	43.5
5	*5500.00	107.9 AV			1.45 H	347	64.4	43.5
6	11000.00	62.7 PK	74.0	-11.3	1.92 H	230	39.9	22.8
7	11000.00	49.2 AV	54.0	-4.8	1.92 H	230	26.4	22.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.3 PK	74.0	-14.7	1.61 V	344	46.3	13.0
2	5460.00	46.9 AV	54.0	-7.1	1.61 V	344	33.9	13.0
3	#5470.00	61.0 PK	68.2	-7.2	1.61 V	344	48.0	13.0
4	*5500.00	116.9 PK			1.61 V	344	73.4	43.5
5	*5500.00	107.4 AV			1.61 V	344	63.9	43.5
6	11000.00	62.4 PK	74.0	-11.6	2.22 V	325	39.6	22.8
7	11000.00	48.9 AV	54.0	-5.1	2.22 V	325	26.1	22.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	118.6 PK			1.49 H	349	75.0	43.6
2	*5580.00	109.1 AV			1.49 H	349	65.5	43.6
3	11160.00	62.0 PK	74.0	-12.0	1.87 H	226	39.7	22.3
4	11160.00	48.9 AV	54.0	-5.1	1.87 H	226	26.6	22.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	117.9 PK			1.62 V	328	74.3	43.6
2	*5580.00	108.6 AV			1.62 V	328	65.0	43.6
3	11160.00	61.8 PK	74.0	-12.2	2.25 V	321	39.5	22.3
4	11160.00	48.7 AV	54.0	-5.3	2.25 V	321	26.4	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	117.5 PK			1.49 H	349	73.3	44.2
2	*5700.00	107.9 AV			1.49 H	349	63.7	44.2
3	#5725.00	62.0 PK	68.2	-6.2	1.49 H	349	48.3	13.7
4	11400.00	63.2 PK	74.0	-10.8	1.79 H	224	39.8	23.4
5	11400.00	49.9 AV	54.0	-4.1	1.79 H	224	26.5	23.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	116.9 PK			1.60 V	1	72.7	44.2
2	*5700.00	107.5 AV			1.60 V	1	63.3	44.2
3	#5725.00	61.7 PK	68.2	-6.5	1.60 V	1	48.0	13.7
4	11400.00	62.9 PK	74.0	-11.1	2.15 V	315	39.5	23.4
5	11400.00	49.6 AV	54.0	-4.4	2.15 V	315	26.2	23.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	60.8 PK	68.2	-7.4	1.48 H	11	47.8	13.0
2	*5720.00	116.9 PK			1.48 H	11	72.5	44.4
3	*5720.00	107.5 AV			1.48 H	11	63.1	44.4
4	#5850.00	61.6 PK	68.2	-6.6	1.48 H	11	47.6	14.0
5	11440.00	63.0 PK	74.0	-11.0	1.86 H	239	39.7	23.3
6	11440.00	50.1 AV	54.0	-3.9	1.86 H	239	26.8	23.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	60.5 PK	68.2	-7.7	1.65 V	346	47.5	13.0
2	*5720.00	116.6 PK			1.65 V	346	72.2	44.4
3	*5720.00	107.3 AV			1.65 V	346	62.9	44.4
4	#5850.00	61.4 PK	68.2	-6.8	1.65 V	346	47.4	14.0
5	11440.00	62.6 PK	74.0	-11.4	2.21 V	315	39.3	23.3
6	11440.00	49.8 AV	54.0	-4.2	2.21 V	315	26.5	23.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5622.40	60.5 PK	68.2	-7.7	1.25 H	25	47.4	13.1
2	*5745.00	122.5 PK			1.25 H	25	77.9	44.6
3	*5745.00	113.3 AV			1.25 H	25	68.7	44.6
4	#5949.20	61.2 PK	68.2	-7.0	1.25 H	25	47.0	14.2
5	11490.00	63.1 PK	74.0	-10.9	1.92 H	232	39.9	23.2
6	11490.00	50.0 AV	54.0	-4.0	1.92 H	232	26.8	23.2

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.40	60.7 PK	68.2	-7.5	1.42 V	14	47.5	13.2
2	*5745.00	122.3 PK			1.42 V	14	77.7	44.6
3	*5745.00	113.0 AV			1.42 V	14	68.4	44.6
4	#5942.00	61.5 PK	68.2	-6.7	1.42 V	14	47.3	14.2
5	11490.00	62.7 PK	74.0	-11.3	2.25 V	316	39.5	23.2
6	11490.00	49.7 AV	54.0	-4.3	2.25 V	316	26.5	23.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5608.40	60.0 PK	68.2	-8.2	1.19 H	26	47.0	13.0
2	*5785.00	122.3 PK			1.19 H	26	77.5	44.8
3	*5785.00	112.9 AV			1.19 H	26	68.1	44.8
4	#5955.20	61.6 PK	68.2	-6.6	1.19 H	26	47.4	14.2
5	11570.00	62.8 PK	74.0	-11.2	1.92 H	235	39.8	23.0
6	11570.00	49.7 AV	54.0	-4.3	1.92 H	235	26.7	23.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.80	60.9 PK	68.2	-7.3	1.49 V	17	47.6	13.3
2	*5785.00	121.9 PK			1.49 V	17	77.1	44.8
3	*5785.00	112.5 AV			1.49 V	17	67.7	44.8
4	#5978.00	62.4 PK	68.2	-5.8	1.49 V	17	48.1	14.3
5	11570.00	62.5 PK	74.0	-11.5	2.25 V	311	39.5	23.0
6	11570.00	49.5 AV	54.0	-4.5	2.25 V	311	26.5	23.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.80	59.9 PK	68.2	-8.3	1.19 H	25	46.6	13.3
2	*5825.00	122.4 PK			1.19 H	25	77.7	44.7
3	*5825.00	113.0 AV			1.19 H	25	68.3	44.7
4	#5939.20	60.8 PK	68.2	-7.4	1.19 H	25	46.6	14.2
5	11650.00	62.2 PK	74.0	-11.8	1.89 H	233	39.6	22.6
6	11650.00	49.2 AV	54.0	-4.8	1.89 H	233	26.6	22.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.80	61.0 PK	68.2	-7.2	1.52 V	17	47.8	13.2
2	*5825.00	121.6 PK			1.52 V	17	76.9	44.7
3	*5825.00	112.4 AV			1.52 V	17	67.7	44.7
4	#5934.00	62.4 PK	68.2	-5.8	1.52 V	17	48.2	14.2
5	11650.00	61.9 PK	74.0	-12.1	2.16 V	318	39.3	22.6
6	11650.00	48.7 AV	54.0	-5.3	2.16 V	318	26.1	22.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.7 PK	74.0	-4.3	1.35 H	18	57.0	12.7
2	5150.00	53.6 AV	54.0	-0.4	1.35 H	18	40.9	12.7
3	*5180.00	124.8 PK			1.35 H	18	81.7	43.1
4	*5180.00	112.9 AV			1.35 H	18	69.8	43.1
5	#10360.00	61.2 PK	68.2	-7.0	1.92 H	229	39.5	21.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5142.00	69.2 PK	74.0	-4.8	1.49 V	341	56.5	12.7
2	5142.00	52.8 AV	54.0	-1.2	1.49 V	341	40.1	12.7
3	*5180.00	124.5 PK			1.49 V	341	81.4	43.1
4	*5180.00	112.6 AV			1.49 V	341	69.5	43.1
5	#10360.00	60.9 PK	68.2	-7.3	2.14 V	330	39.2	21.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	126.1 PK			1.32 H	19	83.1	43.0
2	*5200.00	114.0 AV			1.32 H	19	71.0	43.0
3	#10400.00	61.6 PK	68.2	-6.6	1.92 H	227	39.6	22.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	125.6 PK			1.50 V	342	82.6	43.0
2	*5200.00	113.5 AV			1.50 V	342	70.5	43.0
3	#10400.00	61.4 PK	68.2	-6.8	2.26 V	318	39.4	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.1 PK	74.0	-12.9	1.38 H	20	48.4	12.7
2	5150.00	48.1 AV	54.0	-5.9	1.38 H	20	35.4	12.7
3	*5240.00	127.2 PK			1.38 H	20	84.2	43.0
4	*5240.00	114.7 AV			1.38 H	20	71.7	43.0
5	#10480.00	61.7 PK	88.2	-26.5	1.85 H	223	39.8	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.8 PK	74.0	-13.2	1.49 V	341	48.1	12.7
2	5150.00	47.9 AV	54.0	-6.1	1.49 V	341	35.2	12.7
3	*5240.00	126.9 PK			1.51 V	343	83.9	43.0
4	*5240.00	114.2 AV			1.51 V	343	71.2	43.0
5	#10480.00	61.5 PK	68.2	-6.7	2.14 V	310	39.6	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.5 PK	74.0	-14.5	1.34 H	19	46.8	12.7
2	5150.00	48.0 AV	54.0	-6.0	1.34 H	19	35.3	12.7
3	*5260.00	120.6 PK			1.34 H	19	77.6	43.0
4	*5260.00	108.1 AV			1.34 H	19	65.1	43.0
5	#10520.00	61.7 PK	68.2	-6.5	1.92 H	214	39.8	21.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	1.55 V	344	46.6	12.7
2	5150.00	47.8 AV	54.0	-6.2	1.55 V	344	35.1	12.7
3	*5260.00	120.2 PK			1.55 V	344	77.2	43.0
4	*5260.00	107.8 AV			1.55 V	344	64.8	43.0
5	#10520.00	61.5 PK	68.2	-6.7	2.20 V	319	39.6	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	119.9 PK			1.34 H	19	76.8	43.1
2	*5300.00	108.4 AV			1.34 H	19	65.3	43.1
3	10600.00	61.6 PK	74.0	-12.4	1.86 H	213	39.6	22.0
4	10600.00	47.8 AV	54.0	-6.2	1.86 H	213	25.8	22.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	119.3 PK			1.56 V	342	76.2	43.1
2	*5300.00	108.1 AV			1.56 V	342	65.0	43.1
3	10600.00	61.4 PK	74.0	-12.6	2.18 V	311	39.4	22.0
4	10600.00	47.7 AV	54.0	-6.3	2.18 V	311	25.7	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.5 PK			1.36 H	19	77.3	43.2
2	*5320.00	108.5 AV			1.36 H	19	65.3	43.2
3	5350.00	59.9 PK	74.0	-14.1	1.36 H	19	47.0	12.9
4	5350.00	48.1 AV	54.0	-5.9	1.36 H	19	35.2	12.9
5	10640.00	61.9 PK	74.0	-12.1	1.90 H	214	39.6	22.3
6	10640.00	48.1 AV	54.0	-5.9	1.90 H	214	25.8	22.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.0 PK			1.51 V	344	76.8	43.2
2	*5320.00	108.0 AV			1.51 V	344	64.8	43.2
3	5350.00	59.5 PK	74.0	-14.5	1.51 V	344	46.6	12.9
4	5350.00	47.8 AV	54.0	-6.2	1.51 V	344	34.9	12.9
5	10640.00	61.7 PK	74.0	-12.3	2.18 V	307	39.4	22.3
6	10640.00	47.9 AV	54.0	-6.1	2.18 V	307	25.6	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.





<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.7 PK	74.0	-13.3	1.48 H	346	47.7	13.0
2	5460.00	47.9 AV	54.0	-6.1	1.48 H	346	34.9	13.0
3	#5470.00	61.2 PK	68.2	-7.0	1.48 H	346	48.2	13.0
4	*5500.00	120.2 PK			1.48 H	346	76.7	43.5
5	*5500.00	107.8 AV			1.48 H	346	64.3	43.5
6	11000.00	62.6 PK	74.0	-11.4	1.85 H	227	39.8	22.8
7	11000.00	49.4 AV	54.0	-4.6	1.85 H	227	26.6	22.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.6 PK	74.0	-13.4	1.63 V	343	47.6	13.0
2	5460.00	47.6 AV	54.0	-6.4	1.63 V	343	34.6	13.0
3	#5470.00	61.0 PK	68.2	-7.2	1.63 V	343	48.0	13.0
4	*5500.00	119.9 PK			1.63 V	343	76.4	43.5
5	*5500.00	107.5 AV			1.63 V	343	64.0	43.5
6	11000.00	62.4 PK	74.0	-11.6	2.25 V	328	39.6	22.8
7	11000.00	49.1 AV	54.0	-4.9	2.25 V	328	26.3	22.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	120.4 PK			1.51 H	348	76.8	43.6
2	*5580.00	108.4 AV			1.51 H	348	64.8	43.6
3	11160.00	62.0 PK	74.0	-12.0	1.82 H	229	39.7	22.3
4	11160.00	48.9 AV	54.0	-5.1	1.82 H	229	26.6	22.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	119.9 PK			1.64 V	345	76.3	43.6
2	*5580.00	107.7 AV			1.64 V	345	64.1	43.6
3	11160.00	61.7 PK	74.0	-12.3	2.15 V	312	39.4	22.3
4	11160.00	48.7 AV	54.0	-5.3	2.15 V	312	26.4	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	119.2 PK			1.46 H	351	75.0	44.2
2	*5700.00	106.8 AV			1.46 H	351	62.6	44.2
3	#5725.00	61.0 PK	68.2	-7.2	1.46 H	351	47.3	13.7
4	11400.00	63.0 PK	74.0	-11.0	1.89 H	225	39.6	23.4
5	11400.00	49.9 AV	54.0	-4.1	1.89 H	225	26.5	23.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.9 PK			1.63 V	13	74.7	44.2
2	*5700.00	106.5 AV			1.63 V	13	62.3	44.2
3	#5725.00	60.9 PK	68.2	-7.3	1.63 V	13	47.2	13.7
4	11400.00	62.7 PK	74.0	-11.3	2.15 V	311	39.3	23.4
5	11400.00	49.6 AV	54.0	-4.4	2.15 V	311	26.2	23.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	61.7 PK	68.2	-6.5	1.49 H	24	48.7	13.0
2	*5720.00	119.4 PK			1.49 H	24	75.0	44.4
3	*5720.00	106.6 AV			1.49 H	24	62.2	44.4
4	#5850.00	61.1 PK	68.2	-7.1	1.49 H	24	47.1	14.0
5	11440.00	63.0 PK	74.0	-11.0	1.85 H	226	39.7	23.3
6	11440.00	49.8 AV	54.0	-4.2	1.85 H	226	26.5	23.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	61.5 PK	68.2	-6.7	1.57 V	15	48.5	13.0
2	*5720.00	119.1 PK			1.57 V	15	74.7	44.4
3	*5720.00	106.3 AV			1.57 V	15	61.9	44.4
4	#5850.00	60.9 PK	68.2	-7.3	1.57 V	15	46.9	14.0
5	11440.00	62.7 PK	74.0	-11.3	2.15 V	316	39.4	23.3
6	11440.00	49.6 AV	54.0	-4.4	2.15 V	316	26.3	23.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5607.60	60.3 PK	68.2	-7.9	1.17 H	2	47.3	13.0
2	*5745.00	125.1 PK			1.17 H	2	80.5	44.6
3	*5745.00	113.7 AV			1.17 H	2	69.1	44.6
4	#5967.60	61.4 PK	68.2	-6.8	1.17 H	2	47.1	14.3
5	11490.00	63.0 PK	74.0	-11.0	1.87 H	229	39.8	23.2
6	11490.00	49.9 AV	54.0	-4.1	1.87 H	229	26.7	23.2

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5622.80	61.2 PK	68.2	-7.0	1.57 V	15	48.1	13.1
2	*5745.00	124.7 PK			1.57 V	15	80.1	44.6
3	*5745.00	113.2 AV			1.57 V	15	68.6	44.6
4	#5979.20	61.8 PK	68.2	-6.4	1.57 V	15	47.5	14.3
5	11490.00	62.7 PK	74.0	-11.3	2.18 V	312	39.5	23.2
6	11490.00	49.7 AV	54.0	-4.3	2.18 V	312	26.5	23.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5626.00	59.9 PK	68.2	-8.3	1.17 H	5	46.8	13.1
2	*5785.00	125.9 PK			1.17 H	5	81.1	44.8
3	*5785.00	113.5 AV			1.17 H	5	68.7	44.8
4	#5941.60	61.4 PK	68.2	-6.8	1.17 H	5	47.2	14.2
5	11570.00	62.9 PK	74.0	-11.1	1.85 H	228	39.9	23.0
6	11570.00	49.9 AV	54.0	-4.1	1.85 H	228	26.9	23.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5626.40	60.9 PK	68.2	-7.3	1.53 V	18	47.8	13.1
2	*5785.00	125.4 PK			1.53 V	18	80.6	44.8
3	*5785.00	112.8 AV			1.53 V	18	68.0	44.8
4	#5938.80	62.3 PK	68.2	-5.9	1.53 V	18	48.1	14.2
5	11570.00	62.7 PK	74.0	-11.3	2.25 V	315	39.7	23.0
6	11570.00	49.6 AV	54.0	-4.4	2.25 V	315	26.6	23.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.80	61.1 PK	68.2	-7.1	1.18 H	4	48.0	13.1
2	*5825.00	125.3 PK			1.18 H	4	80.6	44.7
3	*5825.00	113.5 AV			1.18 H	4	68.8	44.7
4	#5932.80	61.3 PK	68.2	-6.9	1.18 H	4	47.1	14.2
5	11650.00	62.2 PK	74.0	-11.8	1.89 H	226	39.6	22.6
6	11650.00	49.1 AV	54.0	-4.9	1.89 H	226	26.5	22.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.00	61.7 PK	68.2	-6.5	1.39 V	18	48.6	13.1
2	*5825.00	124.6 PK			1.39 V	18	79.9	44.7
3	*5825.00	112.6 AV			1.39 V	18	67.9	44.7
4	#5976.00	63.1 PK	68.2	-5.1	1.39 V	18	48.8	14.3
5	11650.00	61.9 PK	74.0	-12.1	2.21 V	311	39.3	22.6
6	11650.00	48.9 AV	54.0	-5.1	2.21 V	311	26.3	22.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 38 : 5190 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.8 PK	74.0	-4.2	1.40 H	20	57.1	12.7
2	<b>5150.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.40 H</b>	<b>20</b>	<b>41.2</b>	<b>12.7</b>
3	*5190.00	121.2 PK			1.40 H	20	78.1	43.1
4	*5190.00	108.5 AV			1.40 H	20	65.4	43.1
5	#10380.00	61.3 PK	68.2	-6.9	1.92 H	232	39.4	21.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5141.80	69.0 PK	74.0	-5.0	1.52 V	324	56.3	12.7
2	5141.80	53.5 AV	54.0	-0.5	1.52 V	324	40.8	12.7
3	*5190.00	120.8 PK			1.58 V	341	77.7	43.1
4	*5190.00	108.1 AV			1.58 V	341	65.0	43.1
5	#10380.00	60.8 PK	68.2	-7.4	2.26 V	318	38.9	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 46 : 5230 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.6 PK	74.0	-10.4	1.39 H	18	50.9	12.7
2	5150.00	50.3 AV	54.0	-3.7	1.39 H	18	37.6	12.7
3	*5230.00	124.1 PK			1.39 H	19	81.1	43.0
4	*5230.00	111.5 AV			1.39 H	19	68.5	43.0
5	#10460.00	61.5 PK	68.2	-6.7	1.85 H	225	39.5	22.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.1 PK	74.0	-10.9	1.52 V	340	50.4	12.7
2	5150.00	50.1 AV	54.0	-3.9	1.52 V	340	37.4	12.7
3	*5230.00	123.6 PK			1.52 V	340	80.6	43.0
4	*5230.00	111.1 AV			1.52 V	340	68.1	43.0
5	#10460.00	61.2 PK	68.2	-7.0	2.28 V	311	39.2	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 54 : 5270 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	1.35 H	20	47.7	12.7
2	5150.00	47.8 AV	54.0	-6.2	1.35 H	20	35.1	12.7
3	*5270.00	117.9 PK			1.35 H	20	74.9	43.0
4	*5270.00	105.4 AV			1.35 H	20	62.4	43.0
5	#10540.00	61.7 PK	68.2	-6.5	1.86 H	212	39.8	21.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	1.51 V	344	47.4	12.7
2	5150.00	47.6 AV	54.0	-6.4	1.51 V	344	34.9	12.7
3	*5270.00	117.2 PK			1.51 V	344	74.2	43.0
4	*5270.00	105.0 AV			1.51 V	344	62.0	43.0
5	#10540.00	61.5 PK	68.2	-6.7	2.26 V	319	39.6	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 62 : 5310 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	117.3 PK			1.30 H	20	74.2	43.1
2	*5310.00	104.7 AV			1.30 H	20	61.6	43.1
3	5350.00	60.4 PK	74.0	-13.6	1.30 H	20	47.5	12.9
4	5350.00	48.6 AV	54.0	-5.4	1.30 H	20	35.7	12.9
5	10620.00	61.7 PK	74.0	-12.3	1.76 H	203	39.6	22.1
6	10620.00	47.9 AV	54.0	-6.1	1.76 H	203	25.8	22.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	116.6 PK			1.59 V	343	73.5	43.1
2	*5310.00	104.3 AV			1.59 V	343	61.2	43.1
3	5350.00	60.0 PK	74.0	-14.0	1.59 V	343	47.1	12.9
4	5350.00	47.5 AV	54.0	-6.5	1.59 V	343	34.6	12.9
5	10620.00	61.4 PK	74.0	-12.6	2.16 V	317	39.3	22.1
6	10620.00	47.7 AV	54.0	-6.3	2.16 V	317	25.6	22.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 102 : 5510 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.3 PK	74.0	-12.7	1.52 H	348	48.3	13.0
2	5460.00	47.7 AV	54.0	-6.3	1.52 H	348	34.7	13.0
3	#5470.00	62.0 PK	68.2	-6.2	1.52 H	348	49.0	13.0
4	*5510.00	117.0 PK			1.52 H	348	73.4	43.6
5	*5510.00	104.7 AV			1.52 H	348	61.1	43.6
6	11020.00	62.3 PK	74.0	-11.7	1.82 H	223	39.6	22.7
7	11020.00	49.0 AV	54.0	-5.0	1.82 H	223	26.3	22.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.1 PK	74.0	-12.9	1.56 V	345	48.1	13.0
2	5460.00	47.6 AV	54.0	-6.4	1.56 V	345	34.6	13.0
3	#5470.00	61.7 PK	68.2	-6.5	1.56 V	345	48.7	13.0
4	*5510.00	116.6 PK			1.56 V	345	73.0	43.6
5	*5510.00	104.4 AV			1.56 V	345	60.8	43.6
6	11020.00	62.0 PK	74.0	-12.0	2.16 V	319	39.3	22.7
7	11020.00	48.8 AV	54.0	-5.2	2.16 V	319	26.1	22.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	116.5 PK			1.55 H	350	72.9	43.6
2	*5550.00	104.9 AV			1.55 H	350	61.3	43.6
3	11100.00	62.0 PK	74.0	-12.0	1.82 H	225	39.7	22.3
4	11100.00	48.7 AV	54.0	-5.3	1.82 H	225	26.4	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	116.0 PK			1.51 V	343	72.4	43.6
2	*5550.00	104.5 AV			1.51 V	343	60.9	43.6
3	11100.00	61.7 PK	74.0	-12.3	2.16 V	311	39.4	22.3
4	11100.00	48.5 AV	54.0	-5.5	2.16 V	311	26.2	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 134 : 5670 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	117.0 PK			1.58 H	349	72.9	44.1
2	*5670.00	104.4 AV			1.58 H	349	60.3	44.1
3	#5725.00	60.7 PK	68.2	-7.5	1.58 H	349	47.0	13.7
4	11340.00	62.6 PK	74.0	-11.4	1.89 H	229	39.7	22.9
5	11340.00	49.3 AV	54.0	-4.7	1.89 H	229	26.4	22.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	116.4 PK			1.52 V	345	72.3	44.1
2	*5670.00	103.7 AV			1.52 V	345	59.6	44.1
3	#5725.00	60.5 PK	68.2	-7.7	1.52 V	345	46.8	13.7
4	11340.00	62.4 PK	74.0	-11.6	2.16 V	313	39.5	22.9
5	11340.00	49.1 AV	54.0	-4.9	2.16 V	313	26.2	22.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 142 : 5710 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	61.0 PK	68.2	-7.2	1.53 H	348	48.0	13.0
2	*5710.00	116.4 PK			1.53 H	348	72.1	44.3
3	*5710.00	103.7 AV			1.53 H	348	59.4	44.3
4	#5850.00	61.4 PK	68.2	-6.8	1.53 H	348	47.4	14.0
5	11420.00	62.9 PK	74.0	-11.1	1.83 H	225	39.5	23.4
6	11420.00	49.7 AV	54.0	-4.3	1.83 H	225	26.3	23.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	60.7 PK	68.2	-7.5	1.60 V	1	47.7	13.0
2	*5710.00	116.1 PK			1.60 V	1	71.8	44.3
3	*5710.00	103.5 AV			1.60 V	1	59.2	44.3
4	#5850.00	61.1 PK	68.2	-7.1	1.60 V	1	47.1	14.0
5	11420.00	62.7 PK	74.0	-11.3	2.22 V	311	39.3	23.4
6	11420.00	49.5 AV	54.0	-4.5	2.22 V	311	26.1	23.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 151 : 5755 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.20	61.1 PK	68.2	-7.1	1.16 H	5	47.9	13.2
2	*5755.00	123.1 PK			1.16 H	5	78.5	44.6
3	*5755.00	110.9 AV			1.16 H	5	66.3	44.6
4	#5938.40	61.2 PK	68.2	-7.0	1.16 H	5	47.0	14.2
5	11510.00	62.7 PK	74.0	-11.3	1.92 H	229	39.6	23.1
6	11510.00	49.6 AV	54.0	-4.4	1.92 H	229	26.5	23.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5617.60	61.0 PK	68.2	-7.2	1.40 V	17	47.9	13.1
2	*5755.00	122.5 PK			1.40 V	17	77.9	44.6
3	*5755.00	110.5 AV			1.40 V	17	65.9	44.6
4	#5981.20	61.3 PK	68.2	-6.9	1.40 V	17	47.0	14.3
5	11510.00	62.4 PK	74.0	-11.6	2.25 V	315	39.3	23.1
6	11510.00	49.2 AV	54.0	-4.8	2.25 V	315	26.1	23.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 159 : 5795 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.20	60.6 PK	68.2	-7.6	1.09 H	4	47.3	13.3
2	*5795.00	123.7 PK			1.09 H	4	78.9	44.8
3	*5795.00	111.2 AV			1.09 H	4	66.4	44.8
4	#5942.80	62.5 PK	68.2	-5.7	1.09 H	4	48.3	14.2
5	11590.00	62.3 PK	74.0	-11.7	1.85 H	228	39.5	22.8
6	11590.00	49.2 AV	54.0	-4.8	1.85 H	228	26.4	22.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5628.40	61.0 PK	68.2	-7.2	1.56 V	18	47.9	13.1
2	*5795.00	123.1 PK			1.56 V	18	78.3	44.8
3	*5795.00	110.7 AV			1.56 V	18	65.9	44.8
4	#5955.20	61.7 PK	68.2	-6.5	1.56 V	18	47.5	14.2
5	11590.00	62.1 PK	74.0	-11.9	2.25 V	315	39.3	22.8
6	11590.00	48.9 AV	54.0	-5.1	2.25 V	315	26.1	22.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 42 : 5210 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.4 PK	74.0	-7.6	1.39 H	19	53.7	12.7
2	5150.00	53.6 AV	54.0	-0.4	1.39 H	19	40.9	12.7
3	*5210.00	117.4 PK			1.39 H	19	74.4	43.0
4	*5210.00	104.5 AV			1.39 H	19	61.5	43.0
5	5350.00	60.8 PK	74.0	-13.2	1.39 H	19	47.9	12.9
6	5350.00	47.8 AV	54.0	-6.2	1.39 H	19	34.9	12.9
7	#10420.00	61.2 PK	68.2	-7.0	1.86 H	221	39.2	22.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.52 V	334	53.1	12.7
2	5150.00	53.2 AV	54.0	-0.8	1.52 V	334	40.5	12.7
3	*5210.00	116.1 PK			1.52 V	334	73.1	43.0
4	*5210.00	104.0 AV			1.52 V	334	61.0	43.0
5	5350.00	60.4 PK	74.0	-13.6	1.52 V	334	47.5	12.9
6	5350.00	47.6 AV	54.0	-6.4	1.52 V	334	34.7	12.9
7	#10420.00	61.0 PK	68.2	-7.2	2.19 V	308	39.0	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 58 : 5290 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.5 PK	74.0	-13.5	1.30 H	20	47.8	12.7
2	5150.00	48.0 AV	54.0	-6.0	1.30 H	20	35.3	12.7
3	*5290.00	114.7 PK			1.30 H	20	71.6	43.1
4	*5290.00	102.2 AV			1.30 H	20	59.1	43.1
5	5350.00	60.8 PK	74.0	-13.2	1.30 H	20	47.9	12.9
6	5350.00	47.8 AV	54.0	-6.2	1.30 H	20	34.9	12.9
7	#10580.00	61.6 PK	68.2	-6.6	1.85 H	204	39.6	22.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	1.56 V	343	47.4	12.7
2	5150.00	47.8 AV	54.0	-6.2	1.56 V	343	35.1	12.7
3	*5290.00	114.4 PK			1.56 V	343	71.3	43.1
4	*5290.00	101.7 AV			1.56 V	343	58.6	43.1
5	5350.00	60.4 PK	74.0	-13.6	1.56 V	343	47.5	12.9
6	5350.00	47.5 AV	54.0	-6.5	1.56 V	343	34.6	12.9
7	#10580.00	61.4 PK	68.2	-6.8	2.29 V	318	39.4	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 106 : 5530 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.1 PK	74.0	-12.9	1.55 H	349	48.1	13.0
2	5460.00	48.5 AV	54.0	-5.5	1.55 H	349	35.5	13.0
3	#5470.00	61.5 PK	68.2	-6.7	1.55 H	349	48.5	13.0
4	*5530.00	114.6 PK			1.55 H	349	71.0	43.6
5	*5530.00	102.2 AV			1.55 H	349	58.6	43.6
6	11060.00	61.9 PK	74.0	-12.1	1.89 H	229	39.5	22.4
7	11060.00	48.6 AV	54.0	-5.4	1.89 H	229	26.2	22.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.8 PK	74.0	-13.2	1.61 V	343	47.8	13.0
2	5460.00	47.9 AV	54.0	-6.1	1.61 V	343	34.9	13.0
3	#5470.00	61.2 PK	68.2	-7.0	1.61 V	343	48.2	13.0
4	*5530.00	114.1 PK			1.61 V	343	70.5	43.6
5	*5530.00	101.8 AV			1.61 V	343	58.2	43.6
6	11060.00	61.6 PK	74.0	-12.4	2.12 V	315	39.2	22.4
7	11060.00	48.4 AV	54.0	-5.6	2.12 V	315	26.0	22.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 122 : 5610 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	114.5 PK			1.55 H	347	70.8	43.7
2	*5610.00	102.2 AV			1.55 H	347	58.5	43.7
3	#5725.00	61.3 PK	68.2	-6.9	1.55 H	347	47.6	13.7
4	11220.00	62.0 PK	74.0	-12.0	1.92 H	229	39.6	22.4
5	11220.00	48.8 AV	54.0	-5.2	1.92 H	229	26.4	22.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	114.2 PK			1.55 V	342	70.5	43.7
2	*5610.00	101.8 AV			1.55 V	342	58.1	43.7
3	#5725.00	61.0 PK	68.2	-7.2	1.55 V	342	47.3	13.7
4	11220.00	61.7 PK	74.0	-12.3	2.08 V	316	39.3	22.4
5	11220.00	48.4 AV	54.0	-5.6	2.08 V	316	26.0	22.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 138 : 5690 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	61.5 PK	68.2	-6.7	1.61 H	348	48.5	13.0
2	*5690.00	114.3 PK			1.61 H	348	70.2	44.1
3	*5690.00	101.4 AV			1.61 H	348	57.3	44.1
4	#5850.00	61.6 PK	68.2	-6.6	1.61 H	348	47.6	14.0
5	11380.00	62.4 PK	74.0	-11.6	1.87 H	227	39.3	23.1
6	11380.00	49.4 AV	54.0	-4.6	1.87 H	227	26.3	23.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	61.0 PK	68.2	-7.2	1.56 V	14	48.0	13.0
2	*5690.00	113.4 PK			1.56 V	14	69.3	44.1
3	*5690.00	100.7 AV			1.56 V	14	56.6	44.1
4	#5850.00	61.4 PK	68.2	-6.8	1.56 V	14	47.4	14.0
5	11380.00	62.2 PK	74.0	-11.8	2.18 V	319	39.1	23.1
6	11380.00	49.2 AV	54.0	-4.8	2.18 V	319	26.1	23.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 155 : 5775 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.80	67.5 PK	68.2	-0.7	1.01 H	3	54.3	13.2
2	*5775.00	119.6 PK			1.01 H	3	74.9	44.7
3	*5775.00	106.9 AV			1.01 H	3	62.2	44.7
4	#5973.60	62.4 PK	68.2	-5.8	1.01 H	3	48.1	14.3
5	11550.00	62.5 PK	74.0	-11.5	1.85 H	225	39.5	23.0
6	11550.00	49.2 AV	54.0	-4.8	1.85 H	225	26.2	23.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.80	66.9 PK	68.2	-1.3	1.54 V	14	53.7	13.2
2	*5775.00	119.0 PK			1.54 V	14	74.3	44.7
3	*5775.00	106.5 AV			1.54 V	14	61.8	44.7
4	#5934.80	61.6 PK	68.2	-6.6	1.54 V	14	47.4	14.2
5	11550.00	62.3 PK	74.0	-11.7	2.21 V	312	39.3	23.0
6	11550.00	49.0 AV	54.0	-5.0	2.21 V	312	26.0	23.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 50 : 5250 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5137.00	66.6 PK	74.0	-7.4	1.48 H	13	53.9	12.7
2	5137.00	52.9 AV	54.0	-1.1	1.48 H	13	40.2	12.7
3	*5250.00	114.7 PK			1.48 H	13	71.8	42.9
4	*5250.00	101.9 AV			1.48 H	13	59.0	42.9
5	5357.90	67.1 PK	74.0	-6.9	1.48 H	13	54.2	12.9
6	5357.90	53.7 AV	54.0	-0.3	1.48 H	13	40.8	12.9
7	#10500.00	61.4 PK	68.2	-6.8	1.92 H	229	39.5	21.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.0 PK	74.0	-8.0	1.55 V	342	53.3	12.7
2	5150.00	52.6 AV	54.0	-1.4	1.55 V	342	39.9	12.7
3	*5250.00	114.2 PK			1.55 V	342	71.3	42.9
4	*5250.00	101.5 AV			1.55 V	342	58.6	42.9
5	5350.00	66.3 PK	74.0	-7.7	1.55 V	342	53.4	12.9
6	5350.00	52.3 AV	54.0	-1.7	1.55 V	342	39.4	12.9
7	#10500.00	61.0 PK	68.2	-7.2	2.21 V	331	39.1	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 114 : 5570 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.5 PK	74.0	-8.5	1.45 H	346	52.5	13.0
2	5460.00	52.1 AV	54.0	-1.9	1.45 H	346	39.1	13.0
3	#5470.00	66.9 PK	68.2	-1.3	1.45 H	346	53.9	13.0
4	*5570.00	113.2 PK			1.45 H	346	69.5	43.7
5	*5570.00	100.3 AV			1.45 H	346	56.6	43.7
6	#5725.00	61.9 PK	68.2	-6.3	1.45 H	346	48.2	13.7
7	11140.00	61.8 PK	74.0	-12.2	1.87 H	228	39.5	22.3
8	11140.00	48.4 AV	54.0	-5.6	1.87 H	228	26.1	22.3

**Antenna Polarity & Test Distance : Vertical at 3 m**


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.9 PK	74.0	-9.1	1.54 V	344	51.9	13.0
2	5460.00	51.9 AV	54.0	-2.1	1.54 V	344	38.9	13.0
3	#5470.00	66.0 PK	68.2	-2.2	1.54 V	344	53.0	13.0
4	*5570.00	112.8 PK			1.54 V	344	69.1	43.7
5	*5570.00	99.8 AV			1.54 V	344	56.1	43.7
6	#5725.00	61.5 PK	68.2	-6.7	1.54 V	344	47.8	13.7
7	11140.00	61.6 PK	74.0	-12.4	2.16 V	312	39.3	22.3
8	11140.00	48.1 AV	54.0	-5.9	2.16 V	312	25.8	22.3

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

### Plot of Band Edge


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

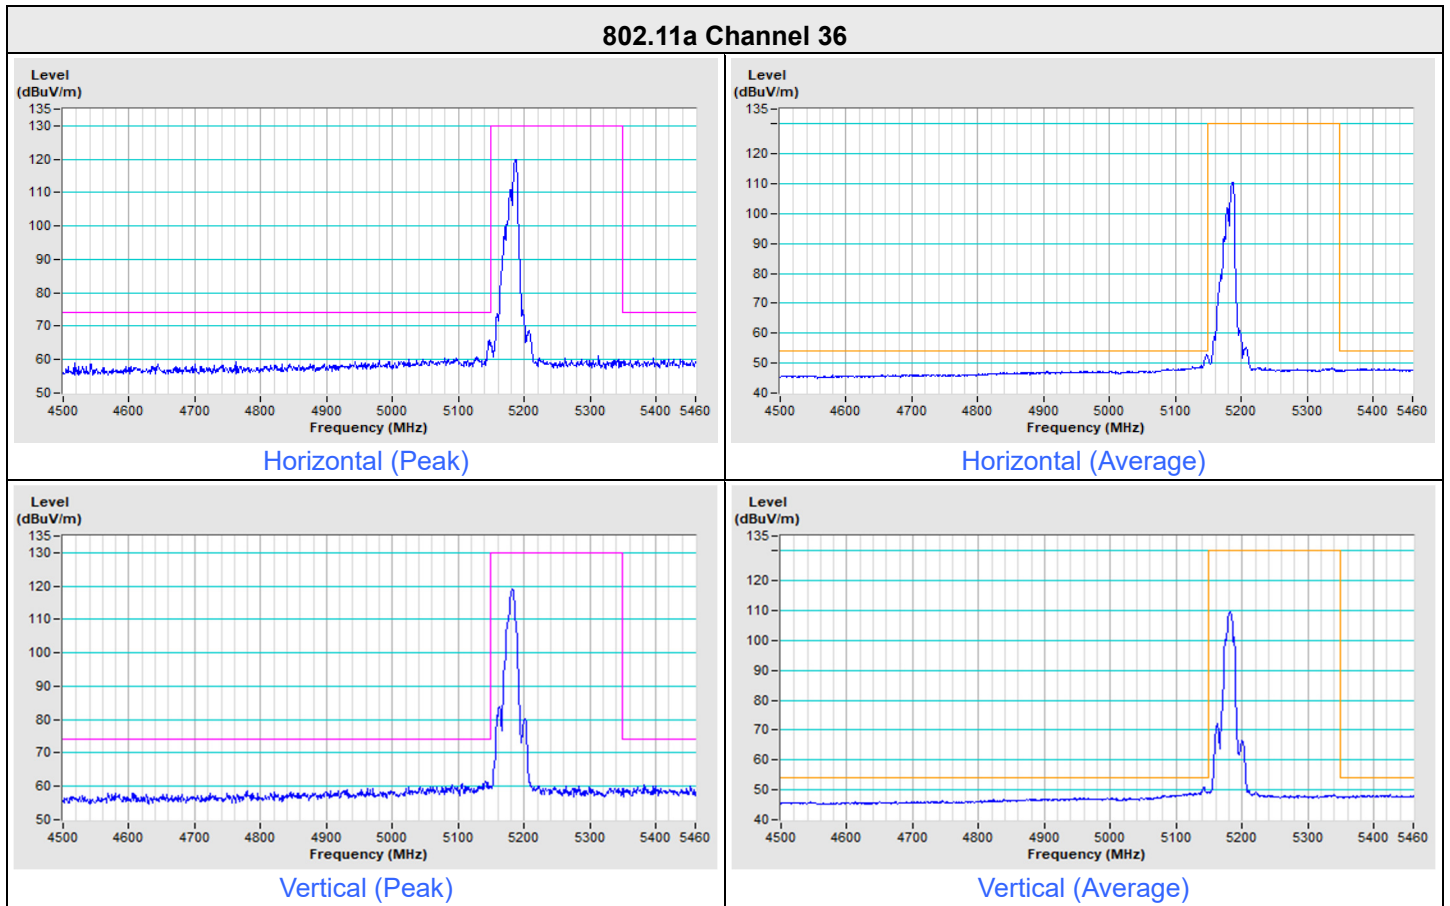


### 802.11a Channel 48

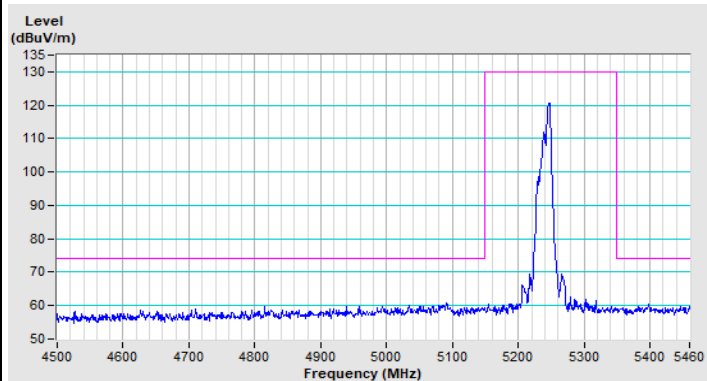


Horizontal (Peak)

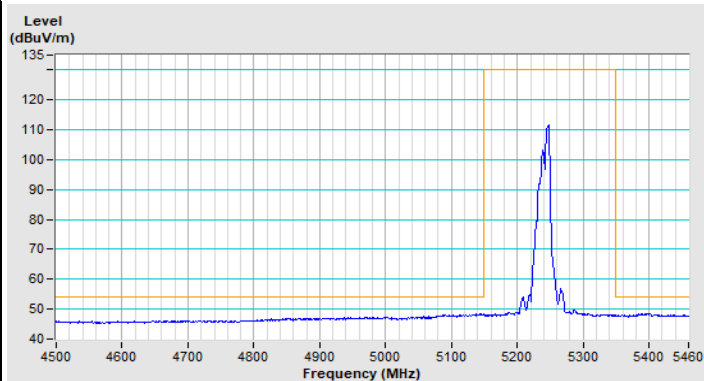

Horizontal (Average)

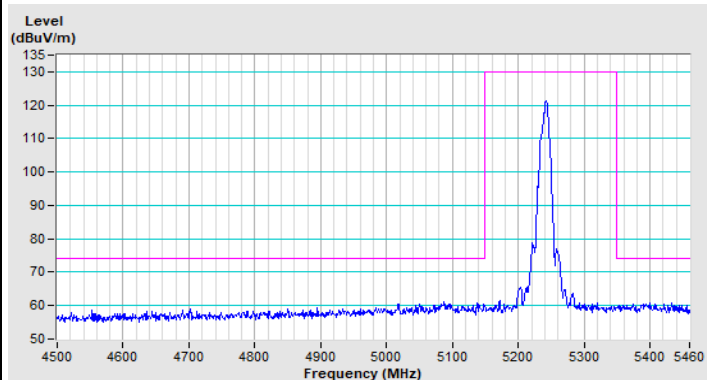


Vertical (Peak)

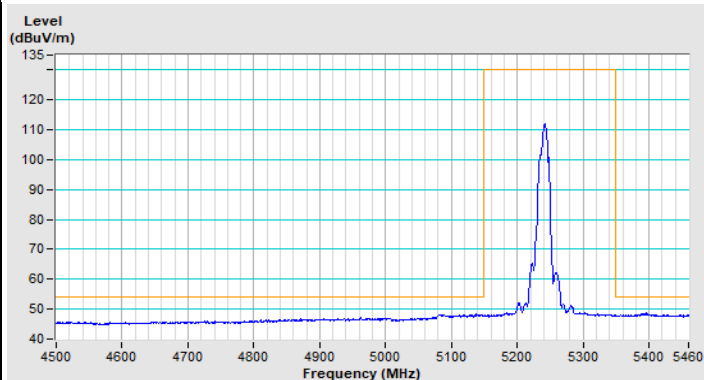


Vertical (Average)


### 802.11a Channel 52

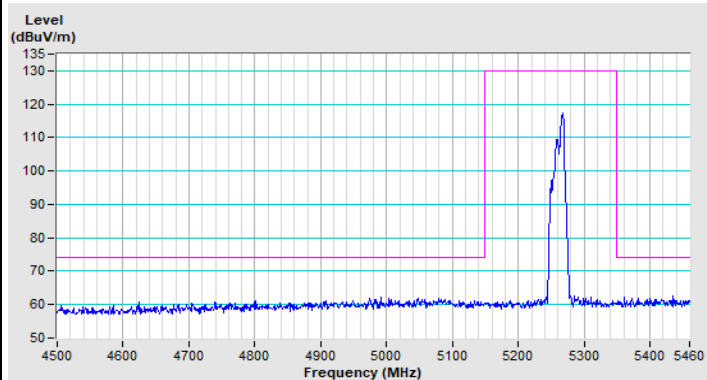


Horizontal (Peak)

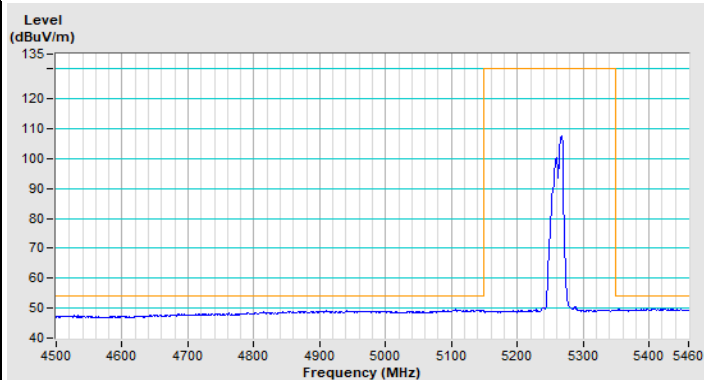

Horizontal (Average)

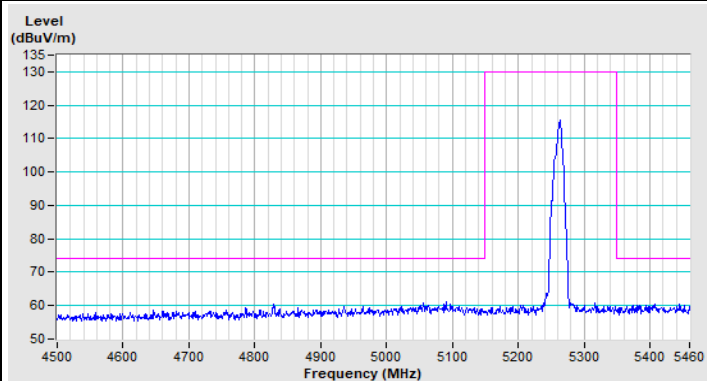


Vertical (Peak)

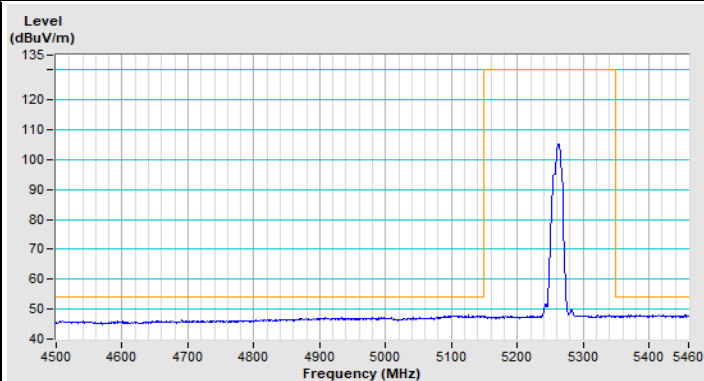


Vertical (Average)


### 802.11a Channel 64

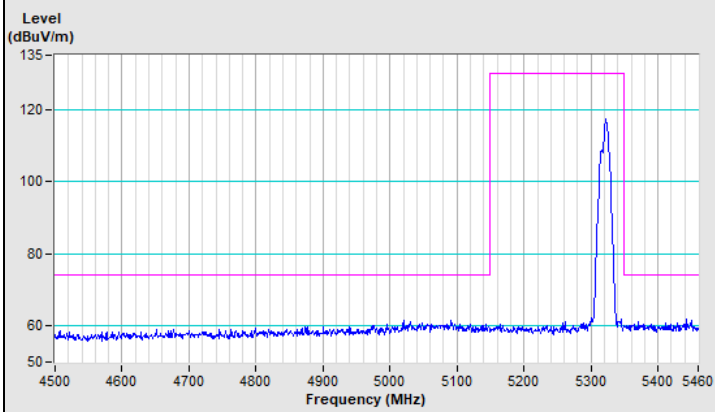


Horizontal (Peak)

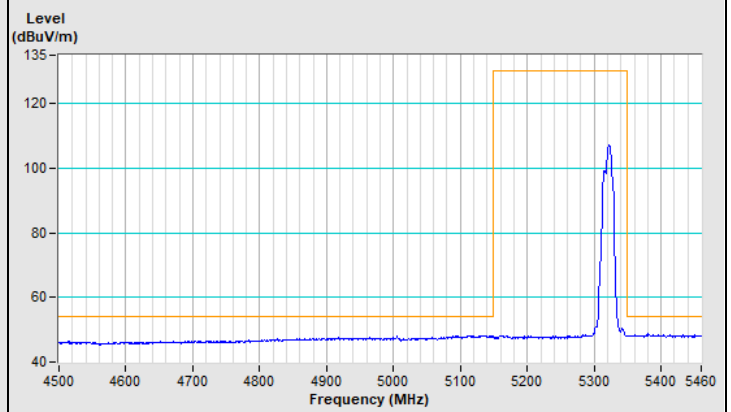

Horizontal (Average)

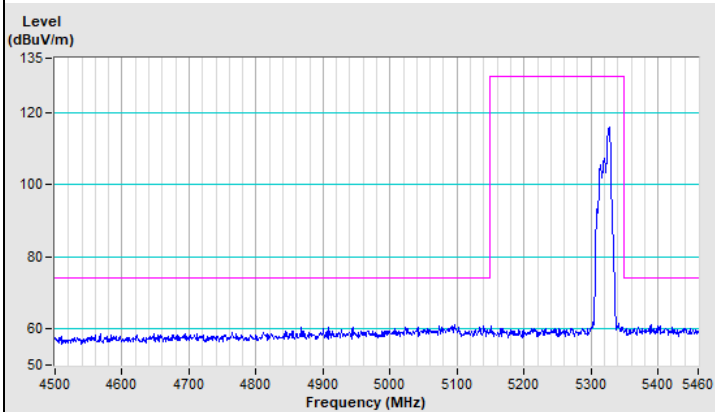


Vertical (Peak)

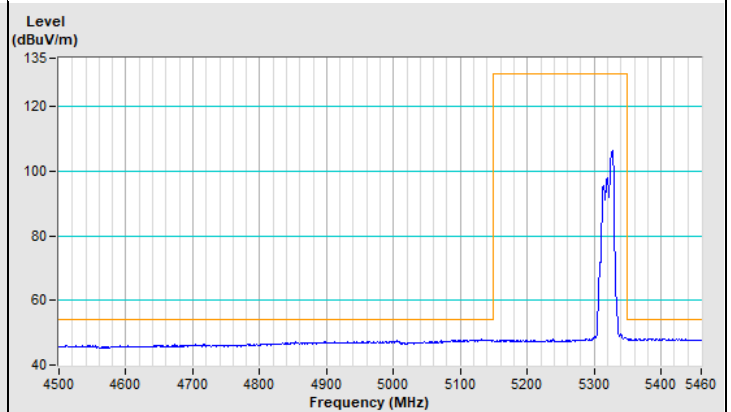


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


### 802.11a Channel 100

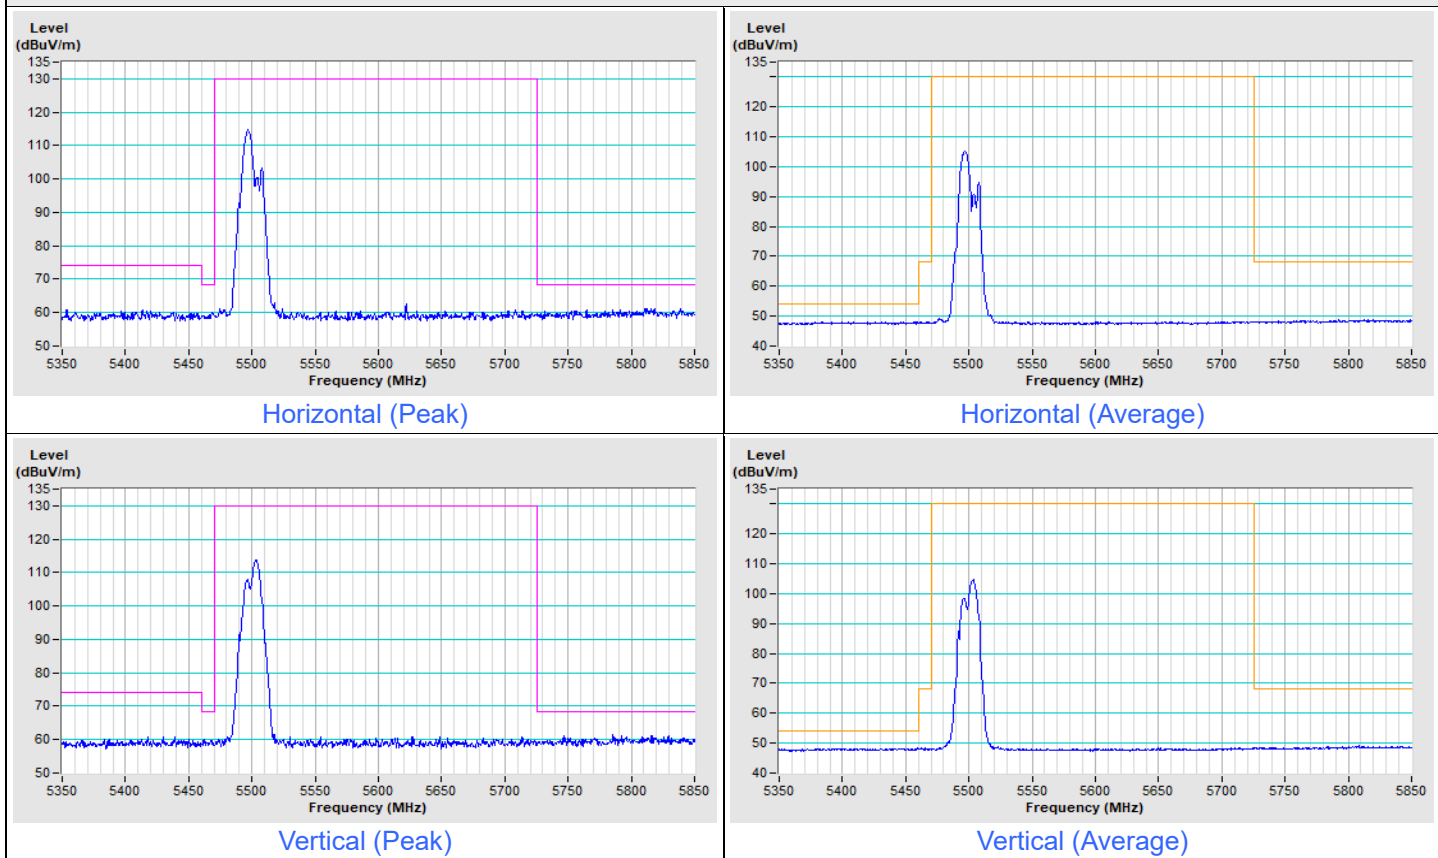


### 802.11a Channel 140

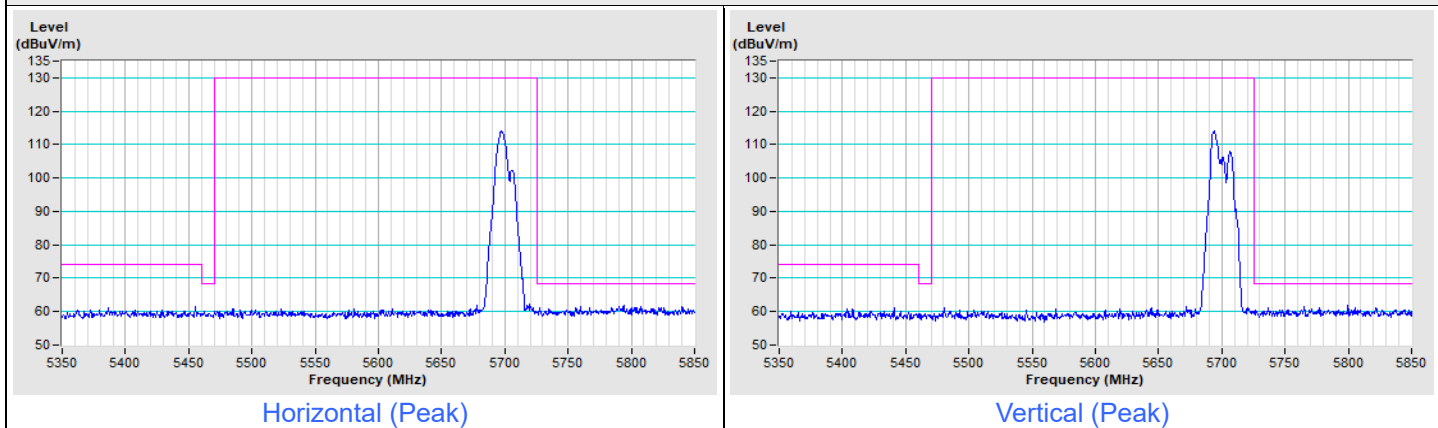

### 802.11a Channel 144

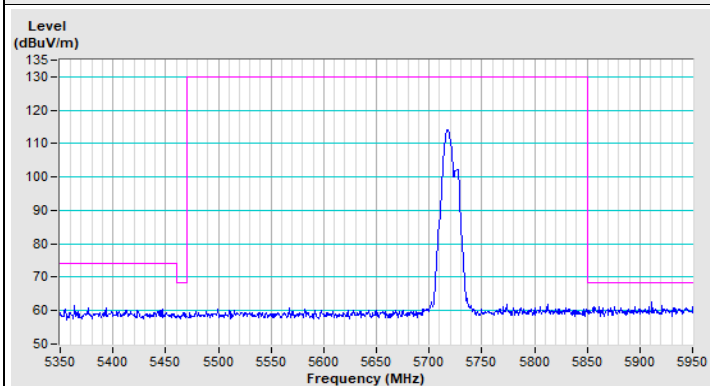


Horizontal (Peak)

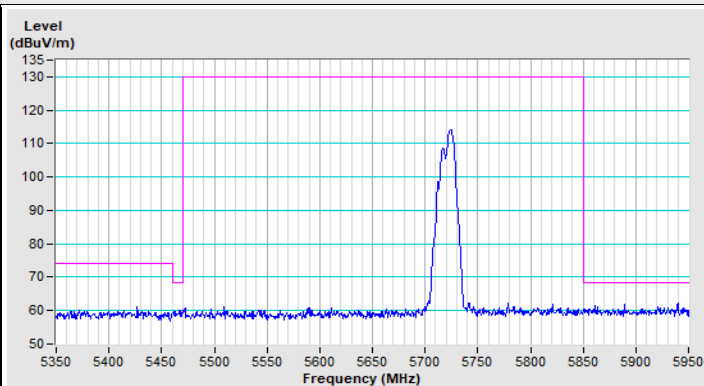


Vertical (Peak)

Frequency Range	5.6 GHz ~ 6.0 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-------------------	-------------------------------	----------------------------------


### 802.11a Channel 149

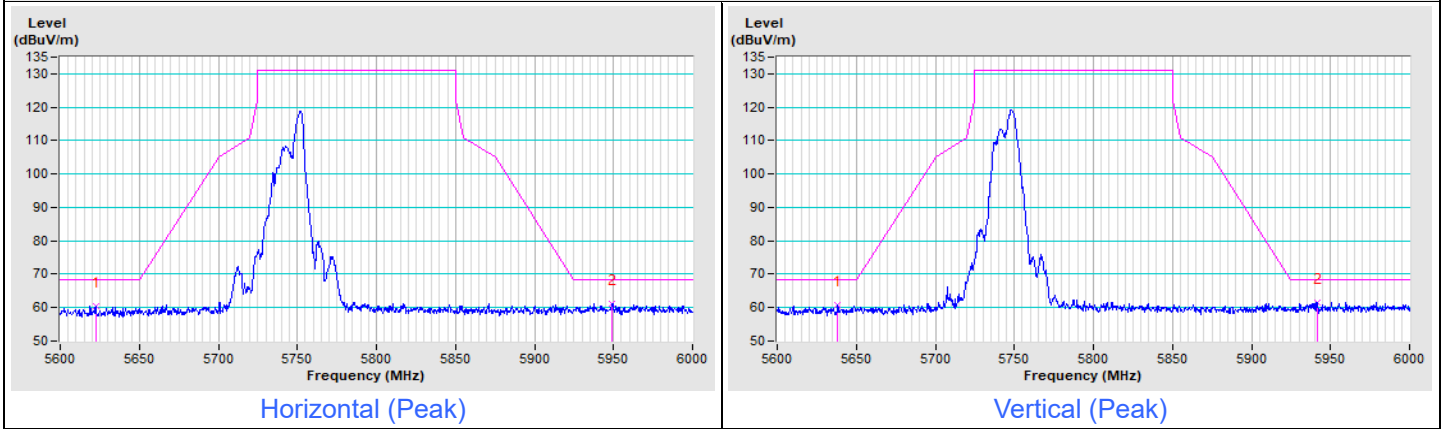

### 802.11a Channel 157

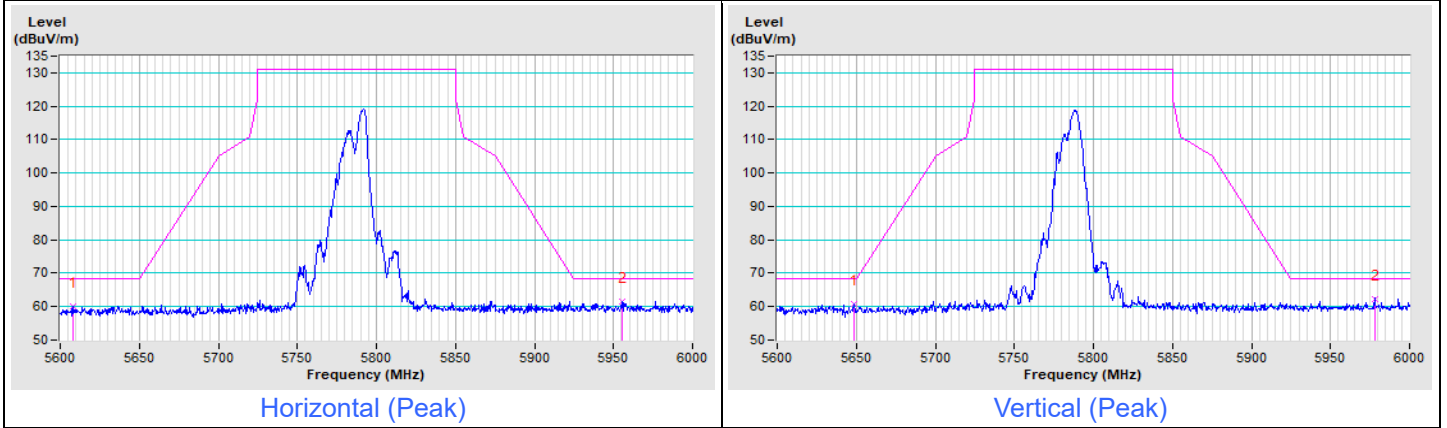


### 802.11a Channel 165

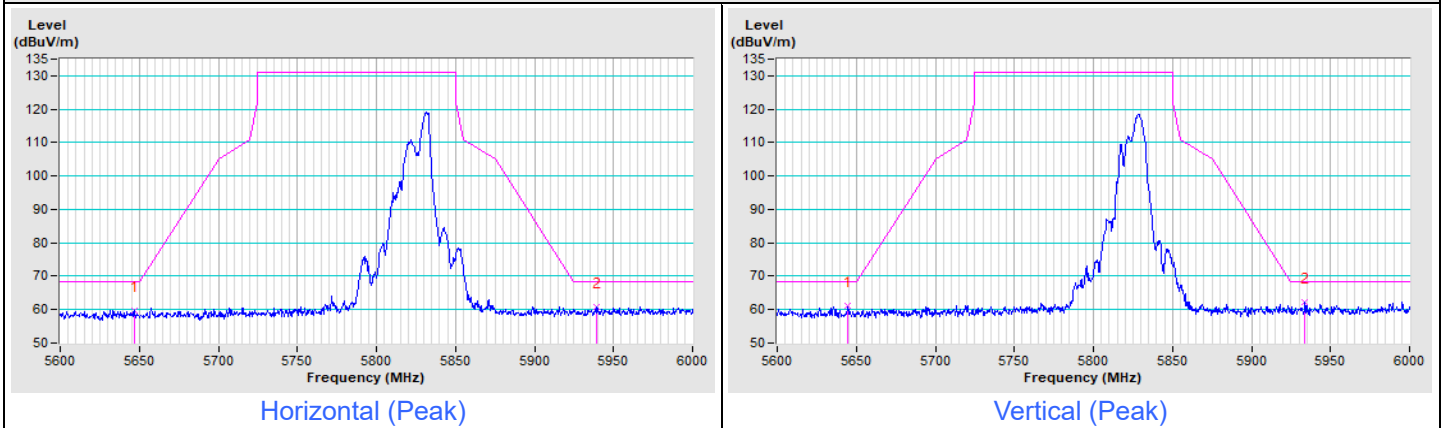


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

**802.11be (EHT20) Channel 36**

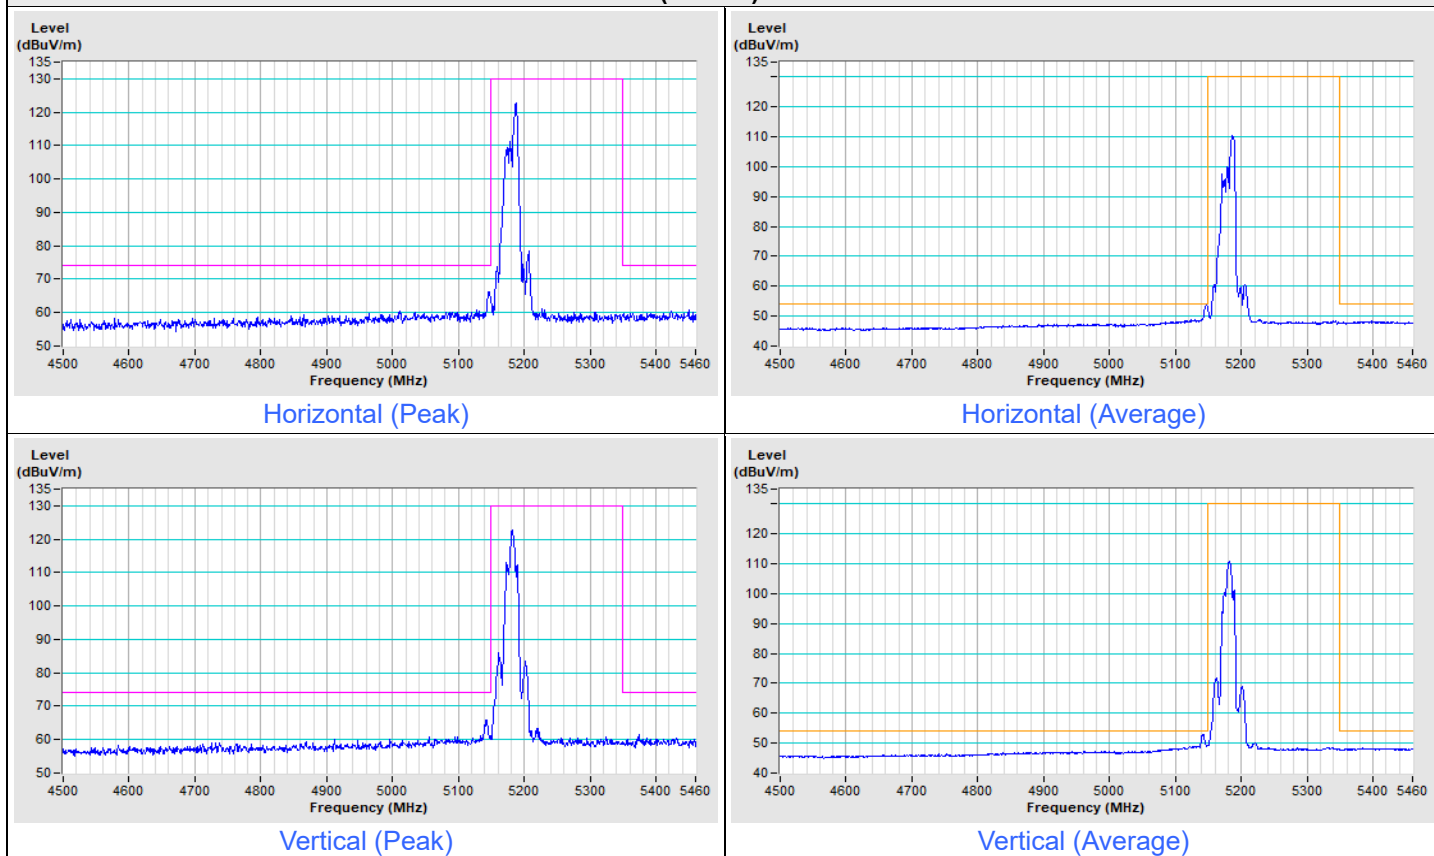





### 802.11be (EHT20) Channel 48

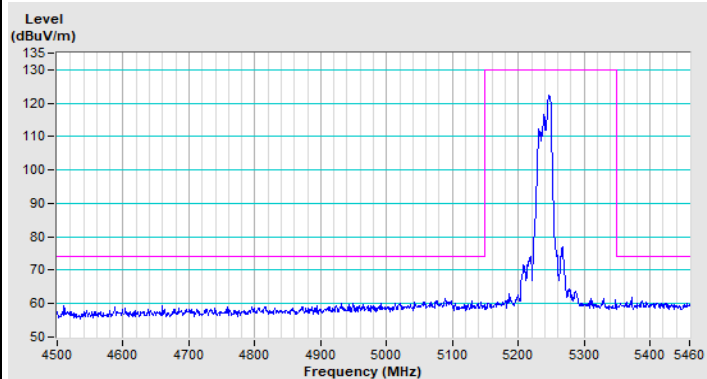


Horizontal (Peak)

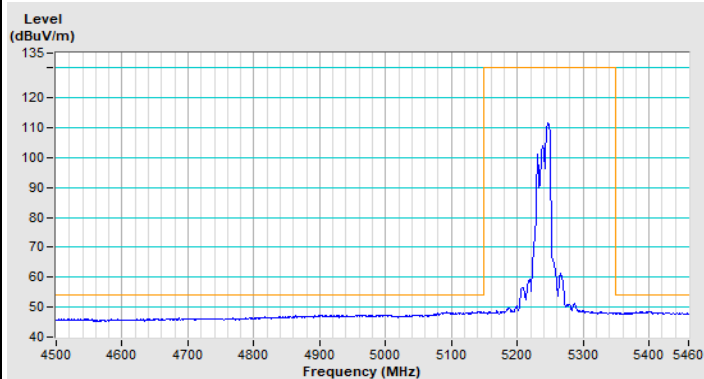

Horizontal (Average)

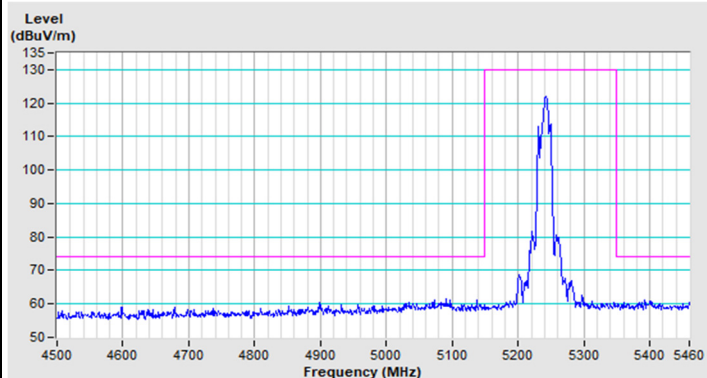


Vertical (Peak)

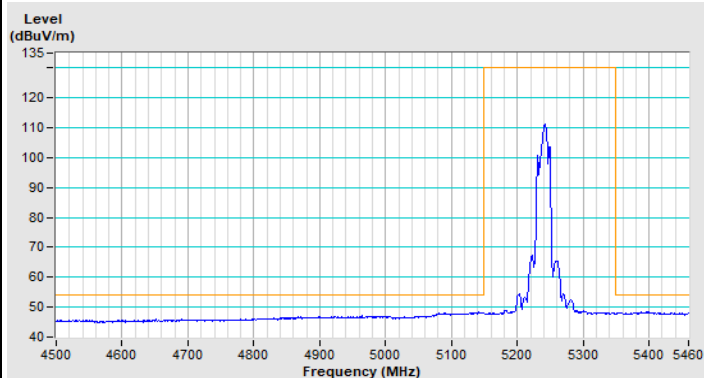


Vertical (Average)


### 802.11be (EHT20) Channel 52

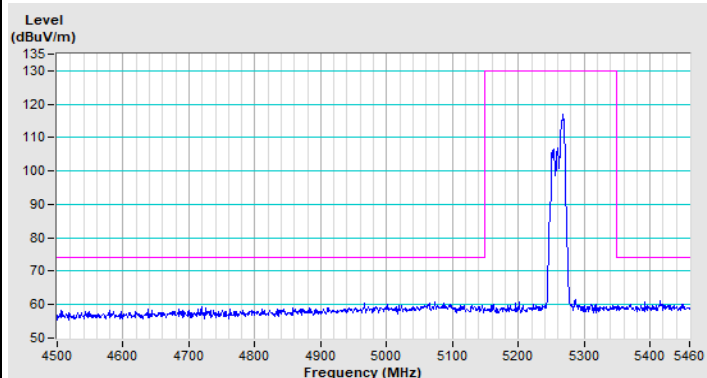


Horizontal (Peak)

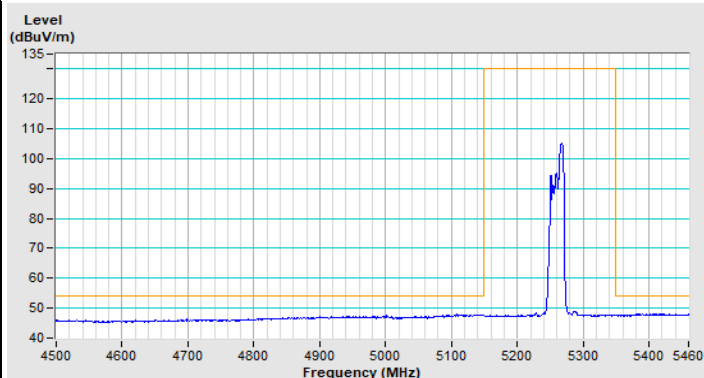

Horizontal (Average)

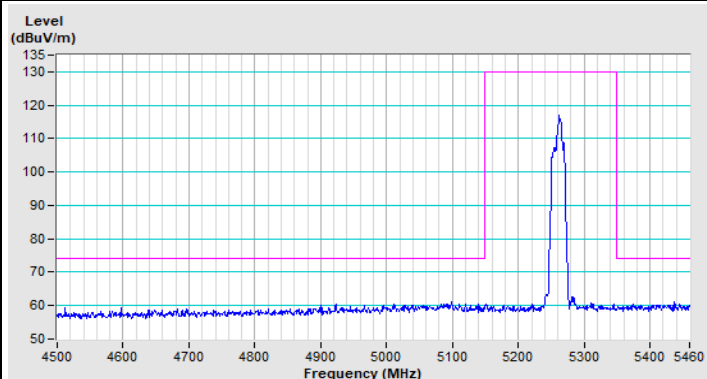


Vertical (Peak)

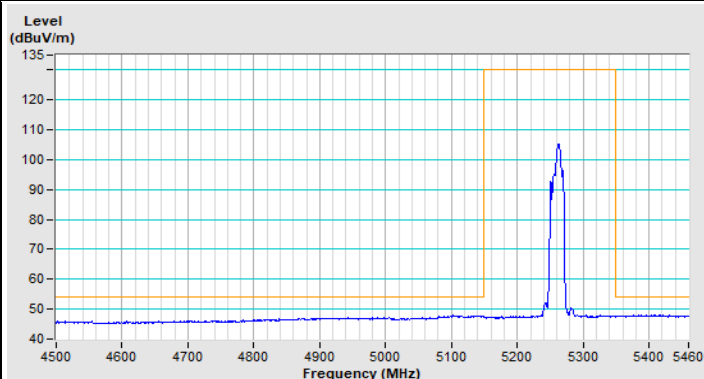


Vertical (Average)


### 802.11be (EHT20) Channel 64

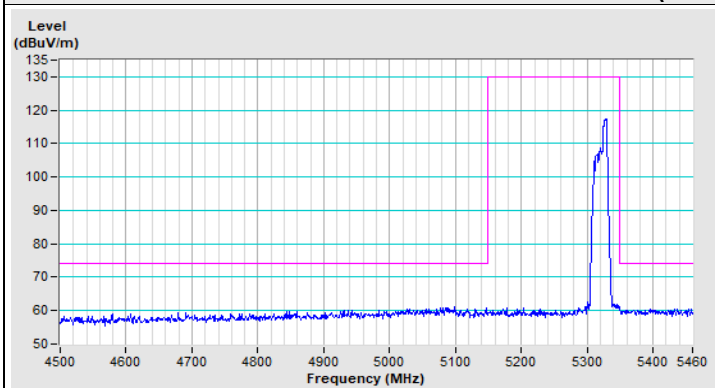


Horizontal (Peak)

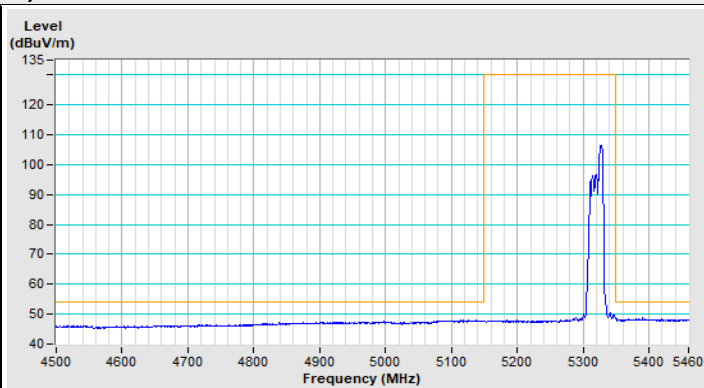

Horizontal (Average)

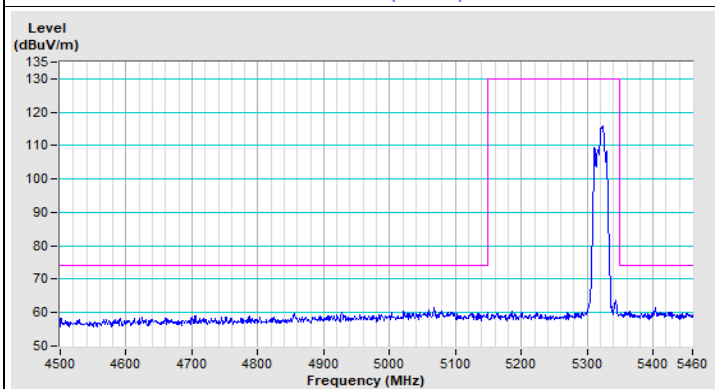


Vertical (Peak)

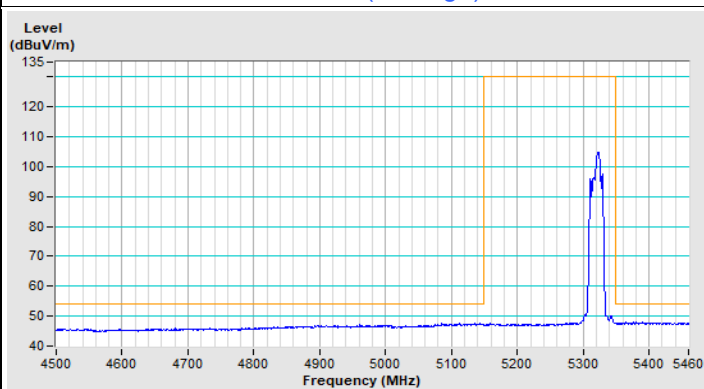


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


### 802.11be (EHT20) Channel 100

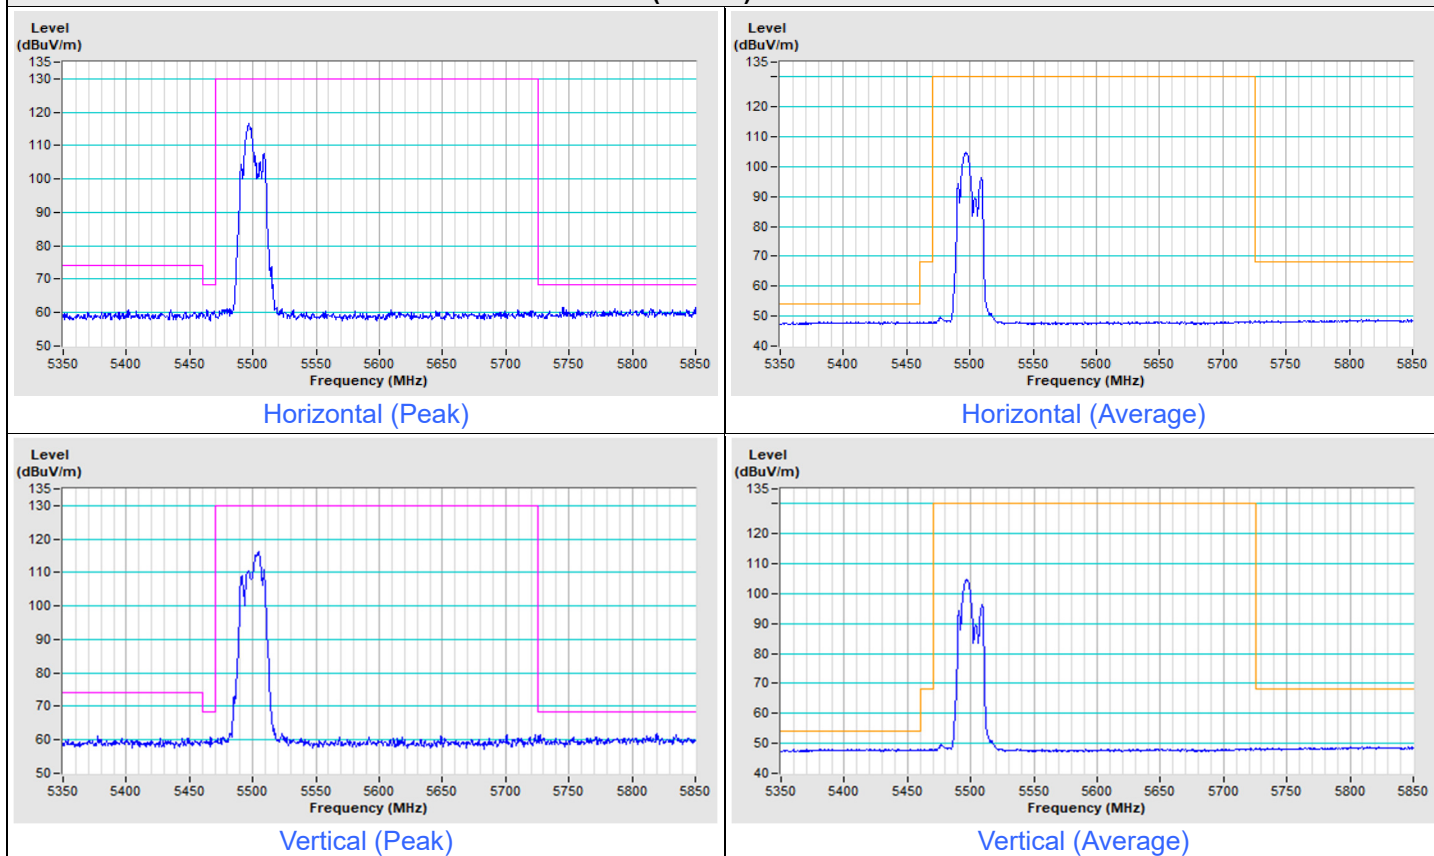


### 802.11be (EHT20) Channel 140

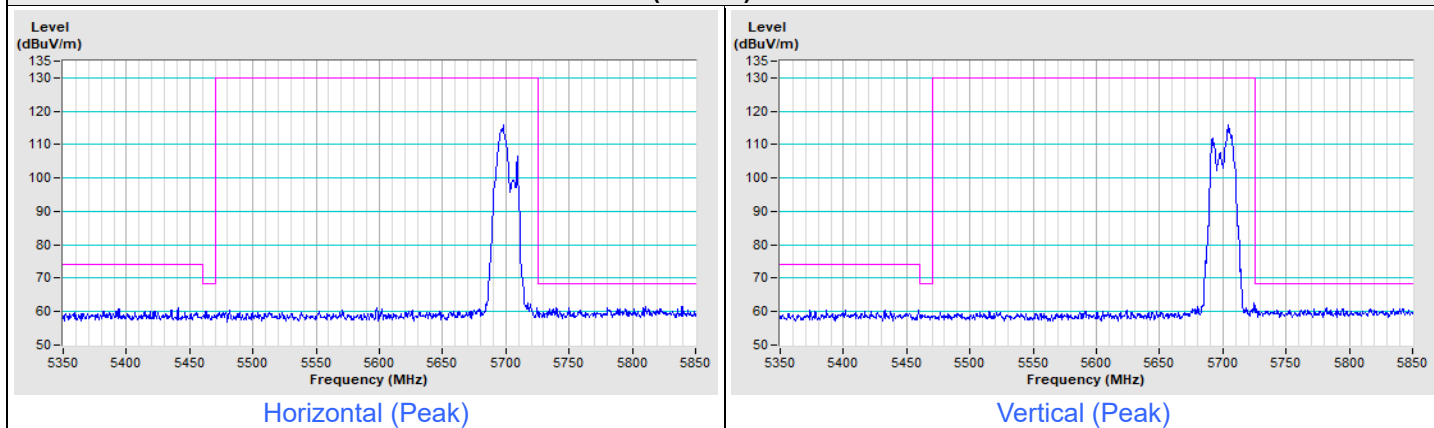

### 802.11be (EHT20) Channel 144

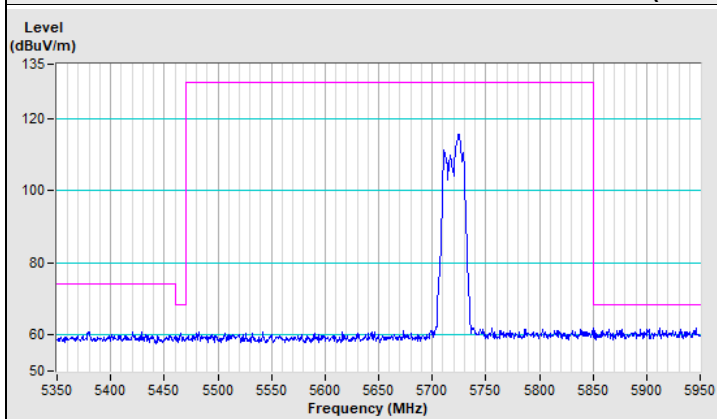



Horizontal (Peak)

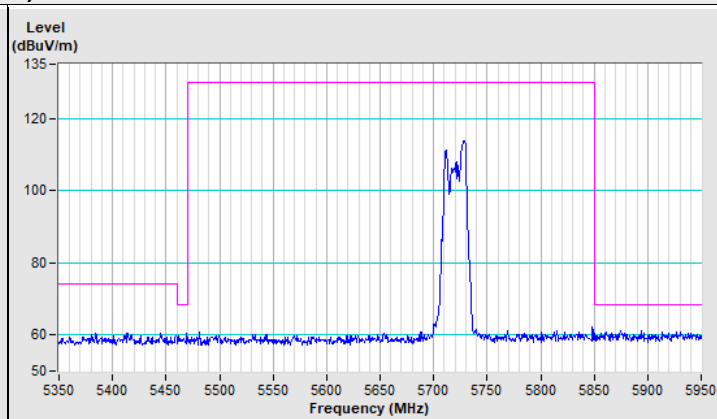



Vertical (Peak)

Frequency Range	5.6 GHz ~ 6.0 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-------------------	-------------------------------	----------------------------------



### 802.11be (EHT20) Channel 149

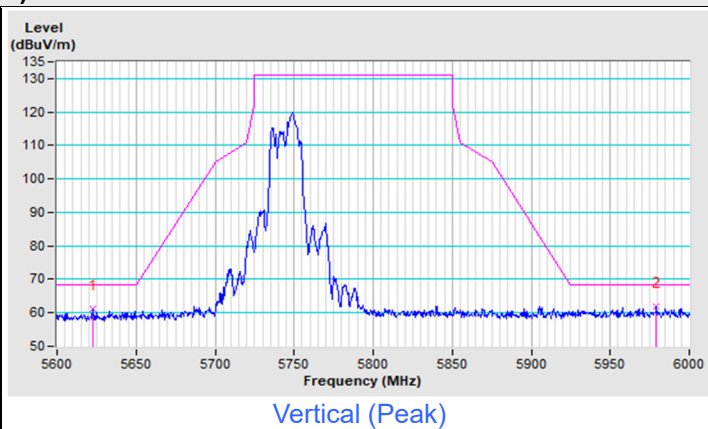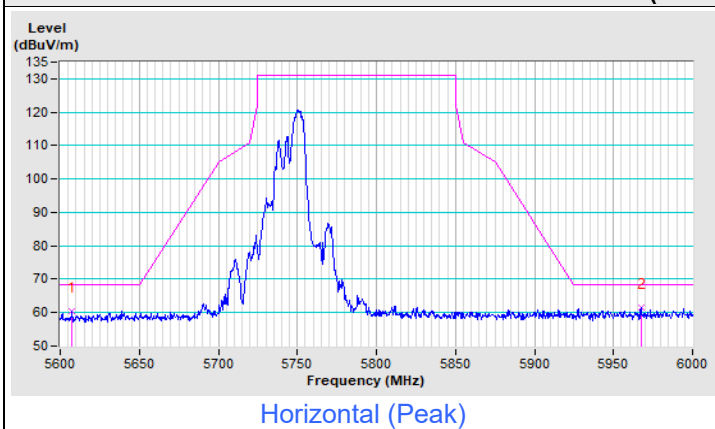

### 802.11be (EHT20) Channel 157

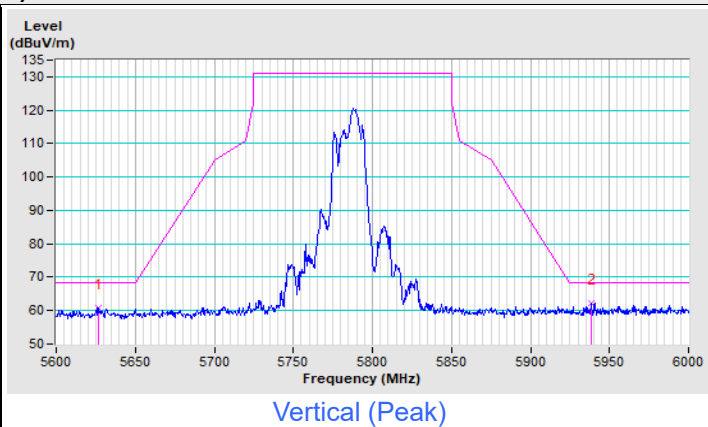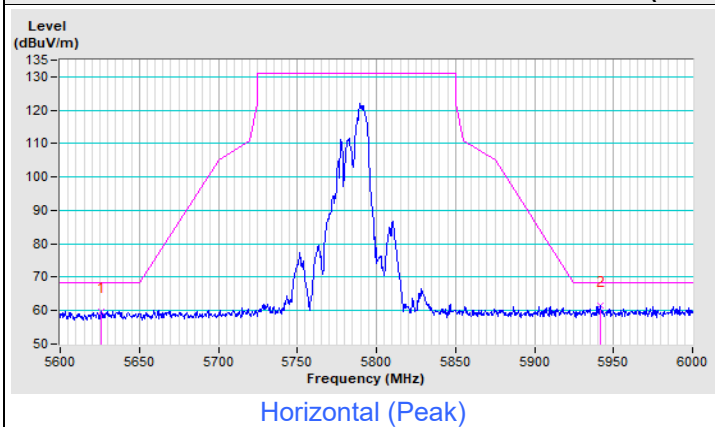


### 802.11be (EHT20) Channel 165

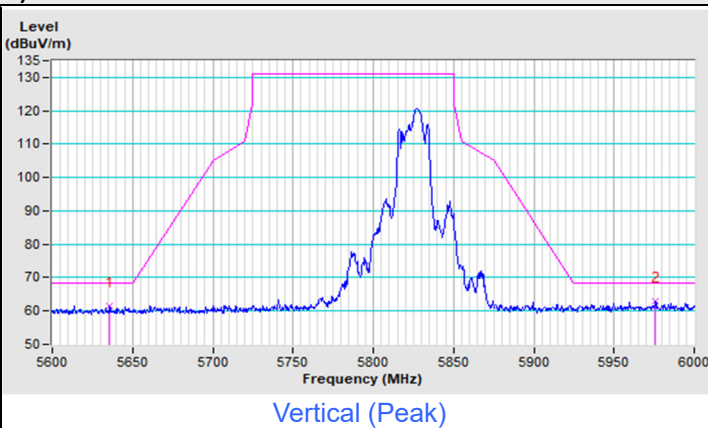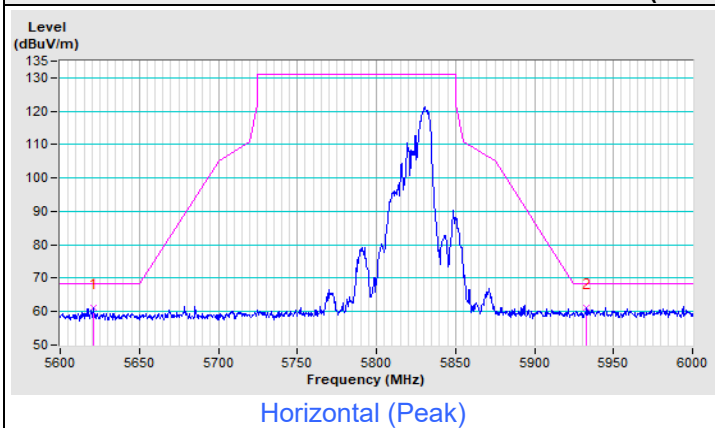


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


### 802.11be (EHT40) Channel 38

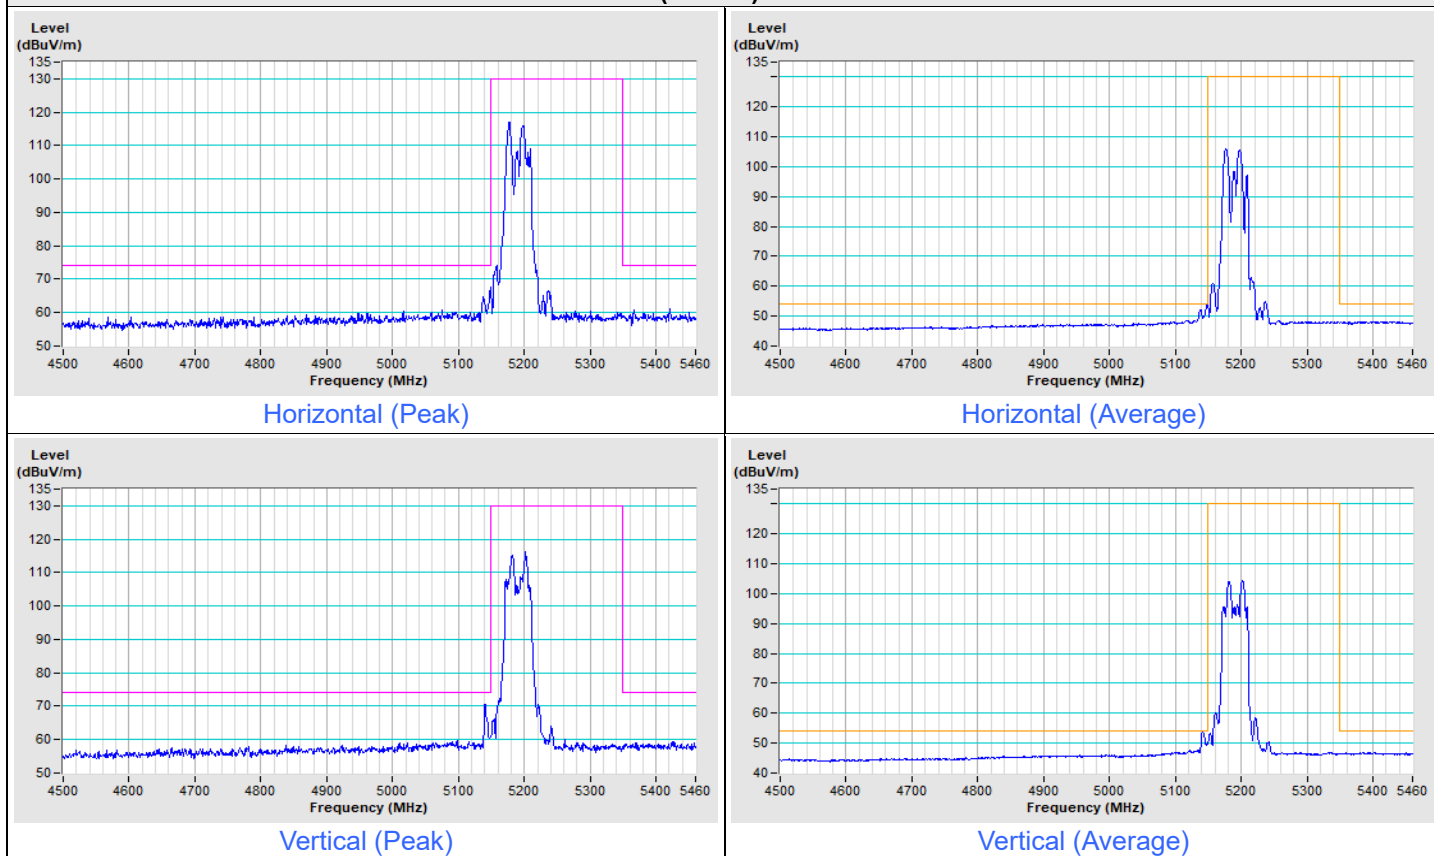


### 802.11be (EHT40) Channel 46

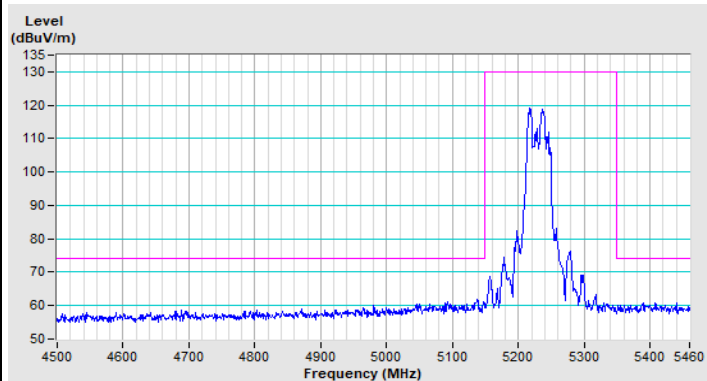


Horizontal (Peak)

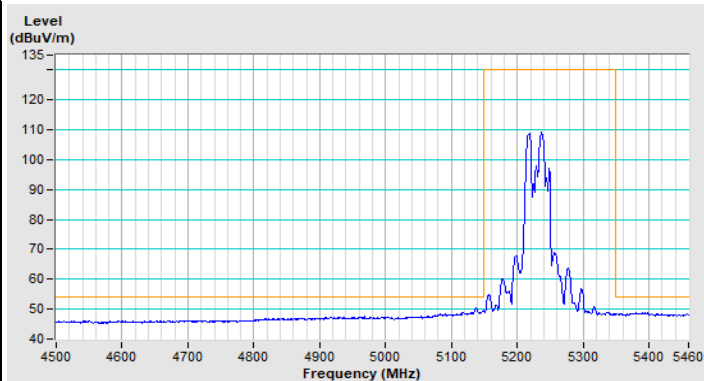

Horizontal (Average)

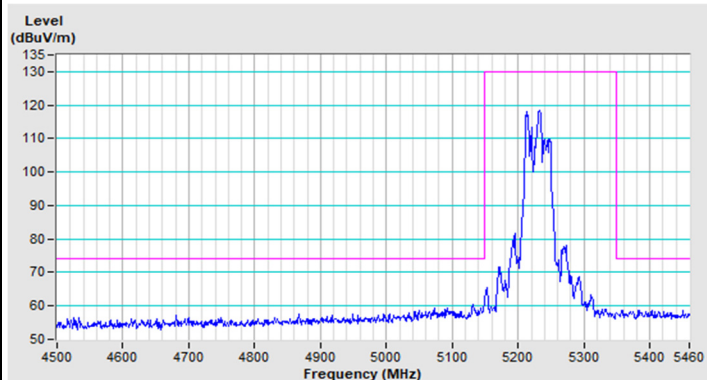


Vertical (Peak)

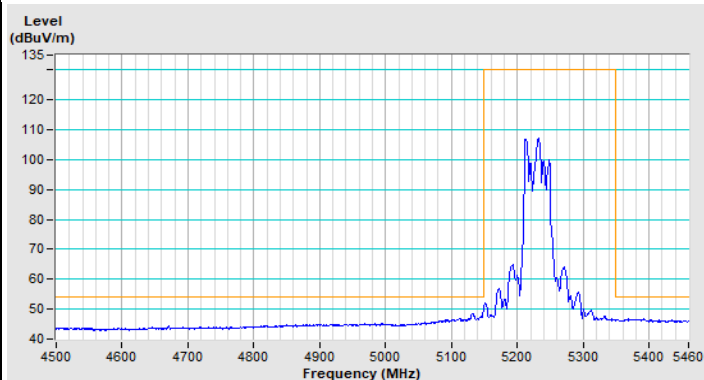


Vertical (Average)


### 802.11be (EHT40) Channel 54

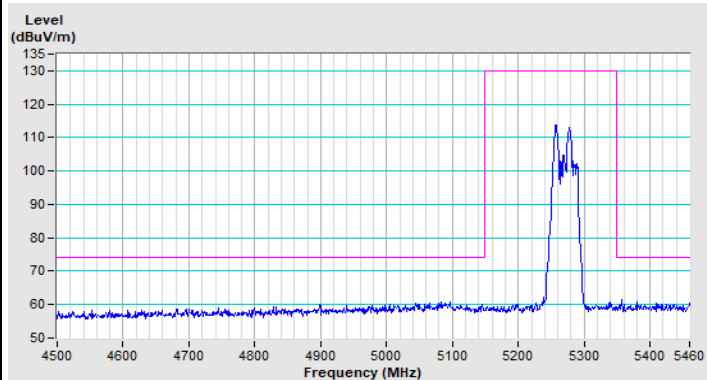


Horizontal (Peak)

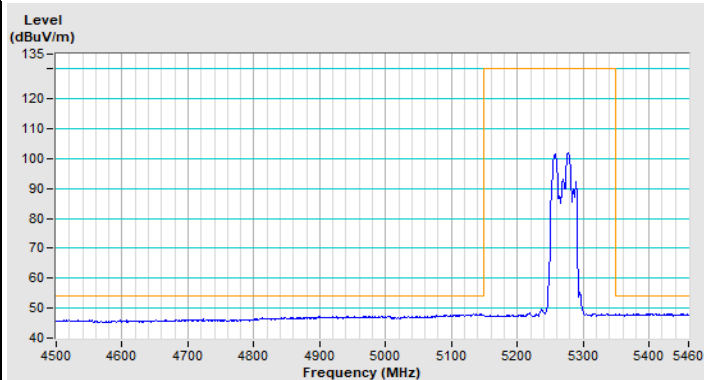

Horizontal (Average)

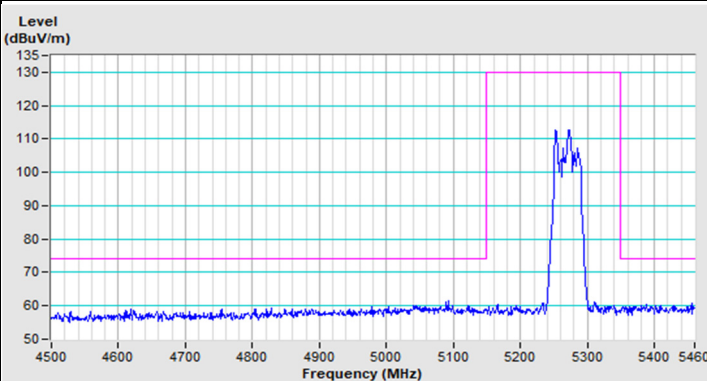


Vertical (Peak)

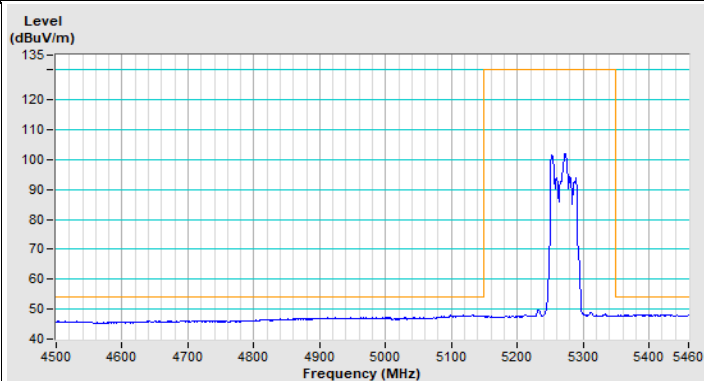


Vertical (Average)


### 802.11be (EHT40) Channel 62

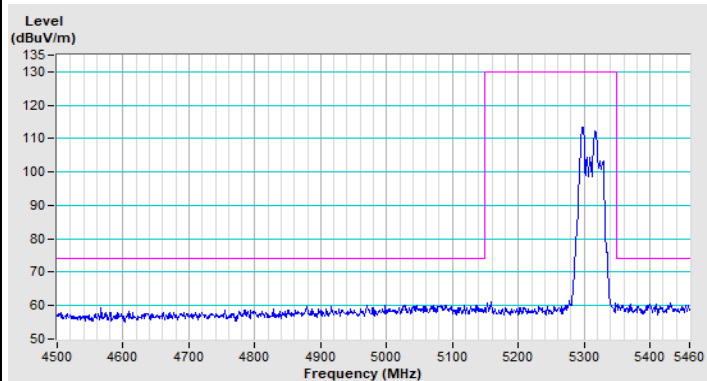


Horizontal (Peak)

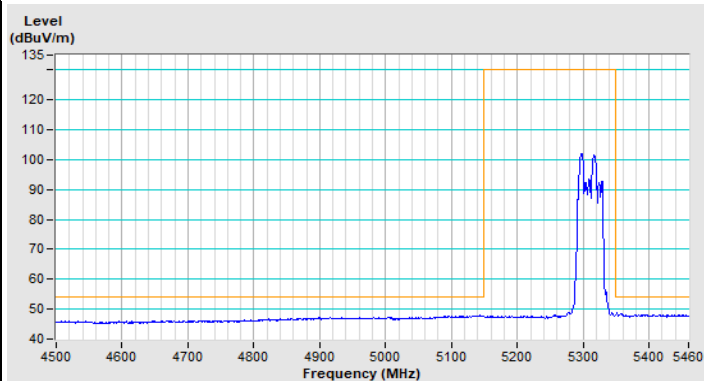

Horizontal (Average)

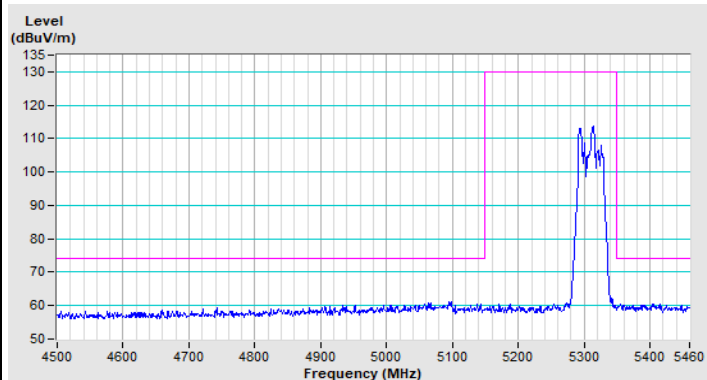

Vertical (Peak)

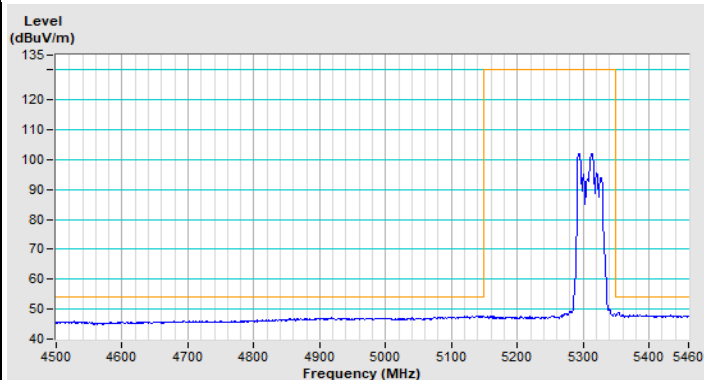


Vertical (Average)




Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


### 802.11be (EHT40) Channel 102

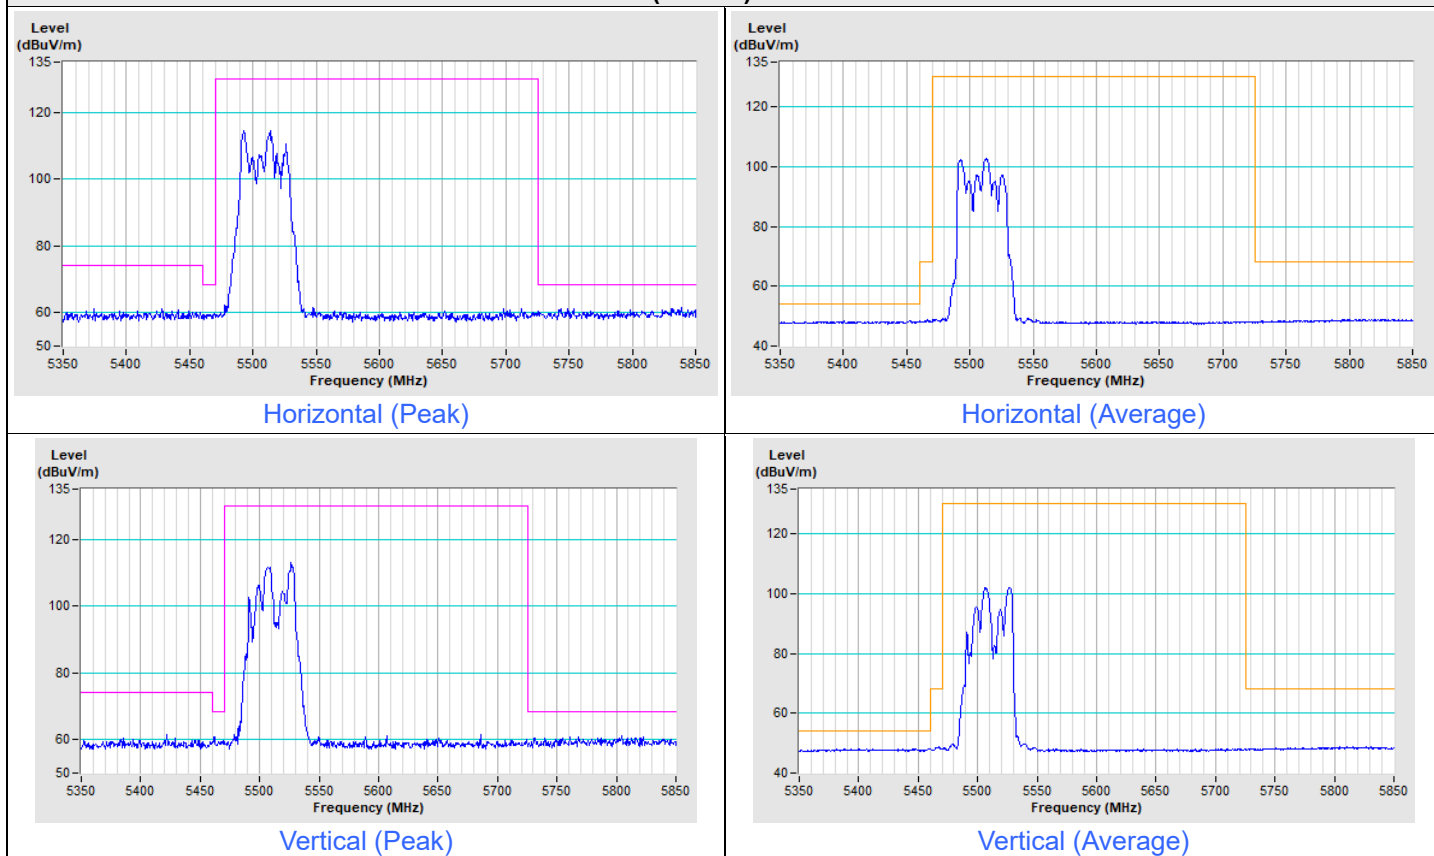


### 802.11be (EHT40) Channel 134

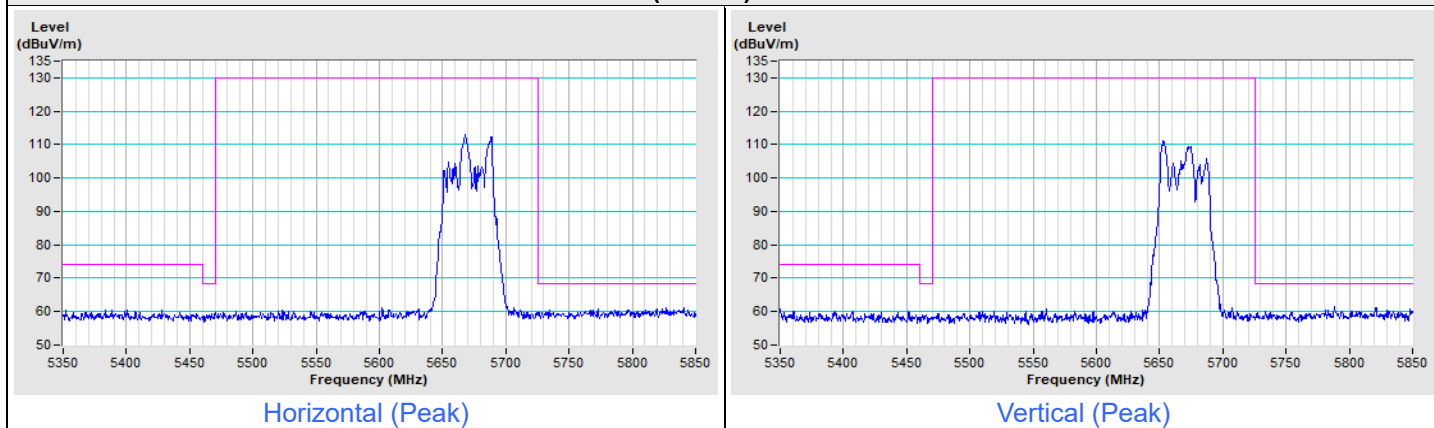

### 802.11be (EHT40) Channel 142

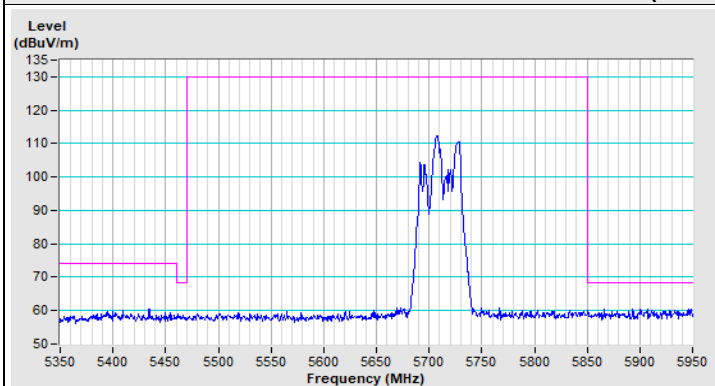


Horizontal (Peak)

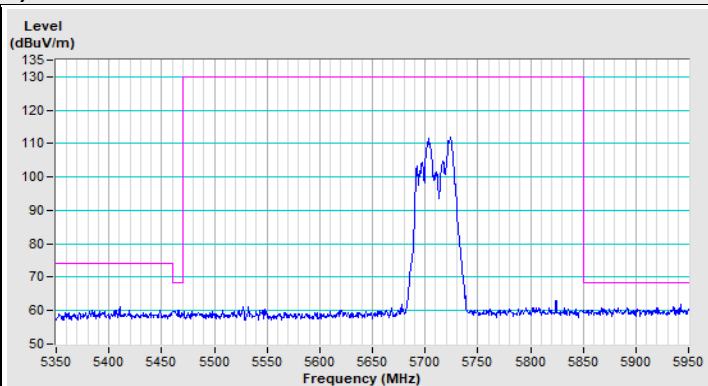


Vertical (Peak)

Frequency Range	5.6 GHz ~ 6.0 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-------------------	-------------------------------	----------------------------------

### 802.11be (EHT40) Channel 151

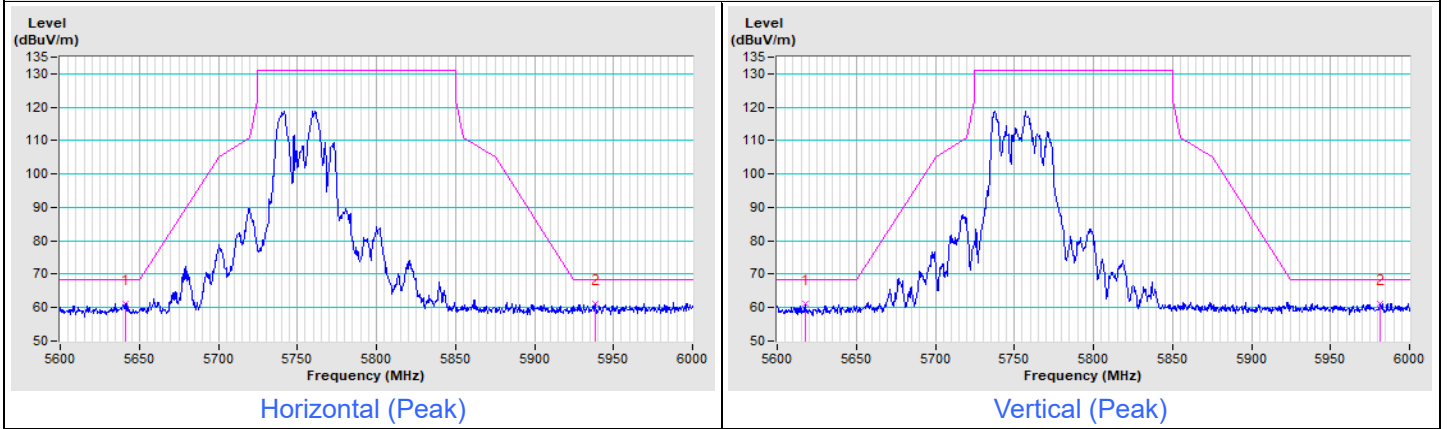


### 802.11be (EHT40) Channel 159

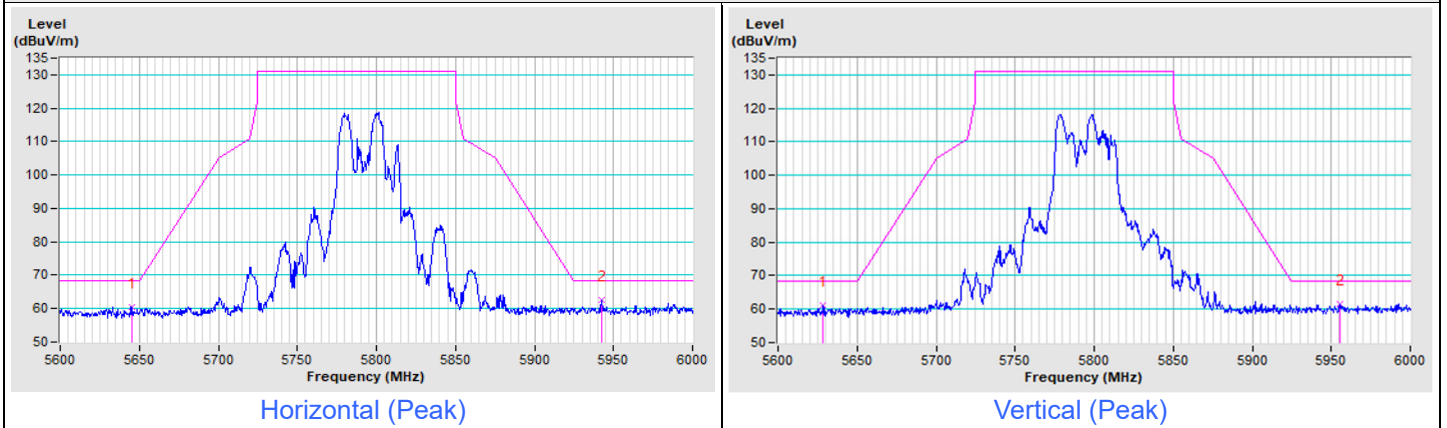


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


**802.11be (EHT80) Channel 42**

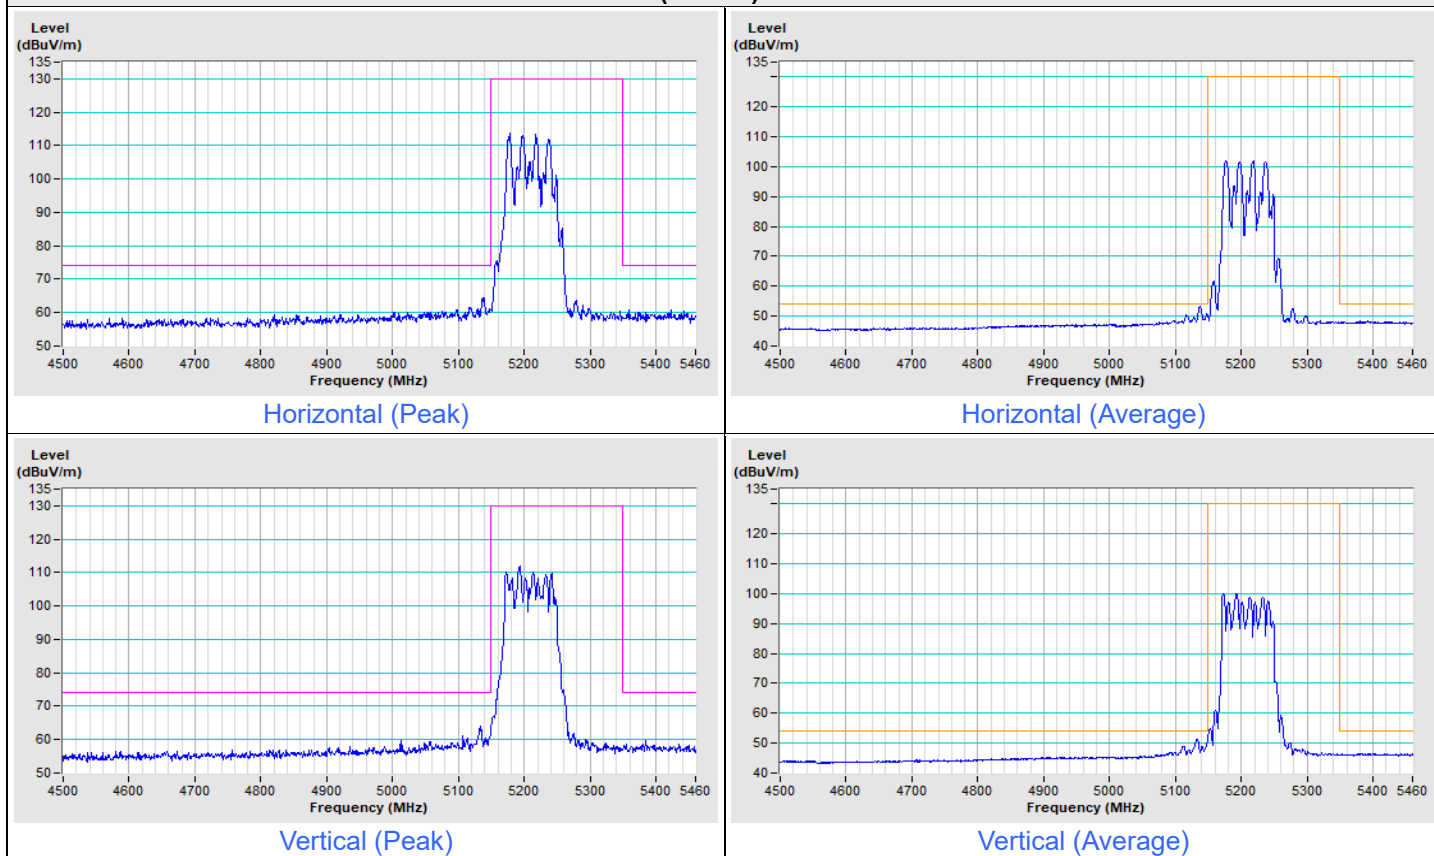


### 802.11be (EHT80) Channel 58

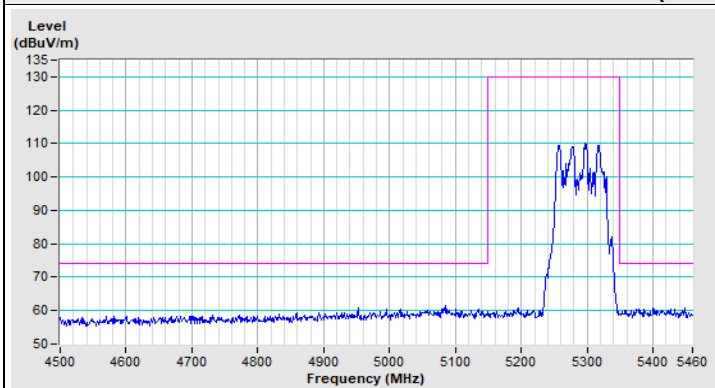


Horizontal (Peak)

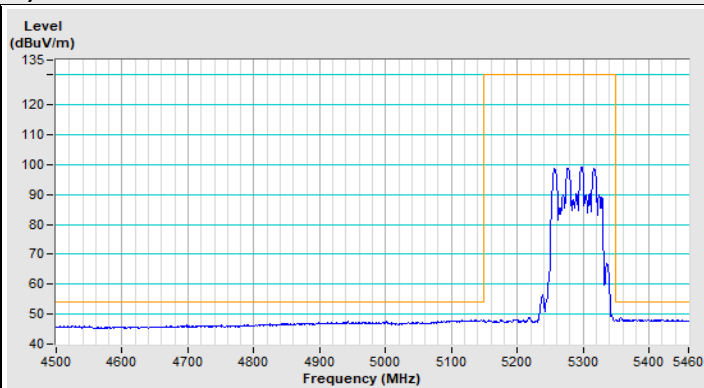

Horizontal (Average)

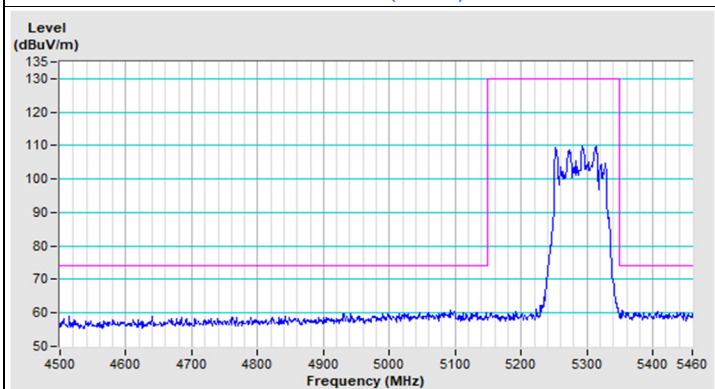

Vertical (Peak)

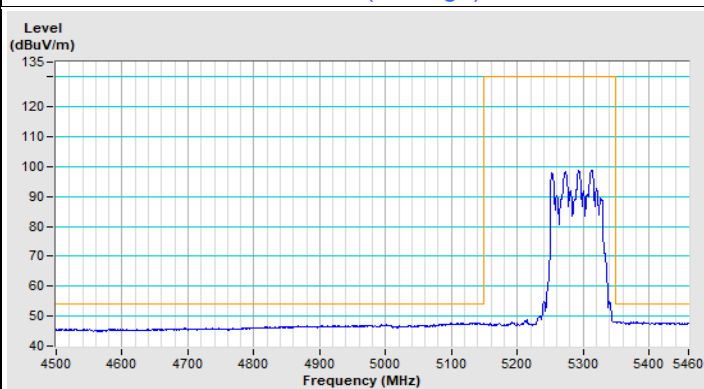


Vertical (Average)




Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


### 802.11be (EHT80) Channel 106

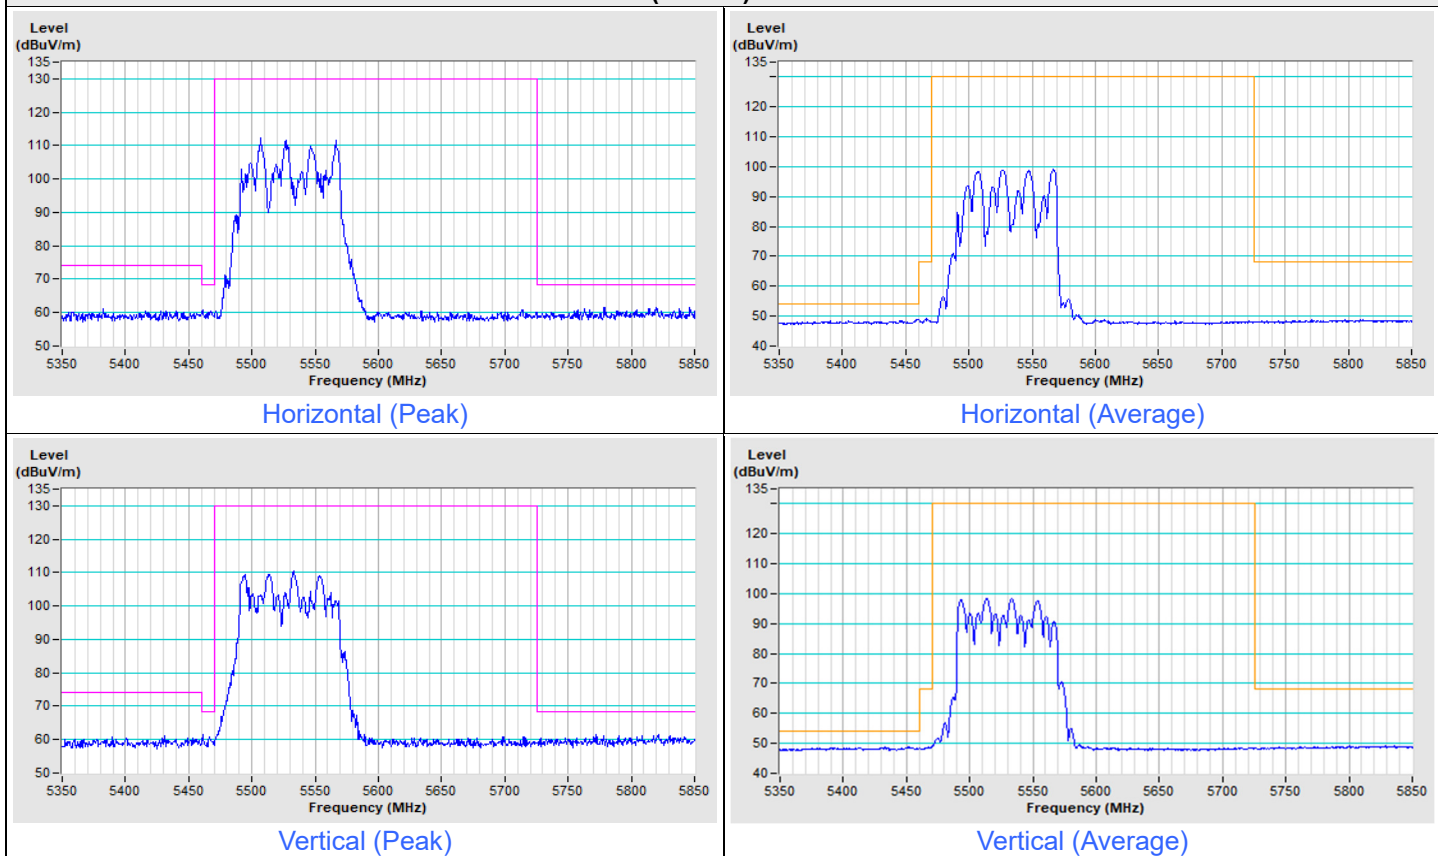


### 802.11be (EHT80) Channel 122

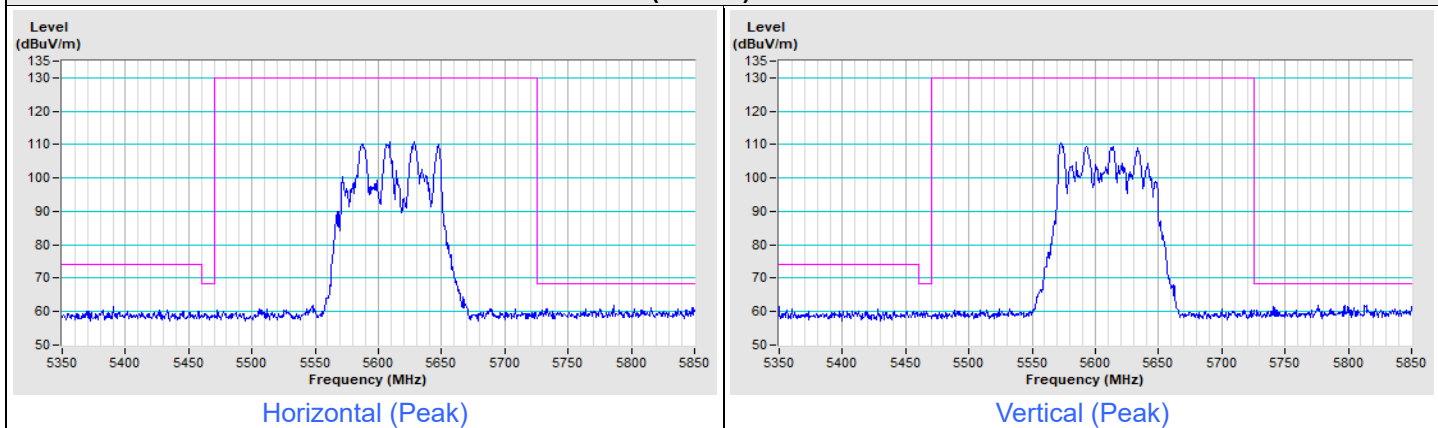

### 802.11be (EHT80) Channel 138

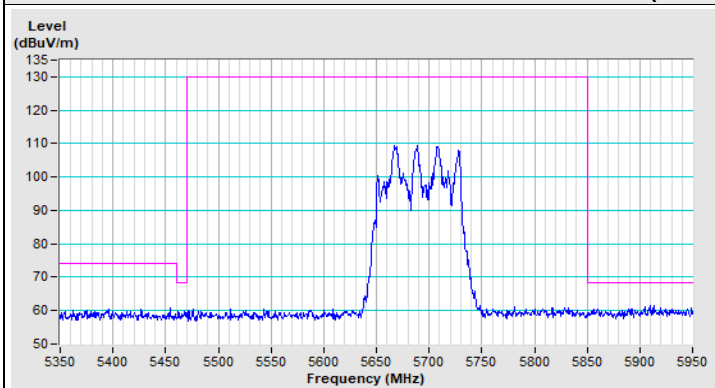


Horizontal (Peak)

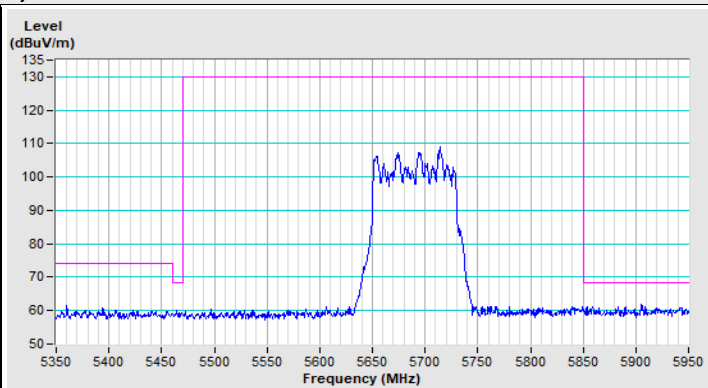

Vertical (Peak)

Frequency Range	5.6 GHz ~ 6.0 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-------------------	-------------------------------	----------------------------------


### 802.11be (EHT80) Channel 155

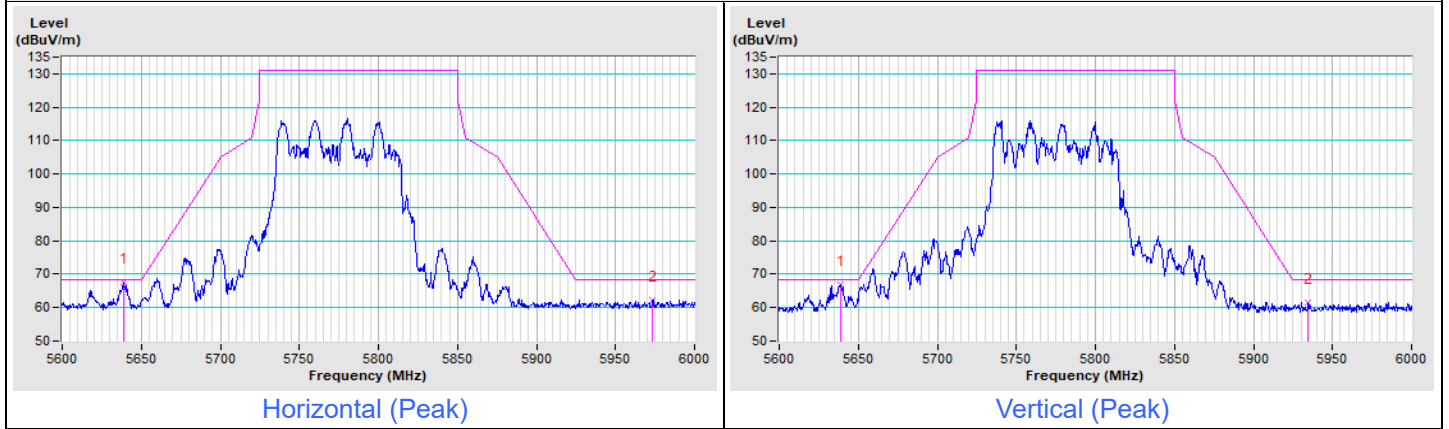




Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

### 802.11be (EHT160) Channel 50

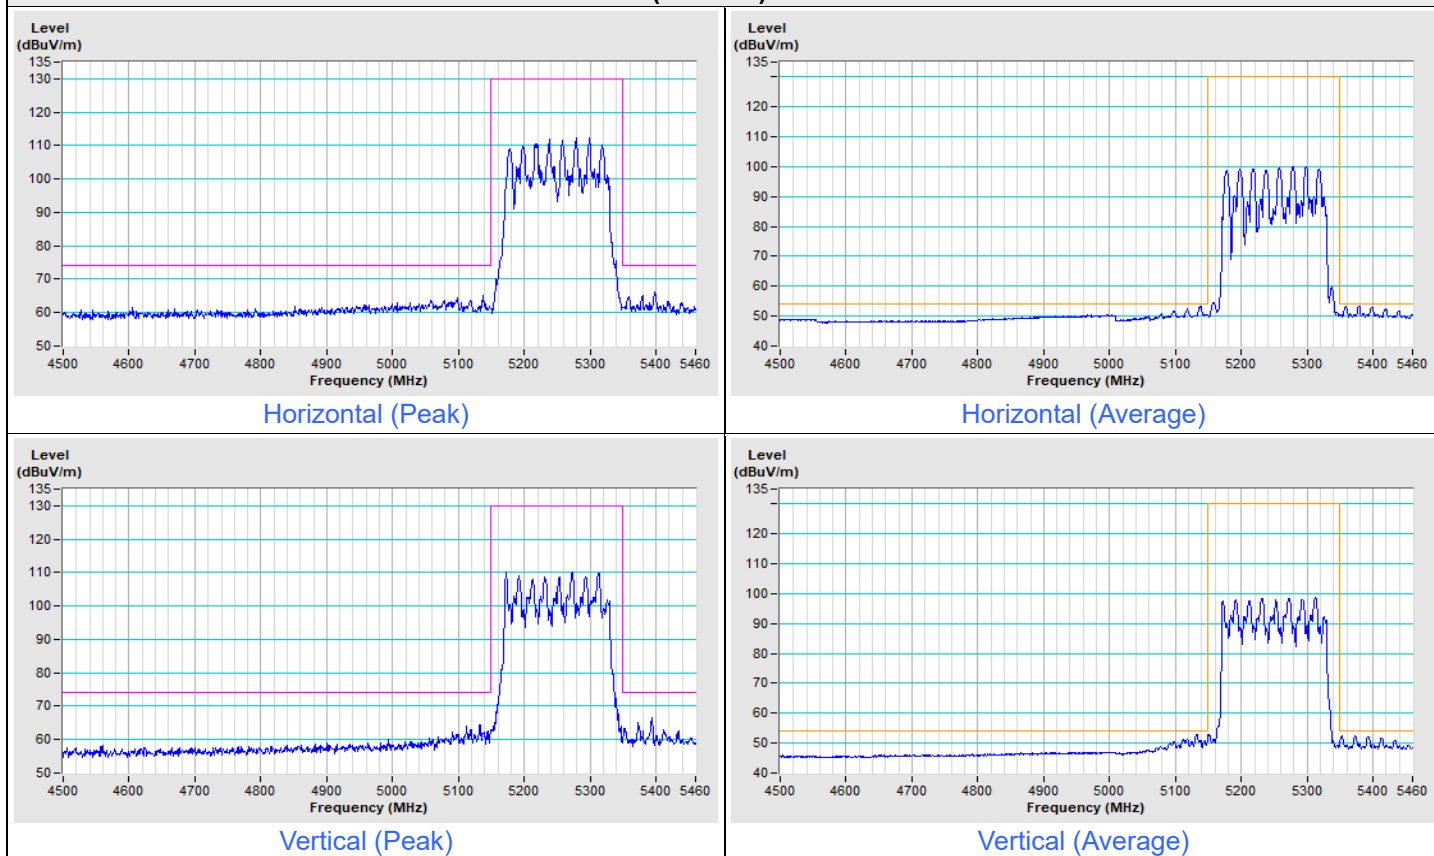

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

### 802.11be (EHT160) Channel 114

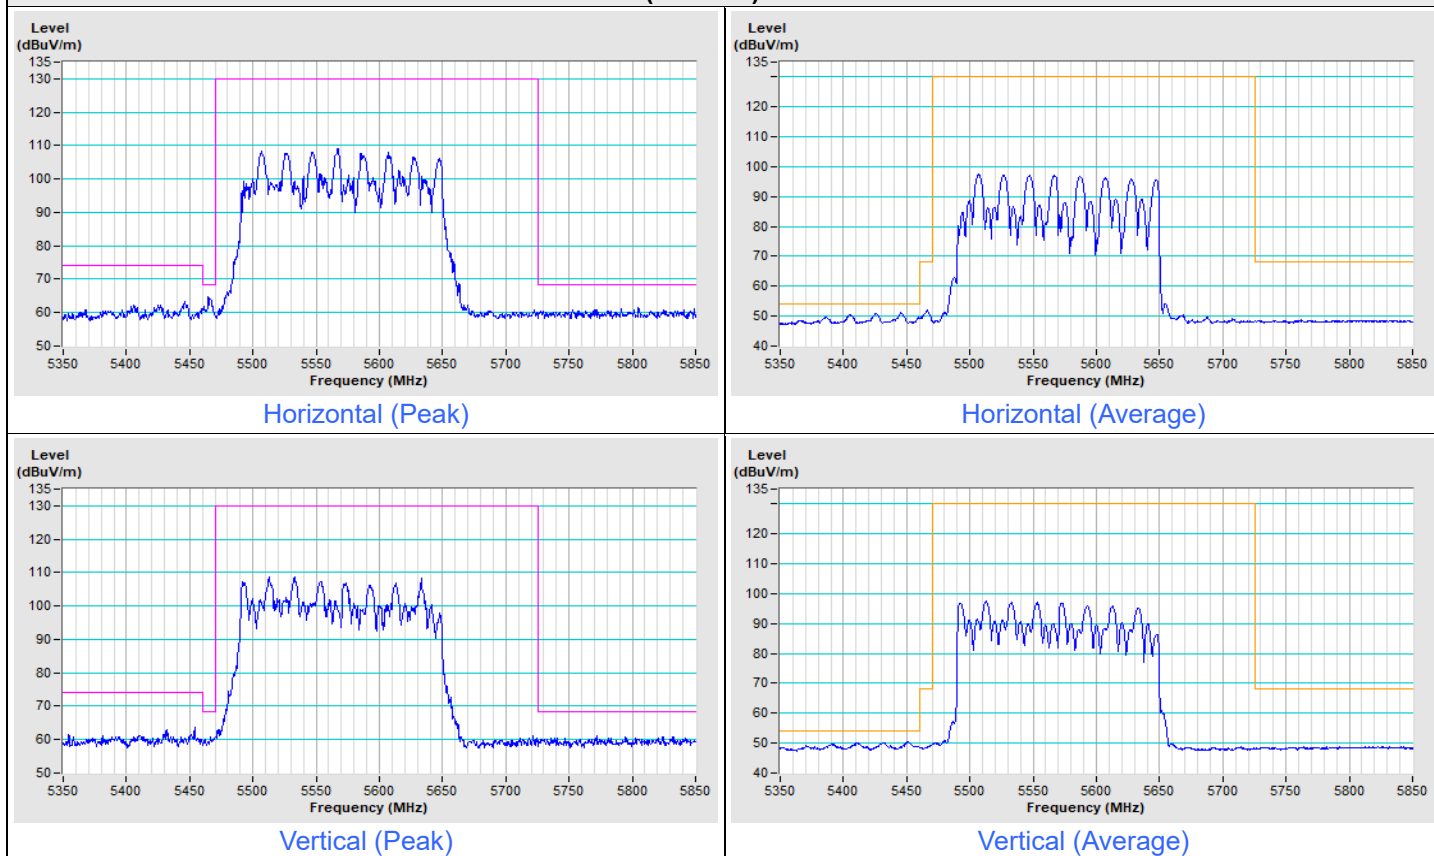

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---