




Plots of Injected signal (AWGN) level

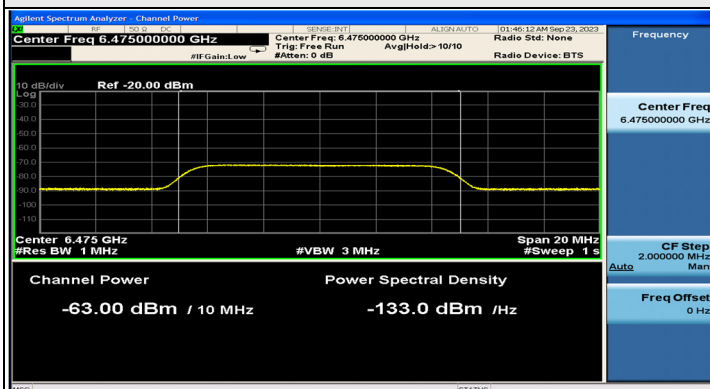


802.11be (EHT20) / CH105

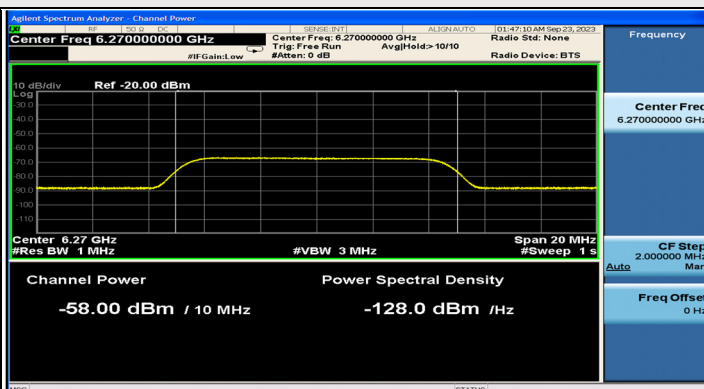

802.11be (EHT320) / CH95(Low Edge)

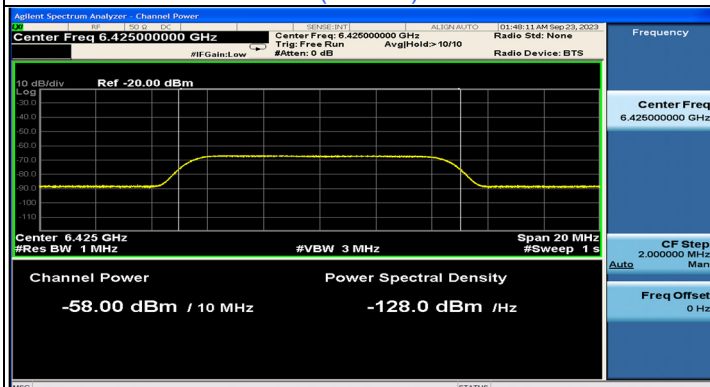


802.11be (EHT320) / CH95(Middle)

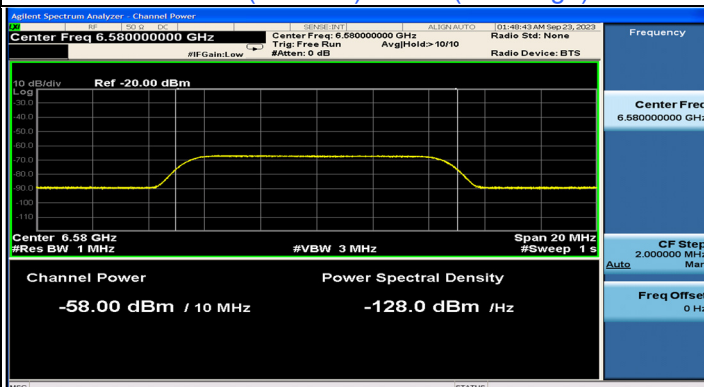


802.11be (EHT320) / CH95(High Edge)


Plots of EUT ceased transmission in the time domain

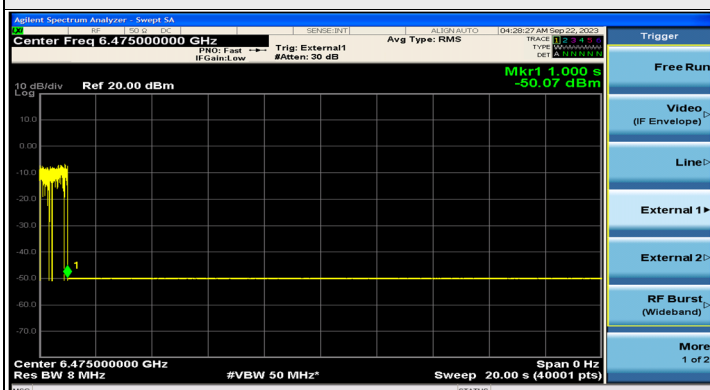


802.11be (EHT20) / CH105

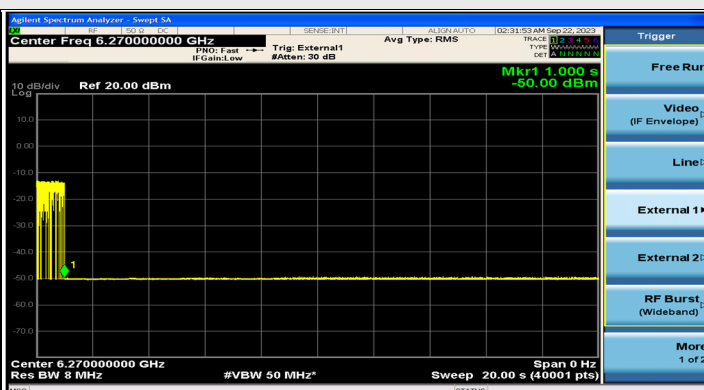

802.11be (EHT320) / CH95(Low Edge)

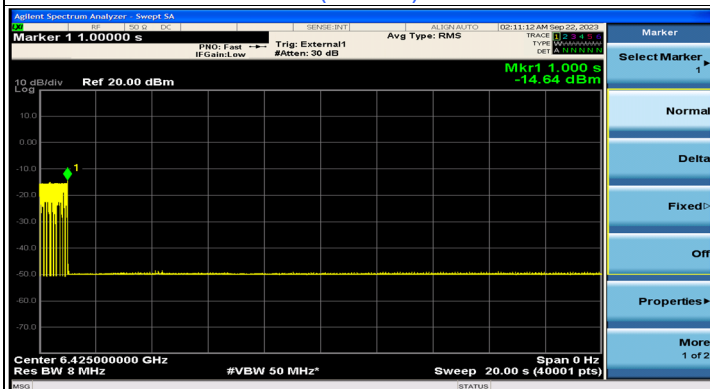

802.11be (EHT320) / CH95(Middle)

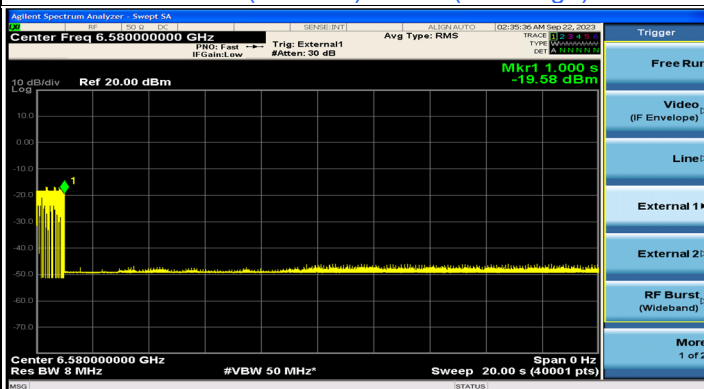

802.11be (EHT320) / CH95(High Edge)




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-63	4.41	0	-67.41	-62	OFF
					-71	4.41	0	-75.41	-62	Minimal
					-77.59	4.41	0	-82	-62	ON
	320	159	6745	6590	-58	4.41	0	-62.41	-62	OFF
					-70	4.41	0	-74.41	-62	Minimal
					-77.59	4.41	0	-82	-62	ON
					-58	4.41	0	-62.41	-62	OFF
					-70	4.41	0	-74.41	-62	Minimal
					-77.59	4.41	0	-82	-62	ON
	6900	6745	-59	4.41	0	-63.41	-62	OFF		
			-70	4.41	0	-74.41	-62	Minimal		
			-77.59	4.41	0	-82	-62	ON		


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6745	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6900	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

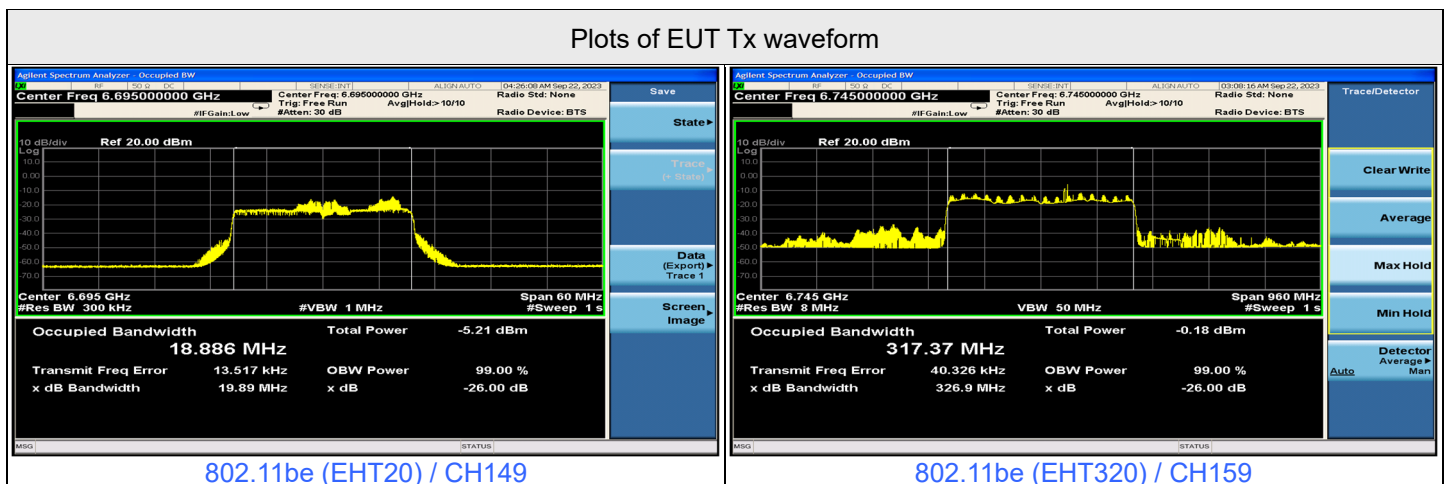


Plots of Injected signal (AWGN) level

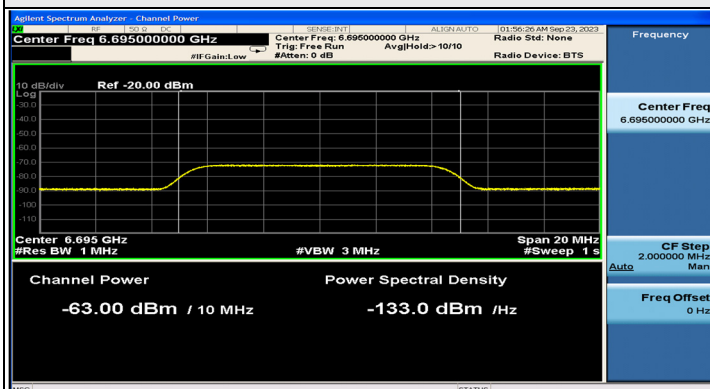


802.11be (EHT20) / CH149

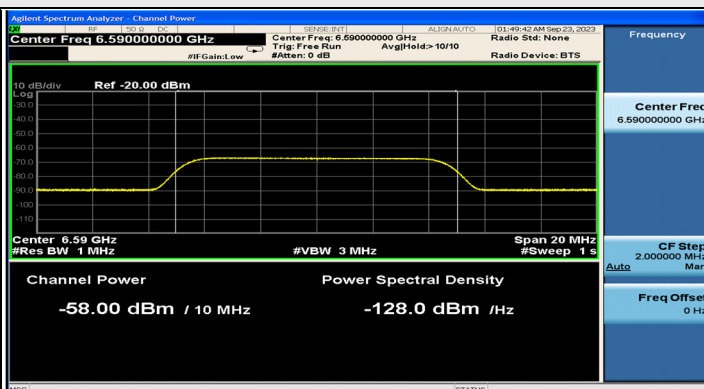

802.11be (EHT320) / CH159(Low Edge)

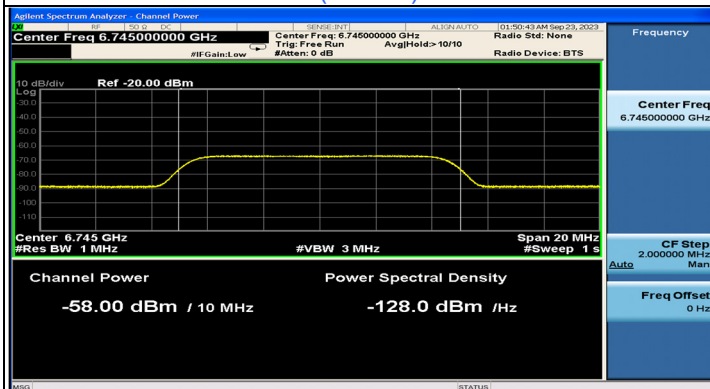


802.11be (EHT320) / CH159(Middle)

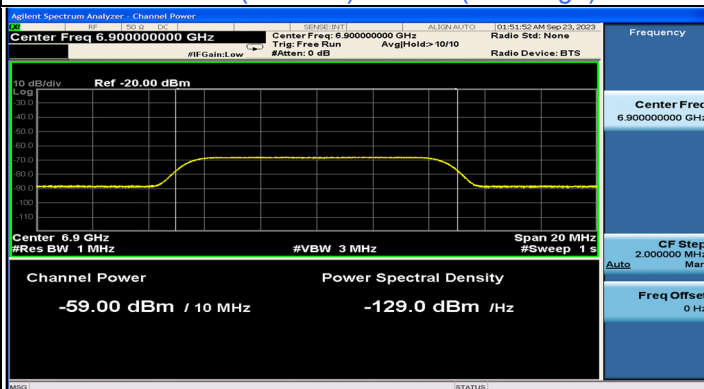


802.11be (EHT320) / CH159(High Edge)


Plots of EUT ceased transmission in the time domain

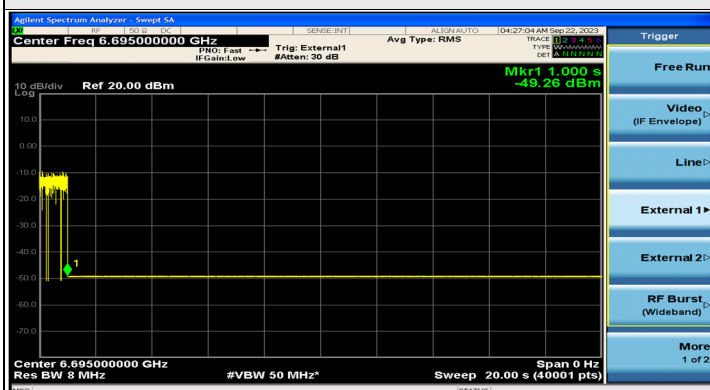


802.11be (EHT20) / CH149

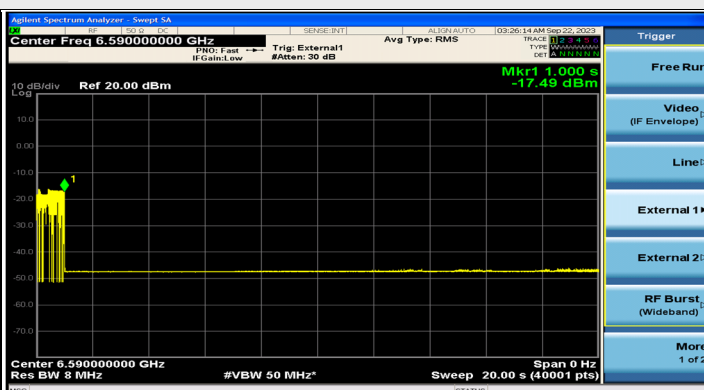

802.11be (EHT320) / CH159(Low Edge)

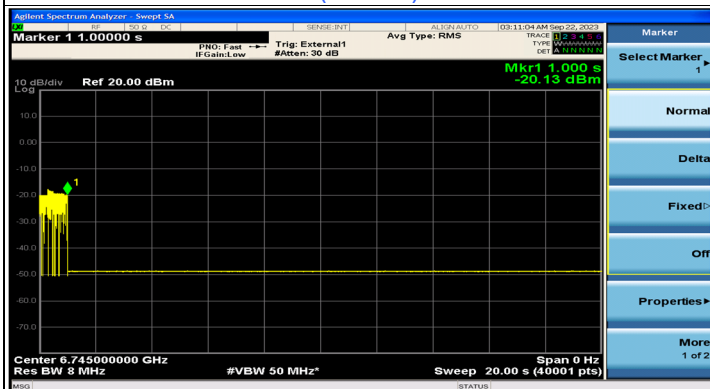

802.11be (EHT320) / CH159(Middle)

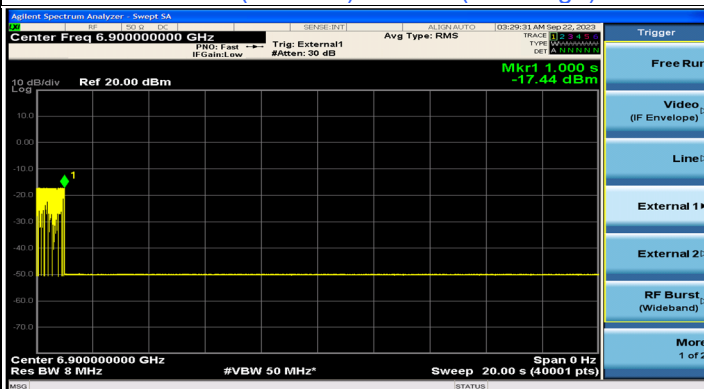

802.11be (EHT320) / CH159(High Edge)




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-63	4.41	0	-67.41	-62	OFF
					-71	4.41	0	-75.41	-62	Minimal
					-77.59	4.41	0	-82	-62	ON
	320	191	6905	6750	-59	4.41	0	-63.41	-62	OFF
					-70	4.41	0	-74.41	-62	Minimal
					-77.59	4.41	0	-82	-62	ON
	7060	191	6905	7060	-58	4.41	0	-62.41	-62	OFF
					-70	4.41	0	-74.41	-62	Minimal
					-77.59	4.41	0	-82	-62	ON
	7060	191	6905	7060	-59	4.41	0	-63.41	-62	OFF
					-70	4.41	0	-74.41	-62	Minimal
					-77.59	4.41	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6995	v	v	v	v	v	v	v			
802.11be	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

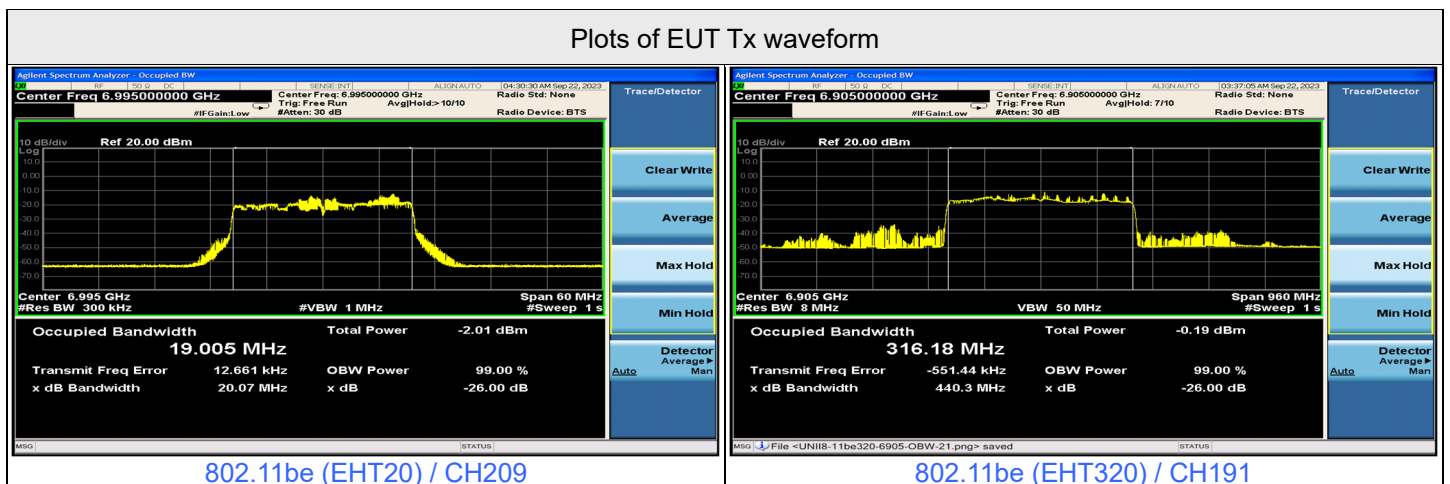


Plots of Injected signal (AWGN) level

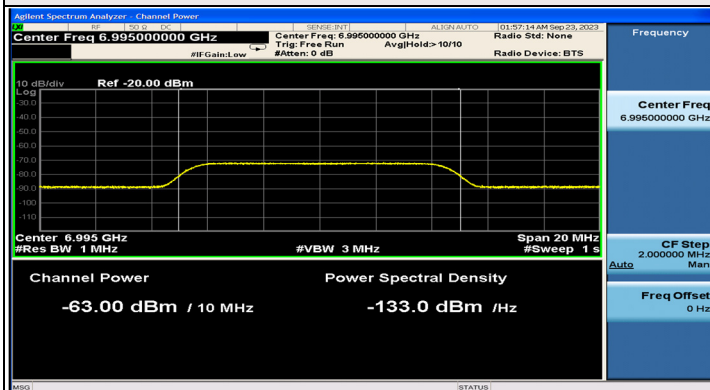


802.11be (EHT20) / CH209

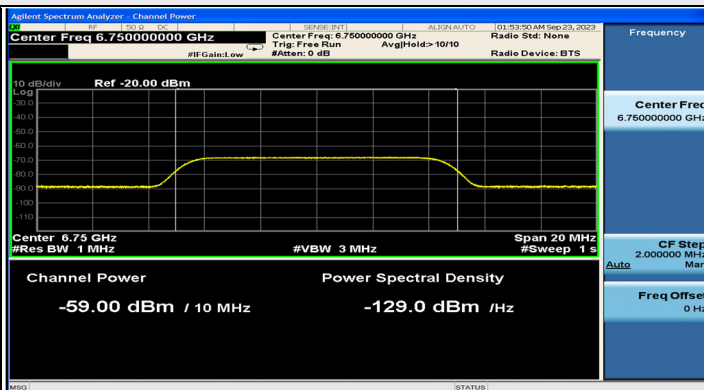

802.11be (EHT320) / CH191(Low Edge)

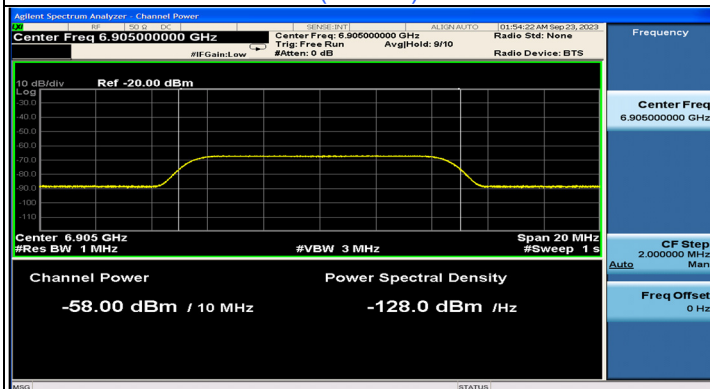


802.11be (EHT320) / CH191(Middle)

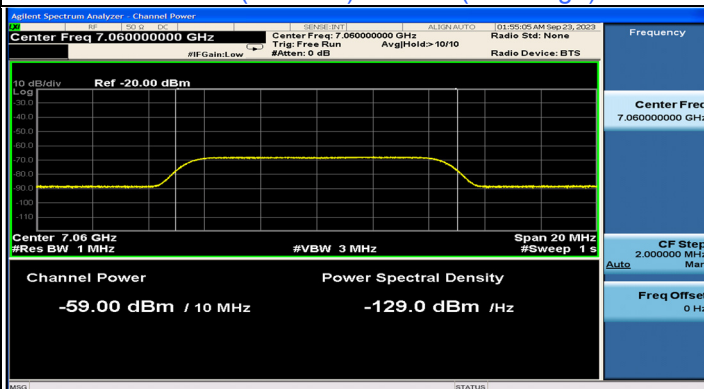


802.11be (EHT320) / CH191(High Edge)


Plots of EUT ceased transmission in the time domain

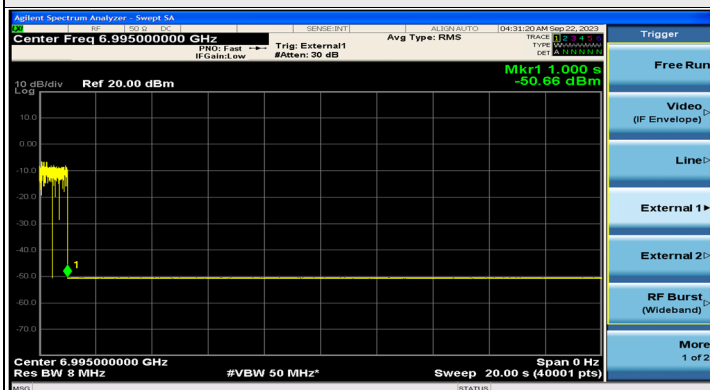


802.11be (EHT20) / CH209

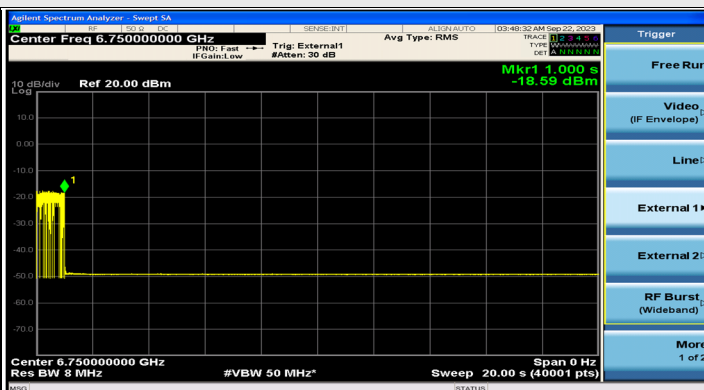

802.11be (EHT320) / CH191(Low Edge)

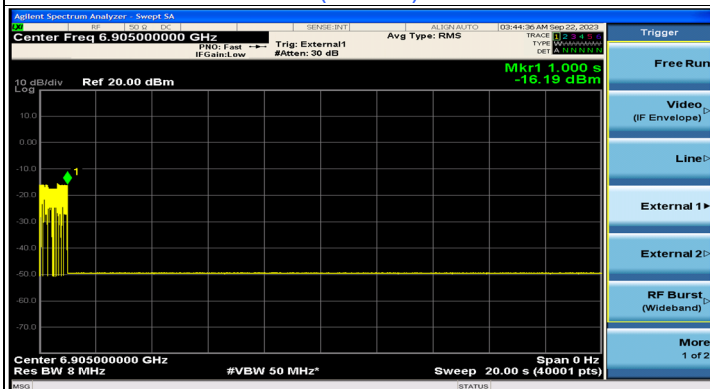

802.11be (EHT320) / CH191(Middle)

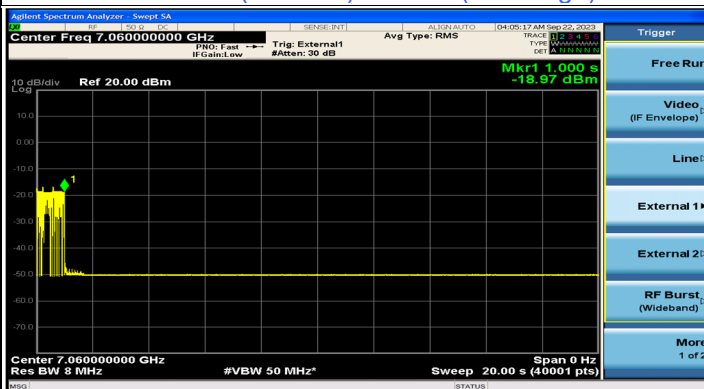

802.11be (EHT320) / CH191(High Edge)

7.8 AC Power Conducted Emissions


Test Mode A

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.66	42.09	25.42	51.75	35.08	66.00	56.00	-14.25	-20.92
2	0.17000	9.68	38.74	24.24	48.42	33.92	64.96	54.96	-16.54	-21.04
3	0.18200	9.69	36.68	21.21	46.37	30.90	64.39	54.39	-18.02	-23.49
4	0.19728	9.70	33.55	18.76	43.25	28.46	63.72	53.72	-20.47	-25.26
5	0.26600	9.73	26.78	19.55	36.51	29.28	61.24	51.24	-24.73	-21.96
6	0.43800	9.79	29.21	18.22	39.00	28.01	57.10	47.10	-18.10	-19.09

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

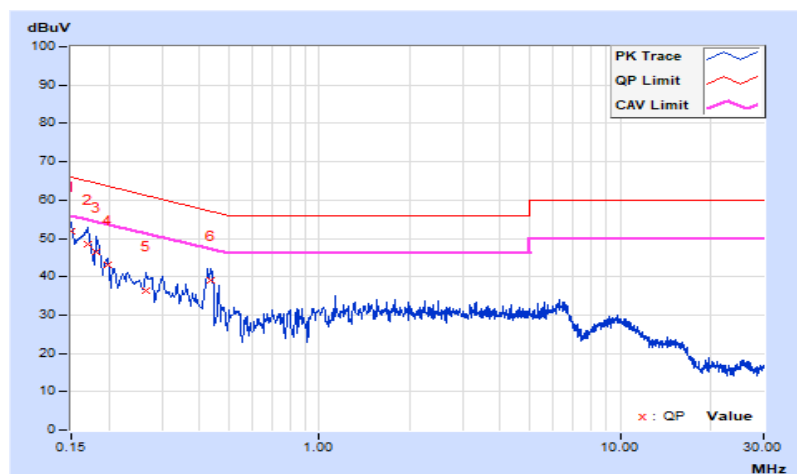


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.66	42.11	23.97	51.77	33.63	66.00	56.00	-14.23	-22.37
2	0.16600	9.67	40.54	24.27	50.21	33.94	65.16	55.16	-14.95	-21.22
3	0.18568	9.69	34.07	20.64	43.76	30.33	64.23	54.23	-20.47	-23.90
4	0.28600	9.73	23.90	15.15	33.63	24.88	60.64	50.64	-27.01	-25.76
5	0.40179	9.77	31.73	22.71	41.50	32.48	57.82	47.82	-16.32	-15.34
6	0.44999	9.78	33.23	23.95	43.01	33.73	56.88	46.88	-13.87	-13.15

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

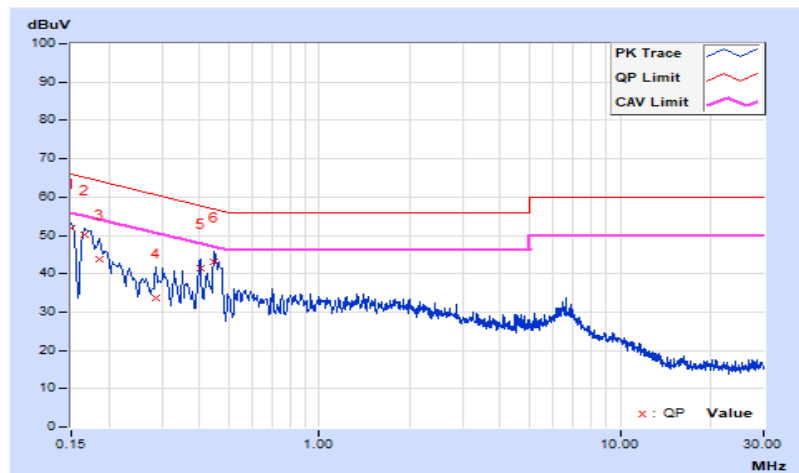

Test Mode B


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.62	32.08	23.07	41.70	32.69	65.78	55.78	-24.08	-23.09
2	0.16600	9.63	29.32	17.12	38.95	26.75	65.16	55.16	-26.21	-28.41
3	0.18200	9.63	28.00	18.98	37.63	28.61	64.39	54.39	-26.76	-25.78
4	0.20600	9.64	23.93	13.52	33.57	23.16	63.37	53.37	-29.80	-30.21
5	0.21800	9.64	22.53	12.94	32.17	22.58	62.89	52.89	-30.72	-30.31
6	0.51606	9.67	30.09	23.94	39.76	33.61	56.00	46.00	-16.24	-12.39

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

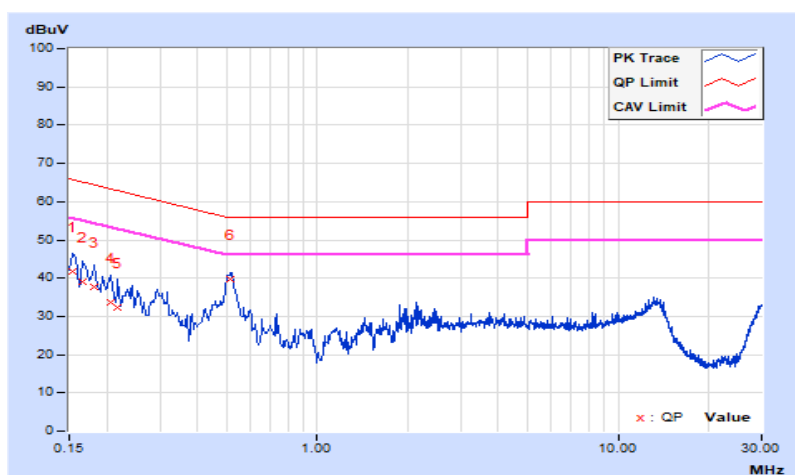


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.62	36.18	26.53	45.80	36.15	66.00	56.00	-20.20	-19.85
2	0.16600	9.63	32.25	20.99	41.88	30.62	65.16	55.16	-23.28	-24.54
3	0.17800	9.63	30.88	22.37	40.51	32.00	64.58	54.58	-24.07	-22.58
4	0.18600	9.63	29.15	19.88	38.78	29.51	64.21	54.21	-25.43	-24.70
5	0.50663	9.68	30.97	24.93	40.65	34.61	56.00	46.00	-15.35	-11.39
6	13.35800	9.84	21.50	16.90	31.34	26.74	60.00	50.00	-28.66	-23.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

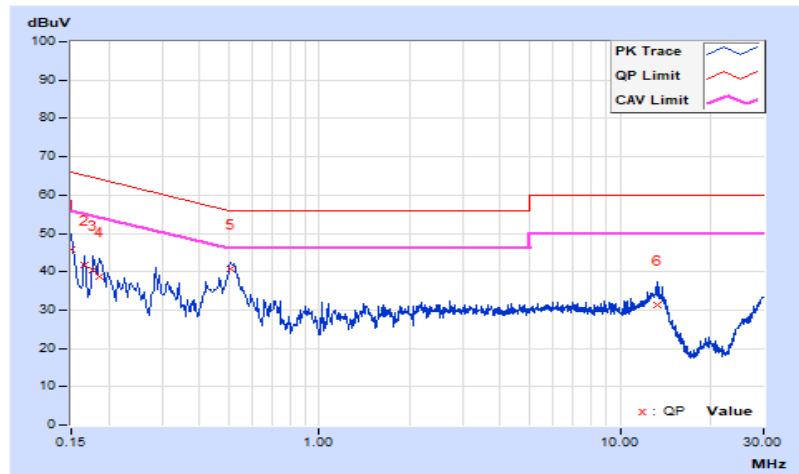

7.9 Unwanted Emissions below 1 GHz

Test Mode A


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.61	25.6 QP	40.0	-14.4	1.00 H	285	34.6	-9.0
2	110.51	28.2 QP	43.5	-15.3	1.49 H	132	40.0	-11.8
3	217.21	33.7 QP	46.0	-12.3	1.49 H	283	45.0	-11.3
4	270.56	32.5 QP	46.0	-13.5	1.00 H	248	40.7	-8.2
5	425.76	33.5 QP	46.0	-12.5	1.99 H	134	38.6	-5.1
6	719.67	39.4 QP	46.0	-6.6	1.00 H	54	38.7	0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

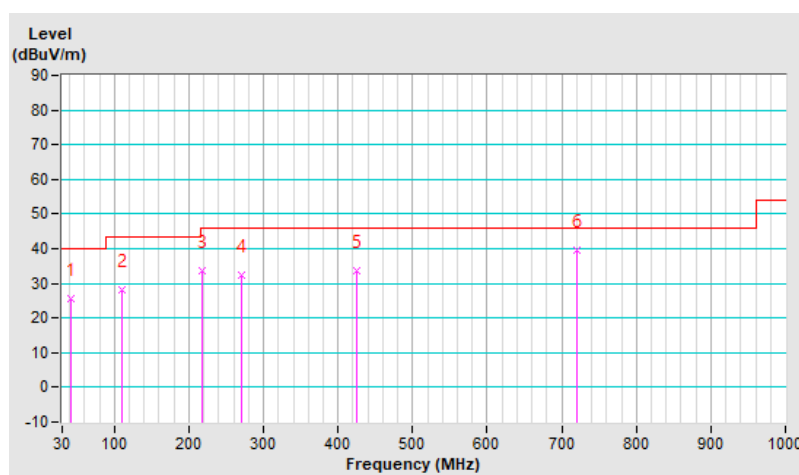


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	32.9 QP	40.0	-7.1	1.00 V	231	43.2	-10.3
2	97.90	27.4 QP	43.5	-16.1	1.49 V	177	40.9	-13.5
3	205.57	29.7 QP	43.5	-13.8	1.00 V	145	41.2	-11.5
4	309.36	31.8 QP	46.0	-14.2	1.49 V	213	39.0	-7.2
5	425.76	33.6 QP	46.0	-12.4	1.00 V	327	38.7	-5.1
6	721.61	35.1 QP	46.0	-10.9	1.00 V	159	34.3	0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

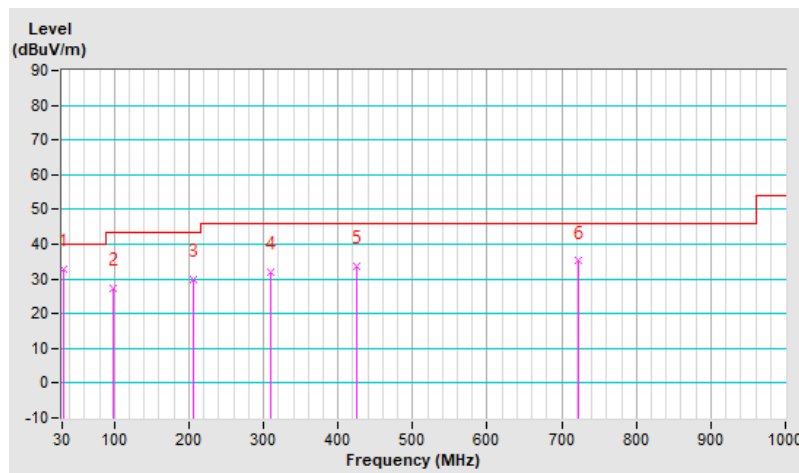


Test Mode B

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	115.36	33.4 QP	43.5	-10.1	2.00 H	261	44.7	-11.3
2	138.64	35.6 QP	43.5	-7.9	2.00 H	121	44.8	-9.2
3	174.53	33.5 QP	43.5	-10.0	1.51 H	255	42.8	-9.3
4	224.97	40.2 QP	46.0	-5.8	1.51 H	49	51.5	-11.3
5	449.04	36.4 QP	46.0	-9.6	2.00 H	27	41.1	-4.7
6	519.85	32.1 QP	46.0	-13.9	1.51 H	342	35.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

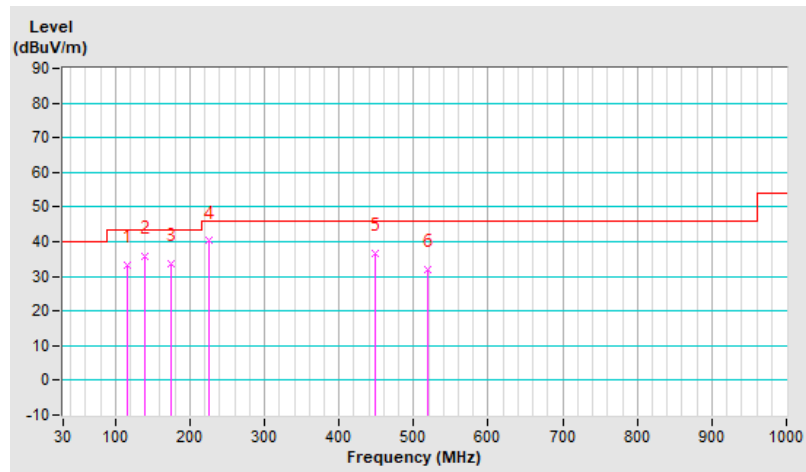


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	34.8 QP	40.0	-5.2	1.00 V	227	44.8	-10.0
2	114.39	34.4 QP	43.5	-9.1	1.00 V	207	45.8	-11.4
3	138.64	37.4 QP	43.5	-6.1	1.00 V	196	46.6	-9.2
4	221.09	37.0 QP	46.0	-9.0	1.49 V	217	48.3	-11.3
5	370.47	33.8 QP	46.0	-12.2	1.49 V	116	39.9	-6.1
6	440.31	33.7 QP	46.0	-12.3	1.49 V	18	38.6	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

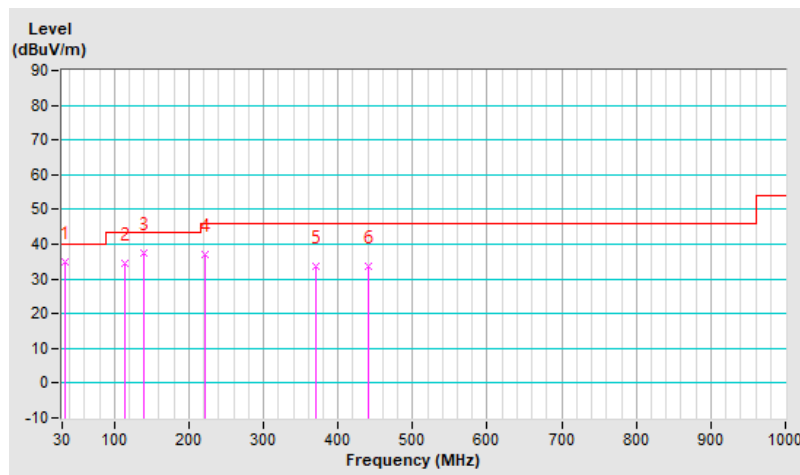

7.10 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.3 PK	88.2	-24.9	1.46 H	34	49.2	14.1
2	#5925.00	48.9 AV	68.2	-19.3	1.46 H	34	34.8	14.1
3	*5955.00	106.9 PK			1.46 H	34	62.0	44.9
4	*5955.00	97.1 AV			1.46 H	34	52.2	44.9
5	11910.00	63.3 PK	74.0	-10.7	1.98 H	105	42.6	20.7
6	11910.00	49.9 AV	54.0	-4.1	1.98 H	105	29.2	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.6 PK	88.2	-24.6	1.39 V	344	49.5	14.1
2	#5925.00	49.2 AV	68.2	-19.0	1.39 V	344	35.1	14.1
3	*5955.00	109.5 PK			1.39 V	344	64.6	44.9
4	*5955.00	99.5 AV			1.39 V	344	54.6	44.9
5	11910.00	63.5 PK	74.0	-10.5	2.63 V	185	42.8	20.7
6	11910.00	50.2 AV	54.0	-3.8	2.63 V	185	29.5	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	106.5 PK			1.55 H	39	61.1	45.4
2	*6175.00	96.6 AV			1.55 H	39	51.2	45.4
3	12350.00	63.4 PK	74.0	-10.6	1.95 H	112	42.6	20.8
4	12350.00	50.1 AV	54.0	-3.9	1.95 H	112	29.3	20.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	108.5 PK			1.87 V	352	63.1	45.4
2	*6175.00	98.7 AV			1.87 V	352	53.3	45.4
3	12350.00	63.4 PK	74.0	-10.6	2.58 V	179	42.6	20.8
4	12350.00	50.1 AV	54.0	-3.9	2.58 V	179	29.3	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.5 PK			1.50 H	36	59.9	46.6
2	*6415.00	97.7 AV			1.50 H	36	51.1	46.6
3	#12830.00	63.7 PK	88.2	-24.5	1.87 H	114	42.1	21.6
4	#12830.00	50.4 AV	68.2	-17.8	1.87 H	114	28.8	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.3 PK			1.93 V	328	61.7	46.6
2	*6415.00	99.0 AV			1.93 V	328	52.4	46.6
3	#12830.00	64.1 PK	88.2	-24.1	2.66 V	184	42.5	21.6
4	#12830.00	50.8 AV	68.2	-17.4	2.66 V	184	29.2	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	106.8 PK			1.49 H	36	60.2	46.6
2	*6435.00	97.3 AV			1.49 H	36	50.7	46.6
3	#12870.00	63.5 PK	88.2	-24.7	1.92 H	112	41.9	21.6
4	#12870.00	50.3 AV	68.2	-17.9	1.92 H	112	28.7	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.1 PK			1.90 V	336	61.5	46.6
2	*6435.00	98.8 AV			1.90 V	336	52.2	46.6
3	#12870.00	64.1 PK	88.2	-24.1	2.66 V	182	42.5	21.6
4	#12870.00	51.2 AV	68.2	-17.0	2.66 V	182	29.6	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.0 PK			1.42 H	37	61.2	46.8
2	*6475.00	97.6 AV			1.42 H	37	50.8	46.8
3	#12950.00	63.1 PK	88.2	-25.1	1.99 H	101	41.3	21.8
4	#12950.00	50.0 AV	68.2	-18.2	1.99 H	101	28.2	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.4 PK			1.87 V	321	62.6	46.8
2	*6475.00	99.2 AV			1.87 V	321	52.4	46.8
3	#12950.00	63.5 PK	88.2	-24.7	2.28 V	189	41.7	21.8
4	#12950.00	50.4 AV	68.2	-17.8	2.28 V	189	28.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.0 PK			1.52 H	39	61.0	47.0
2	*6515.00	98.1 AV			1.52 H	39	51.1	47.0
3	#13030.00	63.3 PK	88.2	-24.9	1.85 H	117	41.4	21.9
4	#13030.00	50.0 AV	68.2	-18.2	1.85 H	117	28.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.3 PK			1.69 V	322	62.3	47.0
2	*6515.00	99.2 AV			1.69 V	322	52.2	47.0
3	#13030.00	63.5 PK	88.2	-24.7	2.71 V	186	41.6	21.9
4	#13030.00	50.3 AV	68.2	-17.9	2.71 V	186	28.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.2 PK			1.66 H	57	60.0	47.2
2	*6535.00	97.0 AV			1.66 H	57	49.8	47.2
3	#13070.00	63.1 PK	88.2	-25.1	1.92 H	114	41.1	22.0
4	#13070.00	50.2 AV	68.2	-18.0	1.92 H	114	28.2	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.6 PK			1.77 V	325	61.4	47.2
2	*6535.00	98.2 AV			1.77 V	325	51.0	47.2
3	#13070.00	63.4 PK	88.2	-24.8	2.63 V	188	41.4	22.0
4	#13070.00	50.5 AV	68.2	-17.7	2.63 V	188	28.5	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.6 PK			1.43 H	36	60.2	47.4
2	*6695.00	97.5 AV			1.43 H	36	50.1	47.4
3	13390.00	63.1 PK	74.0	-10.9	1.85 H	106	40.3	22.8
4	13390.00	50.1 AV	54.0	-3.9	1.85 H	106	27.3	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.8 PK			1.79 V	328	61.4	47.4
2	*6695.00	98.6 AV			1.79 V	328	51.2	47.4
3	13390.00	63.5 PK	74.0	-10.5	2.70 V	178	40.7	22.8
4	13390.00	50.4 AV	54.0	-3.6	2.70 V	178	27.6	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.4 PK			1.42 H	39	60.0	47.4
2	*6855.00	97.2 AV			1.42 H	39	49.8	47.4
3	#13710.00	63.2 PK	88.2	-25.0	1.89 H	114	39.7	23.5
4	#13710.00	50.1 AV	68.2	-18.1	1.89 H	114	26.6	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.7 PK			1.80 V	326	61.3	47.4
2	*6855.00	98.4 AV			1.80 V	326	51.0	47.4
3	#13710.00	63.6 PK	88.2	-24.6	2.71 V	183	40.1	23.5
4	#13710.00	50.3 AV	68.2	-17.9	2.71 V	183	26.8	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.1 PK			1.56 H	42	59.5	47.6
2	*6875.00	97.0 AV			1.56 H	42	49.4	47.6
3	#13750.00	63.2 PK	88.2	-25.0	1.99 H	109	39.6	23.6
4	#13750.00	50.1 AV	68.2	-18.1	1.99 H	109	26.5	23.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.3 PK			1.90 V	327	60.7	47.6
2	*6875.00	98.0 AV			1.90 V	327	50.4	47.6
3	#13750.00	63.5 PK	88.2	-24.7	2.67 V	181	39.9	23.6
4	#13750.00	50.4 AV	68.2	-17.8	2.67 V	181	26.8	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.5 PK			1.47 H	36	58.8	48.7
2	*6995.00	97.3 AV			1.47 H	36	48.6	48.7
3	#13990.00	63.4 PK	88.2	-24.8	1.88 H	140	38.9	24.5
4	#13990.00	50.2 AV	68.2	-18.0	1.88 H	140	25.7	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	108.8 PK			1.93 V	322	60.1	48.7
2	*6995.00	98.6 AV			1.93 V	322	49.9	48.7
3	#13990.00	63.7 PK	88.2	-24.5	2.61 V	189	39.2	24.5
4	#13990.00	50.5 AV	68.2	-17.7	2.61 V	189	26.0	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.6 PK			1.41 H	33	59.0	48.6
2	*7095.00	97.5 AV			1.41 H	33	48.9	48.6
3	#14190.00	63.4 PK	88.2	-24.8	1.92 H	114	38.5	24.9
4	#14190.00	50.0 AV	68.2	-18.2	1.92 H	114	25.1	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	108.9 PK			1.99 V	319	60.3	48.6
2	*7095.00	98.8 AV			1.99 V	319	50.2	48.6
3	#14190.00	63.6 PK	88.2	-24.6	2.56 V	172	38.7	24.9
4	#14190.00	50.4 AV	68.2	-17.8	2.56 V	172	25.5	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*7115.00	107.5 PK			1.43 H	35	58.7	48.8
2	*7115.00	97.4 AV			1.43 H	35	48.6	48.8
3	#7125.00	80.4 PK	88.2	-7.8	1.43 H	35	63.5	16.9
4	#7125.00	58.7 AV	68.2	-9.5	1.43 H	35	41.8	16.9
5	#14230.00	63.1 PK	88.2	-25.1	1.82 H	111	38.2	24.9
6	#14230.00	49.9 AV	68.2	-18.3	1.82 H	111	25.0	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*7115.00	108.8 PK			2.05 V	323	60.0	48.8
2	*7115.00	98.5 AV			2.05 V	323	49.7	48.8
3	#7125.00	81.6 PK	88.2	-6.6	2.05 V	323	64.7	16.9
4	#7125.00	60.1 AV	68.2	-8.1	2.05 V	323	43.2	16.9
5	#14230.00	63.5 PK	88.2	-24.7	2.55 V	178	38.6	24.9
6	#14230.00	50.4 AV	68.2	-17.8	2.55 V	178	25.5	24.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Beamforming (4T1S)

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.3 PK	88.2	-26.9	1.52 H	38	47.2	14.1
2	#5925.00	48.7 AV	68.2	-19.5	1.52 H	38	34.6	14.1
3	*5955.00	109.1 PK			1.52 H	38	64.2	44.9
4	*5955.00	96.9 AV			1.52 H	38	52.0	44.9
5	11910.00	63.3 PK	74.0	-10.7	1.86 H	108	42.6	20.7
6	11910.00	49.9 AV	54.0	-4.1	1.86 H	108	29.2	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.0 PK	88.2	-26.2	2.00 V	333	47.9	14.1
2	#5925.00	49.8 AV	68.2	-18.4	2.00 V	333	35.7	14.1
3	*5955.00	110.5 PK			2.00 V	333	65.6	44.9
4	*5955.00	98.2 AV			2.00 V	333	53.3	44.9
5	11910.00	63.8 PK	74.0	-10.2	2.69 V	172	43.1	20.7
6	11910.00	50.5 AV	54.0	-3.5	2.69 V	172	29.8	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	108.8 PK			1.48 H	32	63.4	45.4
2	*6175.00	96.7 AV			1.48 H	32	51.3	45.4
3	12350.00	63.4 PK	74.0	-10.6	1.83 H	117	42.6	20.8
4	12350.00	50.2 AV	54.0	-3.8	1.83 H	117	29.4	20.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	110.2 PK			1.93 V	325	64.8	45.4
2	*6175.00	98.0 AV			1.93 V	325	52.6	45.4
3	12350.00	63.7 PK	74.0	-10.3	2.78 V	186	42.9	20.8
4	12350.00	50.6 AV	54.0	-3.4	2.78 V	186	29.8	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.9 PK			1.55 H	42	62.3	46.6
2	*6415.00	97.0 AV			1.55 H	42	50.4	46.6
3	#12830.00	63.1 PK	88.2	-25.1	1.83 H	117	41.5	21.6
4	#12830.00	50.1 AV	68.2	-18.1	1.83 H	117	28.5	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.4 PK			2.01 V	329	63.8	46.6
2	*6415.00	98.3 AV			2.01 V	329	51.7	46.6
3	#12830.00	63.6 PK	88.2	-24.6	2.90 V	188	42.0	21.6
4	#12830.00	50.7 AV	68.2	-17.5	2.90 V	188	29.1	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	107.9 PK			1.33 H	49	61.3	46.6
2	*6435.00	96.6 AV			1.33 H	49	50.0	46.6
3	#12870.00	63.1 PK	88.2	-25.1	1.78 H	114	41.5	21.6
4	#12870.00	50.0 AV	68.2	-18.2	1.78 H	114	28.4	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.4 PK			1.92 V	328	62.8	46.6
2	*6435.00	97.6 AV			1.92 V	328	51.0	46.6
3	#12870.00	63.5 PK	88.2	-24.7	2.88 V	179	41.9	21.6
4	#12870.00	50.4 AV	68.2	-17.8	2.88 V	179	28.8	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.0 PK			1.42 H	33	61.2	46.8
2	*6475.00	96.3 AV			1.42 H	33	49.5	46.8
3	#12950.00	63.3 PK	88.2	-24.9	1.83 H	116	41.5	21.8
4	#12950.00	49.8 AV	68.2	-18.4	1.83 H	116	28.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.2 PK			1.89 V	322	62.4	46.8
2	*6475.00	97.5 AV			1.89 V	322	50.7	46.8
3	#12950.00	63.5 PK	88.2	-24.7	2.71 V	193	41.7	21.8
4	#12950.00	50.8 AV	68.2	-17.4	2.71 V	193	29.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.2 PK			1.46 H	35	60.2	47.0
2	*6515.00	95.3 AV			1.46 H	35	48.3	47.0
3	#13030.00	63.0 PK	88.2	-25.2	1.85 H	123	41.1	21.9
4	#13030.00	49.8 AV	68.2	-18.4	1.85 H	123	27.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.4 PK			1.87 V	52	61.4	47.0
2	*6515.00	96.9 AV			1.87 V	52	49.9	47.0
3	#13030.00	63.2 PK	88.2	-25.0	2.77 V	192	41.3	21.9
4	#13030.00	50.7 AV	68.2	-17.5	2.77 V	192	28.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.4 PK			1.55 H	38	61.2	47.2
2	*6535.00	96.3 AV			1.55 H	38	49.1	47.2
3	#13070.00	62.9 PK	88.2	-25.3	1.87 H	136	40.9	22.0
4	#13070.00	50.0 AV	68.2	-18.2	1.87 H	136	28.0	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.5 PK			2.06 V	42	62.3	47.2
2	*6535.00	97.8 AV			2.06 V	42	50.6	47.2
3	#13070.00	63.3 PK	88.2	-24.9	2.75 V	199	41.3	22.0
4	#13070.00	50.8 AV	68.2	-17.4	2.75 V	199	28.8	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.5 PK			1.42 H	38	61.1	47.4
2	*6695.00	97.1 AV			1.42 H	38	49.7	47.4
3	13390.00	62.8 PK	74.0	-11.2	1.77 H	124	40.0	22.8
4	13390.00	49.9 AV	54.0	-4.1	1.77 H	124	27.1	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.8 PK			1.95 V	51	62.4	47.4
2	*6695.00	98.2 AV			1.95 V	51	50.8	47.4
3	13390.00	63.4 PK	74.0	-10.6	2.68 V	193	40.6	22.8
4	13390.00	50.7 AV	54.0	-3.3	2.68 V	193	27.9	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.2 PK			1.42 H	33	61.8	47.4
2	*6855.00	98.1 AV			1.42 H	33	50.7	47.4
3	#13710.00	63.1 PK	88.2	-25.1	1.90 H	117	39.6	23.5
4	#13710.00	50.1 AV	68.2	-18.1	1.90 H	117	26.6	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.5 PK			1.99 V	45	62.1	47.4
2	*6855.00	98.4 AV			1.99 V	45	51.0	47.4
3	#13710.00	63.5 PK	88.2	-24.7	2.69 V	197	40.0	23.5
4	#13710.00	50.8 AV	68.2	-17.4	2.69 V	197	27.3	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.5 PK			1.44 H	30	60.9	47.6
2	*6875.00	97.3 AV			1.44 H	30	49.7	47.6
3	#13750.00	62.9 PK	88.2	-25.3	1.90 H	115	39.3	23.6
4	#13750.00	49.8 AV	68.2	-18.4	1.90 H	115	26.2	23.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.7 PK			2.00 V	48	62.1	47.6
2	*6875.00	98.6 AV			2.00 V	48	51.0	47.6
3	#13750.00	63.5 PK	88.2	-24.7	2.78 V	182	39.9	23.6
4	#13750.00	50.6 AV	68.2	-17.6	2.78 V	182	27.0	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	108.5 PK			1.44 H	35	59.8	48.7
2	*6995.00	97.3 AV			1.44 H	35	48.6	48.7
3	#13990.00	63.0 PK	88.2	-25.2	1.92 H	137	38.5	24.5
4	#13990.00	49.7 AV	68.2	-18.5	1.92 H	137	25.2	24.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.9 PK			1.98 V	51	61.2	48.7
2	*6995.00	98.8 AV			1.98 V	51	50.1	48.7
3	#13990.00	63.8 PK	88.2	-24.4	2.71 V	184	39.3	24.5
4	#13990.00	50.7 AV	68.2	-17.5	2.71 V	184	26.2	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	108.7 PK			1.35 H	46	60.1	48.6
2	*7095.00	97.6 AV			1.35 H	46	49.0	48.6
3	#14190.00	63.1 PK	88.2	-25.1	1.88 H	134	38.2	24.9
4	#14190.00	49.6 AV	68.2	-18.6	1.88 H	134	24.7	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	109.8 PK			2.06 V	43	61.2	48.6
2	*7095.00	98.5 AV			2.06 V	43	49.9	48.6
3	#14190.00	63.9 PK	88.2	-24.3	2.64 V	182	39.0	24.9
4	#14190.00	50.5 AV	68.2	-17.7	2.64 V	182	25.6	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	109.7 PK			1.42 H	29	60.9	48.8
2	*7115.00	99.0 AV			1.42 H	29	50.2	48.8
3	#7125.00	76.7 PK	88.2	-11.5	1.42 H	29	59.8	16.9
4	#7125.00	65.7 AV	68.2	-2.5	1.42 H	29	48.8	16.9
5	#14230.00	63.6 PK	88.2	-24.6	1.99 H	152	38.7	24.9
6	#14230.00	50.0 AV	68.2	-18.2	1.99 H	152	25.1	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.5 PK			1.95 V	51	49.7	48.8
2	*7115.00	85.7 AV			1.95 V	51	36.9	48.8
3	#7125.00	78.8 PK	88.2	-9.4	1.95 V	51	61.9	16.9
4	#7125.00	68.1 AV	68.2	-0.1	1.95 V	51	51.2	16.9
5	#14230.00	63.7 PK	88.2	-24.5	2.66 V	185	38.8	24.9
6	#14230.00	50.2 AV	68.2	-18.0	2.66 V	185	25.3	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.8 PK	88.2	-26.4	1.48 H	45	47.7	14.1
2	#5925.00	49.2 AV	68.2	-19.0	1.48 H	45	35.1	14.1
3	*5965.00	108.8 PK			1.48 H	45	63.8	45.0
4	*5965.00	97.6 AV			1.48 H	45	52.6	45.0
5	11930.00	63.2 PK	74.0	-10.8	1.72 H	114	42.5	20.7
6	11930.00	50.0 AV	54.0	-4.0	1.72 H	114	29.3	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.2 PK	88.2	-26.0	2.07 V	336	48.1	14.1
2	#5925.00	49.8 AV	68.2	-18.4	2.07 V	336	35.7	14.1
3	*5965.00	110.0 PK			2.07 V	336	65.0	45.0
4	*5965.00	98.9 AV			2.07 V	336	53.9	45.0
5	11930.00	63.7 PK	74.0	-10.3	2.69 V	177	43.0	20.7
6	11930.00	50.3 AV	54.0	-3.7	2.69 V	177	29.6	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	108.5 PK			1.44 H	38	63.2	45.3
2	*6165.00	97.5 AV			1.44 H	38	52.2	45.3
3	12330.00	62.8 PK	74.0	-11.2	1.82 H	120	42.0	20.8
4	12330.00	49.9 AV	54.0	-4.1	1.82 H	120	29.1	20.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	109.8 PK			1.95 V	325	64.5	45.3
2	*6165.00	98.9 AV			1.95 V	325	53.6	45.3
3	12330.00	63.5 PK	74.0	-10.5	2.36 V	169	42.7	20.8
4	12330.00	50.6 AV	54.0	-3.4	2.36 V	169	29.8	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	108.2 PK			1.54 H	40	61.6	46.6
2	*6405.00	96.8 AV			1.54 H	40	50.2	46.6
3	#12810.00	63.0 PK	88.2	-25.2	1.89 H	123	41.4	21.6
4	#12810.00	49.8 AV	68.2	-18.4	1.89 H	123	28.2	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	109.6 PK			1.98 V	329	63.0	46.6
2	*6405.00	98.7 AV			1.98 V	329	52.1	46.6
3	#12810.00	63.7 PK	88.2	-24.5	2.25 V	163	42.1	21.6
4	#12810.00	50.8 AV	68.2	-17.4	2.25 V	163	29.2	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	108.1 PK			1.45 H	35	61.5	46.6
2	*6445.00	97.2 AV			1.45 H	35	50.6	46.6
3	#12890.00	63.0 PK	88.2	-25.2	1.72 H	111	41.4	21.6
4	#12890.00	49.9 AV	68.2	-18.3	1.72 H	111	28.3	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	109.3 PK			1.96 V	330	62.7	46.6
2	*6445.00	98.5 AV			1.96 V	330	51.9	46.6
3	#12890.00	63.8 PK	88.2	-24.4	2.33 V	169	42.2	21.6
4	#12890.00	50.6 AV	68.2	-17.6	2.33 V	169	29.0	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	108.5 PK			1.38 H	44	61.6	46.9
2	*6485.00	97.5 AV			1.38 H	44	50.6	46.9
3	#12970.00	62.9 PK	88.2	-25.3	1.89 H	124	41.1	21.8
4	#12970.00	49.8 AV	68.2	-18.4	1.89 H	124	28.0	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	109.7 PK			1.89 V	321	62.8	46.9
2	*6485.00	98.8 AV			1.89 V	321	51.9	46.9
3	#12970.00	63.7 PK	88.2	-24.5	2.16 V	188	41.9	21.8
4	#12970.00	50.5 AV	68.2	-17.7	2.16 V	188	28.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	107.8 PK			1.62 H	33	60.8	47.0
2	*6525.00	96.2 AV			1.62 H	33	49.2	47.0
3	#13050.00	62.8 PK	88.2	-25.4	1.81 H	122	40.9	21.9
4	#13050.00	49.9 AV	68.2	-18.3	1.81 H	122	28.0	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	109.1 PK			1.88 V	59	62.1	47.0
2	*6525.00	97.8 AV			1.88 V	59	50.8	47.0
3	#13050.00	63.5 PK	88.2	-24.7	2.19 V	184	41.6	21.9
4	#13050.00	50.6 AV	68.2	-17.6	2.19 V	184	28.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	108.0 PK			1.48 H	32	60.7	47.3
2	*6565.00	97.1 AV			1.48 H	32	49.8	47.3
3	#13130.00	62.8 PK	88.2	-25.4	1.85 H	122	40.7	22.1
4	#13130.00	49.9 AV	68.2	-18.3	1.85 H	122	27.8	22.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	109.2 PK			1.90 V	55	61.9	47.3
2	*6565.00	98.2 AV			1.90 V	55	50.9	47.3
3	#13130.00	63.6 PK	88.2	-24.6	2.14 V	188	41.5	22.1
4	#13130.00	50.7 AV	68.2	-17.5	2.14 V	188	28.6	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	107.5 PK			1.46 H	31	60.0	47.5
2	*6725.00	95.9 AV			1.46 H	31	48.4	47.5
3	#13450.00	63.0 PK	88.2	-25.2	1.92 H	115	39.8	23.2
4	#13450.00	50.1 AV	68.2	-18.1	1.92 H	115	26.9	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	108.9 PK			1.89 V	56	61.4	47.5
2	*6725.00	97.8 AV			1.89 V	56	50.3	47.5
3	#13450.00	63.7 PK	88.2	-24.5	2.24 V	189	40.5	23.2
4	#13450.00	50.5 AV	68.2	-17.7	2.24 V	189	27.3	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	108.2 PK			1.58 H	44	60.8	47.4
2	*6845.00	97.3 AV			1.58 H	44	49.9	47.4
3	#13690.00	62.8 PK	88.2	-25.4	1.85 H	123	39.3	23.5
4	#13690.00	49.8 AV	68.2	-18.4	1.85 H	123	26.3	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	109.4 PK			1.97 V	57	62.0	47.4
2	*6845.00	98.6 AV			1.97 V	57	51.2	47.4
3	#13690.00	63.5 PK	88.2	-24.7	2.18 V	190	40.0	23.5
4	#13690.00	50.7 AV	68.2	-17.5	2.18 V	190	27.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	108.0 PK			1.46 H	32	60.3	47.7
2	*6885.00	97.1 AV			1.46 H	32	49.4	47.7
3	#13770.00	62.9 PK	88.2	-25.3	1.63 H	114	39.1	23.8
4	#13770.00	49.7 AV	68.2	-18.5	1.63 H	114	25.9	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	109.2 PK			1.99 V	56	61.5	47.7
2	*6885.00	98.4 AV			1.99 V	56	50.7	47.7
3	#13770.00	63.7 PK	88.2	-24.5	2.11 V	182	39.9	23.8
4	#13770.00	50.6 AV	68.2	-17.6	2.11 V	182	26.8	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	108.3 PK			1.49 H	44	59.5	48.8
2	*7005.00	97.5 AV			1.49 H	44	48.7	48.8
3	#14010.00	63.1 PK	88.2	-25.1	1.76 H	120	38.5	24.6
4	#14010.00	50.0 AV	68.2	-18.2	1.76 H	120	25.4	24.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	109.4 PK			2.02 V	59	60.6	48.8
2	*7005.00	98.7 AV			2.02 V	59	49.9	48.8
3	#14010.00	63.6 PK	88.2	-24.6	2.31 V	179	39.0	24.6
4	#14010.00	50.5 AV	68.2	-17.7	2.31 V	179	25.9	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.2 PK			1.49 H	35	59.6	48.6
2	*7085.00	97.1 AV			1.49 H	35	48.5	48.6
3	#7125.00	67.2 PK	88.2	-21.0	1.49 H	35	50.3	16.9
4	#7125.00	53.1 AV	68.2	-15.1	1.49 H	35	36.2	16.9
5	#14170.00	63.1 PK	88.2	-25.1	1.99 H	125	38.2	24.9
6	#14170.00	50.0 AV	68.2	-18.2	1.99 H	125	25.1	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.6 PK			2.05 V	54	61.0	48.6
2	*7085.00	98.5 AV			2.05 V	54	49.9	48.6
3	#7125.00	67.5 PK	88.2	-20.7	2.05 V	54	50.6	16.9
4	#7125.00	53.4 AV	68.2	-14.8	2.05 V	54	36.5	16.9
5	#14170.00	63.8 PK	88.2	-24.4	2.18 V	174	38.9	24.9
6	#14170.00	50.7 AV	68.2	-17.5	2.18 V	174	25.8	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.1 PK	88.2	-25.1	1.49 H	36	49.0	14.1
2	#5925.00	48.9 AV	68.2	-19.3	1.49 H	36	34.8	14.1
3	*5985.00	108.5 PK			1.49 H	36	63.5	45.0
4	*5985.00	98.0 AV			1.49 H	36	53.0	45.0
5	11970.00	63.5 PK	74.0	-10.5	2.18 H	177	42.9	20.6
6	11970.00	50.4 AV	54.0	-3.6	2.18 H	177	29.8	20.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.8 PK	88.2	-24.4	2.05 V	337	49.7	14.1
2	#5925.00	49.3 AV	68.2	-18.9	2.05 V	337	35.2	14.1
3	*5985.00	109.9 PK			2.05 V	337	64.9	45.0
4	*5985.00	99.2 AV			2.05 V	337	54.2	45.0
5	11970.00	63.7 PK	74.0	-10.3	2.22 V	179	43.1	20.6
6	11970.00	50.6 AV	54.0	-3.4	2.22 V	179	30.0	20.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	108.6 PK			1.48 H	35	63.4	45.2
2	*6145.00	98.0 AV			1.48 H	35	52.8	45.2
3	12290.00	62.8 PK	74.0	-11.2	1.81 H	124	41.9	20.9
4	12290.00	49.8 AV	54.0	-4.2	1.81 H	124	28.9	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	109.8 PK			2.13 V	340	64.6	45.2
2	*6145.00	99.1 AV			2.13 V	340	53.9	45.2
3	12290.00	63.5 PK	74.0	-10.5	2.02 V	177	42.6	20.9
4	12290.00	50.6 AV	54.0	-3.4	2.02 V	177	29.7	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	108.4 PK			1.55 H	32	61.8	46.6
2	*6385.00	98.1 AV			1.55 H	32	51.5	46.6
3	#12770.00	63.1 PK	88.2	-25.1	1.77 H	130	41.6	21.5
4	#12770.00	49.9 AV	68.2	-18.3	1.77 H	130	28.4	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.7 PK			2.18 V	335	63.1	46.6
2	*6385.00	99.3 AV			2.18 V	335	52.7	46.6
3	#12770.00	63.7 PK	88.2	-24.5	2.08 V	175	42.2	21.5
4	#12770.00	50.6 AV	68.2	-17.6	2.08 V	175	29.1	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.2 PK			1.43 H	28	61.5	46.7
2	*6465.00	98.0 AV			1.43 H	28	51.3	46.7
3	#12930.00	63.1 PK	88.2	-25.1	1.72 H	125	41.3	21.8
4	#12930.00	50.2 AV	68.2	-18.0	1.72 H	125	28.4	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.6 PK			2.11 V	334	62.9	46.7
2	*6465.00	99.1 AV			2.11 V	334	52.4	46.7
3	#12930.00	63.5 PK	88.2	-24.7	2.10 V	178	41.7	21.8
4	#12930.00	50.5 AV	68.2	-17.7	2.10 V	178	28.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	108.2 PK			1.46 H	38	61.0	47.2
2	*6545.00	98.0 AV			1.46 H	38	50.8	47.2
3	#13090.00	63.2 PK	88.2	-25.0	1.76 H	121	41.1	22.1
4	#13090.00	50.2 AV	68.2	-18.0	1.76 H	121	28.1	22.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.7 PK			2.05 V	329	62.5	47.2
2	*6545.00	99.3 AV			2.05 V	329	52.1	47.2
3	#13090.00	63.7 PK	88.2	-24.5	1.98 V	172	41.6	22.1
4	#13090.00	50.6 AV	68.2	-17.6	1.98 V	172	28.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	108.1 PK			1.45 H	33	60.6	47.5
2	*6705.00	97.0 AV			1.45 H	33	49.5	47.5
3	#13410.00	62.7 PK	88.2	-25.5	1.76 H	124	39.8	22.9
4	#13410.00	49.8 AV	68.2	-18.4	1.76 H	124	26.9	22.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.4 PK			1.89 V	56	61.9	47.5
2	*6705.00	98.2 AV			1.89 V	56	50.7	47.5
3	#13410.00	63.3 PK	88.2	-24.9	2.18 V	182	40.4	22.9
4	#13410.00	50.4 AV	68.2	-17.8	2.18 V	182	27.5	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	108.2 PK			1.47 H	39	60.7	47.5
2	*6865.00	97.1 AV			1.47 H	39	49.6	47.5
3	#13730.00	62.9 PK	88.2	-25.3	1.77 H	120	39.3	23.6
4	#13730.00	49.9 AV	68.2	-18.3	1.77 H	120	26.3	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	109.5 PK			1.87 V	52	62.0	47.5
2	*6865.00	98.3 AV			1.87 V	52	50.8	47.5
3	#13730.00	63.4 PK	88.2	-24.8	2.11 V	186	39.8	23.6
4	#13730.00	50.6 AV	68.2	-17.6	2.11 V	186	27.0	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	108.3 PK			1.44 H	29	60.0	48.3
2	*6945.00	97.2 AV			1.44 H	29	48.9	48.3
3	#13890.00	62.9 PK	88.2	-25.3	1.83 H	121	39.0	23.9
4	#13890.00	50.1 AV	68.2	-18.1	1.83 H	121	26.2	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.5 PK			1.88 V	58	61.2	48.3
2	*6945.00	98.5 AV			1.88 V	58	50.2	48.3
3	#13890.00	63.5 PK	88.2	-24.7	2.19 V	182	39.6	23.9
4	#13890.00	50.7 AV	68.2	-17.5	2.19 V	182	26.8	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.7 PK			1.52 H	355	60.0	48.7
2	*7025.00	97.4 AV			1.52 H	355	48.7	48.7
3	#7125.00	67.6 PK	88.2	-20.6	1.52 H	355	50.7	16.9
4	#7125.00	53.9 AV	68.2	-14.3	1.52 H	355	37.0	16.9
5	#14050.00	63.8 PK	88.2	-24.4	2.11 H	125	39.1	24.7
6	#14050.00	50.7 AV	68.2	-17.5	2.11 H	125	26.0	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.2 PK			1.74 V	40	61.5	48.7
2	*7025.00	98.8 AV			1.74 V	40	50.1	48.7
3	#7125.00	67.9 PK	88.2	-20.3	1.74 V	40	51.0	16.9
4	#7125.00	54.4 AV	68.2	-13.8	1.74 V	40	37.5	16.9
5	#14050.00	65.2 PK	88.2	-23.0	2.19 V	188	40.5	24.7
6	#14050.00	52.3 AV	68.2	-15.9	2.19 V	188	27.6	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5922.90	63.1 PK	88.2	-25.1	1.23 H	32	49.0	14.1
2	#5922.90	48.6 AV	68.2	-19.6	1.23 H	32	34.5	14.1
3	*6025.00	109.1 PK			1.23 H	32	64.0	45.1
4	*6025.00	97.7 AV			1.23 H	32	52.6	45.1
5	12050.00	60.3 PK	74.0	-13.7	2.15 H	133	39.5	20.8
6	12050.00	47.0 AV	54.0	-7.0	2.15 H	133	26.2	20.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5922.90	63.8 PK	88.2	-24.4	1.35 V	346	49.7	14.1
2	#5922.90	48.9 AV	68.2	-19.3	1.35 V	346	34.8	14.1
3	*6025.00	110.8 PK			1.35 V	346	65.7	45.1
4	*6025.00	98.7 AV			1.35 V	346	53.6	45.1
5	12050.00	60.5 PK	74.0	-13.5	1.31 V	102	39.7	20.8
6	12050.00	47.4 AV	54.0	-6.6	1.31 V	102	26.6	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.9 PK			1.44 H	22	64.5	45.4
2	*6185.00	97.7 AV			1.44 H	22	52.3	45.4
3	12370.00	59.7 PK	74.0	-14.3	1.77 H	130	39.0	20.7
4	12370.00	45.8 AV	54.0	-8.2	1.77 H	130	25.1	20.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	111.2 PK			1.86 V	3	65.8	45.4
2	*6185.00	98.9 AV			1.86 V	3	53.5	45.4
3	12370.00	59.9 PK	74.0	-14.1	1.36 V	222	39.2	20.7
4	12370.00	46.5 AV	54.0	-7.5	1.36 V	222	25.8	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.0 PK			1.49 H	53	64.5	46.5
2	*6345.00	98.3 AV			1.49 H	53	51.8	46.5
3	12690.00	59.8 PK	74.0	-14.2	2.11 H	185	38.5	21.3
4	12690.00	47.0 AV	54.0	-7.0	2.11 H	185	25.7	21.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	112.3 PK			1.88 V	46	65.8	46.5
2	*6345.00	99.6 AV			1.88 V	46	53.1	46.5
3	12690.00	60.4 PK	74.0	-13.6	2.11 V	189	39.1	21.3
4	12690.00	47.2 AV	54.0	-6.8	2.11 V	189	25.9	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.8 PK			1.45 H	55	62.8	47.0
2	*6505.00	99.1 AV			1.45 H	55	52.1	47.0
3	#13010.00	60.9 PK	88.2	-27.3	1.77 H	122	39.0	21.9
4	#13010.00	47.1 AV	68.2	-21.1	1.77 H	122	25.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	111.0 PK			1.83 V	45	64.0	47.0
2	*6505.00	100.3 AV			1.83 V	45	53.3	47.0
3	#13010.00	61.2 PK	88.2	-27.0	2.10 V	190	39.3	21.9
4	#13010.00	47.8 AV	68.2	-20.4	2.10 V	190	25.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.5 PK			1.22 H	56	62.2	47.3
2	*6665.00	97.8 AV			1.22 H	56	50.5	47.3
3	13330.00	60.9 PK	74.0	-13.1	1.77 H	124	38.2	22.7
4	13330.00	48.5 AV	54.0	-5.5	1.77 H	124	25.8	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.0 PK			2.18 V	45	63.7	47.3
2	*6665.00	99.3 AV			2.18 V	45	52.0	47.3
3	13330.00	61.2 PK	74.0	-12.8	2.11 V	170	38.5	22.7
4	13330.00	48.9 AV	54.0	-5.1	2.11 V	170	26.2	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.