


Contents

- Chamber Info.
- Name and address of the antenna manufacture
- Peak Gain
- Radiation Pattern



Chamber Info.

➤ Measurement setup info. & test method:

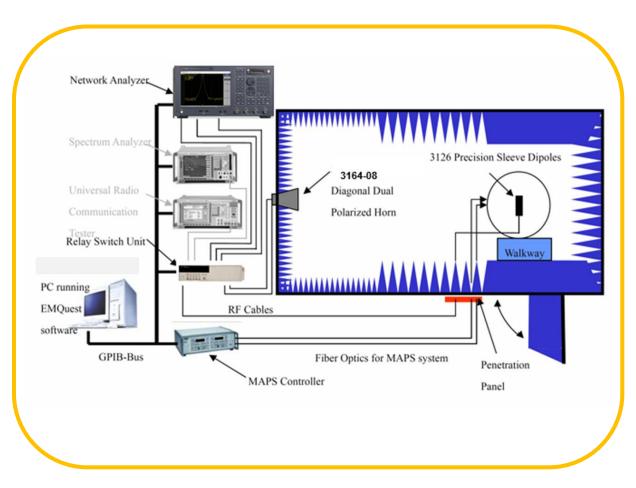

Test Method

The "great circle" cut method, whereby the Measurement Antenna remains fixed and the EUT is rotated about two axes in sequential order. The radiated RF performance of the Equipment Under Test (EUT) is measured by sampling the radiated transmit power of the mobile at various locations surrounding the device. A three-dimensional characterization of the 'transmit' performance of the EUT is pieced together by analyzing the data from the spatially distributed measurements.

Data points taken every 15 degrees in the theta and in the phi axes are deemed sufficient to fully characterize the EUT's Far-Field radiation pattern and total radiated power All of the measured power values will be integrated.

Chamber Info.

Calibrated and measurement equipment table list:

| Describe | Manufacturer | Model Number | Serial Number | Cal. Date | Cal. Due Date | |
|---|--------------|--------------|----------------|---------------|---------------|--|
| Full Anechoic Wireless Test chamber | ETS-Lindgren | AMS-8500 N/A | | N.C.R | | |
| Test Software | EMQuest™ | N/A | N/A | N.C.R | | |
| Multi-Axis Positioning System (MAPS) | EMCO | 2090 | 2090 N/A N.C.R | | | |
| Turn Table | EMCO | 2015 | N/A | N.C.R | | |
| Dual Polarization Horn | ETS-Lindgren | 3164-08 | 00140264 | N.C.R | | |
| ENA Series Network Analyzer | Keysight | E5071C | MY467330006 | May. 31, 2022 | May. 31, 2023 | |


Note:

- N.C.R. = No Calibration Request.
- This ant. test chamber is located in WNC which address is: Add: 20 Park Avenue II (or Yuanchiu 2nd Rd.), Hsinchu Science Park, Hsinchu 300, Taiwan Tel: +886-3-666-7799




Chamber Info.

Test Procedure & SW:

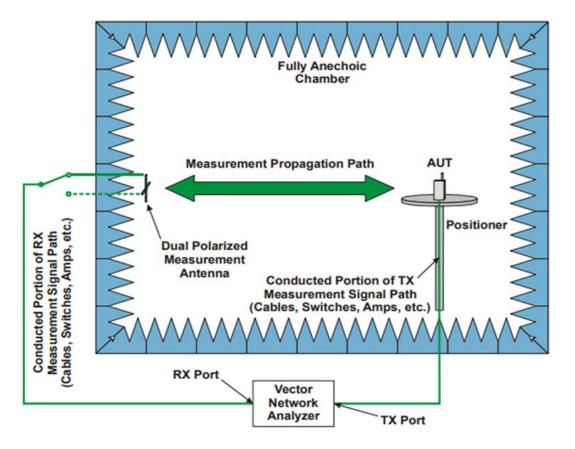

- Place the device at the center of the chamber.
- Connect the antenna cable to RF cable of the chamber.
- Run the test SW (EMQuest™).
- Get 3D data in 15 degree step from phi 0°~360° and theta -90°~ +90°, including efficiency, peak gain, 2D & 3D radiation pattern.
- This is far field test for antenna verification.
- This is passive measurement, which means the device is off and not in any operating mode.

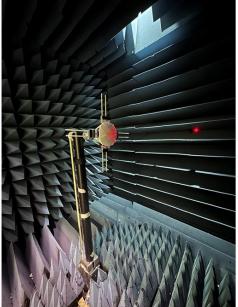





Name and address of the antenna manufacture



NEWEB VIETNAM CO., LTD.

- Land Lot CN01, Dong Van III Industrial Zone, Dong Van Ward, Duy Tien Town, Ha Nam Province, Vietnam
- +84-226-358-8899
- +84-226-358-7799




Peak Gain


Test date: 2024/02/23 Test personnel: Evan Chen

| Dual Band | Freq. (MHz) | 2400 | 2450 | 2500 | 5150 | 5350 | 5550 | 5750 | 5850 |
|------------------|-----------------|------|------|------|------|------|------|------|------|
| 90XYBH15.G81_No1 | Peak Gain (dBi) | 1.37 | 2.14 | 2.34 | 3.26 | 3.59 | 3.81 | 4.01 | 4.22 |
| 90XYBH15.G81_No2 | Peak Gain (dBi) | 1.47 | 2.04 | 2.71 | 3.40 | 3.72 | 3.83 | 3.90 | 4.04 |

| 6G | Freq. (MHz) | 6000 | 6200 | 6300 | 6500 | 6700 | 6800 | 6900 | 7000 | 7100 | 7125 |
|------------------|-----------------|------|------|------|------|------|------|------|------|------|------|
| 90XYBH15.G79_No1 | Peak Gain (dBi) | 2.58 | 2.88 | 3.22 | 4.08 | 4.51 | 4.65 | 4.24 | 3.97 | 3.92 | 3.92 |
| 90XYBH15.G79_No2 | Peak Gain (dBi) | 2.78 | 3.02 | 3.40 | 4.25 | 4.62 | 4.44 | 4.05 | 3.76 | 3.65 | 3.71 |


Radiation Pattern for Dual Band

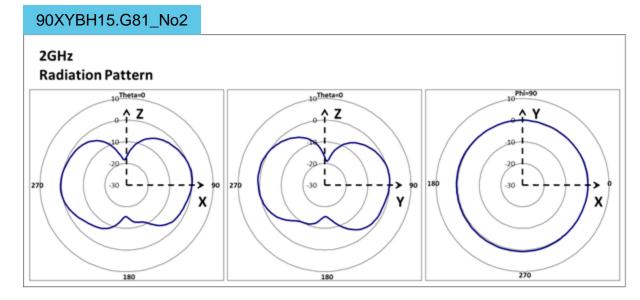


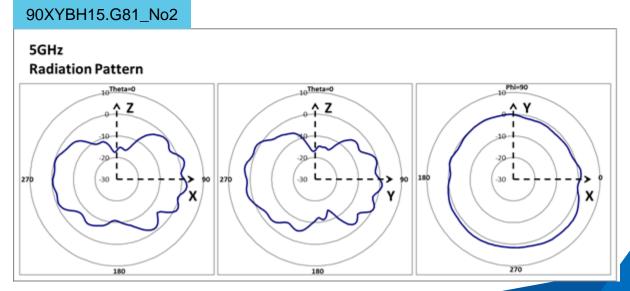



Radiation Pattern for 6G

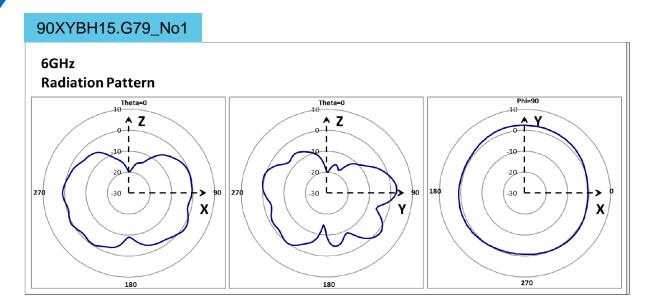

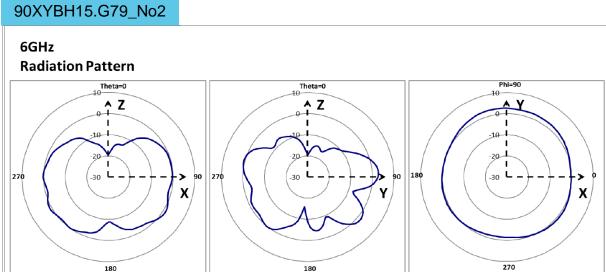



Wistron NeWeb Corp.

