




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-70	2.58	0	-72.58	-62	OFF
					-73	2.58	0	-75.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
	320	127	6585	6430	-74	2.58	0	-76.58	-62	OFF
					-77	2.58	0	-79.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
	6740	127	6585	6740	-70	2.58	0	-72.58	-62	OFF
					-76	2.58	0	-78.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
					-65	2.58	0	-67.58	-62	OFF
					-74	2.58	0	-76.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6695	v	v	v	v	v	v	v			
802.11be	320	6430	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6585	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	v	v	v	v	v	v	v	v	v	v	100%	90%

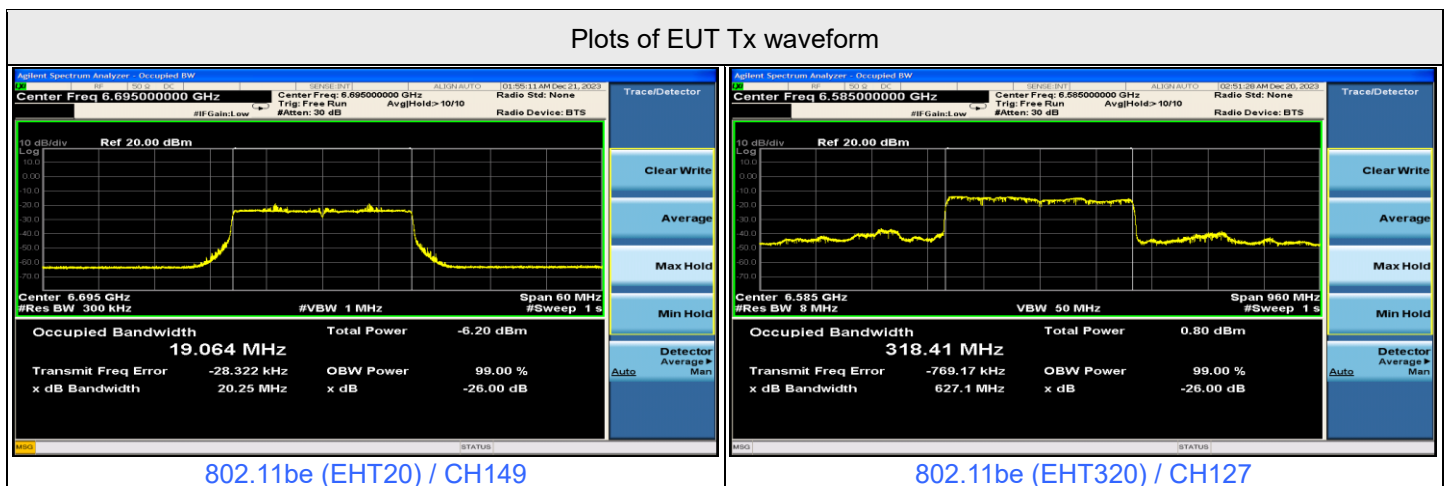


### Plots of Injected signal (AWGN) level

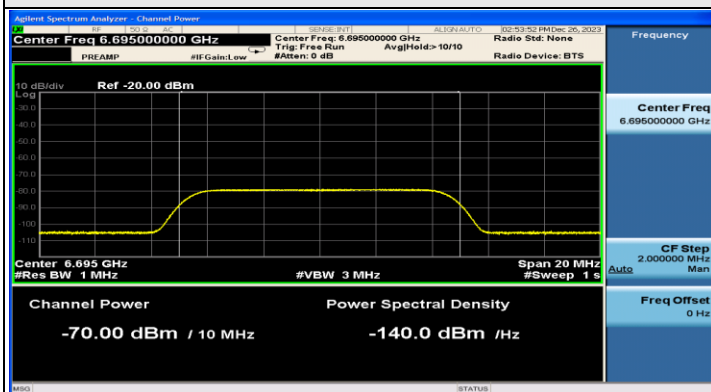


802.11be (EHT20) / CH149

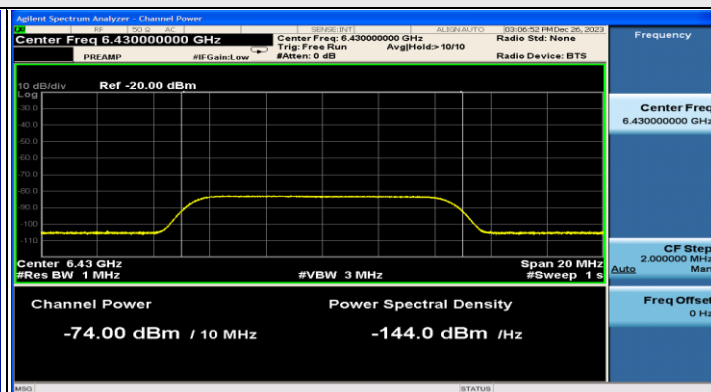

802.11be (EHT320) / CH127(Low Edge)

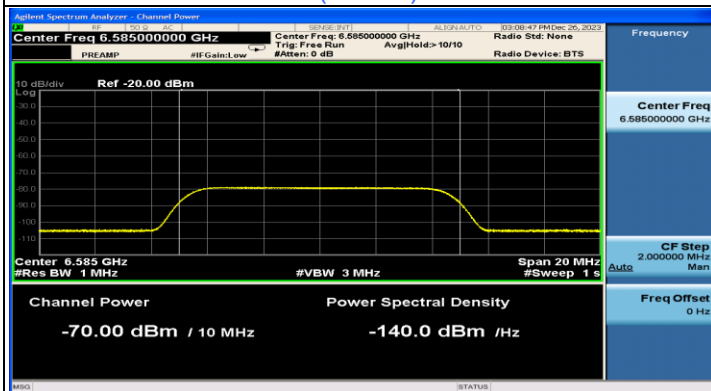


802.11be (EHT320) / CH127(Middle)

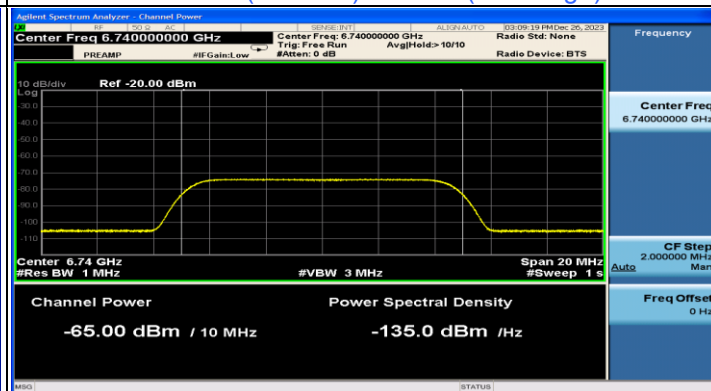

802.11be (EHT320) / CH127(High Edge)


### Plots of EUT ceased transmission in the time domain

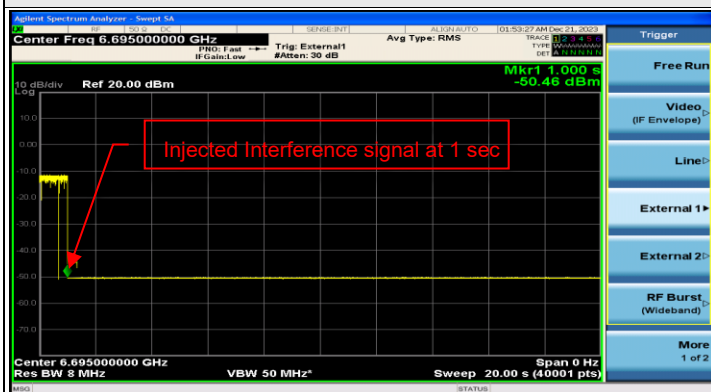


802.11be (EHT20) / CH149



802.11be (EHT320) / CH127(Low Edge)

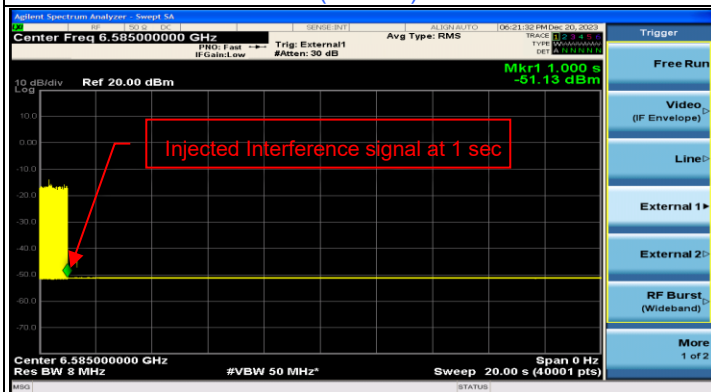

802.11be (EHT320) / CH127(Middle)

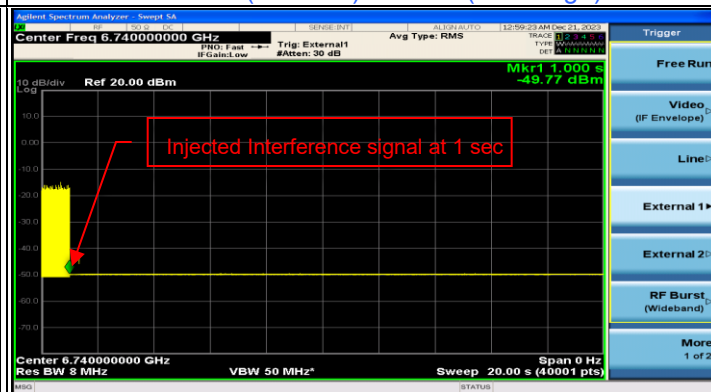

802.11be (EHT320) / CH127(High Edge)




For U-NII-8

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-67	2.58	0	-69.58	-62	OFF
					-69	2.58	0	-71.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
	320	191	6905	6750	-68	2.58	0	-70.58	-62	OFF
					-74	2.58	0	-76.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
				7060	-68	2.58	0	-70.58	-62	OFF
					-72	2.58	0	-74.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
					-63	2.58	0	-65.58	-62	OFF
					-70	2.58	0	-72.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

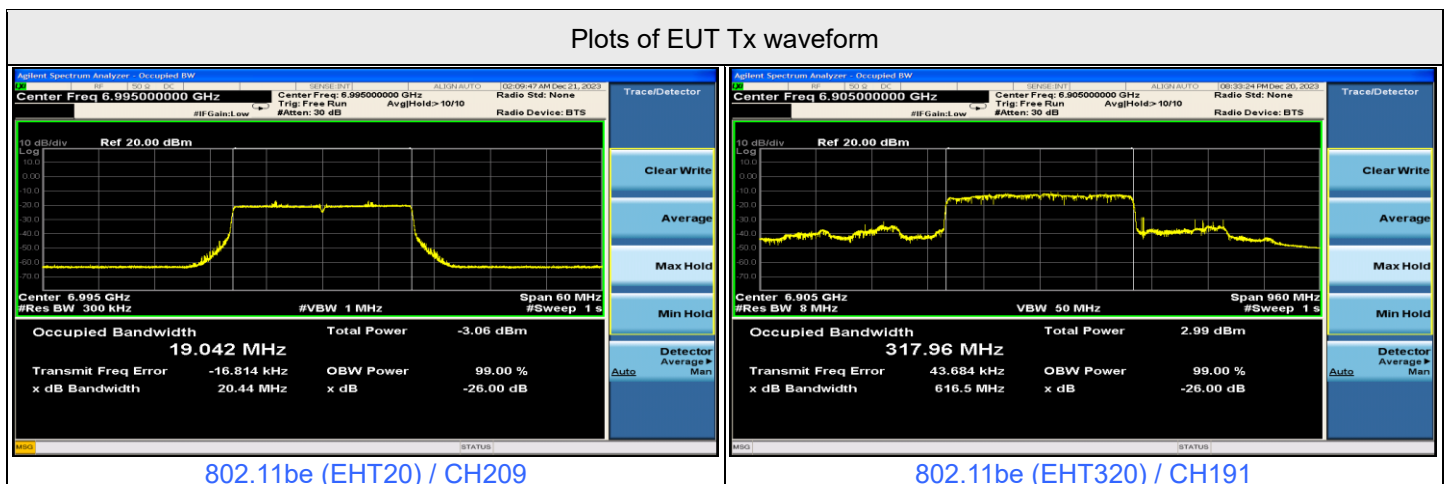


Plots of Injected signal (AWGN) level

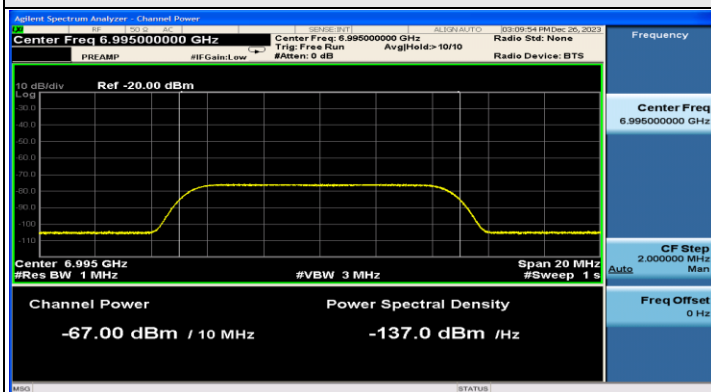


802.11be (EHT20) / CH209

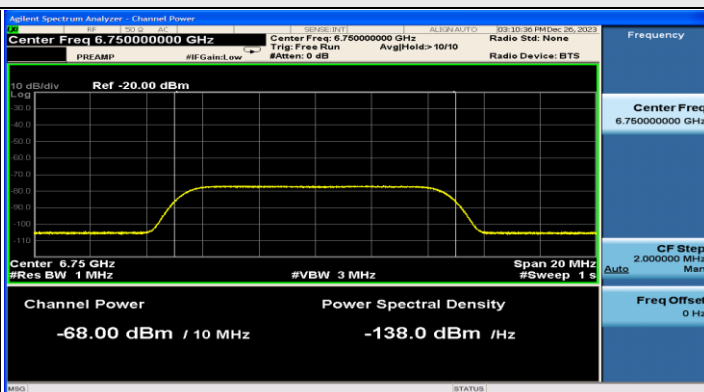

802.11be (EHT320) / CH191(Low Edge)

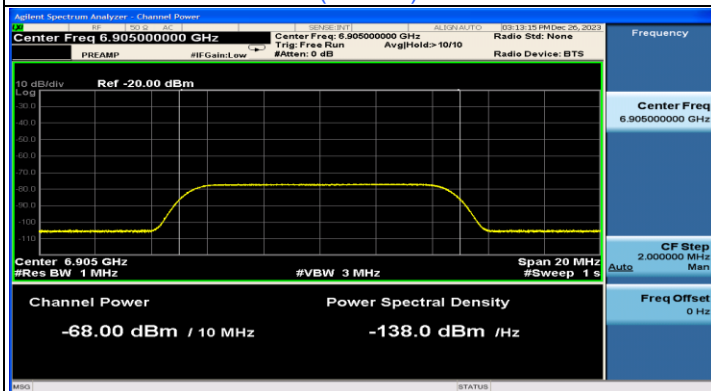


802.11be (EHT320) / CH191(Middle)

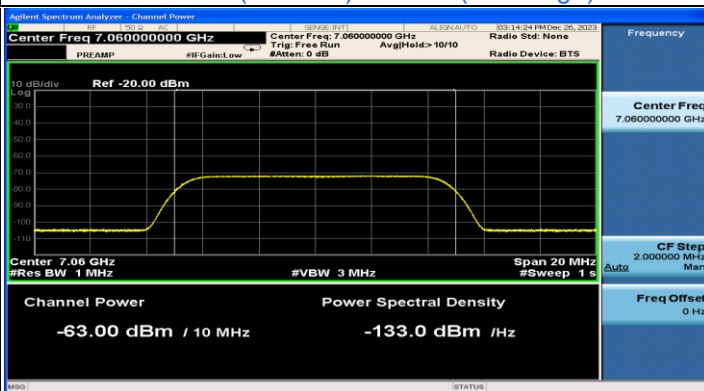


802.11be (EHT320) / CH191(High Edge)


Plots of EUT ceased transmission in the time domain

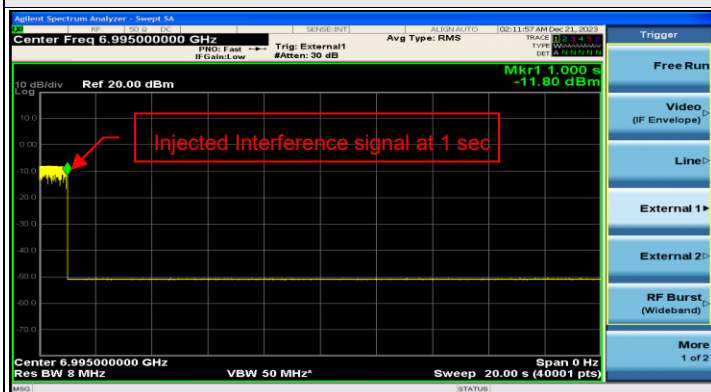


802.11be (EHT20) / CH209

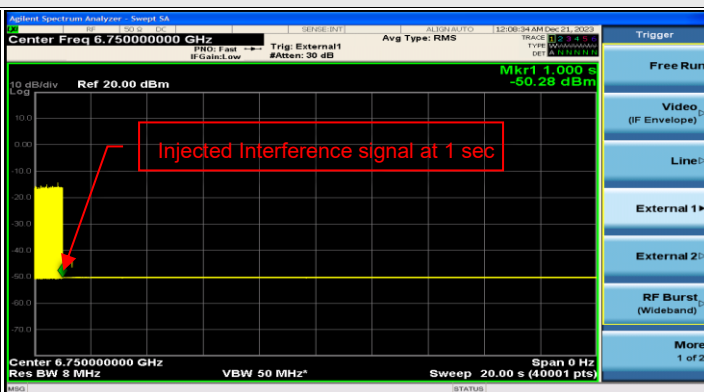

802.11be (EHT320) / CH191(Low Edge)

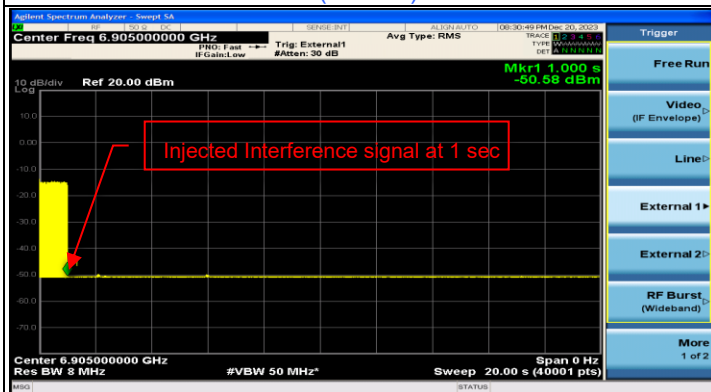

802.11be (EHT320) / CH191(Middle)

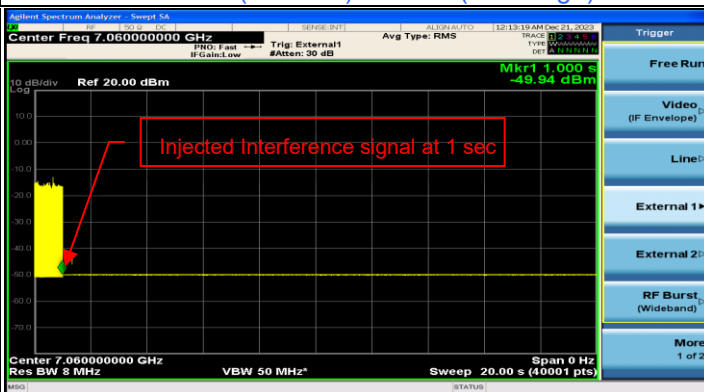

802.11be (EHT320) / CH191(High Edge)

**Mode B**


Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
Router	Netgear	RS700	V1.0.7.77_23.11.14-CBP-ucode 1824-1790

Contention Based Protocol Measurement														
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status				
				Freq. (MHz)	Power (dBm)									
802.11be	20	65	6275	6275	-70	2.58	0	-72.58	-62	OFF				
					-74	2.58	0	-76.58	-62	Minimal				
					-79.42	2.58	0	-82	-62	ON				
	320	63	6265	6110	-63	2.58	0	-65.58	-62	OFF				
					-72	2.58	0	-74.58	-62	Minimal				
					-79.42	2.58	0	-82	-62	ON				
	6265	63	6265	6265	-60	2.58	0	-62.58	-62	OFF				
					-68	2.58	0	-70.58	-62	Minimal				
					-79.42	2.58	0	-82	-62	ON				
					6420	63	6265	6420	-71	2.58	0	-73.58	-62	OFF
									-73	2.58	0	-75.58	-62	Minimal
									-79.42	2.58	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6275	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6110	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6265	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6420	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

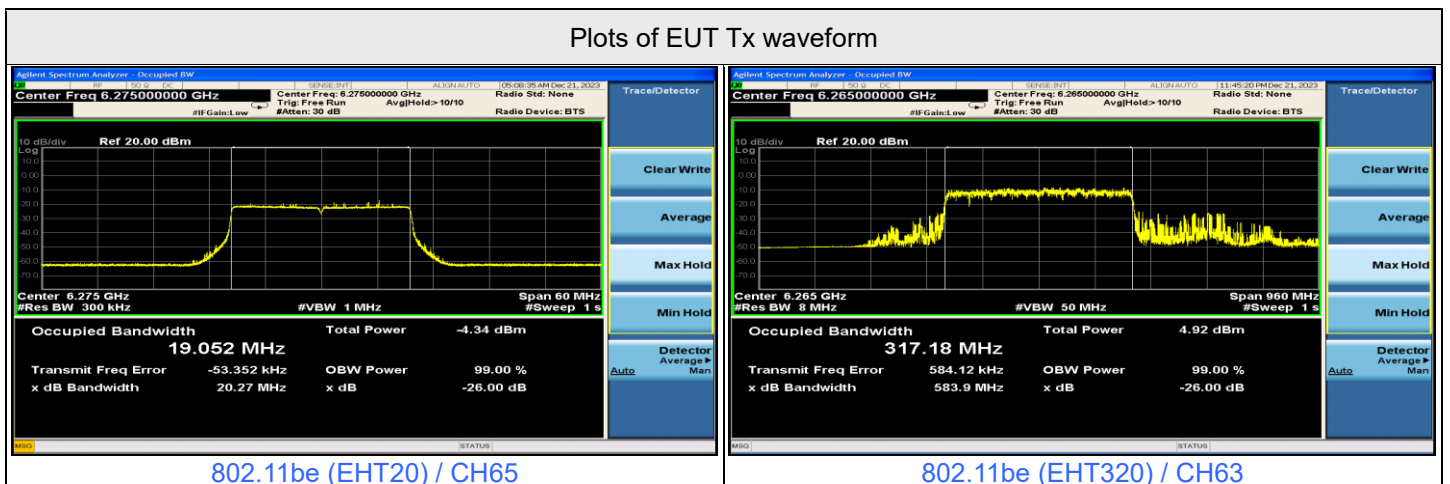


### Plots of Injected signal (AWGN) level

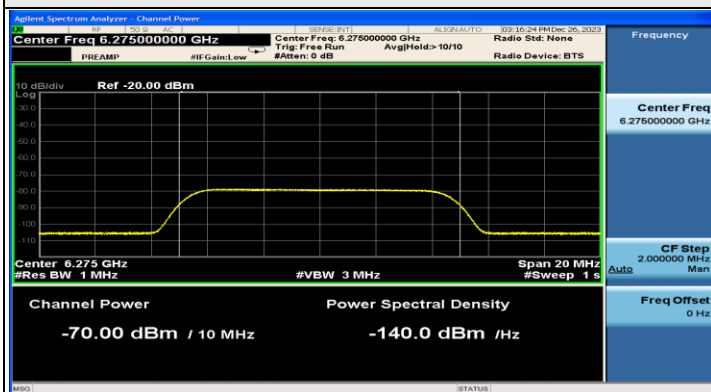


802.11be (EHT20) / CH65

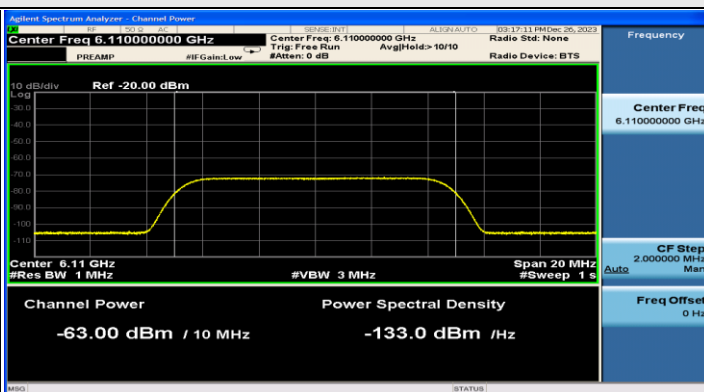

802.11be (EHT320) / CH63(Low Edge)

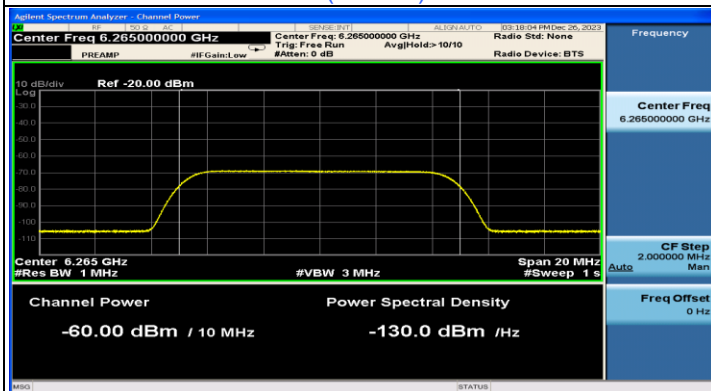


802.11be (EHT320) / CH63(Middle)

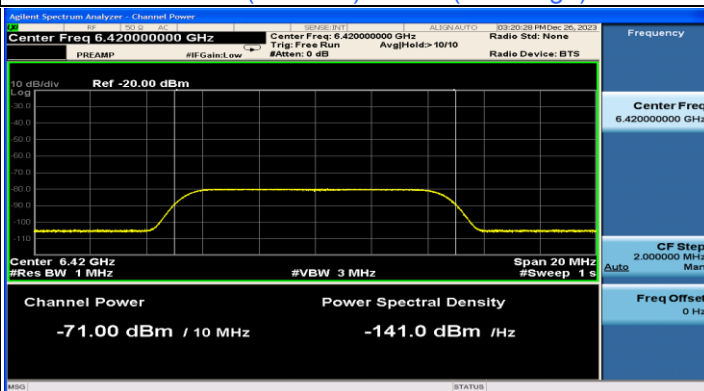

802.11be (EHT320) / CH63(High Edge)


### Plots of EUT ceased transmission in the time domain

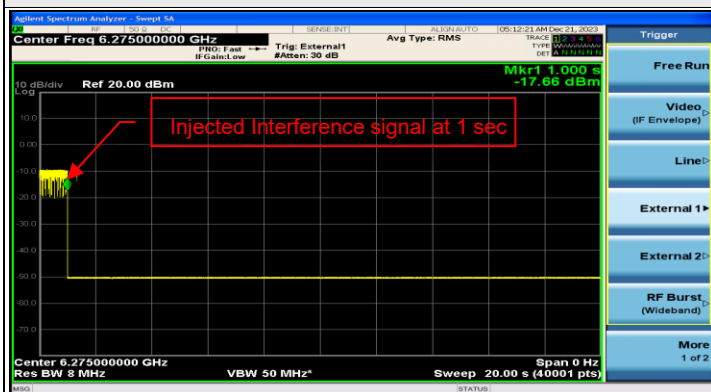


802.11be (EHT20) / CH65



802.11be (EHT320) / CH63(Low Edge)

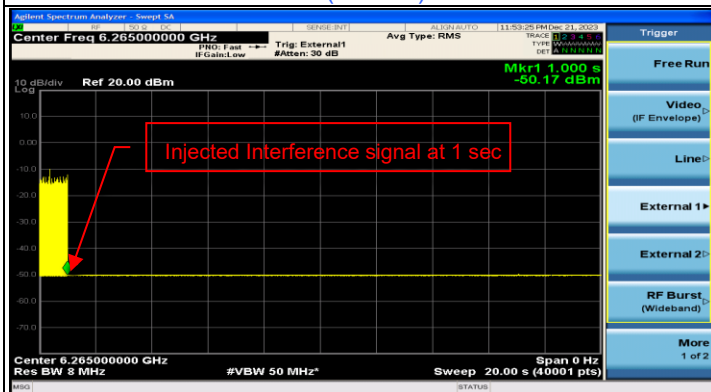

802.11be (EHT320) / CH63(Middle)

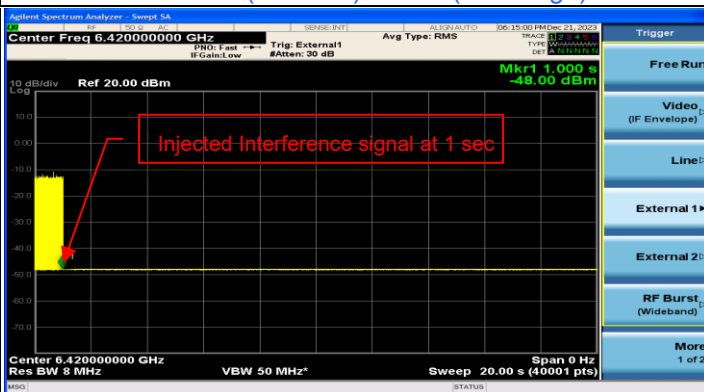

802.11be (EHT320) / CH63(High Edge)




For U-NII-6

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	101	6455	6455	-70	2.58	0	-72.58	-62	OFF
					-74	2.58	0	-76.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
	320	95	6425	6270	-71	2.58	0	-73.58	-62	OFF
					-76	2.58	0	-78.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
					-66	2.58	0	-68.58	-62	OFF
					-75	2.58	0	-77.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
	6580	6425	6425	6580	-68	2.58	0	-70.58	-62	OFF
					-73	2.58	0	-75.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6455	v	v	v	v	v	v	v			
320	6270	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass
	6425	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass
	6580	v		v	v	v	v	v	v	v	v	v	100%	90%	Pass

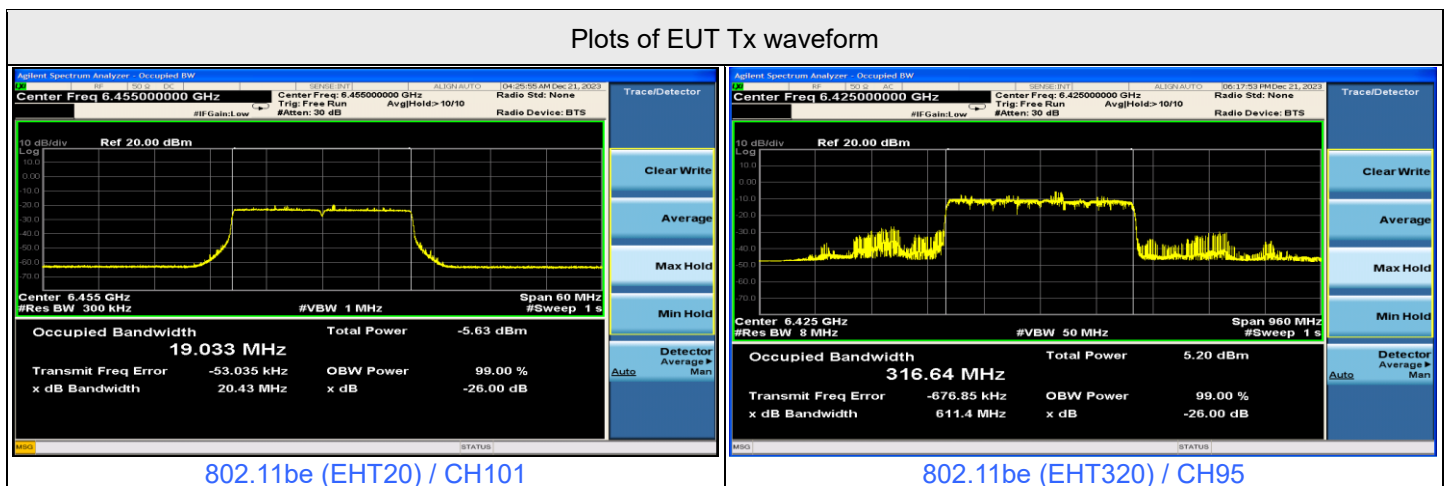





### Plots of Injected signal (AWGN) level

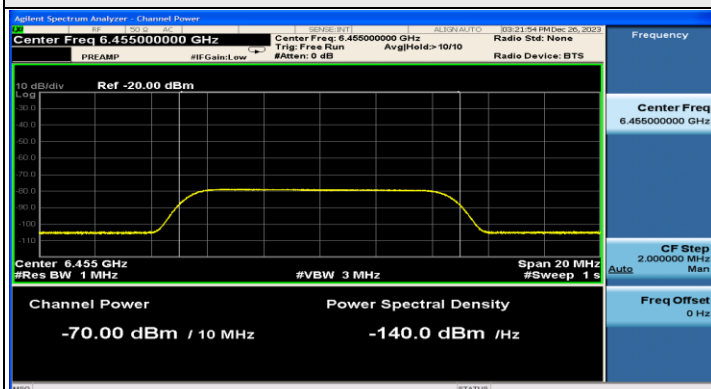


802.11be (EHT20) / CH101

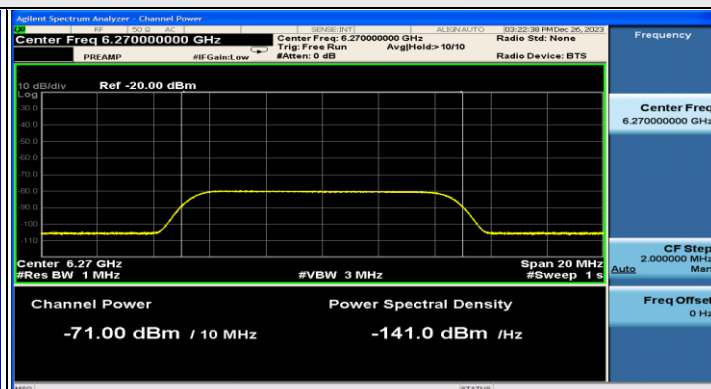

802.11be (EHT320) / CH95(Low Edge)

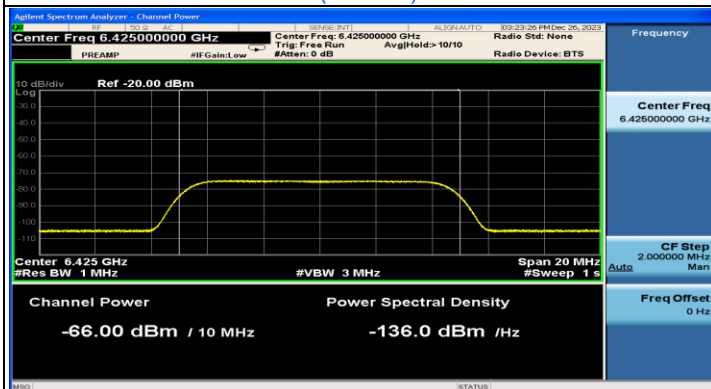


802.11be (EHT320) / CH95(Middle)

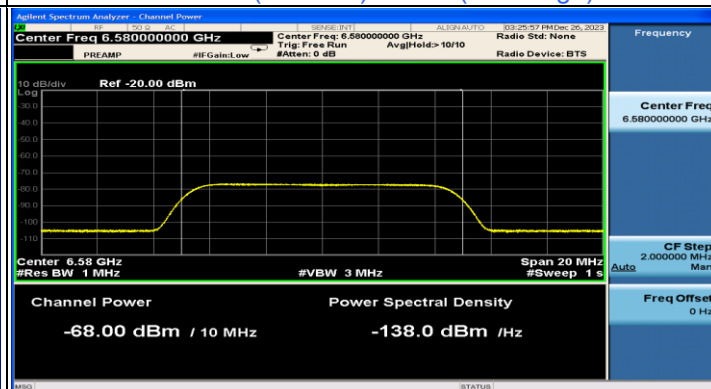

802.11be (EHT320) / CH95(High Edge)

### Plots of EUT ceased transmission in the time domain

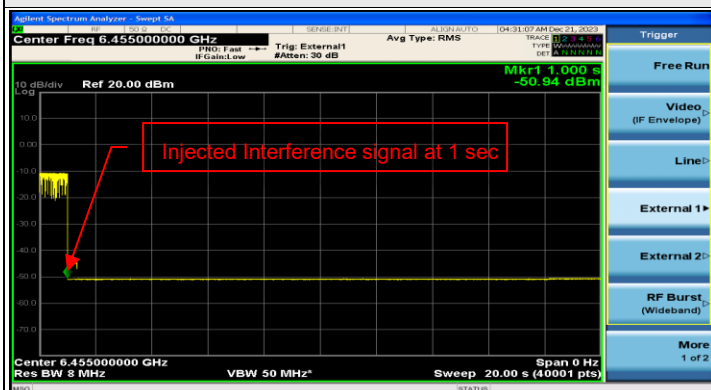


802.11be (EHT20) / CH101



802.11be (EHT320) / CH95(Low Edge)



802.11be (EHT320) / CH95(Middle)

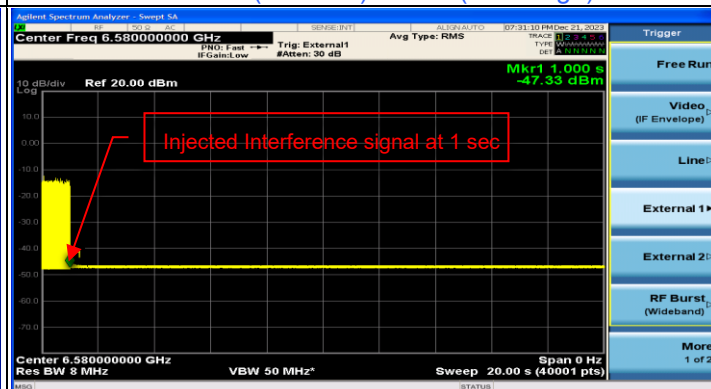

802.11be (EHT320) / CH95(High Edge)




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-67	2.58	0	-69.58	-62	OFF
					-72	2.58	0	-74.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
	320	127	6585	6430	-74	2.58	0	-76.58	-62	OFF
					-77	2.58	0	-79.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
				6585	-70	2.58	0	-72.58	-62	OFF
					-75	2.58	0	-77.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
	6740	-65	2.58	0	-67.58	-62	OFF			
		-74	2.58	0	-76.58	-62	Minimal			
		-79.42	2.58	0	-82	-62	ON			


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6430	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6585	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

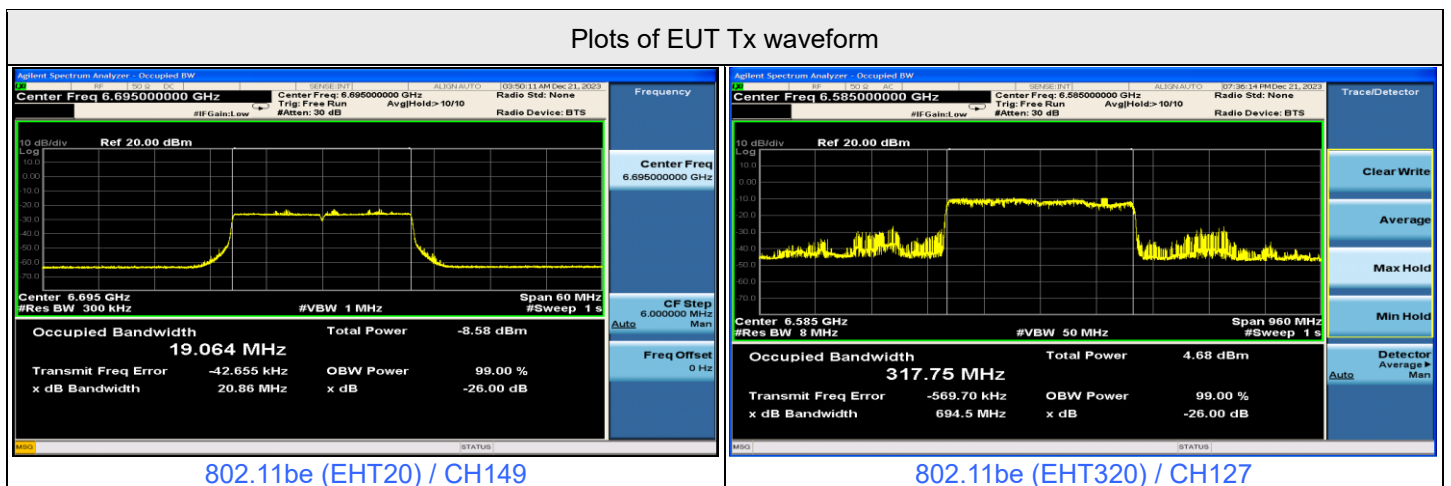


### Plots of Injected signal (AWGN) level

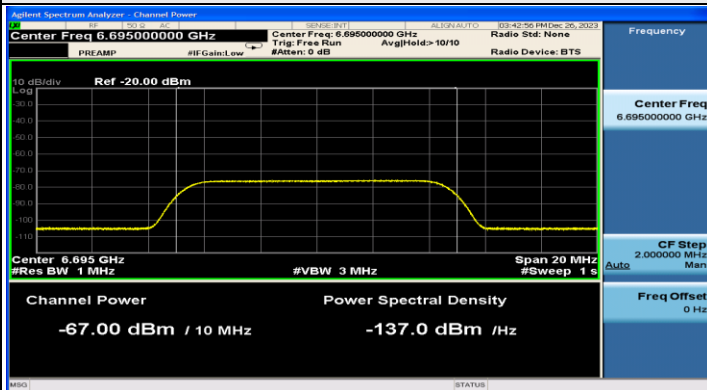


802.11be (EHT20) / CH149

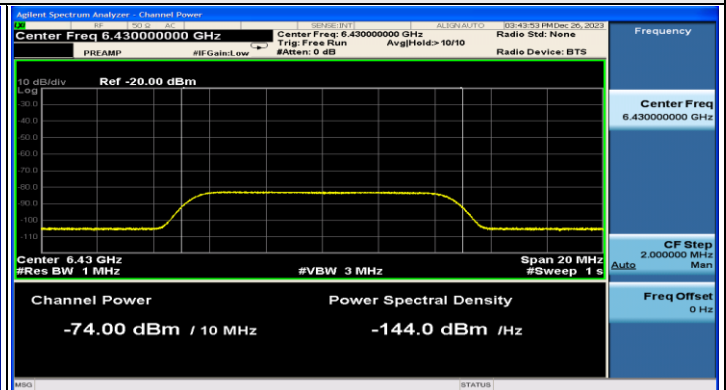

802.11be (EHT320) / CH127(Low Edge)

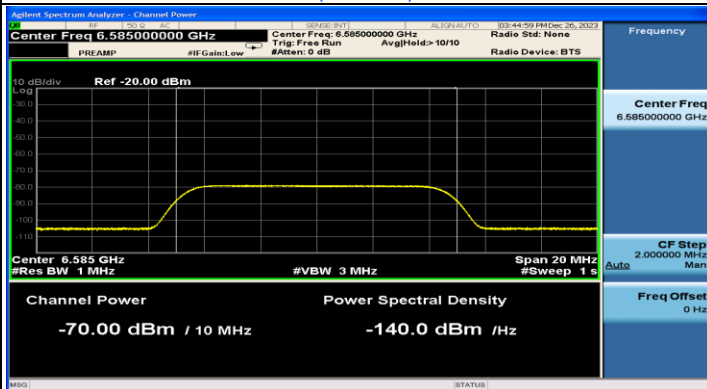

802.11be (EHT320) / CH127(Middle)

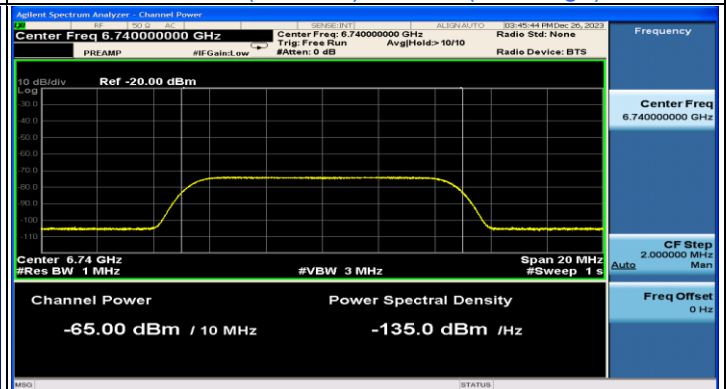

802.11be (EHT320) / CH127(High Edge)


### Plots of EUT ceased transmission in the time domain




802.11be (EHT20) / CH149



802.11be (EHT320) / CH127(Low Edge)

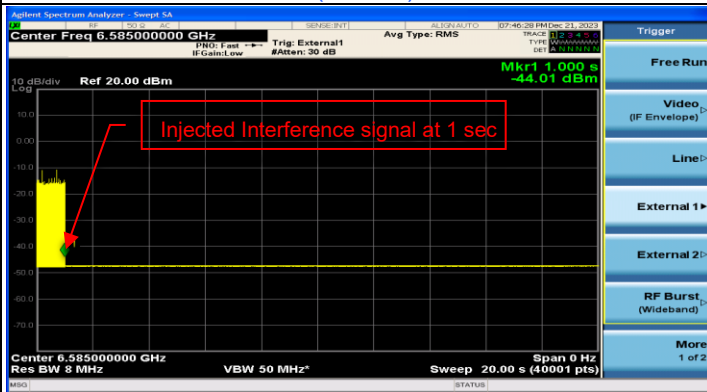

802.11be (EHT320) / CH127(Middle)

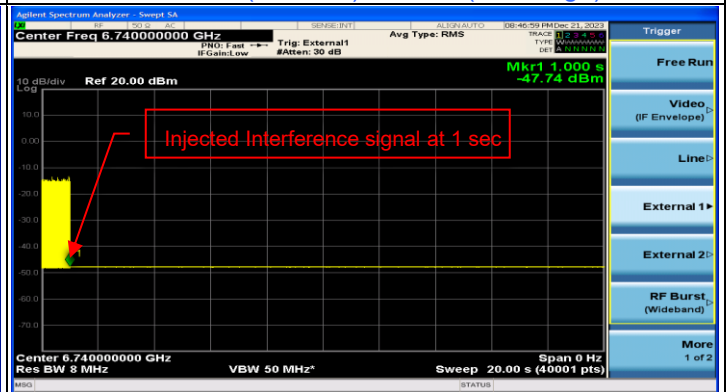

802.11be (EHT320) / CH127(High Edge)




For U-NII-8

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-68	2.58	0	-70.58	-62	OFF
					-70	2.58	0	-72.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
	320	191	6905	6750	-74	2.58	0	-76.58	-62	OFF
					-78	2.58	0	-80.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
	7060	191	6905	6905	-68	2.58	0	-70.58	-62	OFF
					-71	2.58	0	-73.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON
	7060	191	6905	7060	-66	2.58	0	-68.58	-62	OFF
					-70	2.58	0	-72.58	-62	Minimal
					-79.42	2.58	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

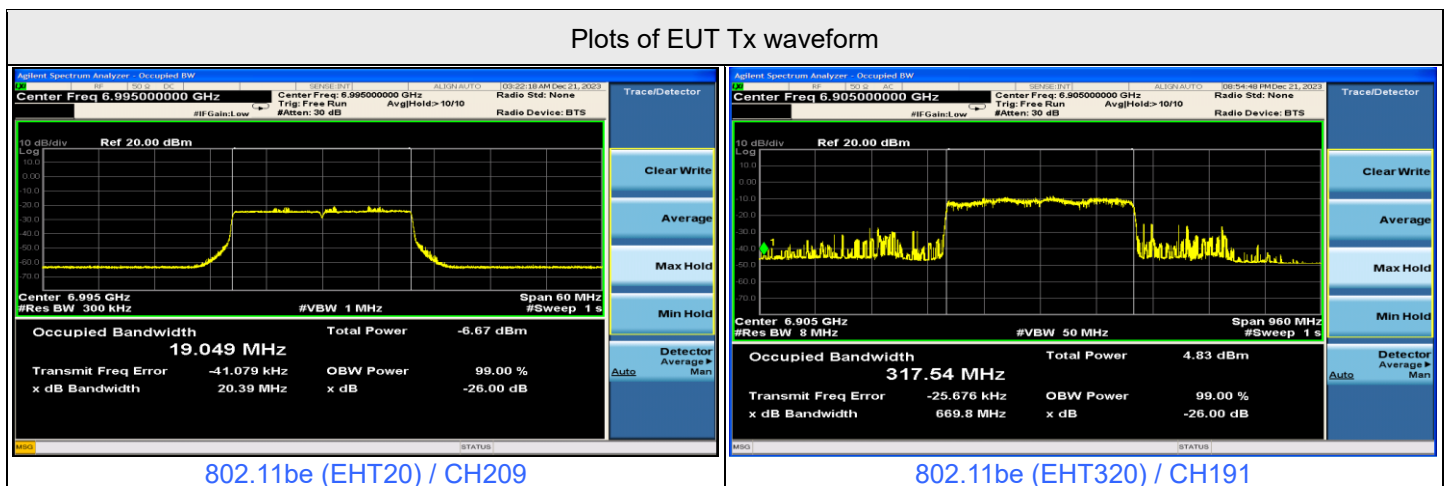


### Plots of Injected signal (AWGN) level

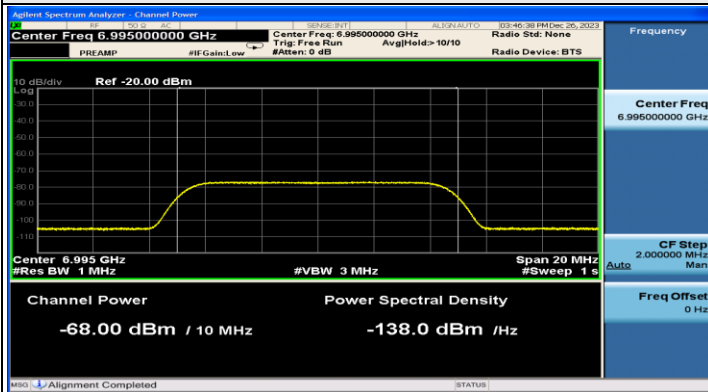


802.11be (EHT20) / CH209

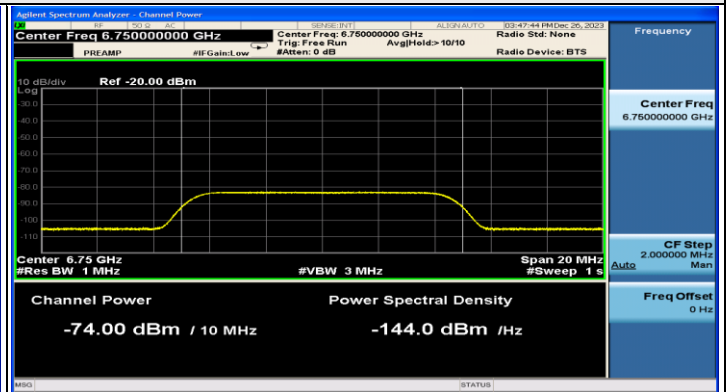

802.11be (EHT320) / CH191(Low Edge)

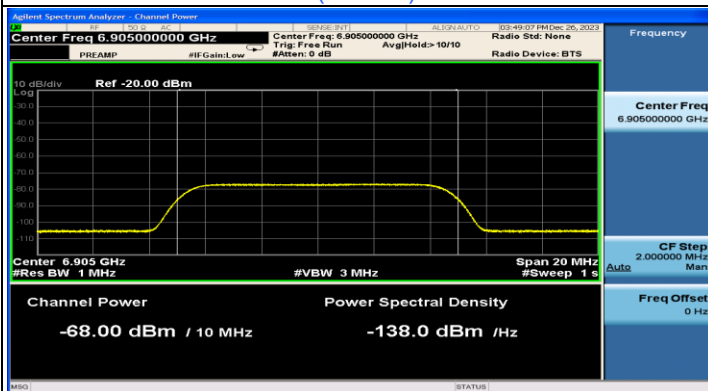


802.11be (EHT320) / CH191(Middle)

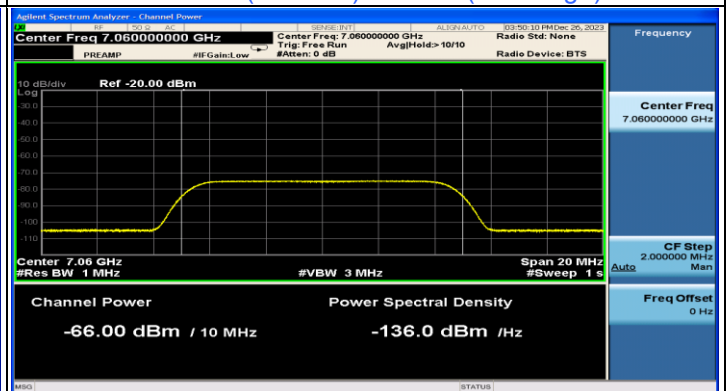

802.11be (EHT320) / CH191(High Edge)


### Plots of EUT ceased transmission in the time domain

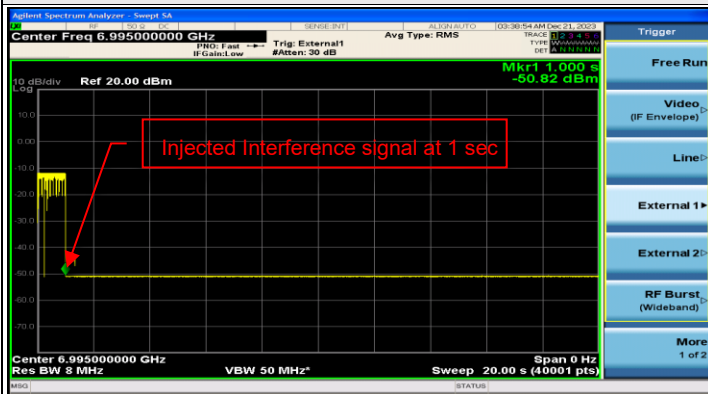


802.11be (EHT20) / CH209



802.11be (EHT320) / CH191(Low Edge)

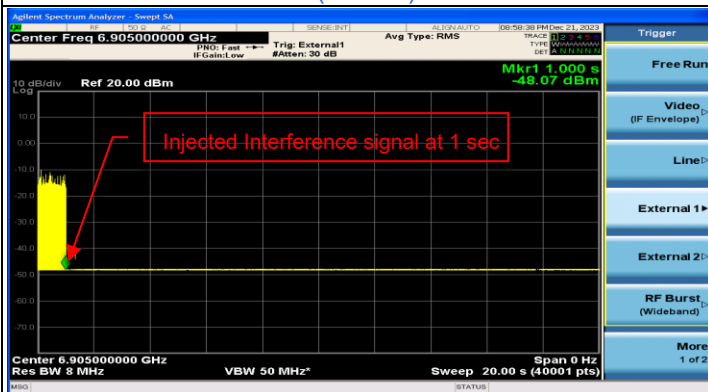

802.11be (EHT320) / CH191(Middle)

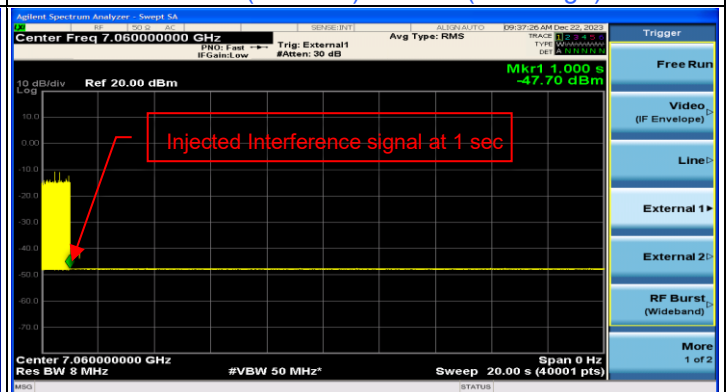

802.11be (EHT320) / CH191(High Edge)

## 7.8 AC Power Conducted Emissions

### Mode A


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Luis Lee		

Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.66	35.31	16.28	44.97	25.94	65.78	55.78	-20.81	-29.84
2	0.16600	9.67	37.49	21.74	47.16	31.41	65.16	55.16	-18.00	-23.75
3	0.19367	9.69	33.07	19.52	42.76	29.21	63.88	53.88	-21.12	-24.67
4	0.22200	9.71	31.05	18.54	40.76	28.25	62.74	52.74	-21.98	-24.49
5	0.24600	9.72	28.35	17.91	38.07	27.63	61.89	51.89	-23.82	-24.26
6	0.28200	9.74	29.30	17.22	39.04	26.96	60.76	50.76	-21.72	-23.80

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

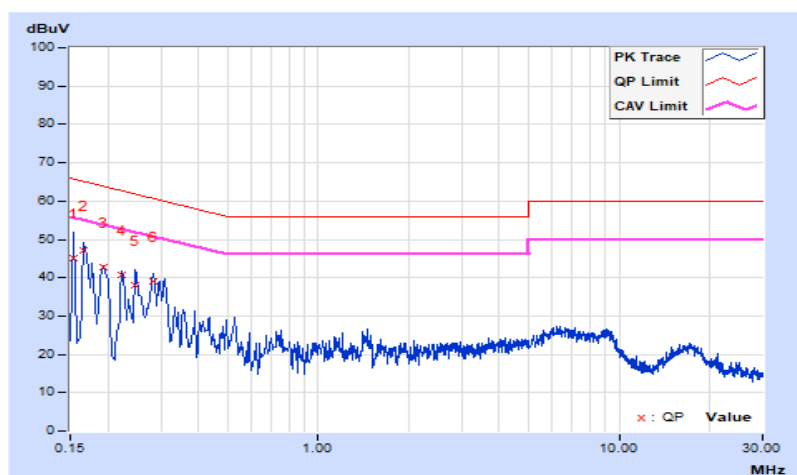


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	9.67	37.65	23.02	47.32	32.69	65.16	55.16	-17.84	-22.47
2	0.18200	9.69	28.92	18.46	38.61	28.15	64.39	54.39	-25.78	-26.24
3	0.22600	9.71	28.67	18.60	38.38	28.31	62.60	52.60	-24.22	-24.29
<b>4</b>	<b>0.25000</b>	<b>9.72</b>	<b>31.26</b>	<b>26.90</b>	<b>40.98</b>	<b>36.62</b>	<b>61.76</b>	<b>51.76</b>	<b>-20.78</b>	<b>-15.14</b>
5	0.27800	9.73	33.23	25.81	42.96	35.54	60.88	50.88	-17.92	-15.34
6	0.30600	9.74	29.29	21.80	39.03	31.54	60.08	50.08	-21.05	-18.54

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

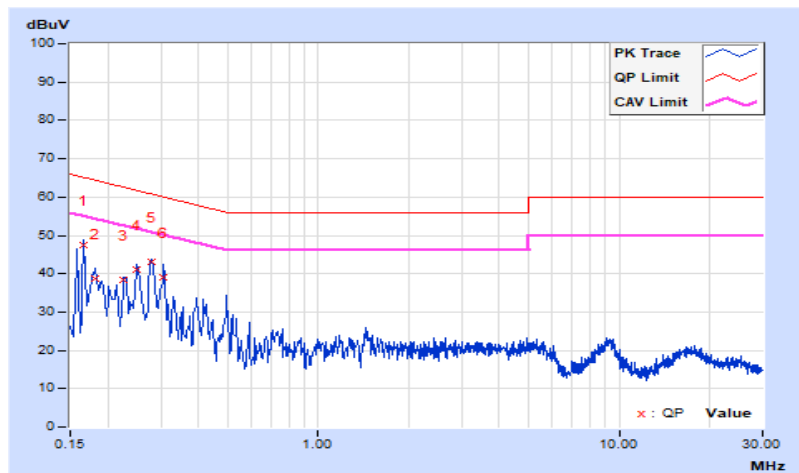

### Mode B


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

#### Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15687	9.68	33.25	14.41	42.93	24.09	65.63	55.63	-22.70	-31.54
2	0.18200	9.69	27.16	16.55	36.85	26.24	64.39	54.39	-27.54	-28.15
3	0.20600	9.70	28.99	11.09	38.69	20.79	63.37	53.37	-24.68	-32.58
4	0.22600	9.72	30.30	21.44	40.02	31.16	62.60	52.60	-22.58	-21.44
5	0.25000	9.73	31.22	24.74	40.95	34.47	61.76	51.76	-20.81	-17.29
6	0.30200	9.76	25.49	16.92	35.25	26.68	60.19	50.19	-24.94	-23.51

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

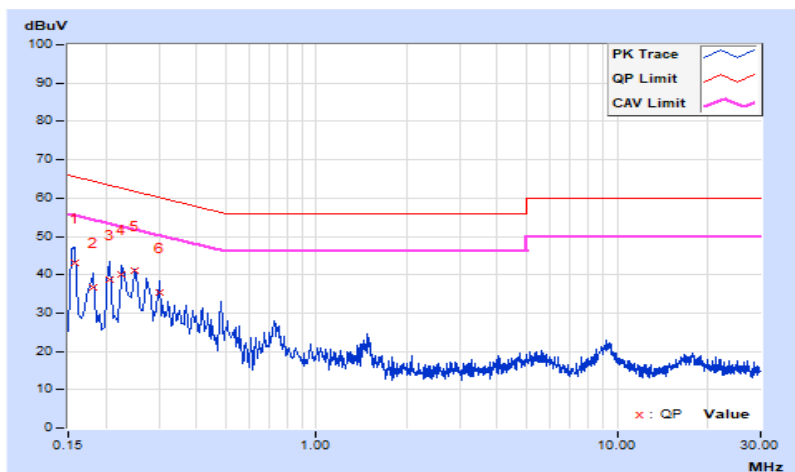




RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.68	35.99	20.34	45.67	30.02	66.00	56.00	-20.33	-25.98
2	0.16600	9.69	36.93	22.24	46.62	31.93	65.16	55.16	-18.54	-23.23
3	0.19000	9.70	29.25	16.57	38.95	26.27	64.04	54.04	-25.09	-27.77
4	0.21400	9.71	22.88	8.90	32.59	18.61	63.05	53.05	-30.46	-34.44
5	0.31000	9.78	24.28	17.04	34.06	26.82	59.97	49.97	-25.91	-23.15
6	0.35000	9.80	23.91	16.54	33.71	26.34	58.96	48.96	-25.25	-22.62

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

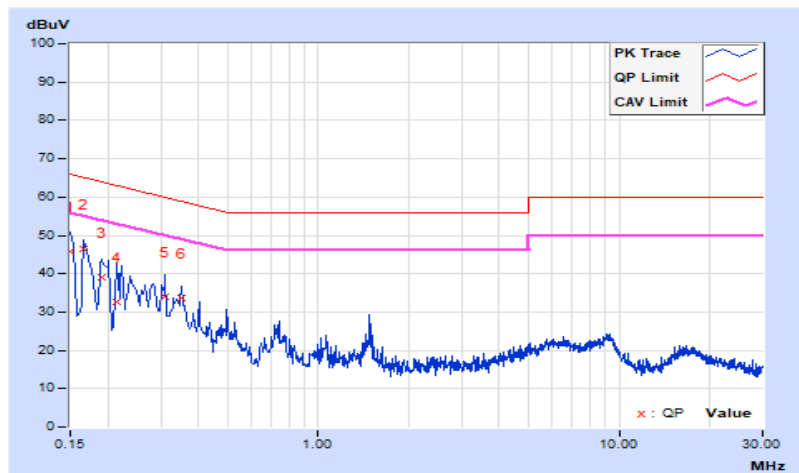

## 7.9 Unwanted Emissions below 1 GHz


### Mode A

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.09	24.9 QP	40.0	-15.1	1.00 H	164	33.5	-8.6
2	162.14	23.8 QP	43.5	-19.7	1.00 H	6	32.3	-8.5
3	283.04	26.6 QP	46.0	-19.4	1.00 H	82	34.4	-7.8
4	384.26	31.3 QP	46.0	-14.7	1.00 H	141	37.2	-5.9
5	437.68	36.1 QP	46.0	-9.9	1.49 H	156	41.0	-4.9
6	658.39	30.8 QP	46.0	-15.2	1.49 H	19	31.3	-0.5

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

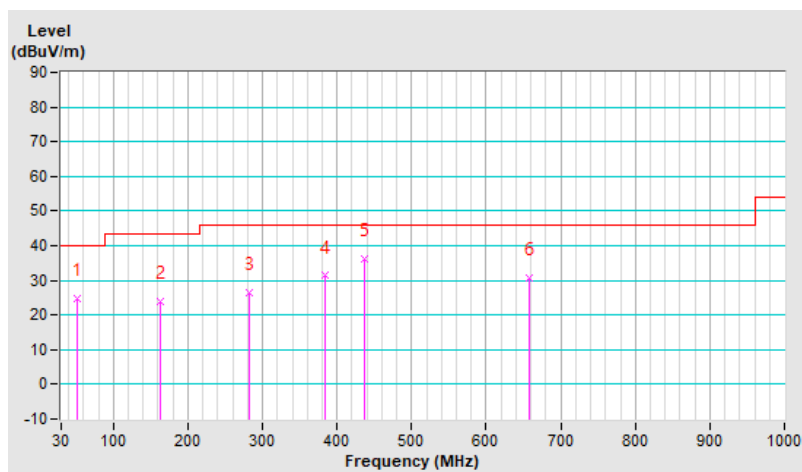


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.09	34.4 QP	40.0	-5.6	1.00 V	325	43.0	-8.6
2	166.36	23.2 QP	43.5	-20.3	1.50 V	37	31.9	-8.7
3	280.23	25.5 QP	46.0	-20.5	1.50 V	59	33.4	-7.9
4	384.26	36.8 QP	46.0	-9.2	1.50 V	307	42.7	-5.9
5	439.09	39.0 QP	46.0	-7.0	1.00 V	73	43.8	-4.8
6	782.10	37.8 QP	46.0	-8.2	1.00 V	6	35.4	2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

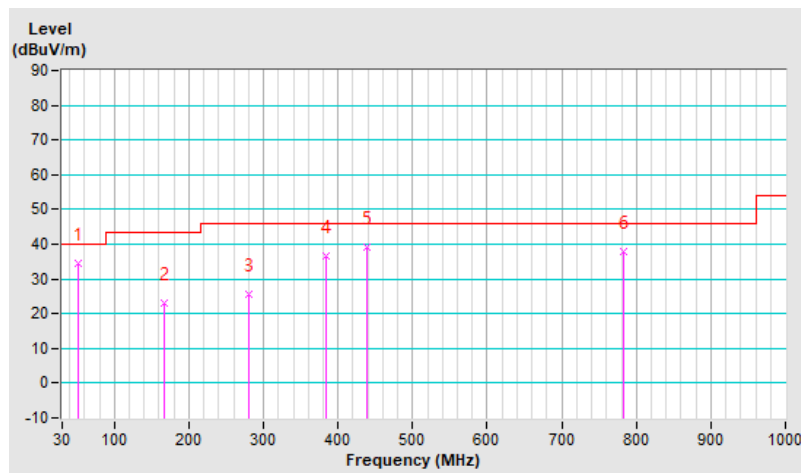


## Mode B

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	22.4 QP	40.0	-17.6	1.00 H	154	32.6	-10.2
2	62.33	21.1 QP	40.0	-18.9	1.00 H	288	30.6	-9.5
3	132.62	20.9 QP	43.5	-22.6	1.49 H	274	30.6	-9.7
4	277.42	24.9 QP	46.0	-21.1	1.00 H	82	32.9	-8.0
5	446.12	34.6 QP	46.0	-11.4	1.49 H	162	39.4	-4.8
6	499.54	30.9 QP	46.0	-15.1	1.49 H	151	34.9	-4.0

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

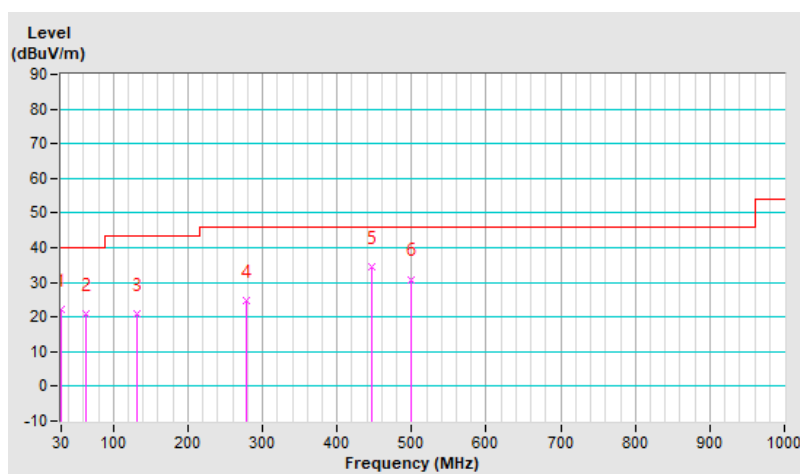


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.62	31.5 QP	40.0	-8.5	1.00 V	257	41.4	-9.9
2	55.30	27.3 QP	40.0	-12.7	1.00 V	325	36.0	-8.7
3	101.70	22.8 QP	43.5	-20.7	1.50 V	187	35.7	-12.9
4	280.23	25.5 QP	46.0	-20.5	1.50 V	59	33.4	-7.9
5	448.93	34.3 QP	46.0	-11.7	1.00 V	113	39.0	-4.7
6	547.33	28.4 QP	46.0	-17.6	1.00 V	111	31.5	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

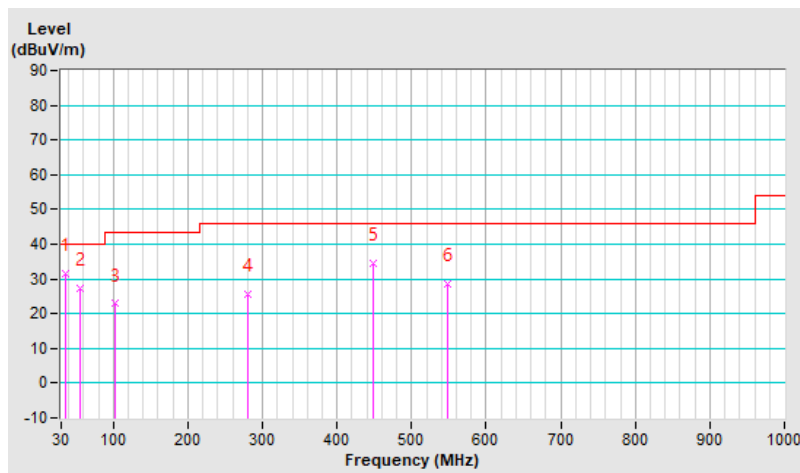

## 7.10 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.9 PK	88.2	-26.3	1.90 H	90	47.8	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.90 H	90	34.5	14.1
3	*6115.00	103.5 PK			1.90 H	90	58.2	45.3
4	*6115.00	93.5 AV			1.90 H	90	48.2	45.3
5	12230.00	60.8 PK	74.0	-13.2	2.12 H	195	39.8	21.0
6	12230.00	47.4 AV	54.0	-6.6	2.12 H	195	26.4	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.4 PK	88.2	-25.8	1.23 V	48	48.3	14.1
2	#5925.00	48.9 AV	68.2	-19.3	1.23 V	48	34.8	14.1
3	*6115.00	109.1 PK			1.23 V	48	63.8	45.3
4	*6115.00	99.8 AV			1.23 V	48	54.5	45.3
5	12230.00	61.2 PK	74.0	-12.8	1.95 V	315	40.2	21.0
6	12230.00	47.6 AV	54.0	-6.4	1.95 V	315	26.6	21.0

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	102.5 PK			1.93 H	90	56.7	45.8
2	*6255.00	92.9 AV			1.93 H	90	47.1	45.8
3	12510.00	60.5 PK	74.0	-13.5	2.09 H	187	39.8	20.7
4	12510.00	46.9 AV	54.0	-7.1	2.09 H	187	26.2	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	108.7 PK			1.16 V	47	62.9	45.8
2	*6255.00	99.2 AV			1.16 V	47	53.4	45.8
3	12510.00	61.0 PK	74.0	-13.0	1.92 V	332	40.3	20.7
4	12510.00	47.2 AV	54.0	-6.8	1.92 V	332	26.5	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	103.9 PK			1.98 H	86	57.3	46.6
2	*6415.00	94.8 AV			1.98 H	86	48.2	46.6
3	#12830.00	61.4 PK	88.2	-26.8	2.12 H	192	39.8	21.6
4	#12830.00	48.1 AV	68.2	-20.1	2.12 H	192	26.5	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.1 PK			1.16 V	46	62.5	46.6
2	*6415.00	99.5 AV			1.16 V	46	52.9	46.6
3	#12830.00	61.8 PK	88.2	-26.4	1.88 V	311	40.2	21.6
4	#12830.00	48.3 AV	68.2	-19.9	1.88 V	311	26.7	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.3 PK			1.86 H	87	57.7	46.6
2	*6435.00	95.2 AV			1.86 H	87	48.6	46.6
3	#12870.00	61.2 PK	88.2	-27.0	2.19 H	182	39.6	21.6
4	#12870.00	47.8 AV	68.2	-20.4	2.19 H	182	26.2	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.5 PK			1.08 V	47	62.9	46.6
2	*6435.00	100.0 AV			1.08 V	47	53.4	46.6
3	#12870.00	61.6 PK	88.2	-26.6	1.86 V	312	40.0	21.6
4	#12870.00	48.1 AV	68.2	-20.1	1.86 V	312	26.5	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.6 PK			2.00 H	86	56.8	46.8
2	*6475.00	94.1 AV			2.00 H	86	47.3	46.8
3	#12950.00	61.4 PK	88.2	-26.8	2.28 H	182	39.6	21.8
4	#12950.00	48.0 AV	68.2	-20.2	2.28 H	182	26.2	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.9 PK			1.66 V	42	62.1	46.8
2	*6475.00	99.5 AV			1.66 V	42	52.7	46.8
3	#12950.00	61.8 PK	88.2	-26.4	1.95 V	318	40.0	21.8
4	#12950.00	48.2 AV	68.2	-20.0	1.95 V	318	26.4	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.7 PK			1.94 H	84	56.7	47.0
2	*6515.00	94.1 AV			1.94 H	84	47.1	47.0
3	#13030.00	61.6 PK	88.2	-26.6	2.28 H	192	39.7	21.9
4	#13030.00	48.1 AV	68.2	-20.1	2.28 H	192	26.2	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.6 PK			1.61 V	45	61.6	47.0
2	*6515.00	99.2 AV			1.61 V	45	52.2	47.0
3	#13030.00	62.0 PK	88.2	-26.2	1.95 V	311	40.1	21.9
4	#13030.00	48.4 AV	68.2	-19.8	1.95 V	311	26.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	103.3 PK			1.78 H	85	56.1	47.2
2	*6535.00	93.7 AV			1.78 H	85	46.5	47.2
3	#13070.00	61.8 PK	88.2	-26.4	2.11 H	192	39.8	22.0
4	#13070.00	48.2 AV	68.2	-20.0	2.11 H	192	26.2	22.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.7 PK			1.61 V	45	61.5	47.2
2	*6535.00	99.2 AV			1.61 V	45	52.0	47.2
3	#13070.00	62.0 PK	88.2	-26.2	1.96 V	318	40.0	22.0
4	#13070.00	48.5 AV	68.2	-19.7	1.96 V	318	26.5	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.1 PK			1.73 H	86	56.7	47.4
2	*6695.00	94.3 AV			1.73 H	86	46.9	47.4
3	13390.00	62.5 PK	74.0	-11.5	2.21 H	195	39.7	22.8
4	13390.00	49.0 AV	54.0	-5.0	2.21 H	195	26.2	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.6 PK			1.48 V	43	61.2	47.4
2	*6695.00	98.7 AV			1.48 V	43	51.3	47.4
3	13390.00	63.0 PK	74.0	-11.0	1.82 V	305	40.2	22.8
4	13390.00	49.3 AV	54.0	-4.7	1.82 V	305	26.5	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	103.6 PK			1.65 H	80	56.2	47.4
2	*6855.00	94.4 AV			1.65 H	80	47.0	47.4
3	#13710.00	63.2 PK	88.2	-25.0	2.20 H	187	39.7	23.5
4	#13710.00	49.6 AV	68.2	-18.6	2.20 H	187	26.1	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.7 PK			1.33 V	44	61.3	47.4
2	*6855.00	98.8 AV			1.33 V	44	51.4	47.4
3	#13710.00	63.5 PK	88.2	-24.7	1.96 V	312	40.0	23.5
4	#13710.00	49.8 AV	68.2	-18.4	1.96 V	312	26.3	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.4 PK			1.56 H	83	56.8	47.6
2	*6875.00	95.0 AV			1.56 H	83	47.4	47.6
3	#13750.00	63.3 PK	88.2	-24.9	2.28 H	185	39.7	23.6
4	#13750.00	49.6 AV	68.2	-18.6	2.28 H	185	26.0	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.6 PK			1.31 V	43	61.0	47.6
2	*6875.00	98.6 AV			1.31 V	43	51.0	47.6
3	#13750.00	63.6 PK	88.2	-24.6	1.95 V	309	40.0	23.6
4	#13750.00	49.9 AV	68.2	-18.3	1.95 V	309	26.3	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.5 PK			1.51 H	86	54.8	48.7
2	*6995.00	94.3 AV			1.51 H	86	45.6	48.7
3	#13990.00	64.2 PK	88.2	-24.0	2.19 H	189	39.7	24.5
4	#13990.00	50.5 AV	68.2	-17.7	2.19 H	189	26.0	24.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	108.7 PK			1.24 V	44	60.0	48.7
2	*6995.00	99.1 AV			1.24 V	44	50.4	48.7
3	#13990.00	64.5 PK	88.2	-23.7	1.92 V	312	40.0	24.5
4	#13990.00	50.9 AV	68.2	-17.3	1.92 V	312	26.4	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





RF Mode	802.11a	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	103.1 PK			1.47 H	84	54.5	48.6
2	*7095.00	93.9 AV			1.47 H	84	45.3	48.6
3	#14190.00	64.6 PK	88.2	-23.6	2.25 H	182	39.7	24.9
4	#14190.00	51.1 AV	68.2	-17.1	2.25 H	182	26.2	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	108.1 PK			1.20 V	44	59.5	48.6
2	*7095.00	98.6 AV			1.20 V	44	50.0	48.6
3	#14190.00	65.1 PK	88.2	-23.1	1.95 V	308	40.2	24.9
4	#14190.00	51.4 AV	68.2	-16.8	1.95 V	308	26.5	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.8 PK			1.46 H	84	55.0	48.8
2	*7115.00	94.2 AV			1.46 H	84	45.4	48.8
3	#7125.00	83.1 PK	88.2	-5.1	1.46 H	84	66.2	16.9
4	#7125.00	64.6 AV	68.2	-3.6	1.46 H	84	47.7	16.9
5	#14230.00	64.4 PK	88.2	-23.8	2.22 H	199	39.5	24.9
6	#14230.00	50.7 AV	68.2	-17.5	2.22 H	199	25.8	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	108.3 PK			1.28 V	41	59.5	48.8
2	*7115.00	98.7 AV			1.28 V	41	49.9	48.8
3	#7125.00	87.4 PK	88.2	-0.8	1.28 V	41	70.5	16.9
4	#7125.00	68.0 AV	68.2	-0.2	1.28 V	41	51.1	16.9
5	#14230.00	64.9 PK	88.2	-23.3	1.85 V	312	40.0	24.9
6	#14230.00	51.1 AV	68.2	-17.1	1.85 V	312	26.2	24.9

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

### Beamforming (2T1S)

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.1 PK	88.2	-26.1	1.42 H	87	48.0	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.42 H	87	34.5	14.1
3	*6115.00	106.8 PK			1.42 H	87	61.5	45.3
4	*6115.00	93.8 AV			1.42 H	87	48.5	45.3
5	12230.00	60.8 PK	74.0	-13.2	2.25 H	185	39.8	21.0
6	12230.00	47.2 AV	54.0	-6.8	2.25 H	185	26.2	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.3 PK	88.2	-25.9	1.24 V	47	48.2	14.1
2	#5925.00	48.8 AV	68.2	-19.4	1.24 V	47	34.7	14.1
3	*6115.00	111.8 PK			1.24 V	47	66.5	45.3
4	*6115.00	99.3 AV			1.24 V	47	54.0	45.3
5	12230.00	61.3 PK	74.0	-12.7	1.92 V	317	40.3	21.0
6	12230.00	47.5 AV	54.0	-6.5	1.92 V	317	26.5	21.0

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	107.3 PK			1.37 H	87	61.5	45.8
2	*6255.00	95.2 AV			1.37 H	87	49.4	45.8
3	12510.00	60.5 PK	74.0	-13.5	2.15 H	185	39.8	20.7
4	12510.00	46.9 AV	54.0	-7.1	2.15 H	185	26.2	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	111.7 PK			1.17 V	49	65.9	45.8
2	*6255.00	99.2 AV			1.17 V	49	53.4	45.8
3	12510.00	60.9 PK	74.0	-13.1	1.95 V	325	40.2	20.7
4	12510.00	47.2 AV	54.0	-6.8	1.95 V	325	26.5	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.6 PK			1.37 H	82	61.0	46.6
2	*6415.00	96.6 AV			1.37 H	82	50.0	46.6
3	#12830.00	61.2 PK	88.2	-27.0	2.25 H	188	39.6	21.6
4	#12830.00	47.5 AV	68.2	-20.7	2.25 H	188	25.9	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.9 PK			1.20 V	47	65.3	46.6
2	*6415.00	100.7 AV			1.20 V	47	54.1	46.6
3	#12830.00	61.8 PK	88.2	-26.4	1.92 V	311	40.2	21.6
4	#12830.00	47.8 AV	68.2	-20.4	1.92 V	311	26.2	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.8 PK			1.38 H	80	62.2	46.6
2	*6435.00	96.6 AV			1.38 H	80	50.0	46.6
3	#12870.00	61.3 PK	88.2	-26.9	2.09 H	183	39.7	21.6
4	#12870.00	47.7 AV	68.2	-20.5	2.09 H	183	26.1	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	113.3 PK			1.19 V	46	66.7	46.6
2	*6435.00	100.8 AV			1.19 V	46	54.2	46.6
3	#12870.00	61.6 PK	88.2	-26.6	1.89 V	315	40.0	21.6
4	#12870.00	47.9 AV	68.2	-20.3	1.89 V	315	26.3	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.0 PK			1.34 H	82	60.2	46.8
2	*6475.00	95.3 AV			1.34 H	82	48.5	46.8
3	#12950.00	61.5 PK	88.2	-26.7	2.08 H	187	39.7	21.8
4	#12950.00	47.8 AV	68.2	-20.4	2.08 H	187	26.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	112.0 PK			1.19 V	44	65.2	46.8
2	*6475.00	99.7 AV			1.19 V	44	52.9	46.8
3	#12950.00	61.8 PK	88.2	-26.4	1.89 V	318	40.0	21.8
4	#12950.00	48.1 AV	68.2	-20.1	1.89 V	318	26.3	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	106.8 PK			1.33 H	81	59.8	47.0
2	*6515.00	95.2 AV			1.33 H	81	48.2	47.0
3	#13030.00	61.5 PK	88.2	-26.7	2.21 H	197	39.6	21.9
4	#13030.00	47.7 AV	68.2	-20.5	2.21 H	197	25.8	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.7 PK			1.24 V	43	64.7	47.0
2	*6515.00	99.0 AV			1.24 V	43	52.0	47.0
3	#13030.00	61.9 PK	88.2	-26.3	1.85 V	328	40.0	21.9
4	#13030.00	48.1 AV	68.2	-20.1	1.85 V	328	26.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.2 PK			1.30 H	80	60.0	47.2
2	*6535.00	95.4 AV			1.30 H	80	48.2	47.2
3	#13070.00	61.7 PK	88.2	-26.5	2.21 H	195	39.7	22.0
4	#13070.00	48.0 AV	68.2	-20.2	2.21 H	195	26.0	22.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.4 PK			1.61 V	43	65.2	47.2
2	*6535.00	99.8 AV			1.61 V	43	52.6	47.2
3	#13070.00	62.0 PK	88.2	-26.2	1.89 V	311	40.0	22.0
4	#13070.00	48.3 AV	68.2	-19.9	1.89 V	311	26.3	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.9 PK			1.23 H	81	59.5	47.4
2	*6695.00	95.4 AV			1.23 H	81	48.0	47.4
3	13390.00	62.5 PK	74.0	-11.5	2.21 H	185	39.7	22.8
4	13390.00	48.8 AV	54.0	-5.2	2.21 H	185	26.0	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.0 PK			1.50 V	44	64.6	47.4
2	*6695.00	99.6 AV			1.50 V	44	52.2	47.4
3	13390.00	62.9 PK	74.0	-11.1	1.92 V	305	40.1	22.8
4	13390.00	49.1 AV	54.0	-4.9	1.92 V	305	26.3	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.6 PK			1.12 H	77	59.2	47.4
2	*6855.00	95.2 AV			1.12 H	77	47.8	47.4
3	#13710.00	63.3 PK	88.2	-24.9	2.28 H	199	39.8	23.5
4	#13710.00	49.7 AV	68.2	-18.5	2.28 H	199	26.2	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.2 PK			1.54 V	41	63.8	47.4
2	*6855.00	98.8 AV			1.54 V	41	51.4	47.4
3	#13710.00	63.7 PK	88.2	-24.5	1.92 V	315	40.2	23.5
4	#13710.00	49.9 AV	68.2	-18.3	1.92 V	315	26.4	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.1 PK			1.15 H	77	59.5	47.6
2	*6875.00	95.4 AV			1.15 H	77	47.8	47.6
3	#13750.00	63.3 PK	88.2	-24.9	2.22 H	186	39.7	23.6
4	#13750.00	49.8 AV	68.2	-18.4	2.22 H	186	26.2	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.8 PK			1.49 V	42	64.2	47.6
2	*6875.00	98.9 AV			1.49 V	42	51.3	47.6
3	#13750.00	63.8 PK	88.2	-24.4	1.95 V	309	40.2	23.6
4	#13750.00	50.1 AV	68.2	-18.1	1.95 V	309	26.5	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.0 PK			1.17 H	75	58.3	48.7
2	*6995.00	95.6 AV			1.17 H	75	46.9	48.7
3	#13990.00	64.3 PK	88.2	-23.9	2.28 H	188	39.8	24.5
4	#13990.00	50.5 AV	68.2	-17.7	2.28 H	188	26.0	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.5 PK			1.25 V	40	62.8	48.7
2	*6995.00	99.1 AV			1.25 V	40	50.4	48.7
3	#13990.00	64.7 PK	88.2	-23.5	1.95 V	308	40.2	24.5
4	#13990.00	50.7 AV	68.2	-17.5	1.95 V	308	26.2	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	106.6 PK			1.20 H	78	58.0	48.6
2	*7095.00	94.2 AV			1.20 H	78	45.6	48.6
3	#14190.00	64.5 PK	88.2	-23.7	2.29 H	192	39.6	24.9
4	#14190.00	50.8 AV	68.2	-17.4	2.29 H	192	25.9	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.1 PK			1.27 V	40	62.5	48.6
2	*7095.00	99.2 AV			1.27 V	40	50.6	48.6
3	#14190.00	64.9 PK	88.2	-23.3	1.85 V	315	40.0	24.9
4	#14190.00	51.1 AV	68.2	-17.1	1.85 V	315	26.2	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	90.4 PK			1.05 H	75	41.6	48.8
2	*7115.00	78.4 AV			1.05 H	75	29.6	48.8
3	#7125.00	73.2 PK	88.2	-15.0	1.05 H	75	56.3	16.9
4	#7125.00	63.5 AV	68.2	-4.7	1.05 H	75	46.6	16.9
5	#14230.00	64.2 PK	88.2	-24.0	2.23 H	185	39.3	24.9
6	#14230.00	50.5 AV	68.2	-17.7	2.23 H	185	25.6	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.6 PK			1.22 V	41	46.8	48.8
2	*7115.00	82.7 AV			1.22 V	41	33.9	48.8
3	#7125.00	82.3 PK	88.2	-5.9	1.22 V	41	65.4	16.9
4	<b>#7125.00</b>	<b>68.1 AV</b>	<b>68.2</b>	<b>-0.1</b>	<b>1.22 V</b>	<b>41</b>	<b>51.2</b>	<b>16.9</b>
5	#14230.00	64.5 PK	88.2	-23.7	1.95 V	315	39.6	24.9
6	#14230.00	50.7 AV	68.2	-17.5	1.95 V	315	25.8	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.7 PK	88.2	-26.5	1.40 H	87	47.6	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.40 H	87	34.5	14.1
3	*6125.00	106.8 PK			1.40 H	87	61.5	45.3
4	*6125.00	94.5 AV			1.40 H	87	49.2	45.3
5	12250.00	60.8 PK	74.0	-13.2	2.16 H	182	39.8	21.0
6	12250.00	46.7 AV	54.0	-7.3	2.16 H	182	25.7	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.3 PK	88.2	-25.9	1.14 V	47	48.2	14.1
2	#5925.00	49.6 AV	68.2	-18.6	1.14 V	47	35.5	14.1
3	*6125.00	111.6 PK			1.14 V	47	66.3	45.3
4	*6125.00	99.6 AV			1.14 V	47	54.3	45.3
5	12250.00	61.0 PK	74.0	-13.0	1.88 V	315	40.0	21.0
6	12250.00	47.2 AV	54.0	-6.8	1.88 V	315	26.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	107.0 PK			1.42 H	87	61.3	45.7
2	*6245.00	93.9 AV			1.42 H	87	48.2	45.7
3	12490.00	60.4 PK	74.0	-13.6	2.21 H	187	39.7	20.7
4	12490.00	46.5 AV	54.0	-7.5	2.21 H	187	25.8	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	112.0 PK			1.18 V	46	66.3	45.7
2	*6245.00	99.3 AV			1.18 V	46	53.6	45.7
3	12490.00	60.7 PK	74.0	-13.3	1.89 V	316	40.0	20.7
4	12490.00	47.0 AV	54.0	-7.0	1.89 V	316	26.3	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	106.9 PK			1.31 H	84	60.3	46.6
2	*6405.00	94.8 AV			1.31 H	84	48.2	46.6
3	#12810.00	61.2 PK	88.2	-27.0	2.09 H	185	39.6	21.6
4	#12810.00	47.5 AV	68.2	-20.7	2.09 H	185	25.9	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.5 PK			1.11 V	47	64.9	46.6
2	*6405.00	99.2 AV			1.11 V	47	52.6	46.6
3	#12810.00	61.6 PK	88.2	-26.6	1.89 V	312	40.0	21.6
4	#12810.00	47.8 AV	68.2	-20.4	1.89 V	312	26.2	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	107.8 PK			1.38 H	83	61.2	46.6
2	*6445.00	94.7 AV			1.38 H	83	48.1	46.6
3	#12890.00	61.4 PK	88.2	-26.8	2.01 H	193	39.8	21.6
4	#12890.00	47.5 AV	68.2	-20.7	2.01 H	193	25.9	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	112.1 PK			1.05 V	45	65.5	46.6
2	*6445.00	99.4 AV			1.05 V	45	52.8	46.6
3	#12890.00	61.7 PK	88.2	-26.5	1.85 V	312	40.1	21.6
4	#12890.00	47.9 AV	68.2	-20.3	1.85 V	312	26.3	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	107.1 PK			1.35 H	82	60.2	46.9
2	*6485.00	94.9 AV			1.35 H	82	48.0	46.9
3	#12970.00	61.5 PK	88.2	-26.7	2.05 H	193	39.7	21.8
4	#12970.00	47.6 AV	68.2	-20.6	2.05 H	193	25.8	21.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.7 PK			1.59 V	41	64.8	46.9
2	*6485.00	99.1 AV			1.59 V	41	52.2	46.9
3	#12970.00	61.8 PK	88.2	-26.4	1.92 V	319	40.0	21.8
4	#12970.00	48.0 AV	68.2	-20.2	1.92 V	319	26.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	107.1 PK			1.31 H	79	60.1	47.0
2	*6525.00	94.5 AV			1.31 H	79	47.5	47.0
3	#13050.00	61.7 PK	88.2	-26.5	2.21 H	197	39.8	21.9
4	#13050.00	47.7 AV	68.2	-20.5	2.21 H	197	25.8	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	111.5 PK			1.54 V	42	64.5	47.0
2	*6525.00	99.0 AV			1.54 V	42	52.0	47.0
3	#13050.00	61.9 PK	88.2	-26.3	1.92 V	311	40.0	21.9
4	#13050.00	48.1 AV	68.2	-20.1	1.92 V	311	26.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	107.3 PK			1.24 H	82	60.0	47.3
2	*6565.00	95.6 AV			1.24 H	82	48.3	47.3
3	#13130.00	61.8 PK	88.2	-26.4	2.02 H	182	39.7	22.1
4	#13130.00	48.0 AV	68.2	-20.2	2.02 H	182	25.9	22.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	111.3 PK			1.54 V	41	64.0	47.3
2	*6565.00	99.2 AV			1.54 V	41	51.9	47.3
3	#13130.00	62.1 PK	88.2	-26.1	1.99 V	305	40.0	22.1
4	#13130.00	48.4 AV	68.2	-19.8	1.99 V	305	26.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	107.5 PK			1.16 H	84	60.0	47.5
2	*6725.00	95.1 AV			1.16 H	84	47.6	47.5
3	#13450.00	63.0 PK	88.2	-25.2	2.25 H	197	39.8	23.2
4	#13450.00	49.0 AV	68.2	-19.2	2.25 H	197	25.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	111.9 PK			1.39 V	42	64.4	47.5
2	*6725.00	99.0 AV			1.39 V	42	51.5	47.5
3	#13450.00	63.4 PK	88.2	-24.8	1.93 V	301	40.2	23.2
4	#13450.00	49.4 AV	68.2	-18.8	1.93 V	301	26.2	23.2

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	108.4 PK			1.16 H	79	61.0	47.4
2	*6845.00	95.3 AV			1.16 H	79	47.9	47.4
3	#13690.00	63.2 PK	88.2	-25.0	2.21 H	197	39.7	23.5
4	#13690.00	49.3 AV	68.2	-18.9	2.21 H	197	25.8	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.4 PK			1.40 V	41	64.0	47.4
2	*6845.00	98.9 AV			1.40 V	41	51.5	47.4
3	#13690.00	63.5 PK	88.2	-24.7	1.88 V	305	40.0	23.5
4	#13690.00	49.6 AV	68.2	-18.6	1.88 V	305	26.1	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	106.9 PK			1.17 H	79	59.2	47.7
2	*6885.00	95.1 AV			1.17 H	79	47.4	47.7
3	#13770.00	63.6 PK	88.2	-24.6	2.09 H	197	39.8	23.8
4	#13770.00	49.8 AV	68.2	-18.4	2.09 H	197	26.0	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.2 PK			1.38 V	42	63.5	47.7
2	*6885.00	98.9 AV			1.38 V	42	51.2	47.7
3	#13770.00	63.8 PK	88.2	-24.4	1.95 V	312	40.0	23.8
4	#13770.00	50.0 AV	68.2	-18.2	1.95 V	312	26.2	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	106.8 PK			1.18 H	76	58.0	48.8
2	*7005.00	94.0 AV			1.18 H	76	45.2	48.8
3	#14010.00	64.4 PK	88.2	-23.8	2.19 H	193	39.8	24.6
4	#14010.00	50.5 AV	68.2	-17.7	2.19 H	193	25.9	24.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	111.3 PK			1.34 V	39	62.5	48.8
2	*7005.00	98.8 AV			1.34 V	39	50.0	48.8
3	#14010.00	64.8 PK	88.2	-23.4	1.93 V	319	40.2	24.6
4	#14010.00	50.8 AV	68.2	-17.4	1.93 V	319	26.2	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	105.8 PK			1.47 H	85	57.2	48.6
2	*7085.00	94.2 AV			1.47 H	85	45.6	48.6
3	#7125.00	64.6 PK	88.2	-23.6	1.47 H	85	47.7	16.9
4	#7125.00	52.4 AV	68.2	-15.8	1.47 H	85	35.5	16.9
5	#14170.00	64.6 PK	88.2	-23.6	2.20 H	192	39.7	24.9
6	#14170.00	50.8 AV	68.2	-17.4	2.20 H	192	25.9	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.1 PK			1.37 V	40	62.5	48.6
2	*7085.00	99.1 AV			1.37 V	40	50.5	48.6
3	#7125.00	65.1 PK	88.2	-23.1	1.37 V	40	48.2	16.9
4	#7125.00	52.9 AV	68.2	-15.3	1.37 V	40	36.0	16.9
5	#14170.00	65.0 PK	88.2	-23.2	1.87 V	310	40.1	24.9
6	#14170.00	51.0 AV	68.2	-17.2	1.87 V	310	26.1	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.7 PK	88.2	-26.5	1.41 H	88	47.6	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.41 H	88	34.5	14.1
3	*6145.00	106.8 PK			1.41 H	88	61.6	45.2
4	*6145.00	94.0 AV			1.41 H	88	48.8	45.2
5	12290.00	60.4 PK	74.0	-13.6	2.25 H	188	39.5	20.9
6	12290.00	46.6 AV	54.0	-7.4	2.25 H	188	25.7	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.1 PK	88.2	-26.1	1.31 V	47	48.0	14.1
2	#5925.00	48.9 AV	68.2	-19.3	1.31 V	47	34.8	14.1
3	*6145.00	111.2 PK			1.31 V	47	66.0	45.2
4	*6145.00	98.8 AV			1.31 V	47	53.6	45.2
5	12290.00	60.7 PK	74.0	-13.3	1.85 V	302	39.8	20.9
6	12290.00	46.8 AV	54.0	-7.2	1.85 V	302	25.9	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

## Antenna Polarity &amp; Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	106.7 PK			1.42 H	89	61.1	45.6
2	*6225.00	94.2 AV			1.42 H	89	48.6	45.6
3	12450.00	60.1 PK	74.0	-13.9	2.09 H	189	39.5	20.6
4	12450.00	46.2 AV	54.0	-7.8	2.09 H	189	25.6	20.6

## Antenna Polarity &amp; Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	111.6 PK			1.27 V	47	66.0	45.6
2	*6225.00	99.1 AV			1.27 V	47	53.5	45.6
3	12450.00	60.4 PK	74.0	-13.6	1.92 V	302	39.8	20.6
4	12450.00	46.4 AV	54.0	-7.6	1.92 V	302	25.8	20.6

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.1 PK			1.32 H	82	60.5	46.6
2	*6385.00	94.8 AV			1.32 H	82	48.2	46.6
3	#12770.00	61.0 PK	88.2	-27.2	2.12 H	187	39.5	21.5
4	#12770.00	47.2 AV	68.2	-21.0	2.12 H	187	25.7	21.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.4 PK			1.53 V	45	64.8	46.6
2	*6385.00	99.1 AV			1.53 V	45	52.5	46.6
3	#12770.00	61.2 PK	88.2	-27.0	1.95 V	306	39.7	21.5
4	#12770.00	47.3 AV	68.2	-20.9	1.95 V	306	25.8	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.1 PK			1.26 H	86	61.4	46.7
2	*6465.00	95.4 AV			1.26 H	86	48.7	46.7
3	#12930.00	61.4 PK	88.2	-26.8	2.21 H	185	39.6	21.8
4	#12930.00	47.5 AV	68.2	-20.7	2.21 H	185	25.7	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	113.1 PK			1.67 V	43	66.4	46.7
2	*6465.00	99.7 AV			1.67 V	43	53.0	46.7
3	#12930.00	61.6 PK	88.2	-26.6	1.85 V	302	39.8	21.8
4	#12930.00	47.8 AV	68.2	-20.4	1.85 V	302	26.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	106.4 PK			1.26 H	84	59.2	47.2
2	*6545.00	94.8 AV			1.26 H	84	47.6	47.2
3	#13090.00	61.6 PK	88.2	-26.6	2.19 H	187	39.5	22.1
4	#13090.00	47.7 AV	68.2	-20.5	2.19 H	187	25.6	22.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.4 PK			1.46 V	45	64.2	47.2
2	*6545.00	99.0 AV			1.46 V	45	51.8	47.2
3	#13090.00	61.8 PK	88.2	-26.4	1.86 V	311	39.7	22.1
4	#13090.00	47.9 AV	68.2	-20.3	1.86 V	311	25.8	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.4 PK			1.07 H	88	59.9	47.5
2	*6705.00	94.7 AV			1.07 H	88	47.2	47.5
3	#13410.00	62.6 PK	88.2	-25.6	2.28 H	187	39.7	22.9
4	#13410.00	48.6 AV	68.2	-19.6	2.28 H	187	25.7	22.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.2 PK			1.92 V	308	63.7	47.5
2	*6705.00	98.7 AV			1.92 V	308	51.2	47.5
3	#13410.00	62.9 PK	88.2	-25.3	1.92 V	311	40.0	22.9
4	#13410.00	48.8 AV	68.2	-19.4	1.92 V	311	25.9	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.3 PK			1.06 H	88	59.8	47.5
2	*6865.00	94.6 AV			1.06 H	88	47.1	47.5
3	#13730.00	63.1 PK	88.2	-25.1	2.22 H	185	39.5	23.6
4	#13730.00	49.1 AV	68.2	-19.1	2.22 H	185	25.5	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.8 PK			1.34 V	43	64.3	47.5
2	*6865.00	99.0 AV			1.34 V	43	51.5	47.5
3	#13730.00	63.4 PK	88.2	-24.8	1.95 V	315	39.8	23.6
4	#13730.00	49.4 AV	68.2	-18.8	1.95 V	315	25.8	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.3 PK			1.07 H	79	59.0	48.3
2	*6945.00	94.7 AV			1.07 H	79	46.4	48.3
3	#13890.00	63.4 PK	88.2	-24.8	2.28 H	192	39.5	23.9
4	#13890.00	49.5 AV	68.2	-18.7	2.28 H	192	25.6	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.3 PK			1.40 V	40	64.0	48.3
2	*6945.00	99.1 AV			1.40 V	40	50.8	48.3
3	#13890.00	63.6 PK	88.2	-24.6	1.92 V	302	39.7	23.9
4	#13890.00	49.6 AV	68.2	-18.6	1.92 V	302	25.7	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.3 PK			1.07 H	79	58.6	48.7
2	*7025.00	94.2 AV			1.07 H	79	45.5	48.7
3	#7125.00	65.4 PK	88.2	-22.8	1.07 H	79	48.5	16.9
4	#7125.00	51.1 AV	68.2	-17.1	1.07 H	79	34.2	16.9
5	#14050.00	64.2 PK	88.2	-24.0	2.15 H	184	39.5	24.7
6	#14050.00	50.2 AV	68.2	-18.0	2.15 H	184	25.5	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.3 PK			1.33 V	43	62.6	48.7
2	*7025.00	99.0 AV			1.33 V	43	50.3	48.7
3	#7125.00	65.9 PK	88.2	-22.3	1.33 V	43	49.0	16.9
4	#7125.00	53.5 AV	68.2	-14.7	1.33 V	43	36.6	16.9
5	#14050.00	64.4 PK	88.2	-23.8	1.92 V	311	39.7	24.7
6	#14050.00	50.4 AV	68.2	-17.8	1.92 V	311	25.7	24.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.6 PK	88.2	-26.6	1.39 H	90	47.5	14.1
2	#5925.00	48.1 AV	68.2	-20.1	1.39 H	90	34.0	14.1
3	*6185.00	105.7 PK			1.39 H	90	60.3	45.4
4	*6185.00	93.6 AV			1.39 H	90	48.2	45.4
5	12370.00	60.2 PK	74.0	-13.8	2.21 H	185	39.5	20.7
6	12370.00	46.1 AV	54.0	-7.9	2.21 H	185	25.4	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.7 PK	88.2	-26.5	1.27 V	48	47.6	14.1
2	#5925.00	48.3 AV	68.2	-19.9	1.27 V	48	34.2	14.1
3	*6185.00	111.2 PK			1.27 V	48	65.8	45.4
4	*6185.00	99.1 AV			1.27 V	48	53.7	45.4
5	12370.00	60.3 PK	74.0	-13.7	1.99 V	311	39.6	20.7
6	12370.00	46.3 AV	54.0	-7.7	1.99 V	311	25.6	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.0 PK			1.37 H	85	59.5	46.5
2	*6345.00	94.1 AV			1.37 H	85	47.6	46.5
3	12690.00	60.5 PK	74.0	-13.5	2.12 H	190	39.2	21.3
4	12690.00	46.8 AV	54.0	-7.2	2.12 H	190	25.5	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.2 PK			1.19 V	45	64.7	46.5
2	*6345.00	98.7 AV			1.19 V	45	52.2	46.5
3	12690.00	60.9 PK	74.0	-13.1	1.87 V	305	39.6	21.3
4	12690.00	47.0 AV	54.0	-7.0	1.87 V	305	25.7	21.3

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.6 PK			1.36 H	79	59.6	47.0
2	*6505.00	94.4 AV			1.36 H	79	47.4	47.0
3	#13010.00	61.4 PK	88.2	-26.8	2.16 H	192	39.5	21.9
4	#13010.00	47.6 AV	68.2	-20.6	2.16 H	192	25.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.7 PK			1.04 V	45	63.7	47.0
2	*6505.00	98.8 AV			1.04 V	45	51.8	47.0
3	#13010.00	61.6 PK	88.2	-26.6	1.88 V	309	39.7	21.9
4	#13010.00	47.7 AV	68.2	-20.5	1.88 V	309	25.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.8 PK			1.27 H	81	59.5	47.3
2	*6665.00	94.5 AV			1.27 H	81	47.2	47.3
3	13330.00	62.0 PK	74.0	-12.0	2.15 H	185	39.3	22.7
4	13330.00	48.4 AV	54.0	-5.6	2.15 H	185	25.7	22.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.0 PK			1.37 V	41	63.7	47.3
2	*6665.00	98.9 AV			1.37 V	41	51.6	47.3
3	13330.00	62.3 PK	74.0	-11.7	1.92 V	302	39.6	22.7
4	13330.00	48.5 AV	54.0	-5.5	1.92 V	302	25.8	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.





RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.9 PK			1.13 H	80	58.5	47.4
2	*6825.00	93.8 AV			1.13 H	80	46.4	47.4
3	#13650.00	63.0 PK	88.2	-25.2	2.18 H	182	39.5	23.5
4	#13650.00	49.1 AV	68.2	-19.1	2.18 H	182	25.6	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.0 PK			1.33 V	42	63.6	47.4
2	*6825.00	98.6 AV			1.33 V	42	51.2	47.4
3	#13650.00	63.2 PK	88.2	-25.0	1.89 V	311	39.7	23.5
4	#13650.00	49.2 AV	68.2	-19.0	1.89 V	311	25.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.9 PK			1.19 H	79	57.2	48.7
2	*6985.00	93.7 AV			1.19 H	79	45.0	48.7
3	#7125.00	66.1 PK	88.2	-22.1	1.19 H	79	49.2	16.9
4	#7125.00	52.9 AV	68.2	-15.3	1.19 H	79	36.0	16.9
5	#13970.00	63.6 PK	88.2	-24.6	2.21 H	189	39.3	24.3
6	#13970.00	49.9 AV	68.2	-18.3	2.21 H	189	25.6	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.9 PK			1.30 V	42	62.2	48.7
2	*6985.00	98.7 AV			1.30 V	42	50.0	48.7
3	#7125.00	67.6 PK	88.2	-20.6	1.30 V	42	50.7	16.9
4	#7125.00	54.2 AV	68.2	-14.0	1.30 V	42	37.3	16.9
5	#13970.00	63.9 PK	88.2	-24.3	1.95 V	319	39.6	24.3
6	#13970.00	50.0 AV	68.2	-18.2	1.95 V	319	25.7	24.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.3 PK	88.2	-26.9	1.37 H	83	47.2	14.1
2	#5925.00	48.3 AV	68.2	-19.9	1.37 H	83	34.2	14.1
3	*6265.00	105.4 PK			1.37 H	83	59.6	45.8
4	*6265.00	93.8 AV			1.37 H	83	48.0	45.8
5	12530.00	60.0 PK	74.0	-14.0	2.28 H	187	39.2	20.8
6	12530.00	46.3 AV	54.0	-7.7	2.28 H	187	25.5	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.7 PK	88.2	-26.5	1.12 V	47	47.6	14.1
2	#5925.00	48.7 AV	68.2	-19.5	1.12 V	47	34.6	14.1
3	*6265.00	111.0 PK			1.12 V	47	65.2	45.8
4	*6265.00	99.0 AV			1.12 V	47	53.2	45.8
5	12530.00	60.3 PK	74.0	-13.7	1.92 V	311	39.5	20.8
6	12530.00	46.5 AV	54.0	-7.5	1.92 V	311	25.7	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.8 PK			1.26 H	81	59.2	46.6
2	*6425.00	94.0 AV			1.26 H	81	47.4	46.6
3	#12850.00	60.8 PK	88.2	-27.4	2.21 H	182	39.2	21.6
4	#12850.00	47.2 AV	68.2	-21.0	2.21 H	182	25.6	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.9 PK			1.09 V	46	64.3	46.6
2	*6425.00	99.2 AV			1.09 V	46	52.6	46.6
3	#12850.00	61.2 PK	88.2	-27.0	1.89 V	302	39.6	21.6
4	#12850.00	47.4 AV	68.2	-20.8	1.89 V	302	25.8	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.3 PK			1.25 H	84	59.0	47.3
2	*6585.00	94.3 AV			1.25 H	84	47.0	47.3
3	#13170.00	61.6 PK	88.2	-26.6	2.23 H	187	39.3	22.3
4	#13170.00	47.8 AV	68.2	-20.4	2.23 H	187	25.5	22.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.8 PK			1.08 V	50	63.5	47.3
2	*6585.00	99.1 AV			1.08 V	50	51.8	47.3
3	#13170.00	61.9 PK	88.2	-26.3	1.95 V	305	39.6	22.3
4	#13170.00	48.1 AV	68.2	-20.1	1.95 V	305	25.8	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	105.9 PK			1.22 H	83	58.3	47.6
2	*6745.00	93.9 AV			1.22 H	83	46.3	47.6
3	#13490.00	62.8 PK	88.2	-25.4	2.25 H	192	39.3	23.5
4	#13490.00	49.0 AV	68.2	-19.2	2.25 H	192	25.5	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.8 PK			1.50 V	42	63.2	47.6
2	*6745.00	99.1 AV			1.50 V	42	51.5	47.6
3	#13490.00	63.0 PK	88.2	-25.2	1.89 V	302	39.5	23.5
4	#13490.00	49.2 AV	68.2	-19.0	1.89 V	302	25.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.7 PK			1.18 H	80	57.8	47.9
2	*6905.00	93.9 AV			1.18 H	80	46.0	47.9
3	#7125.00	67.9 PK	88.2	-20.3	1.18 H	80	51.0	16.9
4	#7125.00	54.4 AV	68.2	-13.8	1.18 H	80	37.5	16.9
5	7250.00	65.9 PK	74.0	-8.1	1.18 H	80	48.5	17.4
6	7250.00	51.6 AV	54.0	-2.4	1.18 H	80	34.2	17.4
7	#13810.00	63.1 PK	88.2	-25.1	2.22 H	185	39.3	23.8
8	#13810.00	49.3 AV	68.2	-18.9	2.22 H	185	25.5	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.4 PK			1.36 V	42	62.5	47.9
2	*6905.00	98.4 AV			1.36 V	42	50.5	47.9
3	#7125.00	70.1 PK	88.2	-18.1	1.36 V	42	53.2	16.9
4	#7125.00	56.2 AV	68.2	-12.0	1.36 V	42	39.3	16.9
5	7250.00	67.9 PK	74.0	-6.1	1.36 V	42	50.5	17.4
<b>6</b>	<b>7250.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.36 V</b>	<b>42</b>	<b>36.5</b>	<b>17.4</b>
7	#13810.00	63.4 PK	88.2	-24.8	1.92 V	301	39.6	23.8
8	#13810.00	49.5 AV	68.2	-18.7	1.92 V	301	25.7	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

### Beamforming (2T2S)

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.8 PK	88.2	-26.4	1.40 H	89	47.7	14.1
2	#5925.00	48.4 AV	68.2	-19.8	1.40 H	89	34.3	14.1
3	*6115.00	107.8 PK			1.40 H	89	62.5	45.3
4	*6115.00	95.1 AV			1.40 H	89	49.8	45.3
5	12230.00	60.7 PK	74.0	-13.3	2.09 H	186	39.7	21.0
6	12230.00	46.9 AV	54.0	-7.1	2.09 H	186	25.9	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.1 PK	88.2	-26.1	1.18 V	47	48.0	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.18 V	47	34.5	14.1
3	*6115.00	111.1 PK			1.18 V	47	65.8	45.3
4	*6115.00	99.8 AV			1.18 V	47	54.5	45.3
5	12230.00	61.2 PK	74.0	-12.8	1.95 V	315	40.2	21.0
6	12230.00	47.3 AV	54.0	-6.7	1.95 V	315	26.3	21.0

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.





RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	107.7 PK			1.31 H	89	61.9	45.8
2	*6255.00	95.0 AV			1.31 H	89	49.2	45.8
3	12510.00	60.4 PK	74.0	-13.6	2.09 H	198	39.7	20.7
4	12510.00	46.5 AV	54.0	-7.5	2.09 H	198	25.8	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	111.7 PK			1.19 V	48	65.9	45.8
2	*6255.00	99.8 AV			1.19 V	48	54.0	45.8
3	12510.00	60.9 PK	74.0	-13.1	1.95 V	305	40.2	20.7
4	12510.00	47.1 AV	54.0	-6.9	1.95 V	305	26.4	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.1 PK			1.27 H	82	61.5	46.6
2	*6415.00	95.9 AV			1.27 H	82	49.3	46.6
3	#12830.00	61.3 PK	88.2	-26.9	2.20 H	192	39.7	21.6
4	#12830.00	47.4 AV	68.2	-20.8	2.20 H	192	25.8	21.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.2 PK			1.17 V	46	65.6	46.6
2	*6415.00	100.1 AV			1.17 V	46	53.5	46.6
3	#12830.00	61.6 PK	88.2	-26.6	1.95 V	312	40.0	21.6
4	#12830.00	47.8 AV	68.2	-20.4	1.95 V	312	26.2	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.1 PK			1.38 H	83	61.5	46.6
2	*6435.00	96.1 AV			1.38 H	83	49.5	46.6
3	#12870.00	61.3 PK	88.2	-26.9	2.21 H	185	39.7	21.6
4	#12870.00	47.5 AV	68.2	-20.7	2.21 H	185	25.9	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	112.2 PK			1.09 V	44	65.6	46.6
2	*6435.00	100.2 AV			1.09 V	44	53.6	46.6
3	#12870.00	61.7 PK	88.2	-26.5	1.95 V	311	40.1	21.6
4	#12870.00	47.9 AV	68.2	-20.3	1.95 V	311	26.3	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.3 PK			1.27 H	84	60.5	46.8
2	*6475.00	95.3 AV			1.27 H	84	48.5	46.8
3	#12950.00	61.6 PK	88.2	-26.6	2.11 H	182	39.8	21.8
4	#12950.00	47.6 AV	68.2	-20.6	2.11 H	182	25.8	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	112.0 PK			1.56 V	44	65.2	46.8
2	*6475.00	99.7 AV			1.56 V	44	52.9	46.8
3	#12950.00	61.8 PK	88.2	-26.4	1.88 V	312	40.0	21.8
4	#12950.00	48.0 AV	68.2	-20.2	1.88 V	312	26.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.6 PK			1.26 H	88	60.6	47.0
2	*6515.00	95.4 AV			1.26 H	88	48.4	47.0
3	#13030.00	61.5 PK	88.2	-26.7	2.11 H	198	39.6	21.9
4	#13030.00	47.7 AV	68.2	-20.5	2.11 H	198	25.8	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.5 PK			1.42 V	44	64.5	47.0
2	*6515.00	99.5 AV			1.42 V	44	52.5	47.0
3	#13030.00	61.9 PK	88.2	-26.3	1.86 V	311	40.0	21.9
4	#13030.00	48.1 AV	68.2	-20.1	1.86 V	311	26.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.9 PK			1.14 H	91	60.7	47.2
2	*6535.00	95.2 AV			1.14 H	91	48.0	47.2
3	#13070.00	61.7 PK	88.2	-26.5	2.12 H	182	39.7	22.0
4	#13070.00	47.9 AV	68.2	-20.3	2.12 H	182	25.9	22.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.4 PK			1.49 V	45	65.2	47.2
2	*6535.00	99.6 AV			1.49 V	45	52.4	47.2
3	#13070.00	62.0 PK	88.2	-26.2	1.95 V	311	40.0	22.0
4	#13070.00	48.2 AV	68.2	-20.0	1.95 V	311	26.2	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.4 PK			1.13 H	83	60.0	47.4
2	*6695.00	95.2 AV			1.13 H	83	47.8	47.4
3	13390.00	62.5 PK	74.0	-11.5	2.21 H	186	39.7	22.8
4	13390.00	48.7 AV	54.0	-5.3	2.21 H	186	25.9	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.4 PK			1.42 V	42	64.0	47.4
2	*6695.00	99.4 AV			1.42 V	42	52.0	47.4
3	13390.00	62.9 PK	74.0	-11.1	1.95 V	322	40.1	22.8
4	13390.00	49.1 AV	54.0	-4.9	1.95 V	322	26.3	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.4 PK			1.09 H	83	60.0	47.4
2	*6855.00	95.0 AV			1.09 H	83	47.6	47.4
3	#13710.00	63.3 PK	88.2	-24.9	2.15 H	185	39.8	23.5
4	#13710.00	49.3 AV	68.2	-18.9	2.15 H	185	25.8	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.8 PK			1.36 V	41	64.4	47.4
2	*6855.00	99.0 AV			1.36 V	41	51.6	47.4
3	#13710.00	63.5 PK	88.2	-24.7	1.95 V	313	40.0	23.5
4	#13710.00	49.7 AV	68.2	-18.5	1.95 V	313	26.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.1 PK			1.09 H	82	59.5	47.6
2	*6875.00	95.2 AV			1.09 H	82	47.6	47.6
3	#13750.00	63.4 PK	88.2	-24.8	2.25 H	183	39.8	23.6
4	#13750.00	49.5 AV	68.2	-18.7	2.25 H	183	25.9	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.1 PK			1.34 V	44	63.5	47.6
2	*6875.00	99.4 AV			1.34 V	44	51.8	47.6
3	#13750.00	63.7 PK	88.2	-24.5	1.95 V	319	40.1	23.6
4	#13750.00	49.9 AV	68.2	-18.3	1.95 V	319	26.3	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.3 PK			1.07 H	79	58.6	48.7
2	*6995.00	95.2 AV			1.07 H	79	46.5	48.7
3	#13990.00	64.2 PK	88.2	-24.0	2.15 H	182	39.7	24.5
4	#13990.00	50.5 AV	68.2	-17.7	2.15 H	182	26.0	24.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.5 PK			1.32 V	43	62.8	48.7
2	*6995.00	99.2 AV			1.32 V	43	50.5	48.7
3	#13990.00	64.5 PK	88.2	-23.7	1.88 V	311	40.0	24.5
4	#13990.00	50.8 AV	68.2	-17.4	1.88 V	311	26.3	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	106.4 PK			1.06 H	76	57.8	48.6
2	*7095.00	94.9 AV			1.06 H	76	46.3	48.6
3	#14190.00	64.5 PK	88.2	-23.7	2.25 H	187	39.6	24.9
4	#14190.00	50.9 AV	68.2	-17.3	2.25 H	187	26.0	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.3 PK			1.29 V	40	62.7	48.6
2	*7095.00	99.1 AV			1.29 V	40	50.5	48.6
3	#14190.00	64.9 PK	88.2	-23.3	1.85 V	311	40.0	24.9
4	#14190.00	51.1 AV	68.2	-17.1	1.85 V	311	26.2	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.6 PK			1.52 H	81	40.8	48.8
2	*7115.00	77.5 AV			1.52 H	81	28.7	48.8
3	#7125.00	73.7 PK	88.2	-14.5	1.52 H	81	56.8	16.9
4	#7125.00	61.1 AV	68.2	-7.1	1.52 H	81	44.2	16.9
5	#14230.00	64.3 PK	88.2	-23.9	2.21 H	198	39.4	24.9
6	#14230.00	50.4 AV	68.2	-17.8	2.21 H	198	25.5	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.0 PK			1.27 V	41	45.2	48.8
2	*7115.00	82.2 AV			1.27 V	41	33.4	48.8
3	#7125.00	79.2 PK	88.2	-9.0	1.27 V	41	62.3	16.9
4	#7125.00	67.9 AV	68.2	-0.3	1.27 V	41	51.0	16.9
5	#14230.00	64.5 PK	88.2	-23.7	1.87 V	312	39.6	24.9
6	#14230.00	50.7 AV	68.2	-17.5	1.87 V	312	25.8	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.6 PK	88.2	-26.6	1.87 H	90	47.5	14.1
2	#5925.00	48.7 AV	68.2	-19.5	1.87 H	90	34.6	14.1
3	*6125.00	105.8 PK			1.87 H	90	60.5	45.3
4	*6125.00	92.2 AV			1.87 H	90	46.9	45.3
5	12250.00	60.5 PK	74.0	-13.5	2.28 H	198	39.5	21.0
6	12250.00	46.5 AV	54.0	-7.5	2.28 H	198	25.5	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.1 PK	88.2	-26.1	1.18 V	51	48.0	14.1
2	#5925.00	49.3 AV	68.2	-18.9	1.18 V	51	35.2	14.1
3	*6125.00	111.7 PK			1.18 V	51	66.4	45.3
4	*6125.00	99.1 AV			1.18 V	51	53.8	45.3
5	12250.00	60.6 PK	74.0	-13.4	1.85 V	315	39.6	21.0
6	12250.00	46.7 AV	54.0	-7.3	1.85 V	315	25.7	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	106.2 PK			1.92 H	87	60.5	45.7
2	*6245.00	92.6 AV			1.92 H	87	46.9	45.7
3	12490.00	60.2 PK	74.0	-13.8	2.21 H	189	39.5	20.7
4	12490.00	46.4 AV	54.0	-7.6	2.21 H	189	25.7	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	111.3 PK			1.11 V	51	65.6	45.7
2	*6245.00	99.2 AV			1.11 V	51	53.5	45.7
3	12490.00	60.4 PK	74.0	-13.6	1.89 V	302	39.7	20.7
4	12490.00	46.6 AV	54.0	-7.4	1.89 V	302	25.9	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.1 PK			1.84 H	86	60.5	46.6
2	*6405.00	93.6 AV			1.84 H	86	47.0	46.6
3	#12810.00	61.2 PK	88.2	-27.0	2.09 H	184	39.6	21.6
4	#12810.00	47.4 AV	68.2	-20.8	2.09 H	184	25.8	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.8 PK			1.12 V	52	65.2	46.6
2	*6405.00	99.1 AV			1.12 V	52	52.5	46.6
3	#12810.00	61.4 PK	88.2	-26.8	1.89 V	312	39.8	21.6
4	#12810.00	47.6 AV	68.2	-20.6	1.89 V	312	26.0	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	106.9 PK			1.79 H	88	60.3	46.6
2	*6445.00	94.3 AV			1.79 H	88	47.7	46.6
3	#12890.00	61.1 PK	88.2	-27.1	2.10 H	197	39.5	21.6
4	#12890.00	47.1 AV	68.2	-21.1	2.10 H	197	25.5	21.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	111.4 PK			1.05 V	51	64.8	46.6
2	*6445.00	99.2 AV			1.05 V	51	52.6	46.6
3	#12890.00	61.3 PK	88.2	-26.9	1.82 V	306	39.7	21.6
4	#12890.00	47.4 AV	68.2	-20.8	1.82 V	306	25.8	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	106.0 PK			1.76 H	88	59.1	46.9
2	*6485.00	93.5 AV			1.76 H	88	46.6	46.9
3	#12970.00	61.4 PK	88.2	-26.8	2.28 H	186	39.6	21.8
4	#12970.00	47.6 AV	68.2	-20.6	2.28 H	186	25.8	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.2 PK			1.03 V	48	64.3	46.9
2	*6485.00	99.1 AV			1.03 V	48	52.2	46.9
3	#12970.00	61.6 PK	88.2	-26.6	1.80 V	309	39.8	21.8
4	#12970.00	47.9 AV	68.2	-20.3	1.80 V	309	26.1	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	106.5 PK			1.71 H	85	59.5	47.0
2	*6525.00	93.3 AV			1.71 H	85	46.3	47.0
3	#13050.00	61.4 PK	88.2	-26.8	2.13 H	182	39.5	21.9
4	#13050.00	47.6 AV	68.2	-20.6	2.13 H	182	25.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	111.0 PK			1.56 V	50	64.0	47.0
2	*6525.00	99.0 AV			1.56 V	50	52.0	47.0
3	#13050.00	61.6 PK	88.2	-26.6	1.89 V	314	39.7	21.9
4	#13050.00	47.8 AV	68.2	-20.4	1.89 V	314	25.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	106.3 PK			1.72 H	84	59.0	47.3
2	*6565.00	93.8 AV			1.72 H	84	46.5	47.3
3	#13130.00	61.7 PK	88.2	-26.5	2.05 H	191	39.6	22.1
4	#13130.00	47.7 AV	68.2	-20.5	2.05 H	191	25.6	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	111.1 PK			1.47 V	50	63.8	47.3
2	*6565.00	99.2 AV			1.47 V	50	51.9	47.3
3	#13130.00	61.9 PK	88.2	-26.3	1.95 V	312	39.8	22.1
4	#13130.00	47.9 AV	68.2	-20.3	1.95 V	312	25.8	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	106.6 PK			1.62 H	84	59.1	47.5
2	*6725.00	94.5 AV			1.62 H	84	47.0	47.5
3	#13450.00	62.8 PK	88.2	-25.4	2.21 H	192	39.6	23.2
4	#13450.00	48.8 AV	68.2	-19.4	2.21 H	192	25.6	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	111.0 PK			1.47 V	47	63.5	47.5
2	*6725.00	99.1 AV			1.47 V	47	51.6	47.5
3	#13450.00	63.0 PK	88.2	-25.2	1.82 V	304	39.8	23.2
4	#13450.00	49.0 AV	68.2	-19.2	1.82 V	304	25.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	107.0 PK			1.55 H	81	59.6	47.4
2	*6845.00	95.0 AV			1.55 H	81	47.6	47.4
3	#13690.00	63.0 PK	88.2	-25.2	2.21 H	185	39.5	23.5
4	#13690.00	49.1 AV	68.2	-19.1	2.21 H	185	25.6	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.9 PK			1.25 V	50	63.5	47.4
2	*6845.00	98.9 AV			1.25 V	50	51.5	47.4
3	#13690.00	63.2 PK	88.2	-25.0	1.91 V	302	39.7	23.5
4	#13690.00	49.3 AV	68.2	-18.9	1.91 V	302	25.8	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	107.2 PK			1.55 H	81	59.5	47.7
2	*6885.00	94.7 AV			1.55 H	81	47.0	47.7
3	#13770.00	63.4 PK	88.2	-24.8	2.28 H	184	39.6	23.8
4	#13770.00	49.5 AV	68.2	-18.7	2.28 H	184	25.7	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.9 PK			1.28 V	51	63.2	47.7
2	*6885.00	99.1 AV			1.28 V	51	51.4	47.7
3	#13770.00	63.6 PK	88.2	-24.6	1.92 V	319	39.8	23.8
4	#13770.00	49.7 AV	68.2	-18.5	1.92 V	319	25.9	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	106.0 PK			1.48 H	78	57.2	48.8
2	*7005.00	94.0 AV			1.48 H	78	45.2	48.8
3	#14010.00	64.1 PK	88.2	-24.1	2.29 H	198	39.5	24.6
4	#14010.00	50.1 AV	68.2	-18.1	2.29 H	198	25.5	24.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	111.3 PK			1.31 V	49	62.5	48.8
2	*7005.00	99.1 AV			1.31 V	49	50.3	48.8
3	#14010.00	64.4 PK	88.2	-23.8	1.92 V	312	39.8	24.6
4	#14010.00	50.5 AV	68.2	-17.7	1.92 V	312	25.9	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	105.9 PK			1.88 H	72	57.3	48.6
2	*7085.00	93.8 AV			1.88 H	72	45.2	48.6
3	#7125.00	65.4 PK	88.2	-22.8	1.88 H	72	48.5	16.9
4	#7125.00	52.4 AV	68.2	-15.8	1.88 H	72	35.5	16.9
5	#14170.00	64.5 PK	88.2	-23.7	2.25 H	192	39.6	24.9
6	#14170.00	50.4 AV	68.2	-17.8	2.25 H	192	25.5	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.0 PK			1.34 V	47	62.4	48.6
2	*7085.00	98.6 AV			1.34 V	47	50.0	48.6
3	#7125.00	65.7 PK	88.2	-22.5	1.34 V	47	48.8	16.9
4	#7125.00	53.2 AV	68.2	-15.0	1.34 V	47	36.3	16.9
5	#14170.00	64.7 PK	88.2	-23.5	1.92 V	312	39.8	24.9
6	#14170.00	50.6 AV	68.2	-17.6	1.92 V	312	25.7	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.6 PK	88.2	-26.6	1.80 H	101	47.5	14.1
2	#5925.00	48.3 AV	68.2	-19.9	1.80 H	101	34.2	14.1
3	*6145.00	107.3 PK			1.80 H	101	62.1	45.2
4	*6145.00	93.7 AV			1.80 H	101	48.5	45.2
5	12290.00	60.4 PK	74.0	-13.6	2.11 H	195	39.5	20.9
6	12290.00	46.4 AV	54.0	-7.6	2.11 H	195	25.5	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.8 PK	88.2	-26.4	1.11 V	54	47.7	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.11 V	54	34.5	14.1
3	*6145.00	112.5 PK			1.11 V	54	67.3	45.2
4	*6145.00	99.0 AV			1.11 V	54	53.8	45.2
5	12290.00	60.7 PK	74.0	-13.3	1.99 V	312	39.8	20.9
6	12290.00	46.8 AV	54.0	-7.2	1.99 V	312	25.9	20.9

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	108.1 PK			1.80 H	93	62.5	45.6
2	*6225.00	93.8 AV			1.80 H	93	48.2	45.6
3	12450.00	60.2 PK	74.0	-13.8	2.09 H	192	39.6	20.6
4	12450.00	46.1 AV	54.0	-7.9	2.09 H	192	25.5	20.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.6 PK			1.12 V	56	67.0	45.6
2	*6225.00	99.4 AV			1.12 V	56	53.8	45.6
3	12450.00	60.4 PK	74.0	-13.6	1.89 V	310	39.8	20.6
4	12450.00	46.4 AV	54.0	-7.6	1.89 V	310	25.8	20.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.9 PK			1.91 H	91	61.3	46.6
2	*6385.00	94.9 AV			1.91 H	91	48.3	46.6
3	#12770.00	61.0 PK	88.2	-27.2	2.11 H	198	39.5	21.5
4	#12770.00	47.1 AV	68.2	-21.1	2.11 H	198	25.6	21.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.1 PK			1.11 V	52	65.5	46.6
2	*6385.00	99.4 AV			1.11 V	52	52.8	46.6
3	#12770.00	61.2 PK	88.2	-27.0	1.89 V	303	39.7	21.5
4	#12770.00	47.3 AV	68.2	-20.9	1.89 V	303	25.8	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.9 PK			1.91 H	93	61.2	46.7
2	*6465.00	94.9 AV			1.91 H	93	48.2	46.7
3	#12930.00	61.3 PK	88.2	-26.9	2.08 H	192	39.5	21.8
4	#12930.00	47.5 AV	68.2	-20.7	2.08 H	192	25.7	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.9 PK			1.06 V	52	65.2	46.7
2	*6465.00	99.7 AV			1.06 V	52	53.0	46.7
3	#12930.00	61.6 PK	88.2	-26.6	1.88 V	311	39.8	21.8
4	#12930.00	47.7 AV	68.2	-20.5	1.88 V	311	25.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.4 PK			1.84 H	91	60.2	47.2
2	*6545.00	94.9 AV			1.84 H	91	47.7	47.2
3	#13090.00	61.6 PK	88.2	-26.6	2.28 H	198	39.5	22.1
4	#13090.00	47.7 AV	68.2	-20.5	2.28 H	198	25.6	22.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.7 PK			1.00 V	51	64.5	47.2
2	*6545.00	99.4 AV			1.00 V	51	52.2	47.2
3	#13090.00	61.8 PK	88.2	-26.4	1.88 V	315	39.7	22.1
4	#13090.00	47.9 AV	68.2	-20.3	1.88 V	315	25.8	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.6 PK			1.73 H	89	60.1	47.5
2	*6705.00	95.3 AV			1.73 H	89	47.8	47.5
3	#13410.00	62.5 PK	88.2	-25.7	2.21 H	187	39.6	22.9
4	#13410.00	48.5 AV	68.2	-19.7	2.21 H	187	25.6	22.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.9 PK			1.49 V	49	64.4	47.5
2	*6705.00	99.2 AV			1.49 V	49	51.7	47.5
3	#13410.00	62.7 PK	88.2	-25.5	1.99 V	315	39.8	22.9
4	#13410.00	48.8 AV	68.2	-19.4	1.99 V	315	25.9	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.0 PK			1.62 H	91	59.5	47.5
2	*6865.00	95.0 AV			1.62 H	91	47.5	47.5
3	#13730.00	63.2 PK	88.2	-25.0	2.29 H	187	39.6	23.6
4	#13730.00	49.3 AV	68.2	-18.9	2.29 H	187	25.7	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.0 PK			1.39 V	48	63.5	47.5
2	*6865.00	99.1 AV			1.39 V	48	51.6	47.5
3	#13730.00	63.4 PK	88.2	-24.8	1.82 V	302	39.8	23.6
4	#13730.00	49.4 AV	68.2	-18.8	1.82 V	302	25.8	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.8 PK			1.61 H	84	59.5	48.3
2	*6945.00	95.3 AV			1.61 H	84	47.0	48.3
3	#13890.00	63.4 PK	88.2	-24.8	2.28 H	182	39.5	23.9
4	#13890.00	49.4 AV	68.2	-18.8	2.28 H	182	25.5	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.6 PK			1.37 V	48	63.3	48.3
2	*6945.00	99.3 AV			1.37 V	48	51.0	48.3
3	#13890.00	63.6 PK	88.2	-24.6	1.83 V	308	39.7	23.9
4	#13890.00	49.7 AV	68.2	-18.5	1.83 V	308	25.8	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.2 PK			1.52 H	84	58.5	48.7
2	*7025.00	94.8 AV			1.52 H	84	46.1	48.7
3	#7125.00	65.4 PK	88.2	-22.8	1.52 H	84	48.5	16.9
4	#7125.00	51.9 AV	68.2	-16.3	1.52 H	84	35.0	16.9
5	#14050.00	64.2 PK	88.2	-24.0	2.28 H	189	39.5	24.7
6	#14050.00	50.2 AV	68.2	-18.0	2.28 H	189	25.5	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.6 PK			1.22 V	48	62.9	48.7
2	*7025.00	99.2 AV			1.22 V	48	50.5	48.7
3	#7125.00	66.2 PK	88.2	-22.0	1.22 V	48	49.3	16.9
4	#7125.00	53.1 AV	68.2	-15.1	1.22 V	48	36.2	16.9
5	#14050.00	64.3 PK	88.2	-23.9	1.99 V	311	39.6	24.7
6	#14050.00	50.4 AV	68.2	-17.8	1.99 V	311	25.7	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.3 PK	88.2	-25.9	1.33 H	81	48.2	14.1
2	#5925.00	48.4 AV	68.2	-19.8	1.33 H	81	34.3	14.1
3	*6185.00	105.4 PK			1.33 H	81	60.0	45.4
4	*6185.00	93.9 AV			1.33 H	81	48.5	45.4
5	12370.00	59.9 PK	74.0	-14.1	2.21 H	199	39.2	20.7
6	12370.00	46.2 AV	54.0	-7.8	2.21 H	199	25.5	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.1 PK	88.2	-25.1	1.22 V	49	49.0	14.1
2	#5925.00	48.7 AV	68.2	-19.5	1.22 V	49	34.6	14.1
3	*6185.00	110.6 PK			1.22 V	49	65.2	45.4
4	*6185.00	99.0 AV			1.22 V	49	53.6	45.4
5	12370.00	60.2 PK	74.0	-13.8	1.85 V	305	39.5	20.7
6	12370.00	46.3 AV	54.0	-7.7	1.85 V	305	25.6	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.5 PK			1.74 H	89	59.0	46.5
2	*6345.00	93.0 AV			1.74 H	89	46.5	46.5
3	12690.00	60.8 PK	74.0	-13.2	2.23 H	185	39.5	21.3
4	12690.00	46.7 AV	54.0	-7.3	2.23 H	185	25.4	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.0 PK			1.18 V	48	63.5	46.5
2	*6345.00	98.9 AV			1.18 V	48	52.4	46.5
3	12690.00	60.9 PK	74.0	-13.1	1.87 V	308	39.6	21.3
4	12690.00	46.8 AV	54.0	-7.2	1.87 V	308	25.5	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.8 PK			1.60 H	87	58.8	47.0
2	*6505.00	94.0 AV			1.60 H	87	47.0	47.0
3	#13010.00	61.1 PK	88.2	-27.1	2.22 H	185	39.2	21.9
4	#13010.00	47.4 AV	68.2	-20.8	2.22 H	185	25.5	21.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.5 PK			1.21 V	46	63.5	47.0
2	*6505.00	98.7 AV			1.21 V	46	51.7	47.0
3	#13010.00	61.5 PK	88.2	-26.7	1.87 V	312	39.6	21.9
4	#13010.00	47.6 AV	68.2	-20.6	1.87 V	312	25.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.8 PK			1.60 H	83	58.5	47.3
2	*6665.00	94.3 AV			1.60 H	83	47.0	47.3
3	13330.00	61.9 PK	74.0	-12.1	2.11 H	195	39.2	22.7
4	13330.00	48.1 AV	54.0	-5.9	2.11 H	195	25.4	22.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.5 PK			1.51 V	44	63.2	47.3
2	*6665.00	98.8 AV			1.51 V	44	51.5	47.3
3	13330.00	62.2 PK	74.0	-11.8	1.87 V	302	39.5	22.7
4	13330.00	48.3 AV	54.0	-5.7	1.87 V	302	25.6	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.9 PK			1.58 H	78	58.5	47.4
2	*6825.00	95.0 AV			1.58 H	78	47.6	47.4
3	#13650.00	62.8 PK	88.2	-25.4	2.11 H	195	39.3	23.5
4	#13650.00	49.0 AV	68.2	-19.2	2.11 H	195	25.5	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.6 PK			1.37 V	44	62.2	47.4
2	*6825.00	98.7 AV			1.37 V	44	51.3	47.4
3	#13650.00	63.1 PK	88.2	-25.1	1.92 V	311	39.6	23.5
4	#13650.00	49.2 AV	68.2	-19.0	1.92 V	311	25.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.4 PK			1.75 H	71	56.7	48.7
2	*6985.00	93.7 AV			1.75 H	71	45.0	48.7
3	#7125.00	66.1 PK	88.2	-22.1	1.75 H	71	49.2	16.9
4	#7125.00	53.1 AV	68.2	-15.1	1.75 H	71	36.2	16.9
5	#13970.00	63.7 PK	88.2	-24.5	2.09 H	185	39.4	24.3
6	#13970.00	49.8 AV	68.2	-18.4	2.09 H	185	25.5	24.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.7 PK			1.37 V	43	62.0	48.7
2	*6985.00	98.5 AV			1.37 V	43	49.8	48.7
3	#7125.00	67.4 PK	88.2	-20.8	1.37 V	43	50.5	16.9
4	#7125.00	54.5 AV	68.2	-13.7	1.37 V	43	37.6	16.9
5	#13970.00	63.9 PK	88.2	-24.3	1.82 V	319	39.6	24.3
6	#13970.00	49.9 AV	68.2	-18.3	1.82 V	319	25.6	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.7 PK	88.2	-26.5	1.80 H	88	47.6	14.1
2	#5925.00	48.4 AV	68.2	-19.8	1.80 H	88	34.3	14.1
3	*6265.00	107.8 PK			1.80 H	88	62.0	45.8
4	*6265.00	95.3 AV			1.80 H	88	49.5	45.8
5	12530.00	60.0 PK	74.0	-14.0	2.09 H	195	39.2	20.8
6	12530.00	46.1 AV	54.0	-7.9	2.09 H	195	25.3	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.1 PK	88.2	-26.1	1.13 V	47	48.0	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.13 V	47	34.5	14.1
3	*6265.00	111.5 PK			1.13 V	47	65.7	45.8
4	*6265.00	99.6 AV			1.13 V	47	53.8	45.8
5	12530.00	60.3 PK	74.0	-13.7	1.92 V	305	39.5	20.8
6	12530.00	46.3 AV	54.0	-7.7	1.92 V	305	25.5	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.2 PK			1.85 H	83	60.6	46.6
2	*6425.00	95.6 AV			1.85 H	83	49.0	46.6
3	#12850.00	61.0 PK	88.2	-27.2	2.02 H	195	39.4	21.6
4	#12850.00	47.0 AV	68.2	-21.2	2.02 H	195	25.4	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	111.6 PK			1.07 V	47	65.0	46.6
2	*6425.00	99.8 AV			1.07 V	47	53.2	46.6
3	#12850.00	61.2 PK	88.2	-27.0	1.92 V	308	39.6	21.6
4	#12850.00	47.2 AV	68.2	-21.0	1.92 V	308	25.6	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.4 PK			1.73 H	82	60.1	47.3
2	*6585.00	95.8 AV			1.73 H	82	48.5	47.3
3	#13170.00	61.5 PK	88.2	-26.7	2.21 H	192	39.2	22.3
4	#13170.00	47.6 AV	68.2	-20.6	2.21 H	192	25.3	22.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.8 PK			1.02 V	48	63.5	47.3
2	*6585.00	99.5 AV			1.02 V	48	52.2	47.3
3	#13170.00	61.8 PK	88.2	-26.4	1.89 V	311	39.5	22.3
4	#13170.00	47.8 AV	68.2	-20.4	1.89 V	311	25.5	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.6 PK			1.62 H	82	60.0	47.6
2	*6745.00	95.7 AV			1.62 H	82	48.1	47.6
3	#13490.00	62.7 PK	88.2	-25.5	2.29 H	189	39.2	23.5
4	#13490.00	48.9 AV	68.2	-19.3	2.29 H	189	25.4	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.0 PK			1.09 V	43	63.4	47.6
2	*6745.00	98.9 AV			1.09 V	43	51.3	47.6
3	#13490.00	63.0 PK	88.2	-25.2	1.95 V	311	39.5	23.5
4	#13490.00	49.1 AV	68.2	-19.1	1.95 V	311	25.6	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	104.0 PK			1.56 H	80	56.1	47.9
2	*6905.00	91.9 AV			1.56 H	80	44.0	47.9
3	#7125.00	65.9 PK	88.2	-22.3	1.56 H	80	49.0	16.9
4	#7125.00	53.6 AV	68.2	-14.6	1.56 H	80	36.7	16.9
5	7250.00	66.4 PK	74.0	-7.6	1.56 H	80	49.0	17.4
6	7250.00	50.4 AV	54.0	-3.6	1.56 H	80	33.0	17.4
7	#13810.00	62.8 PK	88.2	-25.4	2.25 H	182	39.0	23.8
8	#13810.00	49.0 AV	68.2	-19.2	2.25 H	182	25.2	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.4 PK			1.42 V	42	59.5	47.9
2	*6905.00	94.9 AV			1.42 V	42	47.0	47.9
3	#7125.00	68.9 PK	88.2	-19.3	1.42 V	42	52.0	16.9
4	#7125.00	55.5 AV	68.2	-12.7	1.42 V	42	38.6	16.9
5	7259.00	67.1 PK	74.0	-6.9	1.42 V	42	49.7	17.4
6	7259.00	50.6 AV	54.0	-3.4	1.42 V	42	33.2	17.4
7	#13810.00	63.1 PK	88.2	-25.1	1.89 V	312	39.3	23.8
8	#13810.00	49.2 AV	68.2	-19.0	1.89 V	312	25.4	23.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.


### Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


#### 802.11a Channel 33

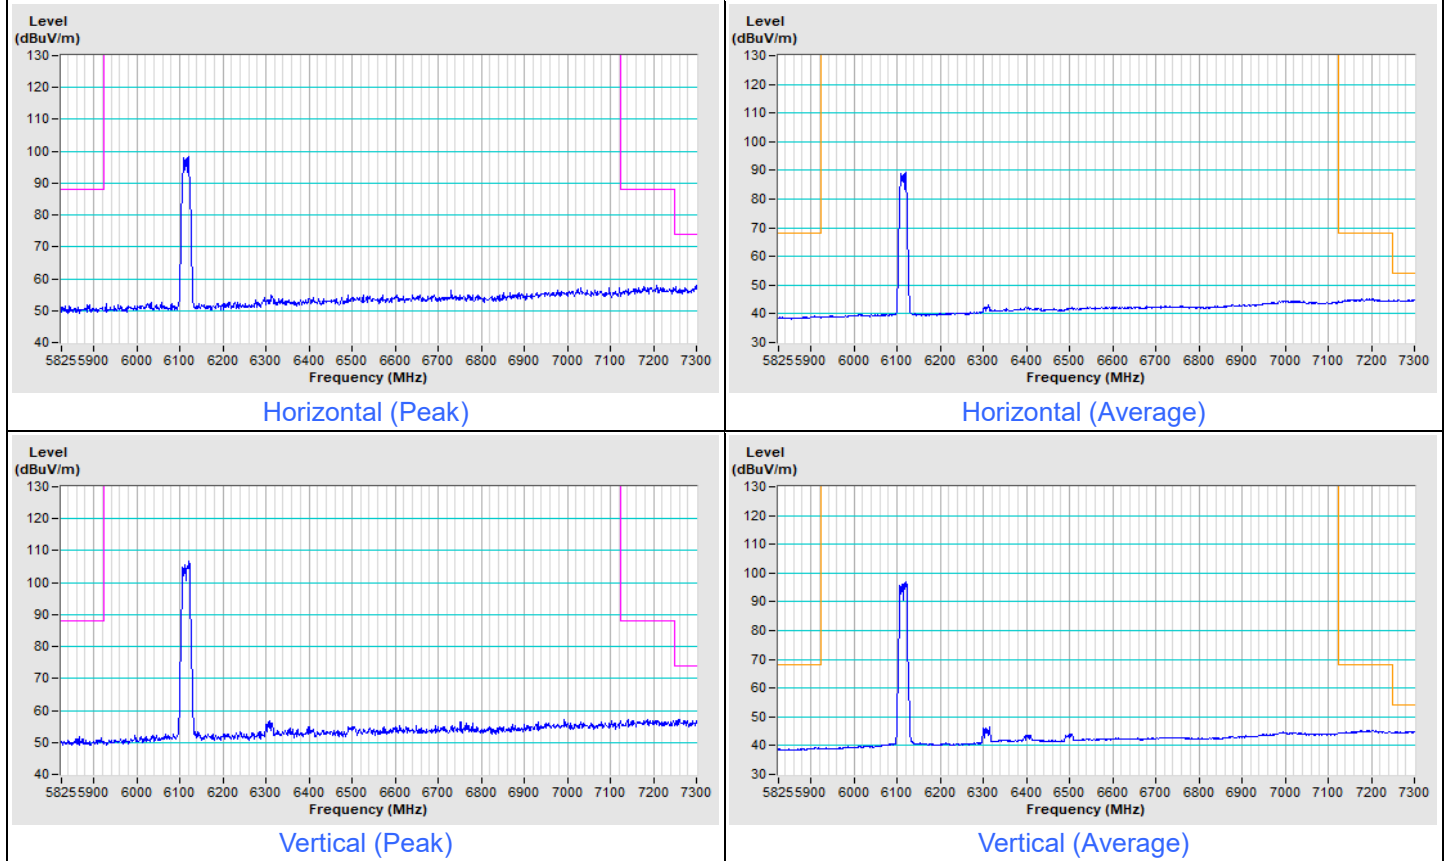


### 802.11a Channel 233

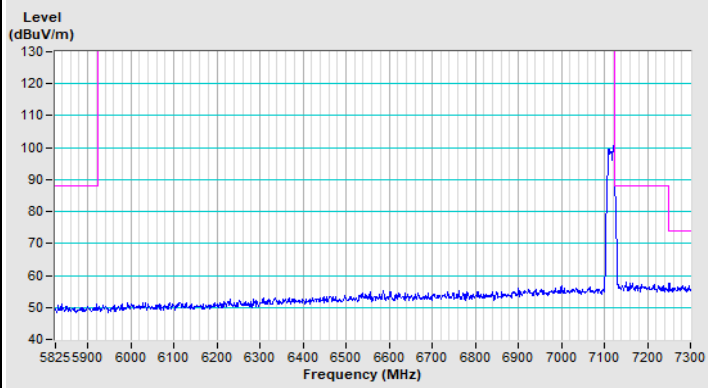


Horizontal (Peak)

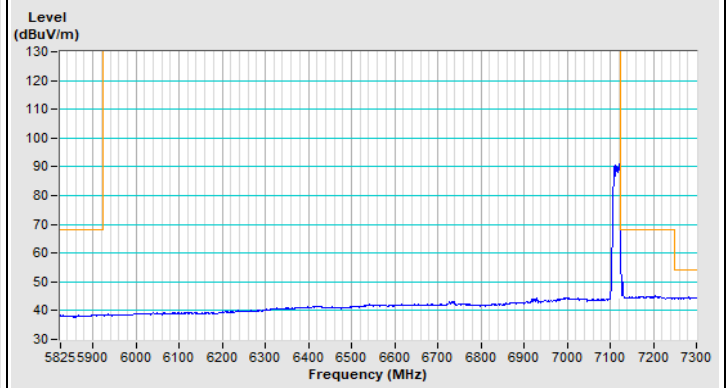

Horizontal (Average)

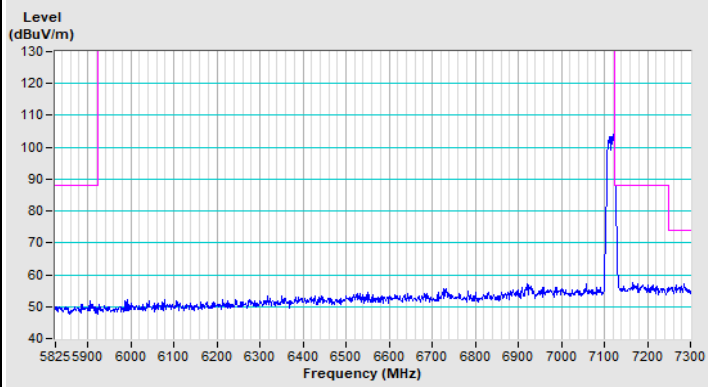


Vertical (Peak)

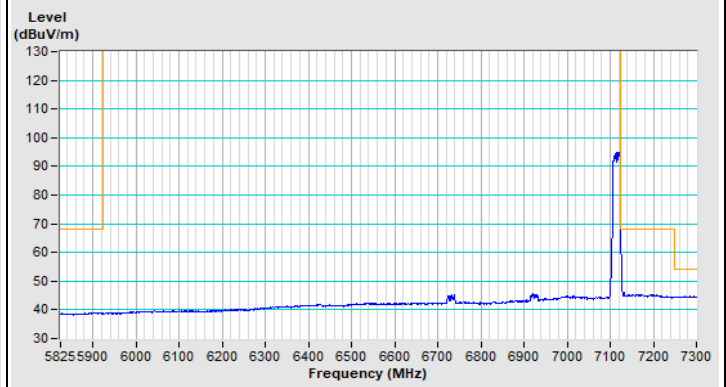


Vertical (Average)

### Beamforming (2T1S)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

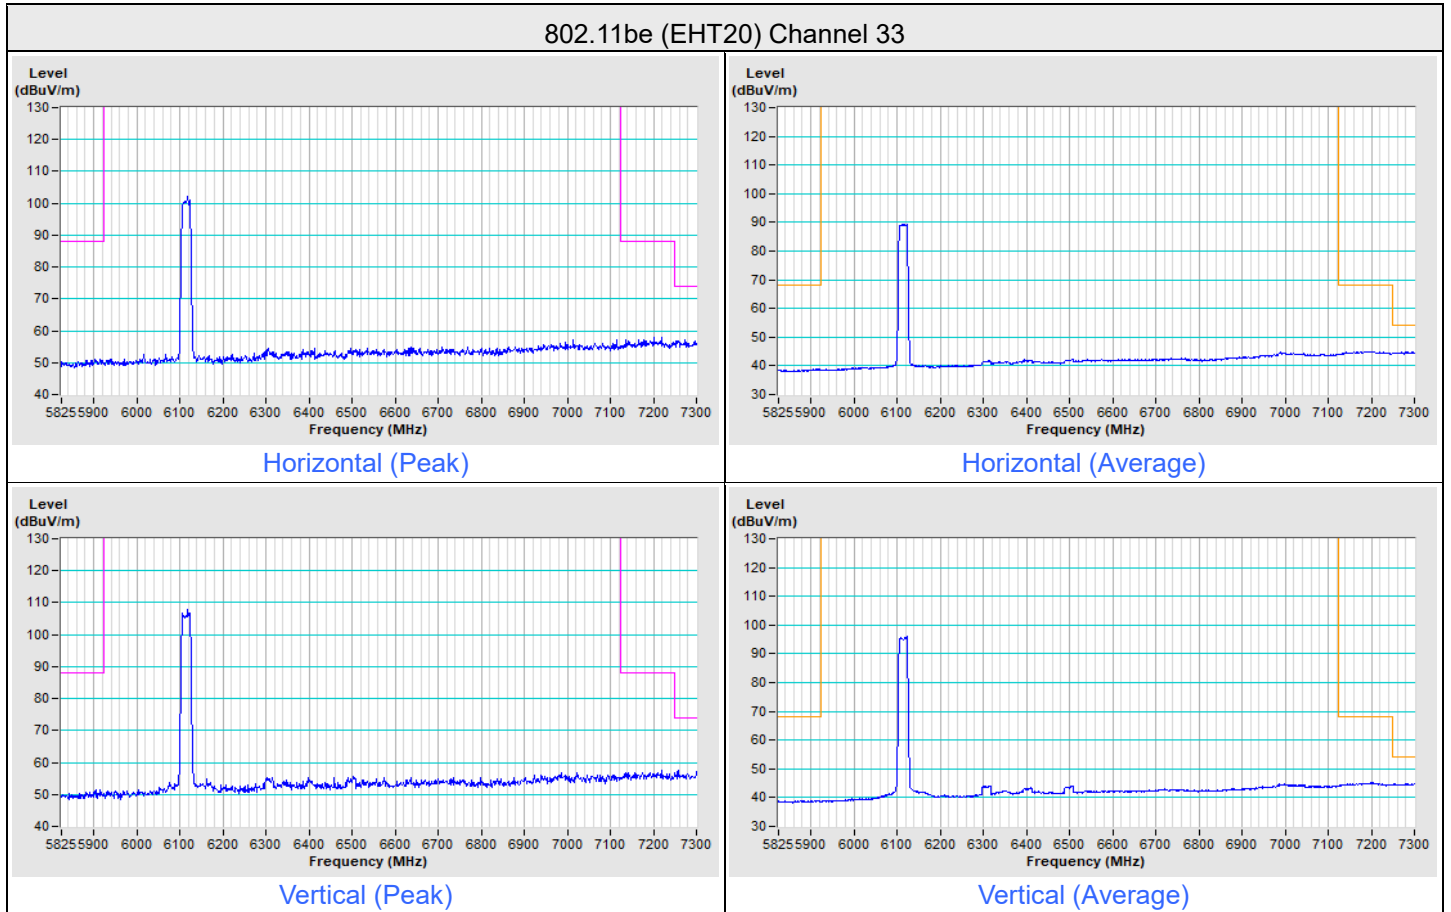


### 802.11be (EHT20) Channel 233

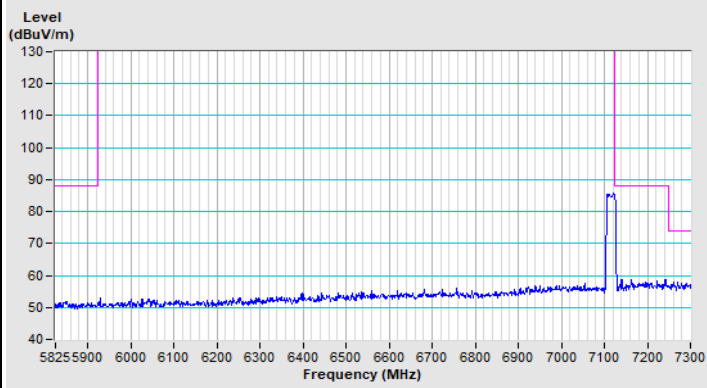


Horizontal (Peak)

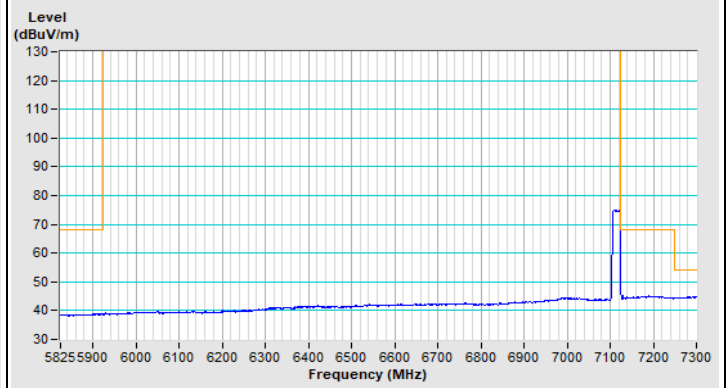

Horizontal (Average)

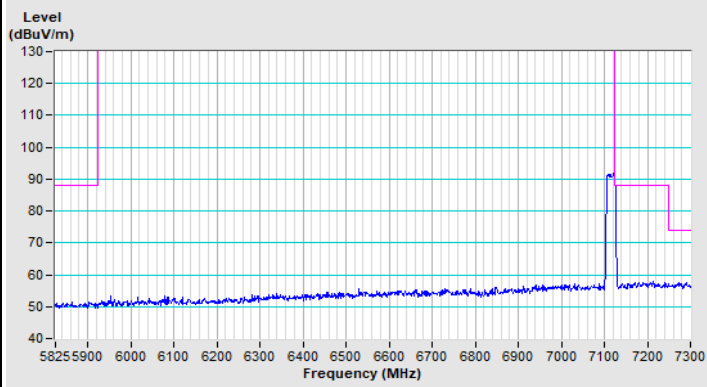

Vertical (Peak)

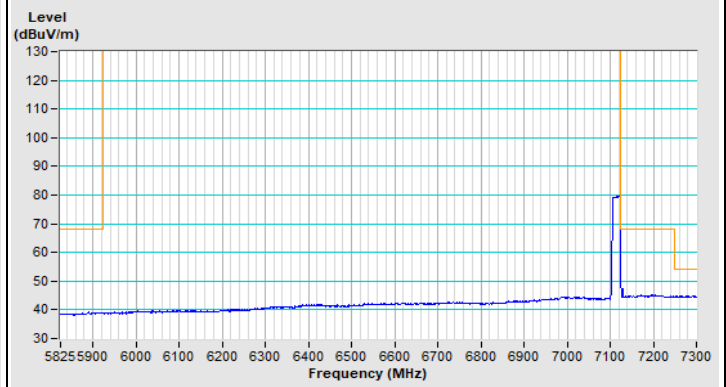


Vertical (Average)




Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 35

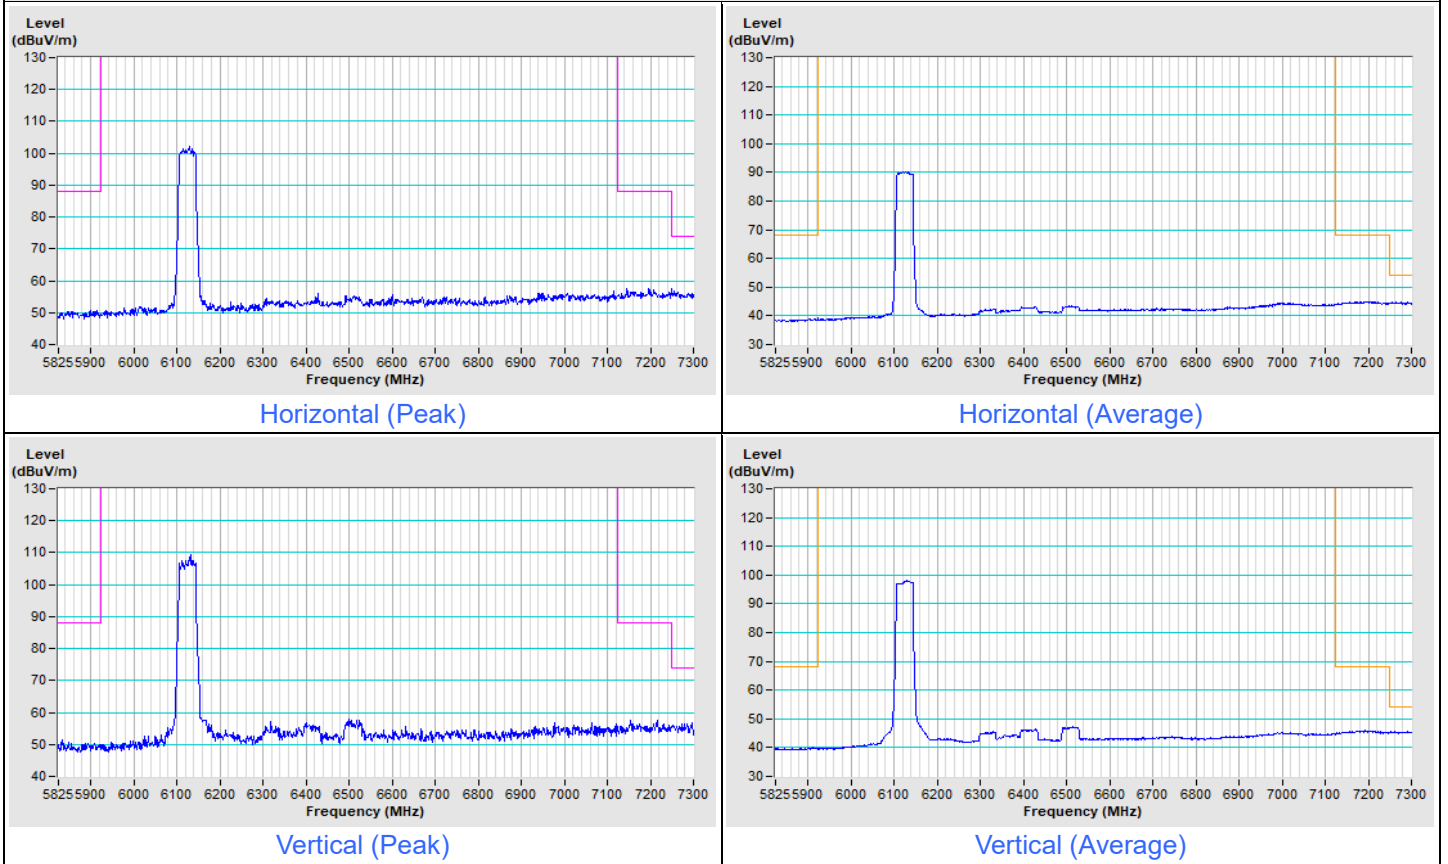


### 802.11be (EHT40) Channel 227

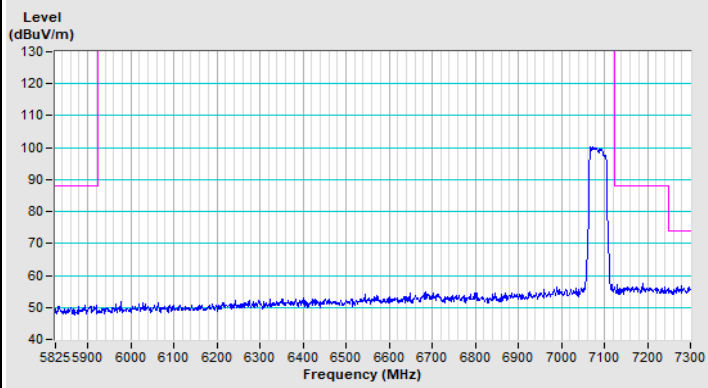


Horizontal (Peak)

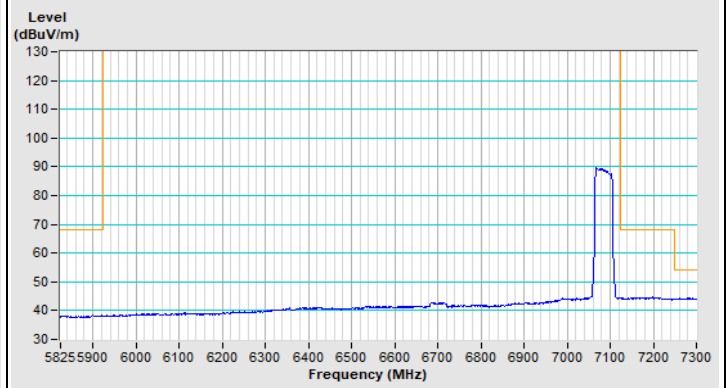

Horizontal (Average)

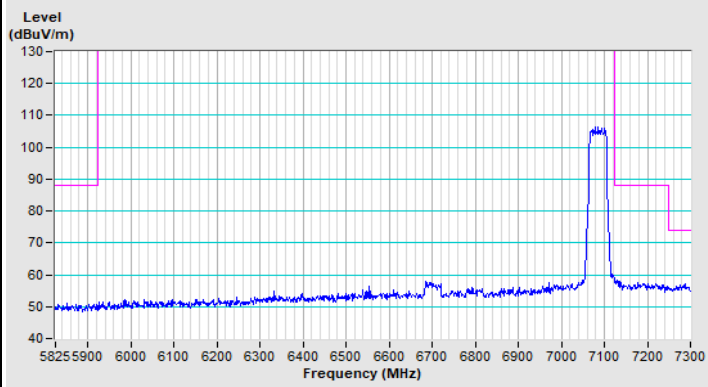

Vertical (Peak)

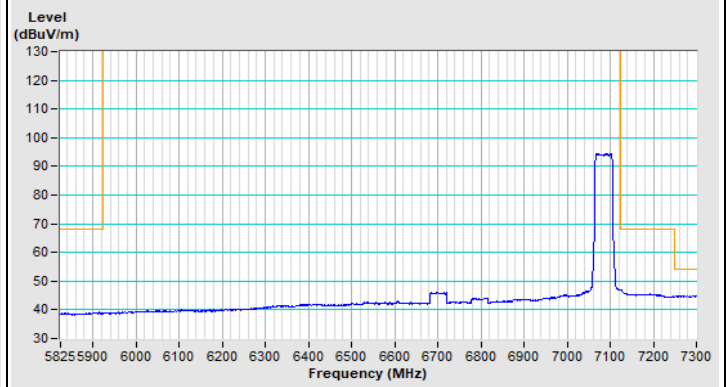

Vertical (Average)