



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.5 PK			1.88 H	64	56.7	46.8
2	*6475.00	93.9 AV			1.88 H	64	47.1	46.8
3	#12950.00	60.5 PK	88.2	-27.7	2.23 H	151	38.7	21.8
4	#12950.00	46.4 AV	68.2	-21.8	2.23 H	151	24.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.7 PK			1.20 V	16	60.9	46.8
2	*6475.00	97.8 AV			1.20 V	16	51.0	46.8
3	#12950.00	60.9 PK	88.2	-27.3	1.99 V	172	39.1	21.8
4	#12950.00	46.8 AV	68.2	-21.4	1.99 V	172	25.0	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.6 PK			1.87 H	69	56.6	47.0
2	*6515.00	94.0 AV			1.87 H	69	47.0	47.0
3	#13030.00	60.2 PK	88.2	-28.0	2.30 H	161	38.3	21.9
4	#13030.00	46.3 AV	68.2	-21.9	2.30 H	161	24.4	21.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.6 PK			1.22 V	13	60.6	47.0
2	*6515.00	97.8 AV			1.22 V	13	50.8	47.0
3	#13030.00	60.7 PK	88.2	-27.5	1.99 V	172	38.8	21.9
4	#13030.00	46.6 AV	68.2	-21.6	1.99 V	172	24.7	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	103.7 PK			1.89 H	63	56.5	47.2
2	*6535.00	94.0 AV			1.89 H	63	46.8	47.2
3	#13070.00	60.2 PK	88.2	-28.0	2.36 H	158	38.2	22.0
4	#13070.00	46.3 AV	68.2	-21.9	2.36 H	158	24.3	22.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.8 PK			1.20 V	11	60.6	47.2
2	*6535.00	97.9 AV			1.20 V	11	50.7	47.2
3	#13070.00	60.8 PK	88.2	-27.4	1.99 V	180	38.8	22.0
4	#13070.00	46.7 AV	68.2	-21.5	1.99 V	180	24.7	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	103.6 PK			1.84 H	61	56.2	47.4
2	*6695.00	94.0 AV			1.84 H	61	46.6	47.4
3	13390.00	60.5 PK	74.0	-13.5	2.29 H	156	37.7	22.8
4	13390.00	46.2 AV	54.0	-7.8	2.29 H	156	23.4	22.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.7 PK			1.23 V	15	60.3	47.4
2	*6695.00	97.7 AV			1.23 V	15	50.3	47.4
3	13390.00	60.7 PK	74.0	-13.3	1.99 V	172	37.9	22.8
4	13390.00	46.8 AV	54.0	-7.2	1.99 V	172	24.0	22.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	103.5 PK			1.85 H	66	56.1	47.4
2	*6855.00	94.0 AV			1.85 H	66	46.6	47.4
3	#13710.00	60.2 PK	88.2	-28.0	2.39 H	154	36.7	23.5
4	#13710.00	46.3 AV	68.2	-21.9	2.39 H	154	22.8	23.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.7 PK			1.20 V	20	60.3	47.4
2	*6855.00	97.9 AV			1.20 V	20	50.5	47.4
3	#13710.00	60.9 PK	88.2	-27.3	1.94 V	177	37.4	23.5
4	#13710.00	46.8 AV	68.2	-21.4	1.94 V	177	23.3	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	103.5 PK			1.88 H	62	55.9	47.6
2	*6875.00	93.8 AV			1.88 H	62	46.2	47.6
3	#13750.00	60.1 PK	88.2	-28.1	2.28 H	153	36.5	23.6
4	#13750.00	46.2 AV	68.2	-22.0	2.28 H	153	22.6	23.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.7 PK			1.24 V	10	60.1	47.6
2	*6875.00	97.9 AV			1.24 V	10	50.3	47.6
3	#13750.00	60.9 PK	88.2	-27.3	1.92 V	170	37.3	23.6
4	#13750.00	46.8 AV	68.2	-21.4	1.92 V	170	23.2	23.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.8 PK			1.84 H	66	55.1	48.7
2	*6995.00	94.2 AV			1.84 H	66	45.5	48.7
3	#13990.00	60.5 PK	88.2	-27.7	2.36 H	158	36.0	24.5
4	#13990.00	46.6 AV	68.2	-21.6	2.36 H	158	22.1	24.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.8 PK			1.25 V	11	59.1	48.7
2	*6995.00	97.6 AV			1.25 V	11	48.9	48.7
3	#13990.00	60.7 PK	88.2	-27.5	1.99 V	178	36.2	24.5
4	#13990.00	46.6 AV	68.2	-21.6	1.99 V	178	22.1	24.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 229 : 7095 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	103.8 PK			1.80 H	60	55.2	48.6
2	*7095.00	94.2 AV			1.80 H	60	45.6	48.6
3	#14190.00	60.3 PK	88.2	-27.9	2.33 H	164	35.4	24.9
4	#14190.00	46.3 AV	68.2	-21.9	2.33 H	164	21.4	24.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.5 PK			1.23 V	11	58.9	48.6
2	*7095.00	97.6 AV			1.23 V	11	49.0	48.6
3	#14190.00	60.7 PK	88.2	-27.5	1.99 V	172	35.8	24.9
4	#14190.00	46.8 AV	68.2	-21.4	1.99 V	172	21.9	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.1 PK			1.87 H	62	54.3	48.8
2	*7115.00	93.0 AV			1.87 H	62	44.2	48.8
3	#7125.00	79.9 PK	88.2	-8.3	1.87 H	62	63.0	16.9
4	#7125.00	53.6 AV	68.2	-14.6	1.87 H	62	36.7	16.9
5	#14230.00	60.3 PK	88.2	-27.9	2.33 H	156	35.4	24.9
6	#14230.00	46.6 AV	68.2	-21.6	2.33 H	156	21.7	24.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	106.0 PK			1.22 V	13	57.2	48.8
2	*7115.00	96.3 AV			1.22 V	13	47.5	48.8
3	#7125.00	85.1 PK	88.2	-3.1	1.22 V	13	68.2	16.9
4	#7125.00	56.3 AV	68.2	-11.9	1.22 V	13	39.4	16.9
5	#14230.00	60.9 PK	88.2	-27.3	1.99 V	172	36.0	24.9
6	#14230.00	46.8 AV	68.2	-21.4	1.99 V	172	21.9	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 33 : 6115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.3 PK	88.2	-24.9	1.79 H	63	49.2	14.1
2	#5925.00	48.8 AV	68.2	-19.4	1.79 H	63	34.7	14.1
3	*6115.00	107.6 PK			1.79 H	63	62.3	45.3
4	*6115.00	93.9 AV			1.79 H	63	48.6	45.3
5	12230.00	60.2 PK	74.0	-13.8	2.11 H	169	39.2	21.0
6	12230.00	46.3 AV	54.0	-7.7	2.11 H	169	25.3	21.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	1.06 V	16	49.8	14.1
2	#5925.00	49.3 AV	68.2	-18.9	1.06 V	16	35.2	14.1
3	*6115.00	110.5 PK			1.06 V	16	65.2	45.3
4	*6115.00	97.8 AV			1.06 V	16	52.5	45.3
5	12230.00	60.8 PK	74.0	-13.2	1.99 V	172	39.8	21.0
6	12230.00	46.9 AV	54.0	-7.1	1.99 V	172	25.9	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 61 : 6255 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	107.7 PK			1.77 H	65	61.9	45.8
2	*6255.00	94.7 AV			1.77 H	65	48.9	45.8
3	12510.00	60.0 PK	74.0	-14.0	2.16 H	159	39.3	20.7
4	12510.00	45.9 AV	54.0	-8.1	2.16 H	159	25.2	20.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	110.9 PK			1.12 V	14	65.1	45.8
2	*6255.00	97.9 AV			1.12 V	14	52.1	45.8
3	12510.00	60.4 PK	74.0	-13.6	1.94 V	175	39.7	20.7
4	12510.00	46.5 AV	54.0	-7.5	1.94 V	175	25.8	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.4 PK			1.74 H	62	60.8	46.6
2	*6415.00	93.6 AV			1.74 H	62	47.0	46.6
3	#12830.00	60.1 PK	88.2	-28.1	2.09 H	166	38.5	21.6
4	#12830.00	46.2 AV	68.2	-22.0	2.09 H	166	24.6	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.4 PK			1.07 V	13	63.8	46.6
2	*6415.00	97.7 AV			1.07 V	13	51.1	46.6
3	#12830.00	60.7 PK	88.2	-27.5	1.95 V	177	39.1	21.6
4	#12830.00	46.8 AV	68.2	-21.4	1.95 V	177	25.2	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	107.4 PK			1.77 H	65	60.8	46.6
2	*6435.00	93.6 AV			1.77 H	65	47.0	46.6
3	#12870.00	60.2 PK	88.2	-28.0	2.13 H	167	38.6	21.6
4	#12870.00	46.2 AV	68.2	-22.0	2.13 H	167	24.6	21.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.3 PK			1.04 V	14	63.7	46.6
2	*6435.00	97.5 AV			1.04 V	14	50.9	46.6
3	#12870.00	60.7 PK	88.2	-27.5	1.95 V	177	39.1	21.6
4	#12870.00	46.8 AV	68.2	-21.4	1.95 V	177	25.2	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.5 PK			1.72 H	65	60.7	46.8
2	*6475.00	93.9 AV			1.72 H	65	47.1	46.8
3	#12950.00	60.3 PK	88.2	-27.9	2.04 H	164	38.5	21.8
4	#12950.00	46.4 AV	68.2	-21.8	2.04 H	164	24.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.6 PK			1.08 V	16	63.8	46.8
2	*6475.00	97.9 AV			1.08 V	16	51.1	46.8
3	#12950.00	60.7 PK	88.2	-27.5	1.93 V	180	38.9	21.8
4	#12950.00	46.8 AV	68.2	-21.4	1.93 V	180	25.0	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.5 PK			1.76 H	64	60.5	47.0
2	*6515.00	93.7 AV			1.76 H	64	46.7	47.0
3	#13030.00	60.1 PK	88.2	-28.1	2.16 H	173	38.2	21.9
4	#13030.00	46.2 AV	68.2	-22.0	2.16 H	173	24.3	21.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.7 PK			1.06 V	15	63.7	47.0
2	*6515.00	97.8 AV			1.06 V	15	50.8	47.0
3	#13030.00	60.7 PK	88.2	-27.5	1.94 V	173	38.8	21.9
4	#13030.00	46.8 AV	68.2	-21.4	1.94 V	173	24.9	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.4 PK			1.80 H	69	60.2	47.2
2	*6535.00	93.7 AV			1.80 H	69	46.5	47.2
3	#13070.00	60.1 PK	88.2	-28.1	2.16 H	163	38.1	22.0
4	#13070.00	46.2 AV	68.2	-22.0	2.16 H	163	24.2	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.6 PK			1.08 V	12	63.4	47.2
2	*6535.00	97.8 AV			1.08 V	12	50.6	47.2
3	#13070.00	60.7 PK	88.2	-27.5	1.97 V	179	38.7	22.0
4	#13070.00	46.8 AV	68.2	-21.4	1.97 V	179	24.8	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.4 PK			1.72 H	65	60.0	47.4
2	*6695.00	93.7 AV			1.72 H	65	46.3	47.4
3	13390.00	60.1 PK	74.0	-13.9	2.13 H	162	37.3	22.8
4	13390.00	46.2 AV	54.0	-7.8	2.13 H	162	23.4	22.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.7 PK			1.08 V	15	63.3	47.4
2	*6695.00	97.9 AV			1.08 V	15	50.5	47.4
3	13390.00	60.7 PK	74.0	-13.3	1.95 V	177	37.9	22.8
4	13390.00	46.9 AV	54.0	-7.1	1.95 V	177	24.1	22.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.8 PK			1.74 H	70	60.4	47.4
2	*6855.00	93.9 AV			1.74 H	70	46.5	47.4
3	#13710.00	60.4 PK	88.2	-27.8	2.13 H	163	36.9	23.5
4	#13710.00	46.5 AV	68.2	-21.7	2.13 H	163	23.0	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.7 PK			1.06 V	18	63.3	47.4
2	*6855.00	97.6 AV			1.06 V	18	50.2	47.4
3	#13710.00	60.6 PK	88.2	-27.6	1.92 V	177	37.1	23.5
4	#13710.00	46.7 AV	68.2	-21.5	1.92 V	177	23.2	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.5 PK			1.84 H	69	59.9	47.6
2	*6875.00	93.6 AV			1.84 H	69	46.0	47.6
3	#13750.00	60.3 PK	88.2	-27.9	2.20 H	162	36.7	23.6
4	#13750.00	46.5 AV	68.2	-21.7	2.20 H	162	22.9	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.7 PK			1.05 V	11	63.1	47.6
2	*6875.00	97.7 AV			1.05 V	11	50.1	47.6
3	#13750.00	61.2 PK	88.2	-27.0	1.95 V	182	37.6	23.6
4	#13750.00	47.3 AV	68.2	-20.9	1.95 V	182	23.7	23.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.4 PK			1.78 H	69	58.7	48.7
2	*6995.00	93.5 AV			1.78 H	69	44.8	48.7
3	#13990.00	60.2 PK	88.2	-28.0	2.09 H	163	35.7	24.5
4	#13990.00	46.5 AV	68.2	-21.7	2.09 H	163	22.0	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.4 PK			1.09 V	18	61.7	48.7
2	*6995.00	97.8 AV			1.09 V	18	49.1	48.7
3	#13990.00	60.8 PK	88.2	-27.4	1.93 V	178	36.3	24.5
4	#13990.00	46.8 AV	68.2	-21.4	1.93 V	178	22.3	24.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 229 : 7095 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.0 PK			1.75 H	62	58.4	48.6
2	*7095.00	93.1 AV			1.75 H	62	44.5	48.6
3	#14190.00	60.0 PK	88.2	-28.2	2.11 H	169	35.1	24.9
4	#14190.00	46.3 AV	68.2	-21.9	2.11 H	169	21.4	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	110.6 PK			1.05 V	18	62.0	48.6
2	*7095.00	97.6 AV			1.05 V	18	49.0	48.6
3	#14190.00	60.7 PK	88.2	-27.5	1.95 V	177	35.8	24.9
4	#14190.00	46.9 AV	68.2	-21.3	1.95 V	177	22.0	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	90.7 PK			1.72 H	69	41.9	48.8
2	*7115.00	77.3 AV			1.72 H	69	28.5	48.8
3	#7125.00	75.0 PK	88.2	-13.2	1.72 H	69	58.1	16.9
4	#7125.00	63.2 AV	68.2	-5.0	1.72 H	69	46.3	16.9
5	#14230.00	60.1 PK	88.2	-28.1	2.16 H	166	35.2	24.9
6	#14230.00	46.2 AV	68.2	-22.0	2.16 H	166	21.3	24.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.3 PK			1.32 V	11	44.5	48.8
2	*7115.00	80.3 AV			1.32 V	11	31.5	48.8
3	#7125.00	83.3 PK	88.2	-4.9	1.32 V	11	66.4	16.9
<b>4</b>	<b>#7125.00</b>	<b>68.0 AV</b>	<b>68.2</b>	<b>-0.2</b>	<b>1.32 V</b>	<b>11</b>	<b>51.1</b>	<b>16.9</b>
5	#14230.00	60.7 PK	88.2	-27.5	1.98 V	177	35.8	24.9
6	#14230.00	46.6 AV	68.2	-21.6	1.98 V	177	21.7	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 35 : 6125 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.1 PK	88.2	-25.1	1.76 H	59	49.0	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.76 H	59	34.5	14.1
3	*6125.00	107.1 PK			1.76 H	59	61.8	45.3
4	*6125.00	94.3 AV			1.76 H	59	49.0	45.3
5	12250.00	60.3 PK	74.0	-13.7	2.13 H	166	39.3	21.0
6	12250.00	46.5 AV	54.0	-7.5	2.13 H	166	25.5	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.8 PK	88.2	-24.4	1.12 V	13	49.7	14.1
2	#5925.00	49.2 AV	68.2	-19.0	1.12 V	13	35.1	14.1
3	*6125.00	110.4 PK			1.12 V	13	65.1	45.3
4	*6125.00	97.1 AV			1.12 V	13	51.8	45.3
5	12250.00	60.7 PK	74.0	-13.3	1.95 V	175	39.7	21.0
6	12250.00	46.8 AV	54.0	-7.2	1.95 V	175	25.8	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 59 : 6245 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	107.8 PK			1.81 H	64	62.1	45.7
2	*6245.00	93.8 AV			1.81 H	64	48.1	45.7
3	12490.00	60.3 PK	74.0	-13.7	2.16 H	170	39.6	20.7
4	12490.00	46.2 AV	54.0	-7.8	2.16 H	170	25.5	20.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	110.4 PK			1.09 V	15	64.7	45.7
2	*6245.00	97.6 AV			1.09 V	15	51.9	45.7
3	12490.00	60.9 PK	74.0	-13.1	1.98 V	177	40.2	20.7
4	12490.00	46.8 AV	54.0	-7.2	1.98 V	177	26.1	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.5 PK			1.71 H	60	60.9	46.6
2	*6405.00	93.7 AV			1.71 H	60	47.1	46.6
3	#12810.00	60.3 PK	88.2	-27.9	2.16 H	174	38.7	21.6
4	#12810.00	46.1 AV	68.2	-22.1	2.16 H	174	24.5	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.7 PK			1.04 V	15	64.1	46.6
2	*6405.00	97.8 AV			1.04 V	15	51.2	46.6
3	#12810.00	60.9 PK	88.2	-27.3	1.95 V	170	39.3	21.6
4	#12810.00	46.7 AV	68.2	-21.5	1.95 V	170	25.1	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	107.4 PK			1.72 H	63	60.8	46.6
2	*6445.00	93.5 AV			1.72 H	63	46.9	46.6
3	#12890.00	60.4 PK	88.2	-27.8	2.13 H	162	38.8	21.6
4	#12890.00	46.5 AV	68.2	-21.7	2.13 H	162	24.9	21.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	110.4 PK			1.15 V	12	63.8	46.6
2	*6445.00	97.8 AV			1.15 V	12	51.2	46.6
3	#12890.00	60.9 PK	88.2	-27.3	1.96 V	188	39.3	21.6
4	#12890.00	46.8 AV	68.2	-21.4	1.96 V	188	25.2	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	107.5 PK			1.78 H	62	60.6	46.9
2	*6485.00	93.9 AV			1.78 H	62	47.0	46.9
3	#12970.00	60.1 PK	88.2	-28.1	2.08 H	163	38.3	21.8
4	#12970.00	46.2 AV	68.2	-22.0	2.08 H	163	24.4	21.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.7 PK			1.14 V	18	63.8	46.9
2	*6485.00	97.5 AV			1.14 V	18	50.6	46.9
3	#12970.00	60.8 PK	88.2	-27.4	1.86 V	170	39.0	21.8
4	#12970.00	46.7 AV	68.2	-21.5	1.86 V	170	24.9	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	107.5 PK			1.77 H	58	60.5	47.0
2	*6525.00	93.6 AV			1.77 H	58	46.6	47.0
3	#13050.00	60.2 PK	88.2	-28.0	2.13 H	166	38.3	21.9
4	#13050.00	46.5 AV	68.2	-21.7	2.13 H	166	24.6	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	110.7 PK			1.08 V	12	63.7	47.0
2	*6525.00	97.9 AV			1.08 V	12	50.9	47.0
3	#13050.00	61.0 PK	88.2	-27.2	1.95 V	179	39.1	21.9
4	#13050.00	47.1 AV	68.2	-21.1	1.95 V	179	25.2	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	107.8 PK			1.77 H	69	60.5	47.3
2	*6565.00	93.7 AV			1.77 H	69	46.4	47.3
3	#13130.00	60.1 PK	88.2	-28.1	2.17 H	158	38.0	22.1
4	#13130.00	46.5 AV	68.2	-21.7	2.17 H	158	24.4	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.8 PK			1.14 V	19	63.5	47.3
2	*6565.00	97.6 AV			1.14 V	19	50.3	47.3
3	#13130.00	60.7 PK	88.2	-27.5	1.92 V	177	38.6	22.1
4	#13130.00	46.8 AV	68.2	-21.4	1.92 V	177	24.7	22.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 155 : 6725 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	107.7 PK			1.80 H	65	60.2	47.5
2	*6725.00	93.7 AV			1.80 H	65	46.2	47.5
3	#13450.00	60.4 PK	88.2	-27.8	2.09 H	163	37.2	23.2
4	#13450.00	46.5 AV	68.2	-21.7	2.09 H	163	23.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.7 PK			1.09 V	13	63.2	47.5
2	*6725.00	97.9 AV			1.09 V	13	50.4	47.5
3	#13450.00	60.9 PK	88.2	-27.3	1.96 V	168	37.7	23.2
4	#13450.00	47.0 AV	68.2	-21.2	1.96 V	168	23.8	23.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	107.5 PK			1.84 H	66	60.1	47.4
2	*6845.00	93.6 AV			1.84 H	66	46.2	47.4
3	#13690.00	60.1 PK	88.2	-28.1	2.10 H	163	36.6	23.5
4	#13690.00	46.2 AV	68.2	-22.0	2.10 H	163	22.7	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.8 PK			1.14 V	14	63.4	47.4
2	*6845.00	97.9 AV			1.14 V	14	50.5	47.4
3	#13690.00	60.8 PK	88.2	-27.4	1.90 V	171	37.3	23.5
4	#13690.00	46.8 AV	68.2	-21.4	1.90 V	171	23.3	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	107.5 PK			1.74 H	65	59.8	47.7
2	*6885.00	93.8 AV			1.74 H	65	46.1	47.7
3	#13770.00	60.3 PK	88.2	-27.9	2.05 H	164	36.5	23.8
4	#13770.00	46.4 AV	68.2	-21.8	2.05 H	164	22.6	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.5 PK			1.15 V	14	62.8	47.7
2	*6885.00	97.6 AV			1.15 V	14	49.9	47.7
3	#13770.00	60.9 PK	88.2	-27.3	1.95 V	177	37.1	23.8
4	#13770.00	46.8 AV	68.2	-21.4	1.95 V	177	23.0	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 211 : 7005 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	107.4 PK			1.78 H	68	58.6	48.8
2	*7005.00	93.5 AV			1.78 H	68	44.7	48.8
3	#14010.00	60.3 PK	88.2	-27.9	2.18 H	162	35.7	24.6
4	#14010.00	46.5 AV	68.2	-21.7	2.18 H	162	21.9	24.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	110.6 PK			1.08 V	12	61.8	48.8
2	*7005.00	97.7 AV			1.08 V	12	48.9	48.8
3	#14010.00	60.7 PK	88.2	-27.5	1.95 V	177	36.1	24.6
4	#14010.00	46.8 AV	68.2	-21.4	1.95 V	177	22.2	24.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	106.7 PK			1.72 H	68	58.1	48.6
2	*7085.00	93.5 AV			1.72 H	68	44.9	48.6
3	#7125.00	61.2 PK	88.2	-27.0	1.72 H	68	44.3	16.9
4	#7125.00	44.0 AV	68.2	-24.2	1.72 H	68	27.1	16.9
5	#14170.00	60.3 PK	88.2	-27.9	2.10 H	166	35.4	24.9
6	#14170.00	46.5 AV	68.2	-21.7	2.10 H	166	21.6	24.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.2 PK			1.13 V	5	60.6	48.6
2	*7085.00	96.7 AV			1.13 V	5	48.1	48.6
3	#7125.00	63.0 PK	88.2	-25.2	1.13 V	5	46.1	16.9
4	#7125.00	45.5 AV	68.2	-22.7	1.13 V	5	28.6	16.9
5	#14170.00	60.9 PK	88.2	-27.3	1.95 V	180	36.0	24.9
6	#14170.00	46.8 AV	68.2	-21.4	1.95 V	180	21.9	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 39 : 6145 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.1 PK	88.2	-25.1	1.70 H	52	49.0	14.1
2	#5925.00	48.4 AV	68.2	-19.8	1.70 H	52	34.3	14.1
3	*6145.00	107.5 PK			1.70 H	52	62.3	45.2
4	*6145.00	95.0 AV			1.70 H	52	49.8	45.2
5	12290.00	60.1 PK	74.0	-13.9	2.17 H	163	39.2	20.9
6	12290.00	46.3 AV	54.0	-7.7	2.17 H	163	25.4	20.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	1.12 V	10	49.8	14.1
2	#5925.00	49.5 AV	68.2	-18.7	1.12 V	10	35.4	14.1
3	*6145.00	110.5 PK			1.12 V	10	65.3	45.2
4	*6145.00	97.1 AV			1.12 V	10	51.9	45.2
5	12290.00	60.7 PK	74.0	-13.3	1.97 V	172	39.8	20.9
6	12290.00	47.0 AV	54.0	-7.0	1.97 V	172	26.1	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 55 : 6225 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	107.4 PK			1.79 H	68	61.8	45.6
2	*6225.00	95.2 AV			1.79 H	68	49.6	45.6
3	12450.00	60.2 PK	74.0	-13.8	2.16 H	167	39.6	20.6
4	12450.00	46.4 AV	54.0	-7.6	2.16 H	167	25.8	20.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.4 PK			1.15 V	14	64.8	45.6
2	*6225.00	97.3 AV			1.15 V	14	51.7	45.6
3	12450.00	60.7 PK	74.0	-13.3	1.96 V	175	40.1	20.6
4	12450.00	47.3 AV	54.0	-6.7	1.96 V	175	26.7	20.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.6 PK			1.74 H	56	61.0	46.6
2	*6385.00	95.2 AV			1.74 H	56	48.6	46.6
3	#12770.00	60.2 PK	88.2	-28.0	2.19 H	168	38.7	21.5
4	#12770.00	46.1 AV	68.2	-22.1	2.19 H	168	24.6	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.7 PK			1.18 V	12	64.1	46.6
2	*6385.00	97.2 AV			1.18 V	12	50.6	46.6
3	#12770.00	60.9 PK	88.2	-27.3	1.99 V	170	39.4	21.5
4	#12770.00	47.2 AV	68.2	-21.0	1.99 V	170	25.7	21.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.5 PK			1.78 H	53	60.8	46.7
2	*6465.00	95.1 AV			1.78 H	53	48.4	46.7
3	#12930.00	60.2 PK	88.2	-28.0	2.13 H	169	38.4	21.8
4	#12930.00	46.1 AV	68.2	-22.1	2.13 H	169	24.3	21.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.7 PK			1.14 V	14	64.0	46.7
2	*6465.00	97.1 AV			1.14 V	14	50.4	46.7
3	#12930.00	60.5 PK	88.2	-27.7	1.96 V	178	38.7	21.8
4	#12930.00	47.1 AV	68.2	-21.1	1.96 V	178	25.3	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.8 PK			1.74 H	61	60.6	47.2
2	*6545.00	95.4 AV			1.74 H	61	48.2	47.2
3	#13090.00	60.1 PK	88.2	-28.1	2.19 H	159	38.0	22.1
4	#13090.00	46.4 AV	68.2	-21.8	2.19 H	159	24.3	22.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.7 PK			1.14 V	12	63.5	47.2
2	*6545.00	97.3 AV			1.14 V	12	50.1	47.2
3	#13090.00	60.9 PK	88.2	-27.3	1.99 V	174	38.8	22.1
4	#13090.00	47.2 AV	68.2	-21.0	1.99 V	174	25.1	22.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 135 : 6625 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.6 PK			1.79 H	60	60.3	47.3
2	*6625.00	95.1 AV			1.79 H	60	47.8	47.3
3	13250.00	60.1 PK	74.0	-13.9	2.11 H	168	37.6	22.5
4	13250.00	46.5 AV	54.0	-7.5	2.11 H	168	24.0	22.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.7 PK			1.16 V	18	63.4	47.3
2	*6625.00	97.4 AV			1.16 V	18	50.1	47.3
3	13250.00	60.7 PK	74.0	-13.3	1.99 V	175	38.2	22.5
4	13250.00	47.2 AV	54.0	-6.8	1.99 V	175	24.7	22.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.4 PK			1.70 H	56	59.9	47.5
2	*6705.00	94.8 AV			1.70 H	56	47.3	47.5
3	#13410.00	60.1 PK	88.2	-28.1	2.25 H	163	37.2	22.9
4	#13410.00	46.2 AV	68.2	-22.0	2.25 H	163	23.3	22.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.5 PK			1.20 V	18	63.0	47.5
2	*6705.00	97.3 AV			1.20 V	18	49.8	47.5
3	#13410.00	60.8 PK	88.2	-27.4	1.95 V	188	37.9	22.9
4	#13410.00	47.2 AV	68.2	-21.0	1.95 V	188	24.3	22.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 167 : 6785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.4 PK			1.79 H	58	60.0	47.4
2	*6785.00	95.2 AV			1.79 H	58	47.8	47.4
3	#13570.00	60.5 PK	88.2	-27.7	2.11 H	169	36.9	23.6
4	#13570.00	46.2 AV	68.2	-22.0	2.11 H	169	22.6	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.6 PK			1.14 V	12	63.2	47.4
2	*6785.00	97.2 AV			1.14 V	12	49.8	47.4
3	#13570.00	60.9 PK	88.2	-27.3	1.95 V	170	37.3	23.6
4	#13570.00	47.2 AV	68.2	-21.0	1.95 V	170	23.6	23.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.4 PK			1.75 H	58	59.9	47.5
2	*6865.00	95.3 AV			1.75 H	58	47.8	47.5
3	#13730.00	60.2 PK	88.2	-28.0	2.14 H	166	36.6	23.6
4	#13730.00	46.5 AV	68.2	-21.7	2.14 H	166	22.9	23.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.4 PK			1.13 V	14	62.9	47.5
2	*6865.00	97.0 AV			1.13 V	14	49.5	47.5
3	#13730.00	60.5 PK	88.2	-27.7	1.90 V	178	36.9	23.6
4	#13730.00	47.2 AV	68.2	-21.0	1.90 V	178	23.6	23.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.6 PK			1.78 H	64	59.3	48.3
2	*6945.00	95.2 AV			1.78 H	64	46.9	48.3
3	#13890.00	60.2 PK	88.2	-28.0	2.13 H	169	36.3	23.9
4	#13890.00	46.5 AV	68.2	-21.7	2.13 H	169	22.6	23.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.7 PK			1.26 V	18	62.4	48.3
2	*6945.00	97.3 AV			1.26 V	18	49.0	48.3
3	#13890.00	61.2 PK	88.2	-27.0	1.89 V	163	37.3	23.9
4	#13890.00	47.5 AV	68.2	-20.7	1.89 V	163	23.6	23.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	106.9 PK			1.71 H	59	58.2	48.7
2	*7025.00	93.8 AV			1.71 H	59	45.1	48.7
3	#7125.00	67.7 PK	88.2	-20.5	1.71 H	59	50.8	16.9
4	#7125.00	46.4 AV	68.2	-21.8	1.71 H	59	29.5	16.9
5	#14050.00	60.2 PK	88.2	-28.0	2.20 H	165	35.5	24.7
6	#14050.00	46.7 AV	68.2	-21.5	2.20 H	165	22.0	24.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.5 PK			1.25 V	4	61.8	48.7
2	*7025.00	98.1 AV			1.25 V	4	49.4	48.7
3	#7125.00	71.1 PK	88.2	-17.1	1.25 V	4	54.2	16.9
4	#7125.00	48.0 AV	68.2	-20.2	1.25 V	4	31.1	16.9
5	#14050.00	60.9 PK	88.2	-27.3	1.95 V	170	36.2	24.7
6	#14050.00	47.5 AV	68.2	-20.7	1.95 V	170	22.8	24.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.2 PK	88.2	-25.0	1.74 H	56	49.1	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.74 H	56	34.5	14.1
3	*6185.00	107.1 PK			1.74 H	56	61.7	45.4
4	*6185.00	94.9 AV			1.74 H	56	49.5	45.4
5	12370.00	60.2 PK	74.0	-13.8	2.15 H	169	39.5	20.7
6	12370.00	46.5 AV	54.0	-7.5	2.15 H	169	25.8	20.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.8 PK	88.2	-24.4	1.15 V	15	49.7	14.1
2	#5925.00	49.3 AV	68.2	-18.9	1.15 V	15	35.2	14.1
3	*6185.00	110.7 PK			1.15 V	15	65.3	45.4
4	*6185.00	98.4 AV			1.15 V	15	53.0	45.4
5	12370.00	60.8 PK	74.0	-13.2	1.99 V	184	40.1	20.7
6	12370.00	47.2 AV	54.0	-6.8	1.99 V	184	26.5	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.6 PK			1.79 H	59	61.1	46.5
2	*6345.00	95.2 AV			1.79 H	59	48.7	46.5
3	12690.00	60.2 PK	74.0	-13.8	2.17 H	166	38.9	21.3
4	12690.00	46.5 AV	54.0	-7.5	2.17 H	166	25.2	21.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.8 PK			1.14 V	16	64.3	46.5
2	*6345.00	98.0 AV			1.14 V	16	51.5	46.5
3	12690.00	60.7 PK	74.0	-13.3	1.85 V	179	39.4	21.3
4	12690.00	47.3 AV	54.0	-6.7	1.85 V	179	26.0	21.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.6 PK			1.78 H	56	60.6	47.0
2	*6505.00	95.2 AV			1.78 H	56	48.2	47.0
3	#13010.00	60.4 PK	88.2	-27.8	2.16 H	169	38.5	21.9
4	#13010.00	46.2 AV	68.2	-22.0	2.16 H	169	24.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.7 PK			1.20 V	12	63.7	47.0
2	*6505.00	98.3 AV			1.20 V	12	51.3	47.0
3	#13010.00	60.9 PK	88.2	-27.3	1.95 V	188	39.0	21.9
4	#13010.00	47.5 AV	68.2	-20.7	1.95 V	188	25.6	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.7 PK			1.76 H	59	60.4	47.3
2	*6665.00	95.2 AV			1.76 H	59	47.9	47.3
3	13330.00	60.2 PK	74.0	-13.8	2.15 H	163	37.5	22.7
4	13330.00	46.5 AV	54.0	-7.5	2.15 H	163	23.8	22.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.6 PK			1.12 V	12	63.3	47.3
2	*6665.00	98.5 AV			1.12 V	12	51.2	47.3
3	13330.00	60.9 PK	74.0	-13.1	1.85 V	172	38.2	22.7
4	13330.00	47.1 AV	54.0	-6.9	1.85 V	172	24.4	22.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.5 PK			1.72 H	56	60.1	47.4
2	*6825.00	95.2 AV			1.72 H	56	47.8	47.4
3	#13650.00	60.2 PK	88.2	-28.0	2.16 H	159	36.7	23.5
4	#13650.00	46.5 AV	68.2	-21.7	2.16 H	159	23.0	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.8 PK			1.17 V	14	63.4	47.4
2	*6825.00	98.6 AV			1.17 V	14	51.2	47.4
3	#13650.00	60.8 PK	88.2	-27.4	1.95 V	183	37.3	23.5
4	#13650.00	47.2 AV	68.2	-21.0	1.95 V	183	23.7	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.2 PK			1.74 H	62	58.5	48.7
2	*6985.00	93.6 AV			1.74 H	62	44.9	48.7
3	#7125.00	72.5 PK	88.2	-15.7	1.74 H	62	55.6	16.9
4	#7125.00	57.1 AV	68.2	-11.1	1.74 H	62	40.2	16.9
5	#13970.00	60.3 PK	88.2	-27.9	2.18 H	163	36.0	24.3
6	#13970.00	46.5 AV	68.2	-21.7	2.18 H	163	22.2	24.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.6 PK			1.15 V	16	61.9	48.7
2	*6985.00	97.7 AV			1.15 V	16	49.0	48.7
3	#7125.00	76.4 PK	88.2	-11.8	1.15 V	16	59.5	16.9
4	#7125.00	60.5 AV	68.2	-7.7	1.15 V	16	43.6	16.9
5	#13970.00	60.8 PK	88.2	-27.4	1.85 V	172	36.5	24.3
6	#13970.00	47.3 AV	68.2	-20.9	1.85 V	172	23.0	24.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.0 PK	88.2	-25.2	1.70 H	63	48.9	14.1
2	#5925.00	48.9 AV	68.2	-19.3	1.70 H	63	34.8	14.1
3	*6265.00	107.0 PK			1.70 H	63	61.2	45.8
4	*6265.00	93.9 AV			1.70 H	63	48.1	45.8
5	12530.00	60.2 PK	74.0	-13.8	2.24 H	171	39.4	20.8
6	12530.00	46.3 AV	54.0	-7.7	2.24 H	171	25.5	20.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	1.10 V	11	49.8	14.1
2	#5925.00	49.9 AV	68.2	-18.3	1.10 V	11	35.8	14.1
3	*6265.00	110.2 PK			1.10 V	11	64.4	45.8
4	*6265.00	97.6 AV			1.10 V	11	51.8	45.8
5	12530.00	60.7 PK	74.0	-13.3	1.95 V	180	39.9	20.8
6	12530.00	47.3 AV	54.0	-6.7	1.95 V	180	26.5	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 95 : 6425 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.0 PK			1.78 H	59	60.4	46.6
2	*6425.00	93.6 AV			1.78 H	59	47.0	46.6
3	#12850.00	60.2 PK	88.2	-28.0	2.19 H	174	38.6	21.6
4	#12850.00	46.8 AV	68.2	-21.4	2.19 H	174	25.2	21.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.4 PK			1.13 V	15	63.8	46.6
2	*6425.00	97.6 AV			1.13 V	15	51.0	46.6
3	#12850.00	60.9 PK	88.2	-27.3	1.99 V	172	39.3	21.6
4	#12850.00	47.5 AV	68.2	-20.7	1.99 V	172	25.9	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.9 PK			1.69 H	60	59.6	47.3
2	*6585.00	93.8 AV			1.69 H	60	46.5	47.3
3	#13170.00	60.2 PK	88.2	-28.0	2.19 H	170	37.9	22.3
4	#13170.00	46.1 AV	68.2	-22.1	2.19 H	170	23.8	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.3 PK			1.17 V	19	63.0	47.3
2	*6585.00	97.7 AV			1.17 V	19	50.4	47.3
3	#13170.00	60.8 PK	88.2	-27.4	1.95 V	175	38.5	22.3
4	#13170.00	47.6 AV	68.2	-20.6	1.95 V	175	25.3	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 159 : 6745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.0 PK			1.79 H	55	59.4	47.6
2	*6745.00	93.8 AV			1.79 H	55	46.2	47.6
3	#13490.00	60.2 PK	88.2	-28.0	2.18 H	164	36.7	23.5
4	#13490.00	46.7 AV	68.2	-21.5	2.18 H	164	23.2	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.5 PK			1.16 V	18	62.9	47.6
2	*6745.00	97.8 AV			1.16 V	18	50.2	47.6
3	#13490.00	60.9 PK	88.2	-27.3	1.99 V	182	37.4	23.5
4	#13490.00	47.5 AV	68.2	-20.7	1.99 V	182	24.0	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.4 PK			1.70 H	68	58.5	47.9
2	*6905.00	92.8 AV			1.70 H	68	44.9	47.9
3	#7125.00	75.3 PK	88.2	-12.9	1.70 H	68	58.4	16.9
4	#7125.00	59.3 AV	68.2	-8.9	1.70 H	68	42.4	16.9
5	7250.00	64.2 PK	74.0	-9.8	1.70 H	68	46.8	17.4
6	7250.00	49.3 AV	54.0	-4.7	1.70 H	68	31.9	17.4
7	#13810.00	60.9 PK	88.2	-27.3	2.16 H	170	37.1	23.8
8	#13810.00	47.0 AV	68.2	-21.2	2.16 H	170	23.2	23.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.2 PK			1.08 V	10	62.3	47.9
2	*6905.00	98.2 AV			1.08 V	10	50.3	47.9
3	#7125.00	78.3 PK	88.2	-9.9	1.08 V	10	61.4	16.9
4	#7125.00	62.5 AV	68.2	-5.7	1.08 V	10	45.6	16.9
5	7250.00	67.0 PK	74.0	-7.0	1.08 V	10	49.6	17.4
6	7250.00	51.5 AV	54.0	-2.5	1.08 V	10	34.1	17.4
7	#13810.00	61.2 PK	88.2	-27.0	1.83 V	169	37.4	23.8
8	#13810.00	47.8 AV	68.2	-20.4	1.83 V	169	24.0	23.8

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.




### NSS1 Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


#### 802.11a Channel 33

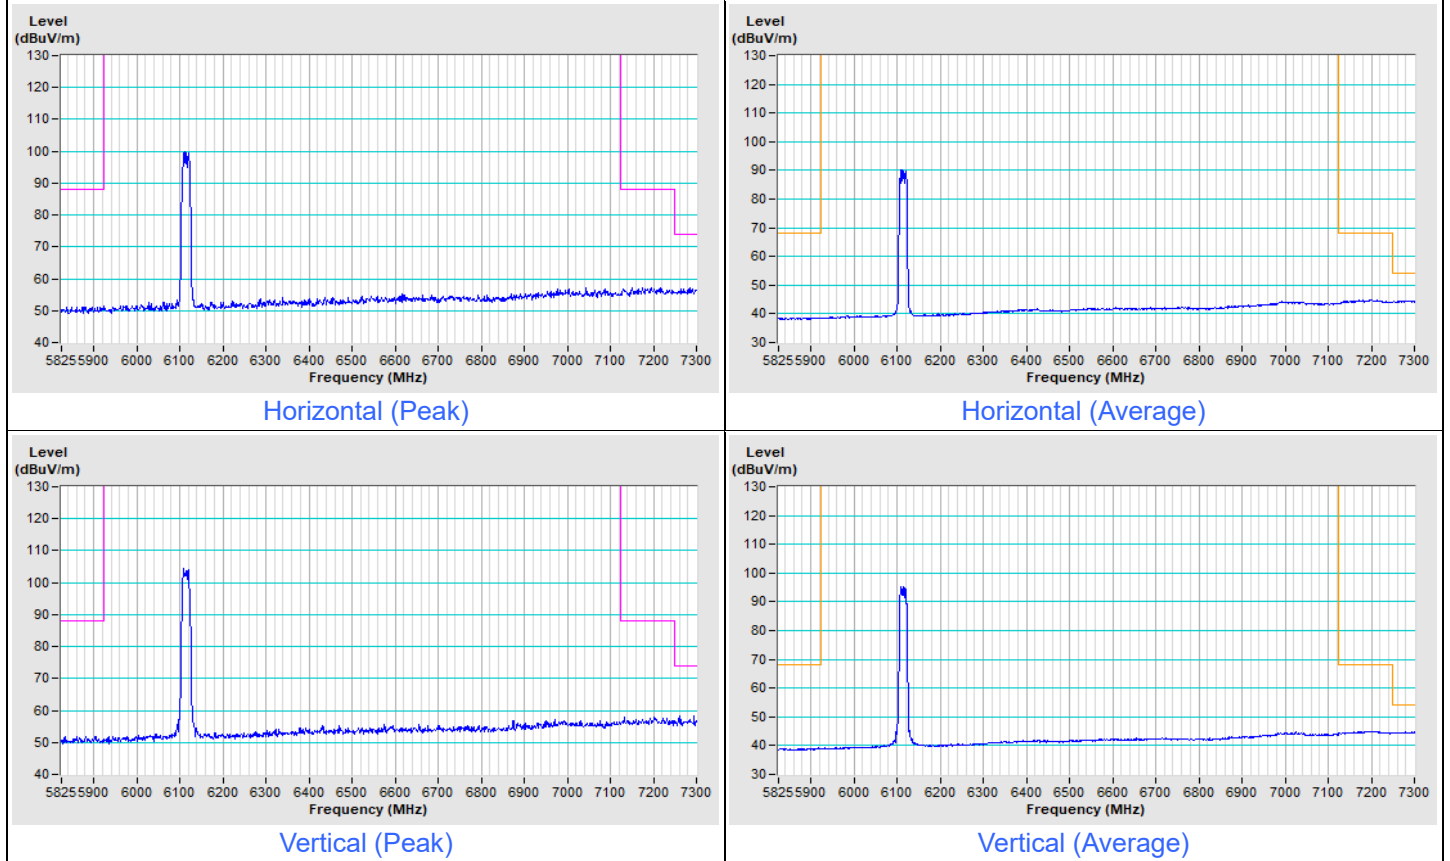


### 802.11a Channel 233

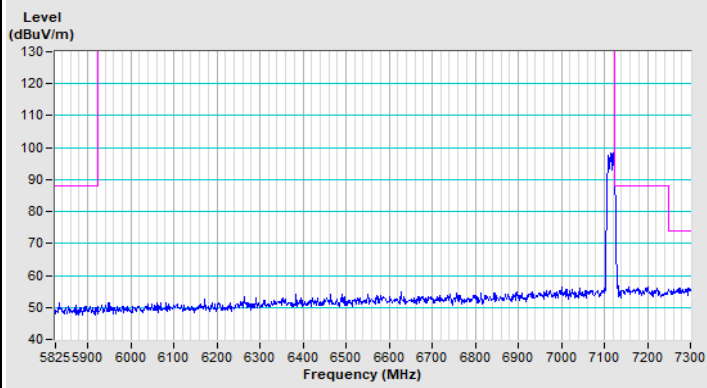


Horizontal (Peak)

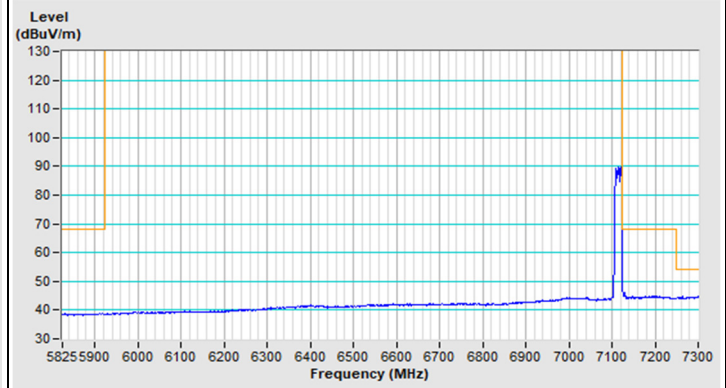

Horizontal (Average)

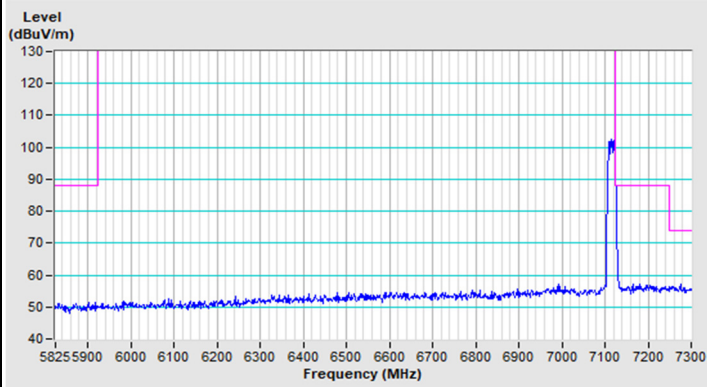


Vertical (Peak)

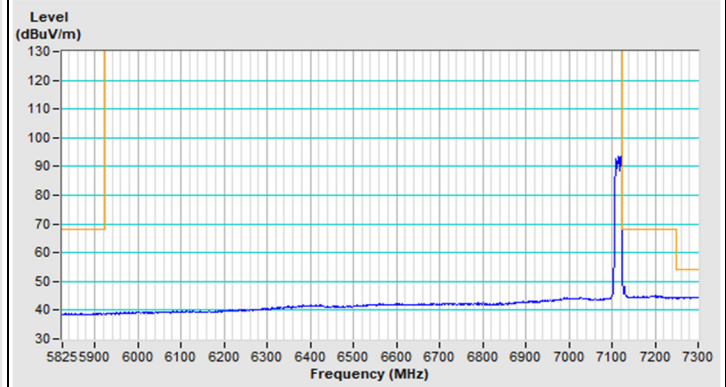


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


### 802.11be (EHT20) Channel 33

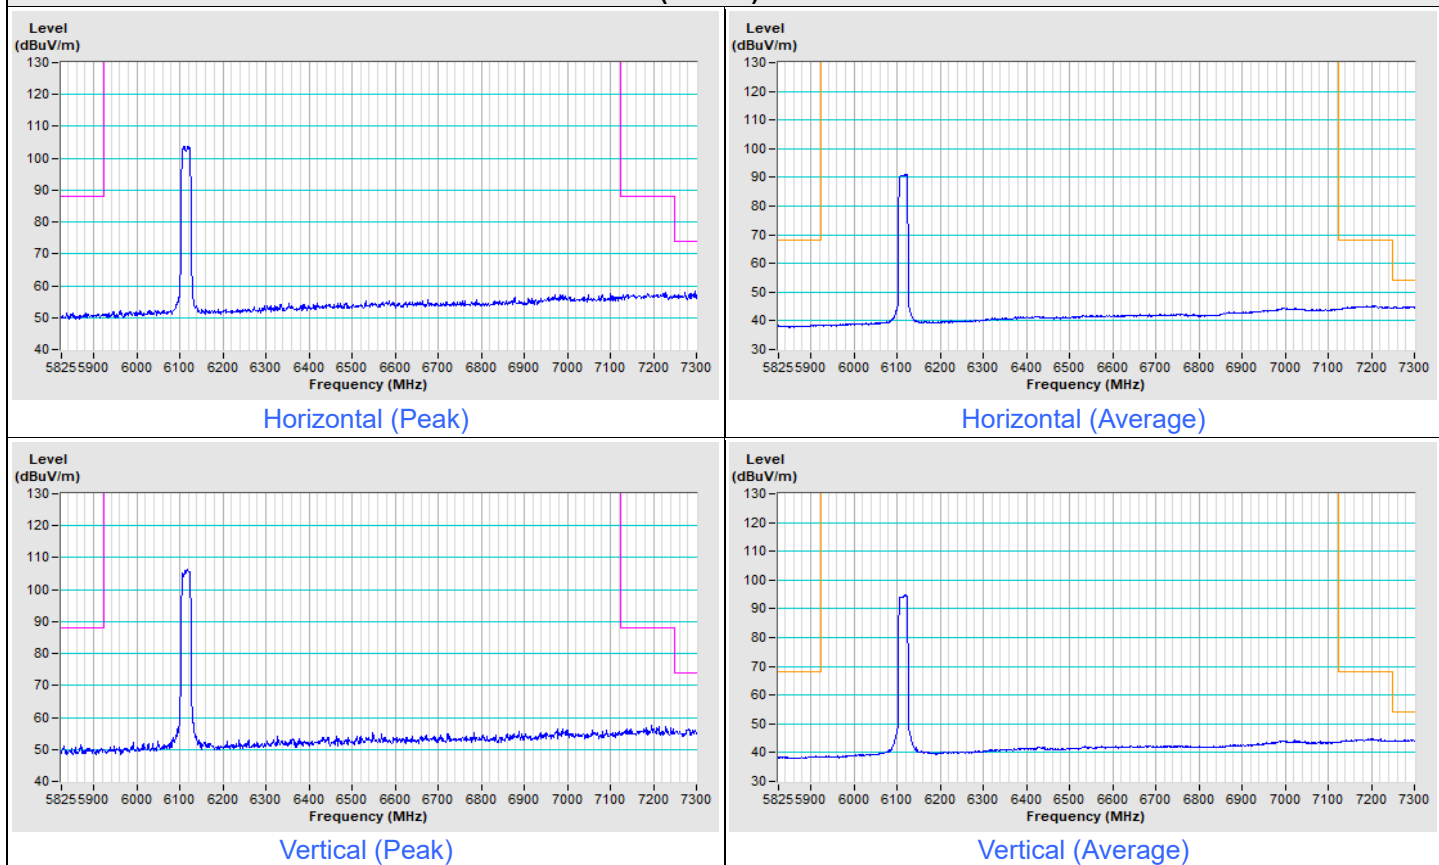


### 802.11be (EHT20) Channel 233

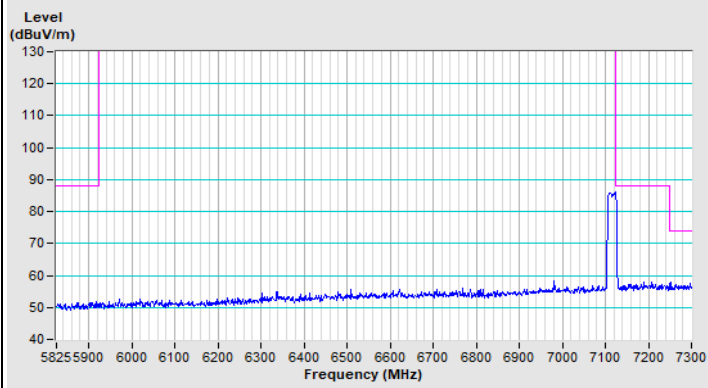


Horizontal (Peak)

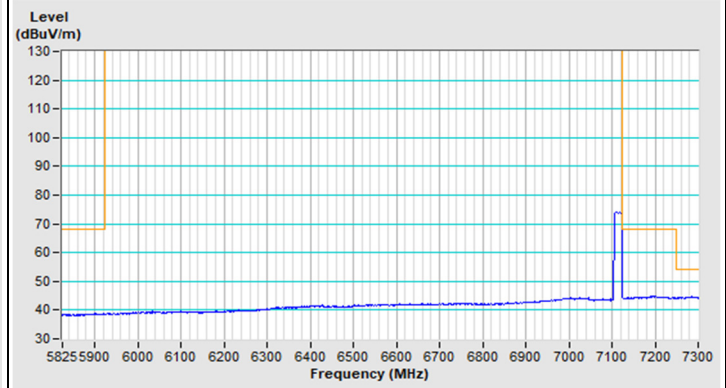

Horizontal (Average)

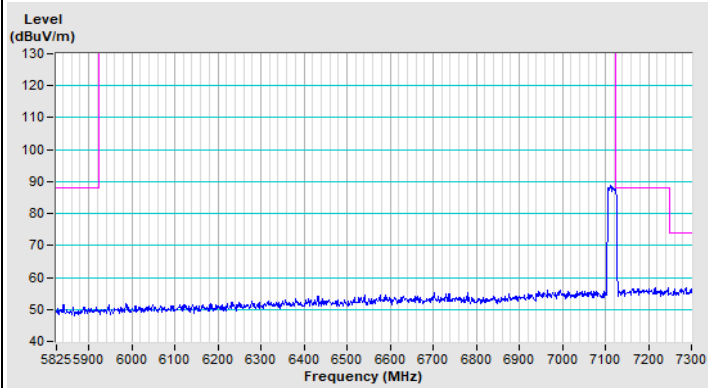


Vertical (Peak)

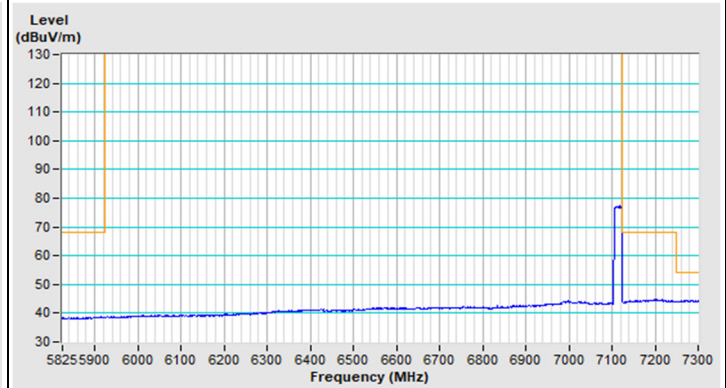


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


**802.11be (EHT40) Channel 35**

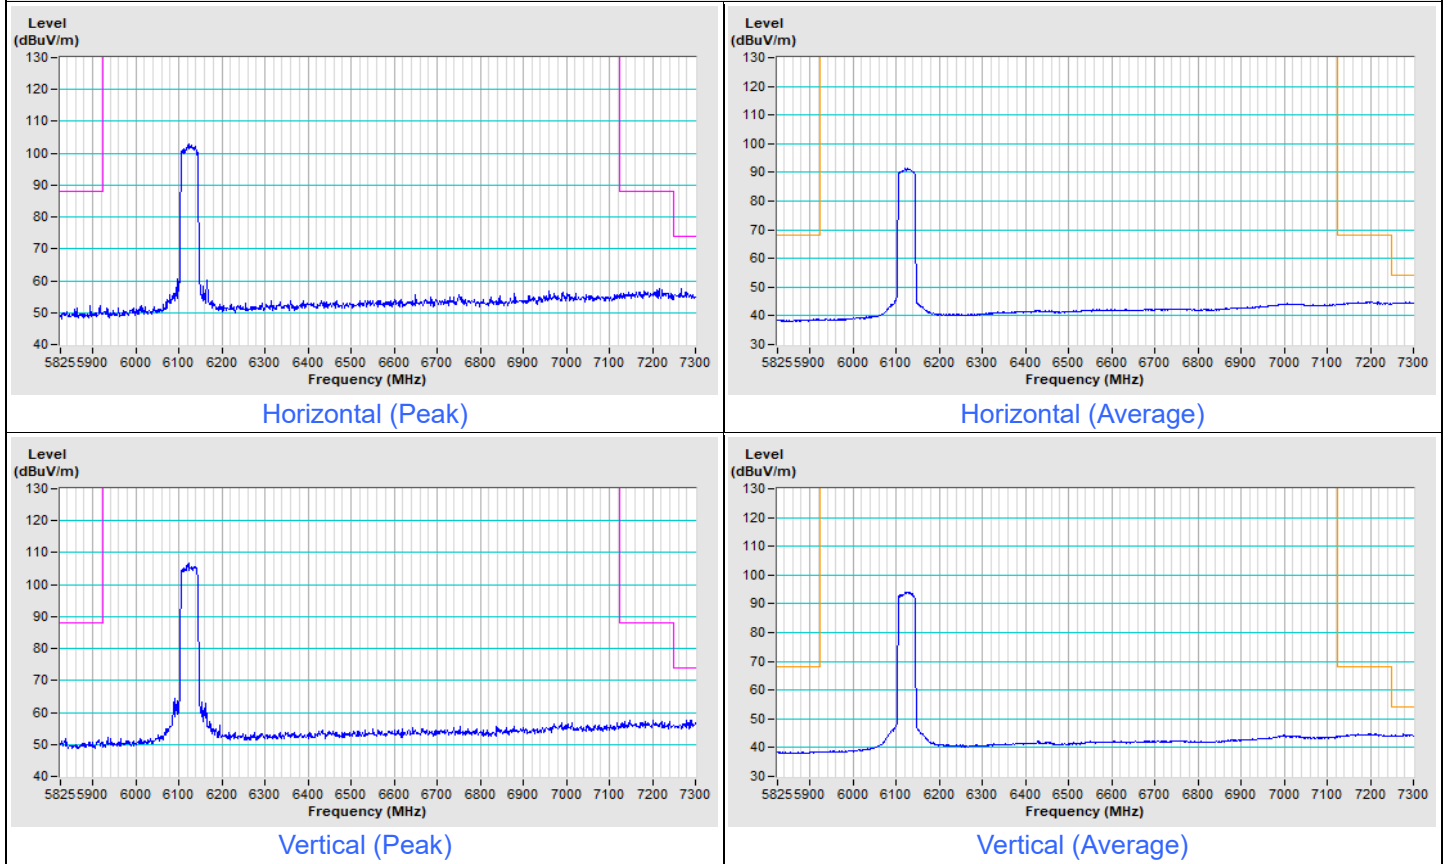


### 802.11be (EHT40) Channel 227

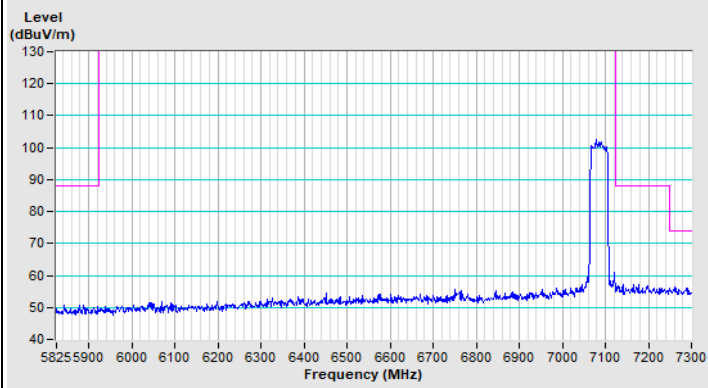


Horizontal (Peak)

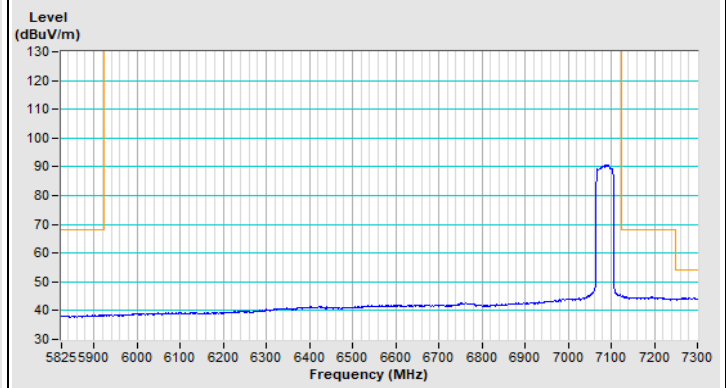

Horizontal (Average)

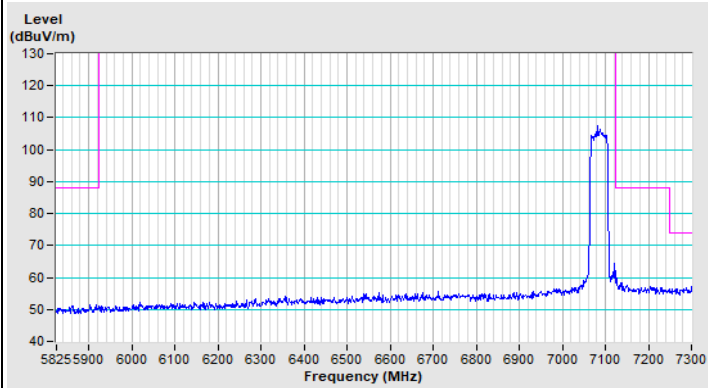


Vertical (Peak)

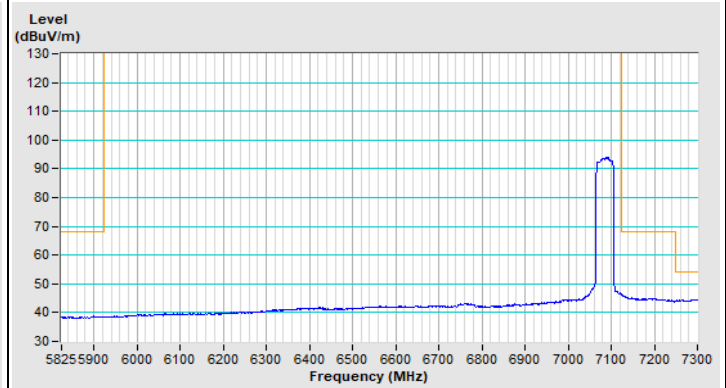


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


### 802.11be (EHT80) Channel 39

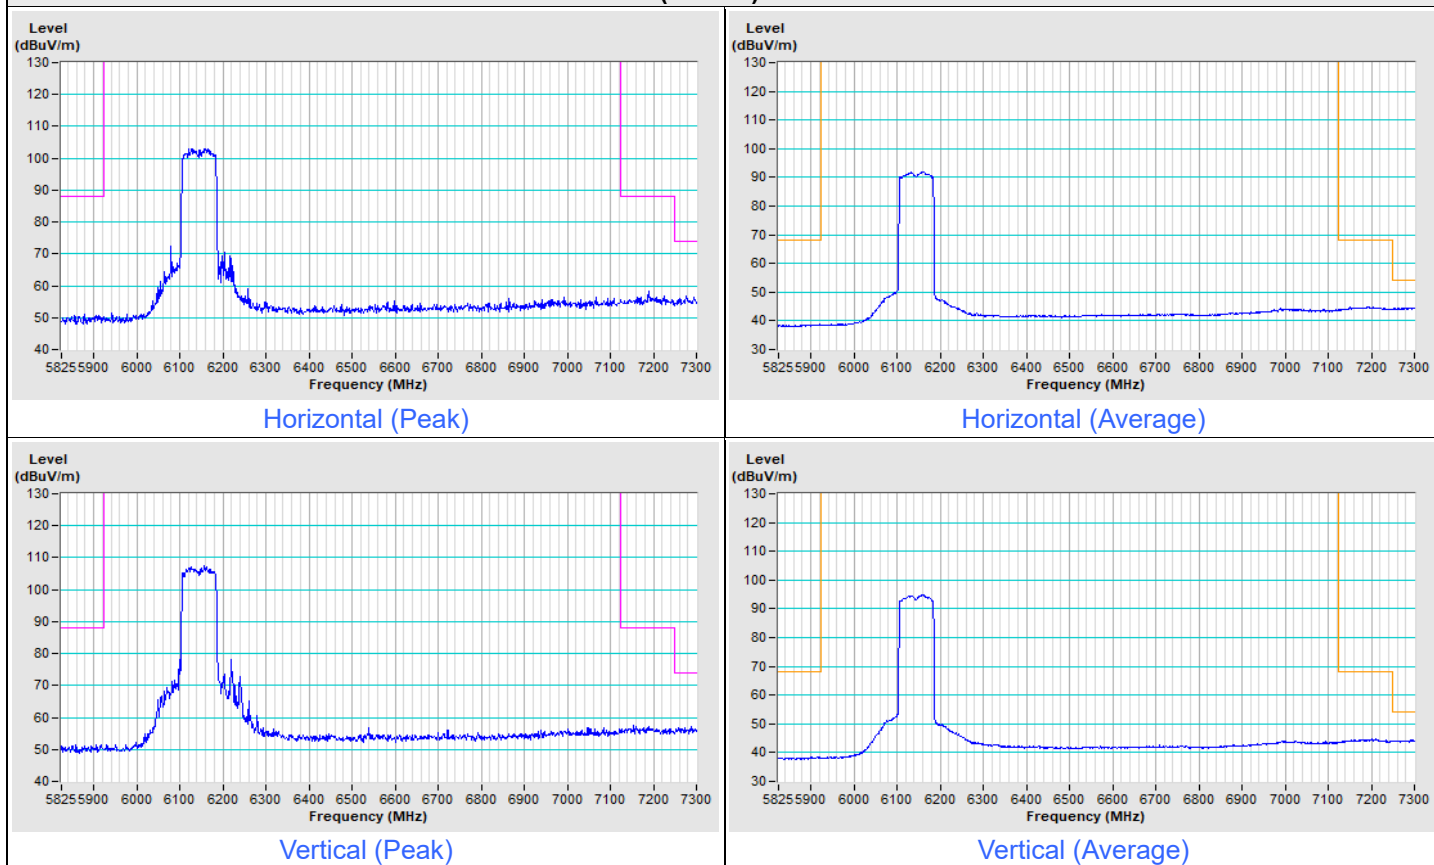


### 802.11be (EHT80) Channel 215

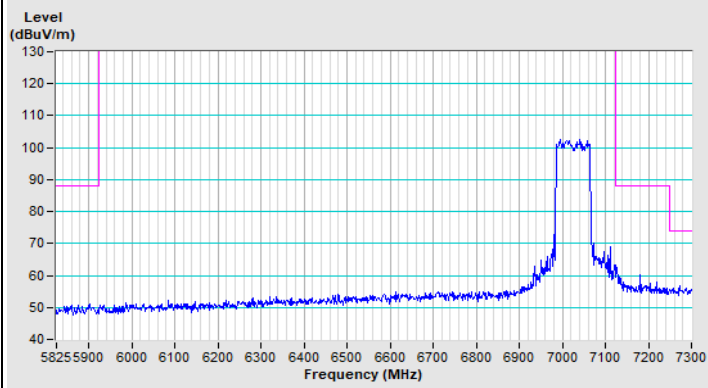


Horizontal (Peak)

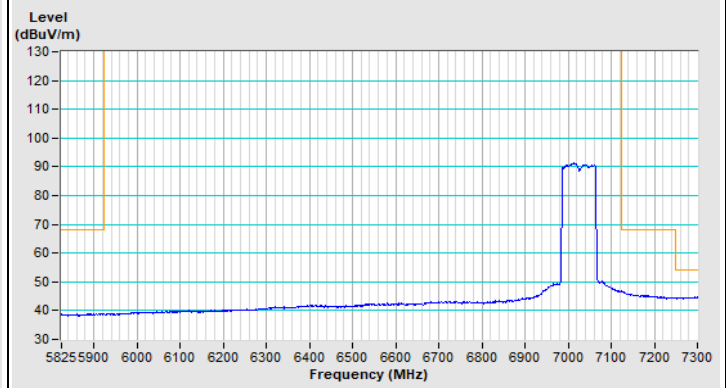

Horizontal (Average)

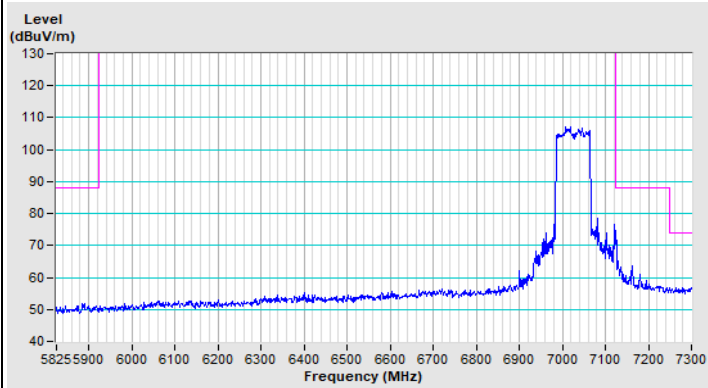

Vertical (Peak)

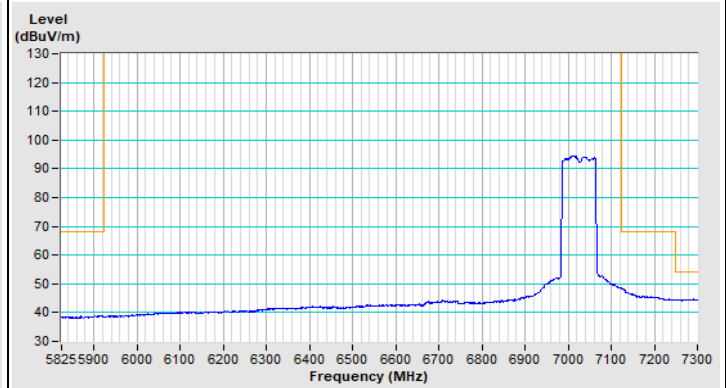


Vertical (Average)




Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


**802.11be (EHT160) Channel 47**

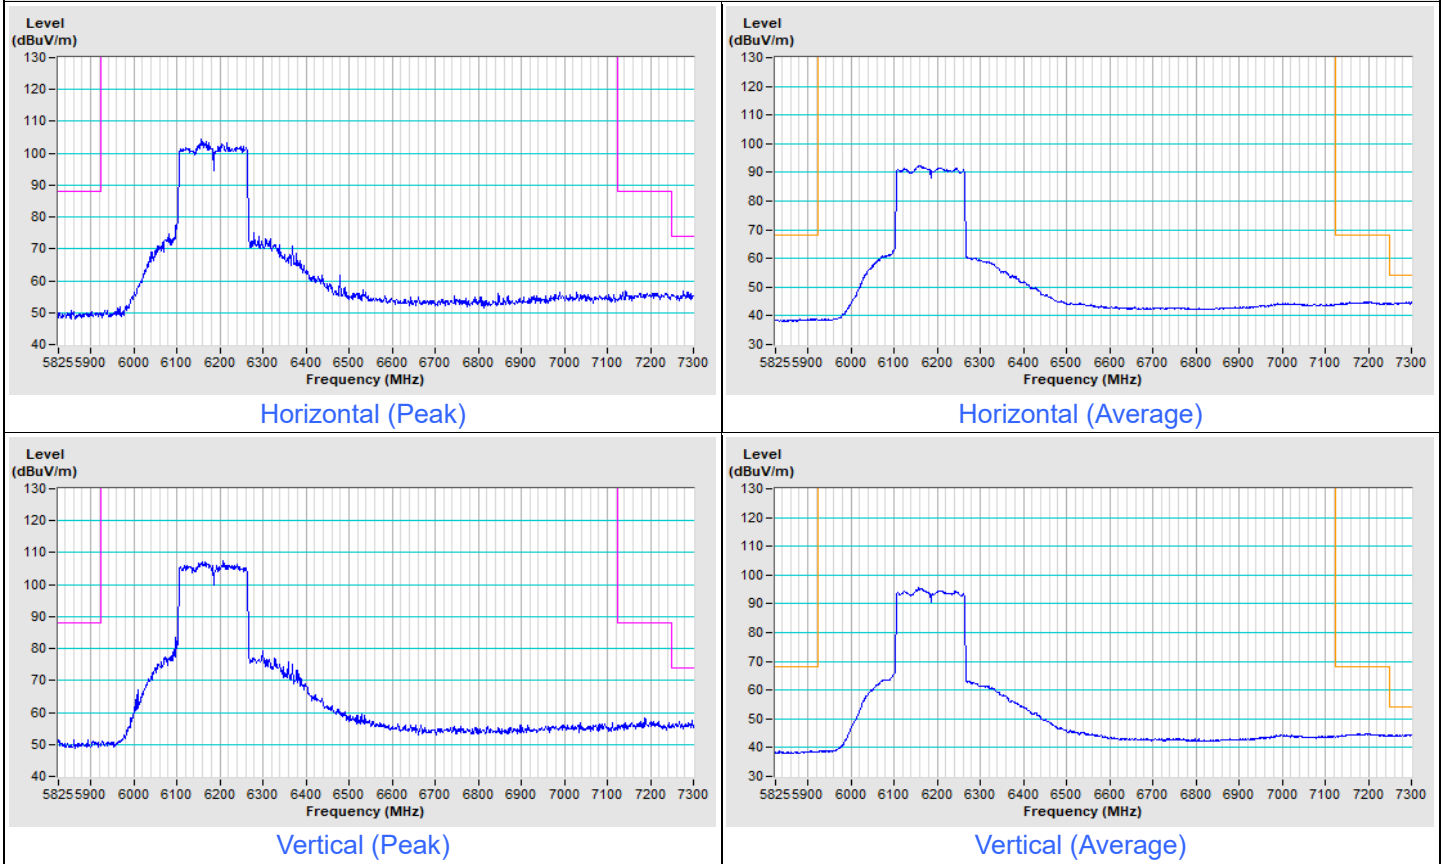


### 802.11be (EHT160) Channel 207

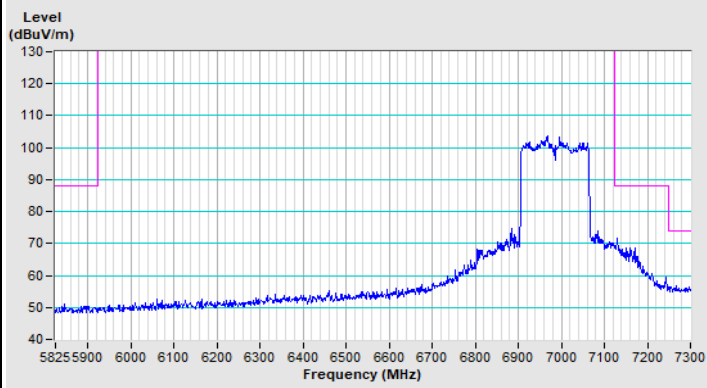


Horizontal (Peak)

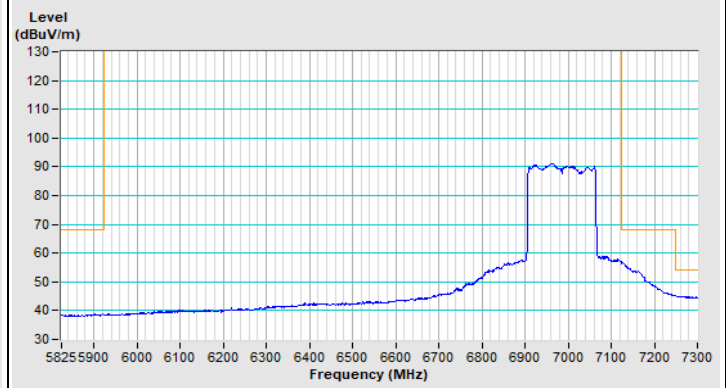

Horizontal (Average)

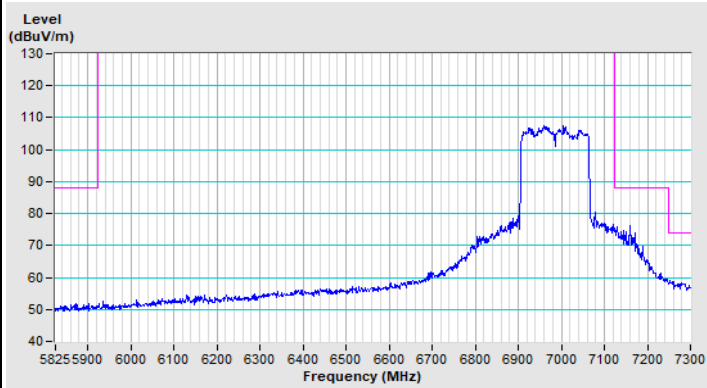


Vertical (Peak)

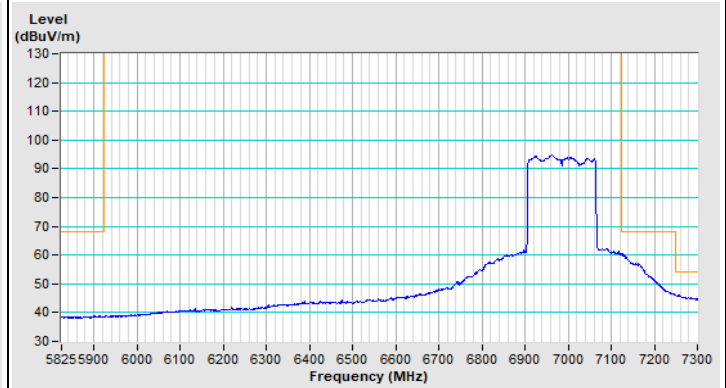


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


### 802.11be (EHT320) Channel 63

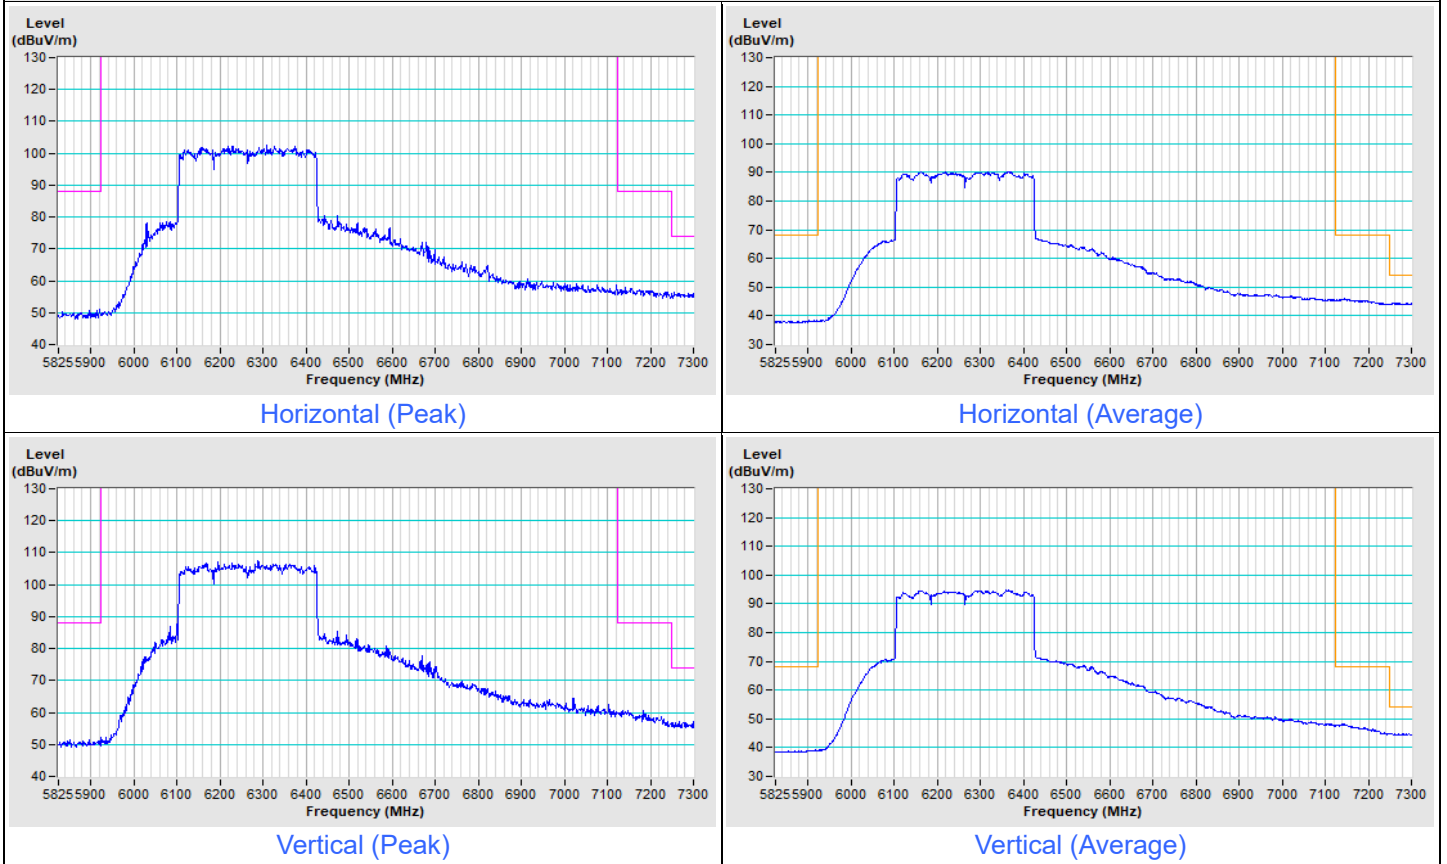


### 802.11be (EHT320) Channel 191

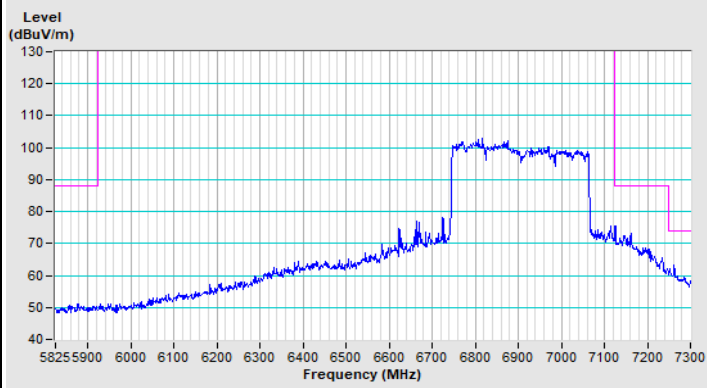


Horizontal (Peak)

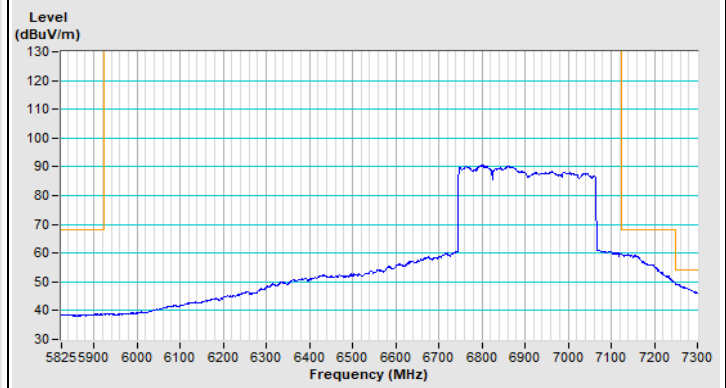

Horizontal (Average)

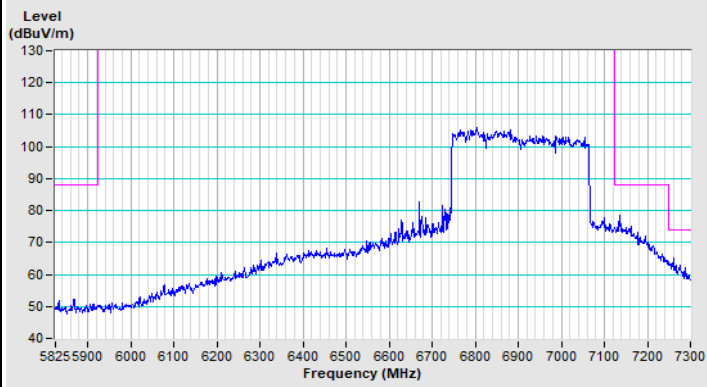

Vertical (Peak)

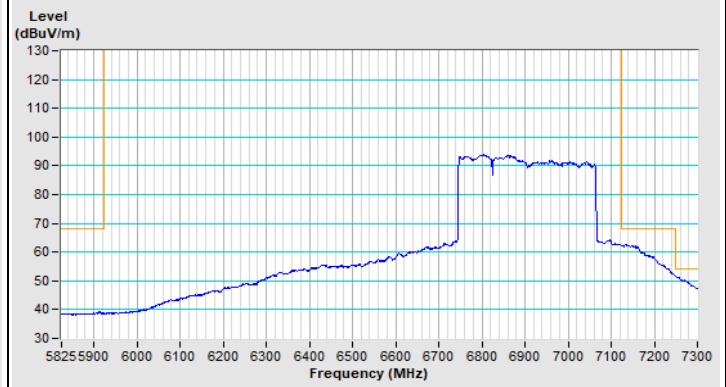

Vertical (Average)

**NSS2**

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 33 : 6115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.2 PK	88.2	-25.0	1.78 H	59	49.1	14.1
2	#5925.00	49.2 AV	68.2	-19.0	1.78 H	59	35.1	14.1
3	*6115.00	107.0 PK			1.78 H	59	61.7	45.3
4	*6115.00	93.6 AV			1.78 H	59	48.3	45.3
5	12230.00	60.2 PK	74.0	-13.8	2.19 H	167	39.2	21.0
6	12230.00	46.6 AV	54.0	-7.4	2.19 H	167	25.6	21.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.8 PK	88.2	-24.4	1.16 V	11	49.7	14.1
2	#5925.00	49.8 AV	68.2	-18.4	1.16 V	11	35.7	14.1
3	*6115.00	110.2 PK			1.16 V	11	64.9	45.3
4	*6115.00	97.1 AV			1.16 V	11	51.8	45.3
5	12230.00	60.8 PK	74.0	-13.2	1.94 V	172	39.8	21.0
6	12230.00	47.5 AV	54.0	-6.5	1.94 V	172	26.5	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 61 : 6255 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	107.2 PK			1.77 H	62	61.4	45.8
2	*6255.00	93.8 AV			1.77 H	62	48.0	45.8
3	12510.00	60.3 PK	74.0	-13.7	2.15 H	169	39.6	20.7
4	12510.00	46.5 AV	54.0	-7.5	2.15 H	169	25.8	20.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	110.5 PK			1.13 V	15	64.7	45.8
2	*6255.00	97.7 AV			1.13 V	15	51.9	45.8
3	12510.00	60.8 PK	74.0	-13.2	1.84 V	171	40.1	20.7
4	12510.00	47.6 AV	54.0	-6.4	1.84 V	171	26.9	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.9 PK			1.76 H	70	60.3	46.6
2	*6415.00	93.4 AV			1.76 H	70	46.8	46.6
3	#12830.00	60.2 PK	88.2	-28.0	2.25 H	180	38.6	21.6
4	#12830.00	46.3 AV	68.2	-21.9	2.25 H	180	24.7	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.3 PK			1.10 V	21	63.7	46.6
2	*6415.00	97.5 AV			1.10 V	21	50.9	46.6
3	#12830.00	60.8 PK	88.2	-27.4	1.99 V	180	39.2	21.6
4	#12830.00	47.5 AV	68.2	-20.7	1.99 V	180	25.9	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	107.0 PK			1.77 H	74	60.4	46.6
2	*6435.00	93.8 AV			1.77 H	74	47.2	46.6
3	#12870.00	60.3 PK	88.2	-27.9	2.15 H	161	38.7	21.6
4	#12870.00	46.2 AV	68.2	-22.0	2.15 H	161	24.6	21.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.4 PK			1.17 V	16	63.8	46.6
2	*6435.00	97.5 AV			1.17 V	16	50.9	46.6
3	#12870.00	60.9 PK	88.2	-27.3	1.95 V	183	39.3	21.6
4	#12870.00	47.5 AV	68.2	-20.7	1.95 V	183	25.9	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.2 PK			1.78 H	76	60.4	46.8
2	*6475.00	93.7 AV			1.78 H	76	46.9	46.8
3	#12950.00	60.3 PK	88.2	-27.9	2.15 H	169	38.5	21.8
4	#12950.00	46.8 AV	68.2	-21.4	2.15 H	169	25.0	21.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.6 PK			1.19 V	16	63.8	46.8
2	*6475.00	97.8 AV			1.19 V	16	51.0	46.8
3	#12950.00	60.8 PK	88.2	-27.4	1.99 V	174	39.0	21.8
4	#12950.00	47.6 AV	68.2	-20.6	1.99 V	174	25.8	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.2 PK			1.77 H	69	60.2	47.0
2	*6515.00	93.4 AV			1.77 H	69	46.4	47.0
3	#13030.00	60.5 PK	88.2	-27.7	2.11 H	159	38.6	21.9
4	#13030.00	46.7 AV	68.2	-21.5	2.11 H	159	24.8	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.4 PK			1.11 V	9	63.4	47.0
2	*6515.00	97.8 AV			1.11 V	9	50.8	47.0
3	#13030.00	60.9 PK	88.2	-27.3	1.85 V	169	39.0	21.9
4	#13030.00	47.6 AV	68.2	-20.6	1.85 V	169	25.7	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.0 PK			1.70 H	69	59.8	47.2
2	*6535.00	93.5 AV			1.70 H	69	46.3	47.2
3	#13070.00	60.2 PK	88.2	-28.0	2.19 H	170	38.2	22.0
4	#13070.00	46.3 AV	68.2	-21.9	2.19 H	170	24.3	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.6 PK			1.16 V	12	63.4	47.2
2	*6535.00	97.6 AV			1.16 V	12	50.4	47.2
3	#13070.00	60.9 PK	88.2	-27.3	1.91 V	183	38.9	22.0
4	#13070.00	47.5 AV	68.2	-20.7	1.91 V	183	25.5	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.4 PK			1.69 H	73	60.0	47.4
2	*6695.00	93.9 AV			1.69 H	73	46.5	47.4
3	13390.00	60.5 PK	74.0	-13.5	2.09 H	181	37.7	22.8
4	13390.00	46.7 AV	54.0	-7.3	2.09 H	181	23.9	22.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.8 PK			1.18 V	20	63.4	47.4
2	*6695.00	97.6 AV			1.18 V	20	50.2	47.4
3	13390.00	60.7 PK	74.0	-13.3	1.99 V	172	37.9	22.8
4	13390.00	47.5 AV	54.0	-6.5	1.99 V	172	24.7	22.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.1 PK			1.79 H	60	59.7	47.4
2	*6855.00	94.0 AV			1.79 H	60	46.6	47.4
3	#13710.00	60.2 PK	88.2	-28.0	2.25 H	159	36.7	23.5
4	#13710.00	46.3 AV	68.2	-21.9	2.25 H	159	22.8	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.6 PK			1.12 V	13	63.2	47.4
2	*6855.00	97.7 AV			1.12 V	13	50.3	47.4
3	#13710.00	60.8 PK	88.2	-27.4	1.90 V	181	37.3	23.5
4	#13710.00	47.5 AV	68.2	-20.7	1.90 V	181	24.0	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.2 PK			1.73 H	69	59.6	47.6
2	*6875.00	93.8 AV			1.73 H	69	46.2	47.6
3	#13750.00	60.5 PK	88.2	-27.7	2.19 H	155	36.9	23.6
4	#13750.00	46.7 AV	68.2	-21.5	2.19 H	155	23.1	23.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.6 PK			1.19 V	15	63.0	47.6
2	*6875.00	97.9 AV			1.19 V	15	50.3	47.6
3	#13750.00	60.9 PK	88.2	-27.3	1.89 V	177	37.3	23.6
4	#13750.00	47.8 AV	68.2	-20.4	1.89 V	177	24.2	23.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.4 PK			1.81 H	60	58.7	48.7
2	*6995.00	94.2 AV			1.81 H	60	45.5	48.7
3	#13990.00	60.8 PK	88.2	-27.4	2.26 H	179	36.3	24.5
4	#13990.00	47.0 AV	68.2	-21.2	2.26 H	179	22.5	24.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.4 PK			1.10 V	14	61.7	48.7
2	*6995.00	97.9 AV			1.10 V	14	49.2	48.7
3	#13990.00	62.6 PK	88.2	-25.6	1.99 V	170	38.1	24.5
4	#13990.00	49.1 AV	68.2	-19.1	1.99 V	170	24.6	24.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 229 : 7095 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.3 PK			1.79 H	64	58.7	48.6
2	*7095.00	93.8 AV			1.79 H	64	45.2	48.6
3	#14190.00	60.7 PK	88.2	-27.5	2.28 H	174	35.8	24.9
4	#14190.00	46.8 AV	68.2	-21.4	2.28 H	174	21.9	24.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	110.6 PK			1.10 V	18	62.0	48.6
2	*7095.00	97.8 AV			1.10 V	18	49.2	48.6
3	#14190.00	61.4 PK	88.2	-26.8	1.94 V	180	36.5	24.9
4	#14190.00	48.0 AV	68.2	-20.2	1.94 V	180	23.1	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.8 PK			1.74 H	63	41.0	48.8
2	*7115.00	77.4 AV			1.74 H	63	28.6	48.8
3	#7125.00	78.9 PK	88.2	-9.3	1.74 H	63	62.0	16.9
4	#7125.00	64.4 AV	68.2	-3.8	1.74 H	63	47.5	16.9
5	#14230.00	60.9 PK	88.2	-27.3	2.12 H	153	36.0	24.9
6	#14230.00	47.3 AV	68.2	-20.9	2.12 H	153	22.4	24.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.0 PK			1.16 V	11	44.2	48.8
2	*7115.00	80.4 AV			1.16 V	11	31.6	48.8
3	#7125.00	83.1 PK	88.2	-5.1	1.16 V	11	66.2	16.9
<b>4</b>	<b>#7125.00</b>	<b>68.1 AV</b>	<b>68.2</b>	<b>-0.1</b>	<b>1.16 V</b>	<b>11</b>	<b>51.2</b>	<b>16.9</b>
5	#14230.00	61.9 PK	88.2	-26.3	1.89 V	174	37.0	24.9
6	#14230.00	48.8 AV	68.2	-19.4	1.89 V	174	23.9	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 35 : 6125 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.0 PK	88.2	-25.2	1.79 H	55	48.9	14.1
2	#5925.00	49.0 AV	68.2	-19.2	1.79 H	55	34.9	14.1
3	*6125.00	107.1 PK			1.79 H	55	61.8	45.3
4	*6125.00	93.9 AV			1.79 H	55	48.6	45.3
5	12250.00	60.4 PK	74.0	-13.6	2.23 H	169	39.4	21.0
6	12250.00	46.5 AV	54.0	-7.5	2.23 H	169	25.5	21.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	1.20 V	15	49.8	14.1
2	#5925.00	49.7 AV	68.2	-18.5	1.20 V	15	35.6	14.1
3	*6125.00	110.4 PK			1.22 V	6	65.1	45.3
4	*6125.00	97.8 AV			1.22 V	6	52.5	45.3
5	12250.00	60.9 PK	74.0	-13.1	1.90 V	177	39.9	21.0
6	12250.00	47.7 AV	54.0	-6.3	1.90 V	177	26.7	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 59 : 6245 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	107.3 PK			1.77 H	52	61.6	45.7
2	*6245.00	93.7 AV			1.77 H	52	48.0	45.7
3	12490.00	60.2 PK	74.0	-13.8	2.26 H	159	39.5	20.7
4	12490.00	46.7 AV	54.0	-7.3	2.26 H	159	26.0	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	110.5 PK			1.19 V	17	64.8	45.7
2	*6245.00	97.5 AV			1.19 V	17	51.8	45.7
3	12490.00	60.7 PK	74.0	-13.3	1.99 V	175	40.0	20.7
4	12490.00	47.6 AV	54.0	-6.4	1.99 V	175	26.9	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.2 PK			1.81 H	55	60.6	46.6
2	*6405.00	93.4 AV			1.81 H	55	46.8	46.6
3	#12810.00	60.3 PK	88.2	-27.9	2.24 H	163	38.7	21.6
4	#12810.00	46.7 AV	68.2	-21.5	2.24 H	163	25.1	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.5 PK			1.19 V	14	63.9	46.6
2	*6405.00	97.2 AV			1.19 V	14	50.6	46.6
3	#12810.00	60.7 PK	88.2	-27.5	1.94 V	177	39.1	21.6
4	#12810.00	47.6 AV	68.2	-20.6	1.94 V	177	26.0	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	107.3 PK			1.71 H	63	60.7	46.6
2	*6445.00	93.7 AV			1.71 H	63	47.1	46.6
3	#12890.00	60.1 PK	88.2	-28.1	2.15 H	163	38.5	21.6
4	#12890.00	46.8 AV	68.2	-21.4	2.15 H	163	25.2	21.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	110.4 PK			1.21 V	10	63.8	46.6
2	*6445.00	97.3 AV			1.21 V	10	50.7	46.6
3	#12890.00	60.9 PK	88.2	-27.3	1.99 V	172	39.3	21.6
4	#12890.00	47.6 AV	68.2	-20.6	1.99 V	172	26.0	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	107.3 PK			1.77 H	56	60.4	46.9
2	*6485.00	93.5 AV			1.77 H	56	46.6	46.9
3	#12970.00	60.9 PK	88.2	-27.3	2.23 H	160	39.1	21.8
4	#12970.00	46.8 AV	68.2	-21.4	2.23 H	160	25.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.5 PK			1.16 V	15	63.6	46.9
2	*6485.00	97.4 AV			1.16 V	15	50.5	46.9
3	#12970.00	60.9 PK	88.2	-27.3	1.90 V	163	39.1	21.8
4	#12970.00	47.8 AV	68.2	-20.4	1.90 V	163	26.0	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	107.2 PK			1.84 H	62	60.2	47.0
2	*6525.00	93.8 AV			1.84 H	62	46.8	47.0
3	#13050.00	60.4 PK	88.2	-27.8	2.23 H	163	38.5	21.9
4	#13050.00	46.8 AV	68.2	-21.4	2.23 H	163	24.9	21.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	110.4 PK			1.25 V	17	63.4	47.0
2	*6525.00	97.2 AV			1.25 V	17	50.2	47.0
3	#13050.00	60.8 PK	88.2	-27.4	1.99 V	170	38.9	21.9
4	#13050.00	47.9 AV	68.2	-20.3	1.99 V	170	26.0	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	107.3 PK			1.81 H	67	60.0	47.3
2	*6565.00	93.8 AV			1.81 H	67	46.5	47.3
3	#13130.00	60.4 PK	88.2	-27.8	2.20 H	163	38.3	22.1
4	#13130.00	46.7 AV	68.2	-21.5	2.20 H	163	24.6	22.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.4 PK			1.18 V	10	63.1	47.3
2	*6565.00	97.2 AV			1.18 V	10	49.9	47.3
3	#13130.00	60.7 PK	88.2	-27.5	1.90 V	178	38.6	22.1
4	#13130.00	47.6 AV	68.2	-20.6	1.90 V	178	25.5	22.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 155 : 6725 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	107.3 PK			1.74 H	53	59.8	47.5
2	*6725.00	93.5 AV			1.74 H	53	46.0	47.5
3	#13450.00	60.5 PK	88.2	-27.7	2.15 H	169	37.3	23.2
4	#13450.00	46.9 AV	68.2	-21.3	2.15 H	169	23.7	23.2

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.5 PK			1.21 V	13	63.0	47.5
2	*6725.00	97.4 AV			1.21 V	13	49.9	47.5
3	#13450.00	61.1 PK	88.2	-27.1	1.99 V	178	37.9	23.2
4	#13450.00	47.9 AV	68.2	-20.3	1.99 V	178	24.7	23.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	107.2 PK			1.89 H	55	59.8	47.4
2	*6845.00	93.6 AV			1.89 H	55	46.2	47.4
3	#13690.00	60.7 PK	88.2	-27.5	2.12 H	161	37.2	23.5
4	#13690.00	47.3 AV	68.2	-20.9	2.12 H	161	23.8	23.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.5 PK			1.25 V	19	63.1	47.4
2	*6845.00	97.4 AV			1.25 V	19	50.0	47.4
3	#13690.00	61.5 PK	88.2	-26.7	1.90 V	177	38.0	23.5
4	#13690.00	48.3 AV	68.2	-19.9	1.90 V	177	24.8	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	107.2 PK			1.77 H	60	59.5	47.7
2	*6885.00	93.8 AV			1.77 H	60	46.1	47.7
3	#13770.00	60.1 PK	88.2	-28.1	2.16 H	168	36.3	23.8
4	#13770.00	46.8 AV	68.2	-21.4	2.16 H	168	23.0	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.4 PK			1.23 V	16	62.7	47.7
2	*6885.00	97.4 AV			1.23 V	16	49.7	47.7
3	#13770.00	61.0 PK	88.2	-27.2	1.98 V	177	37.2	23.8
4	#13770.00	48.2 AV	68.2	-20.0	1.98 V	177	24.4	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 211 : 7005 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	107.2 PK			1.72 H	61	58.4	48.8
2	*7005.00	93.8 AV			1.72 H	61	45.0	48.8
3	#14010.00	60.8 PK	88.2	-27.4	2.31 H	165	36.2	24.6
4	#14010.00	47.8 AV	68.2	-20.4	2.31 H	165	23.2	24.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	110.5 PK			1.25 V	18	61.7	48.8
2	*7005.00	97.4 AV			1.25 V	18	48.6	48.8
3	#14010.00	61.9 PK	88.2	-26.3	1.90 V	170	37.3	24.6
4	#14010.00	48.2 AV	68.2	-20.0	1.90 V	170	23.6	24.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	106.8 PK			1.89 H	55	58.2	48.6
2	*7085.00	93.7 AV			1.89 H	55	45.1	48.6
3	#7125.00	62.5 PK	88.2	-25.7	1.89 H	55	45.6	16.9
4	#7125.00	44.5 AV	68.2	-23.7	1.89 H	55	27.6	16.9
5	#14170.00	61.3 PK	88.2	-26.9	2.25 H	164	36.4	24.9
6	#14170.00	47.9 AV	68.2	-20.3	2.25 H	164	23.0	24.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.7 PK			1.22 V	8	62.1	48.6
2	*7085.00	97.5 AV			1.22 V	8	48.9	48.6
3	#7125.00	61.0 PK	88.2	-27.2	1.22 V	8	44.1	16.9
4	#7125.00	46.3 AV	68.2	-21.9	1.22 V	8	29.4	16.9
5	#14170.00	62.1 PK	88.2	-26.1	1.88 V	170	37.2	24.9
6	#14170.00	48.9 AV	68.2	-19.3	1.88 V	170	24.0	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 39 : 6145 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.1 PK	88.2	-25.1	1.80 H	55	49.0	14.1
2	#5925.00	49.4 AV	68.2	-18.8	1.80 H	55	35.3	14.1
3	*6145.00	107.3 PK			1.80 H	55	62.1	45.2
4	*6145.00	93.8 AV			1.80 H	55	48.6	45.2
5	12290.00	60.3 PK	74.0	-13.7	2.23 H	160	39.4	20.9
6	12290.00	46.8 AV	54.0	-7.2	2.23 H	160	25.9	20.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	1.22 V	8	49.8	14.1
2	#5925.00	49.8 AV	68.2	-18.4	1.22 V	8	35.7	14.1
3	*6145.00	110.3 PK			1.22 V	8	65.1	45.2
4	*6145.00	97.7 AV			1.22 V	8	52.5	45.2
5	12290.00	60.9 PK	74.0	-13.1	1.96 V	178	40.0	20.9
6	12290.00	47.8 AV	54.0	-6.2	1.96 V	178	26.9	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 55 : 6225 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	107.4 PK			1.77 H	64	61.8	45.6
2	*6225.00	93.4 AV			1.77 H	64	47.8	45.6
3	12450.00	60.3 PK	74.0	-13.7	2.13 H	166	39.7	20.6
4	12450.00	46.9 AV	54.0	-7.1	2.13 H	166	26.3	20.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.3 PK			1.19 V	15	64.7	45.6
2	*6225.00	97.5 AV			1.19 V	15	51.9	45.6
3	12450.00	60.9 PK	74.0	-13.1	1.88 V	169	40.3	20.6
4	12450.00	47.6 AV	54.0	-6.4	1.88 V	169	27.0	20.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.4 PK			1.81 H	63	60.8	46.6
2	*6385.00	93.5 AV			1.81 H	63	46.9	46.6
3	#12770.00	60.4 PK	88.2	-27.8	2.19 H	166	38.9	21.5
4	#12770.00	46.7 AV	68.2	-21.5	2.19 H	166	25.2	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.3 PK			1.28 V	12	63.7	46.6
2	*6385.00	97.4 AV			1.28 V	12	50.8	46.6
3	#12770.00	60.7 PK	88.2	-27.5	1.99 V	170	39.2	21.5
4	#12770.00	47.6 AV	68.2	-20.6	1.99 V	170	26.1	21.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.2 PK			1.89 H	50	60.5	46.7
2	*6465.00	93.6 AV			1.89 H	50	46.9	46.7
3	#12930.00	60.4 PK	88.2	-27.8	2.20 H	163	38.6	21.8
4	#12930.00	46.7 AV	68.2	-21.5	2.20 H	163	24.9	21.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.5 PK			1.18 V	19	63.8	46.7
2	*6465.00	97.6 AV			1.18 V	19	50.9	46.7
3	#12930.00	60.8 PK	88.2	-27.4	1.88 V	173	39.0	21.8
4	#12930.00	47.6 AV	68.2	-20.6	1.88 V	173	25.8	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.2 PK			1.88 H	54	60.0	47.2
2	*6545.00	93.8 AV			1.88 H	54	46.6	47.2
3	#13090.00	60.4 PK	88.2	-27.8	2.12 H	163	38.3	22.1
4	#13090.00	46.7 AV	68.2	-21.5	2.12 H	163	24.6	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.3 PK			1.24 V	10	63.1	47.2
2	*6545.00	97.4 AV			1.24 V	10	50.2	47.2
3	#13090.00	60.9 PK	88.2	-27.3	1.88 V	190	38.8	22.1
4	#13090.00	47.6 AV	68.2	-20.6	1.88 V	190	25.5	22.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 135 : 6625 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.2 PK			1.75 H	63	59.9	47.3
2	*6625.00	93.7 AV			1.75 H	63	46.4	47.3
3	13250.00	60.4 PK	74.0	-13.6	2.20 H	163	37.9	22.5
4	13250.00	46.7 AV	54.0	-7.3	2.20 H	163	24.2	22.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.3 PK			1.15 V	8	63.0	47.3
2	*6625.00	97.3 AV			1.15 V	8	50.0	47.3
3	13250.00	60.9 PK	74.0	-13.1	1.99 V	178	38.4	22.5
4	13250.00	47.7 AV	54.0	-6.3	1.99 V	178	25.2	22.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.4 PK			1.80 H	55	59.9	47.5
2	*6705.00	93.7 AV			1.80 H	55	46.2	47.5
3	#13410.00	60.5 PK	88.2	-27.7	2.21 H	163	37.6	22.9
4	#13410.00	46.7 AV	68.2	-21.5	2.21 H	163	23.8	22.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.4 PK			1.26 V	20	62.9	47.5
2	*6705.00	97.8 AV			1.26 V	20	50.3	47.5
3	#13410.00	60.9 PK	88.2	-27.3	1.86 V	180	38.0	22.9
4	#13410.00	47.9 AV	68.2	-20.3	1.86 V	180	25.0	22.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 167 : 6785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.0 PK			1.75 H	69	59.6	47.4
2	*6785.00	93.5 AV			1.75 H	69	46.1	47.4
3	#13570.00	60.8 PK	88.2	-27.4	2.31 H	169	37.2	23.6
4	#13570.00	47.0 AV	68.2	-21.2	2.31 H	169	23.4	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.3 PK			1.14 V	10	62.9	47.4
2	*6785.00	97.3 AV			1.14 V	10	49.9	47.4
3	#13570.00	60.8 PK	88.2	-27.4	1.99 V	162	37.2	23.6
4	#13570.00	47.8 AV	68.2	-20.4	1.99 V	162	24.2	23.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.3 PK			1.77 H	54	59.8	47.5
2	*6865.00	93.9 AV			1.77 H	54	46.4	47.5
3	#13730.00	60.5 PK	88.2	-27.7	2.16 H	170	36.9	23.6
4	#13730.00	46.9 AV	68.2	-21.3	2.16 H	170	23.3	23.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.4 PK			1.09 V	6	62.9	47.5
2	*6865.00	97.5 AV			1.09 V	6	50.0	47.5
3	#13730.00	60.9 PK	88.2	-27.3	1.99 V	168	37.3	23.6
4	#13730.00	47.8 AV	68.2	-20.4	1.99 V	168	24.2	23.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.2 PK			1.77 H	55	58.9	48.3
2	*6945.00	93.8 AV			1.77 H	55	45.5	48.3
3	#13890.00	60.8 PK	88.2	-27.4	2.14 H	178	36.9	23.9
4	#13890.00	47.2 AV	68.2	-21.0	2.14 H	178	23.3	23.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.5 PK			1.20 V	15	62.2	48.3
2	*6945.00	97.4 AV			1.20 V	15	49.1	48.3
3	#13890.00	61.3 PK	88.2	-26.9	1.99 V	170	37.4	23.9
4	#13890.00	48.2 AV	68.2	-20.0	1.99 V	170	24.3	23.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*7025.00	107.6 PK			1.78 H	58	58.9	48.7
2	*7025.00	94.1 AV			1.78 H	58	45.4	48.7
3	#7125.00	62.8 PK	88.2	-25.4	1.78 H	58	45.9	16.9
4	#7125.00	44.7 AV	68.2	-23.5	1.78 H	58	27.8	16.9
5	#14050.00	60.9 PK	88.2	-27.3	2.24 H	165	36.2	24.7
6	#14050.00	47.0 AV	68.2	-21.2	2.24 H	165	22.3	24.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*7025.00	111.0 PK			1.18 V	9	62.3	48.7
2	*7025.00	98.1 AV			1.18 V	9	49.4	48.7
3	#7125.00	66.1 PK	88.2	-22.1	1.18 V	9	49.2	16.9
4	#7125.00	46.5 AV	68.2	-21.7	1.18 V	9	29.6	16.9
5	#14050.00	61.5 PK	88.2	-26.7	1.99 V	170	36.8	24.7
6	#14050.00	48.1 AV	68.2	-20.1	1.99 V	170	23.4	24.7

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.3 PK	88.2	-24.9	1.77 H	60	49.2	14.1
2	#5925.00	49.4 AV	68.2	-18.8	1.77 H	60	35.3	14.1
3	*6185.00	106.4 PK			1.77 H	60	61.0	45.4
4	*6185.00	93.7 AV			1.77 H	60	48.3	45.4
5	12370.00	60.3 PK	74.0	-13.7	2.24 H	160	39.6	20.7
6	12370.00	46.8 AV	54.0	-7.2	2.24 H	160	26.1	20.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.8 PK	88.2	-24.4	1.18 V	12	49.7	14.1
2	#5925.00	49.9 AV	68.2	-18.3	1.18 V	12	35.8	14.1
3	*6185.00	110.0 PK			1.13 V	13	64.6	45.4
4	*6185.00	97.2 AV			1.13 V	13	51.8	45.4
5	12370.00	60.8 PK	74.0	-13.2	1.99 V	180	40.1	20.7
6	12370.00	47.6 AV	54.0	-6.4	1.99 V	180	26.9	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.1 PK			1.70 H	66	60.6	46.5
2	*6345.00	93.8 AV			1.70 H	66	47.3	46.5
3	12690.00	60.5 PK	74.0	-13.5	2.18 H	163	39.2	21.3
4	12690.00	46.9 AV	54.0	-7.1	2.18 H	163	25.6	21.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.4 PK			1.18 V	14	63.9	46.5
2	*6345.00	97.3 AV			1.18 V	14	50.8	46.5
3	12690.00	60.9 PK	74.0	-13.1	1.98 V	170	39.6	21.3
4	12690.00	47.6 AV	54.0	-6.4	1.98 V	170	26.3	21.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.2 PK			1.79 H	62	60.2	47.0
2	*6505.00	93.8 AV			1.79 H	62	46.8	47.0
3	#13010.00	60.5 PK	88.2	-27.7	2.14 H	178	38.6	21.9
4	#13010.00	46.8 AV	68.2	-21.4	2.14 H	178	24.9	21.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.5 PK			1.19 V	10	63.5	47.0
2	*6505.00	97.3 AV			1.19 V	10	50.3	47.0
3	#13010.00	60.9 PK	88.2	-27.3	1.99 V	168	39.0	21.9
4	#13010.00	47.8 AV	68.2	-20.4	1.99 V	168	25.9	21.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.4 PK			1.81 H	64	60.1	47.3
2	*6665.00	93.8 AV			1.81 H	64	46.5	47.3
3	13330.00	60.4 PK	74.0	-13.6	2.13 H	158	37.7	22.7
4	13330.00	46.8 AV	54.0	-7.2	2.13 H	158	24.1	22.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.5 PK			1.20 V	7	63.2	47.3
2	*6665.00	68.4 AV			1.20 V	7	21.1	47.3
3	13330.00	60.9 PK	74.0	-13.1	1.99 V	170	38.2	22.7
4	13330.00	47.8 AV	54.0	-6.2	1.99 V	170	25.1	22.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.3 PK			1.74 H	64	59.9	47.4
2	*6825.00	93.8 AV			1.74 H	64	46.4	47.4
3	#13650.00	60.4 PK	88.2	-27.8	2.21 H	163	36.9	23.5
4	#13650.00	46.9 AV	68.2	-21.3	2.21 H	163	23.4	23.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.4 PK			1.14 V	18	63.0	47.4
2	*6825.00	97.5 AV			1.14 V	18	50.1	47.4
3	#13650.00	61.3 PK	88.2	-26.9	1.99 V	170	37.8	23.5
4	#13650.00	48.1 AV	68.2	-20.1	1.99 V	170	24.6	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.7 PK			1.75 H	61	58.0	48.7
2	*6985.00	93.8 AV			1.75 H	61	45.1	48.7
3	#7125.00	71.5 PK	88.2	-16.7	1.75 H	61	54.6	16.9
4	#7125.00	53.7 AV	68.2	-14.5	1.75 H	61	36.8	16.9
5	#13970.00	61.0 PK	88.2	-27.2	2.25 H	159	36.7	24.3
6	#13970.00	47.2 AV	68.2	-21.0	2.25 H	159	22.9	24.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.2 PK			1.14 V	13	61.5	48.7
2	*6985.00	97.0 AV			1.14 V	13	48.3	48.7
3	#7125.00	74.3 PK	88.2	-13.9	1.14 V	13	57.4	16.9
4	#7125.00	56.9 AV	68.2	-11.3	1.14 V	13	40.0	16.9
5	#13970.00	61.9 PK	88.2	-26.3	1.90 V	169	37.6	24.3
6	#13970.00	48.4 AV	68.2	-19.8	1.90 V	169	24.1	24.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.3 PK	88.2	-24.9	1.77 H	56	49.2	14.1
2	#5925.00	49.4 AV	68.2	-18.8	1.77 H	56	35.3	14.1
3	*6265.00	107.3 PK			1.77 H	56	61.5	45.8
4	*6265.00	93.7 AV			1.77 H	56	47.9	45.8
5	12530.00	60.3 PK	74.0	-13.7	2.25 H	163	39.5	20.8
6	12530.00	46.9 AV	54.0	-7.1	2.25 H	163	26.1	20.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.7 PK	88.2	-24.5	1.12 V	3	49.6	14.1
2	#5925.00	49.6 AV	68.2	-18.6	1.12 V	3	35.5	14.1
3	*6265.00	109.7 PK			1.12 V	3	63.9	45.8
4	*6265.00	97.1 AV			1.12 V	3	51.3	45.8
5	12530.00	60.8 PK	74.0	-13.2	1.90 V	168	40.0	20.8
6	12530.00	47.4 AV	54.0	-6.6	1.90 V	168	26.6	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 95 : 6425 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.0 PK			1.78 H	55	60.4	46.6
2	*6425.00	93.7 AV			1.78 H	55	47.1	46.6
3	#12850.00	60.5 PK	88.2	-27.7	2.13 H	165	38.9	21.6
4	#12850.00	46.8 AV	68.2	-21.4	2.13 H	165	25.2	21.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.4 PK			1.12 V	5	63.8	46.6
2	*6425.00	97.3 AV			1.12 V	5	50.7	46.6
3	#12850.00	60.9 PK	88.2	-27.3	1.89 V	177	39.3	21.6
4	#12850.00	47.8 AV	68.2	-20.4	1.89 V	177	26.2	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.2 PK			1.88 H	56	59.9	47.3
2	*6585.00	93.9 AV			1.88 H	56	46.6	47.3
3	#13170.00	60.5 PK	88.2	-27.7	2.23 H	164	38.2	22.3
4	#13170.00	46.8 AV	68.2	-21.4	2.23 H	164	24.5	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.4 PK			1.20 V	19	63.1	47.3
2	*6585.00	97.4 AV			1.20 V	19	50.1	47.3
3	#13170.00	61.0 PK	88.2	-27.2	1.99 V	163	38.7	22.3
4	#13170.00	47.9 AV	68.2	-20.3	1.99 V	163	25.6	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 159 : 6745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.4 PK			1.77 H	60	59.8	47.6
2	*6745.00	93.7 AV			1.77 H	60	46.1	47.6
3	#13490.00	60.7 PK	88.2	-27.5	2.13 H	160	37.2	23.5
4	#13490.00	47.2 AV	68.2	-21.0	2.13 H	160	23.7	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.2 PK			1.12 V	18	62.6	47.6
2	*6745.00	96.8 AV			1.12 V	18	49.2	47.6
3	#13490.00	60.7 PK	88.2	-27.5	1.89 V	175	37.2	23.5
4	#13490.00	47.6 AV	68.2	-20.6	1.89 V	175	24.1	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 67% RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.3 PK			1.77 H	58	59.4	47.9
2	*6905.00	94.5 AV			1.77 H	58	46.6	47.9
3	#7125.00	76.5 PK	88.2	-11.7	1.77 H	58	59.6	16.9
4	#7125.00	62.2 AV	68.2	-6.0	1.77 H	58	45.3	16.9
5	7250.00	65.0 PK	74.0	-9.0	1.77 H	58	47.6	17.4
6	7250.00	50.1 AV	54.0	-3.9	1.77 H	58	32.7	17.4
7	#13810.00	61.5 PK	88.2	-26.7	2.24 H	162	37.7	23.8
8	#13810.00	48.3 AV	68.2	-19.9	2.24 H	162	24.5	23.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.6 PK			1.20 V	6	62.7	47.9
2	*6905.00	97.1 AV			1.20 V	6	49.2	47.9
3	#7125.00	79.6 PK	88.2	-8.6	1.20 V	3	62.7	16.9
4	#7125.00	65.1 AV	68.2	-3.1	1.20 V	3	48.2	16.9
5	7250.00	67.7 PK	74.0	-6.3	1.20 V	3	50.3	17.4
6	7250.00	53.8 AV	54.0	-0.2	1.20 V	3	36.4	17.4
7	#13810.00	61.9 PK	88.2	-26.3	1.96 V	170	38.1	23.8
8	#13810.00	48.3 AV	68.2	-19.9	1.96 V	170	24.5	23.8


**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


### NSS2 Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


#### 802.11be (EHT20) Channel 33

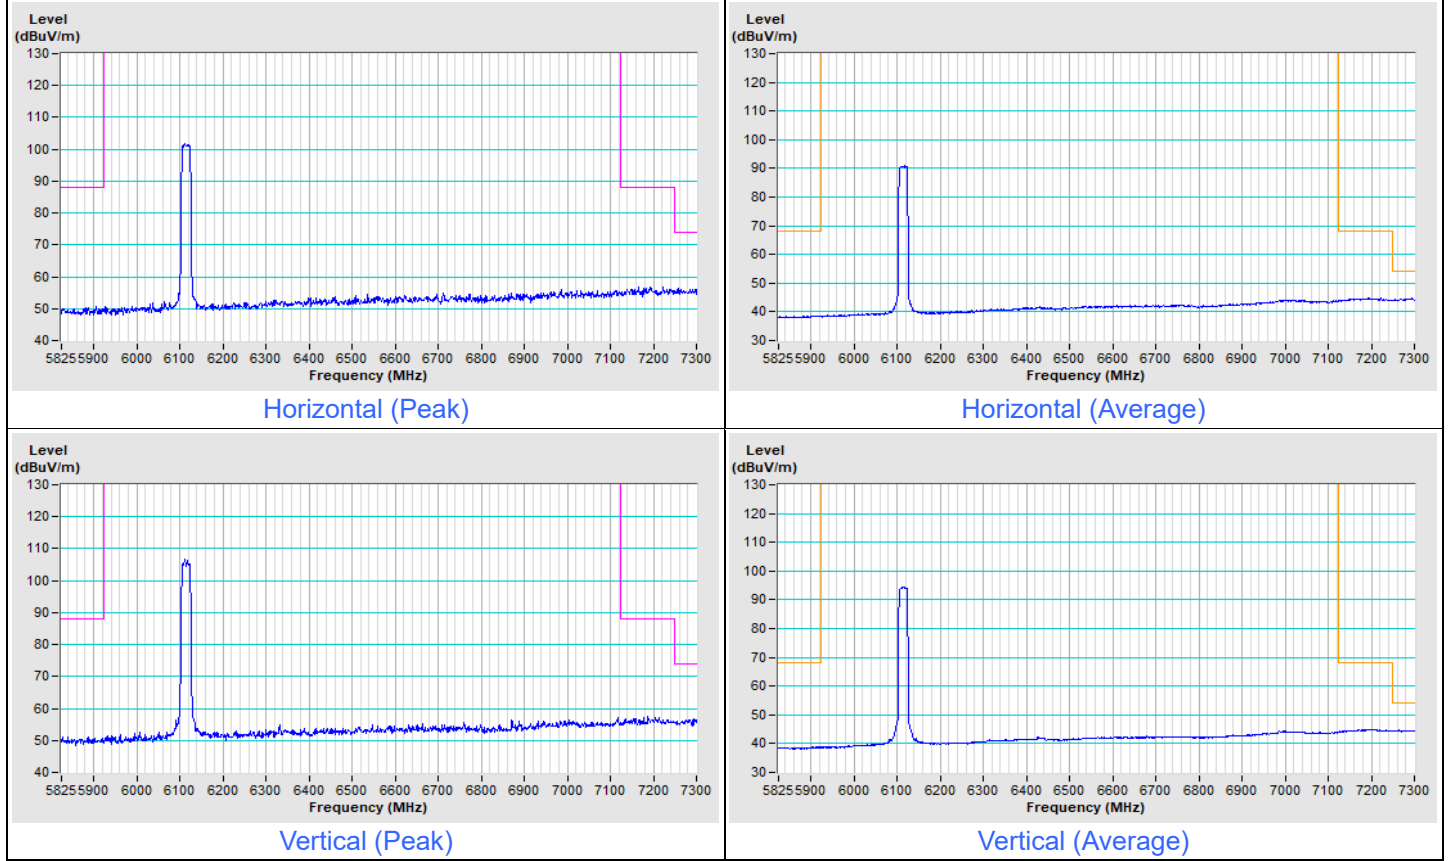


### 802.11be (EHT20) Channel 233

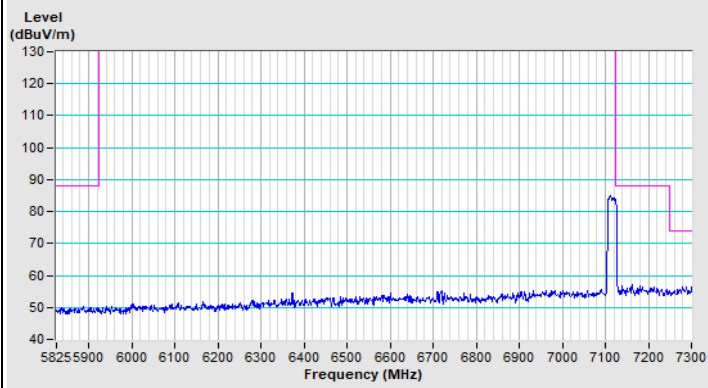


Horizontal (Peak)

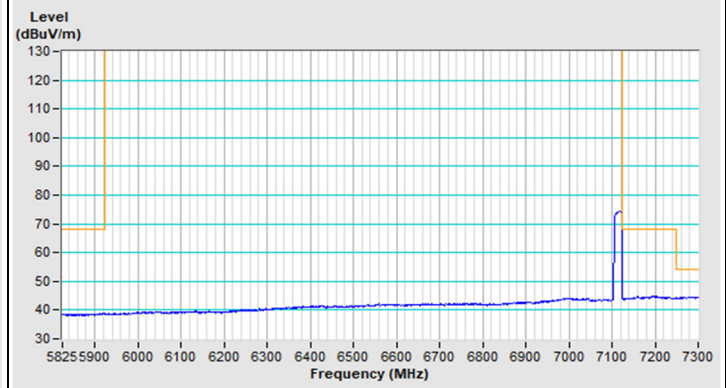

Horizontal (Average)

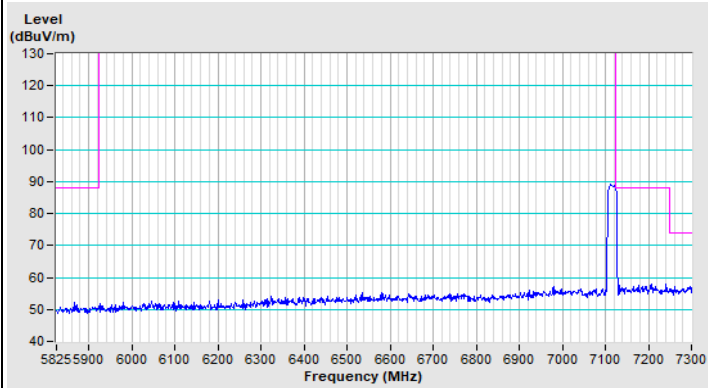


Vertical (Peak)

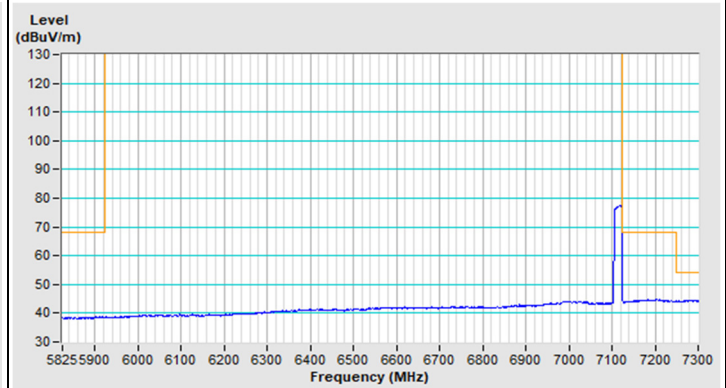


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


### 802.11be (EHT40) Channel 35

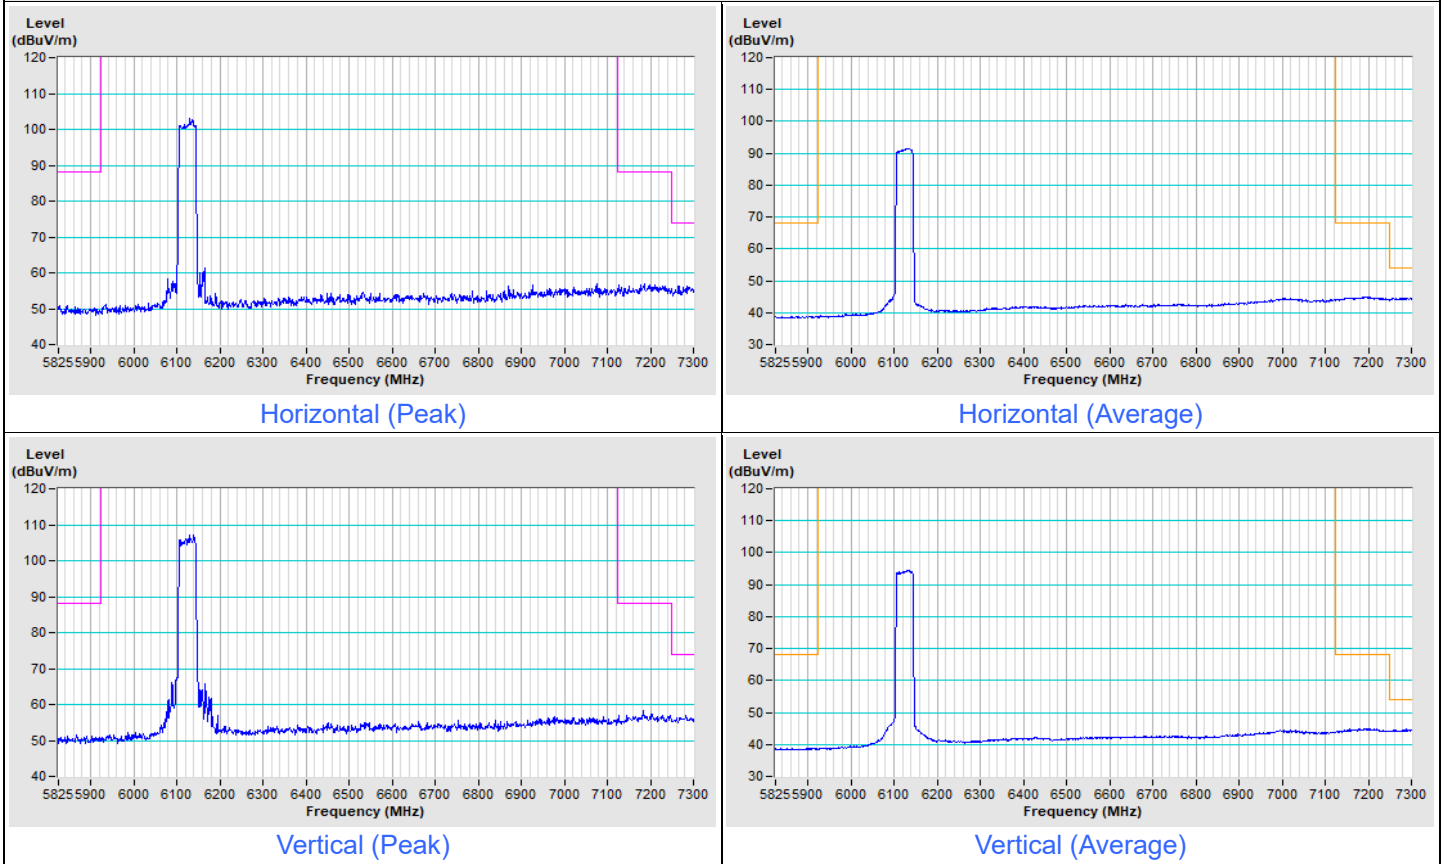


### 802.11be (EHT40) Channel 227

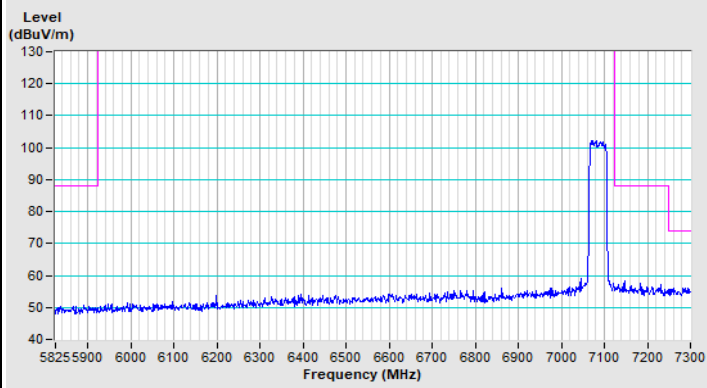


Horizontal (Peak)

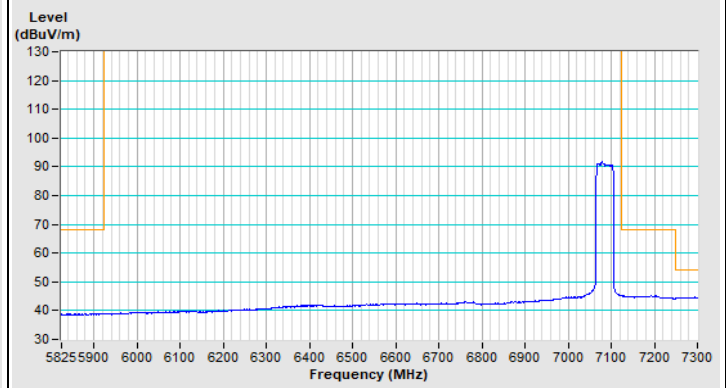

Horizontal (Average)

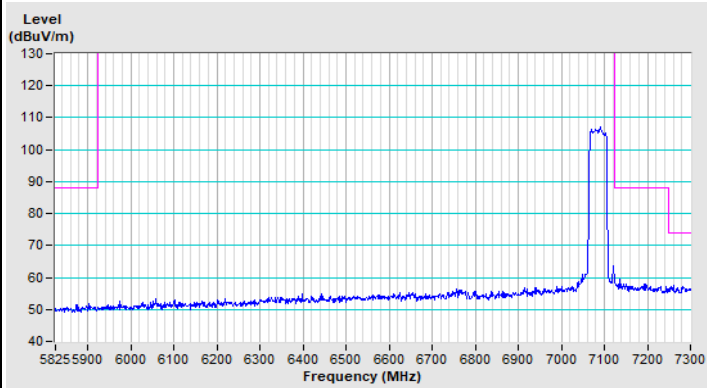


Vertical (Peak)

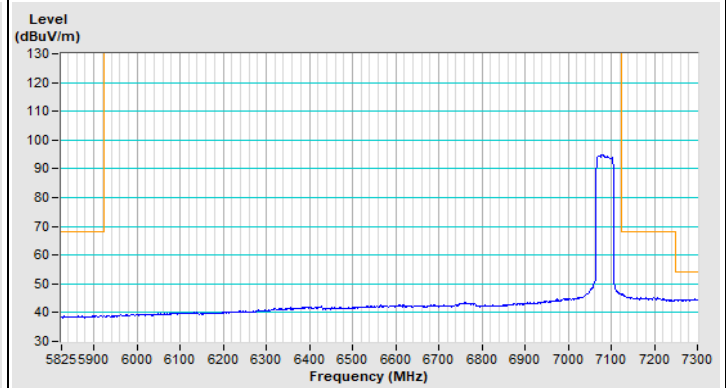

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11be (EHT80) Channel 39**

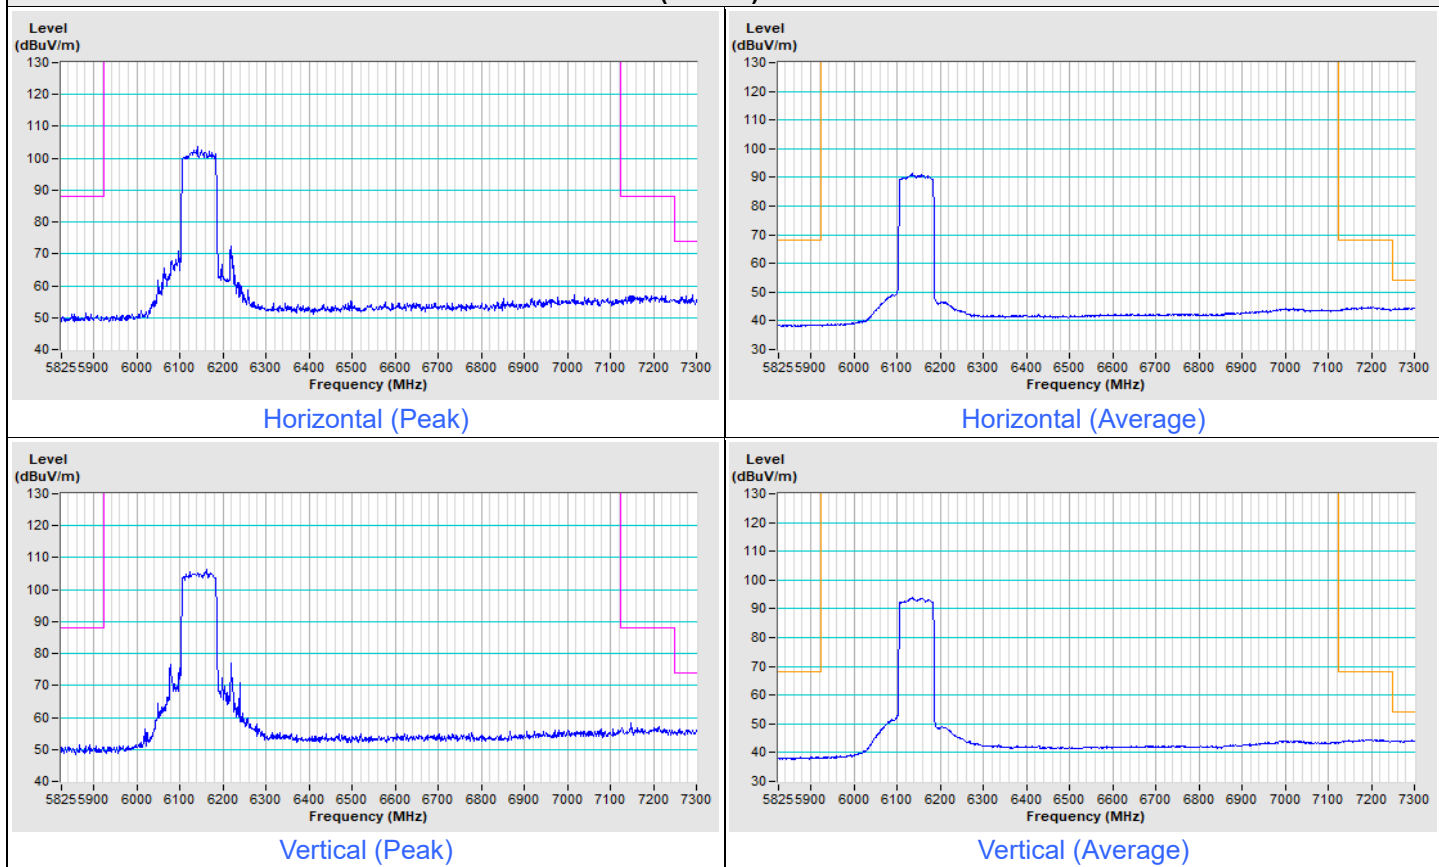





### 802.11be (EHT80) Channel 215

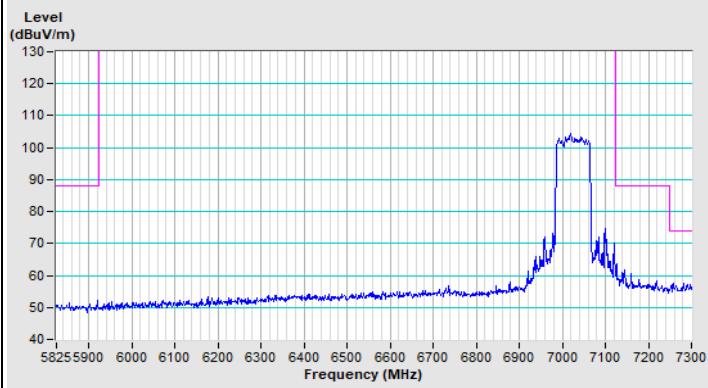


Horizontal (Peak)

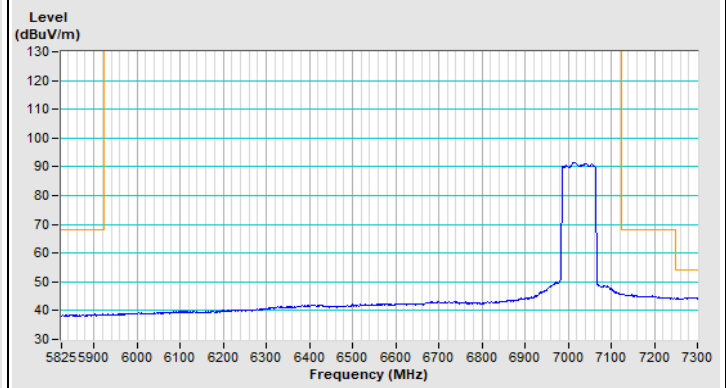

Horizontal (Average)

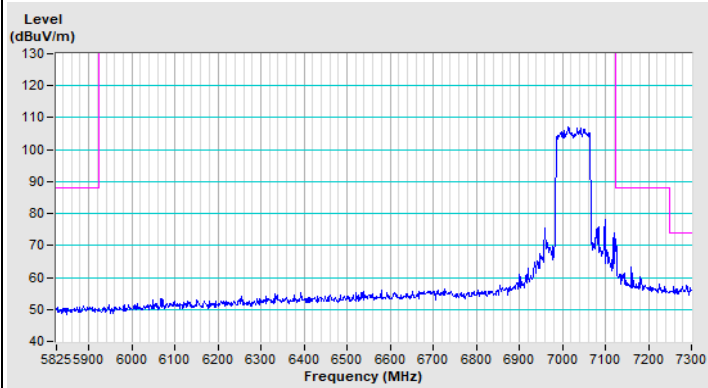

Vertical (Peak)

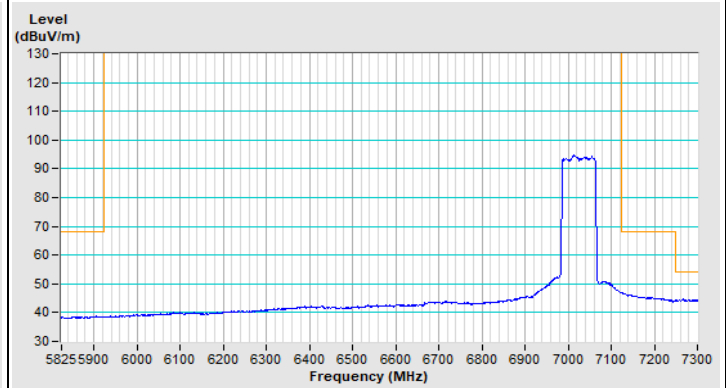


Vertical (Average)




Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


### 802.11be (EHT160) Channel 47

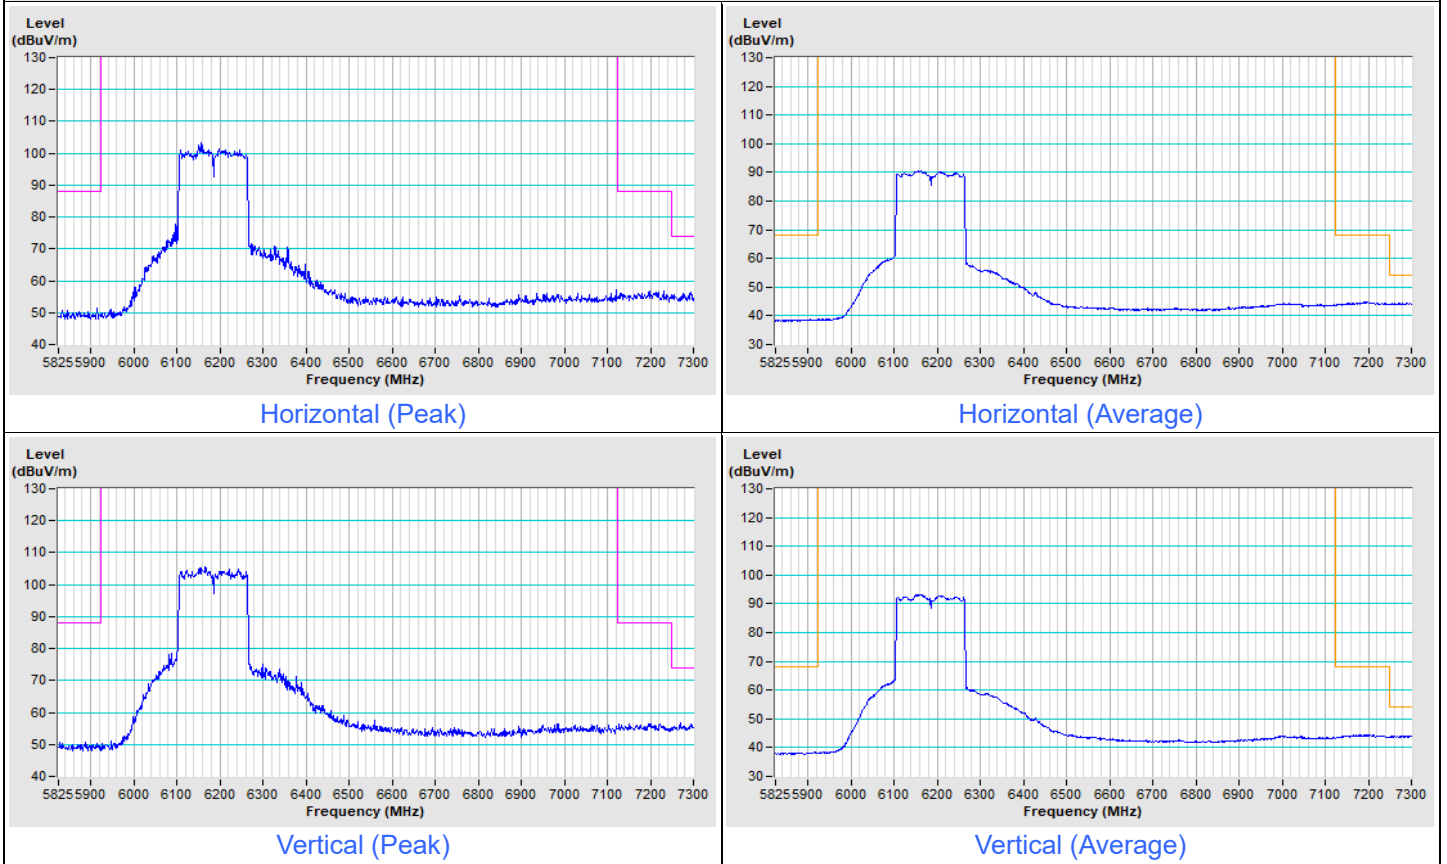


### 802.11be (EHT160) Channel 207

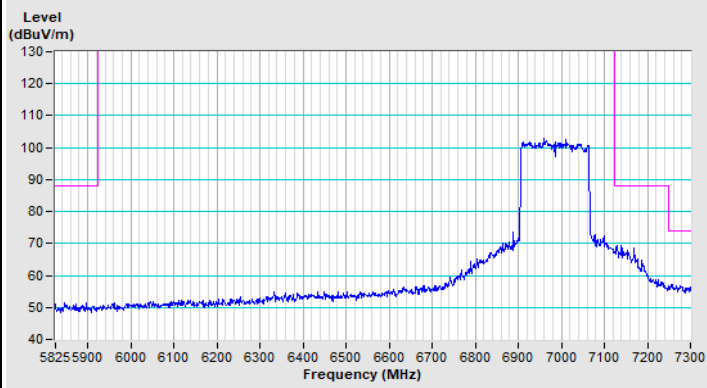


Horizontal (Peak)

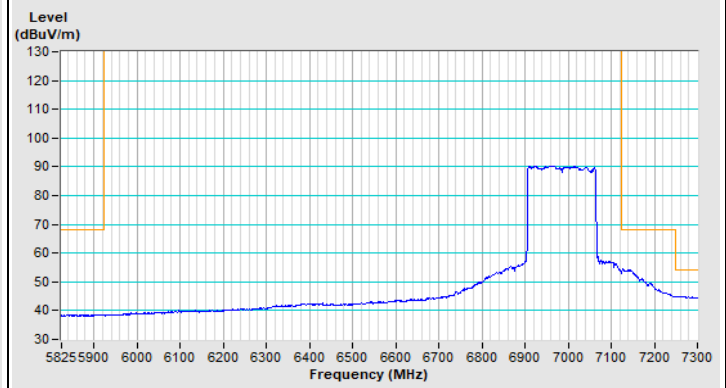

Horizontal (Average)

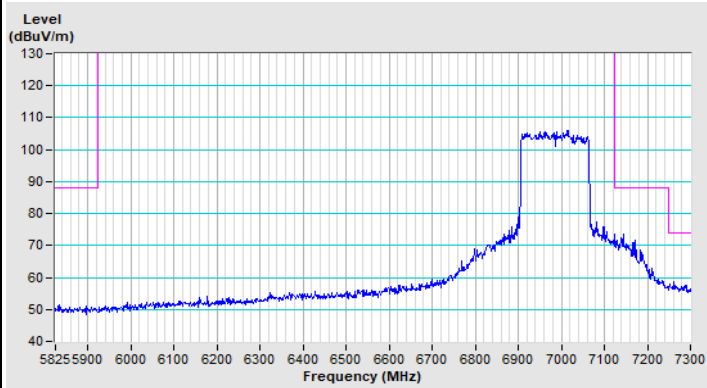


Vertical (Peak)

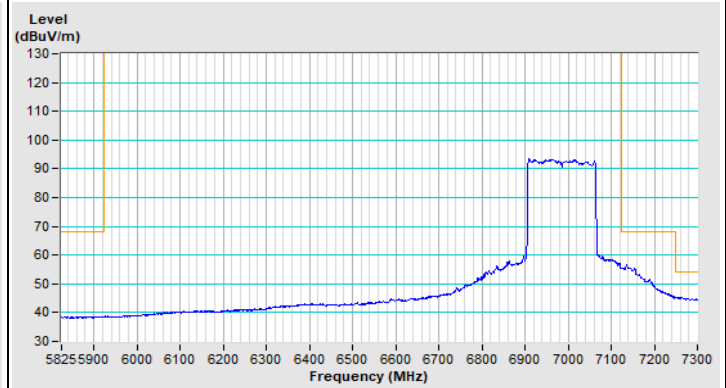


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


**802.11be (EHT320) Channel 63**

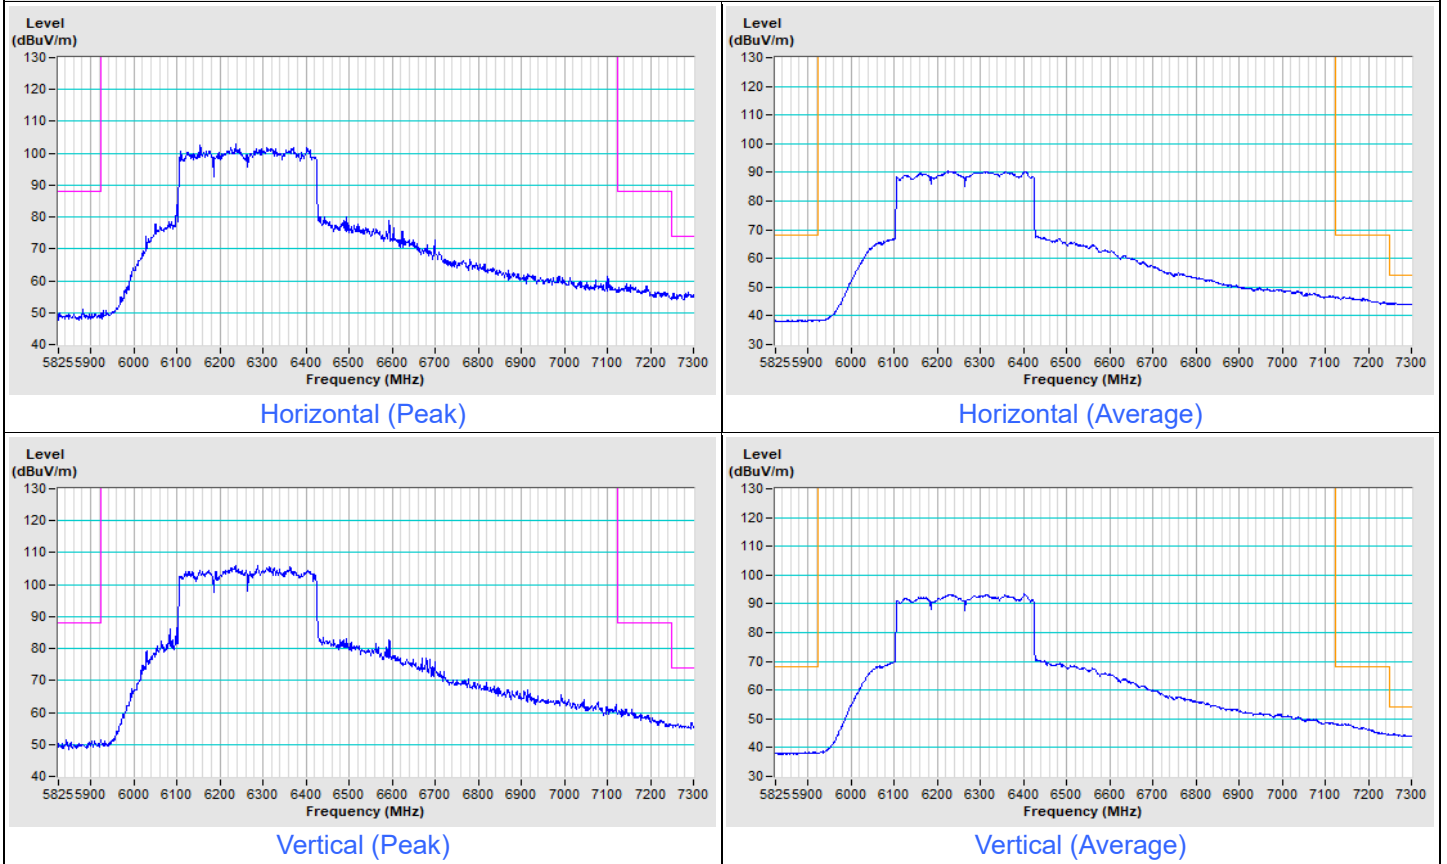


### 802.11be (EHT320) Channel 191

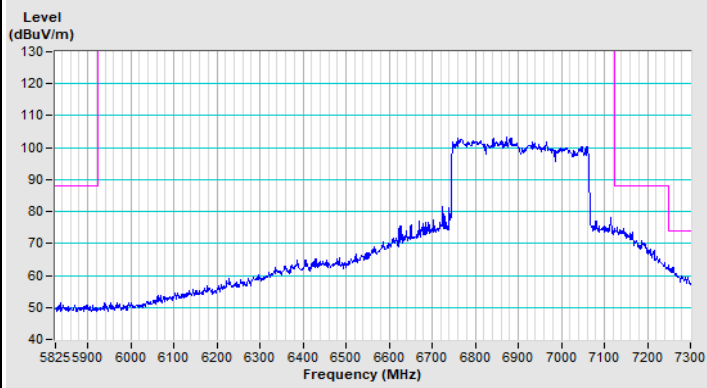


Horizontal (Peak)

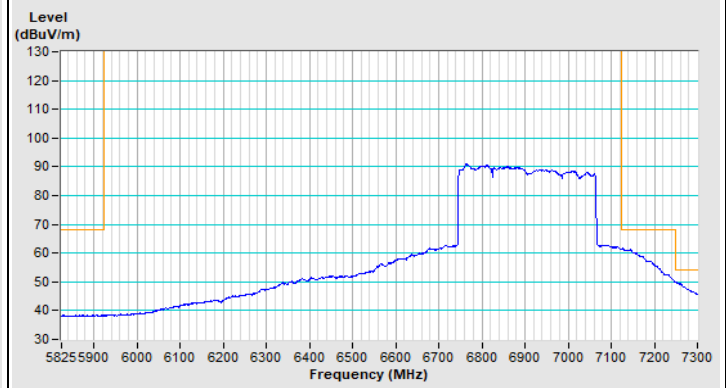

Horizontal (Average)

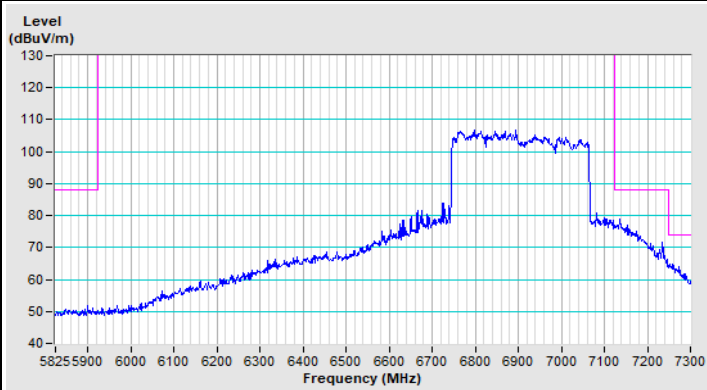

Vertical (Peak)

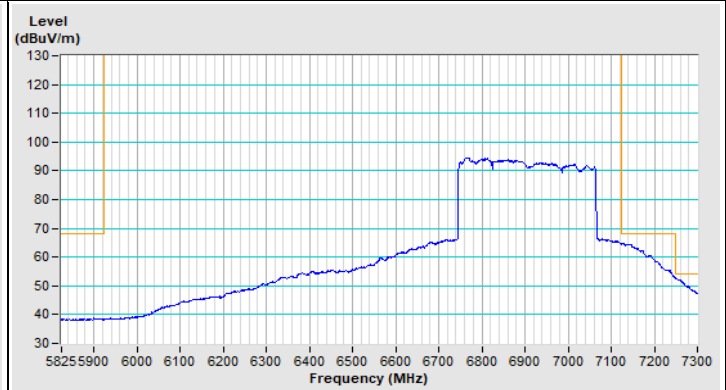

Vertical (Average)

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---