




### Plots of EUT ceased transmission in the time domain

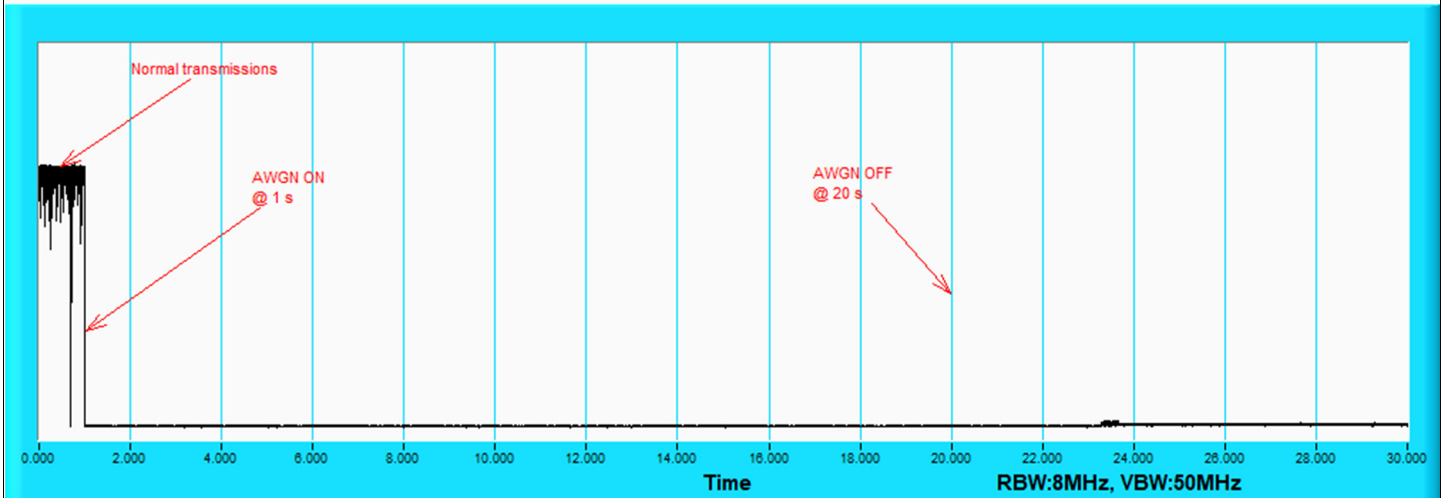

802.11be (EHT20) / CH105

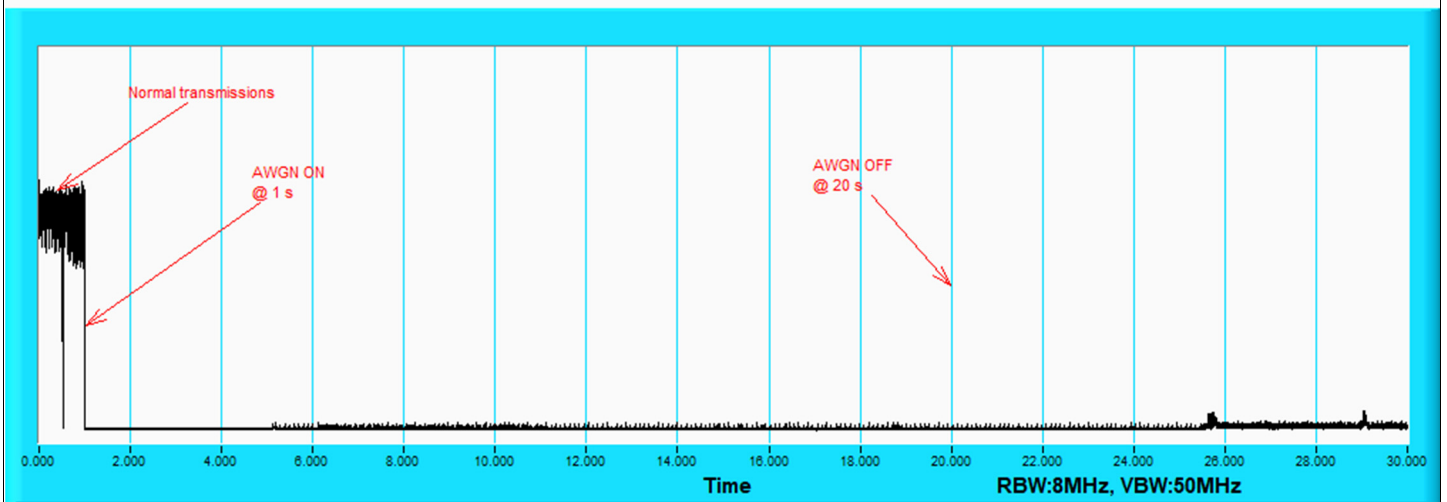


802.11be (EHT320) / CH95(Low Edge)

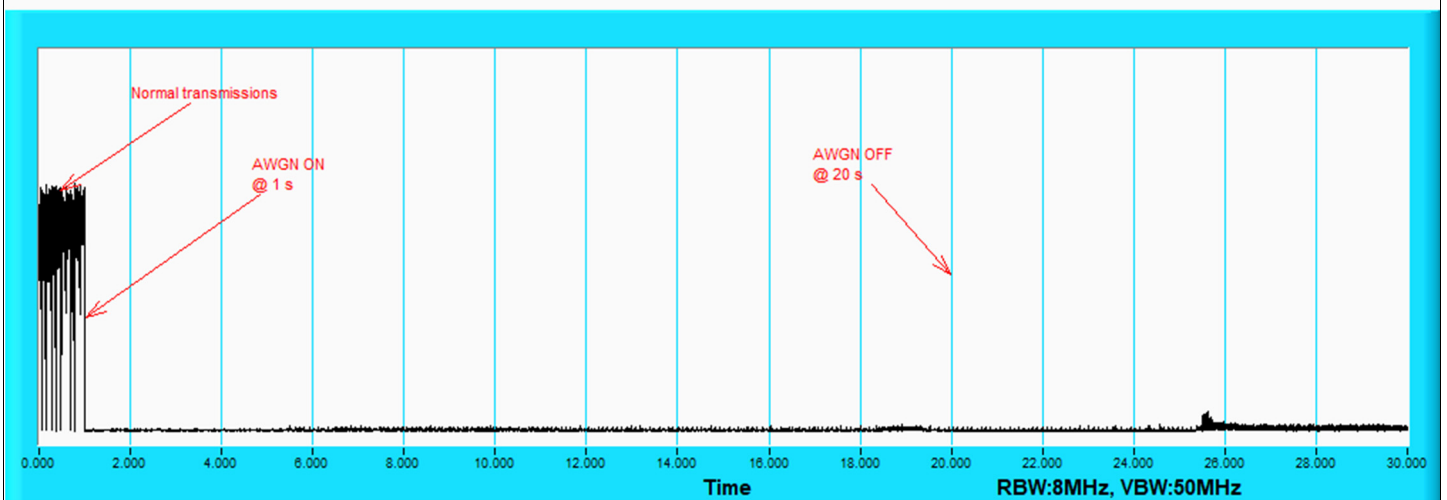

802.11be (EHT320) / CH95(Middle)

Plots of EUT ceased transmission in the time domain

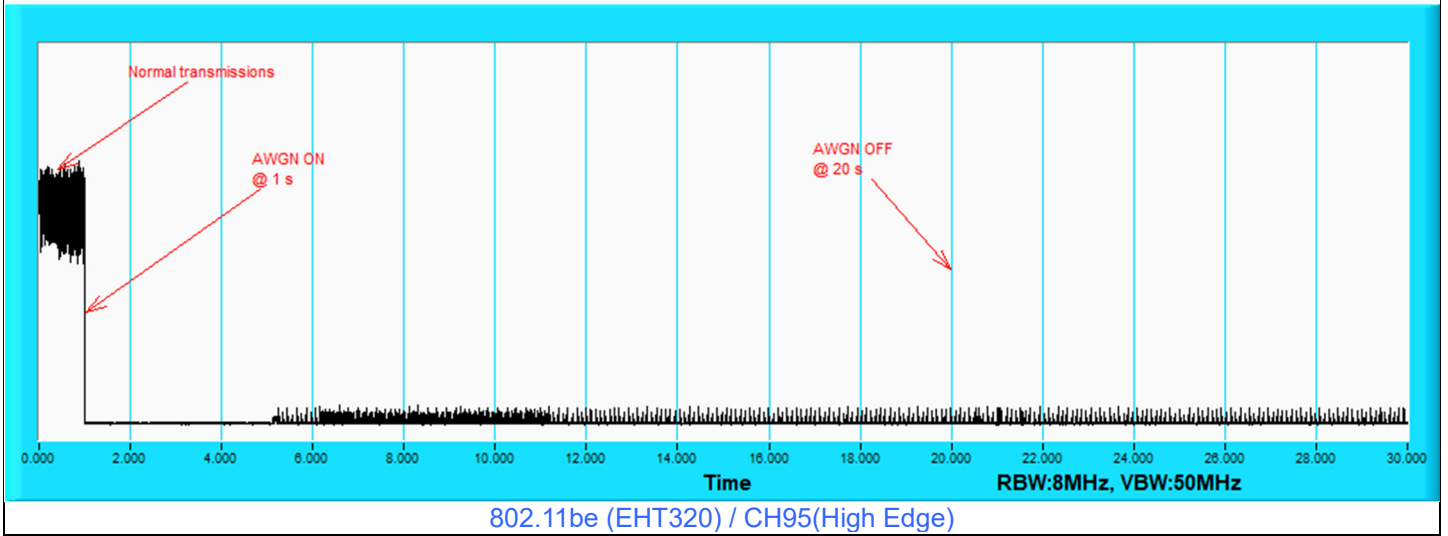

For U-NII-7


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-66	2.13	0	-68.13	-62	OFF
					-69	2.13	0	-71.13	-62	Minimal
					-79.87	2.13	0	-82	-62	ON
	320	159	6745	6590	-65	2.13	0	-67.13	-62	OFF
					-67	2.13	0	-69.13	-62	Minimal
					-79.87	2.13	0	-82	-62	ON
				6745	-62	2.13	0	-64.13	-62	OFF
					-66	2.13	0	-68.13	-62	Minimal
					-79.87	2.13	0	-82	-62	ON
				6900	-62	2.13	0	-64.13	-62	OFF
					-66	2.13	0	-68.13	-62	Minimal
					-79.87	2.13	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Ant. 7) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6745	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6900	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

### Plots of EUT Tx waveform

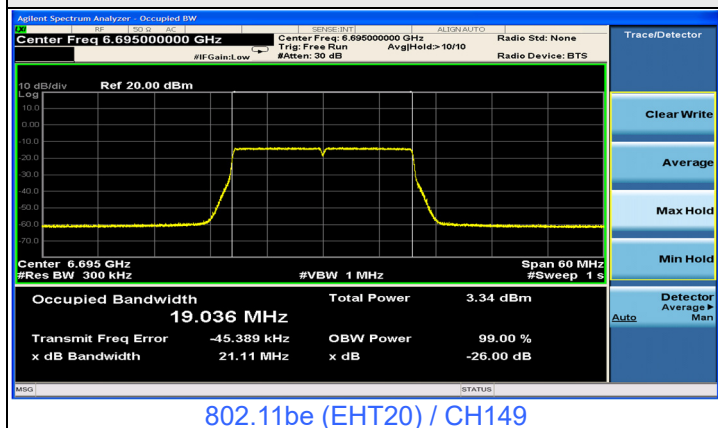


802.11be (EHT20) / CH149

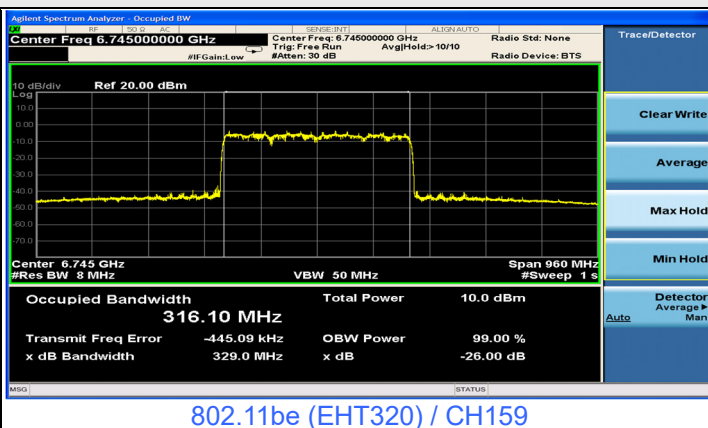


802.11be (EHT320) / CH159


### Plots of Injected signal (AWGN) level

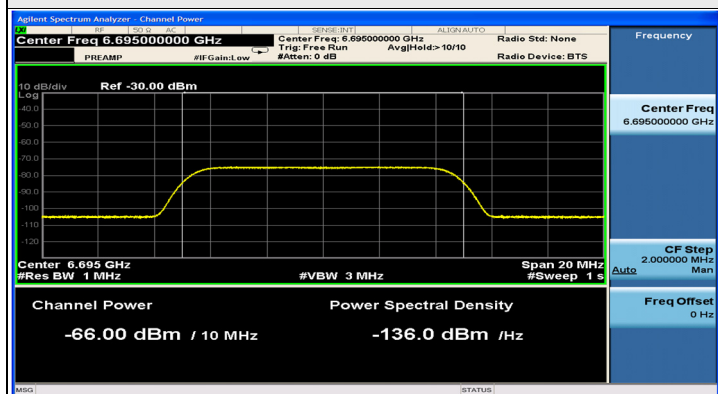


802.11be (EHT20) / CH149

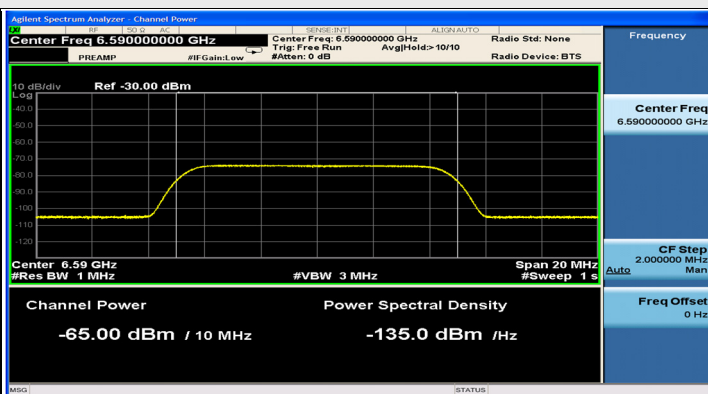

802.11be (EHT320) / CH159 (Low Edge)

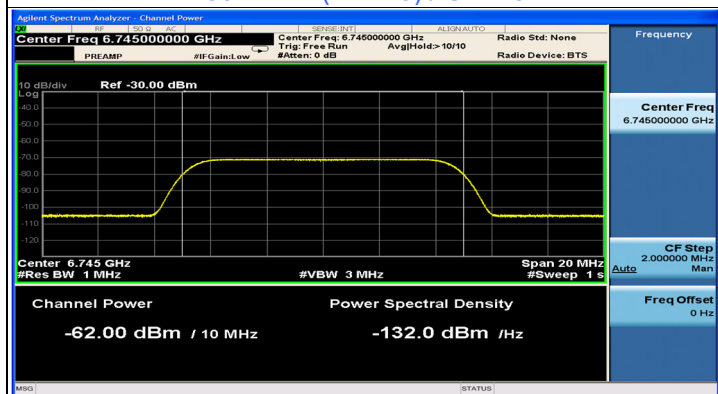


802.11be (EHT320) / CH159 (Middle)

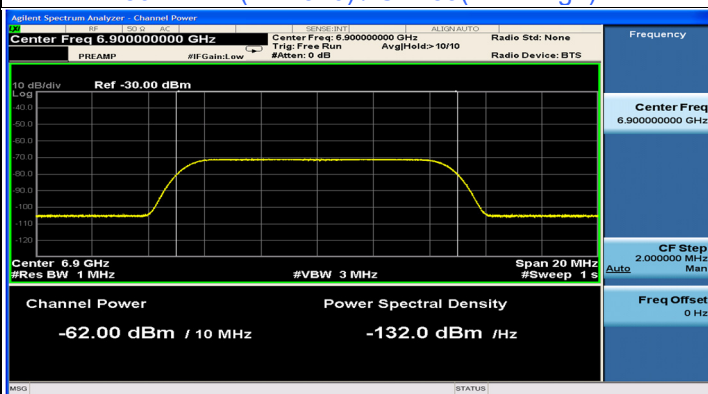


802.11be (EHT320) / CH159 (High Edge)


### Plots of EUT ceased transmission in the time domain

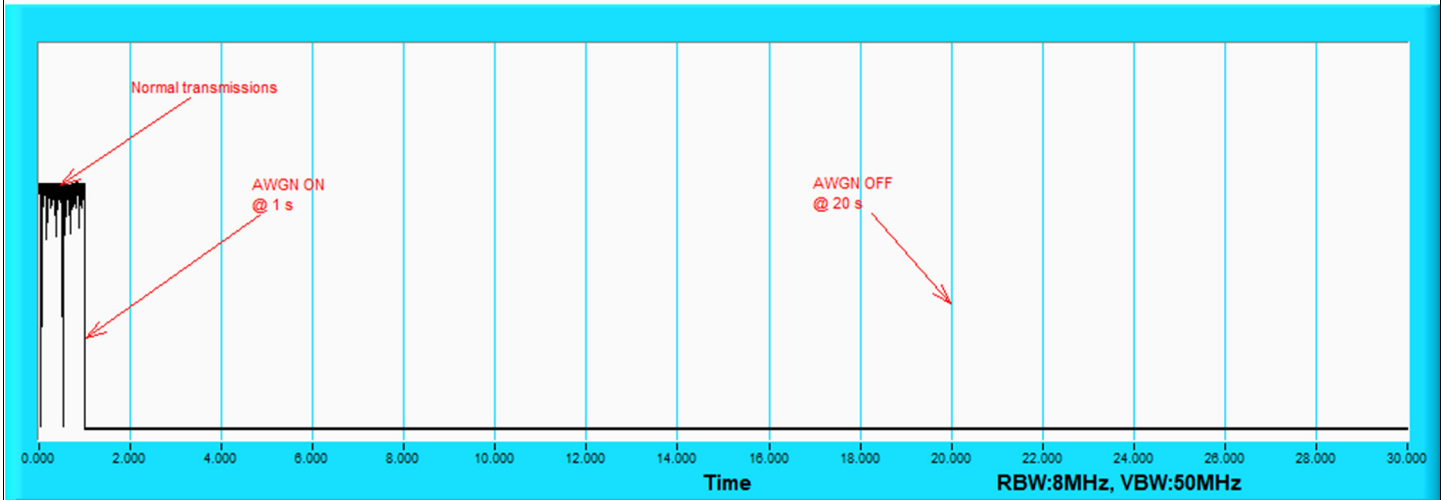

802.11be (EHT20) / CH149

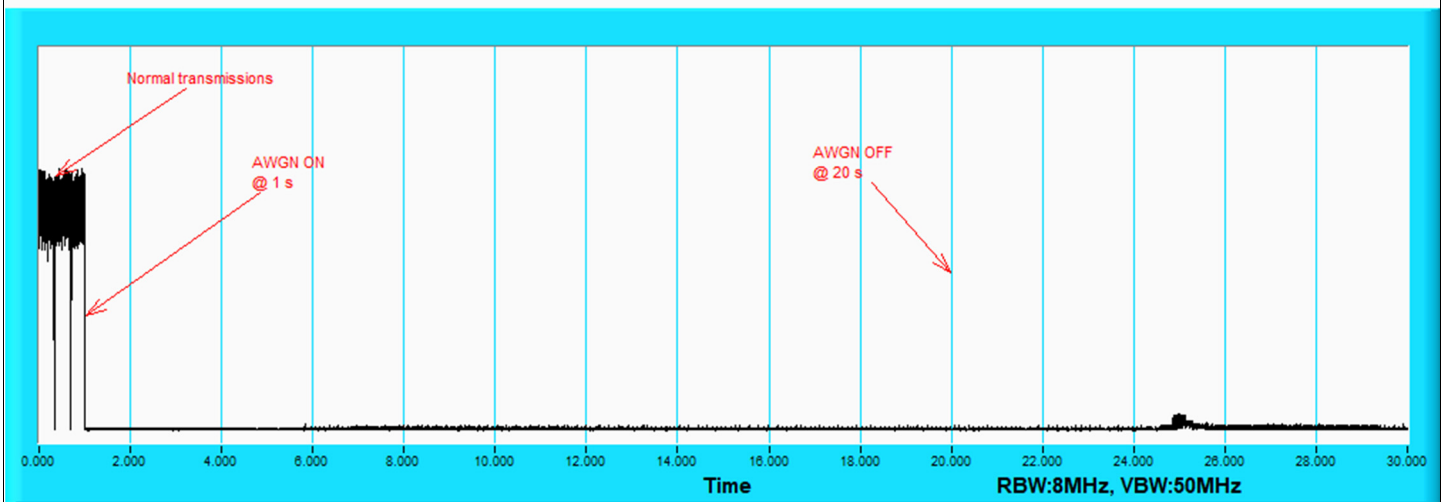


802.11be (EHT320) / CH159(Low Edge)

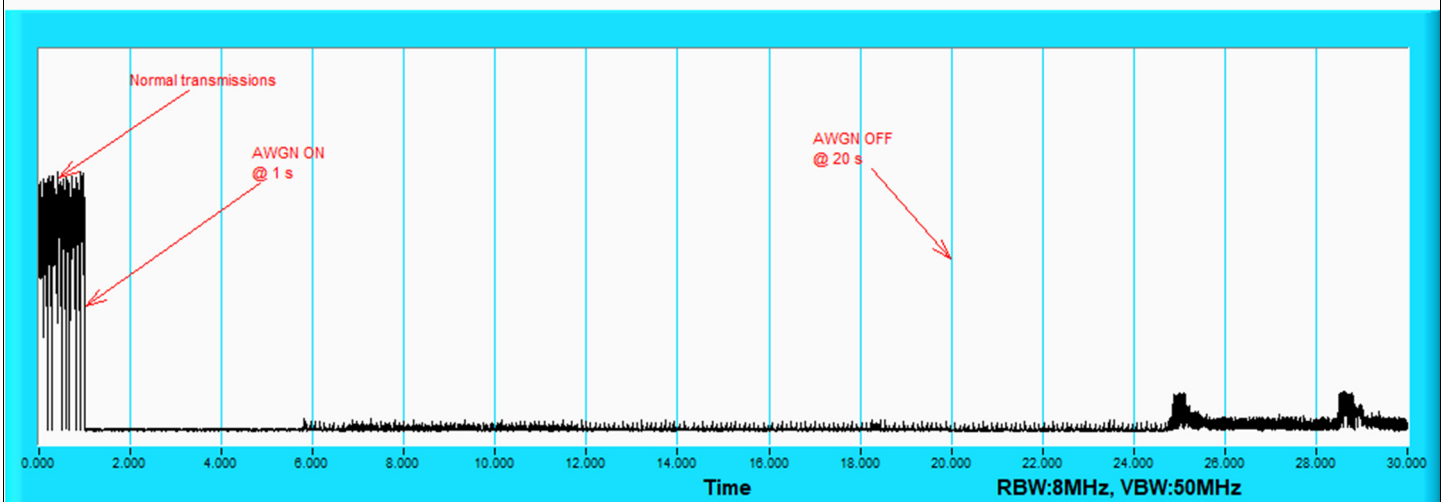

802.11be (EHT320) / CH159(Middle)

### Plots of EUT ceased transmission in the time domain

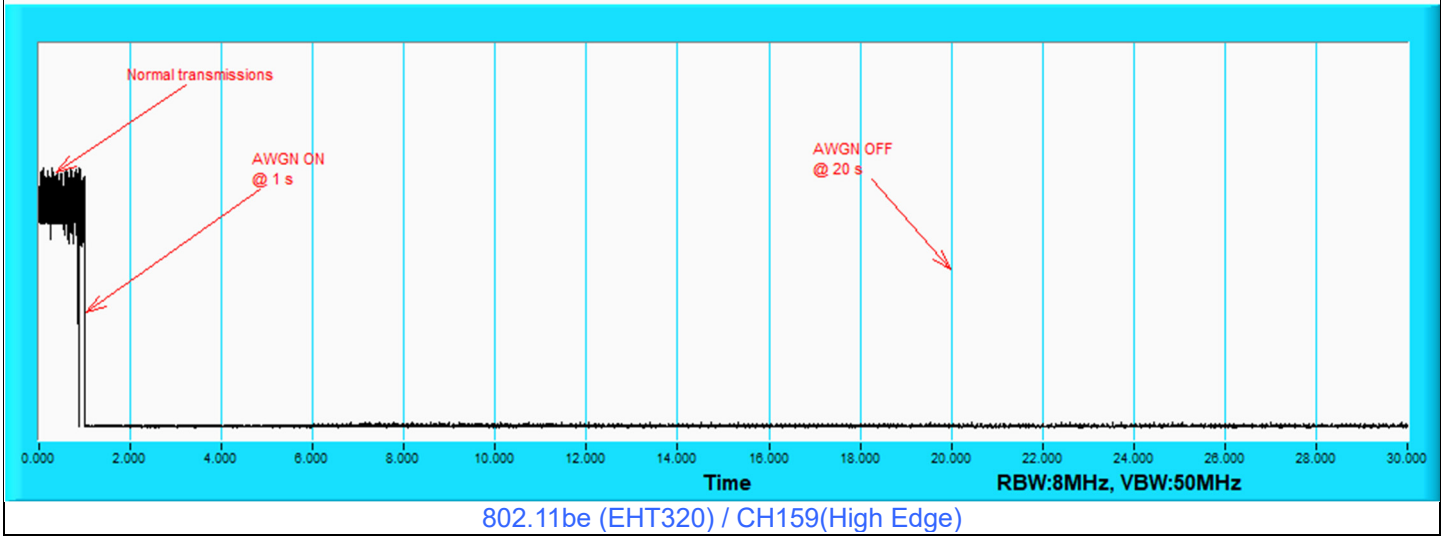

For U-NII-8


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-66	2.13	0	-68.13	-62	OFF
					-70	2.13	0	-72.13	-62	Minimal
					-79.87	2.13	0	-82	-62	ON
	320	191	6905	6750	-60	2.13	0	-62.13	-62	OFF
					-66	2.13	0	-68.13	-62	Minimal
					-79.87	2.13	0	-82	-62	ON
				6905	-60	2.13	0	-62.13	-62	OFF
					-66	2.13	0	-68.13	-62	Minimal
					-79.87	2.13	0	-82	-62	ON
				7060	-60	2.13	0	-62.13	-62	OFF
					-65	2.13	0	-67.13	-62	Minimal
					-79.87	2.13	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Ant. 7) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

### Plots of EUT Tx waveform

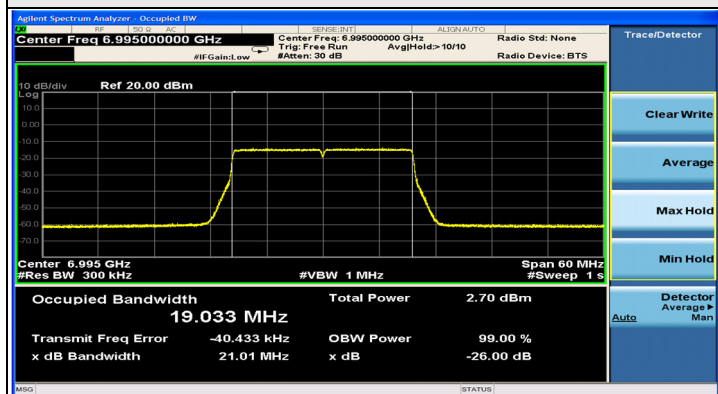


802.11be (EHT20) / CH209

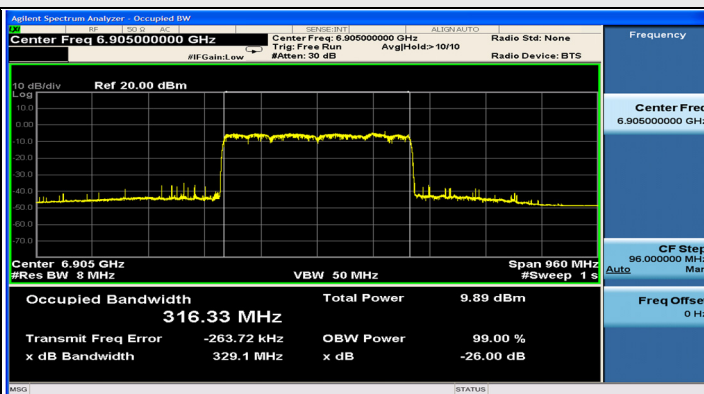


802.11be (EHT320) / CH191


### Plots of Injected signal (AWGN) level

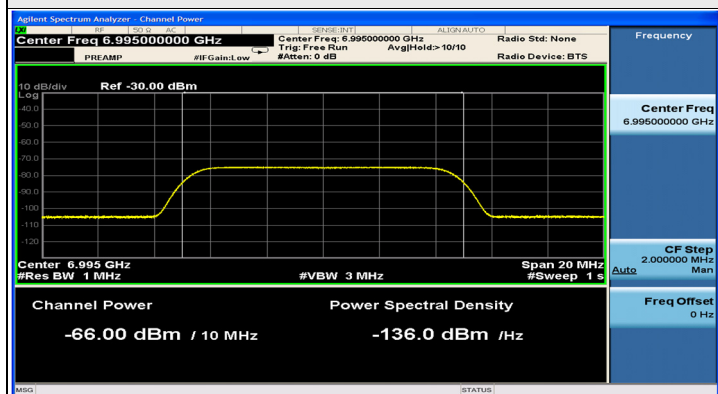


802.11be (EHT20) / CH209

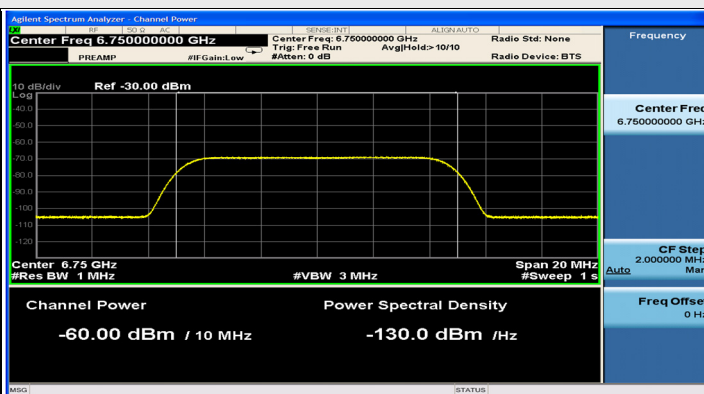

802.11be (EHT320) / CH191 (Low Edge)

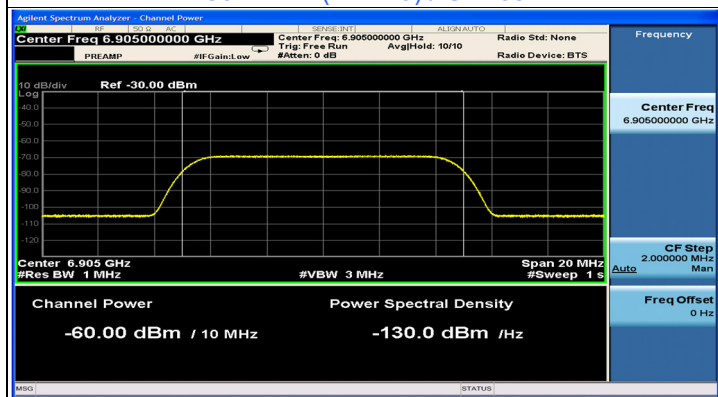


802.11be (EHT320) / CH191 (Middle)

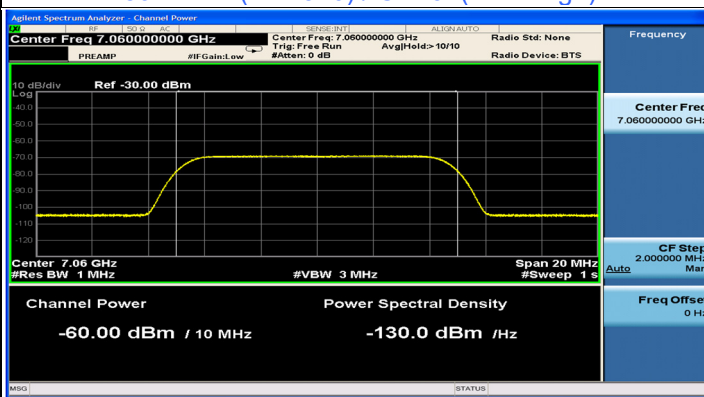


802.11be (EHT320) / CH191 (High Edge)




### Plots of EUT ceased transmission in the time domain

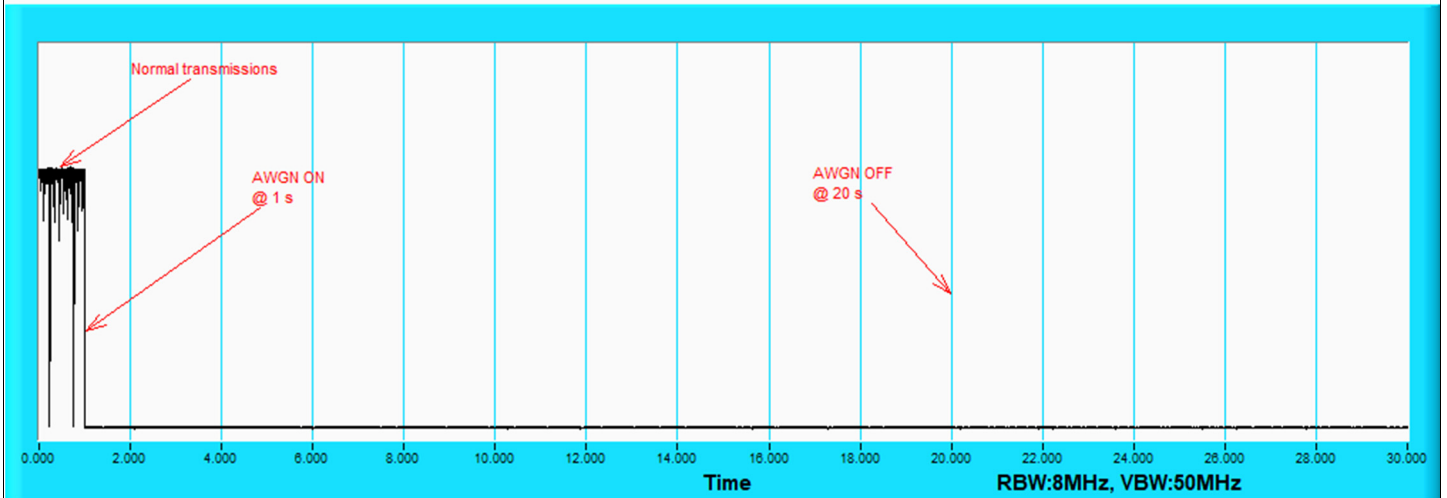

802.11be (EHT20) / CH209

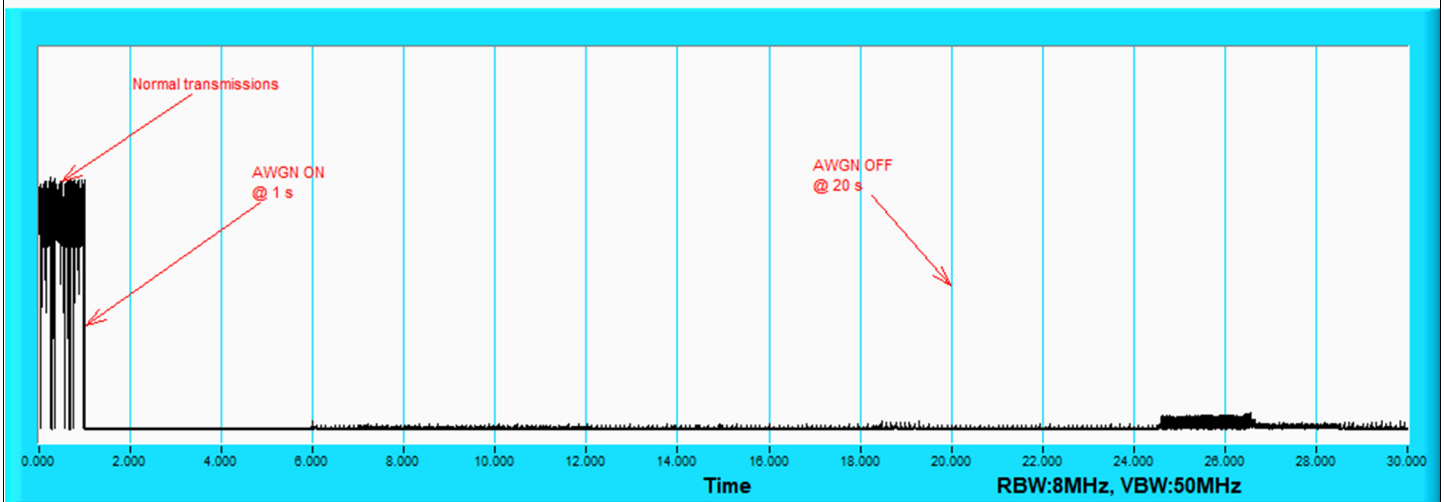


802.11be (EHT320) / CH191(Low Edge)

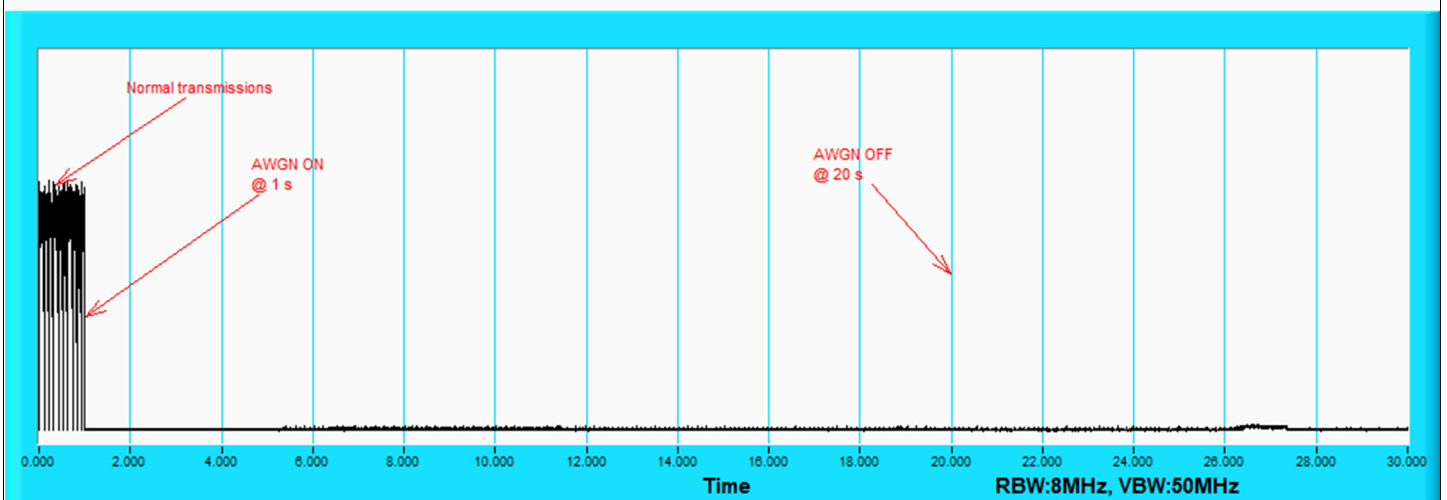

802.11be (EHT320) / CH191(Middle)

### Plots of EUT ceased transmission in the time domain

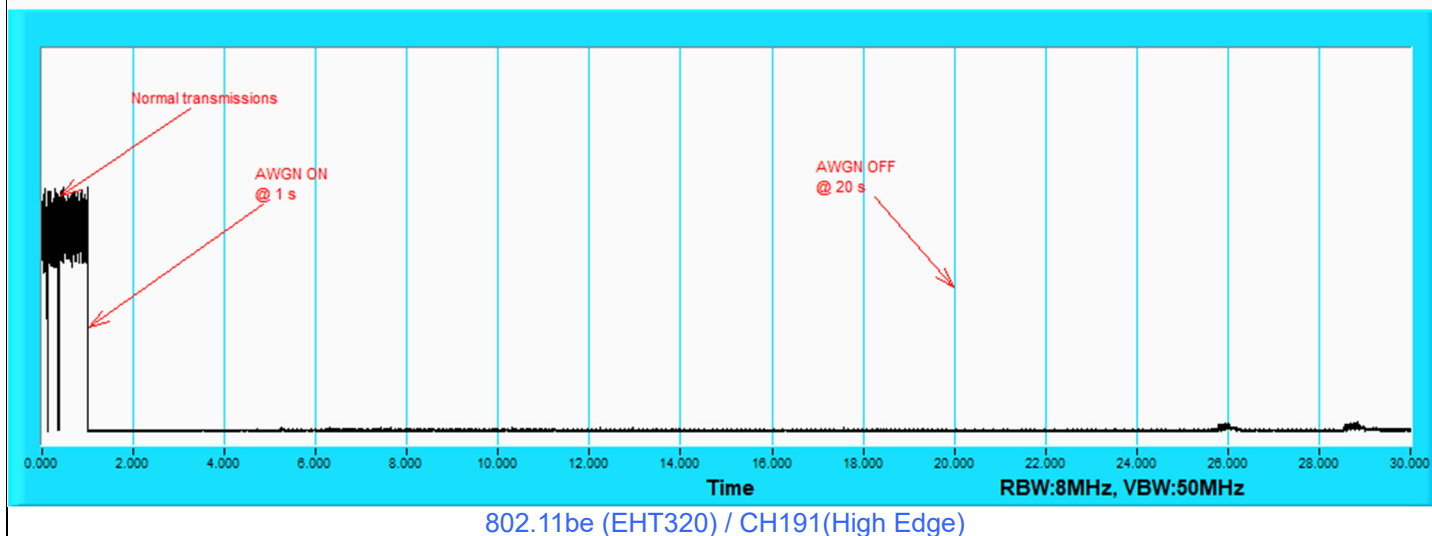

## 7.8 AC Power Conducted Emissions


### Beamforming (4T4S)

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18200	9.72	35.07	25.97	44.79	35.69	64.39	54.39	-19.60	-18.70
2	0.24200	9.74	29.70	18.55	39.44	28.29	62.03	52.03	-22.59	-23.74
3	0.47620	9.84	23.57	15.12	33.41	24.96	56.41	46.41	-23.00	-21.45
4	1.47000	9.92	13.04	4.29	22.96	14.21	56.00	46.00	-33.04	-31.79
5	16.05400	10.30	6.68	2.69	16.98	12.99	60.00	50.00	-43.02	-37.01
6	28.63800	10.71	5.97	1.54	16.68	12.25	60.00	50.00	-43.32	-37.75

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

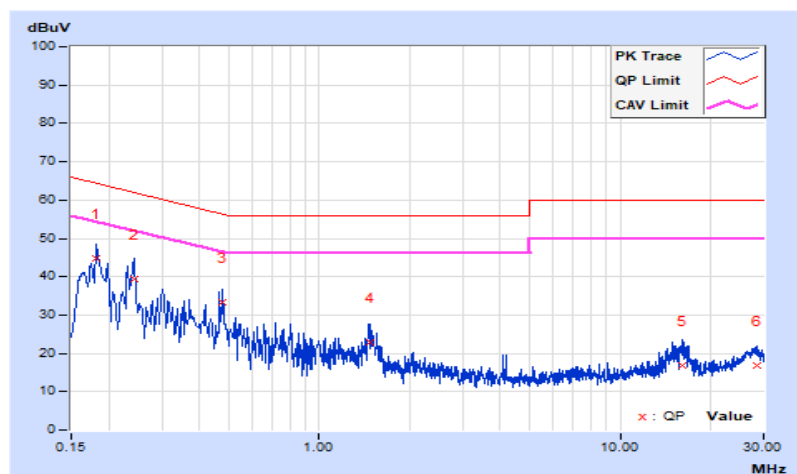


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 67 % RH
<b>Tested By</b>	Adair Peng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17400	9.70	35.60	24.46	45.30	34.16	64.77	54.77	-19.47	-20.61
2	0.23400	9.74	30.31	19.55	40.05	29.29	62.31	52.31	-22.26	-23.02
3	0.30200	9.79	26.38	14.80	36.17	24.59	60.19	50.19	-24.02	-25.60
4	0.47000	9.88	21.04	10.78	30.92	20.66	56.51	46.51	-25.59	-25.85
5	1.43400	9.95	10.10	2.78	20.05	12.73	56.00	46.00	-35.95	-33.27
6	17.01400	10.45	5.42	1.04	15.87	11.49	60.00	50.00	-44.13	-38.51

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

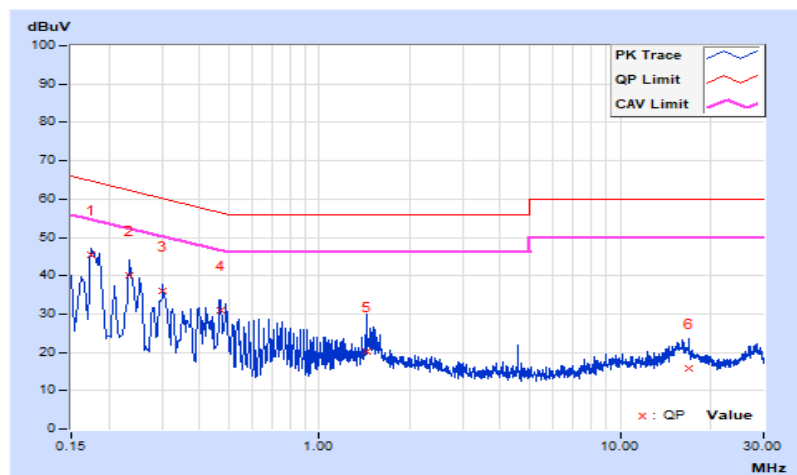

## 7.9 Unwanted Emissions below 1 GHz

### Beamforming (4T4S)


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	60.07	24.9 QP	40.0	-15.1	1.00 H	141	34.0	-9.1
2	140.58	30.3 QP	43.5	-13.2	1.00 H	261	39.5	-9.2
3	315.18	25.1 QP	46.0	-20.9	1.50 H	260	32.1	-7.0
4	446.13	27.1 QP	46.0	-18.9	1.50 H	18	31.8	-4.7
5	579.02	29.9 QP	46.0	-16.1	1.00 H	18	31.9	-2.0
6	712.88	31.4 QP	46.0	-14.6	1.00 H	137	30.9	0.5

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

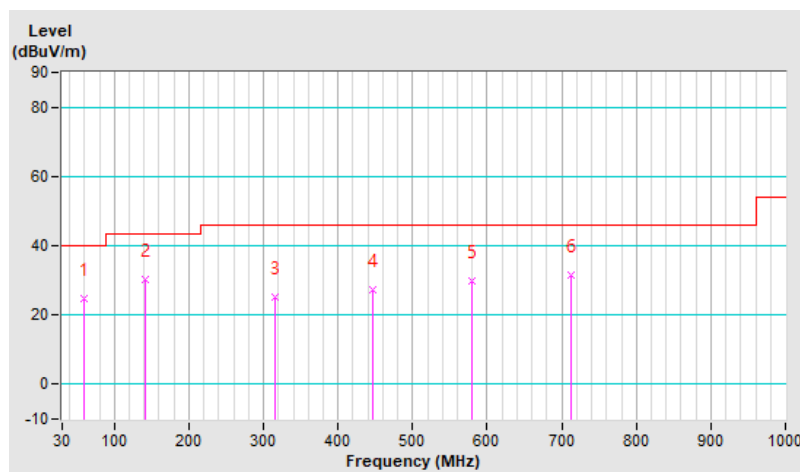


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	60.07	37.1 QP	40.0	-2.9	1.00 V	301	46.2	-9.1
2	130.88	33.1 QP	43.5	-10.4	1.00 V	108	43.0	-9.9
3	277.35	22.3 QP	46.0	-23.7	1.00 V	81	30.3	-8.0
4	371.44	24.7 QP	46.0	-21.3	1.50 V	163	30.8	-6.1
5	470.38	29.2 QP	46.0	-16.8	1.50 V	39	33.4	-4.2
6	570.29	31.7 QP	46.0	-14.3	1.00 V	280	34.1	-2.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

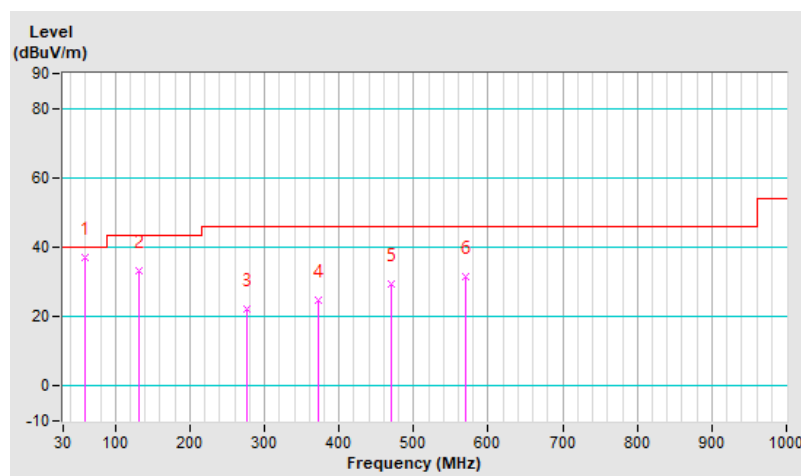

## 7.10 Unwanted Emissions above 1 GHz

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 33 : 6115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.50 H	83	37.2	13.9
2	#5925.00	38.2 AV	68.2	-30.0	1.50 H	83	24.3	13.9
3	*6115.00	103.9 PK			1.50 H	83	58.4	45.5
4	*6115.00	93.9 AV			1.50 H	83	48.4	45.5
5	12230.00	60.3 PK	74.0	-13.7	2.25 H	311	39.3	21.0
6	12230.00	47.0 AV	54.0	-7.0	2.25 H	311	26.0	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.27 V	180	37.5	13.9
2	#5925.00	38.4 AV	68.2	-29.8	1.27 V	180	24.5	13.9
3	*6115.00	108.0 PK			1.27 V	180	62.5	45.5
4	*6115.00	98.1 AV			1.27 V	180	52.6	45.5
5	12230.00	60.6 PK	74.0	-13.4	1.95 V	228	39.6	21.0
6	12230.00	47.2 AV	54.0	-6.8	1.95 V	228	26.2	21.0

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 61 : 6255 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	102.4 PK			1.52 H	85	56.4	46.0
2	*6255.00	93.0 AV			1.52 H	85	47.0	46.0
3	12510.00	60.1 PK	74.0	-13.9	2.30 H	315	39.2	20.9
4	12510.00	46.8 AV	54.0	-7.2	2.30 H	315	25.9	20.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	108.4 PK			1.44 V	220	62.4	46.0
2	*6255.00	99.4 AV			1.44 V	220	53.4	46.0
3	12510.00	60.4 PK	74.0	-13.6	1.92 V	230	39.5	20.9
4	12510.00	47.0 AV	54.0	-7.0	1.92 V	230	26.1	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	102.4 PK			1.55 H	87	55.3	47.1
2	*6415.00	92.3 AV			1.55 H	87	45.2	47.1
3	#12830.00	61.0 PK	88.2	-27.2	2.27 H	336	39.2	21.8
4	#12830.00	47.6 AV	68.2	-20.6	2.27 H	336	25.8	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.2 PK			1.26 V	220	61.1	47.1
2	*6415.00	98.4 AV			1.26 V	220	51.3	47.1
3	#12830.00	61.3 PK	88.2	-26.9	1.87 V	225	39.5	21.8
4	#12830.00	47.9 AV	68.2	-20.3	1.87 V	225	26.1	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.1 PK			1.52 H	82	55.0	47.1
2	*6435.00	92.3 AV			1.52 H	82	45.2	47.1
3	#12870.00	61.3 PK	88.2	-26.9	2.27 H	305	39.2	22.1
4	#12870.00	47.9 AV	68.2	-20.3	2.27 H	305	25.8	22.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	107.5 PK			1.33 V	219	60.4	47.1
2	*6435.00	98.4 AV			1.33 V	219	51.3	47.1
3	#12870.00	61.6 PK	88.2	-26.6	1.88 V	230	39.5	22.1
4	#12870.00	48.2 AV	68.2	-20.0	1.88 V	230	26.1	22.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.6 PK			1.52 H	81	55.2	47.4
2	*6475.00	92.0 AV			1.52 H	81	44.6	47.4
3	#12950.00	61.4 PK	88.2	-26.8	2.18 H	306	39.2	22.2
4	#12950.00	47.9 AV	68.2	-20.3	2.18 H	306	25.7	22.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.2 PK			1.33 V	221	60.8	47.4
2	*6475.00	98.7 AV			1.33 V	221	51.3	47.4
3	#12950.00	61.7 PK	88.2	-26.5	1.92 V	238	39.5	22.2
4	#12950.00	48.3 AV	68.2	-19.9	1.92 V	238	26.1	22.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.2 PK			1.58 H	89	54.5	47.7
2	*6515.00	92.5 AV			1.58 H	89	44.8	47.7
3	#13030.00	61.6 PK	88.2	-26.6	2.09 H	311	39.2	22.4
4	#13030.00	48.2 AV	68.2	-20.0	2.09 H	311	25.8	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.5 PK			1.37 V	222	61.8	47.7
2	*6515.00	99.2 AV			1.37 V	222	51.5	47.7
3	#13030.00	61.9 PK	88.2	-26.3	1.95 V	229	39.5	22.4
4	#13030.00	48.4 AV	68.2	-19.8	1.95 V	229	26.0	22.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	103.1 PK			1.52 H	92	55.2	47.9
2	*6535.00	93.1 AV			1.52 H	92	45.2	47.9
3	#13070.00	61.6 PK	88.2	-26.6	2.02 H	315	39.2	22.4
4	#13070.00	48.3 AV	68.2	-19.9	2.02 H	315	25.9	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.2 PK			1.35 V	220	60.3	47.9
2	*6535.00	99.3 AV			1.35 V	220	51.4	47.9
3	#13070.00	61.8 PK	88.2	-26.4	1.82 V	225	39.4	22.4
4	#13070.00	48.4 AV	68.2	-19.8	1.82 V	225	26.0	22.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	103.5 PK			1.56 H	92	55.5	48.0
2	*6695.00	93.7 AV			1.56 H	92	45.7	48.0
3	13390.00	62.5 PK	74.0	-11.5	2.11 H	319	39.0	23.5
4	13390.00	49.3 AV	54.0	-4.7	2.11 H	319	25.8	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.2 PK			1.27 V	227	61.2	48.0
2	*6695.00	99.8 AV			1.27 V	227	51.8	48.0
3	13390.00	63.0 PK	74.0	-11.0	1.85 V	222	39.5	23.5
4	13390.00	49.6 AV	54.0	-4.4	1.85 V	222	26.1	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	102.1 PK			1.52 H	89	54.0	48.1
2	*6855.00	92.2 AV			1.52 H	89	44.1	48.1
3	#13710.00	62.8 PK	88.2	-25.4	2.02 H	309	39.0	23.8
4	#13710.00	49.5 AV	68.2	-18.7	2.02 H	309	25.7	23.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.6 PK			1.44 V	222	60.5	48.1
2	*6855.00	98.5 AV			1.44 V	222	50.4	48.1
3	#13710.00	63.2 PK	88.2	-25.0	1.78 V	229	39.4	23.8
4	#13710.00	49.8 AV	68.2	-18.4	1.78 V	229	26.0	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.1 PK			1.51 H	87	53.8	48.3
2	*6875.00	91.9 AV			1.51 H	87	43.6	48.3
3	#13750.00	62.8 PK	88.2	-25.4	2.01 H	315	38.9	23.9
4	#13750.00	49.5 AV	68.2	-18.7	2.01 H	315	25.6	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.3 PK			1.35 V	201	60.0	48.3
2	*6875.00	98.3 AV			1.35 V	201	50.0	48.3
3	#13750.00	63.2 PK	88.2	-25.0	1.75 V	222	39.3	23.9
4	#13750.00	49.9 AV	68.2	-18.3	1.75 V	222	26.0	23.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.5 PK			1.51 H	92	53.8	49.7
2	*6995.00	92.9 AV			1.51 H	92	43.2	49.7
3	#13990.00	63.6 PK	88.2	-24.6	2.05 H	311	38.9	24.7
4	#13990.00	50.3 AV	68.2	-17.9	2.05 H	311	25.6	24.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.1 PK			1.31 V	201	59.4	49.7
2	*6995.00	99.1 AV			1.31 V	201	49.4	49.7
3	#13990.00	64.0 PK	88.2	-24.2	1.75 V	225	39.3	24.7
4	#13990.00	50.7 AV	68.2	-17.5	1.75 V	225	26.0	24.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.6 PK			1.45 H	95	52.0	49.6
2	*7115.00	91.5 AV			1.45 H	95	41.9	49.6
3	#7125.00	73.6 PK	88.2	-14.6	1.45 H	95	56.0	17.6
4	#7125.00	49.6 AV	68.2	-18.6	1.45 H	95	32.0	17.6
5	#14230.00	63.6 PK	88.2	-24.6	2.02 H	315	38.5	25.1
6	#14230.00	50.6 AV	68.2	-17.6	2.02 H	315	25.5	25.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.8 PK			1.43 V	199	58.2	49.6
2	*7115.00	97.8 AV			1.43 V	199	48.2	49.6
3	#7125.00	80.2 PK	88.2	-8.0	1.43 V	199	62.6	17.6
4	#7125.00	53.8 AV	68.2	-14.4	1.43 V	199	36.2	17.6
5	#14230.00	64.3 PK	88.2	-23.9	1.72 V	229	39.2	25.1
6	#14230.00	51.0 AV	68.2	-17.2	1.72 V	229	25.9	25.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

### Beamforming (4T1S)

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 33 : 6115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.36 H	81	37.2	13.9
2	#5925.00	37.9 AV	68.2	-30.3	1.36 H	81	24.0	13.9
3	*6115.00	103.9 PK			1.36 H	81	58.4	45.5
4	*6115.00	93.0 AV			1.36 H	81	47.5	45.5
5	12230.00	60.2 PK	74.0	-13.8	2.11 H	316	39.2	21.0
6	12230.00	46.8 AV	54.0	-7.2	2.11 H	316	25.8	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.14 V	346	37.5	13.9
2	#5925.00	38.1 AV	68.2	-30.1	1.14 V	346	24.2	13.9
3	*6115.00	109.9 PK			1.14 V	346	64.4	45.5
4	*6115.00	98.2 AV			1.14 V	346	52.7	45.5
5	12230.00	60.5 PK	74.0	-13.5	1.82 V	235	39.5	21.0
6	12230.00	46.9 AV	54.0	-7.1	1.82 V	235	25.9	21.0

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 61 : 6255 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	104.6 PK			1.32 H	82	58.6	46.0
2	*6255.00	91.9 AV			1.32 H	82	45.9	46.0
3	12510.00	60.2 PK	74.0	-13.8	2.05 H	315	39.3	20.9
4	12510.00	46.7 AV	54.0	-7.3	2.05 H	315	25.8	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	109.8 PK			1.41 V	348	63.8	46.0
2	*6255.00	98.4 AV			1.41 V	348	52.4	46.0
3	12510.00	60.4 PK	74.0	-13.6	1.85 V	232	39.5	20.9
4	12510.00	46.9 AV	54.0	-7.1	1.85 V	232	26.0	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	102.9 PK			1.39 H	88	55.8	47.1
2	*6415.00	90.6 AV			1.39 H	88	43.5	47.1
3	#12830.00	61.1 PK	88.2	-27.1	2.07 H	312	39.3	21.8
4	#12830.00	47.6 AV	68.2	-20.6	2.07 H	312	25.8	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.9 PK			1.11 V	346	61.8	47.1
2	*6415.00	96.8 AV			1.11 V	346	49.7	47.1
3	#12830.00	61.2 PK	88.2	-27.0	1.82 V	231	39.4	21.8
4	#12830.00	47.7 AV	68.2	-20.5	1.82 V	231	25.9	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.7 PK			1.42 H	90	55.6	47.1
2	*6435.00	89.8 AV			1.42 H	90	42.7	47.1
3	#12870.00	61.1 PK	88.2	-27.1	2.02 H	315	39.0	22.1
4	#12870.00	47.7 AV	68.2	-20.5	2.02 H	315	25.6	22.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.1 PK			1.54 V	5	61.0	47.1
2	*6435.00	96.3 AV			1.54 V	5	49.2	47.1
3	#12870.00	61.6 PK	88.2	-26.6	1.88 V	233	39.5	22.1
4	#12870.00	48.0 AV	68.2	-20.2	1.88 V	233	25.9	22.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.4 PK			1.45 H	87	56.0	47.4
2	*6475.00	90.2 AV			1.45 H	87	42.8	47.4
3	#12950.00	61.4 PK	88.2	-26.8	2.05 H	311	39.2	22.2
4	#12950.00	47.8 AV	68.2	-20.4	2.05 H	311	25.6	22.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.4 PK			1.06 V	4	62.0	47.4
2	*6475.00	96.6 AV			1.06 V	4	49.2	47.4
3	#12950.00	61.6 PK	88.2	-26.6	1.85 V	235	39.4	22.2
4	#12950.00	48.0 AV	68.2	-20.2	1.85 V	235	25.8	22.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.3 PK			1.42 H	90	55.6	47.7
2	*6515.00	90.3 AV			1.42 H	90	42.6	47.7
3	#13030.00	61.4 PK	88.2	-26.8	2.08 H	315	39.0	22.4
4	#13030.00	47.9 AV	68.2	-20.3	2.08 H	315	25.5	22.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.4 PK			1.43 V	5	61.7	47.7
2	*6515.00	96.8 AV			1.43 V	5	49.1	47.7
3	#13030.00	61.8 PK	88.2	-26.4	1.82 V	231	39.4	22.4
4	#13030.00	48.1 AV	68.2	-20.1	1.82 V	231	25.7	22.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	102.4 PK			1.45 H	88	54.5	47.9
2	*6535.00	89.9 AV			1.45 H	88	42.0	47.9
3	#13070.00	61.5 PK	88.2	-26.7	2.11 H	312	39.1	22.4
4	#13070.00	48.0 AV	68.2	-20.2	2.11 H	312	25.6	22.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.4 PK			1.33 V	339	60.5	47.9
2	*6535.00	95.9 AV			1.33 V	339	48.0	47.9
3	#13070.00	61.9 PK	88.2	-26.3	1.85 V	239	39.5	22.4
4	#13070.00	48.3 AV	68.2	-19.9	1.85 V	239	25.9	22.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	103.3 PK			1.39 H	90	55.3	48.0
2	*6695.00	91.6 AV			1.39 H	90	43.6	48.0
3	13390.00	62.4 PK	74.0	-11.6	2.05 H	305	38.9	23.5
4	13390.00	49.1 AV	54.0	-4.9	2.05 H	305	25.6	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.5 PK			1.34 V	354	61.5	48.0
2	*6695.00	97.9 AV			1.34 V	354	49.9	48.0
3	13390.00	62.9 PK	74.0	-11.1	1.92 V	242	39.4	23.5
4	13390.00	49.3 AV	54.0	-4.7	1.92 V	242	25.8	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	103.3 PK			1.38 H	88	55.2	48.1
2	*6855.00	91.7 AV			1.38 H	88	43.6	48.1
3	#13710.00	62.6 PK	88.2	-25.6	2.02 H	311	38.8	23.8
4	#13710.00	49.3 AV	68.2	-18.9	2.02 H	311	25.5	23.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.1 PK			1.35 V	356	61.0	48.1
2	*6855.00	97.9 AV			1.35 V	356	49.8	48.1
3	#13710.00	63.3 PK	88.2	-24.9	1.82 V	245	39.5	23.8
4	#13710.00	49.7 AV	68.2	-18.5	1.82 V	245	25.9	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.3 PK			1.35 H	91	56.0	48.3
2	*6875.00	92.2 AV			1.35 H	91	43.9	48.3
3	#13750.00	62.7 PK	88.2	-25.5	2.05 H	306	38.8	23.9
4	#13750.00	49.5 AV	68.2	-18.7	2.05 H	306	25.6	23.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.8 PK			1.25 V	355	61.5	48.3
2	*6875.00	98.6 AV			1.25 V	355	50.3	48.3
3	#13750.00	63.4 PK	88.2	-24.8	1.82 V	244	39.5	23.9
4	#13750.00	49.9 AV	68.2	-18.3	1.82 V	244	26.0	23.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.2 PK			1.32 H	92	53.5	49.7
2	*6995.00	92.8 AV			1.32 H	92	43.1	49.7
3	#13990.00	63.5 PK	88.2	-24.7	2.02 H	309	38.8	24.7
4	#13990.00	50.4 AV	68.2	-17.8	2.02 H	309	25.7	24.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.1 PK			1.22 V	358	59.4	49.7
2	*6995.00	98.2 AV			1.22 V	358	48.5	49.7
3	#13990.00	64.0 PK	88.2	-24.2	1.85 V	245	39.3	24.7
4	#13990.00	50.6 AV	68.2	-17.6	1.85 V	245	25.9	24.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 229 : 7095 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	103.4 PK			1.38 H	95	54.0	49.4
2	*7095.00	91.3 AV			1.38 H	95	41.9	49.4
3	#14190.00	63.8 PK	88.2	-24.4	2.11 H	315	38.7	25.1
4	#14190.00	50.7 AV	68.2	-17.5	2.11 H	315	25.6	25.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	109.7 PK			1.23 V	359	60.3	49.4
2	*7095.00	97.7 AV			1.23 V	359	48.3	49.4
3	#14190.00	64.4 PK	88.2	-23.8	1.87 V	242	39.3	25.1
4	#14190.00	50.9 AV	68.2	-17.3	1.87 V	242	25.8	25.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.5 PK			1.37 H	92	45.9	49.6
2	*7115.00	82.5 AV			1.37 H	92	32.9	49.6
3	#7125.00	73.1 PK	88.2	-15.1	1.37 H	92	55.5	17.6
4	#7125.00	61.2 AV	68.2	-7.0	1.37 H	92	43.6	17.6
5	#14230.00	63.6 PK	88.2	-24.6	2.05 H	306	38.5	25.1
6	#14230.00	50.6 AV	68.2	-17.6	2.05 H	306	25.5	25.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.5 PK			1.23 V	354	50.9	49.6
2	*7115.00	88.9 AV			1.23 V	354	39.3	49.6
3	#7125.00	81.1 PK	88.2	-7.1	1.23 V	354	63.5	17.6
<b>4</b>	<b>#7125.00</b>	<b>67.6 AV</b>	<b>68.2</b>	<b>-0.6</b>	<b>1.23 V</b>	<b>354</b>	<b>50.0</b>	<b>17.6</b>
5	#14230.00	64.1 PK	88.2	-24.1	1.85 V	235	39.0	25.1
6	#14230.00	50.8 AV	68.2	-17.4	1.85 V	235	25.7	25.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 35 : 6125 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	68.2	-17.1	1.35 H	95	37.2	13.9
2	#5925.00	38.1 AV	54.0	-15.9	1.35 H	95	24.2	13.9
3	*6125.00	104.1 PK			1.35 H	95	58.6	45.5
4	*6125.00	91.2 AV			1.35 H	95	45.7	45.5
5	12250.00	59.5 PK	74.0	-14.5	2.07 H	309	38.5	21.0
6	12250.00	46.5 AV	54.0	-7.5	2.07 H	309	25.5	21.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.28 V	346	37.5	13.9
2	#5925.00	38.5 AV	68.2	-29.7	1.28 V	346	24.6	13.9
3	*6125.00	110.1 PK			1.28 V	346	64.6	45.5
4	*6125.00	97.4 AV			1.28 V	346	51.9	45.5
5	12250.00	59.8 PK	74.0	-14.2	1.92 V	225	38.8	21.0
6	12250.00	46.8 AV	54.0	-7.2	1.92 V	225	25.8	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 59 : 6245 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	104.1 PK			1.32 H	92	58.3	45.8
2	*6245.00	91.7 AV			1.32 H	92	45.9	45.8
3	12490.00	59.3 PK	74.0	-14.7	2.11 H	302	38.4	20.9
4	12490.00	46.4 AV	54.0	-7.6	2.11 H	302	25.5	20.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	110.8 PK			1.24 V	346	65.0	45.8
2	*6245.00	98.0 AV			1.24 V	346	52.2	45.8
3	12490.00	59.6 PK	74.0	-14.4	1.88 V	229	38.7	20.9
4	12490.00	46.6 AV	54.0	-7.4	1.88 V	229	25.7	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	103.0 PK			1.35 H	95	56.0	47.0
2	*6405.00	90.8 AV			1.35 H	95	43.8	47.0
3	#12810.00	60.1 PK	88.2	-28.1	2.02 H	306	38.4	21.7
4	#12810.00	47.1 AV	68.2	-21.1	2.02 H	306	25.4	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	109.8 PK			1.18 V	19	62.8	47.0
2	*6405.00	96.9 AV			1.18 V	19	49.9	47.0
3	#12810.00	60.3 PK	88.2	-27.9	1.82 V	232	38.6	21.7
4	#12810.00	47.3 AV	68.2	-20.9	1.82 V	232	25.6	21.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.2 PK			1.32 H	89	55.1	47.1
2	*6445.00	90.1 AV			1.32 H	89	43.0	47.1
3	#12890.00	60.7 PK	88.2	-27.5	2.11 H	315	38.5	22.2
4	#12890.00	47.7 AV	68.2	-20.5	2.11 H	315	25.5	22.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	108.9 PK			1.75 V	9	61.8	47.1
2	*6445.00	96.3 AV			1.75 V	9	49.2	47.1
3	#12890.00	60.8 PK	88.2	-27.4	1.85 V	238	38.6	22.2
4	#12890.00	47.9 AV	68.2	-20.3	1.85 V	238	25.7	22.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	103.0 PK			1.36 H	87	55.5	47.5
2	*6485.00	90.5 AV			1.36 H	87	43.0	47.5
3	#12970.00	60.8 PK	88.2	-27.4	2.15 H	319	38.5	22.3
4	#12970.00	47.7 AV	68.2	-20.5	2.15 H	319	25.4	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	108.4 PK			1.78 V	12	60.9	47.5
2	*6485.00	96.5 AV			1.78 V	12	49.0	47.5
3	#12970.00	61.1 PK	88.2	-27.1	1.87 V	232	38.8	22.3
4	#12970.00	47.9 AV	68.2	-20.3	1.87 V	232	25.6	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	103.4 PK			1.33 H	85	55.6	47.8
2	*6525.00	91.7 AV			1.33 H	85	43.9	47.8
3	#13050.00	60.9 PK	88.2	-27.3	2.01 H	304	38.4	22.5
4	#13050.00	47.9 AV	68.2	-20.3	2.01 H	304	25.4	22.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	109.8 PK			1.79 V	13	62.0	47.8
2	*6525.00	97.5 AV			1.79 V	13	49.7	47.8
3	#13050.00	61.2 PK	88.2	-27.0	1.85 V	238	38.7	22.5
4	#13050.00	48.2 AV	68.2	-20.0	1.85 V	238	25.7	22.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	103.6 PK			1.36 H	92	55.5	48.1
2	*6565.00	90.9 AV			1.36 H	92	42.8	48.1
3	#13130.00	61.1 PK	88.2	-27.1	2.05 H	311	38.5	22.6
4	#13130.00	48.1 AV	68.2	-20.1	2.05 H	311	25.5	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	108.8 PK			1.82 V	11	60.7	48.1
2	*6565.00	97.1 AV			1.82 V	11	49.0	48.1
3	#13130.00	61.2 PK	88.2	-27.0	1.82 V	232	38.6	22.6
4	#13130.00	48.2 AV	68.2	-20.0	1.82 V	232	25.6	22.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 155 : 6725 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	104.2 PK			1.32 H	85	56.0	48.2
2	*6725.00	91.2 AV			1.32 H	85	43.0	48.2
3	#13450.00	62.0 PK	88.2	-26.2	2.02 H	302	38.5	23.5
4	#13450.00	48.9 AV	68.2	-19.3	2.02 H	302	25.4	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	109.9 PK			2.05 V	8	61.7	48.2
2	*6725.00	97.6 AV			2.05 V	8	49.4	48.2
3	#13450.00	62.1 PK	88.2	-26.1	1.85 V	239	38.6	23.5
4	#13450.00	49.2 AV	68.2	-19.0	1.85 V	239	25.7	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	103.4 PK			1.35 H	92	55.2	48.2
2	*6845.00	91.8 AV			1.35 H	92	43.6	48.2
3	#13690.00	62.2 PK	88.2	-26.0	2.02 H	318	38.4	23.8
4	#13690.00	49.2 AV	68.2	-19.0	2.02 H	318	25.4	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	109.4 PK			1.29 V	355	61.2	48.2
2	*6845.00	97.9 AV			1.29 V	355	49.7	48.2
3	#13690.00	62.3 PK	88.2	-25.9	1.88 V	232	38.5	23.8
4	#13690.00	49.4 AV	68.2	-18.8	1.88 V	232	25.6	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	104.2 PK			1.28 H	85	55.8	48.4
2	*6885.00	91.5 AV			1.28 H	85	43.1	48.4
3	#13770.00	62.4 PK	88.2	-25.8	2.05 H	322	38.3	24.1
4	#13770.00	49.5 AV	68.2	-18.7	2.05 H	322	25.4	24.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.0 PK			1.33 V	356	61.6	48.4
2	*6885.00	97.6 AV			1.33 V	356	49.2	48.4
3	#13770.00	62.7 PK	88.2	-25.5	1.85 V	228	38.6	24.1
4	#13770.00	49.8 AV	68.2	-18.4	1.85 V	228	25.7	24.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 211 : 7005 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	103.8 PK			1.30 H	88	54.0	49.8
2	*7005.00	91.3 AV			1.30 H	88	41.5	49.8
3	#14010.00	63.1 PK	88.2	-25.1	2.02 H	315	38.4	24.7
4	#14010.00	50.1 AV	68.2	-18.1	2.02 H	315	25.4	24.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	110.0 PK			1.33 V	355	60.2	49.8
2	*7005.00	97.6 AV			1.33 V	355	47.8	49.8
3	#14010.00	63.2 PK	88.2	-25.0	1.82 V	222	38.5	24.7
4	#14010.00	50.3 AV	68.2	-17.9	1.82 V	222	25.6	24.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	104.1 PK			1.32 H	90	54.7	49.4
2	*7085.00	91.4 AV			1.32 H	90	42.0	49.4
3	#7125.00	56.0 PK	88.2	-32.2	1.32 H	90	38.4	17.6
4	#7125.00	43.8 AV	68.2	-24.4	1.32 H	90	26.2	17.6
5	#14170.00	63.4 PK	88.2	-24.8	2.05 H	306	38.4	25.0
6	#14170.00	50.3 AV	68.2	-17.9	2.05 H	306	25.3	25.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.5 PK			1.77 V	2	60.1	49.4
2	*7085.00	97.1 AV			1.77 V	2	47.7	49.4
3	#7125.00	56.4 PK	88.2	-31.8	1.77 V	2	38.8	17.6
4	#7125.00	44.1 AV	68.2	-24.1	1.77 V	2	26.5	17.6
5	#14170.00	63.6 PK	88.2	-24.6	1.88 V	225	38.6	25.0
6	#14170.00	50.6 AV	68.2	-17.6	1.88 V	225	25.6	25.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 39 : 6145 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.30 H	88	37.8	13.9
2	#5925.00	38.5 AV	68.2	-29.7	1.30 H	88	24.6	13.9
3	*6145.00	104.0 PK			1.30 H	88	58.6	45.4
4	*6145.00	91.4 AV			1.30 H	88	46.0	45.4
5	12290.00	59.0 PK	74.0	-15.0	2.14 H	315	38.0	21.0
6	12290.00	46.2 AV	54.0	-7.8	2.14 H	315	25.2	21.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	1.14 V	346	38.2	13.9
2	#5925.00	39.2 AV	68.2	-29.0	1.14 V	346	25.3	13.9
3	*6145.00	109.4 PK			1.14 V	346	64.0	45.4
4	*6145.00	97.7 AV			1.14 V	346	52.3	45.4
5	12290.00	59.5 PK	74.0	-14.5	1.88 V	230	38.5	21.0
6	12290.00	46.9 AV	54.0	-7.1	1.88 V	230	25.9	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 55 : 6225 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	103.8 PK			1.28 H	87	58.1	45.7
2	*6225.00	91.2 AV			1.28 H	87	45.5	45.7
3	12450.00	58.9 PK	74.0	-15.1	2.22 H	308	38.0	20.9
4	12450.00	46.2 AV	54.0	-7.8	2.22 H	308	25.3	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.4 PK			1.50 V	343	64.7	45.7
2	*6225.00	97.8 AV			1.50 V	343	52.1	45.7
3	12450.00	59.5 PK	74.0	-14.5	1.87 V	229	38.6	20.9
4	12450.00	46.8 AV	54.0	-7.2	1.87 V	229	25.9	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	103.9 PK			1.26 H	84	56.9	47.0
2	*6385.00	91.3 AV			1.26 H	84	44.3	47.0
3	#12770.00	58.8 PK	88.2	-29.4	2.16 H	317	37.1	21.7
4	#12770.00	46.0 AV	68.2	-22.2	2.16 H	317	24.3	21.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.5 PK			1.42 V	344	62.5	47.0
2	*6385.00	97.6 AV			1.42 V	344	50.6	47.0
3	#12770.00	59.8 PK	88.2	-28.4	1.79 V	224	38.1	21.7
4	#12770.00	47.0 AV	68.2	-21.2	1.79 V	224	25.3	21.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.9 PK			1.22 H	85	56.6	47.3
2	*6465.00	91.2 AV			1.22 H	85	43.9	47.3
3	#12930.00	60.0 PK	88.2	-28.2	2.19 H	308	37.8	22.2
4	#12930.00	47.4 AV	68.2	-20.8	2.19 H	308	25.2	22.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.2 PK			1.18 V	348	61.9	47.3
2	*6465.00	97.5 AV			1.18 V	348	50.2	47.3
3	#12930.00	60.7 PK	88.2	-27.5	1.92 V	225	38.5	22.2
4	#12930.00	48.0 AV	68.2	-20.2	1.92 V	225	25.8	22.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	103.8 PK			1.27 H	93	55.9	47.9
2	*6545.00	91.1 AV			1.27 H	93	43.2	47.9
3	#13090.00	60.5 PK	88.2	-27.7	2.11 H	310	37.9	22.6
4	#13090.00	47.6 AV	68.2	-20.6	2.11 H	310	25.0	22.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.4 PK			1.19 V	344	61.5	47.9
2	*6545.00	97.8 AV			1.19 V	344	49.9	47.9
3	#13090.00	61.0 PK	88.2	-27.2	1.86 V	228	38.4	22.6
4	#13090.00	48.5 AV	68.2	-19.7	1.86 V	228	25.9	22.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.8 PK			1.33 H	82	55.7	48.1
2	*6705.00	91.2 AV			1.33 H	82	43.1	48.1
3	#13410.00	61.4 PK	88.2	-26.8	2.17 H	311	37.9	23.5
4	#13410.00	48.5 AV	68.2	-19.7	2.17 H	311	25.0	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.3 PK			1.42 V	344	61.2	48.1
2	*6705.00	97.5 AV			1.42 V	344	49.4	48.1
3	#13410.00	62.0 PK	88.2	-26.2	1.80 V	233	38.5	23.5
4	#13410.00	49.3 AV	68.2	-18.9	1.80 V	233	25.8	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	104.0 PK			1.29 H	86	55.8	48.2
2	*6865.00	91.2 AV			1.29 H	86	43.0	48.2
3	#13730.00	61.7 PK	88.2	-26.5	2.11 H	318	37.8	23.9
4	#13730.00	48.8 AV	68.2	-19.4	2.11 H	318	24.9	23.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	109.5 PK			1.24 V	344	61.3	48.2
2	*6865.00	97.8 AV			1.24 V	344	49.6	48.2
3	#13730.00	62.4 PK	88.2	-25.8	1.85 V	234	38.5	23.9
4	#13730.00	49.5 AV	68.2	-18.7	1.85 V	234	25.6	23.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	103.8 PK			1.35 H	79	54.7	49.1
2	*6945.00	91.2 AV			1.35 H	79	42.1	49.1
3	#13890.00	62.0 PK	88.2	-26.2	2.24 H	309	37.8	24.2
4	#13890.00	49.2 AV	68.2	-19.0	2.24 H	309	25.0	24.2

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.5 PK			1.50 V	345	60.4	49.1
2	*6945.00	97.6 AV			1.50 V	345	48.5	49.1
3	#13890.00	63.0 PK	88.2	-25.2	1.90 V	225	38.8	24.2
4	#13890.00	50.1 AV	68.2	-18.1	1.90 V	225	25.9	24.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	104.2 PK			1.26 H	83	54.5	49.7
2	*7025.00	91.2 AV			1.26 H	83	41.5	49.7
3	#7125.00	56.4 PK	88.2	-31.8	1.26 H	83	38.8	17.6
4	#7125.00	43.6 AV	68.2	-24.6	1.26 H	83	26.0	17.6
5	#14050.00	62.7 PK	88.2	-25.5	2.11 H	318	37.8	24.9
6	#14050.00	50.1 AV	68.2	-18.1	2.11 H	318	25.2	24.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.6 PK			1.44 V	306	60.9	49.7
2	*7025.00	98.1 AV			1.44 V	306	48.4	49.7
3	#7125.00	57.5 PK	88.2	-30.7	1.44 V	306	39.9	17.6
4	#7125.00	44.4 AV	68.2	-23.8	1.44 V	306	26.8	17.6
5	#14050.00	63.4 PK	88.2	-24.8	1.92 V	224	38.5	24.9
6	#14050.00	50.5 AV	68.2	-17.7	1.92 V	224	25.6	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	1.29 H	85	37.6	13.9
2	#5925.00	38.5 AV	68.2	-29.7	1.29 H	85	24.6	13.9
3	*6185.00	104.1 PK			1.29 H	85	58.7	45.4
4	*6185.00	91.7 AV			1.29 H	85	46.3	45.4
5	12370.00	58.7 PK	74.0	-15.3	2.16 H	311	37.8	20.9
6	12370.00	45.9 AV	54.0	-8.1	2.16 H	311	25.0	20.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5925.00	52.3 PK	88.2	-35.9	1.05 V	346	38.4	13.9
2	#5925.00	39.4 AV	68.2	-28.8	1.05 V	346	25.5	13.9
3	*6185.00	110.2 PK			1.05 V	346	64.8	45.4
4	*6185.00	97.9 AV			1.05 V	346	52.5	45.4
5	12370.00	59.3 PK	74.0	-14.7	1.86 V	233	38.4	20.9
6	12370.00	46.7 AV	54.0	-7.3	1.86 V	233	25.8	20.9

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	103.8 PK			1.33 H	84	57.0	46.8
2	*6345.00	91.5 AV			1.33 H	84	44.7	46.8
3	12690.00	58.8 PK	74.0	-15.2	2.19 H	305	37.1	21.7
4	12690.00	45.7 AV	54.0	-8.3	2.19 H	305	24.0	21.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.1 PK			1.08 V	344	63.3	46.8
2	*6345.00	97.8 AV			1.08 V	344	51.0	46.8
3	12690.00	59.5 PK	74.0	-14.5	1.90 V	234	37.8	21.7
4	12690.00	46.9 AV	54.0	-7.1	1.90 V	234	25.2	21.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.0 PK			1.34 H	86	56.3	47.7
2	*6505.00	91.5 AV			1.34 H	86	43.8	47.7
3	#13010.00	60.2 PK	88.2	-28.0	2.23 H	305	37.8	22.4
4	#13010.00	47.4 AV	68.2	-20.8	2.23 H	305	25.0	22.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.3 PK			1.09 V	344	62.6	47.7
2	*6505.00	98.0 AV			1.09 V	344	50.3	47.7
3	#13010.00	60.9 PK	88.2	-27.3	1.94 V	227	38.5	22.4
4	#13010.00	47.9 AV	68.2	-20.3	1.94 V	227	25.5	22.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.8 PK			1.30 H	88	55.8	48.0
2	*6665.00	91.6 AV			1.30 H	88	43.6	48.0
3	13330.00	60.9 PK	74.0	-13.1	2.20 H	317	37.8	23.1
4	13330.00	48.4 AV	54.0	-5.6	2.20 H	317	25.3	23.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.8 PK			1.10 V	348	61.8	48.0
2	*6665.00	97.8 AV			1.10 V	348	49.8	48.0
3	13330.00	61.9 PK	74.0	-12.1	1.85 V	234	38.8	23.1
4	13330.00	49.0 AV	54.0	-5.0	1.85 V	234	25.9	23.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	104.0 PK			1.27 H	81	55.7	48.3
2	*6825.00	91.6 AV			1.27 H	81	43.3	48.3
3	#13650.00	61.7 PK	88.2	-26.5	2.14 H	309	37.9	23.8
4	#13650.00	48.8 AV	68.2	-19.4	2.14 H	309	25.0	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.3 PK			1.04 V	342	62.0	48.3
2	*6825.00	97.9 AV			1.04 V	342	49.6	48.3
3	#13650.00	62.4 PK	88.2	-25.8	1.90 V	218	38.6	23.8
4	#13650.00	49.6 AV	68.2	-18.6	1.90 V	218	25.8	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.8 PK			1.28 H	89	55.1	49.7
2	*6985.00	92.1 AV			1.28 H	89	42.4	49.7
3	#7125.00	55.6 PK	88.2	-32.6	1.28 H	89	38.0	17.6
4	#7125.00	43.9 AV	68.2	-24.3	1.28 H	89	26.3	17.6
5	#13970.00	61.8 PK	88.2	-26.4	2.20 H	304	37.2	24.6
6	#13970.00	48.8 AV	68.2	-19.4	2.20 H	304	24.2	24.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.0 PK			1.17 V	355	60.3	49.7
2	*6985.00	98.2 AV			1.17 V	355	48.5	49.7
3	#7125.00	58.6 PK	88.2	-29.6	1.17 V	355	41.0	17.6
4	#7125.00	44.9 AV	68.2	-23.3	1.17 V	355	27.3	17.6
5	#13970.00	62.5 PK	88.2	-25.7	1.88 V	236	37.9	24.6
6	#13970.00	49.4 AV	68.2	-18.8	1.88 V	236	24.8	24.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.25 H	88	37.8	13.9
2	#5925.00	38.7 AV	68.2	-29.5	1.25 H	88	24.8	13.9
3	*6265.00	101.8 PK			1.25 H	88	55.8	46.0
4	*6265.00	89.8 AV			1.25 H	88	43.8	46.0
5	12530.00	58.8 PK	74.0	-15.2	2.20 H	310	37.8	21.0
6	12530.00	45.8 AV	54.0	-8.2	2.20 H	310	24.8	21.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.4 PK	88.2	-35.8	1.20 V	346	38.5	13.9
2	#5925.00	39.5 AV	68.2	-28.7	1.20 V	346	25.6	13.9
3	*6265.00	107.4 PK			1.20 V	346	61.4	46.0
4	*6265.00	96.1 AV			1.20 V	346	50.1	46.0
5	12530.00	59.2 PK	74.0	-14.8	1.88 V	231	38.2	21.0
6	12530.00	46.8 AV	54.0	-7.2	1.88 V	231	25.8	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 95 : 6425 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	101.7 PK			1.29 H	90	54.6	47.1
2	*6425.00	89.6 AV			1.29 H	90	42.5	47.1
3	#12850.00	59.9 PK	88.2	-28.3	2.13 H	335	37.9	22.0
4	#12850.00	46.8 AV	68.2	-21.4	2.13 H	335	24.8	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.2 PK			1.23 V	344	60.1	47.1
2	*6425.00	96.0 AV			1.23 V	344	48.9	47.1
3	#12850.00	60.5 PK	88.2	-27.7	1.91 V	233	38.5	22.0
4	#12850.00	47.7 AV	68.2	-20.5	1.91 V	233	25.7	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	101.7 PK			1.22 H	79	53.6	48.1
2	*6585.00	89.9 AV			1.22 H	79	41.8	48.1
3	#13170.00	60.3 PK	88.2	-27.9	2.21 H	305	37.7	22.6
4	#13170.00	47.6 AV	68.2	-20.6	2.21 H	305	25.0	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.5 PK			1.42 V	344	59.4	48.1
2	*6585.00	96.3 AV			1.42 V	344	48.2	48.1
3	#13170.00	61.3 PK	88.2	-26.9	1.90 V	233	38.7	22.6
4	#13170.00	48.1 AV	68.2	-20.1	1.90 V	233	25.5	22.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 159 : 6745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	101.5 PK			1.27 H	84	53.2	48.3
2	*6745.00	89.6 AV			1.27 H	84	41.3	48.3
3	#13490.00	61.5 PK	88.2	-26.7	2.25 H	317	37.9	23.6
4	#13490.00	48.4 AV	68.2	-19.8	2.25 H	317	24.8	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.5 PK			1.22 V	349	59.2	48.3
2	*6745.00	96.2 AV			1.22 V	349	47.9	48.3
3	#13490.00	62.4 PK	88.2	-25.8	1.82 V	236	38.8	23.6
4	#13490.00	49.3 AV	68.2	-18.9	1.82 V	236	25.7	23.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	102.0 PK			1.23 H	84	53.4	48.6
2	*6905.00	89.2 AV			1.23 H	84	40.6	48.6
3	#7125.00	59.1 PK	88.2	-29.1	1.23 H	84	41.5	17.6
4	#7125.00	45.5 AV	68.2	-22.7	1.23 H	84	27.9	17.6
5	#13810.00	62.1 PK	88.2	-26.1	2.30 H	322	38.0	24.1
6	#13810.00	49.1 AV	68.2	-19.1	2.30 H	322	25.0	24.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.4 PK			1.12 V	355	58.8	48.6
2	*6905.00	95.7 AV			1.12 V	355	47.1	48.6
3	#7125.00	61.3 PK	88.2	-26.9	1.12 V	355	43.7	17.6
4	#7125.00	48.4 AV	68.2	-19.8	1.12 V	355	30.8	17.6
5	#13810.00	62.6 PK	88.2	-25.6	1.90 V	233	38.5	24.1
6	#13810.00	49.9 AV	68.2	-18.3	1.90 V	233	25.8	24.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

### Beamforming (4T4S)

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 33 : 6115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.8 PK	88.2	-36.4	1.19 H	83	37.9	13.9
2	#5925.00	38.7 AV	68.2	-29.5	1.19 H	83	24.8	13.9
3	*6115.00	105.3 PK			1.19 H	83	59.8	45.5
4	*6115.00	92.6 AV			1.19 H	83	47.1	45.5
5	12230.00	58.7 PK	74.0	-15.3	2.31 H	316	37.7	21.0
6	12230.00	45.6 AV	54.0	-8.4	2.31 H	316	24.6	21.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.3 PK	88.2	-35.9	1.12 V	343	38.4	13.9
2	#5925.00	39.4 AV	68.2	-28.8	1.12 V	343	25.5	13.9
3	*6115.00	111.3 PK			1.12 V	343	65.8	45.5
4	*6115.00	98.6 AV			1.12 V	343	53.1	45.5
5	12230.00	59.3 PK	74.0	-14.7	1.88 V	233	38.3	21.0
6	12230.00	46.9 AV	54.0	-7.1	1.88 V	233	25.9	21.0

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 61 : 6255 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	105.2 PK			1.18 H	89	59.2	46.0
2	*6255.00	92.4 AV			1.18 H	89	46.4	46.0
3	12510.00	58.6 PK	74.0	-15.4	2.30 H	307	37.7	20.9
4	12510.00	45.7 AV	54.0	-8.3	2.30 H	307	24.8	20.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	111.1 PK			1.15 V	340	65.1	46.0
2	*6255.00	98.6 AV			1.15 V	340	52.6	46.0
3	12510.00	59.4 PK	74.0	-14.6	1.89 V	230	38.5	20.9
4	12510.00	46.8 AV	54.0	-7.2	1.89 V	230	25.9	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	105.4 PK			1.24 H	80	58.3	47.1
2	*6415.00	92.8 AV			1.24 H	80	45.7	47.1
3	#12830.00	58.7 PK	88.2	-29.5	2.22 H	319	36.9	21.8
4	#12830.00	45.5 AV	68.2	-22.7	2.22 H	319	23.7	21.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.1 PK			1.19 V	345	64.0	47.1
2	*6415.00	98.5 AV			1.19 V	345	51.4	47.1
3	#12830.00	59.5 PK	88.2	-28.7	1.90 V	234	37.7	21.8
4	#12830.00	46.7 AV	68.2	-21.5	1.90 V	234	24.9	21.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	105.2 PK			1.17 H	85	58.1	47.1
2	*6435.00	92.8 AV			1.17 H	85	45.7	47.1
3	#12870.00	58.6 PK	88.2	-29.6	2.30 H	309	36.5	22.1
4	#12870.00	45.8 AV	68.2	-22.4	2.30 H	309	23.7	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.5 PK			1.22 V	349	64.4	47.1
2	*6435.00	98.8 AV			1.22 V	349	51.7	47.1
3	#12870.00	59.5 PK	88.2	-28.7	1.79 V	228	37.4	22.1
4	#12870.00	46.7 AV	68.2	-21.5	1.79 V	228	24.6	22.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	105.2 PK			1.19 H	87	57.8	47.4
2	*6475.00	92.5 AV			1.19 H	87	45.1	47.4
3	#12950.00	59.8 PK	88.2	-28.4	2.28 H	314	37.6	22.2
4	#12950.00	47.2 AV	68.2	-21.0	2.28 H	314	25.0	22.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.5 PK			1.19 V	342	64.1	47.4
2	*6475.00	98.8 AV			1.19 V	342	51.4	47.4
3	#12950.00	60.7 PK	88.2	-27.5	1.80 V	231	38.5	22.2
4	#12950.00	47.9 AV	68.2	-20.3	1.80 V	231	25.7	22.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	105.4 PK			1.19 H	88	57.7	47.7
2	*6515.00	92.4 AV			1.19 H	88	44.7	47.7
3	#13030.00	60.0 PK	88.2	-28.2	2.27 H	306	37.6	22.4
4	#13030.00	47.4 AV	68.2	-20.8	2.27 H	306	25.0	22.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.2 PK			1.18 V	340	63.5	47.7
2	*6515.00	98.5 AV			1.18 V	340	50.8	47.7
3	#13030.00	61.0 PK	88.2	-27.2	1.92 V	234	38.6	22.4
4	#13030.00	48.2 AV	68.2	-20.0	1.92 V	234	25.8	22.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.4 PK			1.18 H	84	57.5	47.9
2	*6535.00	92.3 AV			1.18 H	84	44.4	47.9
3	#13070.00	59.9 PK	88.2	-28.3	2.25 H	317	37.5	22.4
4	#13070.00	47.2 AV	68.2	-21.0	2.25 H	317	24.8	22.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.5 PK			1.20 V	344	63.6	47.9
2	*6535.00	98.8 AV			1.20 V	344	50.9	47.9
3	#13070.00	60.9 PK	88.2	-27.3	1.90 V	235	38.5	22.4
4	#13070.00	48.0 AV	68.2	-20.2	1.90 V	235	25.6	22.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	105.5 PK			1.23 H	80	57.5	48.0
2	*6695.00	92.5 AV			1.23 H	80	44.5	48.0
3	13390.00	61.4 PK	74.0	-12.6	2.28 H	306	37.9	23.5
4	13390.00	48.5 AV	54.0	-5.5	2.28 H	306	25.0	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.5 PK			1.28 V	346	63.5	48.0
2	*6695.00	98.5 AV			1.28 V	346	50.5	48.0
3	13390.00	61.9 PK	74.0	-12.1	1.85 V	227	38.4	23.5
4	13390.00	49.1 AV	54.0	-4.9	1.85 V	227	25.6	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.2 PK			1.27 H	93	57.1	48.1
2	*6855.00	92.5 AV			1.27 H	93	44.4	48.1
3	#13710.00	61.6 PK	88.2	-26.6	2.27 H	304	37.8	23.8
4	#13710.00	48.7 AV	68.2	-19.5	2.27 H	304	24.9	23.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.4 PK			1.15 V	340	63.3	48.1
2	*6855.00	98.6 AV			1.15 V	340	50.5	48.1
3	#13710.00	62.3 PK	88.2	-25.9	1.90 V	238	38.5	23.8
4	#13710.00	49.5 AV	68.2	-18.7	1.90 V	238	25.7	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	105.0 PK			1.15 H	79	56.7	48.3
2	*6875.00	92.4 AV			1.15 H	79	44.1	48.3
3	#13750.00	62.0 PK	88.2	-26.2	2.33 H	302	38.1	23.9
4	#13750.00	48.5 AV	68.2	-19.7	2.33 H	302	24.6	23.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.2 PK			1.10 V	342	62.9	48.3
2	*6875.00	98.4 AV			1.10 V	342	50.1	48.3
3	#13750.00	62.6 PK	88.2	-25.6	1.72 V	234	38.7	23.9
4	#13750.00	49.7 AV	68.2	-18.5	1.72 V	234	25.8	23.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.9 PK			1.18 H	99	55.2	49.7
2	*6995.00	92.2 AV			1.18 H	99	42.5	49.7
3	#13990.00	62.5 PK	88.2	-25.7	2.19 H	334	37.8	24.7
4	#13990.00	49.6 AV	68.2	-18.6	2.19 H	334	24.9	24.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.2 PK			1.18 V	350	61.5	49.7
2	*6995.00	98.6 AV			1.18 V	350	48.9	49.7
3	#13990.00	63.5 PK	88.2	-24.7	1.90 V	231	38.8	24.7
4	#13990.00	50.4 AV	68.2	-17.8	1.90 V	231	25.7	24.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 229 : 7095 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	105.2 PK			1.23 H	88	55.8	49.4
2	*7095.00	92.5 AV			1.23 H	88	43.1	49.4
3	#14190.00	62.9 PK	88.2	-25.3	2.38 H	319	37.8	25.1
4	#14190.00	50.0 AV	68.2	-18.2	2.38 H	319	24.9	25.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.2 PK			1.15 V	342	61.8	49.4
2	*7095.00	98.8 AV			1.15 V	342	49.4	49.4
3	#14190.00	63.8 PK	88.2	-24.4	1.90 V	233	38.7	25.1
4	#14190.00	50.9 AV	68.2	-17.3	1.90 V	233	25.8	25.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.7 PK			1.28 H	91	43.1	49.6
2	*7115.00	79.1 AV			1.28 H	91	29.5	49.6
3	#7125.00	74.5 PK	88.2	-13.7	1.28 H	91	56.9	17.6
4	#7125.00	59.6 AV	68.2	-8.6	1.28 H	91	42.0	17.6
5	#14230.00	62.7 PK	88.2	-25.5	2.39 H	311	37.6	25.1
6	#14230.00	49.9 AV	68.2	-18.3	2.39 H	311	24.8	25.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.8 PK			1.47 V	294	49.2	49.6
2	*7115.00	85.3 AV			1.47 V	294	35.7	49.6
3	#7125.00	80.4 PK	88.2	-7.8	1.47 V	294	62.8	17.6
<b>4</b>	<b>#7125.00</b>	<b>67.9 AV</b>	<b>68.2</b>	<b>-0.3</b>	<b>1.47 V</b>	<b>294</b>	<b>50.3</b>	<b>17.6</b>
5	#14230.00	63.8 PK	88.2	-24.4	1.75 V	216	38.7	25.1
6	#14230.00	50.8 AV	68.2	-17.4	1.75 V	216	25.7	25.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 35 : 6125 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.4 PK	88.2	-38.8	1.35 H	95	35.5	13.9
2	#5925.00	39.3 AV	68.2	-28.9	1.35 H	95	25.4	13.9
3	*6125.00	105.8 PK			1.35 H	95	60.3	45.5
4	*6125.00	92.5 AV			1.35 H	95	47.0	45.5
5	12250.00	59.7 PK	74.0	-14.3	2.25 H	315	38.7	21.0
6	12250.00	46.8 AV	54.0	-7.2	2.25 H	315	25.8	21.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.1 PK	88.2	-38.1	1.47 V	344	36.2	13.9
2	#5925.00	39.5 AV	68.2	-28.7	1.47 V	344	25.6	13.9
3	*6125.00	112.1 PK			1.47 V	344	66.6	45.5
4	*6125.00	98.9 AV			1.47 V	344	53.4	45.5
5	12250.00	60.5 PK	74.0	-13.5	1.82 V	221	39.5	21.0
6	12250.00	47.5 AV	54.0	-6.5	1.82 V	221	26.5	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 59 : 6245 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	107.0 PK			1.32 H	88	61.2	45.8
2	*6245.00	93.7 AV			1.32 H	88	47.9	45.8
3	12490.00	59.7 PK	74.0	-14.3	2.02 H	311	38.8	20.9
4	12490.00	46.6 AV	54.0	-7.4	2.02 H	311	25.7	20.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	113.2 PK			1.59 V	343	67.4	45.8
2	*6245.00	100.0 AV			1.59 V	343	54.2	45.8
3	12490.00	60.2 PK	74.0	-13.8	1.85 V	223	39.3	20.9
4	12490.00	47.1 AV	54.0	-6.9	1.85 V	223	26.2	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	105.0 PK			1.35 H	87	58.0	47.0
2	*6405.00	92.7 AV			1.35 H	87	45.7	47.0
3	#12810.00	60.6 PK	88.2	-27.6	2.15 H	312	38.9	21.7
4	#12810.00	47.5 AV	68.2	-20.7	2.15 H	312	25.8	21.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.1 PK			1.65 V	346	65.1	47.0
2	*6405.00	98.9 AV			1.65 V	346	51.9	47.0
3	#12810.00	60.9 PK	88.2	-27.3	1.82 V	223	39.2	21.7
4	#12810.00	47.7 AV	68.2	-20.5	1.82 V	223	26.0	21.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	105.6 PK			1.35 H	90	58.5	47.1
2	*6445.00	92.4 AV			1.35 H	90	45.3	47.1
3	#12890.00	60.9 PK	88.2	-27.3	2.11 H	305	38.7	22.2
4	#12890.00	48.0 AV	68.2	-20.2	2.11 H	305	25.8	22.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	112.1 PK			1.75 V	13	65.0	47.1
2	*6445.00	98.8 AV			1.75 V	13	51.7	47.1
3	#12890.00	61.4 PK	88.2	-26.8	1.82 V	224	39.2	22.2
4	#12890.00	48.3 AV	68.2	-19.9	1.82 V	224	26.1	22.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	104.3 PK			1.35 H	90	56.8	47.5
2	*6485.00	92.2 AV			1.35 H	90	44.7	47.5
3	#12970.00	61.0 PK	88.2	-27.2	2.05 H	319	38.7	22.3
4	#12970.00	48.0 AV	68.2	-20.2	2.05 H	319	25.7	22.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.1 PK			1.72 V	10	63.6	47.5
2	*6485.00	98.1 AV			1.72 V	10	50.6	47.5
3	#12970.00	61.5 PK	88.2	-26.7	1.82 V	225	39.2	22.3
4	#12970.00	48.4 AV	68.2	-19.8	1.82 V	225	26.1	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	105.4 PK			1.35 H	85	57.6	47.8
2	*6525.00	92.7 AV			1.35 H	85	44.9	47.8
3	#13050.00	61.2 PK	88.2	-27.0	2.05 H	305	38.7	22.5
4	#13050.00	48.1 AV	68.2	-20.1	2.05 H	305	25.6	22.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	112.1 PK			1.71 V	12	64.3	47.8
2	*6525.00	98.7 AV			1.71 V	12	50.9	47.8
3	#13050.00	61.7 PK	88.2	-26.5	1.77 V	225	39.2	22.5
4	#13050.00	48.5 AV	68.2	-19.7	1.77 V	225	26.0	22.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	104.3 PK			1.35 H	86	56.2	48.1
2	*6565.00	92.3 AV			1.35 H	86	44.2	48.1
3	#13130.00	61.3 PK	88.2	-26.9	2.06 H	308	38.7	22.6
4	#13130.00	48.2 AV	68.2	-20.0	2.06 H	308	25.6	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	111.3 PK			1.74 V	17	63.2	48.1
2	*6565.00	98.4 AV			1.74 V	17	50.3	48.1
3	#13130.00	61.8 PK	88.2	-26.4	1.82 V	216	39.2	22.6
4	#13130.00	48.6 AV	68.2	-19.6	1.82 V	216	26.0	22.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 155 : 6725 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	106.2 PK			1.35 H	88	58.0	48.2
2	*6725.00	92.7 AV			1.35 H	88	44.5	48.2
3	#13450.00	62.2 PK	88.2	-26.0	2.11 H	308	38.7	23.5
4	#13450.00	49.0 AV	68.2	-19.2	2.11 H	308	25.5	23.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	111.4 PK			1.81 V	19	63.2	48.2
2	*6725.00	98.8 AV			1.81 V	19	50.6	48.2
3	#13450.00	62.7 PK	88.2	-25.5	1.82 V	225	39.2	23.5
4	#13450.00	49.6 AV	68.2	-18.6	1.82 V	225	26.1	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	105.8 PK			1.35 H	82	57.6	48.2
2	*6845.00	92.7 AV			1.35 H	82	44.5	48.2
3	#13690.00	62.5 PK	88.2	-25.7	2.05 H	313	38.7	23.8
4	#13690.00	49.4 AV	68.2	-18.8	2.05 H	313	25.6	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.9 PK			1.77 V	353	63.7	48.2
2	*6845.00	98.9 AV			1.77 V	353	50.7	48.2
3	#13690.00	63.0 PK	88.2	-25.2	1.87 V	229	39.2	23.8
4	#13690.00	49.8 AV	68.2	-18.4	1.87 V	229	26.0	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	105.1 PK			1.38 H	90	56.7	48.4
2	*6885.00	93.2 AV			1.38 H	90	44.8	48.4
3	#13770.00	62.8 PK	88.2	-25.4	2.05 H	316	38.7	24.1
4	#13770.00	49.7 AV	68.2	-18.5	2.05 H	316	25.6	24.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.6 PK			1.89 V	357	63.2	48.4
2	*6885.00	99.3 AV			1.89 V	357	50.9	48.4
3	#13770.00	63.3 PK	88.2	-24.9	1.82 V	225	39.2	24.1
4	#13770.00	50.2 AV	68.2	-18.0	1.82 V	225	26.1	24.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 211 : 7005 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	105.6 PK			1.36 H	91	55.8	49.8
2	*7005.00	93.3 AV			1.36 H	91	43.5	49.8
3	#14010.00	63.6 PK	88.2	-24.6	2.11 H	313	38.9	24.7
4	#14010.00	50.5 AV	68.2	-17.7	2.11 H	313	25.8	24.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	112.0 PK			1.80 V	356	62.2	49.8
2	*7005.00	99.3 AV			1.80 V	356	49.5	49.8
3	#14010.00	63.9 PK	88.2	-24.3	1.87 V	222	39.2	24.7
4	#14010.00	50.9 AV	68.2	-17.3	1.87 V	222	26.2	24.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	105.2 PK			1.39 H	90	55.8	49.4
2	*7085.00	93.0 AV			1.39 H	90	43.6	49.4
3	#7125.00	57.1 PK	88.2	-31.1	1.39 H	90	39.5	17.6
4	#7125.00	44.8 AV	68.2	-23.4	1.39 H	90	27.2	17.6
5	#14170.00	63.7 PK	88.2	-24.5	2.22 H	305	38.7	25.0
6	#14170.00	50.7 AV	68.2	-17.5	2.22 H	305	25.7	25.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.9 PK			1.88 V	357	62.5	49.4
2	*7085.00	99.2 AV			1.88 V	357	49.8	49.4
3	#7125.00	57.6 PK	88.2	-30.6	1.88 V	357	40.0	17.6
4	#7125.00	45.4 AV	68.2	-22.8	1.88 V	357	27.8	17.6
5	#14170.00	64.2 PK	88.2	-24.0	1.82 V	227	39.2	25.0
6	#14170.00	51.0 AV	68.2	-17.2	1.82 V	227	26.0	25.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 39 : 6145 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.4 PK	88.2	-37.8	1.40 H	89	36.5	13.9
2	#5925.00	39.7 AV	68.2	-28.5	1.40 H	89	25.8	13.9
3	*6145.00	105.3 PK			1.40 H	89	59.9	45.4
4	*6145.00	92.6 AV			1.40 H	89	47.2	45.4
5	12290.00	59.0 PK	74.0	-15.0	2.33 H	318	38.0	21.0
6	12290.00	46.0 AV	54.0	-8.0	2.33 H	318	25.0	21.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.7 PK	88.2	-37.5	1.34 V	344	36.8	13.9
2	#5925.00	39.8 AV	68.2	-28.4	1.34 V	344	25.9	13.9
3	*6145.00	112.0 PK			1.34 V	344	66.6	45.4
4	*6145.00	99.7 AV			1.34 V	344	54.3	45.4
5	12290.00	59.8 PK	74.0	-14.2	1.88 V	234	38.8	21.0
6	12290.00	46.9 AV	54.0	-7.1	1.88 V	234	25.9	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 55 : 6225 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	105.7 PK			1.38 H	90	60.0	45.7
2	*6225.00	92.4 AV			1.38 H	90	46.7	45.7
3	12450.00	58.8 PK	74.0	-15.2	2.33 H	308	37.9	20.9
4	12450.00	45.8 AV	54.0	-8.2	2.33 H	308	24.9	20.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.0 PK			1.40 V	342	66.3	45.7
2	*6225.00	98.8 AV			1.40 V	342	53.1	45.7
3	12450.00	59.9 PK	74.0	-14.1	1.88 V	219	39.0	20.9
4	12450.00	46.9 AV	54.0	-7.1	1.88 V	219	26.0	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	105.9 PK			1.37 H	94	58.9	47.0
2	*6385.00	92.5 AV			1.37 H	94	45.5	47.0
3	#12770.00	59.5 PK	88.2	-28.7	2.28 H	300	37.8	21.7
4	#12770.00	46.9 AV	68.2	-21.3	2.28 H	300	25.2	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.9 PK			1.45 V	328	64.9	47.0
2	*6385.00	98.7 AV			1.45 V	328	51.7	47.0
3	#12770.00	60.5 PK	88.2	-27.7	1.90 V	234	38.8	21.7
4	#12770.00	47.6 AV	68.2	-20.6	1.90 V	234	25.9	21.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	105.2 PK			1.39 H	88	57.9	47.3
2	*6465.00	92.6 AV			1.39 H	88	45.3	47.3
3	#12930.00	60.2 PK	88.2	-28.0	2.28 H	319	38.0	22.2
4	#12930.00	47.1 AV	68.2	-21.1	2.28 H	319	24.9	22.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.8 PK			1.45 V	342	64.5	47.3
2	*6465.00	98.6 AV			1.45 V	342	51.3	47.3
3	#12930.00	60.7 PK	88.2	-27.5	1.88 V	219	38.5	22.2
4	#12930.00	48.1 AV	68.2	-20.1	1.88 V	219	25.9	22.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	105.3 PK			1.44 H	81	57.4	47.9
2	*6545.00	92.4 AV			1.44 H	81	44.5	47.9
3	#13090.00	60.4 PK	88.2	-27.8	2.39 H	320	37.8	22.6
4	#13090.00	47.5 AV	68.2	-20.7	2.39 H	320	24.9	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.9 PK			1.31 V	348	64.0	47.9
2	*6545.00	99.5 AV			1.31 V	348	51.6	47.9
3	#13090.00	61.3 PK	88.2	-26.9	1.85 V	227	38.7	22.6
4	#13090.00	48.4 AV	68.2	-19.8	1.85 V	227	25.8	22.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.1 PK			1.42 H	88	57.0	48.1
2	*6705.00	92.3 AV			1.42 H	88	44.2	48.1
3	#13410.00	61.6 PK	88.2	-26.6	2.39 H	317	38.1	23.5
4	#13410.00	48.7 AV	68.2	-19.5	2.39 H	317	25.2	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.2 PK			1.38 V	347	64.1	48.1
2	*6705.00	99.8 AV			1.38 V	347	51.7	48.1
3	#13410.00	62.2 PK	88.2	-26.0	1.86 V	233	38.7	23.5
4	#13410.00	49.3 AV	68.2	-18.9	1.86 V	233	25.8	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	105.2 PK			1.48 H	85	57.0	48.2
2	*6865.00	92.4 AV			1.48 H	85	44.2	48.2
3	#13730.00	61.7 PK	88.2	-26.5	2.35 H	319	37.8	23.9
4	#13730.00	48.8 AV	68.2	-19.4	2.35 H	319	24.9	23.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.7 PK			1.36 V	341	63.5	48.2
2	*6865.00	99.5 AV			1.36 V	341	51.3	48.2
3	#13730.00	62.6 PK	88.2	-25.6	1.90 V	228	38.7	23.9
4	#13730.00	49.7 AV	68.2	-18.5	1.90 V	228	25.8	23.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	115.1 PK			1.42 H	86	66.0	49.1
2	*6945.00	92.4 AV			1.42 H	86	43.3	49.1
3	#13890.00	62.2 PK	88.2	-26.0	2.36 H	320	38.0	24.2
4	#13890.00	49.1 AV	68.2	-19.1	2.36 H	320	24.9	24.2

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.8 PK			1.45 V	342	62.7	49.1
2	*6945.00	99.4 AV			1.45 V	342	50.3	49.1
3	#13890.00	62.9 PK	88.2	-25.3	1.87 V	229	38.7	24.2
4	#13890.00	50.0 AV	68.2	-18.2	1.87 V	229	25.8	24.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	106.0 PK			1.48 H	92	56.3	49.7
2	*7025.00	92.7 AV			1.48 H	92	43.0	49.7
3	#7125.00	59.2 PK	88.2	-29.0	1.48 H	92	41.6	17.6
4	#7125.00	44.6 AV	68.2	-23.6	1.48 H	92	27.0	17.6
5	#14050.00	63.0 PK	88.2	-25.2	2.39 H	320	38.1	24.9
6	#14050.00	50.1 AV	68.2	-18.1	2.39 H	320	25.2	24.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	112.4 PK			1.38 V	328	62.7	49.7
2	*7025.00	99.7 AV			1.38 V	328	50.0	49.7
3	#7125.00	63.1 PK	88.2	-25.1	1.38 V	328	45.5	17.6
4	#7125.00	46.1 AV	68.2	-22.1	1.38 V	328	28.5	17.6
5	#14050.00	63.6 PK	88.2	-24.6	1.87 V	236	38.7	24.9
6	#14050.00	50.8 AV	68.2	-17.4	1.87 V	236	25.9	24.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.4 PK	88.2	-37.8	1.39 H	88	36.5	13.9
2	#5925.00	39.6 AV	68.2	-28.6	1.39 H	88	25.7	13.9
3	*6185.00	105.6 PK			1.39 H	88	60.2	45.4
4	*6185.00	92.4 AV			1.39 H	88	47.0	45.4
5	12370.00	58.8 PK	74.0	-15.2	2.35 H	311	37.9	20.9
6	12370.00	45.7 AV	54.0	-8.3	2.35 H	311	24.8	20.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.40 V	344	37.8	13.9
2	#5925.00	40.3 AV	68.2	-27.9	1.40 V	344	26.4	13.9
3	*6185.00	111.4 PK			1.40 V	344	66.0	45.4
4	*6185.00	98.7 AV			1.40 V	344	53.3	45.4
5	12370.00	59.7 PK	74.0	-14.3	1.85 V	234	38.8	20.9
6	12370.00	46.7 AV	54.0	-7.3	1.85 V	234	25.8	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.2 PK			1.44 H	83	58.4	46.8
2	*6345.00	92.4 AV			1.44 H	83	45.6	46.8
3	12690.00	59.8 PK	74.0	-14.2	2.30 H	328	38.1	21.7
4	12690.00	47.0 AV	54.0	-7.0	2.30 H	328	25.3	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.9 PK			1.39 V	342	65.1	46.8
2	*6345.00	99.5 AV			1.39 V	342	52.7	46.8
3	12690.00	60.4 PK	74.0	-13.6	1.91 V	242	38.7	21.7
4	12690.00	47.5 AV	54.0	-6.5	1.91 V	242	25.8	21.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.2 PK			1.39 H	88	57.5	47.7
2	*6505.00	92.4 AV			1.39 H	88	44.7	47.7
3	#13010.00	60.3 PK	88.2	-27.9	2.38 H	317	37.9	22.4
4	#13010.00	47.2 AV	68.2	-21.0	2.38 H	317	24.8	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	112.1 PK			1.39 V	345	64.4	47.7
2	*6505.00	99.6 AV			1.39 V	345	51.9	47.7
3	#13010.00	61.1 PK	88.2	-27.1	1.91 V	228	38.7	22.4
4	#13010.00	48.2 AV	68.2	-20.0	1.91 V	228	25.8	22.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.1 PK			1.40 H	86	57.1	48.0
2	*6665.00	92.4 AV			1.40 H	86	44.4	48.0
3	13330.00	60.9 PK	74.0	-13.1	2.37 H	310	37.8	23.1
4	13330.00	48.1 AV	54.0	-5.9	2.37 H	310	25.0	23.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	112.0 PK			1.36 V	333	64.0	48.0
2	*6665.00	99.4 AV			1.36 V	333	51.4	48.0
3	13330.00	61.8 PK	74.0	-12.2	1.90 V	228	38.7	23.1
4	13330.00	48.8 AV	54.0	-5.2	1.90 V	228	25.7	23.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.1 PK			1.38 H	79	56.8	48.3
2	*6825.00	92.4 AV			1.38 H	79	44.1	48.3
3	#13650.00	61.5 PK	88.2	-26.7	2.19 H	310	37.7	23.8
4	#13650.00	48.7 AV	68.2	-19.5	2.19 H	310	24.9	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.8 PK			1.36 V	342	63.5	48.3
2	*6825.00	99.6 AV			1.36 V	342	51.3	48.3
3	#13650.00	62.5 PK	88.2	-25.7	1.90 V	238	38.7	23.8
4	#13650.00	49.5 AV	68.2	-18.7	1.90 V	238	25.7	23.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.9 PK			1.44 H	85	56.2	49.7
2	*6985.00	93.0 AV			1.44 H	85	43.3	49.7
3	#7125.00	68.0 PK	88.2	-20.2	1.44 H	85	50.4	17.6
4	#7125.00	48.6 AV	68.2	-19.6	1.44 H	85	31.0	17.6
5	#13970.00	62.6 PK	88.2	-25.6	2.29 H	310	38.0	24.6
6	#13970.00	49.6 AV	68.2	-18.6	2.29 H	310	25.0	24.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	112.1 PK			1.34 V	356	62.4	49.7
2	*6985.00	99.4 AV			1.34 V	356	49.7	49.7
3	#7125.00	73.8 PK	88.2	-14.4	1.34 V	356	56.2	17.6
4	#7125.00	53.1 AV	68.2	-15.1	1.34 V	356	35.5	17.6
5	#13970.00	63.4 PK	88.2	-24.8	1.85 V	233	38.8	24.6
6	#13970.00	50.4 AV	68.2	-17.8	1.85 V	233	25.8	24.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.3 PK	88.2	-37.9	1.37 H	89	36.4	13.9
2	#5925.00	39.8 AV	68.2	-28.4	1.37 H	89	25.9	13.9
3	*6265.00	104.4 PK			1.37 H	89	58.4	46.0
4	*6265.00	92.3 AV			1.37 H	89	46.3	46.0
5	12530.00	59.1 PK	74.0	-14.9	2.31 H	309	38.1	21.0
6	12530.00	45.9 AV	54.0	-8.1	2.31 H	309	24.9	21.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.21 V	343	37.5	13.9
2	#5925.00	40.3 AV	68.2	-27.9	1.21 V	343	26.4	13.9
3	*6265.00	111.0 PK			1.21 V	343	65.0	46.0
4	*6265.00	98.8 AV			1.21 V	343	52.8	46.0
5	12530.00	59.6 PK	74.0	-14.4	1.80 V	226	38.6	21.0
6	12530.00	46.7 AV	54.0	-7.3	1.80 V	226	25.7	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 95 : 6425 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	104.2 PK			1.36 H	84	57.1	47.1
2	*6425.00	92.1 AV			1.36 H	84	45.0	47.1
3	#12850.00	60.0 PK	88.2	-28.2	2.33 H	306	38.0	22.0
4	#12850.00	47.0 AV	68.2	-21.2	2.33 H	306	25.0	22.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	111.1 PK			1.30 V	342	64.0	47.1
2	*6425.00	98.6 AV			1.30 V	342	51.5	47.1
3	#12850.00	60.7 PK	88.2	-27.5	1.85 V	226	38.7	22.0
4	#12850.00	47.8 AV	68.2	-20.4	1.85 V	226	25.8	22.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	104.3 PK			1.40 H	87	56.2	48.1
2	*6585.00	92.2 AV			1.40 H	87	44.1	48.1
3	#13170.00	60.6 PK	88.2	-27.6	2.29 H	314	38.0	22.6
4	#13170.00	47.7 AV	68.2	-20.5	2.29 H	314	25.1	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.8 PK			1.28 V	342	62.7	48.1
2	*6585.00	98.6 AV			1.28 V	342	50.5	48.1
3	#13170.00	61.3 PK	88.2	-26.9	1.84 V	220	38.7	22.6
4	#13170.00	48.4 AV	68.2	-19.8	1.84 V	220	25.8	22.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 159 : 6745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	104.3 PK			1.41 H	88	56.0	48.3
2	*6745.00	92.5 AV			1.41 H	88	44.2	48.3
3	#13490.00	61.6 PK	88.2	-26.6	2.27 H	312	38.0	23.6
4	#13490.00	48.4 AV	68.2	-19.8	2.27 H	312	24.8	23.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.9 PK			1.29 V	344	62.6	48.3
2	*6745.00	98.5 AV			1.29 V	344	50.2	48.3
3	#13490.00	62.1 PK	88.2	-26.1	1.99 V	236	38.5	23.6
4	#13490.00	49.1 AV	68.2	-19.1	1.99 V	236	25.5	23.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 66 % RH
<b>Tested By</b>	Luis Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	104.0 PK			1.38 H	90	55.4	48.6
2	*6905.00	91.1 AV			1.38 H	90	42.5	48.6
3	#7125.00	68.7 PK	88.2	-19.5	1.38 H	90	51.1	17.6
4	#7125.00	53.3 AV	68.2	-14.9	1.38 H	90	35.7	17.6
5	7250.00	62.1 PK	74.0	-11.9	1.38 H	90	44.2	17.9
6	7250.00	49.1 AV	54.0	-4.9	1.38 H	90	31.2	17.9
7	#13810.00	62.1 PK	88.2	-26.1	2.30 H	317	38.0	24.1
8	#13810.00	49.1 AV	68.2	-19.1	2.30 H	317	25.0	24.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.2 PK			1.40 V	351	61.6	48.6
2	*6905.00	97.1 AV			1.40 V	351	48.5	48.6
3	#7125.00	73.0 PK	88.2	-15.2	1.40 V	351	55.4	17.6
4	#7125.00	59.7 AV	68.2	-8.5	1.40 V	351	42.1	17.6
5	7251.00	66.9 PK	74.0	-7.1	1.40 V	351	49.0	17.9
6	7251.00	53.2 AV	54.0	-0.8	1.40 V	351	35.3	17.9
7	#13810.00	62.7 PK	88.2	-25.5	1.82 V	221	38.6	24.1
8	#13810.00	49.8 AV	68.2	-18.4	1.82 V	221	25.7	24.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

### Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

#### 802.11a Channel 33

