

7.7 Contention-based Protocol

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------

Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
BE9400 Tri-Band PoE 2.5G Insight Managed WiFi 7 Access Point	NETGEAR	WBE710	OpenWrt 19.07-SNAPSHOT, r0-e5941ad


For U-NII-5

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	45	6175	6175	-70	5.02	0	-75.02	-62	OFF
					-73	5.02	0	-78.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
				5950	-72	5.02	0	-77.02	-62	OFF
					-75	5.02	0	-80.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
	320	31	6105	6105	-69	5.02	0	-74.02	-62	OFF
					-72	5.02	0	-77.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
				6260	-68	5.02	0	-73.02	-62	OFF
					-72	5.02	0	-77.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. Channel puncturing and bandwidth reduction are not supported.


Contention Based Protocol Detection Probability																
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result	
			802.11be	20	6175	v	v	v	v	v	v	v				v
802.11be	320	5950	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass	
		6105	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass	
		6260	v	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

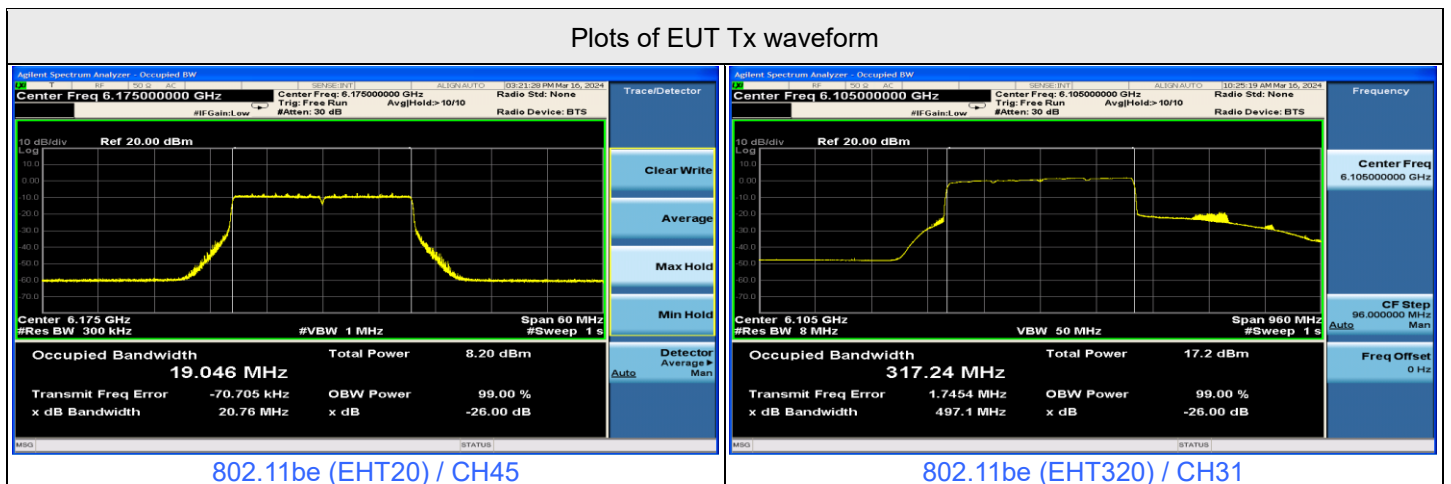


Plots of Injected signal (AWGN) level

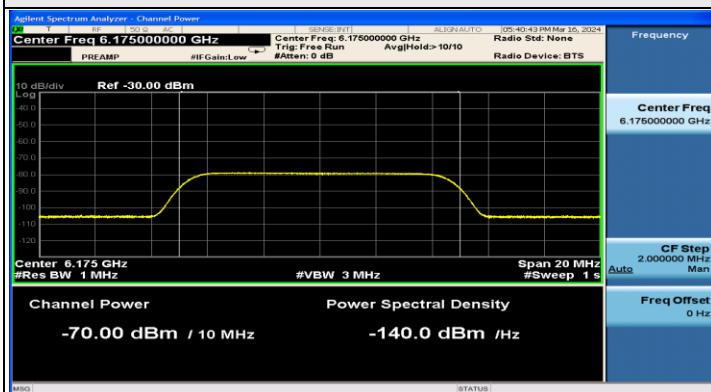


802.11be (EHT20) / CH45

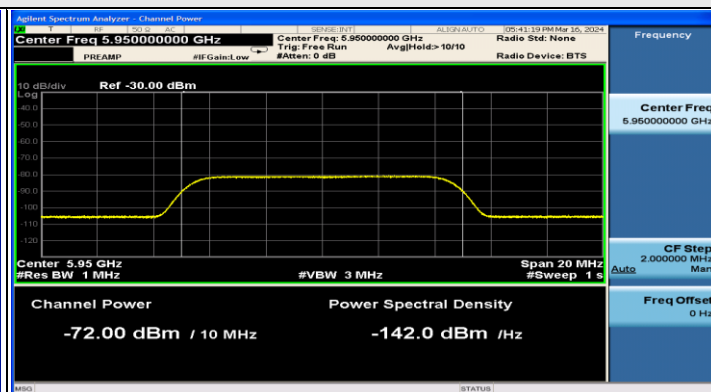

802.11be (EHT320) / CH31(Low Edge)

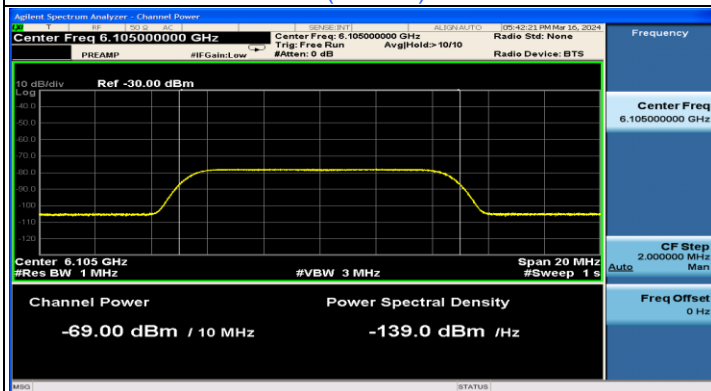


802.11be (EHT320) / CH31(Middle)

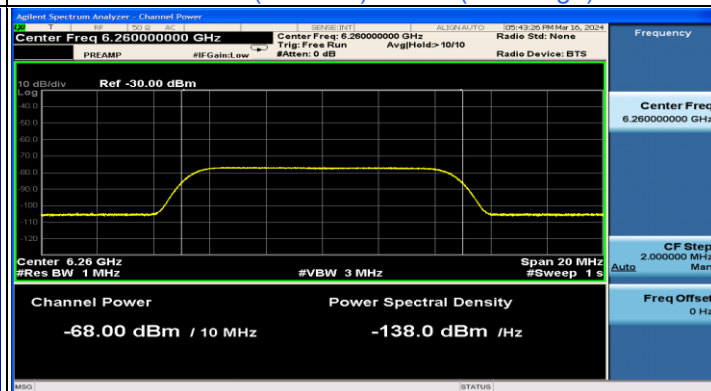

802.11be (EHT320) / CH31(High Edge)

Plots of EUT ceased transmission in the time domain


Plots of Adaptivity

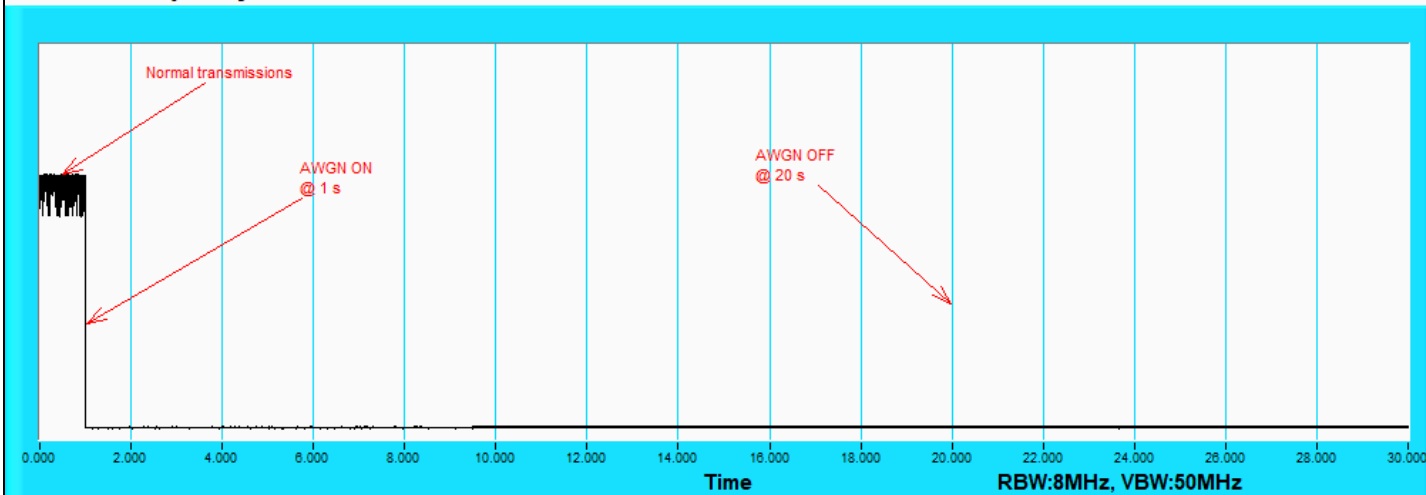

802.11be (EHT20) / CH45


Plots of EUT ceased transmission in the time domain

Plots of Adaptivity

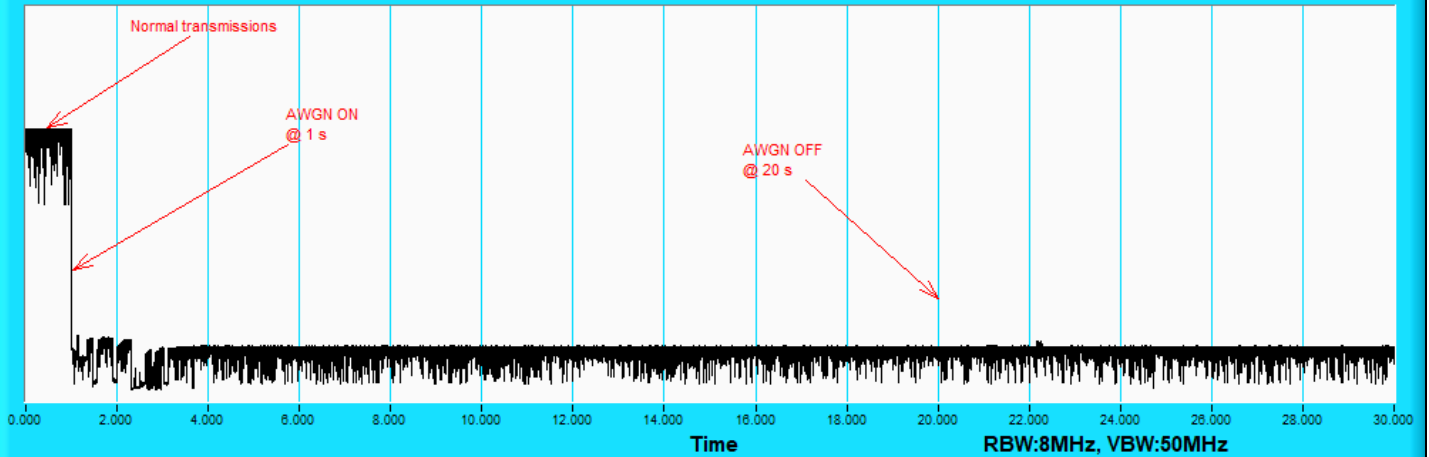


802.11be (EHT320) / CH31(Low Edge)

Plots of Adaptivity

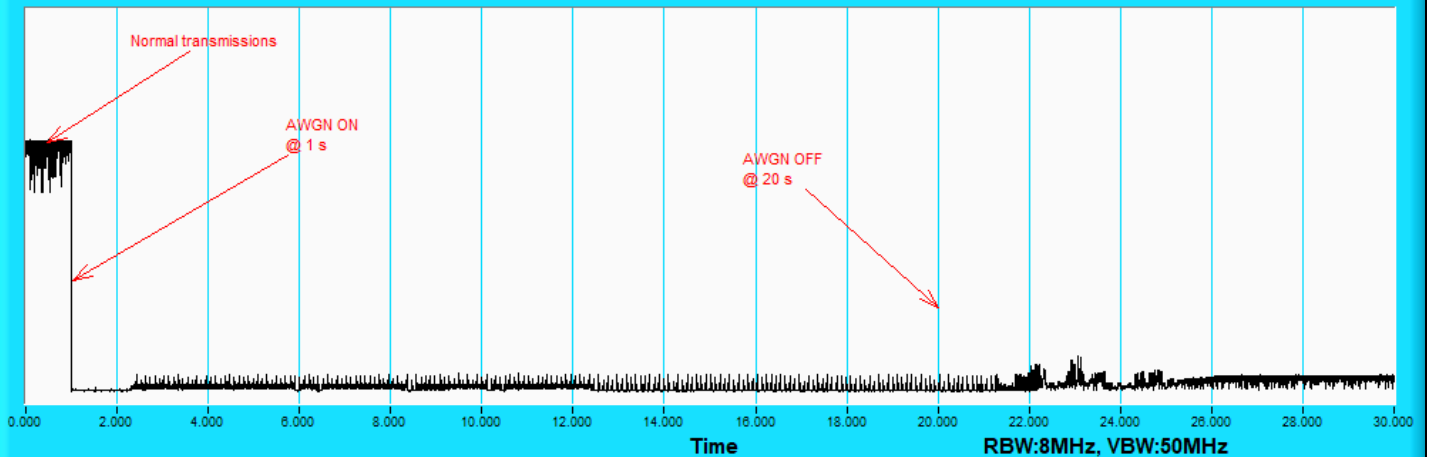

802.11be (EHT320) / CH31(Middle)

Plots of Adaptivity

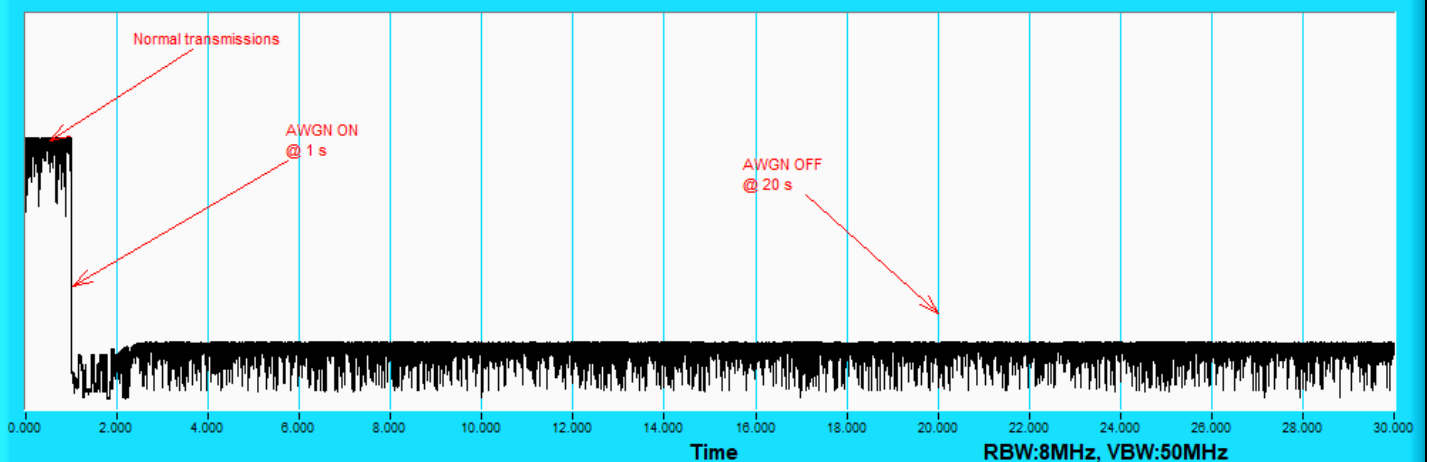


802.11be (EHT320) / CH31(High Edge)

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	105	6475	6475	-71	5.02	0	-76.02	-62	OFF
					-74	5.02	0	-79.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
				6270	-73	5.02	0	-78.02	-62	OFF
					-75	5.02	0	-80.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
	320	95	6425	6425	-68	5.02	0	-73.02	-62	OFF
					-71	5.02	0	-76.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
				6580	-67	5.02	0	-72.02	-62	OFF
					-70	5.02	0	-75.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. Channel puncturing and bandwidth reduction are not supported.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6475	v	v	v	v	v	v	v			
802.11be	320	6270	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6425	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6580	v	v	v	v	v	v	v	v	v	v	v	100%	90%

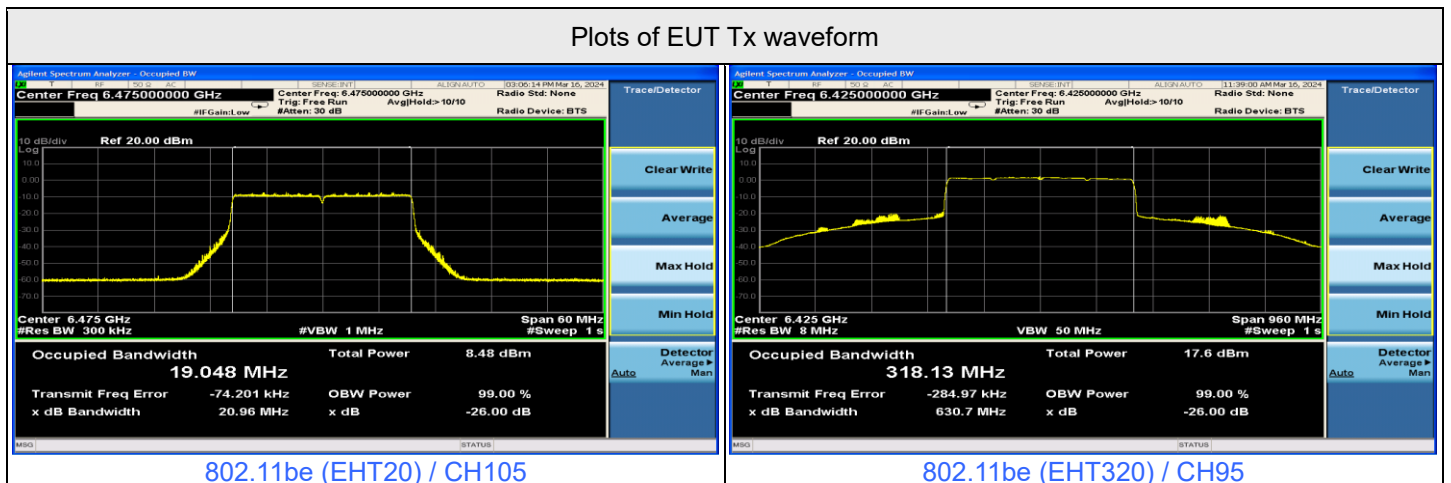


Plots of Injected signal (AWGN) level

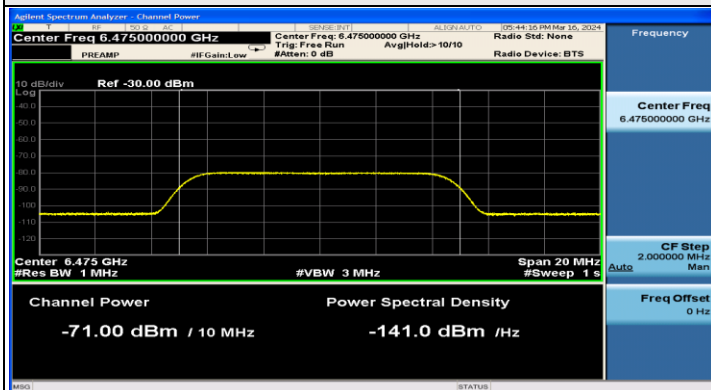


802.11be (EHT20) / CH105

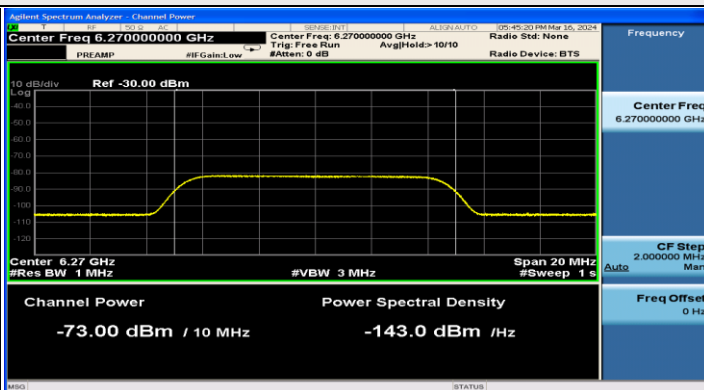

802.11be (EHT320) / CH95(Low Edge)

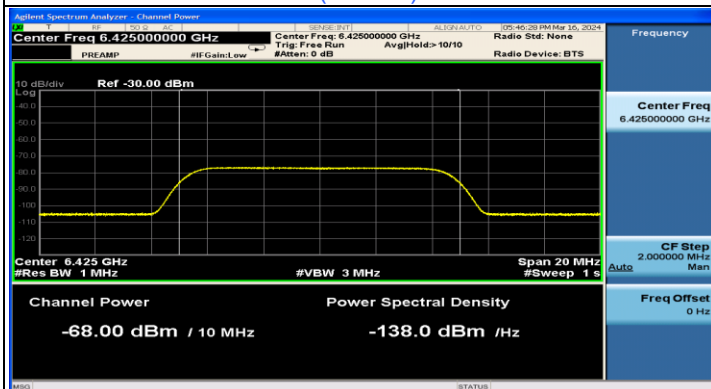


802.11be (EHT320) / CH95(Middle)

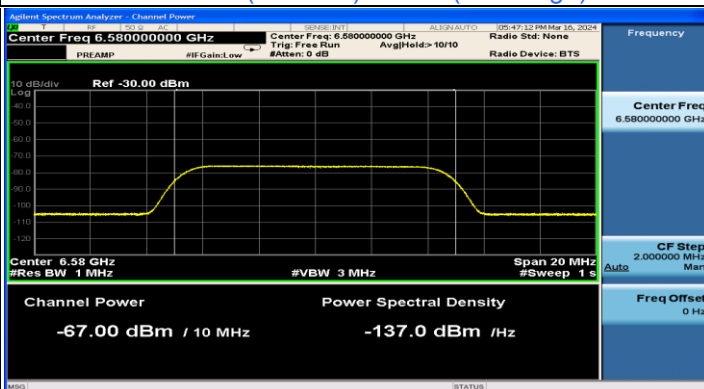

802.11be (EHT320) / CH95(High Edge)

Plots of EUT ceased transmission in the time domain


Plots of Adaptivity

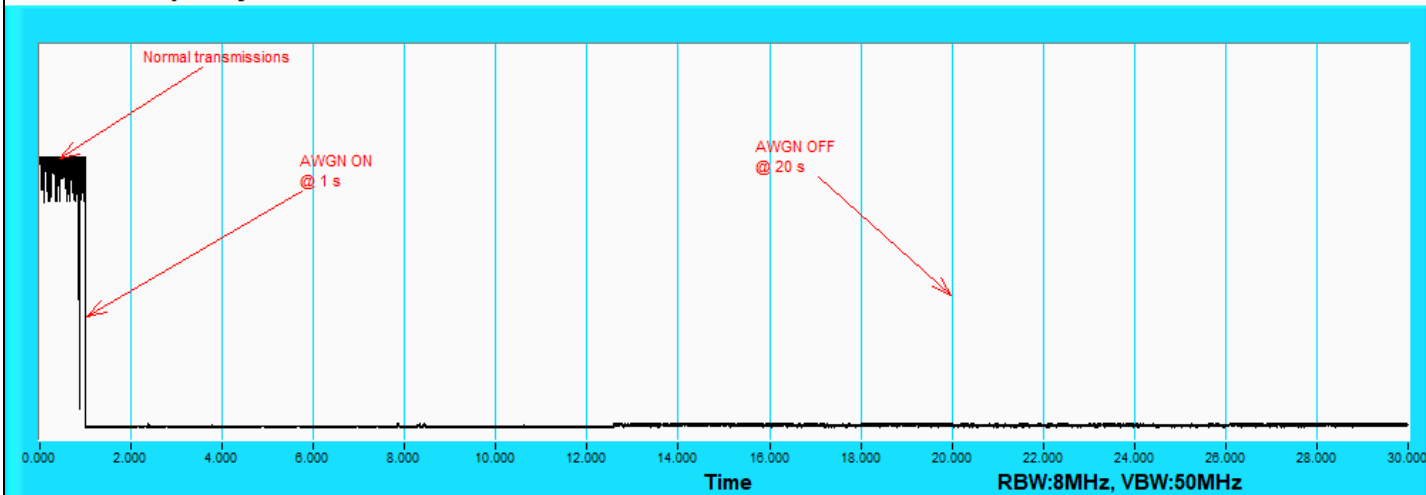

802.11be (EHT20) / CH105


Plots of EUT ceased transmission in the time domain

Plots of Adaptivity

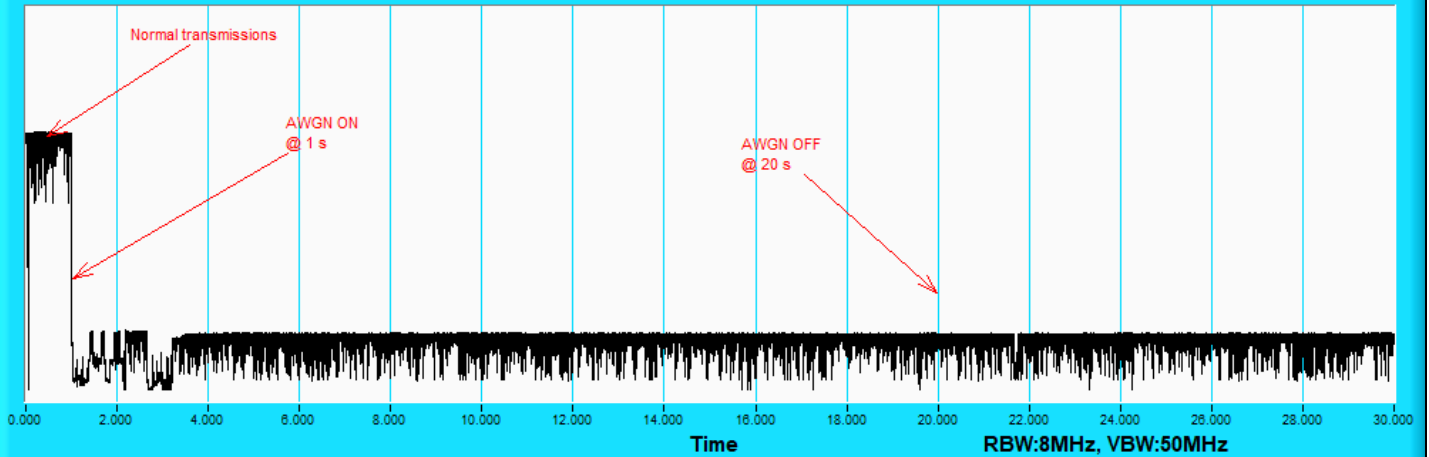


802.11be (EHT320) / CH95(Low Edge)

Plots of Adaptivity

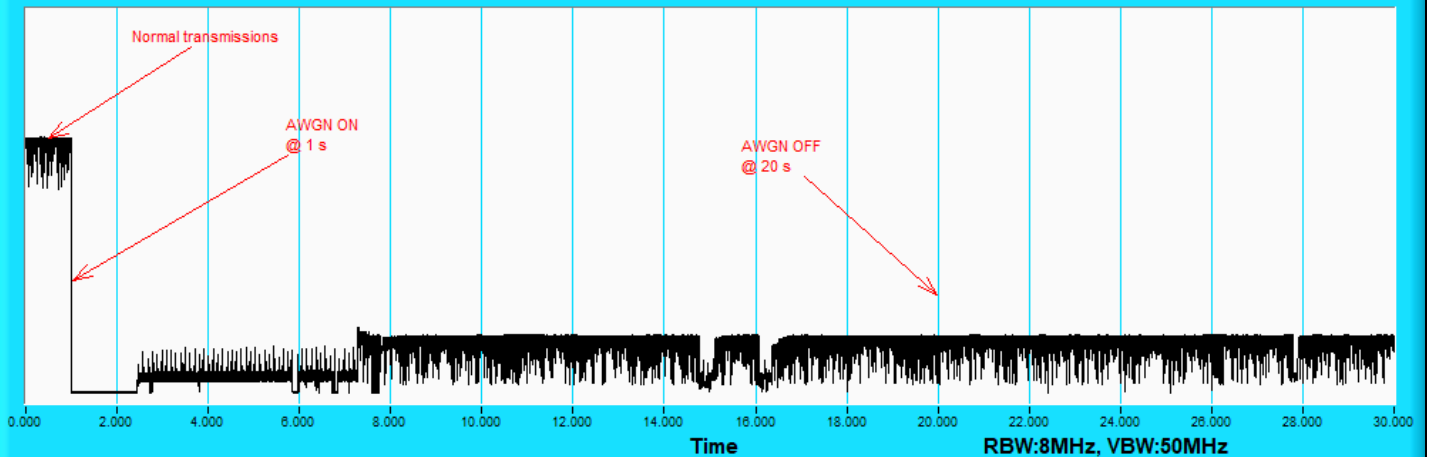

802.11be (EHT320) / CH95(Middle)

Plots of Adaptivity

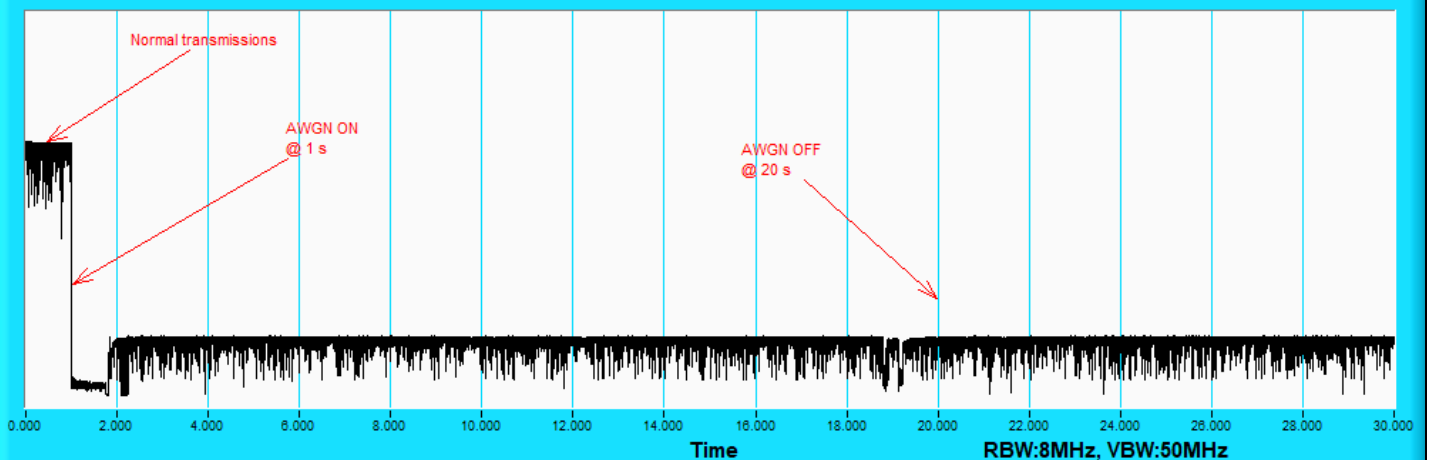

802.11be (EHT320) / CH95(High Edge)




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-68	5.02	0	-73.02	-62	OFF
					-71	5.02	0	-76.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
	320	127	6585	6430	-70	5.02	0	-75.02	-62	OFF
					-73	5.02	0	-78.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
	6740	127	6585	6740	-68	5.02	0	-73.02	-62	OFF
					-71	5.02	0	-76.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
					-66	5.02	0	-71.02	-62	OFF
					-70	5.02	0	-75.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. Channel puncturing and bandwidth reduction are not supported.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6695	v	v	v	v	v	v	v			
802.11be	320	6430	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6585	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	v	v	v	v	v	v	v	v	v	v	100%	90%

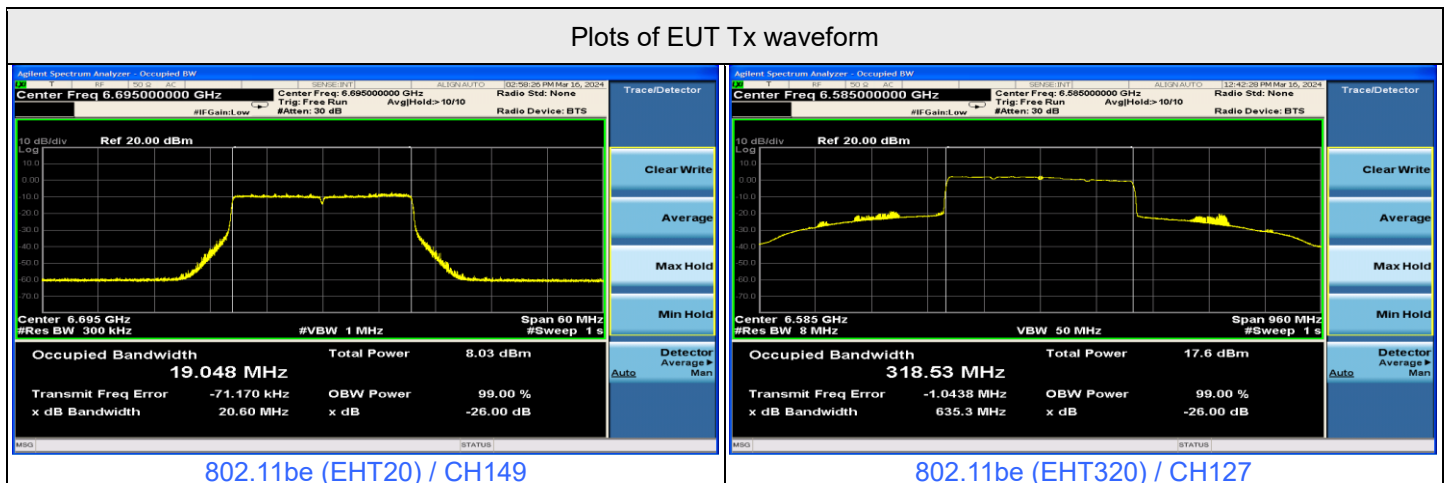


Plots of Injected signal (AWGN) level

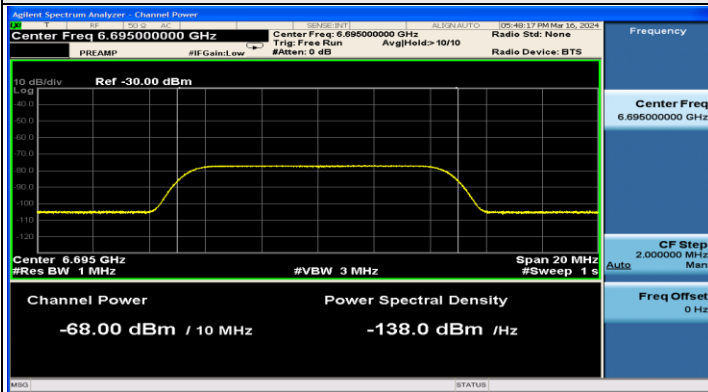


802.11be (EHT20) / CH149

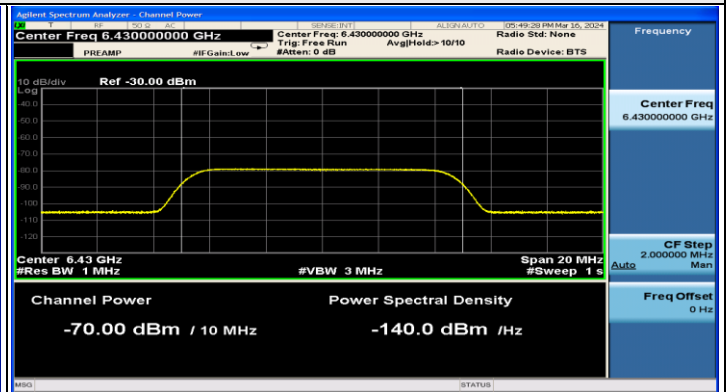

802.11be (EHT320) / CH127(Low Edge)

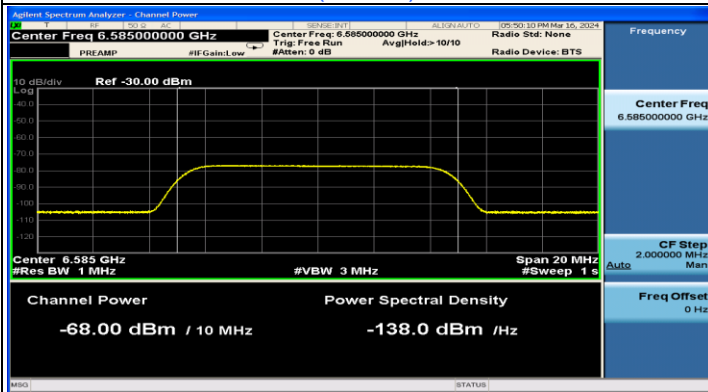


802.11be (EHT320) / CH127(Middle)

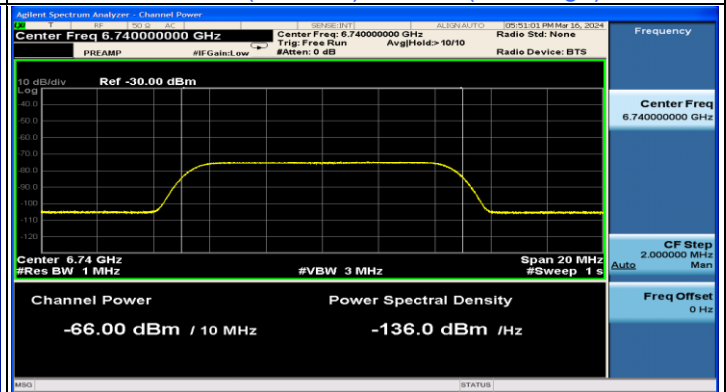

802.11be (EHT320) / CH127(High Edge)

Plots of EUT ceased transmission in the time domain


Plots of Adaptivity

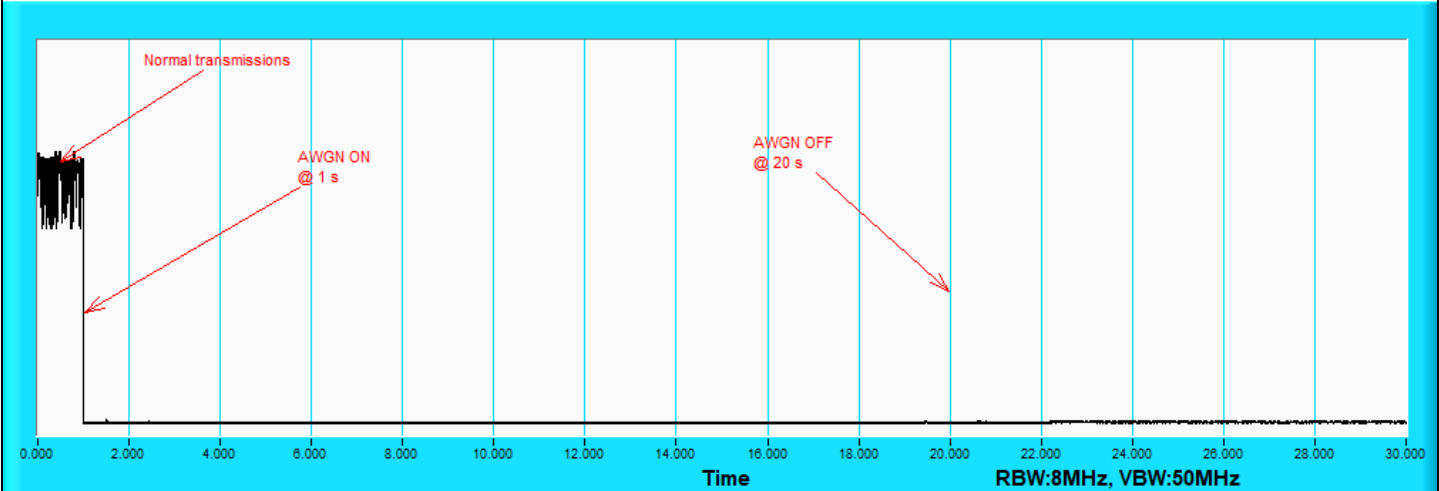

802.11be (EHT20) / CH149


Plots of EUT ceased transmission in the time domain

Plots of Adaptivity

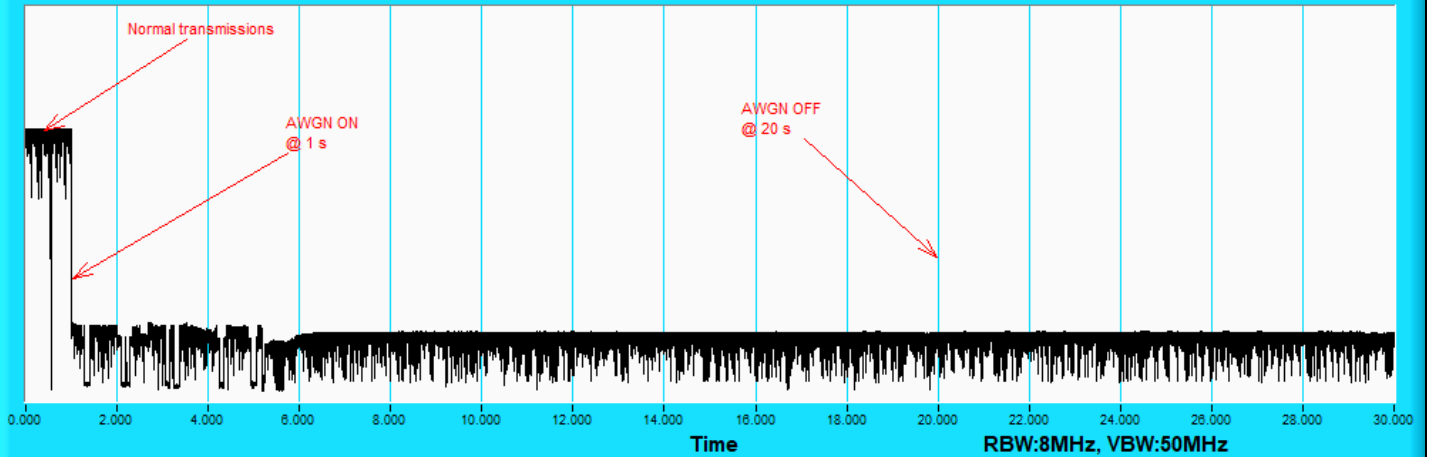


802.11be (EHT320) / CH127(Low Edge)

Plots of Adaptivity

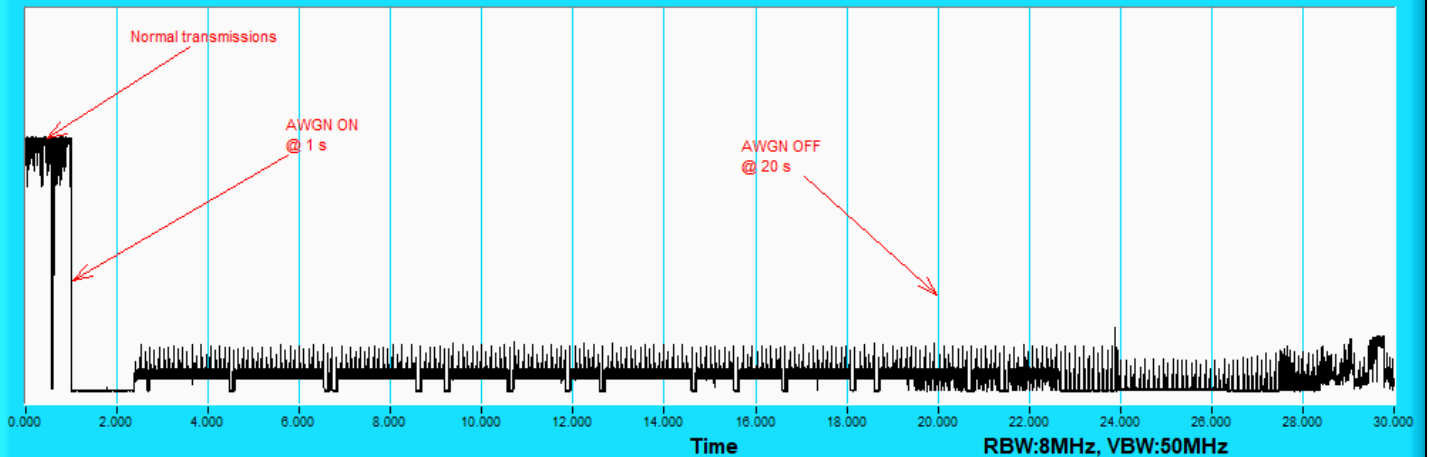

802.11be (EHT320) / CH127(Middle)

Plots of Adaptivity

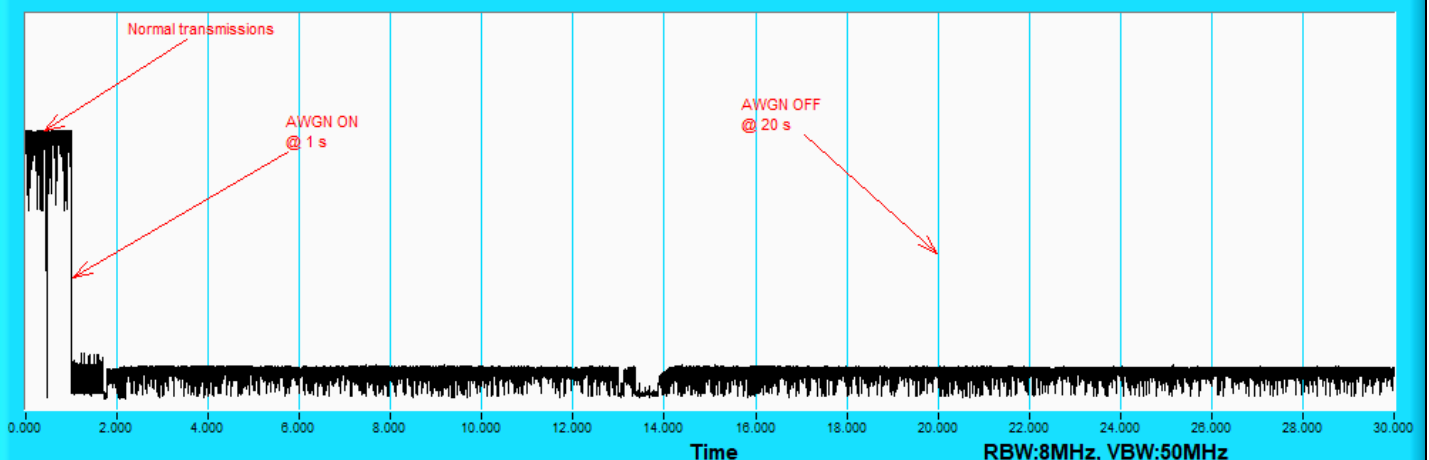

802.11be (EHT320) / CH127(High Edge)




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-67	5.02	0	-72.02	-62	OFF
					-71	5.02	0	-76.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
				6750	-70	5.02	0	-75.02	-62	OFF
					-74	5.02	0	-79.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
	320	191	6905	6905	-62	5.02	0	-67.02	-62	OFF
					-67	5.02	0	-72.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON
				7060	-62	5.02	0	-67.02	-62	OFF
					-67	5.02	0	-72.02	-62	Minimal
					-76.98	5.02	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. Channel puncturing and bandwidth reduction are not supported.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6995	v	v	v	v	v	v	v			
802.11be	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

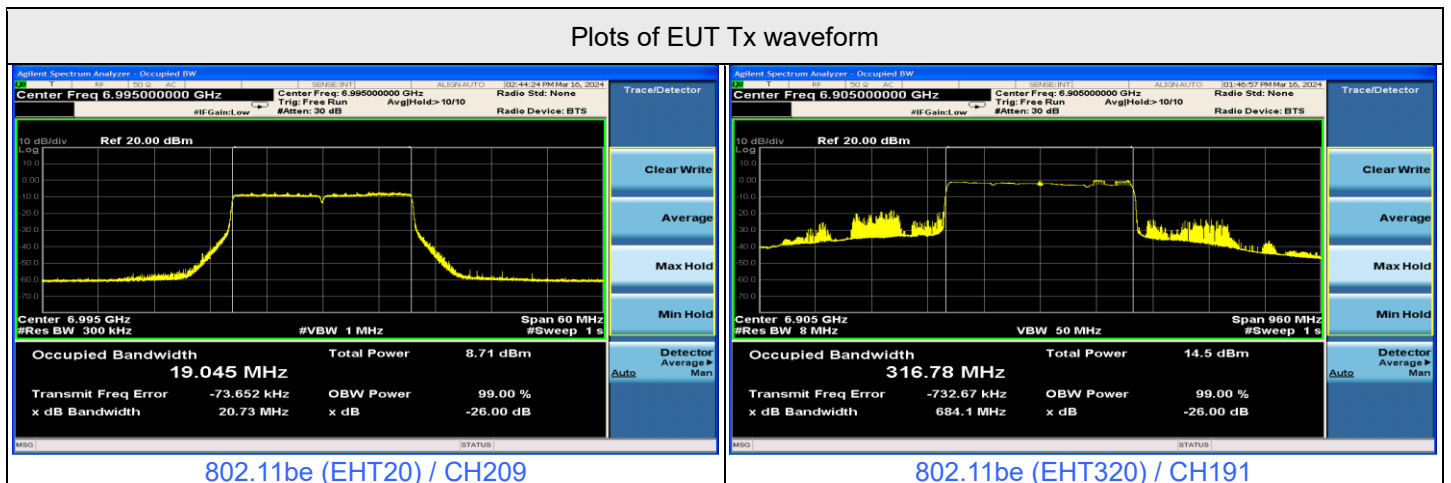


Plots of Injected signal (AWGN) level

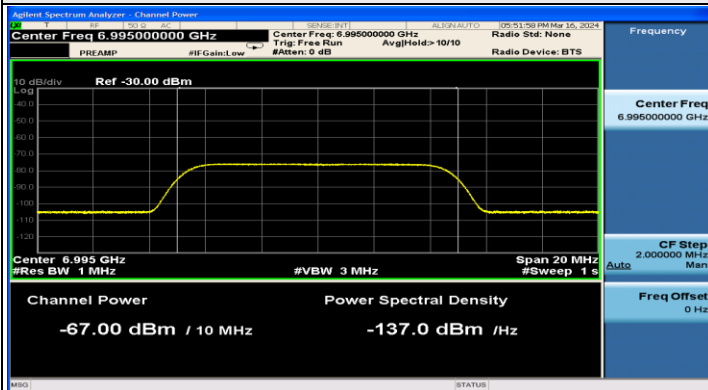


802.11be (EHT20) / CH209

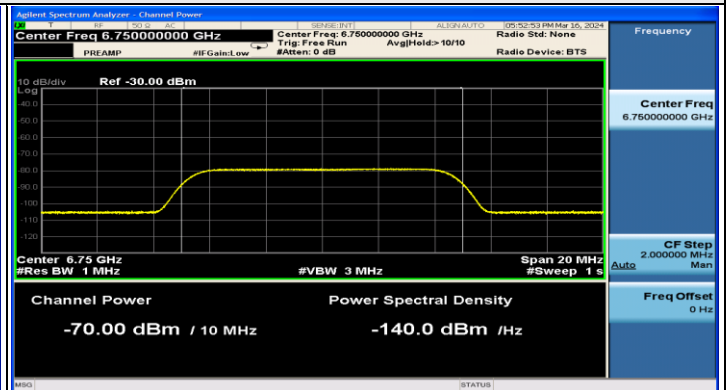

802.11be (EHT320) / CH191(Low Edge)

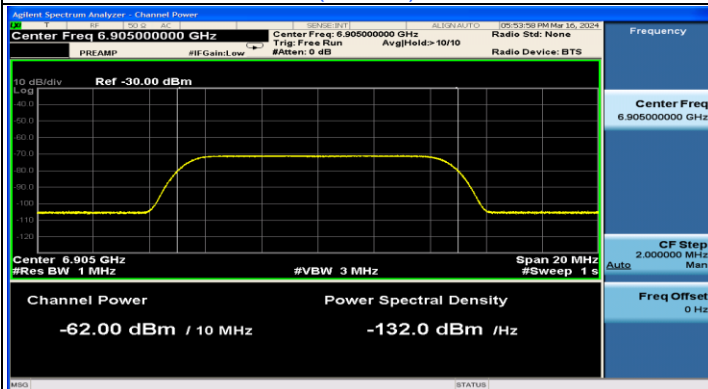


802.11be (EHT320) / CH191(Middle)

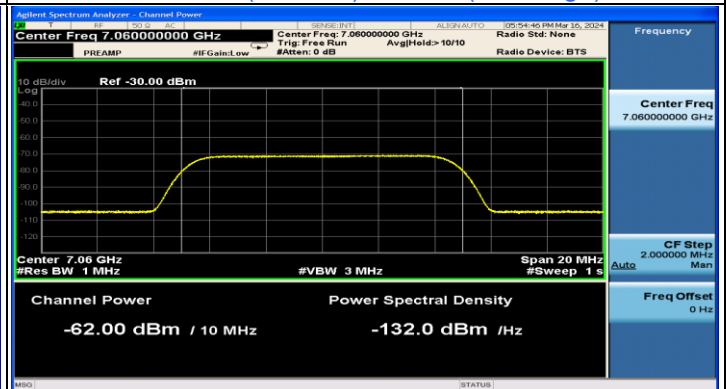

802.11be (EHT320) / CH191(High Edge)

Plots of EUT ceased transmission in the time domain


Plots of Adaptivity

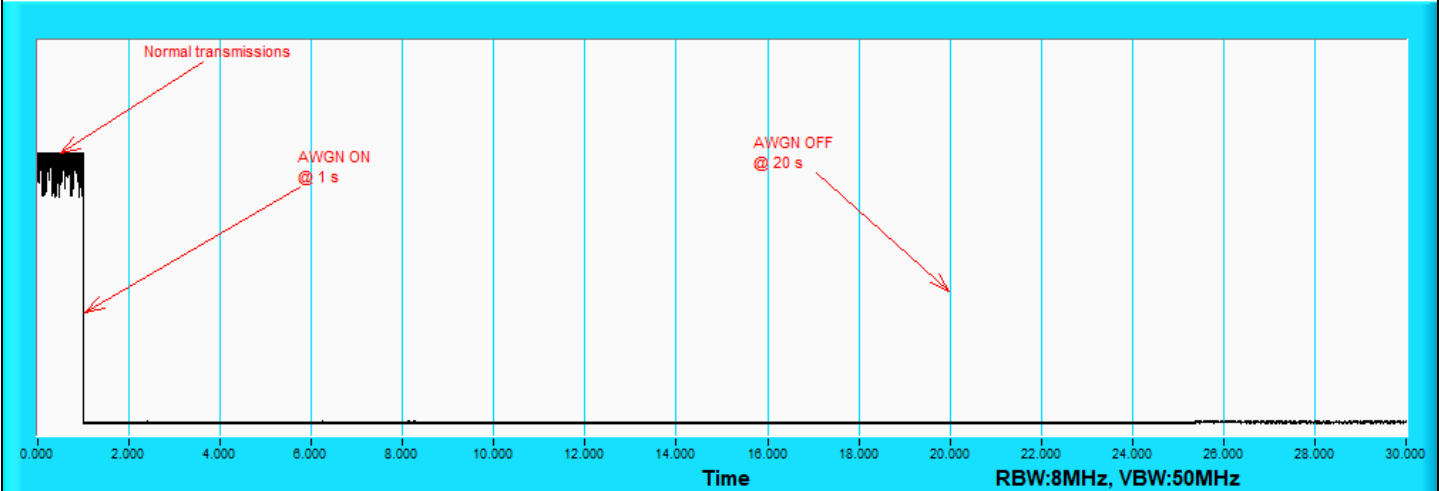

802.11be (EHT20) / CH209


Plots of EUT ceased transmission in the time domain

Plots of Adaptivity

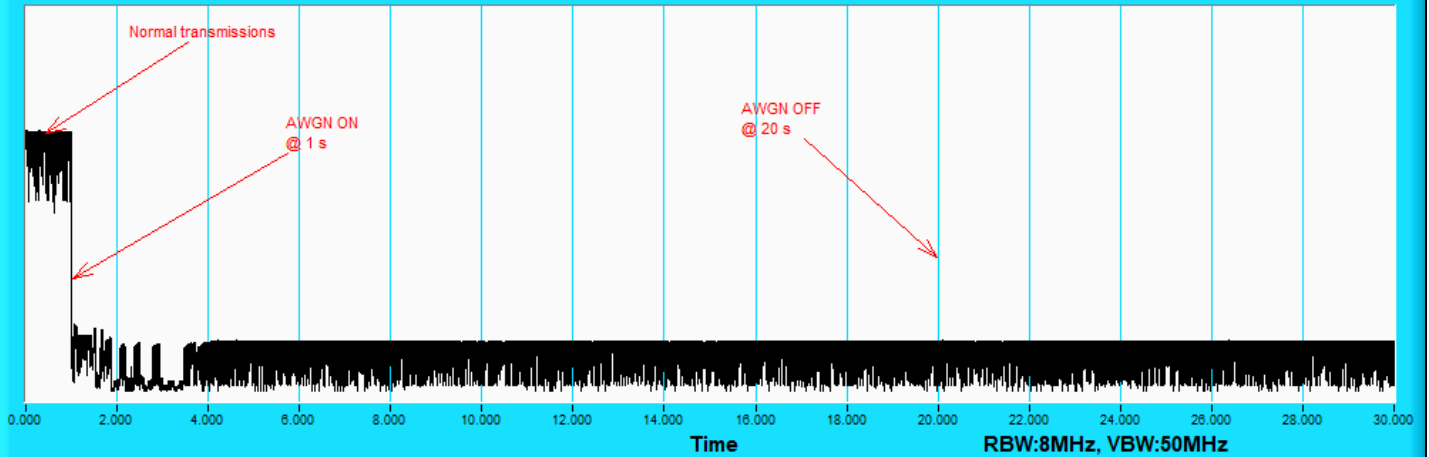


802.11be (EHT320) / CH191(Low Edge)

Plots of Adaptivity

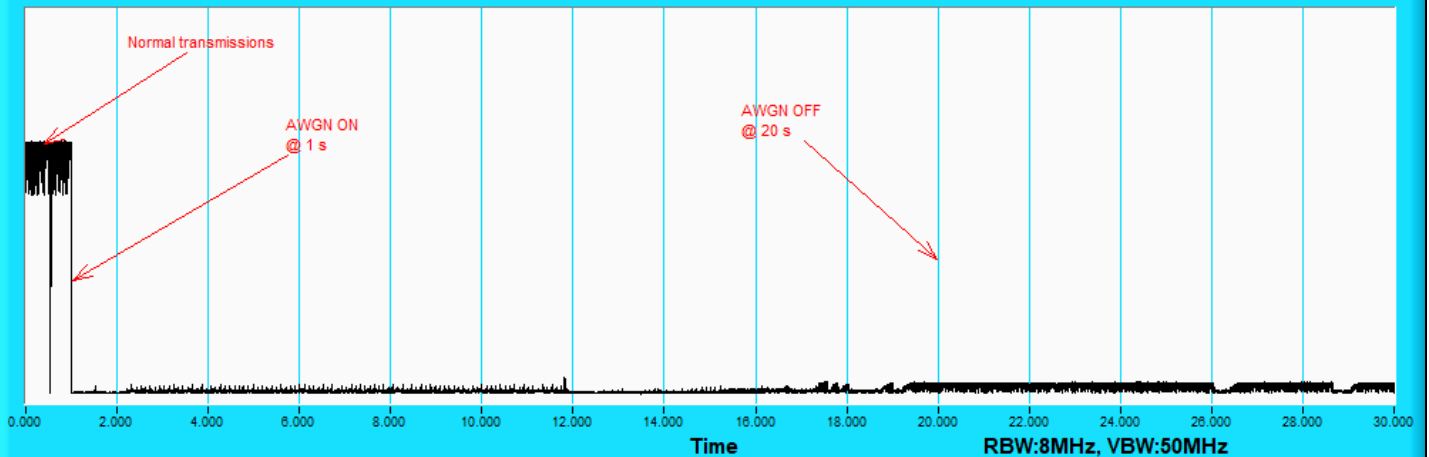

802.11be (EHT320) / CH191(Middle)

Plots of Adaptivity

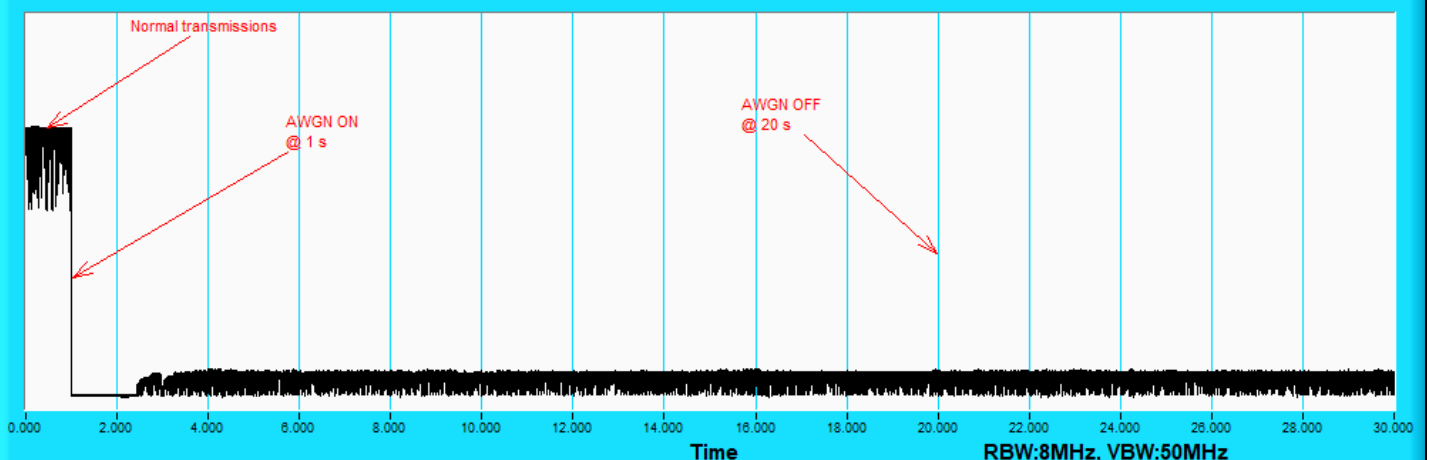

802.11be (EHT320) / CH191(High Edge)


7.8 AC Power Conducted Emissions

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15687	9.67	38.96	22.53	48.63	32.20	65.63	55.63	-17.00	-23.43
2	0.17708	9.66	33.31	23.98	42.97	33.64	64.62	54.62	-21.65	-20.98
3	0.19780	9.66	26.76	11.78	36.42	21.44	63.70	53.70	-27.28	-32.26
4	0.25000	9.67	28.65	22.70	38.32	32.37	61.76	51.76	-23.44	-19.39
5	0.29400	9.67	28.69	16.04	38.36	25.71	60.41	50.41	-22.05	-24.70
6	0.55000	9.70	18.11	8.74	27.81	18.44	56.00	46.00	-28.19	-27.56

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

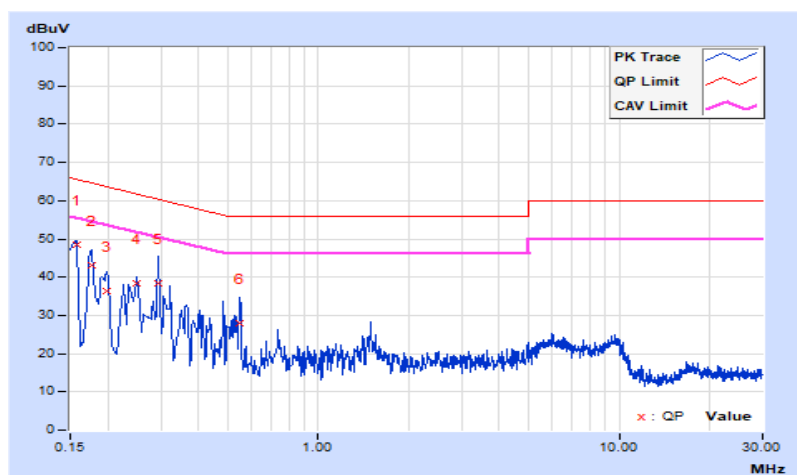


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.64	39.17	22.62	48.81	32.26	65.78	55.78	-16.97	-23.52
2	0.18200	9.65	34.20	24.79	43.85	34.44	64.39	54.39	-20.54	-19.95
3	0.20600	9.65	29.80	15.77	39.45	25.42	63.37	53.37	-23.92	-27.95
4	0.23351	9.66	30.99	20.56	40.65	30.22	62.32	52.32	-21.67	-22.10
5	0.24600	9.66	28.64	17.85	38.30	27.51	61.89	51.89	-23.59	-24.38
6	0.30600	9.68	27.37	16.84	37.05	26.52	60.08	50.08	-23.03	-23.56

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

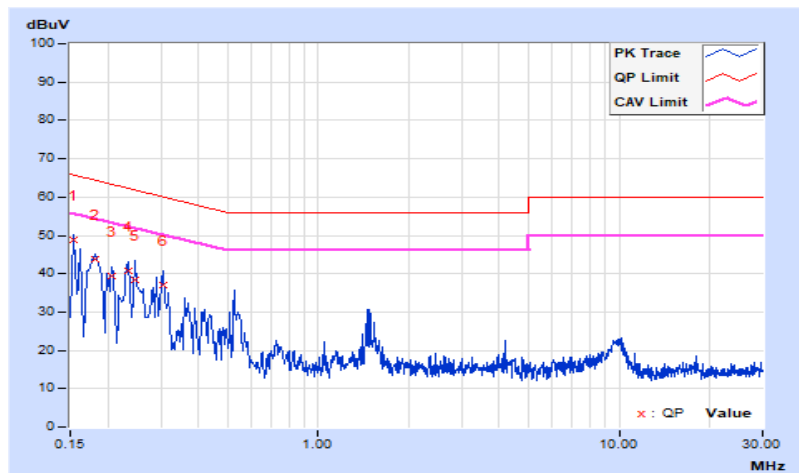


7.9 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.82	26.3 QP	40.0	-13.7	1.01 H	254	36.2	-9.9
2	128.94	21.1 QP	43.5	-22.4	1.49 H	268	31.3	-10.2
3	229.82	19.5 QP	46.0	-26.5	1.49 H	258	30.6	-11.1
4	397.63	25.8 QP	46.0	-20.2	1.49 H	89	31.6	-5.8
5	610.06	28.6 QP	46.0	-17.4	1.01 H	201	29.5	-0.9
6	796.30	32.8 QP	46.0	-13.2	1.01 H	336	30.2	2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

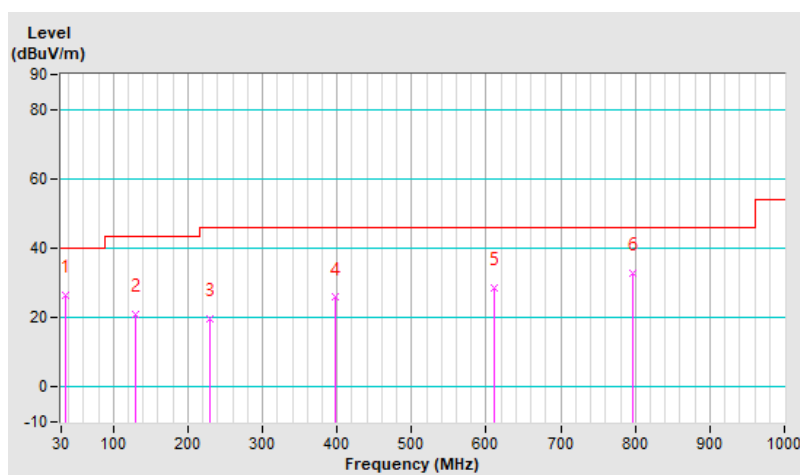


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.22	20.6 QP	40.0	-19.4	1.01 V	118	29.3	-8.7
2	148.34	20.8 QP	43.5	-22.7	1.01 V	119	29.5	-8.7
3	294.81	21.0 QP	46.0	-25.0	1.49 V	110	28.7	-7.7
4	498.51	26.6 QP	46.0	-19.4	1.01 V	266	30.6	-4.0
5	688.63	30.0 QP	46.0	-16.0	1.49 V	311	30.1	-0.1
6	775.93	34.3 QP	46.0	-11.7	1.01 V	190	32.0	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

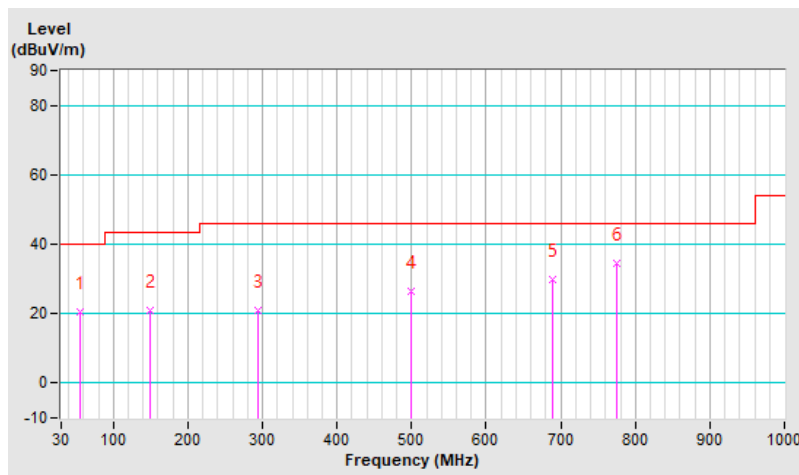

7.10 Unwanted Emissions above 1 GHz

NSS1

RF Mode	802.11a	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5924.50	56.9 PK	88.2	-31.3	1.47 H	343	42.8	14.1
2	#5924.50	46.0 AV	68.2	-22.2	1.47 H	343	31.9	14.1
3	*6115.00	109.3 PK			1.47 H	343	64.0	45.3
4	*6115.00	100.0 AV			1.47 H	343	54.7	45.3
5	12230.00	62.5 PK	74.0	-11.5	1.92 H	230	41.5	21.0
6	12230.00	48.8 AV	54.0	-5.2	1.92 H	230	27.8	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.6 PK	88.2	-35.6	1.42 V	342	38.5	14.1
2	#5925.00	41.3 AV	68.2	-26.9	1.42 V	342	27.2	14.1
3	*6115.00	104.0 PK			1.42 V	342	58.7	45.3
4	*6115.00	94.8 AV			1.42 V	342	49.5	45.3
5	12230.00	62.2 PK	74.0	-11.8	1.65 V	189	41.2	21.0
6	12230.00	48.6 AV	54.0	-5.4	1.65 V	189	27.6	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	109.2 PK			1.45 H	347	63.4	45.8
2	*6255.00	100.0 AV			1.45 H	347	54.2	45.8
3	12510.00	62.4 PK	74.0	-11.6	1.94 H	228	41.7	20.7
4	12510.00	48.6 AV	54.0	-5.4	1.94 H	228	27.9	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	104.0 PK			1.44 V	348	58.2	45.8
2	*6255.00	95.0 AV			1.44 V	348	49.2	45.8
3	12510.00	62.0 PK	74.0	-12.0	1.69 V	188	41.3	20.7
4	12510.00	48.1 AV	54.0	-5.9	1.69 V	188	27.4	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.3 PK			1.45 H	347	62.7	46.6
2	*6415.00	100.1 AV			1.45 H	347	53.5	46.6
3	#12830.00	62.5 PK	88.2	-25.7	1.99 H	230	40.9	21.6
4	#12830.00	48.7 AV	68.2	-19.5	1.99 H	230	27.1	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	104.1 PK			1.46 V	339	57.5	46.6
2	*6415.00	94.8 AV			1.46 V	339	48.2	46.6
3	#12830.00	62.0 PK	88.2	-26.2	1.70 V	192	40.4	21.6
4	#12830.00	48.2 AV	68.2	-20.0	1.70 V	192	26.6	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.5 PK			1.45 H	344	62.9	46.6
2	*6435.00	100.3 AV			1.45 H	344	53.7	46.6
3	#12870.00	62.5 PK	88.2	-25.7	1.99 H	230	40.9	21.6
4	#12870.00	48.6 AV	68.2	-19.6	1.99 H	230	27.0	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.1 PK			1.49 V	348	57.5	46.6
2	*6435.00	94.8 AV			1.49 V	348	48.2	46.6
3	#12870.00	62.1 PK	88.2	-26.1	1.63 V	188	40.5	21.6
4	#12870.00	48.4 AV	68.2	-19.8	1.63 V	188	26.8	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.4 PK			1.49 H	350	62.6	46.8
2	*6475.00	100.3 AV			1.49 H	350	53.5	46.8
3	#12950.00	62.5 PK	88.2	-25.7	1.99 H	227	40.7	21.8
4	#12950.00	48.8 AV	68.2	-19.4	1.99 H	227	27.0	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.5 PK			1.40 V	344	57.7	46.8
2	*6475.00	95.3 AV			1.40 V	344	48.5	46.8
3	#12950.00	62.3 PK	88.2	-25.9	1.88 V	190	40.5	21.8
4	#12950.00	48.4 AV	68.2	-19.8	1.88 V	190	26.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.4 PK			1.45 H	348	62.4	47.0
2	*6515.00	100.2 AV			1.45 H	348	53.2	47.0
3	#13030.00	62.6 PK	88.2	-25.6	1.94 H	241	40.7	21.9
4	#13030.00	48.7 AV	68.2	-19.5	1.94 H	241	26.8	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.5 PK			1.44 V	341	57.5	47.0
2	*6515.00	95.3 AV			1.44 V	341	48.3	47.0
3	#13030.00	62.1 PK	88.2	-26.1	1.70 V	188	40.2	21.9
4	#13030.00	48.5 AV	68.2	-19.7	1.70 V	188	26.6	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.6 PK			1.46 H	340	62.4	47.2
2	*6535.00	100.5 AV			1.46 H	340	53.3	47.2
3	#13070.00	62.8 PK	88.2	-25.4	1.99 H	231	40.8	22.0
4	#13070.00	48.5 AV	68.2	-19.7	1.99 H	231	26.5	22.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.1 PK			1.44 V	350	57.9	47.2
2	*6535.00	95.7 AV			1.44 V	350	48.5	47.2
3	#13070.00	62.2 PK	88.2	-26.0	1.62 V	194	40.2	22.0
4	#13070.00	48.4 AV	68.2	-19.8	1.62 V	194	26.4	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.4 PK			1.44 H	345	62.0	47.4
2	*6695.00	100.2 AV			1.44 H	345	52.8	47.4
3	13390.00	62.5 PK	74.0	-11.5	1.99 H	230	39.7	22.8
4	13390.00	48.7 AV	54.0	-5.3	1.99 H	230	25.9	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.9 PK			1.44 V	348	57.5	47.4
2	*6695.00	95.4 AV			1.44 V	348	48.0	47.4
3	13390.00	62.3 PK	74.0	-11.7	1.70 V	184	39.5	22.8
4	13390.00	48.3 AV	54.0	-5.7	1.70 V	184	25.5	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.2 PK			1.45 H	349	61.8	47.4
2	*6855.00	100.1 AV			1.45 H	349	52.7	47.4
3	#13710.00	62.5 PK	88.2	-25.7	1.82 H	230	39.0	23.5
4	#13710.00	48.7 AV	68.2	-19.5	1.82 H	230	25.2	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	104.9 PK			1.40 V	339	57.5	47.4
2	*6855.00	95.2 AV			1.40 V	339	47.8	47.4
3	#13710.00	62.1 PK	88.2	-26.1	1.77 V	194	38.6	23.5
4	#13710.00	48.4 AV	68.2	-19.8	1.77 V	194	24.9	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.4 PK			1.44 H	345	61.8	47.6
2	*6875.00	100.3 AV			1.44 H	345	52.7	47.6
3	#13750.00	62.5 PK	88.2	-25.7	1.99 H	230	38.9	23.6
4	#13750.00	48.7 AV	68.2	-19.5	1.99 H	230	25.1	23.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.1 PK			1.45 V	341	56.5	47.6
2	*6875.00	95.1 AV			1.45 V	341	47.5	47.6
3	#13750.00	62.3 PK	88.2	-25.9	1.63 V	185	38.7	23.6
4	#13750.00	48.5 AV	68.2	-19.7	1.63 V	185	24.9	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.4 PK			1.44 H	350	60.7	48.7
2	*6995.00	100.2 AV			1.44 H	350	51.5	48.7
3	#13990.00	62.5 PK	88.2	-25.7	1.90 H	233	38.0	24.5
4	#13990.00	48.8 AV	68.2	-19.4	1.90 H	233	24.3	24.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.5 PK			1.44 V	348	55.8	48.7
2	*6995.00	95.2 AV			1.44 V	348	46.5	48.7
3	#13990.00	62.4 PK	88.2	-25.8	1.62 V	191	37.9	24.5
4	#13990.00	48.6 AV	68.2	-19.6	1.62 V	191	24.1	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	109.3 PK			1.43 H	342	60.7	48.6
2	*7095.00	100.2 AV			1.43 H	342	51.6	48.6
3	#14190.00	62.5 PK	88.2	-25.7	1.93 H	228	37.6	24.9
4	#14190.00	48.7 AV	68.2	-19.5	1.93 H	228	23.8	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	104.6 PK			1.44 V	340	56.0	48.6
2	*7095.00	95.4 AV			1.44 V	340	46.8	48.6
3	#14190.00	62.3 PK	88.2	-25.9	1.64 V	192	37.4	24.9
4	#14190.00	48.5 AV	68.2	-19.7	1.64 V	192	23.6	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	109.4 PK			1.22 H	347	60.6	48.8
2	*7115.00	99.7 AV			1.22 H	347	50.9	48.8
3	#7125.00	84.7 PK	88.2	-3.5	1.22 H	347	67.8	16.9
4	#7125.00	64.9 AV	68.2	-3.3	1.22 H	347	48.0	16.9
5	#14230.00	62.5 PK	88.2	-25.7	1.99 H	227	37.6	24.9
6	#14230.00	48.7 AV	68.2	-19.5	1.99 H	227	23.8	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.3 PK			1.40 V	339	54.5	48.8
2	*7115.00	93.8 AV			1.40 V	339	45.0	48.8
3	#7125.00	80.4 PK	88.2	-7.8	1.40 V	339	63.5	16.9
4	#7125.00	63.3 AV	68.2	-4.9	1.40 V	339	46.4	16.9
5	#14230.00	62.0 PK	88.2	-26.2	1.66 V	185	37.1	24.9
6	#14230.00	48.3 AV	68.2	-19.9	1.66 V	185	23.4	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.3 PK	88.2	-31.9	1.53 H	345	42.2	14.1
2	#5925.00	43.8 AV	68.2	-24.4	1.53 H	345	29.7	14.1
3	*6115.00	111.5 PK			1.53 H	345	66.2	45.3
4	*6115.00	99.9 AV			1.53 H	345	54.6	45.3
5	12230.00	62.6 PK	74.0	-11.4	1.95 H	230	41.6	21.0
6	12230.00	48.9 AV	54.0	-5.1	1.95 H	230	27.9	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.9 PK	88.2	-32.3	1.44 V	340	41.8	14.1
2	#5925.00	43.4 AV	68.2	-24.8	1.44 V	340	29.3	14.1
3	*6115.00	105.8 PK			1.44 V	340	60.5	45.3
4	*6115.00	94.8 AV			1.44 V	340	49.5	45.3
5	12230.00	62.2 PK	74.0	-11.8	1.69 V	199	41.2	21.0
6	12230.00	48.3 AV	54.0	-5.7	1.69 V	199	27.3	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	111.3 PK			1.49 H	346	65.5	45.8
2	*6255.00	99.8 AV			1.49 H	346	54.0	45.8
3	12510.00	62.8 PK	74.0	-11.2	1.94 H	228	42.1	20.7
4	12510.00	48.8 AV	54.0	-5.2	1.94 H	228	28.1	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	106.0 PK			1.42 V	336	60.2	45.8
2	*6255.00	94.3 AV			1.42 V	336	48.5	45.8
3	12510.00	62.1 PK	74.0	-11.9	1.63 V	189	41.4	20.7
4	12510.00	48.2 AV	54.0	-5.8	1.63 V	189	27.5	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.6 PK			1.50 H	343	65.0	46.6
2	*6415.00	99.8 AV			1.50 H	343	53.2	46.6
3	#12830.00	62.7 PK	88.2	-25.5	1.92 H	229	41.1	21.6
4	#12830.00	48.7 AV	68.2	-19.5	1.92 H	229	27.1	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.6 PK			1.42 V	338	60.0	46.6
2	*6415.00	94.4 AV			1.42 V	338	47.8	46.6
3	#12830.00	62.3 PK	88.2	-25.9	1.62 V	190	40.7	21.6
4	#12830.00	48.4 AV	68.2	-19.8	1.62 V	190	26.8	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.7 PK			1.55 H	349	65.1	46.6
2	*6435.00	100.0 AV			1.55 H	349	53.4	46.6
3	#12870.00	62.7 PK	88.2	-25.5	1.92 H	227	41.1	21.6
4	#12870.00	48.8 AV	68.2	-19.4	1.92 H	227	27.2	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	106.6 PK			1.42 V	346	60.0	46.6
2	*6435.00	94.8 AV			1.42 V	346	48.2	46.6
3	#12870.00	62.1 PK	88.2	-26.1	1.62 V	189	40.5	21.6
4	#12870.00	48.3 AV	68.2	-19.9	1.62 V	189	26.7	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.4 PK			1.49 H	342	64.6	46.8
2	*6475.00	99.9 AV			1.49 H	342	53.1	46.8
3	#12950.00	62.7 PK	88.2	-25.5	1.99 H	230	40.9	21.8
4	#12950.00	48.8 AV	68.2	-19.4	1.99 H	230	27.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	106.0 PK			1.33 V	328	59.2	46.8
2	*6475.00	94.3 AV			1.33 V	328	47.5	46.8
3	#12950.00	62.2 PK	88.2	-26.0	1.77 V	182	40.4	21.8
4	#12950.00	48.4 AV	68.2	-19.8	1.77 V	182	26.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.8 PK			1.50 H	341	64.8	47.0
2	*6515.00	100.2 AV			1.50 H	341	53.2	47.0
3	#13030.00	62.8 PK	88.2	-25.4	1.99 H	225	40.9	21.9
4	#13030.00	48.6 AV	68.2	-19.6	1.99 H	225	26.7	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	106.5 PK			1.42 V	333	59.5	47.0
2	*6515.00	95.5 AV			1.42 V	333	48.5	47.0
3	#13030.00	62.2 PK	88.2	-26.0	1.66 V	189	40.3	21.9
4	#13030.00	48.4 AV	68.2	-19.8	1.66 V	189	26.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.1 PK			1.49 H	344	64.9	47.2
2	*6535.00	100.5 AV			1.49 H	344	53.3	47.2
3	#13070.00	62.7 PK	88.2	-25.5	1.97 H	226	40.7	22.0
4	#13070.00	48.9 AV	68.2	-19.3	1.97 H	226	26.9	22.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.4 PK			1.42 V	338	60.2	47.2
2	*6535.00	95.6 AV			1.42 V	338	48.4	47.2
3	#13070.00	62.3 PK	88.2	-25.9	1.66 V	195	40.3	22.0
4	#13070.00	48.5 AV	68.2	-19.7	1.66 V	195	26.5	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.4 PK			1.49 H	344	64.0	47.4
2	*6695.00	99.8 AV			1.49 H	344	52.4	47.4
3	13390.00	62.4 PK	74.0	-11.6	1.83 H	224	39.6	22.8
4	13390.00	48.7 AV	54.0	-5.3	1.83 H	224	25.9	22.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.4 PK			1.28 V	347	59.0	47.4
2	*6695.00	94.7 AV			1.28 V	347	47.3	47.4
3	13390.00	62.1 PK	74.0	-11.9	1.77 V	185	39.3	22.8
4	13390.00	48.2 AV	54.0	-5.8	1.77 V	185	25.4	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.4 PK			1.51 H	340	63.0	47.4
2	*6855.00	99.9 AV			1.51 H	340	52.5	47.4
3	#13710.00	62.6 PK	88.2	-25.6	1.92 H	227	39.1	23.5
4	#13710.00	48.8 AV	68.2	-19.4	1.92 H	227	25.3	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.2 PK			1.49 V	336	58.8	47.4
2	*6855.00	94.6 AV			1.49 V	336	47.2	47.4
3	#13710.00	62.4 PK	88.2	-25.8	1.61 V	195	38.9	23.5
4	#13710.00	48.2 AV	68.2	-20.0	1.61 V	195	24.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.4 PK			1.44 H	342	63.8	47.6
2	*6875.00	99.7 AV			1.44 H	342	52.1	47.6
3	#13750.00	62.5 PK	88.2	-25.7	1.92 H	226	38.9	23.6
4	#13750.00	48.7 AV	68.2	-19.5	1.92 H	226	25.1	23.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	106.6 PK			1.39 V	342	59.0	47.6
2	*6875.00	94.9 AV			1.39 V	342	47.3	47.6
3	#13750.00	62.1 PK	88.2	-26.1	1.70 V	193	38.5	23.6
4	#13750.00	48.2 AV	68.2	-20.0	1.70 V	193	24.6	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.3 PK			1.51 H	342	62.6	48.7
2	*6995.00	99.6 AV			1.51 H	342	50.9	48.7
3	#13990.00	62.4 PK	88.2	-25.8	1.93 H	227	37.9	24.5
4	#13990.00	48.6 AV	68.2	-19.6	1.93 H	227	24.1	24.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	106.4 PK			1.41 V	329	57.7	48.7
2	*6995.00	95.0 AV			1.41 V	329	46.3	48.7
3	#13990.00	62.3 PK	88.2	-25.9	1.66 V	192	37.8	24.5
4	#13990.00	48.2 AV	68.2	-20.0	1.66 V	192	23.7	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.2 PK			1.49 H	337	62.6	48.6
2	*7095.00	99.5 AV			1.49 H	337	50.9	48.6
3	#14190.00	62.7 PK	88.2	-25.5	1.99 H	236	37.8	24.9
4	#14190.00	48.8 AV	68.2	-19.4	1.99 H	236	23.9	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	106.4 PK			1.48 V	345	57.8	48.6
2	*7095.00	94.8 AV			1.48 V	345	46.2	48.6
3	#14190.00	62.1 PK	88.2	-26.1	1.66 V	195	37.2	24.9
4	#14190.00	48.2 AV	68.2	-20.0	1.66 V	195	23.3	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.7 PK			1.70 H	343	45.9	48.8
2	*7115.00	82.1 AV			1.70 H	343	33.3	48.8
3	#7125.00	79.5 PK	88.2	-8.7	1.70 H	343	62.6	16.9
4	#7125.00	68.0 AV	68.2	-0.2	1.70 H	343	51.1	16.9
5	#14230.00	62.3 PK	88.2	-25.9	1.99 H	230	37.4	24.9
6	#14230.00	48.6 AV	68.2	-19.6	1.99 H	230	23.7	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.5 PK			1.49 V	349	40.7	48.8
2	*7115.00	77.4 AV			1.49 V	349	28.6	48.8
3	#7125.00	73.5 PK	88.2	-14.7	1.49 V	349	56.6	16.9
4	#7125.00	61.3 AV	68.2	-6.9	1.49 V	349	44.4	16.9
5	#14230.00	62.0 PK	88.2	-26.2	1.73 V	198	37.1	24.9
6	#14230.00	48.1 AV	68.2	-20.1	1.73 V	198	23.2	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.0 PK	88.2	-33.2	1.58 H	353	40.9	14.1
2	#5925.00	43.1 AV	68.2	-25.1	1.58 H	353	29.0	14.1
3	*6125.00	112.3 PK			1.58 H	353	67.0	45.3
4	*6125.00	98.9 AV			1.58 H	353	53.6	45.3
5	12250.00	59.7 PK	74.0	-14.3	1.85 H	235	38.7	21.0
6	12250.00	46.0 AV	54.0	-8.0	1.85 H	235	25.0	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.9 PK	88.2	-35.3	2.86 V	329	38.8	14.1
2	#5925.00	40.4 AV	68.2	-27.8	2.86 V	329	26.3	14.1
3	*6125.00	106.8 PK			2.86 V	329	61.5	45.3
4	*6125.00	94.0 AV			2.86 V	329	48.7	45.3
5	12250.00	59.5 PK	74.0	-14.5	1.77 V	220	38.5	21.0
6	12250.00	45.8 AV	54.0	-8.2	1.77 V	220	24.8	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	111.3 PK			1.59 H	357	65.6	45.7
2	*6245.00	98.6 AV			1.59 H	357	52.9	45.7
3	12490.00	59.4 PK	74.0	-14.6	1.85 H	239	38.7	20.7
4	12490.00	45.8 AV	54.0	-8.2	1.85 H	239	25.1	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	105.9 PK			2.85 V	345	60.2	45.7
2	*6245.00	93.2 AV			2.85 V	345	47.5	45.7
3	12490.00	59.3 PK	74.0	-14.7	1.75 V	208	38.6	20.7
4	12490.00	45.5 AV	54.0	-8.5	1.75 V	208	24.8	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.3 PK			1.50 H	338	63.7	46.6
2	*6405.00	98.2 AV			1.50 H	338	51.6	46.6
3	#12810.00	60.3 PK	88.2	-27.9	1.92 H	223	38.7	21.6
4	#12810.00	46.6 AV	68.2	-21.6	1.92 H	223	25.0	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	105.4 PK			2.85 V	335	58.8	46.6
2	*6405.00	93.8 AV			2.85 V	335	47.2	46.6
3	#12810.00	60.1 PK	88.2	-28.1	1.75 V	207	38.5	21.6
4	#12810.00	46.4 AV	68.2	-21.8	1.75 V	207	24.8	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	110.6 PK			1.77 H	337	64.0	46.6
2	*6445.00	97.9 AV			1.77 H	337	51.3	46.6
3	#12890.00	60.3 PK	88.2	-27.9	1.84 H	233	38.7	21.6
4	#12890.00	46.7 AV	68.2	-21.5	1.84 H	233	25.1	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	105.2 PK			2.85 V	337	58.6	46.6
2	*6445.00	93.6 AV			2.85 V	337	47.0	46.6
3	#12890.00	60.1 PK	88.2	-28.1	1.72 V	202	38.5	21.6
4	#12890.00	46.3 AV	68.2	-21.9	1.72 V	202	24.7	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.6 PK			1.62 H	340	63.7	46.9
2	*6485.00	98.2 AV			1.62 H	340	51.3	46.9
3	#12970.00	60.4 PK	88.2	-27.8	1.85 H	238	38.6	21.8
4	#12970.00	46.8 AV	68.2	-21.4	1.85 H	238	25.0	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	105.4 PK			2.85 V	345	58.5	46.9
2	*6485.00	93.4 AV			2.85 V	345	46.5	46.9
3	#12970.00	60.3 PK	88.2	-27.9	1.78 V	209	38.5	21.8
4	#12970.00	46.6 AV	68.2	-21.6	1.78 V	209	24.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	110.7 PK			1.62 H	340	63.7	47.0
2	*6525.00	98.1 AV			1.62 H	340	51.1	47.0
3	#13050.00	60.6 PK	88.2	-27.6	1.82 H	227	38.7	21.9
4	#13050.00	47.0 AV	68.2	-21.2	1.82 H	227	25.1	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	105.9 PK			2.95 V	338	58.9	47.0
2	*6525.00	93.8 AV			2.95 V	338	46.8	47.0
3	#13050.00	60.4 PK	88.2	-27.8	1.75 V	209	38.5	21.9
4	#13050.00	46.7 AV	68.2	-21.5	1.75 V	209	24.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	111.2 PK			1.81 H	346	63.9	47.3
2	*6565.00	98.4 AV			1.81 H	346	51.1	47.3
3	#13130.00	60.8 PK	88.2	-27.4	1.82 H	233	38.7	22.1
4	#13130.00	47.1 AV	68.2	-21.1	1.82 H	233	25.0	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	105.1 PK			2.94 V	341	57.8	47.3
2	*6565.00	93.3 AV			2.94 V	341	46.0	47.3
3	#13130.00	60.6 PK	88.2	-27.6	1.72 V	220	38.5	22.1
4	#13130.00	46.9 AV	68.2	-21.3	1.72 V	220	24.8	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.8 PK			1.76 H	351	63.3	47.5
2	*6725.00	99.0 AV			1.76 H	351	51.5	47.5
3	#13450.00	61.9 PK	88.2	-26.3	1.89 H	229	38.7	23.2
4	#13450.00	48.2 AV	68.2	-20.0	1.89 H	229	25.0	23.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	106.3 PK			2.89 V	315	58.8	47.5
2	*6725.00	94.8 AV			2.89 V	315	47.3	47.5
3	#13450.00	61.7 PK	88.2	-26.5	1.68 V	210	38.5	23.2
4	#13450.00	48.0 AV	68.2	-20.2	1.68 V	210	24.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	112.0 PK			1.75 H	357	64.6	47.4
2	*6845.00	99.5 AV			1.75 H	357	52.1	47.4
3	#13690.00	62.3 PK	88.2	-25.9	1.92 H	229	38.8	23.5
4	#13690.00	48.6 AV	68.2	-19.6	1.92 H	229	25.1	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	107.4 PK			2.95 V	319	60.0	47.4
2	*6845.00	95.0 AV			2.95 V	319	47.6	47.4
3	#13690.00	62.1 PK	88.2	-26.1	1.75 V	206	38.6	23.5
4	#13690.00	48.3 AV	68.2	-19.9	1.75 V	206	24.8	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.6 PK			1.90 H	356	63.9	47.7
2	*6885.00	99.1 AV			1.90 H	356	51.4	47.7
3	#13770.00	62.5 PK	88.2	-25.7	1.85 H	236	38.7	23.8
4	#13770.00	48.9 AV	68.2	-19.3	1.85 H	236	25.1	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	106.2 PK			3.02 V	318	58.5	47.7
2	*6885.00	94.7 AV			3.02 V	318	47.0	47.7
3	#13770.00	62.3 PK	88.2	-25.9	1.75 V	218	38.5	23.8
4	#13770.00	48.6 AV	68.2	-19.6	1.75 V	218	24.8	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	110.5 PK			1.65 H	358	61.7	48.8
2	*7005.00	98.2 AV			1.65 H	358	49.4	48.8
3	#14010.00	63.2 PK	88.2	-25.0	1.82 H	228	38.6	24.6
4	#14010.00	49.6 AV	68.2	-18.6	1.82 H	228	25.0	24.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	106.0 PK			2.95 V	315	57.2	48.8
2	*7005.00	94.0 AV			2.95 V	315	45.2	48.8
3	#14010.00	63.1 PK	88.2	-25.1	1.68 V	211	38.5	24.6
4	#14010.00	49.4 AV	68.2	-18.8	1.68 V	211	24.8	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.2 PK			1.55 H	360	61.6	48.6
2	*7085.00	98.3 AV			1.55 H	360	49.7	48.6
3	#7125.00	59.4 PK	88.2	-28.8	1.55 H	360	42.5	16.9
4	#7125.00	45.9 AV	68.2	-22.3	1.55 H	360	29.0	16.9
5	#14170.00	63.6 PK	88.2	-24.6	1.82 H	225	38.7	24.9
6	#14170.00	49.8 AV	68.2	-18.4	1.82 H	225	24.9	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	106.8 PK			3.04 V	317	58.2	48.6
2	*7085.00	94.8 AV			3.04 V	317	46.2	48.6
3	#7125.00	57.9 PK	88.2	-30.3	3.04 V	317	41.0	16.9
4	#7125.00	44.7 AV	68.2	-23.5	3.04 V	317	27.8	16.9
5	#14170.00	63.4 PK	88.2	-24.8	1.79 V	229	38.5	24.9
6	#14170.00	49.6 AV	68.2	-18.6	1.79 V	229	24.7	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.3 PK	88.2	-33.9	1.54 H	355	40.2	14.1
2	#5925.00	43.1 AV	68.2	-25.1	1.54 H	355	29.0	14.1
3	*6145.00	111.9 PK			1.54 H	355	66.7	45.2
4	*6145.00	99.2 AV			1.54 H	355	54.0	45.2
5	12290.00	59.5 PK	74.0	-14.5	1.89 H	233	38.6	20.9
6	12290.00	45.7 AV	54.0	-8.3	1.89 H	233	24.8	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	2.87 V	329	37.5	14.1
2	#5925.00	38.9 AV	68.2	-29.3	2.87 V	329	24.8	14.1
3	*6145.00	106.8 PK			2.87 V	329	61.6	45.2
4	*6145.00	94.4 AV			2.87 V	329	49.2	45.2
5	12290.00	59.4 PK	74.0	-14.6	1.78 V	210	38.5	20.9
6	12290.00	45.5 AV	54.0	-8.5	1.78 V	210	24.6	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	111.6 PK			1.59 H	354	66.0	45.6
2	*6225.00	98.5 AV			1.59 H	354	52.9	45.6
3	12450.00	59.3 PK	74.0	-14.7	1.92 H	229	38.7	20.6
4	12450.00	45.5 AV	54.0	-8.5	1.92 H	229	24.9	20.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	105.9 PK			2.57 V	317	60.3	45.6
2	*6225.00	93.1 AV			2.57 V	317	47.5	45.6
3	12450.00	59.1 PK	74.0	-14.9	1.75 V	208	38.5	20.6
4	12450.00	45.3 AV	54.0	-8.7	1.75 V	208	24.7	20.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.7 PK			1.44 H	360	65.1	46.6
2	*6385.00	98.9 AV			1.44 H	360	52.3	46.6
3	#12770.00	60.2 PK	88.2	-28.0	1.96 H	227	38.7	21.5
4	#12770.00	46.3 AV	68.2	-21.9	1.96 H	227	24.8	21.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	105.1 PK			2.59 V	315	58.5	46.6
2	*6385.00	93.8 AV			2.59 V	315	47.2	46.6
3	#12770.00	60.0 PK	88.2	-28.2	1.75 V	210	38.5	21.5
4	#12770.00	46.1 AV	68.2	-22.1	1.75 V	210	24.6	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.6 PK			1.50 H	1	63.9	46.7
2	*6465.00	98.0 AV			1.50 H	1	51.3	46.7
3	#12930.00	60.5 PK	88.2	-27.7	1.85 H	225	38.7	21.8
4	#12930.00	46.6 AV	68.2	-21.6	1.85 H	225	24.8	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	104.5 PK			2.49 V	315	57.8	46.7
2	*6465.00	92.7 AV			2.49 V	315	46.0	46.7
3	#12930.00	60.3 PK	88.2	-27.9	1.70 V	201	38.5	21.8
4	#12930.00	46.4 AV	68.2	-21.8	1.70 V	201	24.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.4 PK			1.47 H	344	64.2	47.2
2	*6545.00	98.1 AV			1.47 H	344	50.9	47.2
3	#13090.00	60.9 PK	88.2	-27.3	1.92 H	225	38.8	22.1
4	#13090.00	47.0 AV	68.2	-21.2	1.92 H	225	24.9	22.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	104.8 PK			2.59 V	318	57.6	47.2
2	*6545.00	93.4 AV			2.59 V	318	46.2	47.2
3	#13090.00	60.7 PK	88.2	-27.5	2.59 V	319	38.6	22.1
4	#13090.00	46.8 AV	68.2	-21.4	2.59 V	319	24.7	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.7 PK			1.46 H	345	63.4	47.3
2	*6625.00	98.2 AV			1.46 H	345	50.9	47.3
3	13250.00	61.4 PK	74.0	-12.6	1.95 H	227	38.9	22.5
4	13250.00	47.5 AV	54.0	-6.5	1.95 H	227	25.0	22.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	104.8 PK			2.52 V	315	57.5	47.3
2	*6625.00	93.8 AV			2.52 V	315	46.5	47.3
3	13250.00	61.2 PK	74.0	-12.8	1.70 V	216	38.7	22.5
4	13250.00	47.3 AV	54.0	-6.7	1.70 V	216	24.8	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.3 PK			1.49 H	349	63.8	47.5
2	*6705.00	98.8 AV			1.49 H	349	51.3	47.5
3	#13410.00	61.8 PK	88.2	-26.4	1.88 H	225	38.9	22.9
4	#13410.00	47.9 AV	68.2	-20.3	1.88 H	225	25.0	22.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.0 PK			2.59 V	319	57.5	47.5
2	*6705.00	93.7 AV			2.59 V	319	46.2	47.5
3	#13410.00	61.6 PK	88.2	-26.6	1.72 V	213	38.7	22.9
4	#13410.00	47.7 AV	68.2	-20.5	1.72 V	213	24.8	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.2 PK			1.60 H	352	64.8	47.4
2	*6785.00	98.5 AV			1.60 H	352	51.1	47.4
3	#13570.00	62.4 PK	88.2	-25.8	1.95 H	222	38.8	23.6
4	#13570.00	48.4 AV	68.2	-19.8	1.95 H	222	24.8	23.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	105.6 PK			2.57 V	315	58.2	47.4
2	*6785.00	93.9 AV			2.57 V	315	46.5	47.4
3	#13570.00	62.2 PK	88.2	-26.0	1.75 V	205	38.6	23.6
4	#13570.00	48.3 AV	68.2	-19.9	1.75 V	205	24.7	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.5 PK			1.60 H	356	64.0	47.5
2	*6865.00	98.7 AV			1.60 H	356	51.2	47.5
3	#13730.00	62.4 PK	88.2	-25.8	1.82 H	228	38.8	23.6
4	#13730.00	48.5 AV	68.2	-19.7	1.82 H	228	24.9	23.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	106.2 PK			2.57 V	319	58.7	47.5
2	*6865.00	93.7 AV			2.57 V	319	46.2	47.5
3	#13730.00	62.2 PK	88.2	-26.0	1.72 V	205	38.6	23.6
4	#13730.00	48.3 AV	68.2	-19.9	1.72 V	205	24.7	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.1 PK			1.52 H	356	62.8	48.3
2	*6945.00	98.4 AV			1.52 H	356	50.1	48.3
3	#13890.00	62.8 PK	88.2	-25.4	1.92 H	224	38.9	23.9
4	#13890.00	48.9 AV	68.2	-19.3	1.92 H	224	25.0	23.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	105.3 PK			2.57 V	316	57.0	48.3
2	*6945.00	93.3 AV			2.57 V	316	45.0	48.3
3	#13890.00	62.6 PK	88.2	-25.6	1.70 V	212	38.7	23.9
4	#13890.00	48.7 AV	68.2	-19.5	1.70 V	212	24.8	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.1 PK			1.51 H	355	62.4	48.7
2	*7025.00	98.4 AV			1.51 H	355	49.7	48.7
3	#7125.00	56.4 PK	88.2	-31.8	1.51 H	355	39.5	16.9
4	#7125.00	44.4 AV	68.2	-23.8	1.51 H	355	27.5	16.9
5	#14050.00	63.5 PK	88.2	-24.7	1.95 H	223	38.8	24.7
6	#14050.00	49.5 AV	68.2	-18.7	1.95 H	223	24.8	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	105.7 PK			2.56 V	312	57.0	48.7
2	*7025.00	93.3 AV			2.56 V	312	44.6	48.7
3	#7125.00	56.1 PK	88.2	-32.1	2.56 V	312	39.2	16.9
4	#7125.00	44.1 AV	68.2	-24.1	2.56 V	312	27.2	16.9
5	#14050.00	63.2 PK	88.2	-25.0	1.72 V	213	38.5	24.7
6	#14050.00	49.3 AV	68.2	-18.9	1.72 V	213	24.6	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.1 PK	88.2	-31.1	1.47 H	354	43.0	14.1
2	#5925.00	44.1 AV	68.2	-24.1	1.47 H	354	30.0	14.1
3	*6185.00	110.2 PK			1.47 H	354	64.8	45.4
4	*6185.00	98.0 AV			1.47 H	354	52.6	45.4
5	12370.00	59.4 PK	74.0	-14.6	1.92 H	226	38.7	20.7
6	12370.00	45.5 AV	54.0	-8.5	1.92 H	226	24.8	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.6 PK	88.2	-33.6	2.82 V	335	40.5	14.1
2	#5925.00	42.6 AV	68.2	-25.6	2.82 V	335	28.5	14.1
3	*6185.00	105.2 PK			2.82 V	335	59.8	45.4
4	*6185.00	92.9 AV			2.82 V	335	47.5	45.4
5	12370.00	59.2 PK	74.0	-14.8	1.75 V	21	38.5	20.7
6	12370.00	45.3 AV	54.0	-8.7	1.75 V	21	24.6	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.8 PK			1.50 H	356	64.3	46.5
2	*6345.00	98.4 AV			1.50 H	356	51.9	46.5
3	12690.00	60.2 PK	74.0	-13.8	1.82 H	228	38.9	21.3
4	12690.00	46.3 AV	54.0	-7.7	1.82 H	228	25.0	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.0 PK			2.75 V	346	57.5	46.5
2	*6345.00	93.0 AV			2.75 V	346	46.5	46.5
3	12690.00	60.0 PK	74.0	-14.0	1.70 V	206	38.7	21.3
4	12690.00	46.1 AV	54.0	-7.9	1.70 V	206	24.8	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.6 PK			1.48 H	2	63.6	47.0
2	*6505.00	97.4 AV			1.48 H	2	50.4	47.0
3	#13010.00	60.8 PK	88.2	-27.4	1.82 H	228	38.9	21.9
4	#13010.00	46.9 AV	68.2	-21.3	1.82 H	228	25.0	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.0 PK			2.82 V	345	57.0	47.0
2	*6505.00	91.8 AV			2.82 V	345	44.8	47.0
3	#13010.00	60.6 PK	88.2	-27.6	1.72 V	209	38.7	21.9
4	#13010.00	46.6 AV	68.2	-21.6	1.72 V	209	24.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.1 PK			1.47 H	347	63.8	47.3
2	*6665.00	97.7 AV			1.47 H	347	50.4	47.3
3	13330.00	61.5 PK	74.0	-12.5	1.92 H	228	38.8	22.7
4	13330.00	47.6 AV	54.0	-6.4	1.92 H	228	24.9	22.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.5 PK			2.80 V	342	57.2	47.3
2	*6665.00	92.3 AV			2.80 V	342	45.0	47.3
3	13330.00	61.2 PK	74.0	-12.8	1.72 V	212	38.5	22.7
4	13330.00	47.4 AV	54.0	-6.6	1.72 V	212	24.7	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.6 PK			1.43 H	350	64.2	47.4
2	*6825.00	98.4 AV			1.43 H	350	51.0	47.4
3	#13650.00	62.3 PK	88.2	-25.9	1.93 H	227	38.8	23.5
4	#13650.00	48.5 AV	68.2	-19.7	1.93 H	227	25.0	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	106.2 PK			2.74 V	341	58.8	47.4
2	*6825.00	93.4 AV			2.74 V	341	46.0	47.4
3	#13650.00	62.1 PK	88.2	-26.1	1.75 V	212	38.6	23.5
4	#13650.00	48.3 AV	68.2	-19.9	1.75 V	212	24.8	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	111.4 PK			1.70 H	358	62.7	48.7
2	*6985.00	98.2 AV			1.70 H	358	49.5	48.7
3	#7125.00	60.9 PK	88.2	-27.3	1.70 H	358	44.0	16.9
4	#7125.00	47.1 AV	68.2	-21.1	1.70 H	358	30.2	16.9
5	#13970.00	63.0 PK	88.2	-25.2	1.87 H	228	38.7	24.3
6	#13970.00	49.2 AV	68.2	-19.0	1.87 H	228	24.9	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.0 PK			2.72 V	345	56.3	48.7
2	*6985.00	92.5 AV			2.72 V	345	43.8	48.7
3	#7125.00	58.6 PK	88.2	-29.6	2.72 V	345	41.7	16.9
4	#7125.00	45.4 AV	68.2	-22.8	2.72 V	345	28.5	16.9
5	#13970.00	62.8 PK	88.2	-25.4	1.75 V	209	38.5	24.3
6	#13970.00	49.0 AV	68.2	-19.2	1.75 V	209	24.7	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.3 PK	88.2	-25.9	1.45 H	353	48.2	14.1
2	#5925.00	49.6 AV	68.2	-18.6	1.45 H	353	35.5	14.1
3	*6265.00	110.1 PK			1.45 H	353	64.3	45.8
4	*6265.00	97.8 AV			1.45 H	353	52.0	45.8
5	12530.00	59.5 PK	74.0	-14.5	1.92 H	225	38.7	20.8
6	12530.00	45.6 AV	54.0	-8.4	1.92 H	225	24.8	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.6 PK	88.2	-31.6	2.91 V	332	42.5	14.1
2	#5925.00	44.3 AV	68.2	-23.9	2.91 V	332	30.2	14.1
3	*6265.00	105.3 PK			2.91 V	332	59.5	45.8
4	*6265.00	93.5 AV			2.91 V	332	47.7	45.8
5	12530.00	59.3 PK	74.0	-14.7	1.70 V	206	38.5	20.8
6	12530.00	45.4 AV	54.0	-8.6	1.70 V	206	24.6	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.3 PK			1.48 H	359	63.7	46.6
2	*6425.00	97.9 AV			1.48 H	359	51.3	46.6
3	#12850.00	60.4 PK	88.2	-27.8	1.92 H	230	38.8	21.6
4	#12850.00	46.4 AV	68.2	-21.8	1.92 H	230	24.8	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.3 PK			2.99 V	332	58.7	46.6
2	*6425.00	93.3 AV			2.99 V	332	46.7	46.6
3	#12850.00	60.2 PK	88.2	-28.0	1.72 V	216	38.6	21.6
4	#12850.00	46.3 AV	68.2	-21.9	1.72 V	216	24.7	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.8 PK			1.37 H	1	63.5	47.3
2	*6585.00	97.5 AV			1.37 H	1	50.2	47.3
3	#13170.00	61.2 PK	88.2	-27.0	1.82 H	225	38.9	22.3
4	#13170.00	47.2 AV	68.2	-21.0	1.82 H	225	24.9	22.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	105.1 PK			2.96 V	337	57.8	47.3
2	*6585.00	92.6 AV			2.96 V	337	45.3	47.3
3	#13170.00	61.0 PK	88.2	-27.2	1.72 V	206	38.7	22.3
4	#13170.00	47.0 AV	68.2	-21.2	1.72 V	206	24.7	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.2 PK			1.38 H	8	62.6	47.6
2	*6745.00	97.8 AV			1.38 H	8	50.2	47.6
3	#13490.00	62.3 PK	88.2	-25.9	1.82 H	223	38.8	23.5
4	#13490.00	48.3 AV	68.2	-19.9	1.82 H	223	24.8	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	104.3 PK			2.97 V	314	56.7	47.6
2	*6745.00	92.5 AV			2.97 V	314	44.9	47.6
3	#13490.00	62.0 PK	88.2	-26.2	1.72 V	210	38.5	23.5
4	#13490.00	48.2 AV	68.2	-20.0	1.72 V	210	24.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.1 PK			1.37 H	351	62.2	47.9
2	*6905.00	98.7 AV			1.37 H	351	50.8	47.9
3	#7125.00	69.0 PK	88.2	-19.2	1.37 H	351	52.1	16.9
4	#7125.00	53.6 AV	68.2	-14.6	1.37 H	351	36.7	16.9
5	7250.00	64.9 PK	74.0	-9.1	1.37 H	351	47.5	17.4
6	7250.00	53.8 AV	54.0	-0.2	1.37 H	351	36.4	17.4
7	#13810.00	62.6 PK	88.2	-25.6	1.89 H	226	38.8	23.8
8	#13810.00	48.6 AV	68.2	-19.6	1.89 H	226	24.8	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.9 PK			2.99 V	315	58.0	47.9
2	*6905.00	94.5 AV			2.99 V	315	46.6	47.9
3	#7125.00	66.4 PK	88.2	-21.8	2.99 V	315	49.5	16.9
4	#7125.00	51.3 AV	68.2	-16.9	2.99 V	315	34.4	16.9
5	7250.00	60.5 PK	74.0	-13.5	2.99 V	315	43.1	17.4
6	7250.00	45.9 AV	54.0	-8.1	2.99 V	315	28.5	17.4
7	#13810.00	62.3 PK	88.2	-25.9	1.75 V	202	38.5	23.8
8	#13810.00	48.3 AV	68.2	-19.9	1.75 V	202	24.5	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

NSS2

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.1 PK	88.2	-32.1	1.69 H	352	42.0	14.1
2	#5925.00	43.6 AV	68.2	-24.6	1.69 H	352	29.5	14.1
3	*6115.00	112.1 PK			1.69 H	352	66.8	45.3
4	*6115.00	99.2 AV			1.69 H	352	53.9	45.3
5	12230.00	62.5 PK	74.0	-11.5	1.88 H	226	41.5	21.0
6	12230.00	48.7 AV	54.0	-5.3	1.88 H	226	27.7	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.3 PK	88.2	-32.9	2.44 V	317	41.2	14.1
2	#5925.00	43.1 AV	68.2	-25.1	2.44 V	317	29.0	14.1
3	*6115.00	107.3 PK			2.44 V	317	62.0	45.3
4	*6115.00	94.5 AV			2.44 V	317	49.2	45.3
5	12230.00	61.3 PK	74.0	-12.7	1.75 V	202	40.3	21.0
6	12230.00	48.0 AV	54.0	-6.0	1.75 V	202	27.0	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	110.8 PK			1.34 H	359	65.0	45.8
2	*6255.00	98.2 AV			1.34 H	359	52.4	45.8
3	12510.00	62.7 PK	74.0	-11.3	1.89 H	225	42.0	20.7
4	12510.00	48.7 AV	54.0	-5.3	1.89 H	225	28.0	20.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	106.0 PK			2.42 V	328	60.2	45.8
2	*6255.00	93.5 AV			2.42 V	328	47.7	45.8
3	12510.00	60.9 PK	74.0	-13.1	1.70 V	211	40.2	20.7
4	12510.00	47.7 AV	54.0	-6.3	1.70 V	211	27.0	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.0 PK			1.38 H	338	63.4	46.6
2	*6415.00	97.7 AV			1.38 H	338	51.1	46.6
3	#12830.00	63.4 PK	88.2	-24.8	1.89 H	236	41.8	21.6
4	#12830.00	48.6 AV	68.2	-19.6	1.89 H	236	27.0	21.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	105.1 PK			2.45 V	325	58.5	46.6
2	*6415.00	93.3 AV			2.45 V	325	46.7	46.6
3	#12830.00	61.8 PK	88.2	-26.4	1.70 V	205	40.2	21.6
4	#12830.00	47.9 AV	68.2	-20.3	1.70 V	205	26.3	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.5 PK			1.41 H	341	63.9	46.6
2	*6435.00	97.5 AV			1.41 H	341	50.9	46.6
3	#12870.00	62.4 PK	88.2	-25.8	1.85 H	226	40.8	21.6
4	#12870.00	48.6 AV	68.2	-19.6	1.85 H	226	27.0	21.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	105.1 PK			2.53 V	329	58.5	46.6
2	*6435.00	93.2 AV			2.53 V	329	46.6	46.6
3	#12870.00	61.3 PK	88.2	-26.9	1.71 V	206	39.7	21.6
4	#12870.00	48.0 AV	68.2	-20.2	1.71 V	206	26.4	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.1 PK			1.47 H	342	63.3	46.8
2	*6475.00	98.1 AV			1.47 H	342	51.3	46.8
3	#12950.00	62.7 PK	88.2	-25.5	1.89 H	236	40.9	21.8
4	#12950.00	48.9 AV	68.2	-19.3	1.89 H	236	27.1	21.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	105.9 PK			2.45 V	325	59.1	46.8
2	*6475.00	93.8 AV			2.45 V	325	47.0	46.8
3	#12950.00	61.4 PK	88.2	-26.8	1.75 V	202	39.6	21.8
4	#12950.00	48.2 AV	68.2	-20.0	1.75 V	202	26.4	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.3 PK			1.48 H	341	64.3	47.0
2	*6515.00	98.3 AV			1.48 H	341	51.3	47.0
3	#13030.00	62.6 PK	88.2	-25.6	1.87 H	228	40.7	21.9
4	#13030.00	48.7 AV	68.2	-19.5	1.87 H	228	26.8	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	105.6 PK			2.52 V	326	58.6	47.0
2	*6515.00	94.2 AV			2.52 V	326	47.2	47.0
3	#13030.00	61.7 PK	88.2	-26.5	1.75 V	220	39.8	21.9
4	#13030.00	48.2 AV	68.2	-20.0	1.75 V	220	26.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.1 PK			1.44 H	344	63.9	47.2
2	*6535.00	98.9 AV			1.44 H	344	51.7	47.2
3	#13070.00	63.2 PK	88.2	-25.0	1.85 H	227	41.2	22.0
4	#13070.00	49.0 AV	68.2	-19.2	1.85 H	227	27.0	22.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.8 PK			2.49 V	322	58.6	47.2
2	*6535.00	94.8 AV			2.49 V	322	47.6	47.2
3	#13070.00	62.0 PK	88.2	-26.2	1.62 V	209	40.0	22.0
4	#13070.00	48.5 AV	68.2	-19.7	1.62 V	209	26.5	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.3 PK			1.47 H	349	62.9	47.4
2	*6695.00	98.6 AV			1.47 H	349	51.2	47.4
3	13390.00	63.5 PK	74.0	-10.5	1.89 H	223	40.7	22.8
4	13390.00	49.7 AV	54.0	-4.3	1.89 H	223	26.9	22.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.9 PK			2.51 V	328	57.5	47.4
2	*6695.00	94.2 AV			2.51 V	328	46.8	47.4
3	13390.00	62.6 PK	74.0	-11.4	1.70 V	203	39.8	22.8
4	13390.00	49.2 AV	54.0	-4.8	1.70 V	203	26.4	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.7 PK			1.56 H	353	63.3	47.4
2	*6855.00	98.6 AV			1.56 H	353	51.2	47.4
3	#13710.00	64.3 PK	88.2	-23.9	1.89 H	220	40.8	23.5
4	#13710.00	50.5 AV	68.2	-17.7	1.89 H	220	27.0	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.9 PK			2.57 V	324	58.5	47.4
2	*6855.00	94.4 AV			2.57 V	324	47.0	47.4
3	#13710.00	63.2 PK	88.2	-25.0	1.70 V	201	39.7	23.5
4	#13710.00	49.8 AV	68.2	-18.4	1.70 V	201	26.3	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.2 PK			1.62 H	355	63.6	47.6
2	*6875.00	99.2 AV			1.62 H	355	51.6	47.6
3	#13750.00	64.5 PK	88.2	-23.7	1.86 H	221	40.9	23.6
4	#13750.00	50.6 AV	68.2	-17.6	1.86 H	221	27.0	23.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	106.1 PK			2.55 V	322	58.5	47.6
2	*6875.00	94.9 AV			2.55 V	322	47.3	47.6
3	#13750.00	63.3 PK	88.2	-24.9	1.72 V	211	39.7	23.6
4	#13750.00	49.9 AV	68.2	-18.3	1.72 V	211	26.3	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.2 PK			1.69 H	358	61.5	48.7
2	*6995.00	98.3 AV			1.69 H	358	49.6	48.7
3	#13990.00	65.3 PK	88.2	-22.9	1.89 H	221	40.8	24.5
4	#13990.00	51.3 AV	68.2	-16.9	1.89 H	221	26.8	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	105.9 PK			2.62 V	315	57.2	48.7
2	*6995.00	94.5 AV			2.62 V	315	45.8	48.7
3	#13990.00	64.3 PK	88.2	-23.9	1.72 V	206	39.8	24.5
4	#13990.00	50.8 AV	68.2	-17.4	1.72 V	206	26.3	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	110.4 PK			1.80 H	337	61.8	48.6
2	*7095.00	98.4 AV			1.80 H	337	49.8	48.6
3	#14190.00	65.7 PK	88.2	-22.5	1.89 H	223	40.8	24.9
4	#14190.00	51.7 AV	68.2	-16.5	1.89 H	223	26.8	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	106.3 PK			2.73 V	319	57.7	48.6
2	*7095.00	94.6 AV			2.73 V	319	46.0	48.6
3	#14190.00	64.5 PK	88.2	-23.7	1.65 V	208	39.6	24.9
4	#14190.00	51.4 AV	68.2	-16.8	1.65 V	208	26.5	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.6 PK			1.91 H	339	48.8	48.8
2	*7115.00	85.6 AV			1.91 H	339	36.8	48.8
3	#7125.00	81.9 PK	88.2	-6.3	1.91 H	339	65.0	16.9
4	#7125.00	68.0 AV	68.2	-0.2	1.91 H	339	51.1	16.9
5	#14230.00	64.7 PK	88.2	-23.5	1.89 H	229	39.8	24.9
6	#14230.00	51.4 AV	68.2	-16.8	1.89 H	229	26.5	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.4 PK			2.57 V	318	43.6	48.8
2	*7115.00	80.3 AV			2.57 V	318	31.5	48.8
3	#7125.00	76.1 PK	88.2	-12.1	2.57 V	318	59.2	16.9
4	#7125.00	65.4 AV	68.2	-2.8	2.57 V	318	48.5	16.9
5	#14230.00	64.1 PK	88.2	-24.1	1.68 V	205	39.2	24.9
6	#14230.00	51.1 AV	68.2	-17.1	1.68 V	205	26.2	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.9 PK	88.2	-32.3	1.64 H	351	41.8	14.1
2	#5925.00	43.5 AV	68.2	-24.7	1.64 H	351	29.4	14.1
3	*6125.00	115.6 PK			1.64 H	351	70.3	45.3
4	*6125.00	102.8 AV			1.64 H	351	57.5	45.3
5	12230.00	62.5 PK	74.0	-11.5	1.94 H	236	41.5	21.0
6	12230.00	48.6 AV	54.0	-5.4	1.94 H	236	27.6	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.2 PK	88.2	-33.0	2.45 V	312	41.1	14.1
2	#5925.00	43.0 AV	68.2	-25.2	2.45 V	312	28.9	14.1
3	*6125.00	110.4 PK			2.45 V	312	65.1	45.3
4	*6125.00	97.5 AV			2.45 V	312	52.2	45.3
5	12230.00	61.4 PK	74.0	-12.6	1.70 V	199	40.4	21.0
6	12230.00	48.1 AV	54.0	-5.9	1.70 V	199	27.1	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	115.4 PK			1.62 H	353	69.7	45.7
2	*6245.00	102.7 AV			1.62 H	353	57.0	45.7
3	12490.00	62.4 PK	74.0	-11.6	1.85 H	228	41.7	20.7
4	12490.00	48.5 AV	54.0	-5.5	1.85 H	228	27.8	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	110.3 PK			2.44 V	316	64.6	45.7
2	*6245.00	97.4 AV			2.44 V	316	51.7	45.7
3	12490.00	61.2 PK	74.0	-12.8	1.77 V	182	40.5	20.7
4	12490.00	48.0 AV	54.0	-6.0	1.77 V	182	27.3	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	115.4 PK			1.68 H	355	68.8	46.6
2	*6405.00	102.6 AV			1.68 H	355	56.0	46.6
3	#12810.00	62.5 PK	88.2	-25.7	1.99 H	233	40.9	21.6
4	#12810.00	48.4 AV	68.2	-19.8	1.99 H	233	26.8	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.2 PK			2.44 V	310	63.6	46.6
2	*6405.00	97.3 AV			2.44 V	310	50.7	46.6
3	#12810.00	61.2 PK	88.2	-27.0	1.76 V	195	39.6	21.6
4	#12810.00	48.0 AV	68.2	-20.2	1.76 V	195	26.4	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	115.4 PK			1.69 H	355	68.8	46.6
2	*6445.00	102.7 AV			1.69 H	355	56.1	46.6
3	#12890.00	62.1 PK	88.2	-26.1	1.99 H	236	40.5	21.6
4	#12890.00	48.6 AV	68.2	-19.6	1.99 H	236	27.0	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	110.2 PK			2.49 V	314	63.6	46.6
2	*6445.00	94.2 AV			2.49 V	314	47.6	46.6
3	#12890.00	61.2 PK	88.2	-27.0	1.76 V	192	39.6	21.6
4	#12890.00	48.3 AV	68.2	-19.9	1.76 V	192	26.7	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	115.5 PK			1.61 H	349	68.6	46.9
2	*6485.00	102.6 AV			1.61 H	349	55.7	46.9
3	#12970.00	62.4 PK	88.2	-25.8	1.90 H	233	40.6	21.8
4	#12970.00	48.5 AV	68.2	-19.7	1.90 H	233	26.7	21.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.2 PK			2.49 V	311	63.3	46.9
2	*6485.00	97.4 AV			2.49 V	311	50.5	46.9
3	#12970.00	61.3 PK	88.2	-26.9	1.74 V	195	39.5	21.8
4	#12970.00	48.2 AV	68.2	-20.0	1.74 V	195	26.4	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	115.3 PK			1.63 H	353	68.3	47.0
2	*6525.00	102.7 AV			1.63 H	353	55.7	47.0
3	#13050.00	62.5 PK	88.2	-25.7	1.90 H	241	40.6	21.9
4	#13050.00	48.4 AV	68.2	-19.8	1.90 H	241	26.5	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	110.1 PK			2.49 V	315	63.1	47.0
2	*6525.00	97.3 AV			2.49 V	315	50.3	47.0
3	#13050.00	61.5 PK	88.2	-26.7	1.69 V	197	39.6	21.9
4	#13050.00	48.3 AV	68.2	-19.9	1.69 V	197	26.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	115.3 PK			1.66 H	356	68.0	47.3
2	*6565.00	102.5 AV			1.66 H	356	55.2	47.3
3	#13130.00	62.2 PK	88.2	-26.0	1.99 H	234	40.1	22.1
4	#13130.00	48.3 AV	68.2	-19.9	1.99 H	234	26.2	22.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.2 PK			2.49 V	310	62.9	47.3
2	*6565.00	97.2 AV			2.49 V	310	49.9	47.3
3	#13130.00	61.1 PK	88.2	-27.1	1.76 V	195	39.0	22.1
4	#13130.00	48.0 AV	68.2	-20.2	1.76 V	195	25.9	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	115.3 PK			1.62 H	349	67.8	47.5
2	*6725.00	102.5 AV			1.62 H	349	55.0	47.5
3	#13450.00	62.4 PK	88.2	-25.8	1.90 H	238	39.2	23.2
4	#13450.00	48.4 AV	68.2	-19.8	1.90 H	238	25.2	23.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.1 PK			2.44 V	319	62.6	47.5
2	*6725.00	97.4 AV			2.44 V	319	49.9	47.5
3	#13450.00	61.2 PK	88.2	-27.0	1.78 V	189	38.0	23.2
4	#13450.00	48.0 AV	68.2	-20.2	1.78 V	189	24.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	115.4 PK			1.66 H	358	68.0	47.4
2	*6845.00	102.5 AV			1.66 H	358	55.1	47.4
3	#13690.00	62.2 PK	88.2	-26.0	1.90 H	229	38.7	23.5
4	#13690.00	48.8 AV	68.2	-19.4	1.90 H	229	25.3	23.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.0 PK			2.49 V	318	62.6	47.4
2	*6845.00	97.1 AV			2.49 V	318	49.7	47.4
3	#13690.00	61.2 PK	88.2	-27.0	1.68 V	192	37.7	23.5
4	#13690.00	47.9 AV	68.2	-20.3	1.68 V	192	24.4	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	115.2 PK			1.69 H	356	67.5	47.7
2	*6885.00	102.4 AV			1.69 H	356	54.7	47.7
3	#13770.00	62.2 PK	88.2	-26.0	1.89 H	228	38.4	23.8
4	#13770.00	48.3 AV	68.2	-19.9	1.89 H	228	24.5	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.2 PK			1.69 V	348	62.5	47.7
2	*6885.00	97.3 AV			1.69 V	348	49.6	47.7
3	#13770.00	61.1 PK	88.2	-27.1	1.72 V	198	37.3	23.8
4	#13770.00	48.0 AV	68.2	-20.2	1.72 V	198	24.2	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	115.4 PK			1.61 H	350	66.6	48.8
2	*7005.00	102.6 AV			1.61 H	350	53.8	48.8
3	#14010.00	62.3 PK	88.2	-25.9	1.91 H	236	37.7	24.6
4	#14010.00	48.7 AV	68.2	-19.5	1.91 H	236	24.1	24.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	110.1 PK			2.41 V	307	61.3	48.8
2	*7005.00	97.1 AV			2.41 V	307	48.3	48.8
3	#14010.00	61.1 PK	88.2	-27.1	1.68 V	196	36.5	24.6
4	#14010.00	47.9 AV	68.2	-20.3	1.68 V	196	23.3	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	115.4 PK			1.65 H	352	66.8	48.6
2	*7085.00	102.5 AV			1.65 H	352	53.9	48.6
3	#7125.00	63.8 PK	88.2	-24.4	1.65 H	352	46.9	16.9
4	#7125.00	49.7 AV	68.2	-18.5	1.65 H	352	32.8	16.9
5	#14170.00	62.7 PK	88.2	-25.5	1.99 H	233	37.8	24.9
6	#14170.00	48.4 AV	68.2	-19.8	1.99 H	233	23.5	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.0 PK			2.44 V	309	61.4	48.6
2	*7085.00	97.2 AV			2.44 V	309	48.6	48.6
3	#7125.00	59.3 PK	88.2	-28.9	2.44 V	309	42.4	16.9
4	#7125.00	46.0 AV	68.2	-22.2	2.44 V	309	29.1	16.9
5	#14170.00	61.2 PK	88.2	-27.0	1.75 V	198	36.3	24.9
6	#14170.00	48.0 AV	68.2	-20.2	1.75 V	198	23.1	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.9 PK	88.2	-31.3	1.62 H	355	42.8	14.1
2	#5925.00	43.6 AV	68.2	-24.6	1.62 H	355	29.5	14.1
3	*6145.00	112.3 PK			1.62 H	355	67.1	45.2
4	*6145.00	99.6 AV			1.62 H	355	54.4	45.2
5	12290.00	60.9 PK	74.0	-13.1	1.85 H	223	40.0	20.9
6	12290.00	47.5 AV	54.0	-6.5	1.85 H	223	26.6	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.6 PK	88.2	-33.6	2.24 V	317	40.5	14.1
2	#5925.00	42.6 AV	68.2	-25.6	2.24 V	317	28.5	14.1
3	*6145.00	107.7 PK			2.24 V	317	62.5	45.2
4	*6145.00	94.7 AV			2.24 V	317	49.5	45.2
5	12290.00	59.9 PK	74.0	-14.1	1.72 V	209	39.0	20.9
6	12290.00	46.8 AV	54.0	-7.2	1.72 V	209	25.9	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	111.6 PK			1.70 H	355	66.0	45.6
2	*6225.00	98.9 AV			1.70 H	355	53.3	45.6
3	12450.00	60.4 PK	74.0	-13.6	1.82 H	229	39.8	20.6
4	12450.00	47.1 AV	54.0	-6.9	1.82 H	229	26.5	20.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	106.1 PK			2.18 V	320	60.5	45.6
2	*6225.00	94.1 AV			2.18 V	320	48.5	45.6
3	12450.00	59.5 PK	74.0	-14.5	1.72 V	216	38.9	20.6
4	12450.00	46.4 AV	54.0	-7.6	1.72 V	216	25.8	20.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.6 PK			1.56 H	335	65.0	46.6
2	*6385.00	98.4 AV			1.56 H	335	51.8	46.6
3	#12770.00	61.3 PK	88.2	-26.9	1.82 H	229	39.8	21.5
4	#12770.00	48.0 AV	68.2	-20.2	1.82 H	229	26.5	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	106.4 PK			2.20 V	321	59.8	46.6
2	*6385.00	94.2 AV			2.20 V	321	47.6	46.6
3	#12770.00	60.5 PK	88.2	-27.7	1.72 V	211	39.0	21.5
4	#12770.00	47.5 AV	68.2	-20.7	1.72 V	211	26.0	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.7 PK			1.58 H	338	65.0	46.7
2	*6465.00	98.5 AV			1.58 H	338	51.8	46.7
3	#12930.00	61.6 PK	88.2	-26.6	1.82 H	225	39.8	21.8
4	#12930.00	48.3 AV	68.2	-19.9	1.82 H	225	26.5	21.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	105.6 PK			2.18 V	325	58.9	46.7
2	*6465.00	94.2 AV			2.18 V	325	47.5	46.7
3	#12930.00	60.6 PK	88.2	-27.6	1.73 V	209	38.8	21.8
4	#12930.00	47.6 AV	68.2	-20.6	1.73 V	209	25.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	112.6 PK			1.55 H	342	65.4	47.2
2	*6545.00	99.1 AV			1.55 H	342	51.9	47.2
3	#13090.00	61.8 PK	88.2	-26.4	1.82 H	223	39.7	22.1
4	#13090.00	48.5 AV	68.2	-19.7	1.82 H	223	26.4	22.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	106.4 PK			1.52 V	345	59.2	47.2
2	*6545.00	94.7 AV			1.52 V	345	47.5	47.2
3	#13090.00	61.0 PK	88.2	-27.2	1.72 V	208	38.9	22.1
4	#13090.00	47.9 AV	68.2	-20.3	1.72 V	208	25.8	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.2 PK			1.87 H	345	64.9	47.3
2	*6625.00	99.0 AV			1.87 H	345	51.7	47.3
3	13250.00	62.3 PK	74.0	-11.7	1.75 H	229	39.8	22.5
4	13250.00	49.0 AV	54.0	-5.0	1.75 H	229	26.5	22.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	106.8 PK			2.11 V	318	59.5	47.3
2	*6625.00	94.4 AV			2.11 V	318	47.1	47.3
3	13250.00	61.4 PK	74.0	-12.6	1.67 V	206	38.9	22.5
4	13250.00	48.3 AV	54.0	-5.7	1.67 V	206	25.8	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.1 PK			1.73 H	348	63.6	47.5
2	*6705.00	99.2 AV			1.73 H	348	51.7	47.5
3	#13410.00	62.7 PK	88.2	-25.5	1.82 H	226	39.8	22.9
4	#13410.00	49.4 AV	68.2	-18.8	1.82 H	226	26.5	22.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.7 PK			2.16 V	320	58.2	47.5
2	*6705.00	94.4 AV			2.16 V	320	46.9	47.5
3	#13410.00	61.7 PK	88.2	-26.5	1.72 V	201	38.8	22.9
4	#13410.00	48.9 AV	68.2	-19.3	1.72 V	201	26.0	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	111.1 PK			1.56 H	352	63.7	47.4
2	*6785.00	99.1 AV			1.56 H	352	51.7	47.4
3	#13570.00	63.3 PK	88.2	-24.9	1.88 H	225	39.7	23.6
4	#13570.00	50.0 AV	68.2	-18.2	1.88 H	225	26.4	23.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	105.9 PK			2.18 V	319	58.5	47.4
2	*6785.00	94.2 AV			2.18 V	319	46.8	47.4
3	#13570.00	62.5 PK	88.2	-25.7	1.70 V	211	38.9	23.6
4	#13570.00	49.5 AV	68.2	-18.7	1.70 V	211	25.9	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.5 PK			1.76 H	357	64.0	47.5
2	*6865.00	99.6 AV			1.76 H	357	52.1	47.5
3	#13730.00	63.3 PK	88.2	-24.9	1.88 H	221	39.7	23.6
4	#13730.00	50.0 AV	68.2	-18.2	1.88 H	221	26.4	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	106.3 PK			2.19 V	320	58.8	47.5
2	*6865.00	94.2 AV			2.19 V	320	46.7	47.5
3	#13730.00	62.5 PK	88.2	-25.7	1.69 V	202	38.9	23.6
4	#13730.00	49.5 AV	68.2	-18.7	1.69 V	202	25.9	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.0 PK			1.90 H	357	63.7	48.3
2	*6945.00	99.2 AV			1.90 H	357	50.9	48.3
3	#13890.00	63.6 PK	88.2	-24.6	1.84 H	225	39.7	23.9
4	#13890.00	50.4 AV	68.2	-17.8	1.84 H	225	26.5	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	106.9 PK			2.15 V	320	58.6	48.3
2	*6945.00	94.4 AV			2.15 V	320	46.1	48.3
3	#13890.00	62.7 PK	88.2	-25.5	1.69 V	203	38.8	23.9
4	#13890.00	49.7 AV	68.2	-18.5	1.69 V	203	25.8	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.1 PK			1.63 H	358	62.4	48.7
2	*7025.00	98.5 AV			1.63 H	358	49.8	48.7
3	#7125.00	58.6 PK	88.2	-29.6	1.63 H	358	41.7	16.9
4	#7125.00	45.4 AV	68.2	-22.8	1.63 H	358	28.5	16.9
5	#14050.00	64.4 PK	88.2	-23.8	1.81 H	227	39.7	24.7
6	#14050.00	51.1 AV	68.2	-17.1	1.81 H	227	26.4	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	105.6 PK			2.14 V	318	56.9	48.7
2	*7025.00	93.2 AV			2.14 V	318	44.5	48.7
3	#7125.00	56.6 PK	88.2	-31.6	2.14 V	318	39.7	16.9
4	#7125.00	43.9 AV	68.2	-24.3	2.14 V	318	27.0	16.9
5	#14050.00	63.6 PK	88.2	-24.6	1.62 V	205	38.9	24.7
6	#14050.00	50.6 AV	68.2	-17.6	1.62 V	205	25.9	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.3 PK	88.2	-27.9	1.65 H	356	46.2	14.1
2	#5925.00	48.0 AV	68.2	-20.2	1.65 H	356	33.9	14.1
3	*6185.00	111.1 PK			1.65 H	356	65.7	45.4
4	*6185.00	98.6 AV			1.65 H	356	53.2	45.4
5	12370.00	60.2 PK	74.0	-13.8	1.85 H	226	39.5	20.7
6	12370.00	47.2 AV	54.0	-6.8	1.85 H	226	26.5	20.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.2 PK	88.2	-32.0	1.58 V	60	42.1	14.1
2	#5925.00	43.6 AV	68.2	-24.6	1.58 V	60	29.5	14.1
3	*6185.00	106.6 PK			1.58 V	60	61.2	45.4
4	*6185.00	94.4 AV			1.58 V	60	49.0	45.4
5	12370.00	59.6 PK	74.0	-14.4	1.72 V	208	38.9	20.7
6	12370.00	46.7 AV	54.0	-7.3	1.72 V	208	26.0	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.0 PK			1.68 H	358	64.5	46.5
2	*6345.00	99.2 AV			1.68 H	358	52.7	46.5
3	12690.00	60.9 PK	74.0	-13.1	1.84 H	232	39.6	21.3
4	12690.00	47.7 AV	54.0	-6.3	1.84 H	232	26.4	21.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.5 PK			1.59 V	62	60.0	46.5
2	*6345.00	94.0 AV			1.59 V	62	47.5	46.5
3	12690.00	60.2 PK	74.0	-13.8	1.67 V	205	38.9	21.3
4	12690.00	47.2 AV	54.0	-6.8	1.67 V	205	25.9	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.0 PK			1.60 H	343	63.0	47.0
2	*6505.00	98.1 AV			1.60 H	343	51.1	47.0
3	#13010.00	61.5 PK	88.2	-26.7	1.82 H	232	39.6	21.9
4	#13010.00	48.3 AV	68.2	-19.9	1.82 H	232	26.4	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.0 PK			1.55 V	63	59.0	47.0
2	*6505.00	94.2 AV			1.55 V	63	47.2	47.0
3	#13010.00	60.7 PK	88.2	-27.5	1.75 V	203	38.8	21.9
4	#13010.00	47.7 AV	68.2	-20.5	1.75 V	203	25.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.9 PK			1.62 H	346	63.6	47.3
2	*6665.00	98.8 AV			1.62 H	346	51.5	47.3
3	13330.00	62.2 PK	74.0	-11.8	1.86 H	228	39.5	22.7
4	13330.00	49.0 AV	54.0	-5.0	1.86 H	228	26.3	22.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.5 PK			1.50 V	71	58.2	47.3
2	*6665.00	93.5 AV			1.50 V	71	46.2	47.3
3	13330.00	61.5 PK	74.0	-12.5	1.75 V	208	38.8	22.7
4	13330.00	48.6 AV	54.0	-5.4	1.75 V	208	25.9	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.0 PK			1.70 H	352	63.6	47.4
2	*6825.00	99.9 AV			1.70 H	352	52.5	47.4
3	#13650.00	63.1 PK	88.2	-25.1	1.85 H	235	39.6	23.5
4	#13650.00	49.9 AV	68.2	-18.3	1.85 H	235	26.4	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.7 PK			1.64 V	67	58.3	47.4
2	*6825.00	93.9 AV			1.64 V	67	46.5	47.4
3	#13650.00	62.5 PK	88.2	-25.7	1.70 V	203	39.0	23.5
4	#13650.00	49.6 AV	68.2	-18.6	1.70 V	203	26.1	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	111.1 PK			1.75 H	358	62.4	48.7
2	*6985.00	99.2 AV			1.75 H	358	50.5	48.7
3	#7125.00	69.4 PK	88.2	-18.8	1.75 H	358	52.5	16.9
4	#7125.00	52.7 AV	68.2	-15.5	1.75 H	358	35.8	16.9
5	#13970.00	64.0 PK	88.2	-24.2	1.89 H	229	39.7	24.3
6	#13970.00	50.8 AV	68.2	-17.4	1.89 H	229	26.5	24.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.7 PK			1.62 V	66	57.0	48.7
2	*6985.00	93.4 AV			1.62 V	66	44.7	48.7
3	#7125.00	64.9 PK	88.2	-23.3	1.62 V	66	48.0	16.9
4	#7125.00	49.4 AV	68.2	-18.8	1.62 V	66	32.5	16.9
5	#13970.00	63.4 PK	88.2	-24.8	1.75 V	208	39.1	24.3
6	#13970.00	50.4 AV	68.2	-17.8	1.75 V	208	26.1	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	1.67 H	353	62.2	14.1
2	#5925.00	63.2 AV	68.2	-5.0	1.67 H	353	49.1	14.1
3	*6265.00	110.3 PK			1.67 H	353	64.5	45.8
4	*6265.00	98.3 AV			1.67 H	353	52.5	45.8
5	12530.00	60.3 PK	74.0	-13.7	1.88 H	221	39.5	20.8
6	12530.00	47.1 AV	54.0	-6.9	1.88 H	221	26.3	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.7 PK	88.2	-19.5	1.74 V	62	54.6	14.1
2	#5925.00	55.6 AV	68.2	-12.6	1.74 V	62	41.5	14.1
3	*6265.00	105.8 PK			1.74 V	62	60.0	45.8
4	*6265.00	94.2 AV			1.74 V	62	48.4	45.8
5	12530.00	59.9 PK	74.0	-14.1	1.75 V	205	39.1	20.8
6	12530.00	46.8 AV	54.0	-7.2	1.75 V	205	26.0	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	111.2 PK			1.62 H	357	64.6	46.6
2	*6425.00	98.5 AV			1.62 H	357	51.9	46.6
3	#12850.00	61.2 PK	88.2	-27.0	1.86 H	225	39.6	21.6
4	#12850.00	48.0 AV	68.2	-20.2	1.86 H	225	26.4	21.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.4 PK			1.68 V	63	59.8	46.6
2	*6425.00	94.4 AV			1.68 V	63	47.8	46.6
3	#12850.00	60.7 PK	88.2	-27.5	1.70 V	201	39.1	21.6
4	#12850.00	47.5 AV	68.2	-20.7	1.70 V	201	25.9	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.6 PK			1.55 H	344	63.3	47.3
2	*6585.00	98.3 AV			1.55 H	344	51.0	47.3
3	#13170.00	61.8 PK	88.2	-26.4	1.85 H	229	39.5	22.3
4	#13170.00	48.7 AV	68.2	-19.5	1.85 H	229	26.4	22.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.2 PK			1.70 V	65	58.9	47.3
2	*6585.00	94.5 AV			1.70 V	65	47.2	47.3
3	#13170.00	61.2 PK	88.2	-27.0	1.75 V	206	38.9	22.3
4	#13170.00	48.3 AV	68.2	-19.9	1.75 V	206	26.0	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.0 PK			1.79 H	345	63.4	47.6
2	*6745.00	99.6 AV			1.79 H	345	52.0	47.6
3	#13490.00	63.0 PK	88.2	-25.2	1.85 H	228	39.5	23.5
4	#13490.00	49.9 AV	68.2	-18.3	1.85 H	228	26.4	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	105.1 PK			1.61 V	68	57.5	47.6
2	*6745.00	94.3 AV			1.61 V	68	46.7	47.6
3	#13490.00	62.5 PK	88.2	-25.7	1.65 V	202	39.0	23.5
4	#13490.00	49.7 AV	68.2	-18.5	1.65 V	202	26.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	109.9 PK			1.94 H	352	62.0	47.9
2	*6905.00	97.8 AV			1.94 H	352	49.9	47.9
3	#7125.00	78.1 PK	88.2	-10.1	1.94 H	352	61.2	16.9
4	#7125.00	62.6 AV	68.2	-5.6	1.94 H	352	45.7	16.9
5	7250.00	68.0 PK	74.0	-6.0	1.94 H	352	50.6	17.4
6	7250.00	53.9 AV	54.0	-0.1	1.94 H	352	36.5	17.4
7	#13810.00	63.3 PK	88.2	-24.9	1.82 H	224	39.5	23.8
8	#13810.00	50.1 AV	68.2	-18.1	1.82 H	224	26.3	23.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.5 PK			1.70 V	65	57.6	47.9
2	*6905.00	92.8 AV			1.70 V	65	44.9	47.9
3	#7125.00	70.9 PK	88.2	-17.3	1.70 V	65	54.0	16.9
4	#7125.00	55.1 AV	68.2	-13.1	1.70 V	65	38.2	16.9
5	7250.00	62.9 PK	74.0	-11.1	1.70 V	65	45.5	17.4
6	7250.00	48.6 AV	54.0	-5.4	1.70 V	65	31.2	17.4
7	#13810.00	62.8 PK	88.2	-25.4	1.72 V	205	39.0	23.8
8	#13810.00	49.8 AV	68.2	-18.4	1.72 V	205	26.0	23.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.


Plot of Band Edge

NSS1


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

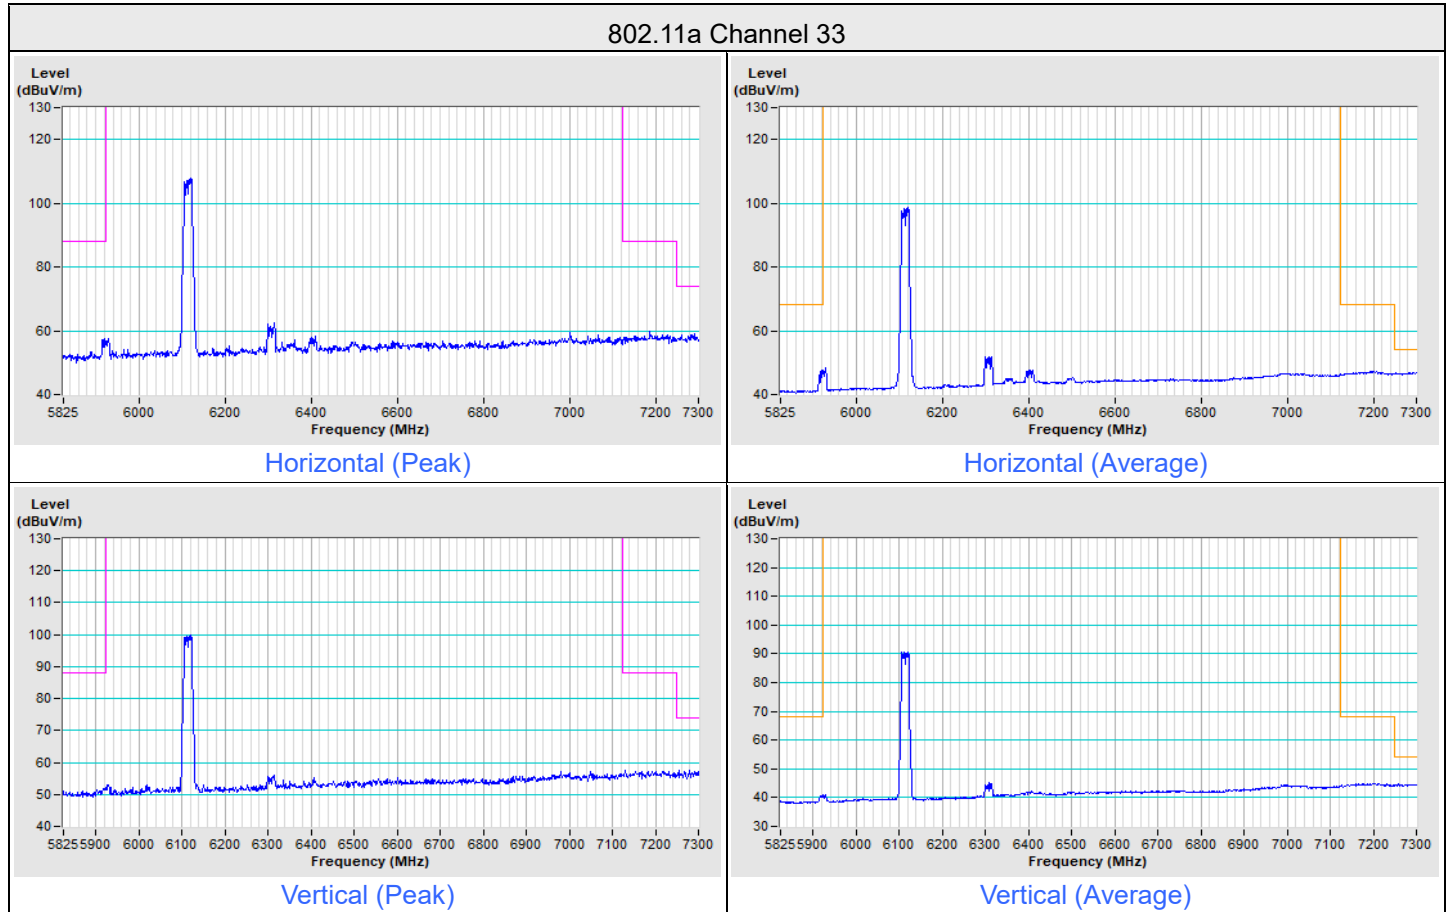


802.11a Channel 233

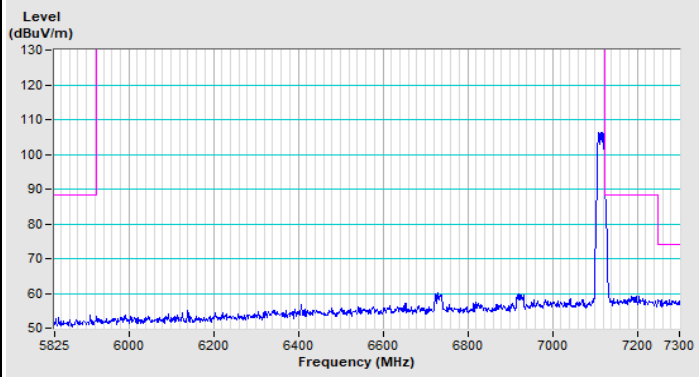


Horizontal (Peak)

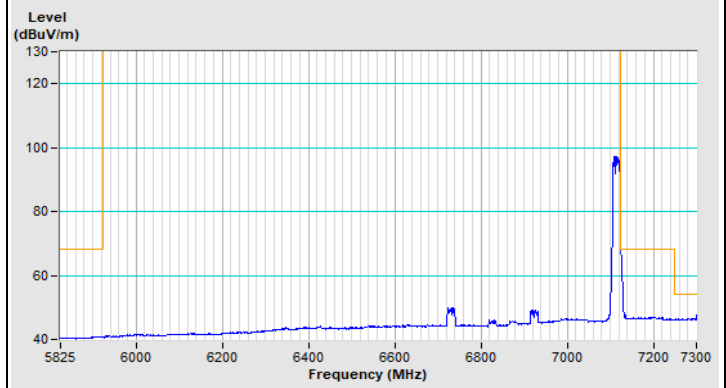

Horizontal (Average)

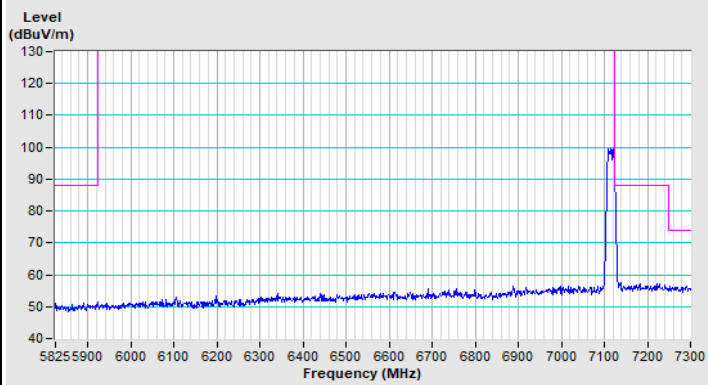

Vertical (Peak)

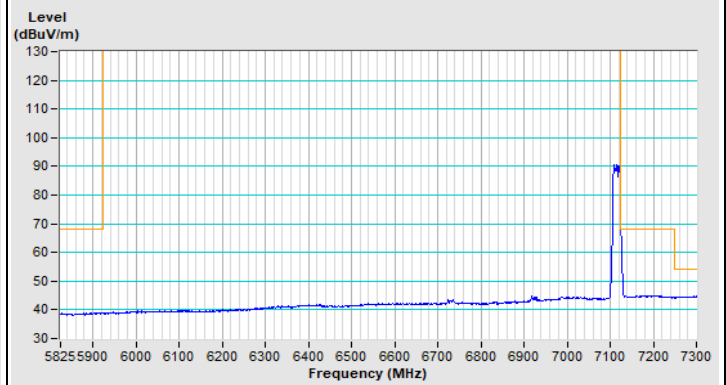


Vertical (Average)




Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 33

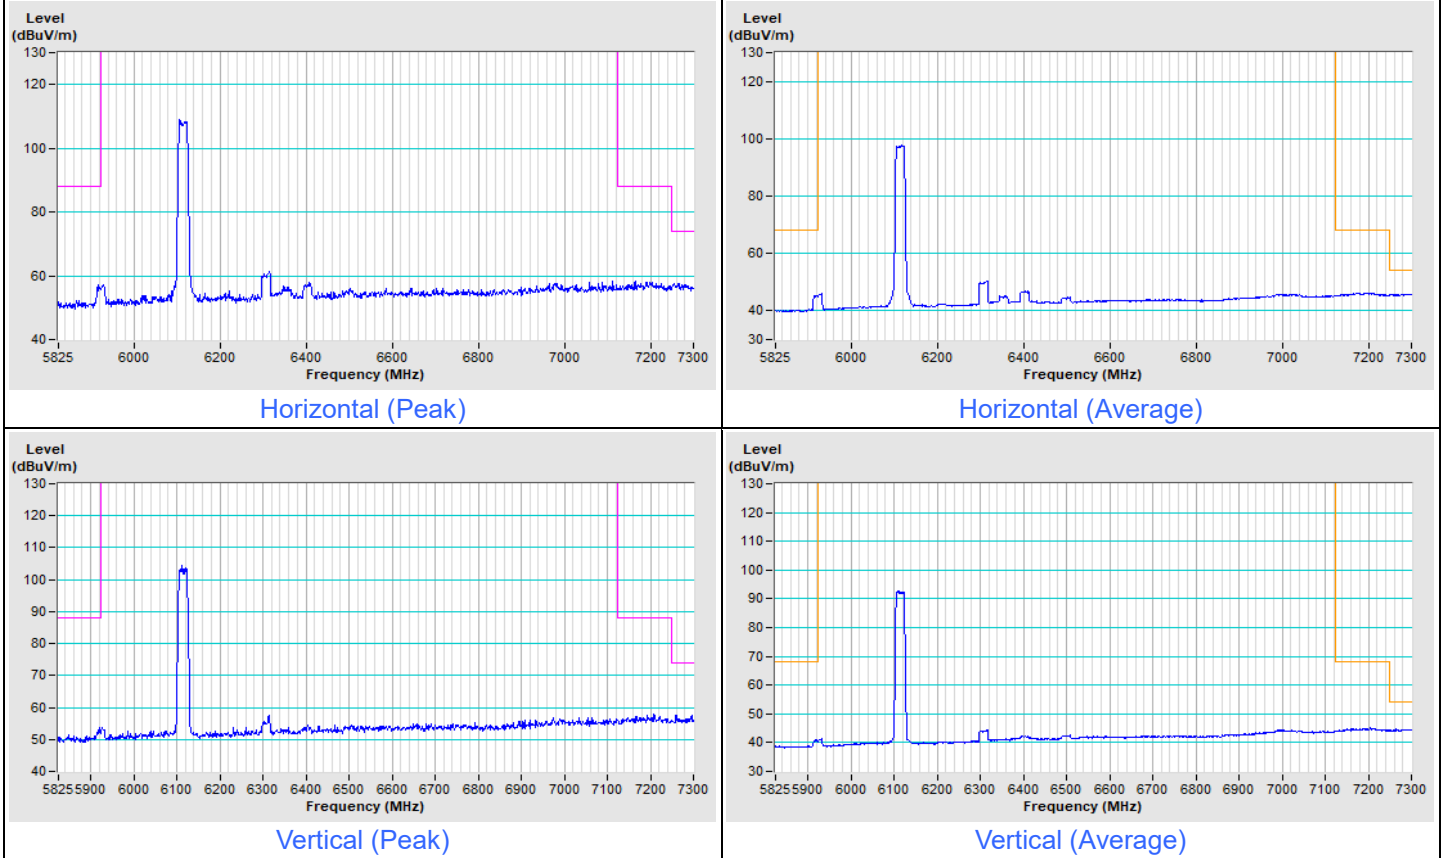


802.11be (EHT20) Channel 233

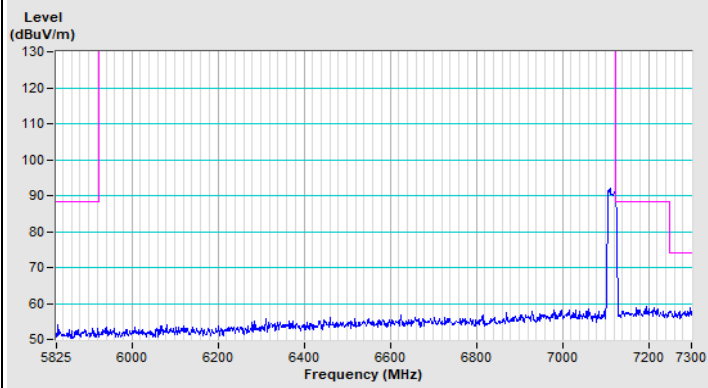


Horizontal (Peak)

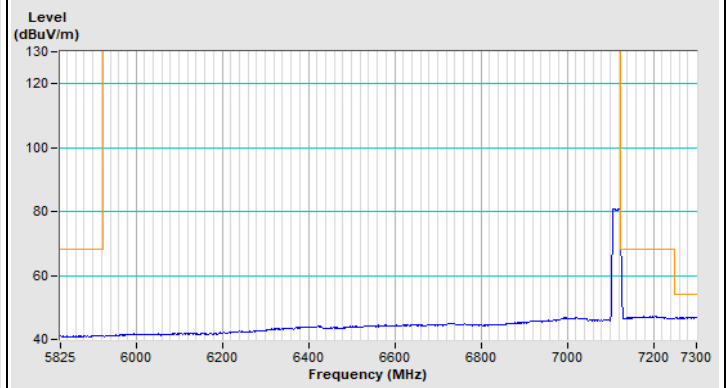

Horizontal (Average)

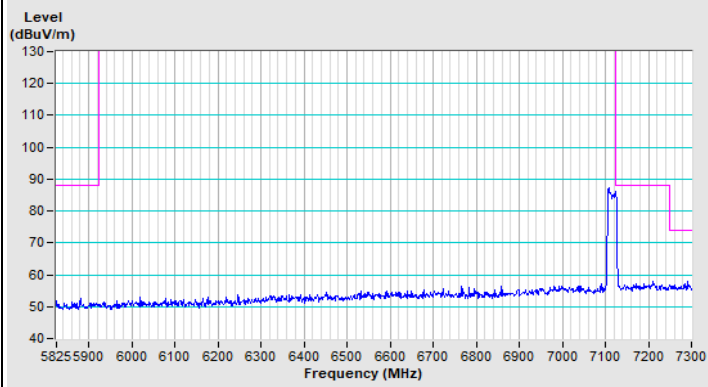


Vertical (Peak)

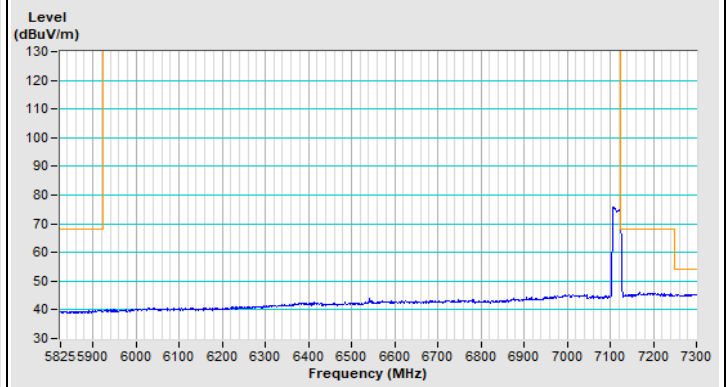


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 35

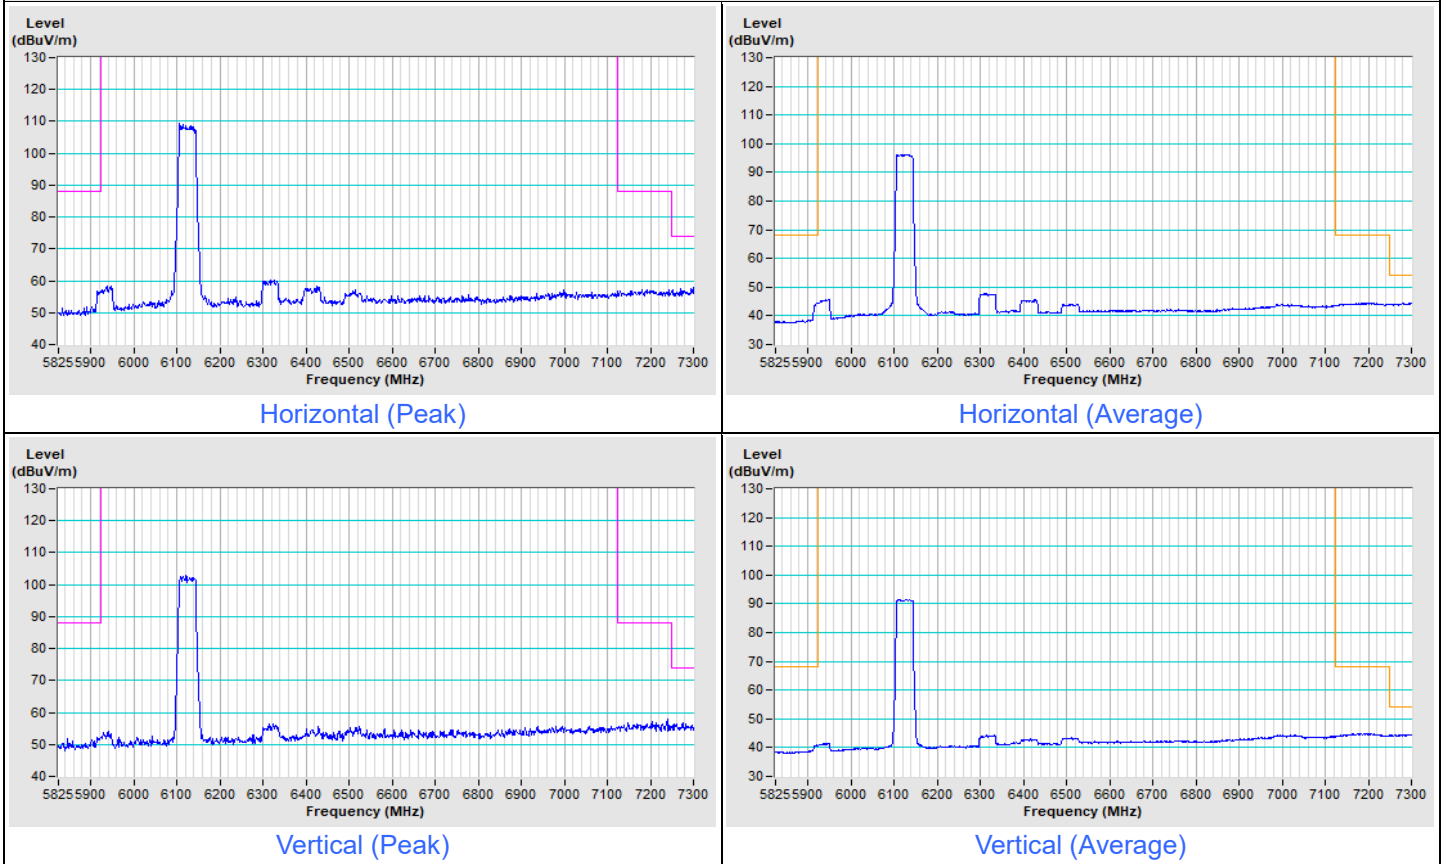


802.11be (EHT40) Channel 227

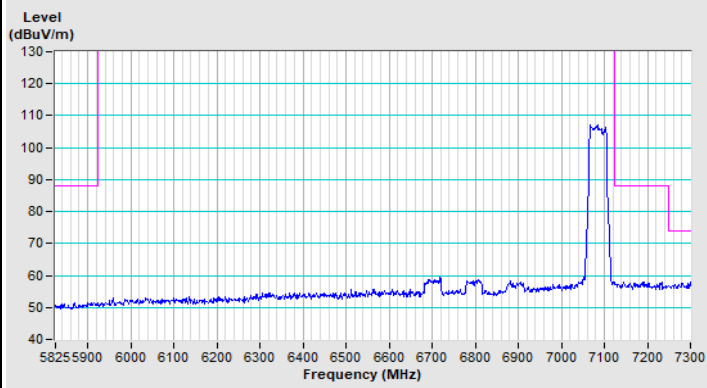


Horizontal (Peak)

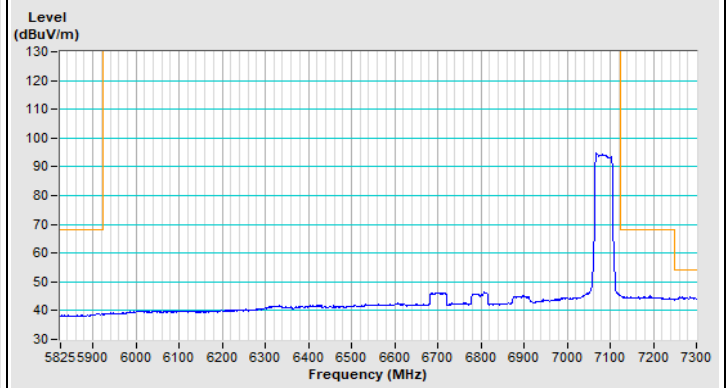

Horizontal (Average)

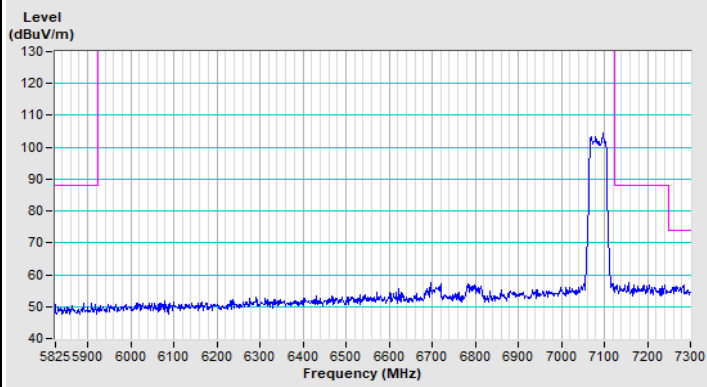


Vertical (Peak)

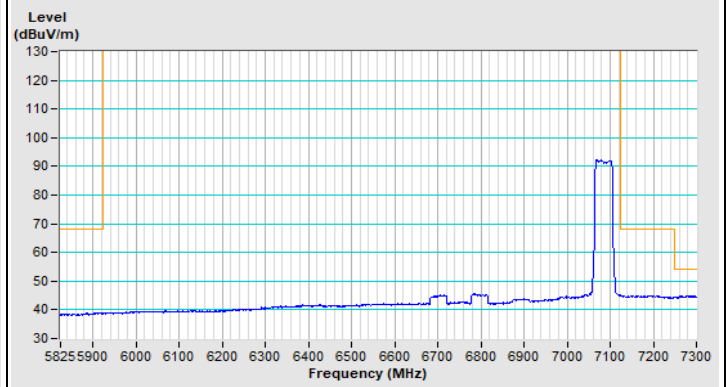


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 39

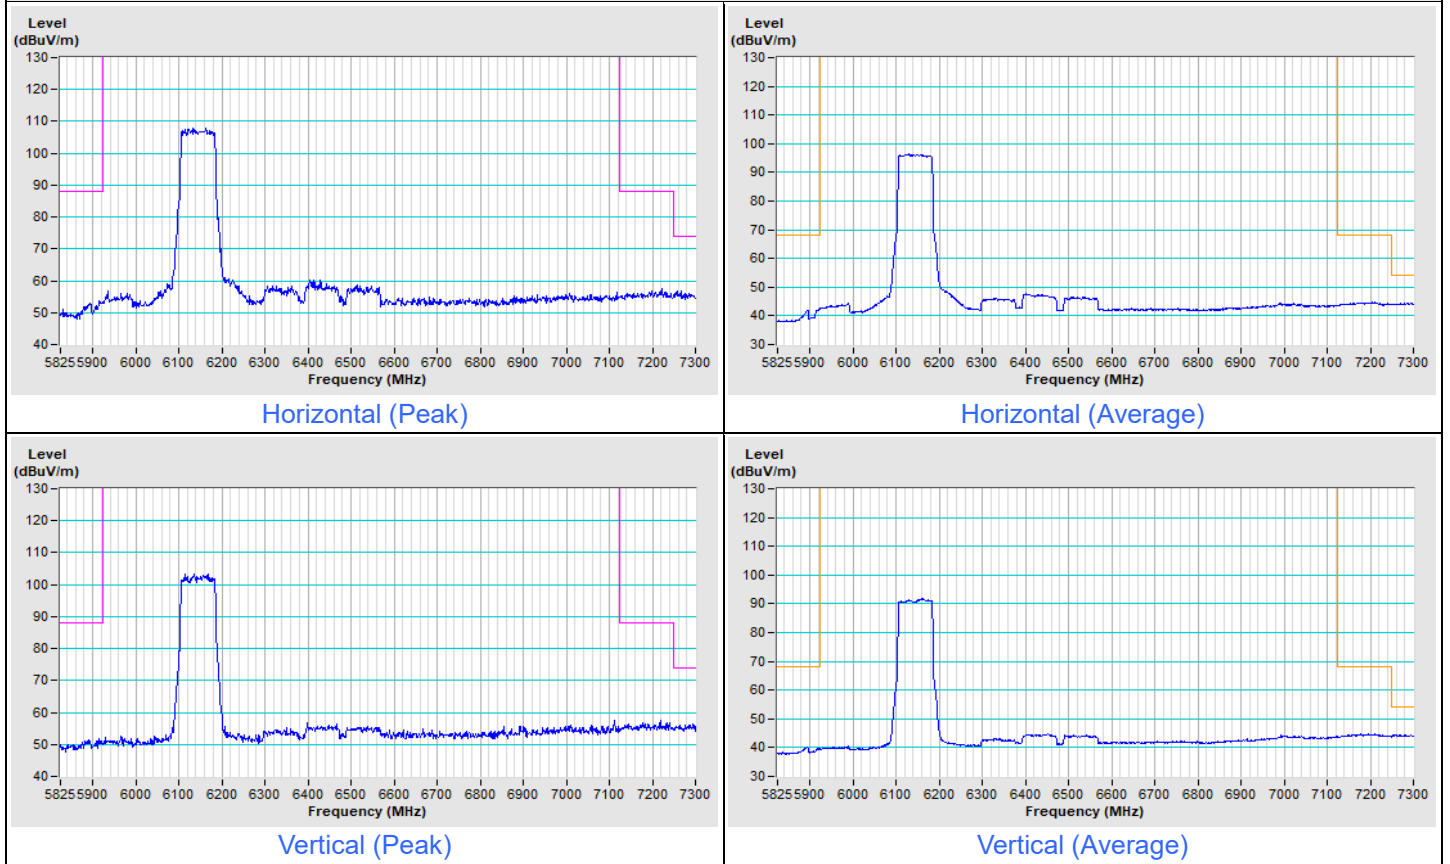


802.11be (EHT80) Channel 215

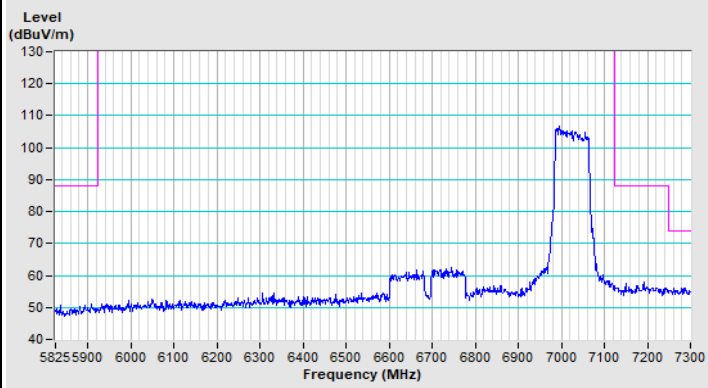


Horizontal (Peak)

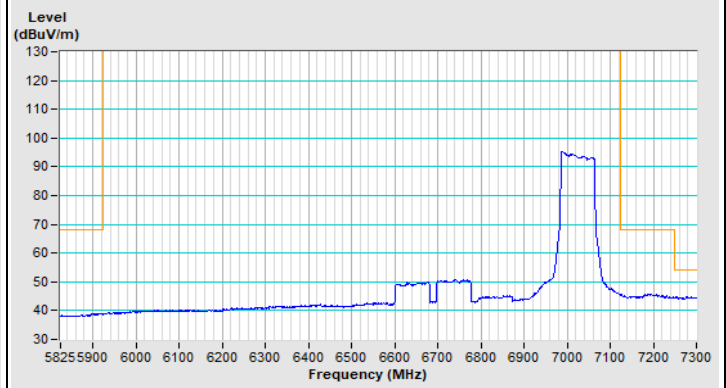

Horizontal (Average)

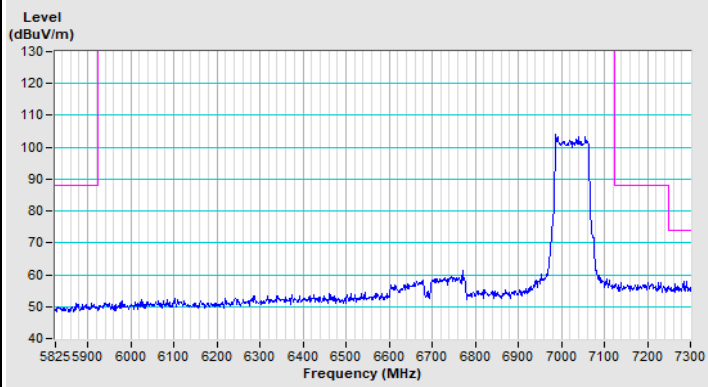


Vertical (Peak)

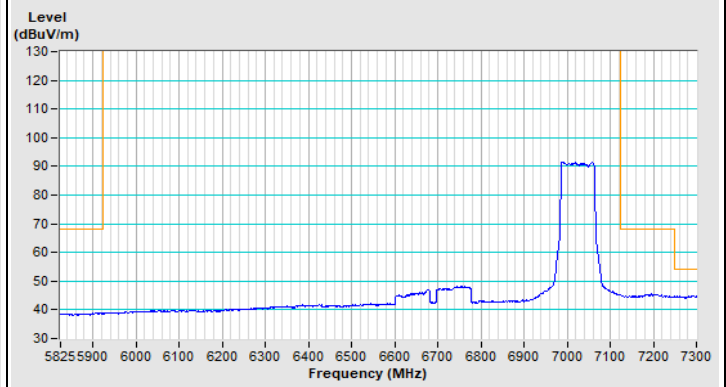


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 47

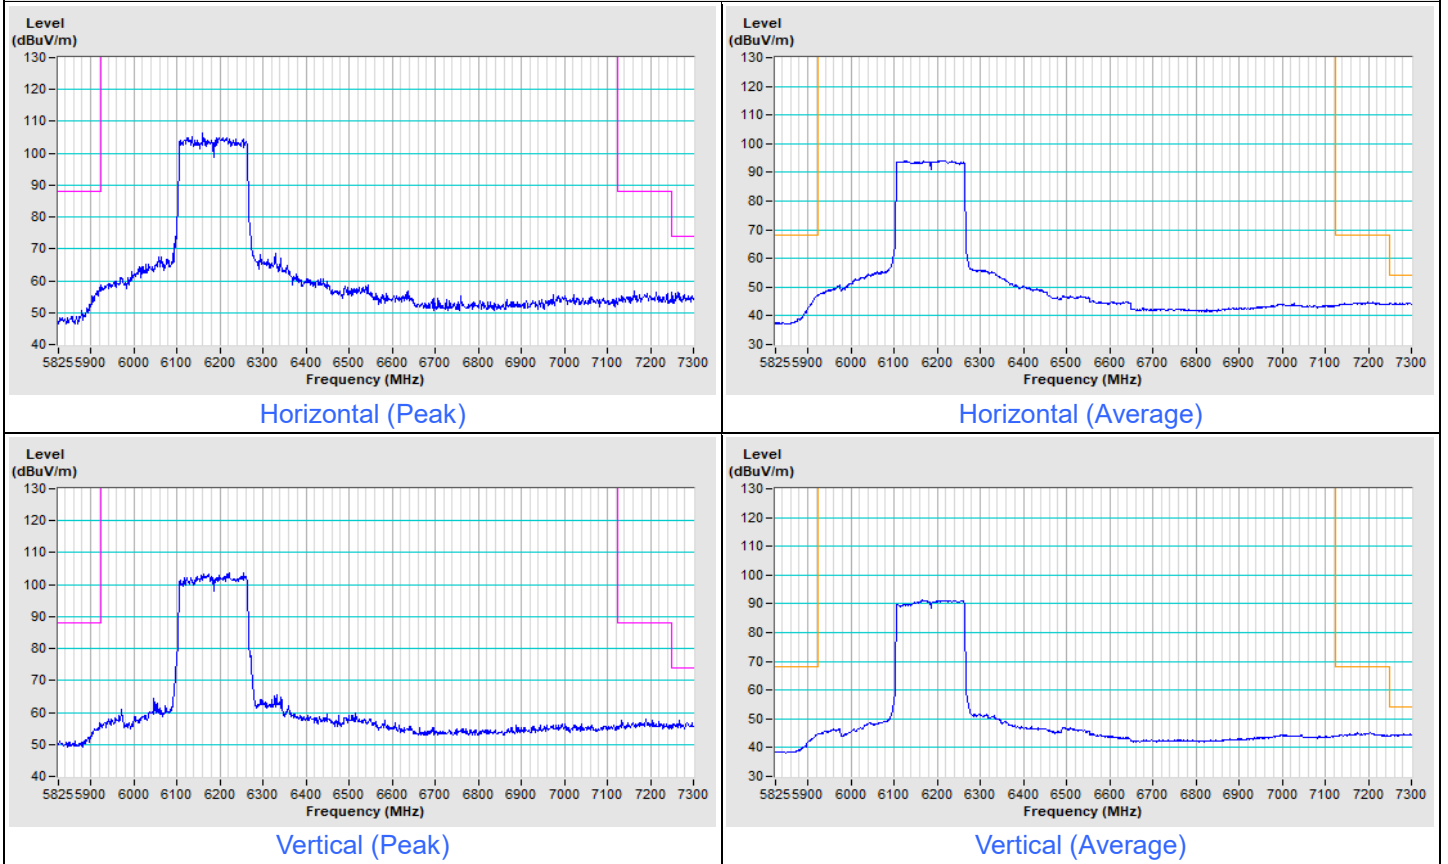


802.11be (EHT160) Channel 207

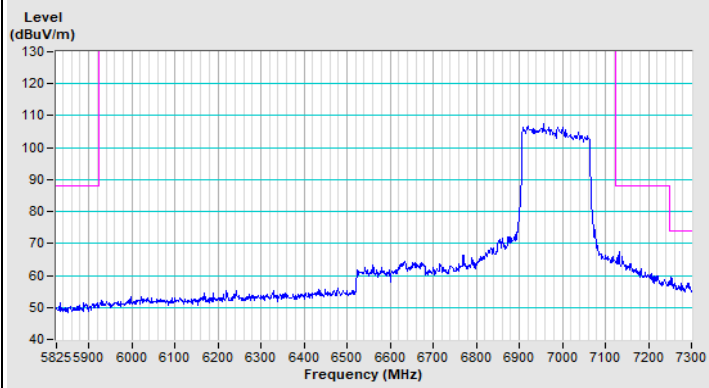


Horizontal (Peak)

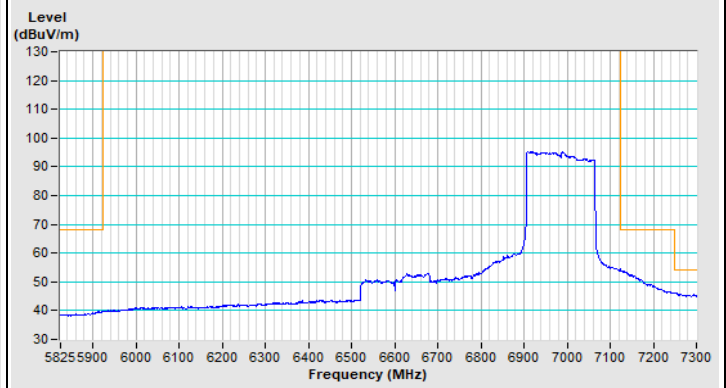

Horizontal (Average)

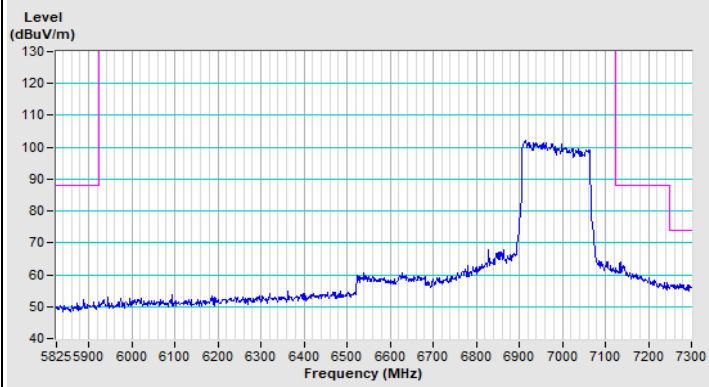


Vertical (Peak)

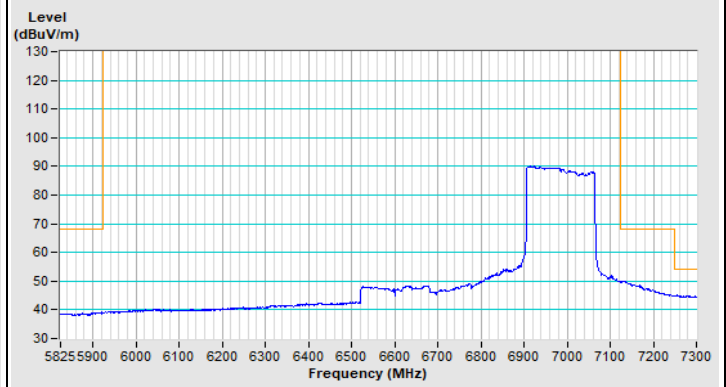


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 63

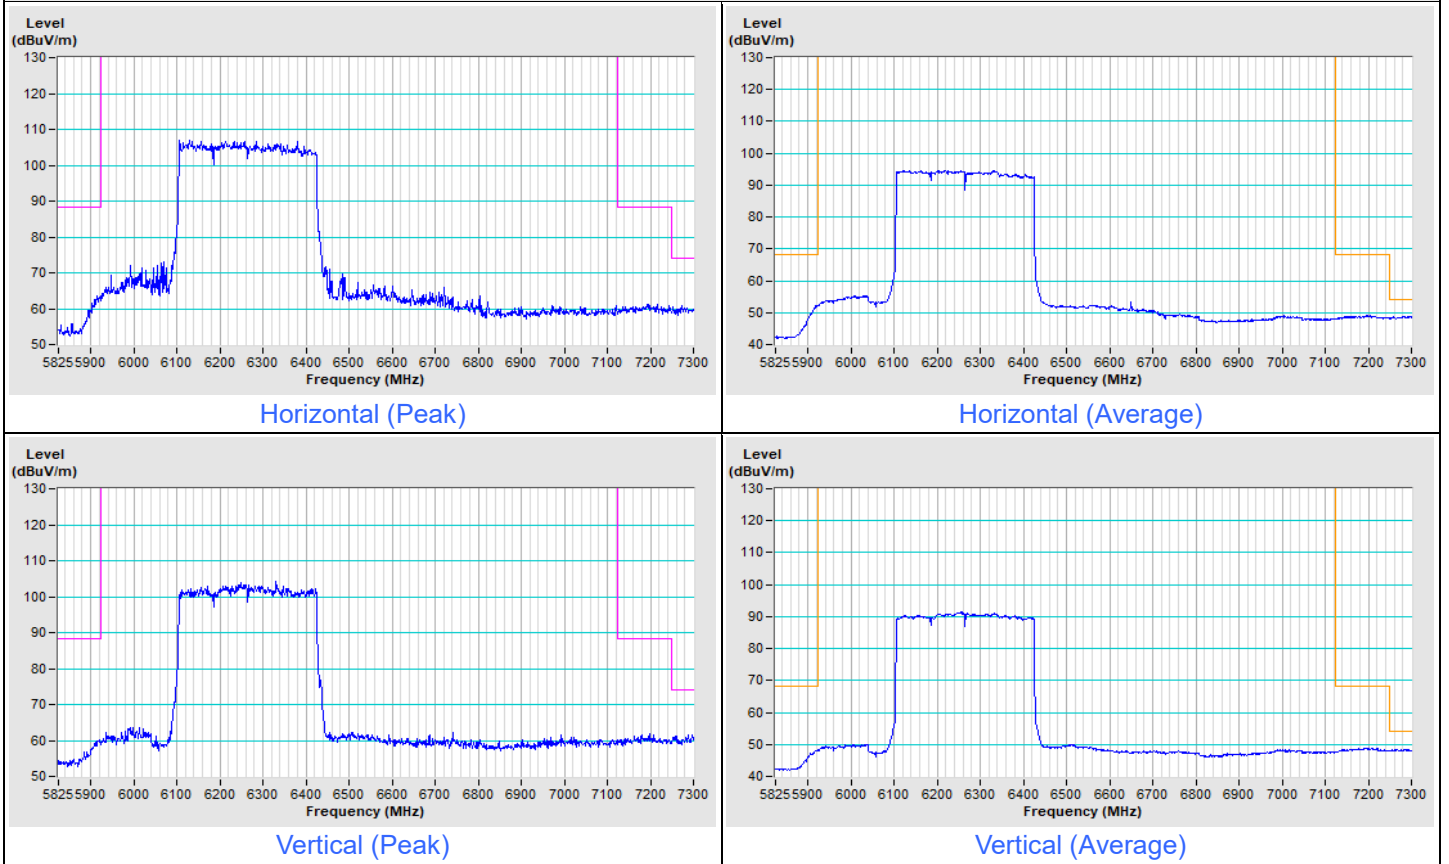


802.11be (EHT320) Channel 191

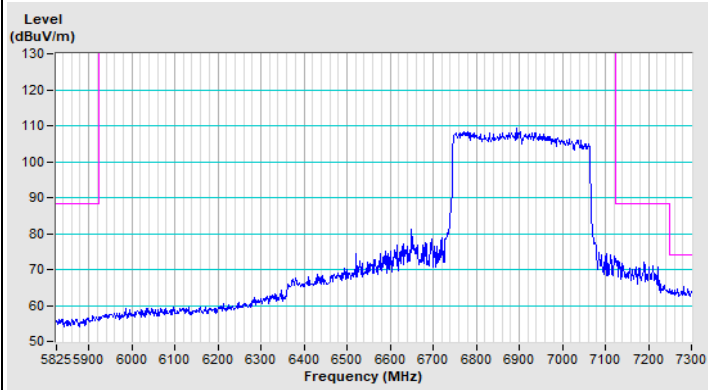


Horizontal (Peak)

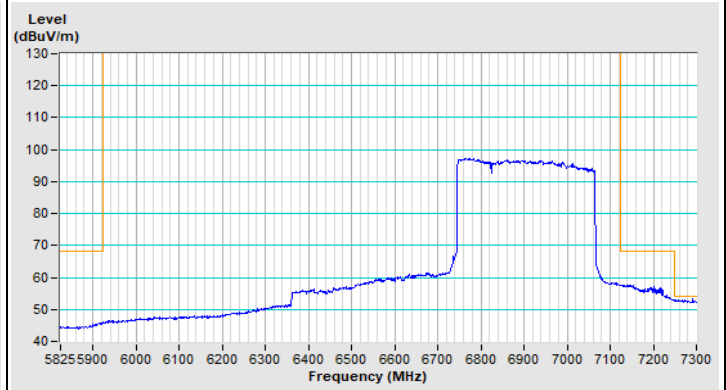

Horizontal (Average)

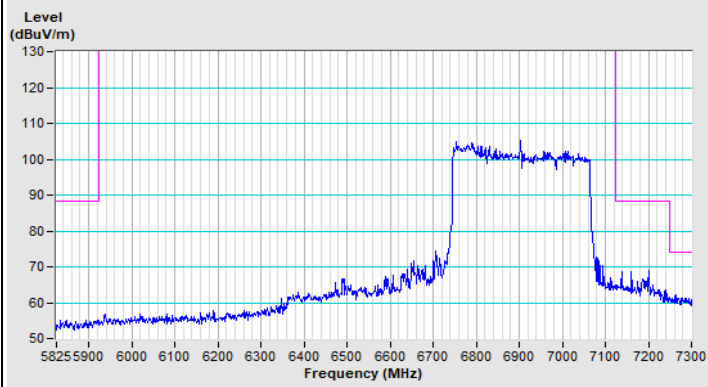


Vertical (Peak)

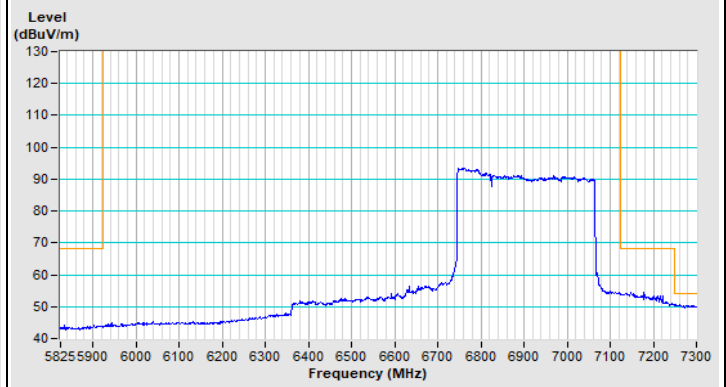


Vertical (Average)

NSS2


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

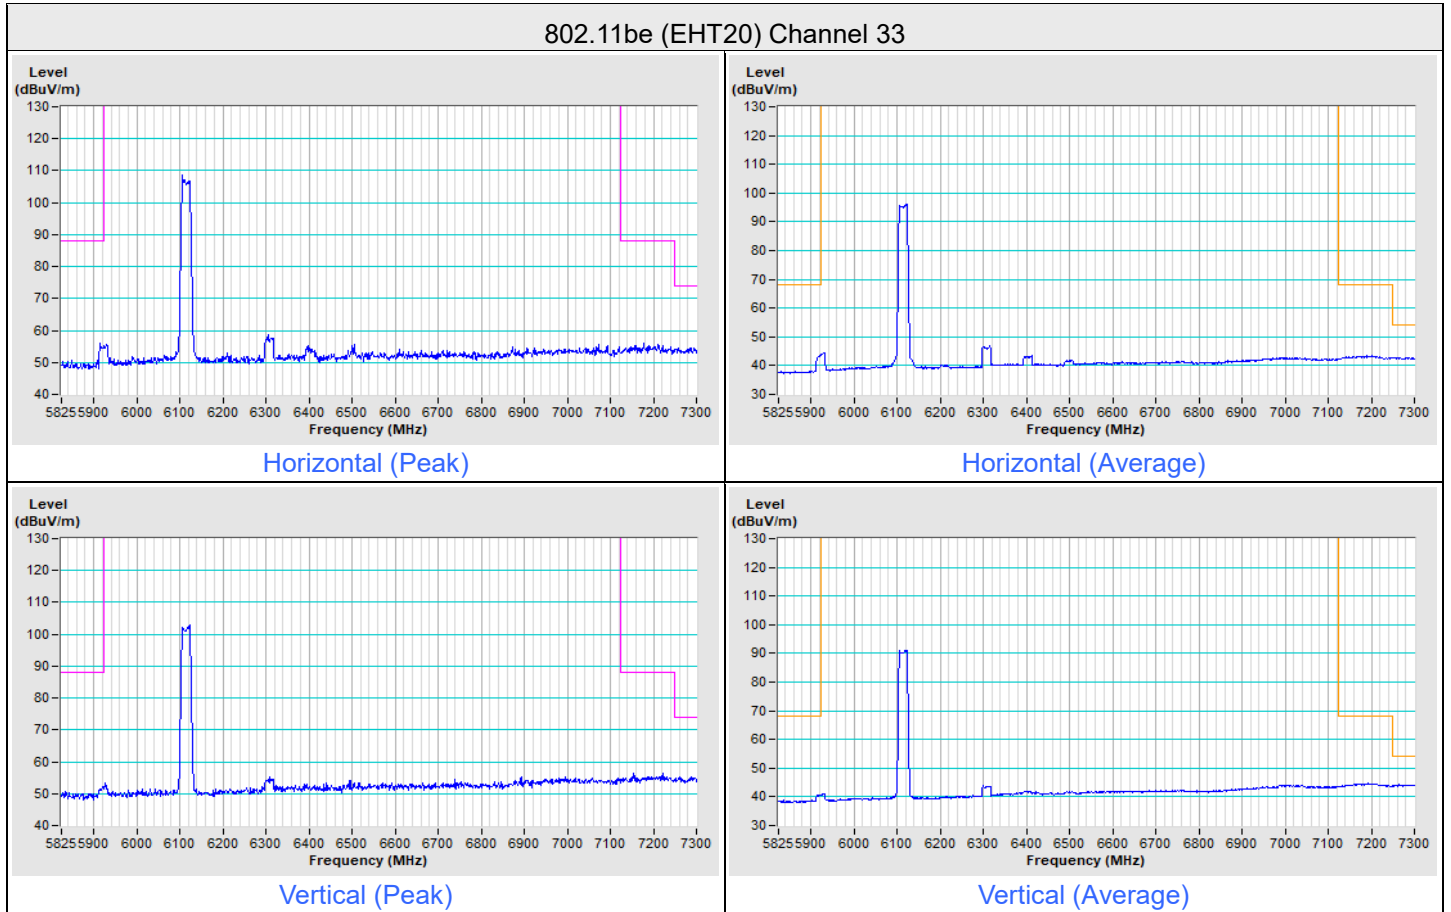


802.11be (EHT20) Channel 233

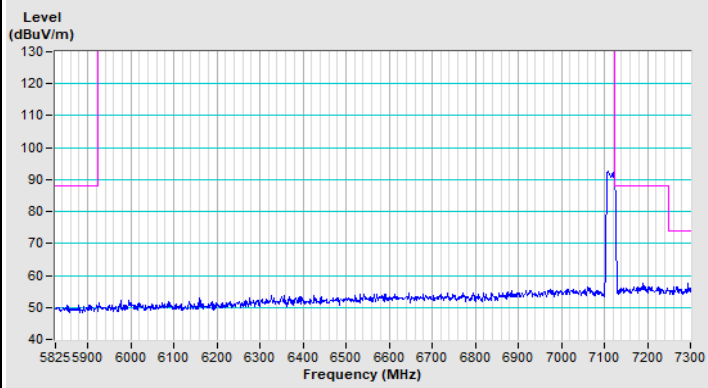


Horizontal (Peak)

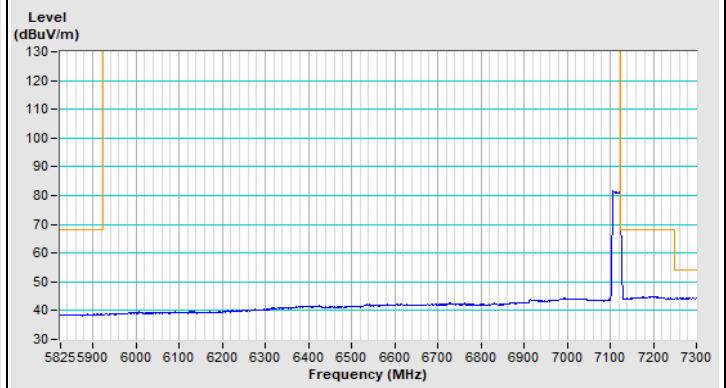

Horizontal (Average)

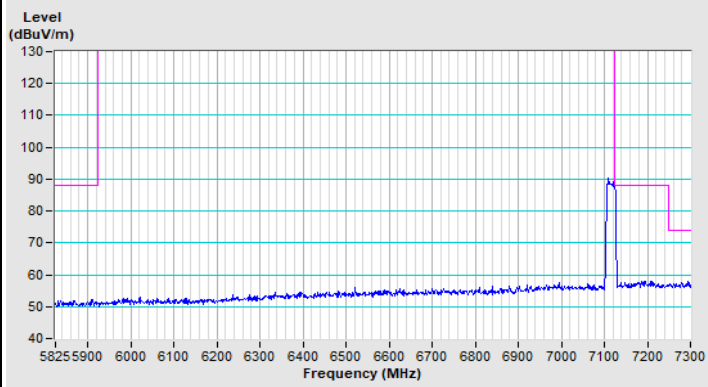


Vertical (Peak)

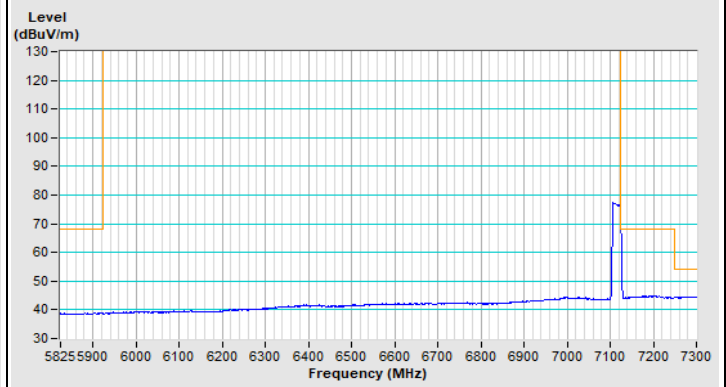


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 35

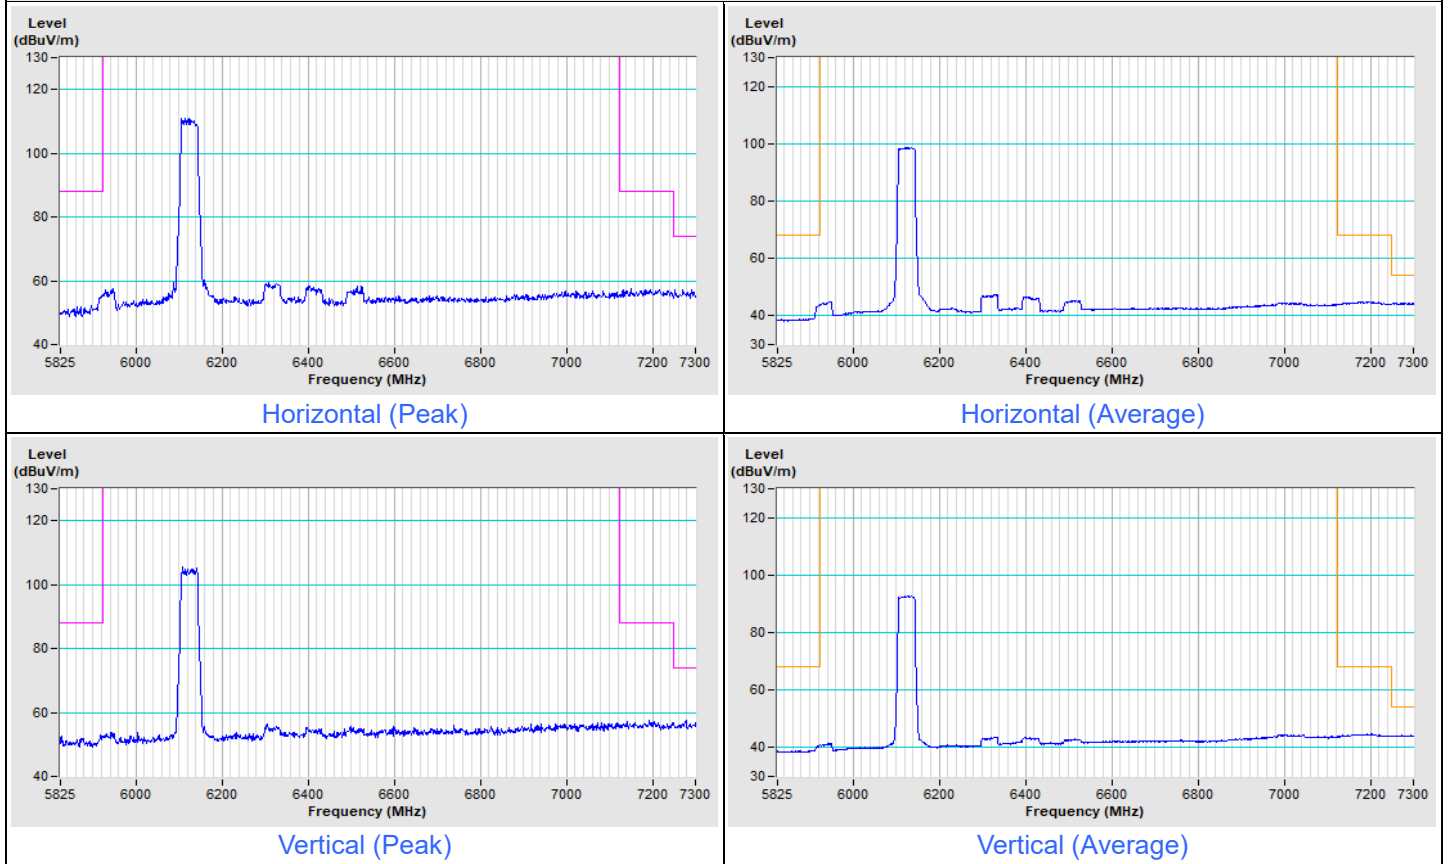


802.11be (EHT40) Channel 227

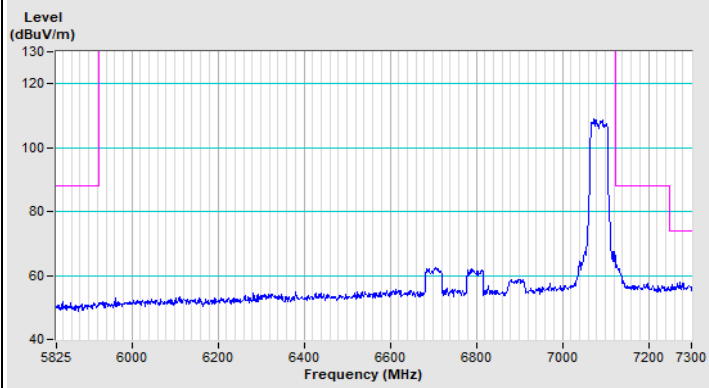


Horizontal (Peak)

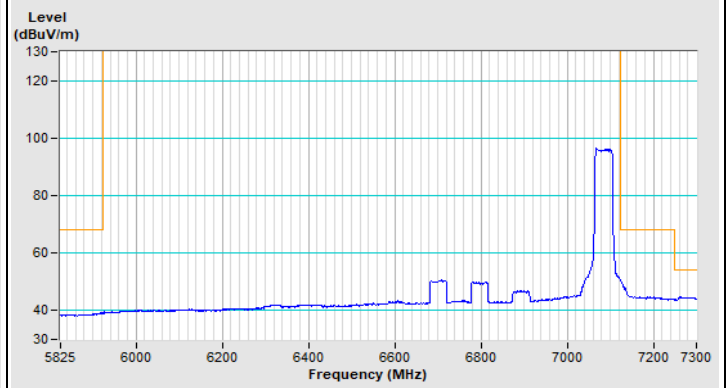

Horizontal (Average)

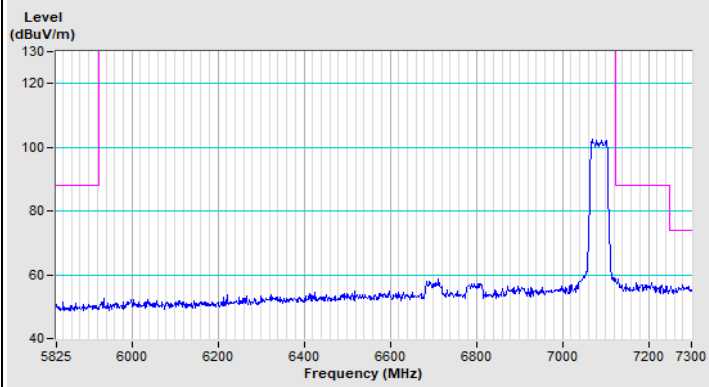


Vertical (Peak)

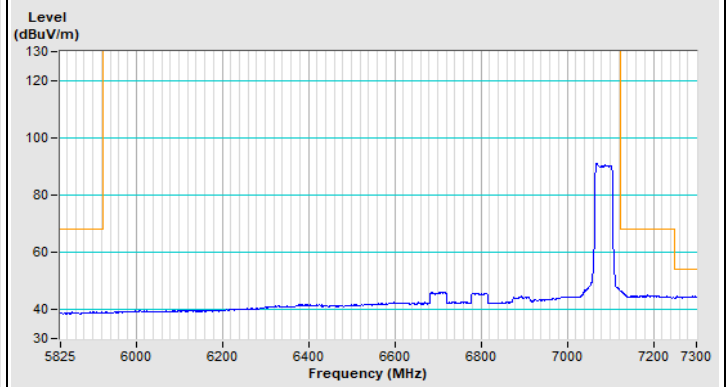


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 39

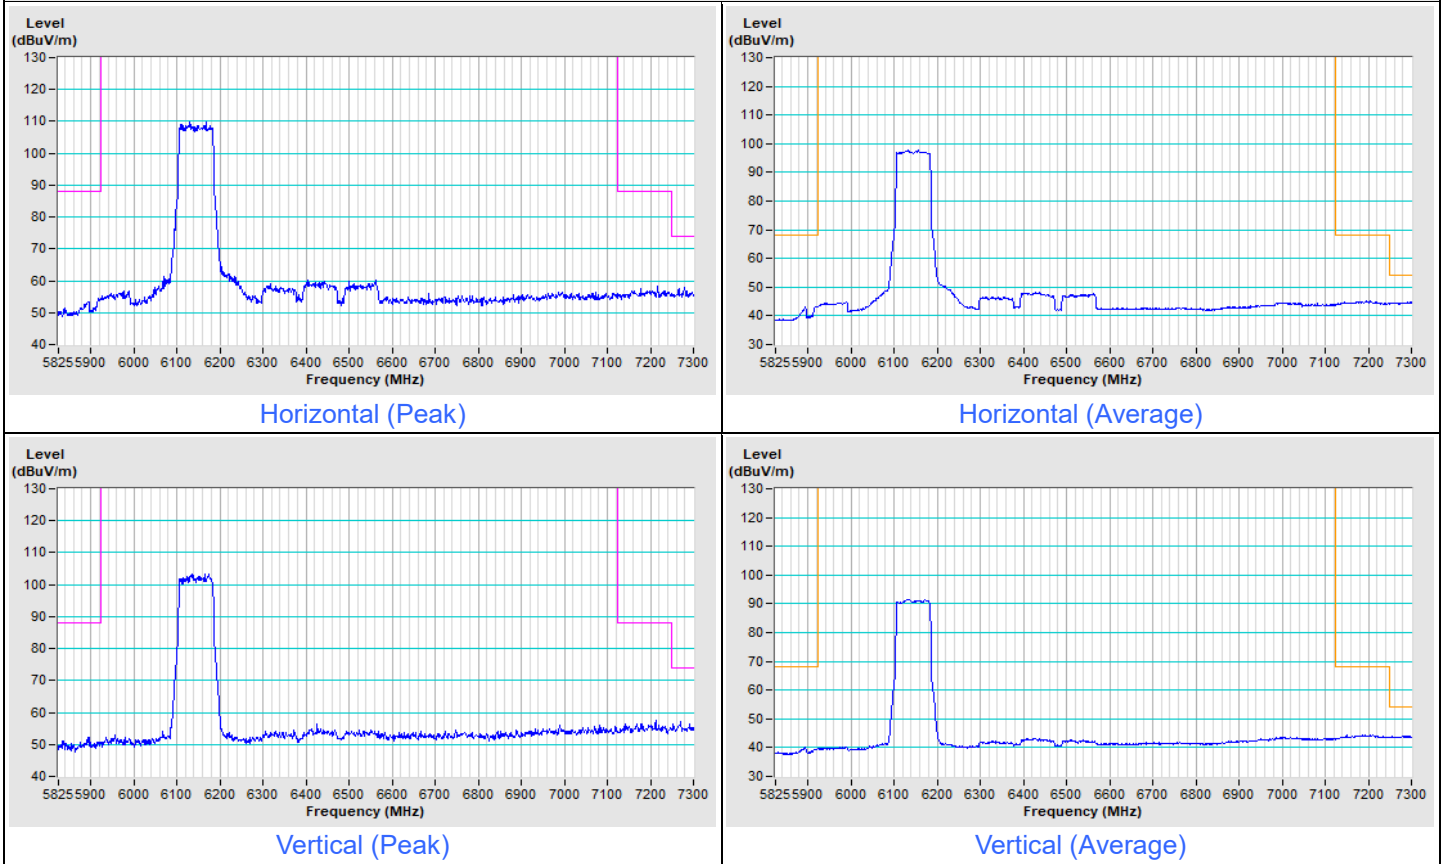


802.11be (EHT80) Channel 215

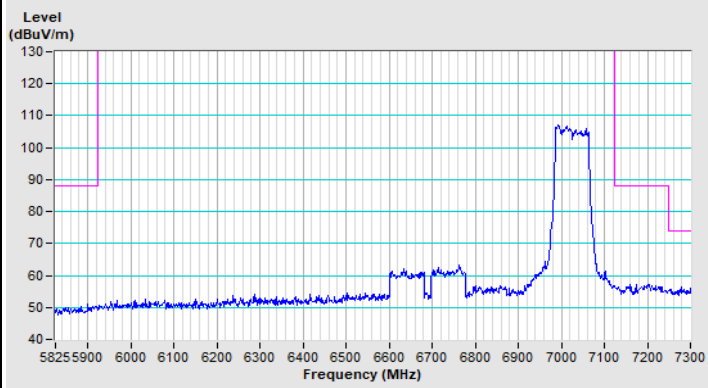


Horizontal (Peak)

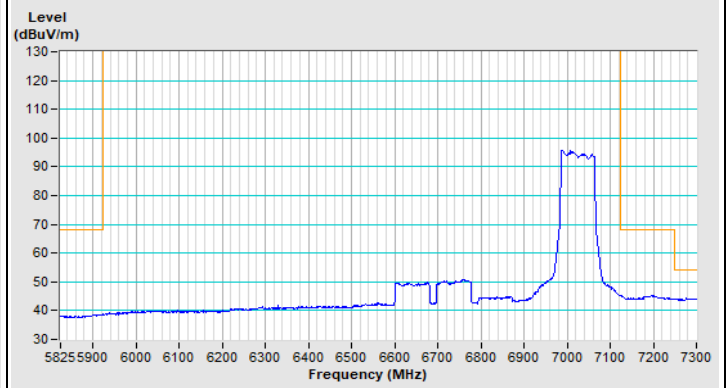

Horizontal (Average)

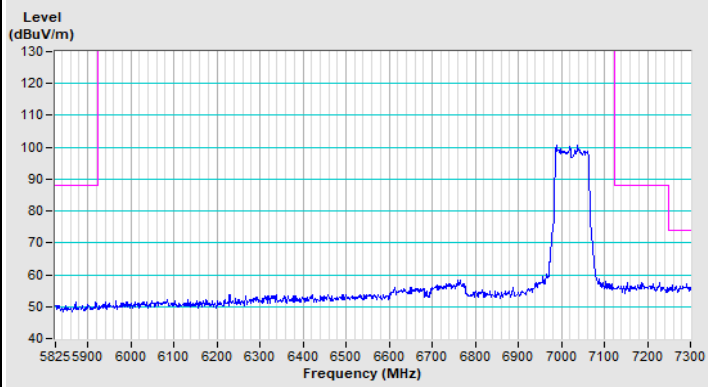


Vertical (Peak)

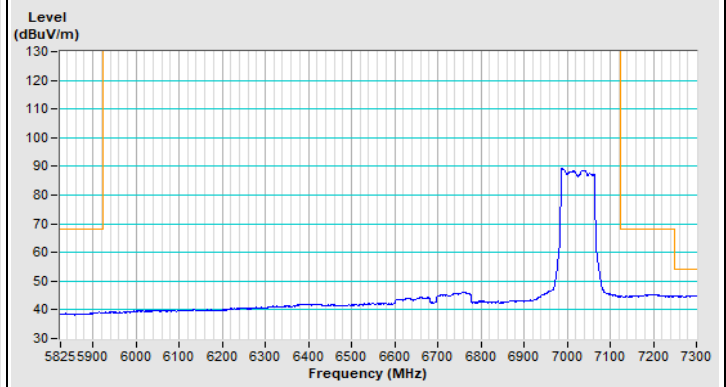


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 47

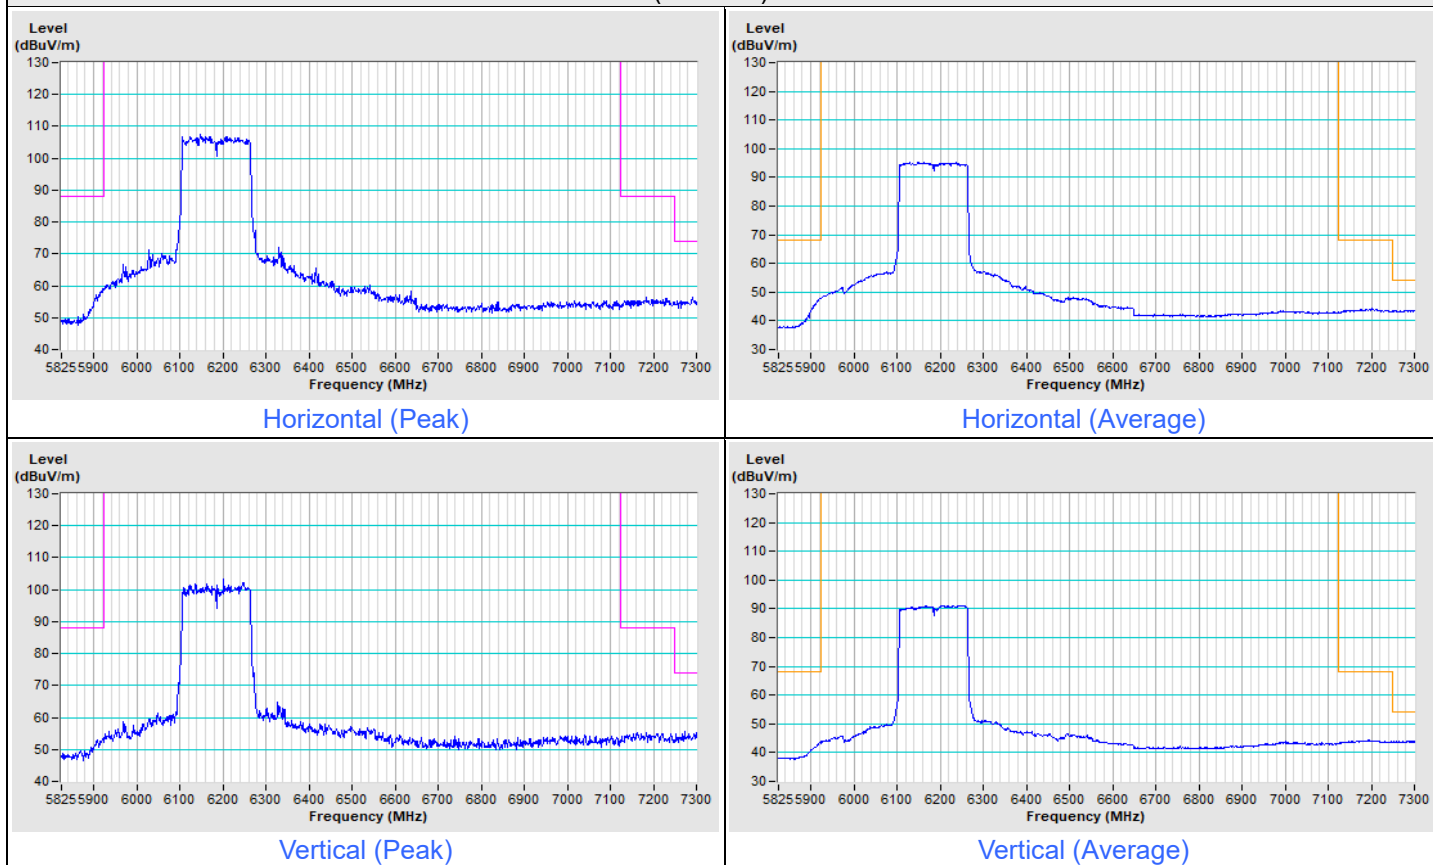


802.11be (EHT160) Channel 207

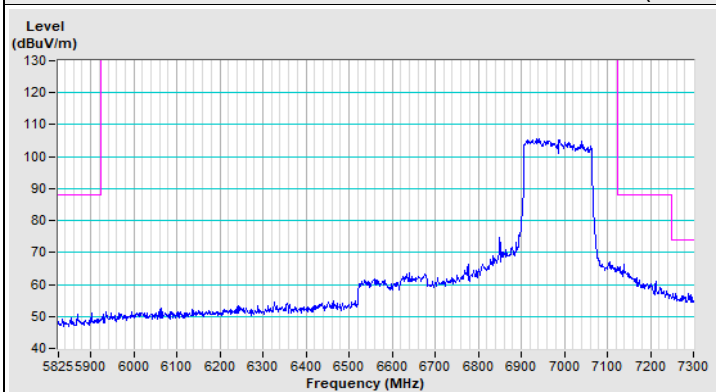


Horizontal (Peak)

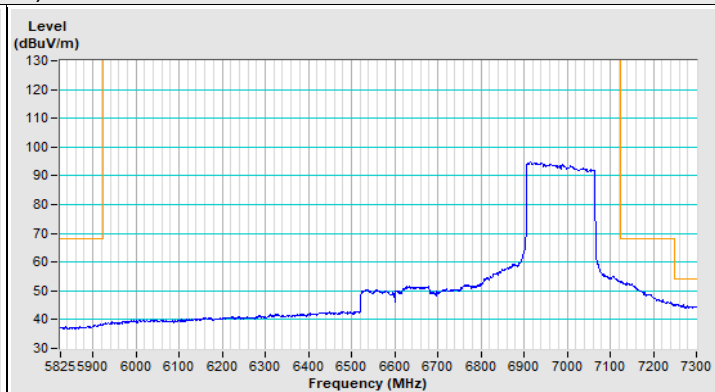

Horizontal (Average)

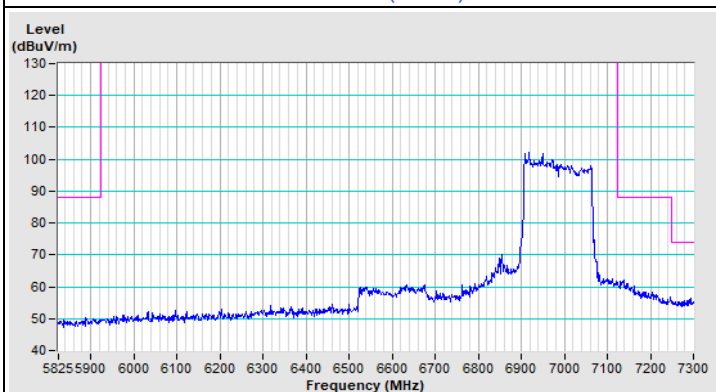


Vertical (Peak)

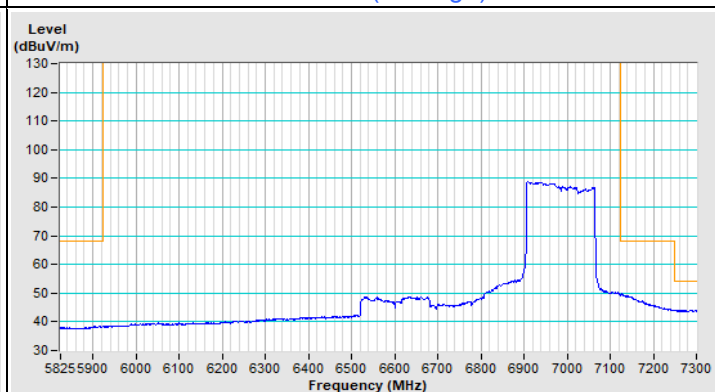


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 63

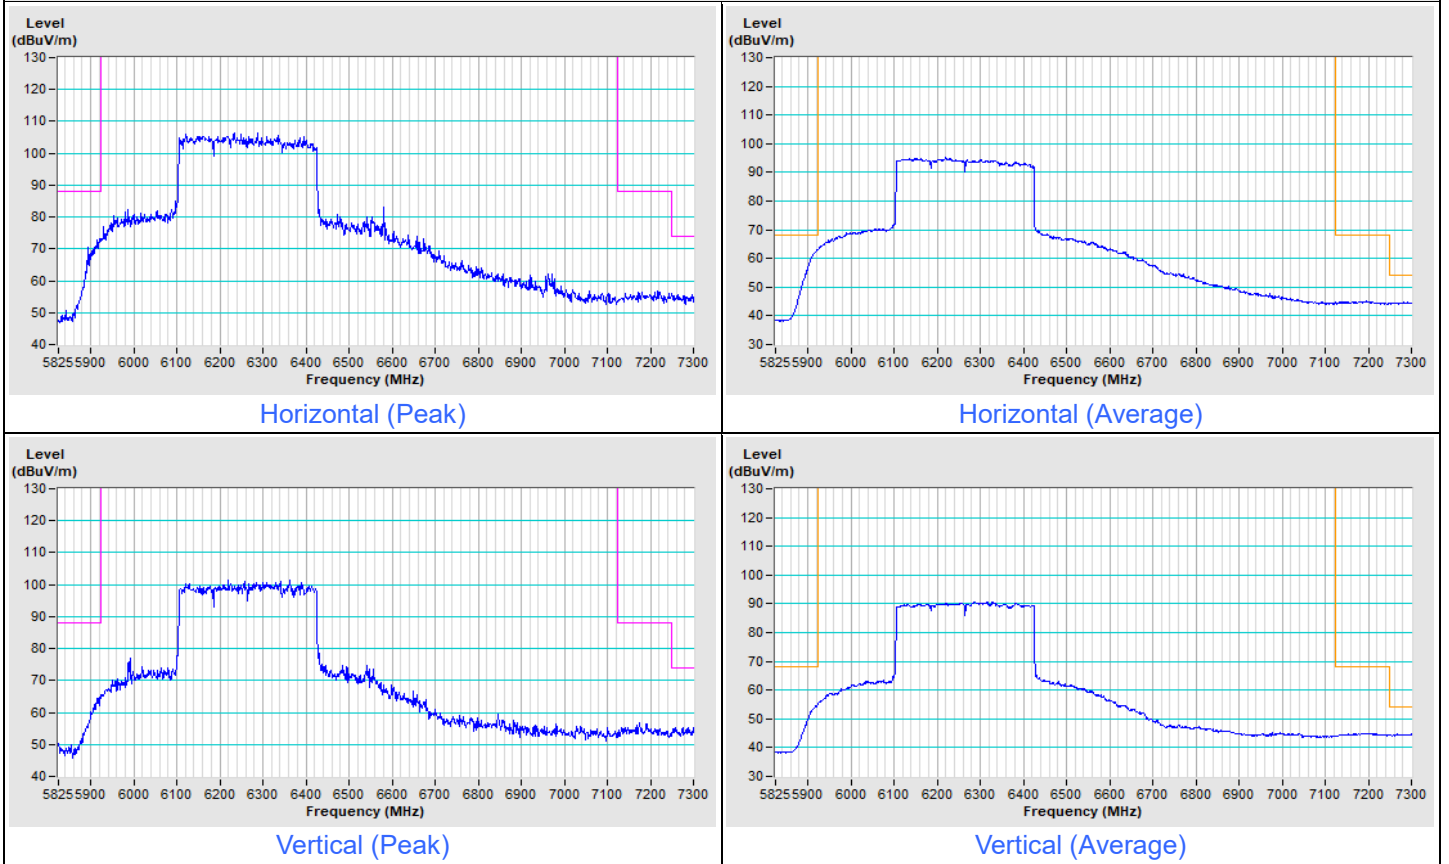


802.11be (EHT320) Channel 191

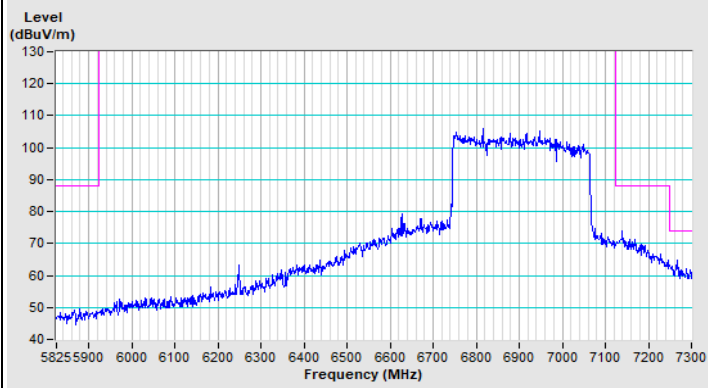


Horizontal (Peak)

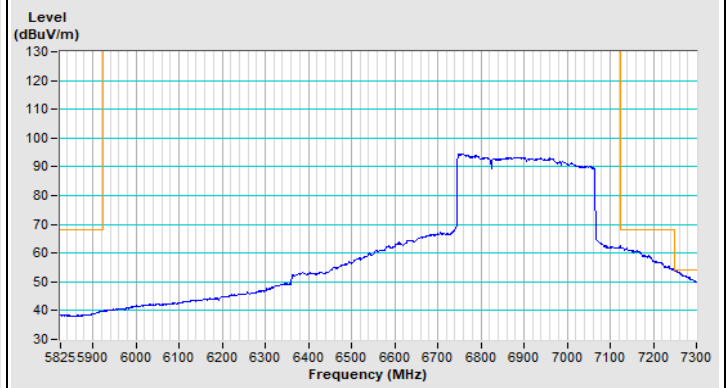

Horizontal (Average)

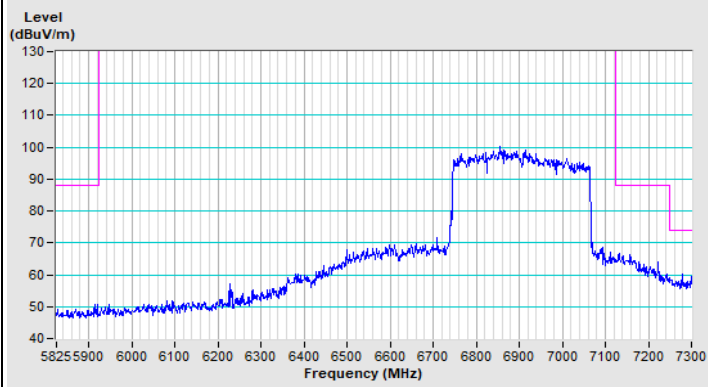


Vertical (Peak)

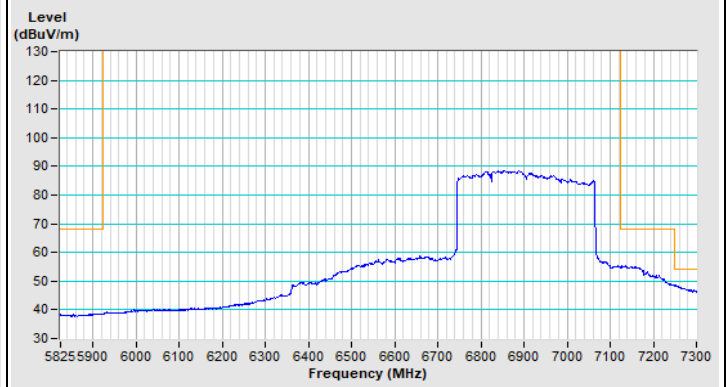


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 33

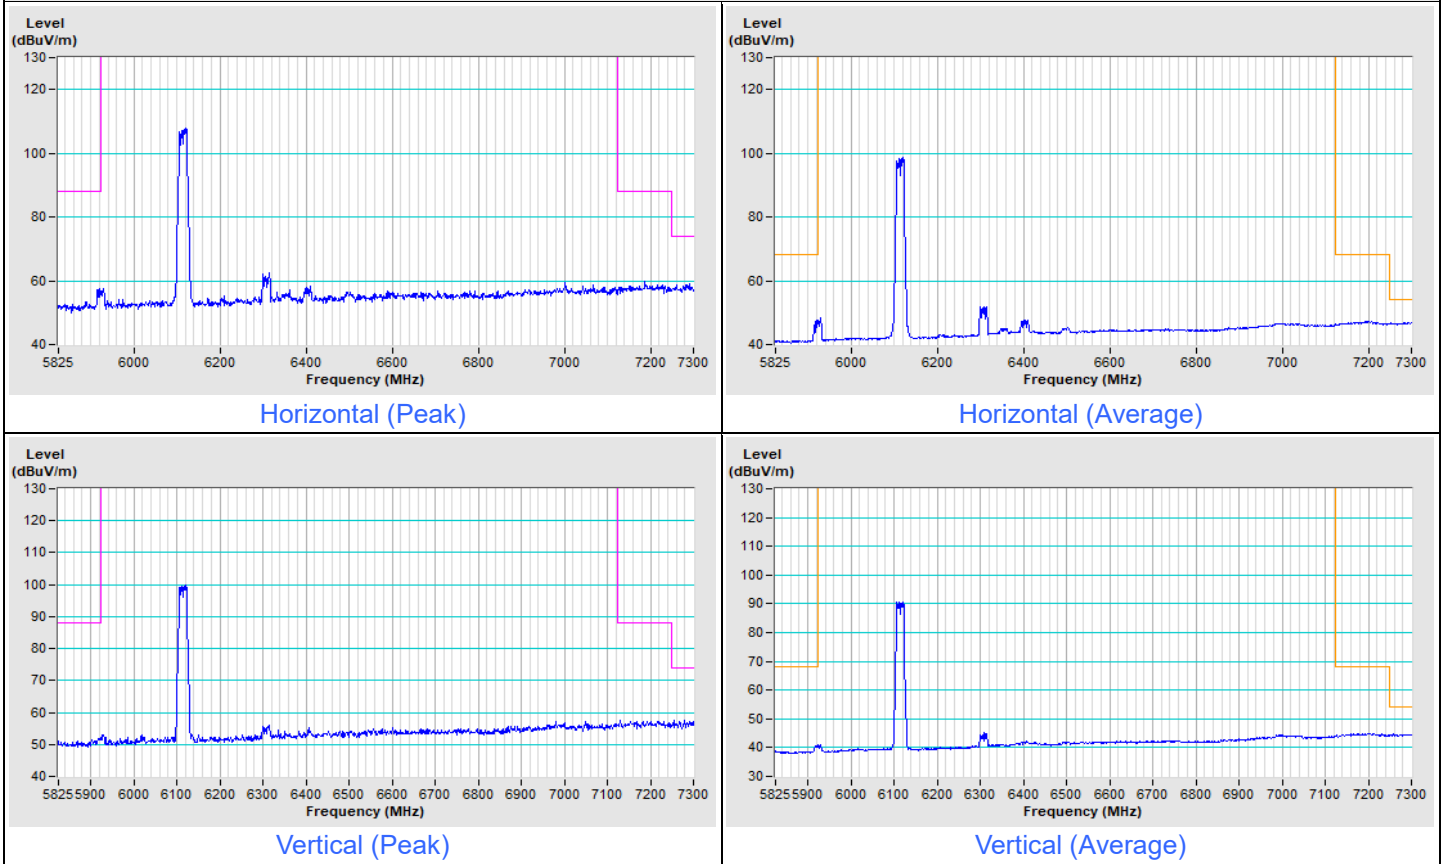


802.11a Channel 233

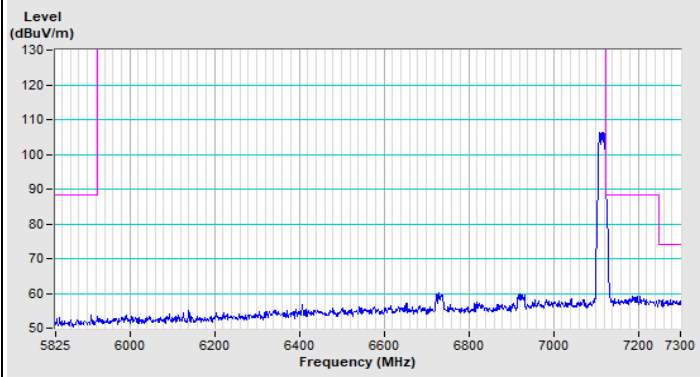


Horizontal (Peak)

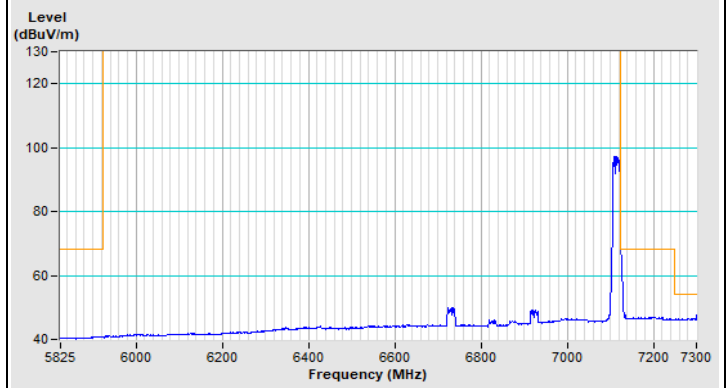

Horizontal (Average)

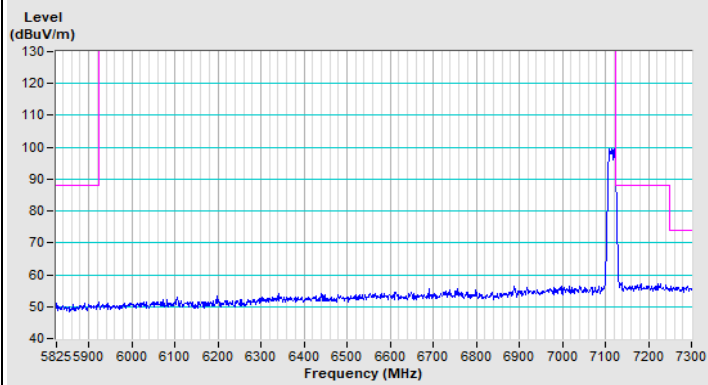


Vertical (Peak)

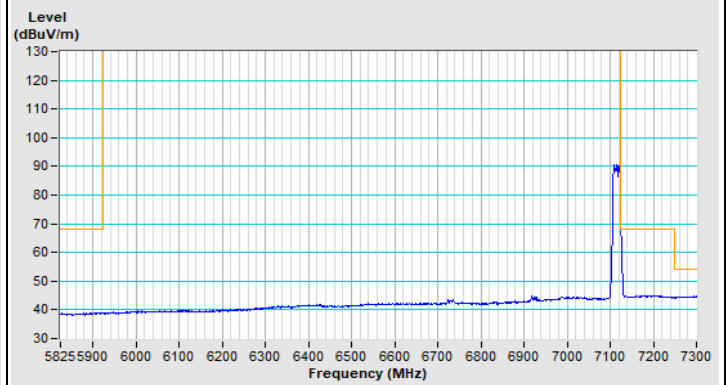


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 33

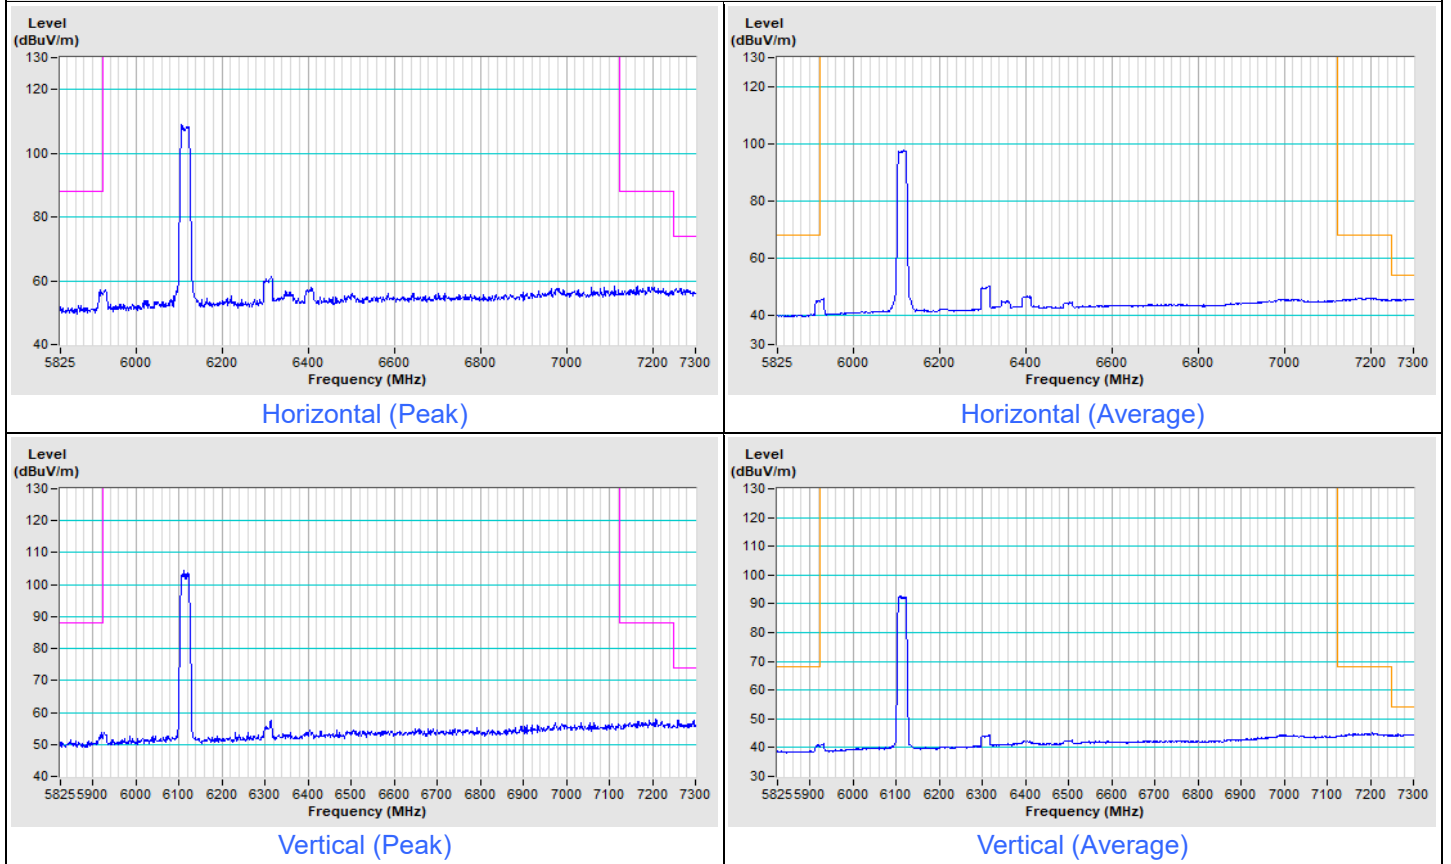


802.11be (EHT20) Channel 233

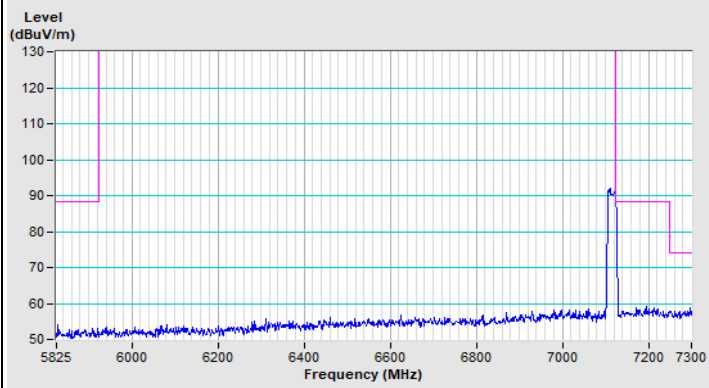


Horizontal (Peak)

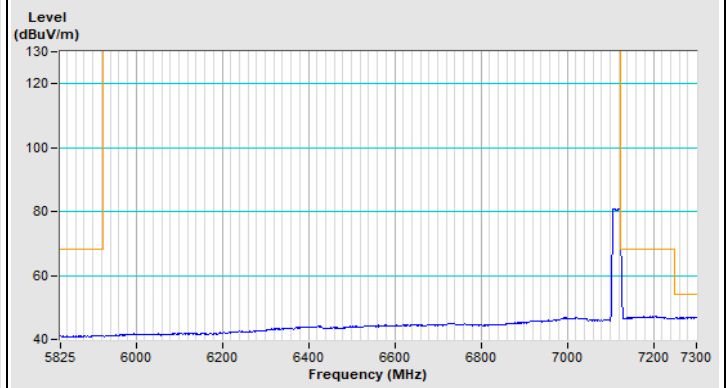

Horizontal (Average)

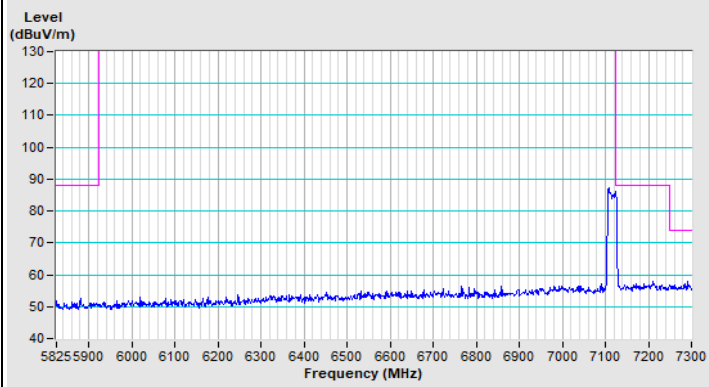


Vertical (Peak)

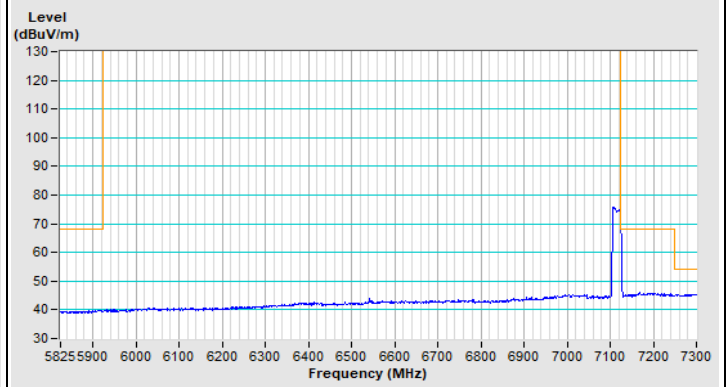


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 35

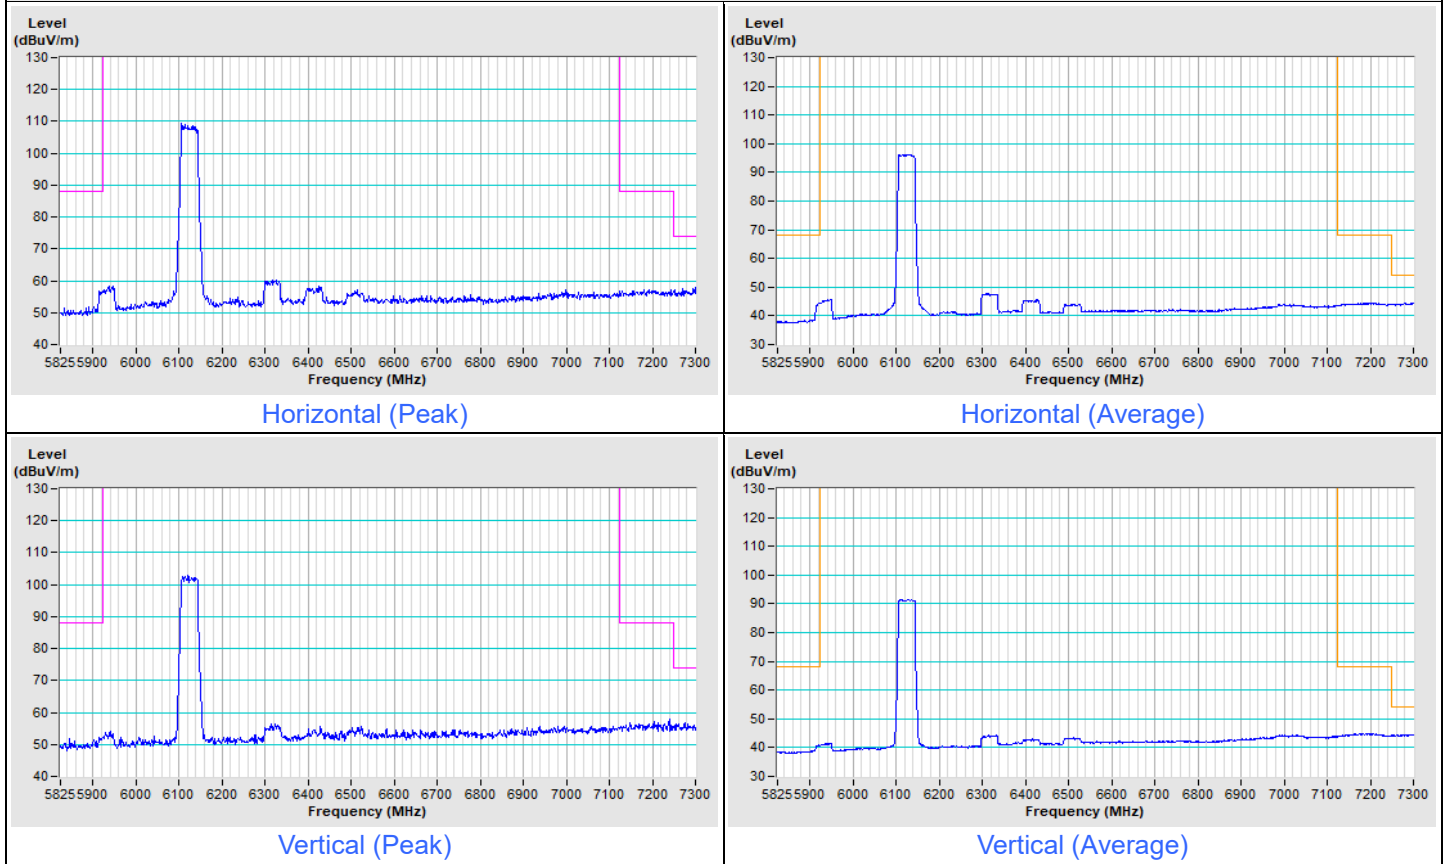


802.11be (EHT40) Channel 227

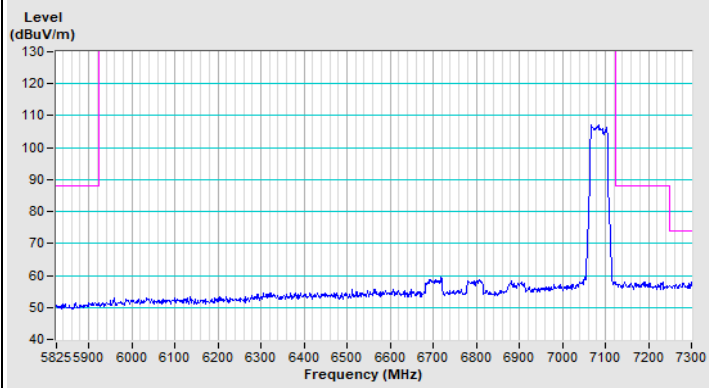


Horizontal (Peak)

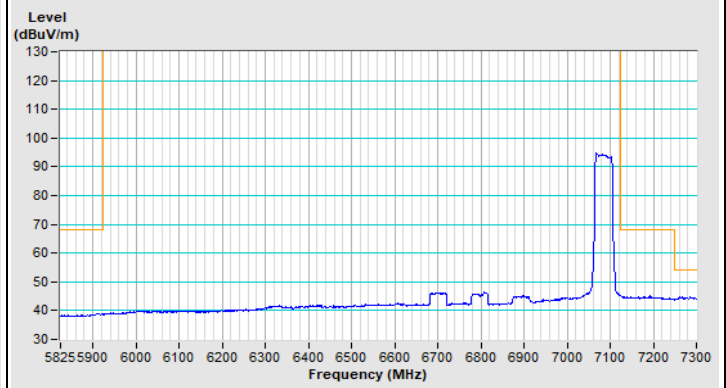

Horizontal (Average)

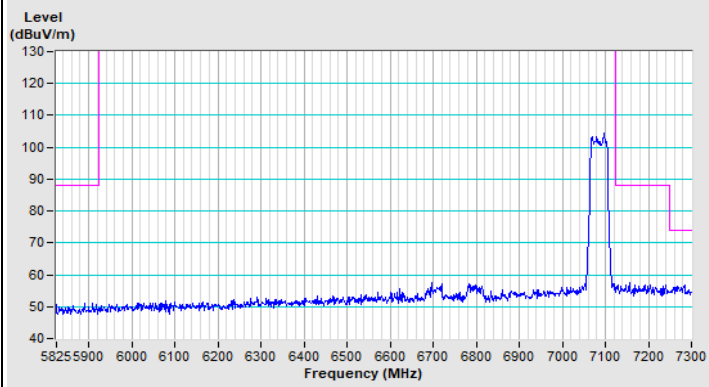


Vertical (Peak)

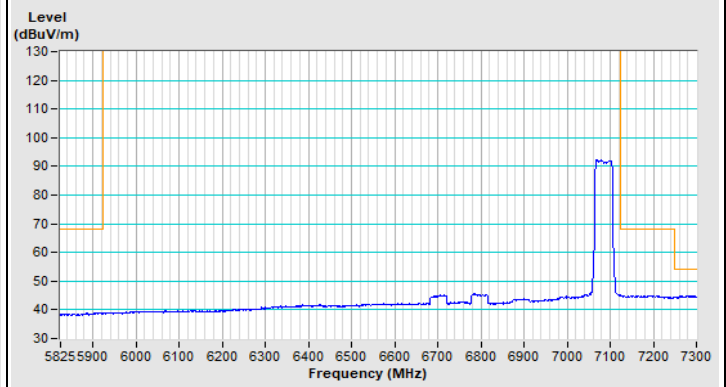


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 39

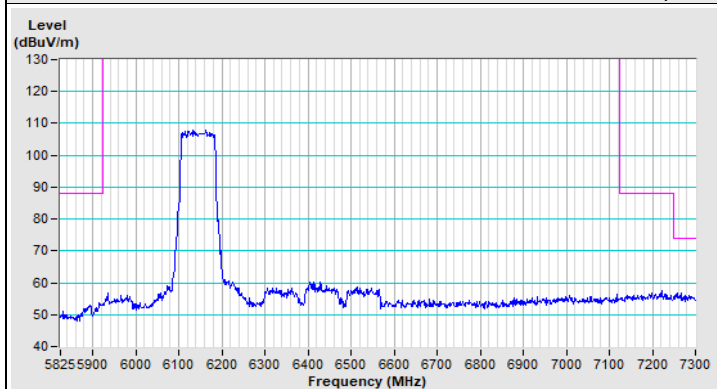


Horizontal (Peak)

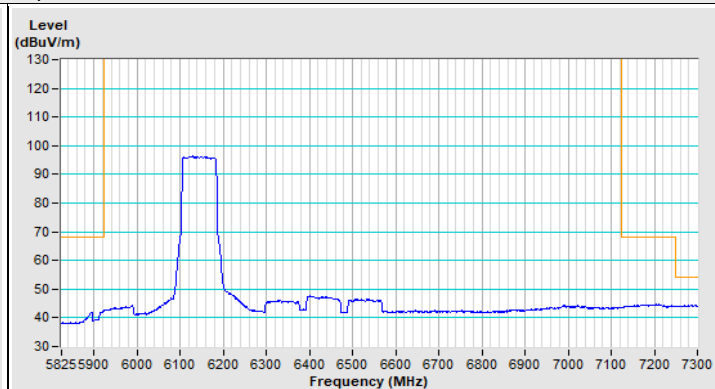

Horizontal (Average)

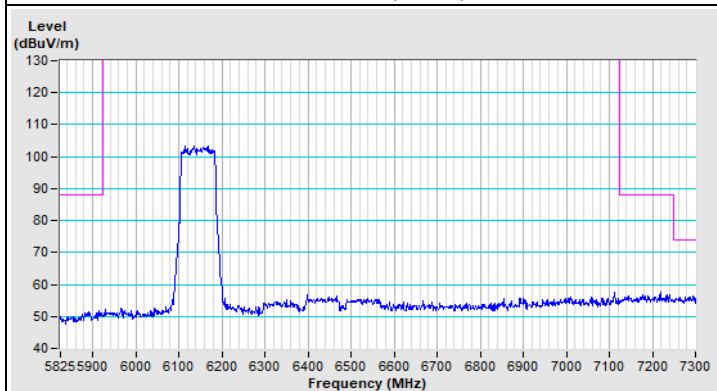


Vertical (Peak)

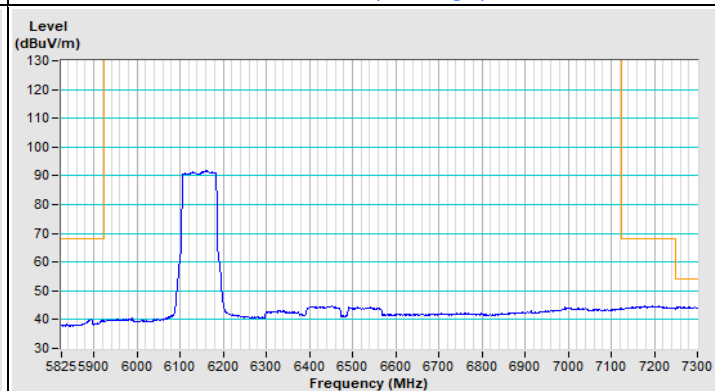


Vertical (Average)


802.11be (EHT80) Channel 215

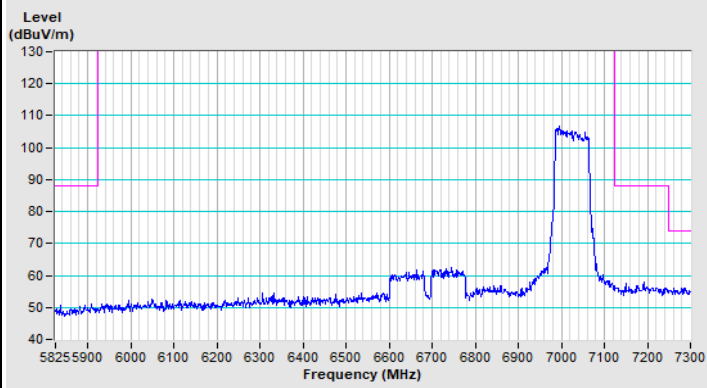


Horizontal (Peak)

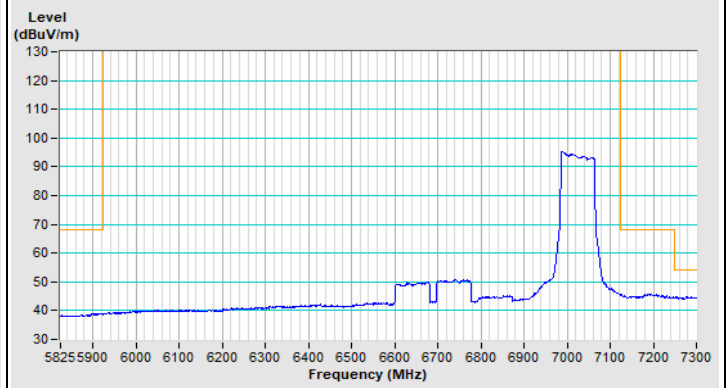

Horizontal (Average)

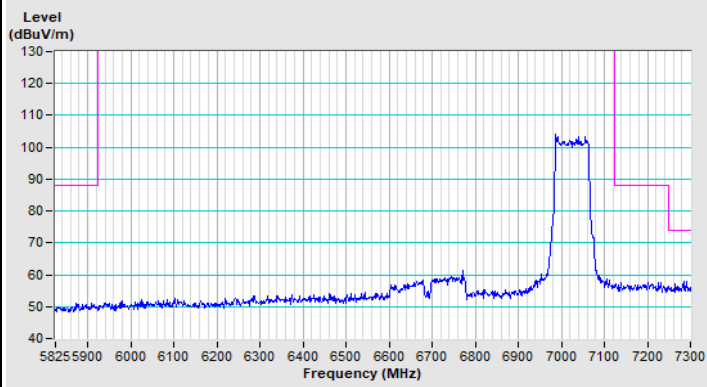


Vertical (Peak)

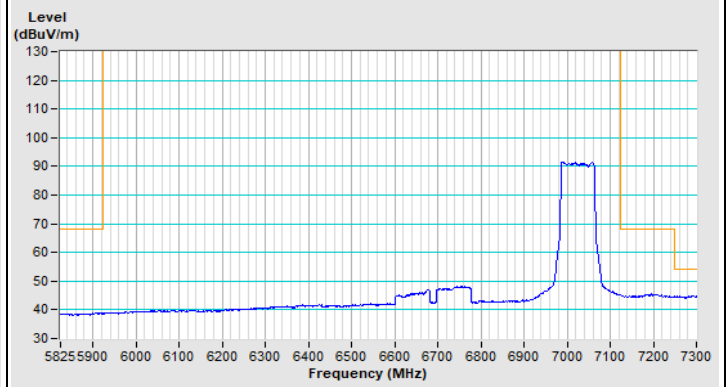


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 47

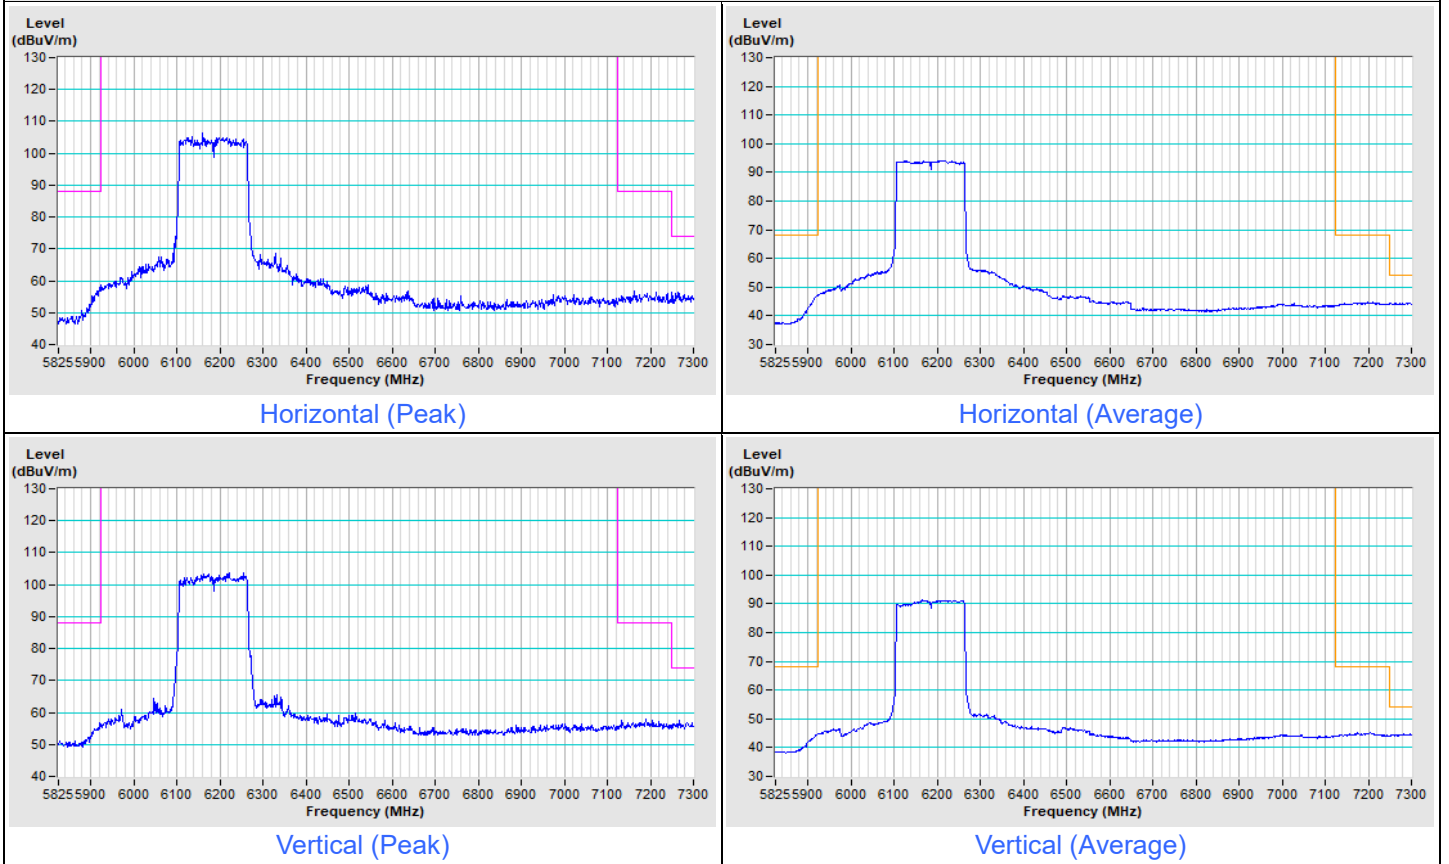


802.11be (EHT160) Channel 207

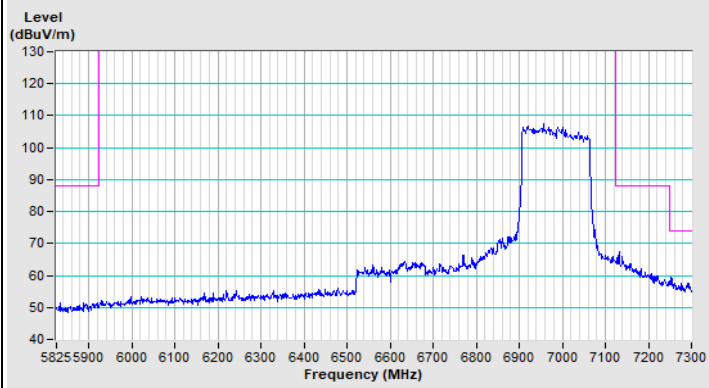


Horizontal (Peak)

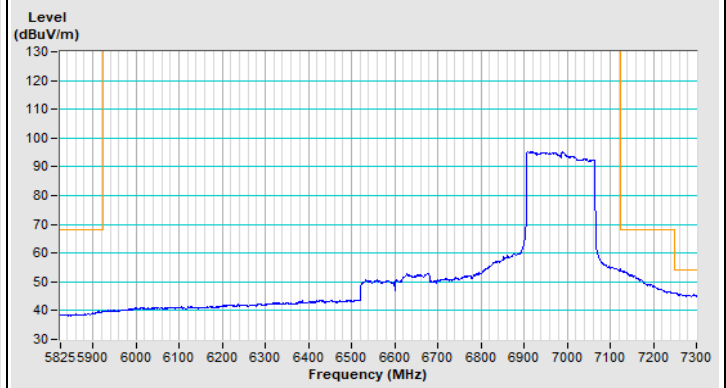

Horizontal (Average)

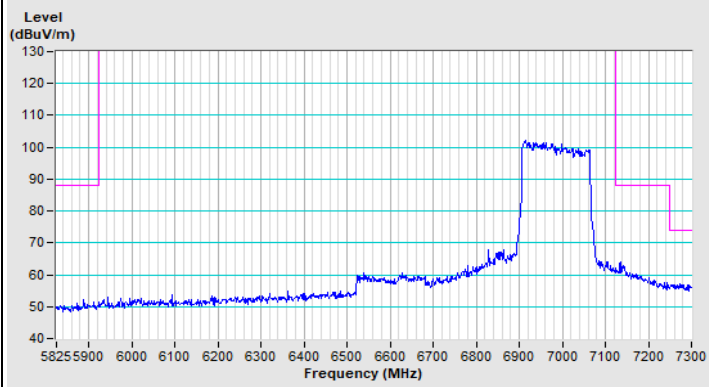


Vertical (Peak)

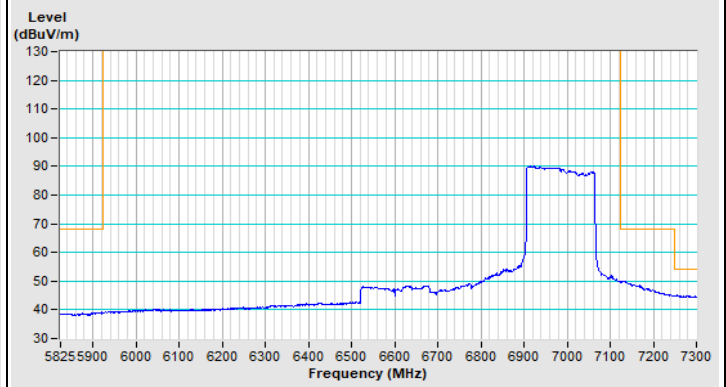


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 63

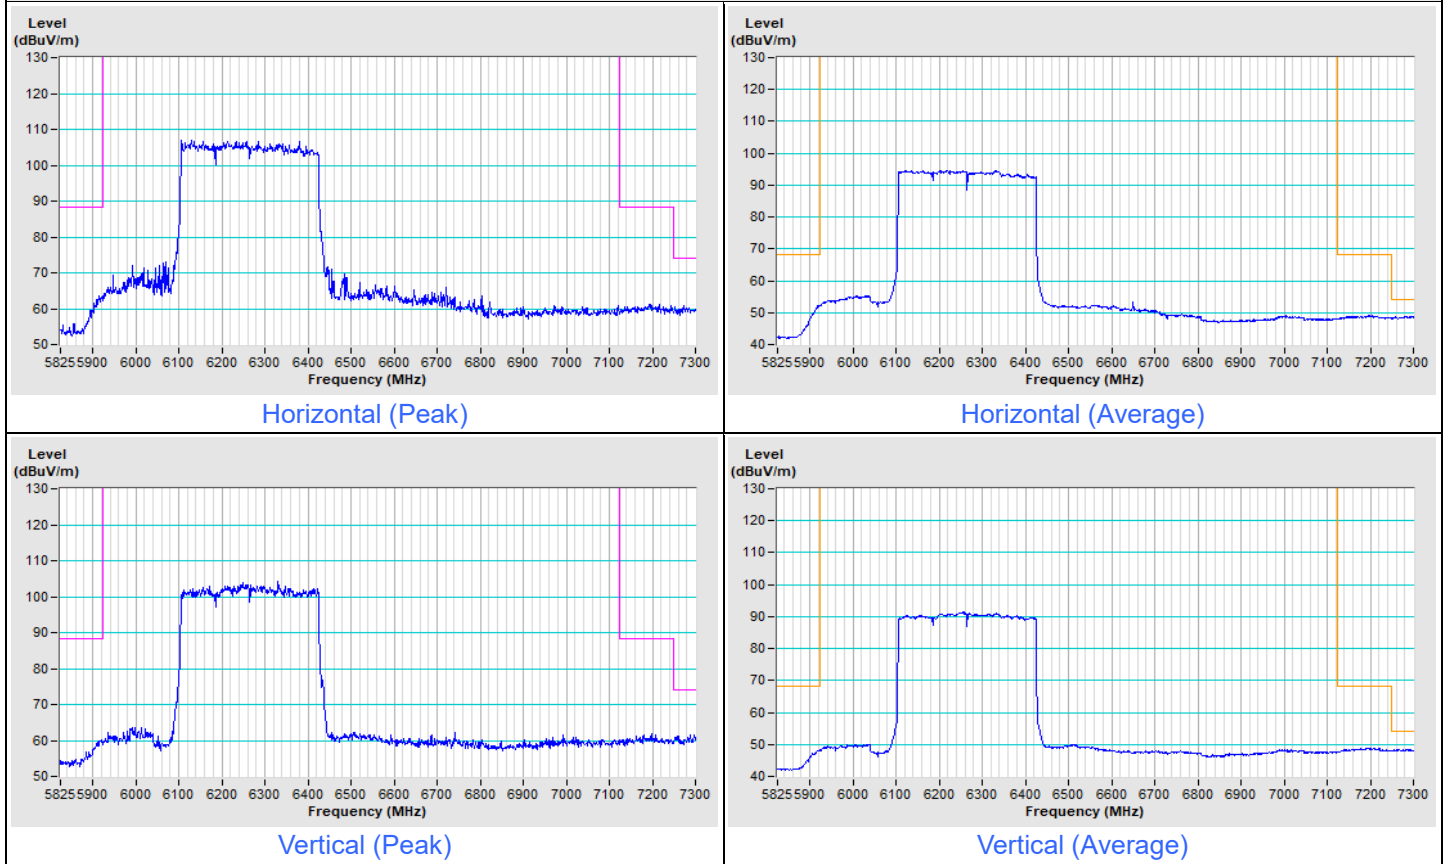


802.11be (EHT320) Channel 191

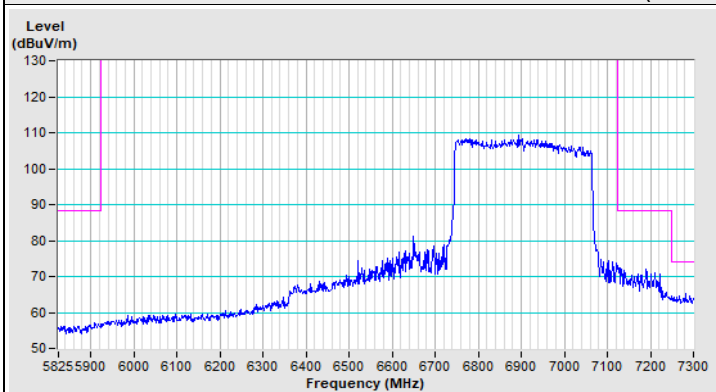


Horizontal (Peak)

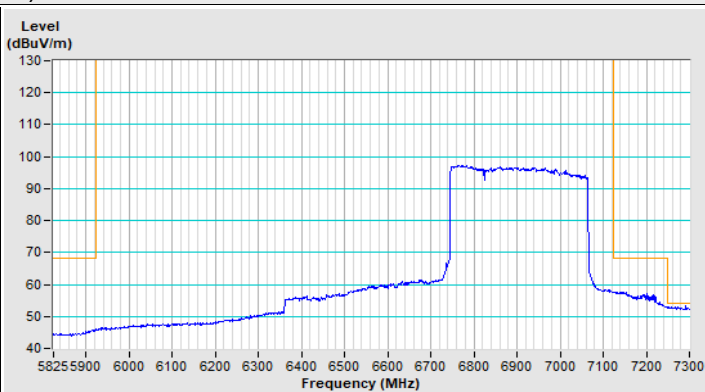

Horizontal (Average)

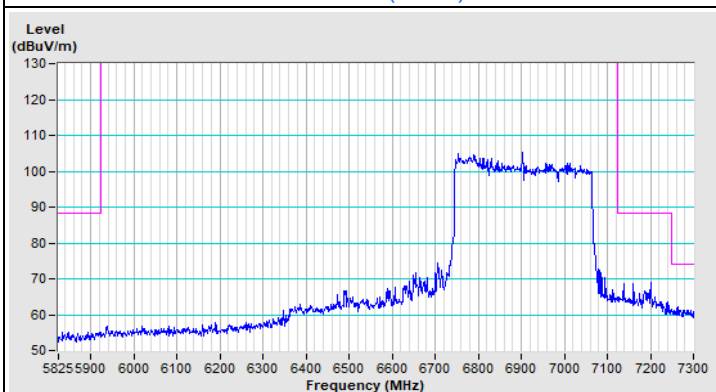

Vertical (Peak)

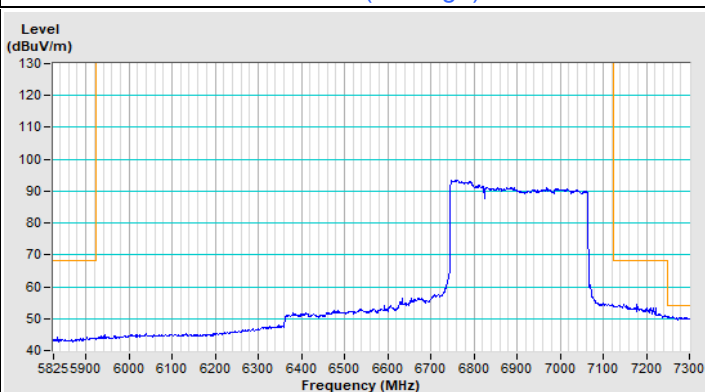

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---