

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Report No.: RFBBQZ-WTW-P24020178

FCC ID: PY323400615

Product: NIGHTHAWK BE6500 WiFi 7 Router, NIGHTHAWK BE5000 WiFi 7 Router, NIGHTHAWK BE4300 WiFi 7 Router (refer to item 3.1 for more details)

Brand: NETGEAR

Model No.: RS200

Series Model: RS150, RS150v2, RS140 (refer to item 3.1 for more details)

Received Date: 2024/2/6

Test Date: 2024/6/5 ~ 2024/6/17

Issued Date: 2024/7/12

Applicant and NETGEAR, INC.

Manufacturer:

Address: 350 East Plumeria Drive San Jose CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories


Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:

Approved by:


Jeremy Lin / Project Engineer

, Date:

2024/7/12

This test report consists of 66 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Polly Chien / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description	7
3.2 Antenna Description of EUT	9
3.3 Channel List	10
3.4 Test Mode Applicability and Tested Channel Detail	11
3.5 Duty Cycle of Test Signal	12
3.6 Test Program Used and Operation Descriptions	14
3.7 Connection Diagram of EUT and Peripheral Devices	14
3.8 Configuration of Peripheral Devices and Cable Connections	14
4 Test Instruments	15
4.1 RF Output Power	15
4.2 Power Spectral Density	15
4.3 6 dB Bandwidth	15
4.4 Conducted Out of Band Emissions	15
4.5 AC Power Conducted Emissions	16
4.6 Unwanted Emissions below 1 GHz	17
4.7 Unwanted Emissions above 1 GHz	18
5 Limits of Test Items.....	19
5.1 RF Output Power	19
5.2 Power Spectral Density	19
5.3 6 dB Bandwidth	19
5.4 Conducted Out of Band Emissions	19
5.5 AC Power Conducted Emissions	19
5.6 Unwanted Emissions below 1 GHz	20
5.7 Unwanted Emissions above 1 GHz	20
6 Test Arrangements	21
6.1 RF Output Power	21
6.1.1 Test Setup	21
6.1.2 Test Procedure	21
6.2 Power Spectral Density	21
6.2.1 Test Setup	21
6.2.2 Test Procedure	21
6.3 6 dB Bandwidth	22
6.3.1 Test Setup	22
6.3.2 Test Procedure	22
6.4 Conducted Out of Band Emissions	22
6.4.1 Test Setup	22
6.4.2 Test Procedure	22
6.5 AC Power Conducted Emissions	23
6.5.1 Test Setup	23
6.5.2 Test Procedure	23
6.6 Unwanted Emissions below 1 GHz	24
6.6.1 Test Setup	24
6.6.2 Test Procedure	25
6.7 Unwanted Emissions above 1 GHz	26
6.7.1 Test Setup	26
6.7.2 Test Procedure	26
7 Test Results of Test Item	27

7.1	RF Output Power	27
7.2	Power Spectral Density	29
7.3	6 dB Bandwidth	31
7.4	Conducted Out of Band Emissions	33
7.5	AC Power Conducted Emissions	41
7.6	Unwanted Emissions below 1 GHz	43
7.7	Unwanted Emissions above 1 GHz	45
8	Pictures of Test Arrangements	65
9	Information of the Testing Laboratories	66

Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P24020178	Original release.	2024/7/12

1 Certificate

Product: Nighthawk BE6500 WiFi 7 Router, Nighthawk BE5000 WiFi 7 Router, Nighthawk BE4300 WiFi 7 Router (refer to item 3.1 for more details)

Brand: NETGEAR

Test Model: RS200

Series Model: RS150, RS150v2, RS140 (refer to item 3.1 for more details)

Sample Status: Engineering sample

**Applicant and
Manufacturer:** NETGEAR, INC.

Test Date: 2024/6/5 ~ 2024/6/17

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2013

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -13.17 dB at 0.26200 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -6.6 dB at 52.31 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.1 dB at 2483.50, 2483.90, 2484.10 and 2485.90 MHz
15.203	Antenna Requirement	Pass	Antenna connector is ipex(MHF) not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
6 dB Bandwidth	-	206.5 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.79 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.90 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1 GHz	3.64 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	NIGHTHAWK BE6500 WiFi 7 Router, NIGHTHAWK BE5000 WiFi 7 Router, NIGHTHAWK BE4300 WiFi 7 Router (Refer to note)
Brand	NETGEAR
Test Model	RS200
Series Model	RS150, RS150v2, RS140
Model Difference	Refer to note
Status of EUT	Engineering sample
Power Supply Rating	12 Vdc from adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in VHT mode 1024QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	Up to 688 Mbps
Operating Frequency	2.412 GHz ~ 2.462 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20), 802.11be (EHT20): 11 802.11n (HT40), VHT40, 802.11ax (HE40), 802.11be (EHT40): 7
Output Power	913.154 mW (29.61 dBm)

Note:

1. The following product and models are as below. The model of the RS200 was chosen for final test.

Product	Model	remark
NIGHTHAWK BE6500 WiFi 7 Router	RS200	2.4GHz (2 x 2): 0.7 Gbps 5GHz (4 x 4): 5.8 Gbps
NIGHTHAWK BE5000 WiFi 7 Router	RS150	2.4GHz (2 x 2): 0.7 Gbps 5GHz (3 x 3): 4.3 Gbps
	RS150v2	2.4GHz (2 x 2): 0.7 Gbps 5GHz (3 x 3): 4.3 Gbps
NIGHTHAWK BE4300 WiFi 7 Router	RS140	2.4GHz (2 x 2): 0.7 Gbps 5GHz (3 x 3): 3.6 Gbps

2. The EUT uses following accessories.

AC Adapter 1			
Brand	Model	Part Number	Specification
NETGEAR	ADS-40FPC-12 12030E	332-11699-01	AC Input: 100-240 Vac, 50/60 Hz, 1.0 A DC Output: 12.0 Vdc, 2.5 A, 30 W DC Output Cable: 1.76 m / 0 core Plug: US/EU/AU Manufacturer: Vietnam Honor High Tech Company Limited
AC Adapter 2			
Brand	Model	Part Number	Specification
NETGEAR	2AED030FC	332-11712-01	AC Input: 100-240 Vac, 50/60 Hz, 1.0 A DC Output: 12.0 Vdc, 2.5 A, 30.0W DC Output Cable: 1.8 m / 0 core Plug: US/EU/AU Manufacturer: Channel Well Technology(Guangzhou) Co., Ltd

Ethernet Cable		
Brand	Model	Specification
NETGEAR	N/A	Signal Line: 1.96 m

3. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Type	Dipole
Connector Type	ipex(MHF)
Antenna Gain	Directional Gain (dBi)
2400~2483.5 MHz	3.81
5150~5250 MHz	6.05
5250~5350 MHz	6.06
5470~5725 MHz	6.21
5725~5850 MHz	6.33

*The detailed antenna information, please refer to the BV CPS Directional Gain Measurement Report no.: RFBBQZ-WTW-P24020178-5.

2. The EUT incorporates a MIMO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11be (EHT20)	2TX	2RX
802.11be (EHT40)	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), VHT mode for 20 MHz (40 MHz), 802.11ax mode for 20 MHz (40 MHz) and 802.11be mode for 20 MHz (40 MHz) therefore the manufacturer will control the power for 802.11n/VHT/ax mode is same as the 802.11be mode or lower than it and investigated worst case to representative mode in test report.
4. For 802.11ax/be, the EUT not support Partial RU (resource unit) reduction mechanisms.

3.3 Channel List

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. For Unwanted Emission (below 1GHz) and AC Power Conducted Emissions items: AC Adapter 1 and AC Adapter 2. Pre-scan these modes and find the worst case as a representative test condition. 2. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Worst Case:	1. AC Adapter 1 and AC Adapter 2 Worst Condition: AC Adapter 1 2. The EUT is designed to be positioned on the Z-Plane only.

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11be (EHT20)	CDD & Beamforming	1, 6, 11	BPSK	MCS0
	802.11be (EHT40)	CDD & Beamforming	3, 6, 9	BPSK	MCS0
Power Spectral Density / 6 dB Bandwidth / Conducted Out of Band Emissions	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11be (EHT20)	CDD	1, 6, 11	BPSK	MCS0
	802.11be (EHT40)	CDD	3, 6, 9	BPSK	MCS0
AC Power Conducted Emissions	802.11b	CDD	1	DBPSK	1Mb/s
Unwanted Emissions below 1 GHz	802.11b	CDD	1	DBPSK	1Mb/s
Unwanted Emissions above 1 GHz	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11be (EHT20)	CDD	1, 6, 11	BPSK	MCS0
	802.11be (EHT40)	CDD	3, 6, 9	BPSK	MCS0

Note: Partial RU (resource unit), channel puncturing and bandwidth reduction mechanisms are not supported.


3.5 Duty Cycle of Test Signal

802.11b: Duty cycle = 3.21 ms / 3.22 ms x 100% = 99.7%


802.11g: Duty cycle = 3.02 ms / 3.04 ms x 100% = 99.3%

802.11be (EHT20): Duty cycle = 2.88 ms / 2.89 ms x 100% = 99.7%


802.11be (EHT40): Duty cycle = 2.86 ms / 2.87 ms x 100% = 99.7%

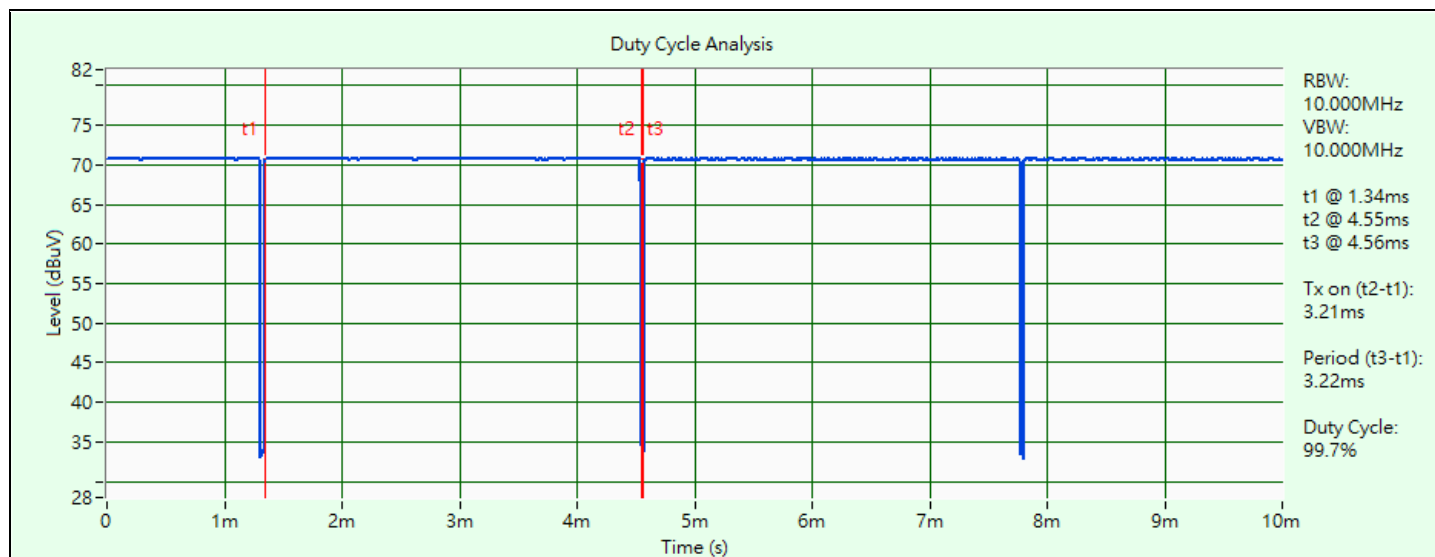


802.11b

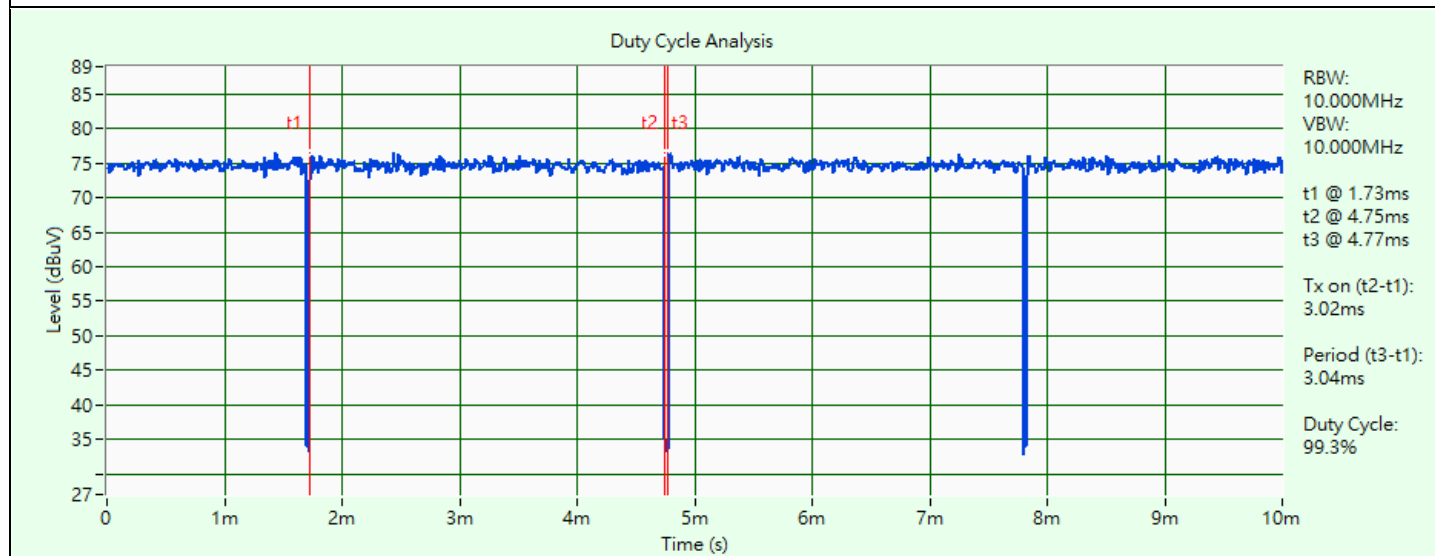

802.11g

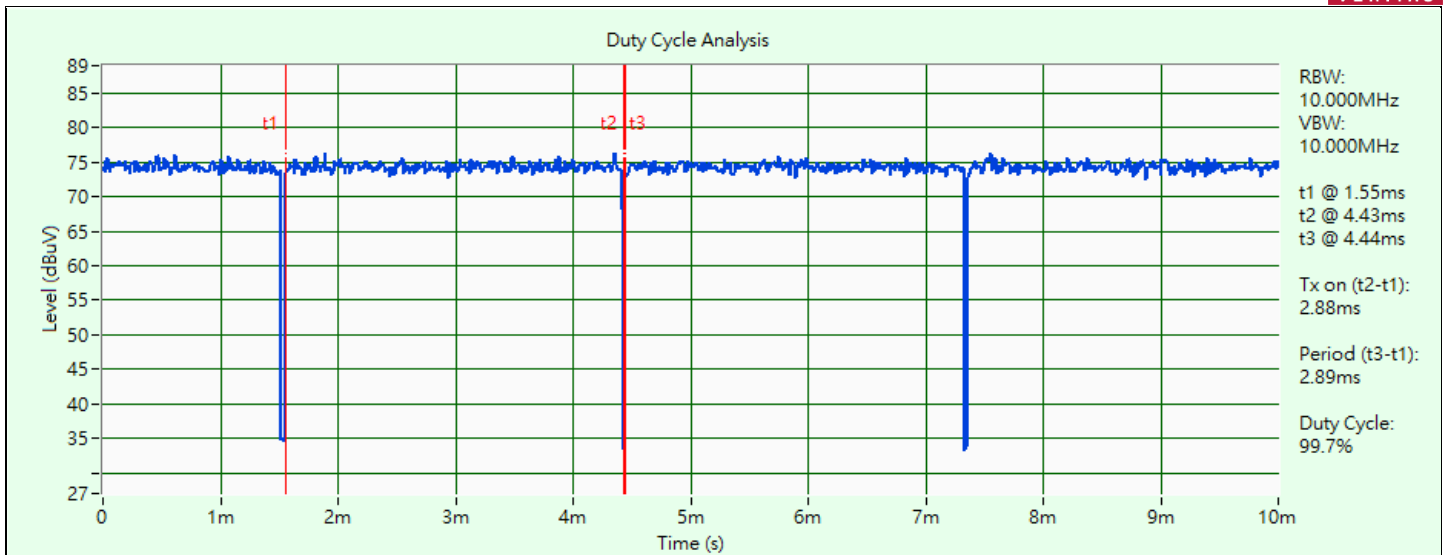

802.11be (EHT20)

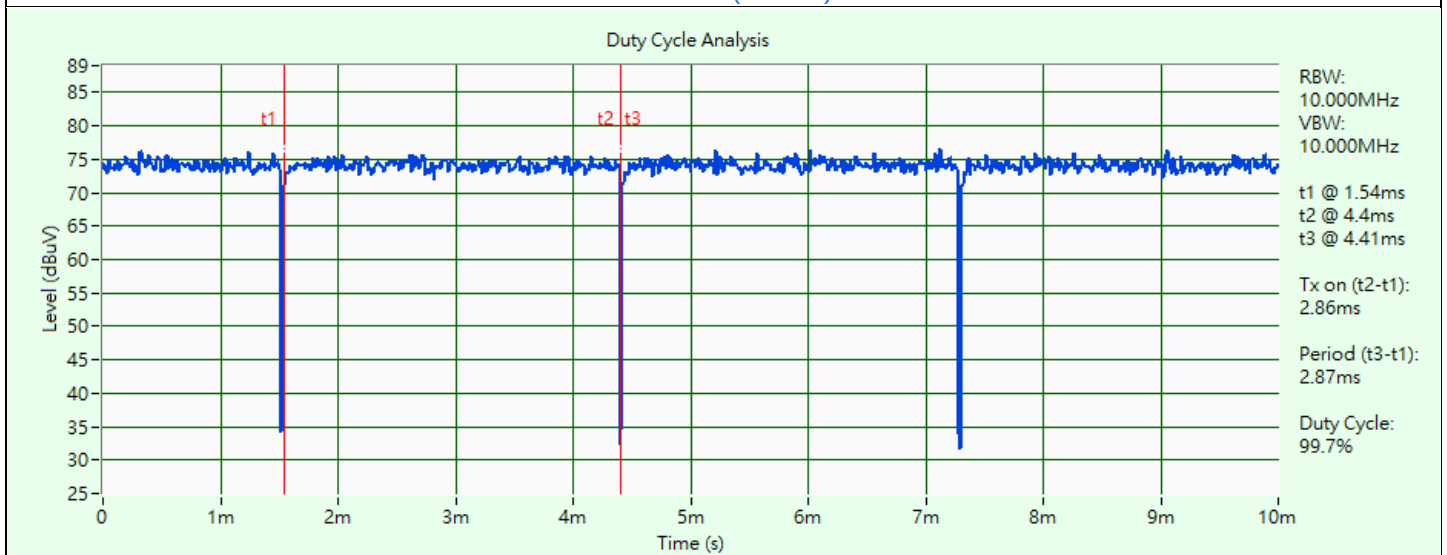


802.11be (EHT40)

3.6 Test Program Used and Operation Descriptions

Controlling software Access manual Tool 3.2.1.5 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

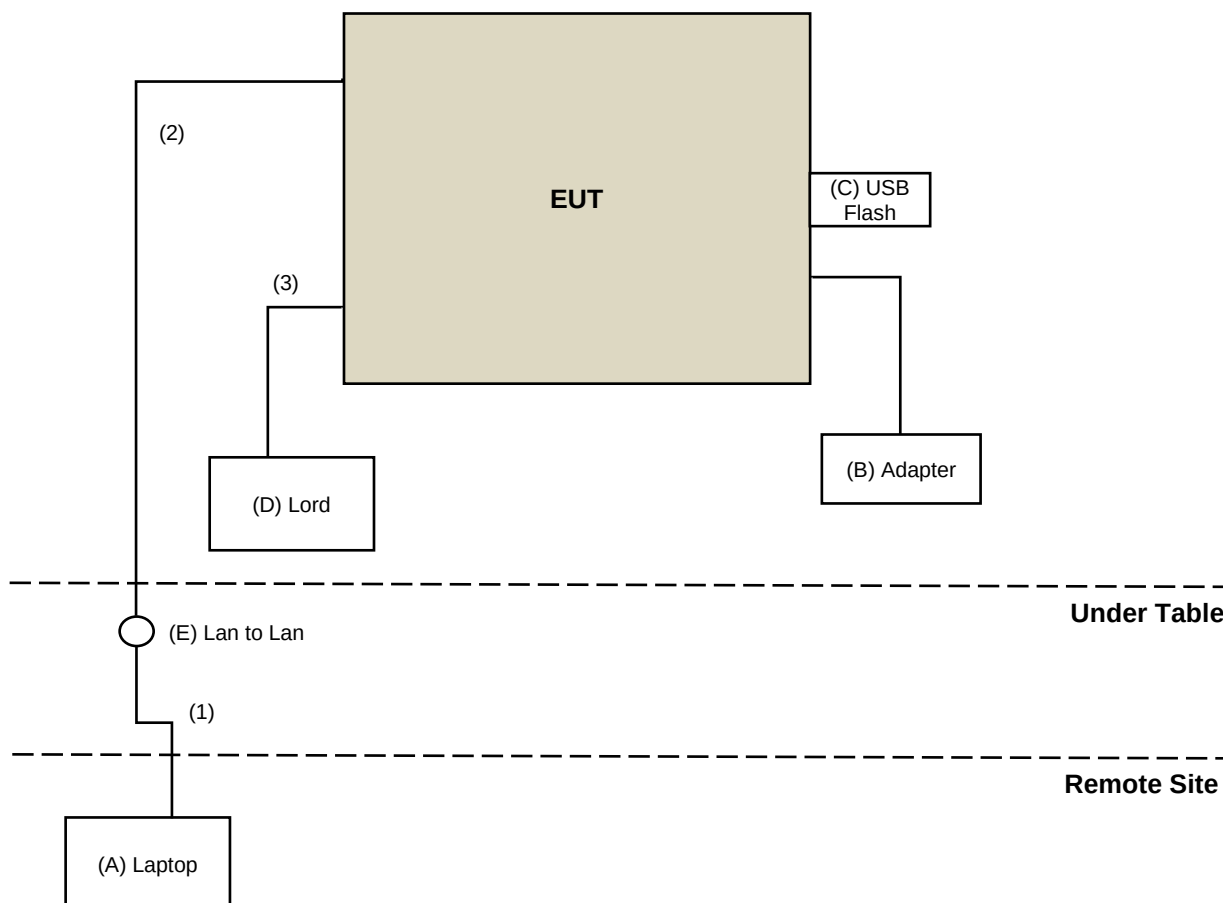

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	DELL	E5430	2RL3YW1	N/A	Provided by Lab
B	Adapter	NETGEAR	ADS-40FPC-12 12030E	N/A	N/A	Supplied by applicant
C	USB Flash	SanDisk	SDDDC3-032G	N/A	N/A	Provided by Lab
D	Lord	N/A	N/A	N/A	N/A	Provided by Lab
E	Lan to Lan	N/A	N/A	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	RJ-45 Cable	1	10	N	N	Provided by Lab
2	RJ-45 Cable	1	1.96	N	N	Accessory of EUT
3	RJ-45 Cable	4	1.5	N	N	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer Keysight	8990B	MY51000485	2024/1/21	2025/1/20
Wideband Power Sensor Keysight	N1923A	MY58020002	2024/1/18	2025/1/17
		MY58140009	2024/1/18	2025/1/17

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/6/17

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Signal & Spectrum Analyzer R&S	FSV3044	101105	2024/2/27	2025/2/26
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/6/17

4.3 6 dB Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get the tested date and information of the instruments.

4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance HUBER+SUHNER	E1-011315	13	2023/11/22	2024/11/21
50 ohm terminal resistance	E1-011279	04	2023/11/22	2024/11/21
	E1-011280	05	2023/11/22	2024/11/21
DC-LISN Schwarzbeck	NNBM 8126G	8126G-069	2023/11/7	2024/11/6
EMI Test Receiver R&S	ESCI	100613	2023/12/4	2024/12/3
Fixed Attenuator Mini-Circuits	HAT-10+	PAD-COND1-01	2024/1/6	2025/1/5
LISN R&S	ENV216	101826	2024/3/25	2025/3/24
	ESH3-Z5	100311	2023/9/6	2024/9/5
RF Coaxial Cable Woken	5D-FB	Cable-cond1-01	2024/1/6	2025/1/5
Software BVADT	BVADT_Cond_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2023/8/31	2024/8/30

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2024/6/5

4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-155	2023/10/13	2024/10/12
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Loop Antenna Electro-Metrics	EM-6879	269	2023/9/23	2024/9/22
Loop Antenna TESEQ	HLA 6121	45745	2023/8/8	2024/8/7
Preamplifier Agilent	8447D	2944A10631	2024/5/1	2025/4/30
Preamplifier EMCI	EMC001340	980201	2023/9/27	2024/9/26
RF Coaxial Cable Woken	8D-FB	Cable-CH4-01	2023/7/8	2024/7/7
Signal & Spectrum Analyzer R&S	FSW43	101582	2024/4/12	2025/4/11
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3.
2. Tested Date: 2024/6/6

4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-408	2023/11/12	2024/11/11
	BBHA 9170	9170-480	2023/11/12	2024/11/11
		BBHA9170241	2023/10/16	2024/10/15
		BBHA9170243	2023/11/12	2024/11/11
Preamplifier EMCI	EMC 184045	980116	2023/9/27	2024/9/26
Preamplifier Keysight	83017A	MY53270295	2024/5/1	2025/4/30
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2023/7/8	2024/7/7
	EMC102-KM-KM-3000	150929	2023/7/8	2024/7/7
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03(250724)	2024/5/1	2025/4/30
	Sucoflex 104	MY 13380+295012/04	2024/5/1	2025/4/30
Signal & Spectrum Analyzer R&S	FSW43	101582	2024/4/12	2025/4/11
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3.
2. Tested Date: 2024/6/7

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

5.4 Conducted Out of Band Emissions

Below 30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup




6.1.2 Test Procedure

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup




6.2.2 Test Procedure

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: 3 kHz.
- Set VBW $\geq 3 \times$ RBW.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

Note: If Duty cycle < 98%, Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Conducted Out of Band Emissions

6.4.1 Test Setup



6.4.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5 AC Power Conducted Emissions

6.5.1 Test Setup

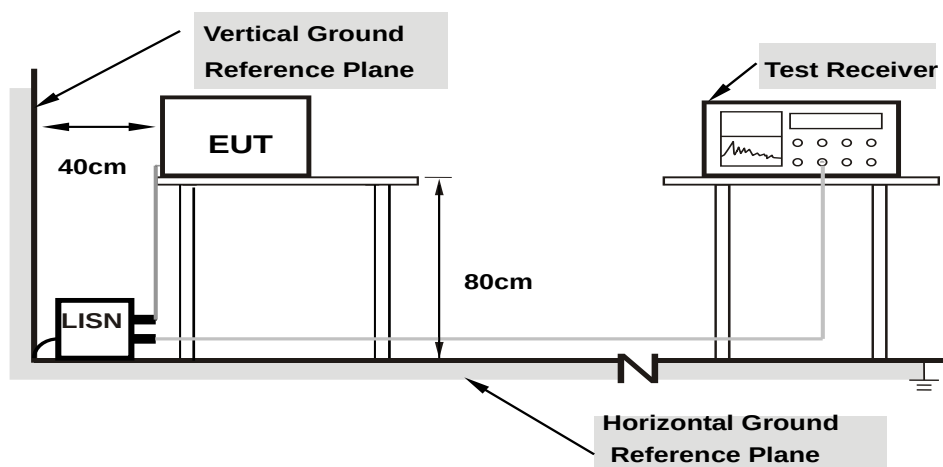

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.6 Unwanted Emissions below 1 GHz

6.6.1 Test Setup

For Radiated emission below 30 MHz

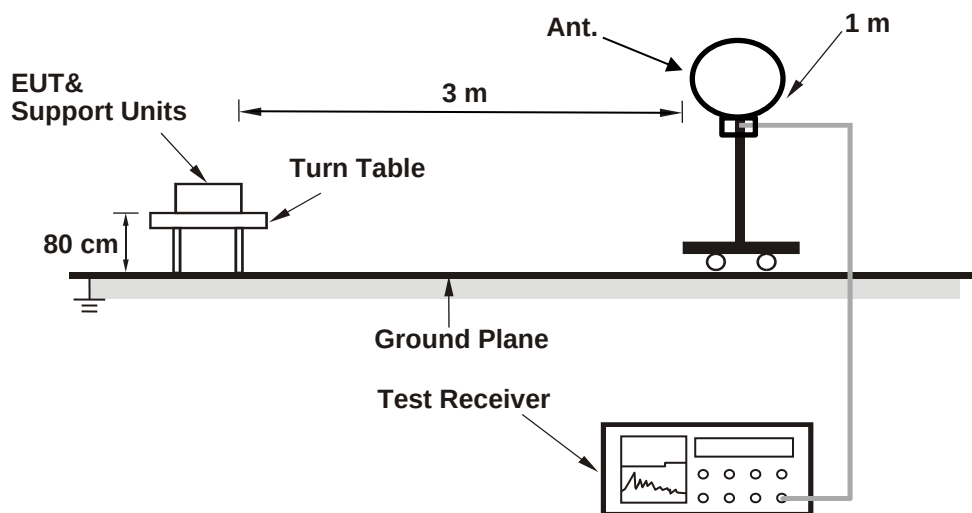

For Radiated emission above 30 MHz

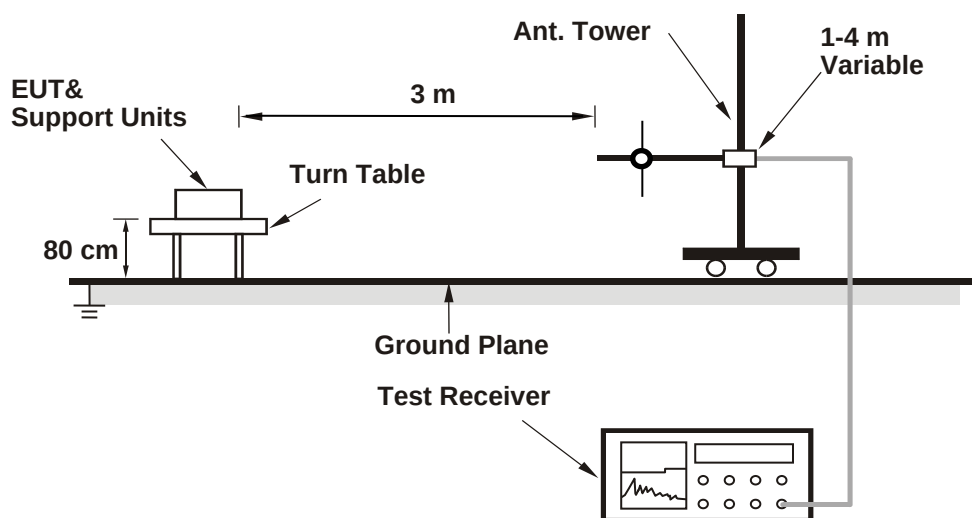

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.7 Unwanted Emissions above 1 GHz

6.7.1 Test Setup

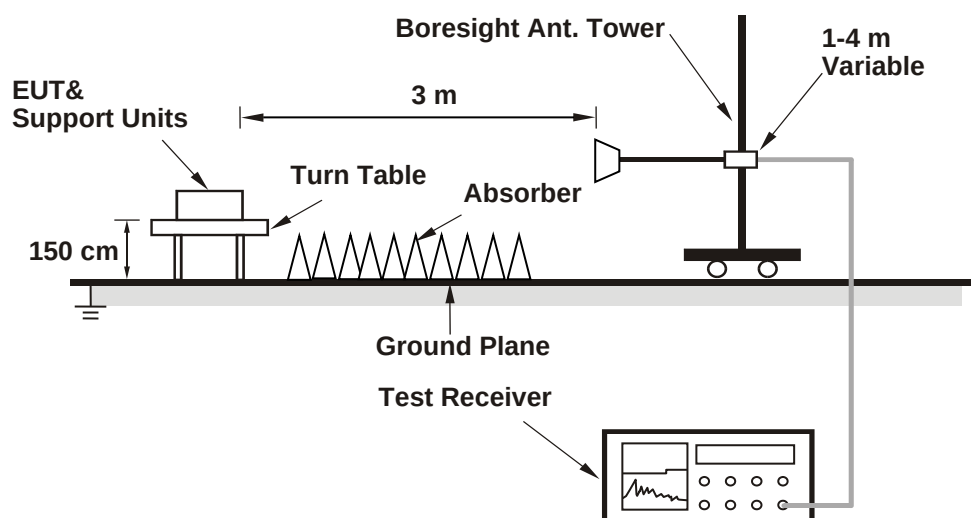

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin
--------------	----------------	---------------------------	--------------	------------	----------

802.11b CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	26.56	26.63	913.154	29.61	30	Pass
6	2437	26.36	26.44	873.069	29.41	30	Pass
11	2462	24.46	24.24	544.715	27.36	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11g CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	26.21	26.38	852.341	29.31	30	Pass
6	2437	25.99	25.58	758.601	28.80	30	Pass
11	2462	22.38	22.48	349.993	25.44	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	26.15	26.37	845.608	29.27	30	Pass
6	2437	24.72	25.76	673.187	28.28	30	Pass
11	2462	20.97	20.83	246.086	23.91	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	25.59	25.90	751.288	28.76	30	Pass
6	2437	22.38	22.28	342.026	25.34	30	Pass
9	2452	20.71	20.79	237.711	23.76	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	26.15	26.37	845.608	29.27	30	Pass
6	2437	24.72	25.76	673.187	28.28	30	Pass
11	2462	20.97	20.83	246.086	23.91	30	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. The directional gain is 3.81 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	25.59	25.90	751.288	28.76	30	Pass
6	2437	22.38	22.28	342.026	25.34	30	Pass
9	2452	20.71	20.79	237.711	23.76	30	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. The directional gain is 3.81 dBi < 6 dBi, so the output power limit shall not be reduced.

7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin
--------------	----------------	---------------------------	--------------	------------	----------

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-6.53	-6.43	-3.47	8	Pass
6	2437	-6.66	-6.47	-3.55	8	Pass
11	2462	-8.64	-8.70	-5.66	8	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. The directional gain is 3.81 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-11.80	-11.54	-8.66	8	Pass
6	2437	-12.05	-12.43	-9.23	8	Pass
11	2462	-15.54	-15.48	-12.50	8	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. The directional gain is 3.81 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-13.78	-13.56	-10.66	8	Pass
6	2437	-15.23	-14.31	-11.74	8	Pass
11	2462	-19.03	-19.21	-16.11	8	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. The directional gain is 3.81 dBi < 6 dBi, so the power density limit shall not be reduced.


802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
3	2422	-15.99	-15.69	-12.83	8	Pass
6	2437	-19.14	-19.23	-16.17	8	Pass
9	2452	-20.78	-20.70	-17.73	8	Pass

Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- The directional gain is 3.81 dBi < 6 dBi, so the power density limit shall not be reduced.

Spectrum Plot of Maximum Value

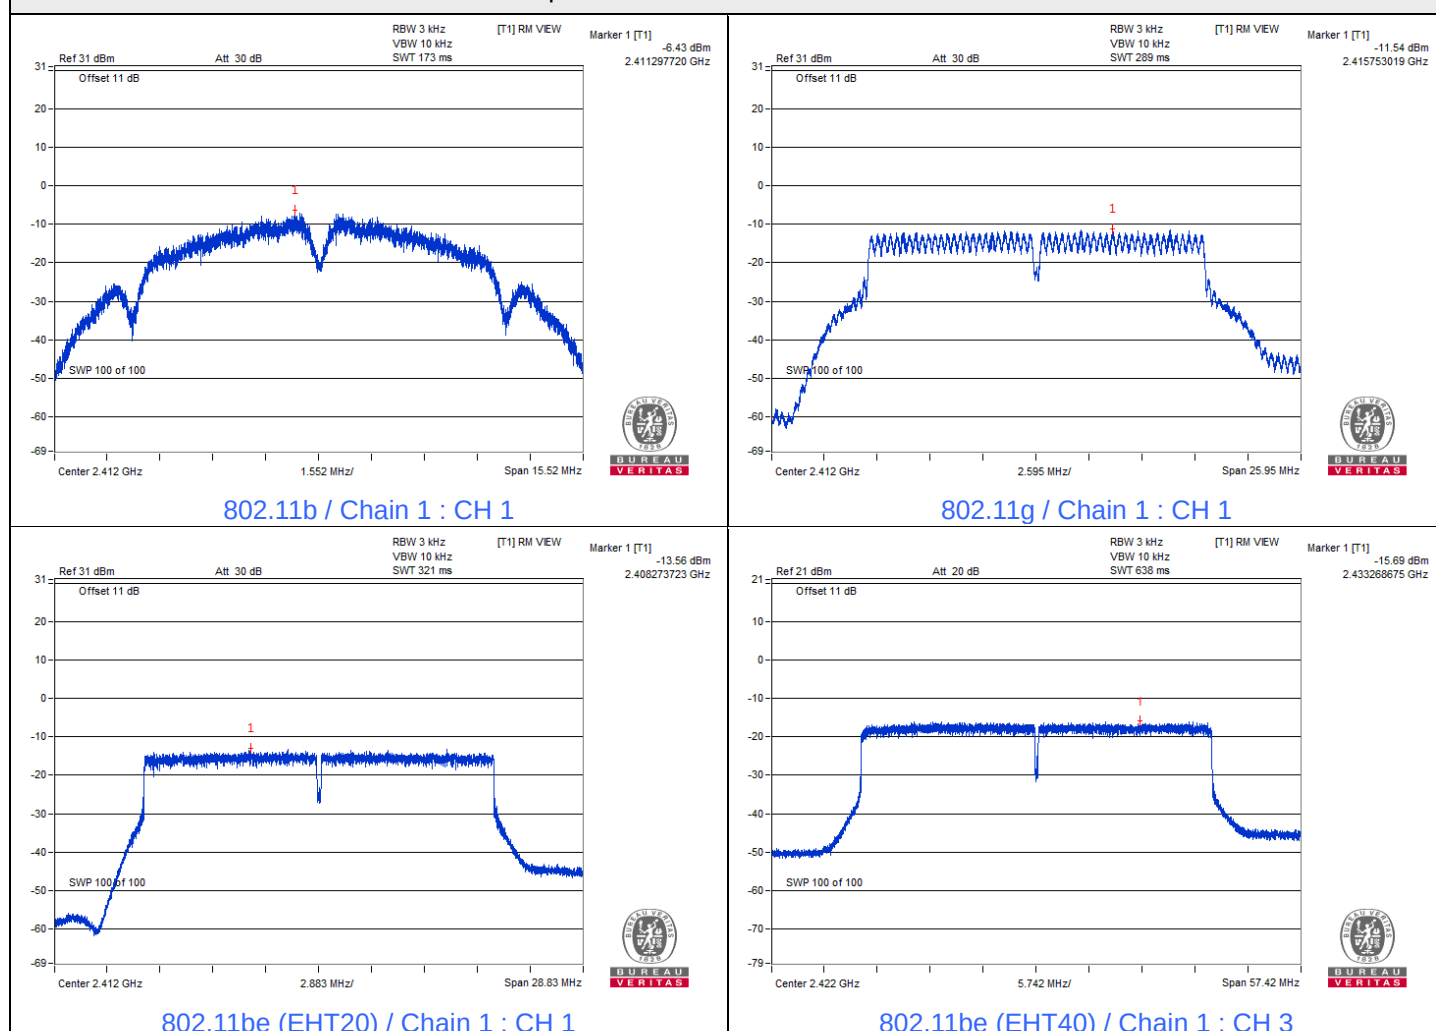

7.3 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin
--------------	----------------	---------------------------	--------------	------------	----------

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	7.12	7.13	0.5	Pass
6	2437	7.13	7.13	0.5	Pass
11	2462	7.12	7.12	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	16.41	16.44	0.5	Pass
6	2437	16.43	16.40	0.5	Pass
11	2462	16.43	16.42	0.5	Pass


802.11be (EHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	19.03	18.94	0.5	Pass
6	2437	19.03	19.01	0.5	Pass
11	2462	19.04	18.96	0.5	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
3	2422	38.06	38.01	0.5	Pass
6	2437	38.13	37.99	0.5	Pass
9	2452	37.99	37.79	0.5	Pass


Spectrum Plot of Minimum Value








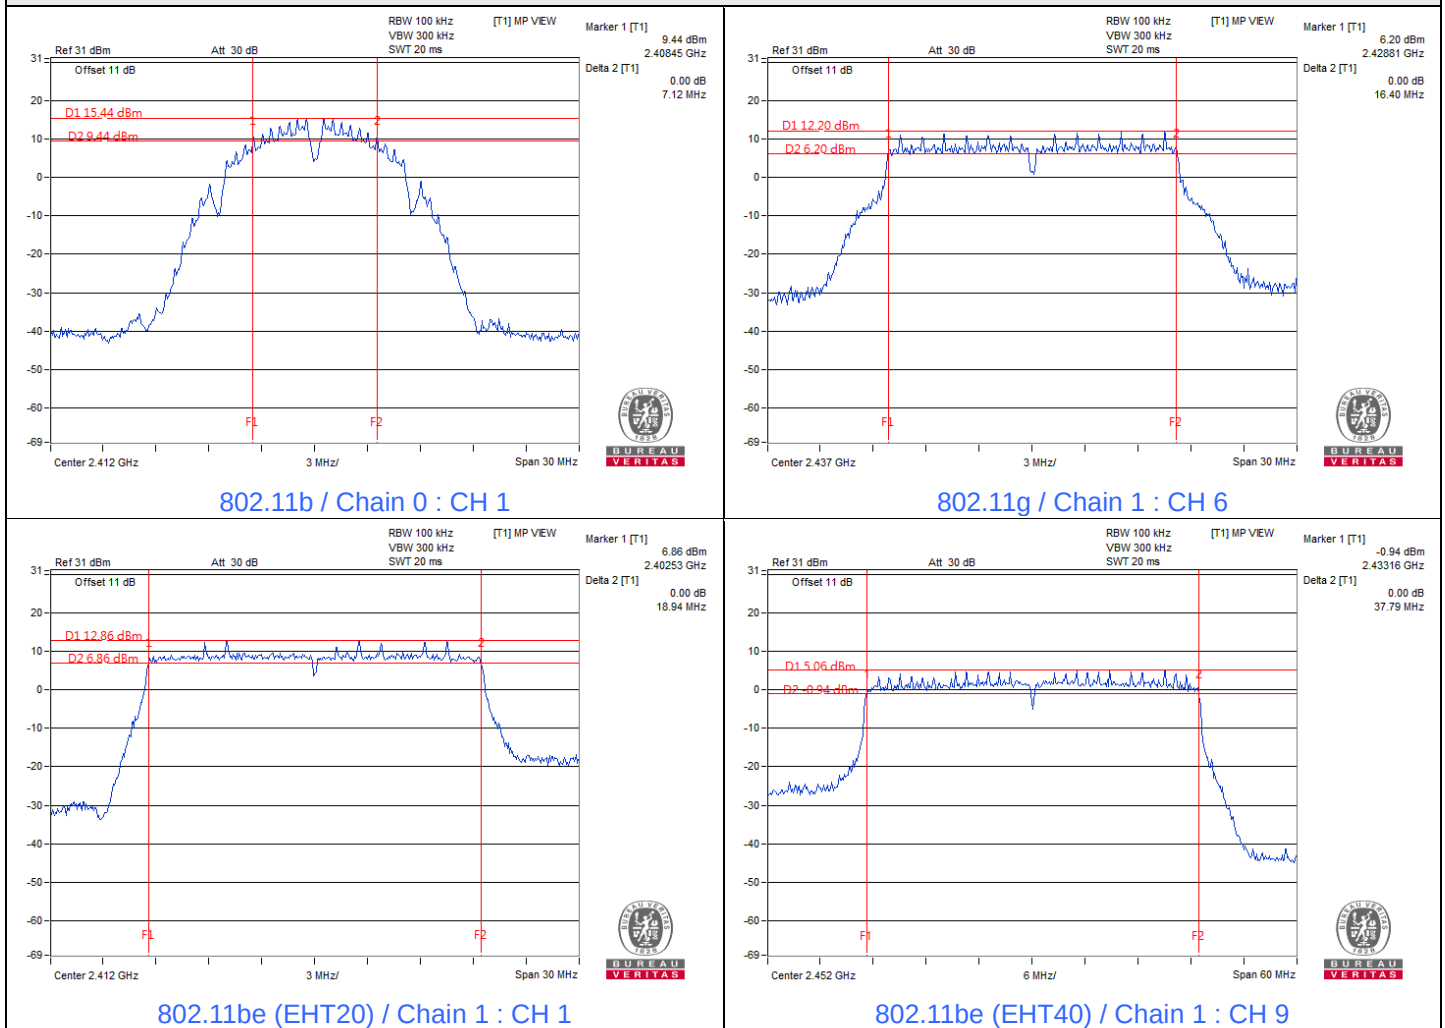


7.4 Conducted Out of Band Emissions


Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin
--------------	----------------	---------------------------	--------------	------------	----------

802.11b

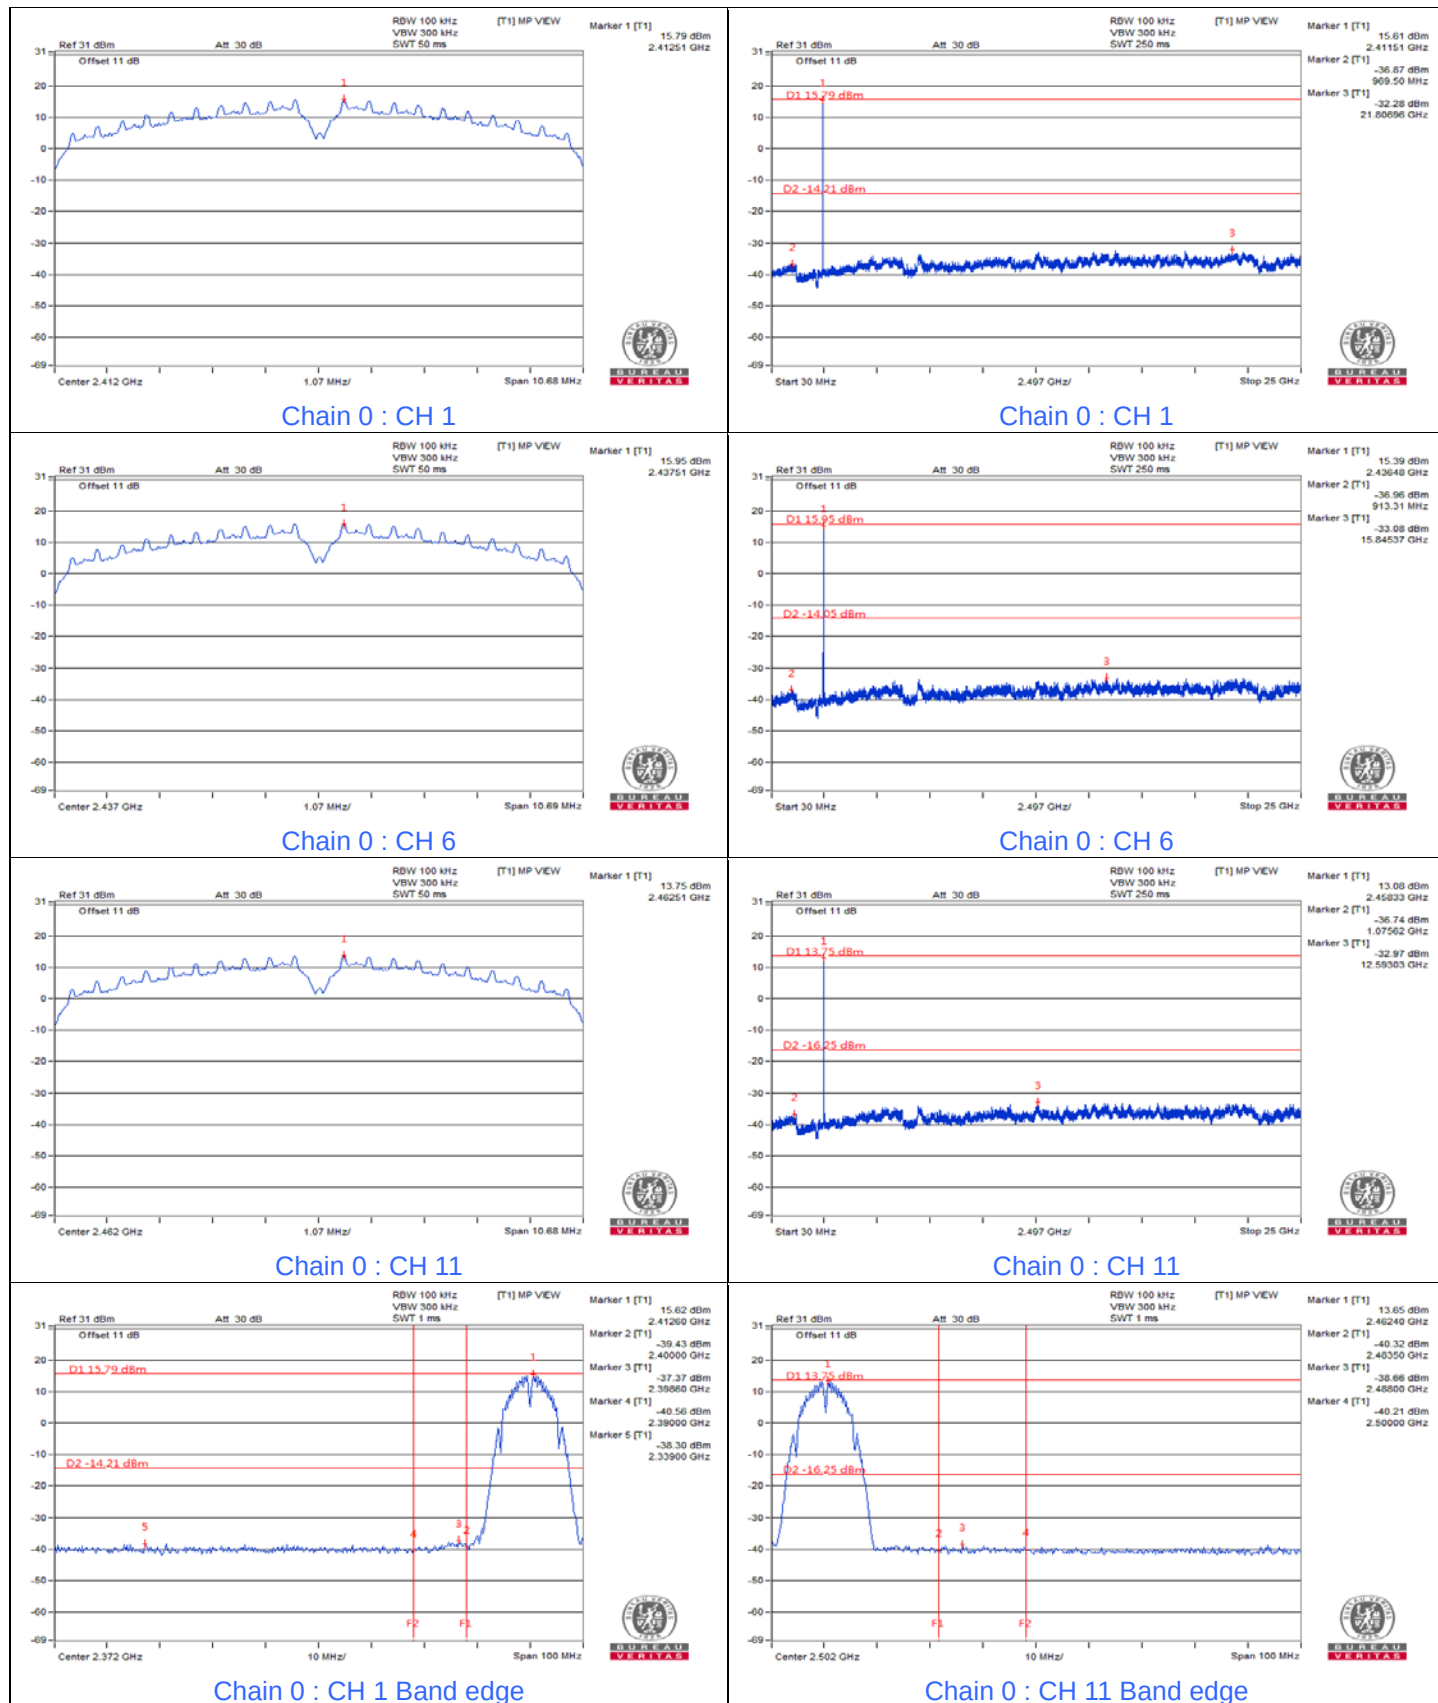


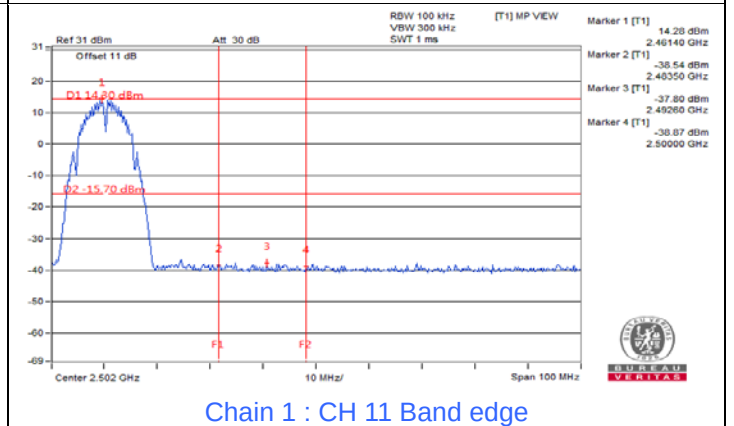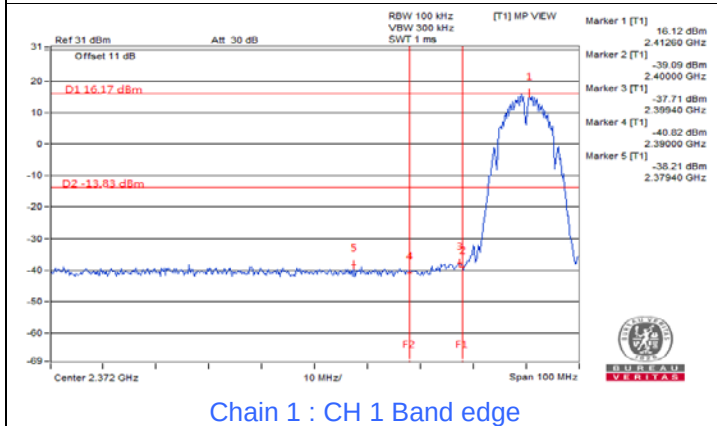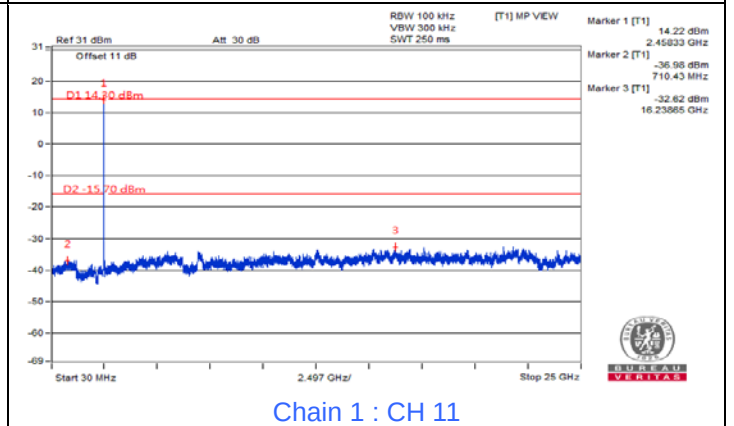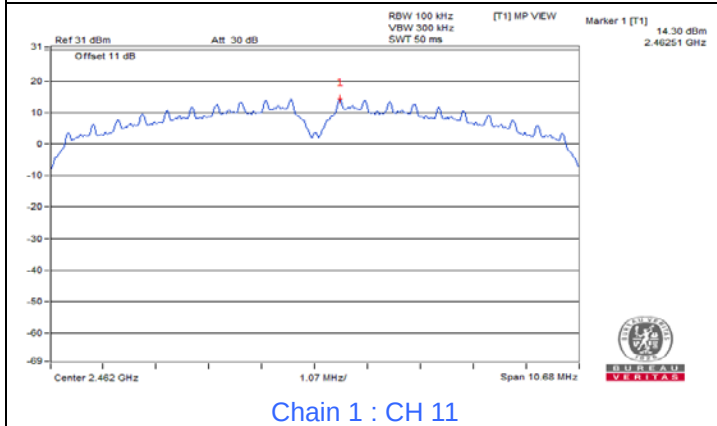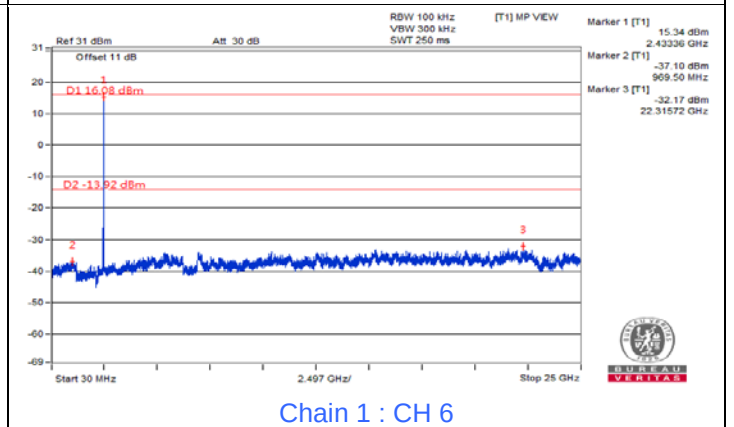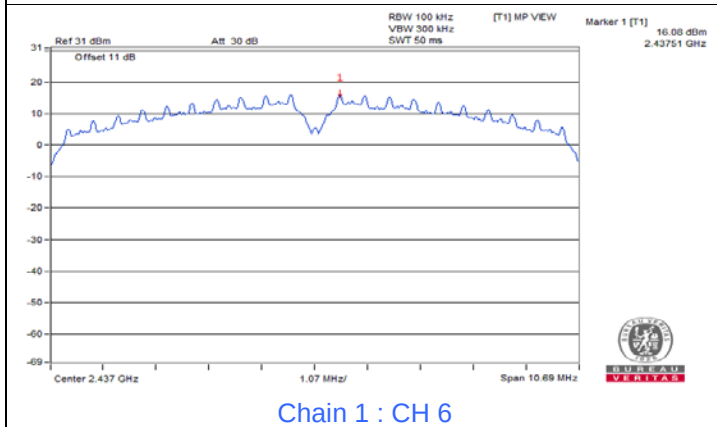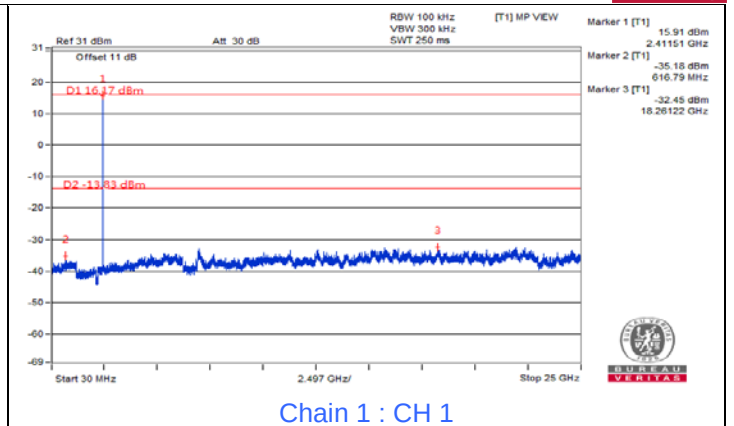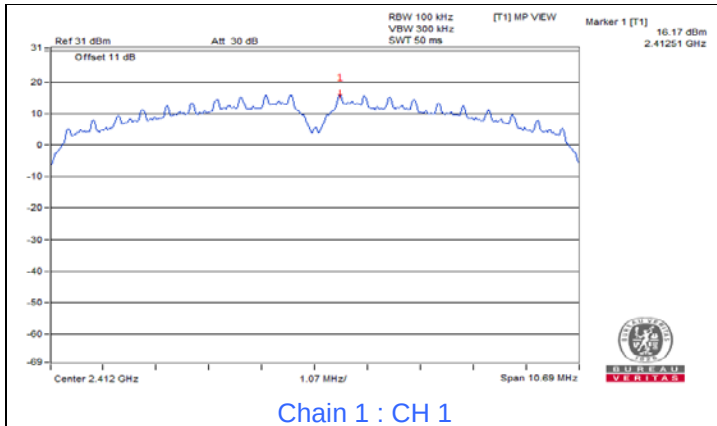


802.11g

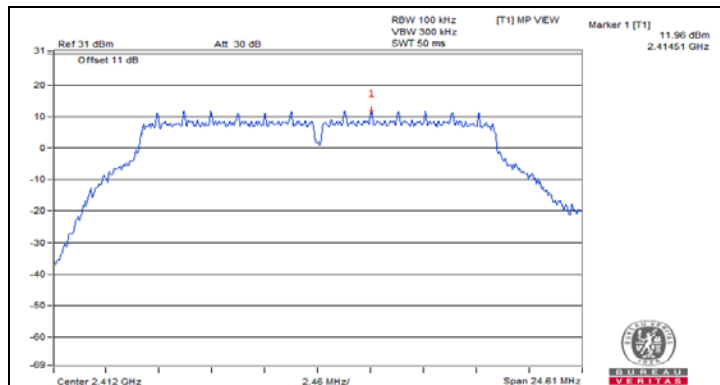


Chain 0 : CH 1

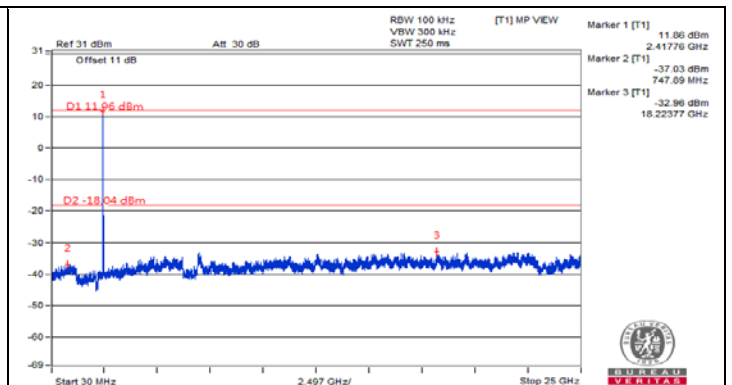


Chain 0 : CH 1

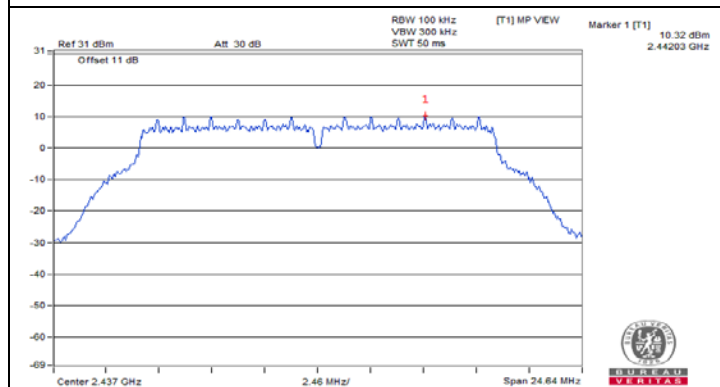


Chain 0 : CH 6

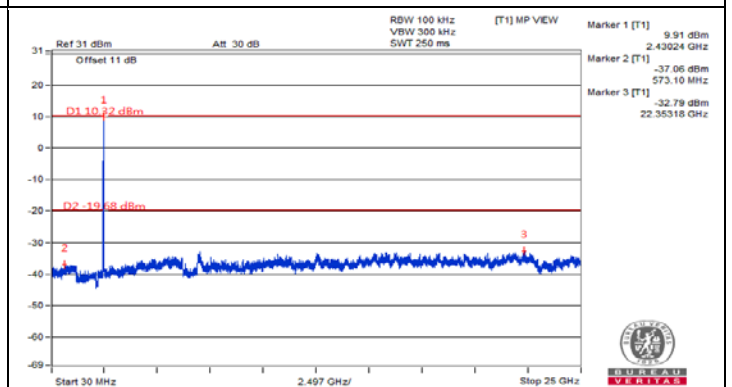


Chain 0 : CH 6

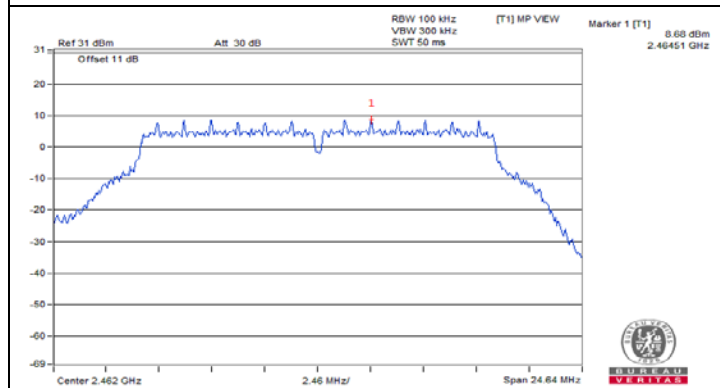


Chain 0 : CH 11

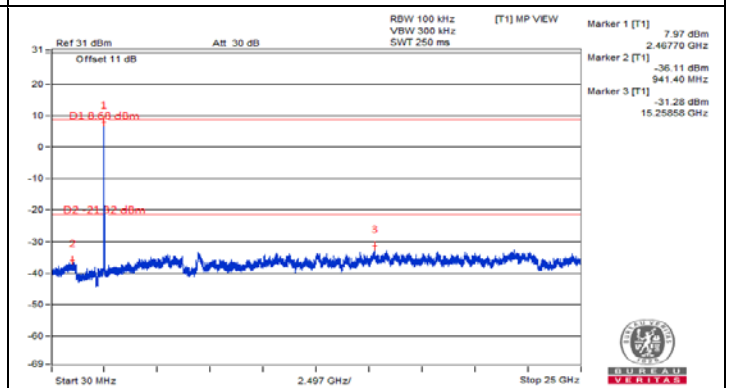









Chain 0 : CH 11

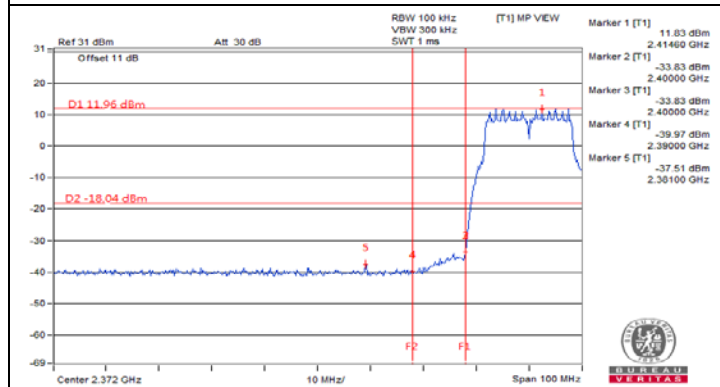









Chain 0 : CH 1 Band edge








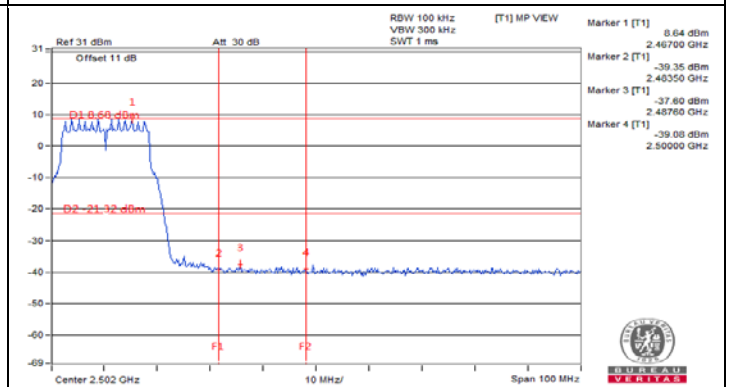


Chain 0 : CH 11 Band edge

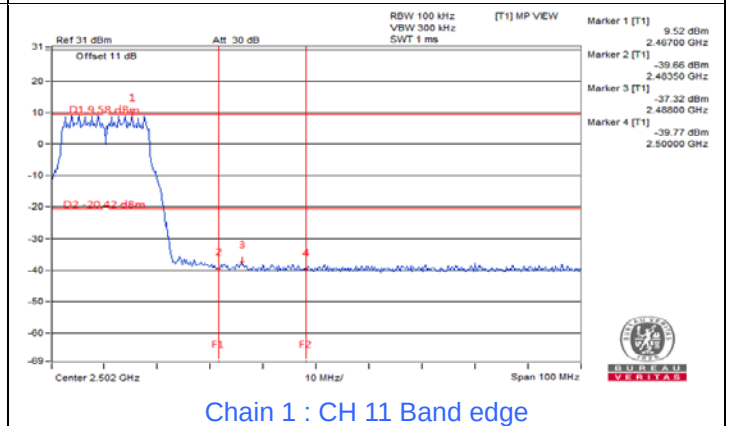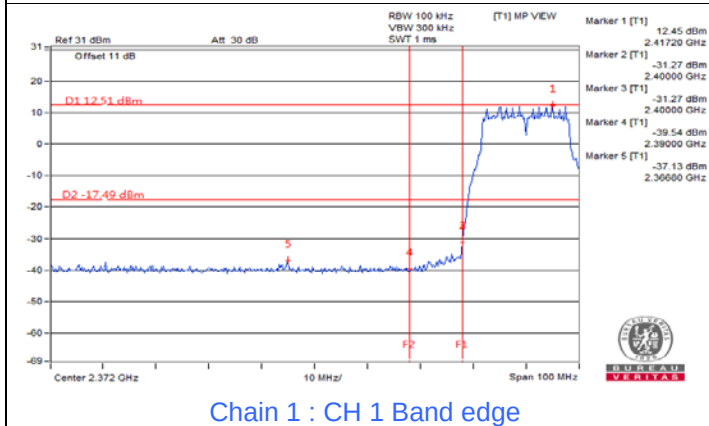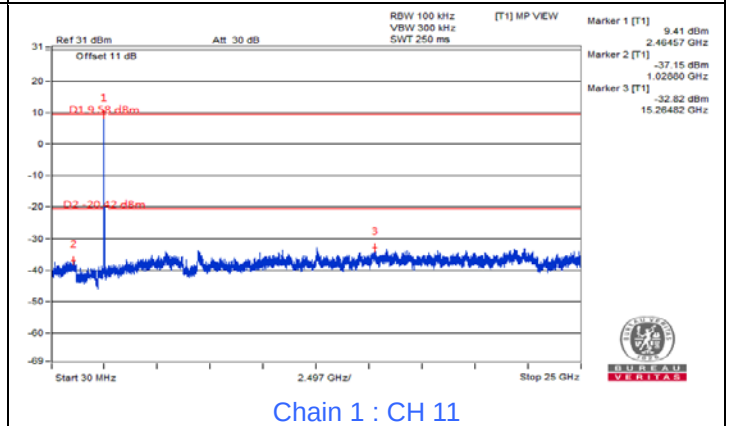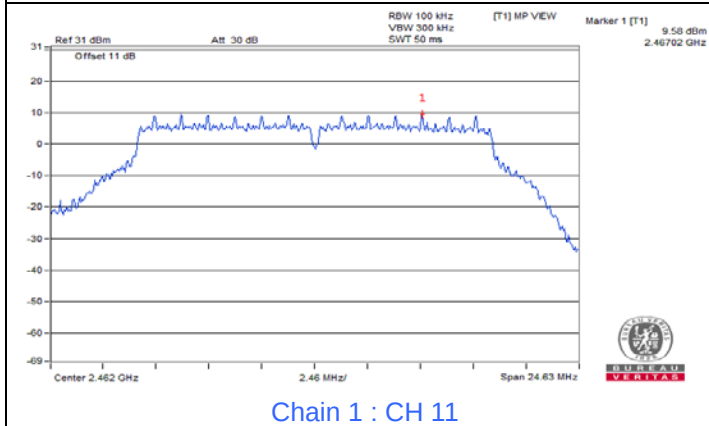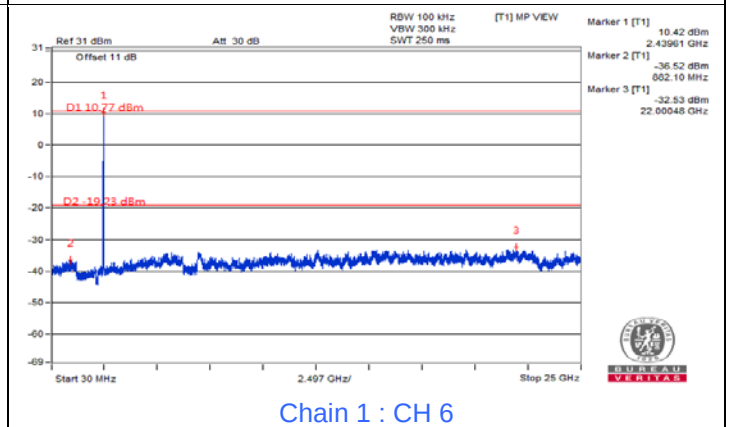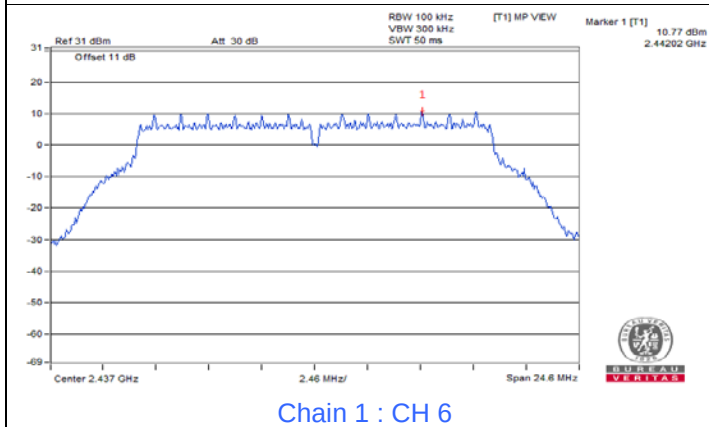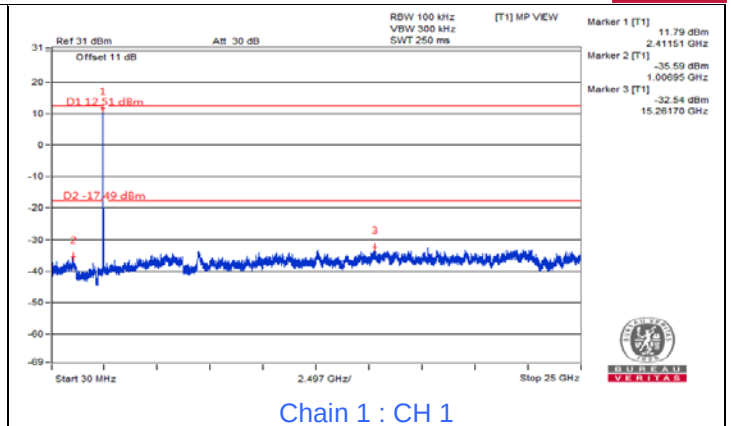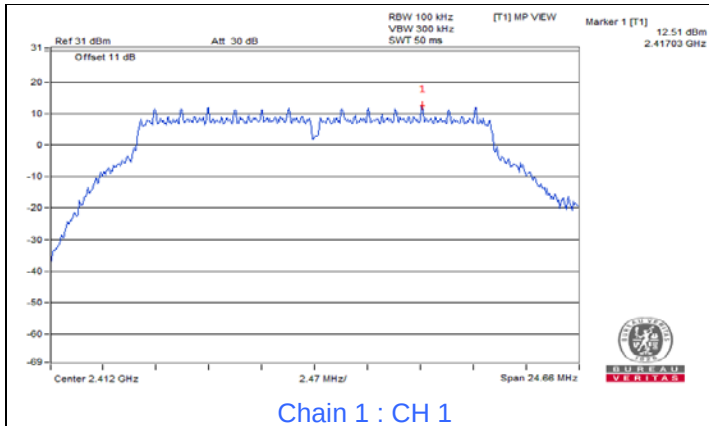










802.11be (EHT20)

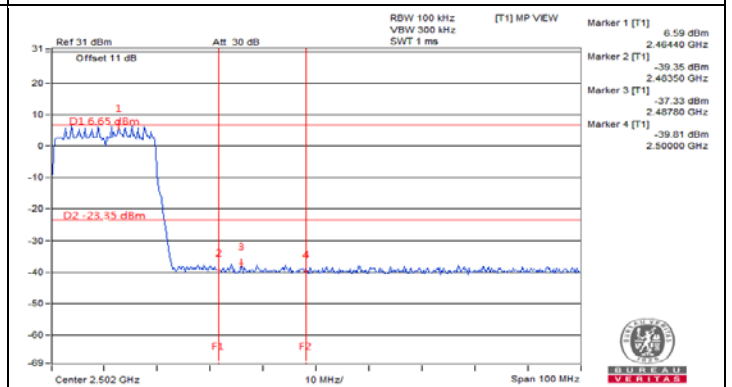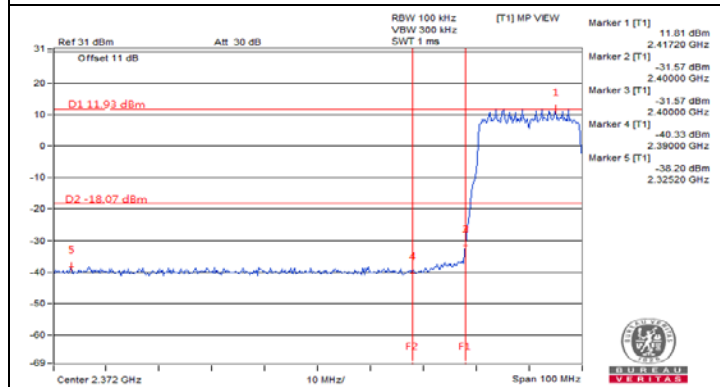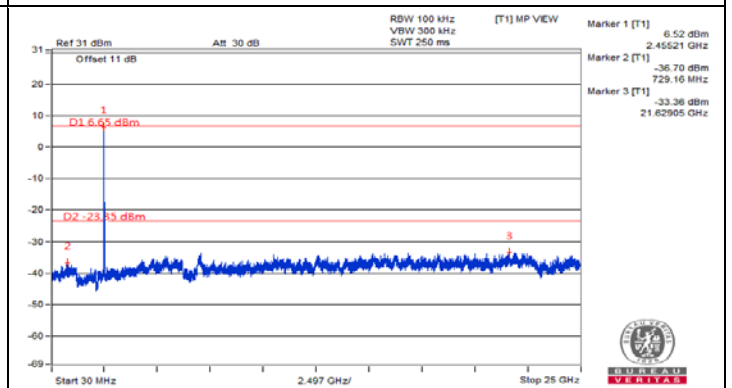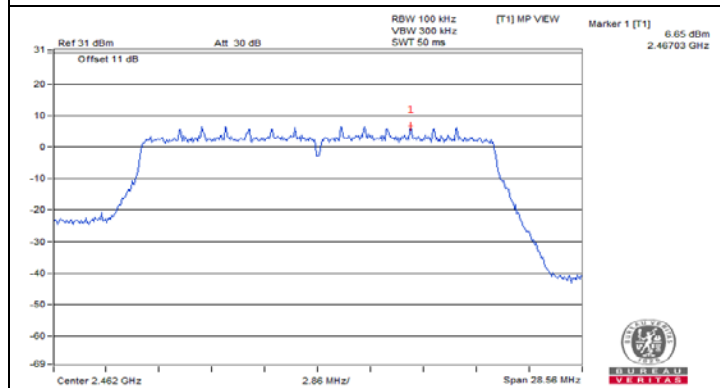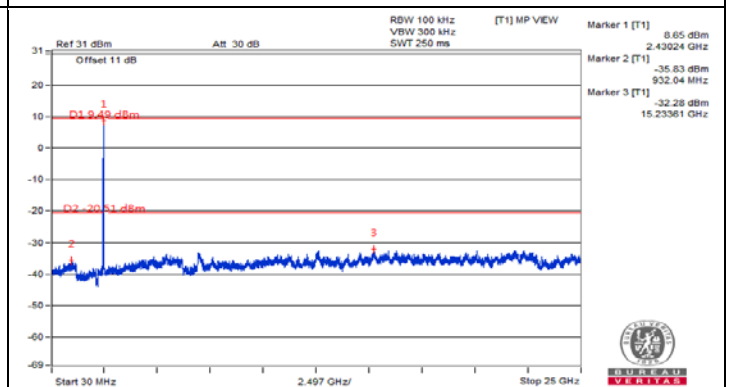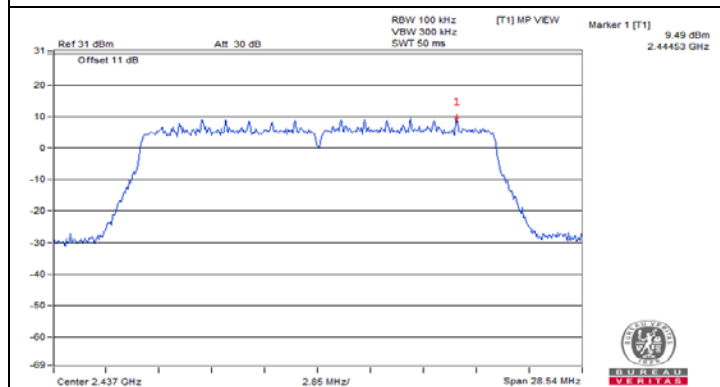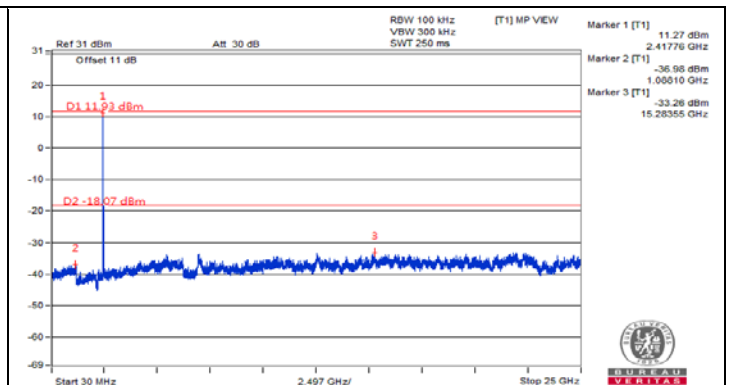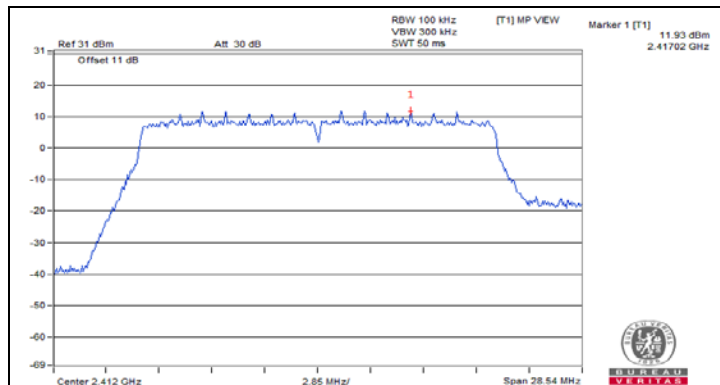

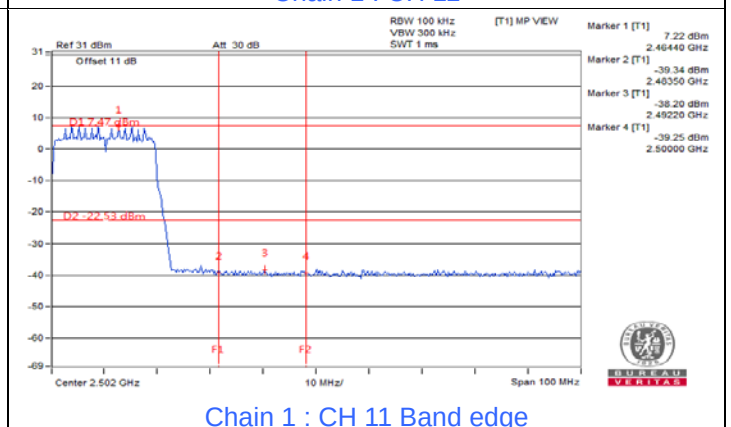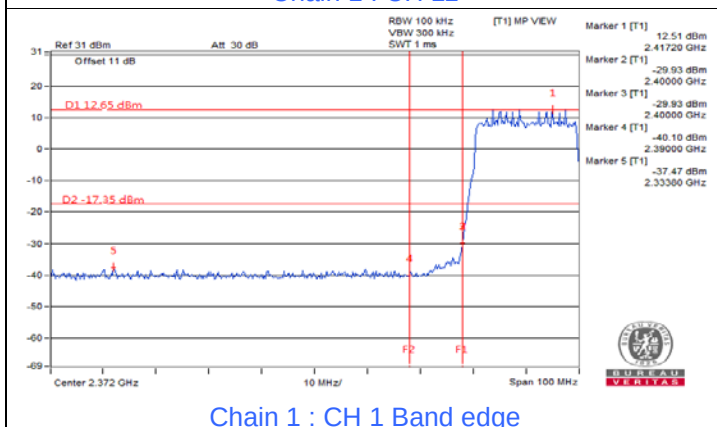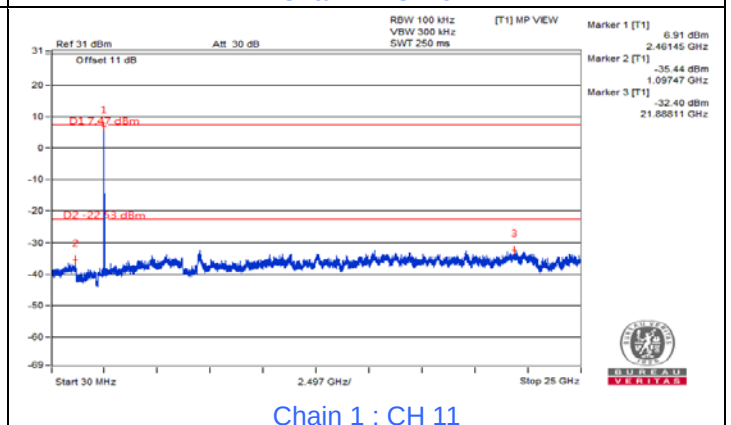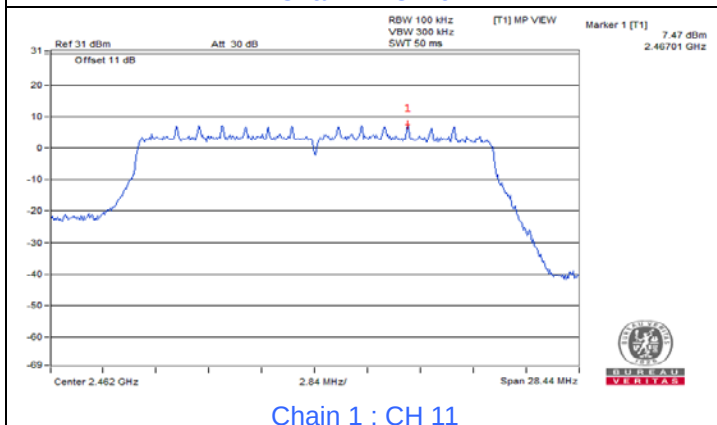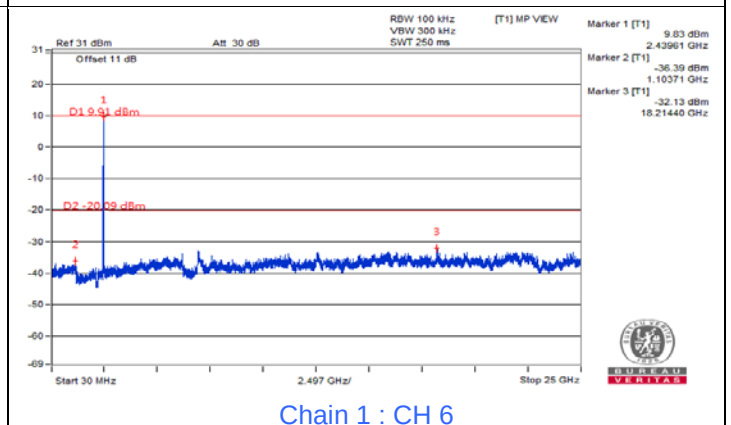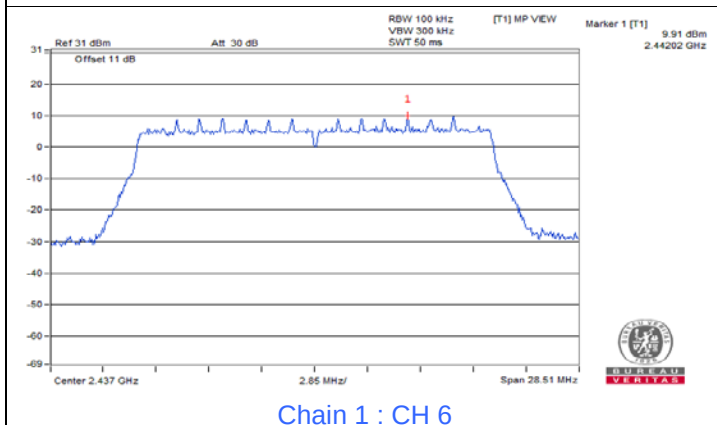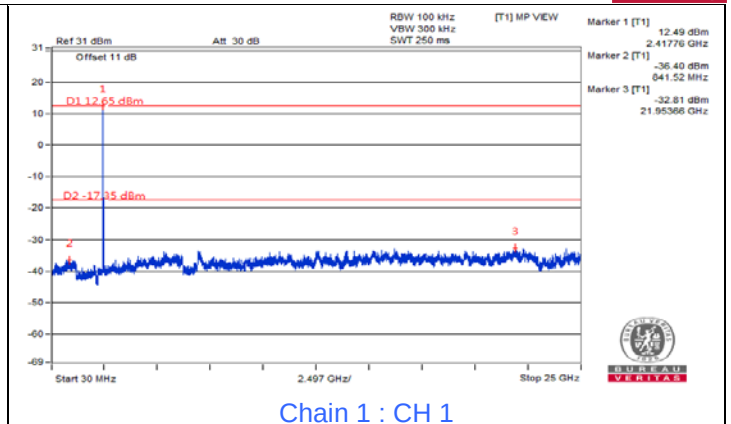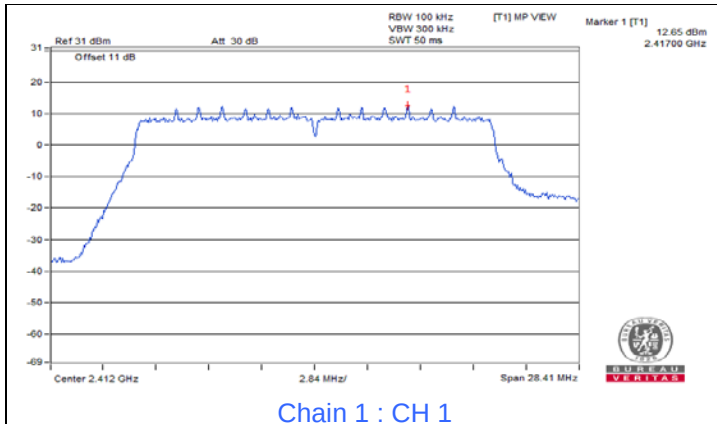

802.11be (EHT40)

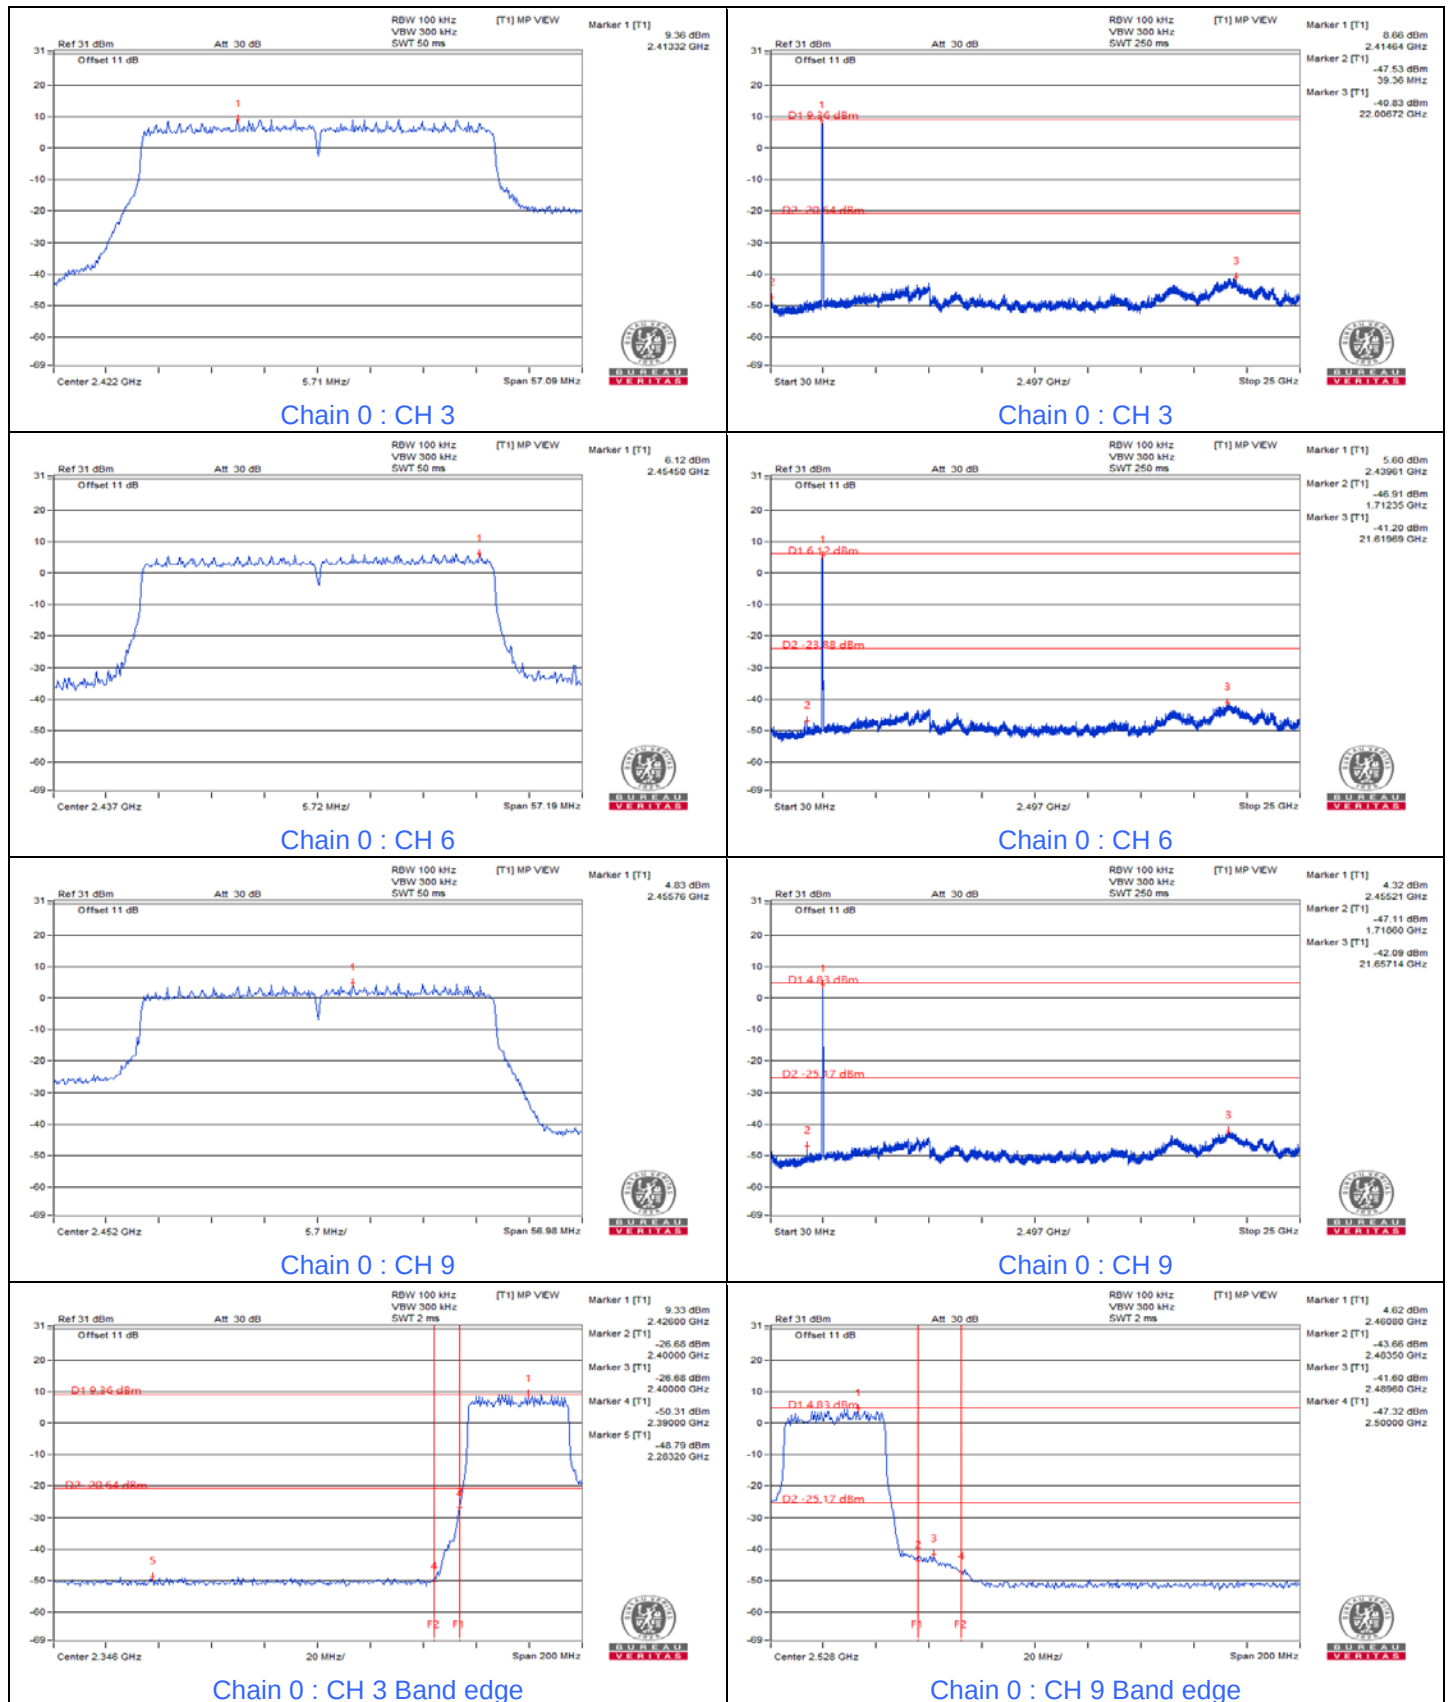

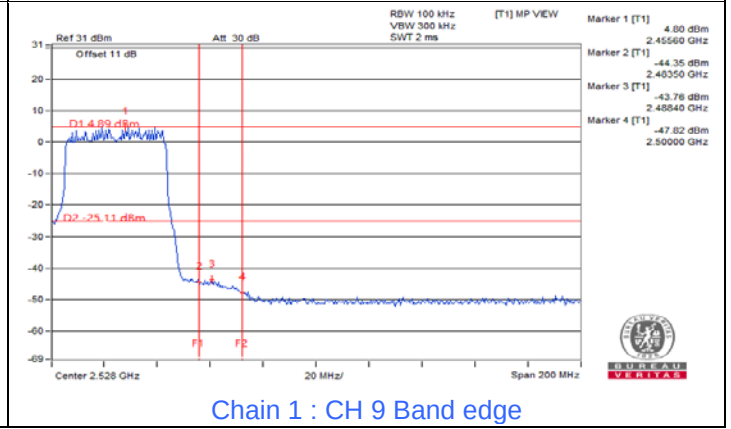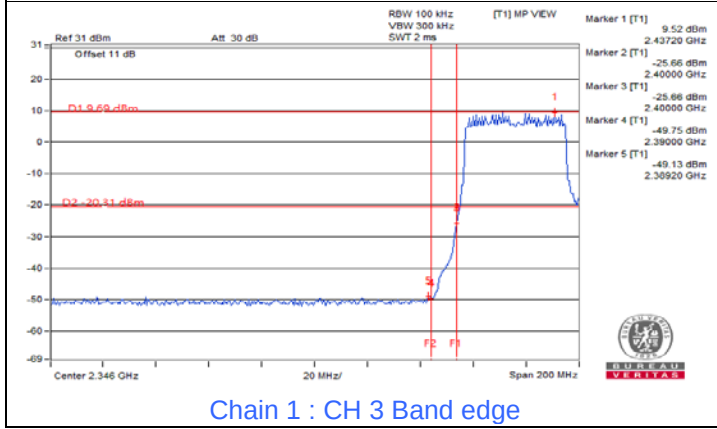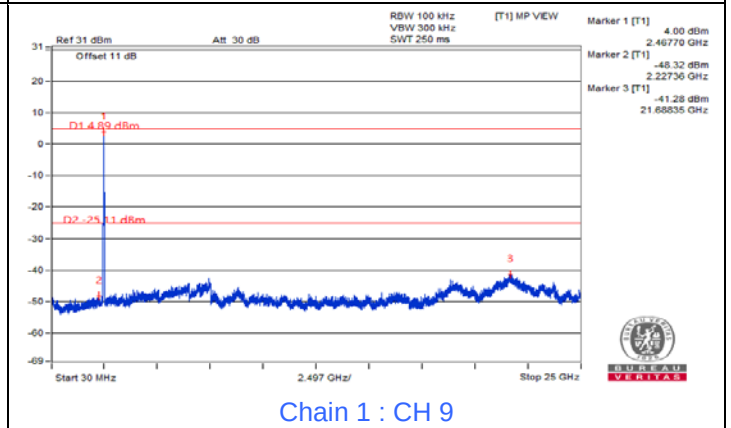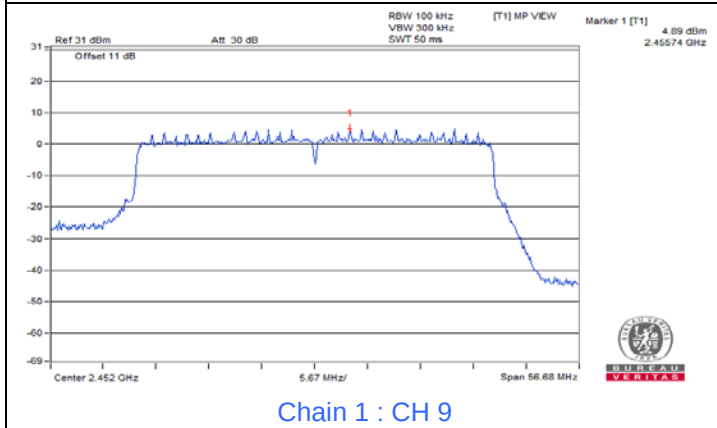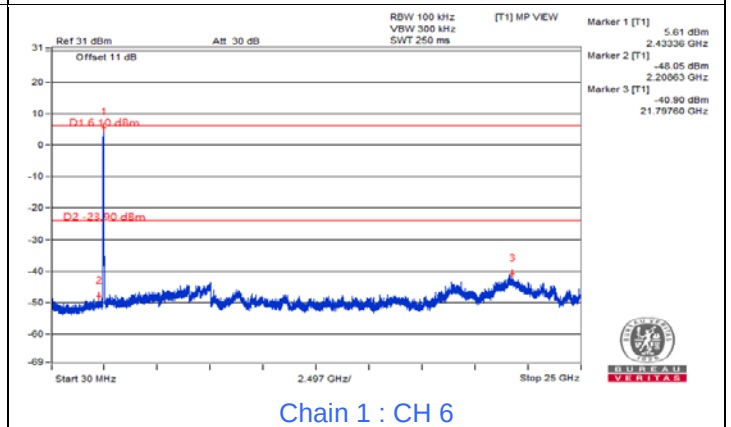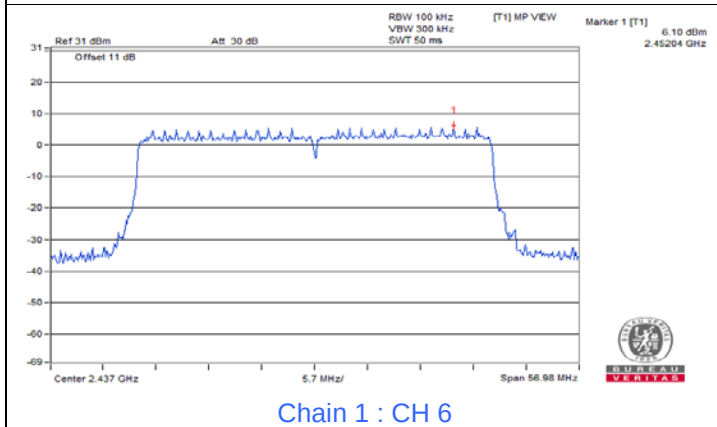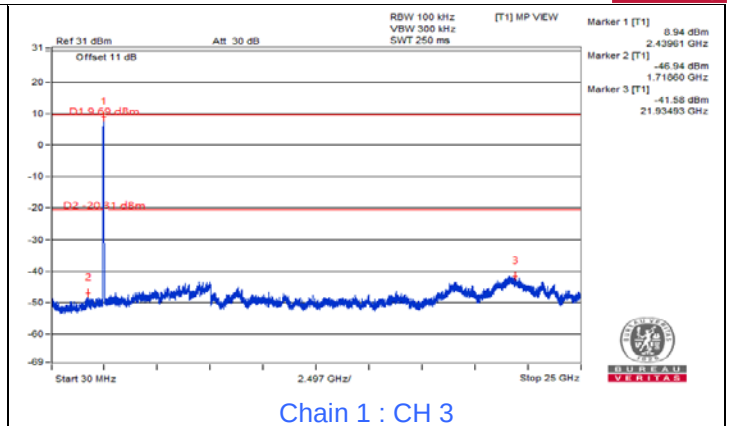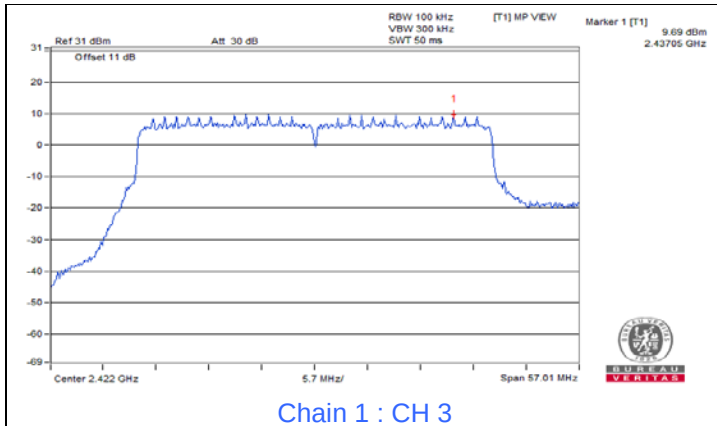


7.5 AC Power Conducted Emissions

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	9.72	30.99	16.26	40.71	25.98	65.16	55.16	-24.45	-29.18
2	0.18200	9.72	35.48	26.43	45.20	36.15	64.39	54.39	-19.19	-18.24
3	0.30600	9.78	28.52	18.88	38.30	28.66	60.08	50.08	-21.78	-21.42
4	1.48600	9.92	13.90	6.63	23.82	16.55	56.00	46.00	-32.18	-29.45
5	8.74600	10.12	10.24	4.05	20.36	14.17	60.00	50.00	-39.64	-35.83
6	14.73000	10.26	10.74	5.74	21.00	16.00	60.00	50.00	-39.00	-34.00

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

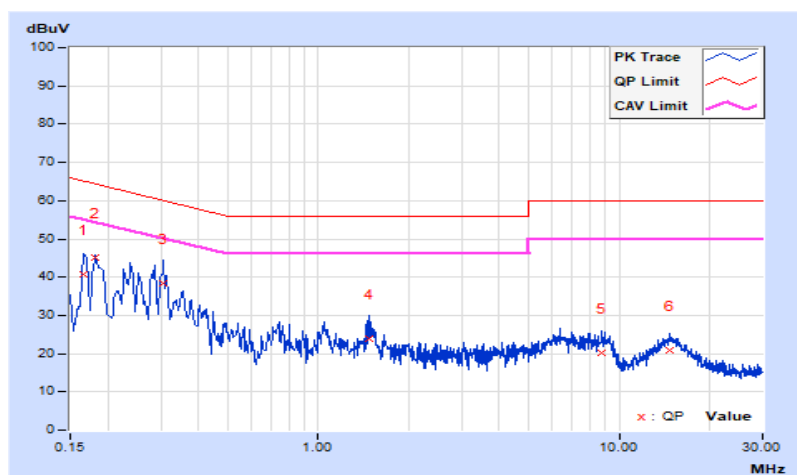


RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.69	33.24	19.51	42.93	29.20	65.78	55.78	-22.85	-26.58
2	0.17400	9.70	36.43	25.40	46.13	35.10	64.77	54.77	-18.64	-19.67
3	0.26200	9.76	32.55	28.44	42.31	38.20	61.37	51.37	-19.06	-13.17
4	0.54200	9.88	16.21	8.94	26.09	18.82	56.00	46.00	-29.91	-27.18
5	1.46200	9.95	13.23	5.38	23.18	15.33	56.00	46.00	-32.82	-30.67
6	13.97800	10.35	8.27	3.28	18.62	13.63	60.00	50.00	-41.38	-36.37

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

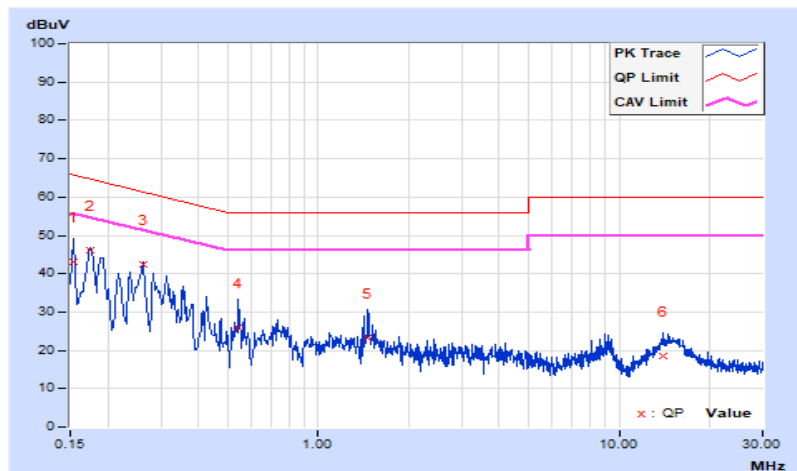


7.6 Unwanted Emissions below 1 GHz

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.76	25.6 QP	40.0	-14.4	1.00 H	236	35.2	-9.6
2	180.35	21.0 QP	43.5	-22.5	1.00 H	273	31.0	-10.0
3	304.51	24.5 QP	46.0	-21.5	1.00 H	11	31.9	-7.4
4	348.16	27.5 QP	46.0	-18.5	1.00 H	332	34.2	-6.7
5	481.05	27.2 QP	46.0	-18.8	1.00 H	183	31.3	-4.1
6	549.92	29.7 QP	46.0	-16.3	1.00 H	72	32.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

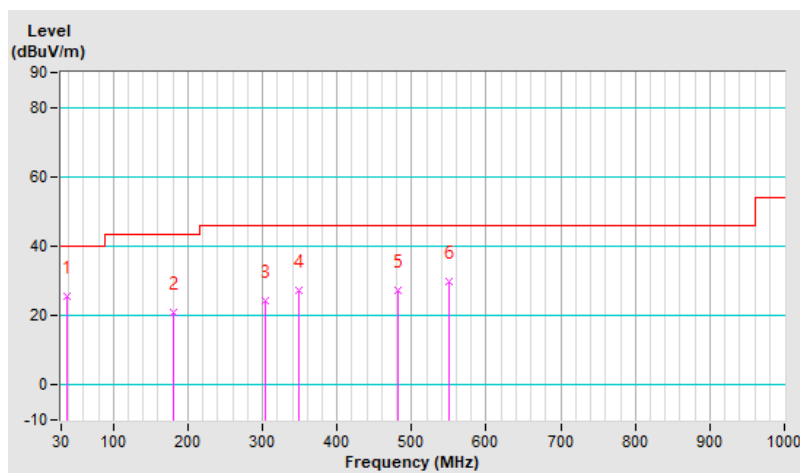


RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.31	33.4 QP	40.0	-6.6	1.00 V	293	42.0	-8.6
2	161.92	22.8 QP	43.5	-20.7	1.00 V	235	31.3	-8.5
3	353.01	25.6 QP	46.0	-20.4	1.50 V	39	32.3	-6.7
4	403.45	25.4 QP	46.0	-20.6	1.50 V	289	31.1	-5.7
5	593.57	30.1 QP	46.0	-15.9	1.00 V	3	31.7	-1.6
6	686.69	30.0 QP	46.0	-16.0	1.00 V	169	30.1	-0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

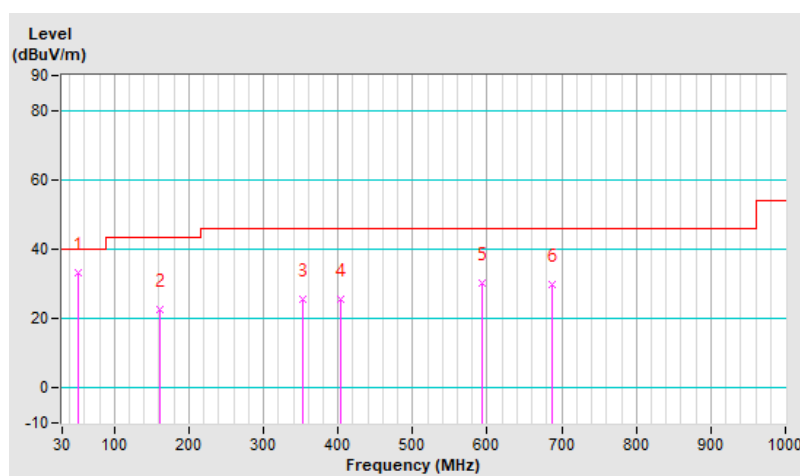

7.7 Unwanted Emissions above 1 GHz

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.8 PK	74.0	-14.2	2.58 H	133	24.9	34.9
2	2390.00	47.4 AV	54.0	-6.6	2.58 H	133	12.5	34.9
3	*2412.00	113.6 PK			2.58 H	133	78.6	35.0
4	*2412.00	111.1 AV			2.58 H	133	76.1	35.0
5	4824.00	51.0 PK	74.0	-23.0	1.89 H	221	37.5	13.5
6	4824.00	41.7 AV	54.0	-12.3	1.89 H	221	28.2	13.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.53 V	121	25.4	34.9
2	2390.00	47.7 AV	54.0	-6.3	1.53 V	121	12.8	34.9
3	*2412.00	119.2 PK			1.53 V	121	84.2	35.0
4	*2412.00	116.8 AV			1.53 V	121	81.8	35.0
5	4824.00	52.8 PK	74.0	-21.2	1.42 V	244	39.3	13.5
6	4824.00	44.9 AV	54.0	-9.1	1.42 V	244	31.4	13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.8 PK			2.53 H	142	78.8	35.0
2	*2437.00	111.4 AV			2.53 H	142	76.4	35.0
3	4874.00	50.7 PK	74.0	-23.3	1.89 H	220	37.0	13.7
4	4874.00	38.5 AV	54.0	-15.5	1.89 H	220	24.8	13.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	119.6 PK			1.61 V	116	84.6	35.0
2	*2437.00	117.2 AV			1.61 V	116	82.2	35.0
3	4874.00	51.2 PK	74.0	-22.8	1.35 V	248	37.5	13.7
4	4874.00	38.9 AV	54.0	-15.1	1.35 V	248	25.2	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.1 PK			2.42 H	143	77.9	35.2
2	*2462.00	110.8 AV			2.42 H	143	75.6	35.2
3	2483.50	63.1 PK	74.0	-10.9	2.42 H	143	28.0	35.1
4	2483.50	52.0 AV	54.0	-2.0	2.42 H	143	16.9	35.1
5	4924.00	50.4 PK	74.0	-23.6	1.85 H	229	36.8	13.6
6	4924.00	38.2 AV	54.0	-15.8	1.85 H	229	24.6	13.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.2 PK			1.35 V	181	83.0	35.2
2	*2462.00	115.6 AV			1.35 V	181	80.4	35.2
3	2483.50	64.4 PK	74.0	-9.6	1.35 V	181	29.3	35.1
4	2483.50	53.9 AV	54.0	-0.1	1.35 V	181	18.8	35.1
5	4924.00	50.8 PK	74.0	-23.2	1.45 V	249	37.2	13.6
6	4924.00	38.7 AV	54.0	-15.3	1.45 V	249	25.1	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	2.38 H	206	25.8	34.9
2	2390.00	47.7 AV	54.0	-6.3	2.38 H	206	12.8	34.9
3	*2412.00	114.3 PK			2.38 H	206	79.3	35.0
4	*2412.00	105.0 AV			2.38 H	206	70.0	35.0
5	4824.00	50.6 PK	74.0	-23.4	1.88 H	224	37.1	13.5
6	4824.00	38.1 AV	54.0	-15.9	1.88 H	224	24.6	13.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.1 PK	74.0	-10.9	1.54 V	306	28.2	34.9
2	2390.00	50.9 AV	54.0	-3.1	1.54 V	306	16.0	34.9
3	*2412.00	120.0 PK			1.54 V	306	85.0	35.0
4	*2412.00	110.1 AV			1.54 V	306	75.1	35.0
5	4824.00	51.0 PK	74.0	-23.0	1.42 V	242	37.5	13.5
6	4824.00	38.5 AV	54.0	-15.5	1.42 V	242	25.0	13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.0 PK			2.35 H	216	79.0	35.0
2	*2437.00	104.2 AV			2.35 H	216	69.2	35.0
3	2483.50	68.1 PK	74.0	-5.9	2.35 H	216	33.0	35.1
4	2483.50	51.0 AV	54.0	-3.0	2.35 H	216	15.9	35.1
5	4874.00	50.5 PK	74.0	-23.5	1.95 H	228	36.8	13.7
6	4874.00	38.2 AV	54.0	-15.8	1.95 H	228	24.5	13.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	120.5 PK			1.52 V	308	85.5	35.0
2	*2437.00	110.1 AV			1.52 V	308	75.1	35.0
3	2483.50	73.5 PK	74.0	-0.5	1.52 V	308	38.4	35.1
4	2483.50	53.6 AV	54.0	-0.4	1.52 V	308	18.5	35.1
5	4874.00	50.9 PK	74.0	-23.1	1.49 V	246	37.2	13.7
6	4874.00	38.6 AV	54.0	-15.4	1.49 V	246	24.9	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.8 PK			2.34 H	212	75.6	35.2
2	*2462.00	101.3 AV			2.34 H	212	66.1	35.2
3	2483.50	68.3 PK	74.0	-5.7	2.34 H	212	33.2	35.1
4	2483.50	52.8 AV	54.0	-1.2	2.34 H	212	17.7	35.1
5	4924.00	50.3 PK	74.0	-23.7	1.99 H	228	36.7	13.6
6	4924.00	38.1 AV	54.0	-15.9	1.99 H	228	24.5	13.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.3 PK			1.39 V	312	82.1	35.2
2	*2462.00	107.2 AV			1.39 V	312	72.0	35.2
3	2485.90	70.7 PK	74.0	-3.3	1.39 V	312	35.6	35.1
4	2485.90	53.9 AV	54.0	-0.1	1.39 V	312	18.8	35.1
5	4924.00	50.7 PK	74.0	-23.3	1.42 V	241	37.1	13.6
6	4924.00	38.4 AV	54.0	-15.6	1.42 V	241	24.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.9 PK	74.0	-13.1	1.97 H	197	26.0	34.9
2	2390.00	48.9 AV	54.0	-5.1	1.97 H	197	14.0	34.9
3	*2412.00	116.2 PK			1.97 H	197	81.2	35.0
4	*2412.00	104.0 AV			1.97 H	197	69.0	35.0
5	4824.00	50.2 PK	74.0	-23.8	1.92 H	221	36.7	13.5
6	4824.00	38.2 AV	54.0	-15.8	1.92 H	221	24.7	13.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.49 V	312	27.6	34.9
2	2390.00	50.0 AV	54.0	-4.0	1.49 V	312	15.1	34.9
3	*2412.00	122.0 PK			1.49 V	312	87.0	35.0
4	*2412.00	109.7 AV			1.49 V	312	74.7	35.0
5	4824.00	50.7 PK	74.0	-23.3	1.52 V	249	37.2	13.5
6	4824.00	38.6 AV	54.0	-15.4	1.52 V	249	25.1	13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.8 PK			2.51 H	151	79.8	35.0
2	*2437.00	101.7 AV			2.51 H	151	66.7	35.0
3	2483.50	65.1 PK	74.0	-8.9	2.51 H	151	30.0	35.1
4	2483.50	51.5 AV	54.0	-2.5	2.51 H	151	16.4	35.1
5	4874.00	50.2 PK	74.0	-23.8	1.92 H	239	36.5	13.7
6	4874.00	38.2 AV	54.0	-15.8	1.92 H	239	24.5	13.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.4 PK			1.52 V	242	86.4	35.0
2	*2437.00	108.9 AV			1.52 V	242	73.9	35.0
3	2483.90	68.1 PK	74.0	-5.9	1.52 V	342	33.0	35.1
4	2483.90	53.8 AV	54.0	-0.2	1.52 V	342	18.7	35.1
5	4874.00	50.7 PK	74.0	-23.3	1.52 V	242	37.0	13.7
6	4874.00	38.5 AV	54.0	-15.5	1.52 V	242	24.8	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.0 PK			2.39 H	137	75.8	35.2
2	*2462.00	100.1 AV			2.39 H	137	64.9	35.2
3	2483.50	61.7 PK	74.0	-12.3	2.39 H	137	26.6	35.1
4	2483.50	50.7 AV	54.0	-3.3	2.39 H	137	15.6	35.1
5	4924.00	50.3 PK	74.0	-23.7	1.82 H	225	36.7	13.6
6	4924.00	38.0 AV	54.0	-16.0	1.82 H	225	24.4	13.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.9 PK			1.37 V	310	82.7	35.2
2	*2462.00	105.3 AV			1.37 V	310	70.1	35.2
3	2484.10	65.8 PK	74.0	-8.2	1.37 V	310	30.7	35.1
4	2484.10	53.9 AV	54.0	-0.1	1.37 V	310	18.8	35.1
5	4924.00	50.6 PK	74.0	-23.4	1.45 V	249	37.0	13.6
6	4924.00	38.4 AV	54.0	-15.6	1.45 V	249	24.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	2.28 H	138	25.8	34.9
2	2390.00	47.4 AV	54.0	-6.6	2.28 H	138	12.5	34.9
3	*2422.00	111.4 PK			2.28 H	138	76.4	35.0
4	*2422.00	99.0 AV			2.28 H	138	64.0	35.0
5	2483.50	63.1 PK	74.0	-10.9	2.28 H	138	28.0	35.1
6	2483.50	51.6 AV	54.0	-2.4	2.28 H	138	16.5	35.1
7	4844.00	50.3 PK	74.0	-23.7	1.89 H	231	36.7	13.6
8	4844.00	38.1 AV	54.0	-15.9	1.89 H	231	24.5	13.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.4 PK	74.0	-12.6	1.41 V	314	26.5	34.9
2	2390.00	48.6 AV	54.0	-5.4	1.41 V	314	13.7	34.9
3	*2422.00	118.3 PK			1.41 V	314	83.3	35.0
4	*2422.00	105.8 AV			1.41 V	314	70.8	35.0
5	2483.50	68.1 PK	74.0	-5.9	1.41 V	314	33.0	35.1
6	2483.50	53.9 AV	54.0	-0.1	1.41 V	314	18.8	35.1
7	4844.00	50.6 PK	74.0	-23.4	1.52 V	245	37.0	13.6
8	4844.00	38.4 AV	54.0	-15.6	1.52 V	245	24.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.2 PK			2.19 H	137	72.2	35.0
2	*2437.00	94.7 AV			2.19 H	137	59.7	35.0
3	2483.50	63.6 PK	74.0	-10.4	2.19 H	137	28.5	35.1
4	2483.50	51.0 AV	54.0	-3.0	2.19 H	137	15.9	35.1
5	4874.00	50.4 PK	74.0	-23.6	2.15 H	185	36.7	13.7
6	4874.00	38.0 AV	54.0	-16.0	2.15 H	185	24.3	13.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.7 PK			1.28 V	309	80.7	35.0
2	*2437.00	102.3 AV			1.28 V	309	67.3	35.0
3	2483.90	72.1 PK	74.0	-1.9	1.28 V	309	37.0	35.1
4	2483.90	53.9 AV	54.0	-0.1	1.28 V	309	18.8	35.1
5	4874.00	50.7 PK	74.0	-23.3	1.52 V	242	37.0	13.7
6	4874.00	38.3 AV	54.0	-15.7	1.52 V	242	24.6	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	107.6 PK			2.38 H	136	72.4	35.2
2	*2452.00	95.4 AV			2.38 H	136	60.2	35.2
3	2483.50	62.1 PK	74.0	-11.9	2.38 H	136	27.0	35.1
4	2483.50	50.1 AV	54.0	-3.9	2.38 H	136	15.0	35.1
5	4904.00	50.6 PK	74.0	-23.4	2.25 H	192	36.8	13.8
6	4904.00	38.2 AV	54.0	-15.8	2.25 H	192	24.4	13.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	115.0 PK			1.30 V	311	79.8	35.2
2	*2452.00	102.1 AV			1.30 V	311	66.9	35.2
3	2483.50	65.3 PK	74.0	-8.7	1.30 V	311	30.2	35.1
4	2483.50	53.9 AV	54.0	-0.1	1.30 V	311	18.8	35.1
5	4904.00	51.0 PK	74.0	-23.0	1.48 V	245	37.2	13.8
6	4904.00	38.5 AV	54.0	-15.5	1.48 V	245	24.7	13.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------------	-------------------------------	--

802.11b Channel 1

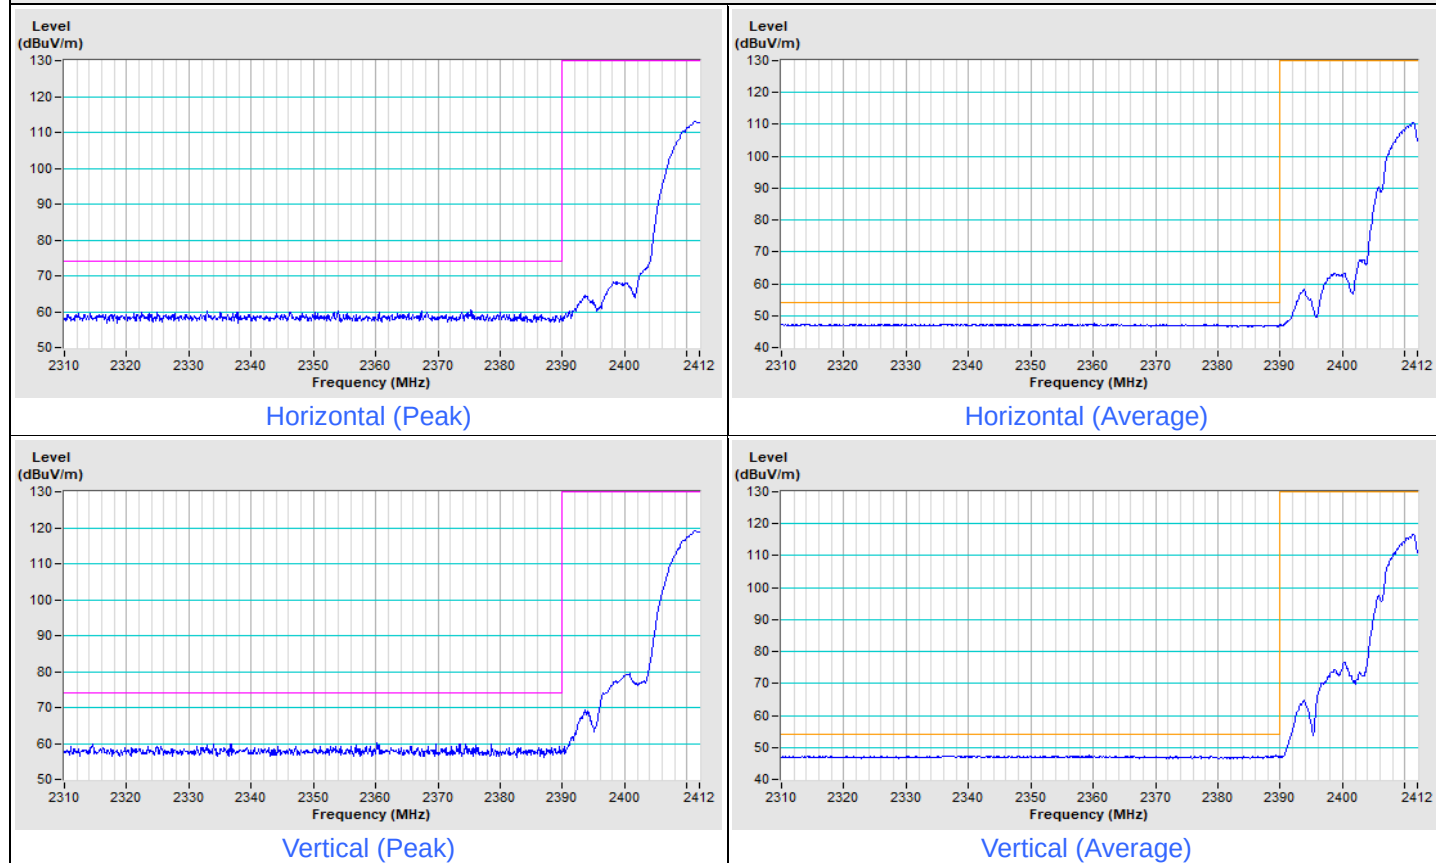


Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11b Channel 11

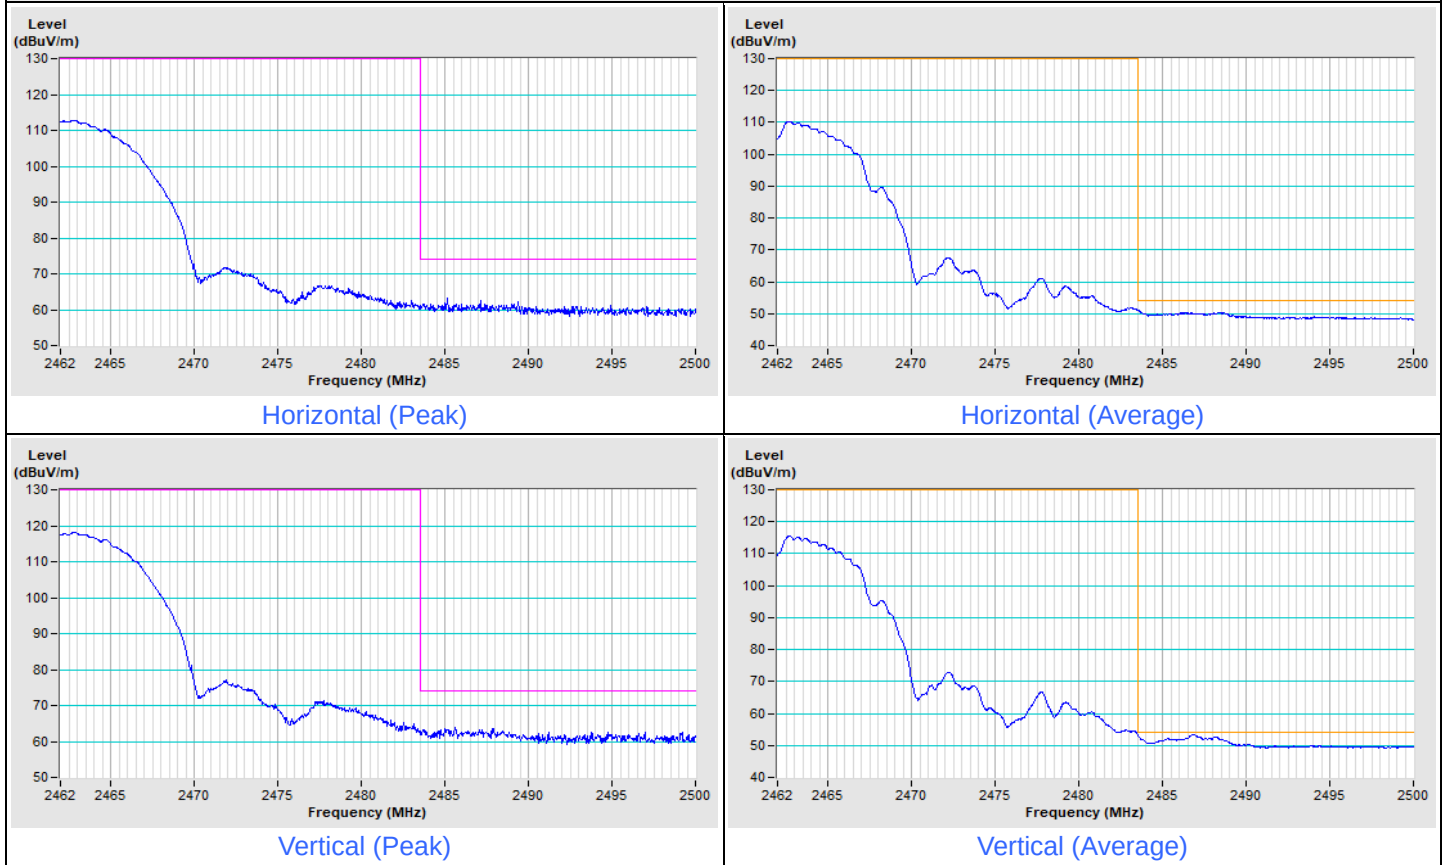


Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------------	-------------------------------	--

802.11g Channel 1

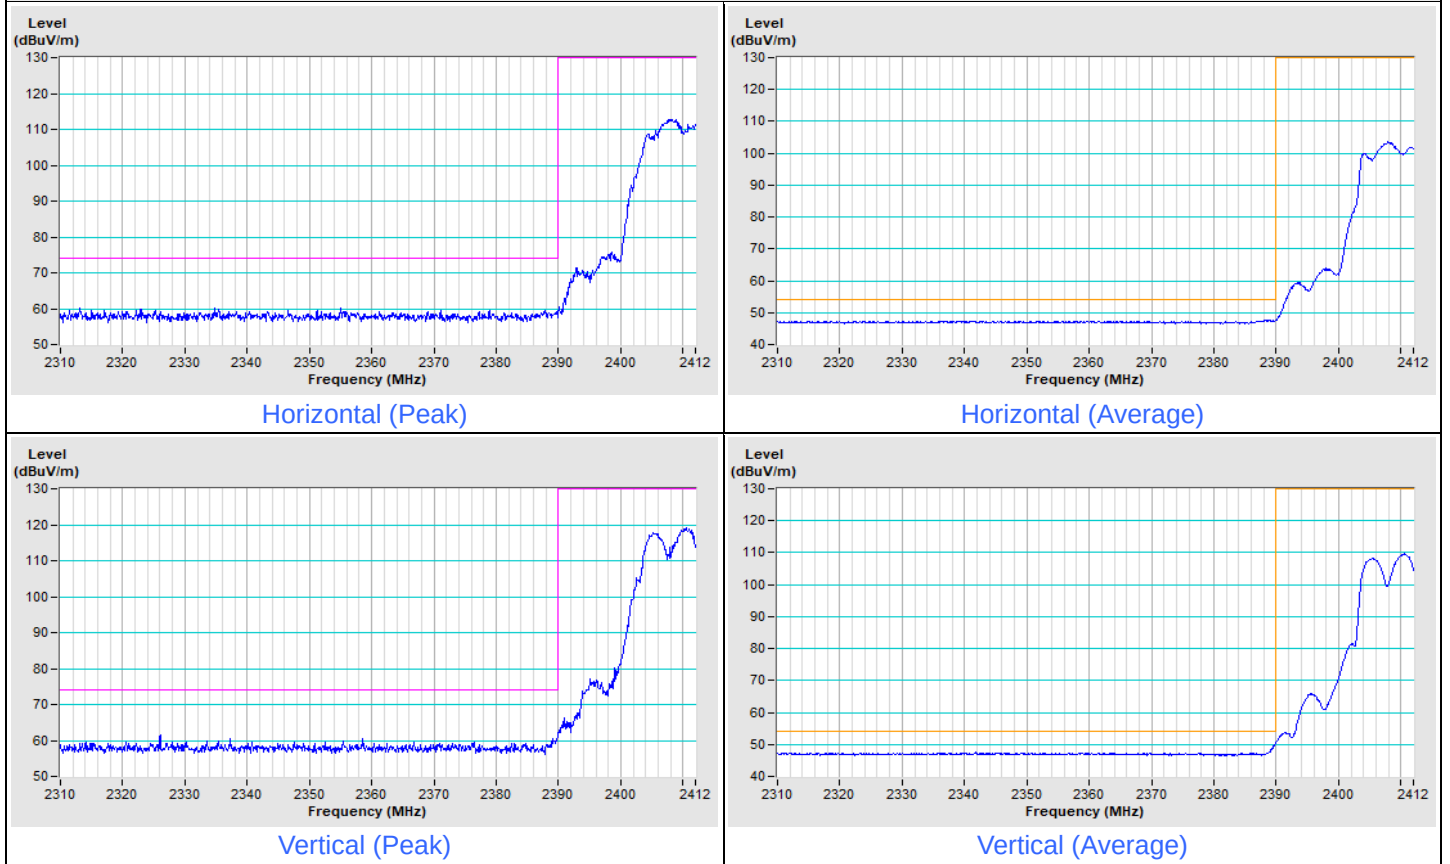


Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11g Channel 11

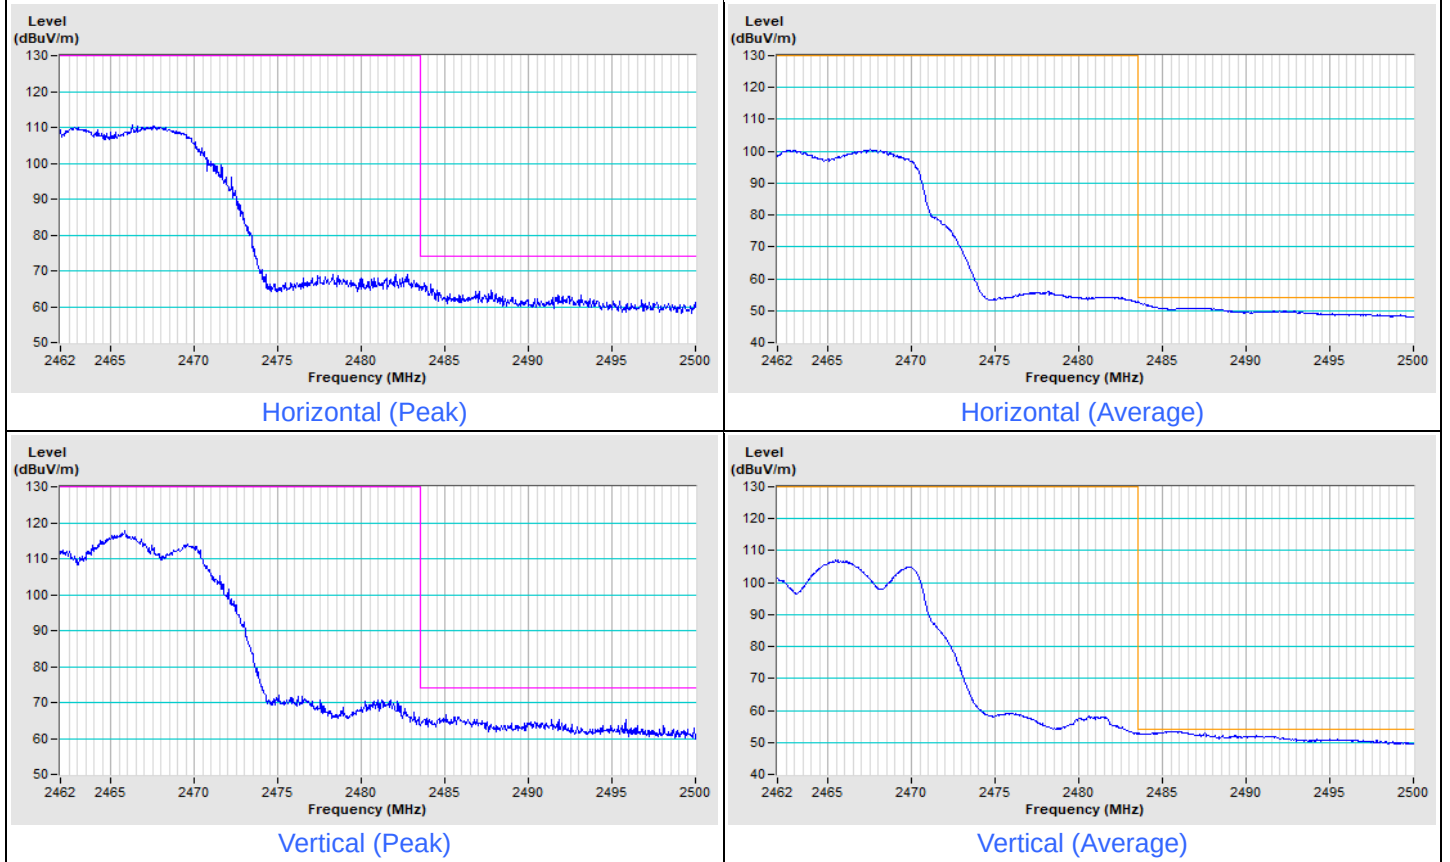


Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------------	-------------------------------	--


802.11be (EHT20) Channel 1

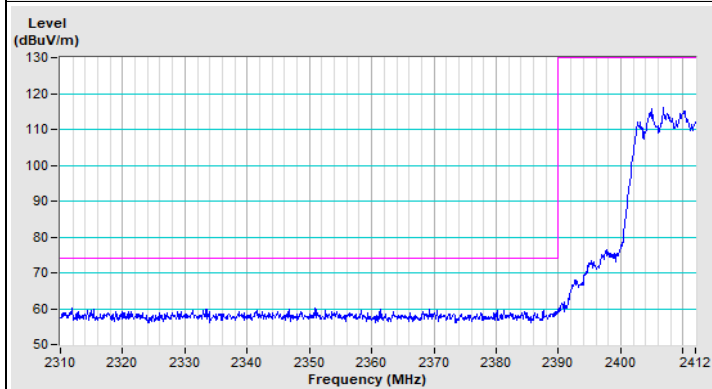


Horizontal (Peak)

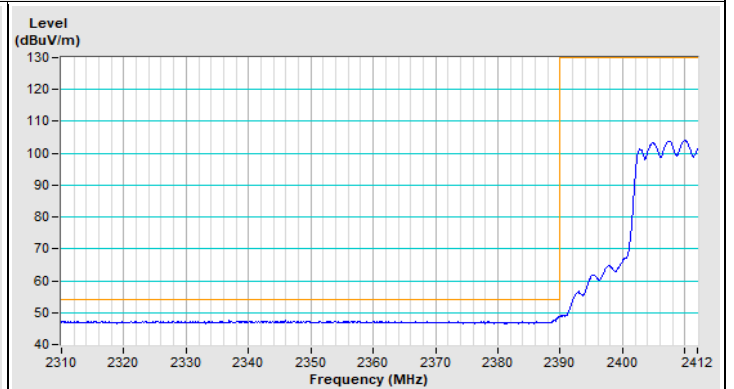

Horizontal (Average)

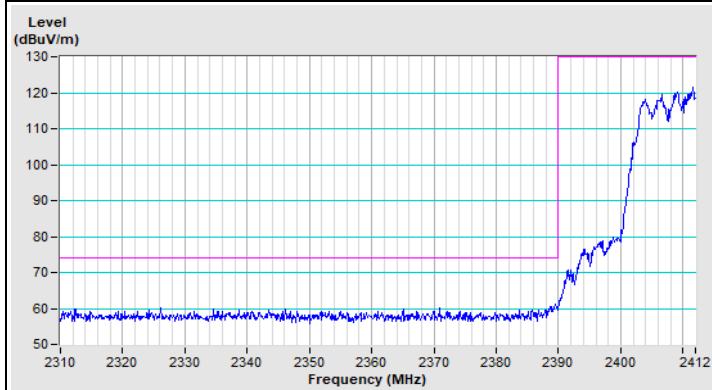


Vertical (Peak)

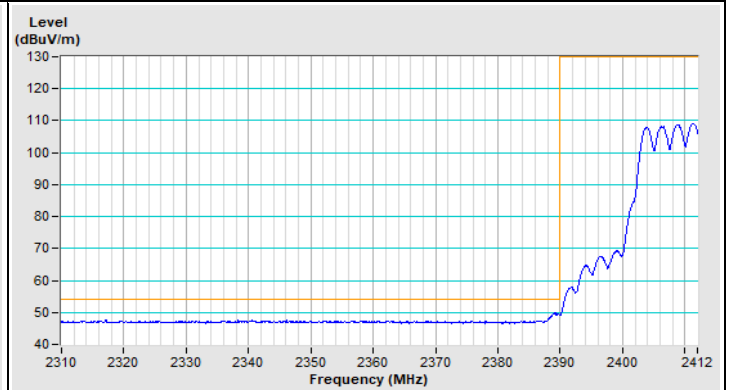

Vertical (Average)


Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 11

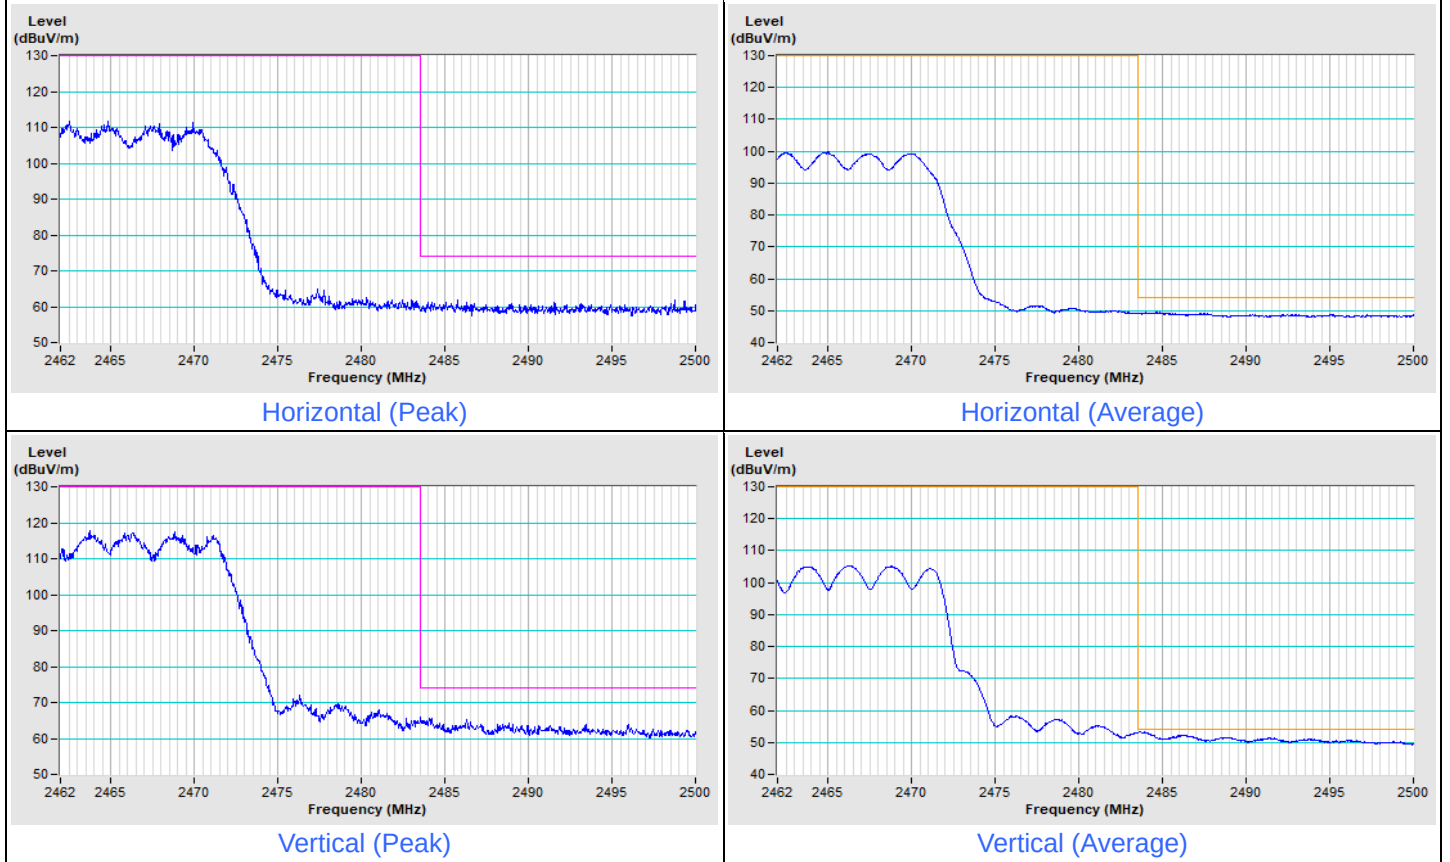


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT40) Channel 3

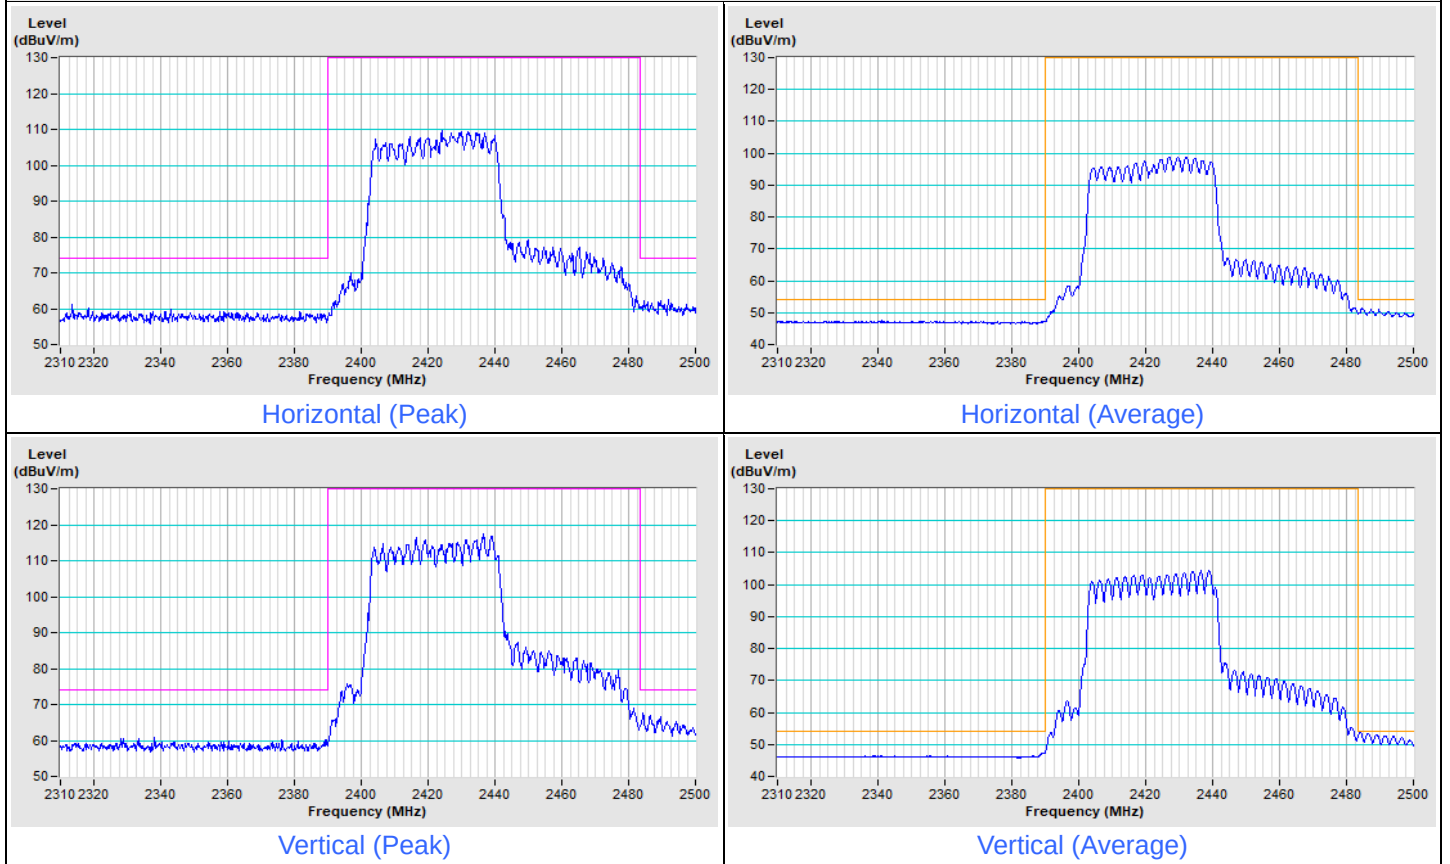

Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 9

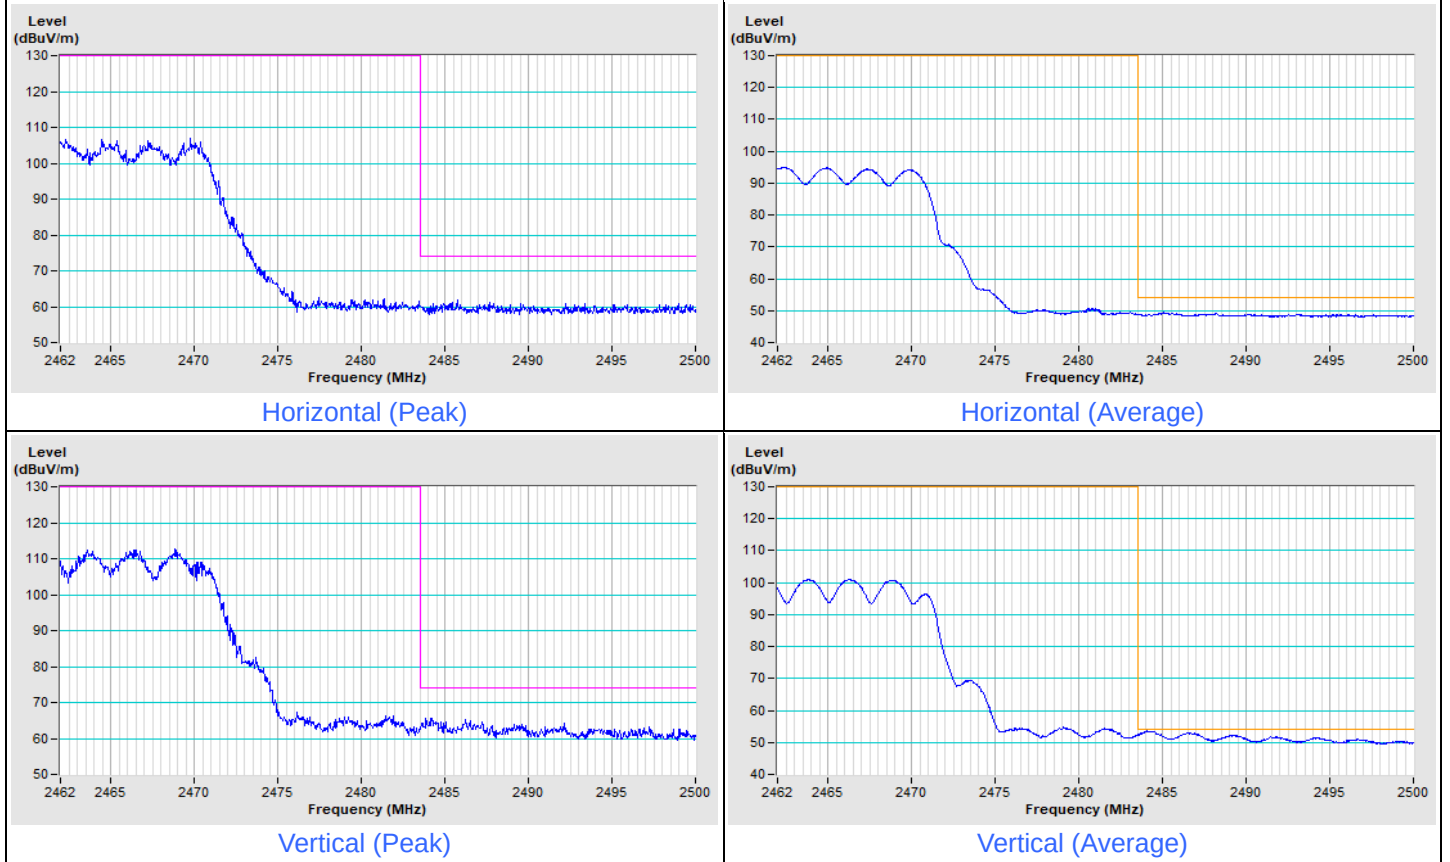

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---