

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Report No.: RFBBQZ-WTW-P24030292-2
FCC ID: PY324100618
Product: Nighthawk 5G Mobile Router
Brand: NETGEAR
Model No.: MR7400
Received Date: 2024/3/18
Test Date: 2024/3/28 ~ 2024/4/25
Issued Date: 2024/7/1

Applicant and Manufacturer: NETGEAR, INC.

Address: 350 East Plumeria Drive San Jose CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration /

Designation Number: 788550 / TW0003

Approved by: Jeremy Lin, **Date:** 2024/7/1
Jeremy Lin / Project Engineer

This test report consists of 53 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Pettie Chen / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us-our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Channel List	9
3.4 Test Mode Applicability and Tested Channel Detail	10
3.5 Duty Cycle of Test Signal	11
3.6 Test Program Used and Operation Descriptions	13
3.7 Connection Diagram of EUT and Peripheral Devices	13
3.8 Configuration of Peripheral Devices and Cable Connections	13
4 Test Instruments	14
4.1 RF Output Power	14
4.2 Power Spectral Density	14
4.3 6 dB Bandwidth	14
4.4 Frequency Stability	14
4.5 AC Power Conducted Emissions	15
4.6 Unwanted Emissions below 1 GHz	16
4.7 Unwanted Emissions above 1 GHz	17
5 Limits of Test Items	18
5.1 RF Output Power	18
5.2 Power Spectral Density	18
5.3 6 dB Bandwidth	18
5.4 Frequency Stability	18
5.5 AC Power Conducted Emissions	18
5.6 Unwanted Emissions below 1 GHz	19
5.7 Unwanted Emissions above 1 GHz	19
6 Test Arrangements	20
6.1 RF Output Power	20
6.1.1 Test Setup	20
6.1.2 Test Procedure	20
6.2 Power Spectral Density	20
6.2.1 Test Setup	20
6.2.2 Test Procedure	20
6.3 6 dB Bandwidth	20
6.3.1 Test Setup	20
6.3.2 Test Procedure	20
6.4 Frequency Stability	21
6.4.1 Test Setup	21
6.4.2 Test Procedure	21
6.5 AC Power Conducted Emissions	22
6.5.1 Test Setup	22
6.5.2 Test Procedure	22
6.6 Unwanted Emissions below 1 GHz	23
6.6.1 Test Setup	23
6.6.2 Test Procedure	24
6.7 Unwanted Emissions above 1 GHz	25
6.7.1 Test Setup	25
6.7.2 Test Procedure	25
7 Test Results of Test Item	26



7.1	RF Output Power.....	26
7.2	Power Spectral Density.....	28
7.3	6 dB Bandwidth.....	31
7.4	Frequency Stability.....	33
7.5	AC Power Conducted Emissions.....	34
7.6	Unwanted Emissions below 1 GHz.....	36
7.7	Unwanted Emissions above 1 GHz.....	38
8	Pictures of Test Arrangements.....	52
9	Information of the Testing Laboratories.....	53



Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P24030292-2	Original release.	2024/7/1

1 Certificate

Product: Nighthawk 5G Mobile Router

Brand: NETGEAR

Test Model: MR7400

Sample Status: Engineering sample

Applicant and Manufacturer: NETGEAR, INC.

Test Date: 2024/3/28 ~ 2024/4/25

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: ANSI C63.10-2013

KDB 291074 D02 EMC Measurement v01

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -20.81 dB at 0.47800 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -4.5 dB at 38.73 MHz
15.407(b)(5) 15.407(b)(10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -4.5 dB at 11690.00 MHz
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
6 dB Bandwidth	-	206.5 Hz
Frequency Stability	-	0.176 ppm
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.88 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1 GHz	3.64 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Nighthawk 5G Mobile Router
Brand	NETGEAR
Test Model	MR7400
Status of EUT	Engineering sample
Power Supply Rating	3.85Vdc from battery 5Vdc or 9Vdc or 12Vdc from adapter
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode 1024QAM for OFDMA in 11ax HE mode 4096QAM for OFDMA in 11be EHT mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	Up to 2882.4 Mbps
Operating Frequency	5.815 GHz ~ 5.885 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20): 3 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40): 2 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80): 1 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160): 1
Output Power	EIRP: 30.341 mW (14.82 dBm)

Note:

1. The EUT uses following accessories.

AC Adapter 1			
Brand	Model	Part Number	Specification
NETGEAR	2AFH0183AA	332-11642-01	AC Input : 100-240Vac, 50/60Hz, 0.5A DC Output : 5.0V, 3.0A, 15.0W 9.0V, 2.0A, 18.0W 12.0V, 1.5A, 18.0W DC Output Cable : N/A Plug : US Manufacturer : CWT
AC Adapter 2			
Brand	Model	Part Number	Specification
NETGEAR	AD2122F20	332-11106-03	AC Input : 100-240V, 50/60Hz, 0.5A DC Output : 5V, 2.0A 9V, 1.8A DC Output Cable : N/A Plug : US Manufacturer : PIE
Battery			
Brand	Model	Part Number	Specification
NETGEAR	W-20b	308-10100-01	Power Rating : 3.85Vdc, 19.96Wh
USB Cable 1			
Brand	Model	Specification	
HORTON	D0017100R37HR	Signal Line : 1m	
USB Cable 2			
Brand	Model	Specification	
LUXSHARE PRECISION INDUSTRY	LZZUC052-CS-H	Signal Line : 1m	

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	Gain (dBi)	Antenna Type	Connector Type
	5800 MHz		
ANT 5	1.36	Monopole	NA
ANT 6	1.89	PIFA	NA

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ac (VHT160)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
802.11ax (HE160)	2TX	2RX
802.11be (EHT20)	2TX	2RX
802.11be (EHT40)	2TX	2RX
802.11be (EHT80)	2TX	2RX
802.11be (EHT160)	2TX	2RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz, 80 MHz, 160 MHz), 802.11ax mode for 20 MHz (40 MHz, 80 MHz, 160 MHz) and 802.11be mode for 20 MHz (40 MHz, 80 MHz, 160 MHz) therefore the manufacturer will control the power for 802.11n/ac/ax mode is same as the 802.11be mode or lower than it and investigated worst case to representative mode in test report.

3.3 Channel List

3 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
*169	5845 MHz	173	5865 MHz	177	5885 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
*167	5835 MHz	175	5875 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
*171	5855 MHz

1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
*163	5815 MHz

Note: * U-NII-3 & -4 span channels.

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	<ol style="list-style-type: none"> The final test modes consider the modulation and the worst data rates as shown in the table below. EUT supports AP mode and client mode. The same output power level is used on the two modes. Due to the limit of the client mode is more restrictive than the AP mode, the client mode test data also shows the compliance of the AP mode. Therefore, this report only shows the test data of client mode. For AP mode is available only when the device is powered by AC adapter connected to AC mains, also illustrated in the user manual. For Unwanted Emission (below 1GHz) items: Battery/AC Adapter/USB Cable. Pre-scan these modes and find the worst case as a representative test condition. EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition.
Worst Case:	<ol style="list-style-type: none"> AC Adapter 1 + USB Cable 1 Z-Axis

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	802.11a	169, 173, 177	BPSK	6Mb/s
	802.11be (EHT20)	169, 173, 177	BPSK	MCS0
	802.11be (EHT40)	167, 175	BPSK	MCS0
	802.11be (EHT80)	171	BPSK	MCS0
	802.11be (EHT160)	163	BPSK	MCS0
Power Spectral Density	802.11a	169, 173, 177	BPSK	6Mb/s
	802.11be (EHT20)	169, 173, 177	BPSK	MCS0
	802.11be (EHT40)	167, 175	BPSK	MCS0
	802.11be (EHT80)	171	BPSK	MCS0
	802.11be (EHT160)	163	BPSK	MCS0
6 dB Bandwidth	802.11a	169, 173, 177	BPSK	6Mb/s
	802.11be (EHT20)	169, 173, 177	BPSK	MCS0
	802.11be (EHT40)	167, 175	BPSK	MCS0
	802.11be (EHT80)	171	BPSK	MCS0
	802.11be (EHT160)	163	BPSK	MCS0
Frequency Stability	802.11a	169	unmodulated	-
AC Power Conducted Emissions	802.11be (EHT160)	163	BPSK	MCS0
Unwanted Emissions below 1 GHz	802.11be (EHT160)	163	BPSK	MCS0
Unwanted Emissions above 1 GHz	802.11a	169, 173, 177	BPSK	6Mb/s
	802.11be (EHT20)	169, 173, 177	BPSK	MCS0
	802.11be (EHT40)	167, 175	BPSK	MCS0
	802.11be (EHT80)	171	BPSK	MCS0
	802.11be (EHT160)	163	BPSK	MCS0
EUT Configure Mode:	Adapter 1+USB Cable 1			
Note: EUT not support Tone RU				

3.5 Duty Cycle of Test Signal


802.11a: Duty cycle = 2.1 ms / 2.11 ms x 100% = 99.5%

802.11be (EHT20): Duty cycle = 100 ms / 100 ms x 100% = 100.0%


802.11be (EHT40): Duty cycle = 100 ms / 100 ms x 100% = 100.0%

802.11be (EHT80): Duty cycle = 100 ms / 100 ms x 100% = 100.0%


802.11be (EHT160): Duty cycle = 100 ms / 100 ms x 100% = 100.0%

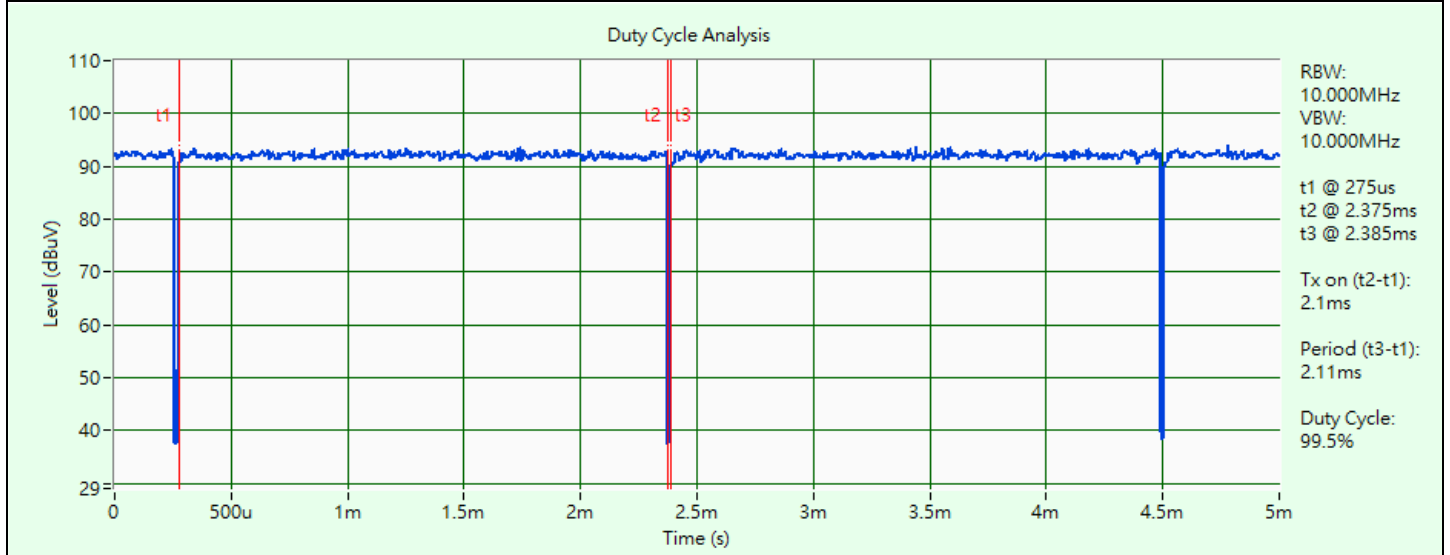


802.11a

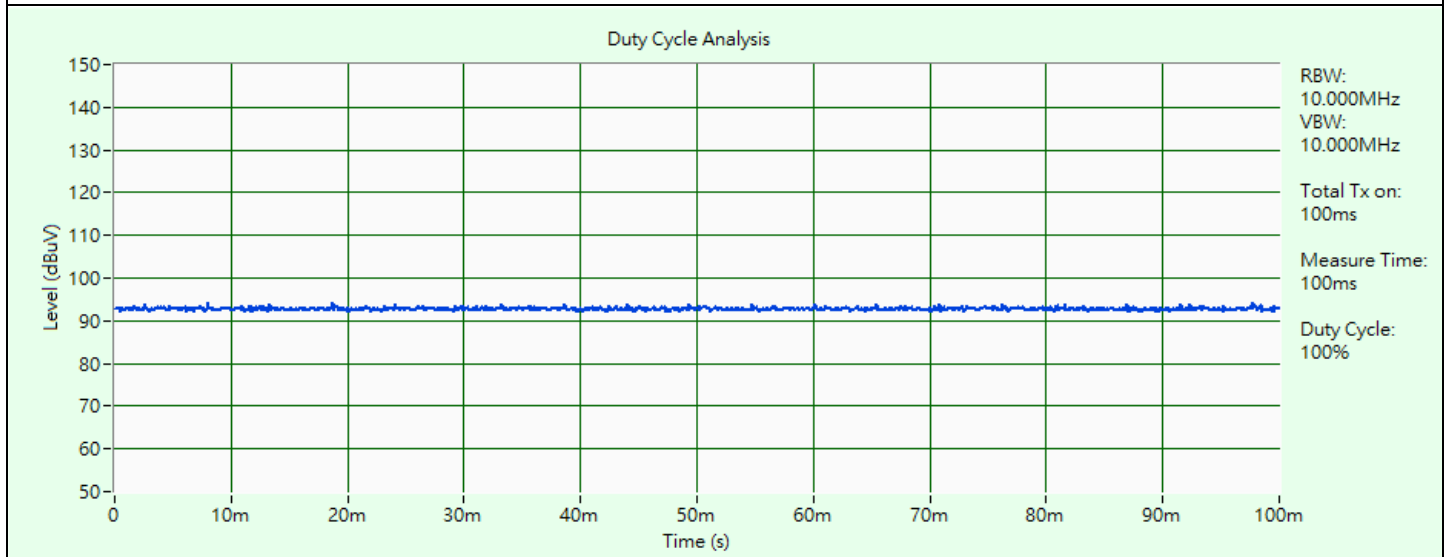


802.11be (EHT20)

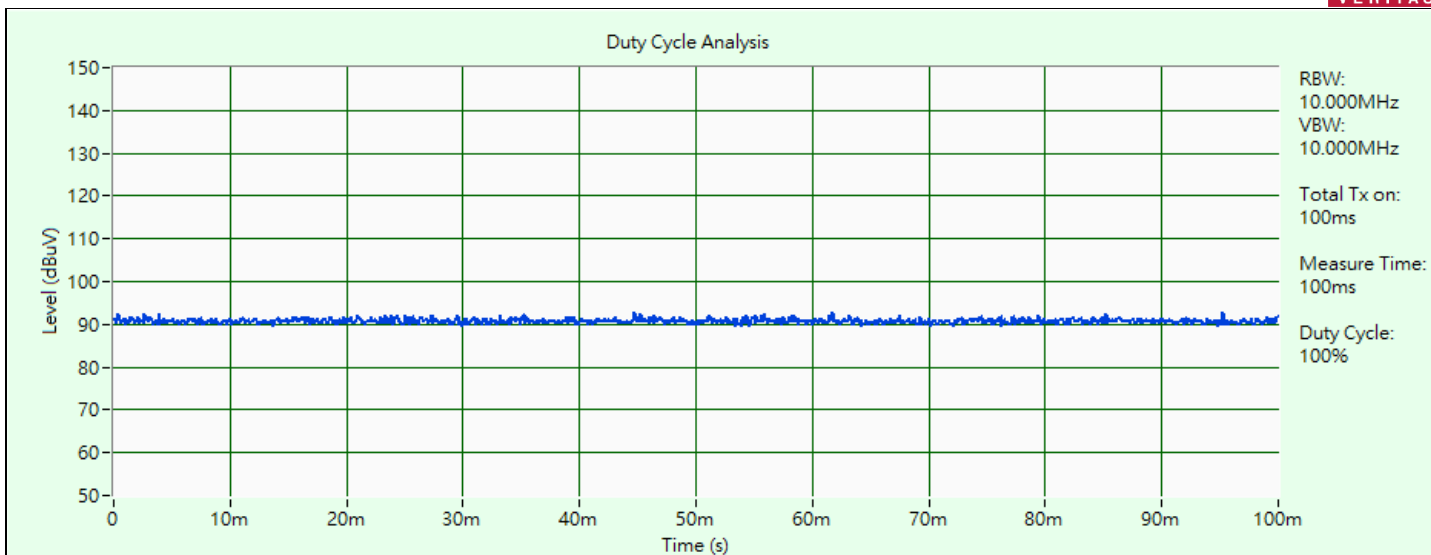

802.11be (EHT40)

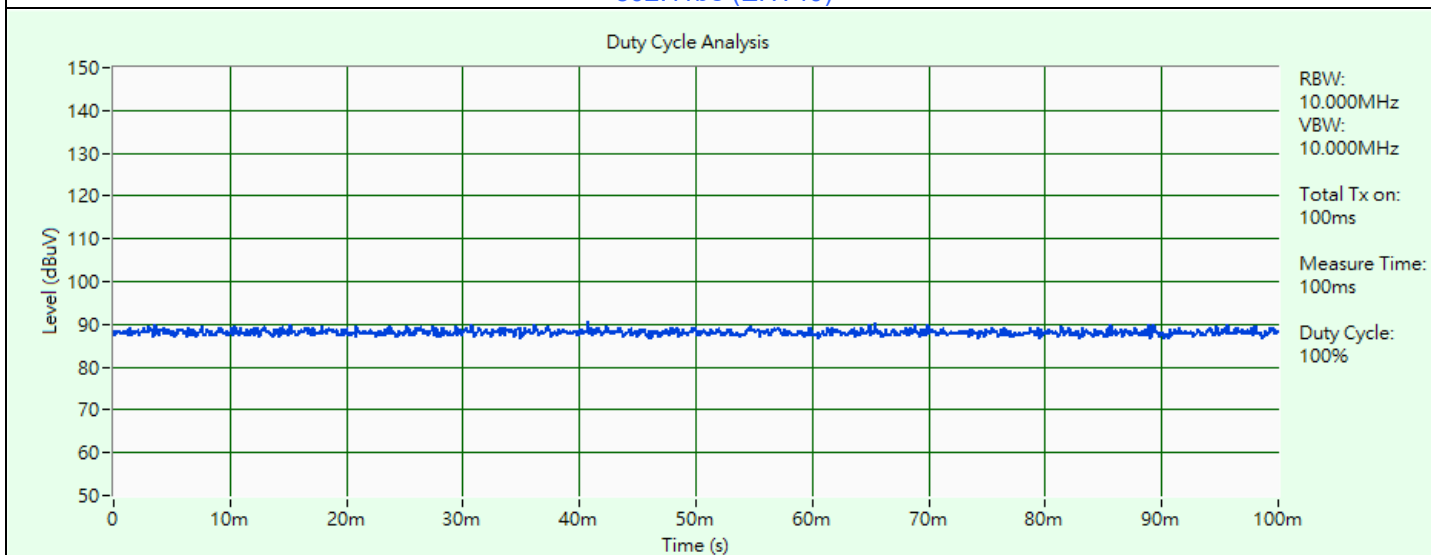

802.11be (EHT80)

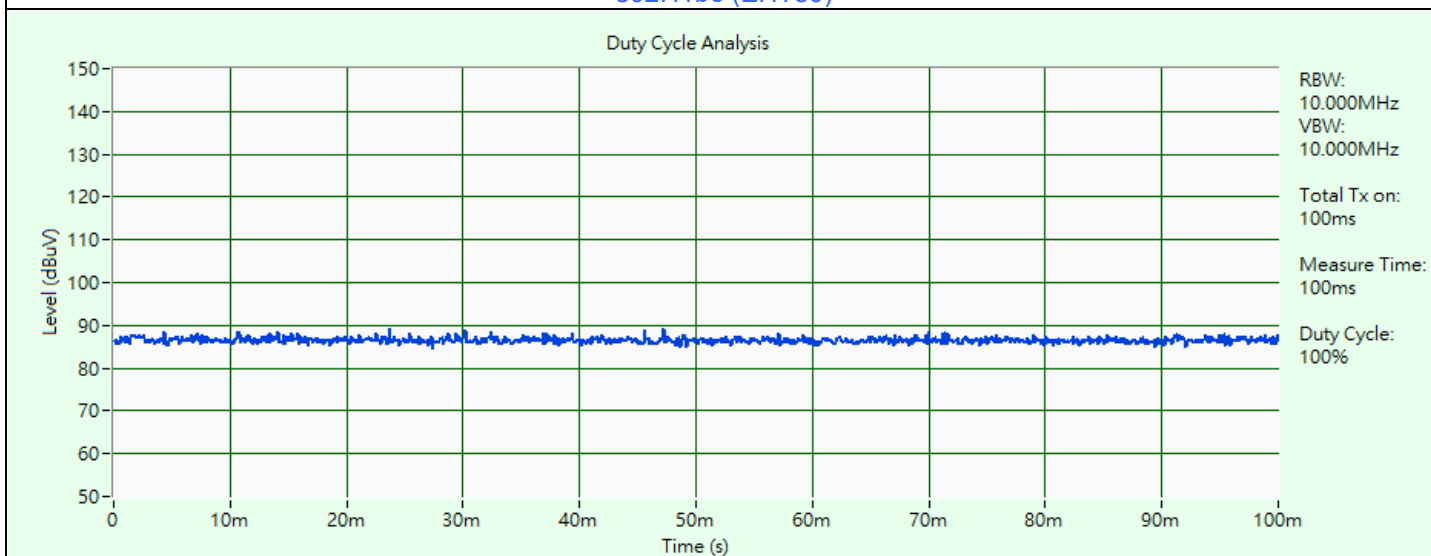


802.11be (EHT160)

3.6 Test Program Used and Operation Descriptions

Controlling software QRCT Version 4.0.211.0 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

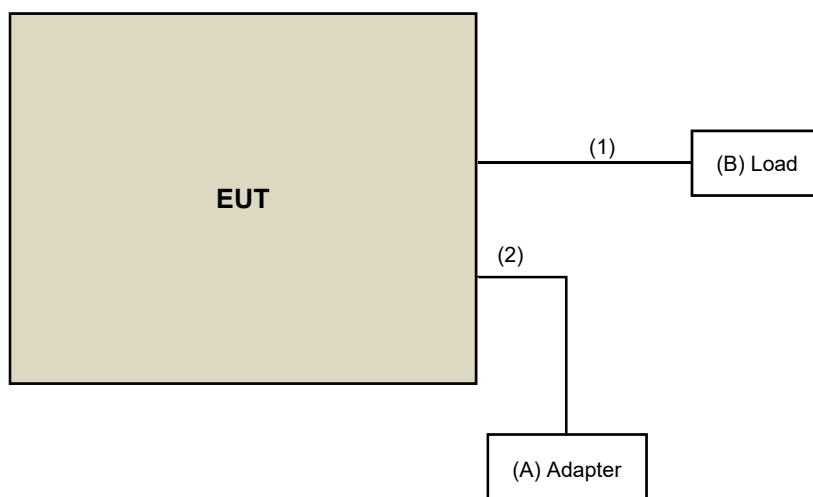

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Adapter	NETGEAR	2AFH0183AA	NA	NA	Accessory of EUT
B.	Load	NA	NA	NA	NA	Provided by Lab

No.	Cable Descriptions	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Qty.)	Remark
1.	RJ45 Cable	1	1.5	No	0	Provided by Lab
2.	USB Cable	1	1	Yes	0	Accessory of EUT

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer Keysight	8990B	MY51000485	2024/1/21	2025/1/20
Wideband Power Sensor Keysight	N1923A	MY58020002	2024/1/18	2025/1/17
		MY58140009	2024/1/18	2025/1/17

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/4/23 ~ 2024/4/25

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Signal & Spectrum Analyzer R&S	FSV3044	101504	2023/6/5	2024/6/4
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/4/23 ~ 2024/4/25

4.3 6 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

4.4 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
3-channel DC power supply JIN YIH Technology	ODP3033	ODP30332128138	N/A	N/A
Digital Multimeter Fluke	87III	70360742	2023/7/6	2024/7/5
Signal & Spectrum Analyzer R&S	FSV3044	101504	2023/6/5	2024/6/4
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Temperature & Humidity Chamber Terchy	HRM-120RF	931022	2023/12/19	2024/12/18

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/4/23 ~ 2024/4/25

4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance HUBER+SUHNER	E1-011315	13	2023/11/22	2024/11/21
50 ohm terminal resistance	E1-011279	04	2023/11/22	2024/11/21
	E1-011280	05	2023/11/22	2024/11/21
DC-LISN Schwarzbeck	NNBM 8126G	8126G-069	2023/11/7	2024/11/6
EMI Test Receiver R&S	ESCI	100613	2023/12/4	2024/12/3
Fixed Attenuator Mini-Circuits	HAT-10+	PAD-COND1-01	2024/1/6	2025/1/5
LISN R&S	ESH3-Z5	100311	2023/9/6	2024/9/5
		100312	2023/9/12	2024/9/11
RF Coaxial Cable Woken	5D-FB	Cable-cond1-01	2024/1/6	2025/1/5
Software BVADT	BVADT_Cond_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2023/8/31	2024/8/30

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2024/3/29

4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-155	2023/10/13	2024/10/12
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Loop Antenna Electro-Metrics	EM-6879	269	2023/9/23	2024/9/22
Loop Antenna TESEQ	HLA 6121	45745	2023/8/8	2024/8/7
Preamplifier Agilent	8447D	2944A10631	2023/5/7	2024/5/6
Preamplifier EMCI	EMC001340	980201	2023/9/27	2024/9/26
RF Coaxial Cable Woken	8D-FB	Cable-CH4-01	2023/7/8	2024/7/7
Signal & Spectrum Analyzer R&S	FSW43	101582	2023/4/13	2024/4/12
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3.
2. Tested Date: 2024/3/29

4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-408	2023/11/12	2024/11/11
	BBHA 9170	9170-480	2023/11/12	2024/11/11
		BBHA9170241	2023/10/16	2024/10/15
		BBHA9170243	2023/11/12	2024/11/11
Preamplifier EMCI	EMC 184045	980116	2023/9/27	2024/9/26
Preamplifier Keysight	83017A	MY53270295	2023/5/7	2024/5/6
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2023/7/8	2024/7/7
	EMC102-KM-KM-3000	150929	2023/7/8	2024/7/7
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03(250724)	2023/5/7	2024/5/6
	Sucoflex 104	MY 13380+295012/04	2023/5/7	2024/5/6
Signal & Spectrum Analyzer R&S	FSW43	101866	2024/3/26	2025/3/25
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3.
2. Tested Date: 2024/3/28

5 Limits of Test Items

5.1 RF Output Power

Device Category	Limit (Max Average Power)
Indoor access point	EIRP 36 dBm
Subordinate device	EIRP 36 dBm
Client device	EIRP 30 dBm

Note: For all U-NII-4 and U-NII-3 & -4 span channels shall met above EIRP values.

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

Device Category	Limit
Indoor access point	EIRP 20 dBm/MHz
Subordinate device	EIRP 20 dBm/MHz
Client device	EIRP 14 dBm/MHz

Note: For all U-NII-4 and U-NII-3 & -4 span channels shall met above EIRP values.

5.3 6 dB Bandwidth

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.4 Frequency Stability

The frequency of the carrier signal shall be maintained within band of operation.

5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.6 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.7 Unwanted Emissions above 1 GHz

- (i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz.
- (ii) For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.
- (iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

Note:


The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup

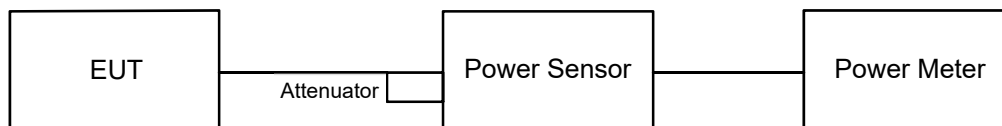


6.1.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup

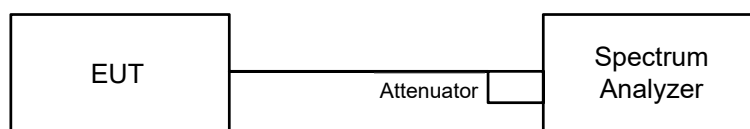

6.2.2 Test Procedure


For specified measurement bandwidth 1 MHz:

Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- Sweep points \geq $[2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing \leq RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

6.3 6 dB Bandwidth

6.3.1 Test Setup

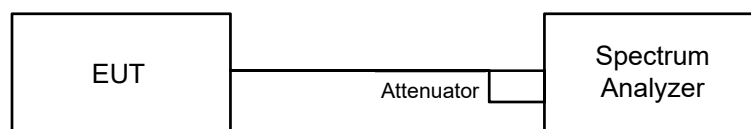


6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) \geq 3 x RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Frequency Stability

6.4.1 Test Setup

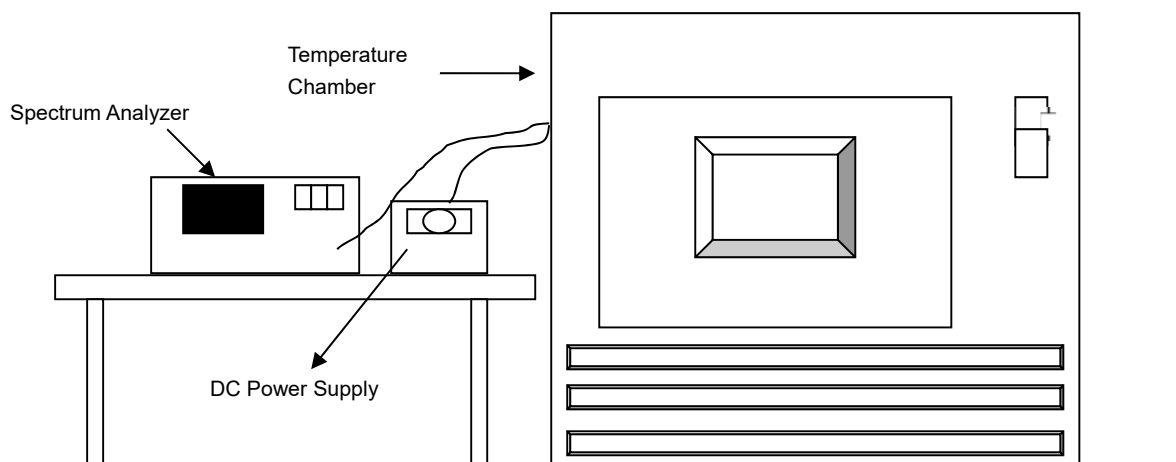


6.4.2 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

6.5 AC Power Conducted Emissions

6.5.1 Test Setup

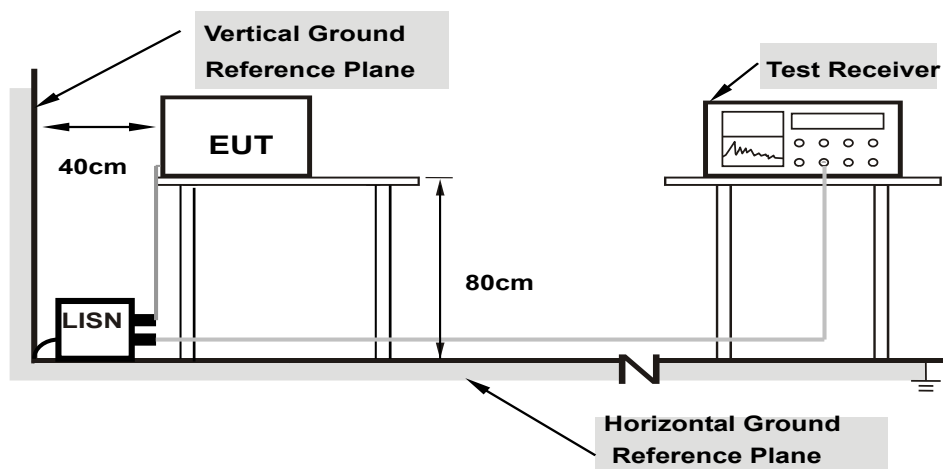

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.6 Unwanted Emissions below 1 GHz

6.6.1 Test Setup

For Radiated emission below 30 MHz

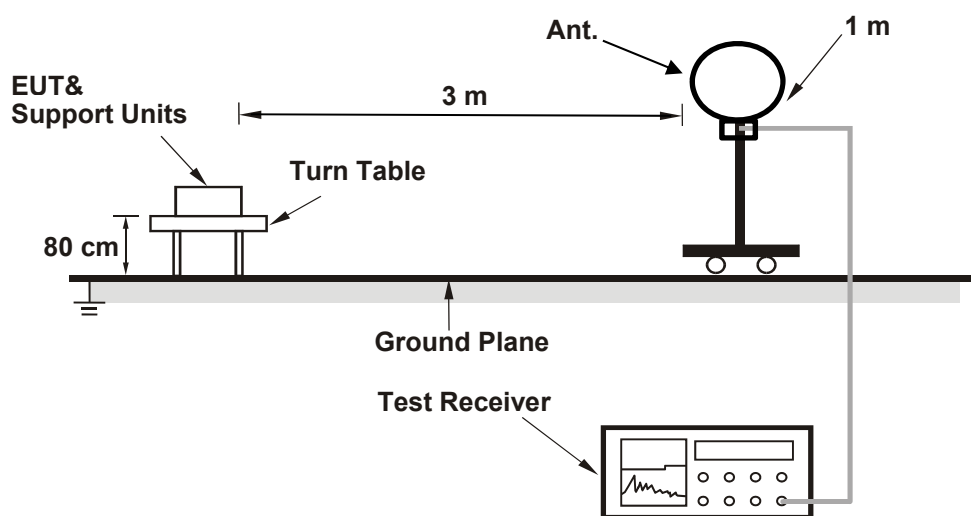

For Radiated emission above 30 MHz

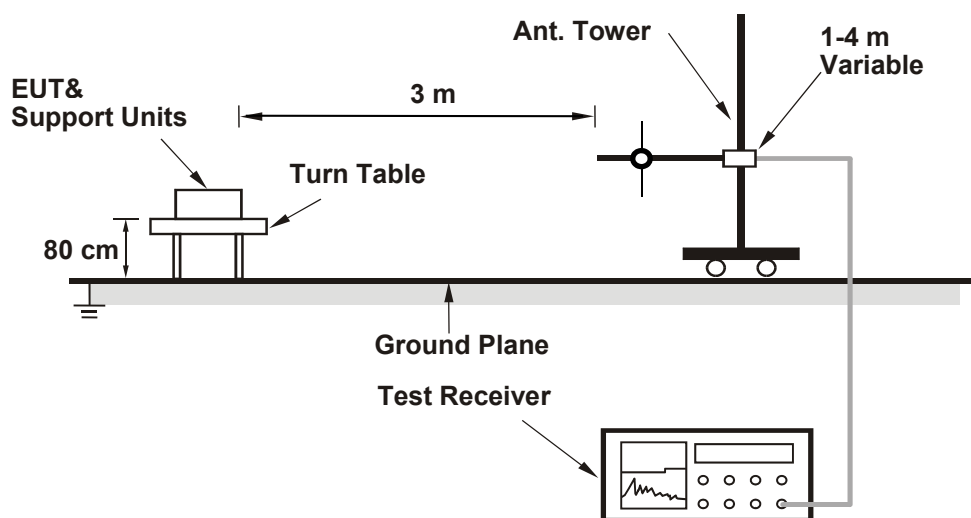

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.7 Unwanted Emissions above 1 GHz

6.7.1 Test Setup

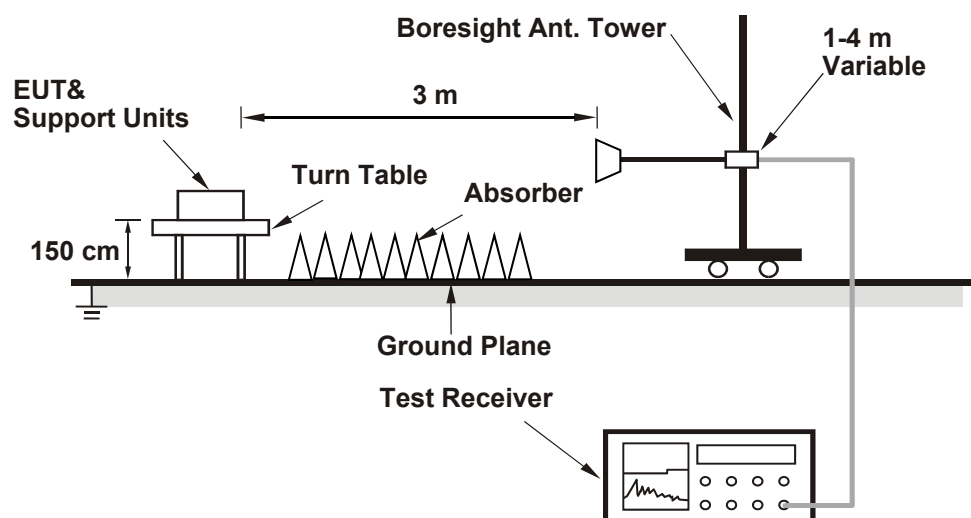

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	3.85 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Wayne Lin
--------------	----------	---------------------------	--------------	------------	-----------

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	9.61	9.87	18.846	12.75	1.89	29.122	14.64	30	Pass
173	5865	9.55	9.98	18.97	12.78	1.89	29.313	14.67	30	Pass
177	5885	9.65	9.96	19.134	12.82	1.89	29.567	14.71	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.89 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	9.65	9.94	19.089	12.81	1.89	29.497	14.7	30	Pass
173	5865	9.65	9.98	19.18	12.83	1.89	29.638	14.72	30	Pass
177	5885	9.72	9.94	19.238	12.84	1.89	29.728	14.73	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.89 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
167	5835	9.78	9.82	19.1	12.81	1.89	29.514	14.7	30	Pass
175	5875	9.81	9.95	19.457	12.89	1.89	30.066	14.78	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.89 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
171	5855	9.85	9.88	19.388	12.88	1.89	29.959	14.77	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.89 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	9.93	9.91	19.635	12.93	1.89	30.341	14.82	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.89 dBi.

7.2 Power Spectral Density

Input Power:	3.85 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Wayne Lin
--------------	----------	---------------------------	--------------	------------	-----------

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
169	5845	-3.41	-3.24	-0.31	4.64	4.33	14	Pass
173	5865	-3.48	-3.10	-0.28	4.64	4.36	14	Pass
177	5885	-3.42	-3.08	-0.24	4.64	4.4	14	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.64 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
169	5845	-3.38	-3.09	-0.22	4.64	4.42	14	Pass
173	5865	-3.38	-3.08	-0.22	4.64	4.42	14	Pass
177	5885	-3.29	-2.98	-0.12	4.64	4.52	14	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.64 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
167	5835	-6.30	-6.27	-3.27	4.64	1.37	14	Pass
175	5875	-6.20	-6.06	-3.12	4.64	1.52	14	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.64 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
171	5855	-9.16	-9.13	-6.13	4.64	-1.49	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. The directional gain is 4.64 dBi.


802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
163	5815	-12.09	-12.17	-9.12	4.64	-4.48	14	Pass


Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. The directional gain is 4.64 dBi.


Spectrum Plot of Maximum Value

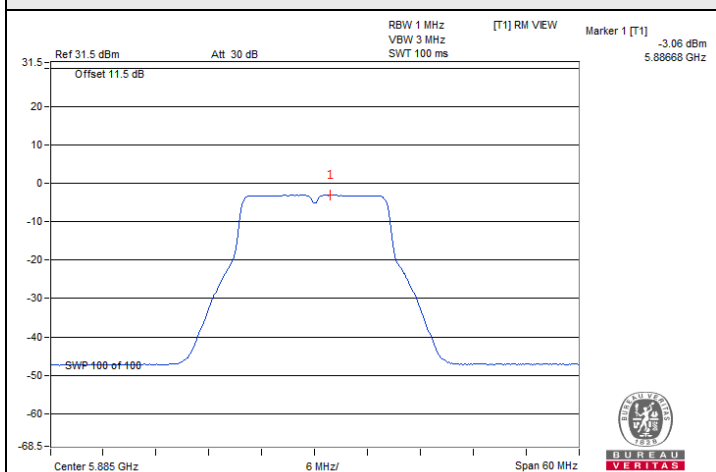


802.11a / Chain 1 : CH 177

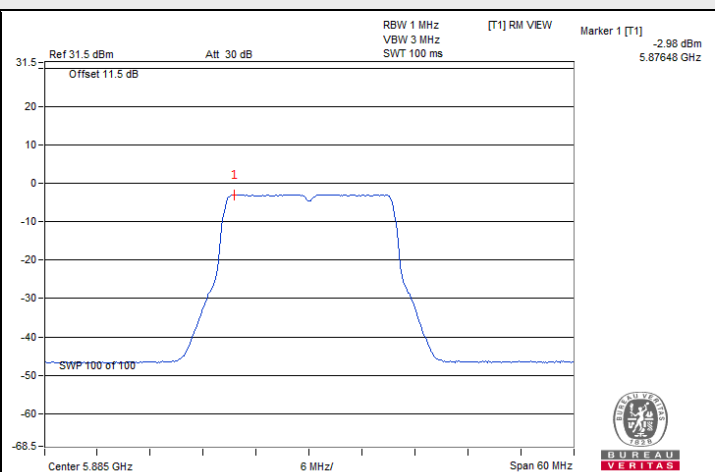


802.11be (EHT20) / Chain 1 : CH 177

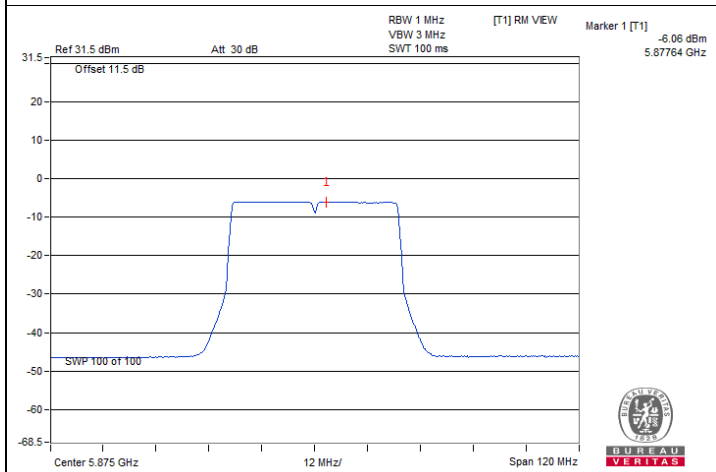

802.11be (EHT40) / Chain 1 : CH 175

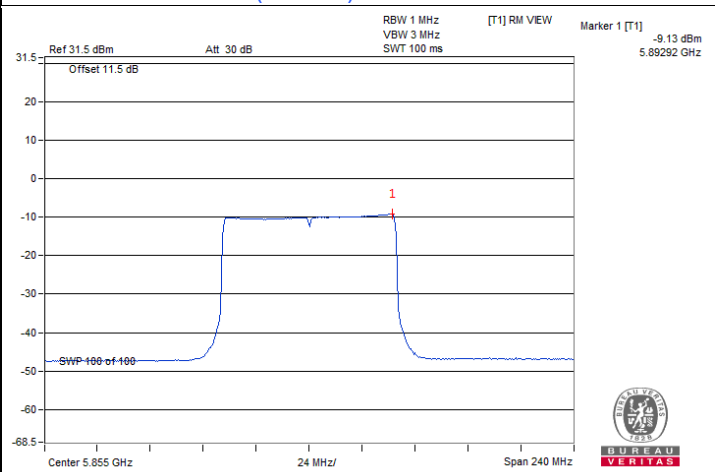

802.11be (EHT80) / Chain 1 : CH 171

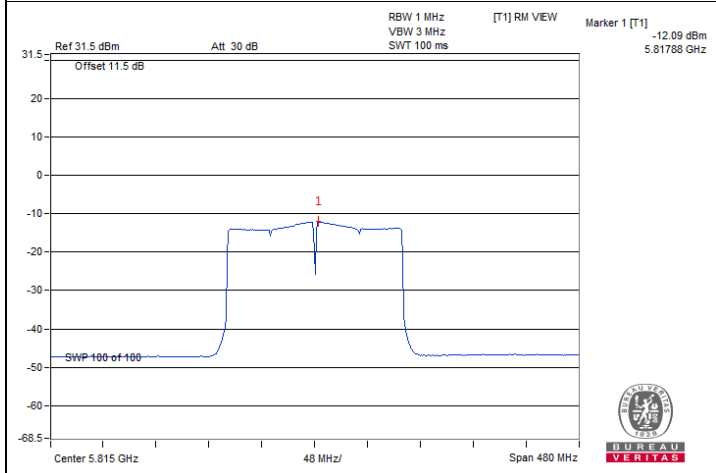

802.11be (EHT160) / Chain 0 : CH 163

7.3 6 dB Bandwidth

Input Power:	3.85 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Wayne Lin
--------------	----------	---------------------------	--------------	------------	-----------

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	16.43	16.43	0.5	Pass
173	5865	16.44	16.45	0.5	Pass
177	5885	16.43	16.43	0.5	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	19.08	19.09	0.5	Pass
173	5865	19.07	19.06	0.5	Pass
177	5885	19.07	19.08	0.5	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
167	5835	38.23	38.39	0.5	Pass
175	5875	38.27	38.32	0.5	Pass

802.11be (EHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
171	5855	78.39	78.34	0.5	Pass

802.11be (EHT160)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
163	5815	158.23	158.38	0.5	Pass




Spectrum Plot of Minimum Value

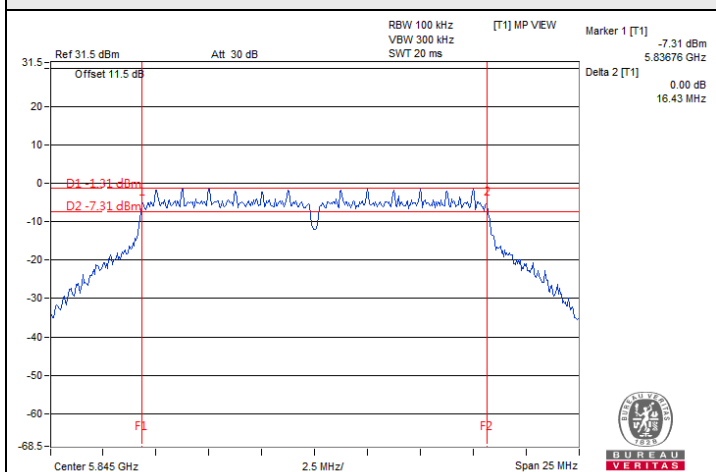


802.11a / Chain 0 : CH 169

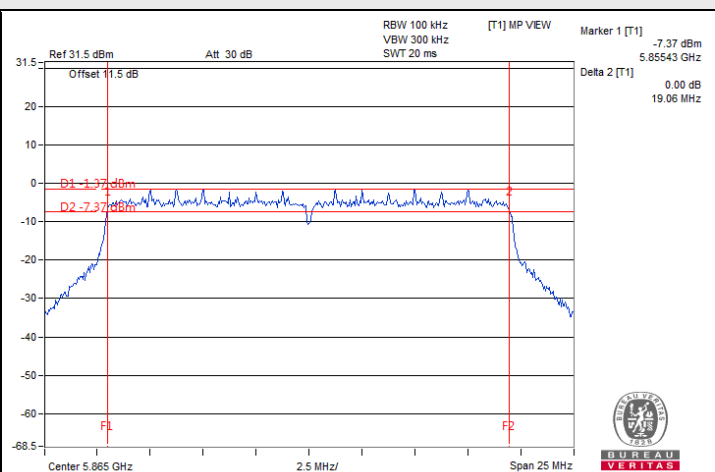


802.11be (EHT20) / Chain 1 : CH 173

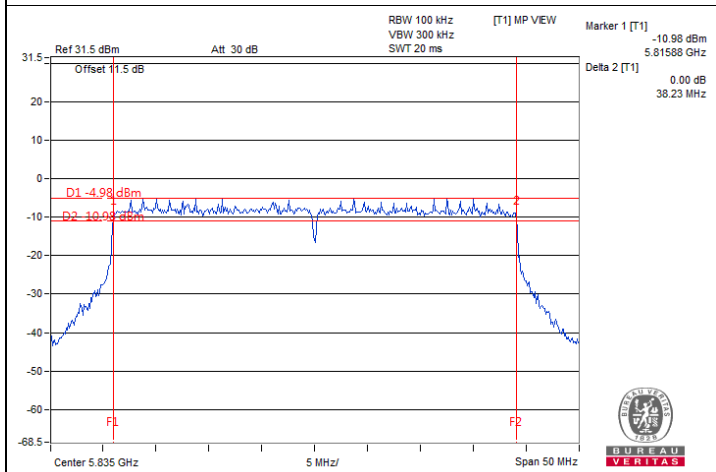

802.11be (EHT40) / Chain 0 : CH 167

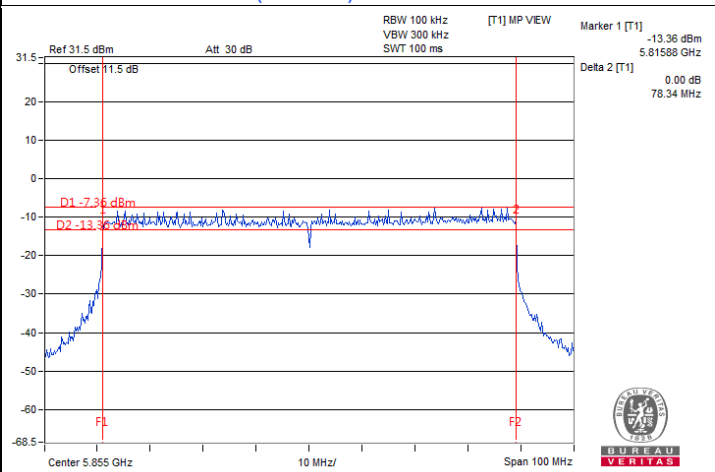

802.11be (EHT80) / Chain 1 : CH 171

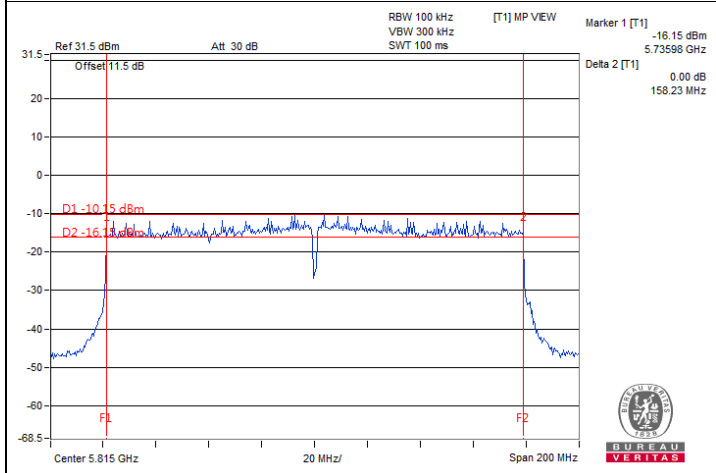

802.11be (EHT160) / Chain 0 : CH 163

7.4 Frequency Stability

Input Power:	3.85 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Wayne Lin
--------------	----------	---------------------------	--------------	------------	-----------

Frequency Stability Versus Temperature									
Operating Frequency: 5865 MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
50	3.85	5864.9707	Pass	5864.9725	Pass	5864.9729	Pass	5864.9732	Pass
40	3.85	5864.9903	Pass	5864.9861	Pass	5864.9912	Pass	5864.9894	Pass
30	3.85	5864.9862	Pass	5864.9885	Pass	5864.9859	Pass	5864.9864	Pass
20	3.85	5865.0093	Pass	5865.0058	Pass	5865.0073	Pass	5865.0059	Pass
10	3.85	5865.028	Pass	5865.0305	Pass	5865.0304	Pass	5865.0277	Pass
0	3.85	5864.9756	Pass	5864.974	Pass	5864.9744	Pass	5864.9774	Pass
-10	3.85	5864.9844	Pass	5864.9837	Pass	5864.9858	Pass	5864.9855	Pass
-20	3.85	5864.9747	Pass	5864.9775	Pass	5864.9766	Pass	5864.9762	Pass
-30	3.85	5865.0258	Pass	5865.0274	Pass	5865.0298	Pass	5865.0284	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5865 MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	4.4275	5865.0187	Pass	5865.0181	Pass	5865.0215	Pass	5865.0217	Pass
	3.85	5865.0093	Pass	5865.0058	Pass	5865.0073	Pass	5865.0059	Pass
	3.2725	5865.0119	Pass	5865.0067	Pass	5865.0076	Pass	5865.0123	Pass


7.5 AC Power Conducted Emissions

RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	9.68	22.79	8.20	32.47	17.88	65.57	55.57	-33.10	-37.69
2	0.18600	9.69	22.94	11.17	32.63	20.86	64.21	54.21	-31.58	-33.35
3	0.23400	9.72	19.48	8.60	29.20	18.32	62.31	52.31	-33.11	-33.99
4	0.47000	9.82	16.95	10.33	26.77	20.15	56.51	46.51	-29.74	-26.36
5	2.58200	9.94	8.38	0.66	18.32	10.60	56.00	46.00	-37.68	-35.40
6	19.20200	10.19	14.20	3.57	24.39	13.76	60.00	50.00	-35.61	-36.24

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

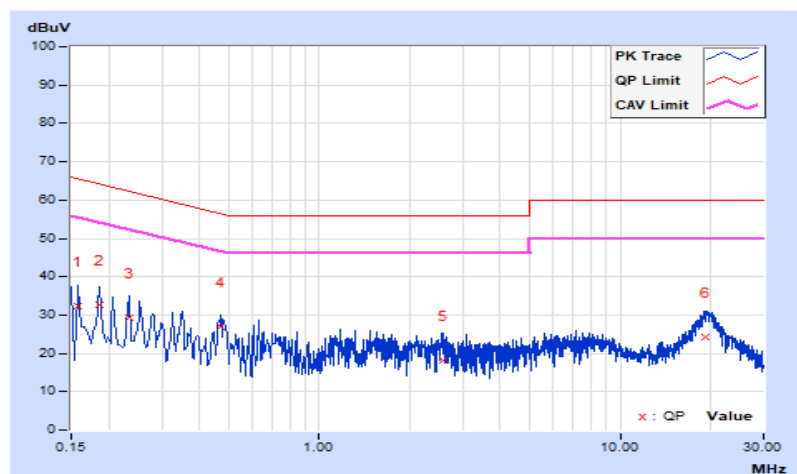


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17615	9.69	22.86	14.76	32.55	24.45	64.67	54.67	-32.12	-30.22
2	0.19000	9.70	22.40	14.00	32.10	23.70	64.04	54.04	-31.94	-30.34
3	0.24165	9.73	19.35	12.74	29.08	22.47	62.04	52.04	-32.96	-29.57
4	0.47800	9.85	18.90	15.71	28.75	25.56	56.37	46.37	-27.62	-20.81
5	1.07000	9.90	9.77	5.49	19.67	15.39	56.00	46.00	-36.33	-30.61
6	18.84200	10.27	14.63	2.56	24.90	12.83	60.00	50.00	-35.10	-37.17

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

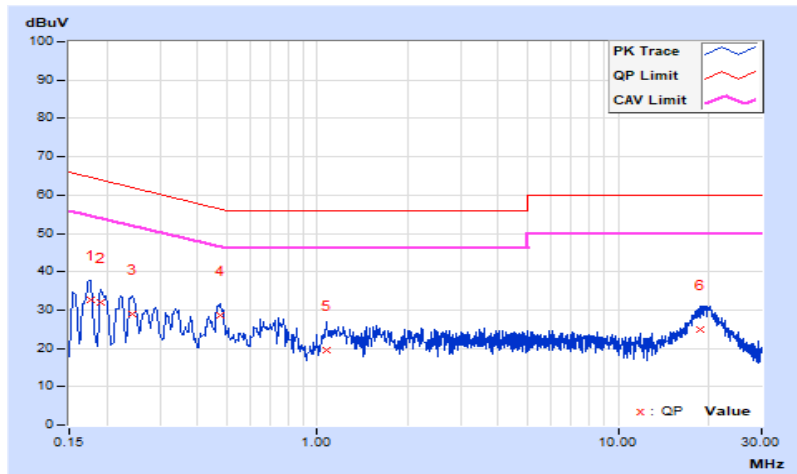


7.6 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	34.1 QP	40.0	-5.9	1.00 H	88	45.0	-10.9
2	157.07	27.2 QP	43.5	-16.3	2.00 H	94	36.1	-8.9
3	175.50	29.1 QP	43.5	-14.4	1.00 H	88	39.0	-9.9
4	543.13	28.8 QP	46.0	-17.2	1.50 H	42	32.1	-3.3
5	658.56	28.8 QP	46.0	-17.2	1.00 H	8	29.5	-0.7
6	860.32	32.5 QP	46.0	-13.5	1.00 H	128	29.3	3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

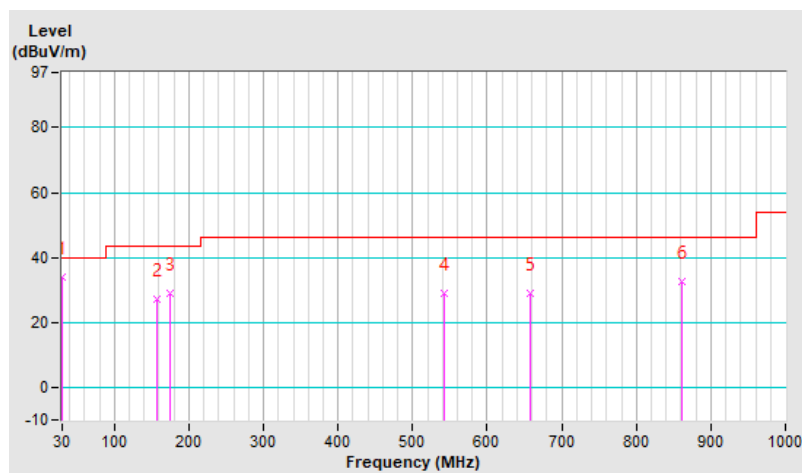


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.73	35.5 QP	40.0	-4.5	1.49 V	85	45.6	-10.1
2	58.13	33.6 QP	40.0	-6.4	1.49 V	177	43.4	-9.8
3	74.62	32.0 QP	40.0	-8.0	1.00 V	170	44.4	-12.4
4	477.17	25.5 QP	46.0	-20.5	1.49 V	6	29.9	-4.4
5	616.85	28.5 QP	46.0	-17.5	1.99 V	311	29.9	-1.4
6	679.90	29.3 QP	46.0	-16.7	1.99 V	36	29.7	-0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

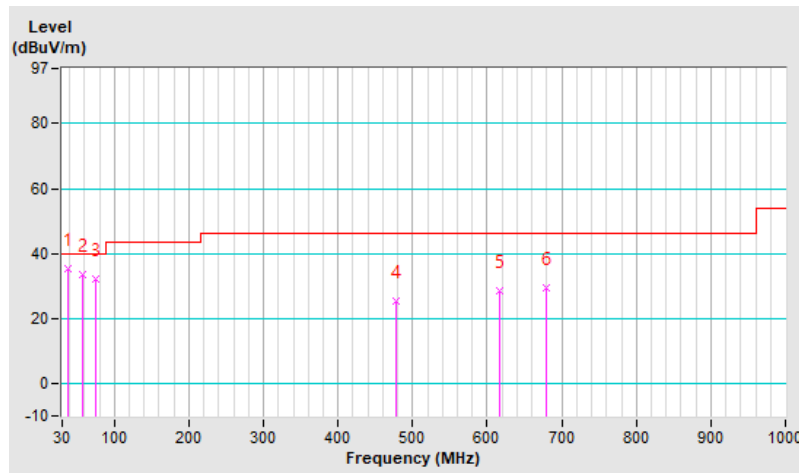

7.7 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.3 PK	68.2	-7.9	1.62 H	233	47.0	13.3
2	*5845.00	103.1 PK			1.62 H	233	58.4	44.7
3	*5845.00	93.4 AV			1.62 H	233	48.7	44.7
4	#5925.00	61.6 PK	88.2	-26.6	1.62 H	233	47.5	14.1
5	11690.00	62.3 PK	74.0	-11.7	1.92 H	289	39.7	22.6
6	11690.00	49.4 AV	54.0	-4.6	1.92 H	289	26.8	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.8 PK	68.2	-7.4	1.63 V	325	47.5	13.3
2	*5845.00	106.2 PK			1.63 V	325	61.5	44.7
3	*5845.00	96.5 AV			1.63 V	325	51.8	44.7
4	#5925.00	62.1 PK	88.2	-26.1	1.63 V	325	48.0	14.1
5	11690.00	62.4 PK	74.0	-11.6	2.20 V	185	39.8	22.6
6	11690.00	49.5 AV	54.0	-4.5	2.20 V	185	26.9	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.3 PK	68.2	-7.9	1.63 H	230	47.0	13.3
2	*5865.00	103.3 PK			1.63 H	230	58.6	44.7
3	*5865.00	93.4 AV			1.63 H	230	48.7	44.7
4	#5925.00	62.1 PK	88.2	-26.1	1.63 H	230	48.0	14.1
5	11730.00	61.9 PK	74.0	-12.1	1.95 H	285	39.6	22.3
6	11730.00	49.0 AV	54.0	-5.0	1.95 H	285	26.7	22.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.5 PK	68.2	-7.7	1.70 V	327	47.2	13.3
2	*5865.00	106.9 PK			1.70 V	327	62.2	44.7
3	*5865.00	96.8 AV			1.70 V	327	52.1	44.7
4	#5925.00	62.3 PK	88.2	-25.9	1.70 V	327	48.2	14.1
5	11730.00	62.0 PK	74.0	-12.0	2.25 V	192	39.7	22.3
6	11730.00	49.1 AV	54.0	-4.9	2.25 V	192	26.8	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.3 PK	68.2	-7.9	1.63 H	226	47.0	13.3
2	*5885.00	104.0 PK			1.63 H	226	59.3	44.7
3	*5885.00	93.5 AV			1.63 H	226	48.8	44.7
4	#5895.00	82.9 PK	110.2	-27.3	1.63 H	226	68.9	14.0
5	#5925.00	60.3 PK	88.2	-27.9	1.63 H	226	46.2	14.1
6	11770.00	61.4 PK	74.0	-12.6	1.97 H	285	39.6	21.8
7	11770.00	48.4 AV	54.0	-5.6	1.97 H	285	26.6	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.5 PK	68.2	-7.7	1.74 V	325	47.2	13.3
2	*5885.00	107.2 PK			1.74 V	325	62.5	44.7
3	*5885.00	97.3 AV			1.74 V	325	52.6	44.7
4	#5895.00	88.9 PK	110.2	-21.3	1.74 V	325	74.9	14.0
5	#5925.00	61.0 PK	88.2	-27.2	1.74 V	325	46.9	14.1
6	11770.00	61.5 PK	74.0	-12.5	2.21 V	189	39.7	21.8
7	11770.00	48.6 AV	54.0	-5.4	2.21 V	189	26.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.8 PK	68.2	-7.4	1.61 H	232	47.5	13.3
2	*5845.00	104.9 PK			1.61 H	232	60.2	44.7
3	*5845.00	92.5 AV			1.61 H	232	47.8	44.7
4	#5925.00	61.3 PK	88.2	-26.9	1.61 H	232	47.2	14.1
5	11690.00	62.1 PK	74.0	-11.9	1.89 H	285	39.5	22.6
6	11690.00	49.1 AV	54.0	-4.9	1.89 H	285	26.5	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.9 PK	68.2	-7.3	1.70 V	328	47.6	13.3
2	*5845.00	109.4 PK			1.70 V	328	64.7	44.7
3	*5845.00	96.1 AV			1.70 V	328	51.4	44.7
4	#5925.00	61.6 PK	88.2	-26.6	1.70 V	328	47.5	14.1
5	11690.00	62.2 PK	74.0	-11.8	2.22 V	181	39.6	22.6
6	11690.00	49.2 AV	54.0	-4.8	2.22 V	181	26.6	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.5 PK	68.2	-7.7	1.61 H	229	47.2	13.3
2	*5865.00	104.8 PK			1.61 H	229	60.1	44.7
3	*5865.00	92.6 AV			1.61 H	229	47.9	44.7
4	#5925.00	61.1 PK	88.2	-27.1	1.61 H	229	47.0	14.1
5	11730.00	61.8 PK	74.0	-12.2	1.86 H	287	39.5	22.3
6	11730.00	48.9 AV	54.0	-5.1	1.86 H	287	26.6	22.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.8 PK	68.2	-7.4	1.70 V	326	47.5	13.3
2	*5865.00	109.2 PK			1.70 V	326	64.5	44.7
3	*5865.00	96.6 AV			1.70 V	326	51.9	44.7
4	#5925.00	61.3 PK	88.2	-26.9	1.70 V	326	47.2	14.1
5	11730.00	62.0 PK	74.0	-12.0	2.29 V	188	39.7	22.3
6	11730.00	49.0 AV	54.0	-5.0	2.29 V	188	26.7	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	59.8 PK	68.2	-8.4	1.59 H	231	46.5	13.3
2	*5885.00	105.1 PK			1.59 H	231	60.4	44.7
3	*5885.00	92.8 AV			1.59 H	231	48.1	44.7
4	#5895.00	89.5 PK	110.2	-20.7	1.59 H	231	75.5	14.0
5	#5925.00	60.4 PK	88.2	-27.8	1.59 H	231	46.3	14.1
6	11770.00	61.3 PK	74.0	-12.7	1.82 H	285	39.5	21.8
7	11770.00	48.3 AV	54.0	-5.7	1.82 H	285	26.5	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.1 PK	68.2	-8.1	1.70 V	328	46.8	13.3
2	*5885.00	109.3 PK			1.70 V	328	64.6	44.7
3	*5885.00	97.3 AV			1.70 V	328	52.6	44.7
4	#5895.00	90.5 PK	110.2	-19.7	1.70 V	328	76.5	14.0
5	#5925.00	61.1 PK	88.2	-27.1	1.70 V	328	47.0	14.1
6	11770.00	61.5 PK	74.0	-12.5	2.29 V	183	39.7	21.8
7	11770.00	48.4 AV	54.0	-5.6	2.29 V	183	26.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	59.5 PK	68.2	-8.7	1.57 H	234	46.2	13.3
2	*5835.00	102.3 PK			1.57 H	234	57.6	44.7
3	*5835.00	89.3 AV			1.57 H	234	44.6	44.7
4	#5925.00	60.2 PK	88.2	-28.0	1.57 H	234	46.1	14.1
5	11670.00	62.1 PK	74.0	-11.9	1.86 H	288	39.6	22.5
6	11670.00	48.9 AV	54.0	-5.1	1.86 H	288	26.4	22.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.6 PK	68.2	-7.6	1.75 V	326	47.3	13.3
2	*5835.00	106.2 PK			1.75 V	326	61.5	44.7
3	*5835.00	93.3 AV			1.75 V	326	48.6	44.7
4	#5925.00	61.6 PK	88.2	-26.6	1.75 V	326	47.5	14.1
5	11670.00	62.2 PK	74.0	-11.8	2.21 V	182	39.7	22.5
6	11670.00	49.0 AV	54.0	-5.0	2.21 V	182	26.5	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.8 PK	68.2	-7.4	1.57 H	231	47.5	13.3
2	*5875.00	103.1 PK			1.57 H	231	58.4	44.7
3	*5875.00	90.0 AV			1.57 H	231	45.3	44.7
4	#5895.00	80.8 PK	110.2	-29.4	1.57 H	231	66.8	14.0
5	#5925.00	60.6 PK	88.2	-27.6	1.57 H	231	46.5	14.1
6	11750.00	61.4 PK	74.0	-12.6	1.82 H	290	39.5	21.9
7	11750.00	48.3 AV	54.0	-5.7	1.82 H	290	26.4	21.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.9 PK	68.2	-7.3	1.74 V	321	47.6	13.3
2	*5875.00	106.3 PK			1.74 V	321	61.6	44.7
3	*5875.00	93.7 AV			1.74 V	321	49.0	44.7
4	#5895.00	88.0 PK	110.2	-22.2	1.74 V	321	74.0	14.0
5	#5925.00	61.3 PK	88.2	-26.9	1.74 V	321	47.2	14.1
6	11750.00	61.5 PK	74.0	-12.5	2.29 V	189	39.6	21.9
7	11750.00	48.4 AV	54.0	-5.6	2.29 V	189	26.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	59.8 PK	68.2	-8.4	1.70 H	227	46.5	13.3
2	*5855.00	99.5 PK			1.70 H	227	54.8	44.7
3	*5855.00	87.0 AV			1.70 H	227	42.3	44.7
4	#5895.00	78.3 PK	110.2	-31.9	1.70 H	227	64.3	14.0
5	#5925.00	61.1 PK	88.2	-27.1	1.70 H	227	47.0	14.1
6	11710.00	61.7 PK	74.0	-12.3	1.85 H	286	39.3	22.4
7	11710.00	48.6 AV	54.0	-5.4	1.85 H	286	26.2	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.0 PK	68.2	-8.2	1.71 V	324	46.7	13.3
2	*5855.00	103.6 PK			1.71 V	324	58.9	44.7
3	*5855.00	91.0 AV			1.71 V	324	46.3	44.7
4	#5895.00	86.9 PK	110.2	-23.3	1.71 V	324	72.9	14.0
5	#5925.00	61.6 PK	88.2	-26.6	1.71 V	324	47.5	14.1
6	11710.00	61.9 PK	74.0	-12.1	2.28 V	187	39.5	22.4
7	11710.00	48.7 AV	54.0	-5.3	2.28 V	187	26.3	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.3 PK	68.2	-7.9	1.72 H	233	47.0	13.3
2	*5815.00	96.6 PK			1.72 H	233	51.8	44.8
3	*5815.00	83.7 AV			1.72 H	233	38.9	44.8
4	#5895.00	73.8 PK	110.2	-36.4	1.72 H	233	59.8	14.0
5	#5925.00	61.6 PK	88.2	-26.6	1.72 H	233	47.5	14.1
6	11630.00	61.9 PK	74.0	-12.1	1.82 H	286	39.2	22.7
7	11630.00	48.9 AV	54.0	-5.1	1.82 H	286	26.2	22.7

Antenna Polarity & Test Distance : Vertical at 3 m




No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.5 PK	68.2	-7.7	1.74 V	327	47.2	13.3
2	*5815.00	101.8 PK			1.74 V	327	57.0	44.8
3	*5815.00	88.6 AV			1.74 V	327	43.8	44.8
4	#5895.00	80.5 PK	110.2	-29.7	1.74 V	327	66.5	14.0
5	#5925.00	61.6 PK	88.2	-26.6	1.74 V	327	47.5	14.1
6	11630.00	62.1 PK	74.0	-11.9	2.29 V	185	39.4	22.7
7	11630.00	49.0 AV	54.0	-5.0	2.29 V	185	26.3	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Plot of Band Edge


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

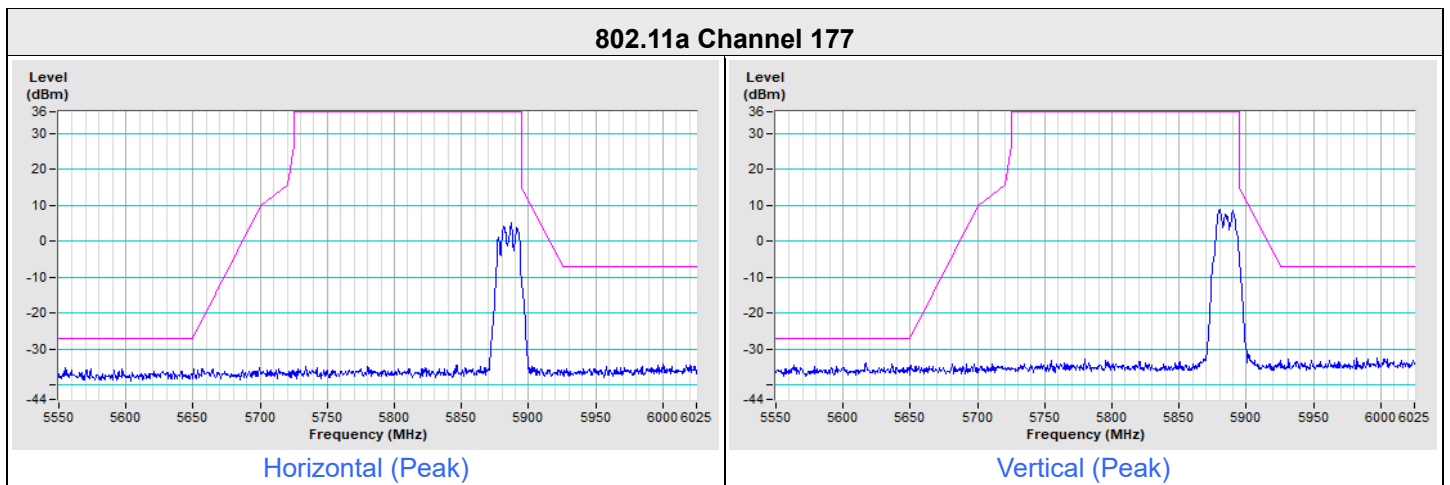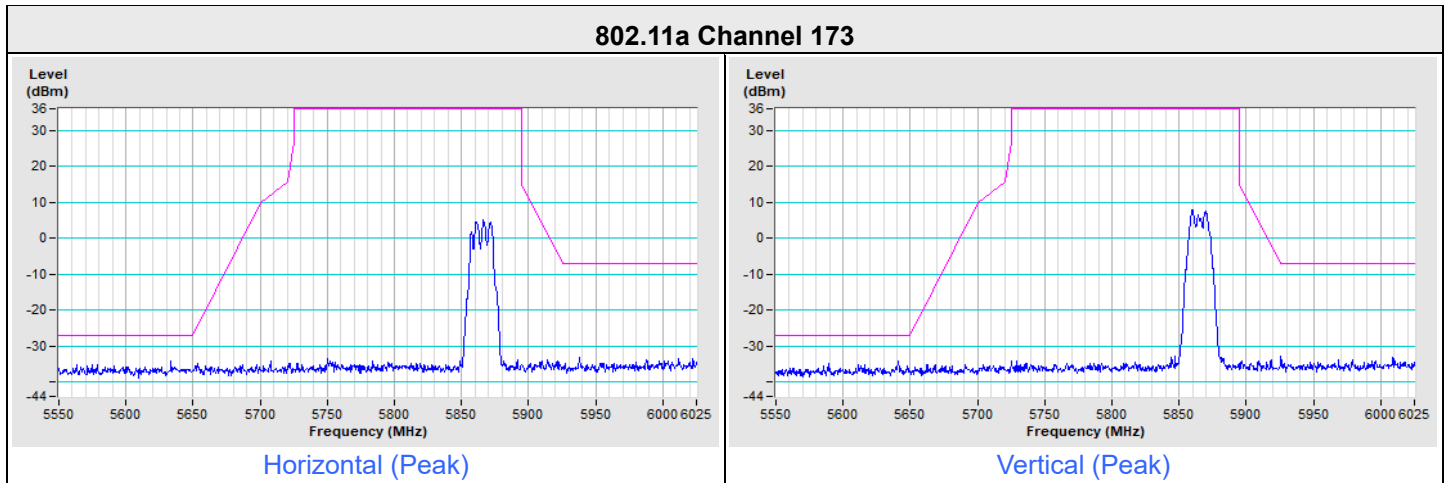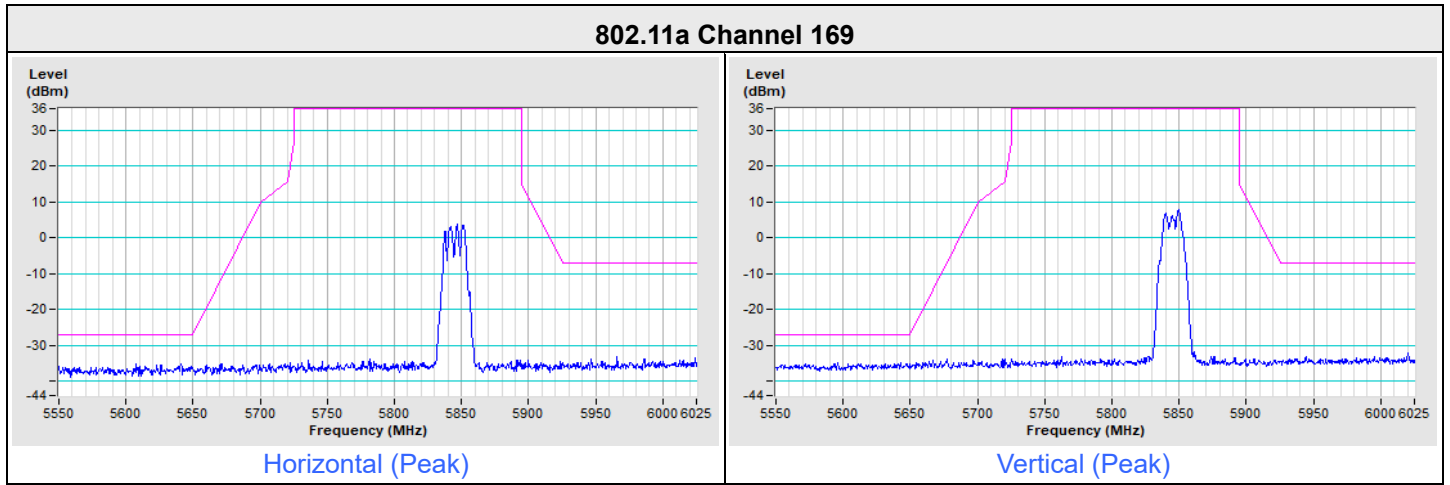




Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------


802.11be (EHT20) Channel 169

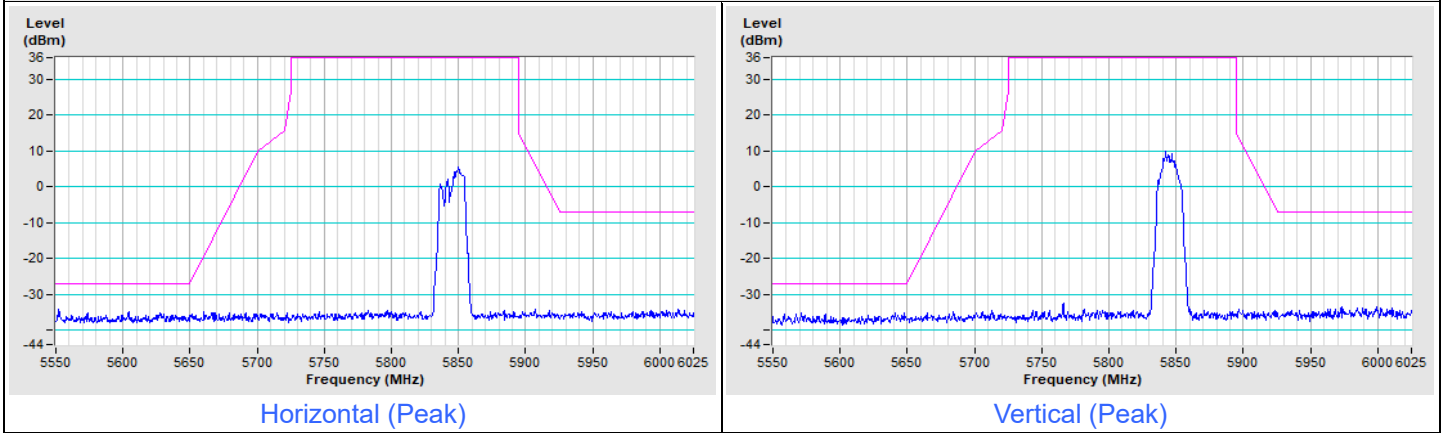

802.11be (EHT20) Channel 173

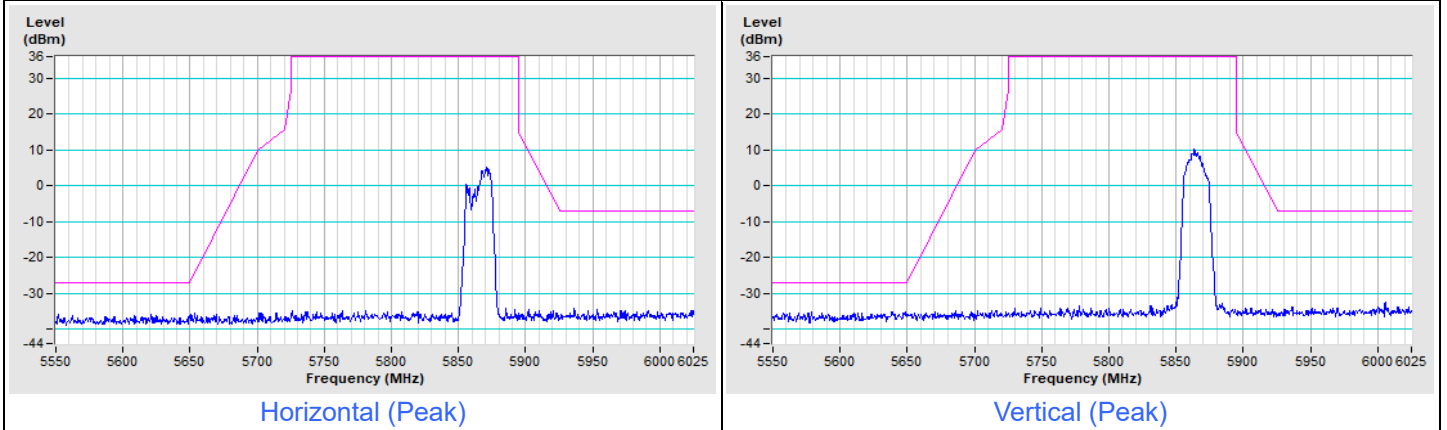


802.11be (EHT20) Channel 177

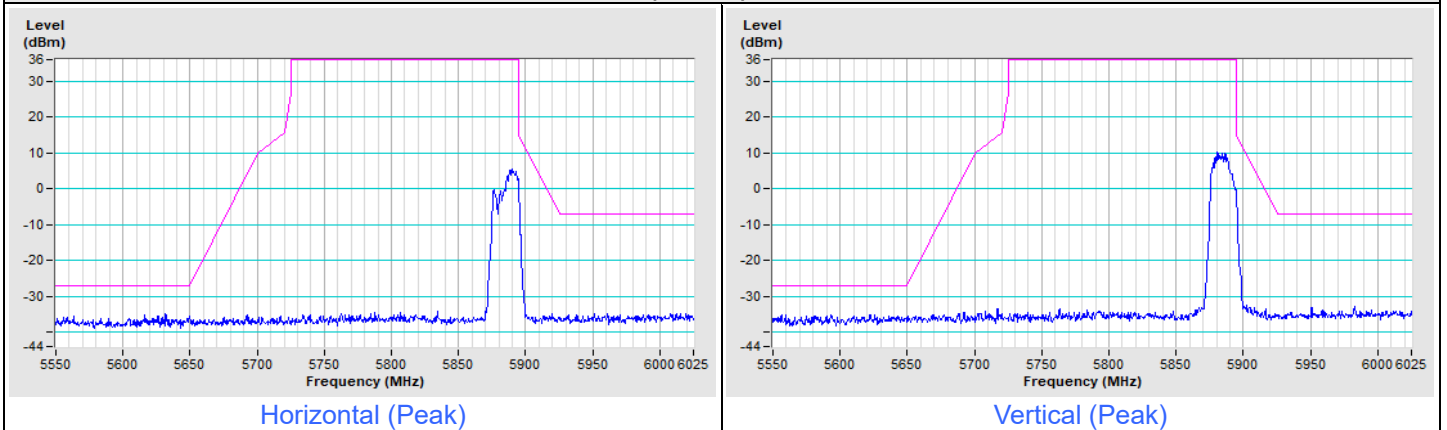




Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 167

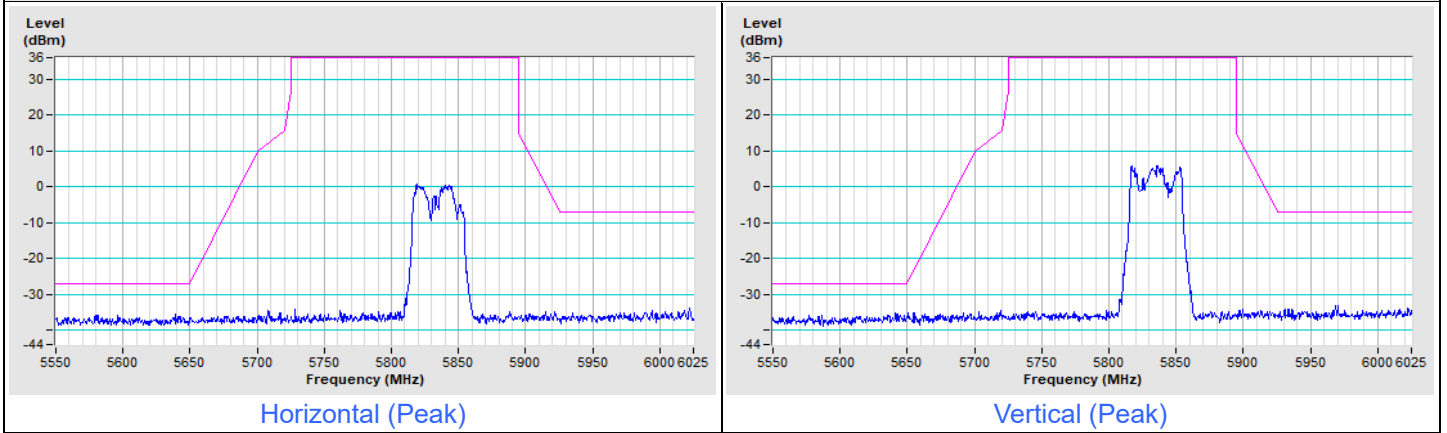


802.11be (EHT40) Channel 175

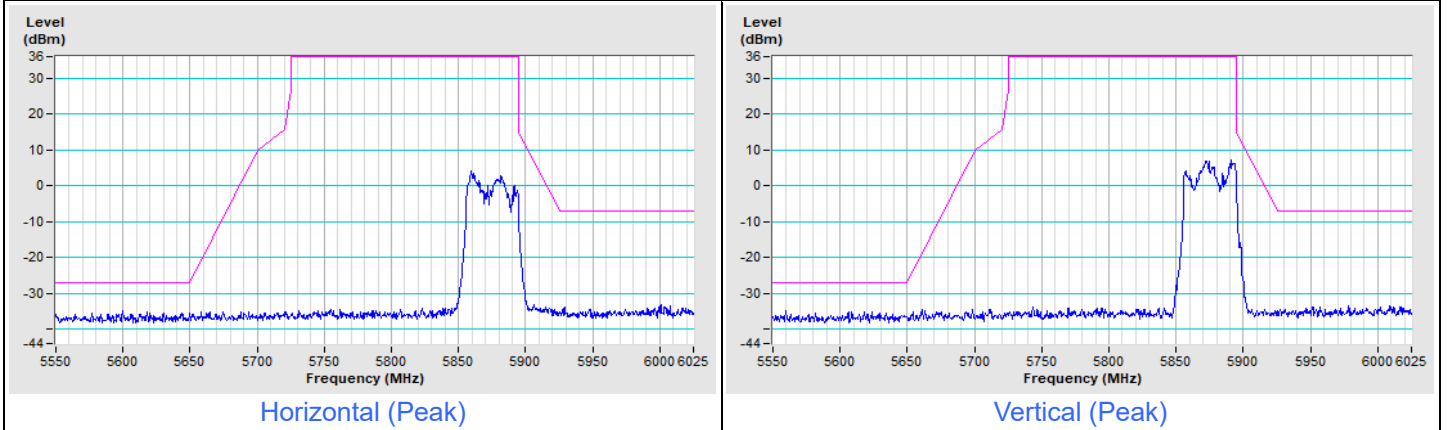


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 171

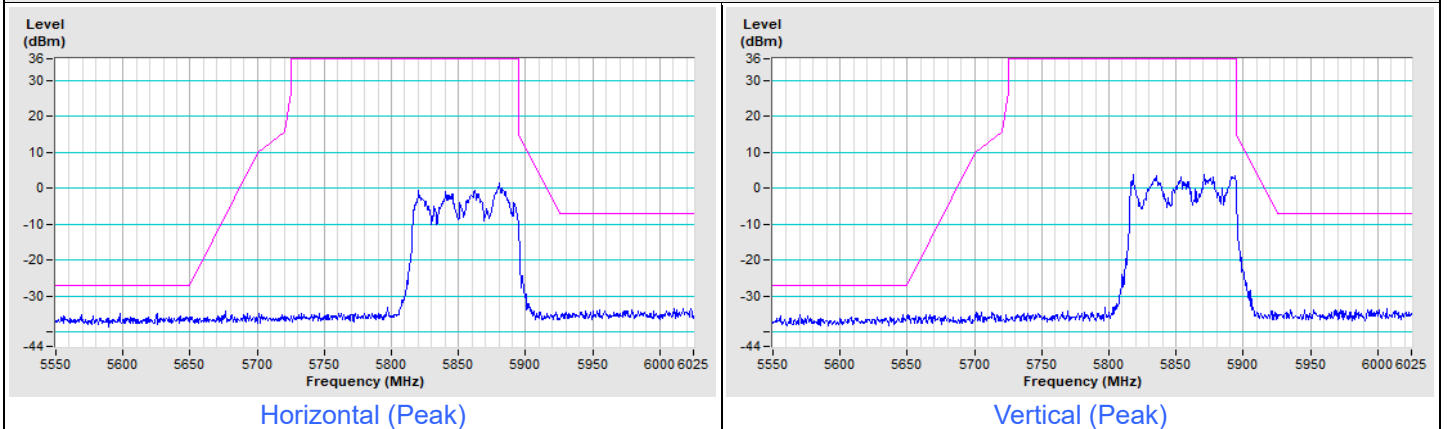

Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT160) Channel 163

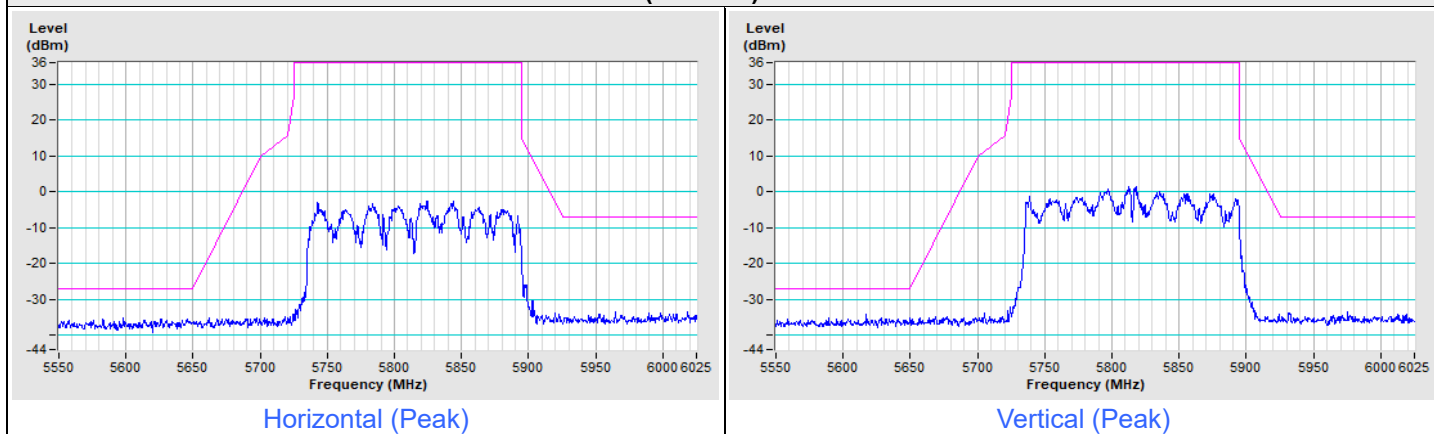

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---