




Plots of EUT ceased transmission in the time domain

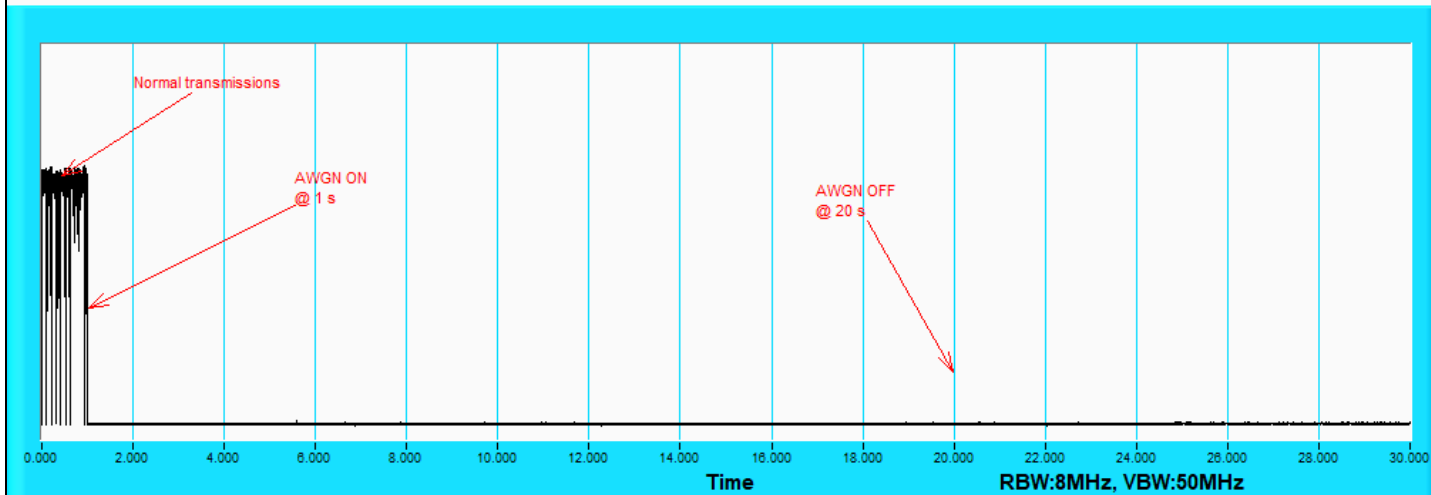

802.11be (EHT320) / CH191(Low Edge)

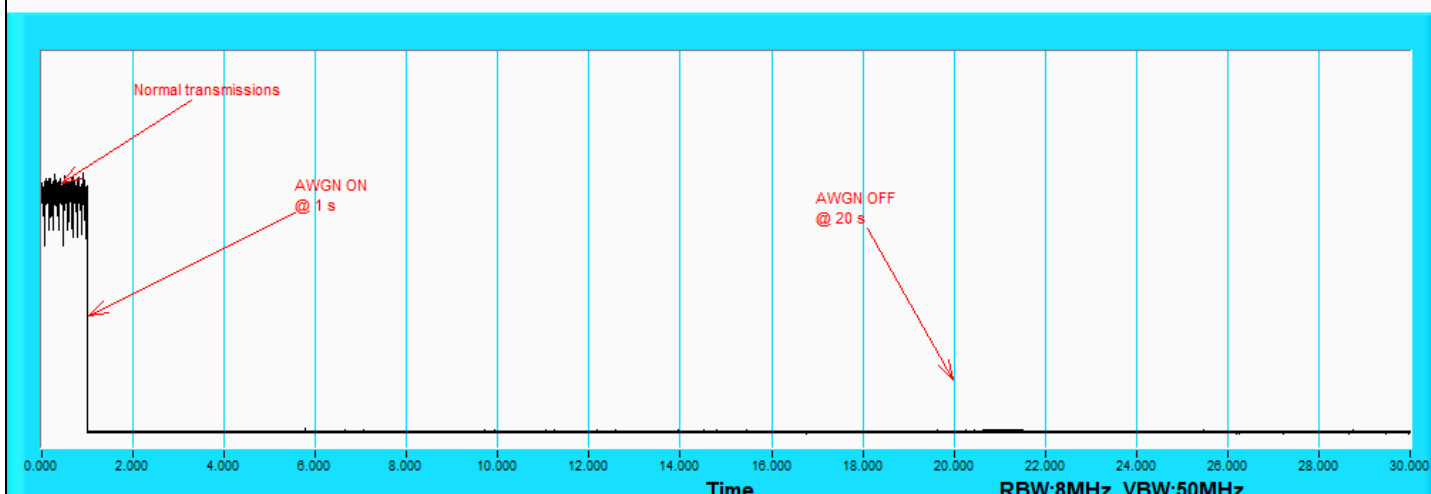

802.11be (EHT320) / CH191(Middle)

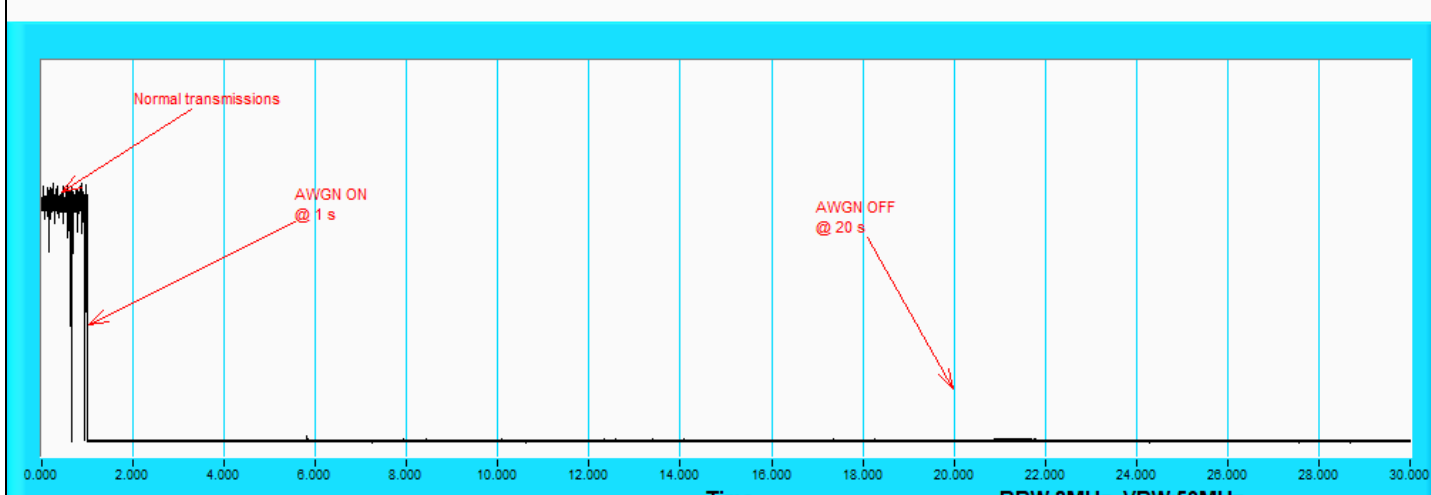

802.11be (EHT320) / CH191(High Edge)


7.8 AC Power Conducted Emissions

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17800	9.72	38.09	27.76	47.81	37.48	64.58	54.58	-16.77	-17.10
2	0.20577	9.72	29.03	13.77	38.75	23.49	63.37	53.37	-24.62	-29.88
3	0.24600	9.75	28.07	16.93	37.82	26.68	61.89	51.89	-24.07	-25.21
4	0.29800	9.77	26.54	20.79	36.31	30.56	60.30	50.30	-23.99	-19.74
5	4.09400	10.03	15.85	3.55	25.88	13.58	56.00	46.00	-30.12	-32.42
6	11.72600	10.19	16.32	9.94	26.51	20.13	60.00	50.00	-33.49	-29.87

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

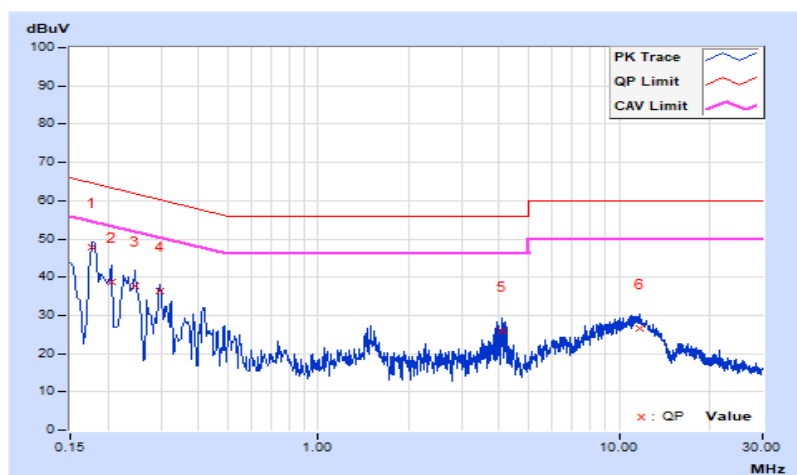


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	9.70	36.75	19.63	46.45	29.33	65.16	55.16	-18.71	-25.83
2	0.17800	9.70	37.66	27.54	47.36	37.24	64.58	54.58	-17.22	-17.34
3	0.23400	9.74	30.39	19.56	40.13	29.30	62.31	52.31	-22.18	-23.01
4	0.31366	9.80	26.09	13.35	35.89	23.15	59.87	49.87	-23.98	-26.72
5	1.48600	9.95	13.46	5.54	23.41	15.49	56.00	46.00	-32.59	-30.51
6	10.86600	10.26	16.81	10.26	27.07	20.52	60.00	50.00	-32.93	-29.48

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

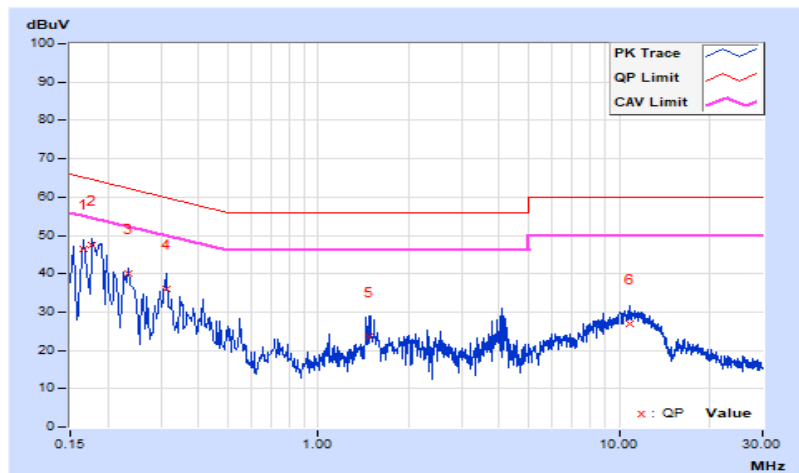


7.9 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.82	27.6 QP	40.0	-12.4	1.00 H	131	37.5	-9.9
2	139.61	28.5 QP	43.5	-15.0	1.00 H	294	37.7	-9.2
3	337.49	26.5 QP	46.0	-19.5	1.00 H	270	33.3	-6.8
4	450.01	29.2 QP	46.0	-16.8	1.50 H	288	33.9	-4.7
5	538.28	29.3 QP	46.0	-16.7	1.50 H	303	32.4	-3.1
6	636.25	30.5 QP	46.0	-15.5	1.00 H	144	31.1	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

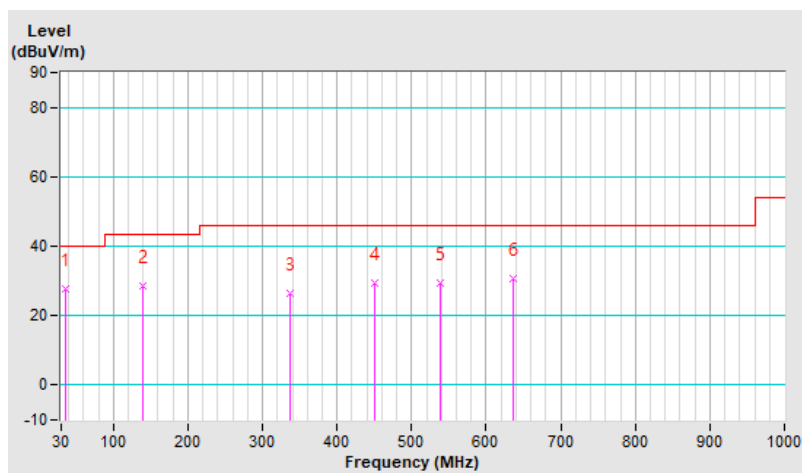


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.43	37.9 QP	40.0	-2.1	1.00 V	198	46.5	-8.6
2	69.77	28.0 QP	40.0	-12.0	1.00 V	199	38.7	-10.7
3	136.70	27.7 QP	43.5	-15.8	1.00 V	262	37.1	-9.4
4	333.61	24.0 QP	46.0	-22.0	1.00 V	213	30.8	-6.8
5	457.77	37.4 QP	46.0	-8.6	1.50 V	7	41.8	-4.4
6	581.93	32.0 QP	46.0	-14.0	1.50 V	174	33.9	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

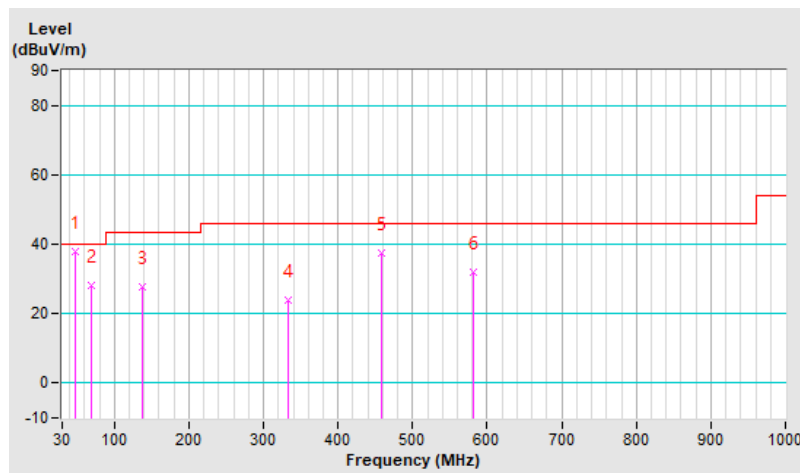

7.10 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.1 PK	88.2	-35.1	1.63 H	78	39.2	13.9
2	#5925.00	38.4 AV	68.2	-29.8	1.63 H	78	24.5	13.9
3	*6115.00	105.3 PK			1.63 H	78	59.8	45.5
4	*6115.00	95.0 AV			1.63 H	78	49.5	45.5
5	12230.00	60.2 PK	74.0	-13.8	1.82 H	311	39.2	21.0
6	12230.00	47.0 AV	54.0	-7.0	1.82 H	311	26.0	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.4 PK	88.2	-34.8	2.17 V	348	39.5	13.9
2	#5925.00	38.8 AV	68.2	-29.4	2.17 V	348	24.9	13.9
3	*6115.00	107.3 PK			2.17 V	348	61.8	45.5
4	*6115.00	97.5 AV			2.17 V	348	52.0	45.5
5	12230.00	60.5 PK	74.0	-13.5	1.92 V	225	39.5	21.0
6	12230.00	47.2 AV	54.0	-6.8	1.92 V	225	26.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	103.9 PK			1.65 H	77	57.9	46.0
2	*6255.00	93.7 AV			1.65 H	77	47.7	46.0
3	12510.00	60.1 PK	74.0	-13.9	1.82 H	316	39.2	20.9
4	12510.00	46.8 AV	54.0	-7.2	1.82 H	316	25.9	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	107.2 PK			1.53 V	345	61.2	46.0
2	*6255.00	97.5 AV			1.53 V	345	51.5	46.0
3	12510.00	60.4 PK	74.0	-13.6	1.88 V	228	39.5	20.9
4	12510.00	47.0 AV	54.0	-7.0	1.88 V	228	26.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	104.7 PK			1.75 H	82	57.6	47.1
2	*6415.00	94.6 AV			1.75 H	82	47.5	47.1
3	#12830.00	61.0 PK	88.2	-27.2	1.88 H	302	39.2	21.8
4	#12830.00	47.8 AV	68.2	-20.4	1.88 H	302	26.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.6 PK			2.08 V	230	60.5	47.1
2	*6415.00	98.0 AV			2.08 V	230	50.9	47.1
3	#12830.00	61.3 PK	88.2	-26.9	1.92 V	221	39.5	21.8
4	#12830.00	47.9 AV	68.2	-20.3	1.92 V	221	26.1	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.8 PK			1.65 H	72	57.7	47.1
2	*6435.00	94.6 AV			1.65 H	72	47.5	47.1
3	#12870.00	61.1 PK	88.2	-27.1	1.85 H	302	39.0	22.1
4	#12870.00	48.0 AV	68.2	-20.2	1.85 H	302	25.9	22.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	107.5 PK			2.17 V	227	60.4	47.1
2	*6435.00	97.8 AV			2.17 V	227	50.7	47.1
3	#12870.00	61.6 PK	88.2	-26.6	1.89 V	229	39.5	22.1
4	#12870.00	48.3 AV	68.2	-19.9	1.89 V	229	26.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	105.1 PK			1.69 H	72	57.7	47.4
2	*6475.00	95.4 AV			1.69 H	72	48.0	47.4
3	#12950.00	61.4 PK	88.2	-26.8	1.77 H	302	39.2	22.2
4	#12950.00	48.0 AV	68.2	-20.2	1.77 H	302	25.8	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.1 PK			2.21 V	228	60.7	47.4
2	*6475.00	98.5 AV			2.21 V	228	51.1	47.4
3	#12950.00	61.6 PK	88.2	-26.6	1.82 V	233	39.4	22.2
4	#12950.00	48.4 AV	68.2	-19.8	1.82 V	233	26.2	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	105.3 PK			1.72 H	75	57.6	47.7
2	*6515.00	95.2 AV			1.72 H	75	47.5	47.7
3	#13030.00	61.6 PK	88.2	-26.6	1.88 H	302	39.2	22.4
4	#13030.00	48.3 AV	68.2	-19.9	1.88 H	302	25.9	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.5 PK			2.24 V	226	60.8	47.7
2	*6515.00	98.5 AV			2.24 V	226	50.8	47.7
3	#13030.00	61.8 PK	88.2	-26.4	1.89 V	228	39.4	22.4
4	#13030.00	48.5 AV	68.2	-19.7	1.89 V	228	26.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.1 PK			1.69 H	72	57.2	47.9
2	*6535.00	95.8 AV			1.69 H	72	47.9	47.9
3	#13070.00	61.6 PK	88.2	-26.6	1.85 H	302	39.2	22.4
4	#13070.00	48.4 AV	68.2	-19.8	1.85 H	302	26.0	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.9 PK			2.18 V	224	61.0	47.9
2	*6535.00	98.9 AV			2.18 V	224	51.0	47.9
3	#13070.00	61.8 PK	88.2	-26.4	1.95 V	221	39.4	22.4
4	#13070.00	48.5 AV	68.2	-19.7	1.95 V	221	26.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.2 PK			1.72 H	72	58.2	48.0
2	*6695.00	96.0 AV			1.72 H	72	48.0	48.0
3	13390.00	62.5 PK	74.0	-11.5	1.89 H	306	39.0	23.5
4	13390.00	49.3 AV	54.0	-4.7	1.89 H	306	25.8	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.9 PK			2.10 V	223	60.9	48.0
2	*6695.00	99.4 AV			2.10 V	223	51.4	48.0
3	13390.00	63.0 PK	74.0	-11.0	1.95 V	228	39.5	23.5
4	13390.00	49.6 AV	54.0	-4.4	1.95 V	228	26.1	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	104.9 PK			1.75 H	79	56.8	48.1
2	*6855.00	94.6 AV			1.75 H	79	46.5	48.1
3	#13710.00	62.9 PK	88.2	-25.3	1.97 H	308	39.1	23.8
4	#13710.00	49.7 AV	68.2	-18.5	1.97 H	308	25.9	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.9 PK			2.36 V	240	59.8	48.1
2	*6855.00	97.5 AV			2.36 V	240	49.4	48.1
3	#13710.00	63.2 PK	88.2	-25.0	1.82 V	221	39.4	23.8
4	#13710.00	49.9 AV	68.2	-18.3	1.82 V	221	26.1	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	105.1 PK			1.69 H	72	56.8	48.3
2	*6875.00	94.8 AV			1.69 H	72	46.5	48.3
3	#13750.00	62.9 PK	88.2	-25.3	1.88 H	312	39.0	23.9
4	#13750.00	49.7 AV	68.2	-18.5	1.88 H	312	25.8	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.9 PK			2.26 V	235	59.6	48.3
2	*6875.00	97.8 AV			2.26 V	235	49.5	48.3
3	#13750.00	63.3 PK	88.2	-24.9	1.82 V	221	39.4	23.9
4	#13750.00	50.0 AV	68.2	-18.2	1.82 V	221	26.1	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	105.7 PK			1.65 H	75	56.0	49.7
2	*6995.00	96.1 AV			1.65 H	75	46.4	49.7
3	#13990.00	63.7 PK	88.2	-24.5	1.88 H	309	39.0	24.7
4	#13990.00	50.7 AV	68.2	-17.5	1.88 H	309	26.0	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	108.9 PK			2.27 V	234	59.2	49.7
2	*6995.00	99.2 AV			2.27 V	234	49.5	49.7
3	#13990.00	64.2 PK	88.2	-24.0	1.82 V	225	39.5	24.7
4	#13990.00	50.9 AV	68.2	-17.3	1.82 V	225	26.2	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.1 PK			1.69 H	77	55.5	49.6
2	*7115.00	95.5 AV			1.69 H	77	45.9	49.6
3	#7125.00	84.4 PK	88.2	-3.8	1.69 H	77	66.8	17.6
4	#7125.00	56.1 AV	68.2	-12.1	1.69 H	77	38.5	17.6
5	#14230.00	64.1 PK	88.2	-24.1	1.89 H	302	39.0	25.1
6	#14230.00	50.9 AV	68.2	-17.3	1.89 H	302	25.8	25.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.6 PK			2.12 V	6	58.0	49.6
2	*7115.00	98.5 AV			2.12 V	6	48.9	49.6
3	#7125.00	87.6 PK	88.2	-0.6	2.12 V	6	70.0	17.6
4	#7125.00	58.4 AV	68.2	-9.8	2.12 V	6	40.8	17.6
5	#14230.00	64.4 PK	88.2	-23.8	1.85 V	231	39.3	25.1
6	#14230.00	51.2 AV	68.2	-17.0	1.85 V	231	26.1	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Beamforming(2T1S)

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.1 PK	88.2	-35.1	1.75 H	72	39.2	13.9
2	#5925.00	38.4 AV	68.2	-29.8	1.75 H	72	24.5	13.9
3	*6115.00	105.5 PK			1.75 H	72	60.0	45.5
4	*6115.00	93.8 AV			1.75 H	72	48.3	45.5
5	12230.00	60.1 PK	74.0	-13.9	1.88 H	306	39.1	21.0
6	12230.00	46.9 AV	54.0	-7.1	1.88 H	306	25.9	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.4 PK	88.2	-34.8	2.20 V	347	39.5	13.9
2	#5925.00	38.7 AV	68.2	-29.5	2.20 V	347	24.8	13.9
3	*6115.00	109.2 PK			2.20 V	347	63.7	45.5
4	*6115.00	96.7 AV			2.20 V	347	51.2	45.5
5	12230.00	60.5 PK	74.0	-13.5	1.95 V	230	39.5	21.0
6	12230.00	47.2 AV	54.0	-6.8	1.95 V	230	26.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	106.0 PK			1.78 H	70	60.0	46.0
2	*6255.00	94.7 AV			1.78 H	70	48.7	46.0
3	12510.00	59.9 PK	74.0	-14.1	1.89 H	309	39.0	20.9
4	12510.00	46.8 AV	54.0	-7.2	1.89 H	309	25.9	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	110.0 PK			2.29 V	240	64.0	46.0
2	*6255.00	97.9 AV			2.29 V	240	51.9	46.0
3	12510.00	60.4 PK	74.0	-13.6	1.82 V	231	39.5	20.9
4	12510.00	47.0 AV	54.0	-7.0	1.82 V	231	26.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.1 PK			1.77 H	75	60.0	47.1
2	*6415.00	95.1 AV			1.77 H	75	48.0	47.1
3	#12830.00	60.8 PK	88.2	-27.4	1.88 H	310	39.0	21.8
4	#12830.00	47.6 AV	68.2	-20.6	1.88 H	310	25.8	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.6 PK			2.21 V	237	63.5	47.1
2	*6415.00	98.3 AV			2.21 V	237	51.2	47.1
3	#12830.00	61.1 PK	88.2	-27.1	1.88 V	221	39.3	21.8
4	#12830.00	47.8 AV	68.2	-20.4	1.88 V	221	26.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	107.7 PK			1.75 H	80	60.6	47.1
2	*6435.00	95.2 AV			1.75 H	80	48.1	47.1
3	#12870.00	61.1 PK	88.2	-27.1	1.92 H	302	39.0	22.1
4	#12870.00	47.9 AV	68.2	-20.3	1.92 H	302	25.8	22.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.6 PK			2.00 V	230	62.5	47.1
2	*6435.00	98.5 AV			2.00 V	230	51.4	47.1
3	#12870.00	61.6 PK	88.2	-26.6	1.82 V	239	39.5	22.1
4	#12870.00	48.2 AV	68.2	-20.0	1.82 V	239	26.1	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.4 PK			1.72 H	79	60.0	47.4
2	*6475.00	95.3 AV			1.72 H	79	47.9	47.4
3	#12950.00	61.2 PK	88.2	-27.0	1.85 H	312	39.0	22.2
4	#12950.00	48.1 AV	68.2	-20.1	1.85 H	312	25.9	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.2 PK			2.08 V	225	62.8	47.4
2	*6475.00	98.7 AV			2.08 V	225	51.3	47.4
3	#12950.00	61.6 PK	88.2	-26.6	1.88 V	228	39.4	22.2
4	#12950.00	48.3 AV	68.2	-19.9	1.88 V	228	26.1	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.8 PK			1.75 H	81	60.1	47.7
2	*6515.00	95.6 AV			1.75 H	81	47.9	47.7
3	#13030.00	61.4 PK	88.2	-26.8	1.85 H	312	39.0	22.4
4	#13030.00	48.3 AV	68.2	-19.9	1.85 H	312	25.9	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.2 PK			2.03 V	226	63.5	47.7
2	*6515.00	99.1 AV			2.03 V	226	51.4	47.7
3	#13030.00	61.8 PK	88.2	-26.4	1.79 V	228	39.4	22.4
4	#13030.00	48.5 AV	68.2	-19.7	1.79 V	228	26.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.4 PK			1.80 H	72	59.5	47.9
2	*6535.00	95.4 AV			1.80 H	72	47.5	47.9
3	#13070.00	61.4 PK	88.2	-26.8	1.89 H	315	39.0	22.4
4	#13070.00	48.2 AV	68.2	-20.0	1.89 H	315	25.8	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.1 PK			2.03 V	227	63.2	47.9
2	*6535.00	98.8 AV			2.03 V	227	50.9	47.9
3	#13070.00	61.6 PK	88.2	-26.6	1.89 V	221	39.2	22.4
4	#13070.00	48.4 AV	68.2	-19.8	1.89 V	221	26.0	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.9 PK			1.85 H	72	59.9	48.0
2	*6695.00	95.8 AV			1.85 H	72	47.8	48.0
3	13390.00	62.6 PK	74.0	-11.4	1.85 H	302	39.1	23.5
4	13390.00	49.4 AV	54.0	-4.6	1.85 H	302	25.9	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.5 PK			1.97 V	227	63.5	48.0
2	*6695.00	99.3 AV			1.97 V	227	51.3	48.0
3	13390.00	62.9 PK	74.0	-11.1	1.80 V	225	39.4	23.5
4	13390.00	49.7 AV	54.0	-4.3	1.80 V	225	26.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.1 PK			1.72 H	80	59.0	48.1
2	*6855.00	94.9 AV			1.72 H	80	46.8	48.1
3	#13710.00	62.8 PK	88.2	-25.4	1.85 H	316	39.0	23.8
4	#13710.00	49.6 AV	68.2	-18.6	1.85 H	316	25.8	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.9 PK			1.94 V	226	61.8	48.1
2	*6855.00	97.9 AV			1.94 V	226	49.8	48.1
3	#13710.00	63.3 PK	88.2	-24.9	1.92 V	228	39.5	23.8
4	#13710.00	50.0 AV	68.2	-18.2	1.92 V	228	26.2	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.0 PK			1.75 H	77	58.7	48.3
2	*6875.00	94.9 AV			1.75 H	77	46.6	48.3
3	#13750.00	62.9 PK	88.2	-25.3	1.82 H	312	39.0	23.9
4	#13750.00	49.6 AV	68.2	-18.6	1.82 H	312	25.7	23.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.1 PK			1.83 V	230	61.8	48.3
2	*6875.00	98.0 AV			1.83 V	230	49.7	48.3
3	#13750.00	63.1 PK	88.2	-25.1	1.85 V	222	39.2	23.9
4	#13750.00	49.9 AV	68.2	-18.3	1.85 V	222	26.0	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.1 PK			1.80 H	72	59.4	49.7
2	*6995.00	96.6 AV			1.80 H	72	46.9	49.7
3	#13990.00	63.7 PK	88.2	-24.5	1.80 H	305	39.0	24.7
4	#13990.00	50.6 AV	68.2	-17.6	1.80 H	305	25.9	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.5 PK			1.83 V	227	61.8	49.7
2	*6995.00	99.6 AV			1.83 V	227	49.9	49.7
3	#13990.00	64.1 PK	88.2	-24.1	1.75 V	221	39.4	24.7
4	#13990.00	50.8 AV	68.2	-17.4	1.75 V	221	26.1	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	108.0 PK			1.82 H	72	58.6	49.4
2	*7095.00	95.3 AV			1.82 H	72	45.9	49.4
3	#14190.00	64.1 PK	88.2	-24.1	1.82 H	302	39.0	25.1
4	#14190.00	50.8 AV	68.2	-17.4	1.82 H	302	25.7	25.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	110.6 PK			1.79 V	226	61.2	49.4
2	*7095.00	98.3 AV			1.79 V	226	48.9	49.4
3	#14190.00	64.4 PK	88.2	-23.8	1.80 V	231	39.3	25.1
4	#14190.00	51.1 AV	68.2	-17.1	1.80 V	231	26.0	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.6 PK			1.80 H	77	48.0	49.6
2	*7115.00	84.4 AV			1.80 H	77	34.8	49.6
3	#7125.00	79.5 PK	88.2	-8.7	1.80 H	77	61.9	17.6
4	#7125.00	65.8 AV	68.2	-2.4	1.80 H	77	48.2	17.6
5	#14230.00	63.9 PK	88.2	-24.3	1.82 H	302	38.8	25.1
6	#14230.00	50.7 AV	68.2	-17.5	1.82 H	302	25.6	25.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.8 PK			1.76 V	227	50.2	49.6
2	*7115.00	88.0 AV			1.76 V	227	38.4	49.6
3	#7125.00	83.5 PK	88.2	-4.7	1.76 V	227	65.9	17.6
4	#7125.00	68.0 AV	68.2	-0.2	1.76 V	227	50.4	17.6
5	#14230.00	64.1 PK	88.2	-24.1	1.82 V	222	39.0	25.1
6	#14230.00	51.0 AV	68.2	-17.2	1.82 V	222	25.9	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.9 PK	88.2	-35.3	1.80 H	77	39.0	13.9
2	#5925.00	38.4 AV	68.2	-29.8	1.80 H	77	24.5	13.9
3	*6125.00	106.5 PK			1.80 H	77	61.0	45.5
4	*6125.00	93.6 AV			1.80 H	77	48.1	45.5
5	12250.00	60.0 PK	74.0	-14.0	1.85 H	316	39.0	21.0
6	12250.00	46.8 AV	54.0	-7.2	1.85 H	316	25.8	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.1 PK	88.2	-35.1	2.18 V	347	39.2	13.9
2	#5925.00	38.7 AV	68.2	-29.5	2.18 V	347	24.8	13.9
3	*6125.00	110.0 PK			2.18 V	347	64.5	45.5
4	*6125.00	96.5 AV			2.18 V	347	51.0	45.5
5	12250.00	60.3 PK	74.0	-13.7	1.88 V	225	39.3	21.0
6	12250.00	47.1 AV	54.0	-6.9	1.88 V	225	26.1	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	107.3 PK			1.81 H	70	61.5	45.8
2	*6245.00	94.3 AV			1.81 H	70	48.5	45.8
3	12490.00	59.7 PK	74.0	-14.3	1.82 H	305	38.8	20.9
4	12490.00	46.6 AV	54.0	-7.4	1.82 H	305	25.7	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	109.6 PK			2.25 V	235	63.8	45.8
2	*6245.00	97.4 AV			2.25 V	235	51.6	45.8
3	12490.00	60.1 PK	74.0	-13.9	1.80 V	229	39.2	20.9
4	12490.00	46.9 AV	54.0	-7.1	1.80 V	229	26.0	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.5 PK			1.82 H	75	60.5	47.0
2	*6405.00	94.9 AV			1.82 H	75	47.9	47.0
3	#12810.00	60.5 PK	88.2	-27.7	1.82 H	322	38.8	21.7
4	#12810.00	47.4 AV	68.2	-20.8	1.82 H	322	25.7	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	109.5 PK			2.20 V	232	62.5	47.0
2	*6405.00	98.0 AV			2.20 V	232	51.0	47.0
3	#12810.00	60.7 PK	88.2	-27.5	1.82 V	225	39.0	21.7
4	#12810.00	47.6 AV	68.2	-20.6	1.82 V	225	25.9	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	107.7 PK			1.82 H	75	60.6	47.1
2	*6445.00	95.2 AV			1.82 H	75	48.1	47.1
3	#12890.00	60.9 PK	88.2	-27.3	1.85 H	300	38.7	22.2
4	#12890.00	48.0 AV	68.2	-20.2	1.85 H	300	25.8	22.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	109.8 PK			2.06 V	230	62.7	47.1
2	*6445.00	98.1 AV			2.06 V	230	51.0	47.1
3	#12890.00	61.4 PK	88.2	-26.8	1.85 V	220	39.2	22.2
4	#12890.00	48.2 AV	68.2	-20.0	1.85 V	220	26.0	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	107.2 PK			1.82 H	75	59.7	47.5
2	*6485.00	95.4 AV			1.82 H	75	47.9	47.5
3	#12970.00	61.0 PK	88.2	-27.2	1.82 H	306	38.7	22.3
4	#12970.00	48.0 AV	68.2	-20.2	1.82 H	306	25.7	22.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.2 PK			2.07 V	228	63.7	47.5
2	*6485.00	98.5 AV			2.07 V	228	51.0	47.5
3	#12970.00	61.5 PK	88.2	-26.7	1.88 V	224	39.2	22.3
4	#12970.00	48.2 AV	68.2	-20.0	1.88 V	224	25.9	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	107.8 PK			1.85 H	72	60.0	47.8
2	*6525.00	95.8 AV			1.85 H	72	48.0	47.8
3	#13050.00	61.4 PK	88.2	-26.8	1.82 H	322	38.9	22.5
4	#13050.00	48.3 AV	68.2	-19.9	1.82 H	322	25.8	22.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	111.3 PK			2.00 V	228	63.5	47.8
2	*6525.00	99.3 AV			2.00 V	228	51.5	47.8
3	#13050.00	61.5 PK	88.2	-26.7	1.82 V	222	39.0	22.5
4	#13050.00	48.4 AV	68.2	-19.8	1.82 V	222	25.9	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	108.5 PK			1.82 H	72	60.4	48.1
2	*6565.00	96.0 AV			1.82 H	72	47.9	48.1
3	#13130.00	61.4 PK	88.2	-26.8	1.82 H	322	38.8	22.6
4	#13130.00	48.4 AV	68.2	-19.8	1.82 H	322	25.8	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	111.4 PK			2.00 V	227	63.3	48.1
2	*6565.00	99.0 AV			2.00 V	227	50.9	48.1
3	#13130.00	61.8 PK	88.2	-26.4	1.82 V	227	39.2	22.6
4	#13130.00	48.6 AV	68.2	-19.6	1.82 V	227	26.0	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	108.0 PK			1.75 H	72	59.8	48.2
2	*6725.00	96.1 AV			1.75 H	72	47.9	48.2
3	#13450.00	62.2 PK	88.2	-26.0	1.82 H	320	38.7	23.5
4	#13450.00	49.2 AV	68.2	-19.0	1.82 H	320	25.7	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	111.7 PK			1.96 V	228	63.5	48.2
2	*6725.00	99.1 AV			1.96 V	228	50.9	48.2
3	#13450.00	62.7 PK	88.2	-25.5	1.88 V	238	39.2	23.5
4	#13450.00	49.5 AV	68.2	-18.7	1.88 V	238	26.0	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	106.7 PK			1.82 H	73	58.5	48.2
2	*6845.00	94.8 AV			1.82 H	73	46.6	48.2
3	#13690.00	62.5 PK	88.2	-25.7	1.88 H	322	38.7	23.8
4	#13690.00	49.5 AV	68.2	-18.7	1.88 H	322	25.7	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.4 PK			2.20 V	233	62.2	48.2
2	*6845.00	98.1 AV			2.20 V	233	49.9	48.2
3	#13690.00	62.8 PK	88.2	-25.4	1.82 V	223	39.0	23.8
4	#13690.00	49.6 AV	68.2	-18.6	1.82 V	223	25.8	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	107.4 PK			1.85 H	79	59.0	48.4
2	*6885.00	95.0 AV			1.85 H	79	46.6	48.4
3	#13770.00	62.8 PK	88.2	-25.4	1.82 H	309	38.7	24.1
4	#13770.00	49.8 AV	68.2	-18.4	1.82 H	309	25.7	24.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.9 PK			2.26 V	238	62.5	48.4
2	*6885.00	98.0 AV			2.26 V	238	49.6	48.4
3	#13770.00	63.3 PK	88.2	-24.9	1.88 V	221	39.2	24.1
4	#13770.00	50.1 AV	68.2	-18.1	1.88 V	221	26.0	24.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	107.8 PK			1.85 H	72	58.0	49.8
2	*7005.00	95.2 AV			1.85 H	72	45.4	49.8
3	#14010.00	63.4 PK	88.2	-24.8	1.92 H	302	38.7	24.7
4	#14010.00	50.3 AV	68.2	-17.9	1.92 H	302	25.6	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	111.6 PK			2.19 V	236	61.8	49.8
2	*7005.00	98.6 AV			2.19 V	236	48.8	49.8
3	#14010.00	63.9 PK	88.2	-24.3	1.88 V	233	39.2	24.7
4	#14010.00	50.7 AV	68.2	-17.5	1.88 V	233	26.0	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	106.6 PK			1.80 H	72	57.2	49.4
2	*7085.00	94.4 AV			1.80 H	72	45.0	49.4
3	#7125.00	57.1 PK	88.2	-31.1	1.80 H	72	39.5	17.6
4	#7125.00	43.9 AV	68.2	-24.3	1.80 H	72	26.3	17.6
5	#14170.00	63.7 PK	88.2	-24.5	1.89 H	321	38.7	25.0
6	#14170.00	50.6 AV	68.2	-17.6	1.89 H	321	25.6	25.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.9 PK			2.11 V	238	60.5	49.4
2	*7085.00	97.2 AV			2.11 V	238	47.8	49.4
3	#7125.00	57.4 PK	88.2	-30.8	2.11 V	238	39.8	17.6
4	#7125.00	44.3 AV	68.2	-23.9	2.11 V	238	26.7	17.6
5	#14170.00	64.2 PK	88.2	-24.0	1.82 V	225	39.2	25.0
6	#14170.00	51.0 AV	68.2	-17.2	1.82 V	225	26.0	25.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.9 PK	88.2	-37.3	1.78 H	80	37.0	13.9
2	#5925.00	37.2 AV	68.2	-31.0	1.78 H	80	23.3	13.9
3	*6145.00	105.6 PK			1.78 H	80	60.2	45.4
4	*6145.00	93.2 AV			1.78 H	80	47.8	45.4
5	12290.00	59.7 PK	74.0	-14.3	1.75 H	322	38.7	21.0
6	12290.00	46.7 AV	54.0	-7.3	1.75 H	322	25.7	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	2.28 V	266	37.2	13.9
2	#5925.00	37.4 AV	68.2	-30.8	2.28 V	266	23.5	13.9
3	*6145.00	108.9 PK			2.28 V	266	63.5	45.4
4	*6145.00	96.3 AV			2.28 V	266	50.9	45.4
5	12290.00	60.0 PK	74.0	-14.0	1.82 V	225	39.0	21.0
6	12290.00	46.9 AV	54.0	-7.1	1.82 V	225	25.9	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	105.3 PK			1.82 H	77	59.6	45.7
2	*6225.00	93.2 AV			1.82 H	77	47.5	45.7
3	12450.00	59.4 PK	74.0	-14.6	1.78 H	30	38.5	20.9
4	12450.00	46.4 AV	54.0	-7.6	1.78 H	30	25.5	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	108.6 PK			2.28 V	239	62.9	45.7
2	*6225.00	96.2 AV			2.28 V	239	50.5	45.7
3	12450.00	60.1 PK	74.0	-13.9	1.85 V	232	39.2	20.9
4	12450.00	46.9 AV	54.0	-7.1	1.85 V	232	26.0	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	106.2 PK			1.75 H	82	59.2	47.0
2	*6385.00	94.3 AV			1.75 H	82	47.3	47.0
3	#12770.00	60.3 PK	88.2	-27.9	1.72 H	305	38.6	21.7
4	#12770.00	47.2 AV	68.2	-21.0	1.72 H	305	25.5	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.9 PK			2.35 V	238	62.9	47.0
2	*6385.00	97.2 AV			2.35 V	238	50.2	47.0
3	#12770.00	60.6 PK	88.2	-27.6	1.82 V	221	38.9	21.7
4	#12770.00	47.6 AV	68.2	-20.6	1.82 V	221	25.9	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	106.8 PK			1.82 H	81	59.5	47.3
2	*6465.00	94.2 AV			1.82 H	81	46.9	47.3
3	#12930.00	60.9 PK	88.2	-27.3	1.82 H	305	38.7	22.2
4	#12930.00	47.7 AV	68.2	-20.5	1.82 H	305	25.5	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.8 PK			2.19 V	227	61.5	47.3
2	*6465.00	97.3 AV			2.19 V	227	50.0	47.3
3	#12930.00	61.2 PK	88.2	-27.0	1.82 V	228	39.0	22.2
4	#12930.00	48.1 AV	68.2	-20.1	1.82 V	228	25.9	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.5 PK			1.72 H	82	59.6	47.9
2	*6545.00	94.9 AV			1.72 H	82	47.0	47.9
3	#13090.00	61.1 PK	88.2	-27.1	1.78 H	316	38.5	22.6
4	#13090.00	48.1 AV	68.2	-20.1	1.78 H	316	25.5	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.3 PK			2.01 V	230	62.4	47.9
2	*6545.00	98.2 AV			2.01 V	230	50.3	47.9
3	#13090.00	61.6 PK	88.2	-26.6	1.88 V	229	39.0	22.6
4	#13090.00	48.5 AV	68.2	-19.7	1.88 V	229	25.9	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.1 PK			1.77 H	73	59.0	48.1
2	*6705.00	95.2 AV			1.77 H	73	47.1	48.1
3	#13410.00	62.3 PK	88.2	-25.9	1.82 H	320	38.8	23.5
4	#13410.00	49.1 AV	68.2	-19.1	1.82 H	320	25.6	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.4 PK			1.87 V	230	62.3	48.1
2	*6705.00	98.6 AV			1.87 V	230	50.5	48.1
3	#13410.00	62.6 PK	88.2	-25.6	1.88 V	228	39.1	23.5
4	#13410.00	49.5 AV	68.2	-18.7	1.88 V	228	26.0	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.9 PK			1.72 H	82	59.7	48.2
2	*6865.00	94.7 AV			1.72 H	82	46.5	48.2
3	#13730.00	62.4 PK	88.2	-25.8	1.73 H	309	38.5	23.9
4	#13730.00	49.4 AV	68.2	-18.8	1.73 H	309	25.5	23.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.1 PK			1.85 V	230	61.9	48.2
2	*6865.00	97.5 AV			1.85 V	230	49.3	48.2
3	#13730.00	62.7 PK	88.2	-25.5	1.88 V	220	38.8	23.9
4	#13730.00	49.8 AV	68.2	-18.4	1.88 V	220	25.9	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	108.6 PK			1.80 H	82	59.5	49.1
2	*6945.00	95.3 AV			1.80 H	82	46.2	49.1
3	#13890.00	62.8 PK	88.2	-25.4	1.73 H	318	38.6	24.2
4	#13890.00	49.8 AV	68.2	-18.4	1.73 H	318	25.6	24.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.2 PK			1.81 V	228	62.1	49.1
2	*6945.00	98.8 AV			1.81 V	228	49.7	49.1
3	#13890.00	63.2 PK	88.2	-25.0	1.89 V	221	39.0	24.2
4	#13890.00	50.1 AV	68.2	-18.1	1.89 V	221	25.9	24.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.5 PK			1.75 H	88	58.8	49.7
2	*7025.00	95.8 AV			1.75 H	88	46.1	49.7
3	#7125.00	56.6 PK	88.2	-31.6	1.75 H	88	39.0	17.6
4	#7125.00	43.6 AV	68.2	-24.6	1.75 H	88	26.0	17.6
5	#14050.00	63.4 PK	88.2	-24.8	1.77 H	316	38.5	24.9
6	#14050.00	50.3 AV	68.2	-17.9	1.77 H	316	25.4	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.7 PK			1.82 V	225	61.0	49.7
2	*7025.00	98.8 AV			1.82 V	225	49.1	49.7
3	#7125.00	57.4 PK	88.2	-30.8	1.82 V	225	39.8	17.6
4	#7125.00	44.4 AV	68.2	-23.8	1.82 V	225	26.8	17.6
5	#14050.00	63.7 PK	88.2	-24.5	1.75 V	228	38.8	24.9
6	#14050.00	50.6 AV	68.2	-17.6	1.75 V	228	25.7	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.7 PK	88.2	-37.5	1.75 H	82	36.8	13.9
2	#5925.00	38.1 AV	68.2	-30.1	1.75 H	82	24.2	13.9
3	*6185.00	105.4 PK			1.75 H	82	60.0	45.4
4	*6185.00	93.3 AV			1.75 H	82	47.9	45.4
5	12370.00	59.6 PK	74.0	-14.4	1.75 H	306	38.7	20.9
6	12370.00	46.5 AV	54.0	-7.5	1.75 H	306	25.6	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.93 V	235	37.5	13.9
2	#5925.00	38.4 AV	68.2	-29.8	1.93 V	235	24.5	13.9
3	*6185.00	108.9 PK			1.93 V	235	63.5	45.4
4	*6185.00	96.6 AV			1.93 V	235	51.2	45.4
5	12370.00	59.9 PK	74.0	-14.1	1.88 V	225	39.0	20.9
6	12370.00	46.8 AV	54.0	-7.2	1.88 V	225	25.9	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.5 PK			1.80 H	85	59.7	46.8
2	*6345.00	94.3 AV			1.80 H	85	47.5	46.8
3	12690.00	60.4 PK	74.0	-13.6	1.80 H	308	38.7	21.7
4	12690.00	47.3 AV	54.0	-6.7	1.80 H	308	25.6	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.3 PK			1.94 V	233	63.5	46.8
2	*6345.00	97.8 AV			1.94 V	233	51.0	46.8
3	12690.00	60.7 PK	74.0	-13.3	1.88 V	221	39.0	21.7
4	12690.00	47.6 AV	54.0	-6.4	1.88 V	221	25.9	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.9 PK			1.78 H	85	60.2	47.7
2	*6505.00	94.6 AV			1.78 H	85	46.9	47.7
3	#13010.00	61.2 PK	88.2	-27.0	1.78 H	311	38.8	22.4
4	#13010.00	48.0 AV	68.2	-20.2	1.78 H	311	25.6	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.9 PK			1.96 V	231	62.2	47.7
2	*6505.00	98.1 AV			1.96 V	231	50.4	47.7
3	#13010.00	61.4 PK	88.2	-26.8	1.87 V	228	39.0	22.4
4	#13010.00	48.3 AV	68.2	-19.9	1.87 V	228	25.9	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.8 PK			1.72 H	85	59.8	48.0
2	*6665.00	95.6 AV			1.72 H	85	47.6	48.0
3	13330.00	61.8 PK	74.0	-12.2	1.72 H	319	38.7	23.1
4	13330.00	48.6 AV	54.0	-5.4	1.72 H	319	25.5	23.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.5 PK			1.95 V	230	63.5	48.0
2	*6665.00	99.5 AV			1.95 V	230	51.5	48.0
3	13330.00	62.1 PK	74.0	-11.9	1.88 V	211	39.0	23.1
4	13330.00	48.9 AV	54.0	-5.1	1.88 V	211	25.8	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.6 PK			1.79 H	88	59.3	48.3
2	*6825.00	95.4 AV			1.79 H	88	47.1	48.3
3	#13650.00	62.5 PK	88.2	-25.7	1.77 H	311	38.7	23.8
4	#13650.00	49.3 AV	68.2	-18.9	1.77 H	311	25.5	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.3 PK			1.93 V	230	62.0	48.3
2	*6825.00	98.6 AV			1.93 V	230	50.3	48.3
3	#13650.00	62.7 PK	88.2	-25.5	1.82 V	222	38.9	23.8
4	#13650.00	49.7 AV	68.2	-18.5	1.82 V	222	25.9	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.7 PK			1.82 H	87	59.0	49.7
2	*6985.00	96.7 AV			1.82 H	87	47.0	49.7
3	#7125.00	70.6 PK	88.2	-17.6	1.82 H	87	53.0	17.6
4	#7125.00	52.6 AV	68.2	-15.6	1.82 H	87	35.0	17.6
5	#13970.00	63.2 PK	88.2	-25.0	1.72 H	311	38.6	24.6
6	#13970.00	50.1 AV	68.2	-18.1	1.72 H	311	25.5	24.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.8 PK			1.85 V	228	61.1	49.7
2	*6985.00	99.6 AV			1.85 V	228	49.9	49.7
3	#7125.00	73.8 PK	88.2	-14.4	1.85 V	228	56.2	17.6
4	#7125.00	55.6 AV	68.2	-12.6	1.85 V	228	38.0	17.6
5	#13970.00	63.4 PK	88.2	-24.8	1.82 V	225	38.8	24.6
6	#13970.00	50.5 AV	68.2	-17.7	1.82 V	225	25.9	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.7 PK	88.2	-37.5	1.80 H	85	36.8	13.9
2	#5925.00	38.5 AV	68.2	-29.7	1.80 H	85	24.6	13.9
3	*6265.00	106.2 PK			1.80 H	85	60.2	46.0
4	*6265.00	94.4 AV			1.80 H	85	48.4	46.0
5	12530.00	59.5 PK	74.0	-14.5	1.78 H	312	38.5	21.0
6	12530.00	46.4 AV	54.0	-7.6	1.78 H	312	25.4	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.90 V	230	37.2	13.9
2	#5925.00	38.9 AV	68.2	-29.3	1.90 V	230	25.0	13.9
3	*6265.00	109.2 PK			1.90 V	230	63.2	46.0
4	*6265.00	97.5 AV			1.90 V	230	51.5	46.0
5	12530.00	59.8 PK	74.0	-14.2	1.85 V	233	38.8	21.0
6	12530.00	46.7 AV	54.0	-7.3	1.85 V	233	25.7	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	108.0 PK			1.82 H	82	60.9	47.1
2	*6425.00	94.8 AV			1.82 H	82	47.7	47.1
3	#12850.00	60.4 PK	88.2	-27.8	1.75 H	311	38.4	22.0
4	#12850.00	47.4 AV	68.2	-20.8	1.75 H	311	25.4	22.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	109.8 PK			1.95 V	229	62.7	47.1
2	*6425.00	99.0 AV			1.95 V	229	51.9	47.1
3	#12850.00	60.8 PK	88.2	-27.4	1.82 V	229	38.8	22.0
4	#12850.00	47.7 AV	68.2	-20.5	1.82 V	229	25.7	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.6 PK			1.88 H	89	59.5	48.1
2	*6585.00	95.6 AV			1.88 H	89	47.5	48.1
3	#13170.00	61.0 PK	88.2	-27.2	1.85 H	312	38.4	22.6
4	#13170.00	47.9 AV	68.2	-20.3	1.85 H	312	25.3	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.3 PK			1.96 V	228	63.2	48.1
2	*6585.00	99.6 AV			1.96 V	228	51.5	48.1
3	#13170.00	61.1 PK	88.2	-27.1	1.85 V	235	38.5	22.6
4	#13170.00	48.1 AV	68.2	-20.1	1.85 V	235	25.5	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	109.0 PK			1.85 H	80	60.7	48.3
2	*6745.00	96.3 AV			1.85 H	80	48.0	48.3
3	#13490.00	62.0 PK	88.2	-26.2	1.82 H	316	38.4	23.6
4	#13490.00	49.0 AV	68.2	-19.2	1.82 H	316	25.4	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.8 PK			1.95 V	231	63.5	48.3
2	*6745.00	99.5 AV			1.95 V	231	51.2	48.3
3	#13490.00	62.2 PK	88.2	-26.0	1.82 V	225	38.6	23.6
4	#13490.00	49.1 AV	68.2	-19.1	1.82 V	225	25.5	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.4 PK			1.80 H	77	57.8	48.6
2	*6905.00	94.4 AV			1.80 H	77	45.8	48.6
3	#7125.00	69.1 PK	88.2	-19.1	1.80 H	77	51.5	17.6
4	#7125.00	54.4 AV	68.2	-13.8	1.80 H	77	36.8	17.6
5	7250.00	64.1 PK	74.0	-9.9	1.80 H	77	46.2	17.9
6	7250.00	51.4 AV	54.0	-2.6	1.80 H	77	33.5	17.9
7	#13810.00	62.5 PK	88.2	-25.7	1.88 H	227	38.4	24.1
8	#13810.00	49.4 AV	68.2	-18.8	1.88 H	227	25.3	24.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	109.7 PK			1.95 V	224	61.1	48.6
2	*6905.00	98.1 AV			1.95 V	224	49.5	48.6
3	#7125.00	72.6 PK	88.2	-15.6	1.95 V	224	55.0	17.6
4	#7125.00	57.4 AV	68.2	-10.8	1.95 V	224	39.8	17.6
5	7251.00	66.9 PK	74.0	-7.1	1.95 V	224	49.0	17.9
6	7251.00	53.8 AV	54.0	-0.2	1.95 V	224	35.9	17.9
7	#13810.00	62.6 PK	88.2	-25.6	1.85 V	229	38.5	24.1
8	#13810.00	49.7 AV	68.2	-18.5	1.85 V	229	25.6	24.1


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 33

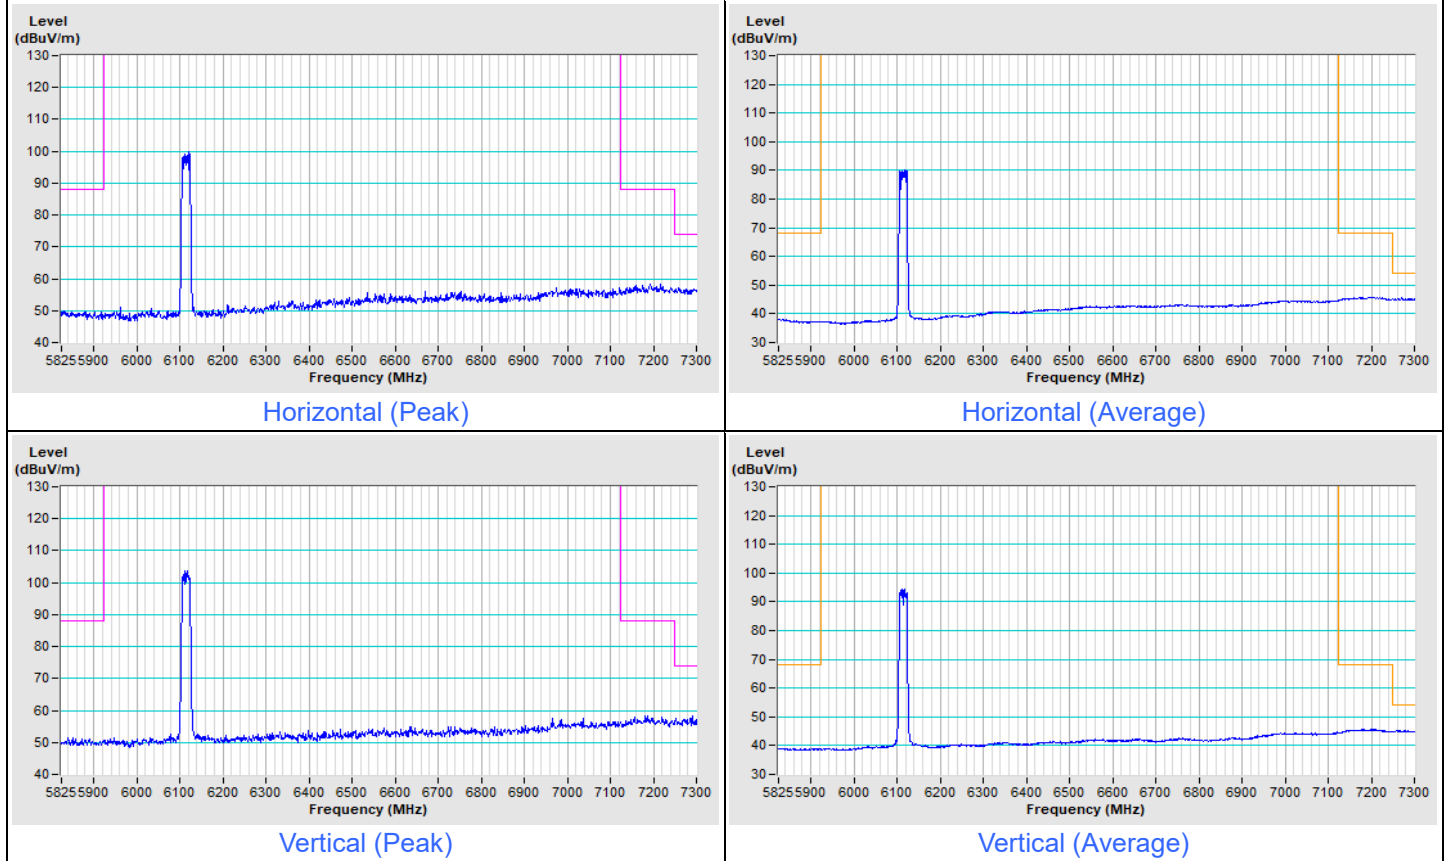


802.11a Channel 233

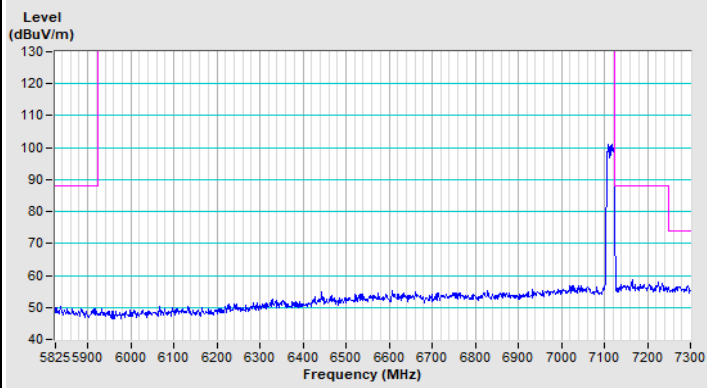


Horizontal (Peak)

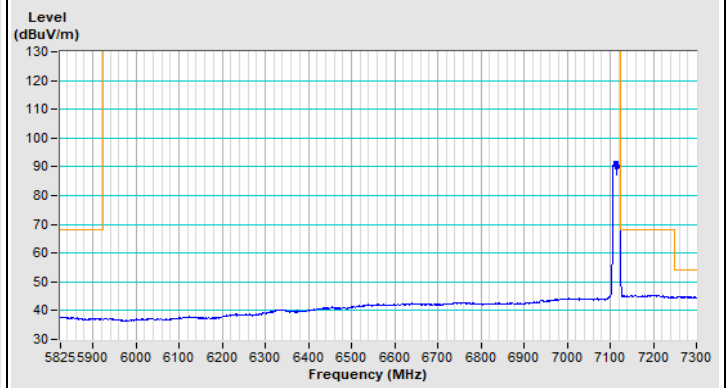

Horizontal (Average)

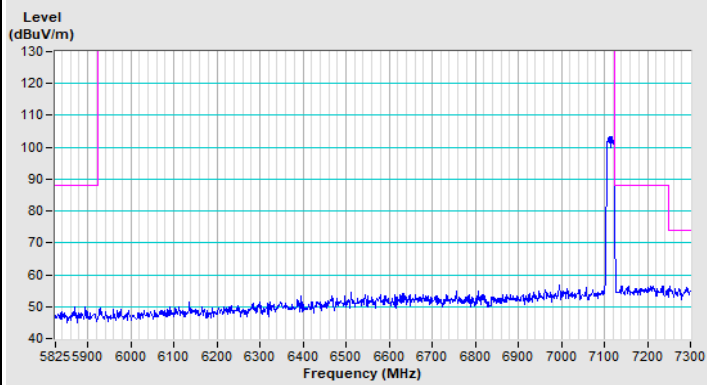

Vertical (Peak)

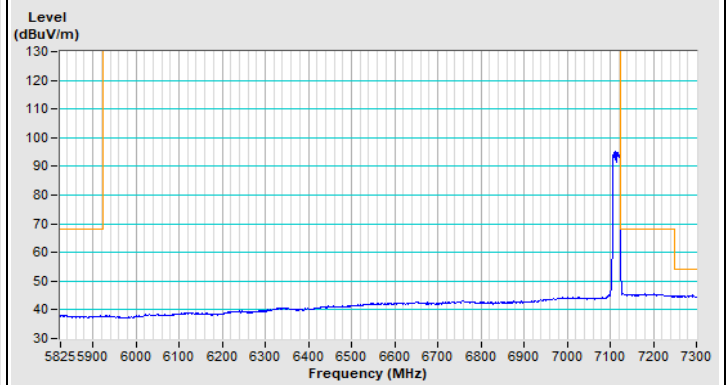


Vertical (Average)




Beamforming(2T1S)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 33

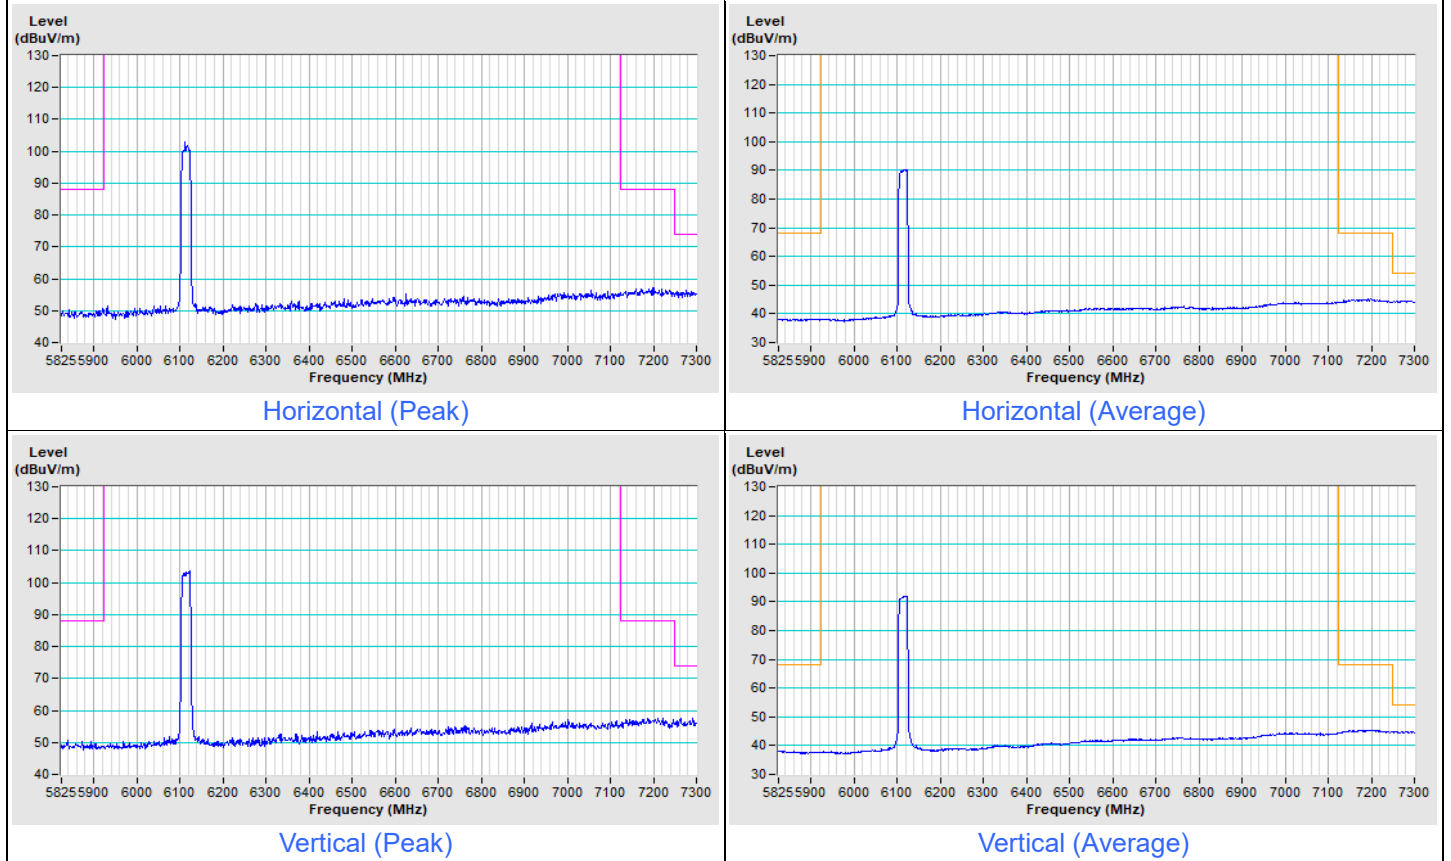


802.11be (EHT20) Channel 233

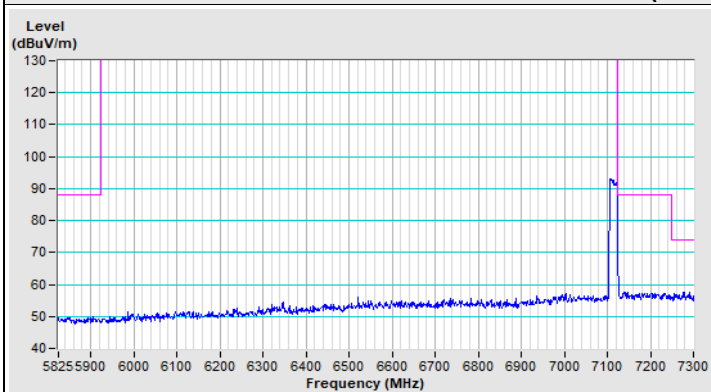


Horizontal (Peak)

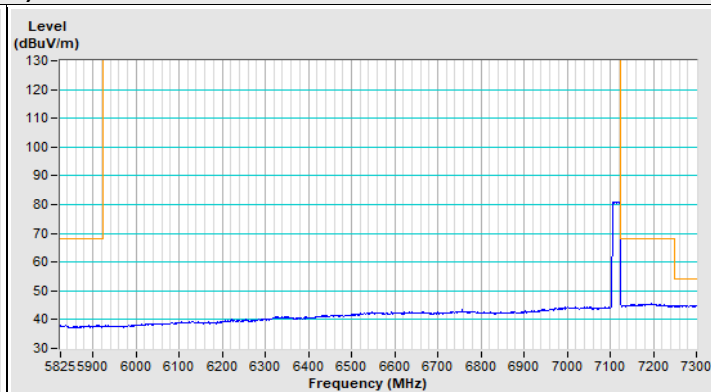

Horizontal (Average)

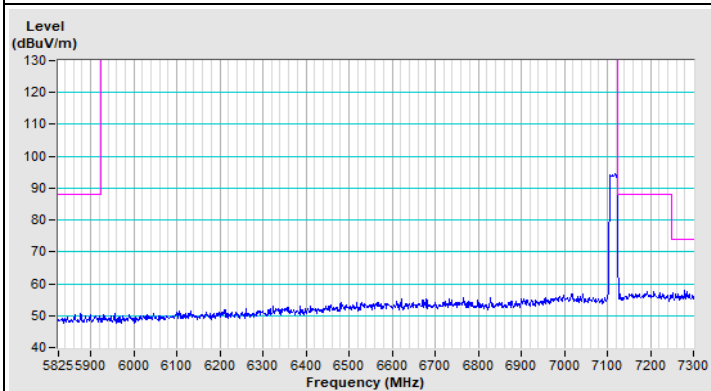


Vertical (Peak)

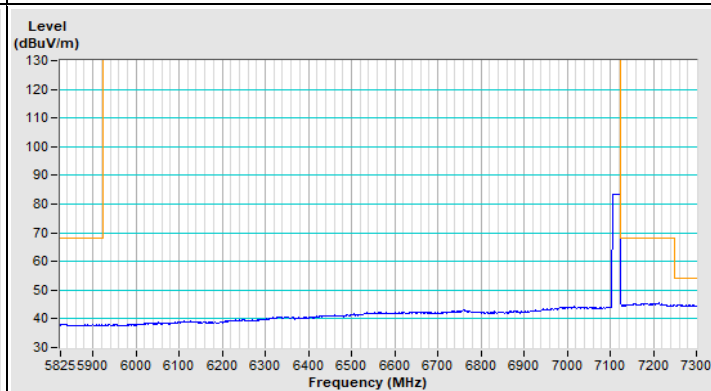


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 35

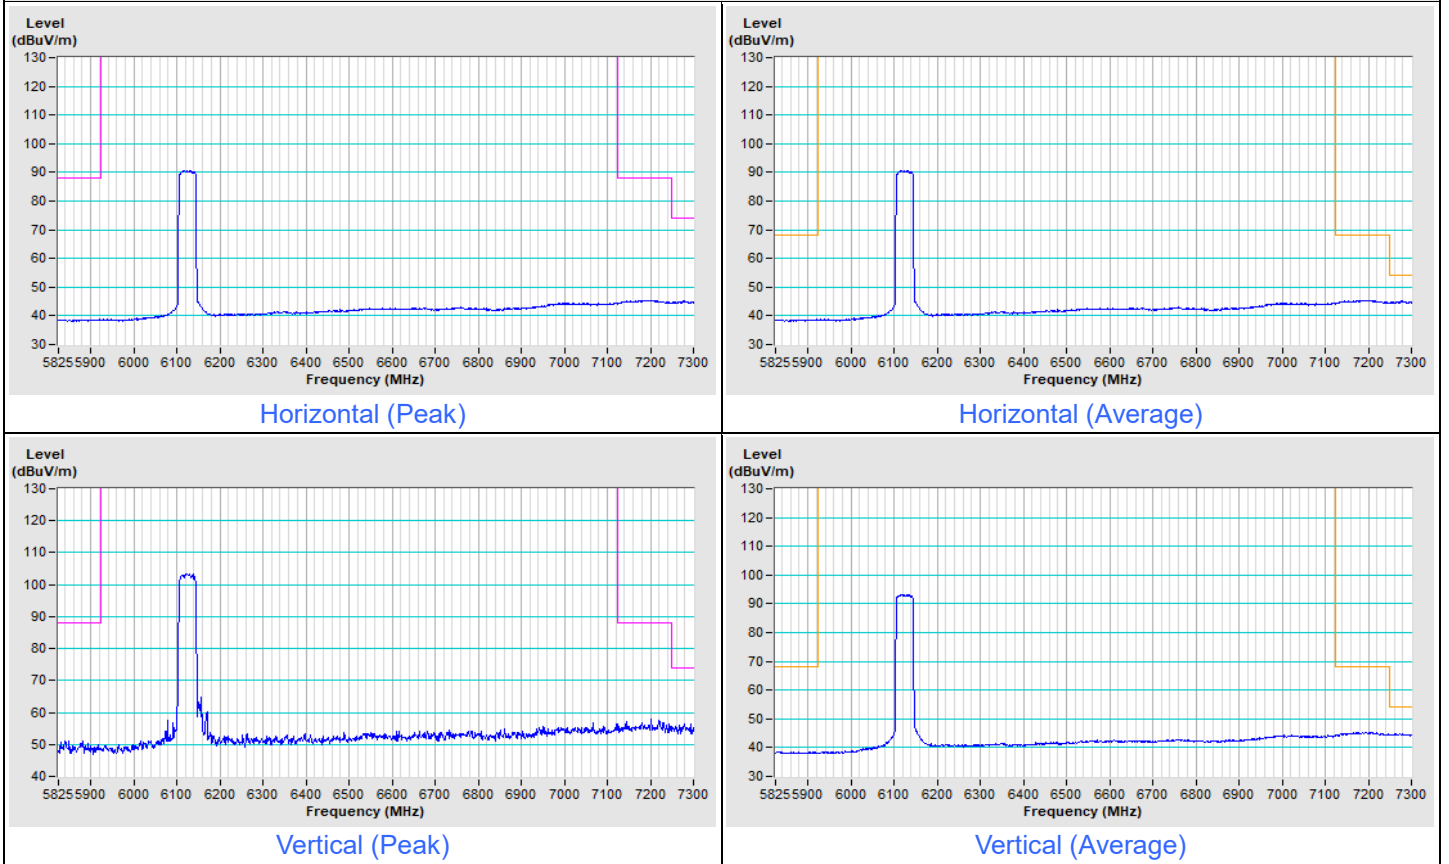


802.11be (EHT40) Channel 227

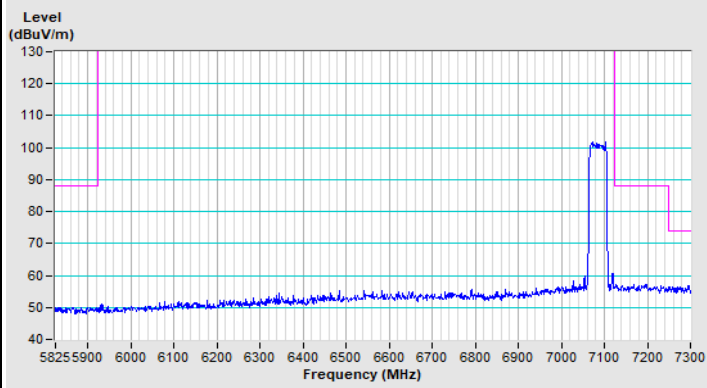


Horizontal (Peak)

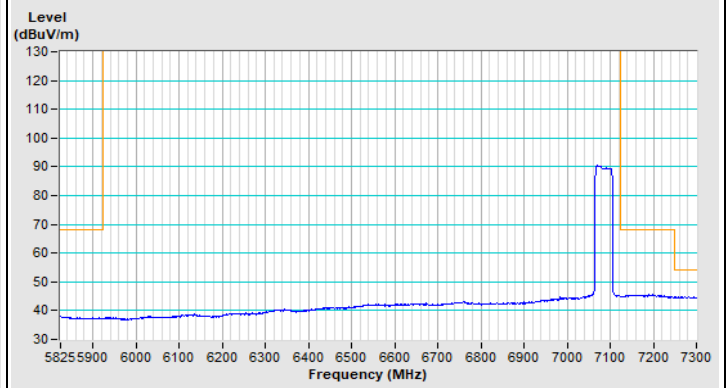

Horizontal (Average)

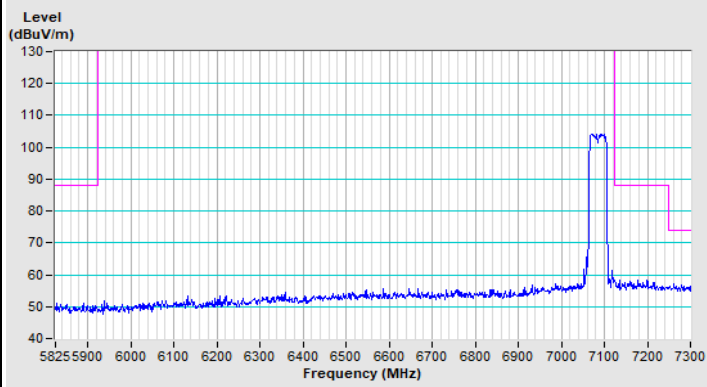


Vertical (Peak)

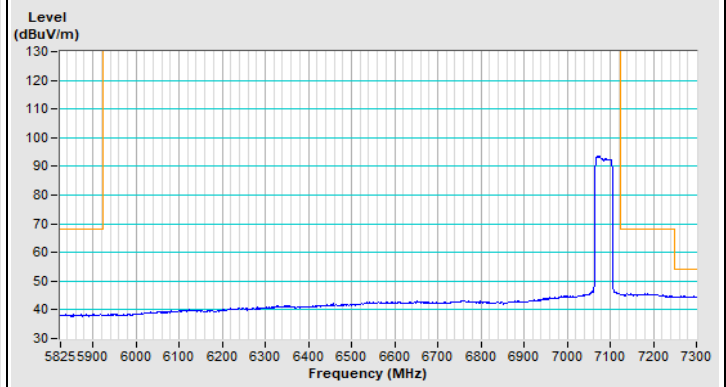


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 39

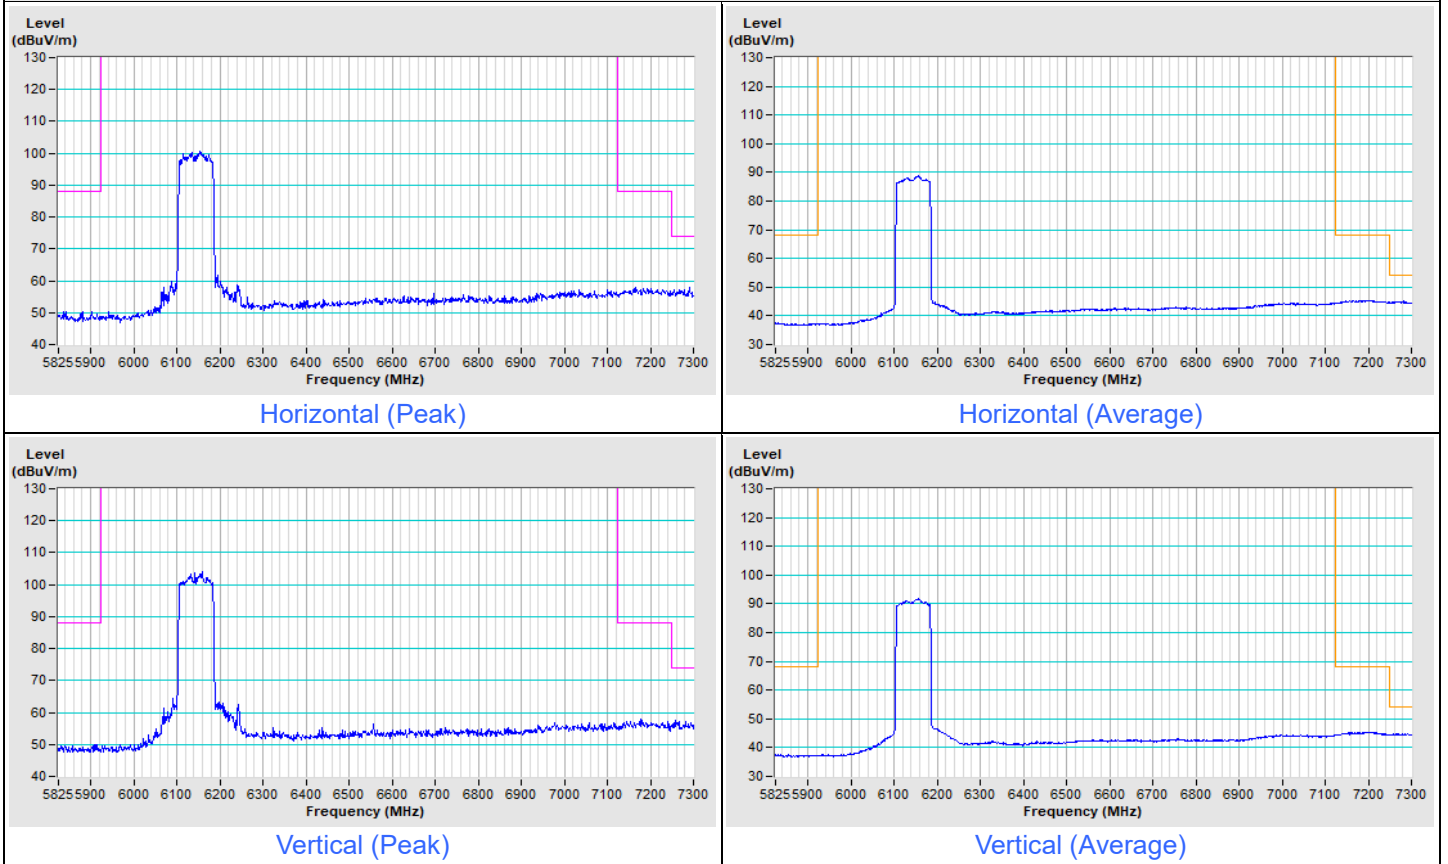


802.11be (EHT80) Channel 215

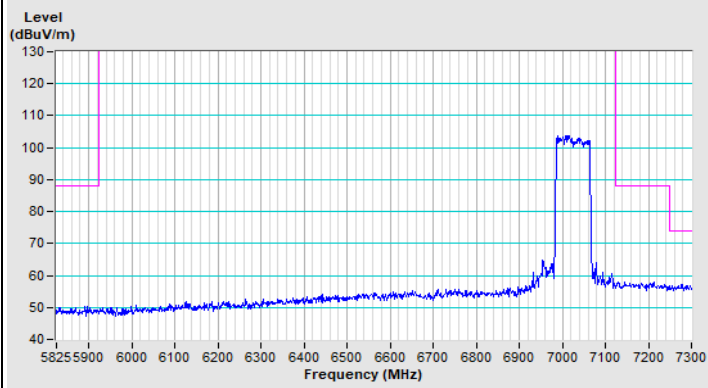


Horizontal (Peak)

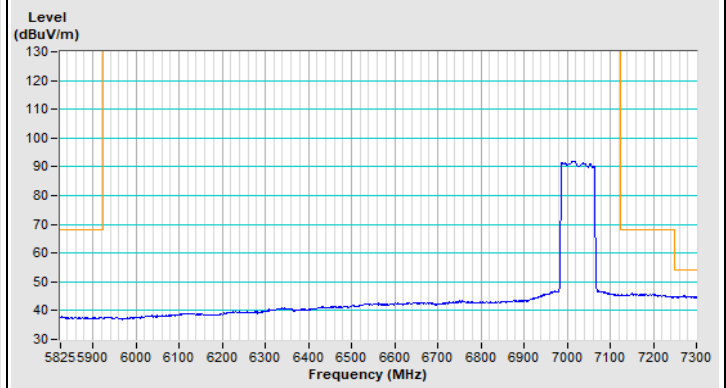

Horizontal (Average)

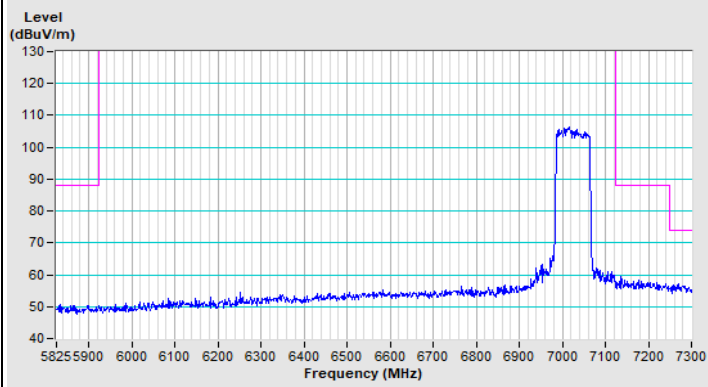


Vertical (Peak)

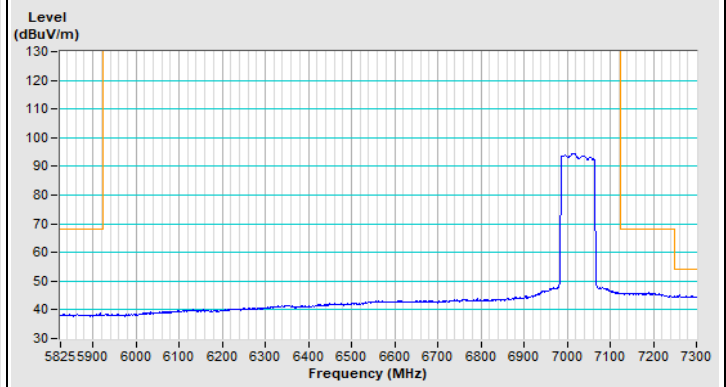


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 47

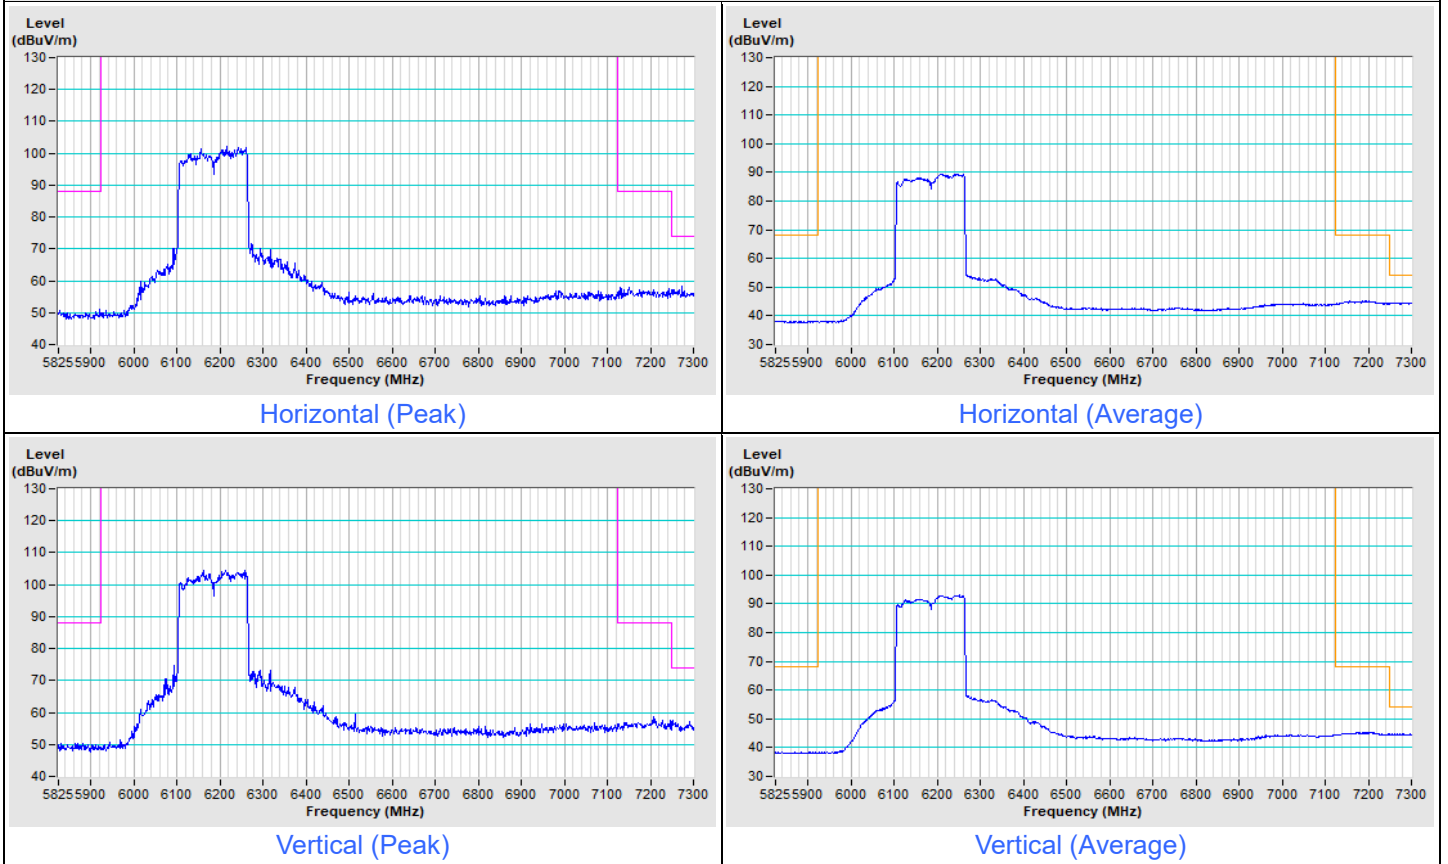


802.11be (EHT160) Channel 207

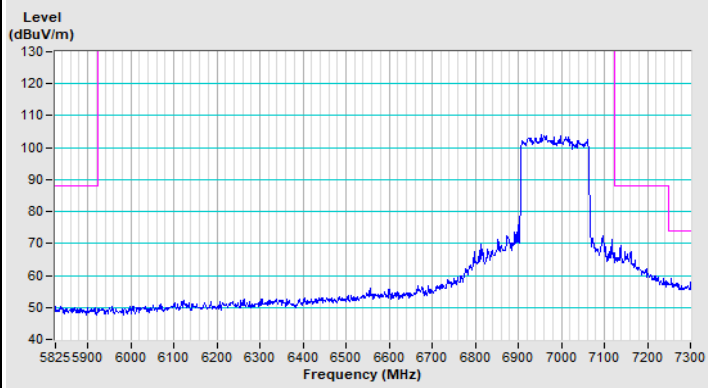


Horizontal (Peak)

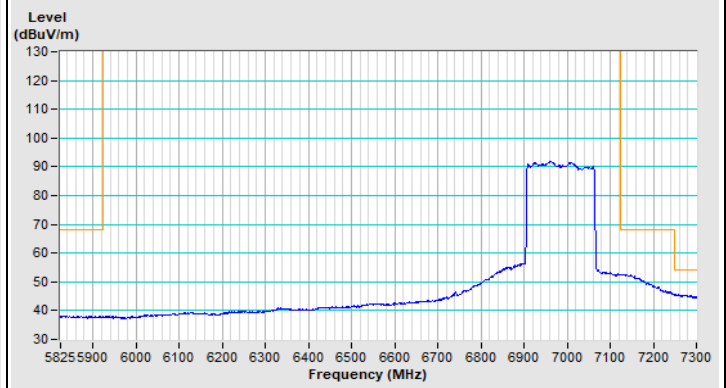

Horizontal (Average)

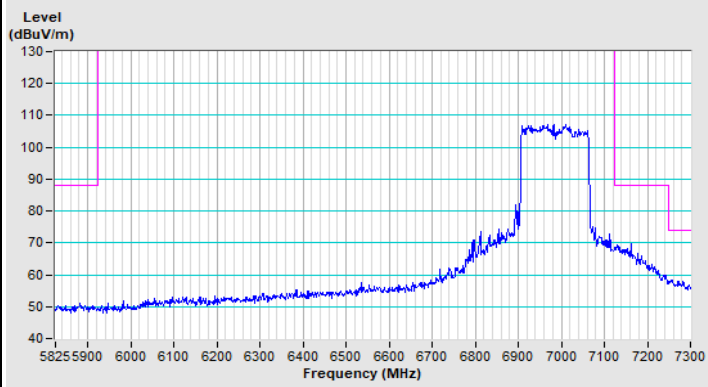


Vertical (Peak)

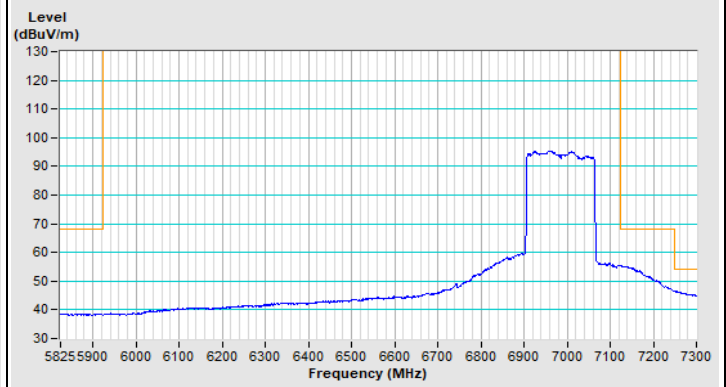


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 63

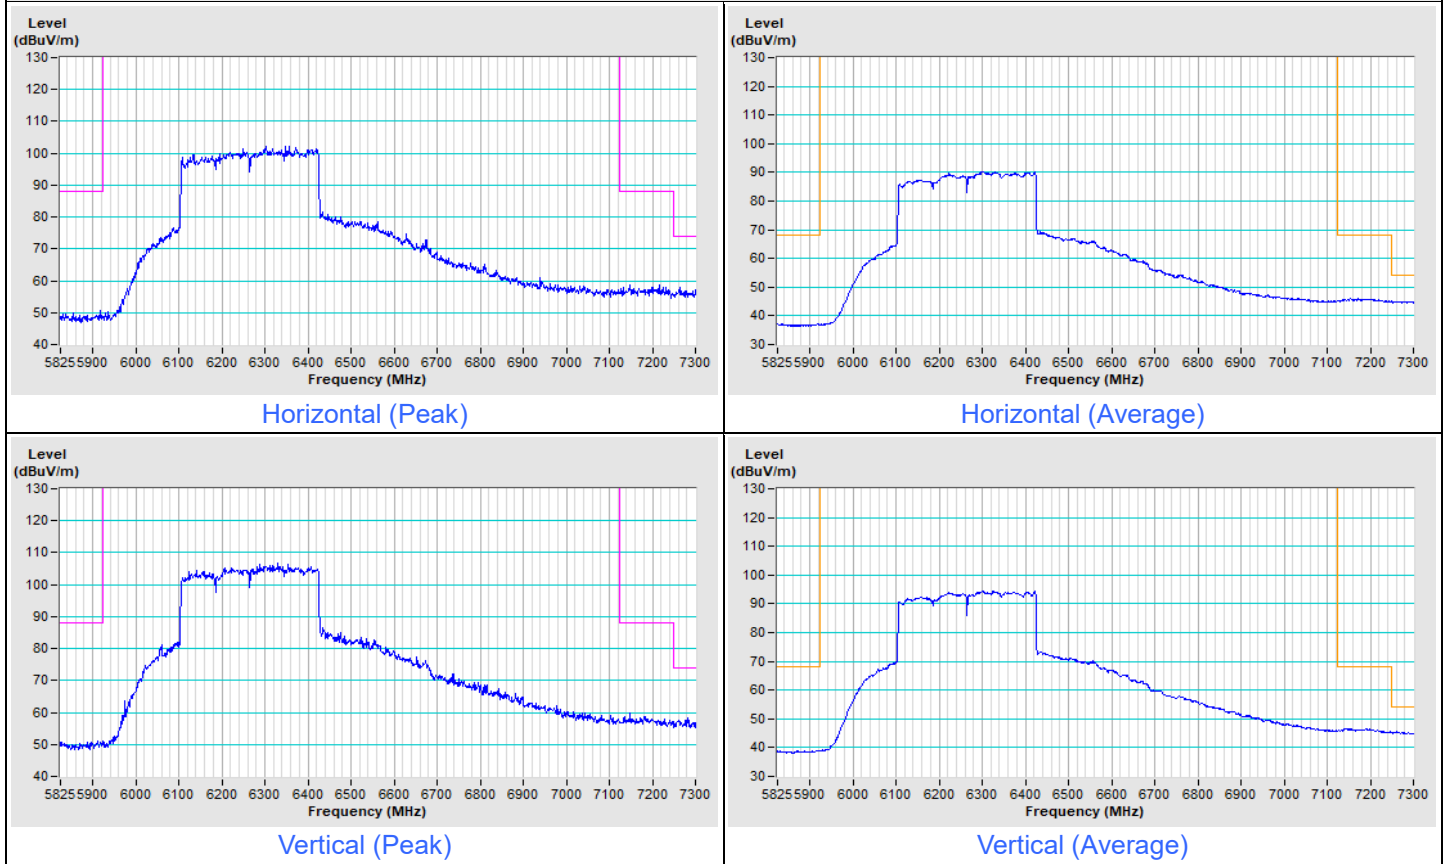


802.11be (EHT320) Channel 191

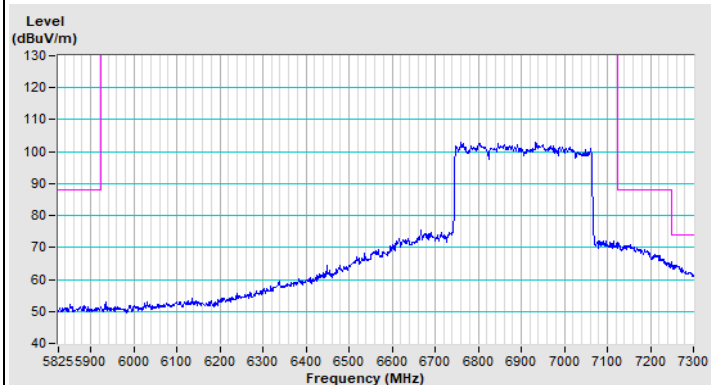


Horizontal (Peak)

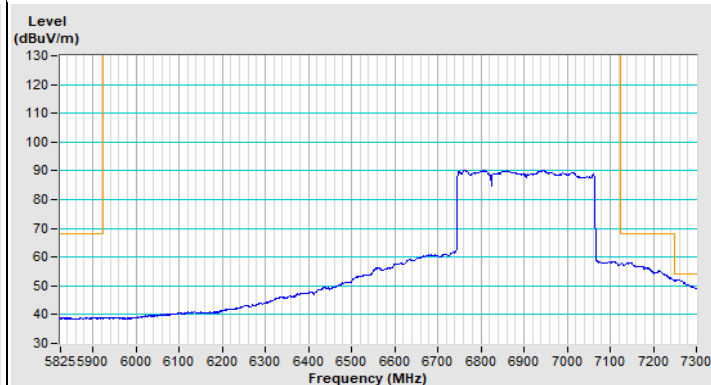

Horizontal (Average)

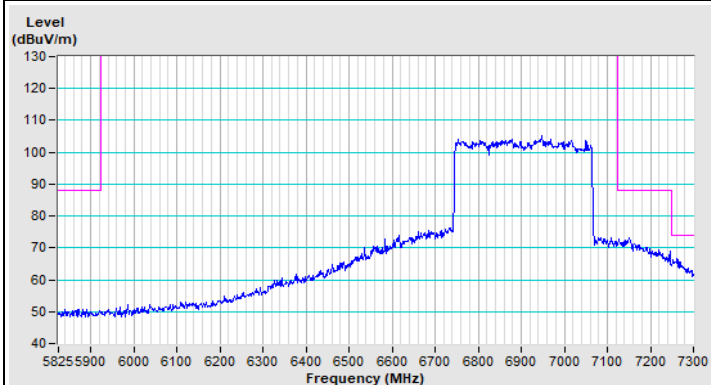

Vertical (Peak)

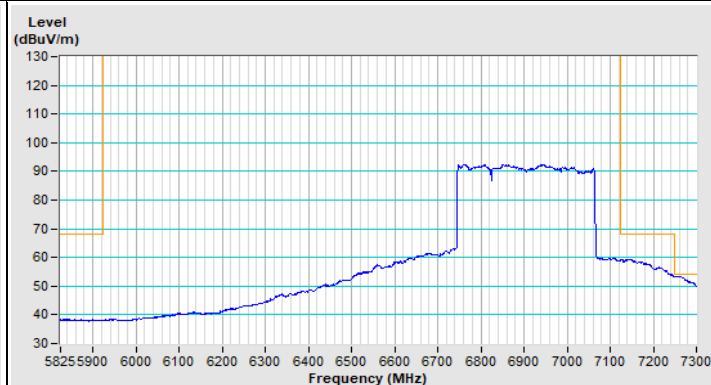

Vertical (Average)

Beamforming(2T2S)

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.9 PK	88.2	-37.3	1.88 H	75	37.0	13.9
2	#5925.00	38.4 AV	68.2	-29.8	1.88 H	75	24.5	13.9
3	*6115.00	107.7 PK			1.88 H	75	62.2	45.5
4	*6115.00	95.6 AV			1.88 H	75	50.1	45.5
5	12230.00	60.2 PK	74.0	-13.8	1.89 H	310	39.2	21.0
6	12230.00	46.9 AV	54.0	-7.1	1.89 H	310	25.9	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.78 V	348	37.5	13.9
2	#5925.00	38.7 AV	68.2	-29.5	1.78 V	348	24.8	13.9
3	*6115.00	110.7 PK			1.78 V	348	65.2	45.5
4	*6115.00	98.9 AV			1.78 V	348	53.4	45.5
5	12230.00	60.5 PK	74.0	-13.5	1.82 V	239	39.5	21.0
6	12230.00	47.2 AV	54.0	-6.8	1.82 V	239	26.2	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	108.5 PK			1.78 H	78	62.5	46.0
2	*6255.00	95.8 AV			1.78 H	78	49.8	46.0
3	12510.00	60.1 PK	74.0	-13.9	1.72 H	315	39.2	20.9
4	12510.00	46.7 AV	54.0	-7.3	1.72 H	315	25.8	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	111.8 PK			1.69 V	236	65.8	46.0
2	*6255.00	99.6 AV			1.69 V	236	53.6	46.0
3	12510.00	60.3 PK	74.0	-13.7	1.88 V	222	39.4	20.9
4	12510.00	47.0 AV	54.0	-7.0	1.88 V	222	26.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.1 PK			1.75 H	79	62.0	47.1
2	*6415.00	95.9 AV			1.75 H	79	48.8	47.1
3	#12830.00	60.9 PK	88.2	-27.3	1.77 H	315	39.1	21.8
4	#12830.00	47.7 AV	68.2	-20.5	1.77 H	315	25.9	21.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.3 PK			1.81 V	236	64.2	47.1
2	*6415.00	99.2 AV			1.81 V	236	52.1	47.1
3	#12830.00	61.3 PK	88.2	-26.9	1.88 V	229	39.5	21.8
4	#12830.00	47.9 AV	68.2	-20.3	1.88 V	229	26.1	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.5 PK			1.80 H	82	62.4	47.1
2	*6435.00	95.9 AV			1.80 H	82	48.8	47.1
3	#12870.00	61.2 PK	88.2	-27.0	1.88 H	315	39.1	22.1
4	#12870.00	47.9 AV	68.2	-20.3	1.88 H	315	25.8	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.0 PK			1.83 V	232	63.9	47.1
2	*6435.00	99.4 AV			1.83 V	232	52.3	47.1
3	#12870.00	61.6 PK	88.2	-26.6	1.88 V	221	39.5	22.1
4	#12870.00	48.3 AV	68.2	-19.9	1.88 V	221	26.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.9 PK			1.72 H	75	62.5	47.4
2	*6475.00	96.7 AV			1.72 H	75	49.3	47.4
3	#12950.00	61.2 PK	88.2	-27.0	1.77 H	312	39.0	22.2
4	#12950.00	47.9 AV	68.2	-20.3	1.77 H	312	25.7	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	112.6 PK			1.97 V	233	65.2	47.4
2	*6475.00	99.7 AV			1.97 V	233	52.3	47.4
3	#12950.00	61.5 PK	88.2	-26.7	1.85 V	239	39.3	22.2
4	#12950.00	48.3 AV	68.2	-19.9	1.85 V	239	26.1	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.6 PK			1.80 H	75	61.9	47.7
2	*6515.00	96.6 AV			1.80 H	75	48.9	47.7
3	#13030.00	61.4 PK	88.2	-26.8	1.78 H	311	39.0	22.4
4	#13030.00	48.3 AV	68.2	-19.9	1.78 H	311	25.9	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.2 PK			1.98 V	231	64.5	47.7
2	*6515.00	99.6 AV			1.98 V	231	51.9	47.7
3	#13030.00	61.7 PK	88.2	-26.5	1.82 V	221	39.3	22.4
4	#13030.00	48.5 AV	68.2	-19.7	1.82 V	221	26.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.7 PK			1.82 H	77	61.8	47.9
2	*6535.00	97.2 AV			1.82 H	77	49.3	47.9
3	#13070.00	61.4 PK	88.2	-26.8	1.72 H	319	39.0	22.4
4	#13070.00	48.3 AV	68.2	-19.9	1.72 H	319	25.9	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.0 PK			1.95 V	233	65.1	47.9
2	*6535.00	100.3 AV			1.95 V	233	52.4	47.9
3	#13070.00	61.8 PK	88.2	-26.4	1.88 V	235	39.4	22.4
4	#13070.00	48.5 AV	68.2	-19.7	1.88 V	235	26.1	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.9 PK			1.80 H	75	61.9	48.0
2	*6695.00	97.4 AV			1.80 H	75	49.4	48.0
3	13390.00	62.5 PK	74.0	-11.5	1.82 H	316	39.0	23.5
4	13390.00	49.4 AV	54.0	-4.6	1.82 H	316	25.9	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.6 PK			1.88 V	231	64.6	48.0
2	*6695.00	100.7 AV			1.88 V	231	52.7	48.0
3	13390.00	63.0 PK	74.0	-11.0	1.82 V	225	39.5	23.5
4	13390.00	49.7 AV	54.0	-4.3	1.82 V	225	26.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.3 PK			1.75 H	82	61.2	48.1
2	*6855.00	96.9 AV			1.75 H	82	48.8	48.1
3	#13710.00	62.8 PK	88.2	-25.4	1.82 H	316	39.0	23.8
4	#13710.00	49.7 AV	68.2	-18.5	1.82 H	316	25.9	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.8 PK			1.80 V	232	63.7	48.1
2	*6855.00	99.9 AV			1.80 V	232	51.8	48.1
3	#13710.00	63.2 PK	88.2	-25.0	1.81 V	229	39.4	23.8
4	#13710.00	49.9 AV	68.2	-18.3	1.81 V	229	26.1	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.8 PK			1.77 H	82	60.5	48.3
2	*6875.00	96.2 AV			1.77 H	82	47.9	48.3
3	#13750.00	62.9 PK	88.2	-25.3	1.72 H	311	39.0	23.9
4	#13750.00	49.7 AV	68.2	-18.5	1.72 H	311	25.8	23.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	112.3 PK			1.81 V	233	64.0	48.3
2	*6875.00	99.6 AV			1.81 V	233	51.3	48.3
3	#13750.00	63.4 PK	88.2	-24.8	1.82 V	228	39.5	23.9
4	#13750.00	50.1 AV	68.2	-18.1	1.82 V	228	26.2	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.9 PK			1.72 H	73	61.2	49.7
2	*6995.00	98.5 AV			1.72 H	73	48.8	49.7
3	#13990.00	63.7 PK	88.2	-24.5	1.70 H	302	39.0	24.7
4	#13990.00	50.4 AV	68.2	-17.8	1.70 H	302	25.7	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	112.7 PK			1.73 V	229	63.0	49.7
2	*6995.00	101.4 AV			1.73 V	229	51.7	49.7
3	#13990.00	64.1 PK	88.2	-24.1	1.72 V	229	39.4	24.7
4	#13990.00	50.8 AV	68.2	-17.4	1.72 V	229	26.1	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	109.4 PK			1.80 H	81	60.0	49.4
2	*7095.00	97.4 AV			1.80 H	81	48.0	49.4
3	#14190.00	64.1 PK	88.2	-24.1	1.75 H	315	39.0	25.1
4	#14190.00	50.8 AV	68.2	-17.4	1.75 H	315	25.7	25.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	112.4 PK			1.73 V	228	63.0	49.4
2	*7095.00	100.4 AV			1.73 V	228	51.0	49.4
3	#14190.00	64.5 PK	88.2	-23.7	1.88 V	234	39.4	25.1
4	#14190.00	51.2 AV	68.2	-17.0	1.88 V	234	26.1	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.1 PK			1.80 H	88	47.5	49.6
2	*7115.00	83.6 AV			1.80 H	88	34.0	49.6
3	#7125.00	81.6 PK	88.2	-6.6	1.80 H	88	64.0	17.6
4	#7125.00	66.1 AV	68.2	-2.1	1.80 H	88	48.5	17.6
5	#14230.00	63.7 PK	88.2	-24.5	1.86 H	319	38.6	25.1
6	#14230.00	50.6 AV	68.2	-17.6	1.86 H	319	25.5	25.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.6 PK			1.70 V	227	50.0	49.6
2	*7115.00	87.6 AV			1.70 V	227	38.0	49.6
3	#7125.00	83.8 PK	88.2	-4.4	1.70 V	227	66.2	17.6
4	#7125.00	68.0 AV	68.2	-0.2	1.70 V	227	50.4	17.6
5	#14230.00	64.0 PK	88.2	-24.2	1.82 V	228	38.9	25.1
6	#14230.00	51.0 AV	68.2	-17.2	1.82 V	228	25.9	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.7 PK	88.2	-37.5	1.72 H	80	36.8	13.9
2	#5925.00	38.4 AV	68.2	-29.8	1.72 H	80	24.5	13.9
3	*6125.00	105.3 PK			1.72 H	80	59.8	45.5
4	*6125.00	93.8 AV			1.72 H	80	48.3	45.5
5	12250.00	60.0 PK	74.0	-14.0	1.82 H	315	39.0	21.0
6	12250.00	46.7 AV	54.0	-7.3	1.82 H	315	25.7	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.72 V	345	37.2	13.9
2	#5925.00	38.5 AV	68.2	-29.7	1.72 V	345	24.6	13.9
3	*6125.00	109.5 PK			1.72 V	345	64.0	45.5
4	*6125.00	97.0 AV			1.72 V	345	51.5	45.5
5	12250.00	60.2 PK	74.0	-13.8	1.82 V	221	39.2	21.0
6	12250.00	47.0 AV	54.0	-7.0	1.82 V	221	26.0	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	107.8 PK			1.75 H	82	62.0	45.8
2	*6245.00	94.5 AV			1.75 H	82	48.7	45.8
3	12490.00	59.8 PK	74.0	-14.2	1.88 H	316	38.9	20.9
4	12490.00	46.8 AV	54.0	-7.2	1.88 H	316	25.9	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	110.3 PK			1.73 V	237	64.5	45.8
2	*6245.00	97.8 AV			1.73 V	237	52.0	45.8
3	12490.00	60.2 PK	74.0	-13.8	1.88 V	233	39.3	20.9
4	12490.00	47.0 AV	54.0	-7.0	1.88 V	233	26.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.8 PK			1.77 H	83	60.8	47.0
2	*6405.00	95.1 AV			1.77 H	83	48.1	47.0
3	#12810.00	60.5 PK	88.2	-27.7	1.88 H	311	38.8	21.7
4	#12810.00	47.4 AV	68.2	-20.8	1.88 H	311	25.7	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.8 PK			1.85 V	235	63.8	47.0
2	*6405.00	98.1 AV			1.85 V	235	51.1	47.0
3	#12810.00	60.8 PK	88.2	-27.4	1.87 V	222	39.1	21.7
4	#12810.00	47.6 AV	68.2	-20.6	1.87 V	222	25.9	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	108.6 PK			1.75 H	82	61.5	47.1
2	*6445.00	95.6 AV			1.75 H	82	48.5	47.1
3	#12890.00	61.0 PK	88.2	-27.2	1.88 H	319	38.8	22.2
4	#12890.00	47.9 AV	68.2	-20.3	1.88 H	319	25.7	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	111.1 PK			1.90 V	232	64.0	47.1
2	*6445.00	98.9 AV			1.90 V	232	51.8	47.1
3	#12890.00	61.3 PK	88.2	-26.9	1.87 V	219	39.1	22.2
4	#12890.00	48.2 AV	68.2	-20.0	1.87 V	219	26.0	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	108.8 PK			1.75 H	88	61.3	47.5
2	*6485.00	95.5 AV			1.75 H	88	48.0	47.5
3	#12970.00	61.0 PK	88.2	-27.2	1.89 H	309	38.7	22.3
4	#12970.00	47.9 AV	68.2	-20.3	1.89 H	309	25.6	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.5 PK			1.96 V	233	64.0	47.5
2	*6485.00	99.0 AV			1.96 V	233	51.5	47.5
3	#12970.00	61.5 PK	88.2	-26.7	1.89 V	231	39.2	22.3
4	#12970.00	48.3 AV	68.2	-19.9	1.89 V	231	26.0	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.4 PK			1.80 H	82	60.6	47.8
2	*6525.00	95.8 AV			1.80 H	82	48.0	47.8
3	#13050.00	61.2 PK	88.2	-27.0	1.88 H	305	38.7	22.5
4	#13050.00	48.1 AV	68.2	-20.1	1.88 H	305	25.6	22.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	112.0 PK			1.92 V	231	64.2	47.8
2	*6525.00	98.9 AV			1.92 V	231	51.1	47.8
3	#13050.00	61.7 PK	88.2	-26.5	1.80 V	229	39.2	22.5
4	#13050.00	48.5 AV	68.2	-19.7	1.80 V	229	26.0	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	108.3 PK			1.75 H	82	60.2	48.1
2	*6565.00	96.1 AV			1.75 H	82	48.0	48.1
3	#13130.00	61.4 PK	88.2	-26.8	1.88 H	309	38.8	22.6
4	#13130.00	48.1 AV	68.2	-20.1	1.88 H	309	25.5	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	112.3 PK			1.96 V	233	64.2	48.1
2	*6565.00	99.1 AV			1.96 V	233	51.0	48.1
3	#13130.00	61.8 PK	88.2	-26.4	1.80 V	239	39.2	22.6
4	#13130.00	48.7 AV	68.2	-19.5	1.80 V	239	26.1	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	109.2 PK			1.77 H	82	61.0	48.2
2	*6725.00	96.6 AV			1.77 H	82	48.4	48.2
3	#13450.00	62.2 PK	88.2	-26.0	1.88 H	311	38.7	23.5
4	#13450.00	49.1 AV	68.2	-19.1	1.88 H	311	25.6	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	112.5 PK			1.92 V	236	64.3	48.2
2	*6725.00	99.8 AV			1.92 V	236	51.6	48.2
3	#13450.00	62.7 PK	88.2	-25.5	1.89 V	224	39.2	23.5
4	#13450.00	49.5 AV	68.2	-18.7	1.89 V	224	26.0	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	108.5 PK			1.75 H	82	60.3	48.2
2	*6845.00	95.8 AV			1.75 H	82	47.6	48.2
3	#13690.00	62.6 PK	88.2	-25.6	1.88 H	319	38.8	23.8
4	#13690.00	49.4 AV	68.2	-18.8	1.88 H	319	25.6	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.2 PK			1.80 V	233	63.0	48.2
2	*6845.00	99.0 AV			1.80 V	233	50.8	48.2
3	#13690.00	62.8 PK	88.2	-25.4	1.89 V	220	39.0	23.8
4	#13690.00	49.7 AV	68.2	-18.5	1.89 V	220	25.9	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	108.6 PK			1.79 H	82	60.2	48.4
2	*6885.00	95.9 AV			1.79 H	82	47.5	48.4
3	#13770.00	62.8 PK	88.2	-25.4	1.88 H	306	38.7	24.1
4	#13770.00	49.7 AV	68.2	-18.5	1.88 H	306	25.6	24.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.6 PK			1.84 V	230	63.2	48.4
2	*6885.00	99.1 AV			1.84 V	230	50.7	48.4
3	#13770.00	63.3 PK	88.2	-24.9	1.82 V	220	39.2	24.1
4	#13770.00	50.2 AV	68.2	-18.0	1.82 V	220	26.1	24.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	109.0 PK			1.78 H	72	59.2	49.8
2	*7005.00	96.3 AV			1.78 H	72	46.5	49.8
3	#14010.00	63.4 PK	88.2	-24.8	1.92 H	306	38.7	24.7
4	#14010.00	50.2 AV	68.2	-18.0	1.92 H	306	25.5	24.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	111.8 PK			1.69 V	229	62.0	49.8
2	*7005.00	99.3 AV			1.69 V	229	49.5	49.8
3	#14010.00	63.9 PK	88.2	-24.3	1.82 V	228	39.2	24.7
4	#14010.00	50.7 AV	68.2	-17.5	1.82 V	228	26.0	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.0 PK			1.77 H	80	58.6	49.4
2	*7085.00	95.1 AV			1.77 H	80	45.7	49.4
3	#7125.00	59.6 PK	88.2	-28.6	1.77 H	80	42.0	17.6
4	#7125.00	44.6 AV	68.2	-23.6	1.77 H	80	27.0	17.6
5	#14170.00	63.7 PK	88.2	-24.5	1.88 H	302	38.7	25.0
6	#14170.00	50.5 AV	68.2	-17.7	1.88 H	302	25.5	25.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.6 PK			1.65 V	231	62.2	49.4
2	*7085.00	98.5 AV			1.65 V	231	49.1	49.4
3	#7125.00	60.6 PK	88.2	-27.6	1.65 V	231	43.0	17.6
4	#7125.00	45.4 AV	68.2	-22.8	1.65 V	231	27.8	17.6
5	#14170.00	64.1 PK	88.2	-24.1	1.88 V	236	39.1	25.0
6	#14170.00	50.9 AV	68.2	-17.3	1.88 V	236	25.9	25.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.6 PK	88.2	-37.6	1.75 H	82	36.7	13.9
2	#5925.00	38.2 AV	68.2	-30.0	1.75 H	82	24.3	13.9
3	*6145.00	105.4 PK			1.75 H	82	60.0	45.4
4	*6145.00	93.0 AV			1.75 H	82	47.6	45.4
5	12290.00	59.8 PK	74.0	-14.2	1.88 H	311	38.8	21.0
6	12290.00	46.6 AV	54.0	-7.4	1.88 H	311	25.6	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.89 V	350	37.5	13.9
2	#5925.00	38.7 AV	68.2	-29.5	1.89 V	350	24.8	13.9
3	*6145.00	108.9 PK			1.89 V	350	63.5	45.4
4	*6145.00	96.8 AV			1.89 V	350	51.4	45.4
5	12290.00	60.0 PK	74.0	-14.0	1.88 V	229	39.0	21.0
6	12290.00	47.0 AV	54.0	-7.0	1.88 V	229	26.0	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	106.7 PK			1.82 H	80	61.0	45.7
2	*6225.00	93.9 AV			1.82 H	80	48.2	45.7
3	12450.00	59.7 PK	74.0	-14.3	1.79 H	312	38.8	20.9
4	12450.00	46.6 AV	54.0	-7.4	1.79 H	312	25.7	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.3 PK			1.91 V	239	63.6	45.7
2	*6225.00	97.2 AV			1.91 V	239	51.5	45.7
3	12450.00	59.9 PK	74.0	-14.1	1.78 V	225	39.0	20.9
4	12450.00	46.9 AV	54.0	-7.1	1.78 V	225	26.0	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.5 PK			1.72 H	85	60.5	47.0
2	*6385.00	94.7 AV			1.72 H	85	47.7	47.0
3	#12770.00	60.3 PK	88.2	-27.9	1.92 H	302	38.6	21.7
4	#12770.00	47.2 AV	68.2	-21.0	1.92 H	302	25.5	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.2 PK			1.91 V	233	63.2	47.0
2	*6385.00	98.1 AV			1.91 V	233	51.1	47.0
3	#12770.00	60.7 PK	88.2	-27.5	1.85 V	236	39.0	21.7
4	#12770.00	47.6 AV	68.2	-20.6	1.85 V	236	25.9	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.3 PK			1.72 H	85	60.0	47.3
2	*6465.00	95.3 AV			1.72 H	85	48.0	47.3
3	#12930.00	60.9 PK	88.2	-27.3	1.82 H	306	38.7	22.2
4	#12930.00	47.9 AV	68.2	-20.3	1.82 H	306	25.7	22.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.7 PK			1.99 V	229	63.4	47.3
2	*6465.00	98.5 AV			1.99 V	229	51.2	47.3
3	#12930.00	61.2 PK	88.2	-27.0	1.89 V	221	39.0	22.2
4	#12930.00	48.3 AV	68.2	-19.9	1.89 V	221	26.1	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.9 PK			1.80 H	77	60.0	47.9
2	*6545.00	95.6 AV			1.80 H	77	47.7	47.9
3	#13090.00	61.2 PK	88.2	-27.0	1.87 H	312	38.6	22.6
4	#13090.00	48.1 AV	68.2	-20.1	1.87 H	312	25.5	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.0 PK			1.96 V	232	63.1	47.9
2	*6545.00	98.8 AV			1.96 V	232	50.9	47.9
3	#13090.00	61.5 PK	88.2	-26.7	1.89 V	222	38.9	22.6
4	#13090.00	48.5 AV	68.2	-19.7	1.89 V	222	25.9	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	108.3 PK			1.80 H	72	60.2	48.1
2	*6705.00	95.7 AV			1.80 H	72	47.6	48.1
3	#13410.00	62.1 PK	88.2	-26.1	1.88 H	309	38.6	23.5
4	#13410.00	49.0 AV	68.2	-19.2	1.88 H	309	25.5	23.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.1 PK			1.91 V	232	64.0	48.1
2	*6705.00	99.2 AV			1.91 V	232	51.1	48.1
3	#13410.00	62.4 PK	88.2	-25.8	1.82 V	229	38.9	23.5
4	#13410.00	49.3 AV	68.2	-18.9	1.82 V	229	25.8	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.8 PK			1.72 H	85	59.6	48.2
2	*6865.00	95.0 AV			1.72 H	85	46.8	48.2
3	#13730.00	62.5 PK	88.2	-25.7	1.82 H	302	38.6	23.9
4	#13730.00	49.3 AV	68.2	-18.9	1.82 H	302	25.4	23.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.7 PK			1.79 V	229	62.5	48.2
2	*6865.00	98.1 AV			1.79 V	229	49.9	48.2
3	#13730.00	62.8 PK	88.2	-25.4	1.89 V	229	38.9	23.9
4	#13730.00	49.7 AV	68.2	-18.5	1.89 V	229	25.8	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	108.5 PK			1.72 H	79	59.4	49.1
2	*6945.00	95.7 AV			1.72 H	79	46.6	49.1
3	#13890.00	62.7 PK	88.2	-25.5	1.92 H	300	38.5	24.2
4	#13890.00	49.7 AV	68.2	-18.5	1.92 H	300	25.5	24.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.9 PK			1.74 V	230	62.8	49.1
2	*6945.00	99.3 AV			1.74 V	230	50.2	49.1
3	#13890.00	63.0 PK	88.2	-25.2	1.89 V	225	38.8	24.2
4	#13890.00	49.9 AV	68.2	-18.3	1.89 V	225	25.7	24.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.1 PK			1.80 H	77	58.4	49.7
2	*7025.00	95.5 AV			1.80 H	77	45.8	49.7
3	#7125.00	61.6 PK	88.2	-26.6	1.80 H	77	44.0	17.6
4	#7125.00	44.8 AV	68.2	-23.4	1.80 H	77	27.2	17.6
5	#14050.00	63.4 PK	88.2	-24.8	1.82 H	302	38.5	24.9
6	#14050.00	50.4 AV	68.2	-17.8	1.82 H	302	25.5	24.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.5 PK			1.66 V	232	61.8	49.7
2	*7025.00	98.9 AV			1.66 V	232	49.2	49.7
3	#7125.00	63.6 PK	88.2	-24.6	1.66 V	232	46.0	17.6
4	#7125.00	46.1 AV	68.2	-22.1	1.66 V	232	28.5	17.6
5	#14050.00	63.8 PK	88.2	-24.4	1.80 V	225	38.9	24.9
6	#14050.00	50.8 AV	68.2	-17.4	1.80 V	225	25.9	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.8 PK	88.2	-37.4	1.72 H	85	36.9	13.9
2	#5925.00	38.3 AV	68.2	-29.9	1.72 H	85	24.4	13.9
3	*6185.00	105.9 PK			1.72 H	85	60.5	45.4
4	*6185.00	93.7 AV			1.72 H	85	48.3	45.4
5	12370.00	59.5 PK	74.0	-14.5	1.92 H	306	38.6	20.9
6	12370.00	46.5 AV	54.0	-7.5	1.92 H	306	25.6	20.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	2.11 V	239	37.2	13.9
2	#5925.00	38.5 AV	68.2	-29.7	2.11 V	239	24.6	13.9
3	*6185.00	109.6 PK			2.11 V	239	64.2	45.4
4	*6185.00	97.6 AV			2.11 V	239	52.2	45.4
5	12370.00	59.9 PK	74.0	-14.1	1.88 V	220	39.0	20.9
6	12370.00	46.8 AV	54.0	-7.2	1.88 V	220	25.9	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.8 PK			1.75 H	86	61.0	46.8
2	*6345.00	95.0 AV			1.75 H	86	48.2	46.8
3	12690.00	60.2 PK	74.0	-13.8	1.82 H	311	38.5	21.7
4	12690.00	47.1 AV	54.0	-6.9	1.82 H	311	25.4	21.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.4 PK			2.13 V	240	64.6	46.8
2	*6345.00	98.7 AV			2.13 V	240	51.9	46.8
3	12690.00	60.7 PK	74.0	-13.3	1.88 V	230	39.0	21.7
4	12690.00	47.6 AV	54.0	-6.4	1.88 V	230	25.9	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	108.0 PK			1.77 H	81	60.3	47.7
2	*6505.00	95.9 AV			1.77 H	81	48.2	47.7
3	#13010.00	60.9 PK	88.2	-27.3	1.95 H	312	38.5	22.4
4	#13010.00	47.9 AV	68.2	-20.3	1.95 H	312	25.5	22.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	111.7 PK			2.09 V	235	64.0	47.7
2	*6505.00	99.3 AV			2.09 V	235	51.6	47.7
3	#13010.00	61.3 PK	88.2	-26.9	1.78 V	232	38.9	22.4
4	#13010.00	48.2 AV	68.2	-20.0	1.78 V	232	25.8	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.2 PK			1.70 H	80	61.2	48.0
2	*6665.00	96.9 AV			1.70 H	80	48.9	48.0
3	13330.00	61.6 PK	74.0	-12.4	1.96 H	312	38.5	23.1
4	13330.00	48.5 AV	54.0	-5.5	1.96 H	312	25.4	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	112.3 PK			1.91 V	232	64.3	48.0
2	*6665.00	100.2 AV			1.91 V	232	52.2	48.0
3	13330.00	62.1 PK	74.0	-11.9	1.85 V	219	39.0	23.1
4	13330.00	49.0 AV	54.0	-5.0	1.85 V	219	25.9	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.5 PK			1.79 H	88	61.2	48.3
2	*6825.00	95.9 AV			1.79 H	88	47.6	48.3
3	#13650.00	62.2 PK	88.2	-26.0	1.88 H	312	38.4	23.8
4	#13650.00	49.3 AV	68.2	-18.9	1.88 H	312	25.5	23.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.8 PK			1.92 V	232	63.5	48.3
2	*6825.00	99.3 AV			1.92 V	232	51.0	48.3
3	#13650.00	62.6 PK	88.2	-25.6	1.85 V	225	38.8	23.8
4	#13650.00	49.5 AV	68.2	-18.7	1.85 V	225	25.7	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.9 PK			1.80 H	82	59.2	49.7
2	*6985.00	96.7 AV			1.80 H	82	47.0	49.7
3	#7125.00	70.6 PK	88.2	-17.6	1.80 H	82	53.0	17.6
4	#7125.00	53.8 AV	68.2	-14.4	1.80 H	82	36.2	17.6
5	#13970.00	63.0 PK	88.2	-25.2	1.88 H	312	38.4	24.6
6	#13970.00	50.0 AV	68.2	-18.2	1.88 H	312	25.4	24.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	112.7 PK			1.79 V	231	63.0	49.7
2	*6985.00	99.9 AV			1.79 V	231	50.2	49.7
3	#7125.00	73.6 PK	88.2	-14.6	1.79 V	231	56.0	17.6
4	#7125.00	57.5 AV	68.2	-10.7	1.79 V	231	39.9	17.6
5	#13970.00	63.6 PK	88.2	-24.6	1.92 V	234	39.0	24.6
6	#13970.00	50.4 AV	68.2	-17.8	1.92 V	234	25.8	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.75 H	88	37.5	13.9
2	#5925.00	38.1 AV	68.2	-30.1	1.75 H	88	24.2	13.9
3	*6265.00	107.2 PK			1.75 H	88	61.2	46.0
4	*6265.00	94.0 AV			1.75 H	88	48.0	46.0
5	12530.00	59.5 PK	74.0	-14.5	1.95 H	318	38.5	21.0
6	12530.00	46.4 AV	54.0	-7.6	1.95 H	318	25.4	21.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.92 V	237	38.0	13.9
2	#5925.00	38.5 AV	68.2	-29.7	1.92 V	237	24.6	13.9
3	*6265.00	110.5 PK			1.92 V	237	64.5	46.0
4	*6265.00	97.9 AV			1.92 V	237	51.9	46.0
5	12530.00	59.8 PK	74.0	-14.2	1.80 V	222	38.8	21.0
6	12530.00	46.7 AV	54.0	-7.3	1.80 V	222	25.7	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.2 PK			1.82 H	90	59.1	47.1
2	*6425.00	95.0 AV			1.82 H	90	47.9	47.1
3	#12850.00	60.6 PK	88.2	-27.6	1.77 H	331	38.6	22.0
4	#12850.00	47.5 AV	68.2	-20.7	1.77 H	331	25.5	22.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	109.8 PK			1.92 V	234	62.7	47.1
2	*6425.00	98.2 AV			1.92 V	234	51.1	47.1
3	#12850.00	60.8 PK	88.2	-27.4	1.80 V	231	38.8	22.0
4	#12850.00	47.8 AV	68.2	-20.4	1.80 V	231	25.8	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.9 PK			1.77 H	90	59.8	48.1
2	*6585.00	95.8 AV			1.77 H	90	47.7	48.1
3	#13170.00	61.0 PK	88.2	-27.2	1.88 H	320	38.4	22.6
4	#13170.00	48.0 AV	68.2	-20.2	1.88 H	320	25.4	22.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.7 PK			1.88 V	233	63.6	48.1
2	*6585.00	99.0 AV			1.88 V	233	50.9	48.1
3	#13170.00	61.3 PK	88.2	-26.9	1.82 V	221	38.7	22.6
4	#13170.00	48.3 AV	68.2	-19.9	1.82 V	221	25.7	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	108.8 PK			1.82 H	72	60.5	48.3
2	*6745.00	96.8 AV			1.82 H	72	48.5	48.3
3	#13490.00	62.0 PK	88.2	-26.2	1.88 H	306	38.4	23.6
4	#13490.00	48.9 AV	68.2	-19.3	1.88 H	306	25.3	23.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	112.0 PK			1.92 V	234	63.7	48.3
2	*6745.00	99.9 AV			1.92 V	234	51.6	48.3
3	#13490.00	62.3 PK	88.2	-25.9	1.88 V	228	38.7	23.6
4	#13490.00	49.3 AV	68.2	-18.9	1.88 V	228	25.7	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6905.00	106.1 PK			1.79 H	85	57.5	48.6
2	*6905.00	93.9 AV			1.79 H	85	45.3	48.6
3	#7125.00	73.6 PK	88.2	-14.6	1.79 H	85	56.0	17.6
4	#7125.00	57.2 AV	68.2	-11.0	1.79 H	85	39.6	17.6
5	7250.00	65.9 PK	74.0	-8.1	1.79 H	85	48.0	17.9
6	7250.00	51.2 AV	54.0	-2.8	1.79 H	85	33.3	17.9
7	#13810.00	62.4 PK	88.2	-25.8	1.88 H	318	38.3	24.1
8	#13810.00	49.3 AV	68.2	-18.9	1.88 H	318	25.2	24.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6905.00	110.2 PK			1.89 V	229	61.6	48.6
2	*6905.00	97.6 AV			1.89 V	229	49.0	48.6
3	#7125.00	77.6 PK	88.2	-10.6	1.89 V	229	60.0	17.6
4	#7125.00	62.3 AV	68.2	-5.9	1.89 V	229	44.7	17.6
5	7250.00	71.2 PK	74.0	-2.8	1.89 V	229	53.3	17.9
6	7250.00	53.9 AV	54.0	-0.1	1.89 V	229	36.0	17.9
7	#13810.00	62.7 PK	88.2	-25.5	1.88 V	236	38.6	24.1
8	#13810.00	49.7 AV	68.2	-18.5	1.88 V	236	25.6	24.1

Remarks:


1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Beamforming(2T2S)


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 33

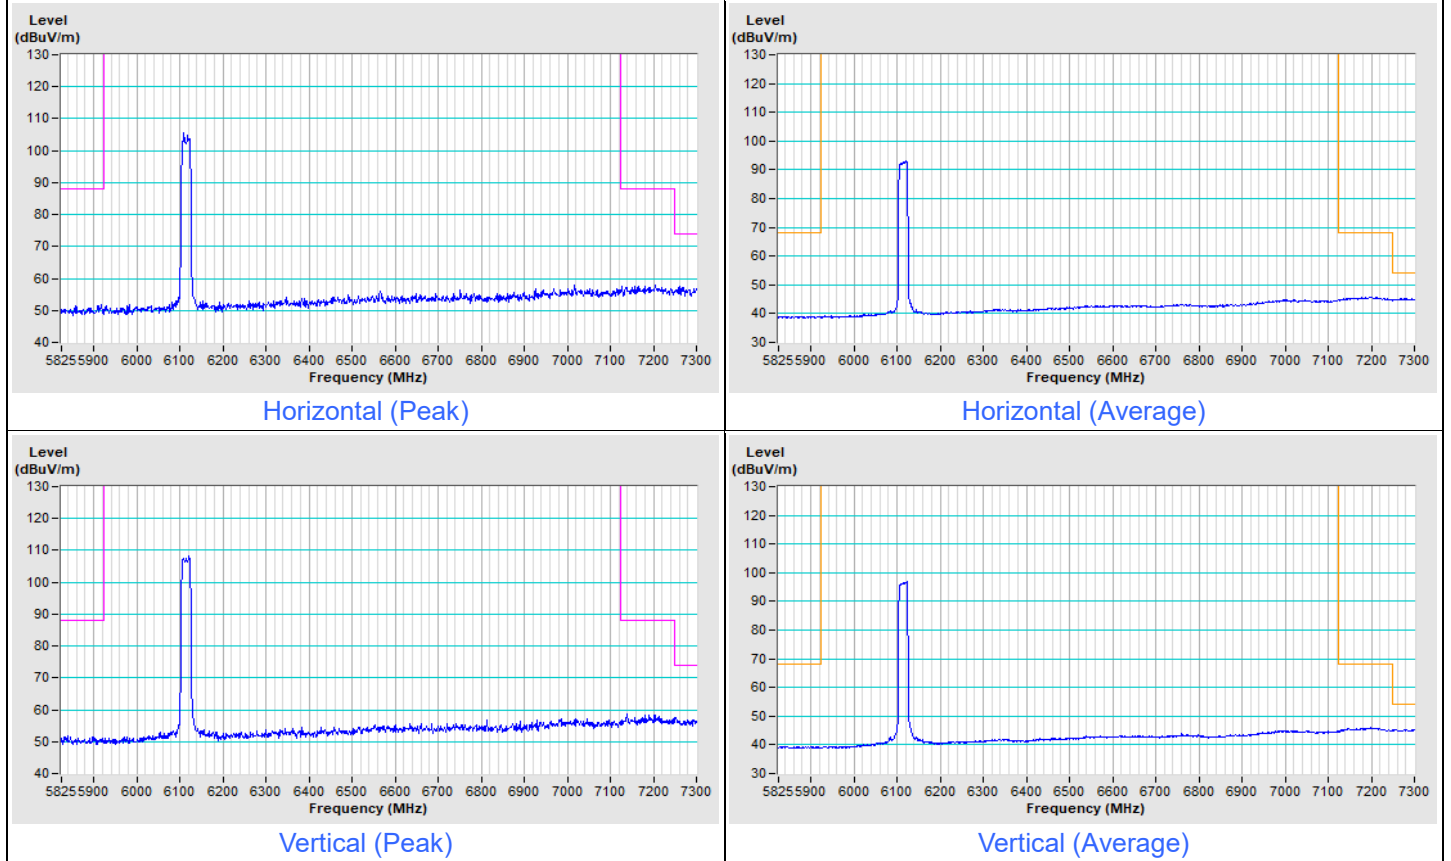


802.11be (EHT20) Channel 233

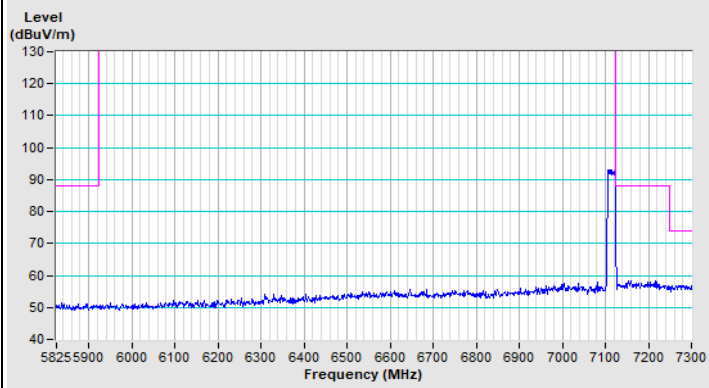


Horizontal (Peak)

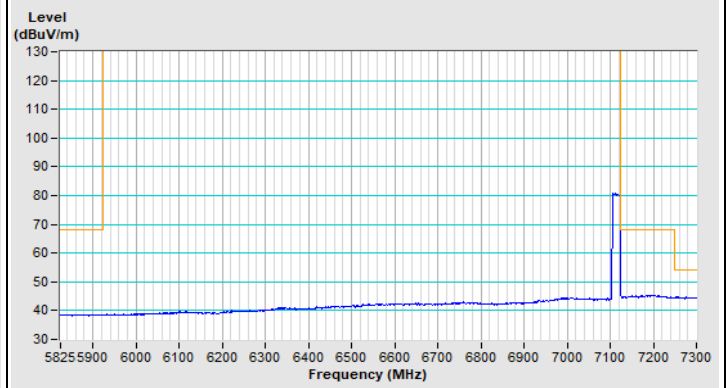

Horizontal (Average)

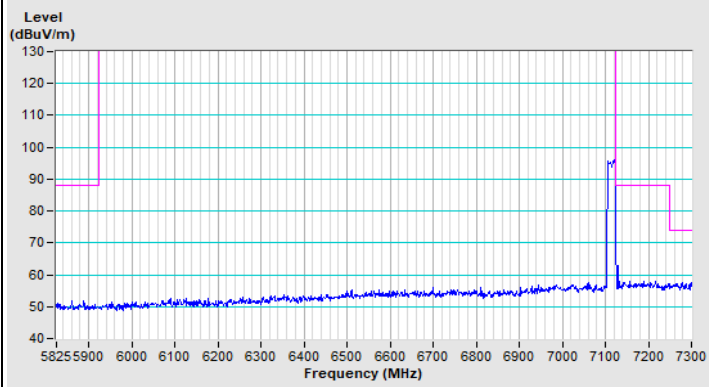


Vertical (Peak)

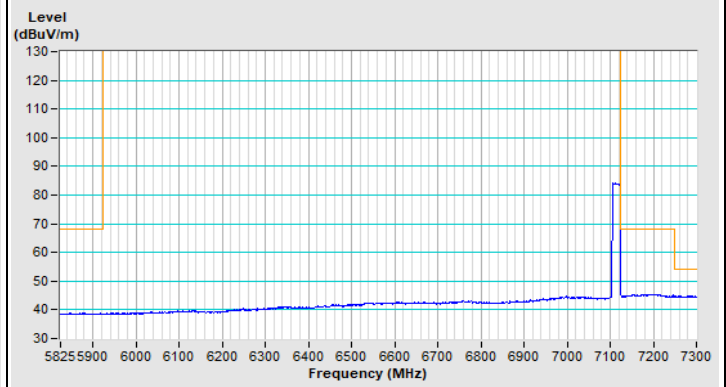


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 35

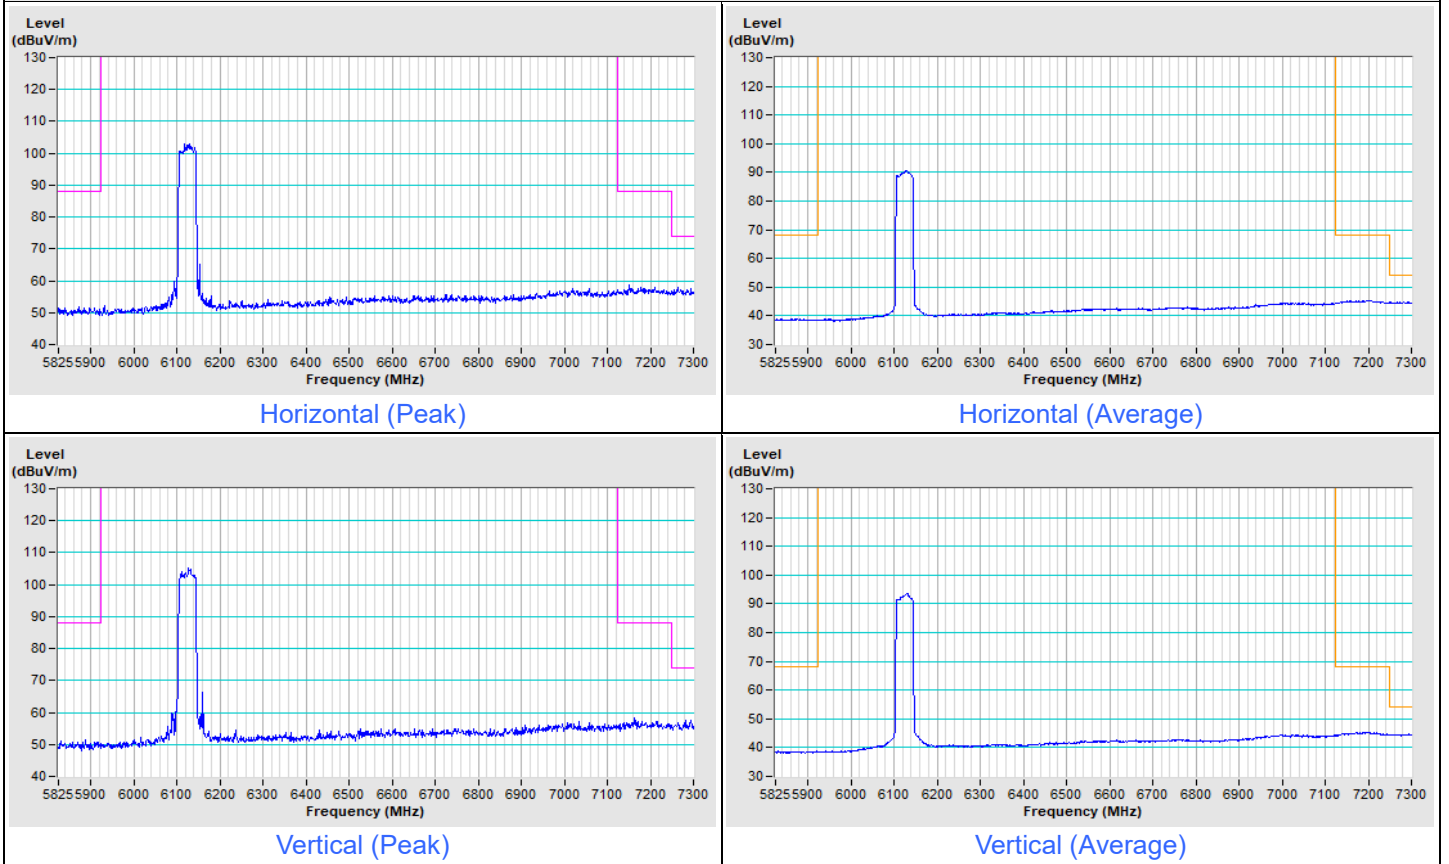


802.11be (EHT40) Channel 227

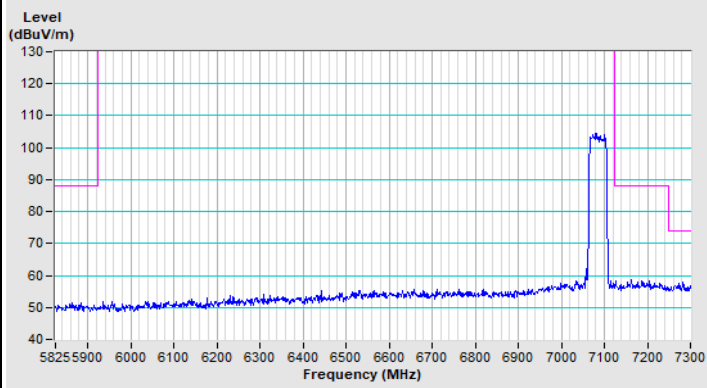


Horizontal (Peak)

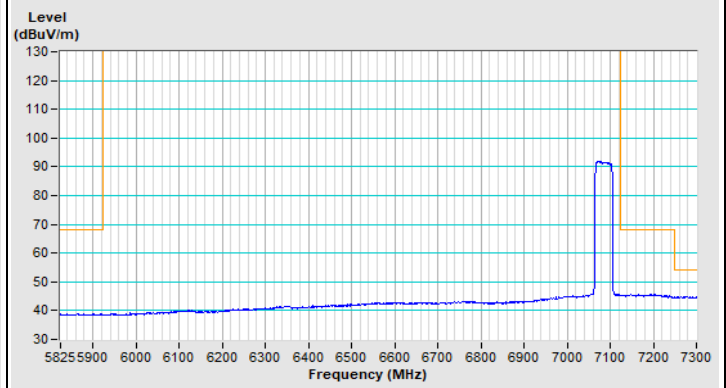

Horizontal (Average)

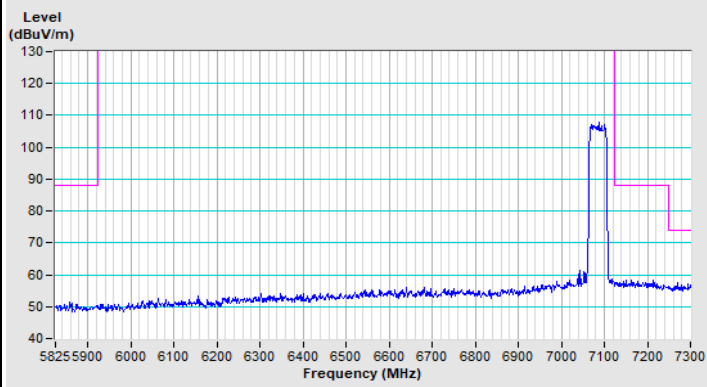


Vertical (Peak)

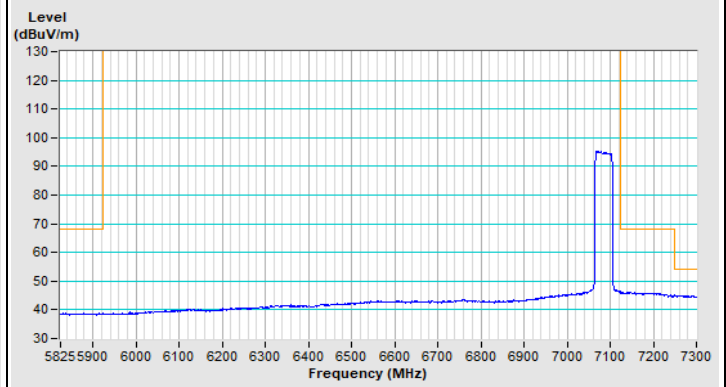


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 39

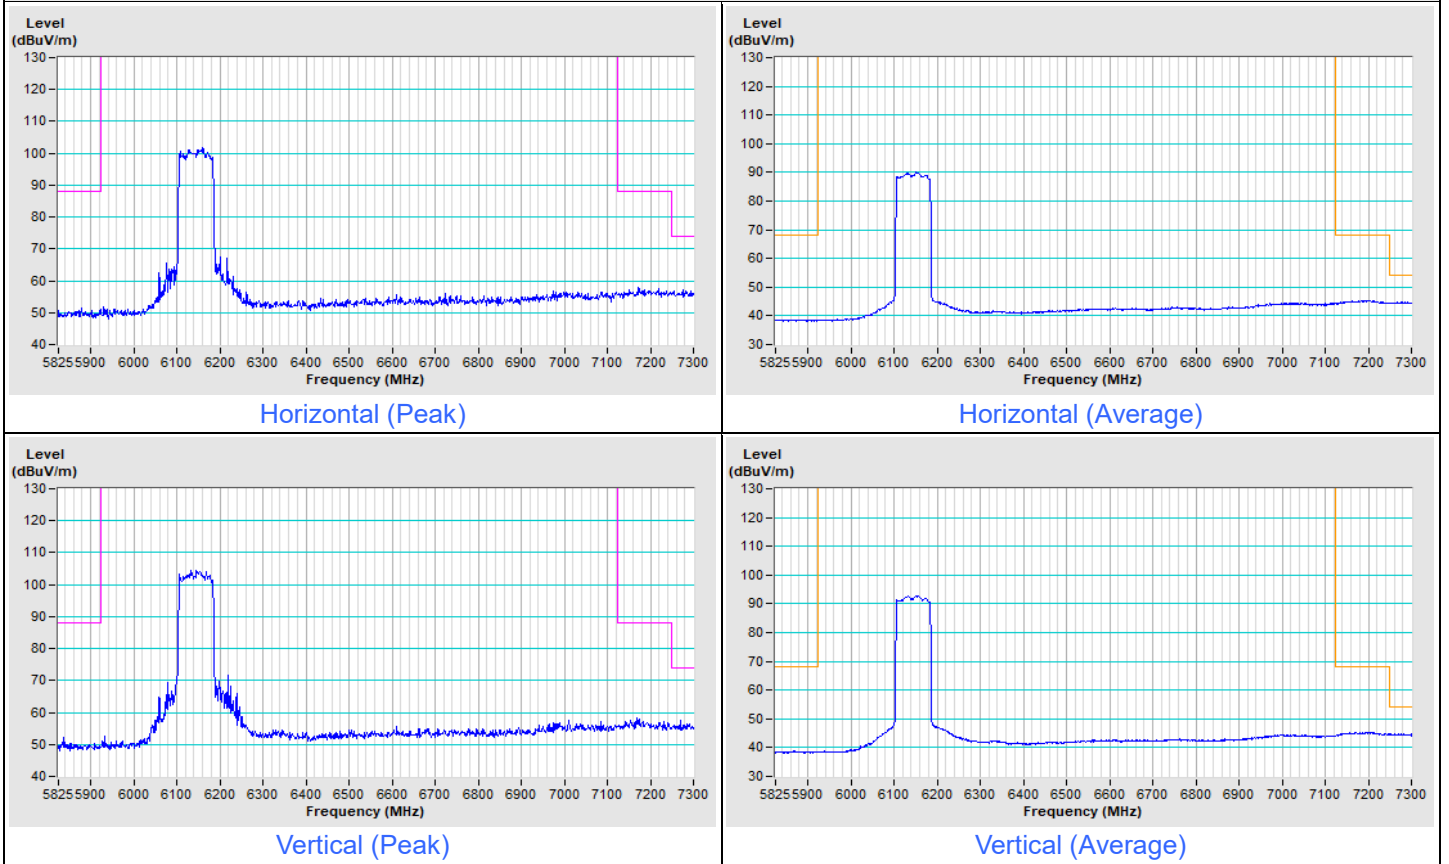


802.11be (EHT80) Channel 215

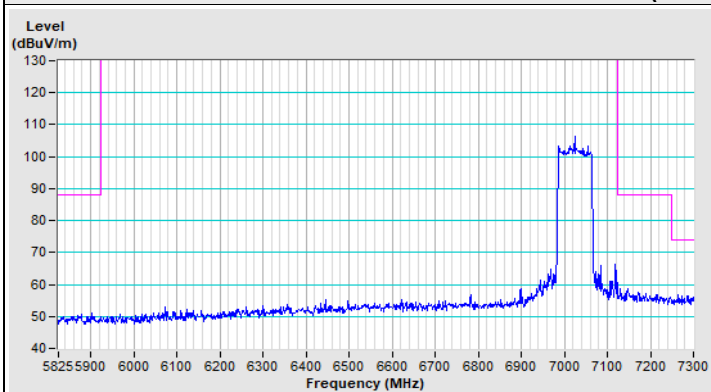


Horizontal (Peak)

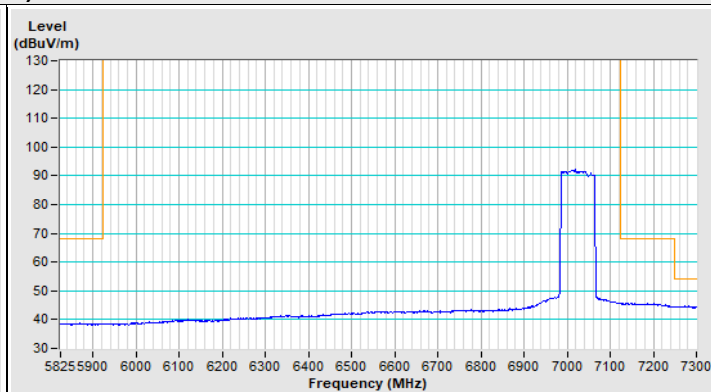

Horizontal (Average)

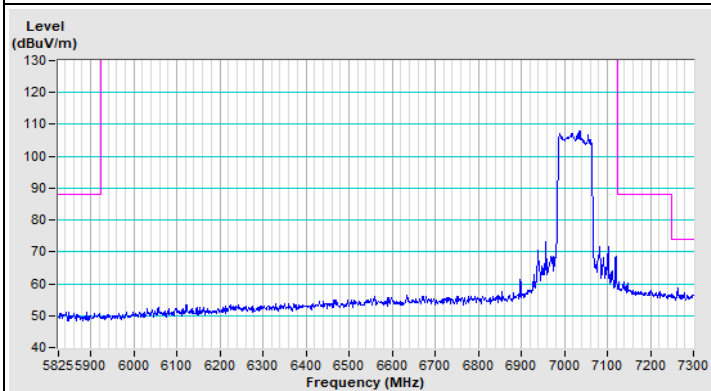


Vertical (Peak)

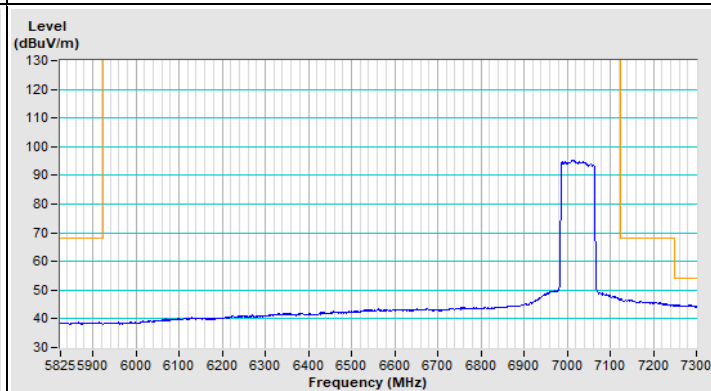


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 47

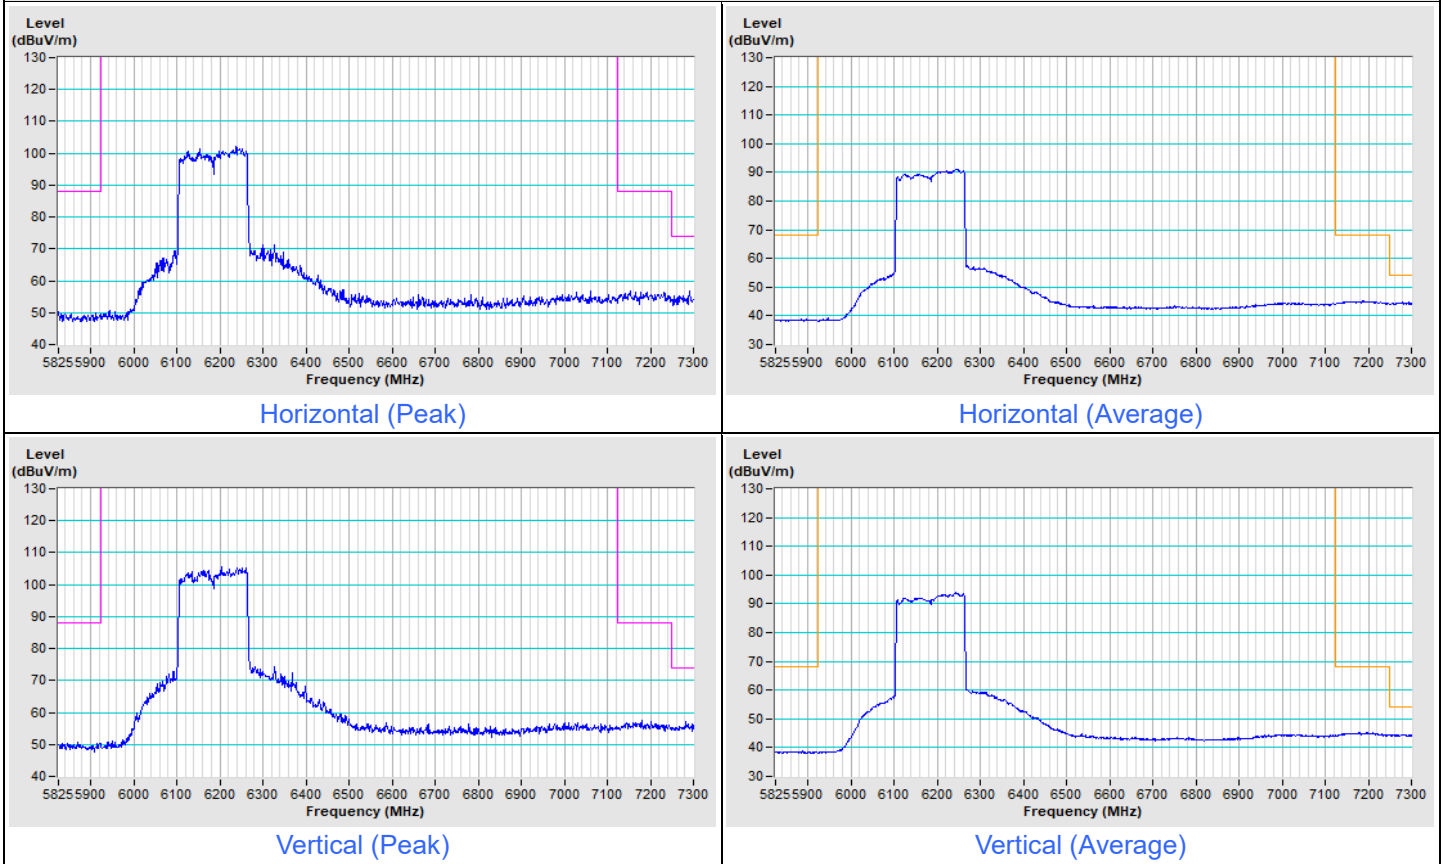


802.11be (EHT160) Channel 207

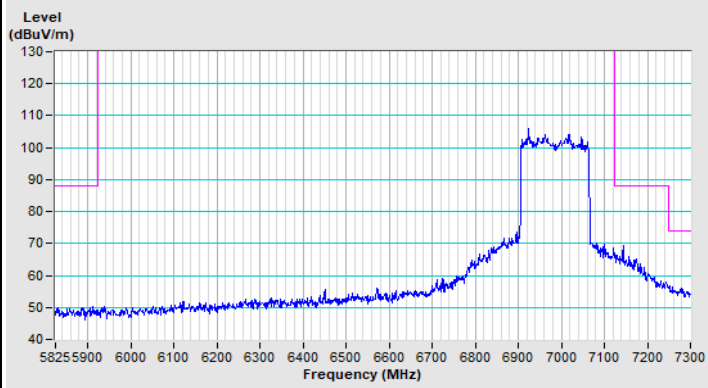


Horizontal (Peak)

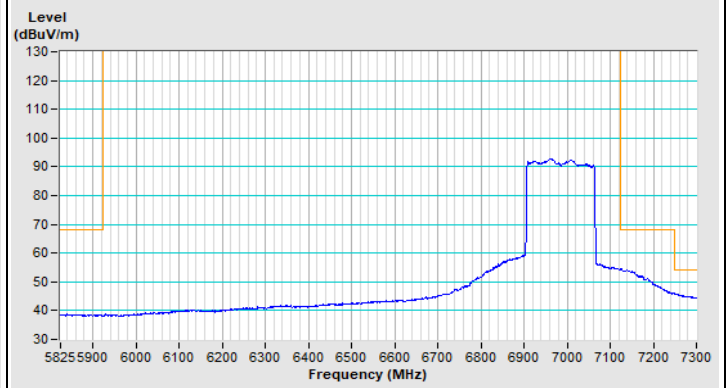

Horizontal (Average)

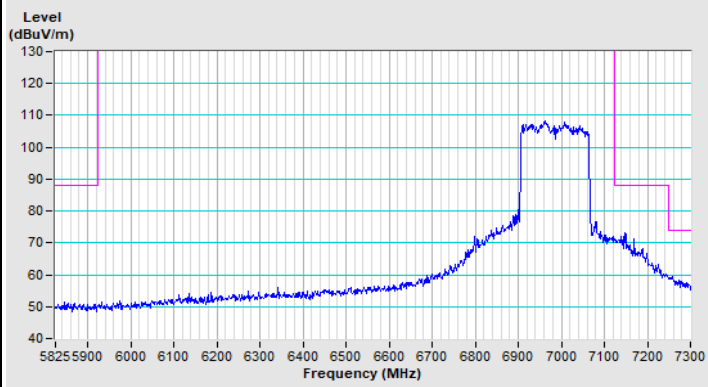


Vertical (Peak)

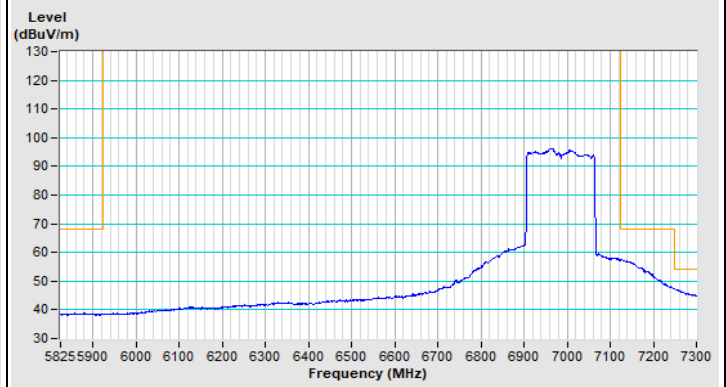


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 63

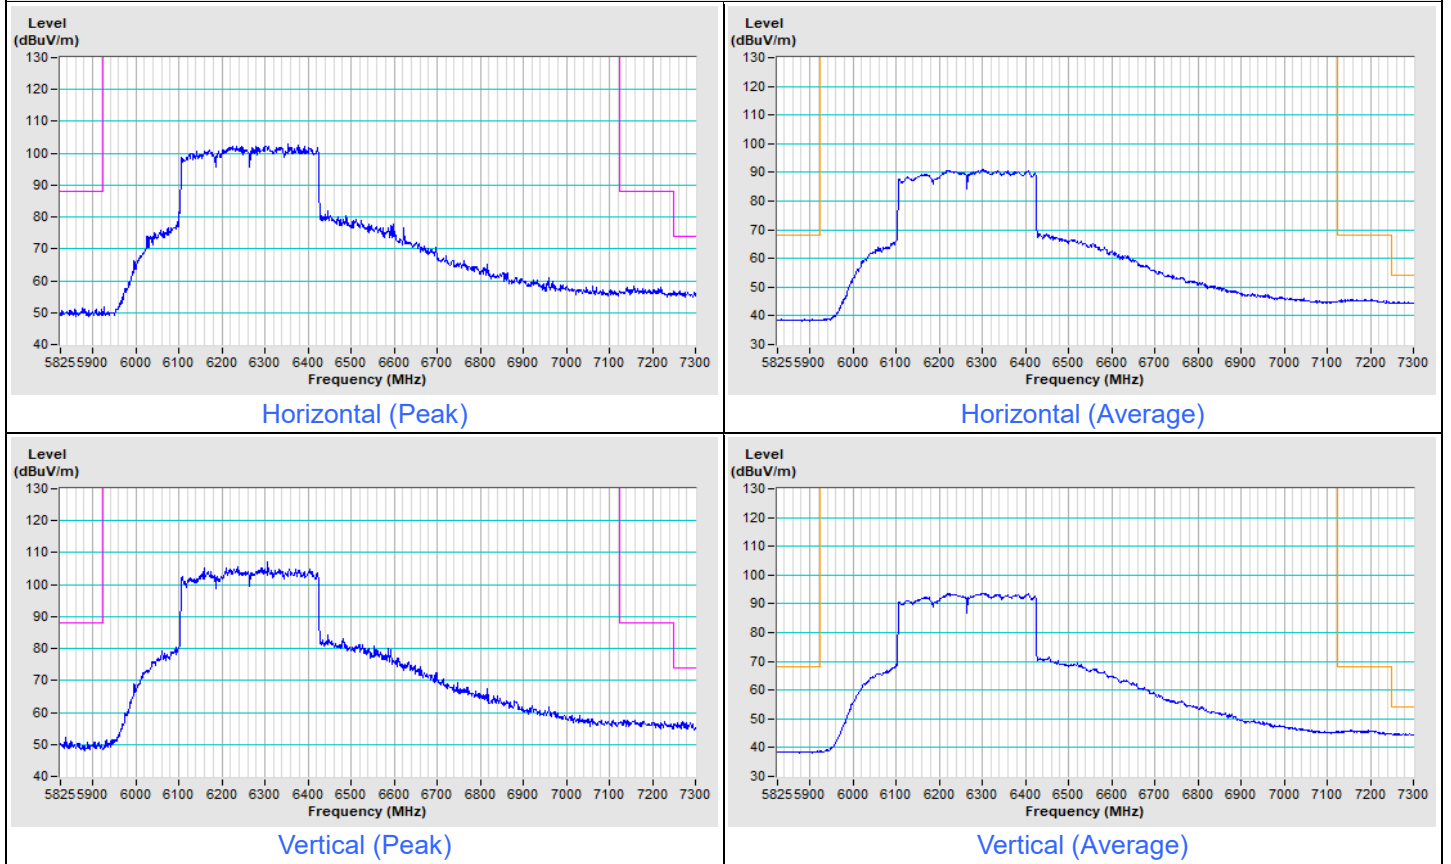


802.11be (EHT320) Channel 191

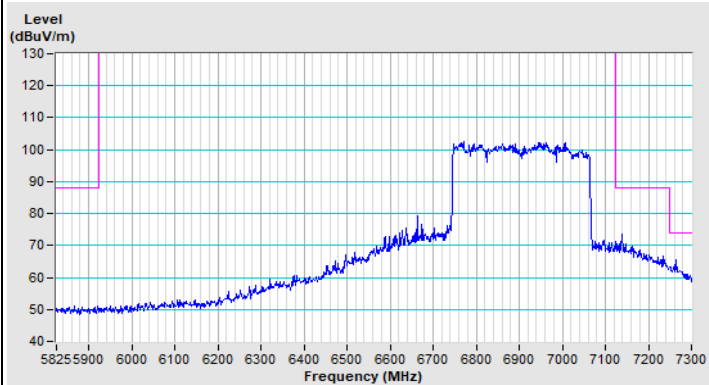


Horizontal (Peak)

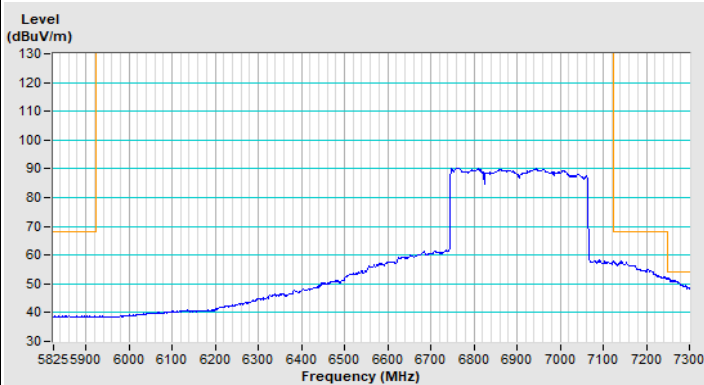

Horizontal (Average)

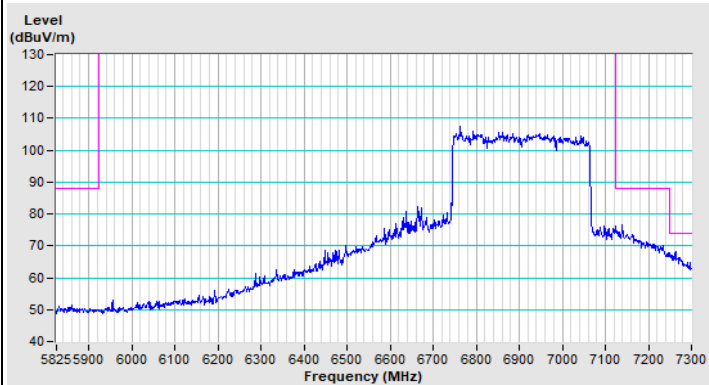

Vertical (Peak)

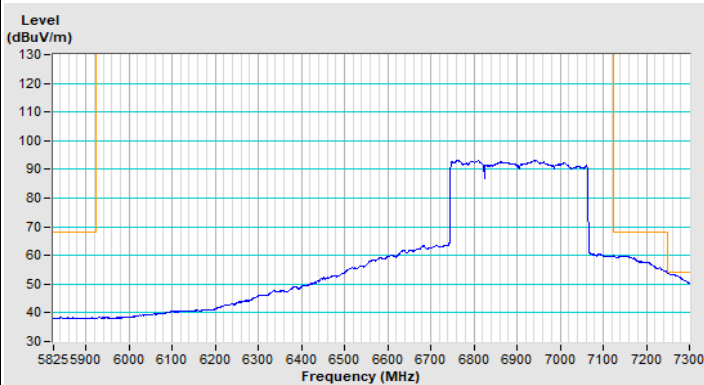

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---