

FCC Test Report

Report No.: RF160623E04-1

FCC ID: PY326200348

Test Model: C7000v2

Received Date: June 23, 2016

Test Date: June 23 to July 19, 2016

Issued Date: Aug. 15, 2016

Applicant: NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standard	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedure	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup	20
4.1.6 EUT Operating Condition	20
4.1.7 Test Results	21
4.2 Conducted Emission Measurement	40
4.2.1 Limits of Conducted Emission Measurement	40
4.2.2 Test Instruments	40
4.2.3 Test Procedure	41
4.2.4 Deviation from Test Standard	41
4.2.5 Test Setup	41
4.2.6 EUT Operating Condition	41
4.2.7 Test Results (Mode 1)	42
4.2.8 Test Results (Mode 2)	44
4.3 Transmit Power Measurement	46
4.3.1 Limits of Transmit Power Measurement	46
4.3.2 Test Setup	46
4.3.3 Test Instruments	46
4.3.4 Test Procedure	46
4.3.5 Deviation from Test Standard	46
4.3.6 EUT Operating Condition	47
4.3.7 Test Result	48
4.4 Occupied Bandwidth Measurement	51
4.4.1 Test Setup	51
4.4.2 Test Instruments	51
4.4.3 Test Procedure	51
4.5 Peak Power Spectral Density Measurement	56
4.5.1 Limits of Peak Power Spectral Density Measurement	56
4.5.2 Test Setup	56
4.5.3 Test Instruments	56
4.5.4 Test Procedure	57
4.5.5 Deviation from Test Standard	57
4.5.6 EUT Operating Condition	57
4.5.7 Test Results	58
4.6 Frequency Stability Measurement	64
4.6.1 Limits of Frequency Stability Measurement	64

4.6.2	Test Setup.....	64
4.6.3	Test Instruments	64
4.6.4	Test Procedure	64
4.6.5	Deviation from Test Standard	64
4.6.6	EUT Operating Condition	64
4.6.7	Test Results	65
4.7	6dB Bandwidth Measurement	66
4.7.1	Limits of 6dB Bandwidth Measurement.....	66
4.7.2	Test Setup.....	66
4.7.3	Test Instruments	66
4.7.4	Test Procedure	66
4.7.5	Deviation from Test Standard	66
4.7.6	EUT Operating Condition	66
4.7.7	Test Results	67
5	Pictures of Test Arrangements.....	69
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	70
	Appendix – Information on the Testing Laboratories	74

Release Control Record

Issue No.	Description	Date Issued
RF160623E04-1	Original release.	Aug. 15, 2016

1 Certificate of Conformity

Product: AC1900 WiFi Cable Modem Router

Brand: NETGEAR

Test Model: C7000v2

Sample Status: ENGINEERING SAMPLE


Applicant: NETGEAR, Inc.

Test Date: June 23 to July 19, 2016

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Aug. 15, 2016
Claire Kuan / Specialist

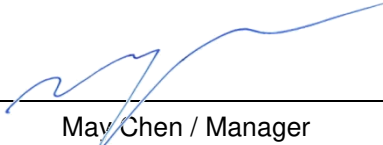Approved by :  , **Date:** Aug. 15, 2016
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -8.10dB at 0.15000MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5150.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex (MHF) not a standard connector.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.19 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.43 dB
	6GHz ~ 18GHz	3.49 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC1900 WiFi Cable Modem Router
Brand	NETGEAR
Test Model	C7000v2
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1300Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz and 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: CDD Mode: 989.004mW Beamforming Mode: 795.949mW 5GHz: 5.18GHz ~ 5.24GHz: CDD Mode: 966.405mW Beamforming Mode: 801.389mW 5.745GHz ~ 5.825GHz: CDD Mode: 968.131mW Beamforming Mode: 830.358mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT must be supplied with a power adapter and following different models could be chosen as following table:

No	Brand Name	Model No.	PN	Spec.
1	NETGEAR	MU42-3120350-A1	332-10762-01	Input: 100-240Vac, 50-60Hz, 1.5A Output: 12Vdc, 3.5A Power cord (Unshielded, 1.8m)
2		2ABN042F NA	332-10761-01	Input: 100-240Vac, 50-60Hz, 1.3A Output: 12Vdc, 3.5A Power cord (Unshielded, 1.8m)

Note: From the above adapters, the radiated emission worse case was found in Adapter 2. Therefore only the test data of the mode was recorded in this report.

3. The antennas provided to the EUT, please refer to the following table:

Transmitter Circuit	Brand	Model	Antenna Gain(dBi) <including cable loss>	Frequency range (MHz ~ MHz)	Antenna Type	Connector Type	Cable Length (mm)
Chain (2)	Masterwave	NA	2	2.4~2.4835	PCB	I-pex (MHF)	105
				5.15~5.85			
Chain (0)	Masterwave	NA	2	2.4~2.4835	PCB	I-pex (MHF)	70
				5.15~5.85			
Chain (1)	Masterwave	NA	2	2.4~2.4835	PCB	I-pex (MHF)	101
				5.15~5.85			

4. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	3TX	3RX
802.11g	6 ~ 54Mbps	3TX	3RX
802.11n (HT20)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS16~23	3TX	3RX
802.11n (HT40)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS16~23	3TX	3RX
VHT20	MCS0~8 Nss=1	3TX	3RX
	MCS0~8 Nss=2	3TX	3RX
	MCS0~9 Nss=3	3TX	3RX
VHT40	MCS0~9 Nss=1	3TX	3RX
	MCS0~9 Nss=2	3TX	3RX
	MCS0~9 Nss=3	3TX	3RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	3TX	3RX
802.11n (HT20)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS16~23	3TX	3RX
802.11n (HT40)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS16~23	3TX	3RX
802.11ac (VHT20)	MCS0~8 Nss=1	3TX	3RX
	MCS0~8 Nss=2	3TX	3RX
	MCS0~9 Nss=3	3TX	3RX
802.11ac (VHT40)	MCS0~9 Nss=1	3TX	3RX
	MCS0~9 Nss=2	3TX	3RX
	MCS0~9 Nss=3	3TX	3RX
802.11ac (VHT80)	MCS0~9 Nss=1	3TX	3RX
	MCS0~9 Nss=2	3TX	3RX
	MCS0~9 Nss=3	3TX	3RX

Note:

- All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
- The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report.
(Final test mode refer section 3.2.1)

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
1	-	-	√	-	EUT with adapter 1
2	√	√	√	√	EUT with adapter 2

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE $<$ 1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

NOTE: 1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **Y-plane**.
 2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	157	OFDM	BPSK	6
	5745-5825	149 to 165				

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	157	OFDM	BPSK	6
	5745-5825	149 to 165				

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3
Beamforming Mode (Output power only)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE _≥ 1G	24deg. C, 70%RH	120Vac, 60Hz	Robert Cheng
RE _{<} 1G	25deg. C, 67%RH	120Vac, 60Hz	Robert Cheng
PLC	26deg. C, 65%RH	120Vac, 60Hz	Jyunchun Lin
APCM	24deg. C, 66%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.
 If duty cycle of test signal is $< 98\%$, duty factor shall be considered.


802.11a: Duty cycle = $2.192 \text{ ms} / 2.219 \text{ ms} = 0.988$

802.11ac (VHT20): Duty cycle = $2.041 \text{ ms} / 2.066 \text{ ms} = 0.988$


802.11ac (VHT40): Duty cycle = $1.004 \text{ ms} / 1.024 \text{ ms} = 0.98$

802.11ac (VHT80): Duty cycle = $0.487 \text{ ms} / 0.505 \text{ ms} = 0.964$, Duty factor = $10 * \log(1/0.964) = 0.16$

802.11a 802.11ac (VHT20)

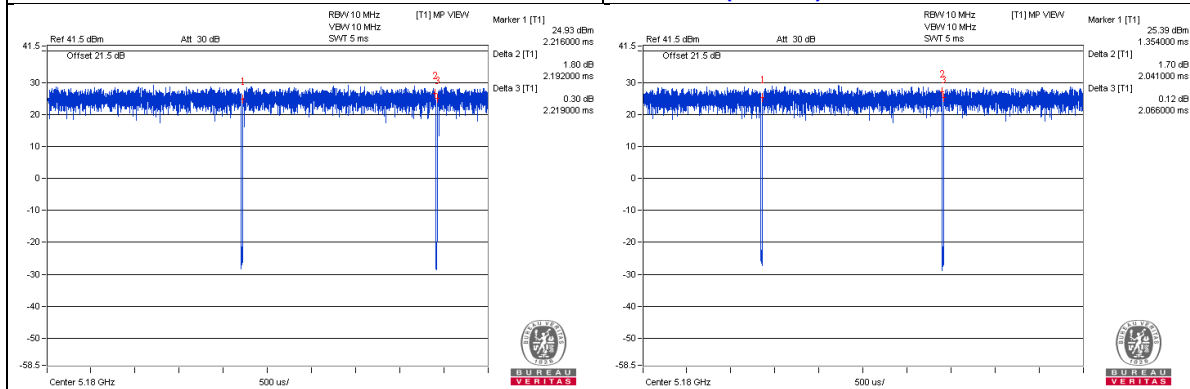

802.11ac (VHT40) 802.11ac (VHT80)

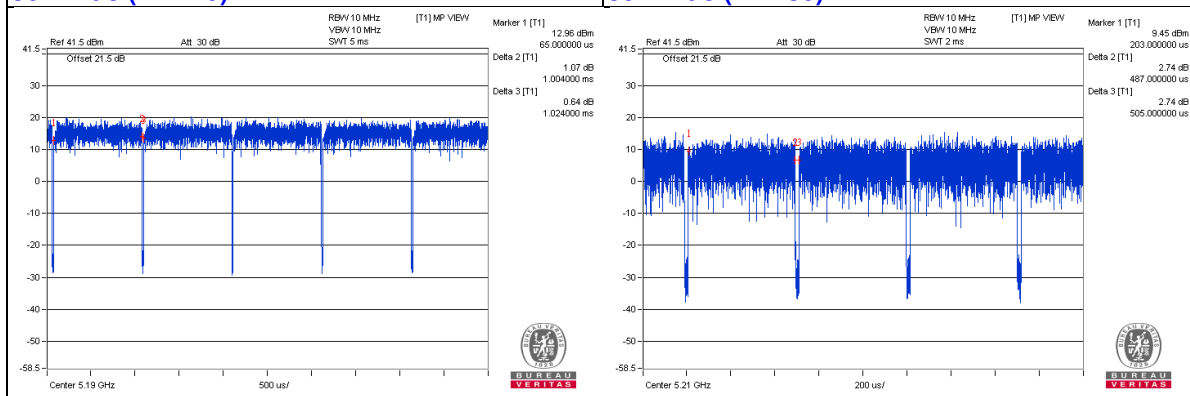

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
B.	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC	Provided by Lab
C.	iPod	Apple	MC749TA/A	CC4DMFJUDFDM	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45	1	10	No	0	Provided by Lab
2.	RJ-45	3	10	No	0	Provided by Lab
3.	USB	1	0.1	Yes	0	Provided by Lab
4.	Coaxial	1	10	Yes	0	Provided by Lab
5.	DC	1	1.8	No	0	Supplied by client

3.4.1 Configuration of System under Test

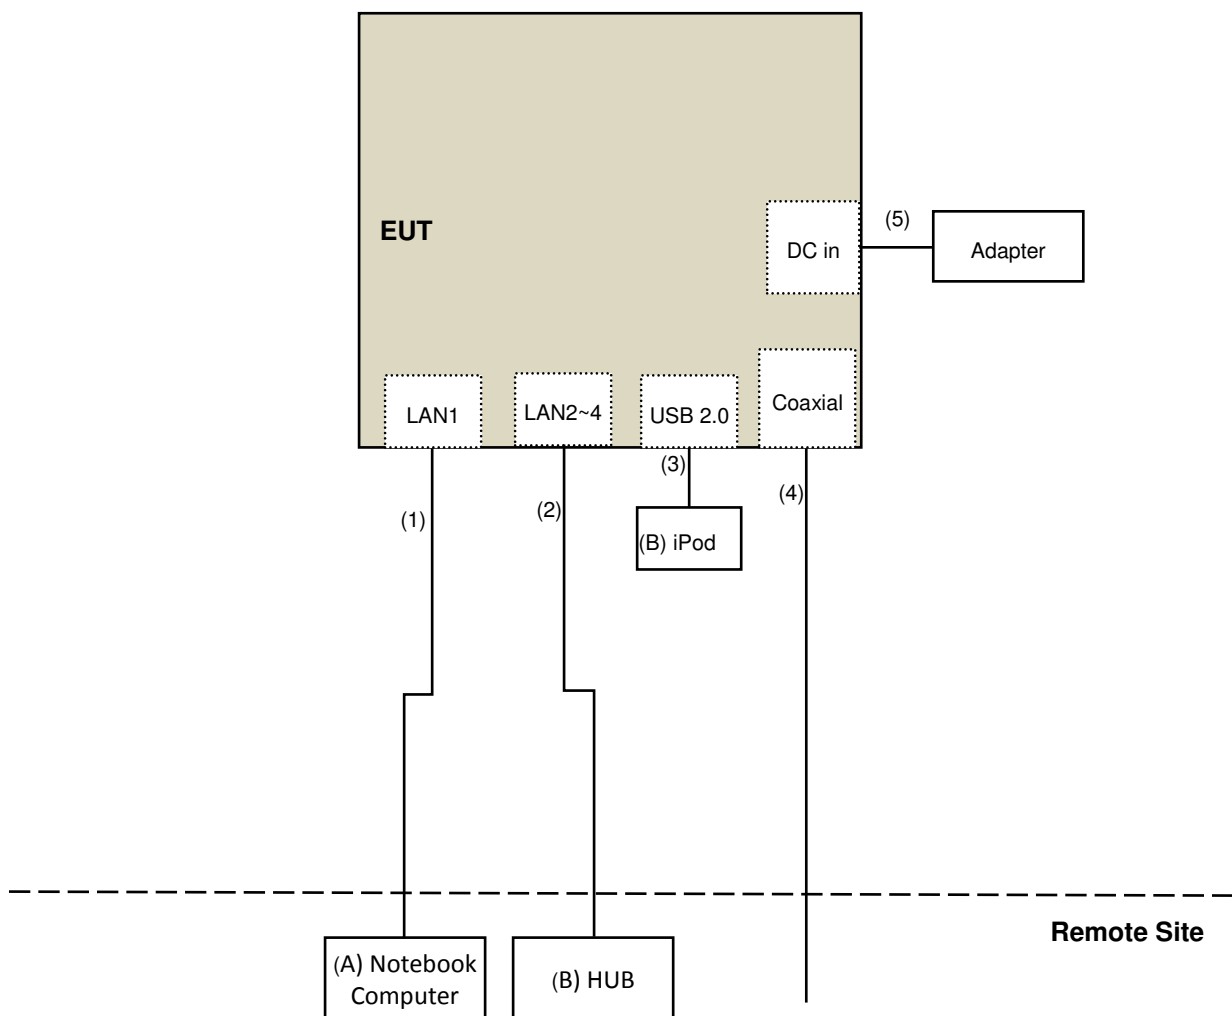

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)
KDB 789033 D02 General UNII Test Procedure New Rules v01r02
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v01r02		Field Strength at 3m	
		PK:74 (dBµV/m)	AV:54 (dBµV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBµV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBµV/m) ^{*1} PK:105.2 (dBµV/m) ^{*2} PK: 110.8(dBµV/m) ^{*3} PK:122.2 (dBµV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY54450088	July 24, 2015	July 23, 2016
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 11, 2015	Nov. 10, 2016
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 02, 2016	Apr. 01, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Jan. 19, 2016	Jan. 18, 2017
Pre-Amplifier Agilent	8449B	3008A01922	Sep. 19, 2015	Sep. 18, 2016
RF Cable	EMC104-SM-SM-2000 EMC104-SM-SM-5000 EMC104-SM-SM-5000	150318 150323 150324	Mar. 30, 2016	Mar. 29, 2017
Pre-Amplifier EMCI	EMC184045	980143	Jan. 15, 2016	Jan. 14, 2017
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Jan. 08, 2016	Jan. 07, 2017
RF Cable	SUCOFLEX 102	36432/2 36441/2	Jan. 16, 2016	Jan. 15, 2017
Software	ADT_Radiated_V8.7.07	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSP40	100060	May 11, 2016	May 10, 2017
Power meter Anritsu	ML2495A	1014008	May 05, 2016	May 04, 2017
Power sensor Anritsu	MA2411B	0917122	May 05, 2016	May 04, 2017
AC Power Source Extech Electronics	6205	1440452	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 15, 2016	Jan. 14, 2017
DC Power Supply Topward	6603D	795558	NA	NA
Digital Multimeter FLUKE	87III	73680266	Nov. 10, 2015	Nov. 09, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. The FCC Site Registration No. is 292998
4. The CANADA Site Registration No. is 20331-2
5. Tested Date: June 23 to July 19, 2016

4.1.3 Test Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

<Frequency Range below 1GHz>

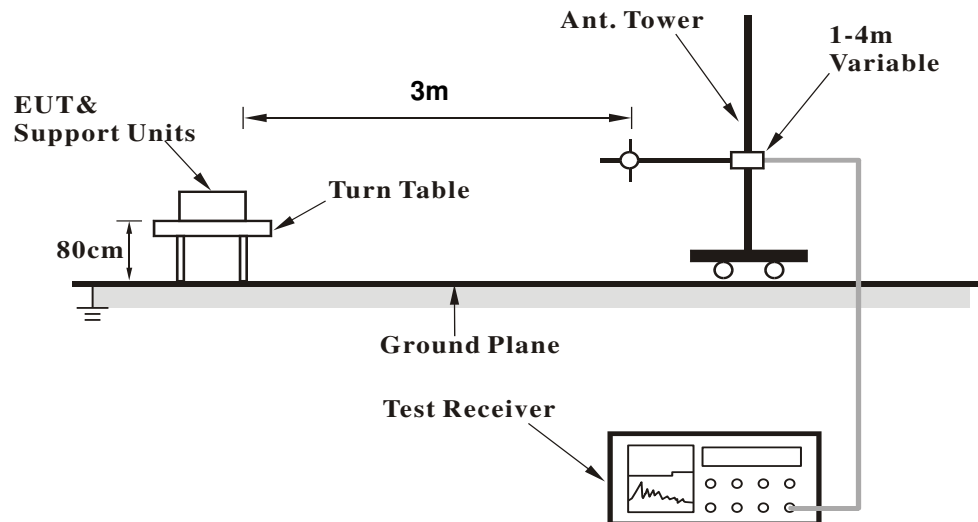

<Frequency Range above 1GHz>

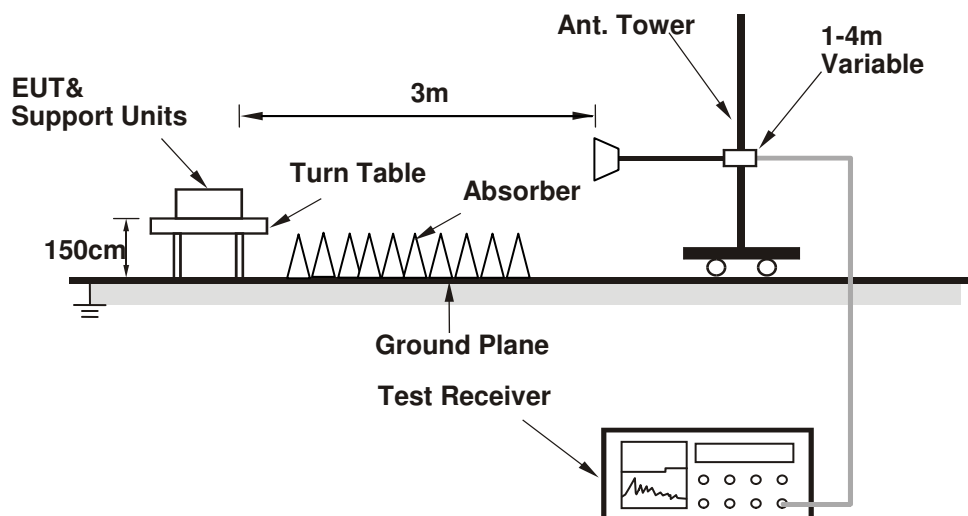

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- a. Connected the EUT with the Notebook Computer which is placed on remote site.
- b. Controlling software (Mtool.exe [2.0.1.0]) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	1.51 H	83	64.9	1.6
2	5150.00	52.3 AV	54.0	-1.7	1.51 H	83	50.7	1.6
3	*5180.00	118.1 PK			1.51 H	83	116.4	1.7
4	*5180.00	107.6 AV			1.51 H	83	105.9	1.7
5	#10360.00	53.4 PK	74.0	-20.6	2.28 H	200	41.7	11.7
6	#10360.00	42.1 AV	54.0	-11.9	2.28 H	200	30.4	11.7
7	15540.00	48.1 PK	74.0	-25.9	2.66 H	138	34.8	13.3
8	15540.00	35.8 AV	54.0	-18.2	2.66 H	138	22.5	13.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.3 PK	74.0	-1.7	1.67 V	253	70.7	1.6
2	5150.00	53.1 AV	54.0	-0.9	1.67 V	253	51.5	1.6
3	*5180.00	118.2 PK			1.67 V	253	116.5	1.7
4	*5180.00	108.7 AV			1.67 V	253	107.0	1.7
5	#10360.00	54.9 PK	74.0	-19.1	3.53 V	272	43.2	11.7
6	#10360.00	41.2 AV	54.0	-12.8	3.53 V	272	29.5	11.7
7	15540.00	48.2 PK	74.0	-25.8	1.68 V	230	34.9	13.3
8	15540.00	36.1 AV	54.0	-17.9	1.68 V	230	22.8	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	117.8 PK			1.57 H	78	116.0	1.8
2	*5200.00	107.3 AV			1.57 H	78	105.5	1.8
3	#10400.00	53.3 PK	74.0	-20.7	1.61 H	202	41.4	11.9
4	#10400.00	42.0 AV	54.0	-12.0	1.61 H	202	30.1	11.9
5	15600.00	49.1 PK	74.0	-24.9	2.02 H	147	35.8	13.3
6	15600.00	36.6 AV	54.0	-17.4	2.02 H	147	23.3	13.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	117.9 PK			1.67 V	266	116.1	1.8
2	*5200.00	108.7 AV			1.67 V	266	106.9	1.8
3	#10400.00	54.4 PK	74.0	-19.6	3.52 V	264	42.5	11.9
4	#10400.00	40.8 AV	54.0	-13.2	3.52 V	264	28.9	11.9
5	15600.00	47.6 PK	74.0	-26.4	1.64 V	238	34.3	13.3
6	15600.00	35.7 AV	54.0	-18.3	1.64 V	238	22.4	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.6 PK			1.49 H	96	115.8	1.8
2	*5240.00	107.1 AV			1.49 H	96	105.3	1.8
3	5350.00	60.8 PK	74.0	-13.2	1.49 H	96	58.7	2.1
4	5350.00	48.4 AV	54.0	-5.6	1.49 H	96	46.3	2.1
5	#10480.00	53.0 PK	74.0	-21.0	1.61 H	206	40.8	12.2
6	#10480.00	41.9 AV	54.0	-12.1	1.61 H	206	29.7	12.2
7	15720.00	48.7 PK	74.0	-25.3	1.99 H	150	35.5	13.2
8	15720.00	36.2 AV	54.0	-17.8	1.99 H	150	23.0	13.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.8 PK			1.70 V	247	117.0	1.8
2	*5240.00	109.1 AV			1.70 V	247	107.3	1.8
3	5350.00	61.4 PK	74.0	-12.6	1.70 V	247	59.3	2.1
4	5350.00	49.3 AV	54.0	-4.7	1.70 V	247	47.2	2.1
5	#10480.00	54.7 PK	74.0	-19.3	3.57 V	266	42.5	12.2
6	#10480.00	40.8 AV	54.0	-13.2	3.57 V	266	28.6	12.2
7	15720.00	48.9 PK	74.0	-25.1	1.64 V	234	35.7	13.2
8	15720.00	36.5 AV	54.0	-17.5	1.64 V	234	23.3	13.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5631.70	62.7 PK	68.2	-5.5	1.45 H	109	60.1	2.6
2	*5745.00	118.2 PK			1.45 H	109	115.4	2.8
3	*5745.00	108.2 AV			1.45 H	109	105.4	2.8
4	#5996.98	60.5 PK	68.2	-7.7	1.45 H	109	57.1	3.4
5	11490.00	57.2 PK	74.0	-16.8	1.02 H	214	43.7	13.5
6	11490.00	43.4 AV	54.0	-10.6	1.02 H	214	29.9	13.5
7	#17235.00	52.5 PK	74.0	-21.5	2.01 H	149	34.1	18.4
8	#17235.00	40.6 AV	54.0	-13.4	2.01 H	149	22.2	18.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5625.05	60.6 PK	68.2	-7.6	1.78 V	251	58.0	2.6
2	*5745.00	117.0 PK			1.78 V	251	114.2	2.8
3	*5745.00	107.9 AV			1.78 V	251	105.1	2.8
4	#6005.52	61.3 PK	68.2	-6.9	1.78 V	251	57.9	3.4
5	11490.00	53.4 PK	74.0	-20.6	1.91 V	230	39.9	13.5
6	11490.00	41.5 AV	54.0	-12.5	1.91 V	230	28.0	13.5
7	#17235.00	51.9 PK	74.0	-22.1	1.43 V	63	33.5	18.4
8	#17235.00	40.4 AV	54.0	-13.6	1.43 V	63	22.0	18.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5598.45	60.8 PK	68.2	-7.4	1.46 H	86	58.3	2.5
2	*5785.00	117.4 PK			1.46 H	86	114.5	2.9
3	*5785.00	108.1 AV			1.46 H	86	105.2	2.9
4	#5982.73	60.8 PK	68.2	-7.4	1.46 H	86	57.5	3.3
5	11570.00	56.6 PK	74.0	-17.4	1.00 H	205	43.4	13.2
6	11570.00	43.0 AV	54.0	-11.0	1.00 H	205	29.8	13.2
7	#17355.00	52.8 PK	74.0	-21.2	1.97 H	144	33.7	19.1
8	#17355.00	41.1 AV	54.0	-12.9	1.97 H	144	22.0	19.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5634.07	60.0 PK	68.2	-8.2	1.74 V	259	57.4	2.6
2	*5785.00	118.0 PK			1.74 V	259	115.1	2.9
3	*5785.00	107.1 AV			1.74 V	259	104.2	2.9
4	#5971.80	61.7 PK	68.2	-6.5	1.74 V	259	58.5	3.2
5	11570.00	53.3 PK	74.0	-20.7	1.83 V	227	40.1	13.2
6	11570.00	41.6 AV	54.0	-12.4	1.83 V	227	28.4	13.2
7	#17355.00	53.0 PK	74.0	-21.0	1.43 V	50	33.9	19.1
8	#17355.00	41.2 AV	54.0	-12.8	1.43 V	50	22.1	19.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5590.37	62.2 PK	68.2	-6.0	1.46 H	108	59.7	2.5
2	*5825.00	117.0 PK			1.46 H	108	114.1	2.9
3	*5825.00	107.9 AV			1.46 H	108	105.0	2.9
4	#5982.25	63.8 PK	68.2	-4.4	1.46 H	108	60.5	3.3
5	11650.00	56.8 PK	74.0	-17.2	1.07 H	212	43.6	13.2
6	11650.00	43.0 AV	54.0	-11.0	1.07 H	212	29.8	13.2
7	#17475.00	52.5 PK	74.0	-21.5	1.98 H	164	33.1	19.4
8	#17475.00	40.8 AV	54.0	-13.2	1.98 H	164	21.4	19.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5556.65	60.3 PK	68.2	-7.9	1.83 V	263	57.8	2.5
2	*5825.00	117.7 PK			1.83 V	263	114.8	2.9
3	*5825.00	107.2 AV			1.83 V	263	104.3	2.9
4	#5945.68	61.5 PK	68.2	-6.7	1.83 V	263	58.4	3.1
5	11650.00	52.8 PK	74.0	-21.2	1.82 V	254	39.6	13.2
6	11650.00	41.0 AV	54.0	-13.0	1.82 V	254	27.8	13.2
7	#17475.00	52.4 PK	74.0	-21.6	1.46 V	61	33.0	19.4
8	#17475.00	40.7 AV	54.0	-13.3	1.46 V	61	21.3	19.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.3 PK	74.0	-7.7	1.40 H	92	64.7	1.6
2	5150.00	51.9 AV	54.0	-2.1	1.40 H	92	50.3	1.6
3	*5180.00	118.2 PK			1.40 H	92	116.5	1.7
4	*5180.00	107.9 AV			1.40 H	92	106.2	1.7
5	#10360.00	53.0 PK	74.0	-21.0	2.32 H	193	41.3	11.7
6	#10360.00	41.8 AV	54.0	-12.2	2.32 H	193	30.1	11.7
7	15540.00	47.9 PK	74.0	-26.1	2.69 H	136	34.6	13.3
8	15540.00	35.3 AV	54.0	-18.7	2.69 H	136	22.0	13.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.6 PK	74.0	-1.4	1.79 V	249	71.0	1.6
2	5150.00	53.2 AV	54.0	-0.8	1.79 V	249	51.6	1.6
3	*5180.00	118.8 PK			1.79 V	249	117.1	1.7
4	*5180.00	108.5 AV			1.79 V	249	106.8	1.7
5	#10360.00	54.8 PK	74.0	-19.2	3.53 V	258	43.1	11.7
6	#10360.00	41.1 AV	54.0	-12.9	3.53 V	258	29.4	11.7
7	15540.00	48.3 PK	74.0	-25.7	1.62 V	242	35.0	13.3
8	15540.00	36.2 AV	54.0	-17.8	1.62 V	242	22.9	13.3

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	118.6 PK			1.47 H	84	116.8	1.8
2	*5200.00	108.1 AV			1.47 H	84	106.3	1.8
3	#10400.00	53.9 PK	74.0	-20.1	2.29 H	189	42.0	11.9
4	#10400.00	42.6 AV	54.0	-11.4	2.29 H	189	30.7	11.9
5	15600.00	48.5 PK	74.0	-25.5	2.70 H	153	35.2	13.3
6	15600.00	35.9 AV	54.0	-18.1	2.70 H	153	22.6	13.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	119.2 PK			1.78 V	258	117.4	1.8
2	*5200.00	109.1 AV			1.78 V	258	107.3	1.8
3	#10400.00	54.6 PK	74.0	-19.4	3.51 V	258	42.7	11.9
4	#10400.00	41.1 AV	54.0	-12.9	3.51 V	258	29.2	11.9
5	15600.00	48.5 PK	74.0	-25.5	1.63 V	226	35.2	13.3
6	15600.00	36.4 AV	54.0	-17.6	1.63 V	226	23.1	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.1 PK			1.44 H	84	116.3	1.8
2	*5240.00	107.7 AV			1.44 H	84	105.9	1.8
3	5350.00	60.6 PK	74.0	-13.4	1.44 H	84	58.5	2.1
4	5350.00	48.1 AV	54.0	-5.9	1.44 H	84	46.0	2.1
5	#10480.00	53.7 PK	74.0	-20.3	1.63 H	202	41.5	12.2
6	#10480.00	42.2 AV	54.0	-11.8	1.63 H	202	30.0	12.2
7	15720.00	49.0 PK	74.0	-25.0	2.03 H	141	35.8	13.2
8	15720.00	36.3 AV	54.0	-17.7	2.03 H	141	23.1	13.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	119.2 PK			1.76 V	246	117.4	1.8
2	*5240.00	108.9 AV			1.76 V	246	107.1	1.8
3	5350.00	61.6 PK	74.0	-12.4	1.76 V	246	59.5	2.1
4	5350.00	49.4 AV	54.0	-4.6	1.76 V	246	47.3	2.1
5	#10480.00	54.4 PK	74.0	-19.6	3.50 V	260	42.2	12.2
6	#10480.00	40.9 AV	54.0	-13.1	3.50 V	260	28.7	12.2
7	15720.00	48.9 PK	74.0	-25.1	1.70 V	220	35.7	13.2
8	15720.00	36.6 AV	54.0	-17.4	1.70 V	220	23.4	13.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.98	63.0 PK	68.2	-5.2	1.45 H	109	60.4	2.6
2	*5745.00	118.7 PK			1.45 H	109	115.9	2.8
3	*5745.00	108.5 AV			1.45 H	109	105.7	2.8
4	#5964.68	60.9 PK	68.2	-7.3	1.45 H	109	57.7	3.2
5	11490.00	57.7 PK	74.0	-16.3	1.00 H	212	44.2	13.5
6	11490.00	43.7 AV	54.0	-10.3	1.00 H	212	30.2	13.5
7	#17235.00	52.4 PK	74.0	-21.6	2.06 H	139	34.0	18.4
8	#17235.00	40.7 AV	54.0	-13.3	2.06 H	139	22.3	18.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5585.62	63.6 PK	68.2	-4.6	1.78 V	251	61.1	2.5
2	*5745.00	117.7 PK			1.78 V	251	114.9	2.8
3	*5745.00	108.2 AV			1.78 V	251	105.4	2.8
4	#5986.05	60.8 PK	68.2	-7.4	1.78 V	251	57.5	3.3
5	11490.00	53.0 PK	74.0	-21.0	1.80 V	232	39.5	13.5
6	11490.00	41.4 AV	54.0	-12.6	1.80 V	232	27.9	13.5
7	#17235.00	52.2 PK	74.0	-21.8	1.39 V	58	33.8	18.4
8	#17235.00	40.8 AV	54.0	-13.2	1.39 V	58	22.4	18.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.98	60.8 PK	68.2	-7.4	1.46 H	86	58.2	2.6
2	*5785.00	117.6 PK			1.46 H	86	114.7	2.9
3	*5785.00	108.3 AV			1.46 H	86	105.4	2.9
4	#5979.87	61.3 PK	68.2	-6.9	1.46 H	86	58.0	3.3
5	11570.00	57.7 PK	74.0	-16.3	1.06 H	223	44.5	13.2
6	11570.00	43.8 AV	54.0	-10.2	1.06 H	223	30.6	13.2
7	#17355.00	52.6 PK	74.0	-21.4	2.06 H	142	33.5	19.1
8	#17355.00	40.8 AV	54.0	-13.2	2.06 H	142	21.7	19.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5595.12	59.5 PK	68.2	-8.7	1.81 V	254	57.0	2.5
2	*5785.00	118.3 PK			1.81 V	254	115.4	2.9
3	*5785.00	108.4 AV			1.81 V	254	105.5	2.9
4	#5936.65	60.8 PK	68.2	-7.4	1.81 V	254	57.7	3.1
5	11570.00	52.8 PK	74.0	-21.2	1.82 V	233	39.6	13.2
6	11570.00	41.1 AV	54.0	-12.9	1.82 V	233	27.9	13.2
7	#17355.00	52.2 PK	74.0	-21.8	1.45 V	52	33.1	19.1
8	#17355.00	40.9 AV	54.0	-13.1	1.45 V	52	21.8	19.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5591.80	61.4 PK	68.2	-6.8	1.46 H	108	58.9	2.5
2	*5825.00	117.4 PK			1.46 H	108	114.5	2.9
3	*5825.00	108.2 AV			1.46 H	108	105.3	2.9
4	#5938.07	61.0 PK	68.2	-7.2	1.46 H	108	57.9	3.1
5	11650.00	56.7 PK	74.0	-17.3	1.04 H	199	43.5	13.2
6	11650.00	42.9 AV	54.0	-11.1	1.04 H	199	29.7	13.2
7	#17475.00	53.1 PK	74.0	-20.9	2.04 H	157	33.7	19.4
8	#17475.00	41.0 AV	54.0	-13.0	2.04 H	157	21.6	19.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5630.75	60.1 PK	68.2	-8.1	1.76 V	266	57.5	2.6
2	*5825.00	118.3 PK			1.76 V	266	115.4	2.9
3	*5825.00	107.9 AV			1.76 V	266	105.0	2.9
4	#5948.52	62.1 PK	68.2	-6.1	1.76 V	266	58.9	3.2
5	11650.00	52.5 PK	74.0	-21.5	1.84 V	245	39.3	13.2
6	11650.00	40.9 AV	54.0	-13.1	1.84 V	245	27.7	13.2
7	#17475.00	52.0 PK	74.0	-22.0	1.49 V	53	32.6	19.4
8	#17475.00	40.8 AV	54.0	-13.2	1.49 V	53	21.4	19.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.4 PK	74.0	-2.6	1.39 H	82	69.8	1.6
2	5150.00	53.7 AV	54.0	-0.3	1.39 H	82	52.1	1.6
3	*5190.00	109.4 PK			1.39 H	82	107.6	1.8
4	*5190.00	98.9 AV			1.39 H	82	97.1	1.8
5	#10380.00	48.9 PK	74.0	-25.1	1.55 H	192	37.1	11.8
6	#10380.00	36.5 AV	54.0	-17.5	1.55 H	192	24.7	11.8
7	15570.00	49.0 PK	74.0	-25.0	2.02 H	142	35.7	13.3
8	15570.00	36.4 AV	54.0	-17.6	2.02 H	142	23.1	13.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.9 PK	74.0	-5.1	2.20 V	254	67.3	1.6
2	5150.00	52.6 AV	54.0	-1.4	2.20 V	254	51.0	1.6
3	*5190.00	110.9 PK			2.20 V	254	109.1	1.8
4	*5190.00	99.6 AV			2.20 V	254	97.8	1.8
5	#10380.00	48.6 PK	74.0	-25.4	3.58 V	267	36.8	11.8
6	#10380.00	36.7 AV	54.0	-17.3	3.58 V	267	24.9	11.8
7	15570.00	48.5 PK	74.0	-25.5	1.59 V	232	35.2	13.3
8	15570.00	36.5 AV	54.0	-17.5	1.59 V	232	23.2	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.3 PK	74.0	-12.7	1.57 H	82	59.7	1.6
2	5150.00	50.2 AV	54.0	-3.8	1.57 H	82	48.6	1.6
3	*5230.00	116.9 PK			1.57 H	82	115.1	1.8
4	*5230.00	105.6 AV			1.57 H	82	103.8	1.8
5	5350.00	59.4 PK	74.0	-14.6	1.57 H	82	57.3	2.1
6	5350.00	49.2 AV	54.0	-4.8	1.57 H	82	47.1	2.1
7	#10460.00	50.3 PK	74.0	-23.7	1.53 H	186	38.2	12.1
8	#10460.00	38.2 AV	54.0	-15.8	1.53 H	186	26.1	12.1
9	15690.00	49.1 PK	74.0	-24.9	2.03 H	158	35.9	13.2
10	15690.00	36.2 AV	54.0	-17.8	2.03 H	158	23.0	13.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.6 PK	74.0	-12.4	2.54 V	77	60.0	1.6
2	5150.00	52.0 AV	54.0	-2.0	2.54 V	77	50.4	1.6
3	*5230.00	117.9 PK			2.54 V	77	116.1	1.8
4	*5230.00	105.9 AV			2.54 V	77	104.1	1.8
5	5350.00	60.2 PK	74.0	-13.8	2.54 V	77	58.1	2.1
6	5350.00	47.9 AV	54.0	-6.1	2.54 V	77	45.8	2.1
7	#10460.00	49.1 PK	74.0	-24.9	3.56 V	282	37.0	12.1
8	#10460.00	37.1 AV	54.0	-16.9	3.56 V	282	25.0	12.1
9	15690.00	48.7 PK	74.0	-25.3	1.55 V	244	35.5	13.2
10	15690.00	36.9 AV	54.0	-17.1	1.55 V	244	23.7	13.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.23	65.9 PK	68.4	-2.5	1.62 H	88	63.3	2.6
2	*5755.00	117.4 PK			1.62 H	88	114.5	2.9
3	*5755.00	105.1 AV			1.62 H	88	102.2	2.9
4	#5957.07	66.3 PK	68.2	-1.9	1.62 H	88	63.1	3.2
5	11510.00	52.7 PK	74.0	-21.3	1.04 H	208	39.2	13.5
6	11510.00	40.9 AV	54.0	-13.1	1.04 H	208	27.4	13.5
7	#17265.00	52.8 PK	74.0	-21.2	2.08 H	141	34.3	18.5
8	#17265.00	41.2 AV	54.0	-12.8	2.08 H	141	22.7	18.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5642.62	65.9 PK	68.2	-2.3	1.77 V	265	63.3	2.6
2	*5755.00	115.4 PK			1.77 V	265	112.5	2.9
3	*5755.00	103.6 AV			1.77 V	265	100.7	2.9
4	#5981.30	66.8 PK	68.2	-1.4	1.77 V	265	63.5	3.3
5	11510.00	53.0 PK	74.0	-21.0	1.85 V	242	39.5	13.5
6	11510.00	41.2 AV	54.0	-12.8	1.85 V	242	27.7	13.5
7	#17265.00	52.3 PK	74.0	-21.7	1.45 V	64	33.8	18.5
8	#17265.00	40.8 AV	54.0	-13.2	1.45 V	64	22.3	18.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.48	61.1 PK	68.2	-7.1	1.62 H	94	58.5	2.6
2	*5795.00	115.3 PK			1.62 H	94	112.4	2.9
3	*5795.00	104.3 AV			1.62 H	94	101.4	2.9
4	#5947.57	61.8 PK	68.2	-6.4	1.62 H	94	58.7	3.1
5	11590.00	53.0 PK	74.0	-21.0	1.06 H	201	39.9	13.1
6	11590.00	41.4 AV	54.0	-12.6	1.06 H	201	28.3	13.1
7	#17385.00	53.1 PK	74.0	-20.9	2.04 H	139	33.8	19.3
8	#17385.00	41.3 AV	54.0	-12.7	2.04 H	139	22.0	19.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5630.27	61.7 PK	68.2	-6.5	1.75 V	240	59.1	2.6
2	*5795.00	115.1 PK			1.75 V	240	112.2	2.9
3	*5795.00	104.4 AV			1.75 V	240	101.5	2.9
4	#5950.43	62.3 PK	68.2	-5.9	1.75 V	240	59.1	3.2
5	11590.00	52.5 PK	74.0	-21.5	1.89 V	228	39.4	13.1
6	11590.00	40.8 AV	54.0	-13.2	1.89 V	228	27.7	13.1
7	#17385.00	51.9 PK	74.0	-22.1	1.49 V	49	32.6	19.3
8	#17385.00	40.7 AV	54.0	-13.3	1.49 V	49	21.4	19.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.4 PK	74.0	-7.6	1.51 H	93	64.8	1.6
2	5150.00	53.2 AV	54.0	-0.8	1.51 H	93	51.6	1.6
3	*5210.00	106.1 PK			1.51 H	93	104.3	1.8
4	*5210.00	93.0 AV			1.51 H	93	91.2	1.8
5	5350.00	54.8 PK	74.0	-19.2	1.51 H	93	52.7	2.1
6	5350.00	42.2 AV	54.0	-11.8	1.51 H	93	40.1	2.1
7	#10420.00	47.3 PK	74.0	-26.7	1.06 H	192	35.3	12.0
8	#10420.00	35.9 AV	54.0	-18.1	1.06 H	192	23.9	12.0
9	15630.00	48.2 PK	74.0	-25.8	2.04 H	135	34.9	13.3
10	15630.00	36.4 AV	54.0	-17.6	2.04 H	135	23.1	13.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.5 PK	74.0	-5.5	2.50 V	77	66.9	1.6
2	5150.00	53.9 AV	54.0	-0.1	2.50 V	77	52.3	1.6
3	*5210.00	107.1 PK			2.54 V	77	105.3	1.8
4	*5210.00	94.2 AV			2.54 V	77	92.4	1.8
5	5350.00	55.0 PK	74.0	-19.0	2.50 V	77	52.9	2.1
6	5350.00	42.6 AV	54.0	-11.4	2.50 V	77	40.5	2.1
7	#10420.00	47.9 PK	74.0	-26.1	3.60 V	268	35.9	12.0
8	#10420.00	36.3 AV	54.0	-17.7	3.60 V	268	24.3	12.0
9	15630.00	48.2 PK	74.0	-25.8	1.57 V	222	34.9	13.3
10	15630.00	36.3 AV	54.0	-17.7	1.57 V	222	23.0	13.3

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.85	64.4 PK	68.2	-3.8	1.31 H	92	61.8	2.6
2	*5775.00	111.2 PK			1.31 H	92	108.3	2.9
3	*5775.00	99.2 AV			1.31 H	92	96.3	2.9
4	#5942.35	64.4 PK	68.2	-3.8	1.31 H	92	61.3	3.1
5	11550.00	52.4 PK	74.0	-21.6	1.08 H	195	39.1	13.3
6	11550.00	40.8 AV	54.0	-13.2	1.08 H	195	27.5	13.3
7	#17325.00	53.0 PK	74.0	-21.0	2.13 H	127	34.1	18.9
8	#17325.00	41.5 AV	54.0	-12.5	2.13 H	127	22.6	18.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5621.73	65.2 PK	68.2	-3.0	1.81 V	269	62.6	2.6
2	*5775.00	112.1 PK			1.81 V	269	109.2	2.9
3	*5775.00	98.9 AV			1.81 V	269	96.0	2.9
4	#5932.70	67.5 PK	68.2	-0.7	1.81 V	269	64.4	3.1
5	11550.00	52.6 PK	74.0	-21.4	1.85 V	253	39.3	13.3
6	11550.00	41.1 AV	54.0	-12.9	1.85 V	253	27.8	13.3
7	#17325.00	52.3 PK	74.0	-21.7	1.41 V	76	33.4	18.9
8	#17325.00	40.5 AV	54.0	-13.5	1.41 V	76	21.6	18.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data:

802.11a

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.66	36.8 QP	40.0	-3.2	1.10 H	100	45.6	-8.8
2	87.10	34.9 QP	40.0	-5.1	1.00 H	150	49.5	-14.6
3	107.40	39.4 QP	43.5	-4.1	1.40 H	120	51.1	-11.7
4	375.50	38.5 QP	46.0	-7.5	2.00 H	100	44.6	-6.1
5	499.86	39.2 QP	46.0	-6.8	2.00 H	100	41.9	-2.7
6	874.86	40.3 QP	46.0	-5.7	1.50 H	100	36.9	3.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.33	36.7 QP	40.0	-3.3	1.00 V	100	45.7	-9.0
2	107.21	36.4 QP	43.5	-7.1	1.00 V	202	48.1	-11.7
3	130.44	40.5 QP	43.5	-3.0	1.00 V	201	50.4	-9.9
4	250.33	39.4 QP	46.0	-6.6	1.00 V	100	49.4	-10.0
5	460.77	37.4 QP	46.0	-8.6	1.10 V	220	40.9	-3.5
6	625.00	39.5 QP	46.0	-6.5	1.40 V	100	39.5	0.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2015	Oct. 22, 2016
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 28, 2015	Oct. 27, 2016
RF Cable	5D-FB	COACAB-002	Mar. 04, 2016	Mar. 03, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 20, 2016	June 19, 2017
Software BVADT	BVADT_Cond_ V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
3. Tested Date: July 12, 2016

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

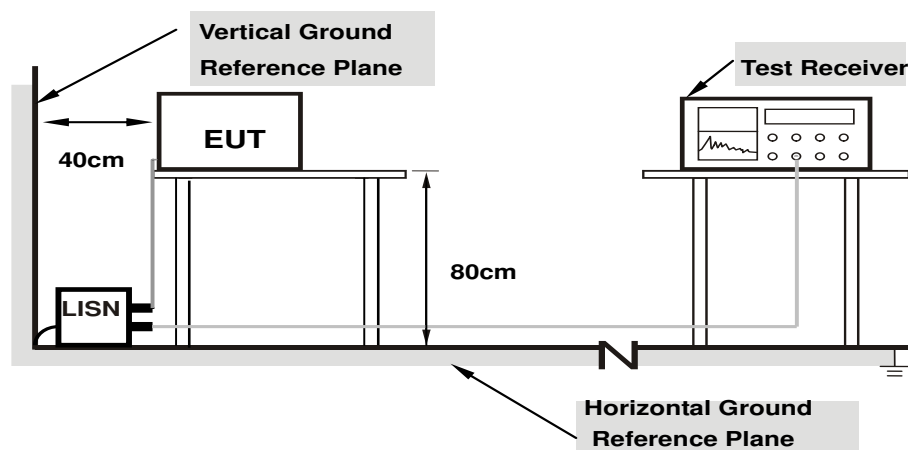

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	10.21	39.34	28.84	49.55	39.05	66.00	56.00	-16.45	-16.95
2	0.32969	10.22	31.95	22.30	42.17	32.52	59.46	49.46	-17.29	-16.94
3	0.95078	10.26	24.36	17.03	34.62	27.29	56.00	46.00	-21.38	-18.71
4	2.42969	10.31	25.94	18.61	36.25	28.92	56.00	46.00	-19.75	-17.08
5	3.89063	10.29	24.59	20.26	34.88	30.55	56.00	46.00	-21.12	-15.45
6	13.51563	10.93	27.47	23.41	38.40	34.34	60.00	50.00	-21.60	-15.66

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

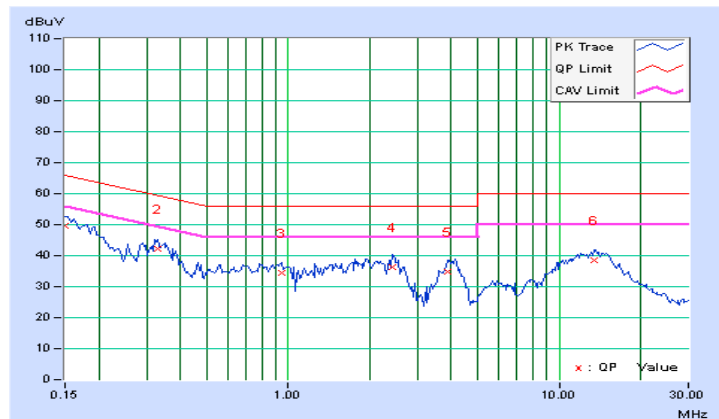


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.19	38.15	26.98	48.34	37.17	65.79	55.79	-17.44	-18.61
2	0.31797	10.20	31.27	24.85	41.47	35.05	59.76	49.76	-18.29	-14.71
3	0.95078	10.24	23.43	15.67	33.67	25.91	56.00	46.00	-22.33	-20.09
4	2.14844	10.29	26.00	20.07	36.29	30.36	56.00	46.00	-19.71	-15.64
5	4.19922	10.26	24.47	20.06	34.73	30.32	56.00	46.00	-21.27	-15.68
6	13.70313	10.79	27.20	23.01	37.99	33.80	60.00	50.00	-22.01	-16.20

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

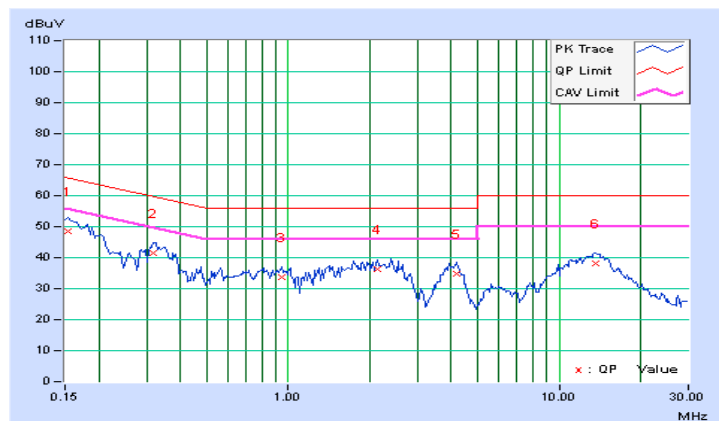


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	10.21	47.69	28.74	57.90	38.95	66.00	56.00	-8.10	-17.05
2	0.17734	10.22	40.38	24.69	50.60	34.91	64.61	54.61	-14.01	-19.70
3	0.23984	10.22	33.94	18.23	44.16	28.45	62.10	52.10	-17.94	-23.65
4	0.31406	10.22	32.01	21.59	42.23	31.81	59.86	49.86	-17.63	-18.05
5	0.41172	10.22	27.61	20.49	37.83	30.71	57.61	47.61	-19.78	-16.90
6	0.94688	10.26	22.09	13.97	32.35	24.23	56.00	46.00	-23.65	-21.77

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

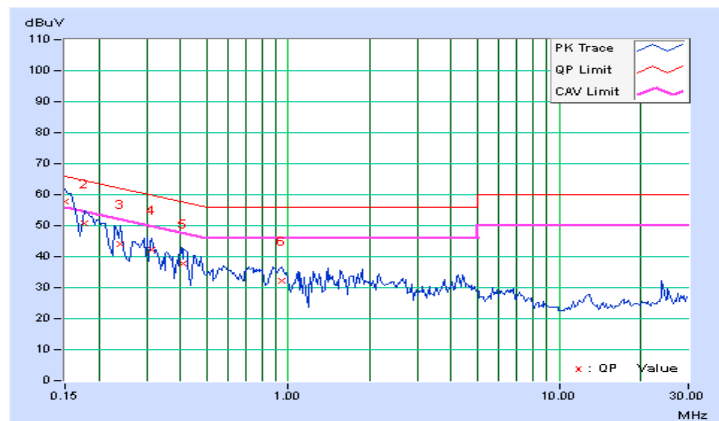


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	10.19	47.47	28.76	57.66	38.95	66.00	56.00	-8.34	-17.05
2	0.18516	10.20	40.85	27.34	51.05	37.54	64.25	54.25	-13.20	-16.71
3	0.30625	10.20	30.63	14.89	40.83	25.09	60.07	50.07	-19.24	-24.98
4	0.40000	10.20	26.56	17.01	36.76	27.21	57.85	47.85	-21.09	-20.64
5	0.95078	10.24	21.62	12.56	31.86	22.80	56.00	46.00	-24.14	-23.20
6	1.94922	10.29	21.01	12.94	31.30	23.23	56.00	46.00	-24.70	-22.77

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

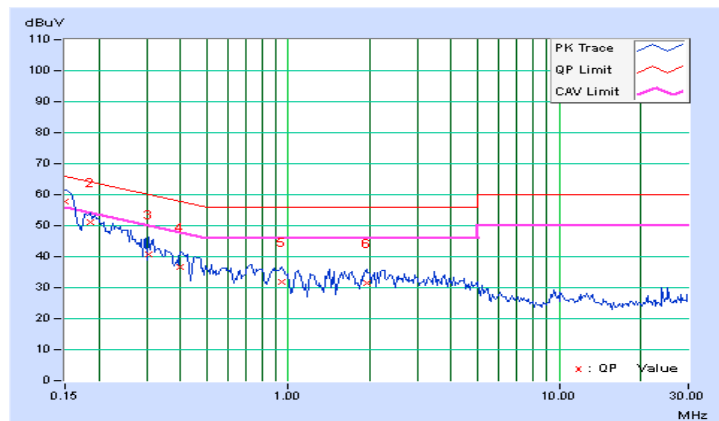

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode
802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	24.12	24.52	24.02	793.713	29.00	30.00	Pass
40	5200	24.13	24.57	24.12	803.465	29.05	30.00	Pass
48	5240	24.03	24.45	24.13	790.363	28.98	30.00	Pass
149	5745	24.96	25.21	24.82	948.612	29.77	30.00	Pass
157	5785	25.09	25.33	24.83	968.131	29.86	30.00	Pass
165	5825	25.05	25.31	24.85	965.007	29.85	30.00	Pass

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	24.13	24.49	24.07	795.281	29.01	30.00	Pass
40	5200	24.09	24.41	24.11	790.138	28.98	30.00	Pass
48	5240	24.10	24.43	24.05	788.469	28.97	30.00	Pass
149	5745	25.08	25.26	24.81	960.536	29.83	30.00	Pass
157	5785	25.04	25.39	24.75	963.631	29.84	30.00	Pass
165	5825	25.07	25.25	24.91	966.073	29.85	30.00	Pass

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
38	5190	17.82	18.03	17.86	185.161	22.68	30.00	Pass
46	5230	25.01	25.15	25.08	966.405	29.85	30.00	Pass
151	5755	24.43	24.73	24.08	830.358	29.19	30.00	Pass
159	5795	25.06	25.18	24.98	965.012	29.85	30.00	Pass

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	16.98	17.63	17.16	159.831	22.04	30.00	Pass
155	5775	24.35	24.84	23.71	812.022	29.10	30.00	Pass

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	24.13	24.49	24.07	795.281	29.01	29.23	Pass
40	5200	24.09	24.41	24.11	790.138	28.98	29.23	Pass
48	5240	24.10	24.43	24.05	788.469	28.97	29.23	Pass
149	5745	24.37	24.51	23.92	802.619	29.05	29.23	Pass
157	5785	24.43	24.61	24.00	817.589	29.13	29.23	Pass
165	5825	24.08	24.74	24.28	821.628	29.15	29.23	Pass

Note: 1. Directional gain = $2\text{dBi} + 10\log(3) = 6.77\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (6.77 - 6) = 29.23\text{dBm}$.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
38	5190	17.82	18.03	17.86	185.161	22.68	29.23	Pass
46	5230	24.35	24.27	24.18	801.389	29.04	29.23	Pass
151	5755	24.43	24.73	24.08	830.358	29.19	29.23	Pass
159	5795	24.12	24.51	24.43	818.046	29.13	29.23	Pass

Note: 1. Directional gain = $2\text{dBi} + 10\log(3) = 6.77\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (6.77 - 6) = 29.23\text{dBm}$.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	16.98	17.63	17.16	159.831	22.04	29.23	Pass
155	5775	24.35	24.84	23.71	812.022	29.10	29.23	Pass

Note: 1. Directional gain = $2\text{dBi} + 10\log(3) = 6.77\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (6.77 - 6) = 29.23\text{dBm}$.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
36	5180	17.16	17.16	17.04
40	5200	17.16	17.04	17.04
48	5240	17.04	17.04	17.04
149	5745	16.68	16.92	16.92
157	5785	17.04	16.80	16.92
165	5825	17.04	16.80	17.04

802.11ac (VHT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
36	5180	18.12	18.00	18.24
40	5200	17.88	18.12	18.12
48	5240	18.00	17.88	17.88
149	5745	17.88	18.00	18.00
157	5785	18.00	17.76	18.00
165	5825	18.00	17.88	17.88

802.11ac (VHT40)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
38	5190	36.72	36.72	36.48
46	5230	36.96	37.20	37.20
151	5755	36.72	36.72	36.48
159	5795	36.72	36.96	36.72

802.11ac (VHT80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
42	5210	75.84	75.84	75.84
155	5775	75.84	75.84	75.36

Spectrum Plot of Worst Value


802.11a_Chain0 / CH36

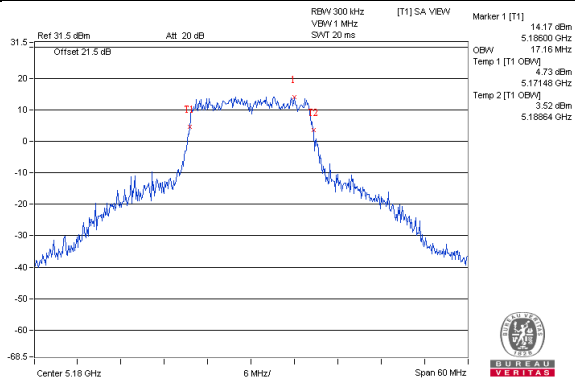


802.11ac (VHT20)_Chain2 / CH36

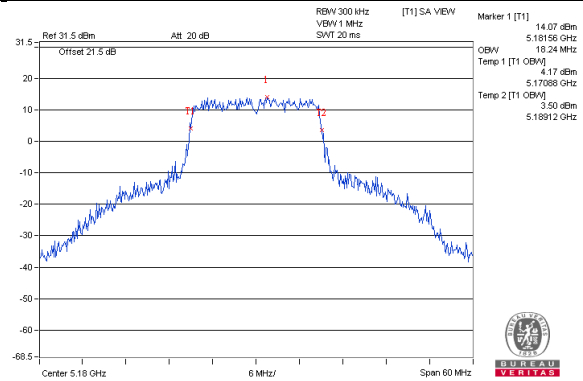

802.11ac (VHT40)_Chain1 / CH46

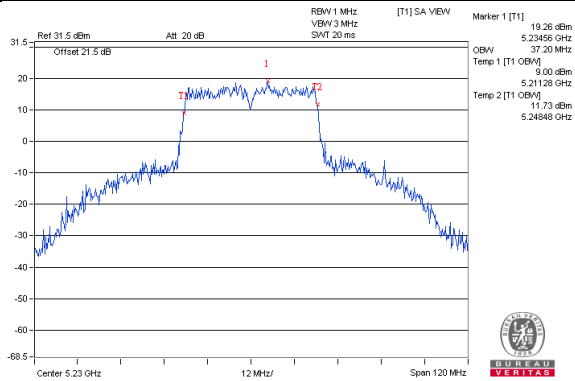


802.11ac (VHT80)_Chain0 / CH42

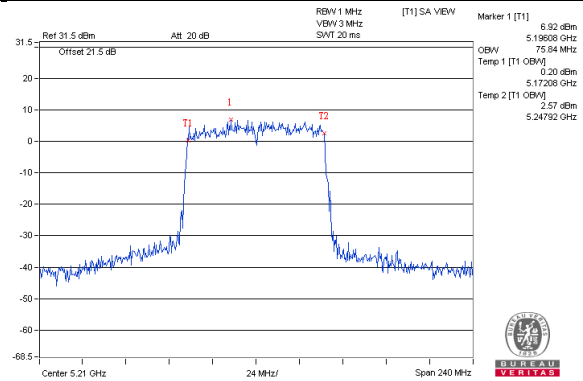


**Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A band)**



802.11a_Chain0 / CH48

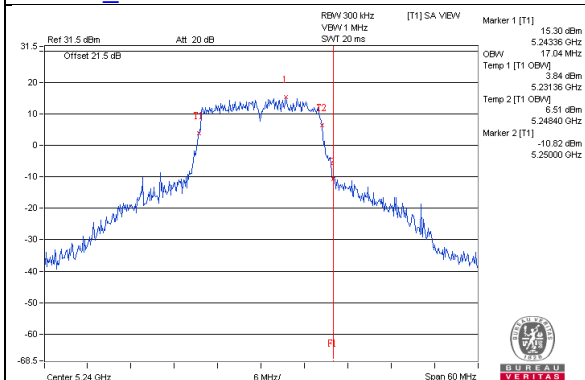


802.11a_Chain1 / CH48

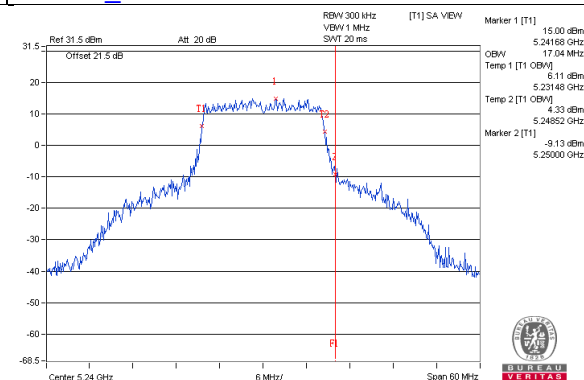


802.11a_Chain2 / CH48

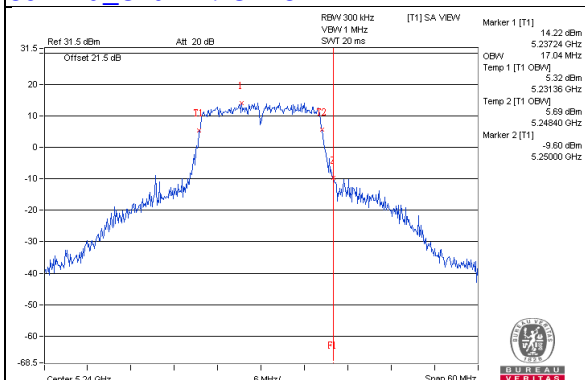


802.11ac(VHT20)_Chain0 / CH48

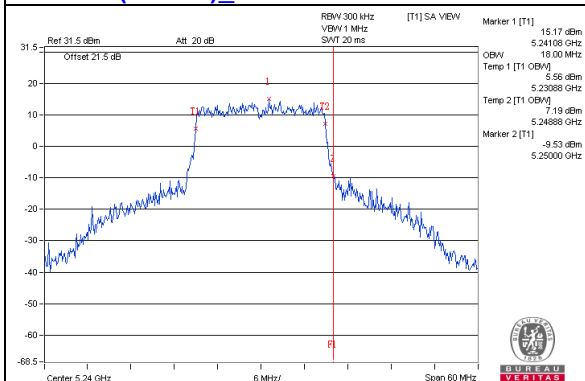


802.11ac(VHT20)_Chain1 / CH48

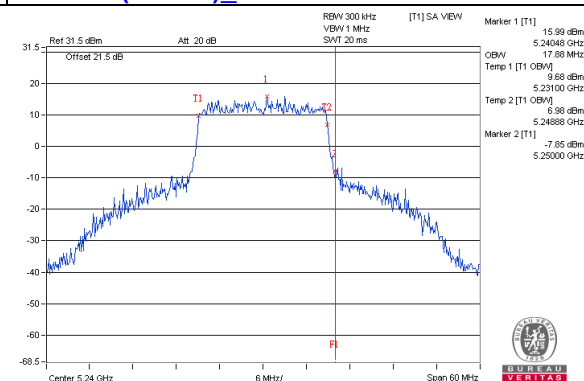


802.11ac(VHT20)_Chain2 / CH48

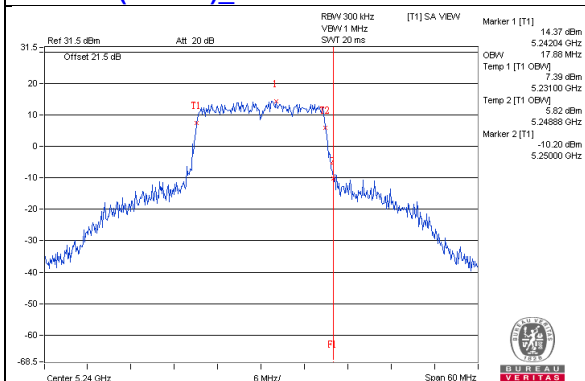


802.11ac(VHT40)_Chain0 / CH46

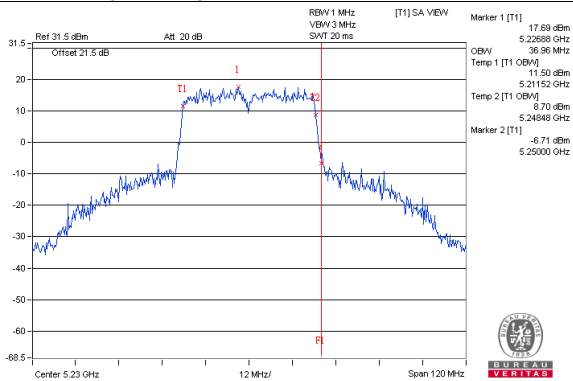


802.11ac(VHT20)_Chain1 / CH46

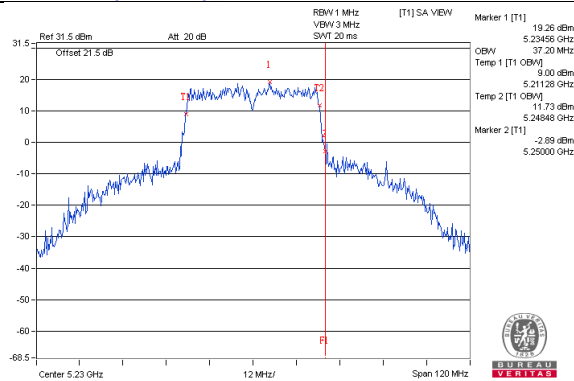


802.11ac(VHT40)_Chain2 / CH46

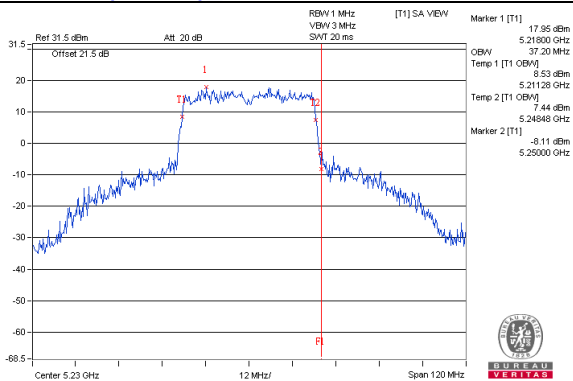


802.11ac(VHT80)_Chain0 / CH42

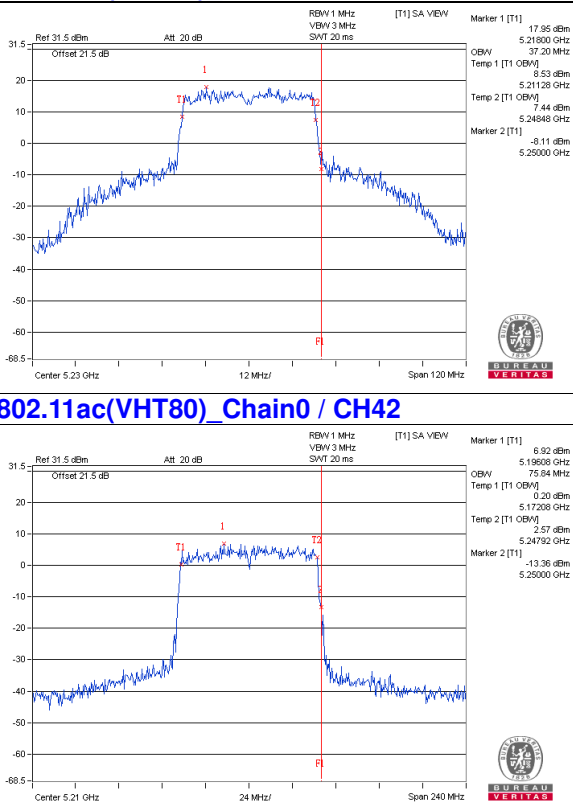

802.11ac(VHT80)_Chain1 / CH42

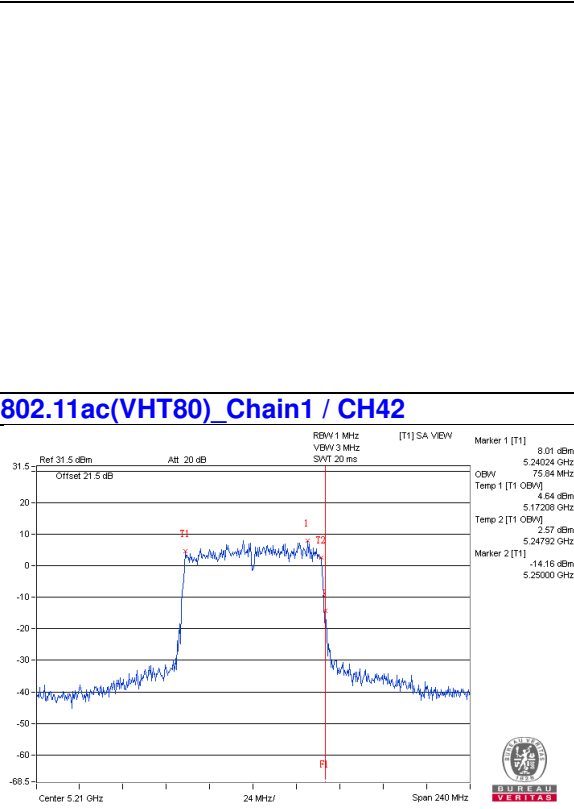

802.11ac(VHT80)_Chain2 / CH42

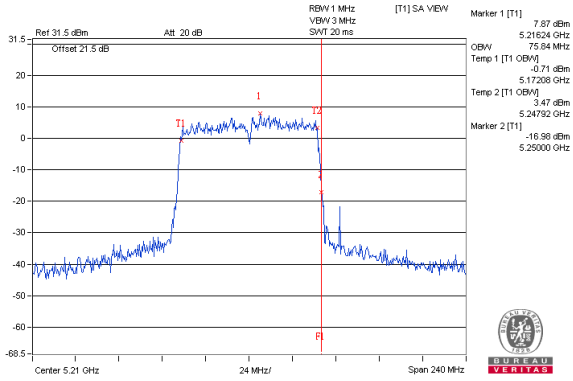


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

802.11a, 802.11ac (VHT20), 802.11ac (VHT40)

For U-NII-1:

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

802.11ac (VHT80)

For U-NII-1:

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add $10 \log (1/\text{duty cycle})$

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

For U-NII-1:

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)			Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2			
36	5180	11.36	10.70	11.51	15.98	16.23	Pass
40	5200	10.41	11.10	11.76	15.90	16.23	Pass
48	5240	11.23	11.30	11.21	16.02	16.23	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 6.77dBi > 6dBi , so the power density limit shall be reduced to $17-(6.77-6) = 16.23\text{dBm}$.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)			Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2			
36	5180	11.23	11.20	10.74	15.83	16.23	Pass
40	5200	11.43	11.23	11.52	16.17	16.23	Pass
48	5240	11.46	11.48	10.72	16.01	16.23	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 6.77dBi > 6dBi , so the power density limit shall be reduced to $17-(6.77-6) = 16.23\text{dBm}$.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)			Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2			
38	5190	1.11	1.63	1.44	6.17	16.23	Pass
46	5230	7.67	8.38	8.20	12.86	16.23	Pass

- Note:**
- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - Directional gain = 6.77dBi > 6dBi , so the power density limit shall be reduced to $17-(6.77-6) = 16.23\text{dBm}$.


802.11ac (VHT80):

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)			Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	-2.64	-2.02	-2.08	0.16	2.69	16.23	Pass


- Note:**
- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - Directional gain = 6.77dBi > 6dBi , so the power density limit shall be reduced to $17-(6.77-6) = 16.23\text{dBm}$.
 - Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a_Chain 2 / CH40

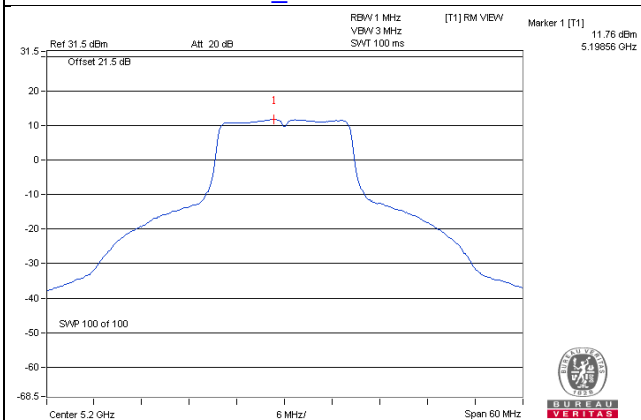


802.11ac (VHT20)_Chain 2 / CH40

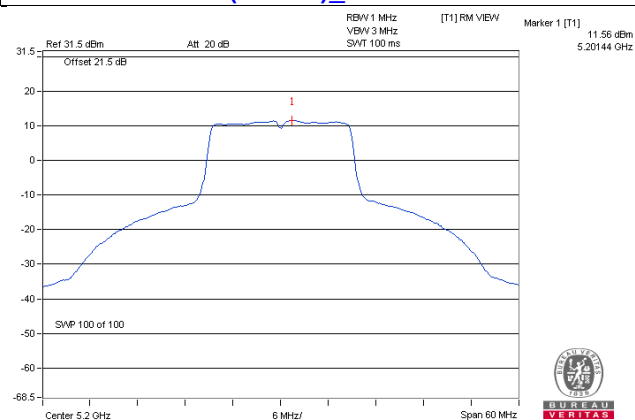

802.11ac (VHT40)_Chain 1 / CH46

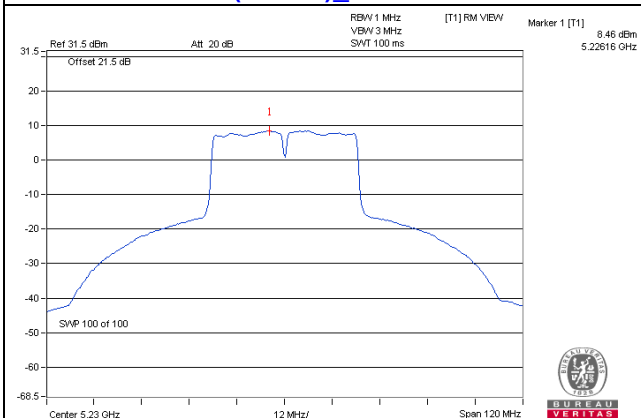

802.11ac (VHT80)_Chain 1 / CH42

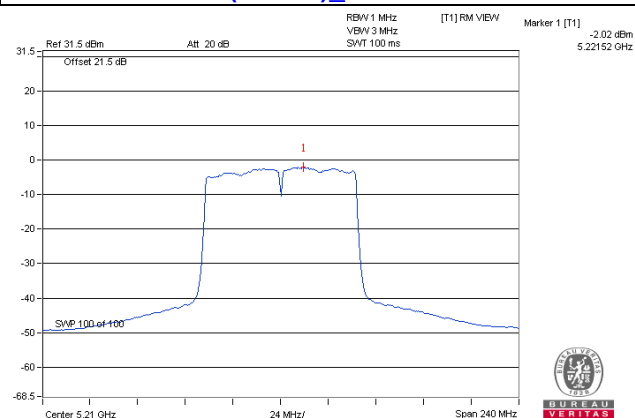

For U-NII-3:

802.11a

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	149	5745	4.10	6.32	4.77	11.09	29.23	Pass
	157	5785	4.46	6.68	4.77	11.45	29.23	Pass
	165	5825	4.59	6.81	4.77	11.58	29.23	Pass
1	149	5745	3.87	6.09	4.77	10.86	29.23	Pass
	157	5785	3.92	6.14	4.77	10.91	29.23	Pass
	165	5825	3.85	6.07	4.77	10.84	29.23	Pass
2	149	5745	3.61	5.83	4.77	10.60	29.23	Pass
	157	5785	3.74	5.96	4.77	10.73	29.23	Pass
	165	5825	3.57	5.79	4.77	10.56	29.23	Pass

Note: 1. Directional gain = 6.77dBi > 6dBi, so the power density limit shall be reduced to $30-(6.77-6) = 29.23\text{dBm}$.

802.11ac (VHT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	149	5745	3.57	5.79	4.77	10.56	29.23	Pass
	157	5785	3.86	6.08	4.77	10.85	29.23	Pass
	165	5825	4.48	6.70	4.77	11.47	29.23	Pass
1	149	5745	3.79	6.01	4.77	10.78	29.23	Pass
	157	5785	3.42	5.64	4.77	10.41	29.23	Pass
	165	5825	3.61	5.83	4.77	10.60	29.23	Pass
2	149	5745	3.08	5.30	4.77	10.07	29.23	Pass
	157	5785	3.14	5.36	4.77	10.13	29.23	Pass
	165	5825	3.07	5.29	4.77	10.06	29.23	Pass

Note: 1. Directional gain = 6.77dBi > 6dBi, so the power density limit shall be reduced to $30-(6.77-6) = 29.23\text{dBm}$.

802.11ac (VHT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	151	5755	-0.41	1.81	4.77	6.58	29.23	Pass
	159	5795	0.48	2.70	4.77	7.47	29.23	Pass
1	151	5755	-0.15	2.07	4.77	6.84	29.23	Pass
	159	5795	-0.13	2.09	4.77	6.86	29.23	Pass
2	151	5755	-0.89	1.33	4.77	6.10	29.23	Pass
	159	5795	-0.18	2.04	4.77	6.81	29.23	Pass

Note: 1. Directional gain = 6.77dBi > 6dBi, so the power density limit shall be reduced to $30-(6.77-6) = 29.23\text{dBm}$.

802.11ac (VHT80)


TX chain	Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor		10 log (N=4) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	155	5775	-3.85	-1.63	4.77	0.16	3.30	29.23	Pass
1	155	5775	-3.86	-1.64	4.77	0.16	3.29	29.23	Pass
2	155	5775	-4.29	-2.07	4.77	0.16	2.86	29.23	Pass

Note: 1. Directional gain = 6.77dBi > 6dBi, so the power density limit shall be reduced to $30-(6.77-6) = 29.23\text{dBm}$.


2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a_Chain 0 / CH165

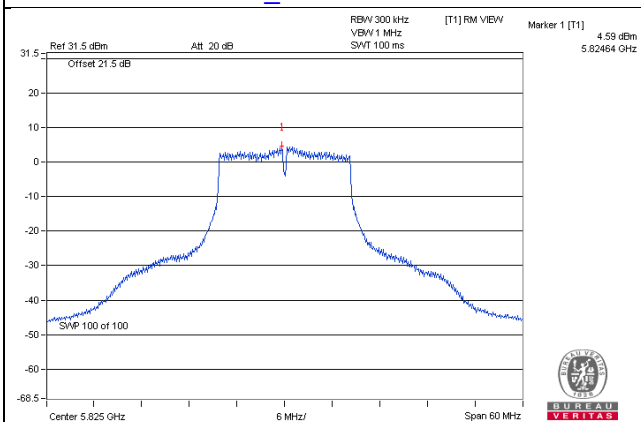


802.11ac (VHT20)_Chain 0 / CH165

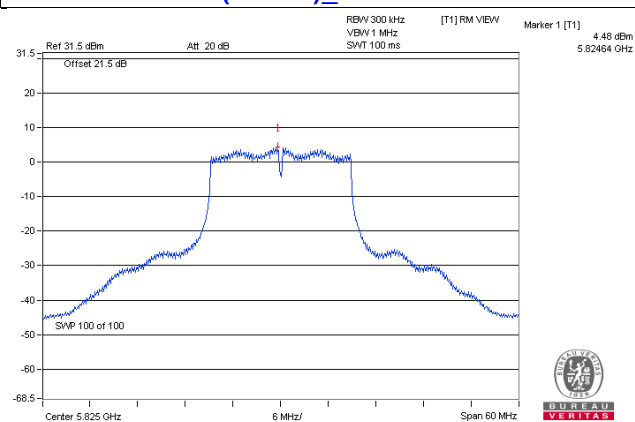

802.11ac (VHT40)_Chain 0 / CH159

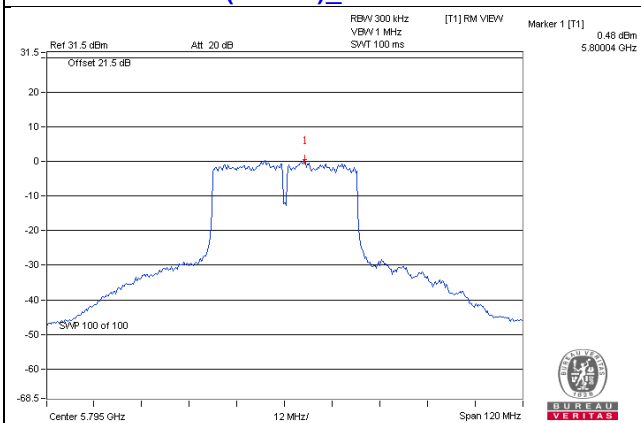

802.11ac (VHT80)_Chain 0 / CH155

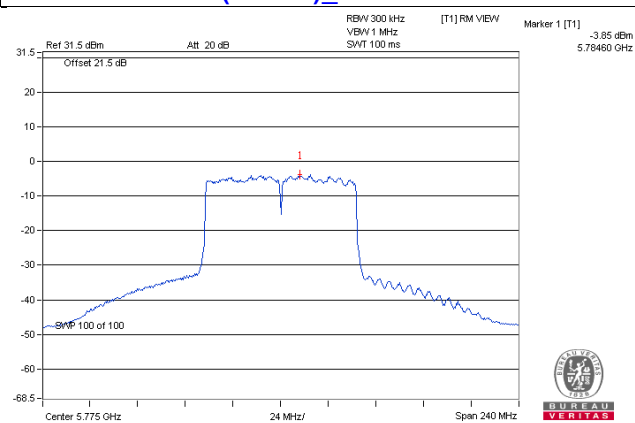


4.6 Frequency Stability Measurement

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

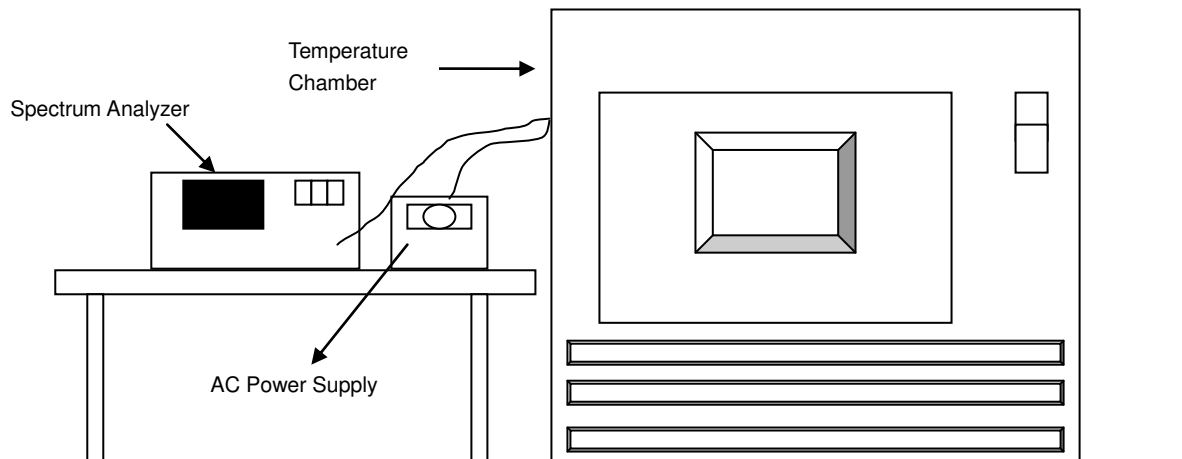

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
50	120	5180.0092	Pass	5180.0099	Pass	5180.0109	Pass	5180.0073	Pass
40	120	5179.9955	Pass	5179.9965	Pass	5179.9937	Pass	5179.996	Pass
30	120	5179.984	Pass	5179.986	Pass	5179.9853	Pass	5179.988	Pass
20	120	5179.999	Pass	5179.9999	Pass	5179.9981	Pass	5179.9975	Pass
10	120	5180.0023	Pass	5180.0013	Pass	5179.9999	Pass	5180.0003	Pass
0	120	5179.9819	Pass	5179.9825	Pass	5179.983	Pass	5179.9795	Pass
-10	120	5180.0074	Pass	5180.0073	Pass	5180.0047	Pass	5180.0065	Pass
-20	120	5179.9934	Pass	5179.9928	Pass	5179.9939	Pass	5179.995	Pass
-30	120	5179.9815	Pass	5179.9819	Pass	5179.9814	Pass	5179.9793	Pass


Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5179.9991	Pass	5179.9998	Pass	5179.9979	Pass	5179.9971	Pass
	120	5179.999	Pass	5179.9999	Pass	5179.9981	Pass	5179.9975	Pass
	102	5179.9986	Pass	5179.9998	Pass	5179.9986	Pass	5179.9978	Pass

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
149	5745	16.38	16.41	16.40	0.5	Pass
157	5785	16.39	16.40	16.40	0.5	Pass
165	5825	16.40	16.39	16.39	0.5	Pass

802.11ac (VHT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
149	5745	17.63	17.67	17.67	0.5	Pass
157	5785	17.62	17.67	17.63	0.5	Pass
165	5825	17.61	17.64	17.63	0.5	Pass

802.11ac (VHT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
151	5755	36.13	36.47	36.18	0.5	Pass
159	5795	36.41	36.44	36.38	0.5	Pass

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
155	5775	75.51	75.70	76.09	0.5	Pass

Spectrum Plot of Worst Value


802.11a / Chain 0 : CH149

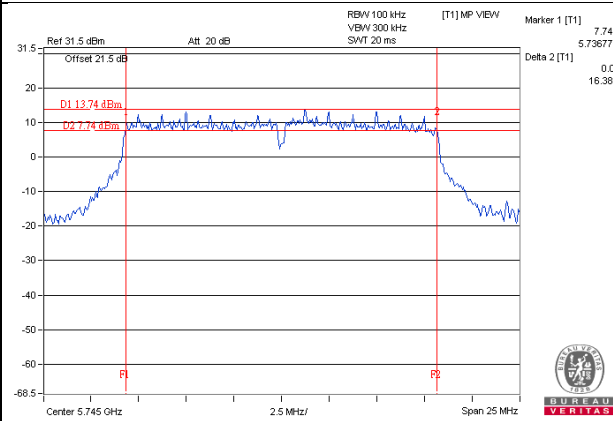


802.11ac(VHT20) / Chain 0 : CH165

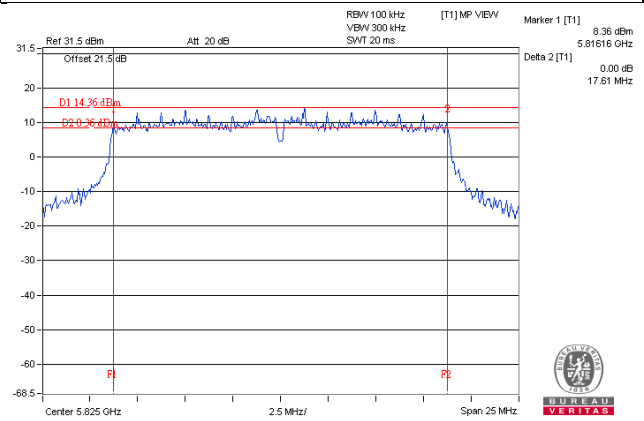

802.11ac(VHT40) / Chain 0 : CH151

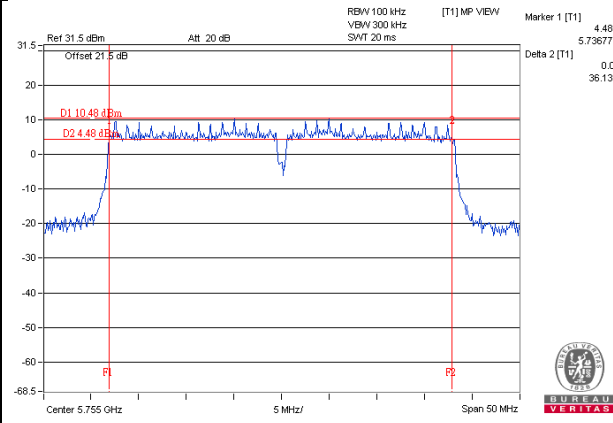

802.11ac(VHT80) / Chain 0 : CH155

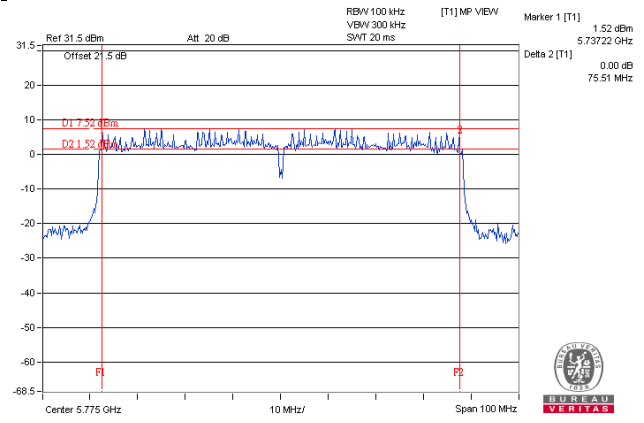

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

CH 149 5745 MHz

Horizontal

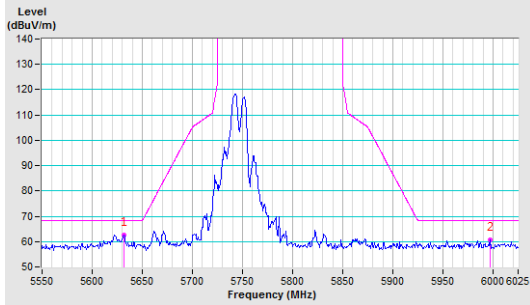


Vertical

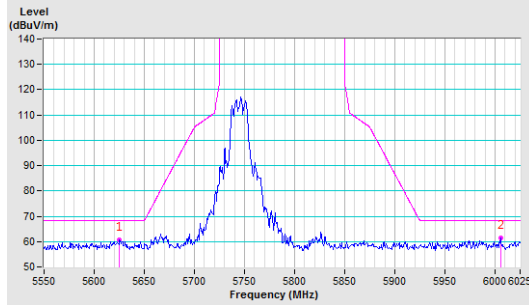


CH 157 5785 MHz

Horizontal

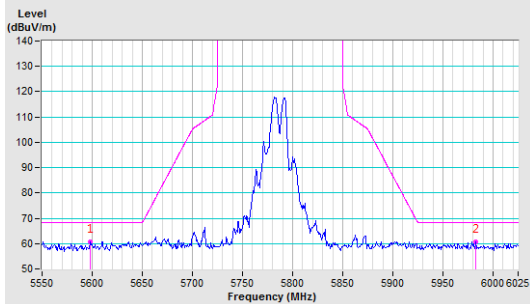


Vertical

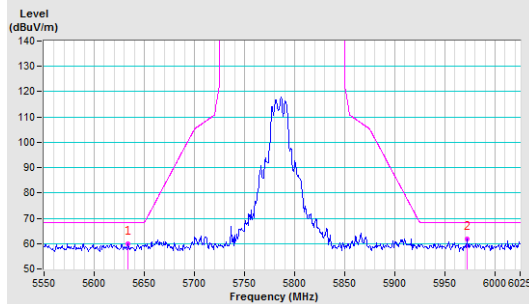


CH 165 5825 MHz

Horizontal

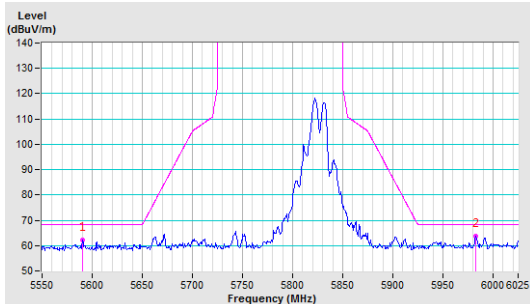


Vertical

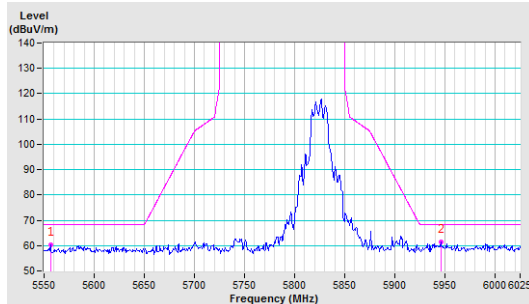


802.11ac (VHT20)

CH 149 5745 MHz

Horizontal

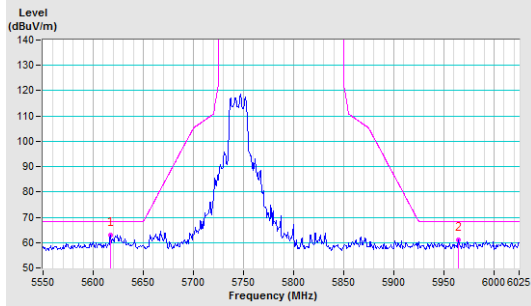


Vertical

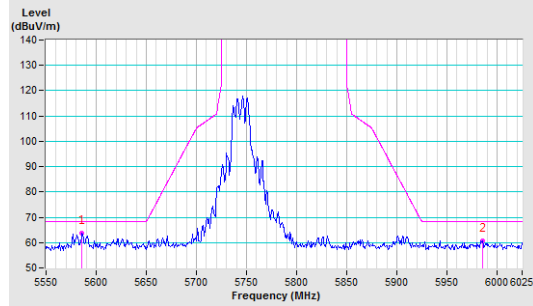


CH 157 5785 MHz

Horizontal

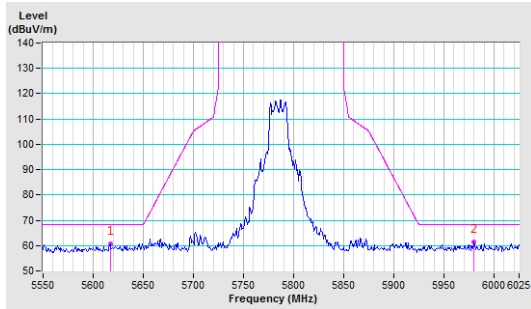


Vertical

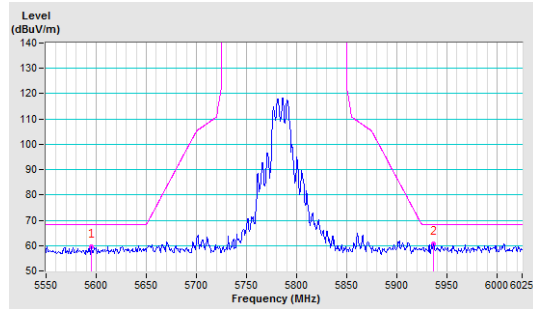


CH 165 5825 MHz

Horizontal

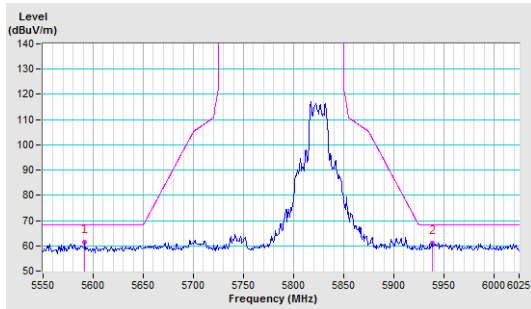


Vertical

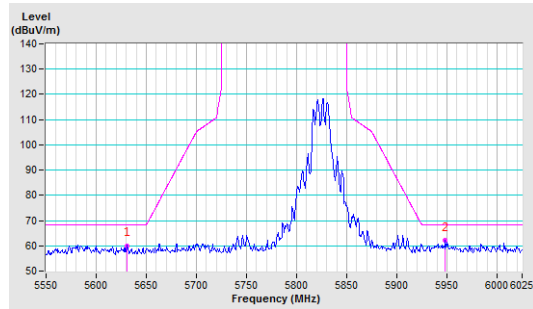


802.11ac (VHT40)

CH 151 5755 MHz

Horizontal

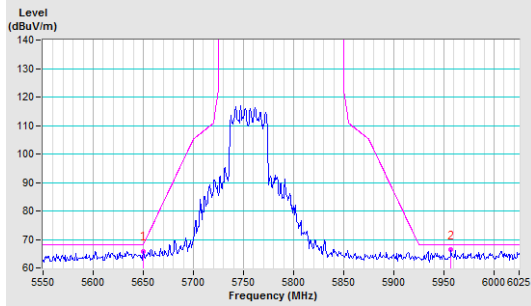


Vertical

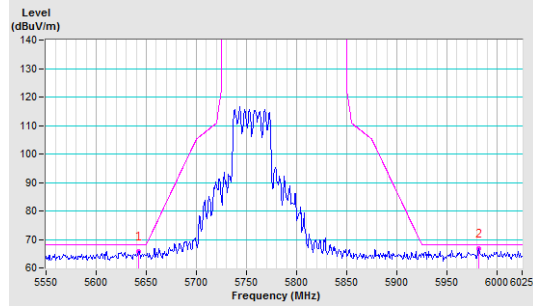


CH 159 5795 MHz

Horizontal

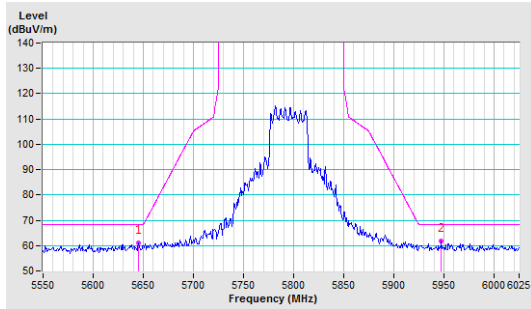


Vertical

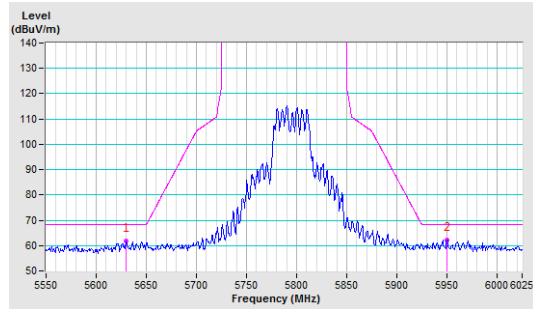


802.11ac (VHT80)

CH 155 5775 MHz

Horizontal

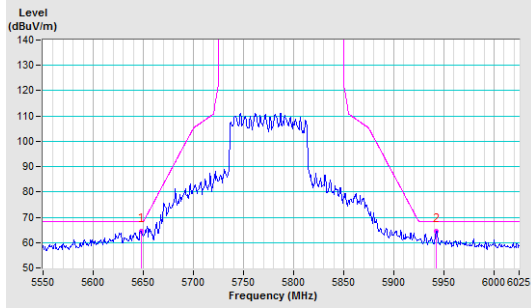

Vertical

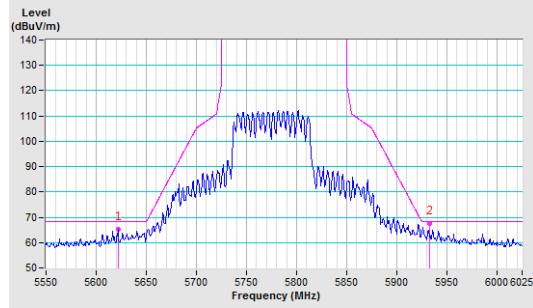

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---