

## FCC 47 CFR PART 15 SUBPART C

Product Type : WWAN Mobile Hotspot Portable Device  
Applicant : Netgear Inc.  
Address : 350 East Plumeria Drive, San Jose, California 95134 United States  
Trade Name : Netgear  
Model Number : AC785S-500  
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2013  
Canada RSS-210 ISSUE 8: Dec., 2010  
Canada RSS-Gen ISSUE 4: Nov., 2014  
ANSI C63.4:2014  
Receive Date : Sep. 11, 2014  
Test Period : Sep.18~Sep.24, 2014  
Issue Date : Dec. 31, 2014

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

FCC Test Firm Information: 510205

IC Test Firm Information: 7381A-1

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

**Revision History**

| Rev. | Issue Date    | Revisions                   | Revised By  |
|------|---------------|-----------------------------|-------------|
| 00   | Oct. 07, 2014 | Initial Issue               |             |
| 01   | Nov. 04, 2014 | Revised report information. | Nina Lin    |
| 02   | Nov. 27, 2014 | Revised report information. | Peggy Chang |
| 03   | Dec. 31, 2014 | Revised report information. | Peggy Chang |

## Verification of Compliance

Issued Date: 12/31/2014

Product Type : WWAN Mobile Hotspot Portable Device  
Applicant : Netgear Inc.  
Address : 350 East Plumeria Drive, San Jose, California 95134 United States  
Trade Name : Netgear  
Model Number : AC785S-500  
FCC ID : PY3AC785S  
EUT Rated Voltage : DC 5.0V, 1.0A  
Test Voltage : 120 Vac / 60 Hz  
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2013  
Canada RSS-210 ISSUE 8: Dec., 2010  
Canada RSS-Gen ISSUE 4: Nov., 2014  
ANSI C63.4:2014

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330  
FCC Test Firm Information: 510205  
IC Test Firm Information: 7381A-1  
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2014 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang  
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)

## TABLE OF CONTENTS

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>General Information .....</b>                                      | <b>6</b>  |
| <b>2</b> | <b>EUT Description .....</b>  | <b>7</b>  |
| <b>3</b> | <b>Test Methodology .....</b>   | <b>8</b>  |
|          | 3.1. Mode of Operation.....   | 8         |
|          | 3.2. EUT Exercise Software .....                                      | 8         |
|          | 3.3. Configuration of Test System Details .....                       | 9         |
|          | 3.4. Test Site Environment .....                                      | 9         |
| <b>4</b> | <b>Conducted Emission Measurement .....</b>                           | <b>10</b> |
|          | 4.1. Limit .....  | 10        |
|          | 4.2. Test Instruments .....   | 10        |
|          | 4.3. Test Setup.....  | 10        |
|          | 4.4. Test Procedure .....   | 11        |
|          | 4.5. Test Result.....   | 12        |
| <b>5</b> | <b>Radiated Emission Measurement.....</b>                             | <b>16</b> |
|          | 5.1. Limit .....  | 16        |
|          | 5.2. Test Instruments .....   | 16        |
|          | 5.3. Setup .....  | 17        |
|          | 5.4. Test Procedure .....   | 18        |
|          | 5.5. Test Result.....   | 20        |
| <b>6</b> | <b>Maximum Conducted Output Power Measurement.....</b>                | <b>29</b> |
|          | 6.1. Limit .....  | 29        |
|          | 6.2. Test Setup.....  | 29        |
|          | 6.3. Test Instruments .....   | 29        |
|          | 6.4. Test Procedure .....   | 29        |
|          | 6.5. Test Result.....   | 30        |
| <b>7</b> | <b>6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement .....</b> | <b>34</b> |
|          | 7.1. Limit .....  | 34        |
|          | 7.2. Test Setup.....  | 34        |
|          | 7.3. Test Instruments .....   | 34        |
|          | 7.4. Test Procedure .....   | 34        |
|          | 7.5. Test Result.....   | 35        |
|          | 7.6. Test Graphs .....  | 37        |
| <b>8</b> | <b>Maximum Power Density Measurement .....</b>                        | <b>53</b> |
|          | 8.1. Limit .....  | 53        |
|          | 8.2. Test Setup.....  | 53        |
|          | 8.3. Test Instruments .....   | 53        |
|          | 8.4. Test Procedure .....   | 53        |
|          | 8.5. Test Result.....   | 54        |
|          | 8.6. Test Graphs .....  | 56        |

|           |  |           |
|-----------|--|-----------|
| <b>9</b>  | <b>Out of Band Conducted Emissions Measurement .....</b> | <b>64</b> |
| 9.1.      | Limit .....  | 64        |
| 9.2.      | Test Setup.....  | 64        |
| 9.3.      | Test Instruments .....                                   | 64        |
| 9.4.      | Test Procedure .....                                     | 64        |
| 9.5.      | Test Graphs .....  | 65        |
| <b>10</b> | <b>Band Edges Measurement .....</b>                      | <b>89</b> |
| 10.1.     | Limit .....  | 89        |
| 10.2.     | Test Setup.....  | 89        |
| 10.3.     | Test Instruments .....                                   | 89        |
| 10.4.     | Test Procedure .....                                     | 90        |
| 10.5.     | Test Result.....   | 91        |
| <b>11</b> | <b>Antenna Measurement.....</b>                          | <b>95</b> |
| 11.1.     | Limit .....  | 95        |
| 11.2.     | Antenna Connector Construction .....                     | 95        |

## 1 General Information

### 1.1 Summary of Test Result

| Standard     |          | Item                                    | Result | Remark |
|--------------|----------|---|--------|--------|
| 15.247       | RSS-GEN  |   |        |        |
| 15.207       | 8.8      | AC Power Conducted Emission             | PASS   | ----   |
| ----         | 7.1      | Receiver Radiated Emissions             | PASS   | ----   |
| ----         | 6.6      | 99 % Occupied Bandwidth                 | PASS   | ----   |
| Standard     |          | Item                                    | Result | Remark |
| 15.247       | RSS-210  |   |        |        |
| 15.247(d)    | A8.5     | Transmitter Radiated Emissions          | PASS   | ----   |
| 15.247(b)(3) | A8.4     | Max. Output Power                       | PASS   | ----   |
| 15.247(a)(2) | A8.2 (a) | 6dB RF Bandwidth                        | PASS   | ----   |
| 15.247(e)    | A8.2 (b) | Power Spectral Density                  | PASS   | ----   |
| 15.247(d)    | A8.5     | Out of Band Conducted Spurious Emission | PASS   | ----   |
| 15.247(d)    | A8.5     | Band Edge Measurement                   | PASS   | ----   |
| 15.203       | -        | Antenna Requirement                     | PASS   | ----   |

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

### 1.2 Measurement Uncertainty

| Test Item          | Frequency Range     |            | Uncertainty (dB) |
|--------------------|---------------------|------------|------------------|
| Conducted Emission | 9kHz ~ 30MHz        |            | ± 2.02           |
| Radiated Emission  | 30MHz ~ 1000MHz     | Horizontal | ± 3.98           |
|                    |                     | Vertical   | ± 3.62           |
|                    | 1000MHz ~ 18000MHz  | Horizontal | ± 3.11           |
|                    |                     | Vertical   | ± 3.07           |
|                    | 18000MHz ~ 40000MHz | Horizontal | ± 3.66           |
|                    |                     | Vertical   | ± 3.54           |

## 2 EUT Description

|                         |  |              |             |          |
|-------------------------|--|--------------|-------------|----------|
| Product Type            | WWAN Mobile Hotspot Portable Device  |              |             |          |
| Trade Name              | Netgear  |              |             |          |
| Model No.               | AC785S-500   |              |             |          |
| Applicant               | Netgear Inc.<br>350 East Plumeria Drive, San Jose, California 95134 United States  |              |             |          |
| Manufacturer            | Netgear Inc.<br>Suite 168 – 10760 Shellbridge Way, Richmond, BC Canada V6X 3H1   |              |             |          |
| IMEI No.                | 014197000002053  |              |             |          |
| FCC ID                  | PY3AC785S  |              |             |          |
| Frequency Range         | IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz: 2412 ~ 2462 MHz<br>IEEE 802.11n 2.4GHz 40MHz: 2422 ~ 2452 MHz   |              |             |          |
| Modulation Type         | IEEE 802.11b:DSSS<br>IEEE 802.11g:DSSS + OFDM<br>IEEE 802.11n 2.4GHz 20MHz: OFDM<br>IEEE 802.11n 2.4GHz 40MHz: OFDM  |              |             |          |
| Antenna Delivery        | 2*TX + 2*RX  |              |             |          |
| Antenna Used            | Item   | Antenna Port | Type        | Max Gain |
|                         | 1  | Ant-1        | IFA Antenna | 2.2dBi   |
|                         | 2  | Ant-2        | IFA Antenna | 2.2dBi   |
| RF Output Power         | IEEE 802.11b: 0.021 W / 13.19 dBm<br>IEEE 802.11g: 0.118 W / 20.73 dBm<br>IEEE 802.11n 2.4GHz 20MHz: 0.121 W / 20.84 dBm<br>IEEE 802.11n 2.4GHz 40MHz: 0.133 W / 21.23 dBm |              |             |          |
| 99 % Occupied Bandwidth | IEEE 802.11b: 12.76 MHz<br>IEEE 802.11g: 17.49 MHz<br>IEEE 802.11n 2.4GHz 20MHz: 18.26 MHz<br>IEEE 802.11n 2.4GHz 40MHz: 37.35 MHz   |              |             |          |
| Emission Designator     | IEEE 802.11b: 12M8G7D<br>IEEE 802.11g: 17M5D7D<br>IEEE 802.11n 2.4GHz 20MHz: 18M3D7D<br>IEEE 802.11n 2.4GHz 40MHz: 37M4D7D   |              |             |          |

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

| Test Mode                                   |
|---|
| Mode 1: Normal Operation Mode               |
| Mode 2: IEEE 802.11b Link Mode              |
| Mode 3: IEEE 802.11g Link Mode              |
| Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode |
| Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode |
| Mode 6: Receiver Mode                       |

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode: (Ant-1+2)

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11g mode: (Ant-1+2)

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11n 2.4GHz 20MHz mode: (Ant-1+2)

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n 2.4GHz 40MHz mode: (Ant-1+2)

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 54Mbps data rate were chosen for full testing.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.


#### 3.2. EUT Exercise Software

|  |
|--|
| 1. Setup the EUT shown on 3.3.         |
| 2. Turn on the power of all equipment. |
| 3. Turn on Wi-Fi function link to AP.  |
| 4. EUT run test program.               |




### 3.3. Configuration of Test System Details

#### Conducted Emission

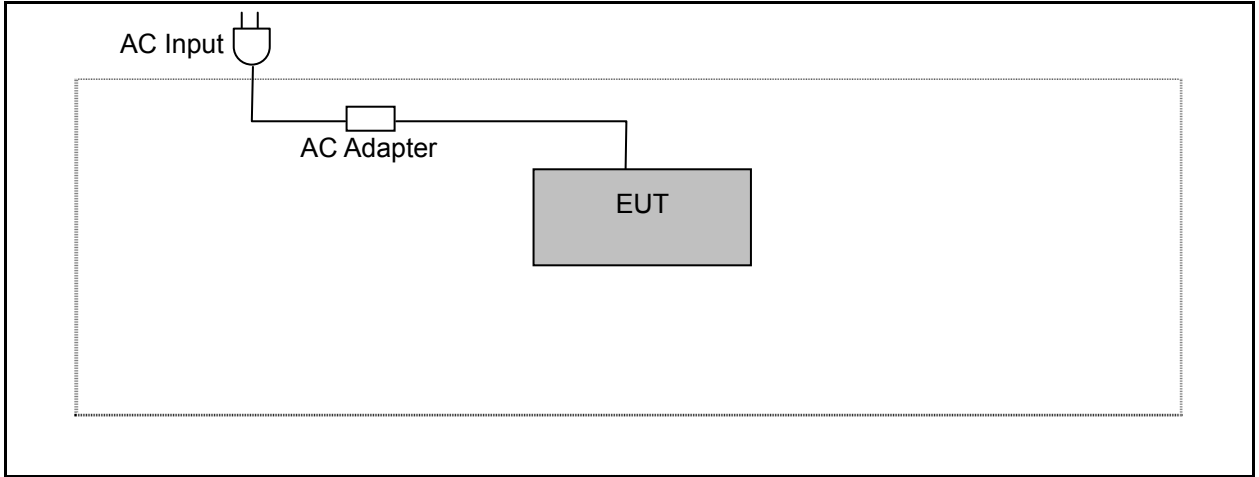

#### Radiated Emission

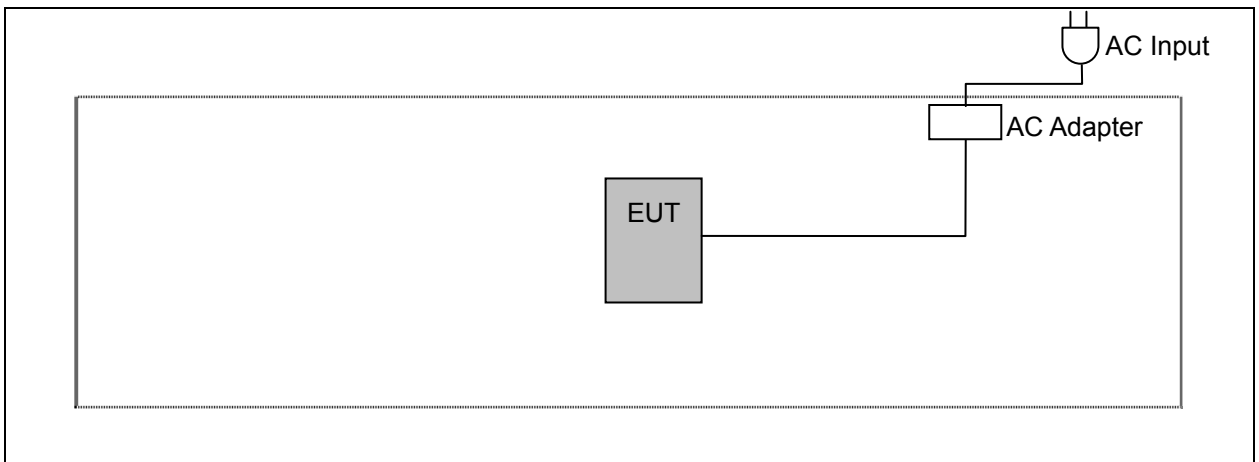

### 3.4. Test Site Environment

| Items                      | Required (IEC 60068-1) | Actual |
|----------------------------|------------------------|--------|
| Temperature (°C)           | 15-35                  | 26     |
| Humidity (%RH)             | 25-75                  | 60     |
| Barometric pressure (mbar) | 860-1060               | 950    |

## 4 Conducted Emission Measurement

### 4.1. Limit

| Frequency (MHz) | Quasi-peak | Average  |
|-----------------|------------|----------|
| 0.15 - 0.5      | 66 to 56   | 56 to 46 |
| 0.50 - 5.0      | 56         | 46       |
| 5.0 - 30.0      | 60         | 50       |


### 4.2. Test Instruments

| Describe      | Manufacturer | Model Number | Serial Number | Cal. Date  | Remark |
|---------------|--------------|--------------|---------------|------------|--------|
| Test Receiver | R&S          | ESCI         | 100367        | 06/12/2014 | (1)    |
| LISN          | R&S          | ENV216       | 101040        | 03/07/2014 | (1)    |
| LISN          | R&S          | ENV216       | 101041        | 03/07/2014 | (1)    |
| Test Site     | ATL          | TE02         | TE02          | N.C.R.     | -----  |

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 4.3. Test Setup

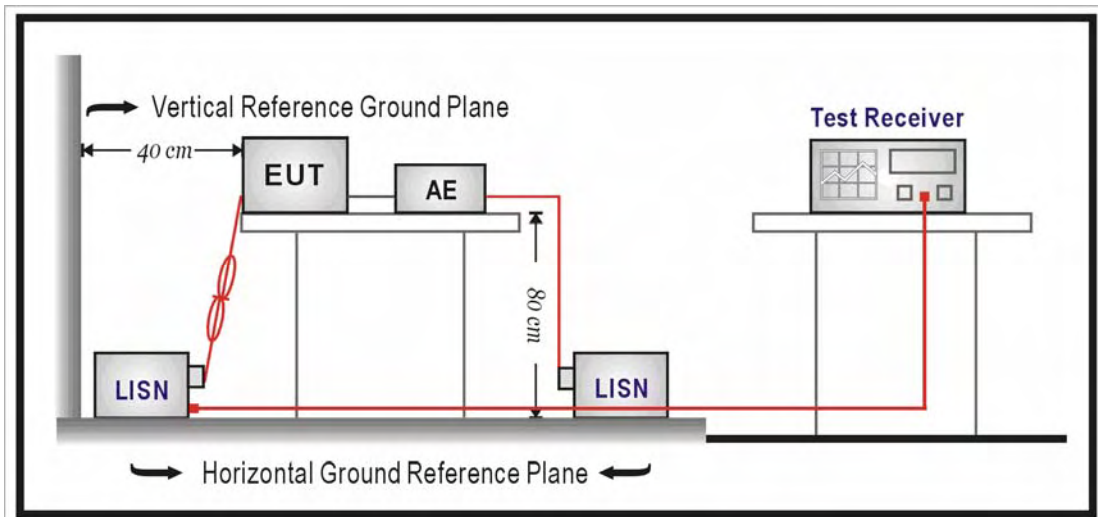

#### 4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

#### 4.5. Test Result

|               |                    |                          |              |
|---------------|--------------------|--------------------------|--------------|
| Standard:     | FCC Part 15C       | Line:                    | L1           |
| Test item:    | Conducted Emission | Power:                   | AC 120V/60Hz |
| Model Number: | AC785S-500         | Temp.(°C)/Hum.(%RH):     | 26(°C)/60%RH |
| Mode:         | 1                  | Date:                    | 09/17/2014   |
|               |                    | Test By:                 | Eric Ou Yang |
| Description:  |                    | Adapter Model: AD2015F21 |              |

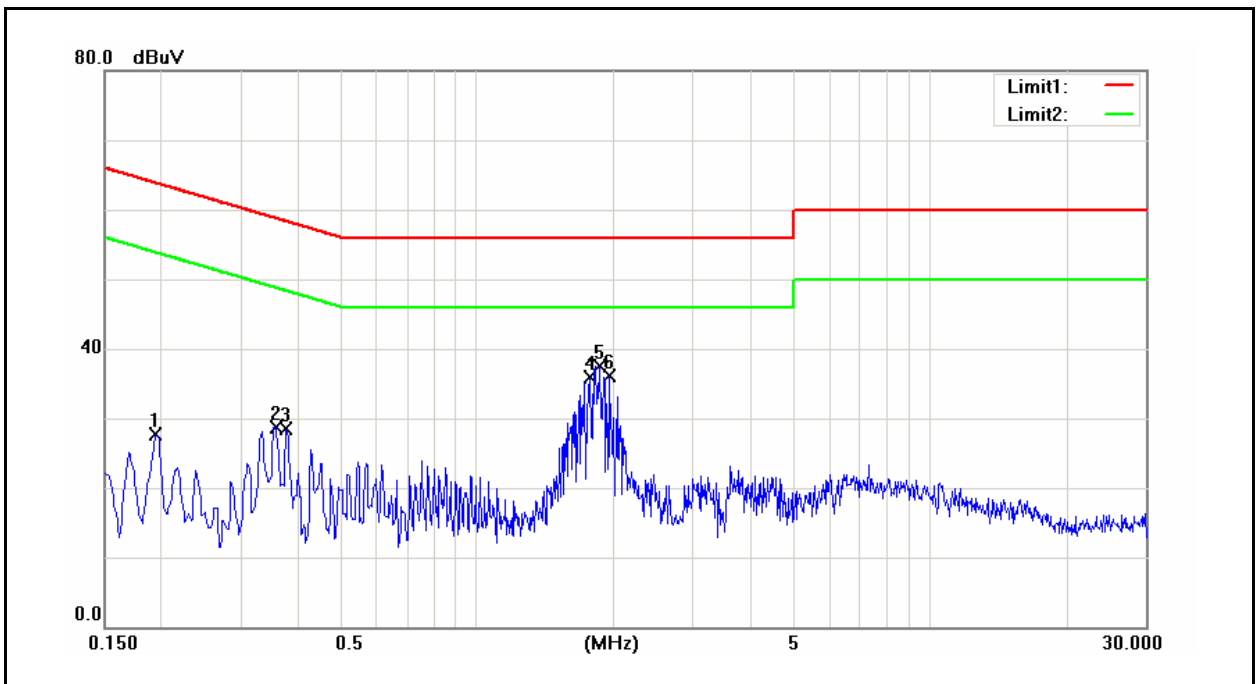


| No. | Frequency (MHz) | QP reading (dBuV) | AVG reading (dBuV) | Correction factor (dB) | QP result (dBuV) | AVG result (dBuV) | QP limit (dBuV) | AVG limit (dBuV) | QP margin (dB) | AVG margin (dB) | Remark |
|-----|-----------------|-------------------|--------------------|------------------------|------------------|-------------------|-----------------|------------------|----------------|-----------------|--------|
| 1   | 0.1940          | 10.85             | -0.55              | 9.60                   | 20.45            | 9.05              | 63.86           | 53.86            | -43.41         | -44.81          | Pass   |
| 2   | 0.3580          | 14.29             | 2.36               | 9.61                   | 23.90            | 11.97             | 58.77           | 48.77            | -34.87         | -36.80          | Pass   |
| 3   | 0.3780          | 13.54             | 1.85               | 9.61                   | 23.15            | 11.46             | 58.32           | 48.32            | -35.17         | -36.86          | Pass   |
| 4   | 1.7740          | 21.46             | 14.70              | 9.68                   | 31.14            | 24.38             | 56.00           | 46.00            | -24.86         | -21.62          | Pass   |
| 5   | 1.8660          | 22.87             | 14.67              | 9.68                   | 32.55            | 24.35             | 56.00           | 46.00            | -23.45         | -21.65          | Pass   |
| 6   | 1.9580          | 23.64             | 12.12              | 9.69                   | 33.33            | 21.81             | 56.00           | 46.00            | -22.67         | -24.19          | Pass   |

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

|               |                    |                          |              |
|---------------|--------------------|--------------------------|--------------|
| Standard:     | FCC Part 15C       | Line:                    | N            |
| Test item:    | Conducted Emission | Power:                   | AC 120V/60Hz |
| Model Number: | AC785S-500         | Temp.(°C)/Hum.(%RH):     | 26(°C)/60%RH |
| Mode:         | 1                  | Date:                    | 09/17/2014   |
|               |                    | Test By:                 | Eric Ou Yang |
| Description:  |                    | Adapter Model: AD2015F21 |              |

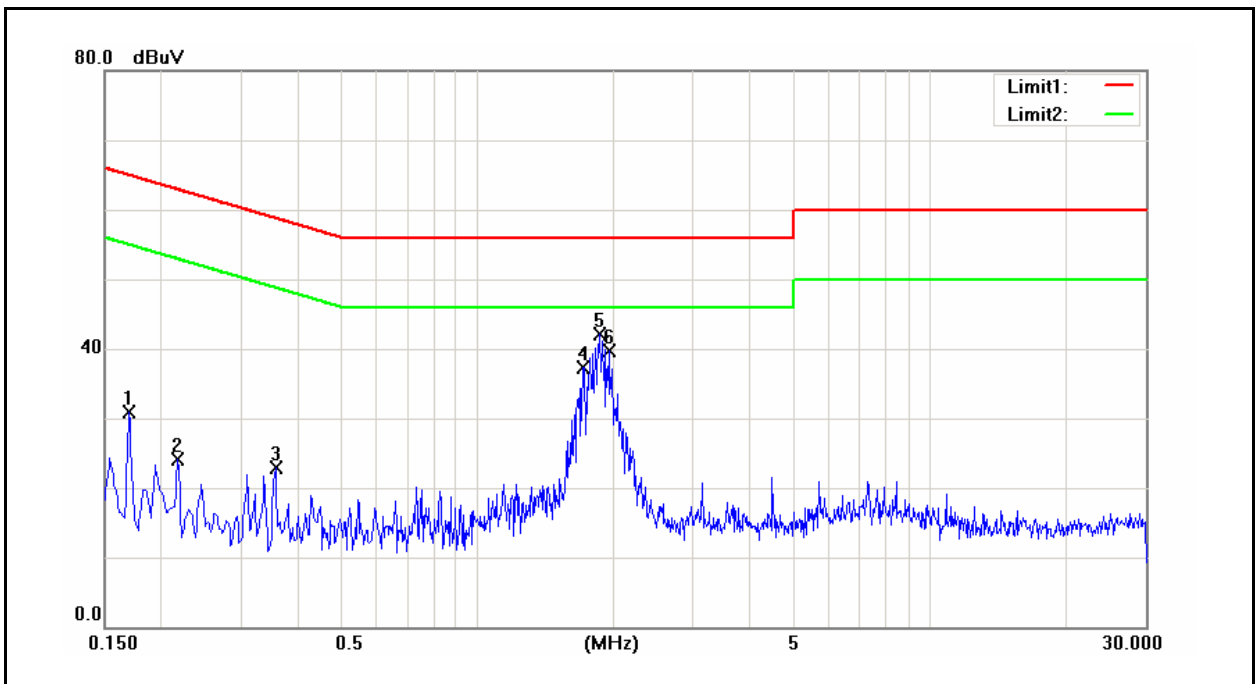


| No. | Frequency (MHz) | QP reading (dBuV) | AVG reading (dBuV) | Correction factor (dB) | QP result (dBuV) | AVG result (dBuV) | QP limit (dBuV) | AVG limit (dBuV) | QP margin (dB) | AVG margin (dB) | Remark |
|-----|-----------------|-------------------|--------------------|------------------------|------------------|-------------------|-----------------|------------------|----------------|-----------------|--------|
| 1   | 0.1700          | 13.18             | 4.67               | 9.60                   | 22.78            | 14.27             | 64.96           | 54.96            | -42.18         | -40.69          | Pass   |
| 2   | 0.2180          | 8.90              | 4.78               | 9.60                   | 18.50            | 14.38             | 62.89           | 52.89            | -44.39         | -38.51          | Pass   |
| 3   | 0.3580          | 5.68              | -2.01              | 9.61                   | 15.29            | 7.60              | 58.77           | 48.77            | -43.48         | -41.17          | Pass   |
| 4   | 1.7100          | 24.23             | 14.71              | 9.69                   | 33.92            | 24.40             | 56.00           | 46.00            | -22.08         | -21.60          | Pass   |
| 5   | 1.8660          | 29.83             | 18.88              | 9.69                   | 39.52            | 28.57             | 56.00           | 46.00            | -16.48         | -17.43          | Pass   |
| 6   | 1.9580          | 27.64             | 15.74              | 9.70                   | 37.34            | 25.44             | 56.00           | 46.00            | -18.66         | -20.56          | Pass   |

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

|               |                    |                                |              |
|---------------|--------------------|--------------------------------|--------------|
| Standard:     | FCC Part 15C       | Line:                          | L1           |
| Test item:    | Conducted Emission | Power:                         | AC 120V/60Hz |
| Model Number: | AC785S-500         | Temp.(°C)/Hum.(%RH):           | 26(°C)/60%RH |
| Mode:         | 1                  | Date:                          | 09/17/2014   |
|               |                    | Test By:                       | Eric Ou Yang |
| Description:  |                    | Adapter Model: MU05BM050100-A1 |              |

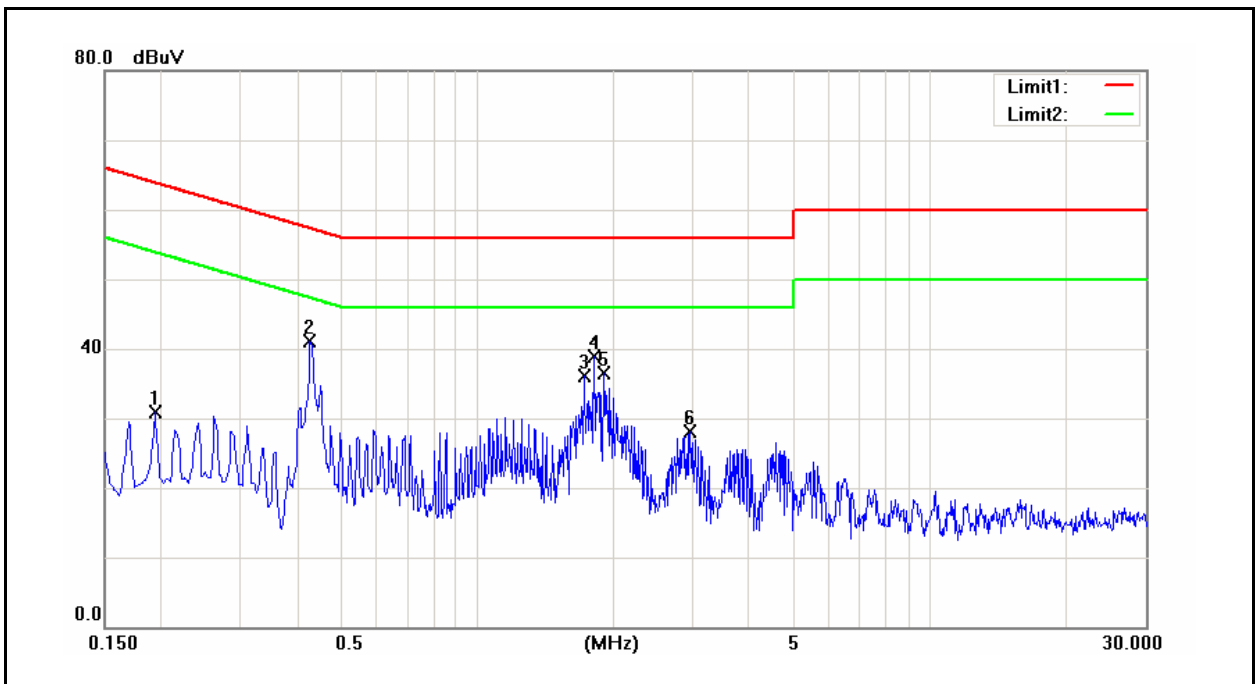


| No. | Frequency (MHz) | QP reading (dBuV) | AVG reading (dBuV) | Correction factor (dB) | QP result (dBuV) | AVG result (dBuV) | QP limit (dBuV) | AVG limit (dBuV) | QP margin (dB) | AVG margin (dB) | Remark |
|-----|-----------------|-------------------|--------------------|------------------------|------------------|-------------------|-----------------|------------------|----------------|-----------------|--------|
| 1   | 0.1940          | 13.51             | 3.01               | 9.60                   | 23.11            | 12.61             | 63.86           | 53.86            | -40.75         | -41.25          | Pass   |
| 2   | 0.4260          | 27.69             | 16.73              | 9.61                   | 37.30            | 26.34             | 57.33           | 47.33            | -20.03         | -20.99          | Pass   |
| 3   | 1.7220          | 20.63             | 12.55              | 9.68                   | 30.31            | 22.23             | 56.00           | 46.00            | -25.69         | -23.77          | Pass   |
| 4   | 1.8140          | 25.42             | 15.45              | 9.68                   | 35.10            | 25.13             | 56.00           | 46.00            | -20.90         | -20.87          | Pass   |
| 5   | 1.9060          | 24.77             | 14.12              | 9.69                   | 34.46            | 23.81             | 56.00           | 46.00            | -21.54         | -22.19          | Pass   |
| 6   | 2.9580          | 11.53             | 1.61               | 9.73                   | 21.26            | 11.34             | 56.00           | 46.00            | -34.74         | -34.66          | Pass   |

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

|               |                    |                                |              |
|---------------|--------------------|--------------------------------|--------------|
| Standard:     | FCC Part 15C       | Line:                          | N            |
| Test item:    | Conducted Emission | Power:                         | AC 120V/60Hz |
| Model Number: | AC785S-500         | Temp.(°C)/Hum.(%RH):           | 26(°C)/60%RH |
| Mode:         | 1                  | Date:                          | 09/17/2014   |
|               |                    | Test By:                       | Eric Ou Yang |
| Description:  |                    | Adapter Model: MU05BM050100-A1 |              |

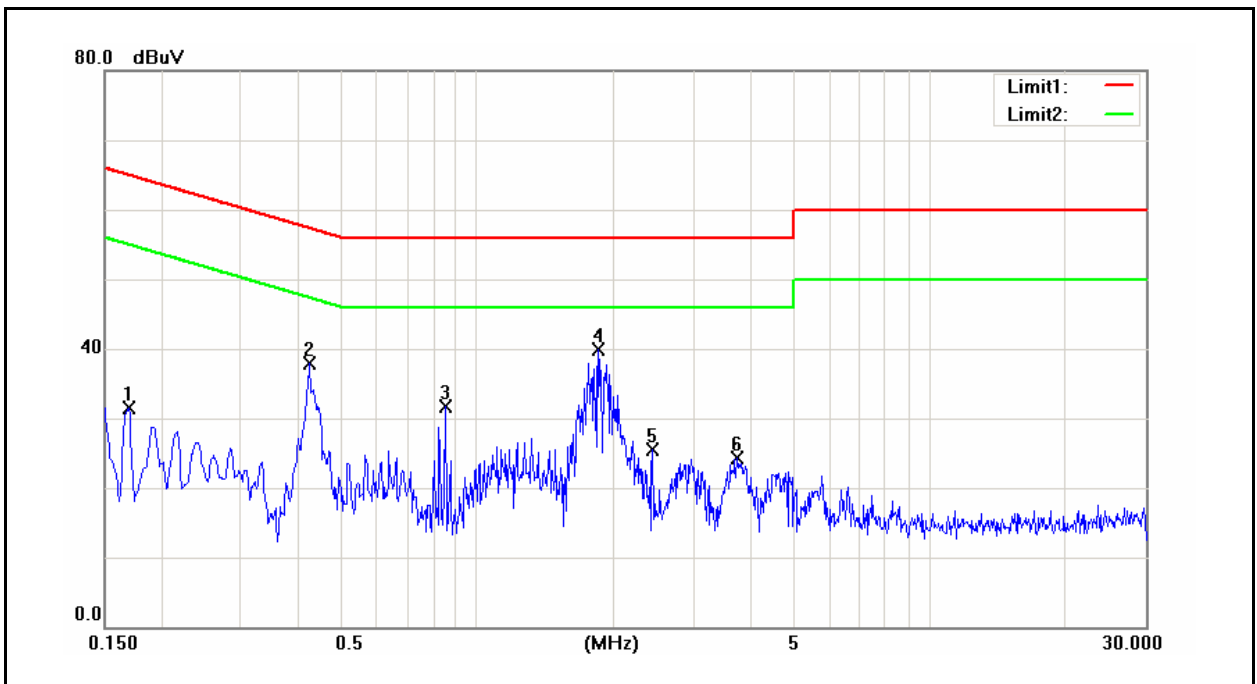

| No. | Frequency (MHz) | QP reading (dBuV) | AVG reading (dBuV) | Correction factor (dB) | QP result (dBuV) | AVG result (dBuV) | QP limit (dBuV) | AVG limit (dBuV) | QP margin (dB) | AVG margin (dB) | Remark |
|-----|-----------------|-------------------|--------------------|------------------------|------------------|-------------------|-----------------|------------------|----------------|-----------------|--------|
| 1   | 0.1700          | 14.44             | 5.63               | 9.60                   | 24.04            | 15.23             | 64.96           | 54.96            | -40.92         | -39.73          | Pass   |
| 2   | 0.4260          | 23.69             | 14.41              | 9.61                   | 33.30            | 24.02             | 57.33           | 47.33            | -24.03         | -23.31          | Pass   |
| 3   | 0.8500          | 12.93             | -1.52              | 9.64                   | 22.57            | 8.12              | 56.00           | 46.00            | -33.43         | -37.88          | Pass   |
| 4   | 1.8580          | 25.58             | 16.35              | 9.69                   | 35.27            | 26.04             | 56.00           | 46.00            | -20.73         | -19.96          | Pass   |
| 5   | 2.4420          | 4.41              | -2.36              | 9.73                   | 14.14            | 7.37              | 56.00           | 46.00            | -41.86         | -38.63          | Pass   |
| 6   | 3.7500          | 7.72              | -0.87              | 9.79                   | 17.51            | 8.92              | 56.00           | 46.00            | -38.49         | -37.08          | Pass   |

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

## 5 Radiated Emission Measurement

### 5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>( $\mu\text{V}/\text{m}$ at meter) | Measurement Distance<br>(meters) |
|--------------------|--|----------------------------------|
| 0.009 – 0.490      | 2400 / F (kHz)                                       | 300                              |
| 0.490 – 1.705      | 24000 / F (kHz)                                      | 30                               |
| 1.705 – 30.0       | 30   | 30                               |
| 30 - 88            | 100**  | 3                                |
| 88-216             | 150**  | 3                                |
| 216-960            | 200**  | 3                                |
| Above 960          | 500  | 3                                |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### 5.2. Test Instruments

| 3 Meter Chamber                   |                                |              |               |            |        |
|-----------------------------------|--------------------------------|--------------|---------------|------------|--------|
| Equipment                         | Manufacturer                   | Model Number | Serial Number | Cal. Date  | Remark |
| RF Pre-selector                   | Agilent                        | N9039A       | MY46520256    | 01/10/2014 | (1)    |
| Spectrum Analyzer                 | Agilent                        | E4446A       | MY46180578    | 01/10/2014 | (1)    |
| Pre Amplifier                     | Agilent                        | 8449B        | 3008A02237    | 02/21/2014 | (1)    |
| Pre Amplifier                     | Agilent                        | 8447D        | 2944A10961    | 02/21/2014 | (1)    |
| Broadband Antenna<br>(30MHz~1GHz) | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9163     | 9163-270      | 07/22/2014 | (1)    |
| Horn Antenna<br>(1~18GHz)         | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA9120D    | 9120D-550     | 06/11/2014 | (1)    |
| Horn Antenna<br>(18~40GHz)        | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA9170     | 9170-320      | 07/02/2014 | (1)    |
| Loop Antenna                      | COM-POWER<br>CORPORATION       | AL-130       | 121014        | 08/14/2012 | (3)    |
| Test Site                         | ATL                            | TE01         | 888001        | 08/28/2014 | (1)    |


Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.




### 5.3. Setup

Below 1GHz

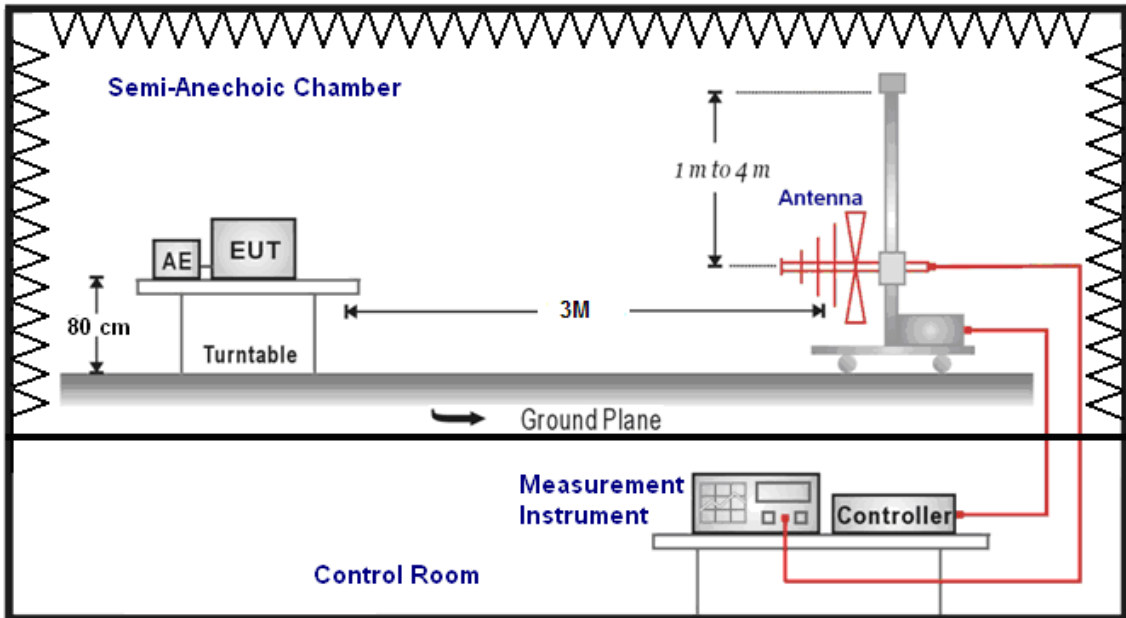

Above 1GHz

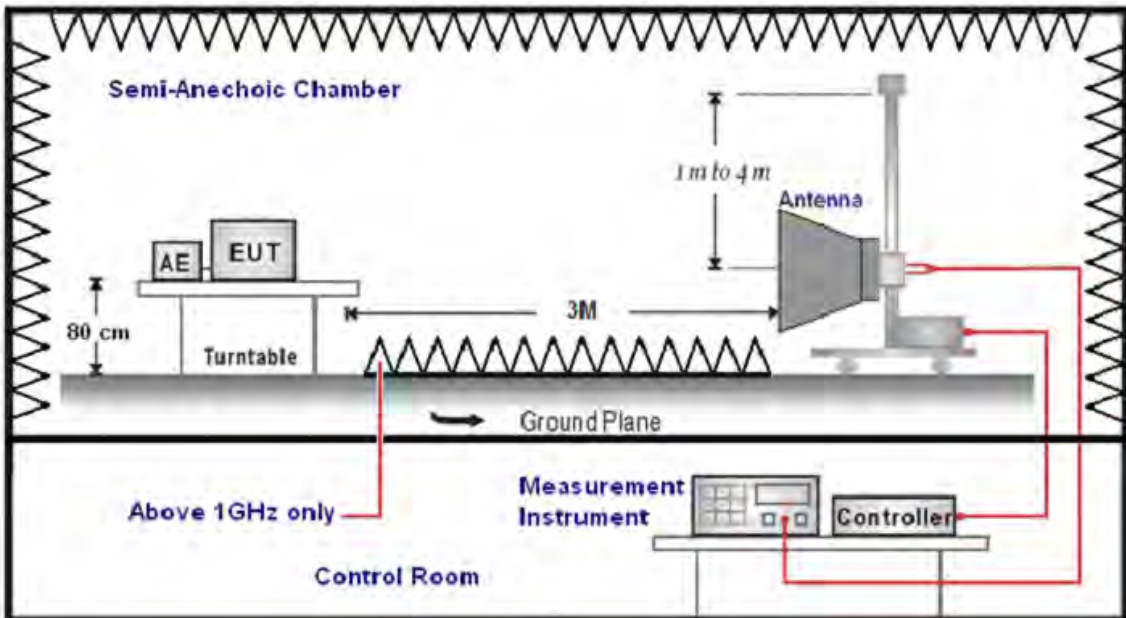

## 5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1)  $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2)  $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 5.5. Test Result

### Below 1GHz

|               |                          |                      |              |
|---------------|--------------------------|----------------------|--------------|
| Standard:     | FCC Part 15C             | Test Distance:       | 3m           |
| Test item:    | Radiated Emission        | Power:               | AC 120V/60Hz |
| Model Number: | AC785S-500               | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:         | 1                        | Date:                | 09/24/2014   |
| Description:  | Adapter Model: AD2015F21 | Test By:             | Eric Ou Yang |

| Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|------------------|
| 171.0000        | 44.99          | -12.23                | 32.76           | 43.50          | -10.74      | QP     | H                |
| 309.5000        | 37.68          | -10.09                | 27.59           | 46.00          | -18.41      | QP     | H                |
| 419.5000        | 33.34          | -7.78                 | 25.56           | 46.00          | -20.44      | QP     | H                |
| 515.5000        | 32.64          | -6.03                 | 26.61           | 46.00          | -19.39      | QP     | H                |
| 661.5000        | 31.63          | -3.07                 | 28.56           | 46.00          | -17.44      | QP     | H                |
| 780.0000        | 30.86          | -0.65                 | 30.21           | 46.00          | -15.79      | QP     | H                |
| 134.5000        | 41.84          | -12.86                | 28.98           | 43.50          | -14.52      | QP     | V                |
| 246.5000        | 43.82          | -12.22                | 31.60           | 46.00          | -14.40      | QP     | V                |
| 358.0000        | 42.13          | -9.19                 | 32.94           | 46.00          | -13.06      | QP     | V                |
| 508.0000        | 38.02          | -6.16                 | 31.86           | 46.00          | -14.14      | QP     | V                |
| 584.0000        | 32.94          | -4.48                 | 28.46           | 46.00          | -17.54      | QP     | V                |
| 852.0000        | 26.59          | 0.63                  | 27.22           | 46.00          | -18.78      | QP     | V                |

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

| Standard:       | FCC Part 15C                   | Test Distance:        | 3m              |                |             |        |                  |
|-----------------|--------------------------------|-----------------------|-----------------|----------------|-------------|--------|------------------|
| Test item:      | Radiated Emission              | Power:                | AC 120V/60Hz    |                |             |        |                  |
| Model Number:   | AC785S-500                     | Temp.(°C)/Hum.(%RH):  | 26(°C)/60%RH    |                |             |        |                  |
| Mode:           | 1                              | Date:                 | 09/24/2014      |                |             |        |                  |
| Description:    | Adapter Model: MU05BM050100-A1 | Test By:              | Eric Ou Yang    |                |             |        |                  |
| Frequency (MHz) | Reading (dBuV)                 | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Polar. H / V |
| 167.0000        | 48.00                          | -12.03                | 35.97           | 43.50          | -7.53       | QP     | H                |
| 299.0000        | 40.92                          | -10.26                | 30.66           | 46.00          | -15.34      | QP     | H                |
| 451.0000        | 32.81                          | -6.99                 | 25.82           | 46.00          | -20.18      | QP     | H                |
| 572.5000        | 32.45                          | -4.82                 | 27.63           | 46.00          | -18.37      | QP     | H                |
| 720.0000        | 32.05                          | -1.92                 | 30.13           | 46.00          | -15.87      | QP     | H                |
| 799.5000        | 32.87                          | -0.25                 | 32.62           | 46.00          | -13.38      | QP     | H                |
| 129.5000        | 43.46                          | -13.39                | 30.07           | 43.50          | -13.43      | QP     | V                |
| 258.0000        | 44.42                          | -11.84                | 32.58           | 46.00          | -13.42      | QP     | V                |
| 368.5000        | 43.20                          | -8.93                 | 34.27           | 46.00          | -11.73      | QP     | V                |
| 515.5000        | 39.37                          | -6.03                 | 33.34           | 46.00          | -12.66      | QP     | V                |
| 572.5000        | 33.69                          | -4.82                 | 28.87           | 46.00          | -17.13      | QP     | V                |
| 860.0000        | 28.43                          | 0.78                  | 29.21           | 46.00          | -16.79      | QP     | V                |

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

**Above 1GHz**

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 2                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2412MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3009.000        | 38.64             | -0.17                 | 38.47           | 74.00                | -35.53       | peak   | H                |
| 4824.000        | 43.42             | 5.03                  | 48.45           | 74.00                | -25.55       | peak   | H                |
| 6670.000        | 34.25             | 9.95                  | 44.20           | 74.00                | -29.80       | peak   | H                |
| 2974.000        | 36.14             | -0.27                 | 35.87           | 74.00                | -38.13       | peak   | V                |
| 4824.000        | 55.50             | 5.03                  | 60.53           | 74.00                | -13.47       | peak   | V                |
| 4824.000        | 46.11             | 5.03                  | 51.14           | 54.00                | -2.86        | AVG    | V                |
| 6670.000        | 33.58             | 9.95                  | 43.53           | 74.00                | -30.47       | peak   | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 2                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2437MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3023.000        | 39.23             | -0.14                 | 39.09           | 74.00                | -34.91       | peak   | H                |
| 4874.000        | 41.63             | 5.16                  | 46.79           | 74.00                | -27.21       | peak   | H                |
| 6719.000        | 34.40             | 10.09                 | 44.49           | 74.00                | -29.51       | peak   | H                |
| 2995.000        | 40.20             | -0.22                 | 39.98           | 74.00                | -34.02       | peak   | V                |
| 4874.000        | 45.23             | 5.16                  | 50.39           | 74.00                | -23.61       | peak   | V                |
| 6635.000        | 33.27             | 9.86                  | 43.13           | 74.00                | -30.87       | peak   | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 2                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2462MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3023.000        | 40.48             | -0.14                 | 40.34           | 74.00                | -33.66       | peak   | H                |
| 4924.000        | 41.28             | 5.29                  | 46.57           | 74.00                | -27.43       | peak   | H                |
| 6698.000        | 34.15             | 10.03                 | 44.18           | 74.00                | -29.82       | peak   | H                |
| 3030.000        | 39.58             | -0.11                 | 39.47           | 74.00                | -34.53       | peak   | V                |
| 4924.000        | 48.36             | 5.29                  | 53.65           | 74.00                | -20.35       | peak   | V                |
| 4924.000        | 46.95             | 5.29                  | 52.24           | 54.00                | -1.76        | AVG    | V                |
| 6719.000        | 33.79             | 10.09                 | 43.88           | 74.00                | -30.12       | peak   | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 3                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2412MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3030.000        | 39.48             | -0.11                 | 39.37           | 74.00                | -34.63       | peak   | H                |
| 4824.000        | 39.16             | 5.03                  | 44.19           | 74.00                | -29.81       | peak   | H                |
| 6698.000        | 33.46             | 10.03                 | 43.49           | 74.00                | -30.51       | peak   | H                |
| 2939.000        | 38.70             | -0.36                 | 38.34           | 74.00                | -35.66       | peak   | V                |
| 4824.000        | 43.85             | 5.03                  | 48.88           | 74.00                | -25.12       | peak   | V                |
| 6677.000        | 33.64             | 9.97                  | 43.61           | 74.00                | -30.39       | peak   | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 3                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2437MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3037.000        | 37.36             | -0.10                 | 37.26           | 74.00                | -36.74       | peak   | H                |
| 4874.000        | 38.74             | 5.16                  | 43.90           | 74.00                | -30.10       | peak   | H                |
| 6705.000        | 33.73             | 10.05                 | 43.78           | 74.00                | -30.22       | peak   | H                |
| 2995.000        | 40.28             | -0.22                 | 40.06           | 74.00                | -33.94       | peak   | V                |
| 4874.000        | 44.26             | 5.16                  | 49.42           | 74.00                | -24.58       | peak   | V                |
| 6726.000        | 34.75             | 10.10                 | 44.85           | 74.00                | -29.15       | peak   | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 3                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2462MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3009.000        | 38.31             | -0.17                 | 38.14           | 74.00                | -35.86       | peak   | H                |
| 4563.000        | 35.02             | 4.36                  | 39.38           | 74.00                | -34.62       | peak   | H                |
| 6691.000        | 33.43             | 10.01                 | 43.44           | 74.00                | -30.56       | peak   | H                |
| 2967.000        | 38.46             | -0.29                 | 38.17           | 74.00                | -35.83       | peak   | V                |
| 4924.000        | 45.14             | 5.29                  | 50.43           | 74.00                | -23.57       | peak   | V                |
| 6726.000        | 33.68             | 10.10                 | 43.78           | 74.00                | -30.22       | peak   | V                |



| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 4                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2412MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3009.000        | 38.51             | -0.17                 | 38.34           | 74.00                | -35.66       | peak   | H                |
| 4577.000        | 34.80             | 4.39                  | 39.19           | 74.00                | -34.81       | peak   | H                |
| 6670.000        | 34.32             | 9.95                  | 44.27           | 74.00                | -29.73       | peak   | H                |
| 2974.000        | 37.39             | -0.27                 | 37.12           | 74.00                | -36.88       | peak   | V                |
| 4577.000        | 34.52             | 4.39                  | 38.91           | 74.00                | -35.09       | peak   | V                |
| 6677.000        | 33.25             | 9.97                  | 43.22           | 74.00                | -30.78       | peak   | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 4                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2437MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3037.000        | 37.01             | -0.10                 | 36.91           | 74.00                | -37.09       | peak   | H                |
| 4577.000        | 35.18             | 4.39                  | 39.57           | 74.00                | -34.43       | peak   | H                |
| 6698.000        | 33.54             | 10.03                 | 43.57           | 74.00                | -30.43       | peak   | H                |
| 3009.000        | 39.92             | -0.17                 | 39.75           | 74.00                | -34.25       | peak   | V                |
| 4577.000        | 34.12             | 4.39                  | 38.51           | 74.00                | -35.49       | peak   | V                |
| 6691.000        | 32.56             | 10.01                 | 42.57           | 74.00                | -31.43       | peak   | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 4                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2462MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3037.000        | 38.86             | -0.10                 | 38.76           | 74.00                | -35.24       | peak   | H                |
| 4570.000        | 34.89             | 4.38                  | 39.27           | 74.00                | -34.73       | peak   | H                |
| 6649.000        | 34.73             | 9.90                  | 44.63           | 74.00                | -29.37       | peak   | H                |
| 2981.000        | 36.85             | -0.25                 | 36.60           | 74.00                | -37.40       | peak   | V                |
| 4577.000        | 35.30             | 4.39                  | 39.69           | 74.00                | -34.31       | peak   | V                |
| 6705.000        | 35.15             | 10.05                 | 45.20           | 74.00                | -28.80       | peak   | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 5                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2422MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3002.000        | 38.34             | -0.20                 | 38.14           | 74.00                | -35.86       | peak   | H                |
| 4549.000        | 34.07             | 4.33                  | 38.40           | 74.00                | -35.60       | peak   | H                |
| 6719.000        | 33.74             | 10.09                 | 43.83           | 74.00                | -30.17       | peak   | H                |
| 2925.000        | 38.47             | -0.39                 | 38.08           | 74.00                | -35.92       | peak   | V                |
| 4626.000        | 34.43             | 4.52                  | 38.95           | 74.00                | -35.05       | peak   | V                |
| 6698.000        | 33.73             | 10.03                 | 43.76           | 74.00                | -30.24       | peak   | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 5                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2437MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3051.000        | 37.52             | -0.06                 | 37.46           | 74.00                | -36.54       | peak   | H                |
| 4654.000        | 34.75             | 4.60                  | 39.35           | 74.00                | -34.65       | peak   | H                |
| 6670.000        | 33.61             | 9.95                  | 43.56           | 74.00                | -30.44       | peak   | H                |
| 3002.000        | 39.70             | -0.20                 | 39.50           | 74.00                | -34.50       | peak   | V                |
| 4598.000        | 35.02             | 4.45                  | 39.47           | 74.00                | -34.53       | peak   | V                |
| 6698.000        | 33.28             | 10.03                 | 43.31           | 74.00                | -30.69       | peak   | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 5                 |                       |                 | Date:                | 09/18/2014   |        |                  |
| Frequency:      | 2452MHz           |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 3002.000        | 35.69             | -0.20                 | 35.49           | 74.00                | -38.51       | peak   | H                |
| 4570.000        | 34.19             | 4.38                  | 38.57           | 74.00                | -35.43       | peak   | H                |
| 6670.000        | 32.46             | 9.95                  | 42.41           | 74.00                | -31.59       | peak   | H                |
| 2981.000        | 37.80             | -0.25                 | 37.55           | 74.00                | -36.45       | peak   | V                |
| 4570.000        | 34.79             | 4.38                  | 39.17           | 74.00                | -34.83       | peak   | V                |
| 6726.000        | 32.90             | 10.10                 | 43.00           | 74.00                | -31.00       | peak   | V                |


| Standard:       | RSS-Gen           | Test Distance:        | 3m             |               |               |             |        |                  |
|-----------------|-------------------|-----------------------|----------------|---------------|---------------|-------------|--------|------------------|
| Test item:      | Radiated Emission | Power:                | AC 120V/60Hz   |               |               |             |        |                  |
| Model Number:   | AC785S-500        | Temp.(°C)/Hum.(%RH):  | 26(°C)/60%RH   |               |               |             |        |                  |
| Mode:           | 6                 | Date:                 | 09/18/2014     |               |               |             |        |                  |
| Modulation:     | IEEE 802.11b      | Test By:              | Eric Ou Yang   |               |               |             |        |                  |
| Frequency:      | 2437MHz           |                       |                |               |               |             |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/) | Peak (dBuV/m) | AVG. (dBuV/m) | Margin (dB) | Remark | Ant.Polar. H / V |
| 3065.000        | 36.66             | -0.01                 | 36.65          | 74.00         | 54.00         | -37.35      | peak   | H                |
| 4549.000        | 34.23             | 4.33                  | 38.56          | 74.00         | 54.00         | -35.44      | peak   | H                |
| 6670.000        | 33.50             | 9.95                  | 43.45          | 74.00         | 54.00         | -30.55      | peak   | H                |
| 2995.000        | 39.97             | -0.22                 | 39.75          | 74.00         | 54.00         | -34.25      | peak   | V                |
| 4626.000        | 34.60             | 4.52                  | 39.12          | 74.00         | 54.00         | -34.88      | peak   | V                |
| 6726.000        | 33.18             | 10.10                 | 43.28          | 74.00         | 54.00         | -30.72      | peak   | V                |

## 6 Maximum Conducted Output Power Measurement

### 6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

### 6.2. Test Setup

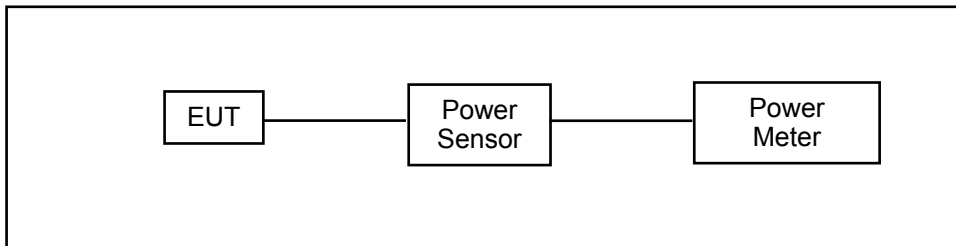

### 6.3. Test Instruments

| Equipment    | Manufacturer | Model Number | Serial Number | Cal. Date  | Remark |
|--------------|--------------|--------------|---------------|------------|--------|
| Power Sensor | Anritsu      | MA2411B      | 1126022       | 08/21/2014 | (1)    |
| Power Meter  | Anritsu      | ML2495A      | 1135009       | 08/21/2014 | (1)    |
| Test Site    | ATL          | TE05         | TE05          | N.C.R.     | -----  |

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

**6.5. Test Result**

| Model Number    | AC785S-500                     |               |       |              |              |               |       |            |       |             |
|-----------------|--------------------------------|---------------|-------|--------------|--------------|---------------|-------|------------|-------|-------------|
| Test Item       | Maximum Conducted Output Power |               |       |              |              |               |       |            |       |             |
| Test Mode       | Mode 2: IEEE 802.11b Link Mode |               |       |              |              |               |       |            |       |             |
| Date of Test    | 09/18/2014                     |               |       |              |              | Test Site     |       | TE05       |       |             |
| Frequency (MHz) | Data Rate                      | Ant-1         |       |              |              | Ant-2         |       |            |       | Limit (dBm) |
|                 |                                | Average Power |       | Peak Power   |              | Average Power |       | Peak Power |       |             |
|                 |                                | (dBm)         | (W)   | (dBm)        | (W)          | (dBm)         | (W)   | (dBm)      | (W)   |             |
| 2412            | 1M                             | 6.81          | 0.005 | 9.59         | 0.009        | 7.46          | 0.006 | 10.70      | 0.012 | < 30        |
| 2437            |                                | 6.75          | 0.005 | 9.38         | 0.009        | 7.28          | 0.005 | 10.14      | 0.010 | < 30        |
| 2462            |                                | 7.14          | 0.005 | 9.82         | 0.010        | 6.98          | 0.005 | 9.85       | 0.010 | < 30        |
| 2437            | 2M                             | 6.63          | 0.005 | 9.15         | 0.008        | 7.25          | 0.005 | 10.16      | 0.010 | < 30        |
| 2437            | 5.5M                           | 6.58          | 0.005 | 6.23         | 0.004        | 7.33          | 0.005 | 10.21      | 0.010 | < 30        |
| 2437            | 11M                            | 6.51          | 0.004 | 6.14         | 0.004        | 7.37          | 0.005 | 10.23      | 0.011 | < 30        |
| Frequency (MHz) | Data Rate                      | Ant- 1+2      |       |              |              | Limit (dBm)   |       |            |       |             |
|                 |                                | Average Power |       | Peak Power   |              |               |       |            |       |             |
|                 |                                | (dBm)         | (W)   | (dBm)        | (W)          |               |       |            |       |             |
| 2412            | 1M                             | 10.16         | 0.010 | <b>13.19</b> | <b>0.021</b> | < 30          |       |            |       |             |
| 2437            |                                | 10.03         | 0.010 | 12.79        | 0.019        | < 30          |       |            |       |             |
| 2462            |                                | 10.07         | 0.010 | 12.85        | 0.019        | < 30          |       |            |       |             |
| 2437            | 2M                             | 9.96          | 0.010 | 12.69        | 0.019        | < 30          |       |            |       |             |
| 2437            | 5.5M                           | 9.98          | 0.010 | 11.67        | 0.015        | < 30          |       |            |       |             |
| 2437            | 11M                            | 9.97          | 0.010 | 11.66        | 0.015        | < 30          |       |            |       |             |

| Model Number    | AC785S-500                     |               |       |              |              |               |       |            |       |             |
|-----------------|--------------------------------|---------------|-------|--------------|--------------|---------------|-------|------------|-------|-------------|
| Test Item       | Maximum Conducted Output Power |               |       |              |              |               |       |            |       |             |
| Test Mode       | Mode 3: IEEE 802.11g Link Mode |               |       |              |              |               |       |            |       |             |
| Date of Test    | 09/18/2014                     |               |       |              |              | Test Site     |       | TE05       |       |             |
| Frequency (MHz) | Data Rate                      | Ant-1         |       |              |              | Ant-2         |       |            |       | Limit (dBm) |
|                 |                                | Average Power |       | Peak Power   |              | Average Power |       | Peak Power |       |             |
|                 |                                | (dBm)         | (W)   | (dBm)        | (W)          | (dBm)         | (W)   | (dBm)      | (W)   |             |
| 2412            | 6M                             | 7.97          | 0.006 | 17.49        | 0.056        | 7.87          | 0.006 | 17.73      | 0.059 | < 30        |
| 2437            |                                | 7.67          | 0.006 | 17.20        | 0.052        | 8.38          | 0.007 | 18.18      | 0.066 | < 30        |
| 2462            |                                | 7.73          | 0.006 | 17.08        | 0.051        | 7.84          | 0.006 | 17.57      | 0.057 | < 30        |
| 2437            | 9M                             | 7.65          | 0.006 | 17.17        | 0.052        | 8.31          | 0.007 | 18.14      | 0.065 | < 30        |
| 2437            | 12M                            | 7.59          | 0.006 | 17.10        | 0.051        | 8.25          | 0.007 | 18.09      | 0.064 | < 30        |
| 2437            | 18M                            | 7.56          | 0.006 | 17.07        | 0.051        | 8.12          | 0.006 | 18.06      | 0.064 | < 30        |
| 2437            | 24M                            | 7.53          | 0.006 | 17.03        | 0.050        | 8.05          | 0.006 | 18.02      | 0.063 | < 30        |
| 2437            | 36M                            | 7.45          | 0.006 | 16.99        | 0.050        | 7.99          | 0.006 | 17.97      | 0.063 | < 30        |
| 2437            | 48M                            | 7.42          | 0.006 | 16.96        | 0.050        | 7.88          | 0.006 | 17.92      | 0.062 | < 30        |
| 2437            | 54M                            | 7.36          | 0.005 | 16.87        | 0.049        | 7.85          | 0.006 | 17.86      | 0.061 | < 30        |
| Frequency (MHz) | Data Rate                      | Ant- 1+2      |       |              |              | Limit (dBm)   |       |            |       |             |
|                 |                                | Average Power |       | Peak Power   |              |               |       |            |       |             |
|                 |                                | (dBm)         | (W)   | (dBm)        | (W)          |               |       |            |       |             |
| 2412            | 6M                             | 10.93         | 0.012 | 20.62        | 0.115        | < 30          |       |            |       |             |
| 2437            |                                | 11.05         | 0.013 | <b>20.73</b> | <b>0.118</b> | < 30          |       |            |       |             |
| 2462            |                                | 10.80         | 0.012 | 20.34        | 0.108        | < 30          |       |            |       |             |
| 2437            | 9M                             | 11.00         | 0.013 | 20.69        | 0.117        | < 30          |       |            |       |             |
| 2437            | 12M                            | 10.94         | 0.012 | 20.63        | 0.116        | < 30          |       |            |       |             |
| 2437            | 18M                            | 10.86         | 0.012 | 20.60        | 0.115        | < 30          |       |            |       |             |
| 2437            | 24M                            | 10.81         | 0.012 | 20.56        | 0.114        | < 30          |       |            |       |             |
| 2437            | 36M                            | 10.74         | 0.012 | 20.52        | 0.113        | < 30          |       |            |       |             |
| 2437            | 48M                            | 10.67         | 0.012 | 20.48        | 0.112        | < 30          |       |            |       |             |
| 2437            | 54M                            | 10.62         | 0.012 | 20.40        | 0.110        | < 30          |       |            |       |             |

| Model Number    | AC785S-500                                  |               |       |              |              |               |       |            |       |             |
|-----------------|---|---------------|-------|--------------|--------------|---------------|-------|------------|-------|-------------|
| Test Item       | Maximum Conducted Output Power              |               |       |              |              |               |       |            |       |             |
| Test Mode       | Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode |               |       |              |              |               |       |            |       |             |
| Date of Test    | 09/18/2014                                  |               |       |              |              | Test Site     |       | TE05       |       |             |
| Frequency (MHz) | Data Rate                                   | Ant-1         |       |              |              | Ant-2         |       |            |       | Limit (dBm) |
|                 |   | Average Power |       | Peak Power   |              | Average Power |       | Peak Power |       |             |
|                 |   | (dBm)         | (W)   | (dBm)        | (W)          | (dBm)         | (W)   | (dBm)      | (W)   |             |
| 2412            | 13M   | 7.89          | 0.006 | 17.67        | 0.058        | 8.12          | 0.006 | 17.92      | 0.062 | < 30        |
| 2437            |   | 7.78          | 0.006 | 17.44        | 0.055        | 8.49          | 0.007 | 18.18      | 0.066 | < 30        |
| 2462            |   | 7.59          | 0.006 | 17.29        | 0.054        | 7.86          | 0.006 | 17.56      | 0.057 | < 30        |
| 2437            | 26M   | 7.76          | 0.006 | 16.52        | 0.045        | 8.43          | 0.007 | 18.15      | 0.065 | < 30        |
| 2437            | 39M   | 7.73          | 0.006 | 16.49        | 0.045        | 8.39          | 0.007 | 18.13      | 0.065 | < 30        |
| 2437            | 52M   | 7.67          | 0.006 | 16.47        | 0.044        | 8.33          | 0.007 | 18.11      | 0.065 | < 30        |
| 2437            | 78M   | 7.59          | 0.006 | 16.44        | 0.044        | 8.28          | 0.007 | 18.06      | 0.064 | < 30        |
| 2437            | 104M  | 7.50          | 0.006 | 16.40        | 0.044        | 8.26          | 0.007 | 18.03      | 0.064 | < 30        |
| 2437            | 117M  | 7.48          | 0.006 | 16.39        | 0.044        | 8.17          | 0.007 | 17.99      | 0.063 | < 30        |
| 2437            | 130M  | 7.45          | 0.006 | 16.35        | 0.043        | 8.12          | 0.006 | 17.95      | 0.062 | < 30        |
| Frequency (MHz) | Data Rate                                   | Ant- 1+2      |       |              |              | Limit (dBm)   |       |            |       |             |
|                 |   | Average Power |       | Peak Power   |              |               |       |            |       |             |
|                 |   | (dBm)         | (W)   | (dBm)        | (W)          |               |       |            |       |             |
| 2412            | 13M   | 11.02         | 0.013 | 20.81        | 0.120        | < 30          |       |            |       |             |
| 2437            |   | 11.16         | 0.013 | <b>20.84</b> | <b>0.121</b> | < 30          |       |            |       |             |
| 2462            |   | 10.74         | 0.012 | 20.44        | 0.111        | < 30          |       |            |       |             |
| 2437            | 26M   | 11.12         | 0.013 | 20.42        | 0.110        | < 30          |       |            |       |             |
| 2437            | 39M   | 11.08         | 0.013 | 20.40        | 0.110        | < 30          |       |            |       |             |
| 2437            | 52M   | 11.02         | 0.013 | 20.38        | 0.109        | < 30          |       |            |       |             |
| 2437            | 78M   | 10.96         | 0.012 | 20.34        | 0.108        | < 30          |       |            |       |             |
| 2437            | 104M  | 10.91         | 0.012 | 20.30        | 0.107        | < 30          |       |            |       |             |
| 2437            | 117M  | 10.85         | 0.012 | 20.27        | 0.107        | < 30          |       |            |       |             |
| 2437            | 130M  | 10.81         | 0.012 | 20.23        | 0.106        | < 30          |       |            |       |             |



| Model Number    | AC785S-500                                  |               |       |              |              |               |       |            |       |             |
|-----------------|---|---------------|-------|--------------|--------------|---------------|-------|------------|-------|-------------|
| Test Item       | Maximum Conducted Output Power              |               |       |              |              |               |       |            |       |             |
| Test Mode       | Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode |               |       |              |              |               |       |            |       |             |
| Date of Test    | 09/18/2014                                  |               |       |              |              | Test Site     |       | TE05       |       |             |
| Frequency (MHz) | Data Rate                                   | Ant-1         |       |              |              | Ant-2         |       |            |       | Limit (dBm) |
|                 |   | Average Power |       | Peak Power   |              | Average Power |       | Peak Power |       |             |
|                 |   | (dBm)         | (W)   | (dBm)        | (W)          | (dBm)         | (W)   | (dBm)      | (W)   |             |
| 2422            | 27M   | 8.38          | 0.007 | 18.36        | 0.069        | 8.07          | 0.006 | 17.39      | 0.055 | < 30        |
| 2437            |   | 8.59          | 0.007 | 18.57        | 0.072        | 8.77          | 0.008 | 17.69      | 0.059 | < 30        |
| 2452            |   | 7.83          | 0.006 | 17.82        | 0.061        | 7.73          | 0.006 | 17.21      | 0.053 | < 30        |
| 2437            | 54M   | 8.53          | 0.007 | 18.42        | 0.070        | 9.06          | 0.008 | 18.02      | 0.063 | < 30        |
| 2437            | 81M   | 8.46          | 0.007 | 18.38        | 0.069        | 8.99          | 0.008 | 17.99      | 0.063 | < 30        |
| 2437            | 108M  | 8.40          | 0.007 | 18.34        | 0.068        | 8.92          | 0.008 | 17.94      | 0.062 | < 30        |
| 2437            | 162M  | 8.44          | 0.007 | 18.33        | 0.068        | 8.84          | 0.008 | 17.91      | 0.062 | < 30        |
| 2437            | 216M  | 8.32          | 0.007 | 18.30        | 0.068        | 8.78          | 0.008 | 17.89      | 0.062 | < 30        |
| 2437            | 243M  | 8.26          | 0.007 | 18.25        | 0.067        | 8.72          | 0.007 | 17.87      | 0.061 | < 30        |
| 2437            | 270M  | 8.22          | 0.007 | 18.23        | 0.067        | 8.62          | 0.007 | 17.83      | 0.061 | < 30        |
| Frequency (MHz) | Data Rate                                   | Ant- 1+2      |       |              |              | Limit (dBm)   |       |            |       |             |
|                 |   | Average Power |       | Peak Power   |              |               |       |            |       |             |
|                 |   | (dBm)         | (W)   | (dBm)        | (W)          |               |       |            |       |             |
| 2422            | 27M   | 11.24         | 0.013 | 20.91        | 0.123        | < 30          |       |            |       |             |
| 2437            |   | 11.69         | 0.015 | 21.16        | 0.131        | < 30          |       |            |       |             |
| 2452            |   | 10.79         | 0.012 | 20.54        | 0.113        | < 30          |       |            |       |             |
| 2437            | 54M   | 11.81         | 0.015 | <b>21.23</b> | <b>0.133</b> | < 30          |       |            |       |             |
| 2437            | 81M   | 11.74         | 0.015 | 21.20        | 0.132        | < 30          |       |            |       |             |
| 2437            | 108M  | 11.68         | 0.015 | 21.15        | 0.130        | < 30          |       |            |       |             |
| 2437            | 162M  | 11.65         | 0.015 | 21.14        | 0.130        | < 30          |       |            |       |             |
| 2437            | 216M  | 11.57         | 0.014 | 21.11        | 0.129        | < 30          |       |            |       |             |
| 2437            | 243M  | 11.51         | 0.014 | 21.07        | 0.128        | < 30          |       |            |       |             |
| 2437            | 270M  | 11.43         | 0.014 | 21.04        | 0.127        | < 30          |       |            |       |             |


## 7 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

### 7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

### 7.2. Test Setup

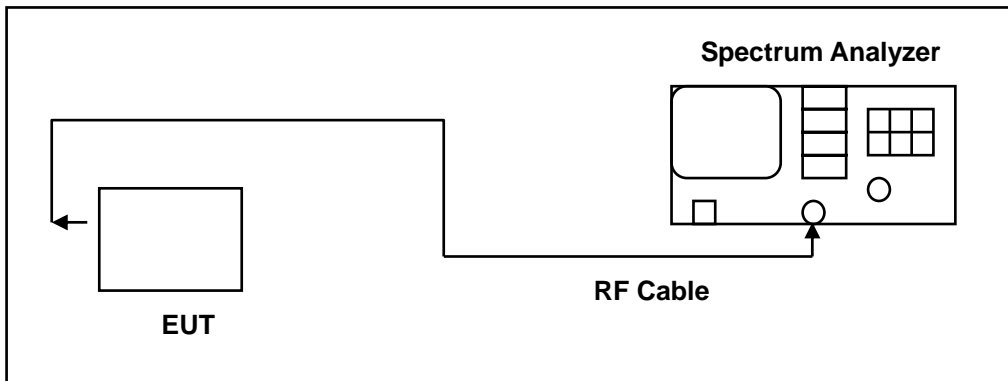

### 7.3. Test Instruments

| Equipment         | Manufacturer | Model Number | Serial Number | Cal. Date  | Remark |
|-------------------|--------------|--------------|---------------|------------|--------|
| Spectrum Analyzer | Agilent      | E4445A       | MY45300744    | 12/19/2012 | (2)    |
| Test Site         | ATL          | TE05         | TE05          | N.C.R.     | -----  |

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 7.4. Test Procedure

The EUT was setup to ANSI C63.4:2014; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

99 % Occupied Bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

**7.5. Test Result**

| Model Number    | AC785S-500                                   |       |                               |           |                              |
|-----------------|--|-------|-------------------------------|-----------|------------------------------|
| Test Item       | 6dB RF Bandwidth and 99 % Occupied Bandwidth |       |                               |           |                              |
| Test Mode       | Mode 2: IEEE 802.11b Link Mode               |       |                               |           |                              |
| Date of Test    | 09/18/2014                                   |       |                               | Test Site | TE05                         |
| Frequency (MHz) | 6dB RF Bandwidth (MHz)                       |       | 99 % Occupied Bandwidth (MHz) |           | 6dB RF Bandwidth Limit (MHz) |
|                 | Ant-1  | Ant-2 | Ant-1                         | Ant-2     |                              |
| 2412            | 7.213  | 7.613 | 12.7575                       | 12.1987   | > 0.500                      |
| 2437            | 7.129  | 7.178 | 12.4242                       | 12.1480   | > 0.500                      |
| 2462            | 6.640  | 6.690 | 12.1794                       | 11.8417   | > 0.500                      |

| Model Number    | AC785S-500                                   |        |                               |           |                              |
|-----------------|--|--------|-------------------------------|-----------|------------------------------|
| Test Item       | 6dB RF Bandwidth and 99 % Occupied Bandwidth |        |                               |           |                              |
| Test Mode       | Mode 3: IEEE 802.11g Link Mode               |        |                               |           |                              |
| Date of Test    | 09/18/2014                                   |        |                               | Test Site | TE05                         |
| Frequency (MHz) | 6dB RF Bandwidth (MHz)                       |        | 99 % Occupied Bandwidth (MHz) |           | 6dB RF Bandwidth Limit (MHz) |
|                 | Ant-1  | Ant-2  | Ant-1                         | Ant-2     |                              |
| 2412            | 16.439                                       | 16.437 | 17.3891                       | 16.9723   | > 0.500                      |
| 2437            | 16.431                                       | 16.157 | 17.4936                       | 16.9545   | > 0.500                      |
| 2462            | 15.767                                       | 15.788 | 17.1597                       | 16.8008   | > 0.500                      |

| Model Number    | AC785S-500                                   |        |                               |           |                              |
|-----------------|--|--------|-------------------------------|-----------|------------------------------|
| Test Item       | 6dB RF Bandwidth and 99 % Occupied Bandwidth |        |                               |           |                              |
| Test Mode       | Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode  |        |                               |           |                              |
| Date of Test    | 09/18/2014                                   |        |                               | Test Site | TE05                         |
| Frequency (MHz) | 6dB RF Bandwidth (MHz)                       |        | 99 % Occupied Bandwidth (MHz) |           | 6dB RF Bandwidth Limit (MHz) |
|                 | Ant-1  | Ant-2  | Ant-1                         | Ant-2     |                              |
| 2412            | 17.756                                       | 17.694 | 18.2575                       | 18.2135   | > 0.500                      |
| 2437            | 17.743                                       | 16.470 | 18.2237                       | 18.1315   | > 0.500                      |
| 2462            | 17.666                                       | 16.413 | 18.0631                       | 18.0214   | > 0.500                      |

| Model Number    | AC785S-500                                   |        |                               |           |                              |
|-----------------|--|--------|-------------------------------|-----------|------------------------------|
| Test Item       | 6dB RF Bandwidth and 99 % Occupied Bandwidth |        |                               |           |                              |
| Test Mode       | Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode  |        |                               |           |                              |
| Date of Test    | 09/18/2014                                   |        |                               | Test Site | TE05                         |
| Frequency (MHz) | 6dB RF Bandwidth (MHz)                       |        | 99 % Occupied Bandwidth (MHz) |           | 6dB RF Bandwidth Limit (MHz) |
|                 | Ant-1  | Ant-2  | Ant-1                         | Ant-2     |                              |
| 2422            | 35.122                                       | 35.213 | 36.8144                       | 36.7834   | > 0.500                      |
| 2437            | 35.523                                       | 35.805 | 37.2082                       | 37.1947   | > 0.500                      |
| 2452            | 35.140                                       | 35.482 | 37.1018                       | 37.3469   | > 0.500                      |

**7.6. Test Graphs**

6dB RF Bandwidth

| Mode 2: IEEE 802.11b Link Mode _Ant-1 |   |
|---------------------------------------|---|
| 2412                                  | <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 12.6553 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -52.136 kHz</p> <p>x dB Bandwidth 7.213 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |
| 2437                                  | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 12.3905 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -237.471 kHz</p> <p>x dB Bandwidth 7.129 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| 2462                                  | <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 11.9771 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -447.563 kHz</p> <p>x dB Bandwidth 6.640 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |

Mode 2: IEEE 802.11b Link Mode\_Ant-2

|             |   |
|-------------|---|
| <p>2412</p> | <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.412 GHz Span 30 MHz<br/>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 12.4150 MHz</b></p> <p>Occ BW % Pwr 99.00 %<br/>x dB -6.00 dB</p> <p>Transmit Freq Error -94.192 kHz<br/>x dB Bandwidth 7.613 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz<br/>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |
| <p>2437</p> | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.437 GHz Span 30 MHz<br/>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 12.1044 MHz</b></p> <p>Occ BW % Pwr 99.00 %<br/>x dB -6.00 dB</p> <p>Transmit Freq Error -263.280 kHz<br/>x dB Bandwidth 7.178 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz<br/>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| <p>2462</p> | <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.462 GHz Span 30 MHz<br/>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 11.5934 MHz</b></p> <p>Occ BW % Pwr 99.00 %<br/>x dB -6.00 dB</p> <p>Transmit Freq Error -459.338 kHz<br/>x dB Bandwidth 6.690 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz<br/>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |

Mode 3: IEEE 802.11g Link Mode\_Ant-1

|             |  |
|-------------|--|
| <p>2412</p> | <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.412 GHz Span 30 MHz<br/>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 16.6343 MHz</b></p> <p>Occ BW % Pwr 99.00 %<br/>x dB -6.00 dB</p> <p>Transmit Freq Error -11.265 kHz<br/>x dB Bandwidth 16.439 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz<br/>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |
| <p>2437</p> | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.437 GHz Span 30 MHz<br/>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 16.7089 MHz</b></p> <p>Occ BW % Pwr 99.00 %<br/>x dB -6.00 dB</p> <p>Transmit Freq Error -161.219 kHz<br/>x dB Bandwidth 16.431 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz<br/>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| <p>2462</p> | <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.462 GHz Span 30 MHz<br/>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 16.5275 MHz</b></p> <p>Occ BW % Pwr 99.00 %<br/>x dB -6.00 dB</p> <p>Transmit Freq Error -111.618 kHz<br/>x dB Bandwidth 15.767 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz<br/>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |

Mode 3: IEEE 802.11g Link Mode\_Ant-2




|             |   |
|-------------|---|
| <p>2412</p> | <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 16.5437 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -7.644 kHz</p> <p>x dB Bandwidth 16.437 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |
| <p>2437</p> | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 16.5420 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -81.082 kHz</p> <p>x dB Bandwidth 16.157 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| <p>2462</p> | <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 16.4763 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -59.872 kHz</p> <p>x dB Bandwidth 15.788 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |



Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-1

|             |  |
|-------------|--|
| <p>2412</p> | <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 17.779 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 10.973 kHz x dB Bandwidth 17.756 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>   |
| <p>2437</p> | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 17.745 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -61.898 kHz x dB Bandwidth 17.743 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |
| <p>2462</p> | <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 17.6948 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -66.823 kHz x dB Bandwidth 17.666 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-2
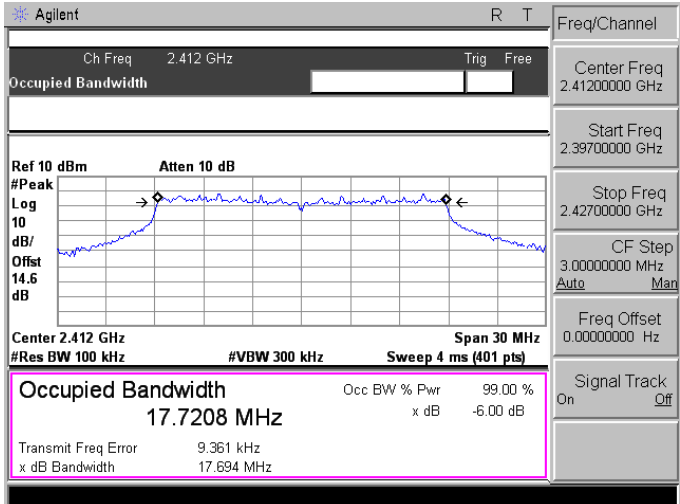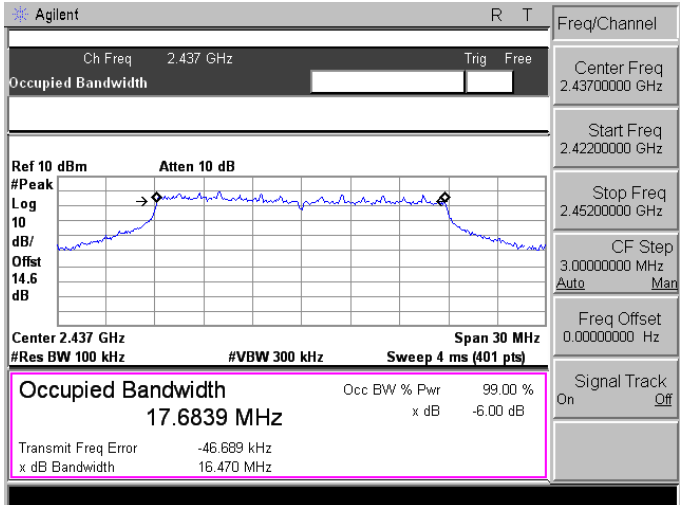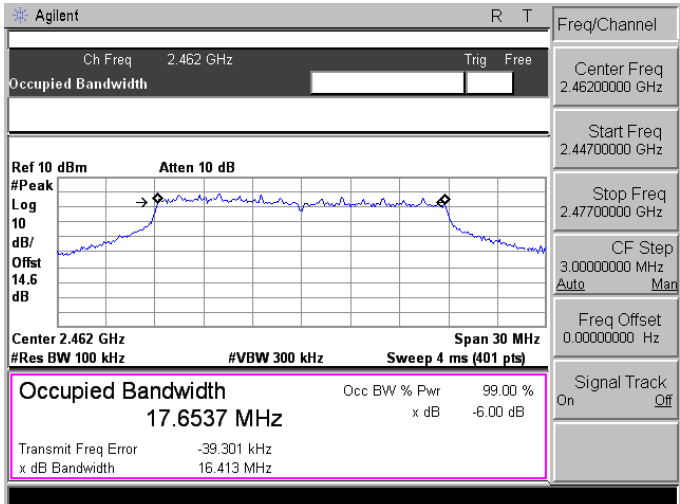
|             |  |
|-------------|--|
| <p>2412</p> |    |
| <p>2437</p> |   |
| <p>2462</p> |  |

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-1

|             |   |
|-------------|---|
| <p>2422</p> | <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.422 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p><b>Occupied Bandwidth 35.8495 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -107.226 kHz</p> <p>x dB Bandwidth 35.122 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.44700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| <p>2437</p> | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.437 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p><b>Occupied Bandwidth 36.0351 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 69.368 kHz</p> <p>x dB Bandwidth 35.523 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>   |
| <p>2452</p> | <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.452 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p><b>Occupied Bandwidth 35.8677 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -14.777 kHz</p> <p>x dB Bandwidth 35.140 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-2

|             |  |
|-------------|--|
| <p>2422</p> | <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offset</p> <p>14.6 dB</p> <p>Center 2.422 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p><b>Occupied Bandwidth 35.8734 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -44.965 kHz</p> <p>x dB Bandwidth 35.213 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.44700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| <p>2437</p> | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offset</p> <p>14.6 dB</p> <p>Center 2.437 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p><b>Occupied Bandwidth 35.9896 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 80.628 kHz</p> <p>x dB Bandwidth 35.805 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |
| <p>2452</p> | <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offset</p> <p>14.6 dB</p> <p>Center 2.452 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p><b>Occupied Bandwidth 35.9265 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -73.271 kHz</p> <p>x dB Bandwidth 35.482 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |

99 % Occupied Bandwidth

| Mode 2: IEEE 802.11b Link Mode_Ant-1 |  |
|--------------------------------------|--|
| 2412                                 | <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.412 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 12.7575 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -21.215 kHz</p> <p>x dB Bandwidth 8.155 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.4120000 GHz</p> <p>Start Freq 2.3995000 GHz</p> <p>Stop Freq 2.4245000 GHz</p> <p>CF Step 2.5000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p>  |
| 2437                                 | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.437 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 12.4242 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -234.581 kHz</p> <p>x dB Bandwidth 7.689 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.4370000 GHz</p> <p>Start Freq 2.4245000 GHz</p> <p>Stop Freq 2.4495000 GHz</p> <p>CF Step 2.5000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> |
| 2462                                 | <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 14.6 dB</p> <p>Center 2.462 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 12.1794 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -355.257 kHz</p> <p>x dB Bandwidth 7.228 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.4620000 GHz</p> <p>Start Freq 2.4495000 GHz</p> <p>Stop Freq 2.4745000 GHz</p> <p>CF Step 2.5000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> |

Mode 2: IEEE 802.11b Link Mode\_Ant-2

|             |  |
|-------------|--|
| <p>2412</p> |  |
| <p>2437</p> |  |
| <p>2462</p> |  |

Mode 3: IEEE 802.11g Link Mode\_Ant-1

|             |  |
|-------------|--|
| <p>2412</p> |  |
| <p>2437</p> |  |
| <p>2462</p> |  |

Mode 3: IEEE 802.11g Link Mode\_Ant-2

|             |   |
|-------------|---|
| <p>2412</p> | <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offist</p> <p>Center 2.412 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 16.9723 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 31.785 kHz</p> <p>x dB Bandwidth 16.534 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39950000 GHz</p> <p>Stop Freq 2.42450000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>   |
| <p>2437</p> | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offist</p> <p>Center 2.437 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 16.9545 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -161.209 kHz</p> <p>x dB Bandwidth 16.442 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42450000 GHz</p> <p>Stop Freq 2.44950000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| <p>2462</p> | <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offist</p> <p>Center 2.462 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 16.8008 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -98.221 kHz</p> <p>x dB Bandwidth 16.398 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44950000 GHz</p> <p>Stop Freq 2.47450000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |



Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-1

|             |  |
|-------------|--|
| <p>2412</p> | <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offset</p> <p>Center 2.412 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>18.2575 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error 50.760 kHz</p> <p>x dB Bandwidth 17.915 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39950000 GHz</p> <p>Stop Freq 2.42450000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>   |
| <p>2437</p> | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offset</p> <p>Center 2.437 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>18.2237 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -144.576 kHz</p> <p>x dB Bandwidth 17.751 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42450000 GHz</p> <p>Stop Freq 2.44950000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| <p>2462</p> | <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offset</p> <p>Center 2.462 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>18.0631 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -116.303 kHz</p> <p>x dB Bandwidth 17.746 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44950000 GHz</p> <p>Stop Freq 2.47450000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-2

|             |  |
|-------------|--|
| <p>2412</p> | <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/ Offset 14.6 dB</p> <p>Center 2.412 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 18.2135 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 114.274 kHz</p> <p>x dB Bandwidth 17.789 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39950000 GHz</p> <p>Stop Freq 2.42450000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| <p>2437</p> | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/ Offset 14.6 dB</p> <p>Center 2.437 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 18.1315 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -62.788 kHz</p> <p>x dB Bandwidth 17.649 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42450000 GHz</p> <p>Stop Freq 2.44950000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| <p>2462</p> | <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/ Offset 14.6 dB</p> <p>Center 2.462 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth 18.0214 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -1.405 kHz</p> <p>x dB Bandwidth 17.330 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44950000 GHz</p> <p>Stop Freq 2.47450000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-1

|             |  |
|-------------|--|
| <p>2422</p> | <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offset</p> <p>Center 2.422 GHz Span 50 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>36.8144 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -186.813 kHz</p> <p>x dB Bandwidth 35.614 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.44700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| <p>2437</p> | <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offset</p> <p>Center 2.437 GHz Span 50 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>37.2082 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error 247.689 kHz</p> <p>x dB Bandwidth 36.596 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |
| <p>2452</p> | <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/Offset</p> <p>Center 2.452 GHz Span 50 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>37.1018 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -28.044 kHz</p> <p>x dB Bandwidth 35.691 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-2


|             |  |
|-------------|--|
| <p>2422</p> |  |
| <p>2437</p> |  |
| <p>2452</p> |  |

## 8 Maximum Power Density Measurement

### 8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.2. Test Setup

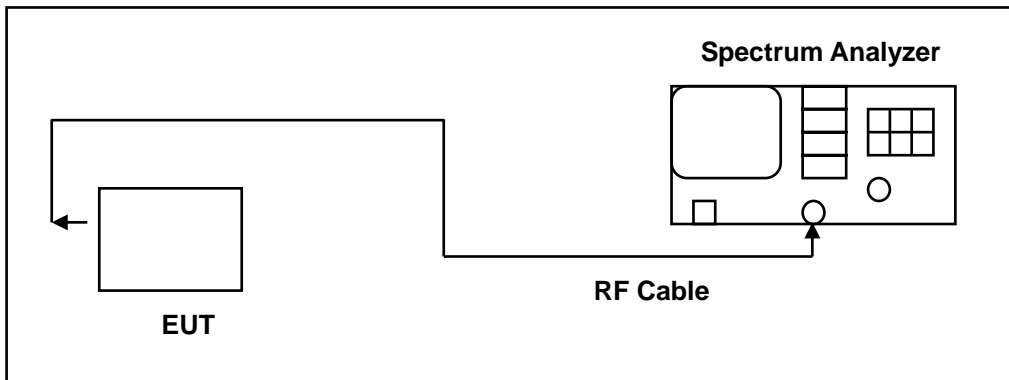

### 8.3. Test Instruments

| Equipment         | Manufacturer | Model Number | Serial Number | Cal. Date  | Remark |
|-------------------|--------------|--------------|---------------|------------|--------|
| Spectrum Analyzer | Agilent      | E4445A       | MY45300744    | 12/19/2012 | (2)    |
| Test Site         | ATL          | TE05         | TE05          | N.C.R.     | -----  |

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 8.4. Test Procedure

The EUT was setup to ANSI C63.4:2014; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**8.5. Test Result**

| Model Number    | AC785S-500                     |        |           |             |
|-----------------|--------------------------------|--------|-----------|-------------|
| Test Item       | Maximum Power Density          |        |           |             |
| Test Mode       | Mode 2: IEEE 802.11b Link Mode |        |           |             |
| Date of Test    | 09/19/2014                     |        | Test Site | TE05        |
| Frequency (MHz) | Reading (dBm/3KHz)             |        |           | Limit (dBm) |
|                 | Ant-1                          | Ant-2  | Ant-1+2   |             |
| 2412            | -18.41                         | -16.37 | -14.26    | < 8         |
| 2437            | -16.96                         | -16.31 | -13.61    | < 8         |
| 2462            | -16.42                         | -15.77 | -13.07    | < 8         |

| Model Number    | AC785S-500                     |        |           |             |
|-----------------|--------------------------------|--------|-----------|-------------|
| Test Item       | Maximum Power Density          |        |           |             |
| Test Mode       | Mode 3: IEEE 802.11g Link Mode |        |           |             |
| Date of Test    | 09/19/2014                     |        | Test Site | TE05        |
| Frequency (MHz) | Reading (dBm/3KHz)             |        |           | Limit (dBm) |
|                 | Ant-1                          | Ant-2  | Ant-1+2   |             |
| 2412            | -18.52                         | -18.06 | -15.27    | < 8         |
| 2437            | -17.30                         | -17.82 | -14.54    | < 8         |
| 2462            | -17.76                         | -19.48 | -15.53    | < 8         |

| Model Number    | AC785S-500                                  |        |           |             |
|-----------------|---|--------|-----------|-------------|
| Test Item       | Maximum Power Density                       |        |           |             |
| Test Mode       | Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode |        |           |             |
| Date of Test    | 09/19/2014                                  |        | Test Site | TE05        |
| Frequency (MHz) | Reading (dBm/3KHz)                          |        |           | Limit (dBm) |
|                 | Ant-1                                       | Ant-2  | Ant-1+2   |             |
| 2412            | -17.83                                      | -17.54 | -14.67    | < 8         |
| 2437            | -17.28                                      | -15.96 | -13.56    | < 8         |
| 2462            | -17.76                                      | -17.20 | -14.46    | < 8         |

| Model Number    | AC785S-500                                  |           |         |             |
|-----------------|---|-----------|---------|-------------|
| Test Item       | Maximum Power Density                       |           |         |             |
| Test Mode       | Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode |           |         |             |
| Date of Test    | 09/19/2014                                  | Test Site | TE05    |             |
| Frequency (MHz) | Reading (dBm/3KHz)                          |           |         | Limit (dBm) |
|                 | Ant-1                                       | Ant-2     | Ant-1+2 |             |
| 2422            | -17.47                                      | -13.49    | -12.03  | < 8         |
| 2437            | -17.72                                      | -14.46    | -12.78  | < 8         |
| 2452            | -19.30                                      | -12.85    | -11.96  | < 8         |

**8.6. Test Graphs**

| Mode 2: IEEE 802.11b Link Mode_Ant1 |   |
|-------------------------------------|---|
| 2412                                | <p>Agilent R T<br/>           Ref 10 dBm Atten 10 dB Mkr1 2.41134 GHz<br/>           Peak Log 10 dB/Offset 14.6 dB<br/>           M1 S2 S3 FC AA<br/>           Center 2.412 GHz Span 12 MHz<br/>           #Res BW 3 kHz #VBW 10 kHz Sweep 1.372 s (401 pts)</p> <p>Freq/Channel<br/>           Center Freq 2.41200000 GHz<br/>           Start Freq 2.40600000 GHz<br/>           Stop Freq 2.41800000 GHz<br/>           CF Step 1.20000000 MHz Auto Man<br/>           Freq Offset 0.00000000 Hz<br/>           Signal Track On Off</p> |
| 2437                                | <p>Agilent R T<br/>           Ref 10 dBm Atten 10 dB Mkr1 2.43775 GHz<br/>           Peak Log 10 dB/Offset 14.6 dB<br/>           M1 S2 S3 FC AA<br/>           Center 2.437 GHz Span 12 MHz<br/>           #Res BW 3 kHz #VBW 10 kHz Sweep 1.372 s (401 pts)</p> <p>Freq/Channel<br/>           Center Freq 2.43700000 GHz<br/>           Start Freq 2.43100000 GHz<br/>           Stop Freq 2.44300000 GHz<br/>           CF Step 1.20000000 MHz Auto Man<br/>           Freq Offset 0.00000000 Hz<br/>           Signal Track On Off</p> |
| 2462                                | <p>Agilent R T<br/>           Ref 10 dBm Atten 10 dB Mkr1 2.46275 GHz<br/>           Peak Log 10 dB/Offset 14.6 dB<br/>           M1 S2 S3 FC AA<br/>           Center 2.462 GHz Span 12 MHz<br/>           #Res BW 3 kHz #VBW 10 kHz Sweep 1.372 s (401 pts)</p> <p>Freq/Channel<br/>           Center Freq 2.46200000 GHz<br/>           Start Freq 2.45600000 GHz<br/>           Stop Freq 2.46800000 GHz<br/>           CF Step 1.20000000 MHz Auto Man<br/>           Freq Offset 0.00000000 Hz<br/>           Signal Track On Off</p> |



Mode 2: IEEE 802.11b Link Mode\_Ant2

|             |  |
|-------------|--|
| <p>2412</p> |  |
| <p>2437</p> |  |
| <p>2462</p> |  |

Mode 3: IEEE 802.11g Link Mode\_Ant-1

| <p>2412</p>  | <p>Agilent R T<br/>           Ref 10 dBm Atten 10 dB Mkr1 2.4053850 GHz<br/>           Peak Log 10 dB/Offset 14.6 dB<br/>           M1 S2 S3 FC AA<br/>           Center 2.412 GHz Span 27 MHz<br/>           #Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts)</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.41200000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.39850000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.42550000 GHz</td> </tr> <tr> <td>CF Step</td> <td>2.70000000 MHz<br/>Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table> | Freq/Channel |  | Center Freq | 2.41200000 GHz | Start Freq | 2.39850000 GHz | Stop Freq | 2.42550000 GHz | CF Step | 2.70000000 MHz<br>Auto Man | Freq Offset | 0.00000000 Hz | Signal Track | On Off |
|--------------|--|--------------|--|-------------|----------------|------------|----------------|-----------|----------------|---------|----------------------------|-------------|---------------|--------------|--------|
| Freq/Channel |  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Center Freq  | 2.41200000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Start Freq   | 2.39850000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Stop Freq    | 2.42550000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| CF Step      | 2.70000000 MHz<br>Auto Man   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Freq Offset  | 0.00000000 Hz  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Signal Track | On Off   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| <p>2437</p>  | <p>Agilent R T<br/>           Ref 10 dBm Atten 10 dB Mkr1 2.4301150 GHz<br/>           Peak Log 10 dB/Offset 14.6 dB<br/>           M1 S2 S3 FC AA<br/>           Center 2.437 GHz Span 27 MHz<br/>           #Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts)</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.43700000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.42350000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.45050000 GHz</td> </tr> <tr> <td>CF Step</td> <td>2.70000000 MHz<br/>Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table> | Freq/Channel |  | Center Freq | 2.43700000 GHz | Start Freq | 2.42350000 GHz | Stop Freq | 2.45050000 GHz | CF Step | 2.70000000 MHz<br>Auto Man | Freq Offset | 0.00000000 Hz | Signal Track | On Off |
| Freq/Channel |  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Center Freq  | 2.43700000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Start Freq   | 2.42350000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Stop Freq    | 2.45050000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| CF Step      | 2.70000000 MHz<br>Auto Man   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Freq Offset  | 0.00000000 Hz  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Signal Track | On Off   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| <p>2462</p>  | <p>Agilent R T<br/>           Ref 10 dBm Atten 10 dB Mkr1 2.4570050 GHz<br/>           Peak Log 10 dB/Offset 14.6 dB<br/>           M1 S2 S3 FC AA<br/>           Center 2.462 GHz Span 27 MHz<br/>           #Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts)</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.46200000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.44850000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.47550000 GHz</td> </tr> <tr> <td>CF Step</td> <td>2.70000000 MHz<br/>Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table> | Freq/Channel |  | Center Freq | 2.46200000 GHz | Start Freq | 2.44850000 GHz | Stop Freq | 2.47550000 GHz | CF Step | 2.70000000 MHz<br>Auto Man | Freq Offset | 0.00000000 Hz | Signal Track | On Off |
| Freq/Channel |  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Center Freq  | 2.46200000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Start Freq   | 2.44850000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Stop Freq    | 2.47550000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| CF Step      | 2.70000000 MHz<br>Auto Man   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Freq Offset  | 0.00000000 Hz  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Signal Track | On Off   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |




Mode 3: IEEE 802.11g Link Mode\_Ant-2

|             |  |
|-------------|--|
| <p>2412</p> | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.4194925 GHz -18.06 dBm<br/>         Peak Log 10 dB/Offset 14.6 dB<br/>         M1 S2 S3 FC AA<br/>         Center 2.412 GHz Span 27 MHz<br/>         #Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts)</p> <p>Freq/Channel<br/>         Center Freq 2.41200000 GHz<br/>         Start Freq 2.39850000 GHz<br/>         Stop Freq 2.42550000 GHz<br/>         CF Step 2.70000000 MHz Auto Man<br/>         Freq Offset 0.00000000 Hz<br/>         Signal Track On Off</p> |
| <p>2437</p> | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.4323425 GHz -17.82 dBm<br/>         Peak Log 10 dB/Offset 14.6 dB<br/>         M1 S2 S3 FC AA<br/>         Center 2.437 GHz Span 27 MHz<br/>         #Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts)</p> <p>Freq/Channel<br/>         Center Freq 2.43700000 GHz<br/>         Start Freq 2.42350000 GHz<br/>         Stop Freq 2.45050000 GHz<br/>         CF Step 2.70000000 MHz Auto Man<br/>         Freq Offset 0.00000000 Hz<br/>         Signal Track On Off</p> |
| <p>2462</p> | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.4554525 GHz -19.48 dBm<br/>         Peak Log 10 dB/Offset 14.6 dB<br/>         M1 S2 S3 FC AA<br/>         Center 2.462 GHz Span 27 MHz<br/>         #Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts)</p> <p>Freq/Channel<br/>         Center Freq 2.46200000 GHz<br/>         Start Freq 2.44850000 GHz<br/>         Stop Freq 2.47550000 GHz<br/>         CF Step 2.70000000 MHz Auto Man<br/>         Freq Offset 0.00000000 Hz<br/>         Signal Track On Off</p> |

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-1

|             |  |
|-------------|--|
| <p>2412</p> |  |
| <p>2437</p> |  |
| <p>2462</p> |  |

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-2
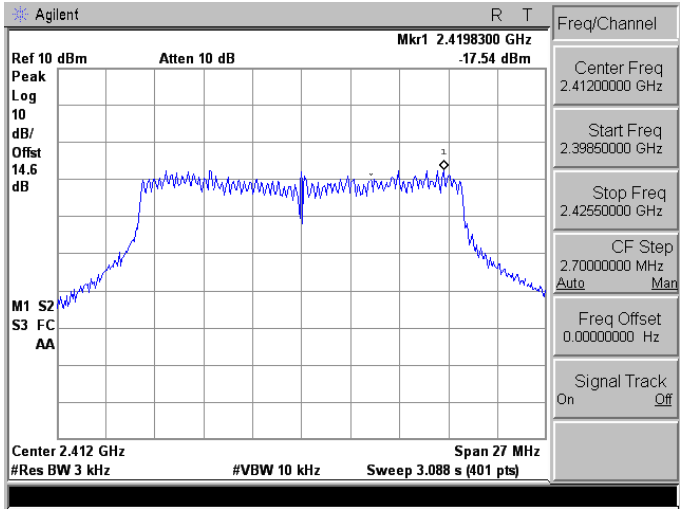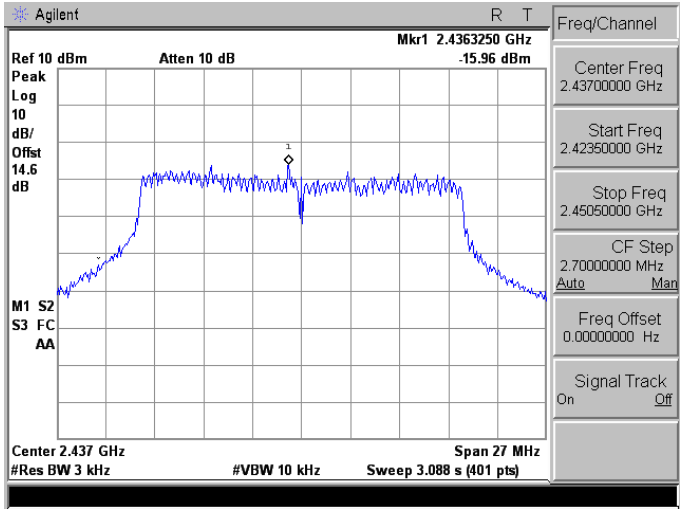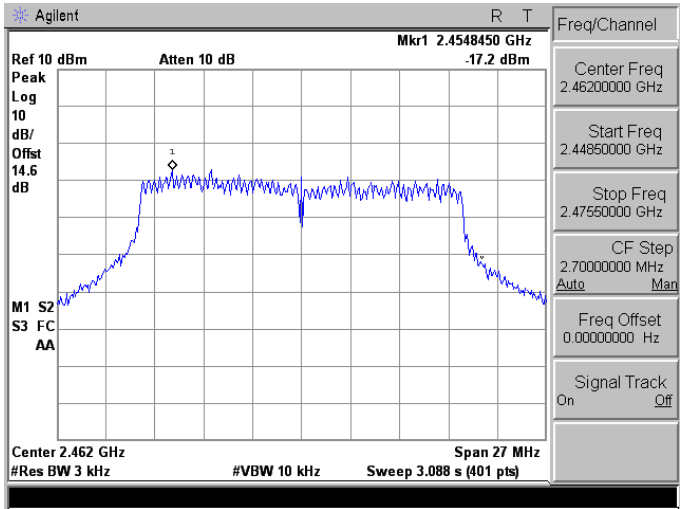
|             |  |
|-------------|--|
| <p>2412</p> |    |
| <p>2437</p> |   |
| <p>2462</p> |  |

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-1

|             |  |
|-------------|--|
| <p>2422</p> |  |
| <p>2437</p> |  |
| <p>2452</p> |  |

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-2


|             |  |
|-------------|--|
| <p>2422</p> | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.422000 GHz<br/>         Peak Log 10 dB/Offset 14.6 dB<br/>         M1 S2 S3 FC AA<br/>         Center 2.422 GHz Span 54 MHz<br/>         #Res BW 3 kHz #VBW 10 kHz Sweep 6.176 s (401 pts)</p> <p>Freq/Channel<br/>         Center Freq 2.42200000 GHz<br/>         Start Freq 2.39500000 GHz<br/>         Stop Freq 2.44900000 GHz<br/>         CF Step 5.40000000 MHz Auto Man<br/>         Freq Offset 0.00000000 Hz<br/>         Signal Track On Off</p> |
| <p>2437</p> | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.423905 GHz<br/>         Peak Log 10 dB/Offset 14.6 dB<br/>         M1 S2 S3 FC AA<br/>         Center 2.437 GHz Span 54 MHz<br/>         #Res BW 3 kHz #VBW 10 kHz Sweep 6.176 s (401 pts)</p> <p>Freq/Channel<br/>         Center Freq 2.43700000 GHz<br/>         Start Freq 2.41000000 GHz<br/>         Stop Freq 2.46400000 GHz<br/>         CF Step 5.40000000 MHz Auto Man<br/>         Freq Offset 0.00000000 Hz<br/>         Signal Track On Off</p> |
| <p>2452</p> | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.452000 GHz<br/>         Peak Log 10 dB/Offset 14.6 dB<br/>         M1 S2 S3 FC AA<br/>         Center 2.452 GHz Span 54 MHz<br/>         #Res BW 3 kHz #VBW 10 kHz Sweep 6.176 s (401 pts)</p> <p>Freq/Channel<br/>         Center Freq 2.45200000 GHz<br/>         Start Freq 2.42500000 GHz<br/>         Stop Freq 2.47900000 GHz<br/>         CF Step 5.40000000 MHz Auto Man<br/>         Freq Offset 0.00000000 Hz<br/>         Signal Track On Off</p> |

## 9 Out of Band Conducted Emissions Measurement

### 9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 9.2. Test Setup

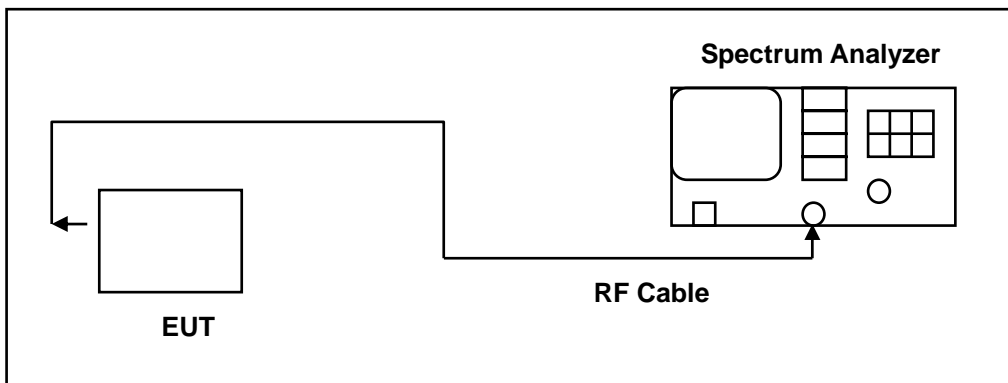

### 9.3. Test Instruments

| Equipment         | Manufacturer | Model Number | Serial Number | Cal. Date  | Remark |
|-------------------|--------------|--------------|---------------|------------|--------|
| Spectrum Analyzer | Agilent      | E4445A       | MY45300744    | 12/19/2012 | (2)    |
| Spectrum Analyzer | Agilent      | E4408B       | MY45107753    | 07/24/2014 | (1)    |
| Test Site         | ATL          | TE05         | TE05          | N.C.R.     | -----  |

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels.



**9.5. Test Graphs**




**Reference level**

| Mode 2: IEEE 802.11b Link Mode_Ant-1 |  |
|--------------------------------------|--|
| 2412                                 |  |
| 2437                                 |  |
| 2462                                 |  |

Mode 2: IEEE 802.11b Link Mode\_Ant-2

| <p>2412</p>  | <p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.41146 GHz<br/>-1.874 dBm</p> <p>Peak Log 10 dB/Offset 14.6 dB</p> <p>M1 S2<br/>S3 FC<br/>AA</p> <p>Center 2.412 GHz Span 12 MHz<br/>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.41200000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.40600000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.41800000 GHz</td> </tr> <tr> <td>CF Step</td> <td>1.20000000 MHz<br/>Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table> | Freq/Channel |  | Center Freq | 2.41200000 GHz | Start Freq | 2.40600000 GHz | Stop Freq | 2.41800000 GHz | CF Step | 1.20000000 MHz<br>Auto Man | Freq Offset | 0.00000000 Hz | Signal Track | On Off |
|--------------|--|--------------|--|-------------|----------------|------------|----------------|-----------|----------------|---------|----------------------------|-------------|---------------|--------------|--------|
| Freq/Channel |  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Center Freq  | 2.41200000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Start Freq   | 2.40600000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Stop Freq    | 2.41800000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| CF Step      | 1.20000000 MHz<br>Auto Man   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Freq Offset  | 0.00000000 Hz  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Signal Track | On Off   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| <p>2437</p>  | <p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.43646 GHz<br/>-1.798 dBm</p> <p>Peak Log 10 dB/Offset 14.6 dB</p> <p>M1 S2<br/>S3 FC<br/>AA</p> <p>Center 2.437 GHz Span 12 MHz<br/>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.43700000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.43100000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.44300000 GHz</td> </tr> <tr> <td>CF Step</td> <td>1.20000000 MHz<br/>Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table> | Freq/Channel |  | Center Freq | 2.43700000 GHz | Start Freq | 2.43100000 GHz | Stop Freq | 2.44300000 GHz | CF Step | 1.20000000 MHz<br>Auto Man | Freq Offset | 0.00000000 Hz | Signal Track | On Off |
| Freq/Channel |  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Center Freq  | 2.43700000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Start Freq   | 2.43100000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Stop Freq    | 2.44300000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| CF Step      | 1.20000000 MHz<br>Auto Man   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Freq Offset  | 0.00000000 Hz  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Signal Track | On Off   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| <p>2462</p>  | <p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.46146 GHz<br/>-2.202 dBm</p> <p>Peak Log 10 dB/Offset 14.6 dB</p> <p>M1 S2<br/>S3 FC<br/>AA</p> <p>Center 2.462 GHz Span 12 MHz<br/>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.46200000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.45600000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.46800000 GHz</td> </tr> <tr> <td>CF Step</td> <td>1.20000000 MHz<br/>Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table> | Freq/Channel |  | Center Freq | 2.46200000 GHz | Start Freq | 2.45600000 GHz | Stop Freq | 2.46800000 GHz | CF Step | 1.20000000 MHz<br>Auto Man | Freq Offset | 0.00000000 Hz | Signal Track | On Off |
| Freq/Channel |  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Center Freq  | 2.46200000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Start Freq   | 2.45600000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Stop Freq    | 2.46800000 GHz   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| CF Step      | 1.20000000 MHz<br>Auto Man   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Freq Offset  | 0.00000000 Hz  |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |
| Signal Track | On Off   |              |  |             |                |            |                |           |                |         |                            |             |               |              |        |

Mode 3: IEEE 802.11g Link Mode\_Ant-1
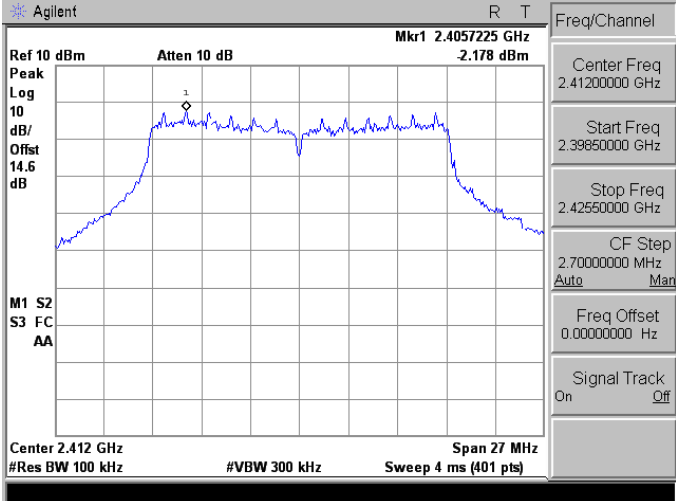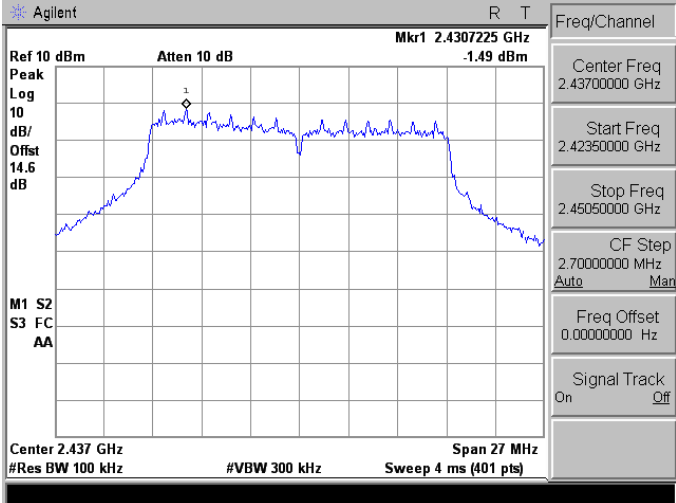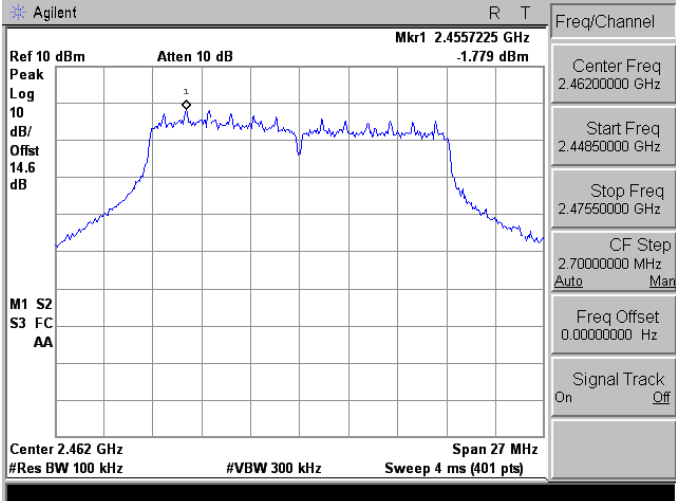
|             |   |
|-------------|---|
| <p>2412</p> |  <p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.4057225 GHz</p> <p>Peak Log 10 dB/Offset 14.6 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 27 MHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39850000 GHz</p> <p>Stop Freq 2.42550000 GHz</p> <p>CF Step 2.70000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>   |
| <p>2437</p> |  <p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.4307225 GHz</p> <p>Peak Log 10 dB/Offset 14.6 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 27 MHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42350000 GHz</p> <p>Stop Freq 2.45050000 GHz</p> <p>CF Step 2.70000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>  |
| <p>2462</p> |  <p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.4557225 GHz</p> <p>Peak Log 10 dB/Offset 14.6 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 27 MHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44850000 GHz</p> <p>Stop Freq 2.47550000 GHz</p> <p>CF Step 2.70000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |

Mode 3: IEEE 802.11g Link Mode\_Ant-2

|             |  |
|-------------|--|
| <p>2412</p> |  |
| <p>2437</p> |  |
| <p>2462</p> |  |

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-1

|             |  |
|-------------|--|
| <p>2412</p> |  |
| <p>2437</p> |  |
| <p>2462</p> |  |

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-2

|             |  |
|-------------|--|
| <p>2412</p> |  |
| <p>2437</p> |  |
| <p>2462</p> |  |

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-1

|             |  |
|-------------|--|
| <p>2422</p> |  |
| <p>2437</p> |  |
| <p>2452</p> |  |

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-2

|             |  |
|-------------|--|
| <p>2422</p> |  |
| <p>2437</p> |  |
| <p>2452</p> |  |



**Out of Band Conducted Emissions**

Mode 2: IEEE 802.11b Link Mode\_Ant-1

|             |  |
|-------------|--|
| <p>2412</p> |  |
| <p>2437</p> |  |
| <p>2462</p> |  |

Mode 2: IEEE 802.11b Link Mode\_Ant-2

|             |  |
|-------------|--|
| <p>2412</p> |  |
| <p>2437</p> |  |
| <p>2462</p> |  |

Mode 3: IEEE 802.11g Link Mode\_Ant-1

| 2412   | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.41 GHz 5.711 dBm<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI -22.2 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.41 GHz</td> <td>-5.711 dBm</td> </tr> </tbody> </table> </p> | Marker | Trace    | Type       | X Axis | Amplitude | 1 | (1) | Freq | 2.41 GHz | -5.711 dBm |
|--------|---|--------|----------|------------|--------|-----------|---|-----|------|----------|------------|
| Marker | Trace   | Type   | X Axis   | Amplitude  |        |           |   |     |      |          |            |
| 1      | (1)   | Freq   | 2.41 GHz | -5.711 dBm |        |           |   |     |      |          |            |
| 2437   | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.44 GHz 5.578 dBm<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI -21.5 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.44 GHz</td> <td>-5.578 dBm</td> </tr> </tbody> </table> </p> | Marker | Trace    | Type       | X Axis | Amplitude | 1 | (1) | Freq | 2.44 GHz | -5.578 dBm |
| Marker | Trace   | Type   | X Axis   | Amplitude  |        |           |   |     |      |          |            |
| 1      | (1)   | Freq   | 2.44 GHz | -5.578 dBm |        |           |   |     |      |          |            |
| 2462   | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.46 GHz 5.08 dBm<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI -21.8 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.46 GHz</td> <td>-5.08 dBm</td> </tr> </tbody> </table> </p>   | Marker | Trace    | Type       | X Axis | Amplitude | 1 | (1) | Freq | 2.46 GHz | -5.08 dBm  |
| Marker | Trace   | Type   | X Axis   | Amplitude  |        |           |   |     |      |          |            |
| 1      | (1)   | Freq   | 2.46 GHz | -5.08 dBm  |        |           |   |     |      |          |            |

Mode 3: IEEE 802.11g Link Mode\_Ant-2

| 2412   | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.41 GHz 5.285 dBm<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI 22.8 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.41 GHz</td> <td>-5.285 dBm</td> </tr> </tbody> </table> </p> | Marker | Trace    | Type       | X Axis | Amplitude | 1 | (1) | Freq | 2.41 GHz | -5.285 dBm |
|--------|--|--------|----------|------------|--------|-----------|---|-----|------|----------|------------|
| Marker | Trace  | Type   | X Axis   | Amplitude  |        |           |   |     |      |          |            |
| 1      | (1)  | Freq   | 2.41 GHz | -5.285 dBm |        |           |   |     |      |          |            |
| 2437   | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.44 GHz 4.096 dBm<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI 21.6 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.44 GHz</td> <td>-4.096 dBm</td> </tr> </tbody> </table> </p> | Marker | Trace    | Type       | X Axis | Amplitude | 1 | (1) | Freq | 2.44 GHz | -4.096 dBm |
| Marker | Trace  | Type   | X Axis   | Amplitude  |        |           |   |     |      |          |            |
| 1      | (1)  | Freq   | 2.44 GHz | -4.096 dBm |        |           |   |     |      |          |            |
| 2462   | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.46 GHz 5.816 dBm<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI 22.3 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.46 GHz</td> <td>-5.816 dBm</td> </tr> </tbody> </table> </p> | Marker | Trace    | Type       | X Axis | Amplitude | 1 | (1) | Freq | 2.46 GHz | -5.816 dBm |
| Marker | Trace  | Type   | X Axis   | Amplitude  |        |           |   |     |      |          |            |
| 1      | (1)  | Freq   | 2.46 GHz | -5.816 dBm |        |           |   |     |      |          |            |




Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-1

|      |  |
|------|--|
| 2412 |  |
| 2437 |  |
| 2462 |  |

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-2

|             |  |
|-------------|--|
| <p>2412</p> |  |
| <p>2437</p> |  |
| <p>2462</p> |  |

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-1
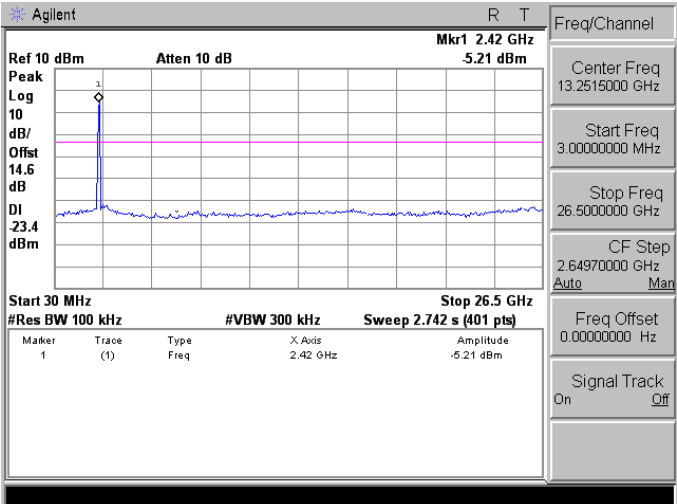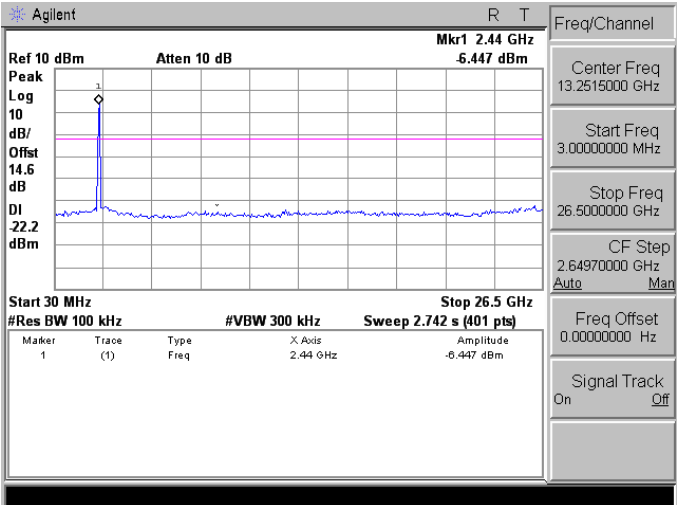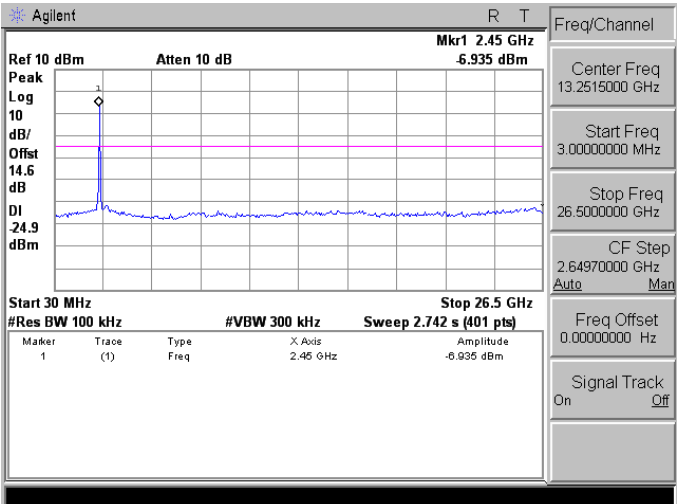
|      |  |
|------|--|
| 2422 |  <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.42 GHz<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI -23.4 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/>         Marker 1 Trace (1) Type Freq X Axis 2.42 GHz Amplitude -5.21 dBm<br/>         Freq/Channel: Center Freq 13.2515000 GHz, Start Freq 3.00000000 MHz, Stop Freq 26.5000000 GHz, CF Step 2.64970000 GHz, Freq Offset 0.00000000 Hz, Signal Track On</p>    |
| 2437 |  <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.44 GHz<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI -22.2 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/>         Marker 1 Trace (1) Type Freq X Axis 2.44 GHz Amplitude -6.447 dBm<br/>         Freq/Channel: Center Freq 13.2515000 GHz, Start Freq 3.00000000 MHz, Stop Freq 26.5000000 GHz, CF Step 2.64970000 GHz, Freq Offset 0.00000000 Hz, Signal Track On</p>  |
| 2452 |  <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.45 GHz<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI -24.9 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/>         Marker 1 Trace (1) Type Freq X Axis 2.45 GHz Amplitude -6.935 dBm<br/>         Freq/Channel: Center Freq 13.2515000 GHz, Start Freq 3.00000000 MHz, Stop Freq 26.5000000 GHz, CF Step 2.64970000 GHz, Freq Offset 0.00000000 Hz, Signal Track On</p> |

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-2


| 2422   | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.42 GHz 4.674 dBm<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI 23.1 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.42 GHz</td> <td>-4.674 dBm</td> </tr> </tbody> </table> </p>      | Marker | Trace    | Type       | X Axis | Amplitude | 1 | (1) | Freq | 2.42 GHz | -4.674 dBm |
|--------|---|--------|----------|------------|--------|-----------|---|-----|------|----------|------------|
| Marker | Trace   | Type   | X Axis   | Amplitude  |        |           |   |     |      |          |            |
| 1      | (1)   | Freq   | 2.42 GHz | -4.674 dBm |        |           |   |     |      |          |            |
| 2437   | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.44 GHz 5.492 dBm<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI 23.5 dBm<br/>         Start 30 MHz Stop 26.5 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.44 GHz</td> <td>-5.492 dBm</td> </tr> </tbody> </table> </p>      | Marker | Trace    | Type       | X Axis | Amplitude | 1 | (1) | Freq | 2.44 GHz | -5.492 dBm |
| Marker | Trace   | Type   | X Axis   | Amplitude  |        |           |   |     |      |          |            |
| 1      | (1)   | Freq   | 2.44 GHz | -5.492 dBm |        |           |   |     |      |          |            |
| 2452   | <p>Agilent R T<br/>         Ref 10 dBm Atten 10 dB Mkr1 2.45 GHz 4.551 dBm<br/>         Peak Log 10<br/>         dB/Offst 14.6 dB<br/>         DI 24.0 dBm<br/>         Center 13.27 GHz Span 26.47 GHz<br/>         #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)<br/> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.45 GHz</td> <td>-4.551 dBm</td> </tr> </tbody> </table> </p> | Marker | Trace    | Type       | X Axis | Amplitude | 1 | (1) | Freq | 2.45 GHz | -4.551 dBm |
| Marker | Trace   | Type   | X Axis   | Amplitude  |        |           |   |     |      |          |            |
| 1      | (1)   | Freq   | 2.45 GHz | -4.551 dBm |        |           |   |     |      |          |            |




**Conducted Band Edge**

Mode 2: IEEE 802.11b Link Mode\_Ant-1

2412

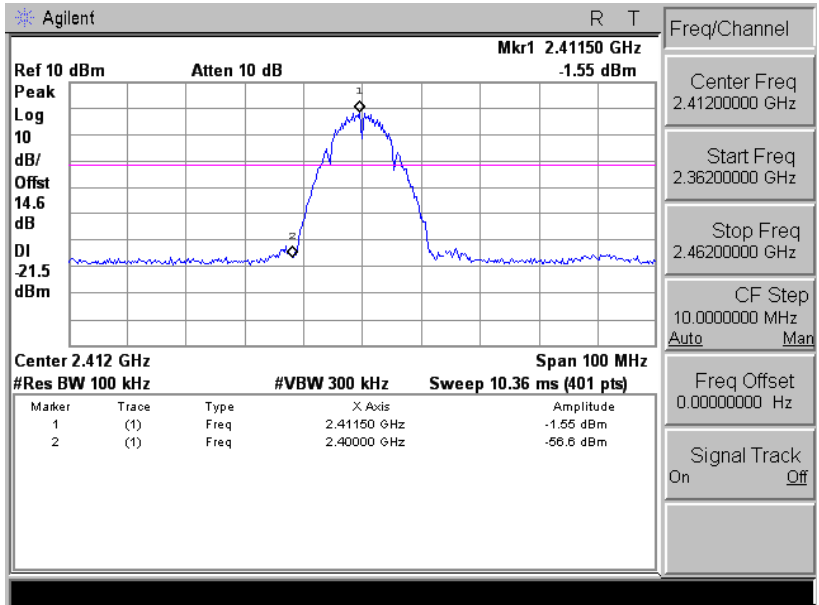


2462

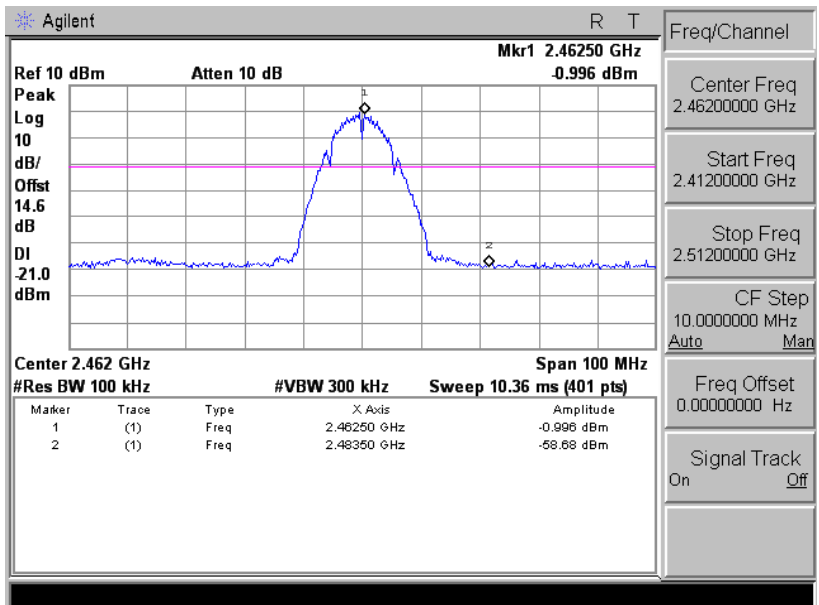


Mode 2: IEEE 802.11b Link Mode\_Ant-2

2412

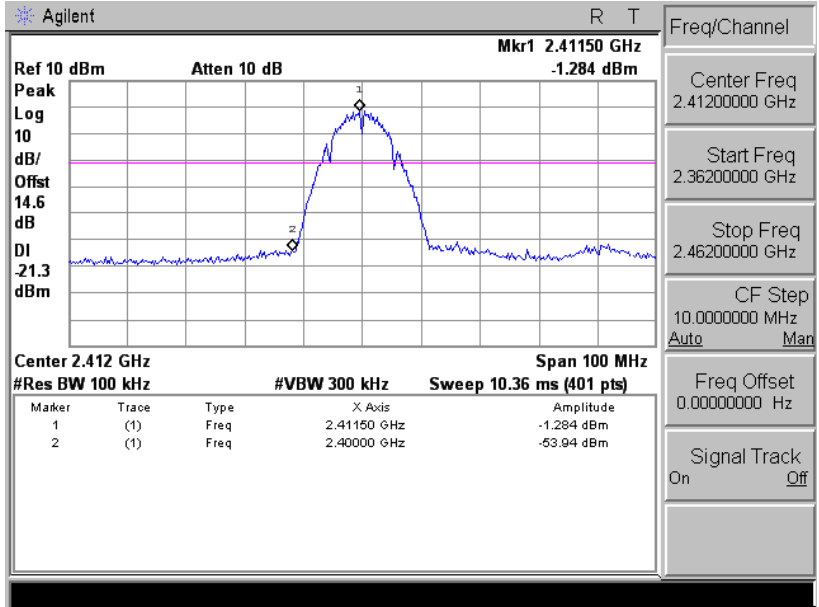


2462

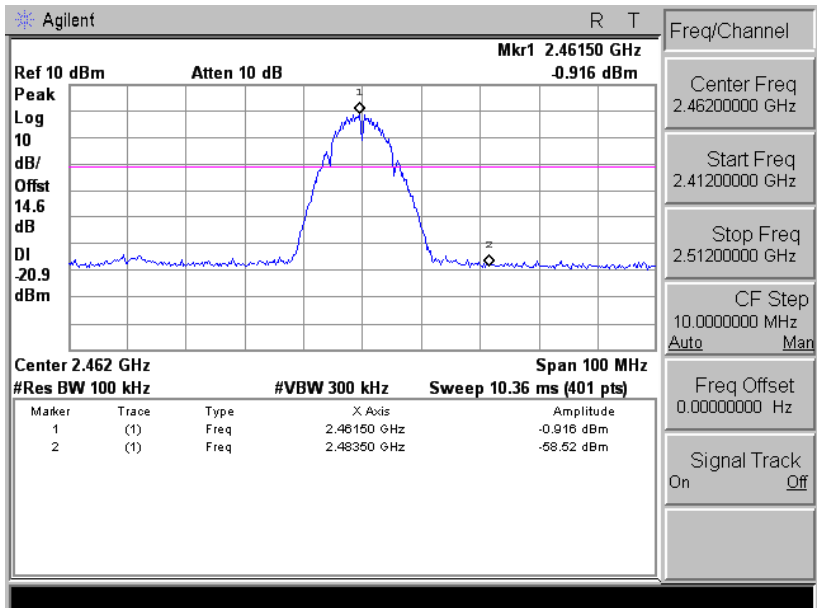


Mode 3: IEEE 802.11g Link Mode\_Ant-1

2412

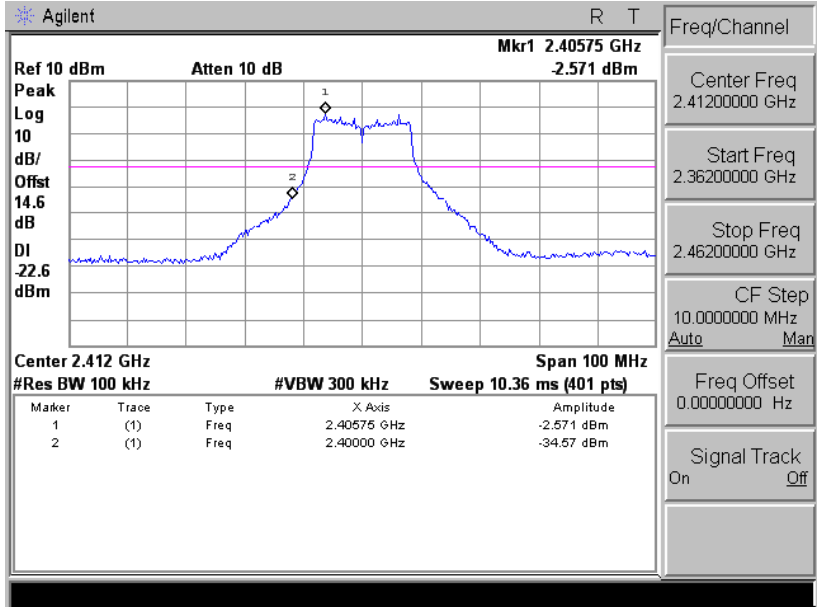


2462

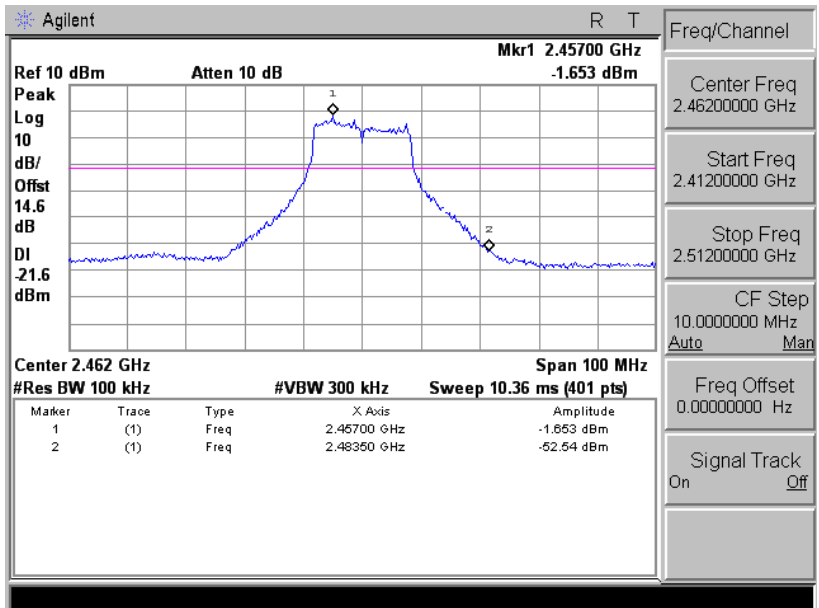


Mode 3: IEEE 802.11g Link Mode\_Ant-2

2412

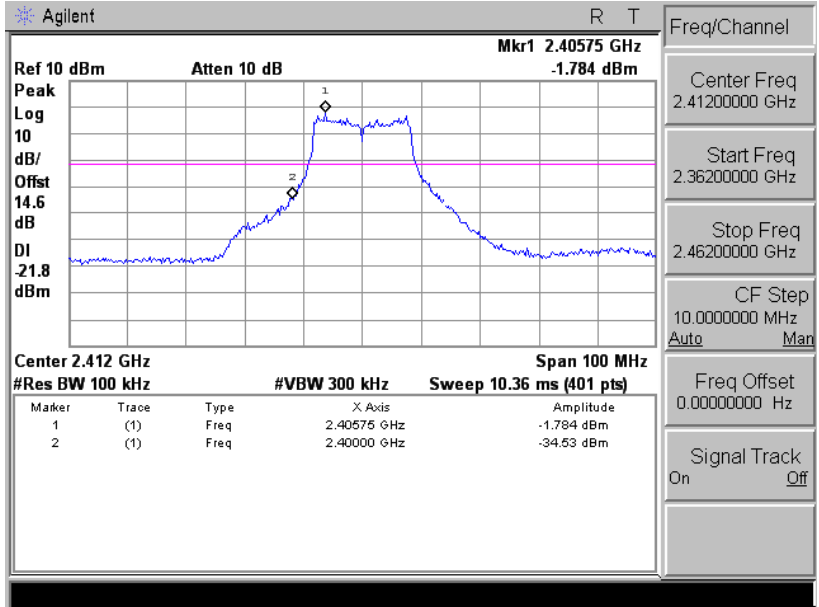


2462

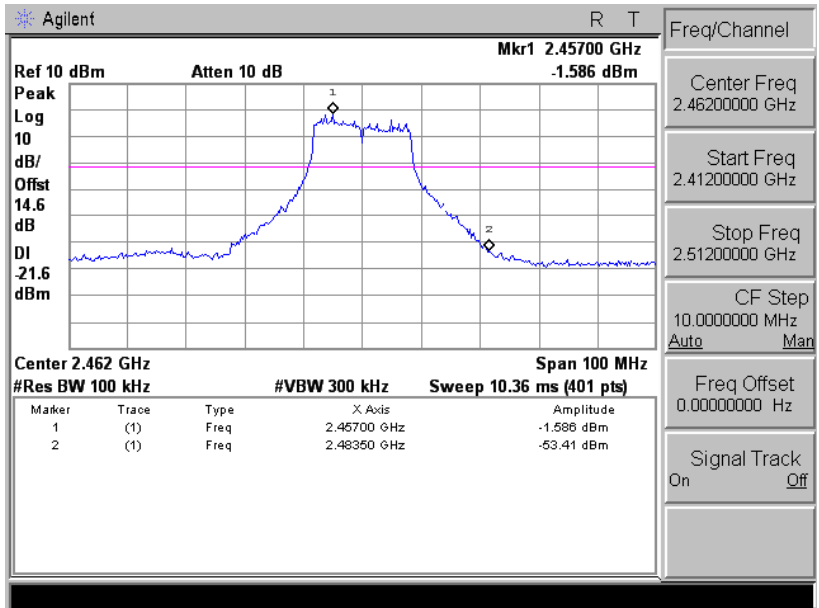


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-1

2412

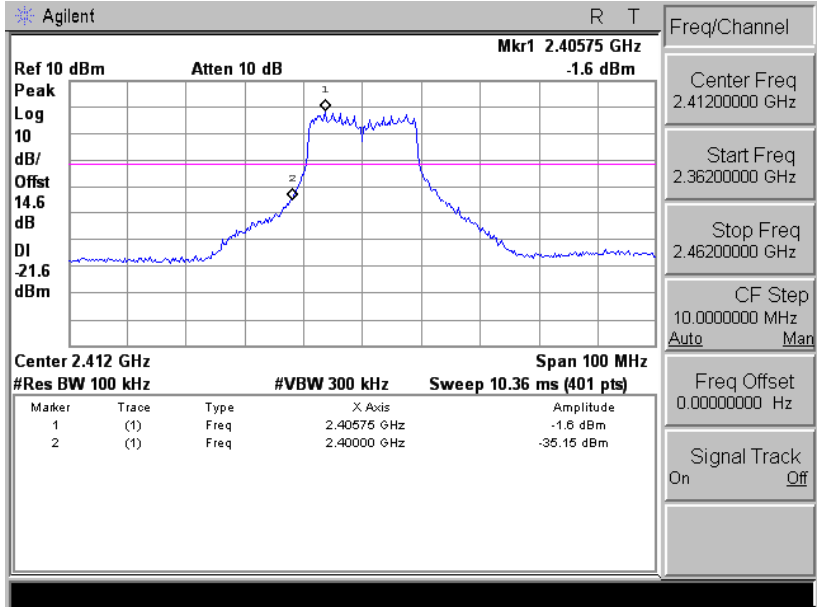


2462

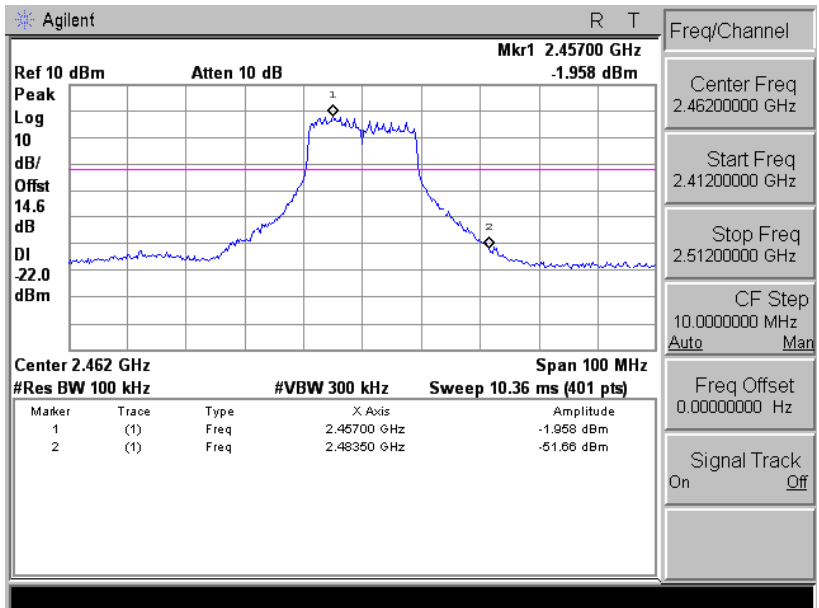


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode\_Ant-2

2412

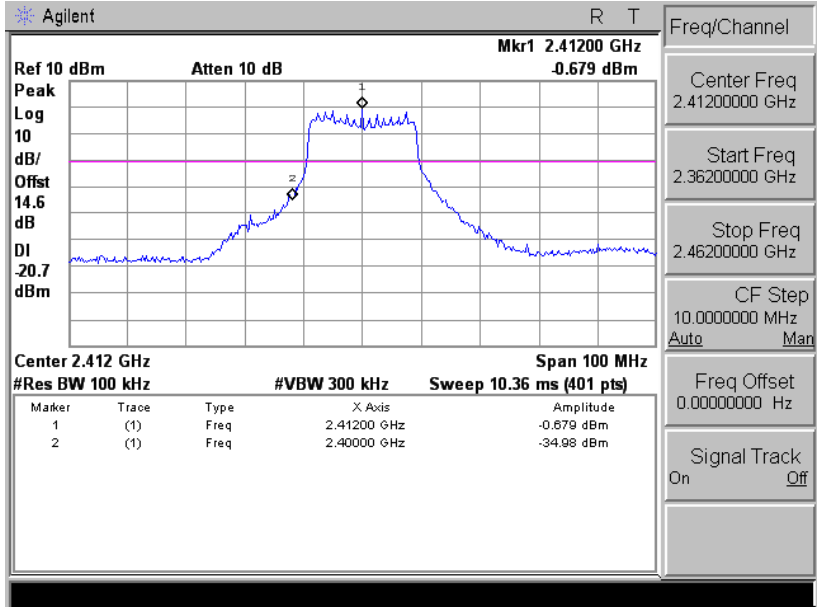


2462

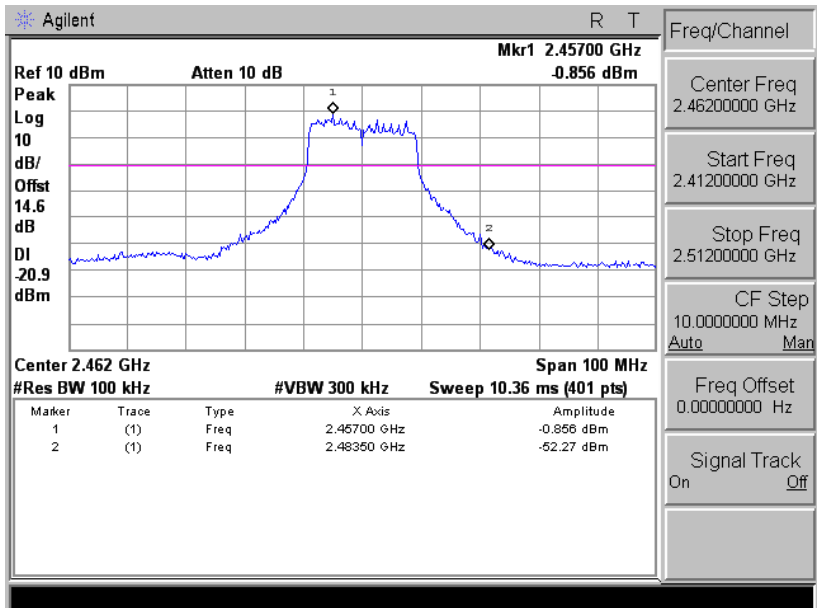


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-1

2422

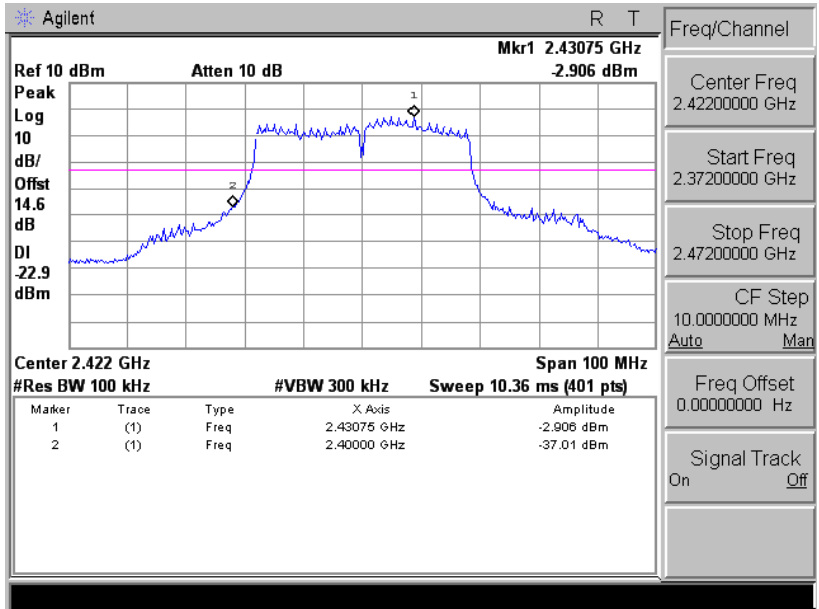


2452

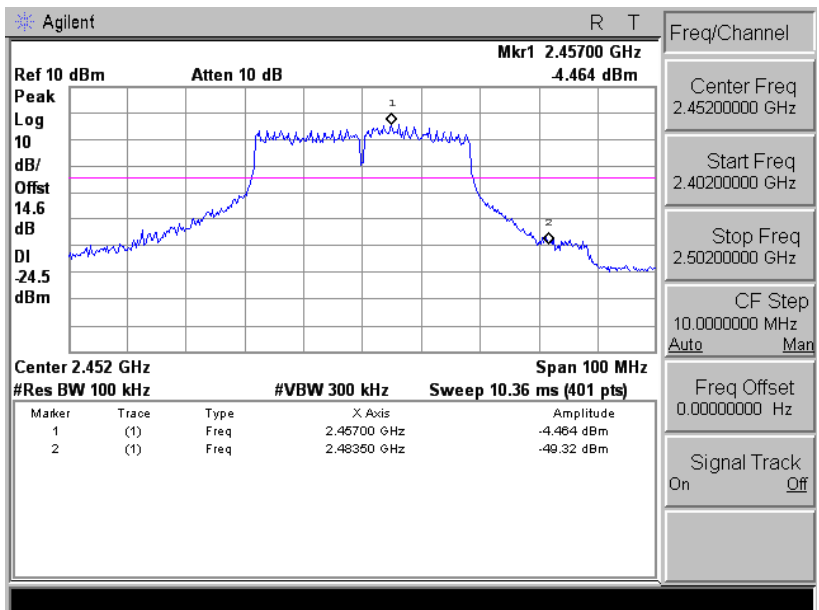


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode\_Ant-2

2422

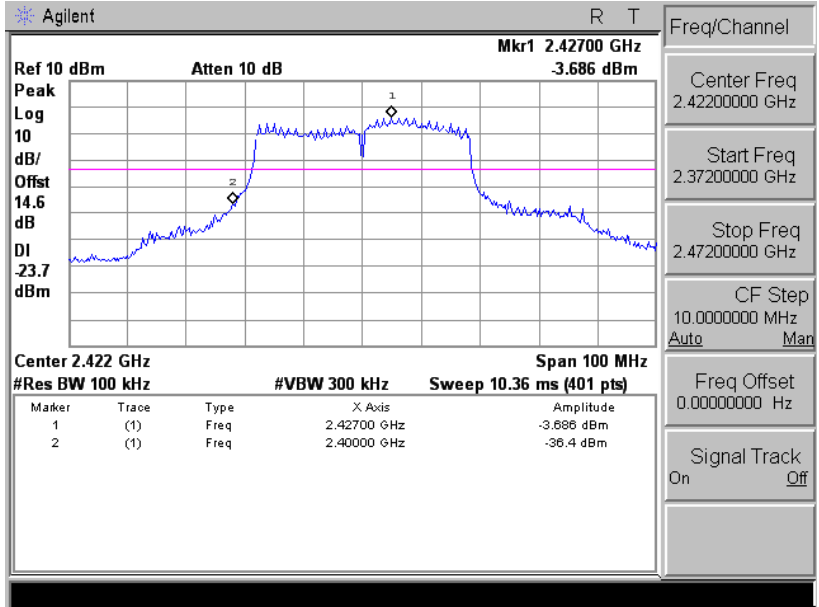

2452

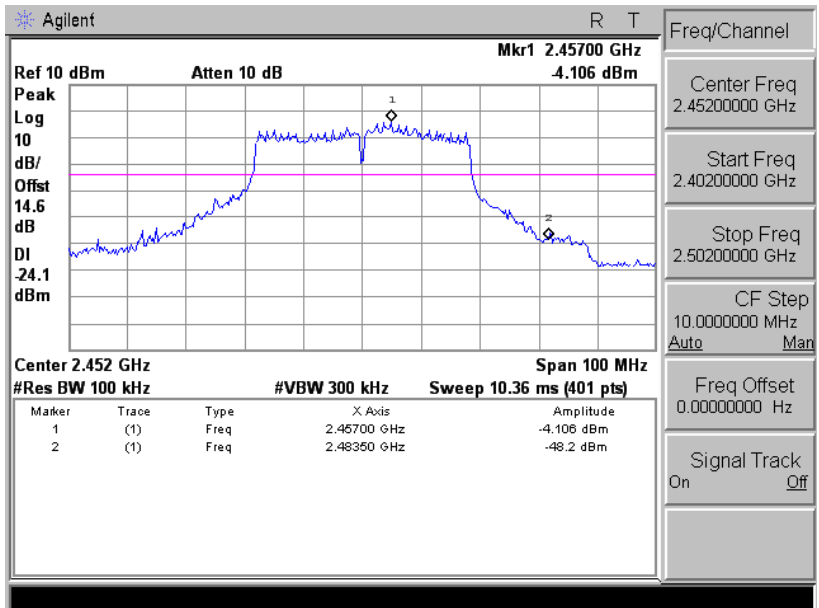




## 10 Band Edges Measurement

### 10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 10.2.Test Setup

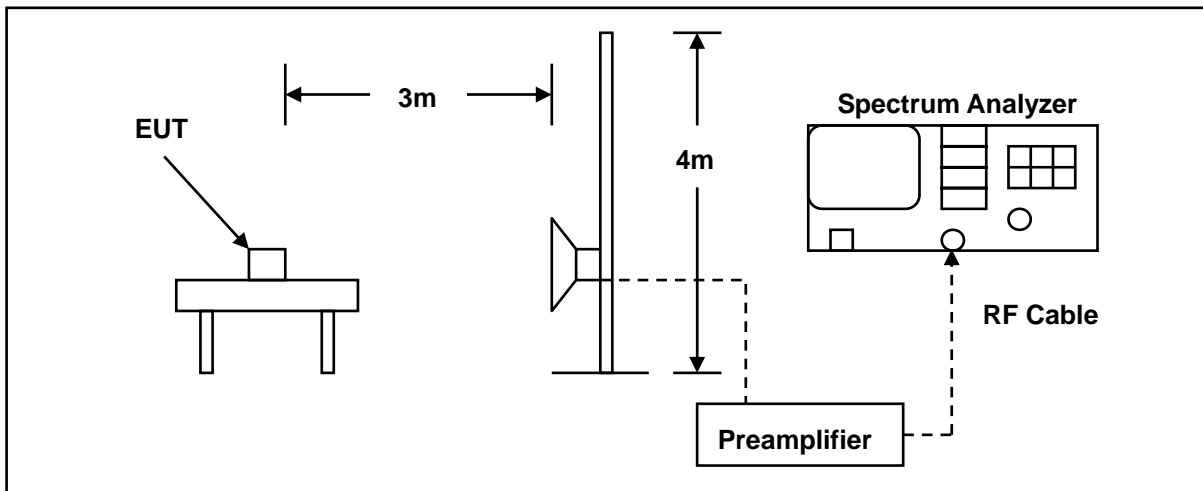

### 10.3.Test Instruments

| 3 Meter Chamber           |                                |              |               |            |        |
|---------------------------|--------------------------------|--------------|---------------|------------|--------|
| Equipment                 | Manufacturer                   | Model Number | Serial Number | Cal. Date  | Remark |
| RF Pre-selector           | Agilent                        | N9039A       | MY46520256    | 01/10/2014 | (1)    |
| Spectrum Analyzer         | Agilent                        | E4446A       | MY46180578    | 01/10/2014 | (1)    |
| Pre Amplifier             | Agilent                        | 8449B        | 3008A02237    | 02/21/2014 | (1)    |
| Pre Amplifier             | Agilent                        | 8447D        | 2944A10961    | 02/21/2014 | (1)    |
| Horn Antenna<br>(1~18GHz) | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA9120D    | 9120D-550     | 06/11/2014 | (1)    |
| Test Site                 | ATL                            | TE01         | 888001        | 08/28/2014 | (1)    |

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

#### **10.4. Test Procedure**

The EUT was setup to ANSI C63.4:2014; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

**10.5. Test Result**

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 2                 |                       |                 | Date:                | 09/19/2014   |        |                  |
| Frequency:      | 2412 MHz          |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 2387.220        | 56.21             | -1.96                 | 54.25           | 74.00                | -19.75       | peak   | H                |
| 2387.220        | 50.59             | -1.96                 | 48.63           | 54.00                | -5.37        | AVG    | H                |
| 2390.000        | 55.10             | -1.94                 | 53.16           | 74.00                | -20.84       | peak   | H                |
| 2390.000        | 47.02             | -1.94                 | 45.08           | 54.00                | -8.92        | AVG    | H                |
| 2388.760        | 58.65             | -1.96                 | 56.69           | 74.00                | -17.31       | peak   | V                |
| 2388.760        | 53.60             | -1.96                 | 51.64           | 54.00                | -2.36        | AVG    | V                |
| 2390.000        | 55.82             | -1.94                 | 53.88           | 74.00                | -20.12       | peak   | V                |
| 2390.000        | 49.10             | -1.94                 | 47.16           | 54.00                | -6.84        | AVG    | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 2                 |                       |                 | Date:                | 09/19/2014   |        |                  |
| Frequency:      | 2462 MHz          |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 2483.500        | 54.60             | -1.52                 | 53.08           | 74.00                | -20.92       | peak   | H                |
| 2483.500        | 50.21             | -1.52                 | 48.69           | 54.00                | -5.31        | AVG    | H                |
| 2486.760        | 59.73             | -1.51                 | 58.22           | 74.00                | -15.78       | peak   | H                |
| 2486.760        | 52.17             | -1.51                 | 50.66           | 54.00                | -3.34        | AVG    | H                |
| 2483.500        | 53.03             | -1.52                 | 51.51           | 74.00                | -22.49       | peak   | V                |
| 2486.760        | 55.78             | -1.51                 | 54.27           | 74.00                | -19.73       | peak   | V                |
| 2486.760        | 50.81             | -1.51                 | 49.30           | 54.00                | -4.70        | AVG    | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 3                 |                       |                 | Date:                | 09/19/2014   |        |                  |
| Frequency:      | 2412 MHz          |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 2389.750        | 74.12             | -1.94                 | 72.18           | 74.00                | -1.82        | peak   | H                |
| 2389.750        | 53.36             | -1.94                 | 51.42           | 54.00                | -2.58        | AVG    | H                |
| 2390.000        | 71.43             | -1.94                 | 69.49           | 74.00                | -4.51        | peak   | H                |
| 2390.000        | 53.81             | -1.94                 | 51.87           | 54.00                | -2.13        | AVG    | H                |
| 2389.530        | 70.39             | -1.95                 | 68.44           | 74.00                | -5.56        | peak   | V                |
| 2389.530        | 52.13             | -1.95                 | 50.18           | 54.00                | -3.82        | AVG    | V                |
| 2390.000        | 70.09             | -1.94                 | 68.15           | 74.00                | -5.85        | peak   | V                |
| 2390.000        | 52.99             | -1.94                 | 51.05           | 54.00                | -2.95        | AVG    | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 3                 |                       |                 | Date:                | 09/19/2014   |        |                  |
| Frequency:      | 2462 MHz          |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 2483.500        | 64.71             | -1.52                 | 63.19           | 74.00                | -10.81       | peak   | H                |
| 2483.500        | 47.43             | -1.52                 | 45.91           | 54.00                | -8.09        | AVG    | H                |
| 2484.120        | 64.96             | -1.51                 | 63.45           | 74.00                | -10.55       | peak   | H                |
| 2484.120        | 46.71             | -1.51                 | 45.20           | 54.00                | -8.80        | AVG    | H                |
| 2483.500        | 63.11             | -1.52                 | 61.59           | 74.00                | -12.41       | peak   | V                |
| 2483.500        | 46.27             | -1.52                 | 44.75           | 54.00                | -9.25        | AVG    | V                |
| 2484.600        | 61.96             | -1.51                 | 60.45           | 74.00                | -13.55       | peak   | V                |
| 2484.600        | 44.58             | -1.51                 | 43.07           | 54.00                | -10.93       | AVG    | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 4                 |                       |                 | Date:                | 09/19/2014   |        |                  |
| Frequency:      | 2412 MHz          |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 2388.870        | 62.82             | -1.96                 | 60.86           | 74.00                | -13.14       | peak   | H                |
| 2388.870        | 49.16             | -1.96                 | 47.20           | 54.00                | -6.80        | AVG    | H                |
| 2390.000        | 64.92             | -1.94                 | 62.98           | 74.00                | -11.02       | peak   | H                |
| 2390.000        | 52.82             | -1.94                 | 50.88           | 54.00                | -3.12        | AVG    | H                |
| 2389.200        | 69.37             | -1.96                 | 67.41           | 74.00                | -6.59        | peak   | V                |
| 2389.200        | 49.74             | -1.96                 | 47.78           | 54.00                | -6.22        | AVG    | V                |
| 2390.000        | 70.35             | -1.94                 | 68.41           | 74.00                | -5.59        | peak   | V                |
| 2390.000        | 52.33             | -1.94                 | 50.39           | 54.00                | -3.61        | AVG    | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 4                 |                       |                 | Date:                | 09/19/2014   |        |                  |
| Frequency:      | 2462 MHz          |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 2483.500        | 60.47             | -1.52                 | 58.95           | 74.00                | -15.05       | peak   | H                |
| 2483.500        | 46.60             | -1.52                 | 45.08           | 54.00                | -8.92        | AVG    | H                |
| 2483.880        | 60.95             | -1.51                 | 59.44           | 74.00                | -14.56       | peak   | H                |
| 2483.880        | 46.09             | -1.51                 | 44.58           | 54.00                | -9.42        | AVG    | H                |
| 2483.500        | 55.64             | -1.52                 | 54.12           | 74.00                | -19.88       | peak   | V                |
| 2483.500        | 44.91             | -1.52                 | 43.39           | 54.00                | -10.61       | AVG    | V                |
| 2483.720        | 62.24             | -1.52                 | 60.72           | 74.00                | -13.28       | peak   | V                |
| 2483.720        | 44.66             | -1.52                 | 43.14           | 54.00                | -10.86       | AVG    | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 5                 |                       |                 | Date:                | 09/19/2014   |        |                  |
| Frequency:      | 2422 MHz          |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 2387.280        | 67.91             | -1.96                 | 65.95           | 74.00                | -8.05        | peak   | H                |
| 2387.280        | 50.03             | -1.96                 | 48.07           | 54.00                | -5.93        | AVG    | H                |
| 2390.000        | 65.53             | -1.94                 | 63.59           | 74.00                | -10.41       | peak   | H                |
| 2390.000        | 53.17             | -1.94                 | 51.23           | 54.00                | -2.77        | AVG    | H                |
| 2389.560        | 66.80             | -1.95                 | 64.85           | 74.00                | -9.15        | peak   | V                |
| 2389.560        | 51.97             | -1.95                 | 50.02           | 54.00                | -3.98        | AVG    | V                |
| 2390.000        | 65.14             | -1.94                 | 63.20           | 74.00                | -10.80       | peak   | V                |
| 2390.000        | 52.49             | -1.94                 | 50.55           | 54.00                | -3.45        | AVG    | V                |

| Standard:       | FCC Part 15C      |                       |                 | Test Distance:       | 3m           |        |                  |
|-----------------|-------------------|-----------------------|-----------------|----------------------|--------------|--------|------------------|
| Test item:      | Radiated Emission |                       |                 | Power:               | AC 120V/60Hz |        |                  |
| Model Number:   | AC785S-500        |                       |                 | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |        |                  |
| Mode:           | 5                 |                       |                 | Date:                | 09/19/2014   |        |                  |
| Frequency:      | 2452 MHz          |                       |                 | Test By:             | Eric Ou Yang |        |                  |
| Frequency (MHz) | Reading (dBuV)    | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m)       | Margin (dB)  | Remark | Ant.Polar. H / V |
| 2483.500        | 64.91             | -1.52                 | 63.39           | 74.00                | -10.61       | peak   | H                |
| 2483.500        | 50.24             | -1.52                 | 48.72           | 54.00                | -5.28        | AVG    | H                |
| 2488.400        | 66.55             | -1.49                 | 65.06           | 74.00                | -8.94        | peak   | H                |
| 2488.400        | 48.45             | -1.49                 | 46.96           | 54.00                | -7.04        | AVG    | H                |
| 2483.500        | 61.03             | -1.52                 | 59.51           | 74.00                | -14.49       | peak   | V                |
| 2483.500        | 48.80             | -1.52                 | 47.28           | 54.00                | -6.72        | AVG    | V                |
| 2487.500        | 65.67             | -1.50                 | 64.17           | 74.00                | -9.83        | peak   | V                |
| 2487.500        | 47.70             | -1.50                 | 46.20           | 54.00                | -7.80        | AVG    | V                |

## **11 Antenna Measurement**

### **11.1.Limit**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **11.2.Antenna Connector Construction**

The antenna used in this product is IFA antenna. And the maximum Gain of this antenna is only 2.2 dBi.