

FCC

RF Test Report

Applicant : Netgear Incorporated
Address : 350 East Plumeria Drive, San Jose, California, United States
95134
Product Type : AirCard 815S Mobile Hotspot
Trade Name : NETGEAR
Model Number : AC815S
Applicable Standard : FCC 47 CFR PART 22H
FCC 47 CFR PART 24E
ANSI/TIA-603-D 2010
Application Purpose : Original
Receive Date : Sep. 22, 2015
Test Period : Oct. 14 ~ Nov. 12, 2015
Issue Date : Nov. 25, 2015

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Nov. 25, 2015	Initial Issue	

Verification of Compliance

Issued Date: 11/25/2015

Applicant : Netgear Incorporated
Address : 350 East Plumeria Drive, San Jose, California, United States
95134
Product Type : AirCard 815S Mobile Hotspot
Trade Name : NETGEAR
Model Number : AC815S
FCC ID : PY3AC815S
EUT Rated Voltage : DC 5V, 1A
Test Voltage : 120 Vac / 60 Hz, DC 3.50V / 3.80V / 4.35V
Applicable Standard : FCC 47 CFR PART 22H
FCC 47 CFR PART 24E
ANSI/TIA-603-D 2010
Application Purpose : Original
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	6
1.1.	EUT Description	6
1.2.	Mode of Operation.....	7
1.3.	EUT Exercise Software	7
1.4.	Configuration of Test System Details	7
1.5.	Test Site Environment	8
1.6.	Summary of Test Result	8
2	RF Output Power Test	9
2.1.	Limit	9
2.2.	Test Instruments	9
2.3.	Test Setup.....	9
2.4.	Test Procedure	9
2.5.	Uncertainty	9
2.6.	Test Result.....	10
3	Effective Radiated Power / Equivalent Isotropic Radiated Power Test.....	13
3.1.	Limit	13
3.2.	Test Instruments	13
3.3.	Test Setup.....	13
3.4.	Test Procedure	15
3.5.	Uncertainty	15
3.6.	Test Result.....	16
4	Peak to Average Ratio Test.....	18
4.1.	Limit	18
4.2.	Test Instruments	18
4.3.	Setup	18
4.4.	Test Procedure	18
4.5.	Uncertainty	19
4.6.	Test Result.....	19
4.7.	Test Graphs	20
5	Emission Bandwidth & Occupied Bandwidth Test.....	21
5.1.	Limit	21
5.2.	Test Instruments	21
5.3.	Setup	21
5.4.	Test Procedure	22
5.5.	Uncertainty	22
5.6.	Test Result.....	22
5.7.	Test Graphs	23

6	Band Edge Test	29
6.1.	Limit	29
6.2.	Test Instruments	29
6.3.	Setup	29
6.4.	Test Procedure	30
6.5.	Uncertainty	30
6.6.	Test Result.....	30
6.7.	Test Graphs	31
7	Conducted Spurious Emission Test	35
7.1.	Limit	35
7.2.	Test Instruments	35
7.3.	Setup	35
7.4.	Test Procedure	36
7.5.	Uncertainty	36
7.6.	Test Result.....	36
8	Field Strength of Spurious Radiation Test	103
8.1.	Limit	103
8.2.	Test Instruments	103
8.3.	Setup	104
8.4.	Test Procedure	105
8.5.	Uncertainty	105
8.6.	Test Result.....	106
9	Frequency Stability (Temperature & Voltage Variation) Test	110
9.1.	Limit	110
9.2.	Test Instruments	110
9.3.	Setup	110
9.4.	Test Procedure	111
9.5.	Uncertainty	111
9.6.	Test Result.....	112

1 General Information

1.1. EUT Description

Applicant	Netgear Incorporated 350 East Plumeria Drive, San Jose, California, United States 95134				
Manufacturer	Netgear Inc. Suite 168 – 10760 Shellbridge Way, Richmond, BC Canada V6X 3H1				
Product Type	AirCard 815S Mobile Hotspot				
Trade Name	NETGEAR				
Model Number	AC815S				
Hardware Version	DV3.2				
Software Version	NTG9X40C_11.06.04.00				
FCC ID	PY3AC815S				
IMEI No.	014475000001006				
Mode	2G	Band	UL Frequency (MHz)	DL Frequency (MHz)	Modulation
		850	824.2 ~ 848.8	869.2 ~ 893.8	GMSK/8PSK
		1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8	GMSK/8PSK
		Operate mode support GPRS/EGPRS. *GPRS/EGPRS Multi Class 10.			
	3G	Band	UL Frequency (MHz)	DL Frequency (MHz)	Modulation
		WCDMA Band II	1852.4 ~ 1907.6	1932.4 ~ 1987.6	QPSK
		WCDMA Band V	826.4 ~ 846.6	871.4 ~ 891.6	QPSK
		Operate mode support WCDMA(RMC12.2K)/HSDPA/HSUPA			
Channel Control	Auto				
Antenna Gain (dBi)	GPRS/EGPRS 850 : 1.30 dBi GPRS/EGPRS 1900 : 1.58 dBi WCDMA/ HSDPA/ HSUPA Band II : 1.58 dBi WCDMA/ HSDPA/ HSUPA Band V : 1.30 dBi				

Operate Band	Max. Conducted Output Power (W)	Max. E.R.P. / E.I.R.P. (W)	Emission Designator
GPRS 850	1.841	1.517	247KG7W
EGPRS 850	0.489	0.381	246KG7W
GPRS 1900	1.114	0.685	243KG7W
EGPRS 1900	0.348	0.217	252KG7W
WCDMA/ HSDPA/ HSUPA Band II	0.154	0.190	4M16F9W
WCDMA/ HSDPA/ HSUPA Band V	0.195	0.195	4M16F9W

1.2. Mode of Operation

ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: GPRS 850 link mode
Mode 2: GPRS 1900 link mode
Mode 3: EGPRS 850 link mode
Mode 4: EGPRS 1900 link mode
Mode 5: WCDMA Band II link mode
Mode 6: WCDMA Band V link mode


Note: Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

1.3. EUT Exercise Software

1	Setup the EUT and Base Station (CMU200) as shown on 1.4.
2	Turn on the power of all equipment.

Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1

1.4. Configuration of Test System Details

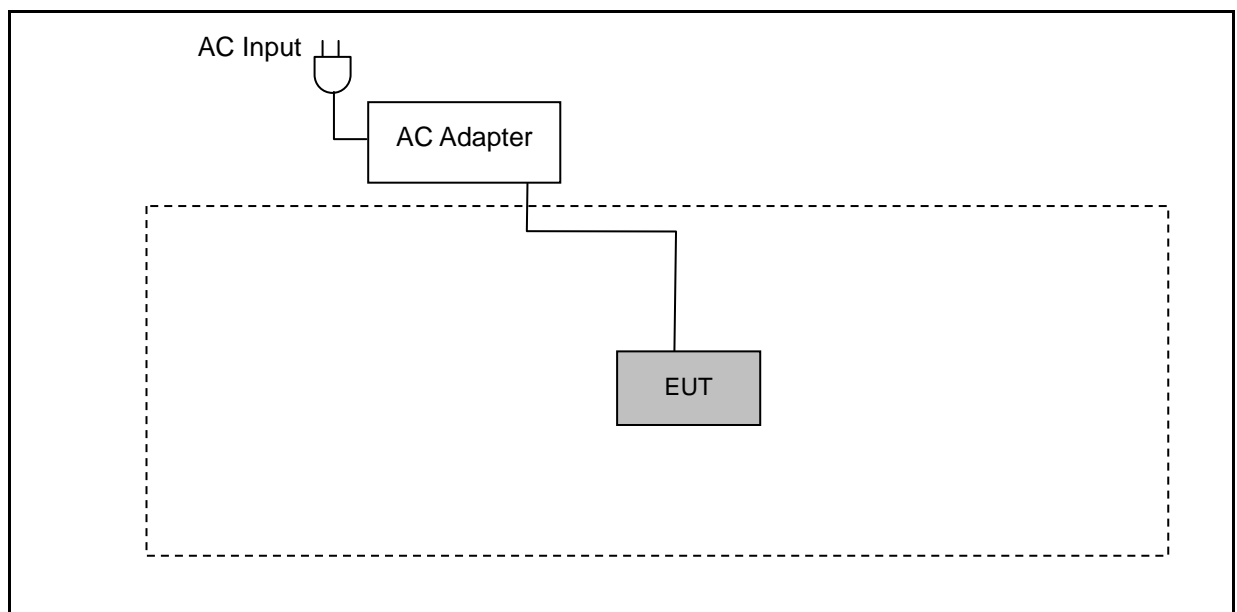

1.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

1.6. Summary of Test Result

Description	FCC Rule	Limit	Result
Conducted Output Power	§2.1046	N/A	Pass
Effective Radiated Power	§22.913(a)(2)	< 7 Watts	Pass
Equivalent Isotropic Radiated Power	§24.232(c)	< 2 Watts	Pass
Peak to average ratio	§24.232(d)	< 13 dB	Pass
Emission Bandwidth & Occupied Bandwidth	§2.1049 §22.917(a) §24.238(a)	N/A	Pass
Band Edge Measurement	§2.1051 §22.917(a) §24.238(a)	< $43+10\log_{10}(P[\text{Watts}])$	Pass
Conducted Spurious Emission	§2.1051 §22.917(a) §24.238(a)	< $43+10\log_{10}(P[\text{Watts}])$	Pass
Field Strength of Spurious Radiation	§2.1053 §22.917(a) §24.238(a)	< $43+10\log_{10}(P[\text{Watts}])$	Pass
Frequency Stability for Temperature & Voltage	§2.1055 §22.355 §24.235	< 2.5 ppm	Pass

2 RF Output Power Test

2.1. Limit


N/A

2.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Universal Radio Communication Tester	R & S	CMU200	109369	10/21/2014	2 years
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/15/2014	1 year
Wideband Power Meter	Agilent	N1921A	MY45241957	12/15/2014	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

2.3. Test Setup

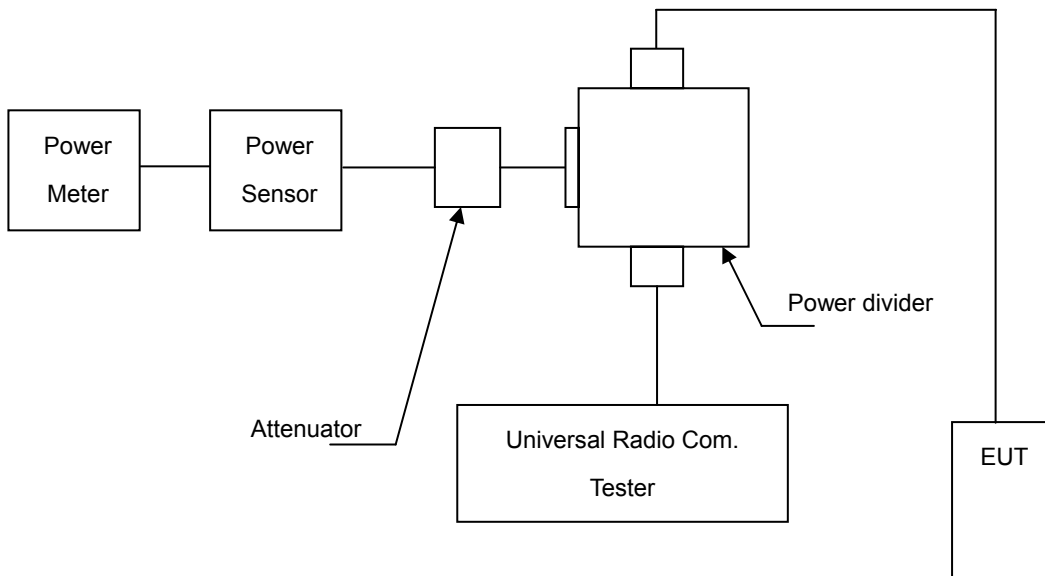

2.4. Test Procedure

The measurement is made according to as follows:

1. The transmitter output was connected to power meter and base station through Power Divider.
2. Set base station for EUT at GSM 850: PCL=5 and PCS 1900: PCL=0.
3. Set base station for EUT at WCDMA Band V and WCDMA Band II, power level was set to maximum.
4. Select lowest, middle, and highest channels for each band.

2.5. Uncertainty

The measurement uncertainty is defined as for RF output power measurement is 1.2 dB.

2.6. Test Result

Model Number	AC815S				
Test Item	RF Output Power				
Date of Test	10/14/2015				
Bands	Modulation Type	Data Rate	Frequency (MHz)	Burst Average Power	
				(dBm)	(W)
GPRS 850 Multi Class :10 Max Up:2 Max Down:4 Sum:5	GMSK	4Down1Up (Duty Factor 1/8)	824.2	32.64	1.837
			836.6	32.65	1.841
			848.8	32.59	1.816
		3Down2Up (Duty Factor 2/8)	824.2	32.13	1.633
			836.6	32.10	1.622
			848.8	31.98	1.578
EGPRS 850 Multi Class :10 Max Up:2 Max Down:4 Sum:5	8PSK	4Down1Up (Duty Factor 1/8)	824.2	26.87	0.486
			836.6	26.89	0.489
			848.8	26.86	0.485
		3Down2Up (Duty Factor 2/8)	824.2	25.73	0.374
			836.6	25.76	0.377
			848.8	25.73	0.374
GPRS 1900 Multi Class :10 Max Up:2 Max Down:4 Sum:5	GMSK	4Down1Up (Duty Factor 1/8)	1850.20	30.46	1.112
			1880.00	30.47	1.114
			1909.80	30.45	1.109
		3Down2Up (Duty Factor 2/8)	1850.20	28.97	0.789
			1880.00	28.78	0.755
			1909.80	28.62	0.728
EGPRS 1900 Multi Class :10 Max Up:2 Max Down:4 Sum:6	8PSK	4Down1Up (Duty Factor 1/8)	1850.20	25.42	0.348
			1880.00	25.39	0.346
			1909.80	25.27	0.337
		3Down2Up (Duty Factor 2/8)	1850.20	24.40	0.275
			1880.00	24.33	0.271
			1909.80	24.19	0.262

Note: The peak power testing result was used peak detector.

Model Number	AC815S				
Test Item	RF Output Power				
Date of Test	10/14/2015				
Bands	Modulation Type	Sub-Test	Frequency (MHz)	Burst Average Power	
				(dBm)	(W)
WCDMA Band II	QPSK	----	1852.4	21.75	0.150
			1880.0	21.87	0.154
			1907.6	21.69	0.148
HSDPA Band II	QPSK	1	1852.4	21.15	0.130
			1880.0	21.20	0.132
			1907.6	21.04	0.127
		2	1852.4	20.89	0.123
			1880.0	21.16	0.131
			1907.6	21.02	0.126
		3	1852.4	20.57	0.114
			1880.0	20.72	0.118
			1907.6	20.51	0.112
		4	1852.4	20.54	0.113
			1880.0	20.67	0.117
			1907.6	20.56	0.114
HSUPA Band II	QPSK	1	1852.4	17.69	0.059
			1880.0	17.77	0.060
			1907.6	17.64	0.058
		2	1852.4	16.91	0.049
			1880.0	17.01	0.050
			1907.6	16.98	0.050
		3	1852.4	17.88	0.061
			1880.0	17.97	0.063
			1907.6	17.82	0.061
		4	1852.4	16.82	0.048
			1880.0	16.99	0.050
			1907.6	16.86	0.049
		5	1852.4	20.47	0.111
			1880.0	20.59	0.115
			1907.6	20.45	0.111

Note: The peak power testing result was used peak detector.

Model Number	AC815S				
Test Item	RF Output Power				
Date of Test	10/14/2015				
Bands	Modulation Type	Sub-Test	Frequency (MHz)	Burst Average Power	
				(dBm)	(W)
WCDMA Band V	QPSK	----	826.4	22.85	0.193
			836.6	22.91	0.195
			846.6	22.78	0.190
HSDPA Band V	QPSK	1	826.4	21.97	0.157
			836.6	22.01	0.159
			846.6	21.93	0.156
		2	826.4	21.82	0.152
			836.6	21.97	0.157
			846.6	21.82	0.152
		3	826.4	21.36	0.137
			836.6	21.48	0.141
			846.6	21.38	0.137
		4	826.4	21.34	0.136
			836.6	21.46	0.140
			846.6	21.37	0.137
HSUPA Band V	QPSK	1	826.4	19.11	0.081
			836.6	19.01	0.080
			846.6	18.97	0.079
		2	826.4	16.87	0.049
			836.6	17.05	0.051
			846.6	16.84	0.048
		3	826.4	18.23	0.067
			836.6	18.35	0.068
			846.6	18.16	0.065
		4	826.4	16.92	0.049
			836.6	17.01	0.050
			846.6	16.88	0.049
		5	826.4	20.65	0.116
			836.6	20.74	0.119
			846.6	20.61	0.115

Note: The peak power testing result was used peak detector.

3 Effective Radiated Power / Equivalent Isotropic Radiated Power Test

3.1. Limit

For FCC Part 22.913(a)(2): The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(c): The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.


3.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	1 year
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	1 year
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	1 year
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	1 year
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	08/11/2015	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/12/2015	1 year
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/06/2015	1 year
Test Site	ATL	TE01	888001	08/27/2015	1 year


Note: N.C.R. = No Calibration Request.

3.3. Test Setup


Below 1 GHz

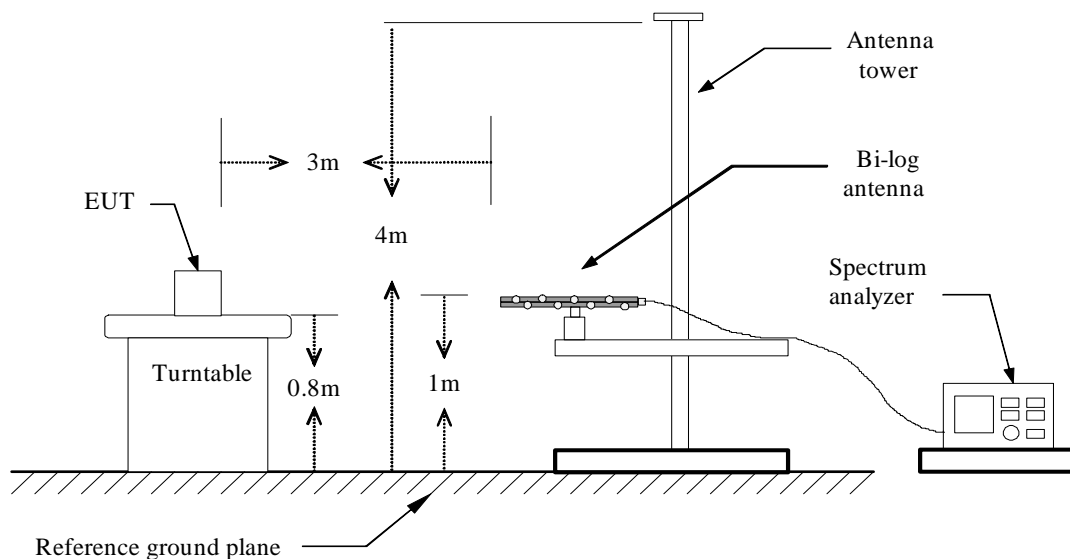

Above 1 GHz

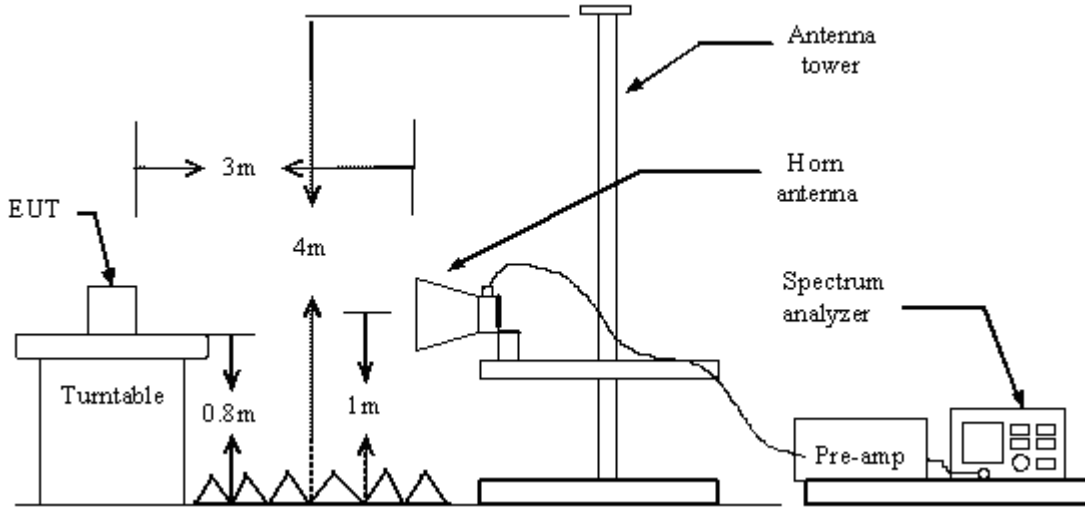

For Substituted Method Test Set-UP

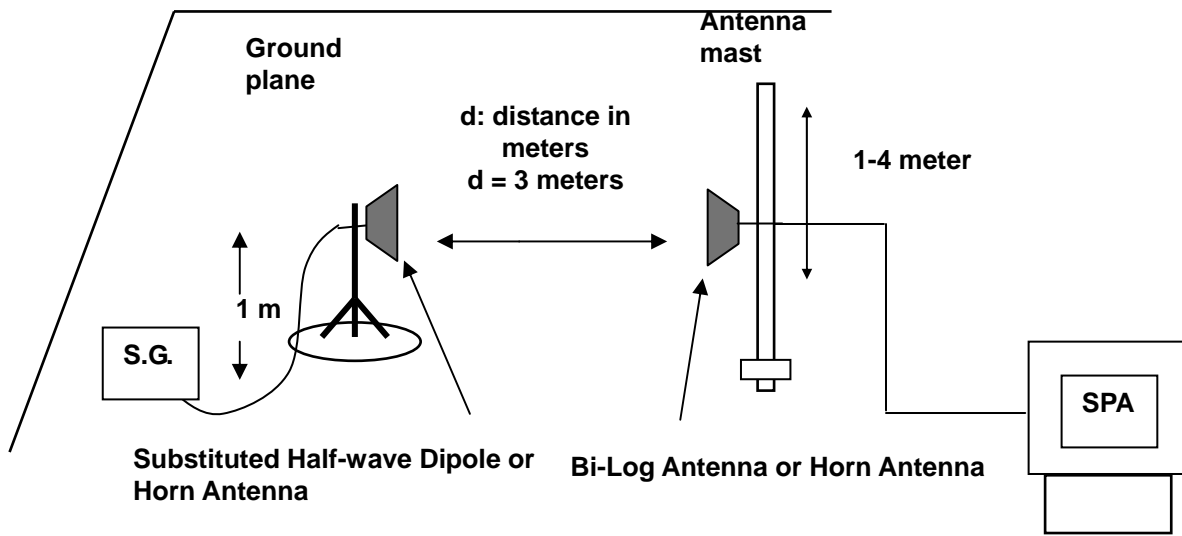

3.4. Test Procedure

- a. The EUT was set up for the maximum power with LTE link data modulation. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high operational frequency range).
- b. Radiation Emission measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- d. E.I.R.P. = Output power level of S.G - TX cable loss + Antenna gain of substitution horn
- e. E.R.P. = E.I.R.P- 2.15 dB

Note: 1. For WCDMA and CDMA signals, a peak detector is used with RBW = VBW = 5MHz.

2. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW= 1 MHz.

3.5. Uncertainty

The measurement uncertainty is defined as for Field Strength of Spurious Radiation measurement is ± 3.072 dB.

3.6. Test Result

Model Number	AC815S						
Test Item	ERP/EIRP						
Date of Test	10/26/2015						
Band	Frequency (MHz)	Ant. Polar.	Read Level (dBm)	Correction factor (dBm)	ERP		Limit
					(dBm)	(W)	
GPRS 850	824.2	H	14.15	12.84	26.99	0.500	< 7W
		V	19.63	12.18	31.81	1.517	< 7W
	836.6	H	13.57	12.97	26.54	0.451	< 7W
		V	19.31	12.24	31.55	1.429	< 7W
	848.8	H	14.12	13.42	27.54	0.568	< 7W
		V	18.81	12.38	31.19	1.315	< 7W
EGPRS 850	824.2	H	10.33	12.84	23.17	0.207	< 7W
		V	13.55	12.18	25.73	0.374	< 7W
	836.6	H	10.88	12.24	23.12	0.205	< 7W
		V	13.29	12.24	25.53	0.357	< 7W
	848.8	H	9.84	13.42	23.26	0.212	< 7W
		V	13.43	12.38	25.81	0.381	< 7W

Model Number	AC815S						
Test Item	ERP/EIRP						
Date of Test	10/26/2015						
Band	Frequency (MHz)	Ant. Polar.	Read Level (dBm)	Correction factor (dBm)	EIRP		Limit
					(dBm)	(W)	
GPRS 1900	1850.20	H	14.08	11.90	25.98	0.396	< 2W
		V	16.39	11.90	28.29	0.675	< 2W
	1880.00	H	13.87	11.94	25.81	0.381	< 2W
		V	16.21	11.94	28.15	0.653	< 2W
	1909.80	H	13.93	11.95	25.88	0.387	< 2W
		V	16.41	11.95	28.36	0.685	< 2W
EGPRS 1900	1850.20	H	9.23	11.90	21.13	0.130	< 2W
		V	11.13	11.90	23.03	0.201	< 2W
	1880.00	H	9.63	11.94	21.57	0.144	< 2W
		V	11.42	11.94	23.36	0.217	< 2W
	1909.80	H	9.14	11.96	21.10	0.129	< 2W
		V	11.38	11.96	23.34	0.216	< 2W

Note: 1. ERP/EIRP = Read Level + Correction factor.

2. For WCDMA and CDMA signals, a peak detector is used with RBW = VBW = 5MHz.

3. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW= 1 MHz.

Model Number	AC815S						
Test Item	ERP/EIRP						
Date of Test	10/26/2015						
Band	Frequency (MHz)	Ant. Polar.	Read Level (dBm)	Correction factor (dBm)	EIRP		Limit
					(dBm)	(W)	
WCDMA Band II	1852.4	H	8.26	11.91	20.17	0.104	< 2W
		V	10.32	11.91	22.23	0.167	< 2W
	1880.0	H	8.59	11.92	20.51	0.112	< 2W
		V	10.47	11.93	22.40	0.174	< 2W
	1907.6	H	8.37	11.96	20.33	0.108	< 2W
		V	10.84	11.95	22.79	0.190	< 2W

Model Number	AC815S						
Test Item	ERP/EIRP						
Date of Test	10/26/2015						
Band	Frequency (MHz)	Ant. Polar.	Read Level (dBm)	Correction factor (dBm)	ERP		Limit
					(dBm)	(W)	
WCDMA Band V	826.4	H	7.86	12.88	20.74	0.119	< 7W
		V	10.71	12.19	22.90	0.195	< 7W
	836.6	H	7.18	12.97	20.15	0.104	< 7W
		V	10.33	12.24	22.57	0.181	< 7W
	846.6	H	7.19	13.28	20.47	0.111	< 7W
		V	10.37	12.34	22.71	0.187	< 7W

Note: 1. ERP/EIRP = Read Level + Correction factor.

2. For WCDMA and CDMA signals, a peak detector is used with RBW = VBW = 5MHz.

3. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW= 1 MHz.

4 Peak to Average Ratio Test

4.1. Limit


In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Period
Universal Radio Communication Tester	R & S	CMU200	109369	10/21/2014	2 years
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2015	1 year
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	----
Power divider	Agilent	87302C	3239A00760	N.C.R.	----
Test Site	ATL	TE05	TE05	N.C.R.	----

Note: N.C.R. = No Calibration Request.

4.3. Setup

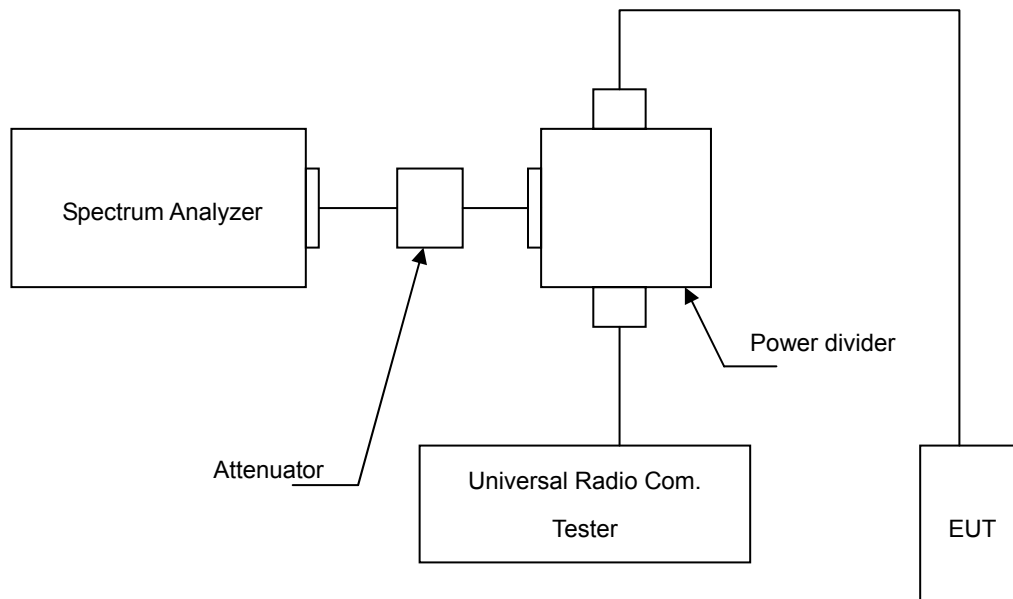

4.4. Test Procedure

The measurement is made according to FCC rules part 24:

- Set resolution/measurement bandwidth signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

4.5. Uncertainty

The measurement uncertainty is defined as for Conducted Power measurement is 1.2 dB.

4.6. Test Result

Model Number	AC815S			
Test Item	Peak to Average Ratio			
Date of Test	11/12/2015			
Bands	Channel	Frequency (MHz)	Peak to Average Ratio (dB)	Limit (dB)
WCDMA Band II	9262	1852.4	2.69	< 13
	9400	1880.0	2.81	< 13
	9538	1907.6	2.75	< 13

4.7. Test Graphs

Mode 5: WCDMA Band II link mode																	
1852.40 MHz	<p>Average Power 21.75 dBm 54.70 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>1.58 dB</td></tr> <tr><td>1.0 %</td><td>2.28 dB</td></tr> <tr><td>0.1 %</td><td>2.69 dB</td></tr> <tr><td>0.01 %</td><td>2.90 dB</td></tr> <tr><td>0.001 %</td><td>3.02 dB</td></tr> <tr><td>0.0001 %</td><td>3.11 dB</td></tr> <tr><td>Peak</td><td>3.28 dB</td></tr> <tr><td></td><td>25.03 dBm</td></tr> </table> <p>Center Freq: 1.852400000 GHz Trig: Free Run #Att: 40 dB Counts: 5.00 M/5.00 Mpt Radio Std: None Info BW: 5.0000 MHz</p>	10.0 %	1.58 dB	1.0 %	2.28 dB	0.1 %	2.69 dB	0.01 %	2.90 dB	0.001 %	3.02 dB	0.0001 %	3.11 dB	Peak	3.28 dB		25.03 dBm
10.0 %	1.58 dB																
1.0 %	2.28 dB																
0.1 %	2.69 dB																
0.01 %	2.90 dB																
0.001 %	3.02 dB																
0.0001 %	3.11 dB																
Peak	3.28 dB																
	25.03 dBm																
1880.00 MHz	<p>Average Power 21.87 dBm 54.06 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>1.62 dB</td></tr> <tr><td>1.0 %</td><td>2.38 dB</td></tr> <tr><td>0.1 %</td><td>2.81 dB</td></tr> <tr><td>0.01 %</td><td>3.03 dB</td></tr> <tr><td>0.001 %</td><td>3.16 dB</td></tr> <tr><td>0.0001 %</td><td>3.25 dB</td></tr> <tr><td>Peak</td><td>3.28 dB</td></tr> <tr><td></td><td>25.15 dBm</td></tr> </table> <p>Center Freq: 1.880000000 GHz Trig: Free Run #Att: 40 dB Counts: 5.00 M/5.00 Mpt Radio Std: None Info BW: 5.0000 MHz</p>	10.0 %	1.62 dB	1.0 %	2.38 dB	0.1 %	2.81 dB	0.01 %	3.03 dB	0.001 %	3.16 dB	0.0001 %	3.25 dB	Peak	3.28 dB		25.15 dBm
10.0 %	1.62 dB																
1.0 %	2.38 dB																
0.1 %	2.81 dB																
0.01 %	3.03 dB																
0.001 %	3.16 dB																
0.0001 %	3.25 dB																
Peak	3.28 dB																
	25.15 dBm																
1907.60 MHz	<p>Average Power 21.69 dBm 53.90 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>1.62 dB</td></tr> <tr><td>1.0 %</td><td>2.38 dB</td></tr> <tr><td>0.1 %</td><td>2.75 dB</td></tr> <tr><td>0.01 %</td><td>2.94 dB</td></tr> <tr><td>0.001 %</td><td>3.05 dB</td></tr> <tr><td>0.0001 %</td><td>3.12 dB</td></tr> <tr><td>Peak</td><td>3.16 dB</td></tr> <tr><td></td><td>24.85 dBm</td></tr> </table> <p>Center Freq: 1.907600000 GHz Trig: Free Run #Att: 40 dB Counts: 5.00 M/5.00 Mpt Radio Std: None Info BW: 5.0000 MHz</p>	10.0 %	1.62 dB	1.0 %	2.38 dB	0.1 %	2.75 dB	0.01 %	2.94 dB	0.001 %	3.05 dB	0.0001 %	3.12 dB	Peak	3.16 dB		24.85 dBm
10.0 %	1.62 dB																
1.0 %	2.38 dB																
0.1 %	2.75 dB																
0.01 %	2.94 dB																
0.001 %	3.05 dB																
0.0001 %	3.12 dB																
Peak	3.16 dB																
	24.85 dBm																

5 Emission Bandwidth & Occupied Bandwidth Test

5.1. Limit


The Occupied Bandwidth Limit: N/A.

5.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Universal Radio Communication Tester	R & S	CMU200	109369	10/21/2014	2 years
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2015	1 year
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	----
Power Divider	Agilent	87302C	3239A00760	N.C.R.	----
Test Site	ATL	TE05	TE05	N.C.R.	----

Note: N.C.R. = No Calibration Request.

5.3. Setup

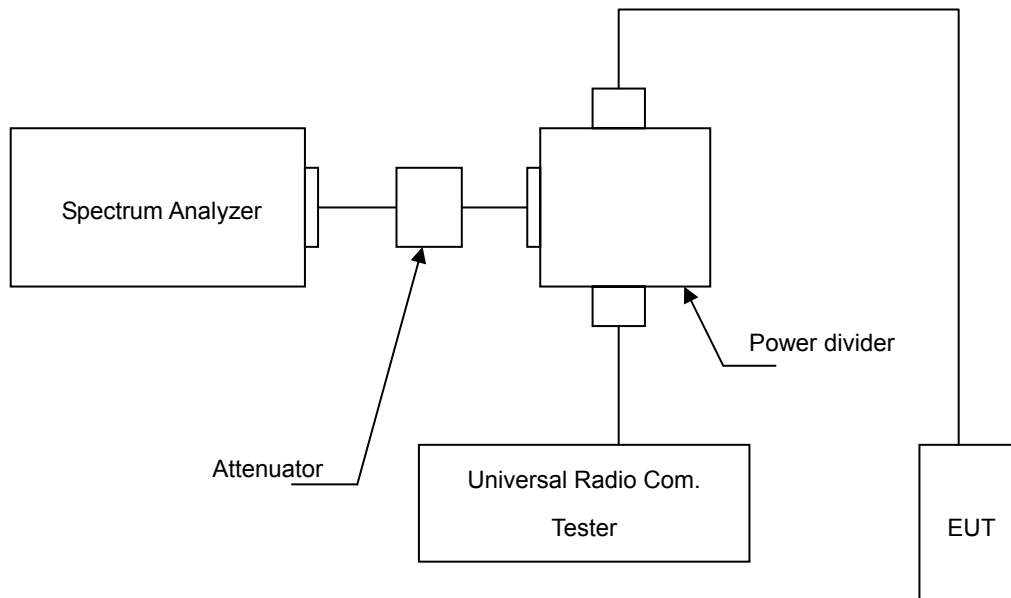

5.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT was connected to Spectrum Analyzer and Base Station via Power Divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers was measured.

5.5. Uncertainty




The measurement uncertainty is defined as $\pm 10\text{Hz}$

5.6. Test Result

Model Number	AC815S				
Test Item	Emission Bandwidth & Occupied Bandwidth				
Date of Test	10/14/2015				
Bands	Channel	Frequency (MHz)	-26dB Bandwidth (kHz)	99% Bandwidth (kHz)	Note
GPRS 850	128	824.2	313.582	239.4324	RBW:10KHz , VBW:30KHz
	190	836.6	313.379	245.3354	RBW:10KHz , VBW:30KHz
	251	848.8	325.255	247.8860	RBW:10KHz , VBW:30KHz
GPRS 1900	512	1850.20	311.237	241.2489	RBW:10KHz , VBW:30KHz
	661	1880.00	316.098	243.3965	RBW:10KHz , VBW:30KHz
	810	1909.80	317.785	243.0112	RBW:10KHz , VBW:30KHz
EGPRS 850	128	824.2	318.430	246.5877	RBW:10KHz , VBW:30KHz
	190	836.6	312.078	239.5082	RBW:10KHz , VBW:30KHz
	251	848.8	316.200	241.9950	RBW:10KHz , VBW:30KHz
EGPRS 1900	512	1850.20	318.794	249.2509	RBW:10KHz , VBW:30KHz
	661	1880.00	318.739	247.2321	RBW:10KHz , VBW:30KHz
	810	1909.80	328.440	252.2975	RBW:10KHz , VBW:30KHz

Bands	Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Note
WCDMA Band II	9262	1852.4	4.735	4.1439	RBW:100KHz , VBW:300KHz
	9400	1880.0	4.741	4.1512	RBW:100KHz , VBW:300KHz
	9538	1907.6	4.727	4.1638	RBW:100KHz , VBW:300KHz
WCDMA Band V	4132	826.4	4.736	4.1392	RBW:100KHz , VBW:300KHz
	4183	836.6	4.727	4.1619	RBW:100KHz , VBW:300KHz
	4233	846.6	4.703	4.1169	RBW:100KHz , VBW:300KHz

5.7. Test Graphs

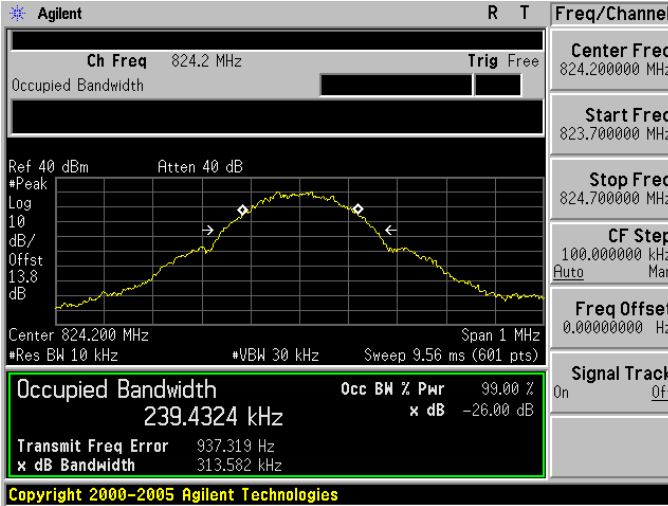
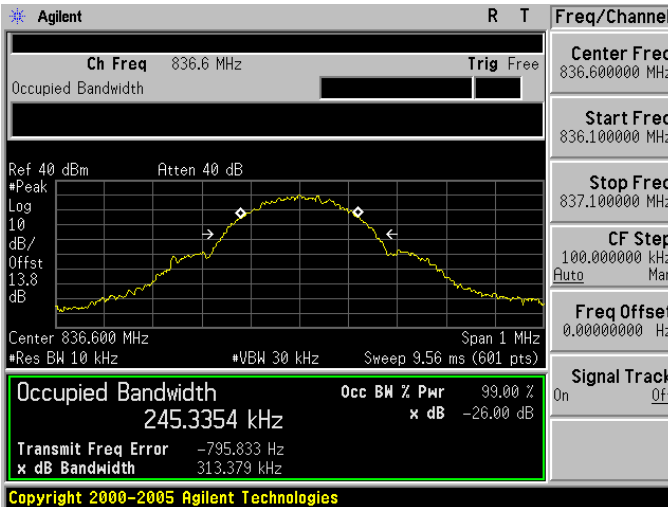
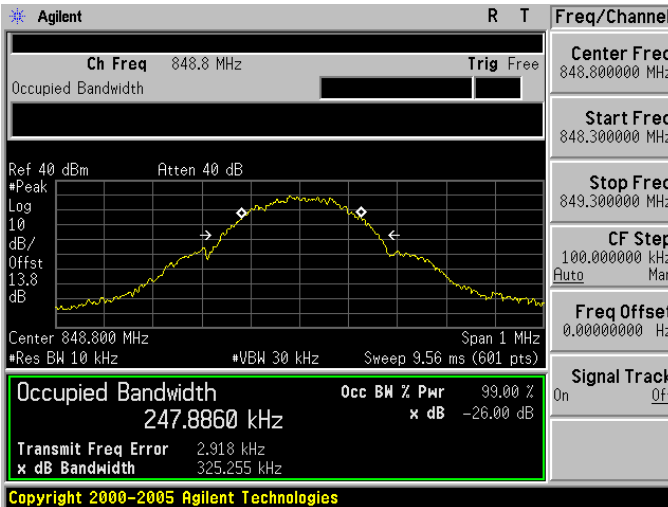
Mode 1: GPRS 850 link mode	
824.2 MHz	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 824.2 MHz Trig Free</p> <p>Center Freq 824.200000 MHz</p> <p>Start Freq 823.700000 MHz</p> <p>Stop Freq 824.700000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm Atten 40 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/Offst 13.8 dB</p> <p>Center 824.200 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 239.4324 kHz</p> <p>Occ BH % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 937.319 Hz</p> <p>x dB Bandwidth 313.582 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
836.6 MHz	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm Atten 40 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/Offst 13.8 dB</p> <p>Center 836.600 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 245.3354 kHz</p> <p>Occ BH % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -795.833 Hz</p> <p>x dB Bandwidth 313.379 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
848.8 MHz	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 848.8 MHz Trig Free</p> <p>Center Freq 848.800000 MHz</p> <p>Start Freq 848.300000 MHz</p> <p>Stop Freq 849.300000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm Atten 40 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/Offst 13.8 dB</p> <p>Center 848.800 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 247.8860 kHz</p> <p>Occ BH % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 2.918 kHz</p> <p>x dB Bandwidth 325.255 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 2: GPRS 1900 link mode

<p>1852.40 MHz</p>	<p>Agilent R T</p> <p>Ch Freq 1.8502 GHz Trig Free</p> <p>Center Freq 1.85020000 GHz</p> <p>Start Freq 1.84970000 GHz</p> <p>Stop Freq 1.85070000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 241.2489 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -297.433 Hz</p> <p>x dB Bandwidth 311.237 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>1880.00 MHz</p>	<p>Agilent R T</p> <p>Ch Freq 1.880 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87950000 GHz</p> <p>Stop Freq 1.88050000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 243.3965 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -75.664 Hz</p> <p>x dB Bandwidth 316.098 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>1907.60 MHz</p>	<p>Agilent R T</p> <p>Ch Freq 1.9098 GHz Trig Free</p> <p>Center Freq 1.90980000 GHz</p> <p>Start Freq 1.90930000 GHz</p> <p>Stop Freq 1.91030000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 243.0112 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 955.726 Hz</p> <p>x dB Bandwidth 317.785 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 3: EGPRS 850 link mode	
824.2 MHz	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 824.2 MHz Trig Free</p> <p>Center Freq 824.200000 MHz</p> <p>Start Freq 823.700000 MHz</p> <p>Stop Freq 824.700000 MHz</p> <p>CF Step 100.000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm Atten 40 dB</p> <p>Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst 13.8</p> <p>dB</p> <p>Center 824.200 MHz Span 1 MHz</p> <p>Res BW 10 kHz VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 246.5877 kHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -392.450 Hz</p> <p>x dB Bandwidth 318.430 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
836.6 MHz	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm Atten 40 dB</p> <p>Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst 13.8</p> <p>dB</p> <p>Center 836.600 MHz Span 1 MHz</p> <p>Res BW 10 kHz VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 239.5082 kHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 269.002 Hz</p> <p>x dB Bandwidth 312.078 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
848.8 MHz	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 848.8 MHz Trig Free</p> <p>Center Freq 848.800000 MHz</p> <p>Start Freq 848.300000 MHz</p> <p>Stop Freq 849.300000 MHz</p> <p>CF Step 100.000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm Atten 40 dB</p> <p>Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst 13.8</p> <p>dB</p> <p>Center 848.800 MHz Span 1 MHz</p> <p>Res BW 10 kHz VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 241.9950 kHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 2.138 kHz</p> <p>x dB Bandwidth 316.200 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 4: EGPRS 1900 link mode
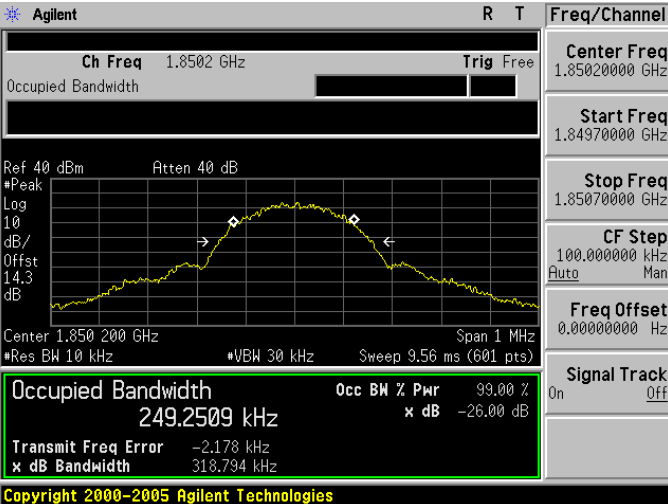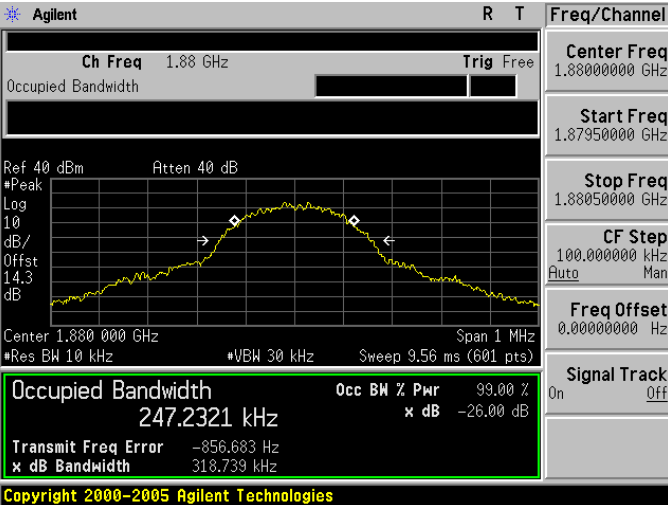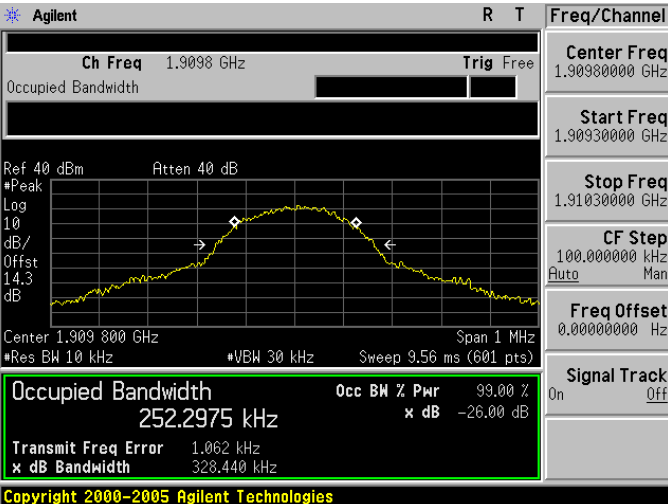
<p>1852.40 MHz</p>	 <p>Agilent R T</p> <p>Ch Freq 1.8502 GHz Trig Free</p> <p>Center Freq 1.85020000 GHz</p> <p>Start Freq 1.84970000 GHz</p> <p>Stop Freq 1.85070000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 249.2509 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -2.178 kHz</p> <p>x dB Bandwidth 318.794 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>1880.00 MHz</p>	 <p>Agilent R T</p> <p>Ch Freq 1.880 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87950000 GHz</p> <p>Stop Freq 1.88050000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 247.2321 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -856.683 Hz</p> <p>x dB Bandwidth 318.739 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>1907.60 MHz</p>	 <p>Agilent R T</p> <p>Ch Freq 1.9098 GHz Trig Free</p> <p>Center Freq 1.90980000 GHz</p> <p>Start Freq 1.90930000 GHz</p> <p>Stop Freq 1.91030000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 252.2975 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.062 kHz</p> <p>x dB Bandwidth 328.440 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 5: WCDMA Band II link mode

<p>1852.40 MHz</p>	<p>Agilent R T</p> <p>Ch Freq 1.8524 GHz Trig Free</p> <p>Center Freq 1.85240000 GHz</p> <p>Start Freq 1.84740000 GHz</p> <p>Stop Freq 1.85740000 GHz</p> <p>CF Step 1.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1439 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 1.582 kHz</p> <p>x dB Bandwidth 4.735 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>1880.00 MHz</p>	<p>Agilent R T</p> <p>Ch Freq 1.880 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87500000 GHz</p> <p>Stop Freq 1.88500000 GHz</p> <p>CF Step 1.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1512 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 601.351 Hz</p> <p>x dB Bandwidth 4.741 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>1907.60 MHz</p>	<p>Agilent R T</p> <p>Ch Freq 1.9076 GHz Trig Free</p> <p>Center Freq 1.90760000 GHz</p> <p>Start Freq 1.90260000 GHz</p> <p>Stop Freq 1.91260000 GHz</p> <p>CF Step 1.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1638 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -2.939 kHz</p> <p>x dB Bandwidth 4.727 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 6: WCDMA Band V link mode

<p>826.4 MHz</p>	<p>Agilent R T</p> <p>Ch Freq 826.4 MHz Trig Free</p> <p>Center Freq 826.400000 MHz</p> <p>Start Freq 821.400000 MHz</p> <p>Stop Freq 831.400000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 30 dBm Atten 30 dB</p> <p>Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst 13.8</p> <p>dB</p> <p>Center 826.40 MHz Span 10 MHz</p> <p>Res BW 100 kHz VBW 300 kHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 4.1392 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 11.913 kHz</p> <p>x dB Bandwidth 4.736 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>836.6 MHz</p>	<p>Agilent R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 30 dBm Atten 30 dB</p> <p>Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst 13.8</p> <p>dB</p> <p>Center 836.60 MHz Span 10 MHz</p> <p>Res BW 100 kHz VBW 300 kHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 4.1619 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -7.623 kHz</p> <p>x dB Bandwidth 4.727 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>846.6 MHz</p>	<p>Agilent R T</p> <p>Ch Freq 846.6 MHz Trig Free</p> <p>Center Freq 846.600000 MHz</p> <p>Start Freq 841.600000 MHz</p> <p>Stop Freq 851.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 30 dBm Atten 30 dB</p> <p>Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst 13.8</p> <p>dB</p> <p>Center 846.60 MHz Span 10 MHz</p> <p>Res BW 100 kHz VBW 300 kHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 4.1169 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -7.798 kHz</p> <p>x dB Bandwidth 4.703 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>

6 Band Edge Test

6.1. Limit

The Band Edge Limit:


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

6.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Universal Radio Communication Tester	R & S	CMU200	109369	10/21/2014	2 years
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2015	1 year
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	----
Power Divider	Agilent	87302C	3239A00760	N.C.R.	----
Test Site	ATL	TE05	TE05	N.C.R.	----

Note: N.C.R. = No Calibration Request.

6.3. Setup

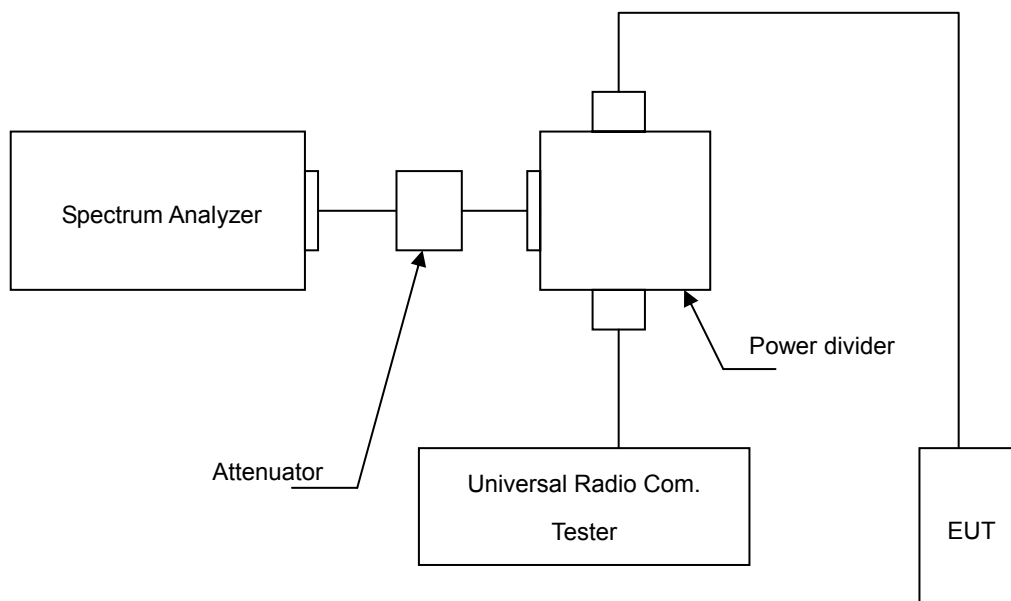

6.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT was connected to Spectrum Analyzer and Base Station via Power Divider.
2. The band edge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly BW/100.
3. The band edge setting:
 - a. RB=10 kHz; VB=30 kHz for GSM 850 and PCS 1900.
 - b. RB=51 kHz; VB=160 kHz for WCDMA Band V and WCDMA Band II.


6.5. Uncertainty

The measurement uncertainty is defined as $\pm 10\text{Hz}$

6.6. Test Result


Model Number		AC815S				
Test Item		Band Edge				
Date of Test		10/14/2015				
Bands		Channel	Frequency (MHz)	Measurement (dBm)	Limit (dBm)	Result
GPRS 850	Lower	128	824.0000	-14.93	-13	Pass
	Higher	251	849.0000	-16.44	-13	Pass
GPRS 1900	Lower	512	1850.000	-16.97	-13	Pass
	Higher	810	1910.000	-15.58	-13	Pass
WCDMA Band II	Lower	9262	1850.000	-18.06	-13	Pass
	Higher	9538	1910.000	-16.12	-13	Pass
WCDMA Band V	Lower	4132	824.0000	-17.86	-13	Pass
	Higher	4233	849.0000	-18.93	-13	Pass

6.7. Test Graphs

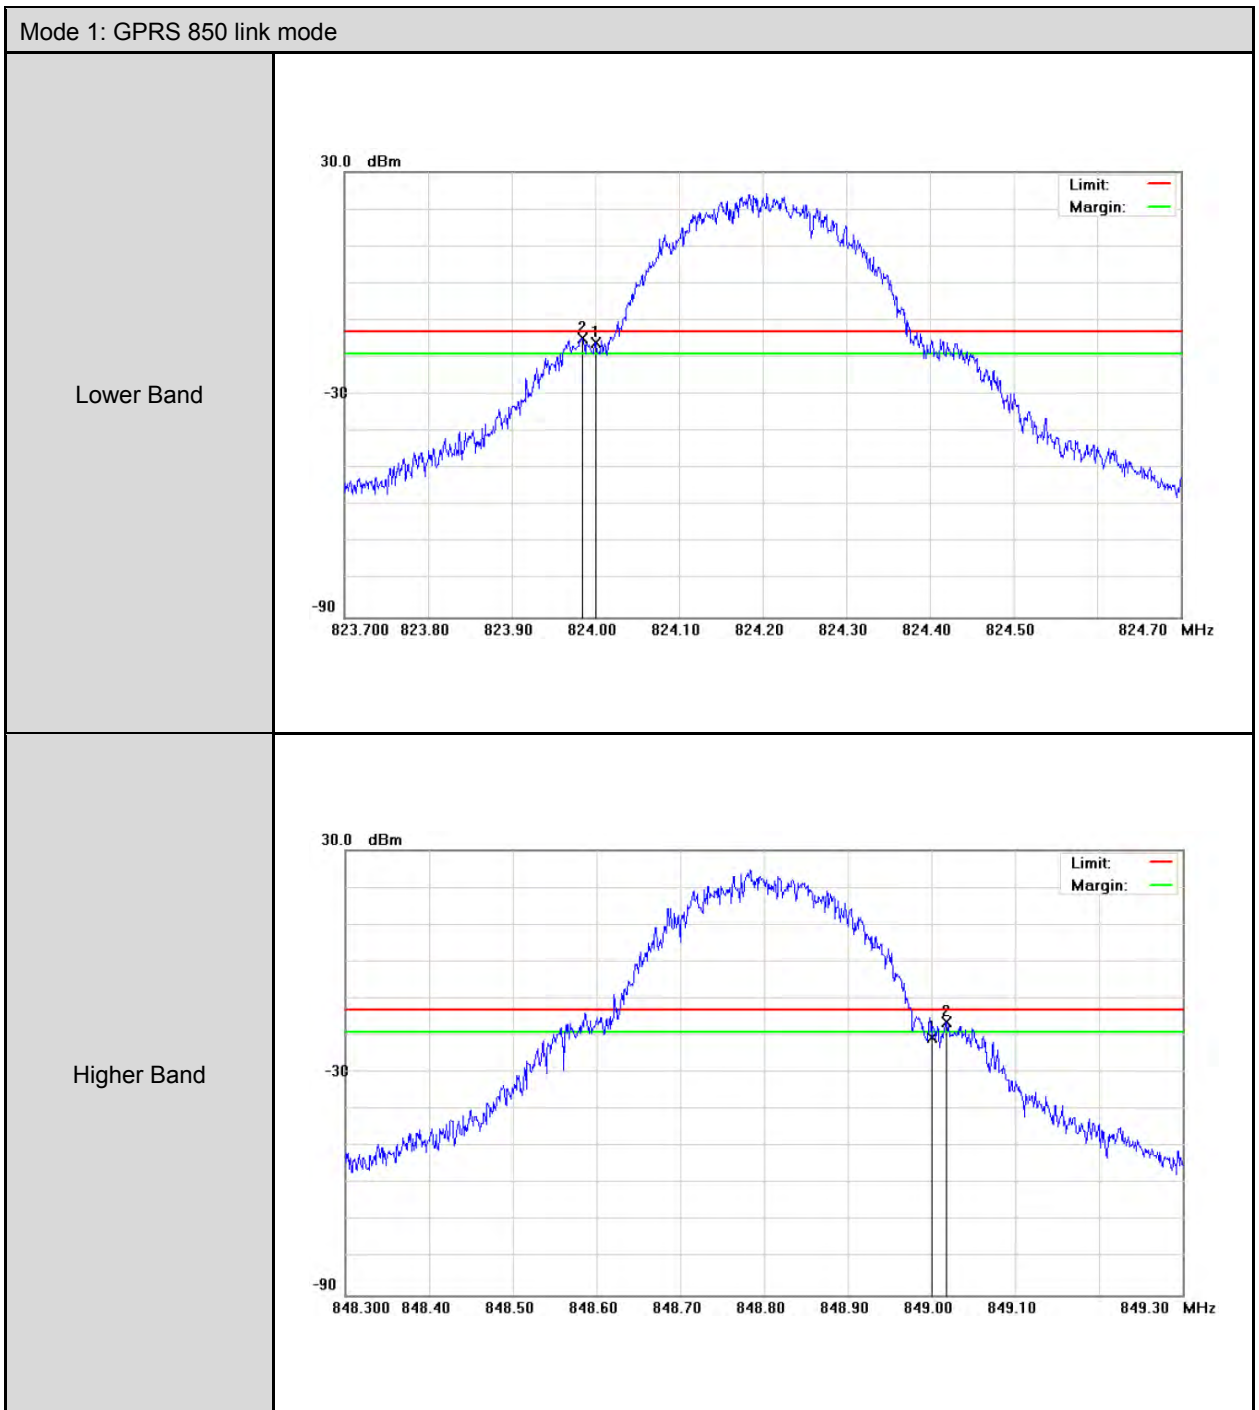


Mode 2: GPRS 1900 link mode

Lower Band

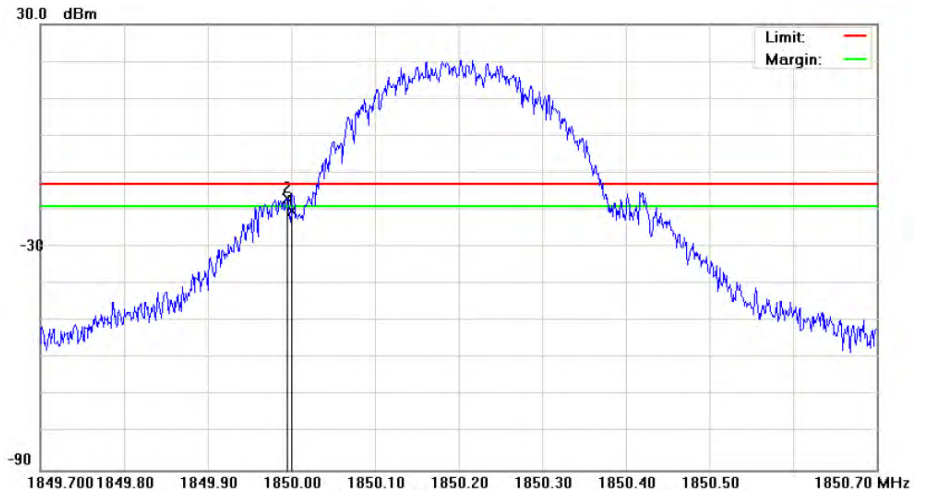


Higher Band

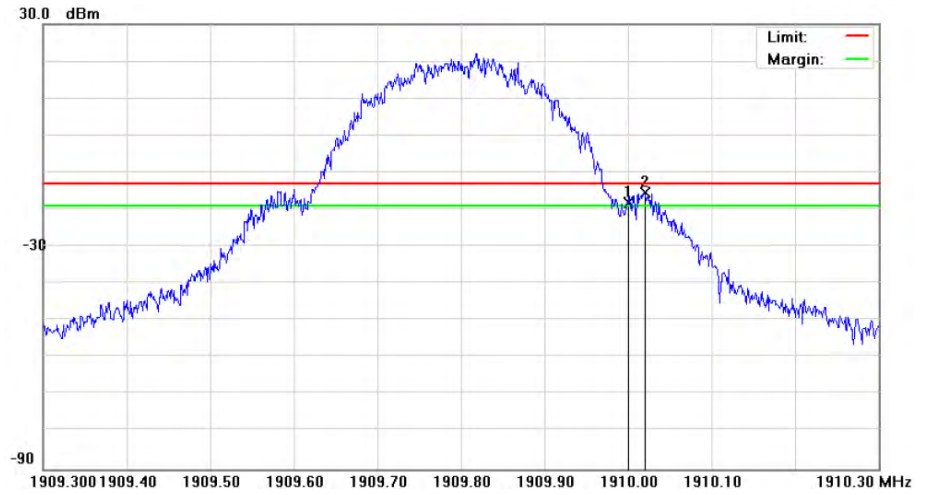


Mode 5: WCDMA Band II link mode


Lower Band

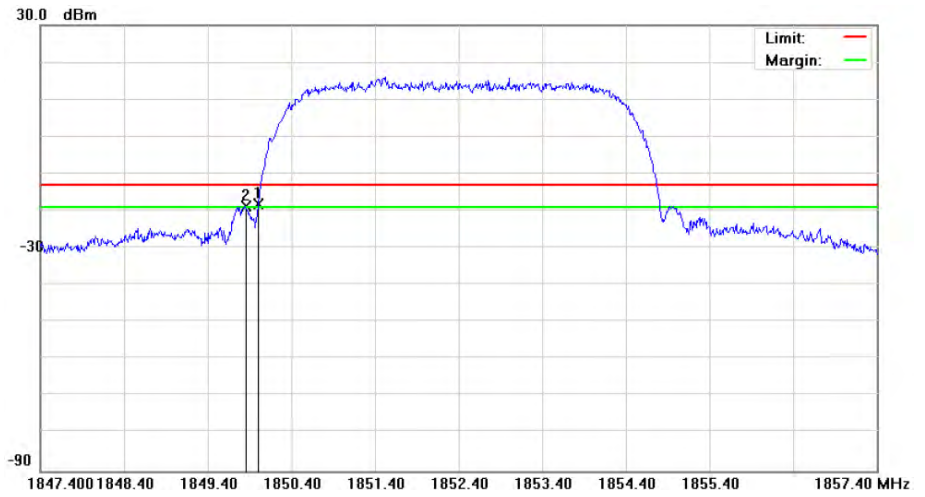

Higher Band

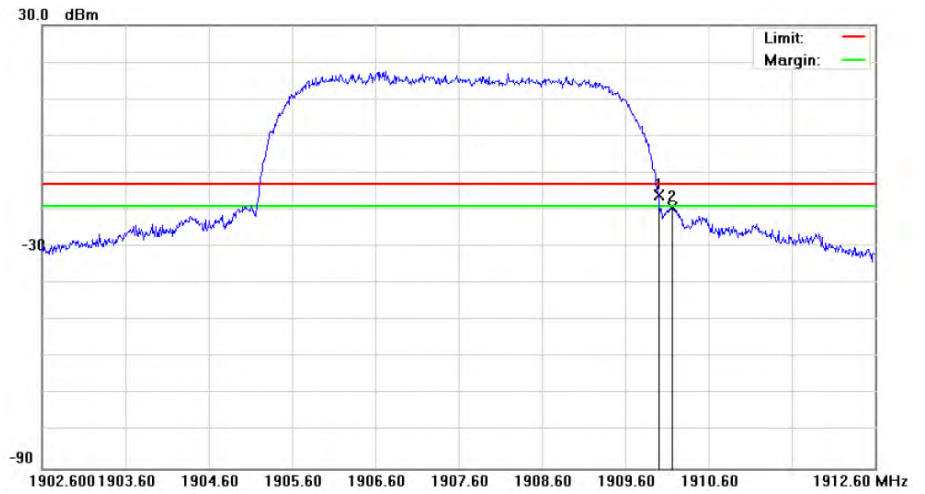

Mode 6: WCDMA Band V link mode

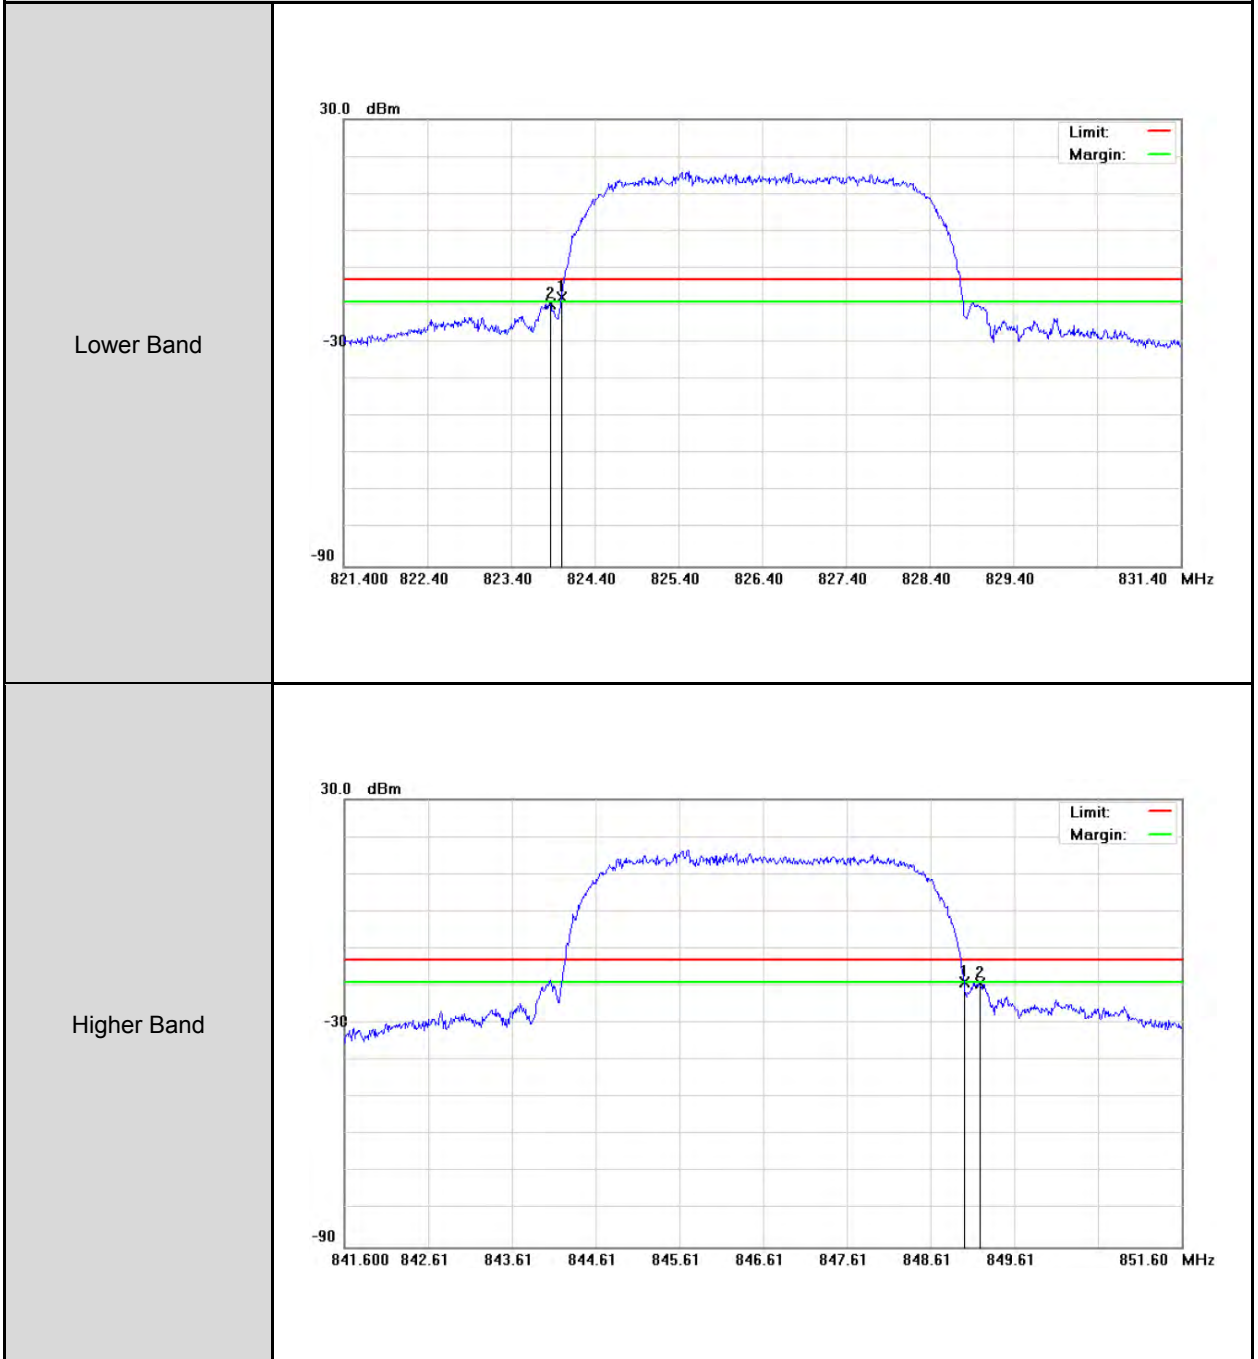

7 Conducted Spurious Emission Test

7.1. Limit


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

7.2. Test Instruments


Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Universal Radio Communication Tester	R & S	CMU200	109369	10/21/2014	2 years
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2015	1 year
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power Divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

7.3. Setup

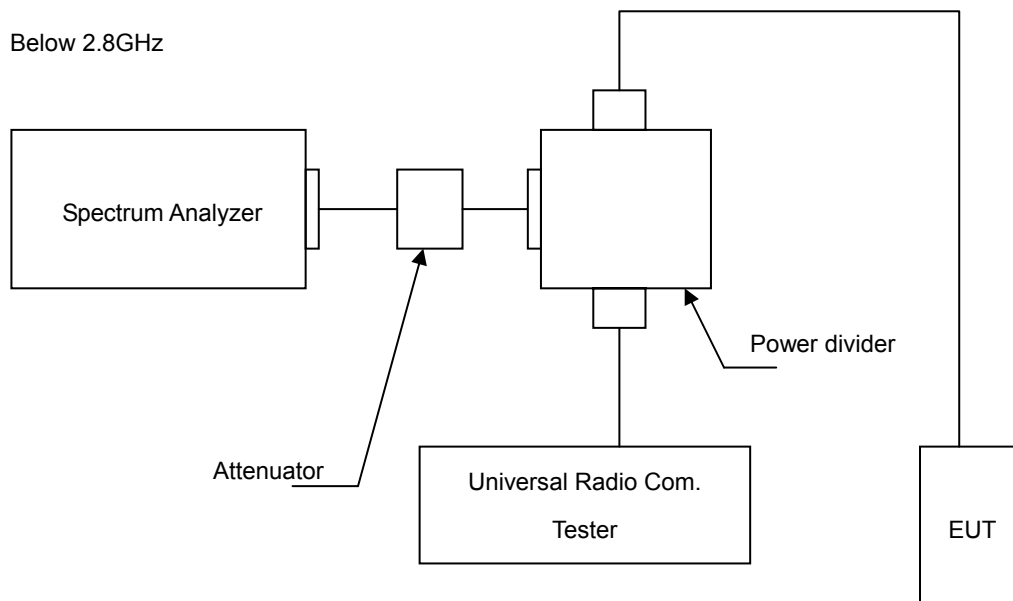

Above 2.8GHz

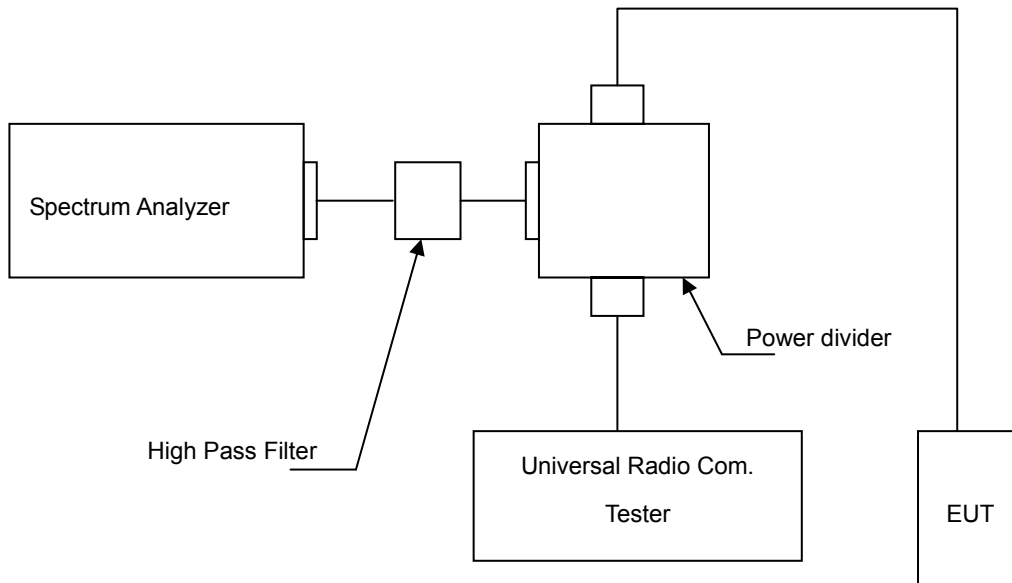

7.4. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via Power Divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

7.5. Uncertainty

The measurement uncertainty is evaluated as ± 2.24 dB.

7.6. Test Result


Model Number	AC815S
Test Item	Conducted Spurious Emission
Test Mode	Mode 1 / Mode 2 / Mode 5 / Mode 6
Date of Test	10/14/2015

File :AC815S(CH128)

Data :#1

Date: 2015/10/14

Time: 上午 11:29:50

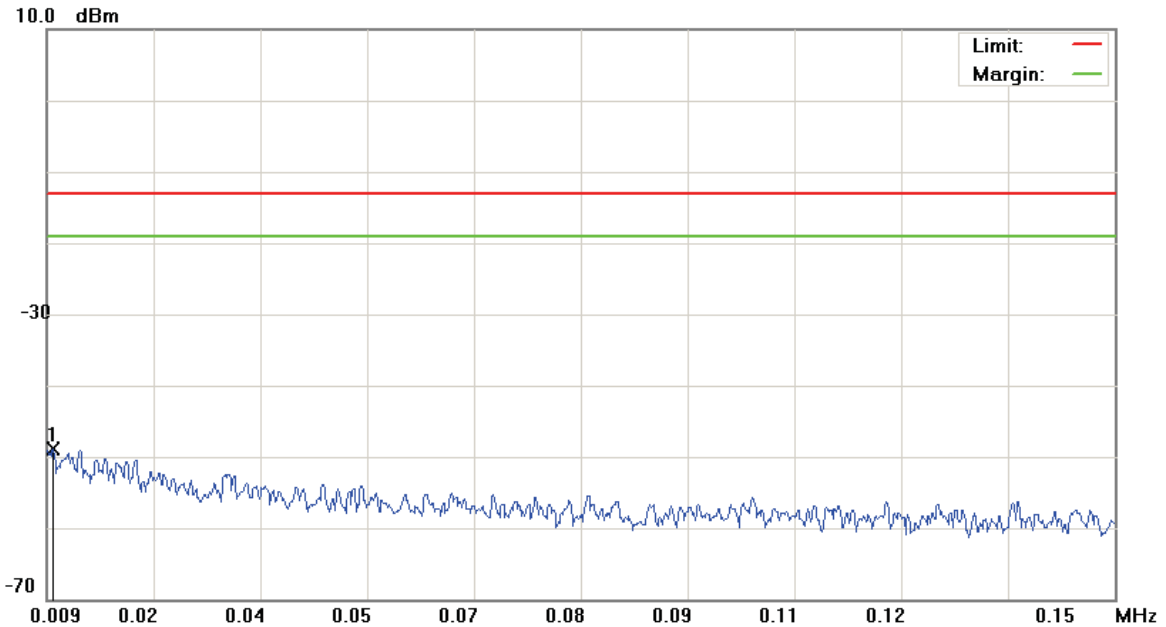

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: GPRS 850

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	cm	degree	Comment
1	*	0.0098	-79.55	30.58	-48.97	-13.00	-35.97			peak


*:Maximum data x:Over limit !:over margin

File :AC815S(CH128)

Data :#2

Date: 2015/10/14

Time: 上午 11:30:14

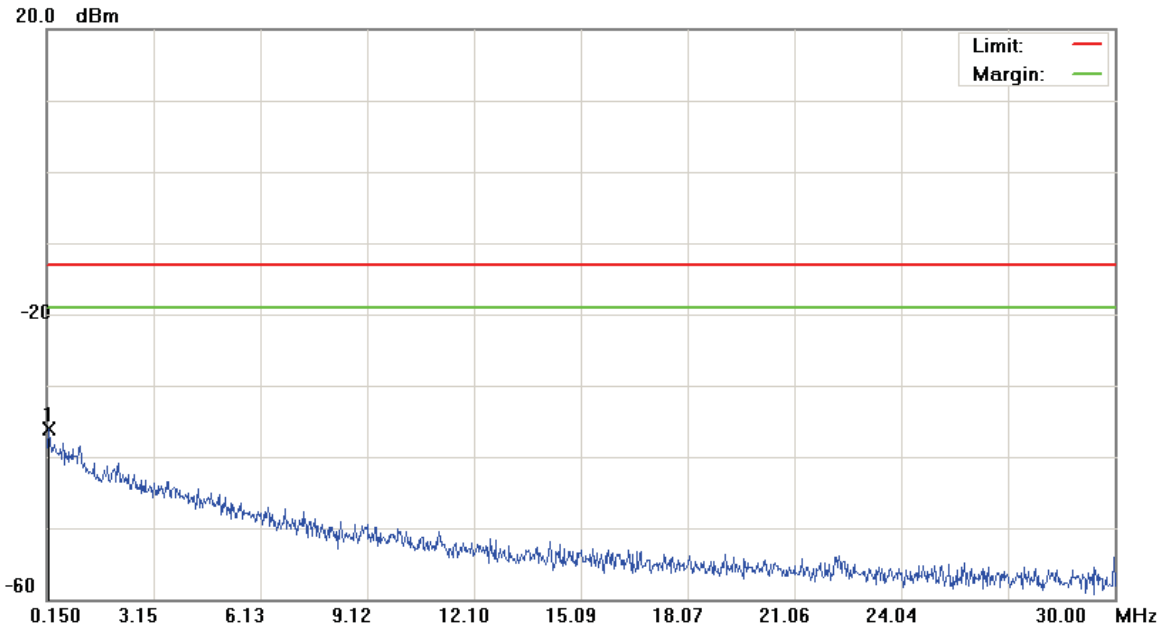

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: AC815S

Mode: GPRS 850

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	cm	degree	Comment
1	*	0.2097	-67.11	31.00	-36.11	-13.00	-23.11	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH128)

Data :#3

Date: 2015/10/14

Time: 上午 11:30:38

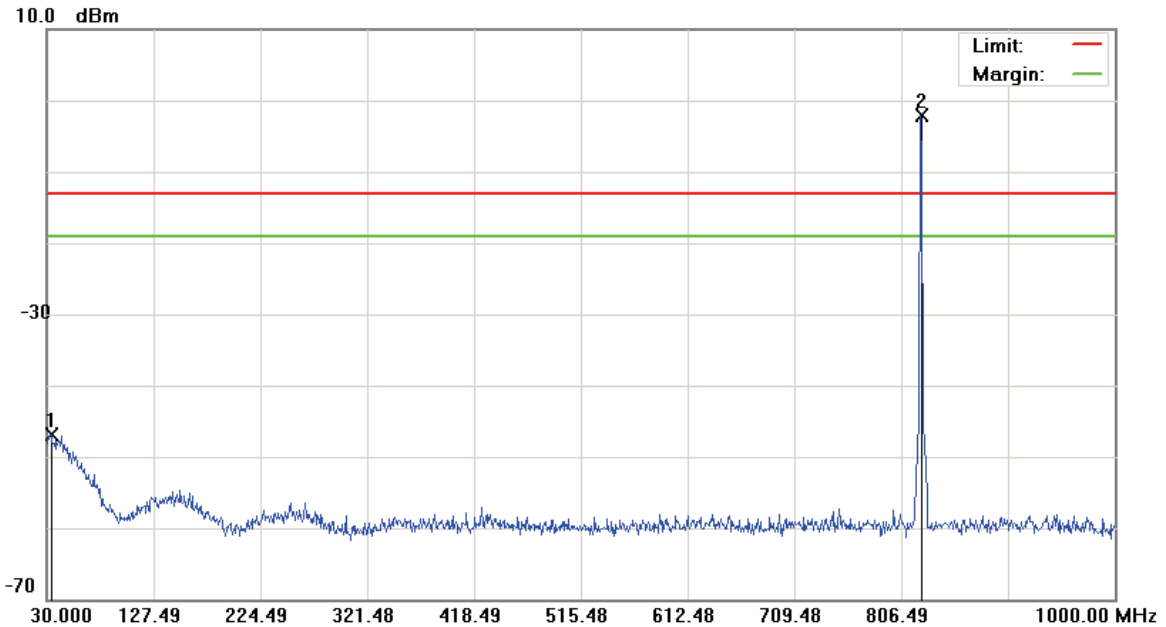

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 100 KHz VBW: 300 KHz

M/N: AC815S

Mode: GPRS 850

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Detector	Comment
1		33.3950	-63.64	16.83	-46.81	-13.00	-33.81			peak	
2	*	823.9450	-5.93	3.83	-2.10	-13.00	10.90			peak	Tx


*:Maximum data x:Over limit !:over margin

File :AC815S(CH128)

Data :#4

Date: 2015/10/14

Time: 上午 11:00:22

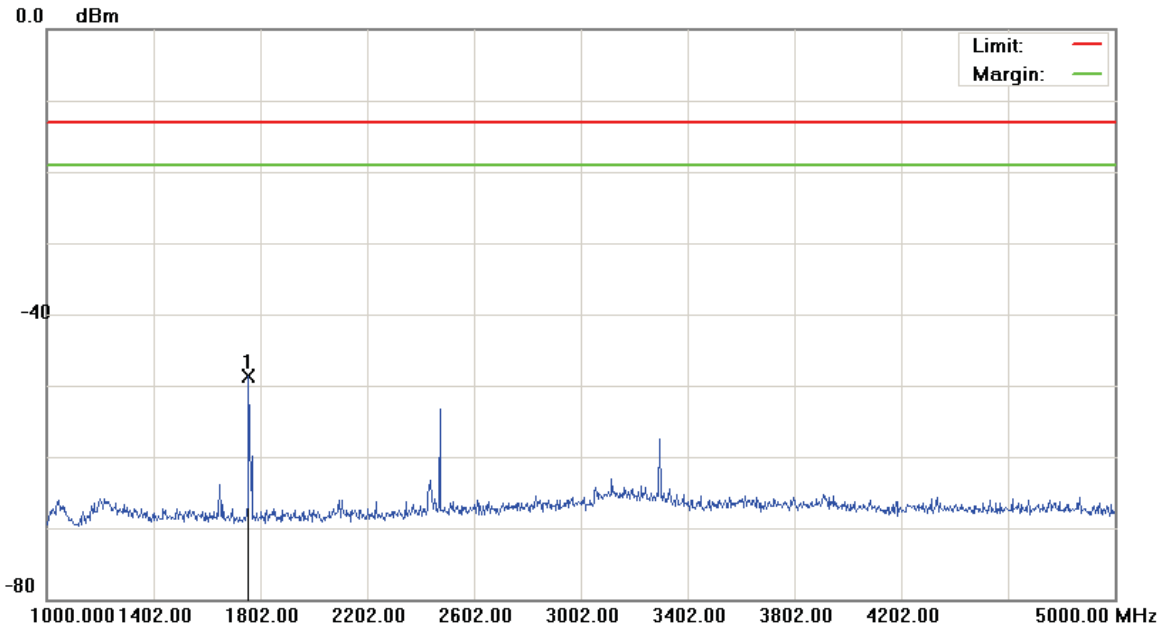

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 850		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1756.000	-53.07	4.36	-48.71	-13.00	-35.71	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH128)

Data :#5

Date: 2015/10/14

Time: 上午 11:00:45

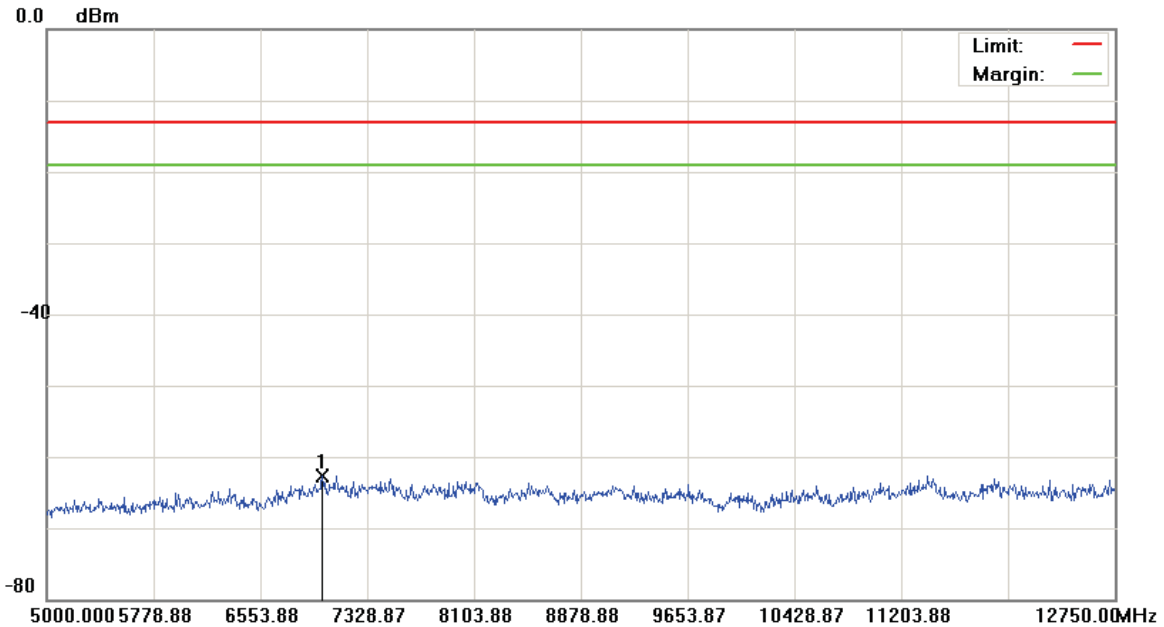

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 850		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	6999.500	-67.67	4.92	-62.75	-13.00	-49.75	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH190)

Data :#1

Date: 2015/10/14

Time: 上午 11:34:51

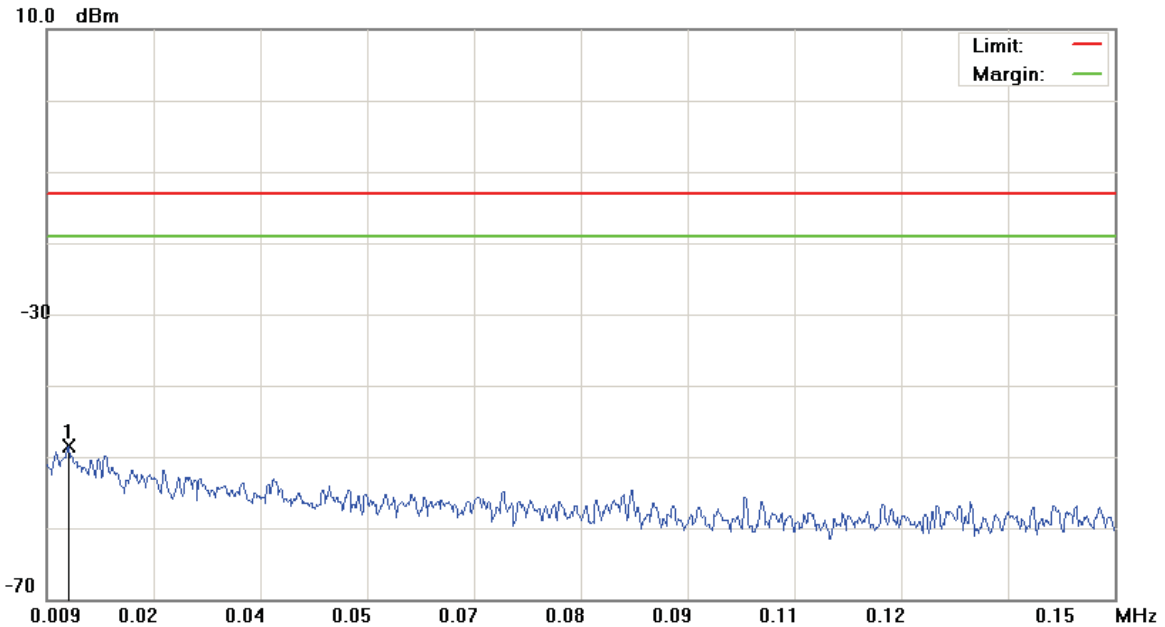

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: GPRS 850

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0120	-79.06	30.57	-48.49	-13.00	-35.49	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH190)

Data :#2

Date: 2015/10/14

Time: 上午 11:35:15

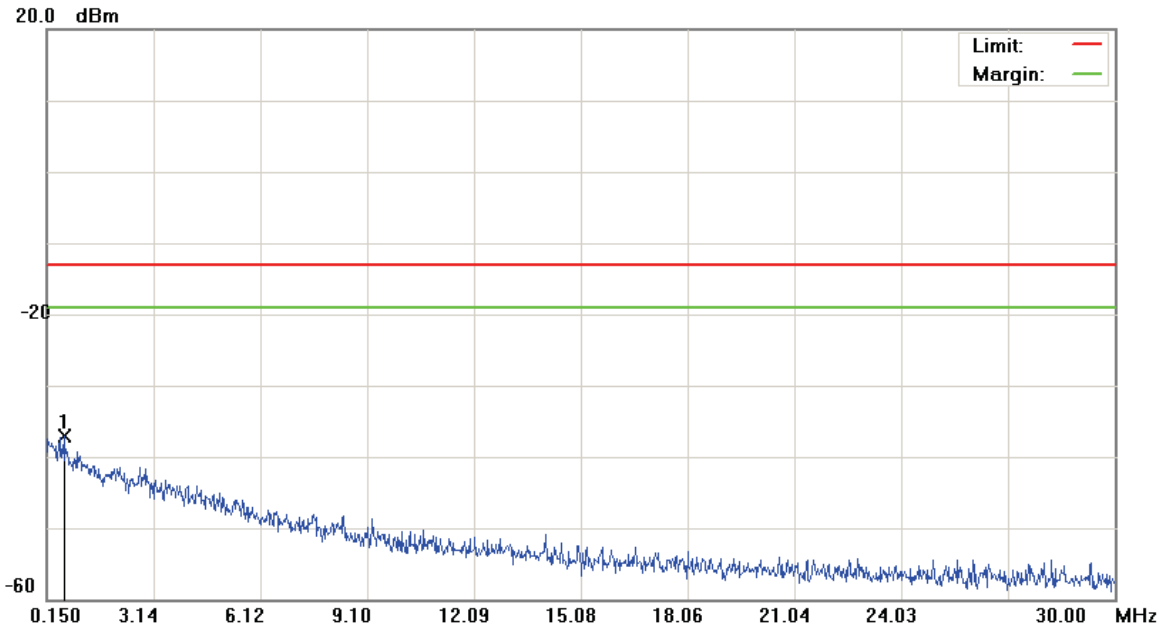

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: AC815S

Mode: GPRS 850

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.6425	-69.10	31.91	-37.19	-13.00	-24.19	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH190)

Data :#3

Date: 2015/10/14

Time: 上午 11:35:39

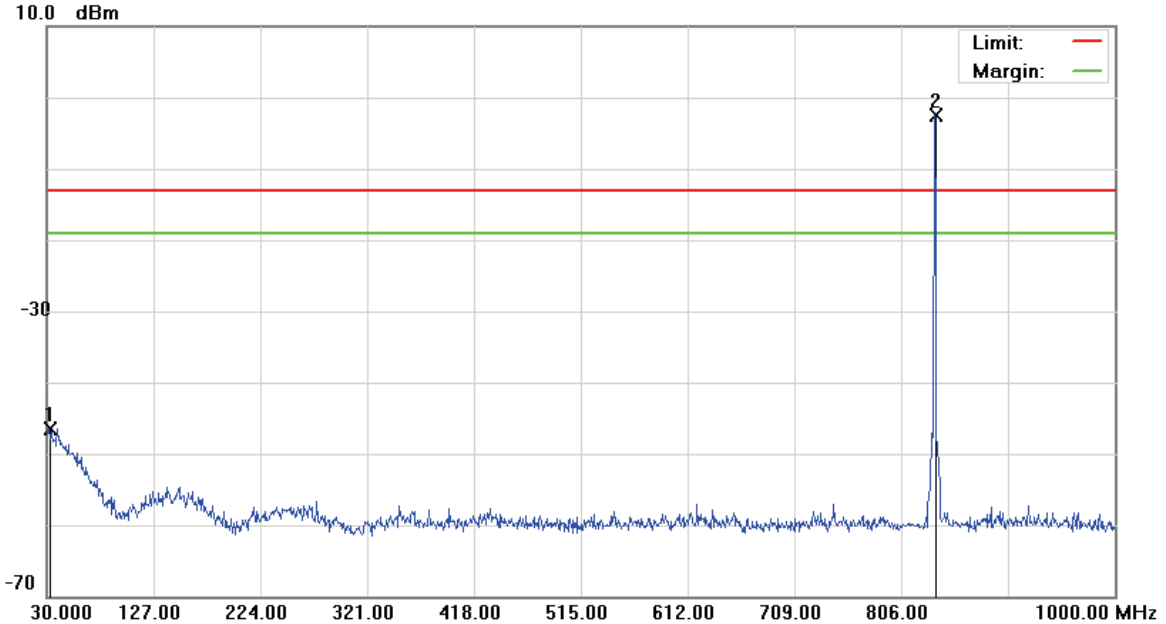

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 100 KHz VBW: 300 KHz

M/N: AC815S

Mode: GPRS 850

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1		32.4250	-63.36	16.94	-46.42	-13.00	-33.42	peak		
2	*	836.5550	-6.45	3.96	-2.49	-13.00	10.51	peak		Tx


*:Maximum data x:Over limit !:over margin

File :AC815S(CH190)

Data :#4

Date: 2015/10/14

Time: 上午 11:02:18

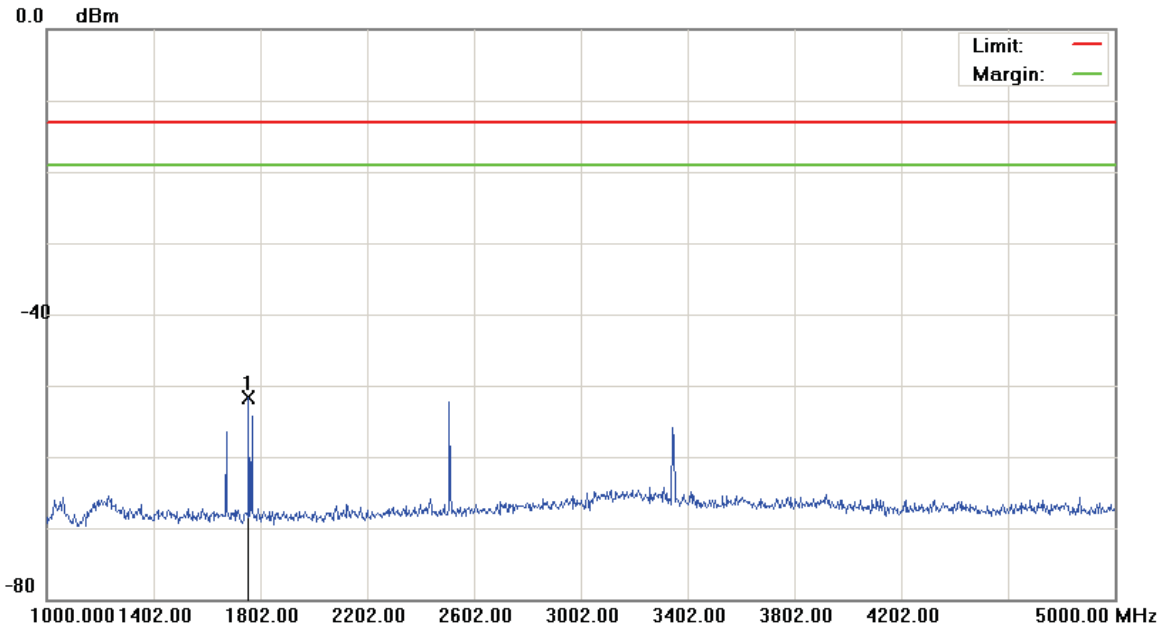

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 850		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1756.000	-56.15	4.36	-51.79	-13.00	-38.79	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH190)

Data :#5

Date: 2015/10/14

Time: 上午 11:02:41

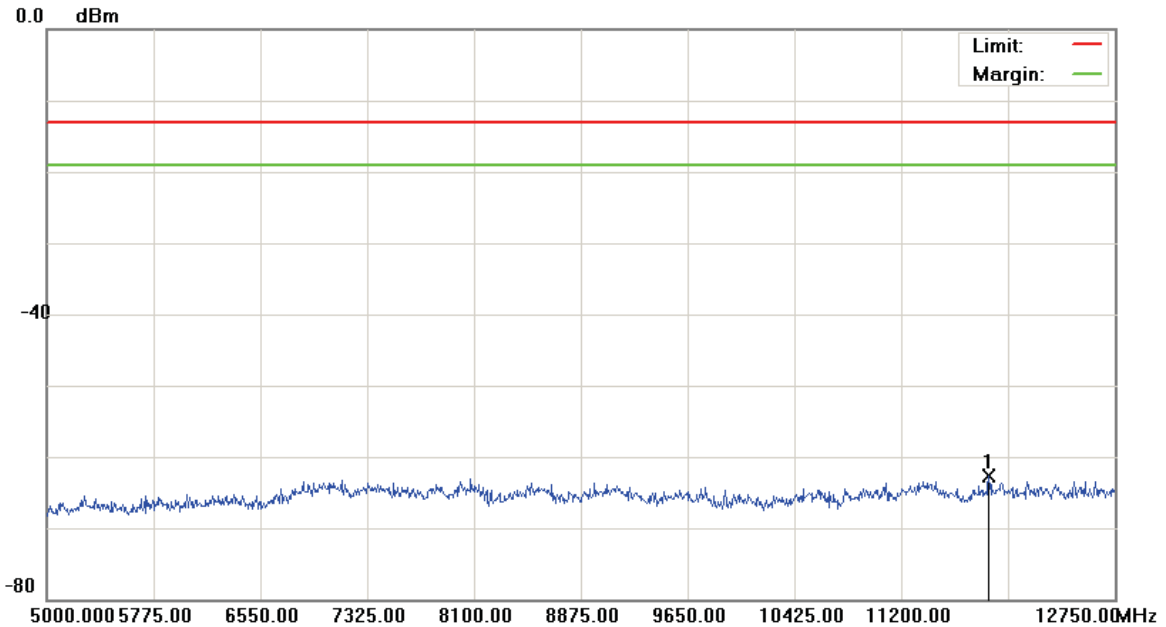

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 850		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Detector	Comment
1	*	11835.500	-68.22	5.57	-62.65	-13.00	-49.65			peak	


*:Maximum data x:Over limit !:over margin

File :AC815S(CH251)

Data :#1

Date: 2015/10/14

Time: 上午 11:37:37

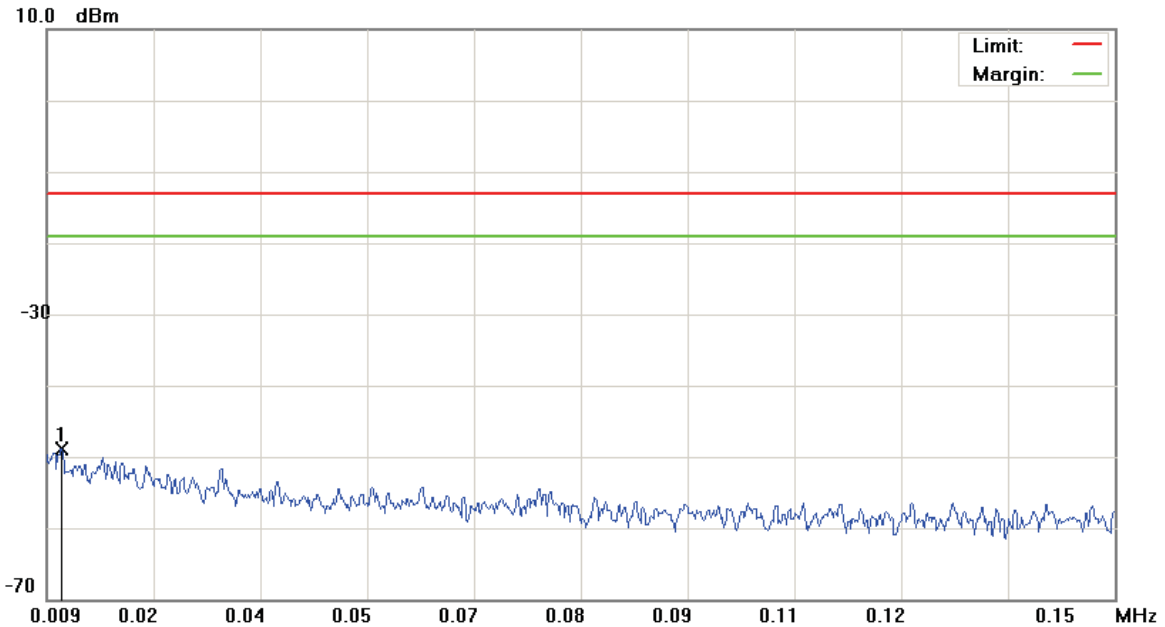

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: GPRS 850

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0110	-79.52	30.57	-48.95	-13.00	-35.95	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH251)

Data :#2

Date: 2015/10/14

Time: 上午 11:38:01

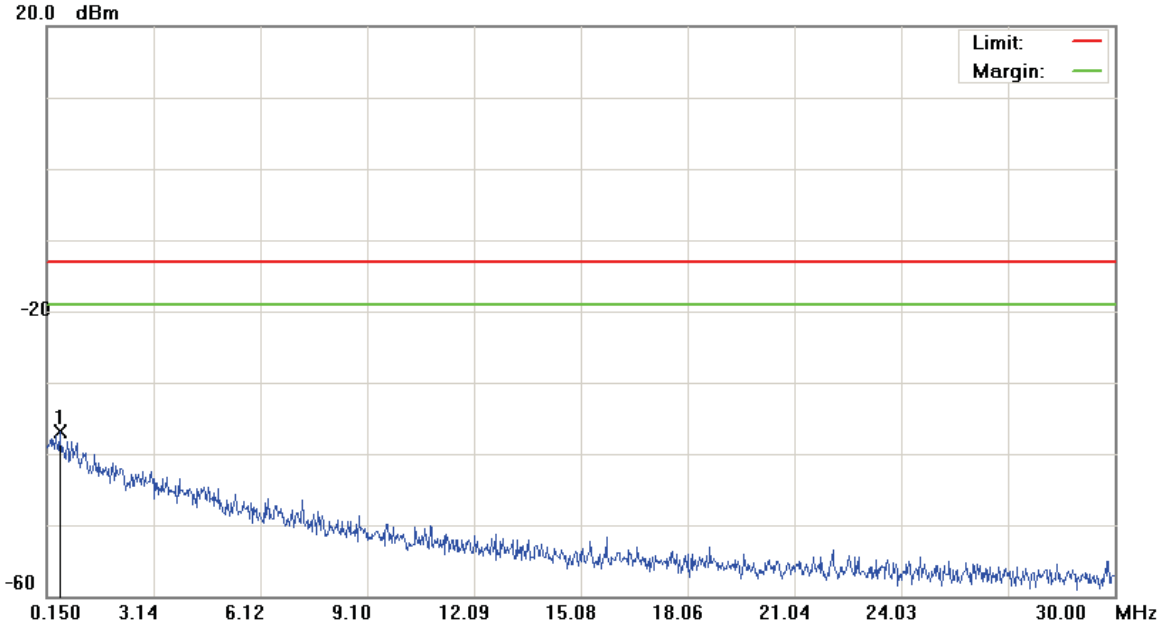

Site: site #1	Polarization: <i>Conducted</i>	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 10 KHz VBW: 30 KHz
M/N: AC815S		
Mode: GPRS 850		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.5231	-68.97	32.01	-36.96	-13.00	-23.96	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH251)

Data :#3

Date: 2015/10/14

Time: 上午 11:38:25

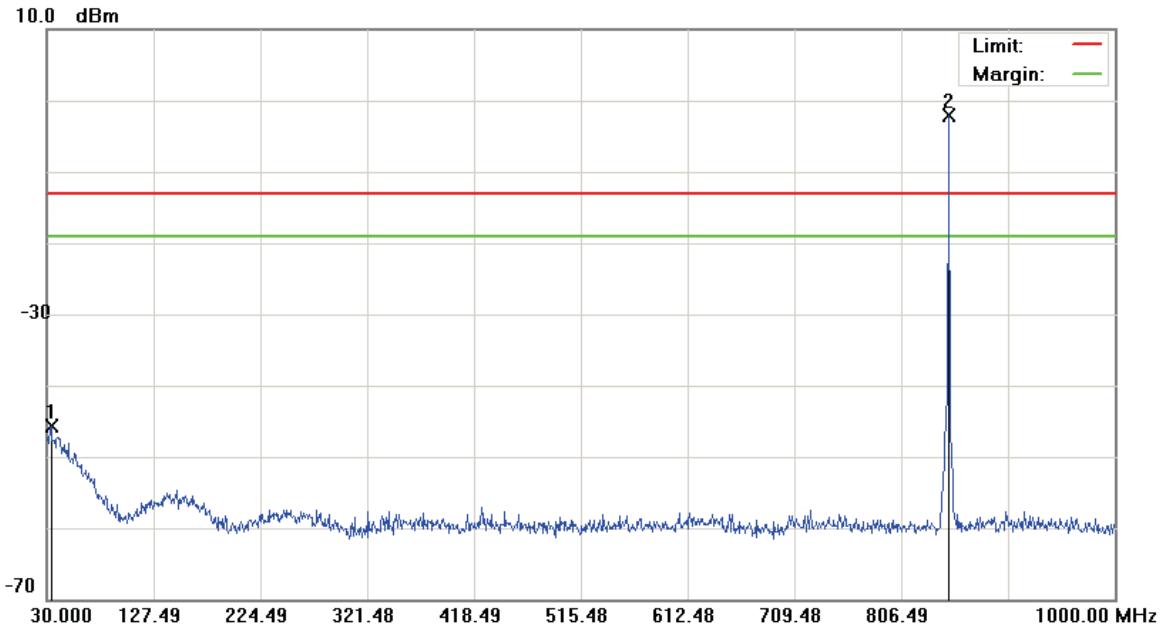

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 100 KHz VBW: 300 KHz

M/N: AC815S

Mode: GPRS 850

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1		34.3650	-62.52	16.72	-45.80	-13.00	-32.80	peak		
2	*	849.6500	-6.01	3.98	-2.03	-13.00	10.97	peak		Tx


*:Maximum data x:Over limit !:over margin

File :AC815S(CH251)

Data :#4

Date: 2015/10/14

Time: 上午 11:06:21

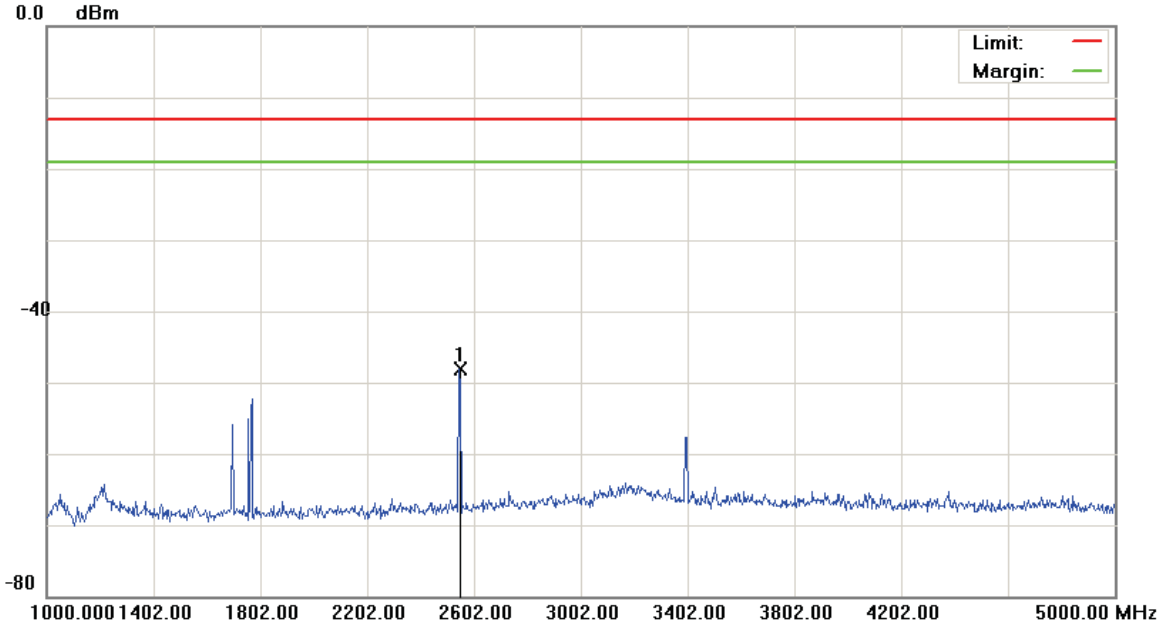

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 850		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2546.000	-52.60	4.45	-48.15	-13.00	-35.15	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH251)

Data :#5

Date: 2015/10/14

Time: 上午 11:06:44

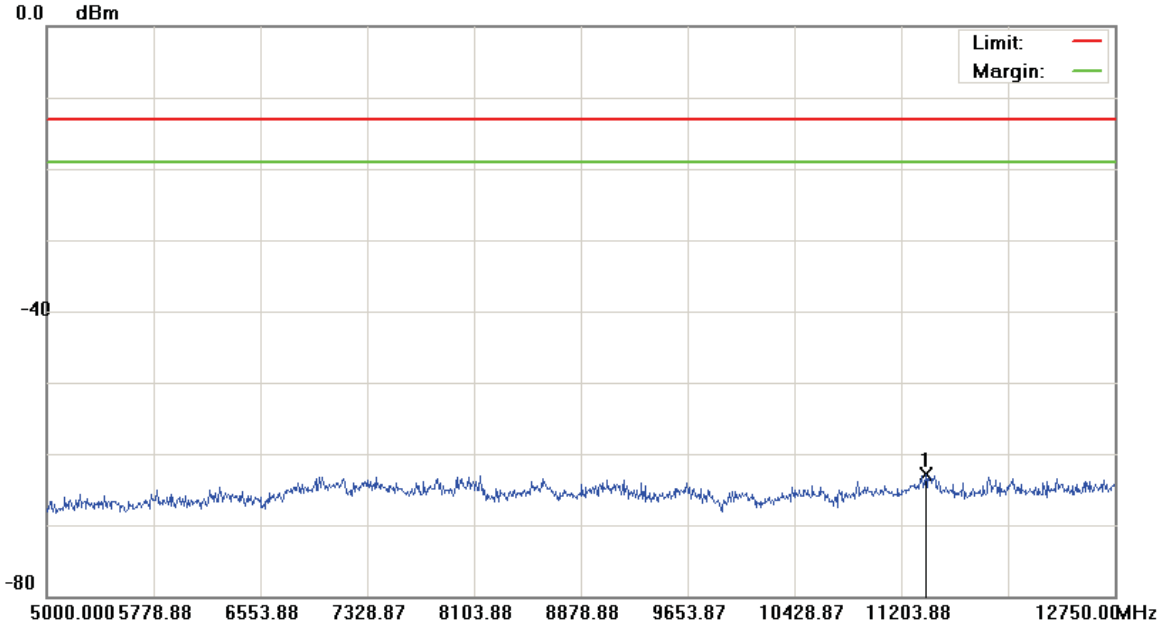

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 850		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	11378.250	-68.30	5.45	-62.85	-13.00	-49.85	Detector	peak	


*:Maximum data x:Over limit !:over margin

File :AC815S(CH512)

Data :#1

Date: 2015/10/14

Time: 上午 11:14:10

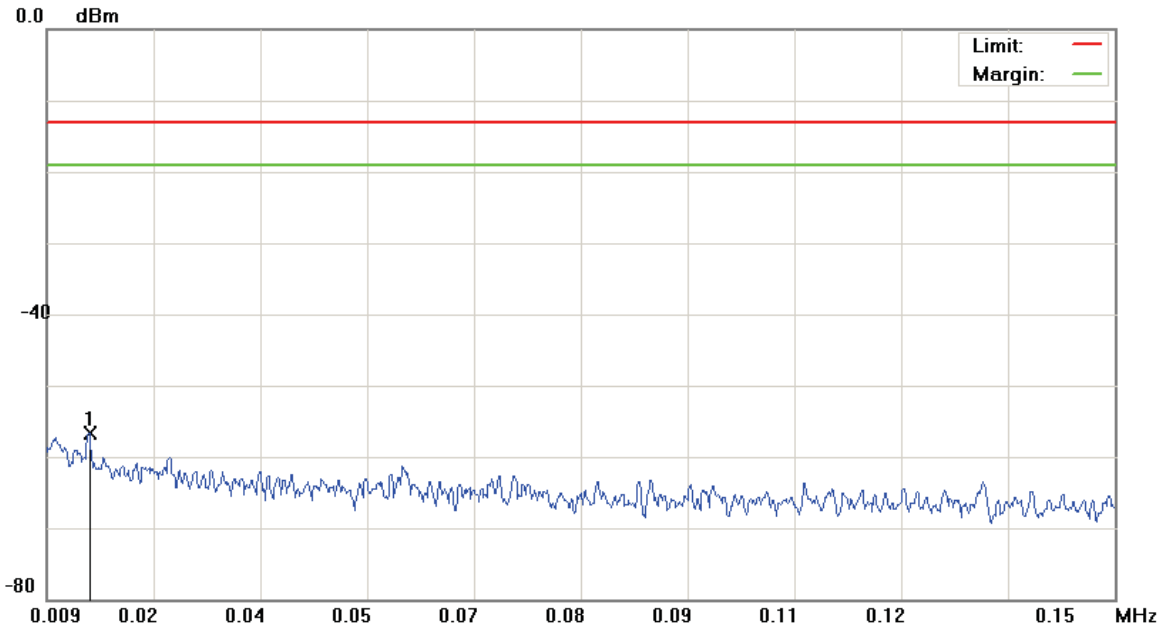

Site: site #1	Polarization: <i>Conducted</i>	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1 KHz VBW: 3 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0146	-68.12	11.39	-56.73	-13.00	-43.73	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH512)

Data :#2

Date: 2015/10/14

Time: 上午 11:14:34

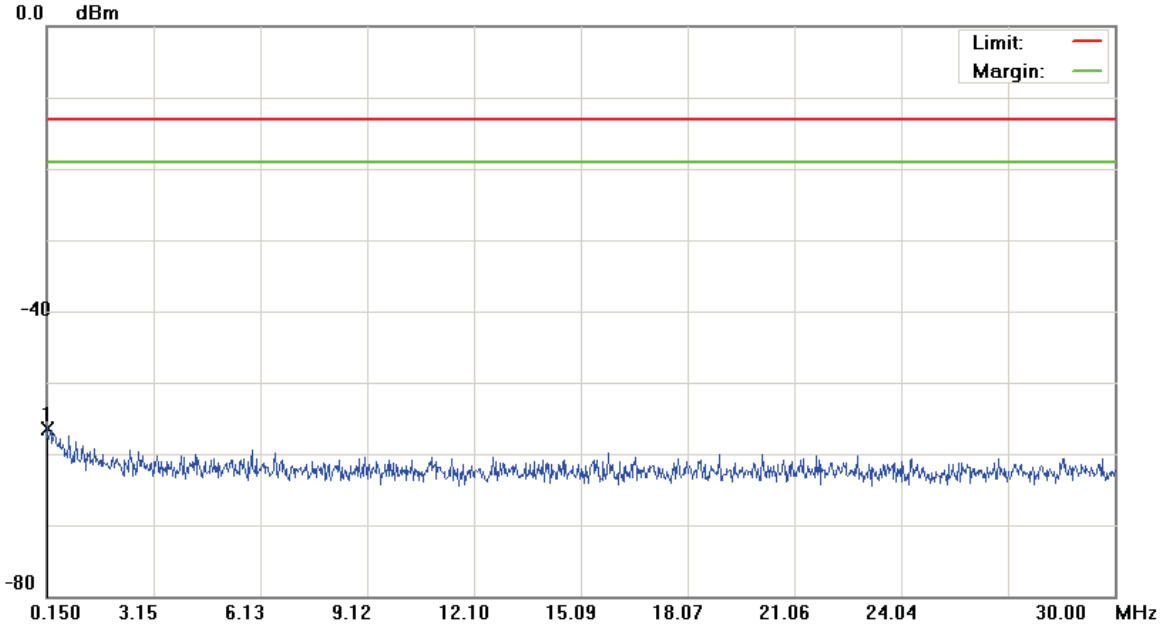

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 10 KHz VBW: 30 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.1650	-68.86	12.46	-56.40	-13.00	-43.40	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH512)

Data :#3

Date: 2015/10/14

Time: 上午 11:14:58

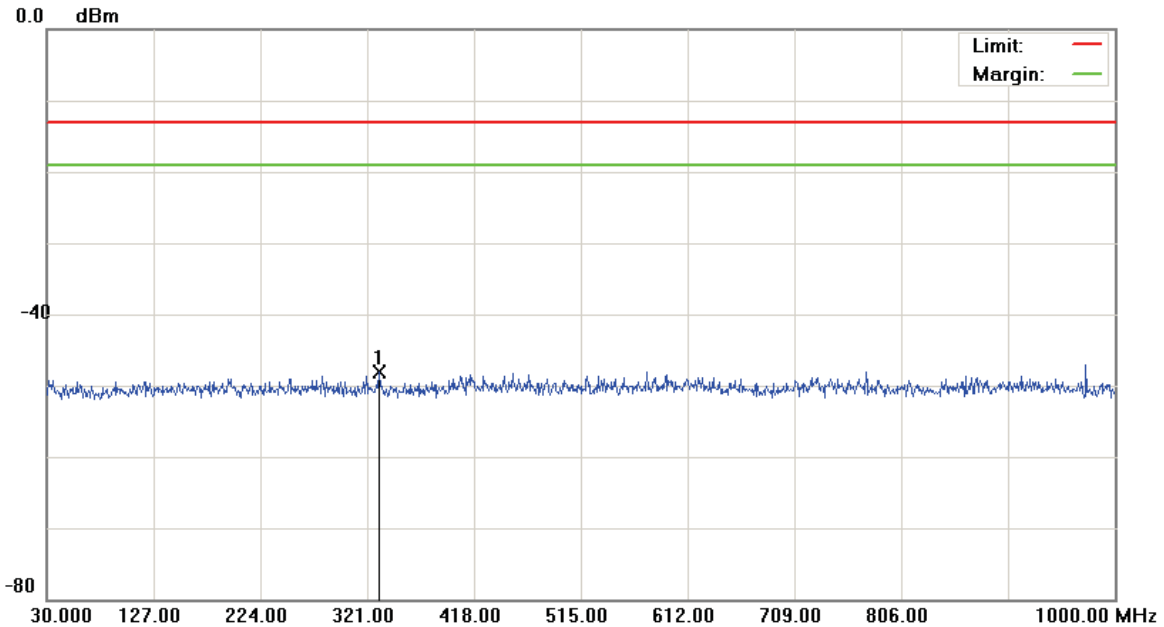

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 100 KHz VBW: 300 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	331.6700	-61.19	13.15	-48.04	-13.00	-35.04	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH512)

Data :#4

Date: 2015/10/14

Time: 上午 11:21:52

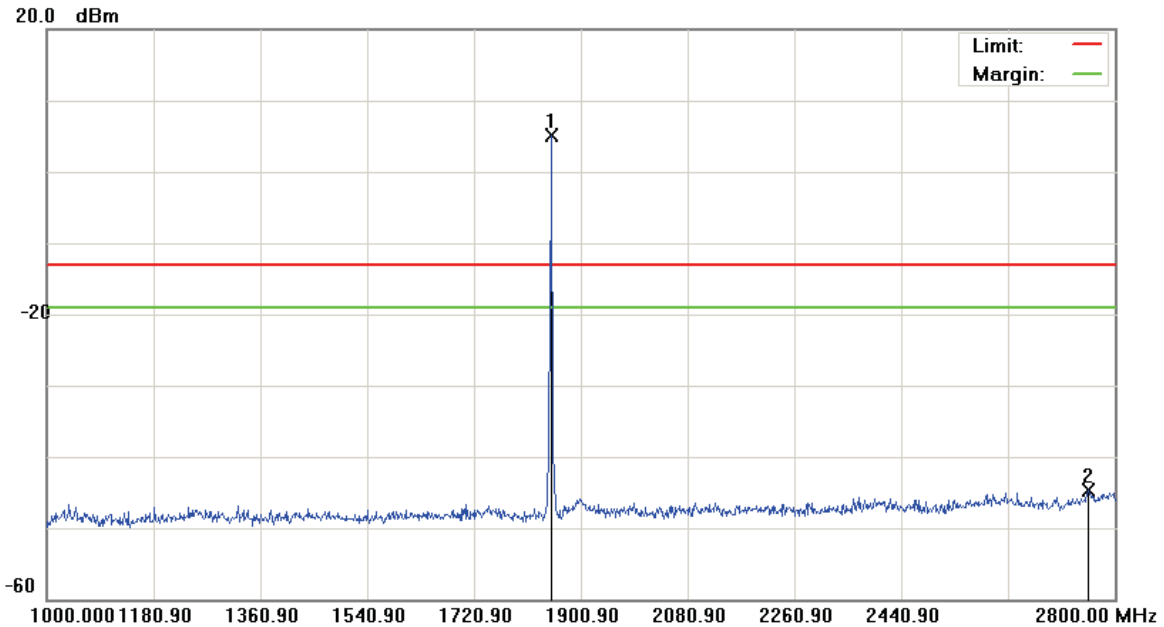

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1851.400	0.88	4.26	5.14	-13.00	18.14	peak		Tx
2		2755.000	-50.22	5.48	-44.74	-13.00	-31.74	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH512)

Data :#5

Date: 2015/10/14

Time: 上午 10:20:57

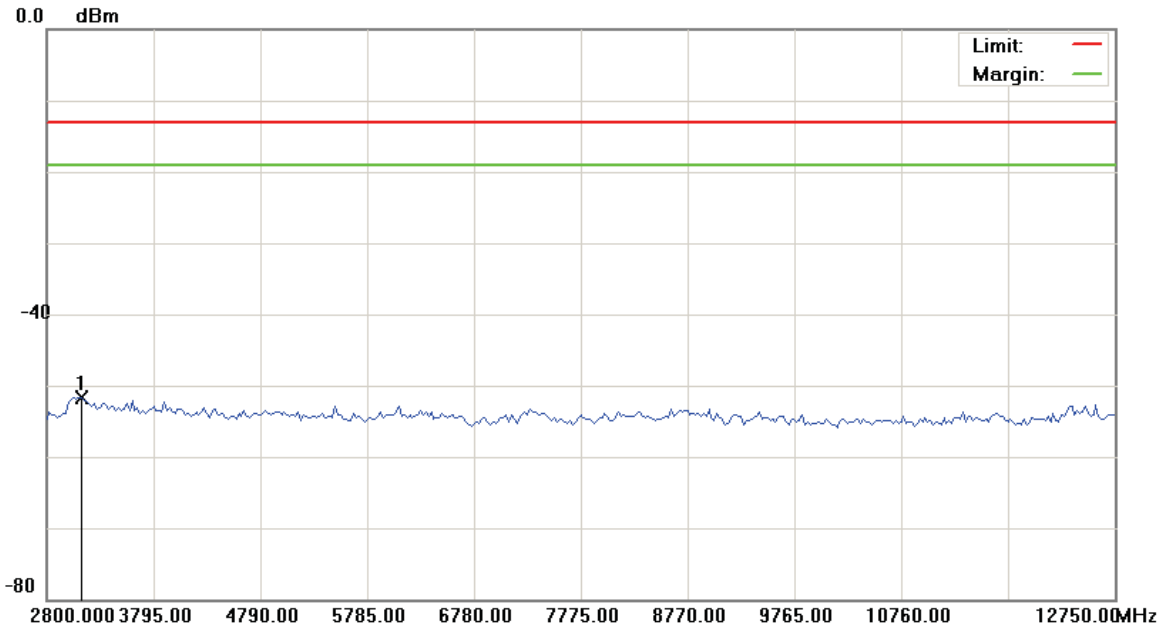

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	3123.375	-56.91	5.30	-51.61	-13.00	-38.61	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH512)

Data :#6

Date: 2015/10/14

Time: 上午 10:21:17

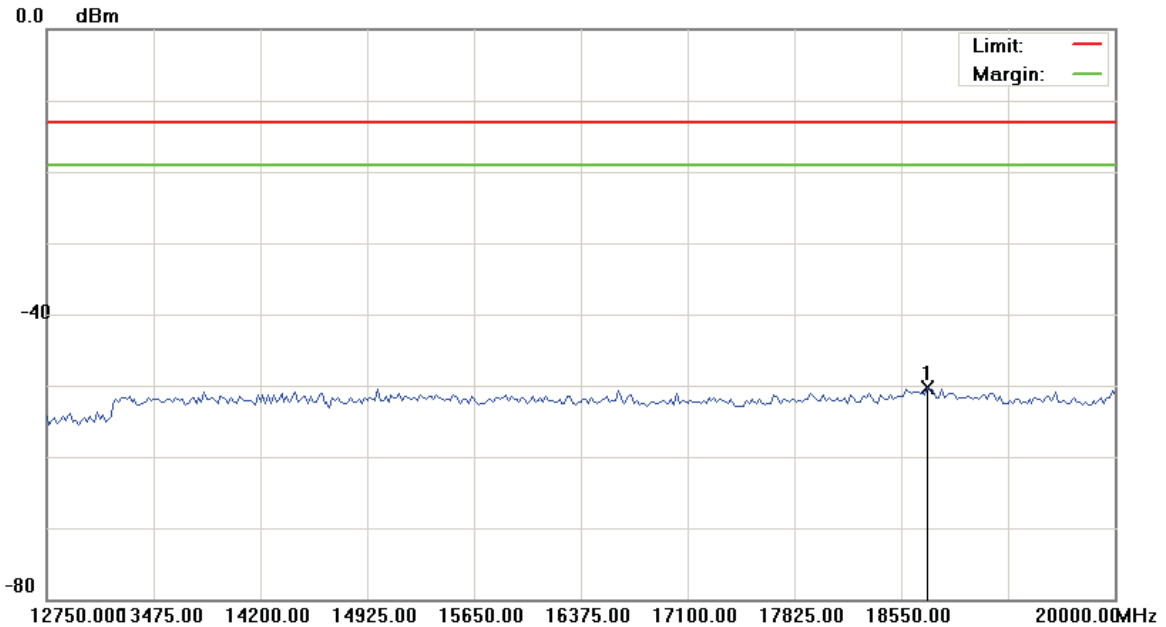

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	18731.250	-57.31	7.08	-50.23	-13.00	-37.23	Detector peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH661)

Data :#1

Date: 2015/10/14

Time: 上午 11:16:13

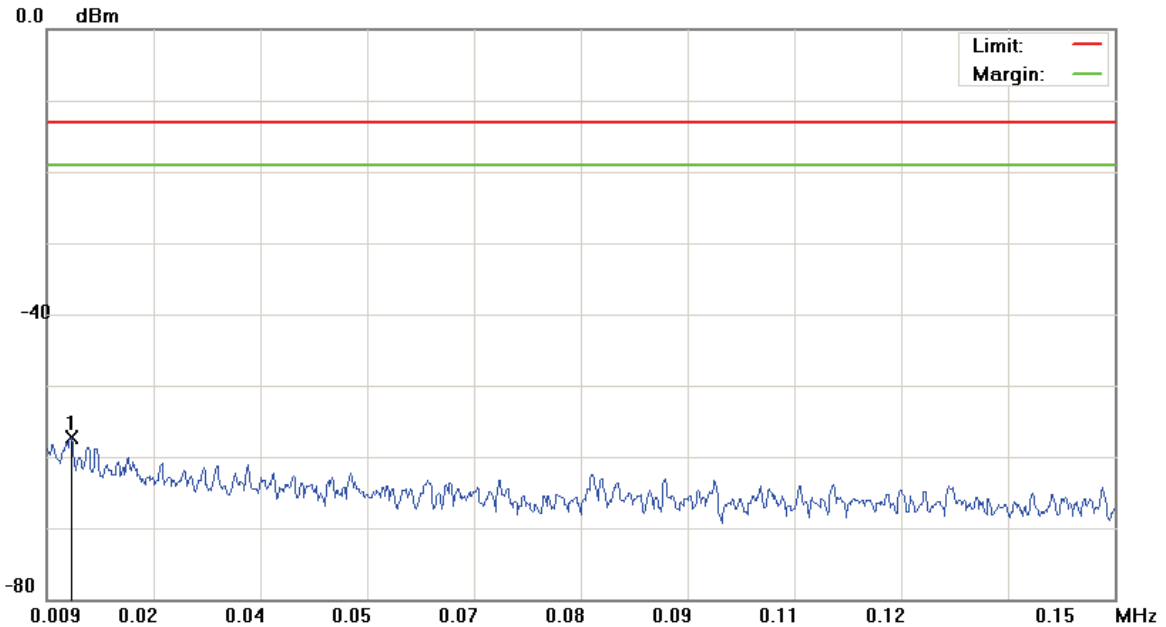

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: GPRS 1900

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0122	-68.75	11.36	-57.39	-13.00	-44.39	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH661)

Data :#2

Date: 2015/10/14

Time: 上午 11:16:37

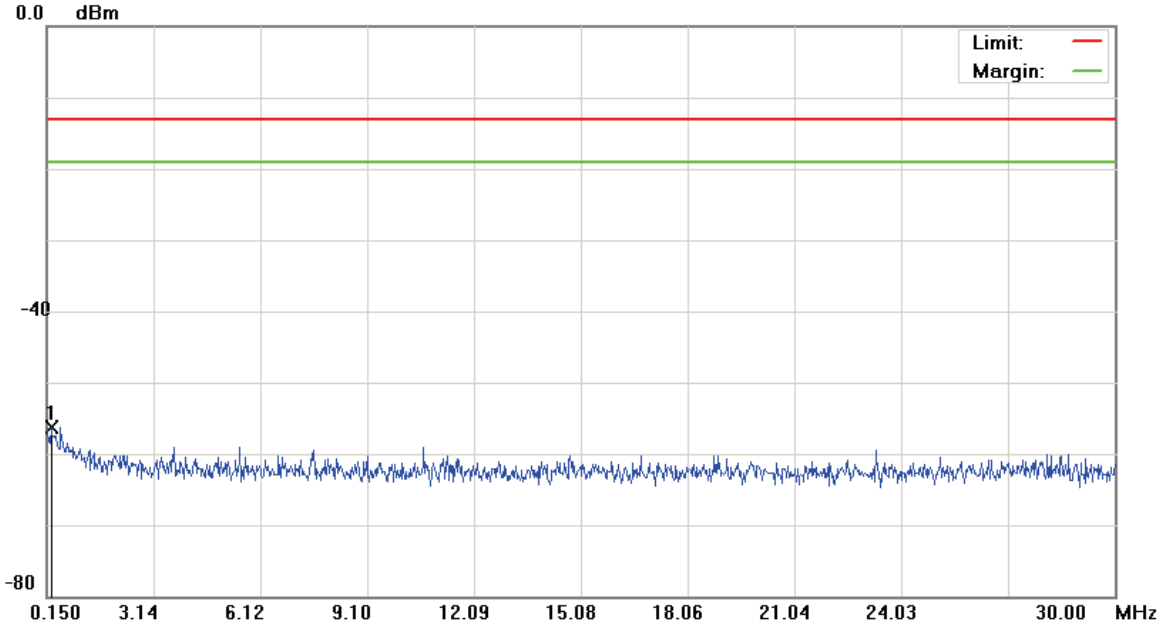

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: AC815S

Mode: GPRS 1900

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.2843	-68.84	12.59	-56.25	-13.00	-43.25	Detector	peak	


*:Maximum data x:Over limit !:over margin

File :AC815S(CH661)

Data :#3

Date: 2015/10/14

Time: 上午 11:17:01

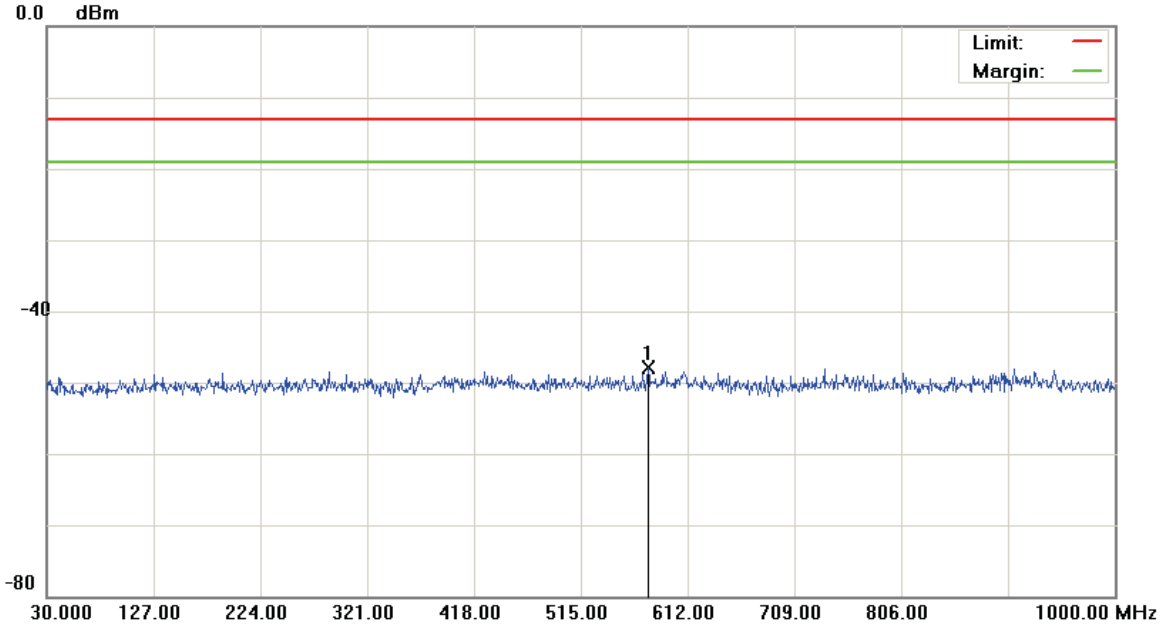

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 100 KHz VBW: 300 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	cm	degree	Comment
1	*	576.1100	-61.03	13.18	-47.85	-13.00	-34.85			peak


*:Maximum data x:Over limit !:over margin

File :AC815S(CH661)

Data :#4

Date: 2015/10/14

Time: 上午 11:23:51

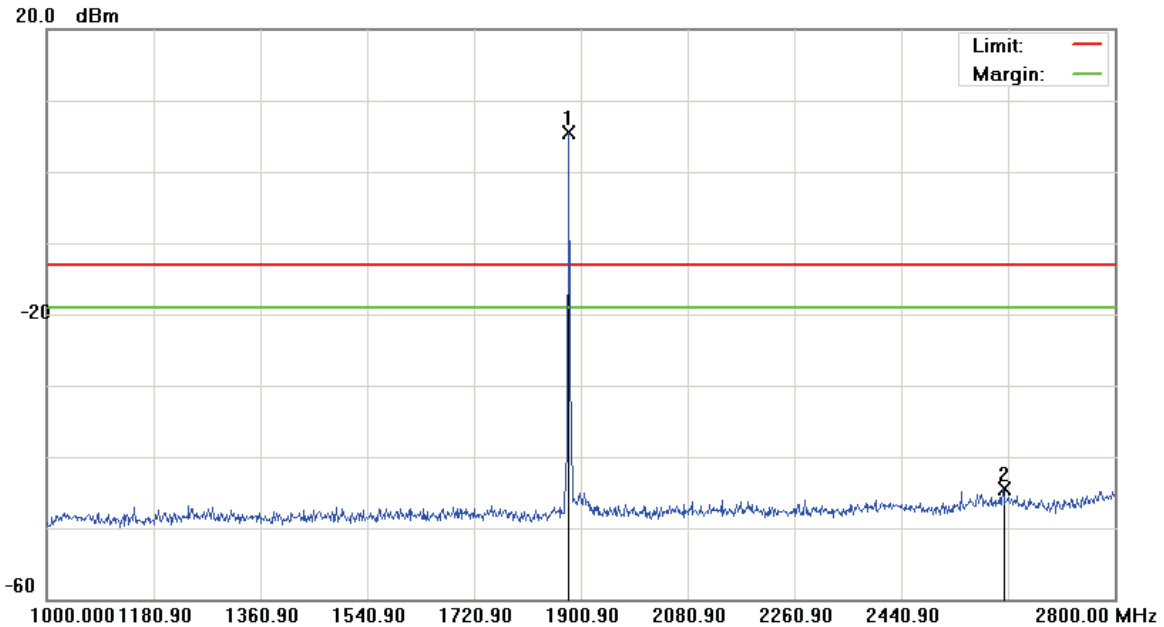

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1880.200	0.87	4.65	5.52	-13.00	18.52	peak		Tx
2		2611.900	-50.03	5.44	-44.59	-13.00	-31.59	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH661)

Data :#5

Date: 2015/10/14

Time: 上午 10:21:47

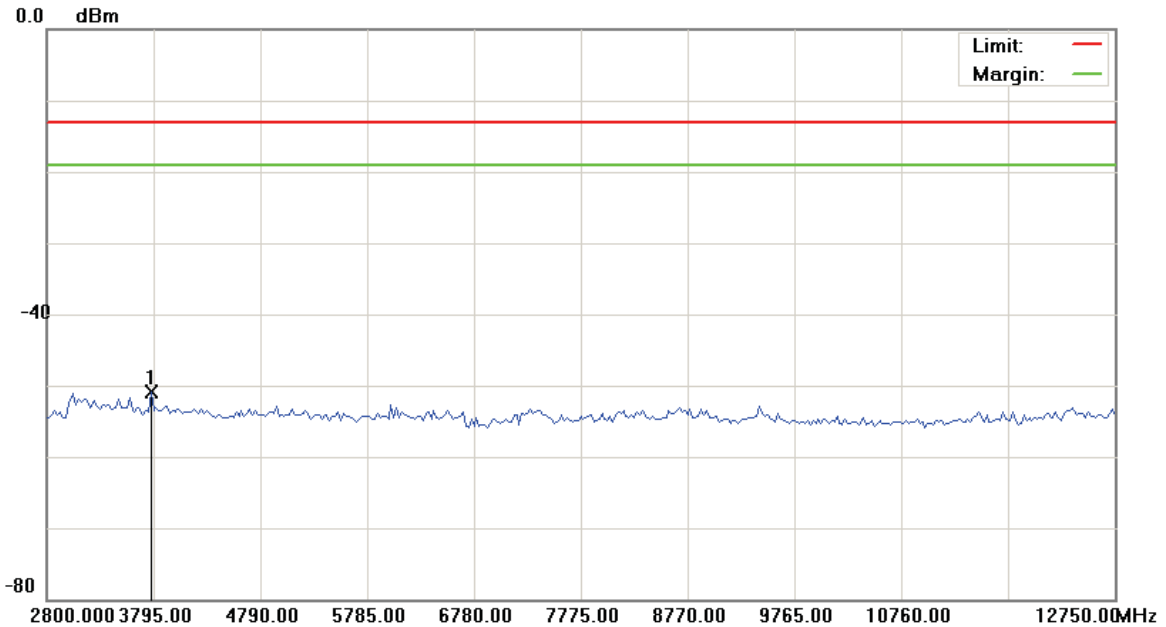

Site: site #1	Polarization: <i>Conducted</i>	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	3770.125	-55.90	4.93	-50.97	-13.00	-37.97	Detector peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH661)

Data :#6

Date: 2015/10/14

Time: 上午 10:22:07

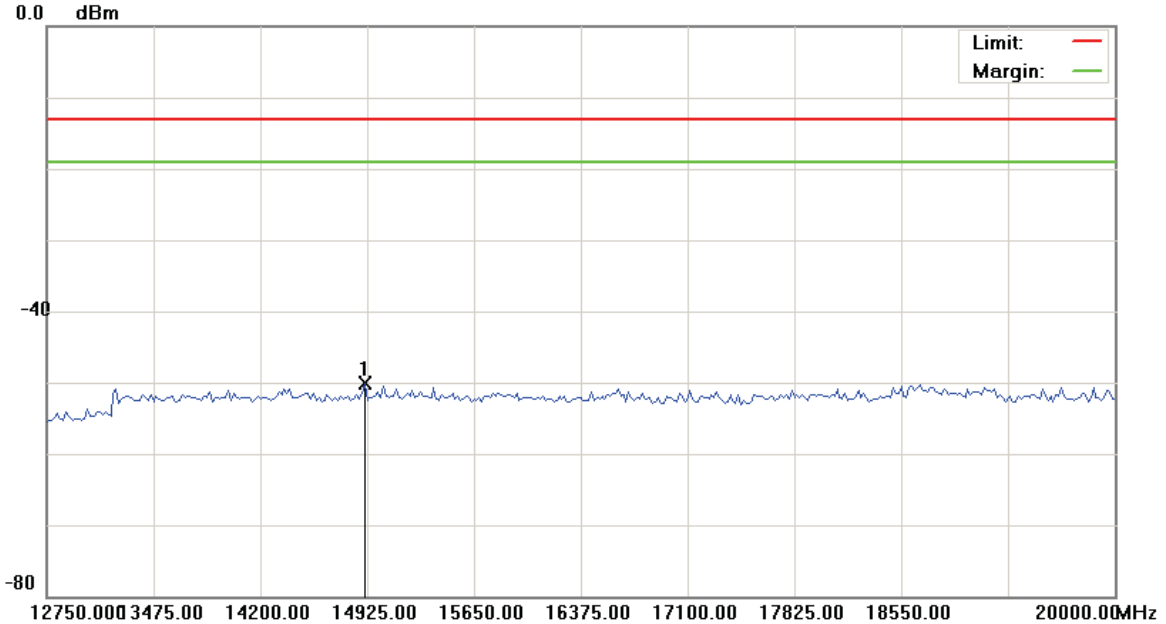

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	14906.875	-56.12	5.99	-50.13	-13.00	-37.13	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH810)

Data :#1

Date: 2015/10/14

Time: 上午 11:17:59

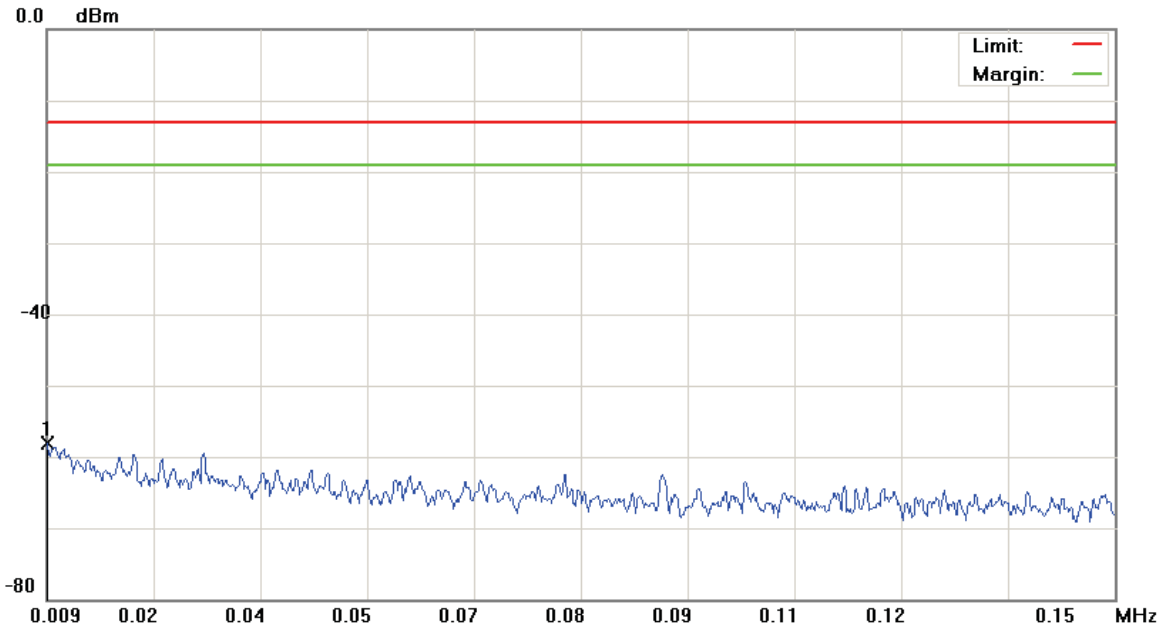

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: GPRS 1900

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0090	-69.50	11.32	-58.18	-13.00	-45.18	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH810)

Data :#2

Date: 2015/10/14

Time: 上午 11:18:23

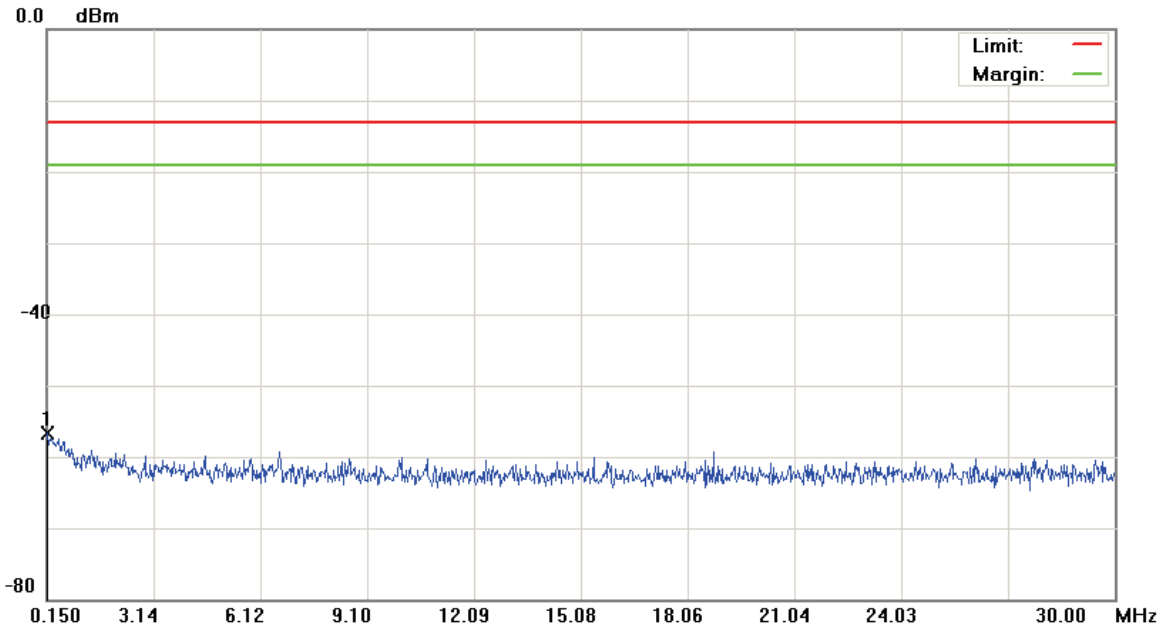

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: AC815S

Mode: GPRS 1900

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.1798	-69.25	12.45	-56.80	-13.00	-43.80	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH810)

Data :#3

Date: 2015/10/14

Time: 上午 11:18:48

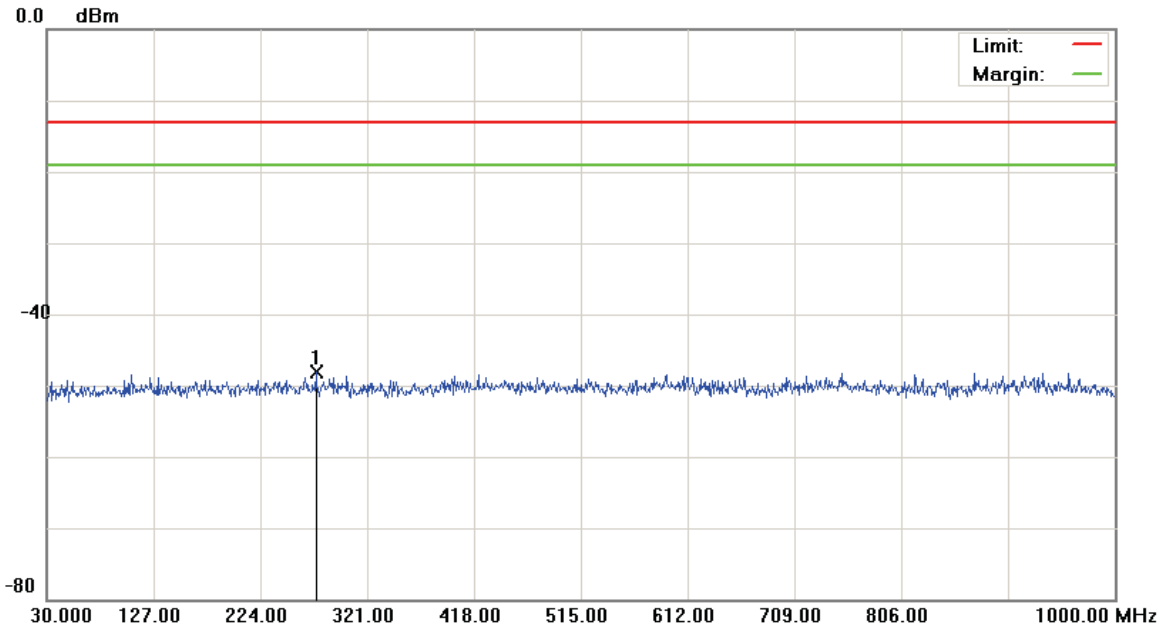

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 100 KHz VBW: 300 KHz

M/N: AC815S

Mode: GPRS 1900

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	cm	degree	Comment
1	*	274.9250	-61.36	13.32	-48.04	-13.00	-35.04	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH810)

Data :#4

Date: 2015/10/14

Time: 上午 11:25:29

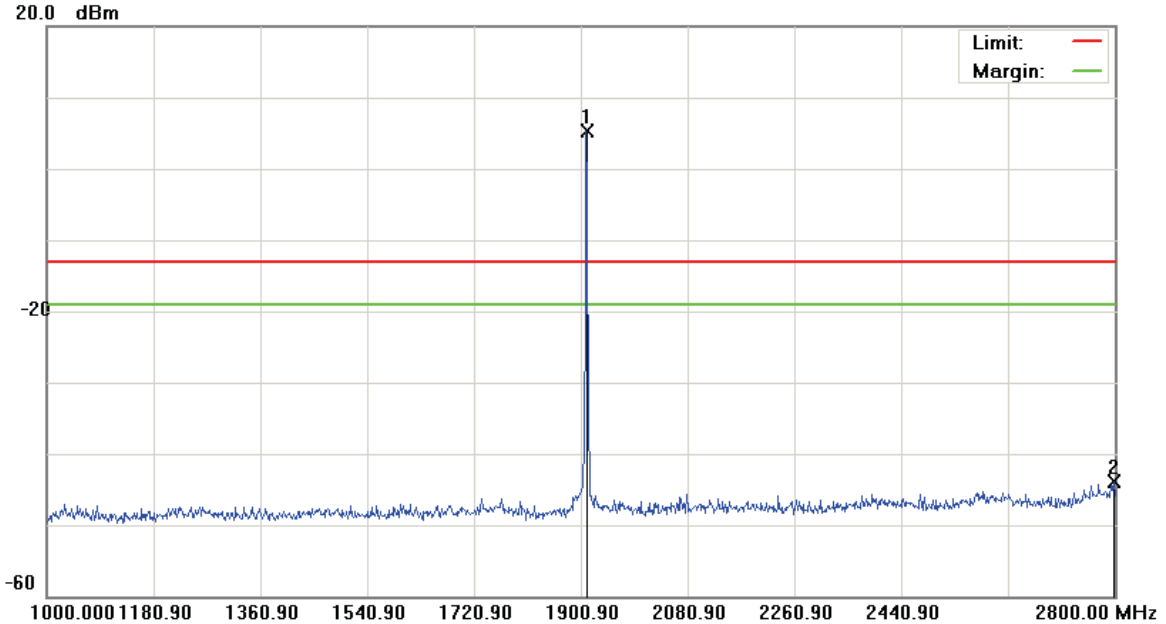

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1909.900	-0.47	5.71	5.24	-13.00	18.24	peak		Tx
2		2798.200	-49.80	5.91	-43.89	-13.00	-30.89	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH810)

Data :#5

Date: 2015/10/14

Time: 上午 10:23:24

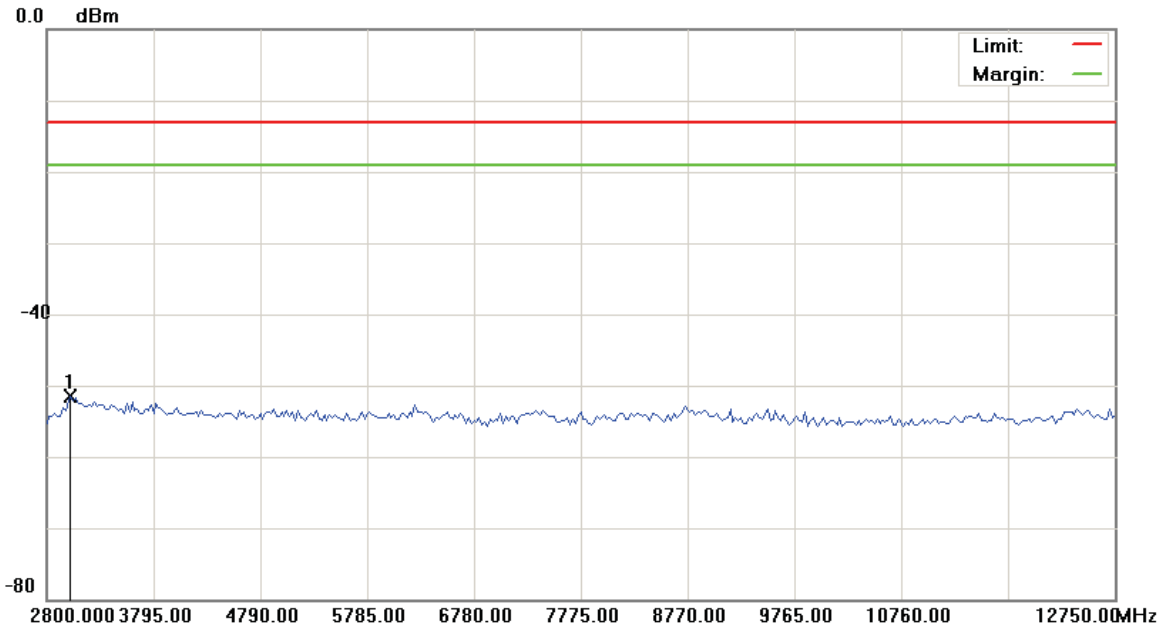

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	3023.875	-56.97	5.48	-51.49	-13.00	-38.49	Detector		peak


*:Maximum data x:Over limit !:over margin

File :AC815S(CH810)

Data :#6

Date: 2015/10/14

Time: 上午 10:23:44

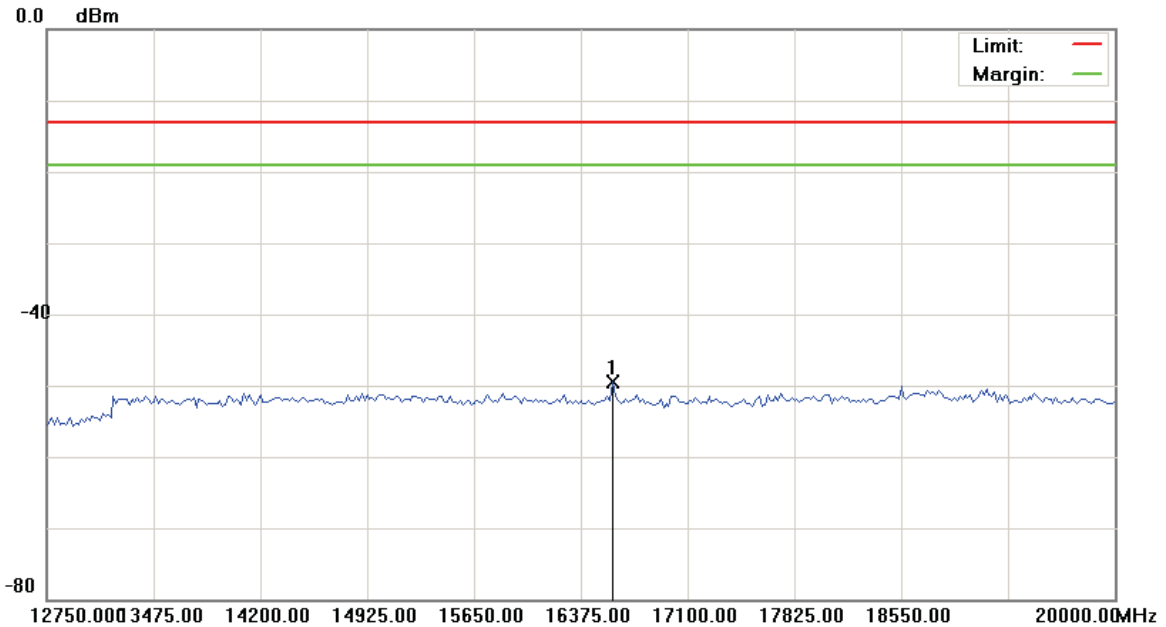

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: GPRS 1900		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	16592.500	-55.93	6.47	-49.46	-13.00	-36.46	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9262)

Data :#1

Date: 2015/10/14

Time: 上午 11:55:59

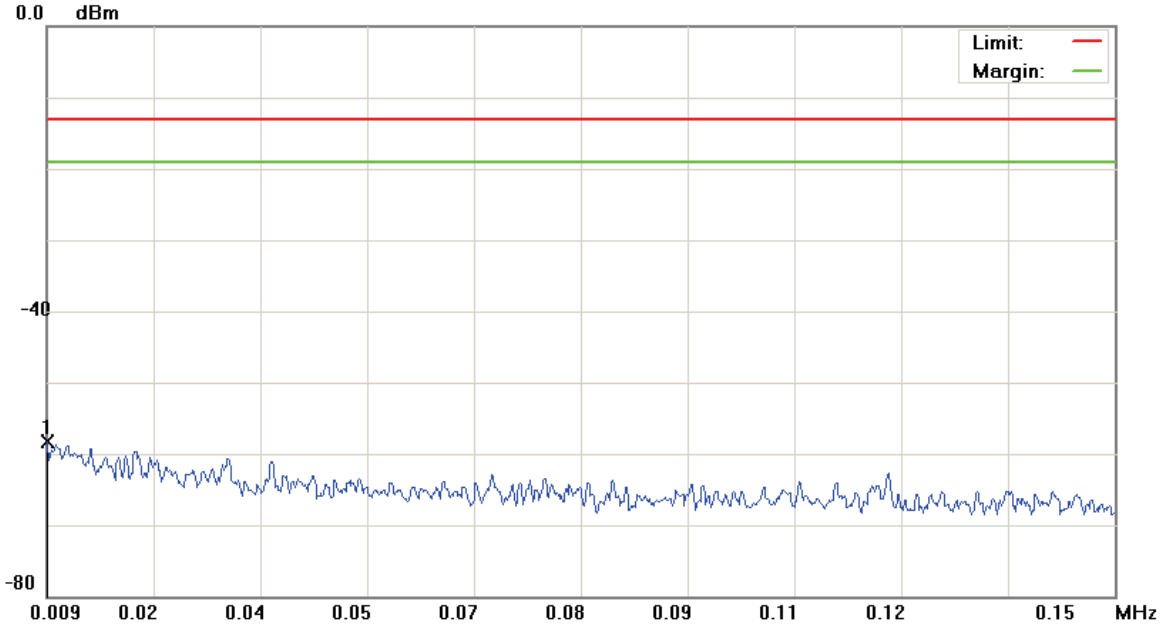

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: WCDMA Band II

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	cm	degree	Comment
1	*	0.0090	-69.57	11.32	-58.25	-13.00	-45.25			peak


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9262)

Data :#2

Date: 2015/10/14

Time: 上午 11:56:23

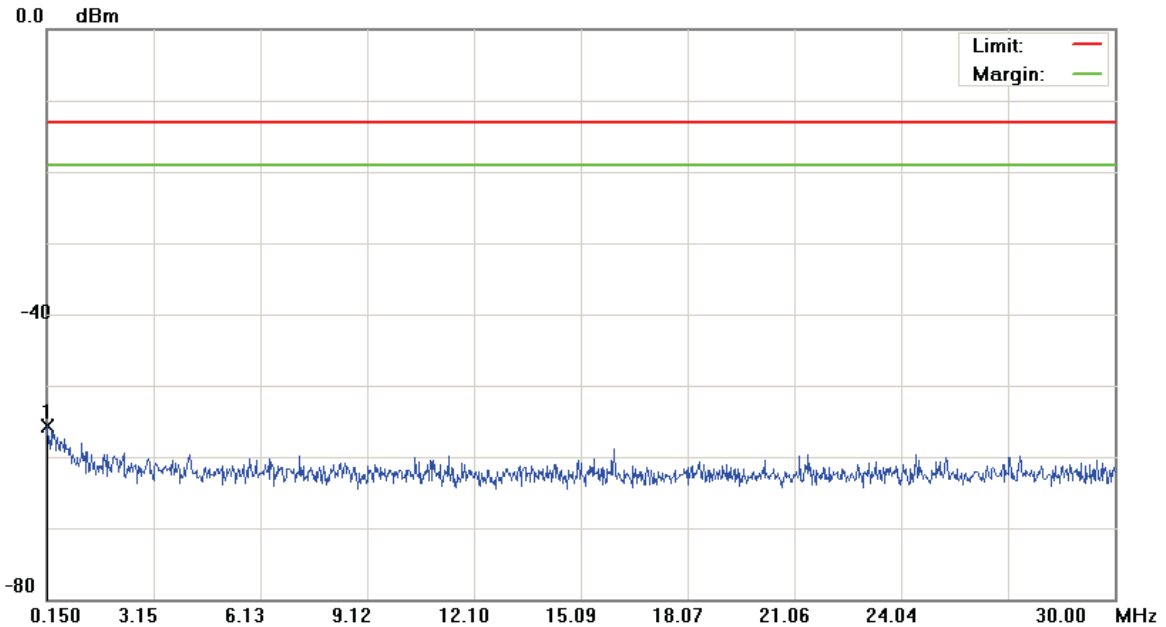

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: AC815S

Mode: WCDMA Band II

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.1650	-68.14	12.46	-55.68	-13.00	-42.68	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9262)

Data :#3

Date: 2015/10/14

Time: 上午 11:56:47

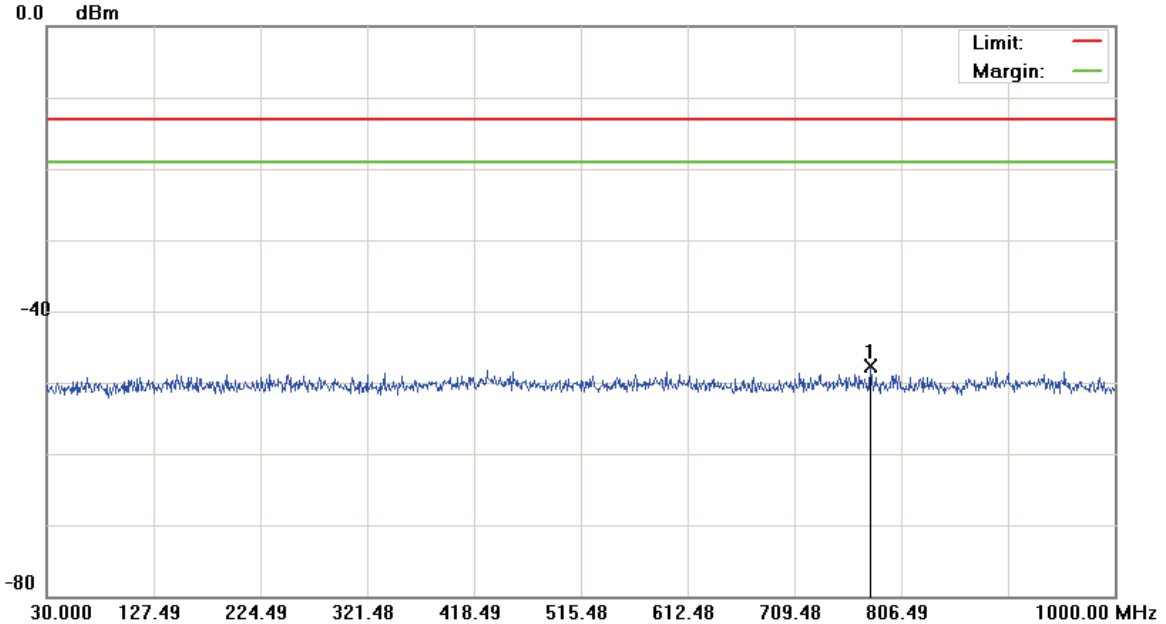

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 100 KHz VBW: 300 KHz

M/N: AC815S

Mode: WCDMA Band II

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	777.8700	-60.84	13.15	-47.69	-13.00	-34.69	Detector peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9262)

Data :#4

Date: 2015/10/14

Time: 下午 01:05:09

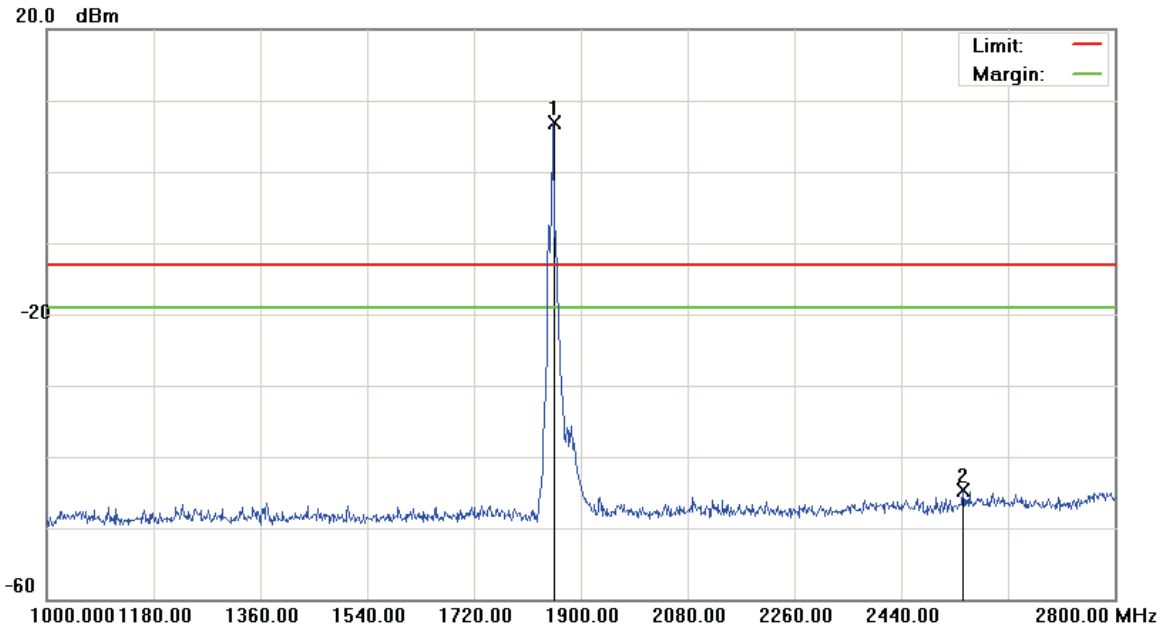

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band II		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1854.100	2.72	4.28	7.00	-13.00	20.00	peak		Tx
2		2544.400	-49.82	5.09	-44.73	-13.00	-31.73	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9262)

Data :#5

Date: 2015/10/14

Time: 上午 10:13:08

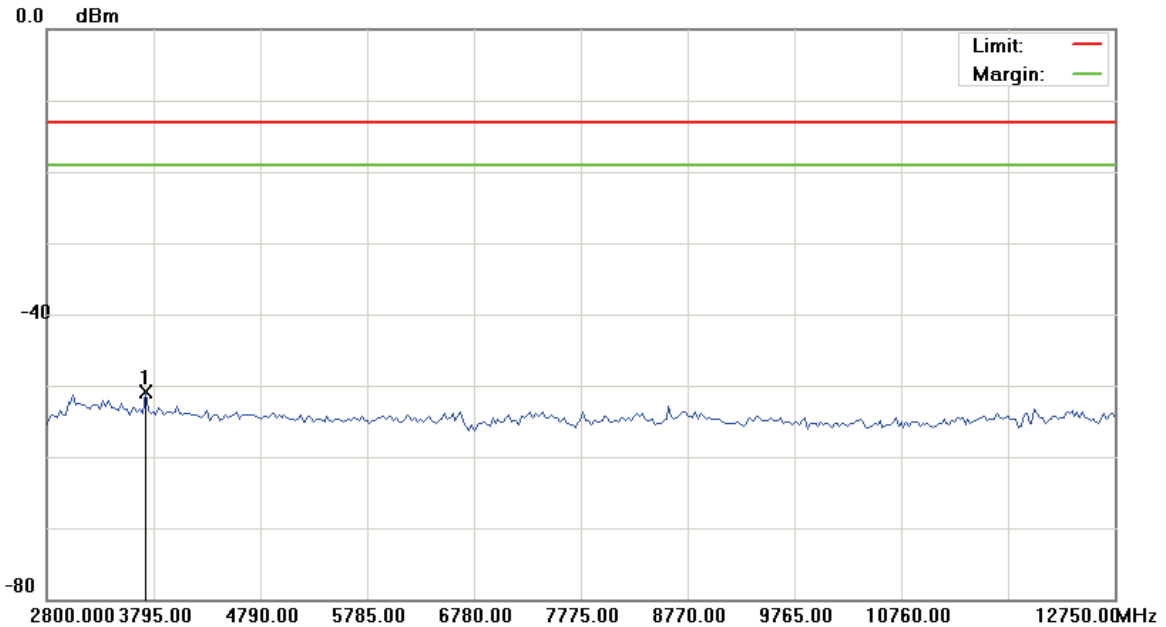

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band II		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	3720.375	-55.70	4.88	-50.82	-13.00	-37.82	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9262)

Data :#6

Date: 2015/10/14

Time: 上午 10:13:28

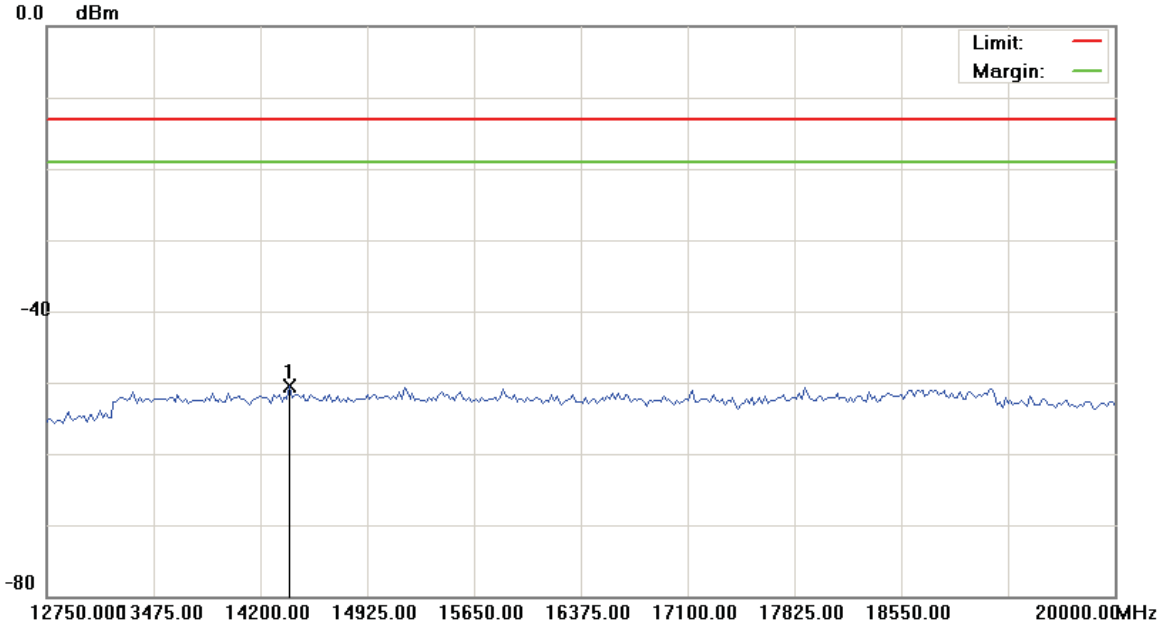

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 300 KHz
M/N: AC815S		
Mode: WCDMA Band II		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	14399.375	-56.43	5.84	-50.59	-13.00	-37.59	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9400)

Data :#1

Date: 2015/10/14

Time: 上午 11:57:57

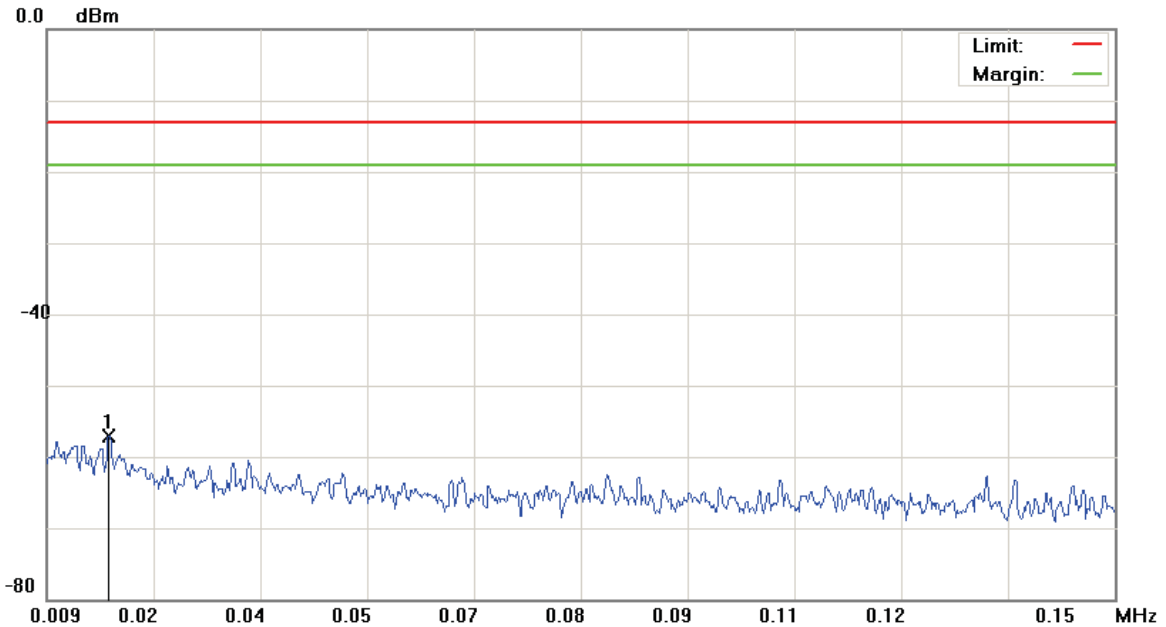

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: WCDMA Band II

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0171	-68.45	11.42	-57.03	-13.00	-44.03	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9400)

Data :#2

Date: 2015/10/14

Time: 上午 11:58:21

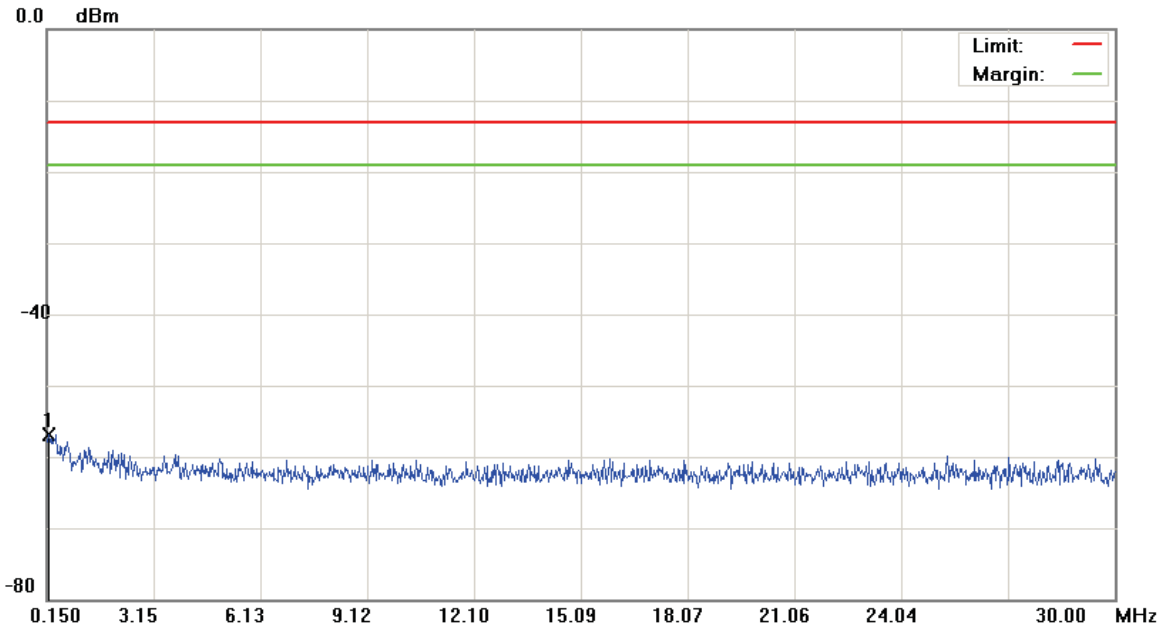

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: AC815S

Mode: WCDMA Band II

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.2097	-69.43	12.44	-56.99	-13.00	-43.99	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9400)

Data :#3

Date: 2015/10/14

Time: 上午 11:58:45

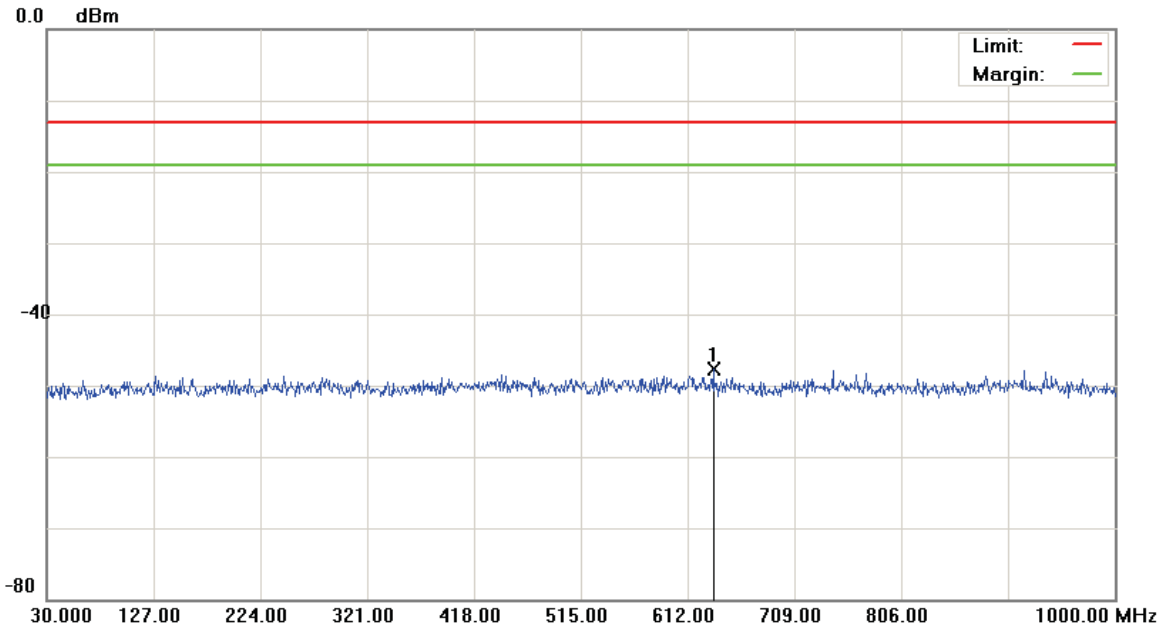

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 100 KHz VBW: 300 KHz

M/N: AC815S

Mode: WCDMA Band II

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	635.7650	-60.90	13.14	-47.76	-13.00	-34.76	Detector peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9400)

Data :#4

Date: 2015/10/14

Time: 下午 01:07:00

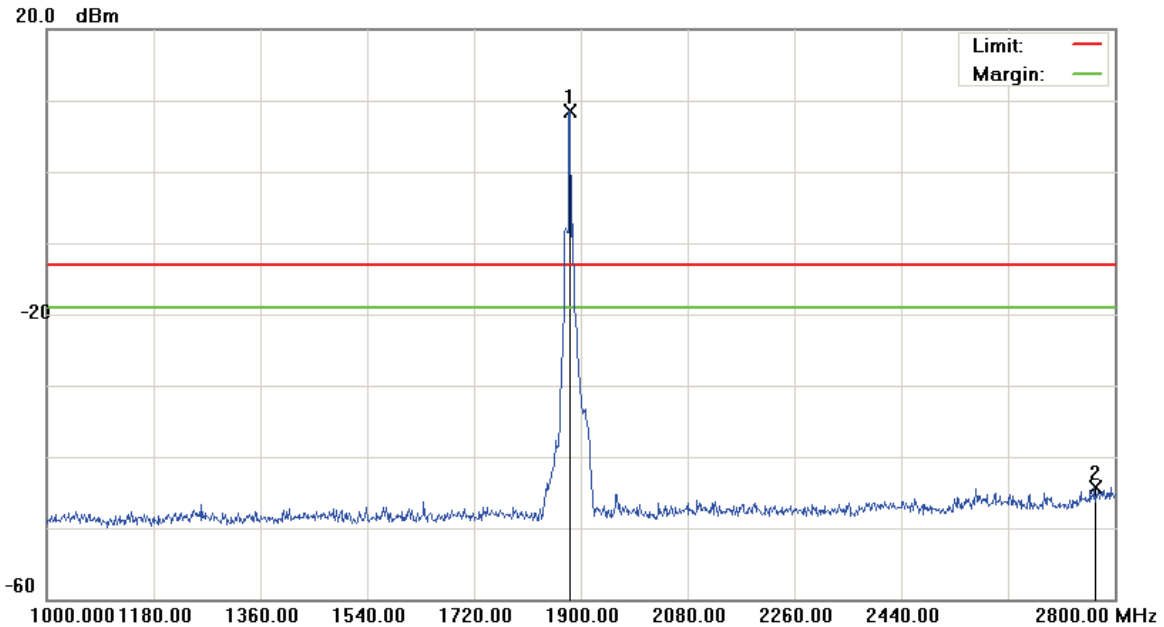

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band II		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1882.000	3.71	4.83	8.54	-13.00	21.54	peak		Tx
2		2766.700	-49.92	5.69	-44.23	-13.00	-31.23	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9400)

Data :#5

Date: 2015/10/14

Time: 上午 10:14:38

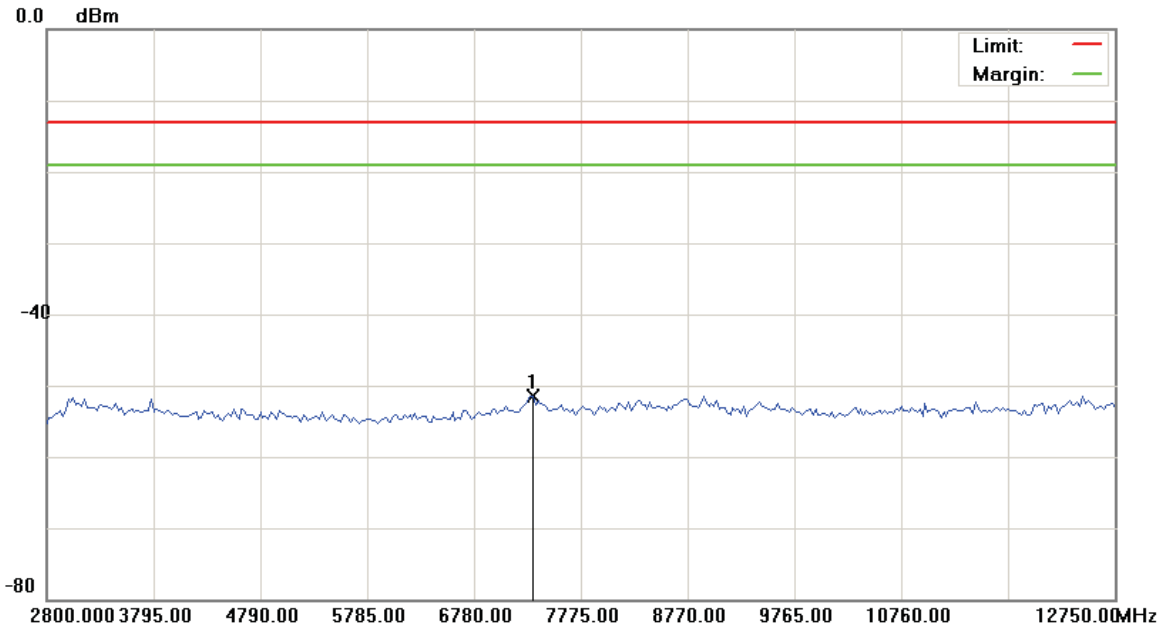

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band II		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	7327.250	-56.63	5.18	-51.45	-13.00	-38.45	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9400)

Data :#6

Date: 2015/10/14

Time: 上午 10:14:57

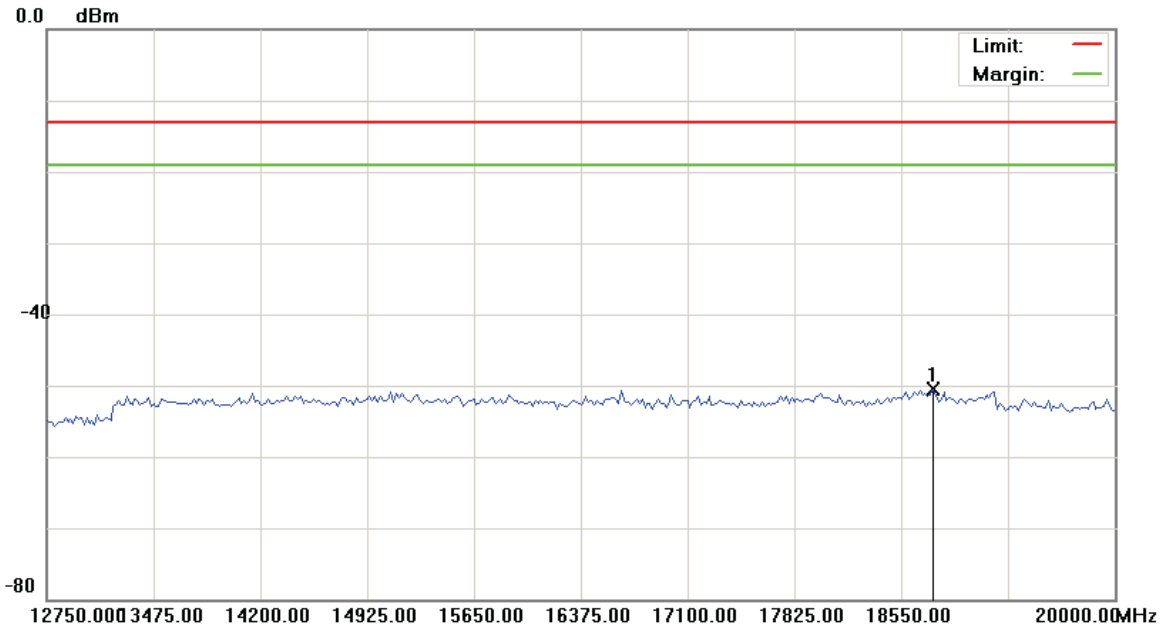

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band II		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	18767.500	-57.58	7.09	-50.49	-13.00	-37.49	Detector peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9538)

Data :#1

Date: 2015/10/14

Time: 下午 12:00:09

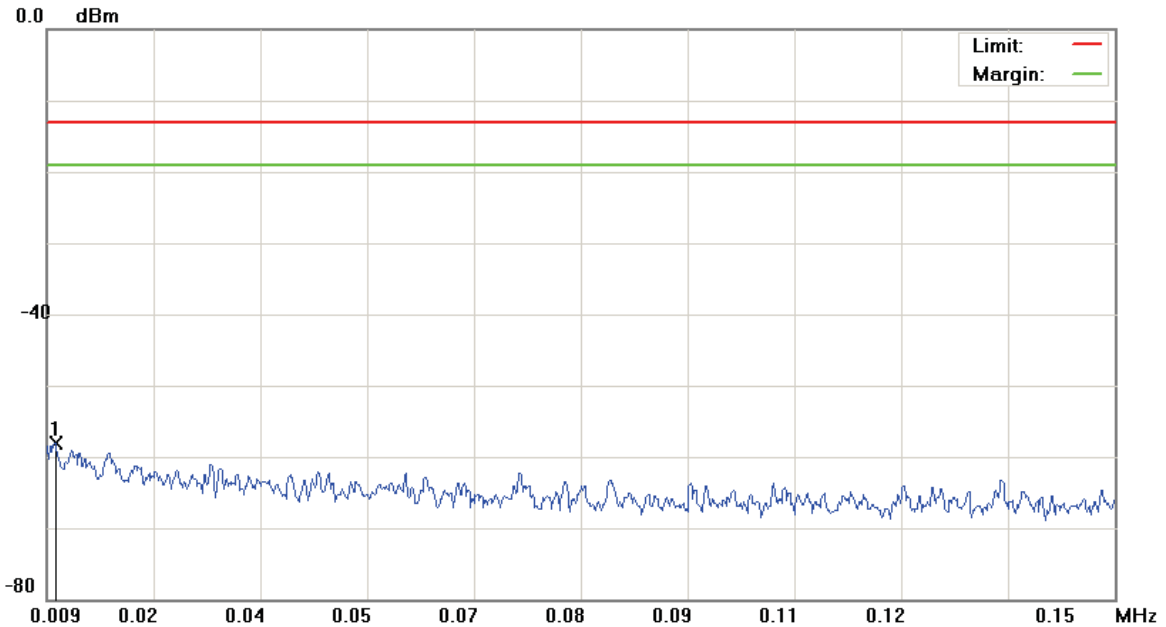

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: WCDMA Band II

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	cm	degree	Comment
1	*	0.0101	-69.47	11.34	-58.13	-13.00	-45.13			peak


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9538)

Data :#2

Date: 2015/10/14

Time: 下午 12:00:33

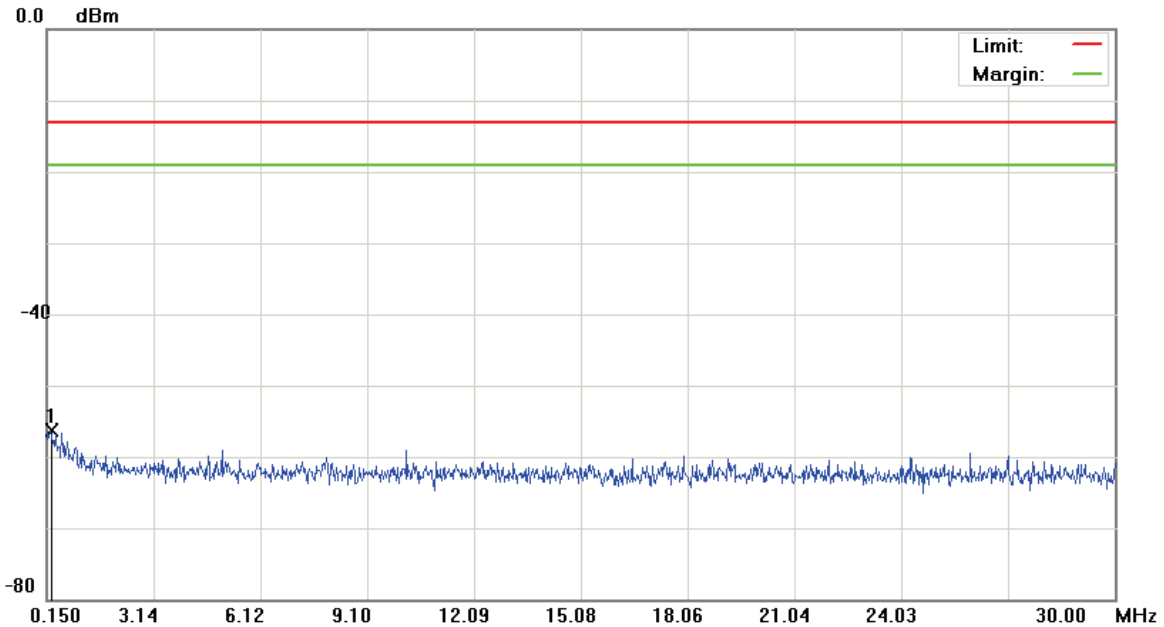

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: AC815S

Mode: WCDMA Band II

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.2545	-68.75	12.53	-56.22	-13.00	-43.22	Detector peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9538)

Data :#3

Date: 2015/10/14

Time: 下午 12:00:57

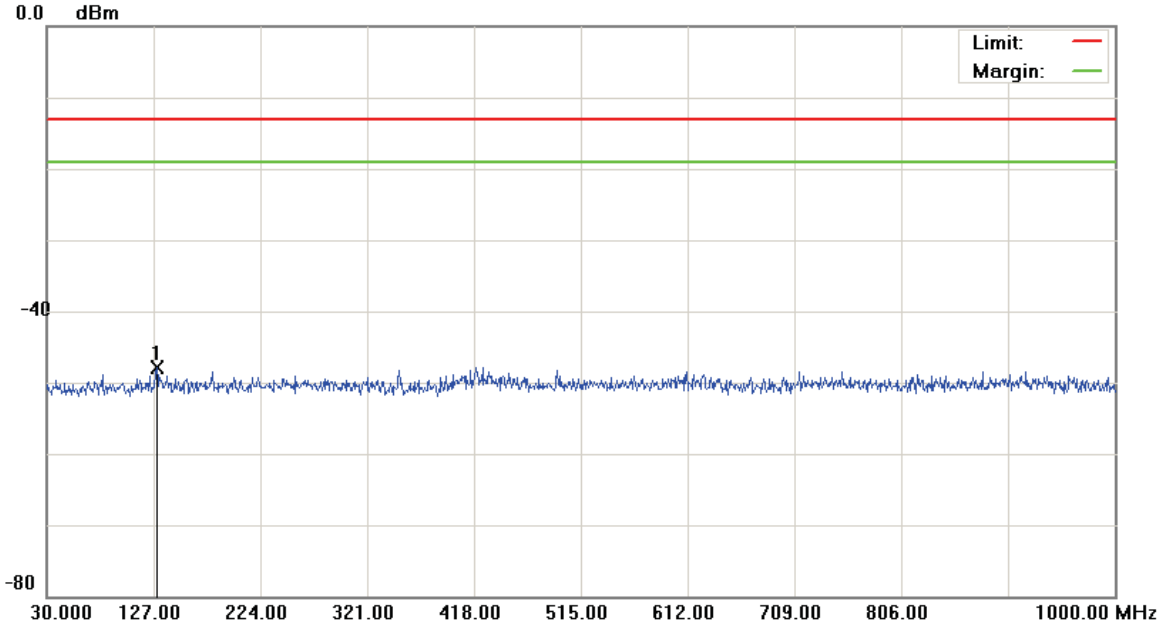

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 100 KHz VBW: 300 KHz

M/N: AC815S

Mode: WCDMA Band II

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	129.9100	-61.23	13.32	-47.91	-13.00	-34.91	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9538)

Data :#4

Date: 2015/10/14

Time: 下午 01:08:37

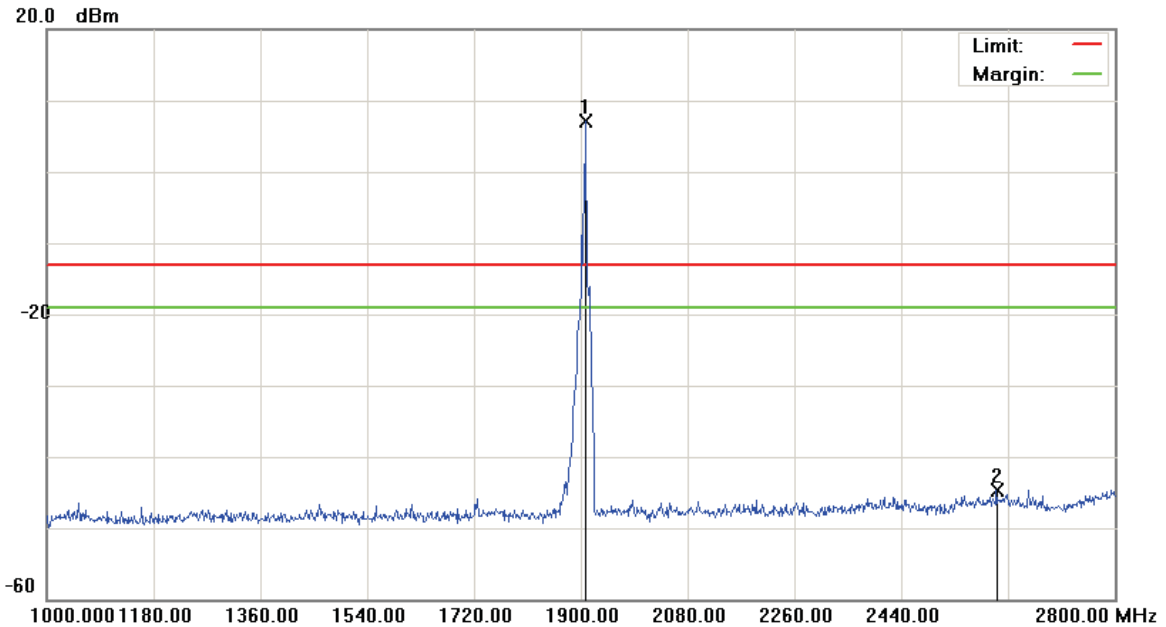

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band II		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1909.000	1.28	5.80	7.08	-13.00	20.08	peak		Tx
2		2601.100	-50.08	5.45	-44.63	-13.00	-31.63	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9538)

Data :#5

Date: 2015/10/14

Time: 上午 10:16:14

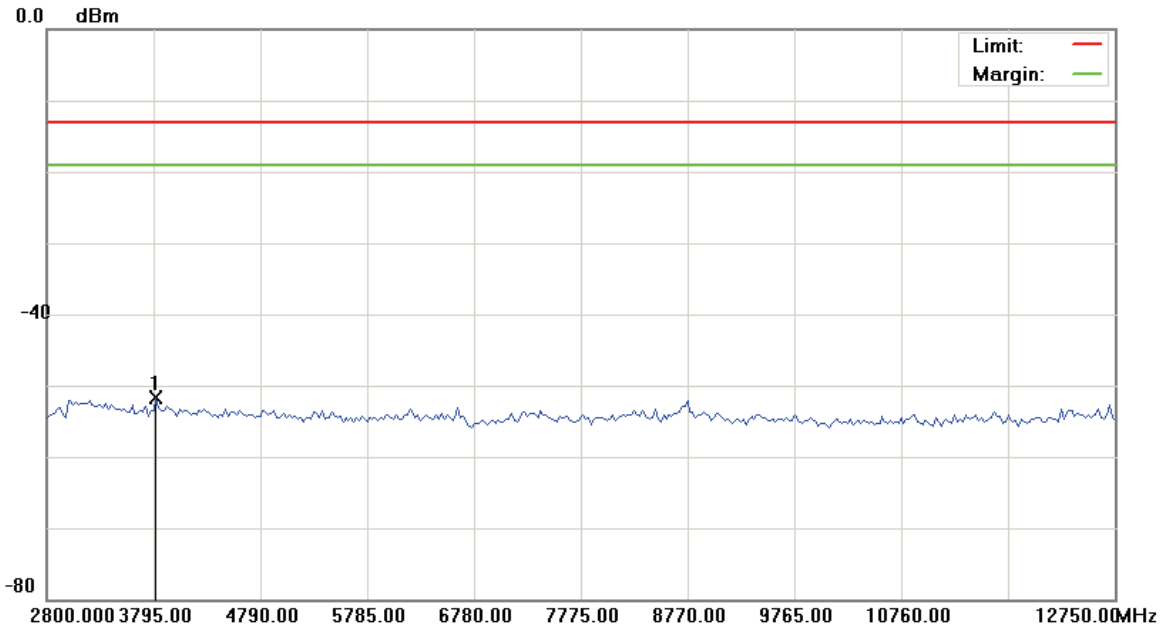

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band II		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	3819.875	-56.53	4.91	-51.62	-13.00	-38.62	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH9538)

Data :#6

Date: 2015/10/14

Time: 上午 10:16:33

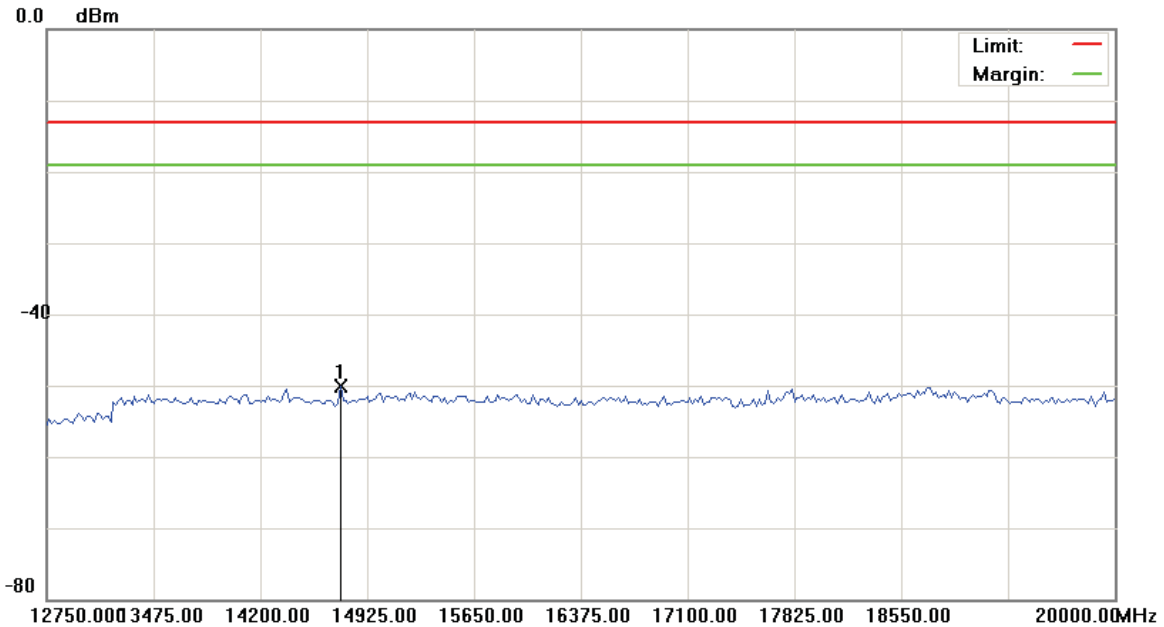

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 24 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band II		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	14743.750	-56.12	5.94	-50.18	-13.00	-37.18	Detector	peak	


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4132)

Data :#1

Date: 2015/10/14

Time: 上午 11:44:21

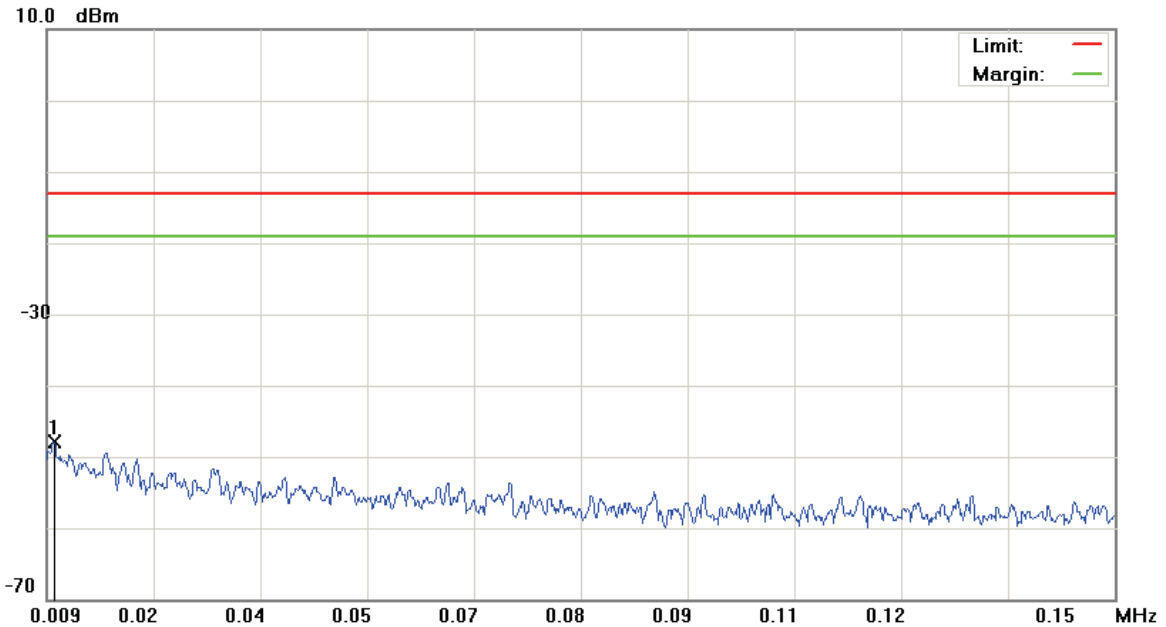

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: WCDMA Band V

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0100	-78.55	30.58	-47.97	-13.00	-34.97	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4132)

Data :#2

Date: 2015/10/14

Time: 上午 11:44:45

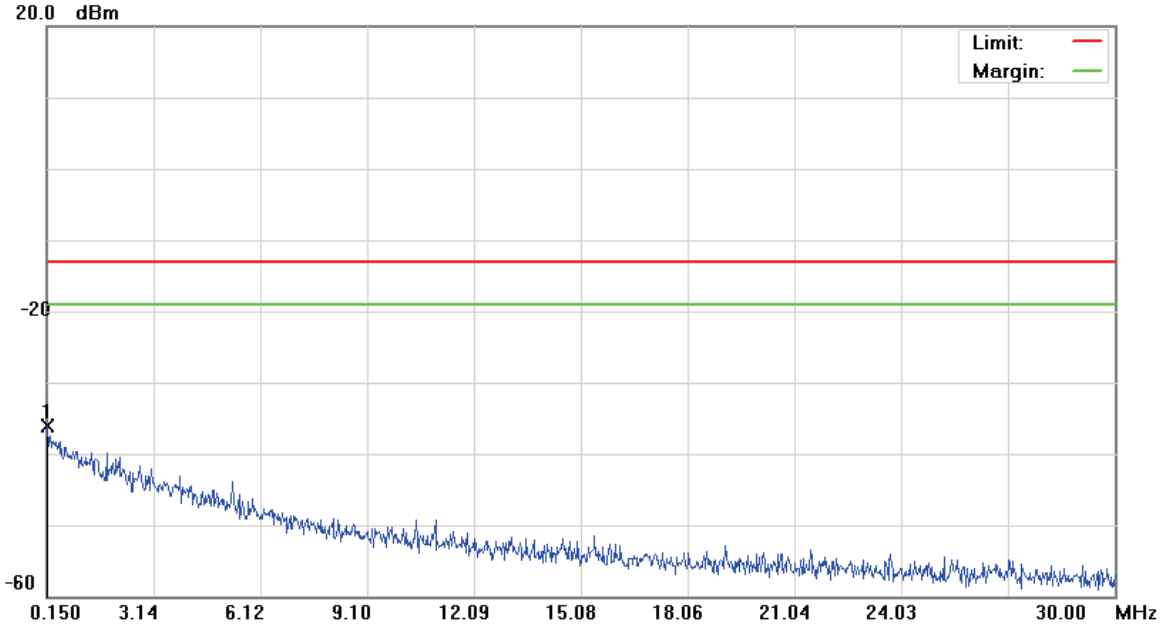

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: AC815S

Mode: WCDMA Band V

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree
1	*	0.1798	-66.87	30.75	-36.12	-13.00	-23.12	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4132)

Data :#3

Date: 2015/10/14

Time: 上午 11:45:11

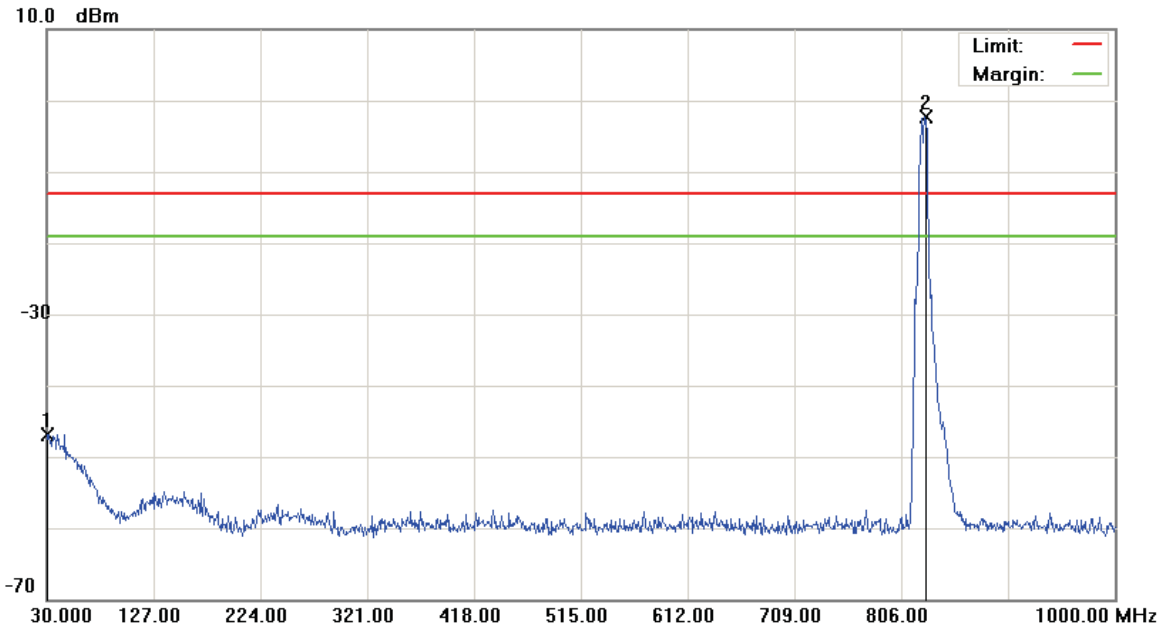

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 100 KHz VBW: 300 KHz

M/N: AC815S

Mode: WCDMA Band V

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1		30.0000	-64.06	17.21	-46.85	-13.00	-33.85	peak		
2	*	827.8250	-6.21	3.87	-2.34	-13.00	10.66	peak		Tx


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4132)

Data :#4

Date: 2015/10/14

Time: 上午 10:32:40

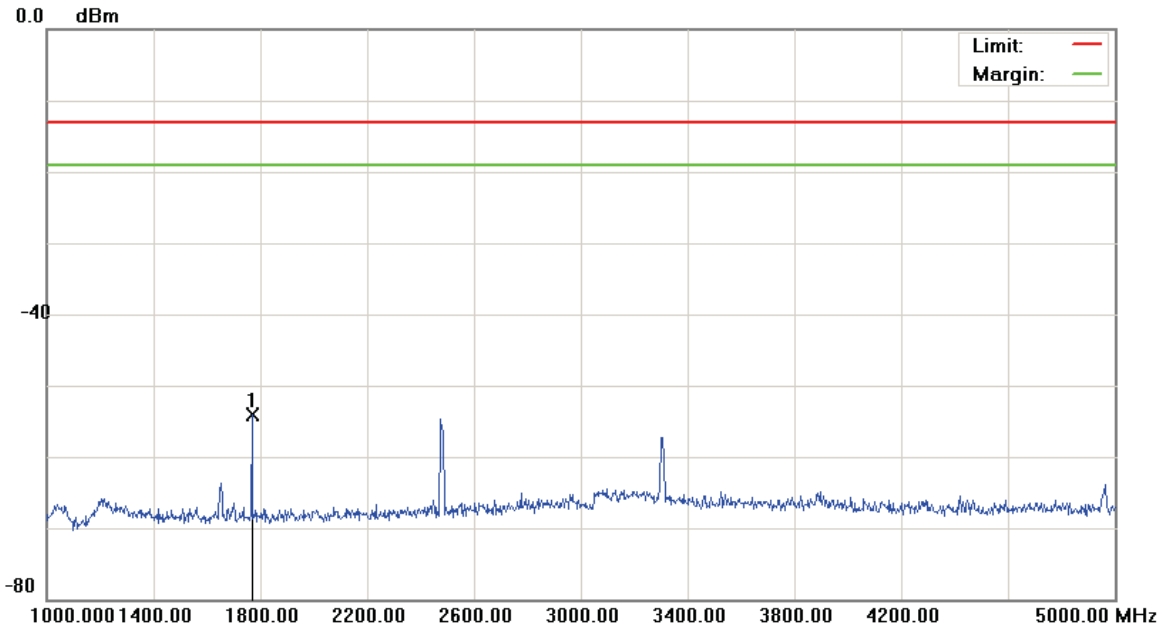

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1000 KHz VBW: 3000 KHz

M/N: AC815S

Mode: WCDMA Band V

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1768.000	-58.44	4.38	-54.06	-13.00	-41.06	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4132)

Data :#5

Date: 2015/10/14

Time: 上午 10:33:04

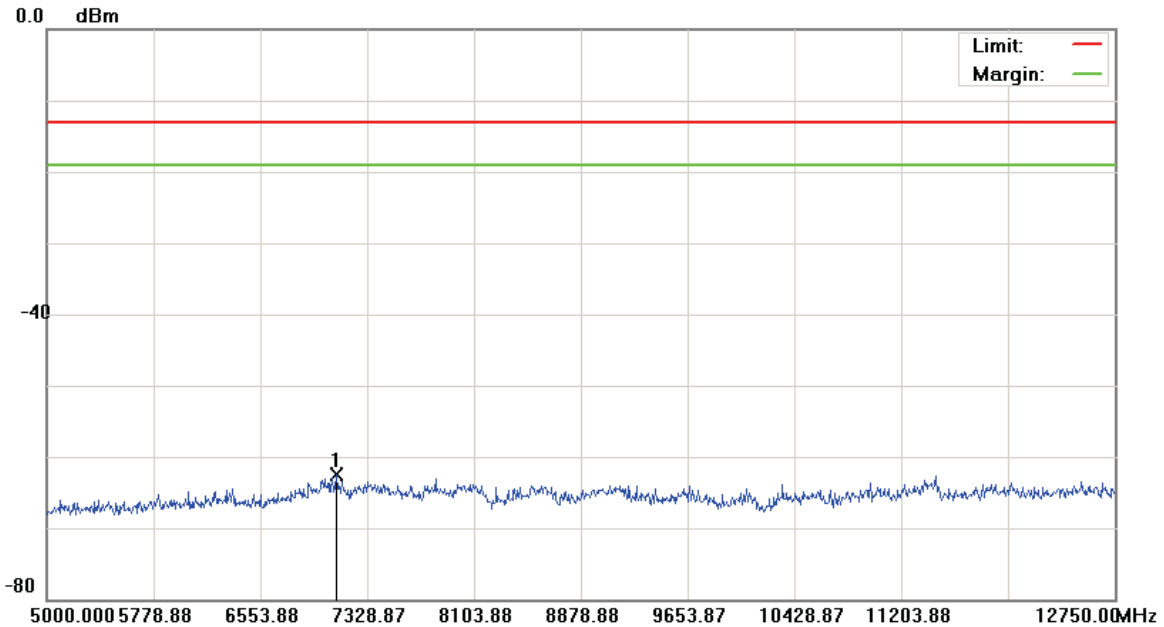

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band V		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	7100.250	-67.63	5.09	-62.54	-13.00	-49.54	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4183)

Data :#1

Date: 2015/10/14

Time: 上午 11:47:42

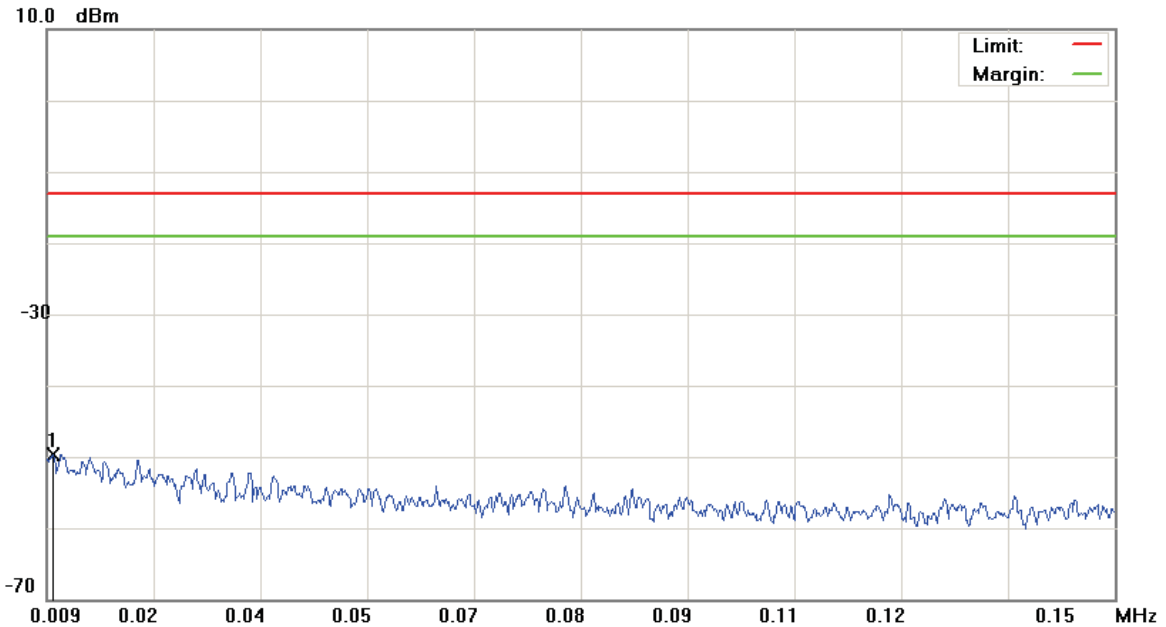

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: WCDMA Band V

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree
1	*	0.0098	-80.21	30.58	-49.63	-13.00	-36.63	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4183)

Data :#2

Date: 2015/10/14

Time: 上午 11:48:06

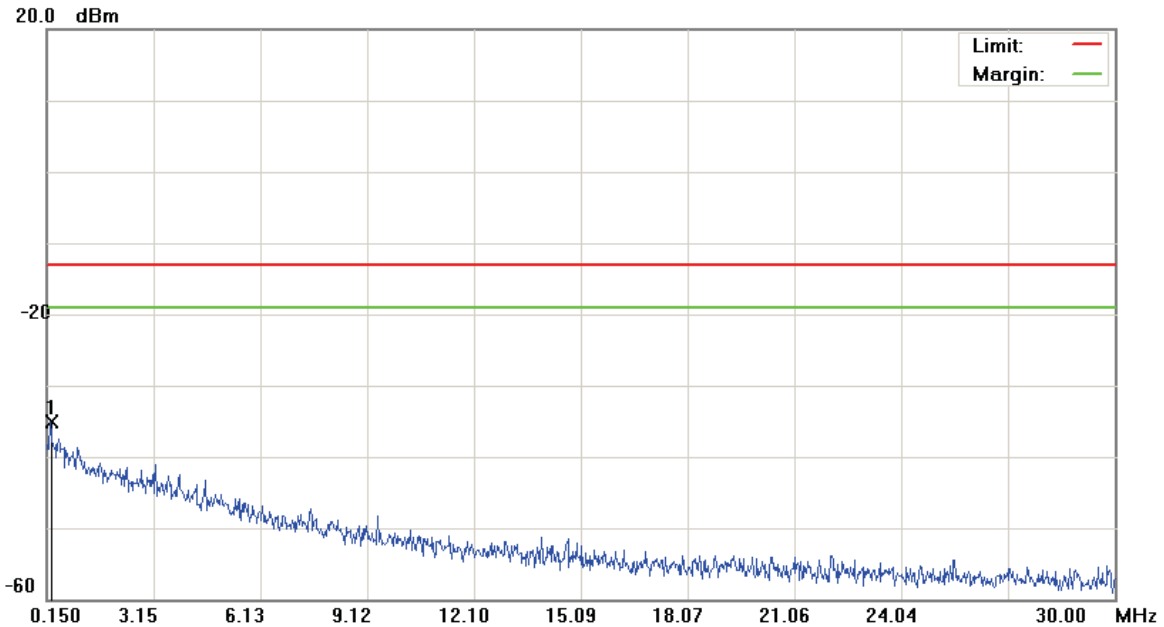

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: AC815S

Mode: WCDMA Band V

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree
1	*	0.2545	-66.51	31.36	-35.15	-13.00	-22.15	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4183)

Data :#3

Date: 2015/10/14

Time: 上午 11:48:30

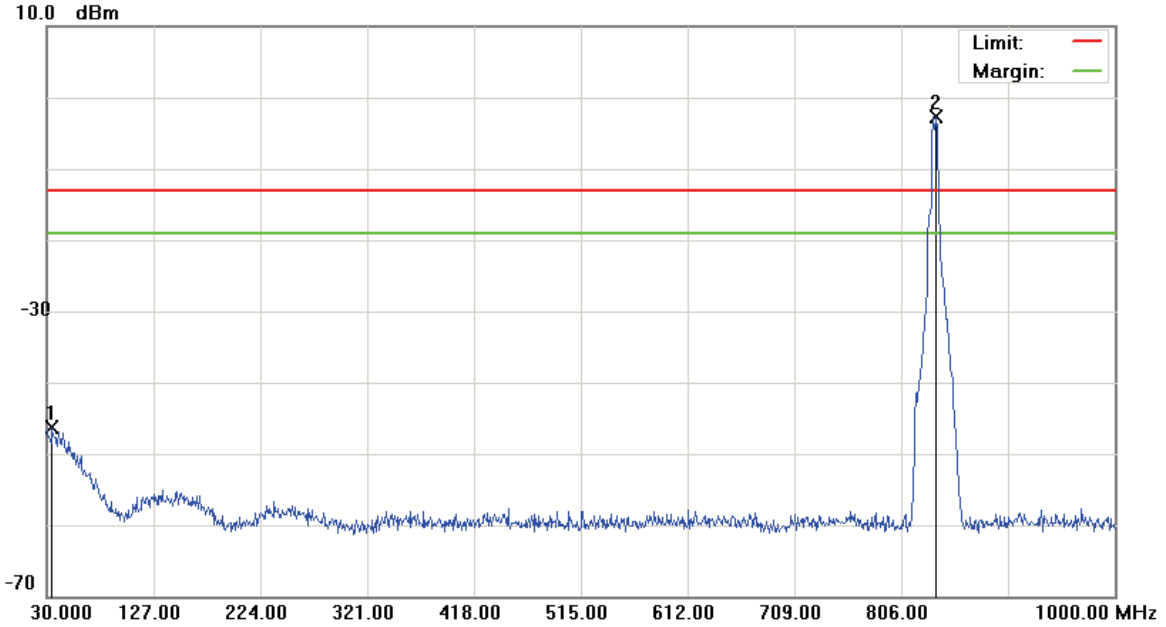

Site: site #1	Polarization: <i>Conducted</i>	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 100 KHz VBW: 300 KHz
M/N: AC815S		
Mode: WCDMA Band V		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1		34.8500	-62.98	16.66	-46.32	-13.00	-33.32	peak		
2	*	838.0100	-6.60	3.97	-2.63	-13.00	10.37	peak		Tx


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4183)

Data :#4

Date: 2015/10/14

Time: 上午 10:34:06

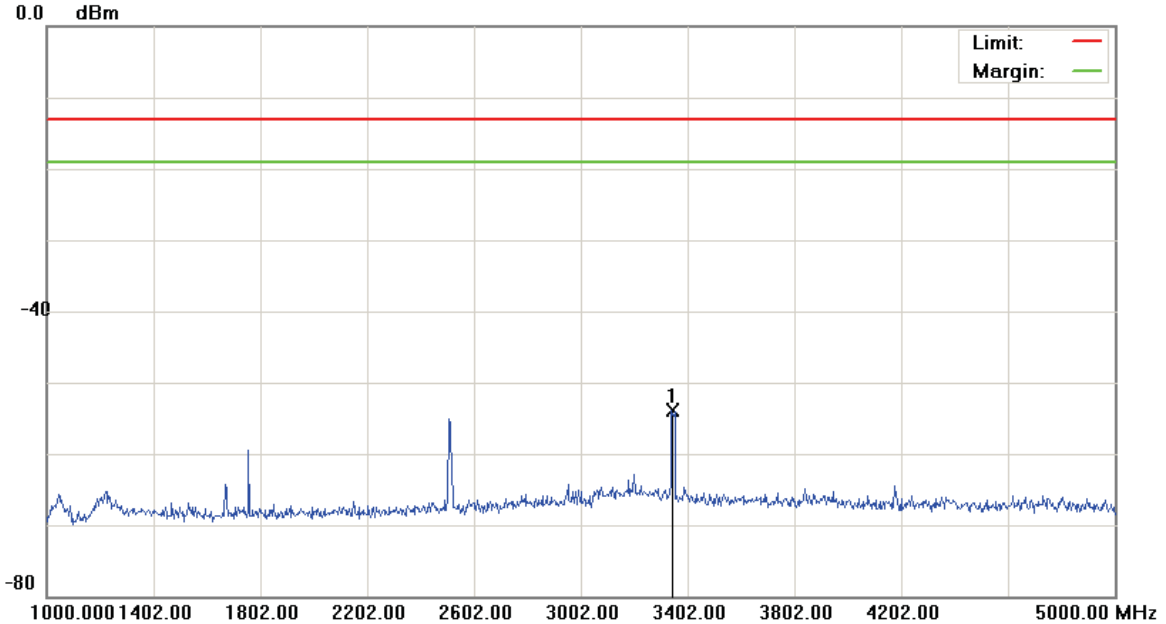

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band V		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	3342.000	-58.48	4.50	-53.98	-13.00	-40.98	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4183)

Data :#5

Date: 2015/10/14

Time: 上午 10:34:29

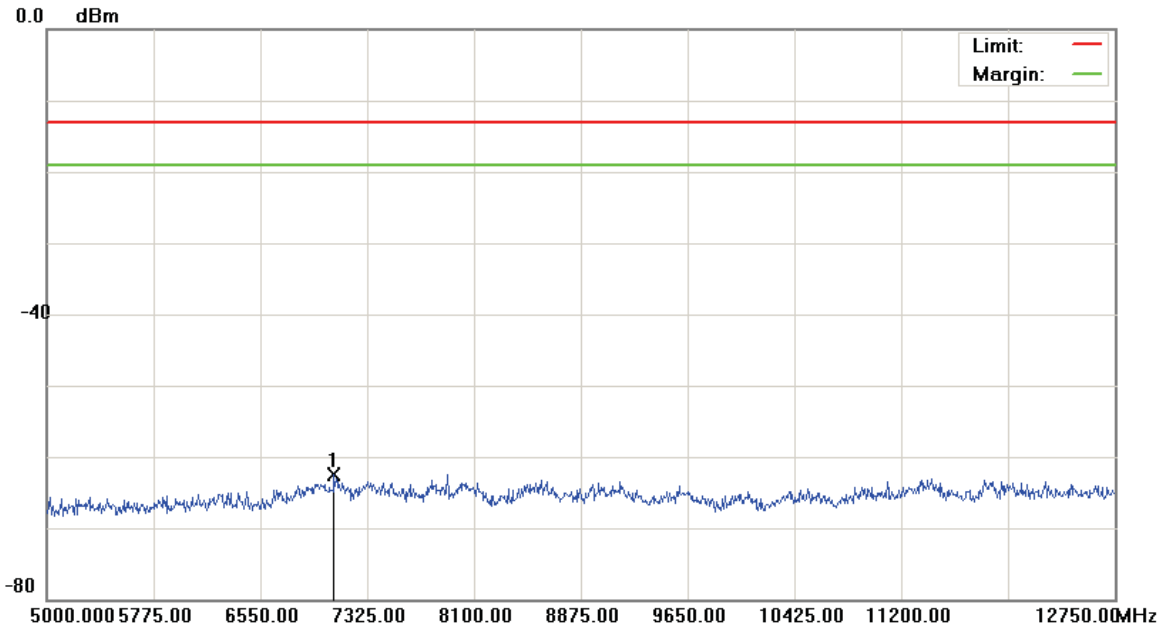

Site: site #1	Polarization: <i>Conducted</i>	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band V		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	7084.750	-67.52	5.00	-62.52	-13.00	-49.52	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4233)

Data :#1

Date: 2015/10/14

Time: 上午 11:50:31

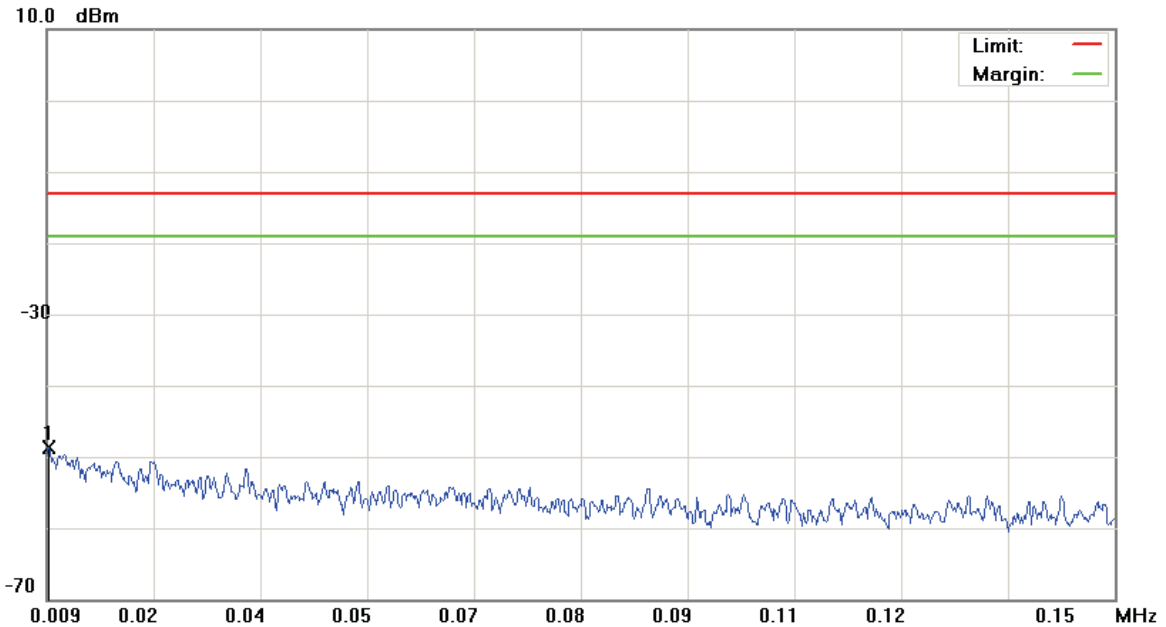

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 1 KHz VBW: 3 KHz

M/N: AC815S

Mode: WCDMA Band V

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0092	-79.22	30.58	-48.64	-13.00	-35.64	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4233)

Data :#2

Date: 2015/10/14

Time: 上午 11:50:55

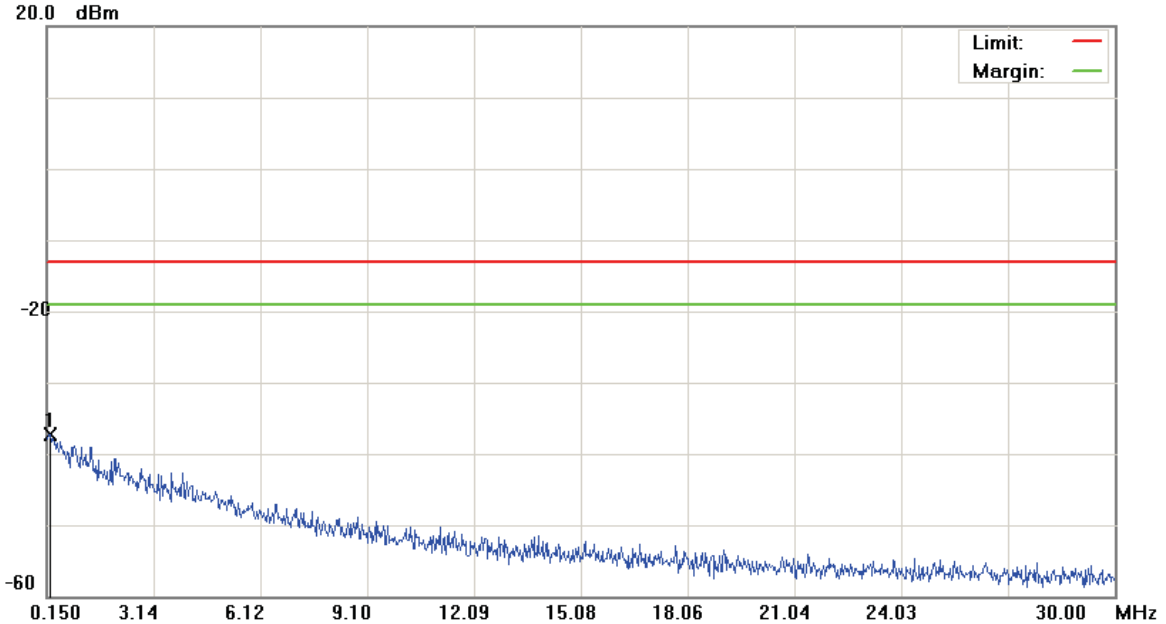

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 10 KHz VBW: 30 KHz
M/N: AC815S		
Mode: WCDMA Band V		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.2395	-68.60	31.24	-37.36	-13.00	-24.36	peak		


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4233)

Data :#3

Date: 2015/10/14

Time: 上午 11:51:19

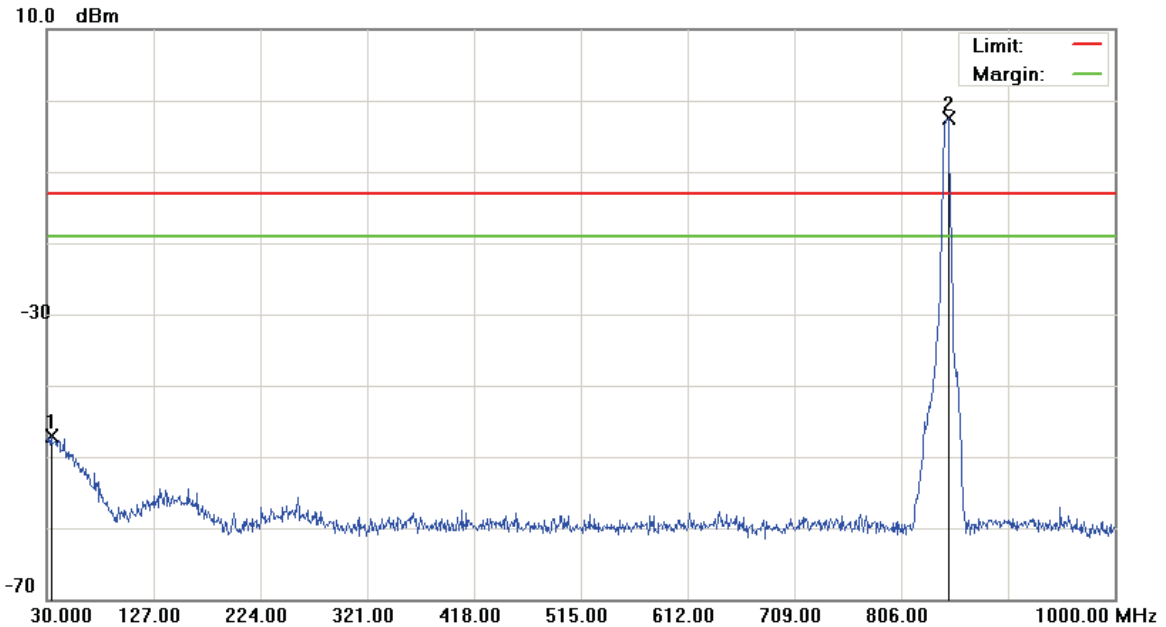

Site: site #1

 Polarization: *Conducted*

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55 %

EUT: AirCard 815S Mobile Hotspot

Distance:

RBW: 100 KHz VBW: 300 KHz

M/N: AC815S

Mode: WCDMA Band V

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Detector	Comment
1		33.8800	-63.82	16.77	-47.05	-13.00	-34.05			peak	
2	*	848.6800	-6.52	3.98	-2.54	-13.00	10.46			peak	Tx


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4233)

Data :#4

Date: 2015/10/14

Time: 上午 10:35:02

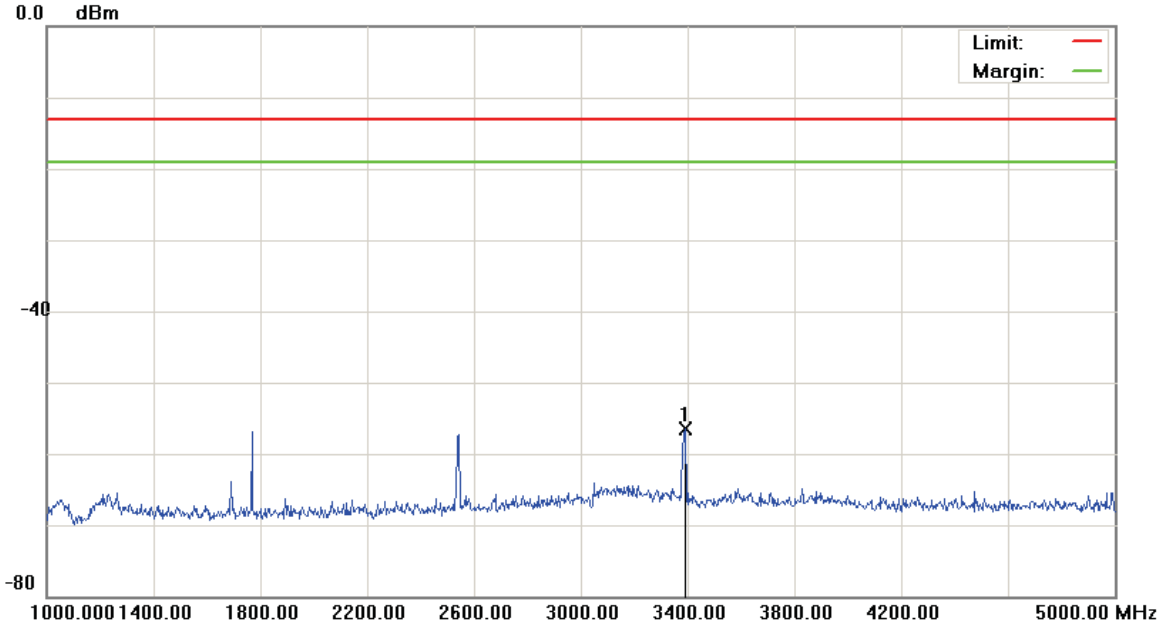

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band V		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	3392.000	-61.06	4.47	-56.59	-13.00	-43.59	Detector		peak


*:Maximum data x:Over limit !:over margin

File :AC815S(CH4233)

Data :#5

Date: 2015/10/14

Time: 上午 10:35:25

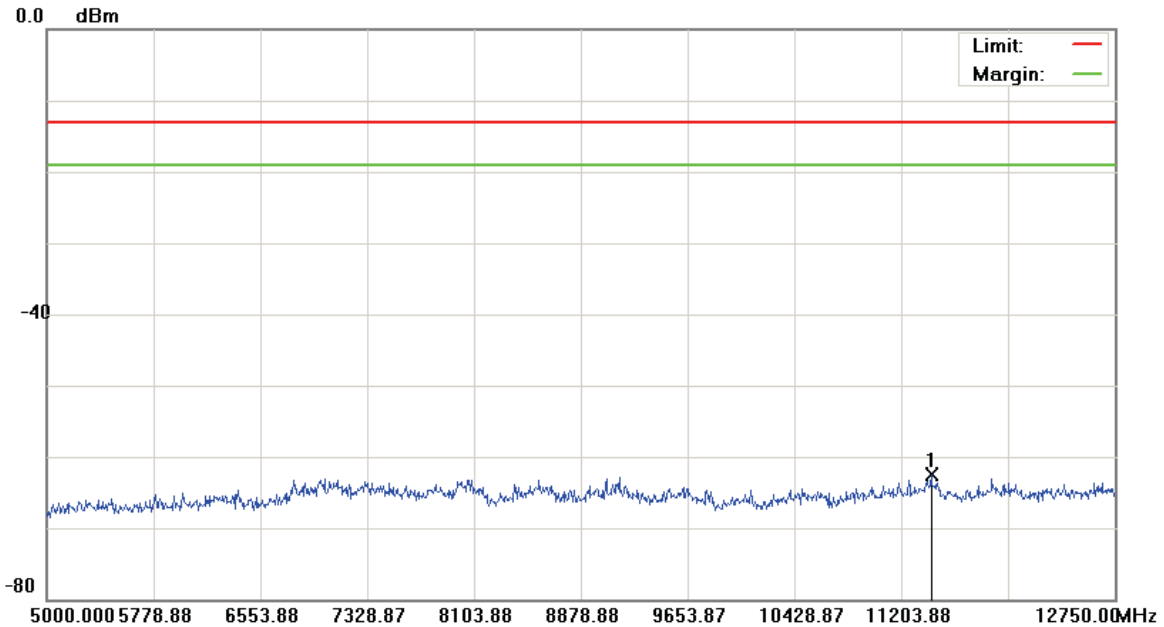

Site: site #1	Polarization: Conducted	Temperature: 26 °C
Limit: FCC Part 22 conducted(9k-12.75G)	Power: DC 3.8V	Humidity: 55 %
EUT: AirCard 815S Mobile Hotspot	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: AC815S		
Mode: WCDMA Band V		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	11203.875	-67.99	5.57	-62.42	-13.00	-49.42			peak

*:Maximum data x:Over limit !:over margin

8 Field Strength of Spurious Radiation Test

8.1. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


8.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	1 year
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	1 year
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	1 year
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	1 year
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	08/11/2015	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/12/2015	1 year
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/06/2015	1 year
Test Site	ATL	TE01	888001	08/27/2015	1 year


Note: N.C.R. = No Calibration Request.


8.3. Setup

Below 1GHz

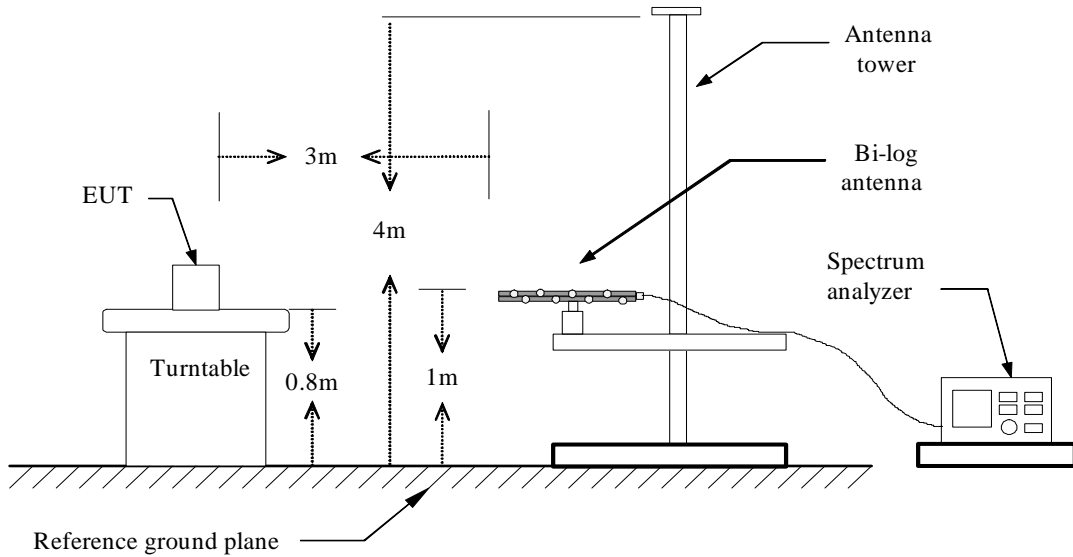

Above 1GHz

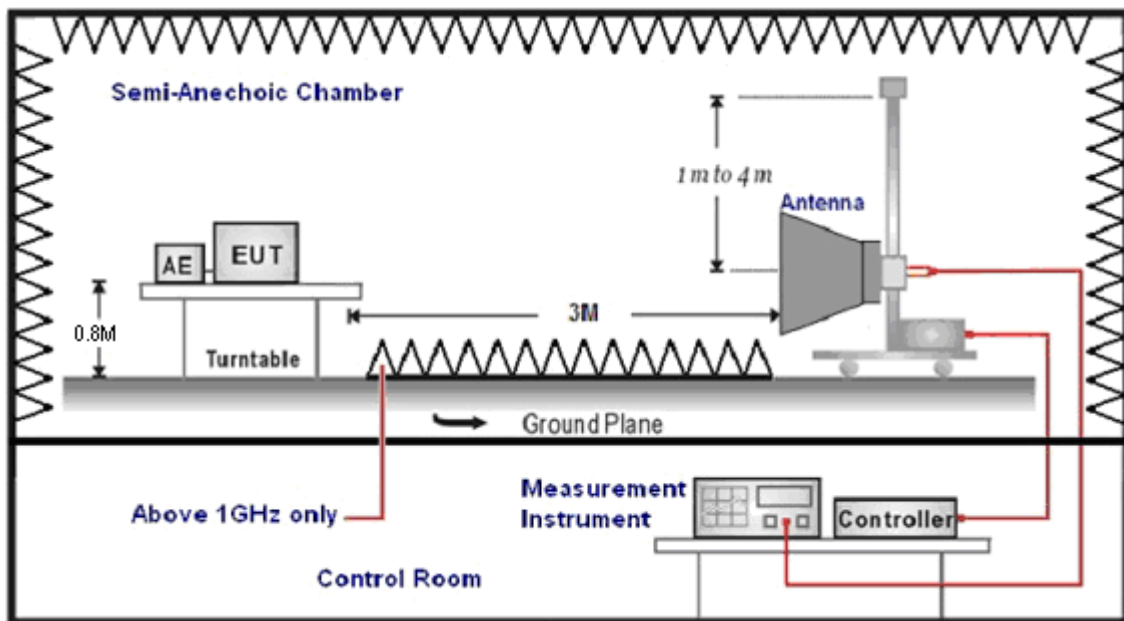

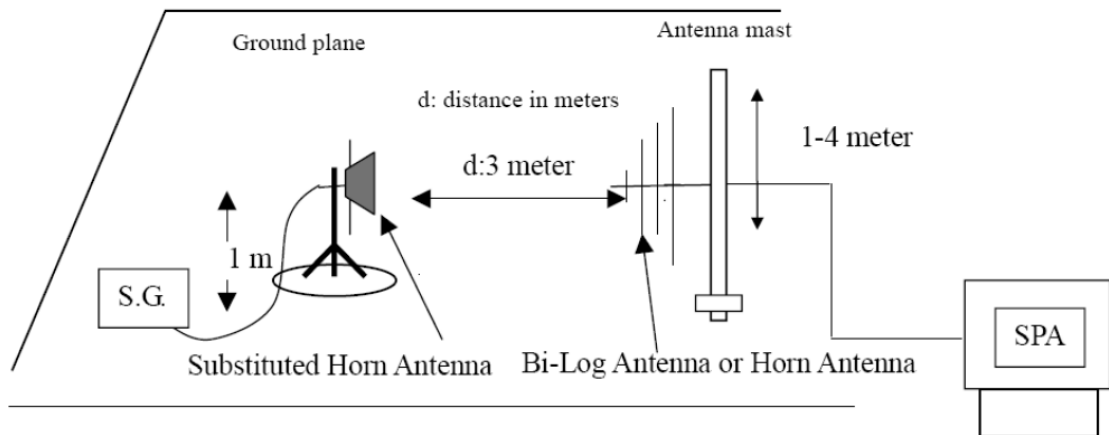

8.4. Test Procedure

- a. The EUT was set up for the maximum power with LTE link data modulation. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high operational frequency range). RWB and VBW is 1MHz.
- b. Radiation Emission measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G. to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- d. $E.I.R.P. = \text{Output power level of S.G.} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$
- e. $E.R.P. = E.I.R.P. - 2.15 \text{ dB}$

8.5. Uncertainty

The measurement uncertainty is defined as for Field Strength of Spurious Radiation measurement is $\pm 3.072 \text{ dB}$.

8.6. Test Result

Standard:		FCC Part 22		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		AC815S		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		1		Date:		10/27/2015	
Frequency:		824.2 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
4864.000	-78.12	21.64	-56.48	-13.00	-43.48	peak	H
5488.000	-79.61	23.68	-55.93	-13.00	-42.93	peak	V

Standard:		FCC Part 22		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		AC815S		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		1		Date:		10/27/2015	
Frequency:		836.6 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
6616.000	-78.17	28.99	-49.18	-13.00	-36.18	peak	H
6652.000	-76.95	29.09	-47.86	-13.00	-34.86	peak	V

Standard:		FCC Part 22		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		AC815S		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		1		Date:		10/27/2015	
Frequency:		848.8 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
7120.000	-76.67	30.49	-46.18	-13.00	-33.18	peak	H
6448.000	-79.07	28.37	-50.70	-13.00	-37.70	peak	V

Standard:	FCC Part 24	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC815S	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	10/27/2015
Frequency:	1850.2 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
5356.000	-78.46	23.36	-55.10	-13.00	-42.10	peak	H
6004.000	-78.11	25.70	-52.41	-13.00	-39.41	peak	V

Standard:	FCC Part 24	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC815S	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	10/27/2015
Frequency:	1880.0 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
5632.000	-79.17	24.23	-54.94	-13.00	-41.94	peak	H
6160.000	-78.91	26.64	-52.27	-13.00	-39.27	peak	V

Standard:	FCC Part 24	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC815S	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	10/27/2015
Frequency:	1909.8 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
6148.000	-77.56	26.56	-51.00	-13.00	-38.00	peak	H
6328.000	-79.13	27.64	-51.49	-13.00	-38.49	peak	V

Standard:	FCC Part 24	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC815S	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	10/27/2015
Frequency:	1852.4 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
6448.000	-78.99	28.37	-50.62	-13.00	-37.62	peak	H
6340.000	-79.48	27.71	-51.77	-13.00	-38.77	peak	V

Standard:	FCC Part 24	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC815S	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	10/27/2015
Frequency:	1880.0 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
6208.000	-79.19	26.92	-52.27	-13.00	-39.27	peak	H
5428.000	-78.99	23.54	-55.45	-13.00	-42.45	peak	V

Standard:	FCC Part 24	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	AC815S	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	10/27/2015
Frequency:	1907.6 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
7372.000	-77.13	31.35	-45.78	-13.00	-32.78	peak	H
6628.000	-78.14	29.02	-49.12	-13.00	-36.12	peak	V

Standard:	FCC Part 22	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	AC815S	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	6	Date:	10/27/2015				
Frequency:	826.4 MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
6496.000	-79.32	28.65	-50.67	-13.00	-37.67	peak	H
5212.000	-79.85	23.02	-56.83	-13.00	-43.83	peak	V

Standard:	FCC Part 22	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	AC815S	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	6	Date:	10/27/2015				
Frequency:	836.6 MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
6388.000	-80.19	28.00	-52.19	-13.00	-39.19	peak	H
5260.000	-79.38	23.13	-56.25	-13.00	-43.25	peak	V

Standard:	FCC Part 22	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	AC815S	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	6	Date:	10/27/2015				
Frequency:	846.6 MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
6256.000	-79.88	27.21	-52.67	-13.00	-39.67	peak	H
5416.000	-78.88	23.51	-55.37	-13.00	-42.37	peak	V

9 Frequency Stability (Temperature & Voltage Variation) Test

9.1. Limit


The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

9.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Universal Radio Communication Tester	R & S	CMU200	109369	10/21/2014	2 years
Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	04/27/2015	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

9.3. Setup

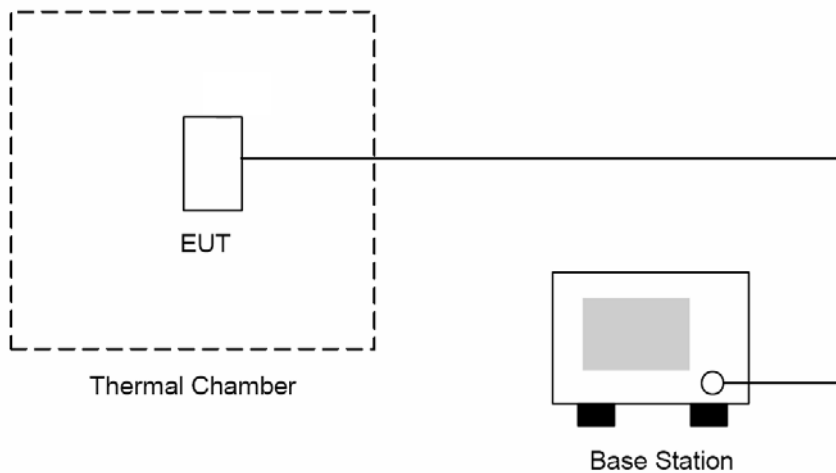

9.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was note within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected as the following section.
5. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
6. The temperature tests were performed for the worst case.
7. Test data was recorded.

9.5. Uncertainty

The measurement uncertainty is defined as for Frequency Stability (Temperature Variation) measurement is $\pm 10\text{Hz}$.

9.6. Test Result

Model Number	AC815S					
Test Item	Frequency Stability (Temperature & Voltage Variation)					
Test Mode	Mode 1					
Date of Test	10/24/2015					
Level	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
Normal	3.80	-30	-15.12	-0.018	±2.5	Pass
Normal	3.80	-20	-17.00	-0.020	±2.5	Pass
Normal	3.80	-10	-22.96	-0.027	±2.5	Pass
Normal	3.80	0	-8.86	-0.011	±2.5	Pass
Normal	3.80	10	2.15	0.003	±2.5	Pass
Battery full point	4.35	20	-14.45	-0.017	±2.5	Pass
Normal	3.80	20	-4.37	-0.005	±2.5	Pass
Battery cut-off point	3.50	20	-2.69	-0.003	±2.5	Pass
Normal	3.80	30	10.28	0.012	±2.5	Pass
Normal	3.80	40	-1.47	-0.002	±2.5	Pass
Normal	3.80	50	6.24	0.007	±2.5	Pass

Model Number	AC815S					
Test Item	Frequency Stability (Temperature & Voltage Variation)					
Test Mode	Mode 2					
Date of Test	10/24/2015					
Level	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
Normal	3.80	-30	-0.74	0.000	±2.5	Pass
Normal	3.80	-20	-8.40	-0.004	±2.5	Pass
Normal	3.80	-10	-29.05	-0.015	±2.5	Pass
Normal	3.80	0	-9.99	-0.005	±2.5	Pass
Normal	3.80	10	-5.03	-0.003	±2.5	Pass
Battery full point	4.35	20	-22.07	-0.012	±2.5	Pass
Normal	3.80	20	2.30	0.001	±2.5	Pass
Battery cut-off point	3.50	20	-8.01	-0.004	±2.5	Pass
Normal	3.80	30	-2.04	-0.001	±2.5	Pass
Normal	3.80	40	-6.74	-0.004	±2.5	Pass
Normal	3.80	50	2.91	0.002	±2.5	Pass

Model Number	AC815S					
Test Item	Frequency Stability (Temperature & Voltage Variation)					
Test Mode	Mode 5					
Date of Test	10/24/2015					
Level	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
Normal	3.80	-30	-5.48	-0.003	±2.5	Pass
Normal	3.80	-20	-7.93	-0.004	±2.5	Pass
Normal	3.80	-10	-7.72	-0.004	±2.5	Pass
Normal	3.80	0	-21.28	-0.011	±2.5	Pass
Normal	3.80	10	-18.31	-0.010	±2.5	Pass
Battery full point	4.35	20	-3.21	-0.002	±2.5	Pass
Normal	3.80	20	-5.43	-0.003	±2.5	Pass
Battery cut-off point	3.50	20	-7.44	-0.004	±2.5	Pass
Normal	3.80	30	3.15	0.002	±2.5	Pass
Normal	3.80	40	-18.50	-0.010	±2.5	Pass
Normal	3.80	50	11.54	0.006	±2.5	Pass

Model Number	AC815S					
Test Item	Frequency Stability (Temperature & Voltage Variation)					
Test Mode	Mode 6					
Date of Test	10/24/2015					
Level	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
Normal	3.80	-30	-4.29	-0.005	±2.5	Pass
Normal	3.80	-20	-9.41	-0.011	±2.5	Pass
Normal	3.80	-10	-17.59	-0.021	±2.5	Pass
Normal	3.80	0	-16.80	-0.020	±2.5	Pass
Normal	3.80	10	-19.43	-0.023	±2.5	Pass
Battery full point	4.35	20	-17.83	-0.021	±2.5	Pass
Normal	3.80	20	-4.98	-0.006	±2.5	Pass
Battery cut-off point	3.50	20	-15.19	-0.018	±2.5	Pass
Normal	3.80	30	1.53	0.002	±2.5	Pass
Normal	3.80	40	-10.51	-0.013	±2.5	Pass
Normal	3.80	50	14.97	0.018	±2.5	Pass