


Test mode 2: Adaptor Model: DV-1280-3

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11b CH L0
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 24 °C
 Humidity : 61 %

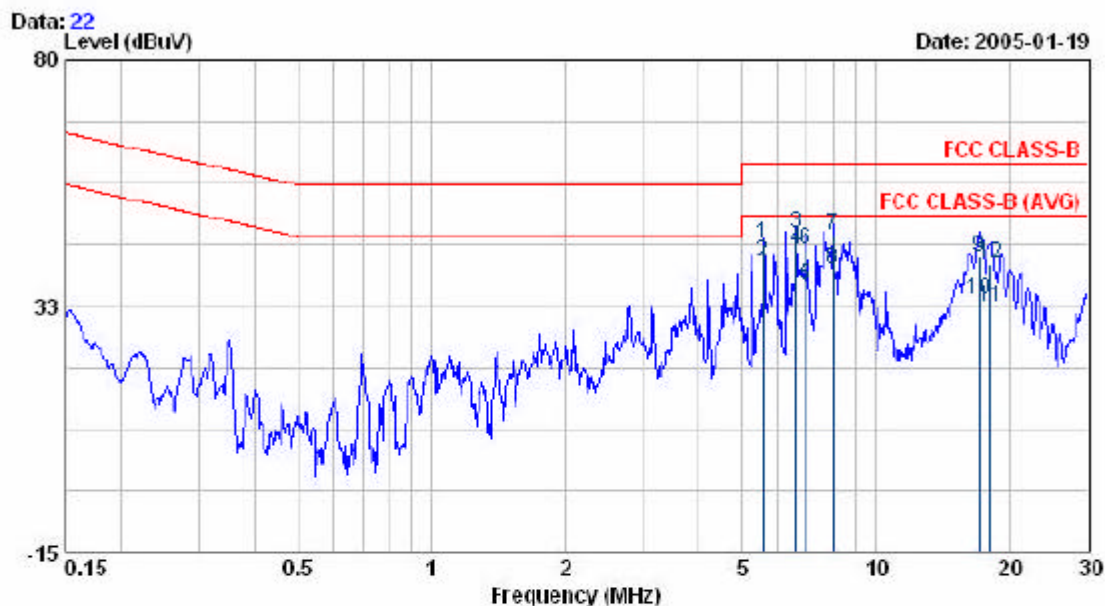


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
5.564	43.90	0.50	44.40	60.00	-15.60	QP
5.564	40.56	0.50	41.06	50.00	-8.94	AVERAGE
6.608	45.92	0.50	46.42	60.00	-13.58	QP
6.608	43.10	0.50	43.60	50.00	-6.40	AVERAGE
6.956	35.91	0.50	36.41	50.00	-13.59	AVERAGE
6.956	42.81	0.50	43.31	60.00	-16.69	QP
8.000	45.78	0.50	46.28	60.00	-13.72	QP
8.000	39.02	0.50	39.52	50.00	-10.48	AVERAGE
17.089	41.34	0.75	42.09	60.00	-17.91	QP
17.089	32.81	0.75	33.56	50.00	-16.44	AVERAGE
18.170	31.66	0.73	32.39	50.00	-17.61	AVERAGE
18.170	39.83	0.73	40.56	60.00	-19.44	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11b CH LO
 Memo :

Pol/Phase : LINE
 Temperature : 24 °C
 Humidity : 61 %

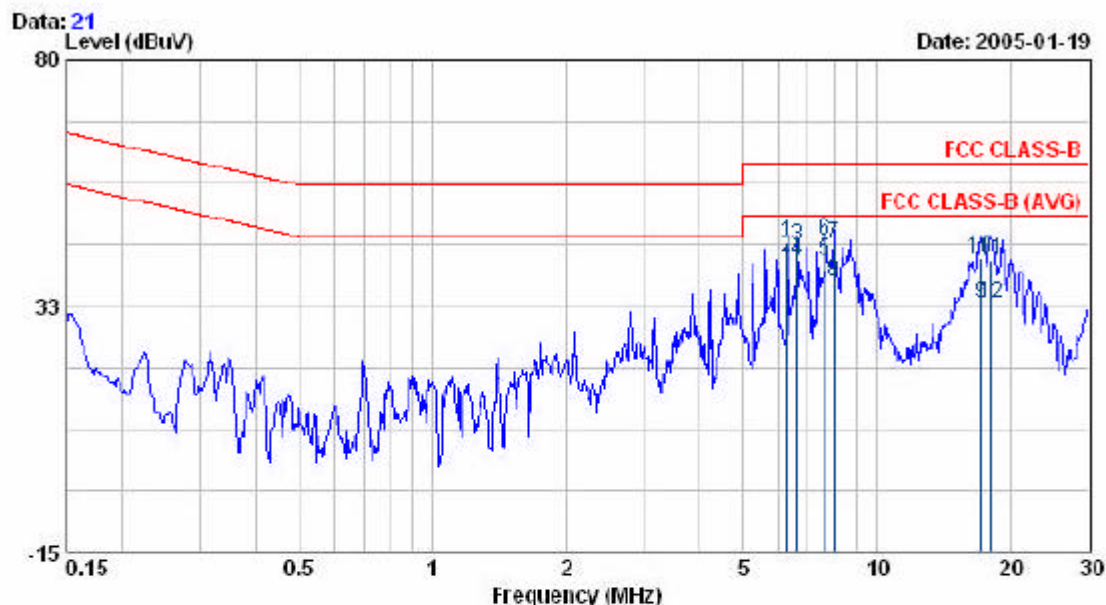


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
6.262	44.29	0.45	44.74	60.00	-15.26	QP
6.262	41.52	0.45	41.97	50.00	-8.03	AVERAGE
6.611	43.73	0.45	44.18	60.00	-15.82	QP
6.611	40.81	0.45	41.26	50.00	-8.74	AVERAGE
7.654	40.85	0.43	41.28	50.00	-8.72	AVERAGE
7.654	44.63	0.43	45.06	60.00	-14.94	QP
8.002	44.07	0.42	44.49	60.00	-15.51	QP
8.002	36.80	0.42	37.22	50.00	-12.78	AVERAGE
17.150	32.33	0.75	33.08	50.00	-16.92	AVERAGE
17.150	40.95	0.75	41.70	60.00	-18.30	QP
18.084	40.64	0.74	41.38	60.00	-18.63	QP
18.084	32.35	0.74	33.09	50.00	-16.91	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11b CH MID
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 24 °C
 Humidity : 61 %

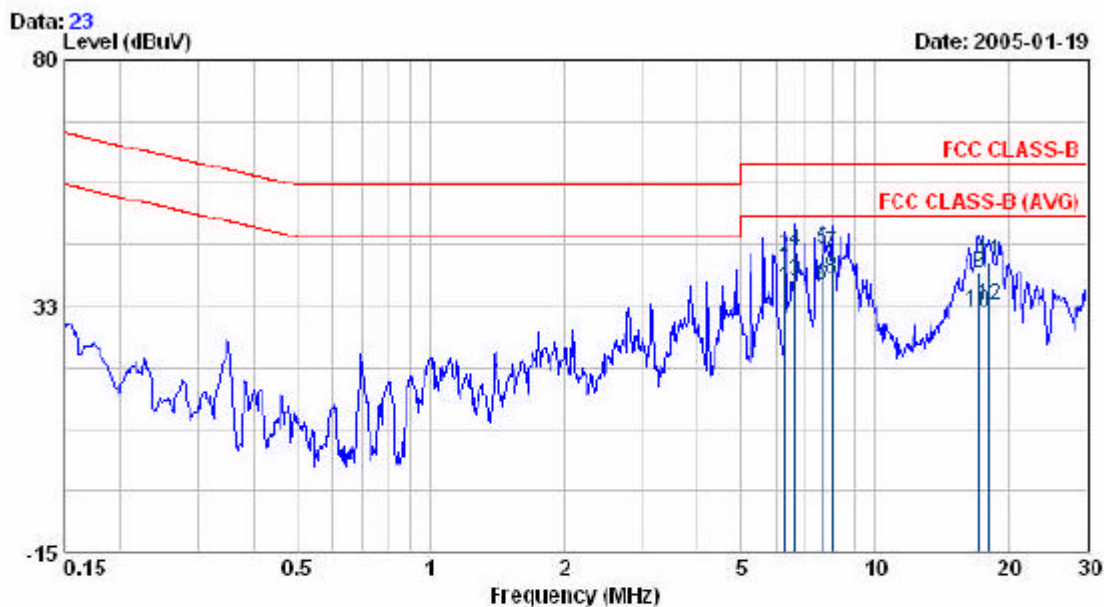


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
6.262	35.58	0.50	36.08	50.00	-13.92	AVERAGE
6.262	41.46	0.50	41.96	60.00	-18.04	QP
6.608	36.81	0.50	37.31	50.00	-12.69	AVERAGE
6.608	42.65	0.50	43.15	60.00	-16.85	QP
7.652	43.08	0.50	43.58	60.00	-16.42	QP
7.652	36.13	0.50	36.63	50.00	-13.37	AVERAGE
7.998	42.27	0.50	42.77	60.00	-17.23	QP
7.998	37.56	0.50	38.06	50.00	-11.94	AVERAGE
17.187	38.22	0.75	38.97	60.00	-21.03	QP
17.187	30.36	0.75	31.11	50.00	-18.89	AVERAGE
18.123	40.14	0.73	40.87	60.00	-19.13	QP
18.123	31.79	0.73	32.52	50.00	-17.48	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11b CH MID
 Memo :

Pol/Phase : LINE
 Temperature : 24 °C
 Humidity : 61 %

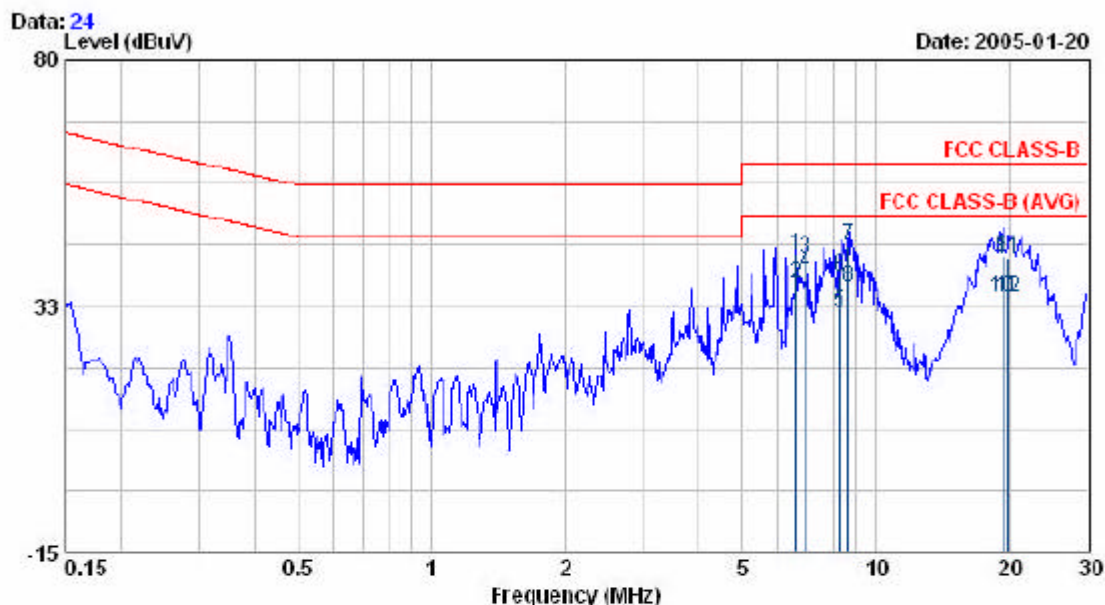


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
6.603	41.90	0.45	42.35	60.00	-17.65	QP
6.603	36.24	0.45	36.69	50.00	-13.31	AVERAGE
6.952	41.13	0.44	41.57	60.00	-18.43	QP
6.952	38.50	0.44	38.94	50.00	-11.06	AVERAGE
8.271	30.69	0.42	31.11	50.00	-18.89	AVERAGE
8.271	37.96	0.42	38.38	60.00	-21.62	QP
8.689	43.76	0.42	44.20	60.00	-15.80	QP
8.689	35.72	0.42	36.14	50.00	-13.86	AVERAGE
19.273	41.32	0.71	42.03	60.00	-17.97	QP
19.273	33.27	0.71	33.98	50.00	-16.02	AVERAGE
19.921	41.08	0.70	41.78	60.00	-18.22	QP
19.921	33.24	0.70	33.94	50.00	-16.06	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11b CH HI
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 24 °C
 Humidity : 61 %

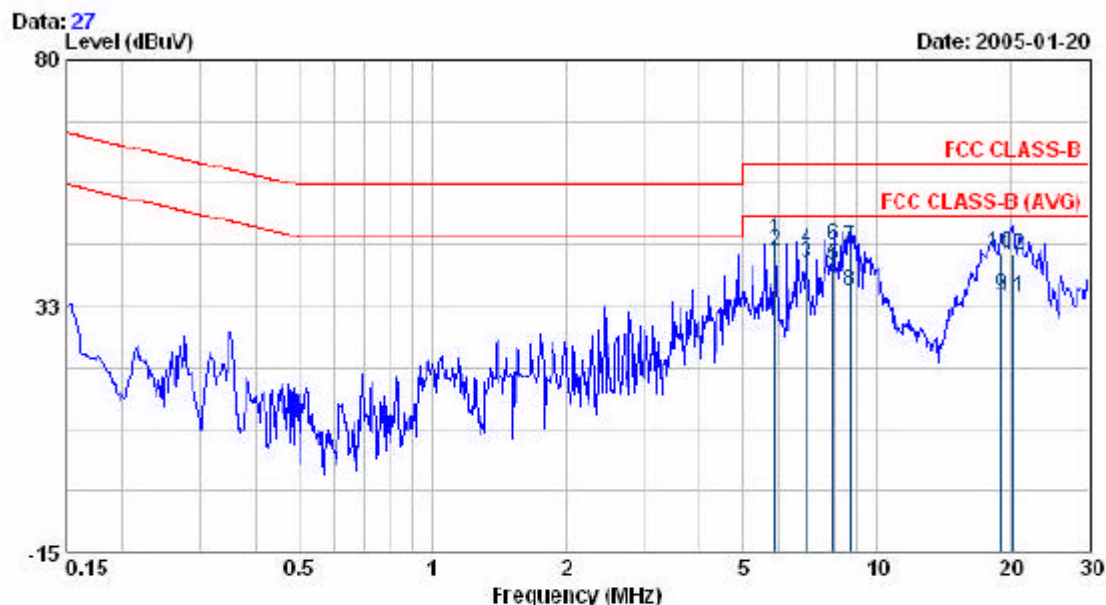


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
5.909	44.80	0.50	45.30	60.00	-14.70	QP
5.909	42.53	0.50	43.03	50.00	-6.97	AVERAGE
6.949	40.11	0.50	40.61	50.00	-9.39	AVERAGE
6.949	43.01	0.50	43.51	60.00	-16.49	QP
7.993	39.71	0.50	40.21	50.00	-9.79	AVERAGE
7.993	43.78	0.50	44.28	60.00	-15.72	QP
8.706	43.35	0.50	43.85	60.00	-16.15	QP
8.706	35.01	0.50	35.51	50.00	-14.49	AVERAGE
19.063	33.79	0.72	34.51	50.00	-15.49	AVERAGE
19.063	41.94	0.72	42.66	60.00	-17.34	QP
20.214	33.45	0.70	34.15	50.00	-15.85	AVERAGE
20.214	41.61	0.70	42.31	60.00	-17.69	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11b CH HI
 Memo :

Pol/Phase : LINE
 Temperature : 24 °C
 Humidity : 61 %

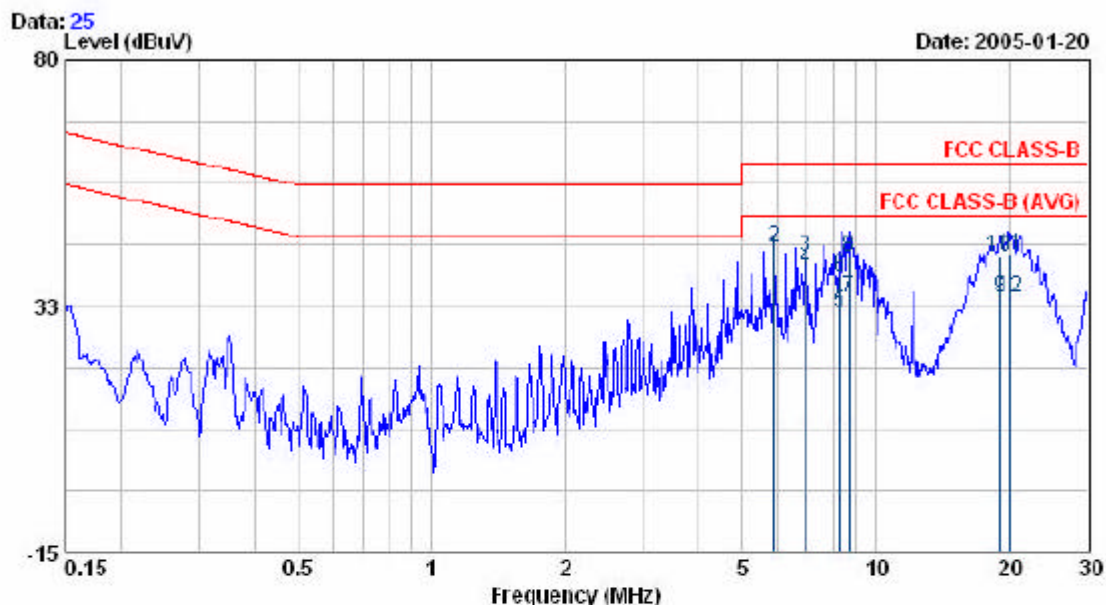


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
5.908	41.45	0.46	41.91	50.00	-8.09	AVERAGE
5.908	43.44	0.46	43.90	60.00	-16.10	QP
6.949	41.62	0.44	42.06	60.00	-17.94	QP
6.949	39.02	0.44	39.46	50.00	-10.54	AVERAGE
8.272	30.75	0.42	31.17	50.00	-18.83	AVERAGE
8.272	37.87	0.42	38.29	60.00	-21.71	QP
8.703	35.49	0.42	35.91	50.00	-16.09	AVERAGE
8.703	41.82	0.42	42.24	60.00	-17.76	QP
19.061	33.19	0.72	33.91	50.00	-16.09	AVERAGE
19.061	41.44	0.72	42.16	60.00	-17.84	QP
19.994	41.55	0.70	42.25	60.00	-17.75	QP
19.994	33.43	0.70	34.13	50.00	-15.87	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11g CH L0
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 24 °C
 Humidity : 61 %

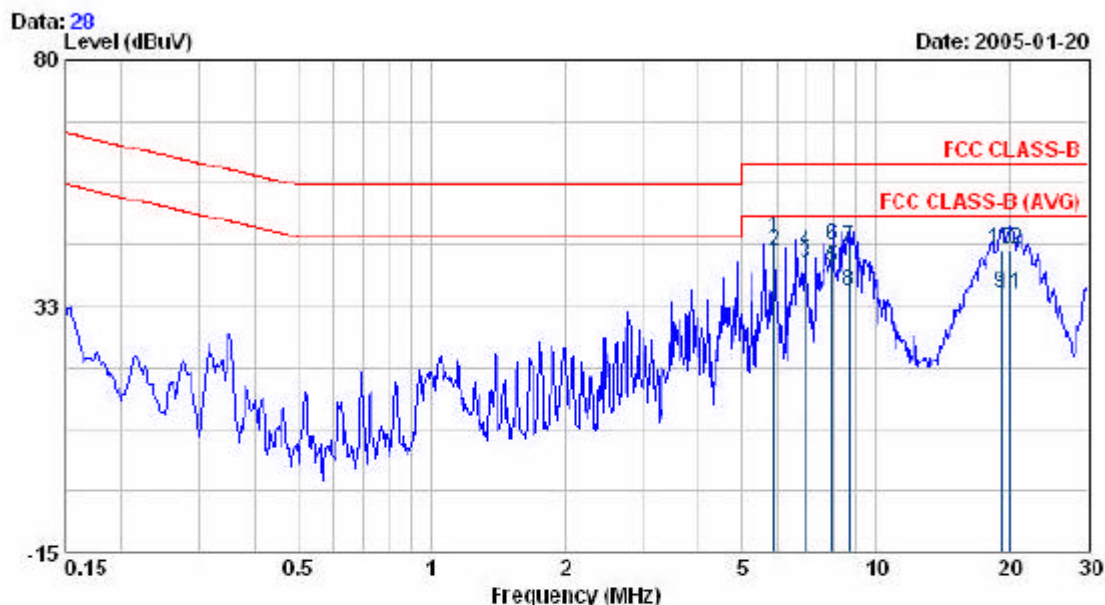


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
5.910	44.92	0.50	45.42	60.00	-14.58	QP
5.910	42.67	0.50	43.17	50.00	-6.83	AVERAGE
6.950	40.21	0.50	40.71	50.00	-9.29	AVERAGE
6.950	42.56	0.50	43.06	60.00	-16.94	QP
7.992	39.61	0.50	40.11	50.00	-9.89	AVERAGE
7.992	43.56	0.50	44.06	60.00	-15.94	QP
8.707	43.37	0.50	43.87	60.00	-16.13	QP
8.707	35.06	0.50	35.56	50.00	-14.44	AVERAGE
19.069	34.44	0.72	35.16	50.00	-14.84	AVERAGE
19.069	42.59	0.72	43.31	60.00	-16.69	QP
20.146	34.08	0.70	34.78	50.00	-15.22	AVERAGE
20.146	42.63	0.70	43.33	60.00	-16.67	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11g CH L0
 Memo :

Pol/Phase : LINE
 Temperature : 24 °C
 Humidity : 61 %

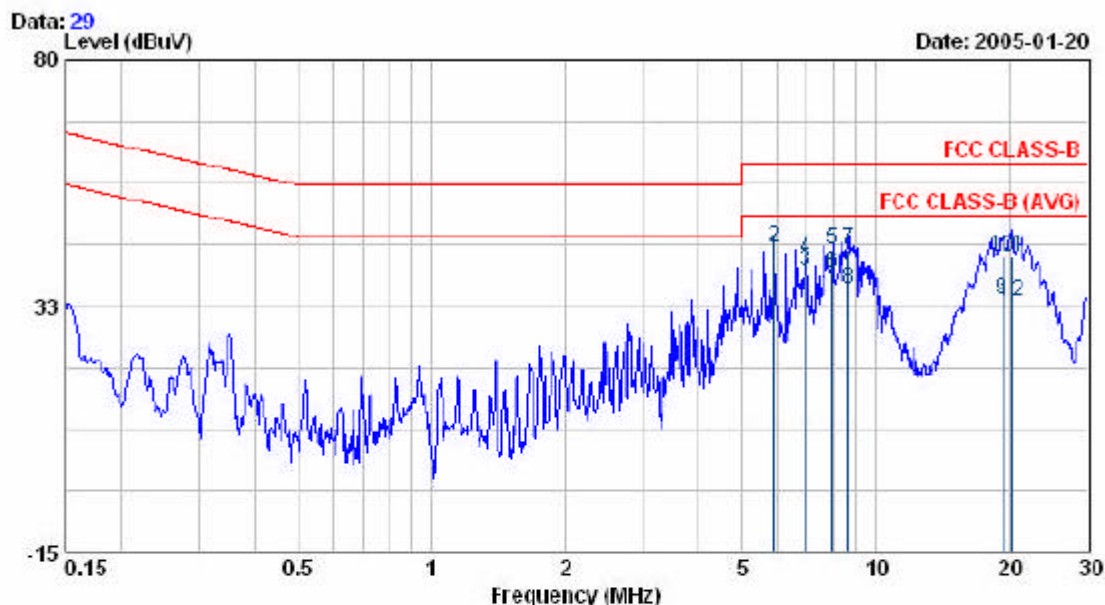


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
5.907	41.46	0.46	41.92	50.00	-8.08	AVERAGE
5.907	43.22	0.46	43.68	60.00	-16.32	QP
6.949	38.71	0.44	39.15	50.00	-10.85	AVERAGE
6.949	41.38	0.44	41.82	60.00	-18.18	QP
7.991	43.02	0.42	43.44	60.00	-16.56	QP
7.991	38.46	0.42	38.88	50.00	-11.12	AVERAGE
8.685	43.03	0.42	43.45	60.00	-16.55	QP
8.685	35.34	0.42	35.76	50.00	-14.24	AVERAGE
19.291	33.04	0.71	33.75	50.00	-16.25	AVERAGE
19.291	41.34	0.71	42.05	60.00	-17.95	QP
20.228	41.19	0.72	41.91	60.00	-18.09	QP
20.228	32.79	0.72	33.51	50.00	-16.49	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11g CH MID
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 24 °C
 Humidity : 61 %

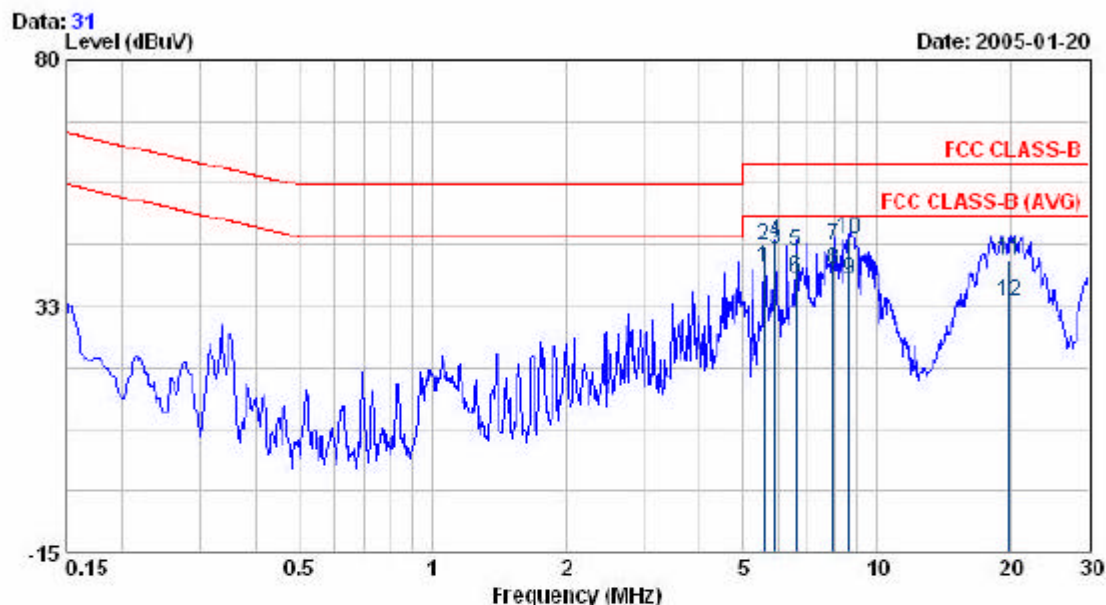


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
5.557	39.42	0.50	39.92	50.00	-10.08	AVERAGE
5.557	43.81	0.50	44.31	60.00	-15.69	QP
5.905	42.90	0.50	43.40	50.00	-6.60	AVERAGE
5.905	44.41	0.50	44.91	60.00	-15.09	QP
6.599	42.59	0.50	43.09	60.00	-16.91	QP
6.599	37.34	0.50	37.84	50.00	-12.16	AVERAGE
7.990	43.75	0.50	44.25	60.00	-15.75	QP
7.990	38.98	0.50	39.48	50.00	-10.52	AVERAGE
8.683	36.94	0.50	37.44	50.00	-12.56	AVERAGE
8.683	45.06	0.50	45.56	60.00	-14.42	QP
19.941	40.59	0.70	41.29	60.00	-18.71	QP
19.941	32.52	0.70	33.22	50.00	-16.78	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11s CH MID
 Memo :

Pol/Phase : LINE
 Temperature : 24 °C
 Humidity : 61 %

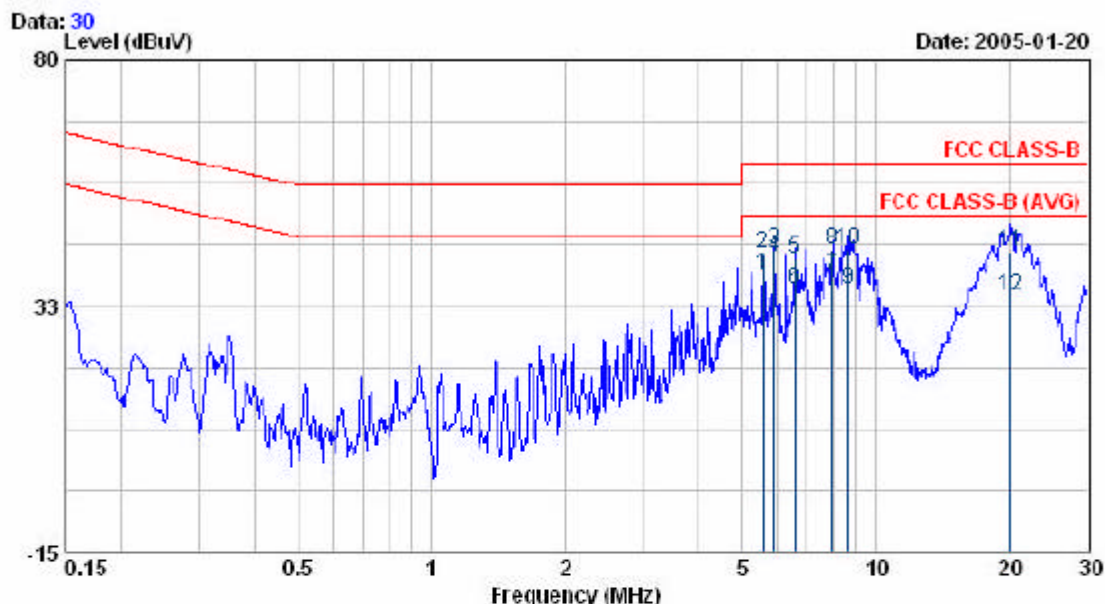


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
5.559	36.07	0.46	36.53	50.00	-11.47	AVERAGE
5.559	42.30	0.46	42.76	60.00	-17.24	QP
5.906	43.13	0.46	43.59	60.00	-16.41	QP
5.906	41.50	0.46	41.96	50.00	-8.04	AVERAGE
6.599	41.43	0.45	41.88	60.00	-18.12	QP
6.599	35.48	0.45	35.93	50.00	-14.07	AVERAGE
7.990	36.30	0.42	36.72	50.00	-11.28	AVERAGE
7.990	43.05	0.42	43.47	60.00	-16.53	QP
8.664	35.29	0.42	35.71	50.00	-14.29	AVERAGE
8.664	43.17	0.42	43.59	60.00	-16.41	QP
20.159	42.32	0.71	43.03	60.00	-16.97	QP
20.159	33.73	0.71	34.44	50.00	-15.56	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGPS606
 Power : AC 110V
 Test Mode : 802.11g CH HI
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 24 °C
 Humidity : 61 %

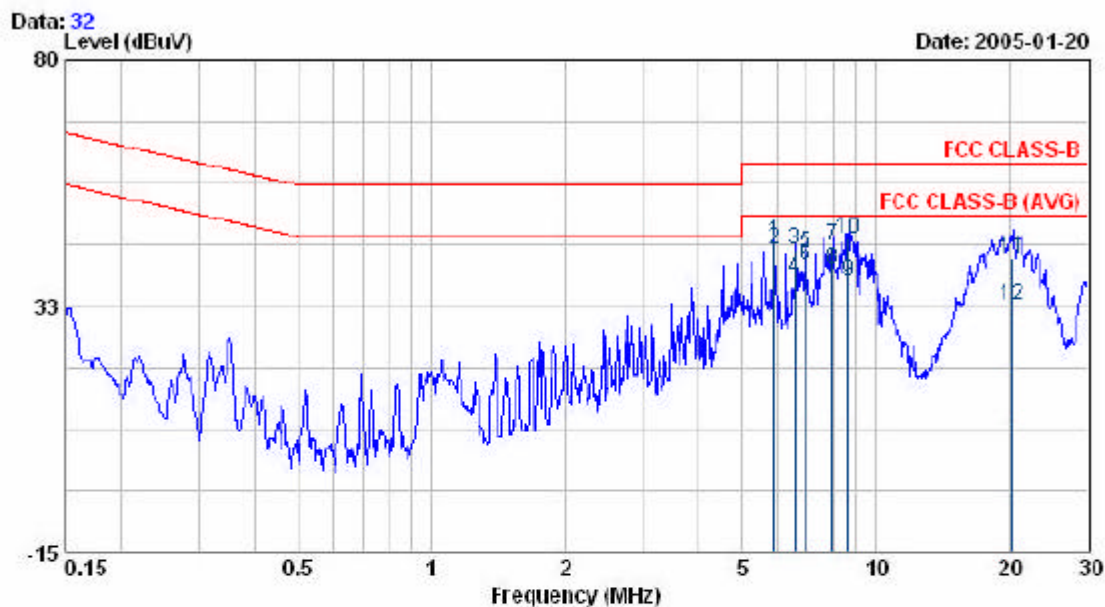


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
5.904	44.40	0.50	44.90	60.00	-15.10	QP
5.904	42.88	0.50	43.38	50.00	-6.62	AVERAGE
6.598	42.83	0.50	43.33	60.00	-16.67	QP
6.598	37.23	0.50	37.73	50.00	-12.27	AVERAGE
6.947	42.37	0.50	42.87	60.00	-17.13	QP
6.947	39.89	0.50	40.39	50.00	-9.61	AVERAGE
7.989	43.64	0.50	44.14	60.00	-15.86	QP
7.989	39.22	0.50	39.72	50.00	-10.28	AVERAGE
8.681	36.68	0.50	37.18	50.00	-12.82	AVERAGE
8.681	45.16	0.50	45.66	60.00	-14.34	QP
20.225	40.87	0.71	41.58	60.00	-18.42	QP
20.225	32.14	0.71	32.85	50.00	-17.15	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGSP606
 Power : AC 110V
 Test Mode : 802.11g CH HI
 Memo :

Pol/Phase : LINE
 Temperature : 24 °C
 Humidity : 61 %

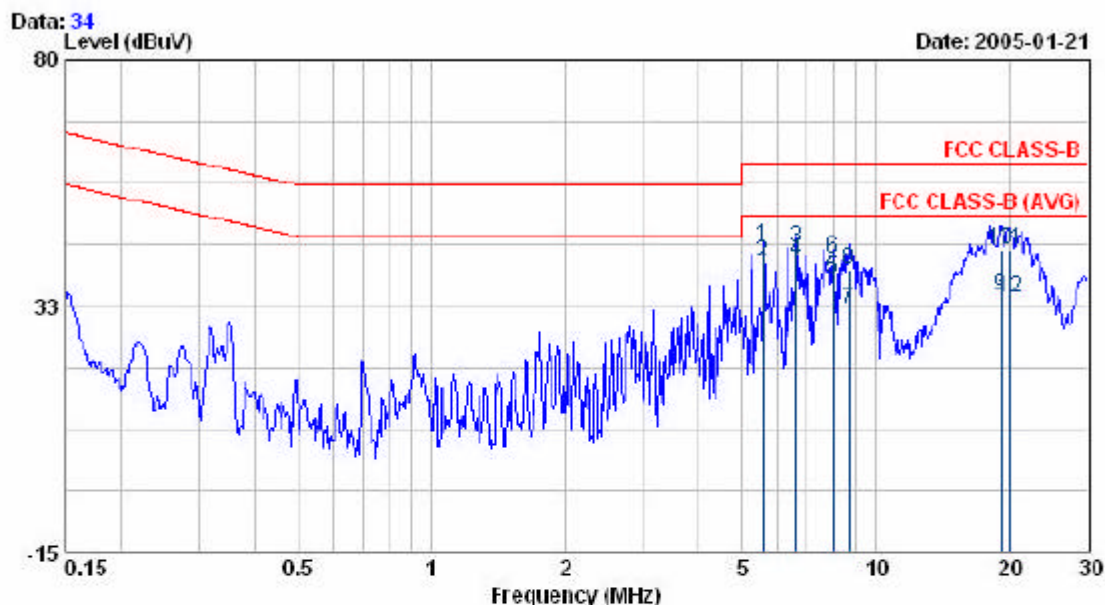

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
5.570	43.63	0.46	44.09	60.00	-15.91	QP
5.570	40.54	0.46	41.00	50.00	-9.00	AVERAGE
6.615	43.24	0.45	43.69	60.00	-16.31	QP
6.615	40.81	0.45	41.26	50.00	-8.74	AVERAGE
8.007	37.50	0.42	37.92	50.00	-12.08	AVERAGE
8.007	41.47	0.42	41.89	60.00	-18.11	QP
8.728	31.48	0.41	31.89	50.00	-18.11	AVERAGE
8.728	39.31	0.41	39.72	60.00	-20.28	QP
19.111	33.77	0.72	34.49	50.00	-15.51	AVERAGE
19.111	42.69	0.72	43.41	60.00	-16.59	QP
20.023	42.76	0.70	43.46	60.00	-16.54	QP
20.023	33.47	0.70	34.17	50.00	-15.83	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

Test by: Carol Jan. 1, 2005

4.2.1. Photographs of Conducted Emission Test

FRONT VIEW



REAR VIEW

