


EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11g CH MID  
 Memo : AD-121A2

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

Data: 127

Level (dBuV)

Date: 2005-02-03

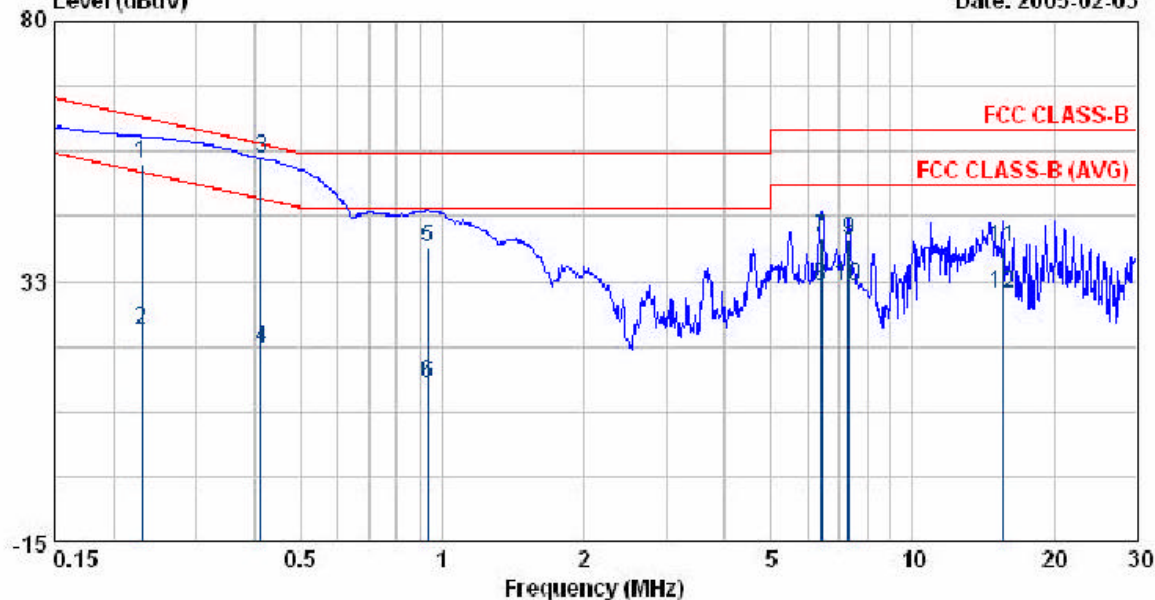

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.230	53.70	0.26	53.96	62.44	-8.47	QP
0.230	23.49	0.26	23.75	52.44	-28.68	AVERAGE
0.413	54.40	0.50	54.90	57.59	-2.70	QP
0.413	19.78	0.50	20.28	47.59	-27.32	AVERAGE
0.933	38.13	0.41	38.54	56.00	-17.46	QP
0.933	13.32	0.41	13.73	46.00	-32.27	AVERAGE
6.420	39.76	0.45	40.21	60.00	-19.79	QP
6.420	31.08	0.45	31.53	50.00	-18.47	AVERAGE
7.326	39.57	0.43	40.00	60.00	-20.00	QP
7.326	31.21	0.43	31.64	50.00	-18.36	AVERAGE
15.537	37.70	0.79	38.49	60.00	-21.51	QP
15.537	29.53	0.79	30.32	50.00	-19.68	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss


EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11g CH HI  
 Memo : AD-121A2

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 58 %

Data: 128

Level (dBuV)

Date: 2005-02-03

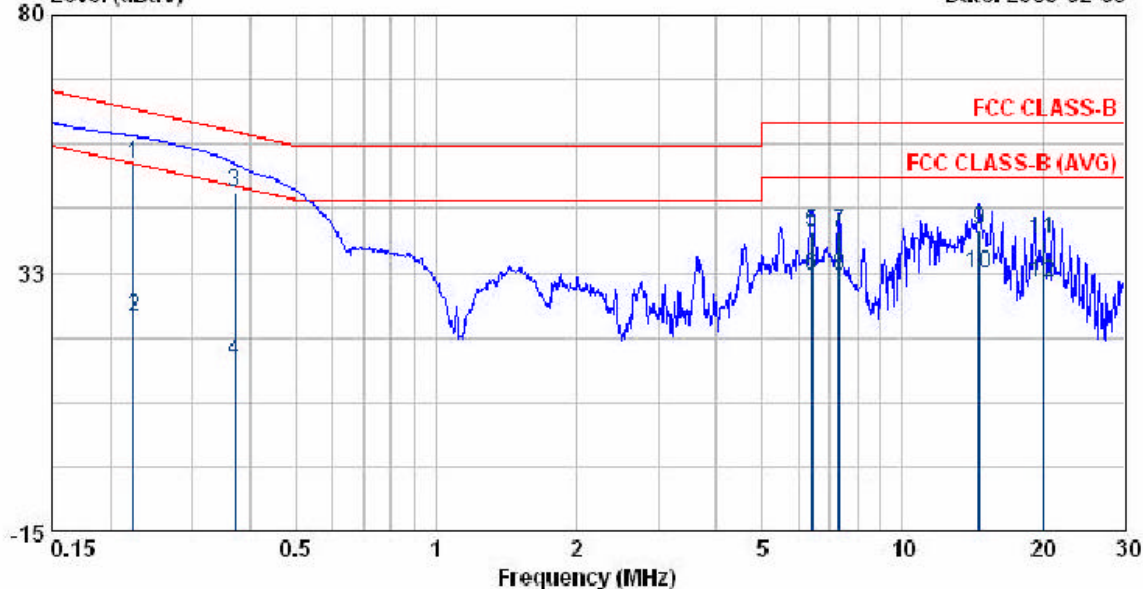

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.225	52.41	0.25	52.66	62.64	-9.98	QP
0.225	24.21	0.25	24.46	52.64	-28.18	AVERAGE
0.371	46.76	0.47	47.23	58.47	-11.25	QP
0.371	15.87	0.47	16.34	48.47	-32.14	AVERAGE
6.414	39.63	0.50	40.13	60.00	-19.87	QP
6.414	31.37	0.50	31.87	50.00	-18.13	AVERAGE
7.325	39.48	0.50	39.98	60.00	-20.02	QP
7.325	31.33	0.50	31.83	50.00	-18.17	AVERAGE
14.644	39.51	0.78	40.29	60.00	-19.71	QP
14.644	31.52	0.78	32.30	50.00	-17.70	AVERAGE
20.097	37.95	0.70	38.65	60.00	-21.35	QP
20.097	29.71	0.70	30.41	50.00	-19.59	AVERAGE


Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(1SN) Factor + Cable Loss

EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11g CH HI  
 Memo : AD-121A2

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

Data: 126  
 Level (dBuV)

Date: 2005-02-03

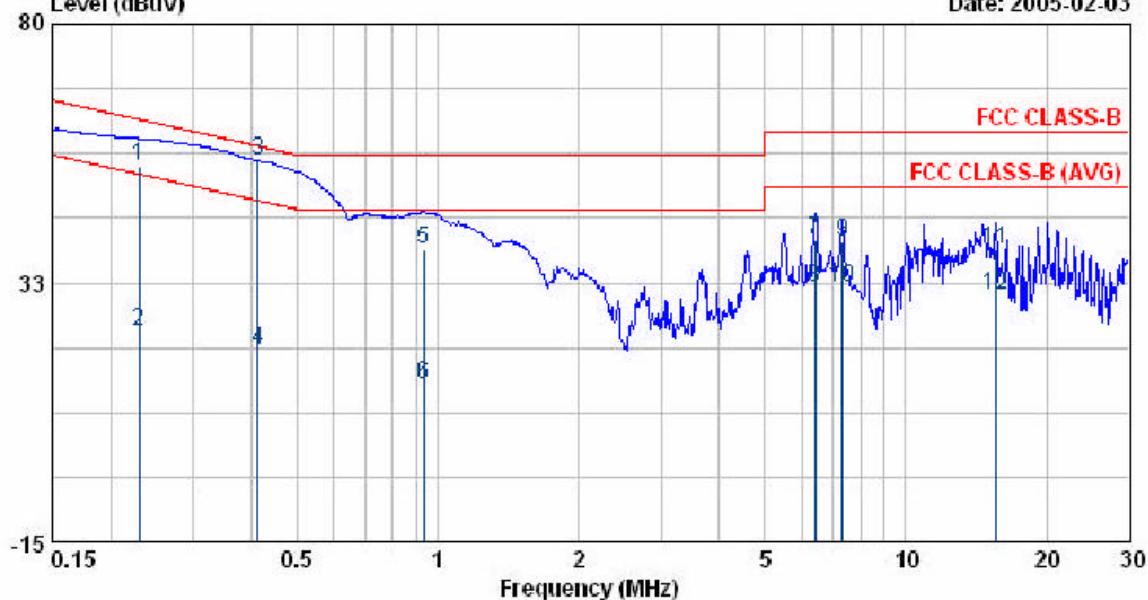


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.230	53.70	0.26	53.96	62.44	-8.47	QP
0.230	23.49	0.26	23.75	52.44	-28.68	AVERAGE
0.413	54.40	0.50	54.90	57.59	-2.70	QP
0.413	19.78	0.50	20.28	47.59	-27.32	AVERAGE
0.933	38.23	0.41	38.64	56.00	-17.36	QP
0.933	13.45	0.41	13.86	46.00	-32.14	AVERAGE
6.420	39.76	0.45	40.21	60.00	-19.79	QP
6.420	31.08	0.45	31.53	50.00	-18.47	AVERAGE
7.326	39.63	0.43	40.06	60.00	-19.94	QP
7.326	31.22	0.43	31.65	50.00	-18.35	AVERAGE
15.537	37.70	0.79	38.49	60.00	-21.51	QP
15.537	29.53	0.79	30.32	50.00	-19.68	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

Test mode 2: Adaptor Model: DV-151A-1

EUT	: WGR613VAL	Pol/Phase	: NEUTRAL
Power	: AC 110V	Temperature	: 25 °C
Test Mode	: 802.11b CH L0	Humidity	: 58 %
Memo	: DV-151A-1		

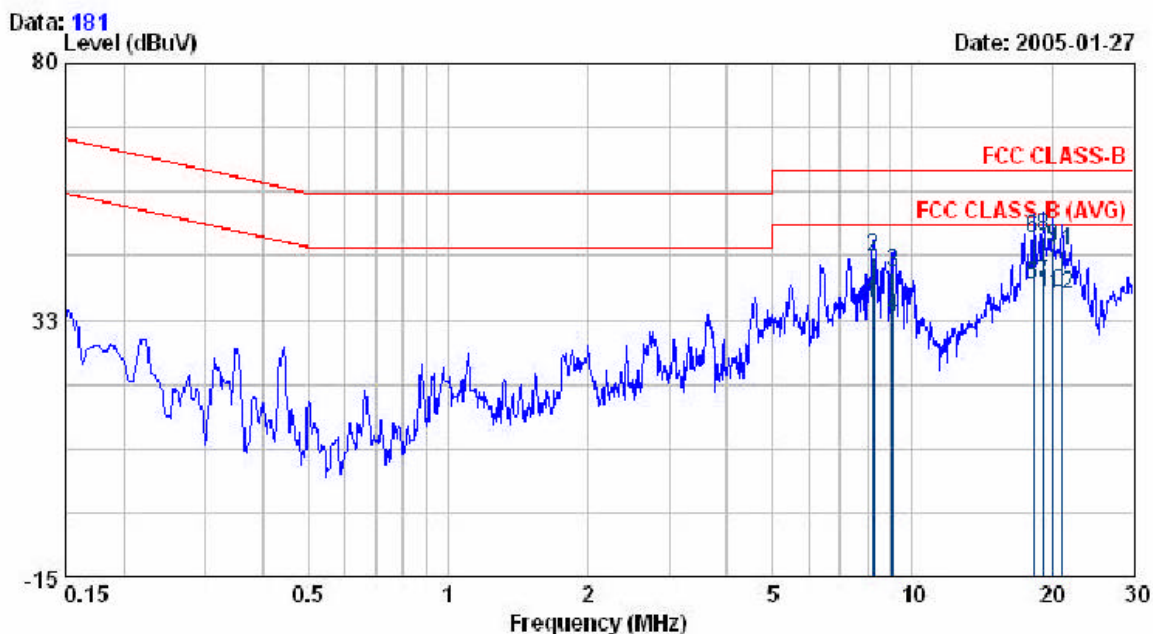


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
8.234	34.96	0.50	35.46	50.00	-14.54	AVERAGE
8.234	43.75	0.50	44.25	60.00	-15.75	QP
9.095	40.92	0.50	41.42	60.00	-18.58	QP
9.095	32.69	0.50	33.19	50.00	-16.81	AVERAGE
18.248	38.36	0.73	39.09	50.00	-10.91	AVERAGE
18.248	46.87	0.73	47.60	60.00	-12.40	QP
19.188	38.74	0.71	39.45	50.00	-10.55	AVERAGE
19.188	47.23	0.71	47.94	60.00	-12.06	QP
20.121	45.08	0.70	45.78	60.00	-14.22	QP
20.121	36.75	0.70	37.45	50.00	-12.55	AVERAGE
20.982	44.59	0.72	45.31	60.00	-14.69	QP
20.982	36.39	0.72	37.11	50.00	-12.89	AVERAGE

Remarks: 1. Level = Read Level + Factor  
2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11b CH L0  
 Memo : DV-151A-1

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

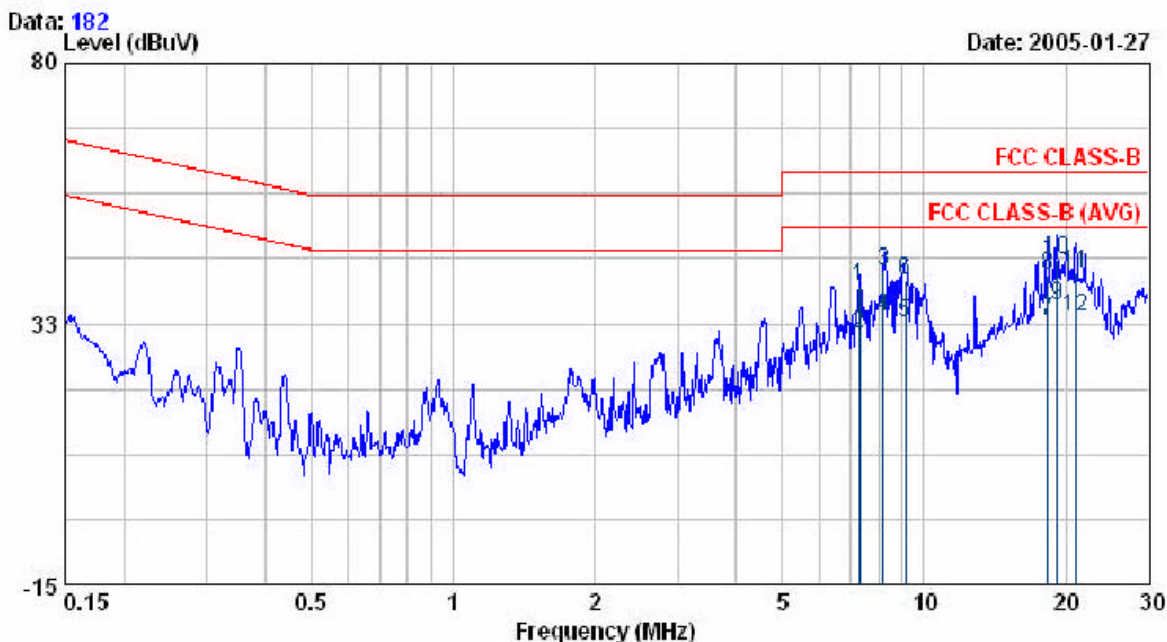


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
7.295	38.79	0.43	39.22	60.00	-20.78	QP
7.295	30.26	0.43	30.69	50.00	-19.31	AVERAGE
8.223	41.77	0.42	42.19	60.00	-17.81	QP
8.223	33.36	0.42	33.78	50.00	-16.22	AVERAGE
9.150	32.27	0.41	32.68	50.00	-17.32	AVERAGE
9.150	39.93	0.41	40.34	60.00	-19.66	QP
18.301	32.15	0.73	32.88	50.00	-17.12	AVERAGE
18.301	40.67	0.73	41.40	60.00	-18.60	QP
19.161	35.11	0.71	35.82	50.00	-14.18	AVERAGE
19.161	43.48	0.71	44.19	60.00	-15.81	QP
21.018	41.02	0.79	41.81	60.00	-18.19	QP
21.018	32.94	0.79	33.73	50.00	-16.27	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss



EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11b CH MID  
 Memo : DV-151A-1

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 58 %

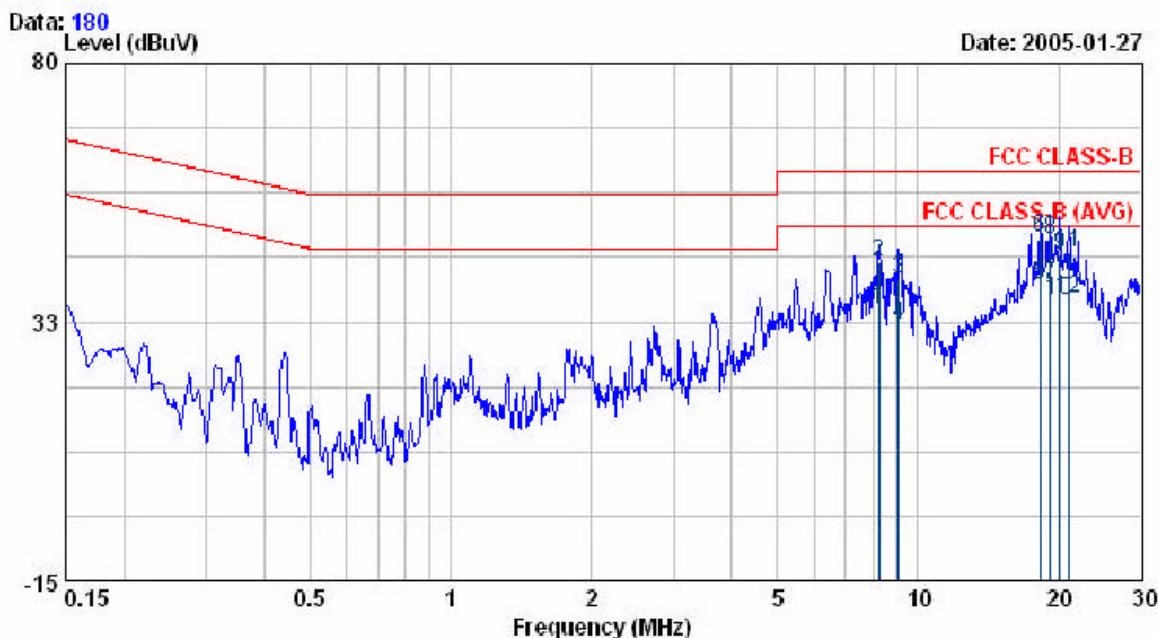


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
8.247	34.42	0.50	34.92	50.00	-15.08	AVERAGE
8.247	43.09	0.50	43.59	60.00	-16.41	QP
9.109	39.92	0.50	40.42	60.00	-19.58	QP
9.109	31.32	0.50	31.82	50.00	-18.18	AVERAGE
18.275	38.60	0.73	39.33	50.00	-10.67	AVERAGE
18.275	47.22	0.73	47.95	60.00	-12.05	QP
19.178	38.50	0.71	39.21	50.00	-10.79	AVERAGE
19.178	46.80	0.71	47.51	60.00	-12.49	QP
20.142	44.15	0.70	44.85	60.00	-15.15	QP
20.142	35.83	0.70	36.53	50.00	-13.47	AVERAGE
21.002	44.51	0.72	45.23	60.00	-14.77	QP
21.002	36.22	0.72	36.94	50.00	-13.06	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11b CH MID  
 Memo : DV-151A-1

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

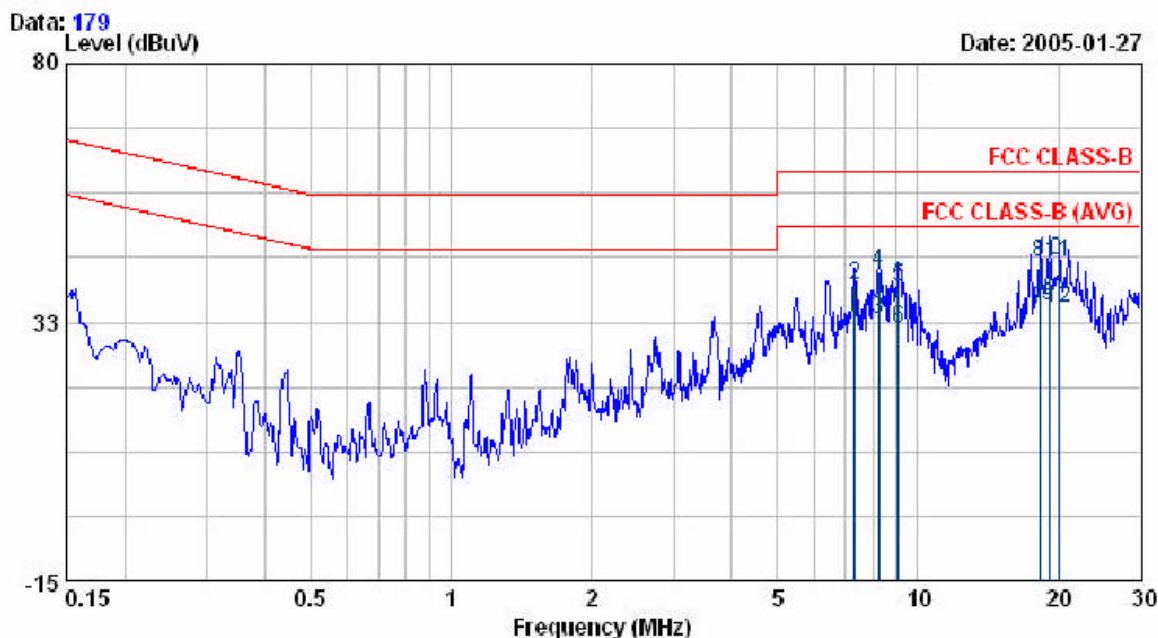


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
7.321	30.36	0.43	30.79	50.00	-19.21	AVERAGE
7.321	38.98	0.43	39.41	60.00	-20.59	QP
8.250	32.71	0.42	33.13	50.00	-16.87	AVERAGE
8.250	41.27	0.42	41.69	60.00	-18.31	QP
9.111	36.69	0.41	39.10	60.00	-20.90	QP
9.111	30.90	0.41	31.31	50.00	-18.69	AVERAGE
18.256	34.11	0.73	34.84	50.00	-15.16	AVERAGE
18.256	42.73	0.73	43.46	60.00	-16.54	QP
19.155	34.66	0.72	35.38	50.00	-14.62	AVERAGE
19.155	43.00	0.72	43.72	60.00	-16.28	QP
20.087	42.62	0.71	43.33	60.00	-16.67	QP
20.087	34.30	0.71	35.01	50.00	-14.99	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11b CH HI  
 Memo : DV-151A-1

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 58 %

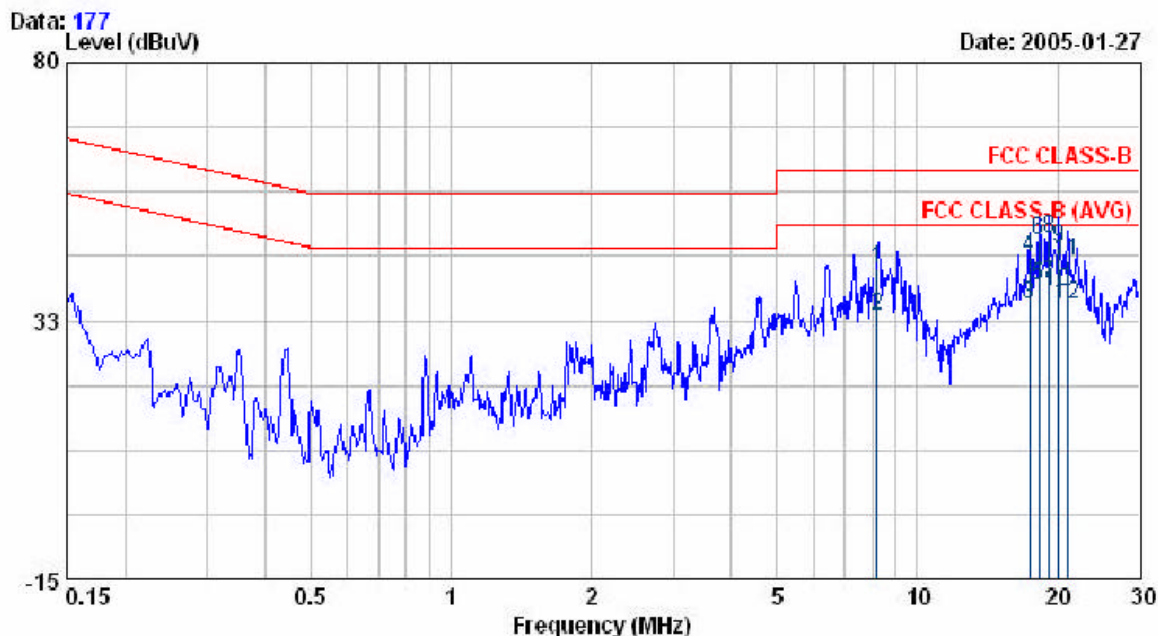


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
8.196	41.71	0.50	42.21	60.00	-17.79	QP
8.196	32.99	0.50	33.49	50.00	-16.51	AVERAGE
17.384	34.72	0.75	35.47	50.00	-14.53	AVERAGE
17.384	43.33	0.75	44.08	60.00	-15.92	QP
18.261	38.16	0.73	38.89	50.00	-11.11	AVERAGE
18.261	46.65	0.73	47.38	60.00	-12.62	QP
19.181	38.61	0.71	39.32	50.00	-10.68	AVERAGE
19.181	46.80	0.71	47.51	60.00	-12.49	QP
20.116	45.30	0.70	46.00	60.00	-14.00	QP
20.116	37.11	0.70	37.81	50.00	-12.19	AVERAGE
21.012	42.86	0.72	43.60	60.00	-16.40	QP
21.012	34.79	0.72	35.51	50.00	-14.49	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(1SN) Factor + Cable Loss



EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11b CH HI  
 Memo : DV-151A-1

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

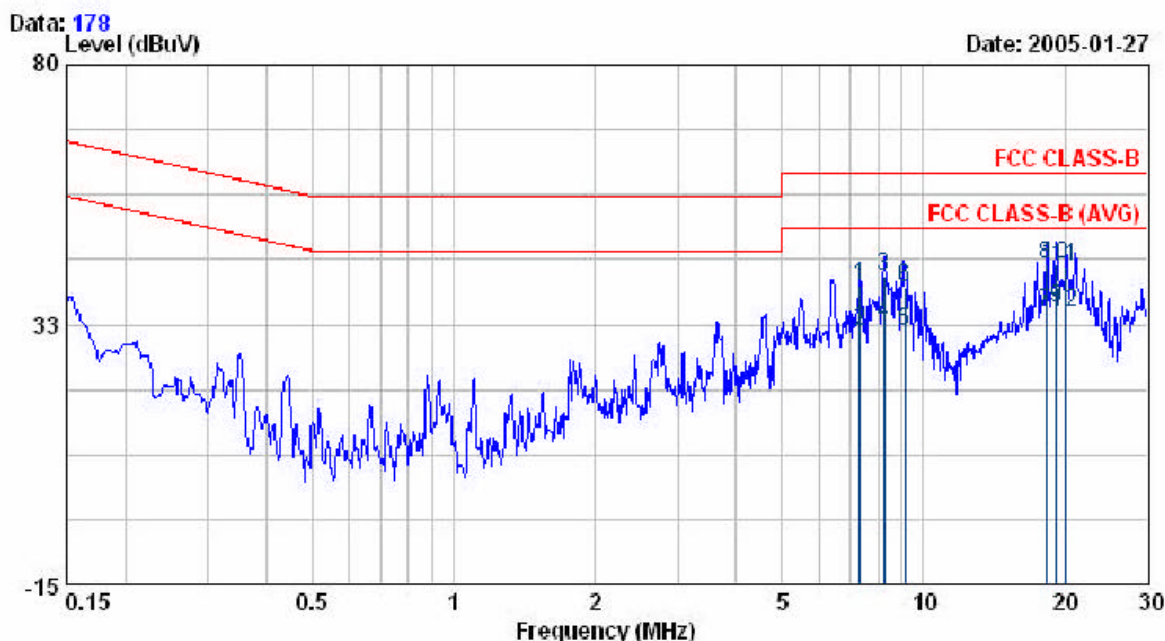

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
7.323	39.20	0.43	39.63	60.00	-20.37	QP
7.323	30.77	0.43	31.20	50.00	-18.80	AVERAGE
8.257	40.87	0.42	41.29	60.00	-18.71	QP
8.257	32.23	0.42	32.65	50.00	-17.35	AVERAGE
9.117	30.79	0.41	31.20	50.00	-18.80	AVERAGE
9.117	38.85	0.41	39.26	60.00	-20.74	QP
18.261	34.08	0.73	34.81	50.00	-15.19	AVERAGE
18.261	42.59	0.73	43.32	60.00	-16.68	QP
19.167	34.59	0.71	35.30	50.00	-14.70	AVERAGE
19.167	42.88	0.71	43.59	60.00	-16.41	QP
20.102	42.30	0.71	43.01	60.00	-16.99	QP
20.102	34.04	0.71	34.75	50.00	-15.25	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss