


EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11g CH LO  
 Memo : DV-151A-I

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 58 %

Data: 176  
 Level (dBuV)

Date: 2005-01-27

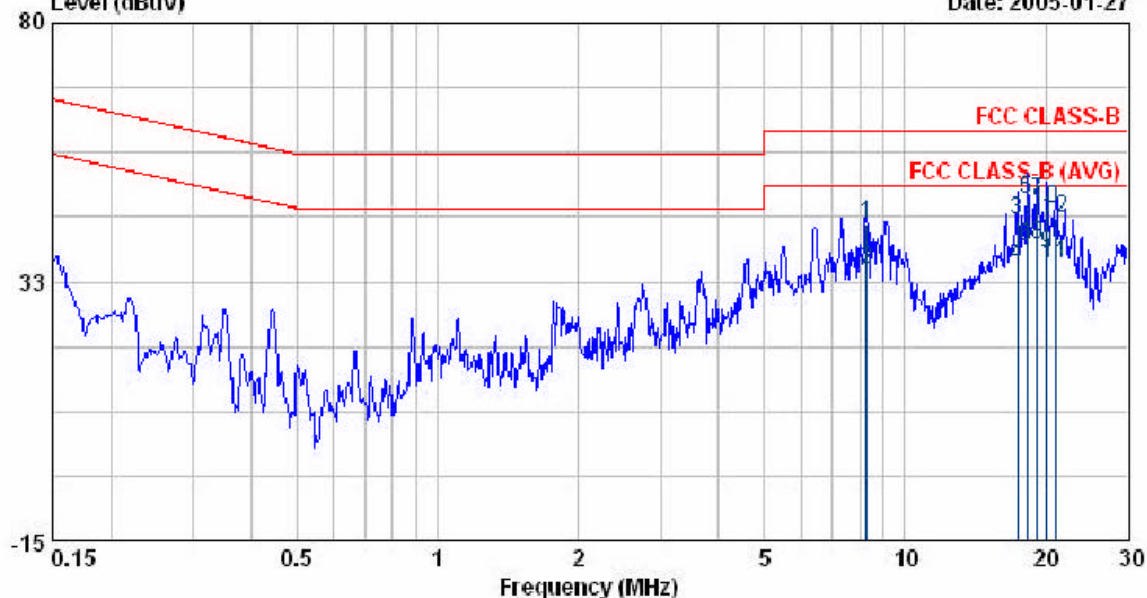


| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 8.266  | 42.48      | 0.50   | 42.98 | 60.00 | -17.02     | QP      |
| 8.266  | 34.35      | 0.50   | 34.85 | 50.00 | -15.15     | AVERAGE |
| 17.381 | 42.98      | 0.75   | 43.73 | 60.00 | -16.27     | QP      |
| 17.381 | 34.63      | 0.75   | 35.38 | 50.00 | -14.62     | AVERAGE |
| 18.265 | 46.82      | 0.73   | 47.55 | 60.00 | -12.45     | QP      |
| 18.265 | 38.29      | 0.73   | 39.02 | 50.00 | -10.98     | AVERAGE |
| 19.186 | 46.70      | 0.71   | 47.41 | 60.00 | -12.59     | QP      |
| 19.186 | 38.58      | 0.71   | 39.29 | 50.00 | -10.71     | AVERAGE |
| 20.122 | 36.79      | 0.70   | 37.49 | 50.00 | -12.51     | AVERAGE |
| 20.122 | 45.15      | 0.70   | 45.85 | 60.00 | -14.15     | QP      |
| 20.987 | 35.17      | 0.72   | 35.89 | 50.00 | -14.11     | AVERAGE |
| 20.987 | 43.40      | 0.72   | 44.12 | 60.00 | -15.88     | QP      |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(1SN) Factor + Cable Loss

EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11g CH L0  
 Memo : DV-151A-1

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

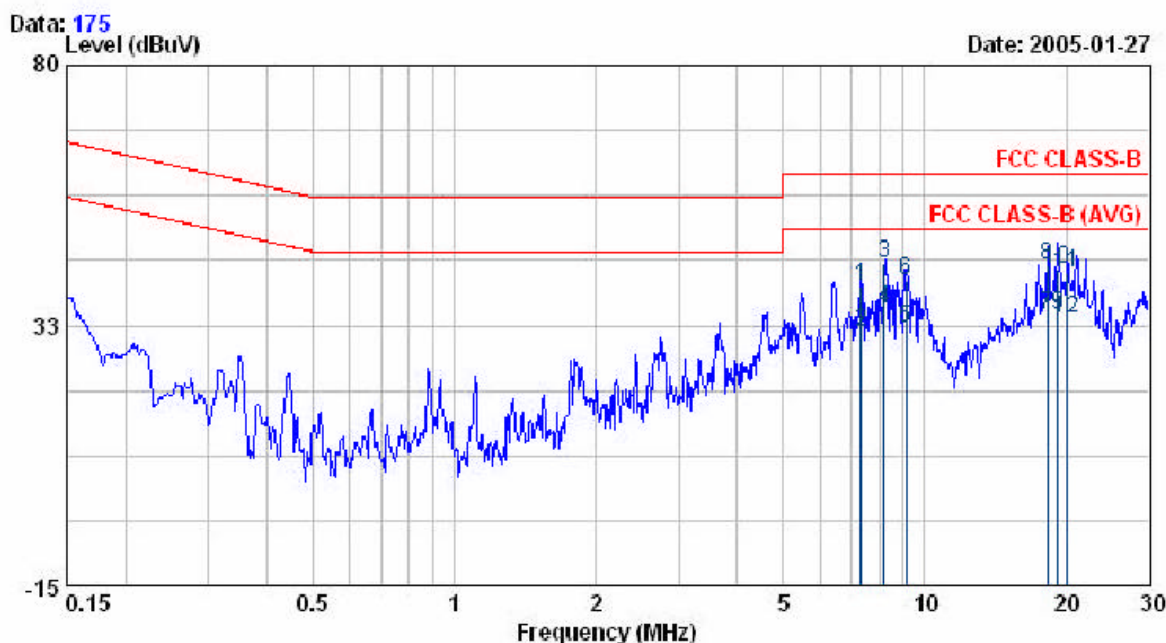


| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 7.340  | 39.07      | 0.43   | 39.50 | 60.00 | -20.50     | QP      |
| 7.340  | 30.73      | 0.43   | 31.16 | 50.00 | -18.84     | AVERAGE |
| 8.203  | 43.48      | 0.42   | 43.90 | 60.00 | -16.10     | QP      |
| 8.203  | 34.98      | 0.42   | 35.40 | 50.00 | -14.60     | AVERAGE |
| 9.136  | 31.60      | 0.41   | 32.01 | 50.00 | -17.99     | AVERAGE |
| 9.136  | 40.32      | 0.41   | 40.73 | 60.00 | -19.27     | QP      |
| 18.272 | 33.85      | 0.73   | 34.58 | 50.00 | -15.42     | AVERAGE |
| 18.272 | 42.70      | 0.73   | 43.43 | 60.00 | -16.57     | QP      |
| 19.170 | 33.73      | 0.71   | 34.44 | 50.00 | -15.56     | AVERAGE |
| 19.170 | 41.97      | 0.71   | 42.68 | 60.00 | -17.32     | QP      |
| 20.074 | 41.49      | 0.71   | 42.20 | 60.00 | -17.80     | QP      |
| 20.074 | 33.18      | 0.71   | 33.89 | 50.00 | -16.11     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11g CH MID  
 Memo : DV-151A-1

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 58 %

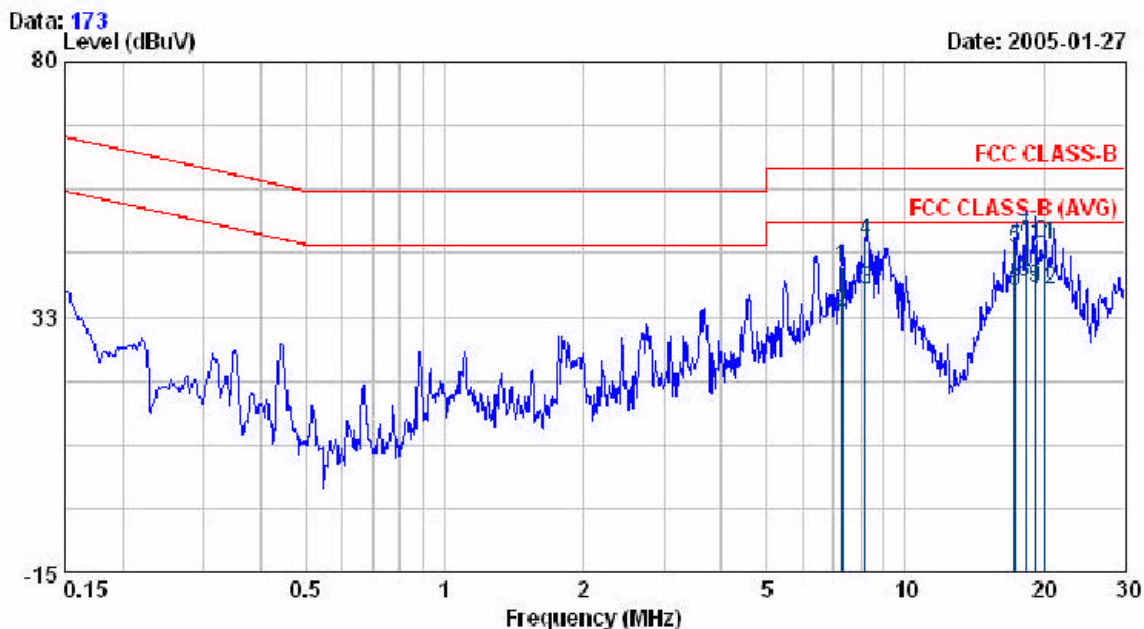

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 7.301  | 41.05      | 0.50   | 41.55 | 60.00 | -18.45     | QP      |
| 7.301  | 32.77      | 0.50   | 33.27 | 50.00 | -16.73     | AVERAGE |
| 8.207  | 37.20      | 0.50   | 37.70 | 50.00 | -12.30     | AVERAGE |
| 8.207  | 45.93      | 0.50   | 46.43 | 60.00 | -13.57     | QP      |
| 17.345 | 44.60      | 0.75   | 45.35 | 60.00 | -14.65     | QP      |
| 17.345 | 36.31      | 0.75   | 37.06 | 50.00 | -12.94     | AVERAGE |
| 18.277 | 46.72      | 0.73   | 47.45 | 60.00 | -12.55     | QP      |
| 18.277 | 38.29      | 0.73   | 39.02 | 50.00 | -10.98     | AVERAGE |
| 19.215 | 37.12      | 0.71   | 37.83 | 50.00 | -12.17     | AVERAGE |
| 19.215 | 45.58      | 0.71   | 46.29 | 60.00 | -13.71     | QP      |
| 20.078 | 45.22      | 0.70   | 45.92 | 60.00 | -14.08     | QP      |
| 20.078 | 36.86      | 0.70   | 37.56 | 50.00 | -12.44     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(1SN) Factor + Cable Loss


EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11g CH MID  
 Memo : DV-151A-1

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

Data: 174

Level (dBuV)

Date: 2005-01-27

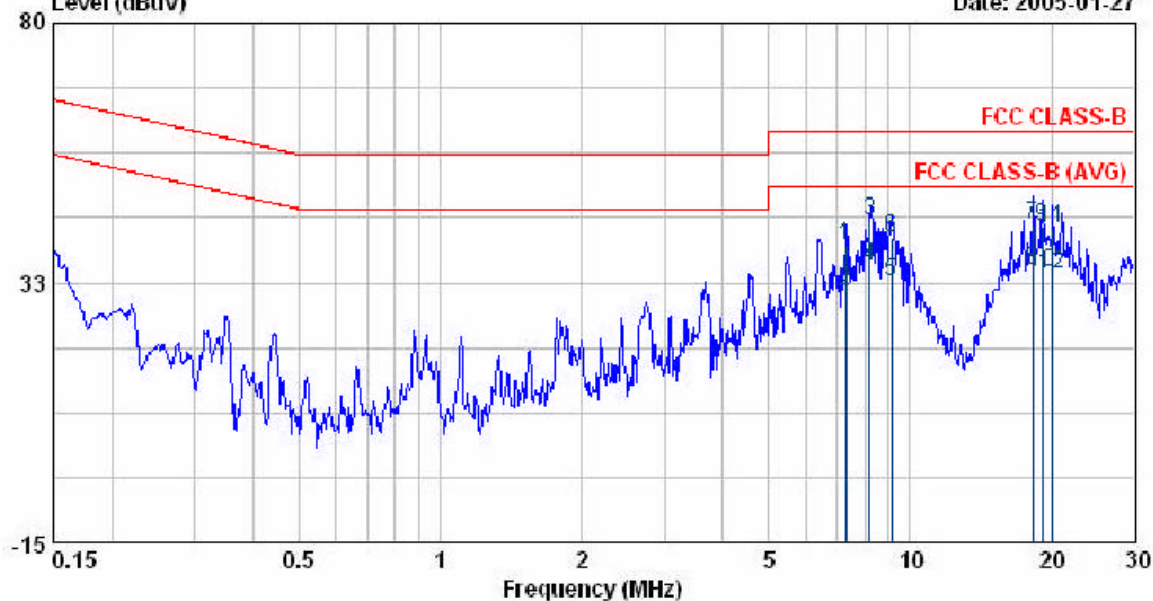

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 7.316  | 38.91      | 0.43   | 39.34 | 60.00 | -20.66     | QP      |
| 7.316  | 30.47      | 0.43   | 30.90 | 50.00 | -19.10     | AVERAGE |
| 8.206  | 43.41      | 0.42   | 43.83 | 60.00 | -16.17     | QP      |
| 8.206  | 34.90      | 0.42   | 35.32 | 50.00 | -14.68     | AVERAGE |
| 9.139  | 32.17      | 0.41   | 32.58 | 50.00 | -17.42     | AVERAGE |
| 9.139  | 40.38      | 0.41   | 40.79 | 60.00 | -19.21     | QP      |
| 18.278 | 42.53      | 0.73   | 43.26 | 60.00 | -16.74     | QP      |
| 18.278 | 34.04      | 0.73   | 34.77 | 50.00 | -15.23     | AVERAGE |
| 19.146 | 41.98      | 0.72   | 42.70 | 60.00 | -17.30     | QP      |
| 19.146 | 33.64      | 0.72   | 34.36 | 50.00 | -15.64     | AVERAGE |
| 20.076 | 41.69      | 0.71   | 42.40 | 60.00 | -17.60     | QP      |
| 20.076 | 33.23      | 0.71   | 33.94 | 50.00 | -16.06     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(1SN) Factor + Cable Loss


EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11g CH HI  
 Memo : DV-151A-1

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 58 %

Data: 172

Level (dBuV)

Date: 2005-01-27

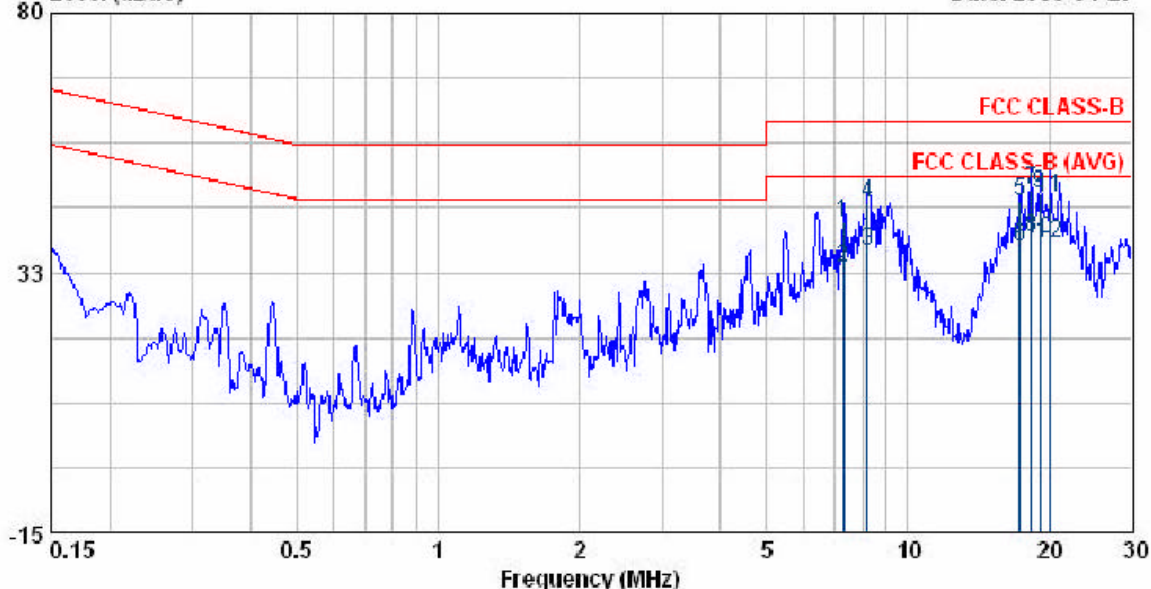


| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 7.302  | 41.24      | 0.50   | 41.74 | 60.00 | -18.26     | QP      |
| 7.302  | 32.84      | 0.50   | 33.34 | 50.00 | -16.66     | AVERAGE |
| 8.220  | 36.15      | 0.50   | 36.65 | 50.00 | -13.35     | AVERAGE |
| 8.220  | 44.66      | 0.50   | 45.16 | 60.00 | -14.84     | QP      |
| 17.350 | 44.90      | 0.75   | 45.65 | 60.00 | -14.35     | QP      |
| 17.350 | 36.37      | 0.75   | 37.12 | 50.00 | -12.88     | AVERAGE |
| 18.283 | 46.85      | 0.73   | 47.58 | 60.00 | -12.42     | QP      |
| 18.283 | 38.38      | 0.73   | 39.11 | 50.00 | -10.89     | AVERAGE |
| 19.151 | 46.29      | 0.72   | 47.01 | 60.00 | -12.99     | QP      |
| 19.151 | 37.72      | 0.72   | 38.44 | 50.00 | -11.56     | AVERAGE |
| 20.083 | 45.41      | 0.70   | 46.11 | 60.00 | -13.89     | QP      |
| 20.083 | 37.13      | 0.70   | 37.83 | 50.00 | -12.17     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11g CH HI  
 Memo : DV-151A-1

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

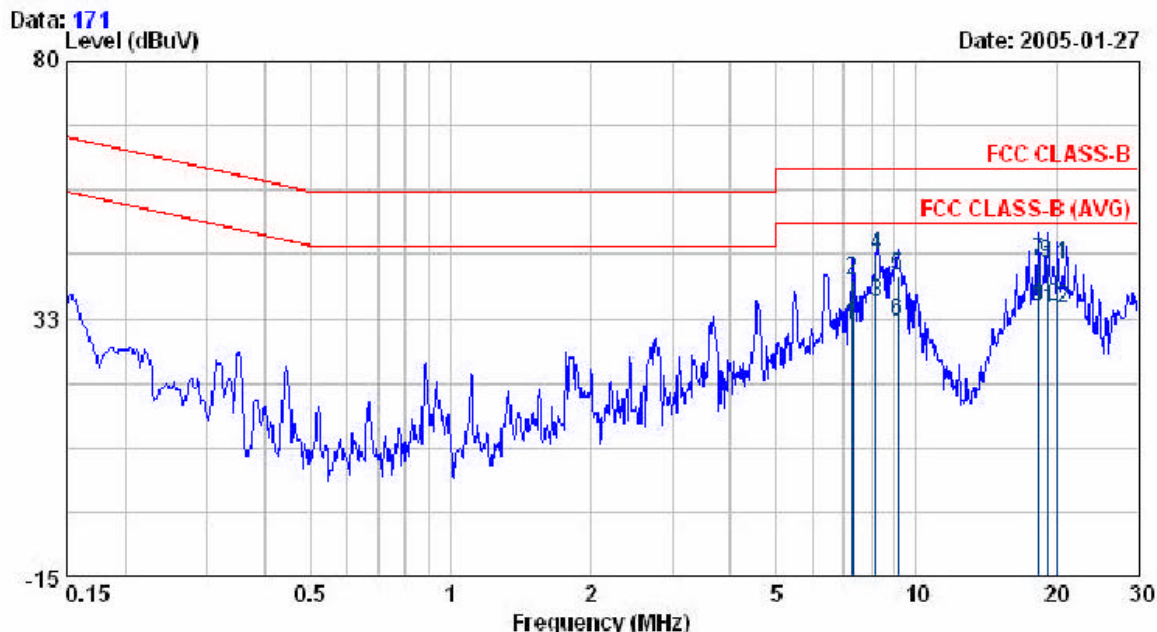


| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 7.311  | 30.79      | 0.43   | 31.22 | 50.00 | -18.78     | AVERAGE |
| 7.311  | 39.05      | 0.43   | 39.48 | 60.00 | -20.52     | QP      |
| 8.208  | 35.19      | 0.42   | 35.61 | 50.00 | -14.39     | AVERAGE |
| 8.208  | 43.77      | 0.42   | 44.19 | 60.00 | -15.81     | QP      |
| 9.147  | 39.97      | 0.41   | 40.38 | 60.00 | -19.62     | QP      |
| 9.147  | 31.73      | 0.41   | 32.14 | 50.00 | -17.86     | AVERAGE |
| 18.289 | 42.45      | 0.73   | 43.18 | 60.00 | -16.82     | QP      |
| 18.289 | 34.04      | 0.73   | 34.77 | 50.00 | -15.23     | AVERAGE |
| 19.154 | 42.14      | 0.72   | 42.86 | 60.00 | -17.14     | QP      |
| 19.154 | 33.95      | 0.72   | 34.67 | 50.00 | -15.33     | AVERAGE |
| 20.088 | 41.79      | 0.71   | 42.50 | 60.00 | -17.50     | QP      |
| 20.088 | 33.57      | 0.71   | 34.28 | 50.00 | -15.72     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

Test mode 3: Adaptor Model: 481212003CT

|           |                 |             |           |
|-----------|-----------------|-------------|-----------|
| EUT       | : WGR613VAL     | Pol/Phase   | : NEUTRAL |
| Power     | : AC 110V       | Temperature | : 25 °C   |
| Test Mode | : 802.11b CH L0 | Humidity    | : 58 %    |
| Memo      | : 481212003CT   |             |           |

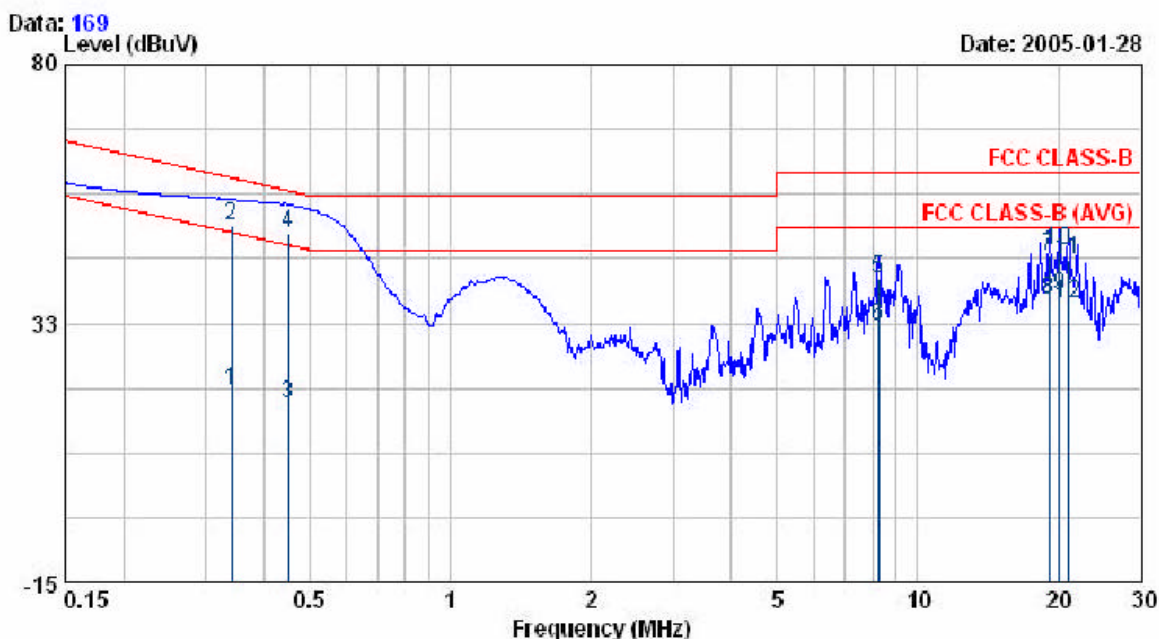

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.341  | 19.55      | 0.43   | 19.98 | 49.17 | -29.19     | AVERAGE |
| 0.341  | 49.87      | 0.43   | 50.30 | 59.17 | -8.87      | QP      |
| 0.452  | 17.20      | 0.49   | 17.69 | 46.85 | -29.16     | AVERAGE |
| 0.452  | 48.38      | 0.49   | 48.87 | 56.85 | -7.98      | QP      |
| 8.237  | 40.25      | 0.50   | 40.75 | 60.00 | -19.25     | QP      |
| 8.237  | 31.61      | 0.50   | 32.11 | 50.00 | -17.89     | AVERAGE |
| 19.156 | 44.23      | 0.71   | 44.94 | 60.00 | -15.06     | QP      |
| 19.156 | 36.16      | 0.71   | 36.87 | 50.00 | -13.13     | AVERAGE |
| 20.092 | 36.95      | 0.70   | 37.65 | 50.00 | -12.35     | AVERAGE |
| 20.092 | 45.15      | 0.70   | 45.85 | 60.00 | -14.15     | QP      |
| 21.027 | 43.55      | 0.72   | 44.27 | 60.00 | -15.73     | QP      |
| 21.027 | 35.42      | 0.72   | 36.14 | 50.00 | -13.86     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss


EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11b CH L0  
 Memo : 481212003CT

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 58 %

Data: 170

Level (dBuV)

Date: 2005-01-28

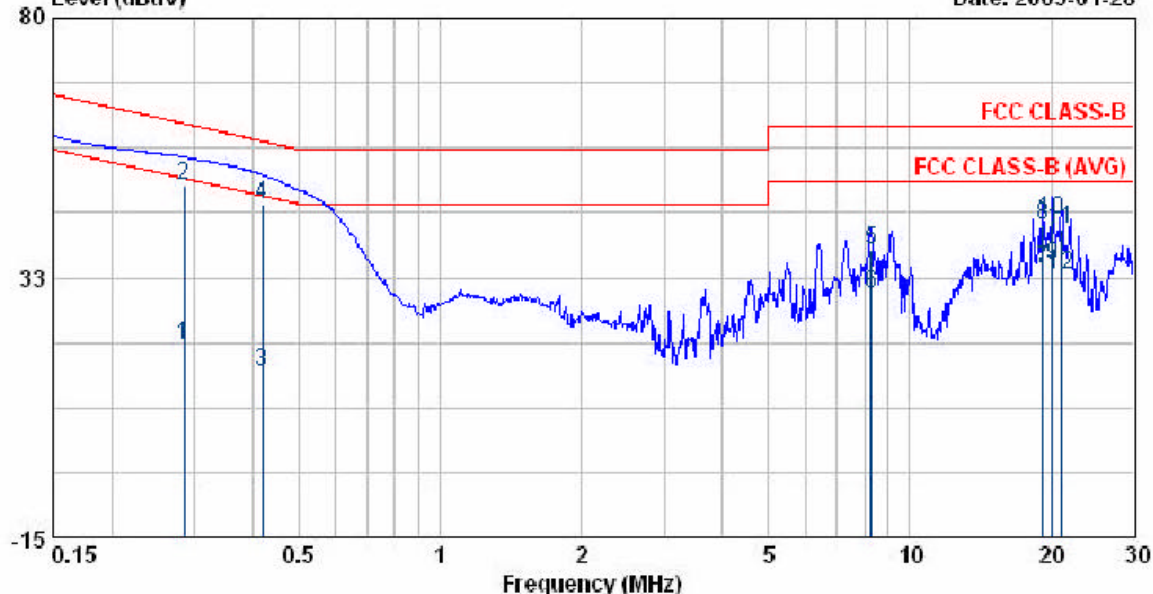

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.285  | 19.90      | 0.35   | 20.25 | 50.68 | -30.43     | AVERAGE |
| 0.285  | 48.90      | 0.35   | 49.25 | 60.68 | -11.43     | QP      |
| 0.418  | 14.73      | 0.50   | 15.23 | 47.48 | -32.26     | AVERAGE |
| 0.418  | 45.31      | 0.50   | 45.81 | 57.48 | -11.68     | QP      |
| 8.281  | 37.02      | 0.42   | 37.44 | 60.00 | -22.56     | QP      |
| 8.281  | 28.95      | 0.42   | 29.37 | 50.00 | -20.63     | AVERAGE |
| 19.158 | 33.18      | 0.71   | 33.89 | 50.00 | -16.11     | AVERAGE |
| 19.158 | 41.40      | 0.71   | 42.11 | 60.00 | -17.89     | QP      |
| 20.094 | 33.88      | 0.71   | 34.59 | 50.00 | -15.41     | AVERAGE |
| 20.094 | 42.33      | 0.71   | 43.04 | 60.00 | -16.96     | QP      |
| 21.013 | 40.53      | 0.79   | 41.32 | 60.00 | -18.68     | QP      |
| 21.013 | 32.29      | 0.79   | 33.08 | 50.00 | -16.92     | AVERAGE |


Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss



EUT : WGR613VAL  
 Power : AC 110V  
 Test Mode : 802.11b CH MID  
 Memo : 481212003CT

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 58 %

Data: 168 Level (dBuV) Date: 2005-01-28

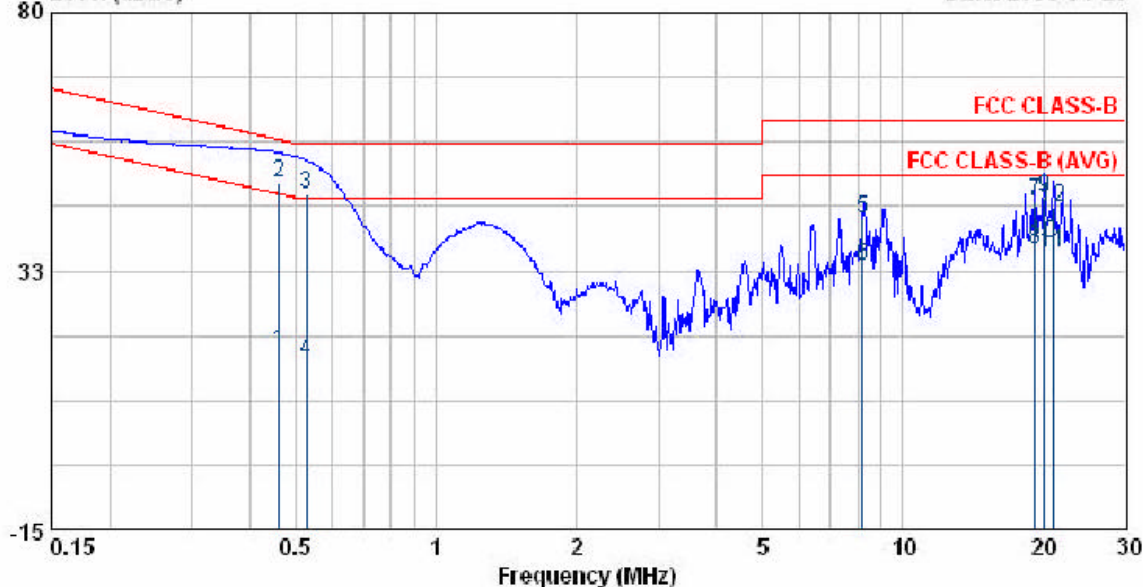

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.461  | 17.40      | 0.48   | 17.88 | 46.67 | -28.79     | AVERAGE |
| 0.461  | 48.31      | 0.48   | 48.79 | 56.67 | -7.88      | QP      |
| 0.529  | 46.25      | 0.47   | 46.72 | 56.00 | -9.28      | QP      |
| 0.529  | 15.40      | 0.47   | 15.87 | 46.00 | -30.13     | AVERAGE |
| 8.214  | 41.49      | 0.50   | 41.99 | 60.00 | -18.01     | QP      |
| 8.214  | 32.83      | 0.50   | 33.33 | 50.00 | -16.67     | AVERAGE |
| 19.159 | 44.51      | 0.71   | 45.22 | 60.00 | -14.78     | QP      |
| 19.159 | 35.84      | 0.71   | 36.55 | 50.00 | -13.45     | AVERAGE |
| 20.094 | 45.13      | 0.70   | 45.83 | 60.00 | -14.17     | QP      |
| 20.094 | 36.81      | 0.70   | 37.51 | 50.00 | -12.49     | AVERAGE |
| 21.022 | 35.17      | 0.72   | 35.89 | 50.00 | -14.11     | AVERAGE |
| 21.022 | 43.45      | 0.72   | 44.17 | 60.00 | -15.83     | QP      |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(1SN) Factor + Cable Loss