


EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11g CH LO
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

Data: 111
 Level (dBuV)


Date: 2004.12.13

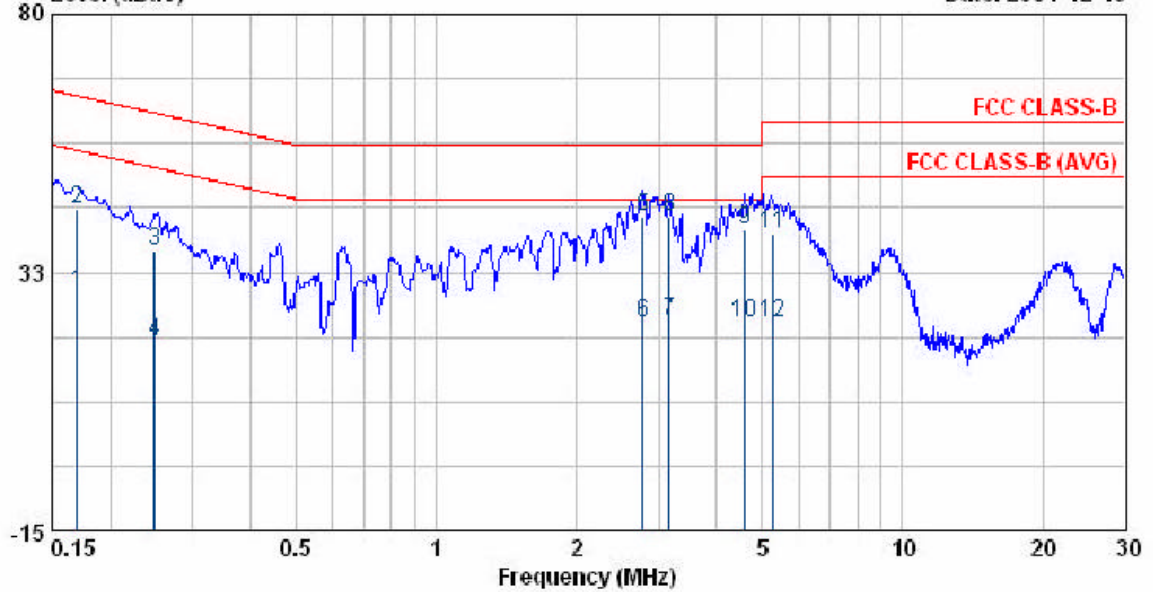

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.170	28.70	0.25	28.95	54.98	-26.03	AVERAGE
0.170	43.94	0.25	44.19	64.98	-20.79	QP
0.249	36.30	0.30	36.60	61.79	-25.19	QP
0.249	19.36	0.30	19.66	51.79	-32.13	AVERAGE
2.779	42.11	0.50	42.61	56.00	-13.39	QP
2.779	22.83	0.50	23.33	46.00	-22.67	AVERAGE
3.164	23.00	0.50	23.50	46.00	-22.50	AVERAGE
3.164	42.16	0.50	42.66	56.00	-13.34	QP
4.598	39.77	0.50	40.27	56.00	-15.73	QP
4.598	22.80	0.50	23.30	46.00	-22.70	AVERAGE
5.255	39.30	0.50	39.80	60.00	-20.20	QP
5.255	22.62	0.50	23.12	50.00	-26.88	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11g CH LO
 Memo :

Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

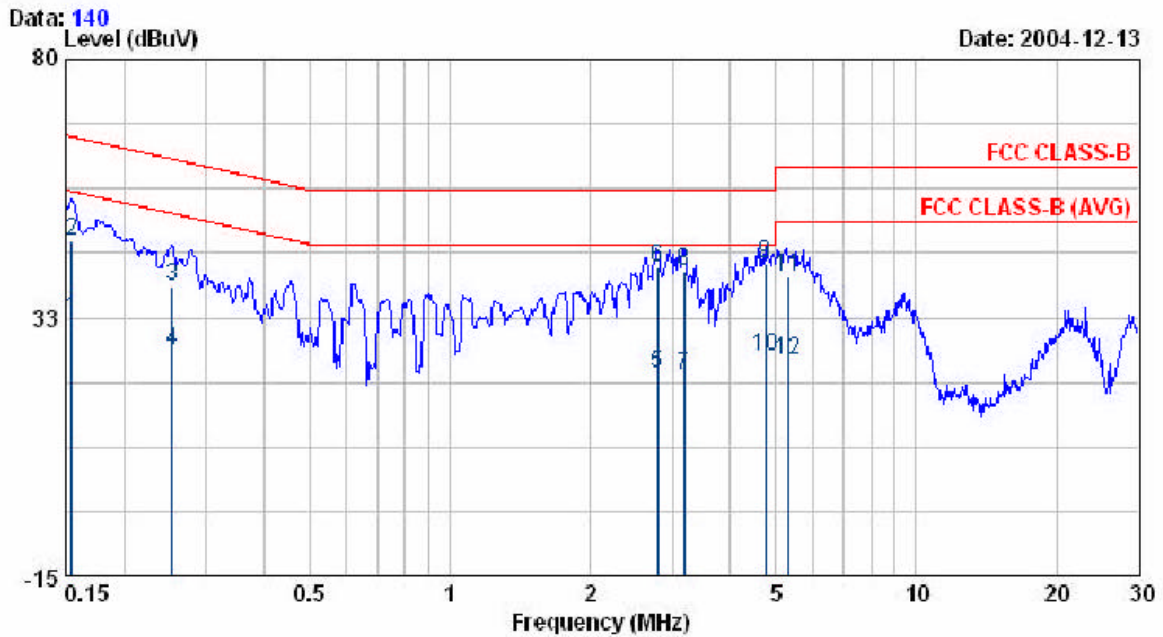

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.155	32.00	0.27	32.27	55.74	-23.46	AVERAGE
0.155	46.26	0.27	46.53	65.74	-19.20	QP
0.254	38.11	0.30	38.41	61.64	-23.23	QP
0.254	25.99	0.30	26.29	51.64	-25.35	AVERAGE
2.785	21.83	0.50	22.33	46.00	-23.67	AVERAGE
2.785	41.30	0.50	41.80	56.00	-14.20	QP
3.176	21.28	0.50	21.78	46.00	-24.22	AVERAGE
3.176	40.46	0.50	40.96	56.00	-15.04	QP
4.755	42.10	0.48	42.58	56.00	-13.42	QP
4.755	24.85	0.48	25.33	46.00	-20.67	AVERAGE
5.314	39.56	0.47	40.03	60.00	-19.97	QP
5.314	24.20	0.47	24.67	50.00	-25.33	AVERAGE


EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11g CH MID
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

Data: 142

Level (dBuV)


Date: 2004-12-13

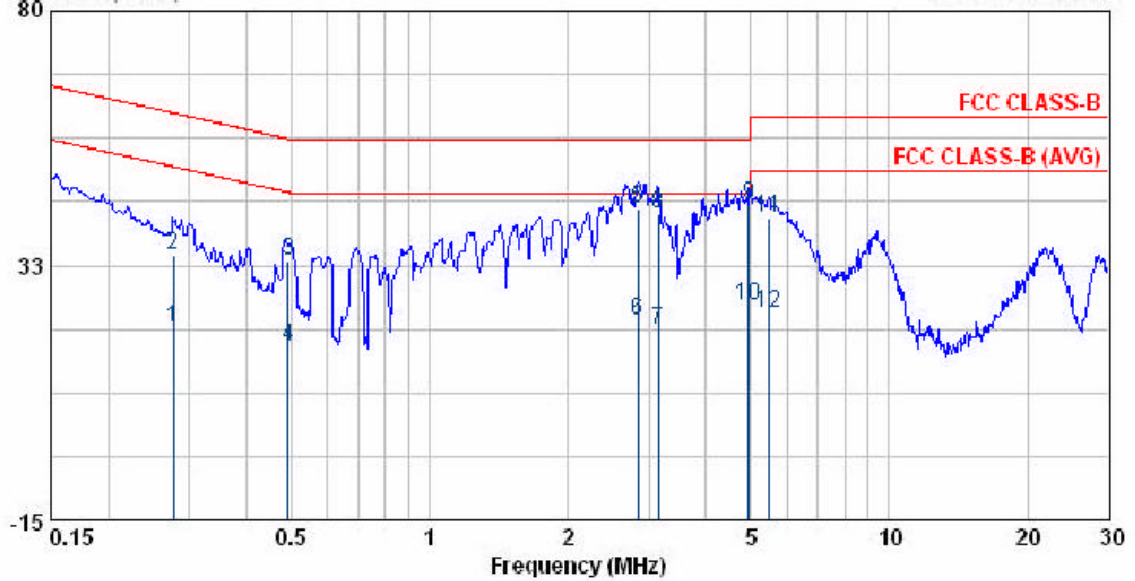

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.277	20.42	0.34	20.76	50.91	-30.15	AVERAGE
0.277	34.11	0.34	34.45	60.91	-26.46	QP
0.492	32.87	0.48	33.35	56.14	-22.79	QP
0.492	16.77	0.48	17.25	46.14	-28.89	AVERAGE
2.839	42.75	0.50	43.25	56.00	-12.75	QP
2.839	21.79	0.50	22.29	46.00	-23.71	AVERAGE
3.142	20.08	0.50	20.58	46.00	-25.42	AVERAGE
3.142	41.42	0.50	41.92	56.00	-14.08	QP
4.953	43.26	0.50	43.76	56.00	-12.24	QP
4.953	24.55	0.50	25.05	46.00	-20.95	AVERAGE
5.470	40.86	0.50	41.36	60.00	-18.64	QP
5.470	23.28	0.50	23.78	50.00	-26.22	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11g CH MID
 Memo :


Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

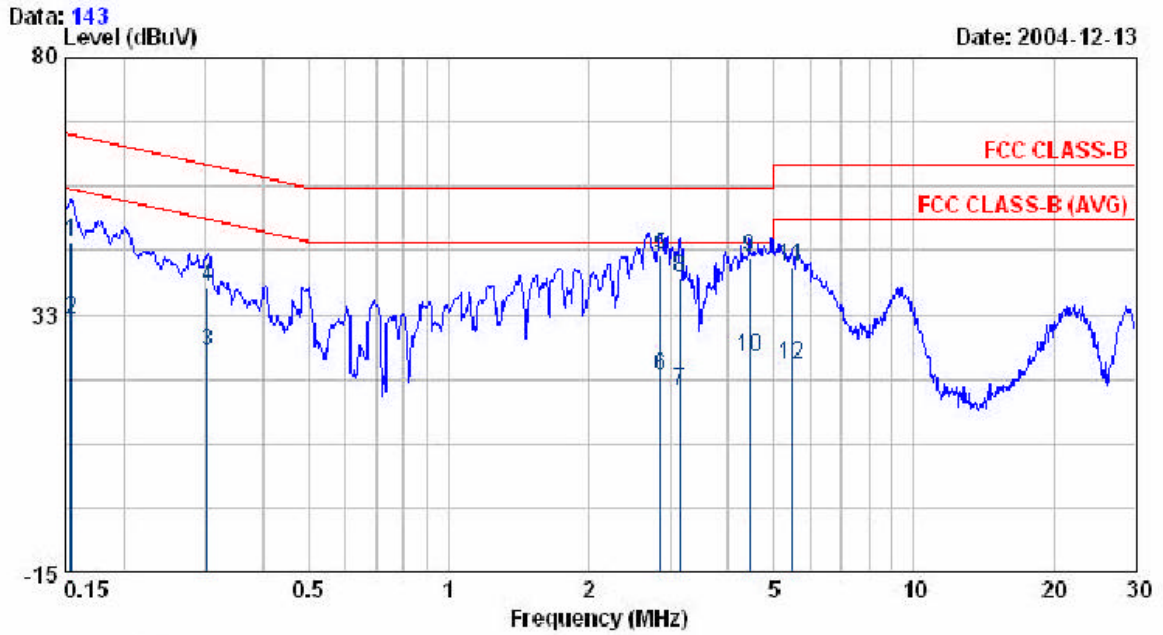

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.155	45.46	0.27	45.73	65.74	-20.00	QP
0.155	31.48	0.27	31.75	55.74	-23.98	AVERAGE
0.304	25.30	0.38	25.68	50.15	-24.47	AVERAGE
0.304	37.00	0.38	37.38	60.15	-22.77	QP
2.849	42.90	0.50	43.40	56.00	-12.60	QP
2.849	20.63	0.50	21.13	46.00	-24.87	AVERAGE
3.148	17.94	0.50	18.44	46.00	-27.56	AVERAGE
3.148	38.68	0.50	39.18	56.00	-16.82	QP
4.453	42.77	0.49	43.26	56.00	-12.74	QP
4.453	24.17	0.49	24.66	46.00	-21.34	AVERAGE
5.463	40.83	0.47	41.30	60.00	-18.70	QP
5.463	22.81	0.47	23.28	50.00	-26.72	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11g CH HI
 Memo :


Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 58 %

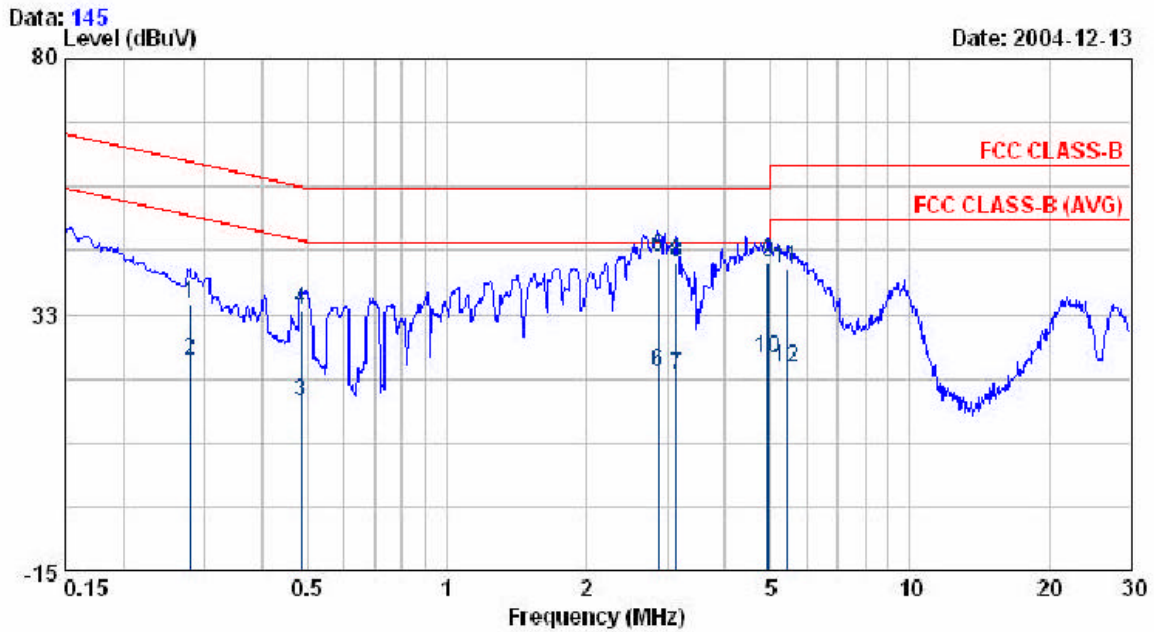

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.280	33.97	0.35	34.32	60.81	-26.49	QP
0.280	23.58	0.35	23.93	50.81	-26.88	AVERAGE
0.486	15.75	0.48	16.23	46.23	-30.00	AVERAGE
0.486	32.73	0.48	33.21	56.23	-23.02	QP
2.866	42.73	0.50	43.23	56.00	-12.77	QP
2.866	21.38	0.50	21.88	46.00	-24.12	AVERAGE
3.139	20.66	0.50	21.16	46.00	-24.84	AVERAGE
3.139	41.63	0.50	42.13	56.00	-13.87	QP
4.952	41.63	0.50	42.13	56.00	-13.87	QP
4.952	23.88	0.50	24.38	46.00	-21.62	AVERAGE
5.445	40.55	0.50	41.05	60.00	-18.95	QP
5.445	21.94	0.50	22.44	50.00	-27.56	AVERAGE

EUT : WGR-615V(new)
 Power : 110V 60Hz(switch)
 Test Mode : 802.11g CH HI
 Memo :

Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 58 %

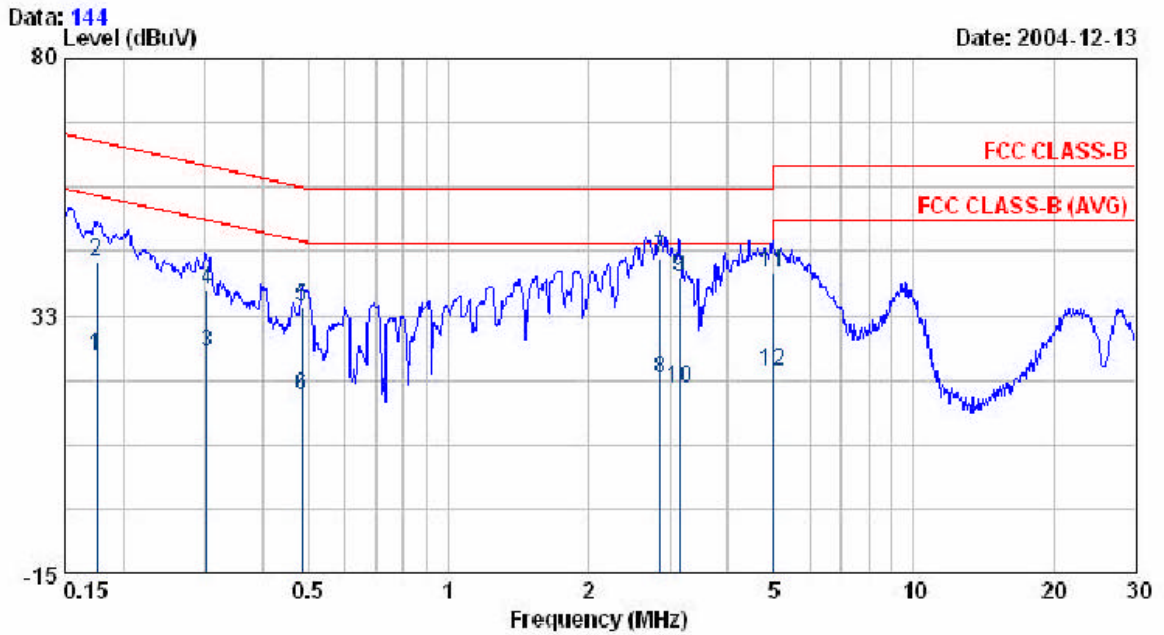

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.175	24.81	0.24	25.05	54.70	-29.65	AVERAGE
0.175	42.09	0.24	42.33	64.70	-22.37	QP
0.303	25.27	0.38	25.65	50.16	-24.51	AVERAGE
0.303	36.97	0.38	37.35	60.16	-22.81	QP
0.485	33.43	0.48	33.91	56.25	-22.34	QP
0.485	17.11	0.48	17.59	46.25	-28.66	AVERAGE
2.855	42.47	0.50	42.97	56.00	-13.03	QP
2.855	20.46	0.50	20.96	46.00	-25.04	AVERAGE
3.143	38.98	0.50	39.48	56.00	-16.52	QP
3.143	18.56	0.50	19.06	46.00	-26.94	AVERAGE
4.973	39.95	0.48	40.43	56.00	-15.57	QP
4.973	21.86	0.48	22.34	46.00	-23.66	AVERAGE

Test by: *Carol DEC. 13. 2004*


4.2.1. Photographs of Conducted Emission Test

Test mode 1: Adaptor Model: DV-151A-1

FRONT VIEW



REAR VIEW

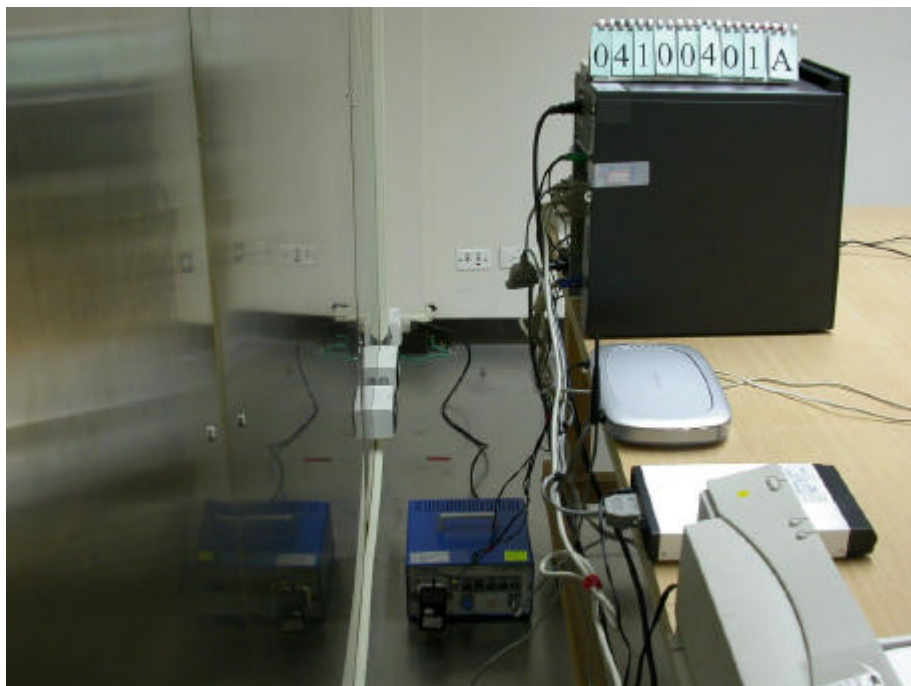


Test mode 2: Adaptor Model: MU18-2120150-A1

FRONT VIEW



REAR VIEW

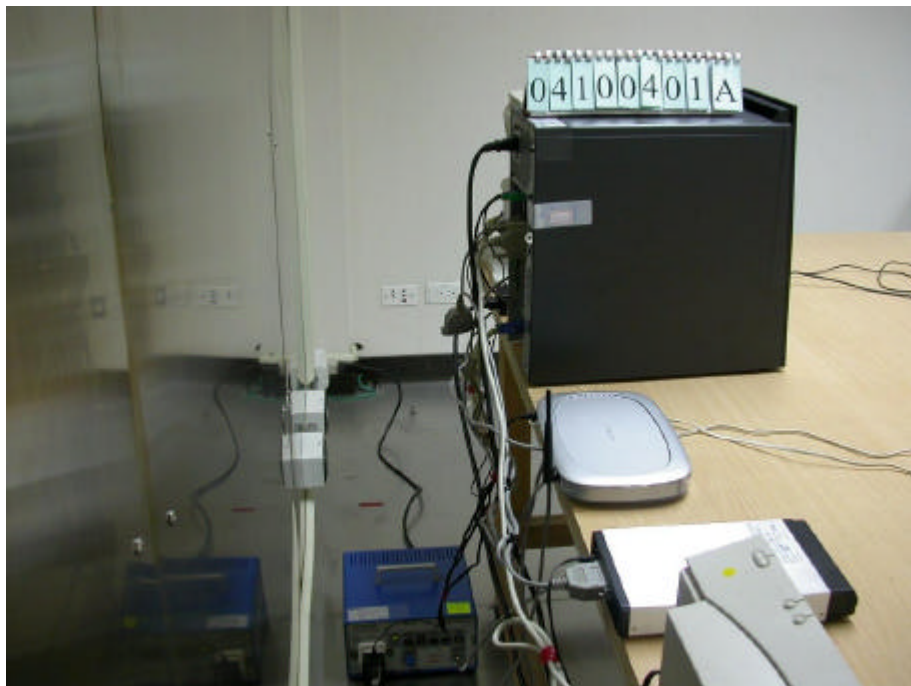


Test mode 3: Adaptor Model: ADS6818-1812-W 1215

FRONT VIEW



REAR VIEW

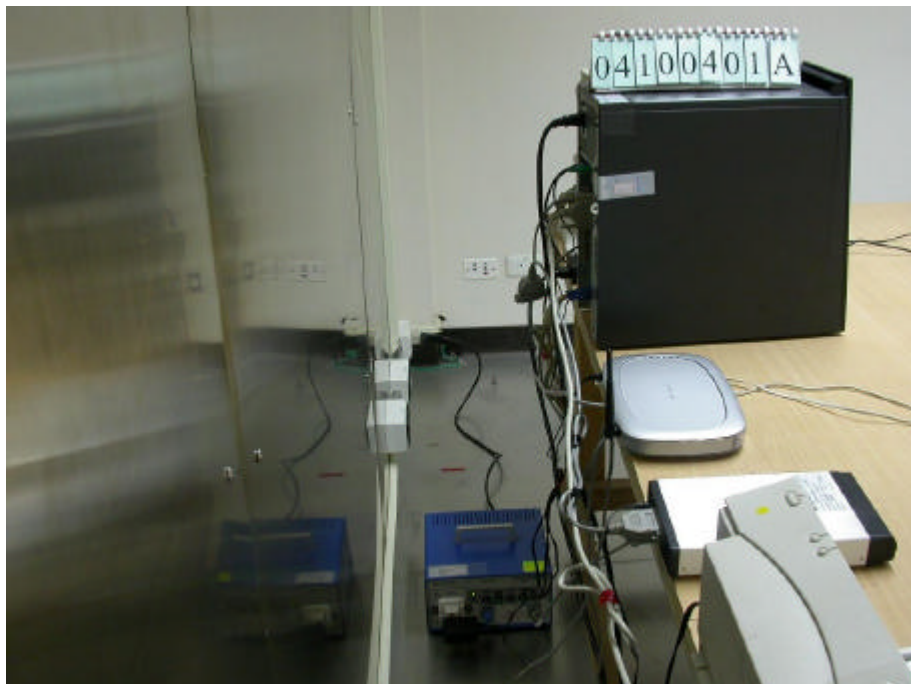

Test mode 4: Adaptor Model: DSA-0151F-12 A

FRONT VIEW



REAR VIEW

