

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Bluetooth Headset

Model No. : BK1010

FCC ID. : PY4-BK1010

Filing Type : Certification

Applicant : **REMOTEK CORPORATION**
6F-6, No. 77, Sec. 1, Hsin Tai Wu Rd., Hsi-Chih, 221 Taipei,
Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test	2
1.4. Feature of Equipment under Test	2
2. Test Configuration of Equipment under Test.....	4
2.1. Test Manner	4
2.2. Description of Test System	4
2.3. Connection Diagram of Test System	6
3. Test Software	7
4. General Information of Test.....	8
4.1. Test Voltage	8
4.2. Standard for Methods of Measurement.....	8
4.3. Test in Compliance with	8
4.4. Frequency Range Investigated	8
4.5. Test Distance	8
5. Report of Measurements and Examinations	9
5.1. List of Measurements and Examinations	9
5.2. Hopping Channel Separation	10
5.3. Number of Hopping Frequency	11
5.4. Hopping Channel Bandwidth.....	12
5.5. Dwell Time of Each Frequency within a 30 Seconds Period.....	13
5.6. Output Power	14
5.7. 100KHz Bandwidth of Frequency Band Edges	15
5.8. Test of Conducted Emission	17
5.9. Test of Radiated Emission	21
6. EMI Suppression Component List.....	41
7. Antenna Requirements	42
7.1. Standard Applicable	42
7.2. Antenna Connected Construction	42
8. Antenna Factor & Cable Loss	43
9. List of Measuring Equipments Used	44
10. Uncertainty of Test Site	45

History of this test report

Original Report Issue Date: Sep. 24, 2003

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : Bluetooth Headset

Model No. : BK1010

FCC ID. : PY4-BK1010

Filing Type : Certification

Applicant : **REMOTEK CORPORATION**

6F-6, No. 77, Sec. 1, Hsin Tai Wu Rd., Hsi-Chih, 221
Taipei, Taiwan, R.O.C.

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2001** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Sep. 24, 2003 at **SPORTON International Inc. LAB**.



Alex Chen
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

REMOTEK CORPORATION

6F-6, No. 77, Sec. 1, Hsin Tai Wu Rd., Hsi-Chih, 221 Taipei, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1

1.3. Basic Description of Equipment under Test

Equipment : Bluetooth Headset
Model No. : BK1010
FCC ID : PY4-BK1010
Trade Name : REMOTEK
USB Cable : Non-Shielded, 1.5m
Power Supply Type : From System, Battery (3.7V) and DC source (car charger)
AC Power Cord : N/A

1.4. Feature of Equipment under Test

1. Host/Radio Interface	FHSS
2. Type of Modulation	GFSK
3. Number of Channels	USA/Canada: 79
4. Frequency Band	2400—2483.5MHz
5. Carrier Frequency of each channel	(2402+k) MHz, k= 0~78
6. Bandwidth of each channel	1MHz
7. Maximum Output Power to Antenna	0.96dBm
8. IF & L.O. frequency	IF=6MHz, LO= $f_c + f_{IF}$
9. Type of Antenna Connector (Ex: SMA, TNC, MCX, MMCX, UFC.....etc)	Antenna on board
10. Antenna Type / Class and Gain	Embedded Antenna / 0~2dBi
11. Function Type	Transceiver
12. Power Rating (DC/AC , Voltage)	DC 3~4.2V
13. Duty Cycle	10%
14. Basic function of product	Bluetooth Headset
15. Car charger adapter	KT / KT-USB-CAR-B

Channel	Frequency	Channel	Frequency
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2001 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included HP PC, HITACHI Monitor, LOGITECH PS/2 Keyboard, COMPAQ PS/2 Mouse, EPSON Printer, ACEEX Modem, LOKO Power Supply and EUT for EMI test.
- c. This device is an integration of an SIG qualified Bluetooth module. The used codes for modulating IF carrier is of course pseudo-random. The hopping sequence is determined by the address of the piconet master. Here is the hopping sequence indicated by channel number:
02, 17, 68, 55, 4, 77, 56, 27, 70, 80, 22, 33, 57, 34, 29, 79, 44, 50, 3, 71, 66, 36, 78, 20, 67, 30, 24, 11, 37, 69, 23, 7, 41 38, 63, 14, 31, 59, 40, 13, 6, 25, 65, 15, 61, 73, 58, 47, 19, 28, 54, 76, 74, 48, 52, 75, 5, 42, 64, 72, 62, 51, 60, 18, 45, 53, 16, 39, 46, 32, 49, 43, 8, 21, 9, 12, 10, 26, 35
- d. For 15.247(g), during data transmission, the carrier frequency is repeatedly switched on 79 hopping frequencies, any 2 hopping frequencies will not be available on the spectrum simultaneously. So, this device can be taken as true frequency hopping device.
- e. For 15.247(h), the hopping sequence is determined by the address of piconet master. Each piconet master will have its unique address at any moment, so re-use of the hopping sequence is completely not possible. Within the piconet, one master can be communicated with many slaves via the same hopping sequence, but at any moment only one (master or slave) can be "talk". It is determined by the master that who should be "listen" or "talk". Any slave who want to "talk" has to sent "inquiry" to master first. So, 2 slaves (or one slave one master) is not possible to be on "talk" mode simultaneously.
- f. The following test modes were pretested for conduction test:
Mode 1: With Charger, CH00 (2402MHz)
Mode 2: With Charger, CH39 (2441MHz)
Mode 3: With Charger, CH78 (2480MHz)
- g. The following test modes were pretested for radiation test:
Mode 1: With Charger, CH00 (2402MHz)
Mode 2: With Charger, CH39 (2441MHz)
Mode 3: With Charger, CH78 (2480MHz)
Mode 4: Without Charger, CH00 (2402MHz)
Mode 5: Without Charger, CH39 (2441MHz)
Mode 6: Without Charger, CH78 (2480MHz)
Mode 7: With Car Charger, CH00 (2402MHz)
Mode 8: With Car Charger, CH39 (2441MHz)
Mode 9: With Car Charger, CH78 (2480MHz)
- h. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 26500MHz.

2.2. Description of Test System

Support Unit 1. – Personal Computer (HP)

FCC ID	: N/A
Model No.	: DTPC-16
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0039
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (HITACHI)

FCC ID : N/A
Model No. : CM823F
Power Supply Type : Switching
Power Cord : Non-Shielded
Serial No. : SP0050
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. -- PS/2 Keyboard (LOGITECH)

FCC ID : N/A
Model No. : Y-SJ17
Serial No. : SP0041
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 4. -- PS/2 Mouse (COMPAQ)

FCC ID : N/A
Model No. : M-S69
Serial No. : SP0041
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 5. -- Printer (EPSON)

FCC ID : N/A
Model No. : STYLUS COLOR 680
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0048
Data Cable : Shielded, 1.35m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 6. -- Modem (ACEEX)


FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0015
Data Cable : Shielded, 1.15m

Support Unit 7. -- Power Supply (LOKO)

FCC ID : N/A
Model No. : SPS-250A
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0145

2.3. Connection Diagram of Test System

<Mode 1~3>

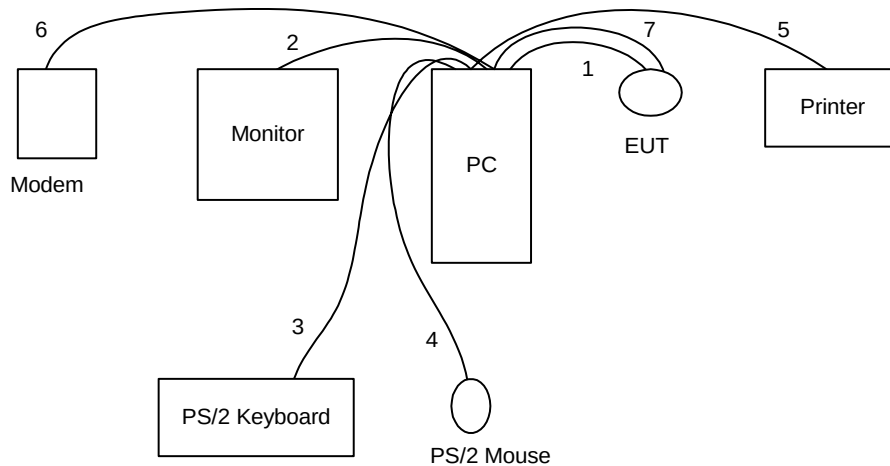


1. The USB cable is connected from PC to the EUT.
2. The I/O cable is connected from PC to the support unit 2.
3. The I/O cable is connected from PC to the support unit 3.
4. The I/O cable is connected from PC to the support unit 4.
5. The I/O cable is connected from PC to the support unit 5.
6. The I/O cable is connected from PC to the support unit 6.
7. The RS-232 cable is connected from PC to the EUT.

<Mode 4~6>



<Mode 7~9>

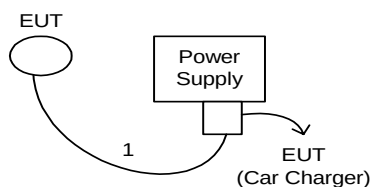

1. The USB cable is connected from EUT to the support unit 7.

3. Test Software

An executive program, EMITEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from c to f.

At the same time, the EUT keep transmitting signals at fixed frequency.

4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH03-HY

4.1. Test Voltage

110V/60Hz or DC 5V

4.2. Standard for Methods of Measurement

ANSI C63.4-2001

4.3. Test in Compliance with

ANSI C63.4-2001 for conducted power line test and radiated emission test
DA 00-705 for test of hopping channel separation
DA 00-705 for test of number of hopping frequency used
DA 00-705 for test of hopping channel bandwidth
DA 00-705 for test of dwell time of each frequency within a 30 second period
DA 00-705 for test of output power
DA 00-705 for test of 100khz bandwidth of frequency band edges

4.4. Frequency Range Investigated

- a. Conduction: from 150 KHz to 30 MHz
- b. Radiation: from 30 MHz to 26500MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.247(a)(1)(ii)	Hopping Channel Bandwidth	Pass
<u>15.247(a)(1)</u>	Hopping Channel Separation	Pass
<u>15.247(a)(1)(ii)</u>	Number of Hopping Frequency Used	Pass
<u>15.247(a)(1)(ii)</u>	Dwell Time of Each Frequency within a 30 Second Period	Pass
<u>15.247(b)</u>	Output Power	Pass
15.247(c)	100KHz Bandwidth of Frequency Band Edges	Pass
<u>15.107/15.207</u>	Conducted Emission	Pass
15.209	Radiated Emission	Pass
<u>15.203</u>	Antenna Requirement	Pass

5.2. Hopping Channel Separation


5.2.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel Separation is defined as the channel is separated with the next channel.

5.2.3. Test Setup Layout :



5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature: 28°C
- Relative Humidity: 55 %
- Duty cycle of the equipment during the test X = 10%

Channel	Frequency	Hopping Channel Separation	Limits	Plot
	(MHz)	(KHz)	(KHz)	Ref. No.
00	2402	1000.0000	25	1
39	2441	1000.0000	25	2
78	2480	1000.0000	25	3

5.2.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition.

The EUT have its hopping function enabled.

5.3. Number of Hopping Frequency


5.3.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.3.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The number of hopping frequency used is defined as the device has the numbers of total channel.

5.3.3. Test Setup Layout :



5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 28°C
- Relative Humidity: 55 %
- Duty cycle of the equipment during the test X = 100%

Number of Hopping Frequency (Channel)	Limits (Channel)	Plot Ref. No.
79	75	1

5.3.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition.

The EUT have its hopping function enabled.

5.4. Hopping Channel Bandwidth


5.4.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.4.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4.3. Test Setup Layout :



5.4.4. Test Result : See spectrum analyzer plots below

- Temperature: 28°C
- Relative Humidity: 55 %
- Duty cycle of the equipment during the test X = 10%

Channel	Frequency (MHz)	Hopping Channel Bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
00	2402	0.804	1.0	1
39	2441	0.768	1.0	2
78	2480	0.800	1.0	3

5.4.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies respectively.

5.5. Dwell Time of Each Frequency within a 30 Seconds Period


5.5.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.5.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
3. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
4. The calculate = $30 \times (1600/79) \times t$ (ie: t = the time duration of one single pulse)

5.5.3. Test Setup Layout :



5.5.4. Test Result : See spectrum analyzer plots below

- Temperature: 28°C
- Relative Humidity: 55 %
- Duty cycle of the equipment during the test X = 10%

Channel	Frequency (MHz)	Dwell Time (s)	Limits (s)	Plot Ref. No.
00	2402	0.398	0.4	1
39	2441	0.305	0.4	2
78	2480	0.199	0.4	3

5.5.5. Test Configuration (EUT Operating Condition) :

Same as Section 5.2.5.

5.6. Output Power


5.6.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.6.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency and set RBW to 1MHz and VBW to 1MHz.

5.6.3. Test Setup Layout :



5.6.4. Test Result : See spectrum analyzer plots below

- Temperature: 28°C
- Relative Humidity: 65 %
- Duty cycle of the equipment during the test X = 10%

Channel	Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mWatt)	Limits (Watt/dBm)
00	2402	0.96	1.247	1W/30 dBm
39	2441	0.30	1.072	1W/30 dBm
78	2480	0.25	1.059	1W/30 dBm

5.6.5. Test Configuration (EUT Operating Condition) :

Same as Section 5.4.5.

5.7. 100KHz Bandwidth of Frequency Band Edges

5.7.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.7.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3. Test Result :

Test Result in lower band (Channel 00) : PASS

Test Result in higher band(Channel 78) : PASS

5.7.4. Note on Band edge Emission

The band edge emission plot on Appendix B page 18. shows 56.16dB delta between carrier maximum power and local maximum emission in the restricted band (2.4835GHz).

<Mode 3>

Polarity	The emission of carrier power strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Result
H	65.92	8.17	74.00	-65.83	Peak	Pass
H	61.01	3.26	54.00	-50.74	Average	Pass
V	70.67	10.14	74.00	-63.86	Peak	Pass
V	64.14	-4.17	54.00	-58.17	Average	Pass

<Mode 6>

Polarity	The emission of carrier power strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Result
H	65.35	4.82	74.00	-69.18	Peak	Pass
H	58.97	1.22	54.00	-52.78	Average	Pass
V	63.46	7.41	74.00	-66.59	Peak	Pass
V	56.26	-1.49	54.00	-55.49	Average	Pass

<Mode 9>

Polarity	The emission of carrier power strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Result
H	76.33	15.80	74.00	-58.20	Peak	Pass
H	69.73	1.42	54.00	-52.58	Average	Pass
V	81.50	20.97	74.00	-53.03	Peak	Pass
V	73.74	5.43	54.00	-48.57	Average	Pass

The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.

5.7.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition continuously at lowest, and highest channel frequencies respectively.

5.8. Test of Conducted Emission

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-2001 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.8.1. Major Measuring Instruments :

• Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

5.8.2. Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.8.3. Test Result of Conducted Emission :

- Test Mode: Mode 1
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 27°C
- Relative Humidity: 53 %
- Test Date: Sep. 22, 2003

■ The test was passed at the minimum margin that marked by a frame in the following data

Site : C001-HY
Condition : CMS/VCCI/CISPR-B 2003 2001/008 LINE
EUT : Bluetooth Earphone
Power : USB 5Vdc, 110Vac
Model : BK1010
Memo : Mode 1, Tx CH00

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.162	40.45	-24.91	65.36	40.30	0.10	0.05	QP
2	0.162	31.85	-23.51	55.36	31.70	0.10	0.05	Average
3	0.187	33.07	-21.10	54.17	32.92	0.10	0.05	Average
4	0.187	34.77	-29.40	64.17	34.62	0.10	0.05	QP
5	0.213	25.65	-27.44	53.09	25.49	0.10	0.06	Average
6	0.213	29.65	-33.44	63.09	29.49	0.10	0.06	QP
7	0.266	37.01	-24.23	61.24	36.82	0.10	0.09	QP
8	0.266	30.97	-20.27	51.24	30.78	0.10	0.09	Average
9	0.302	27.16	-23.03	50.19	26.95	0.10	0.11	Average
10	0.302	30.33	-29.86	60.19	30.12	0.10	0.11	QP
11	12.650	42.60	-7.40	50.00	42.15	0.20	0.25	Average
12	12.650	47.75	-12.25	60.00	47.30	0.20	0.25	QP

Site	: C001-HY							
Condition	: CMS/VCCI/CISPR-B 2003 2001/008 NEUTRAL							
EUT	: Bluetooth Earphone							
Power	: USB 5Vdc, 110Vac							
Model	: BK1010							
Memo	: Mode 1, Tx CH00							
	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.162	39.27	-26.09	65.36	39.12	0.10	0.05	QP
2	0.162	31.13	-24.23	55.36	30.98	0.10	0.05	Average
3	0.184	35.19	-29.11	64.30	35.04	0.10	0.05	QP
4	0.184	32.66	-21.64	54.30	32.51	0.10	0.05	Average
5	0.239	29.76	-32.37	62.13	29.58	0.10	0.08	QP
6	0.239	25.20	-26.93	52.13	25.02	0.10	0.08	Average
7	0.267	30.95	-30.26	61.21	30.76	0.10	0.09	QP
8	0.267	26.07	-25.14	51.21	25.88	0.10	0.09	Average
9	0.302	29.69	-30.50	60.19	29.48	0.10	0.11	QP
10	0.302	26.91	-23.28	50.19	26.70	0.10	0.11	Average
11	13.060	46.33	-13.67	60.00	45.82	0.26	0.25	QP
12	13.060	40.05	-9.95	50.00	39.54	0.26	0.25	Average

Test Engineer: _____

Hendry Yang

- Test Mode: Mode 2
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 27°C
- Relative Humidity: 53 %
- Test Date: Sep. 22, 2003


■ The test was passed at the minimum margin that marked by a frame in the following data

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Bluetooth Earphone
 Power : USB 5Vdc, 110Vac
 Model : BK1010
 Memo : Mode 2, Tx CH39

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.161	43.46	-21.95	65.41	43.31	0.10	0.05	QP
2	0.161	32.58	-22.83	55.41	32.43	0.10	0.05	Average
3	0.187	34.64	-29.53	64.17	34.49	0.10	0.05	QP
4	0.187	33.07	-21.10	54.17	32.92	0.10	0.05	Average
5	0.215	29.35	-33.66	63.01	29.19	0.10	0.06	QP
6	0.215	25.27	-27.74	53.01	25.11	0.10	0.06	Average
7	0.266	30.99	-30.25	61.24	30.80	0.10	0.09	QP
8	0.266	26.26	-24.98	51.24	26.07	0.10	0.09	Average
9	0.303	29.91	-30.25	60.16	29.70	0.10	0.11	QP
10	0.303	26.96	-23.20	50.16	26.75	0.10	0.11	Average
11	12.850	48.74	-11.26	60.00	48.29	0.20	0.25	QP
12	12.850	41.70	-8.30	50.00	41.25	0.20	0.25	Average

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Bluetooth Earphone
 Power : USB 5Vdc, 110Vac
 Model : BK1010
 Memo : Mode 2, Tx CH39

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.162	44.24	-21.12	65.36	44.09	0.10	0.05	QP
2	0.162	31.13	-24.23	55.36	30.98	0.10	0.05	Average
3	0.185	36.53	-27.73	64.26	36.38	0.10	0.05	QP
4	0.185	33.80	-20.46	54.26	33.65	0.10	0.05	Average
5	0.239	29.66	-32.47	62.13	29.48	0.10	0.08	QP
6	0.239	25.14	-26.99	52.13	24.96	0.10	0.08	Average
7	0.267	30.91	-30.30	61.21	30.72	0.10	0.09	QP
8	0.267	26.01	-25.20	51.21	25.82	0.10	0.09	Average
9	0.303	29.77	-30.39	60.16	29.56	0.10	0.11	QP
10	0.303	26.91	-23.25	50.16	26.70	0.10	0.11	Average
11	13.270	48.96	-11.04	60.00	48.43	0.27	0.26	QP
12	13.270	42.06	-7.94	50.00	41.53	0.27	0.26	Average

Test Engineer: 

Hendry Yang

- Test Mode: Mode 3
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 27°C
- Relative Humidity: 53 %
- Test Date: Sep. 22, 2003

■ The test was passed at the minimum margin that marked by a frame in the following data

Site	: C001-HY							
Condition	: CNS/VCCI/CISPR-B 2003 2001/008 LINE							
EUT	: Bluetooth Earphone							
Power	: USB 5Vdc, 110Vac							
Model	: BK1010							
Memo	: Mode 3, Tx CH78							
	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.159	43.00	-21.72	65.52	43.65	0.10	0.05	QP
2	0.159	32.69	-22.83	55.52	32.54	0.10	0.05	Average
3	0.189	34.28	-29.80	64.08	34.13	0.10	0.05	QP
4	0.189	32.50	-21.58	54.08	32.35	0.10	0.05	Average
5	0.213	29.65	-33.44	63.09	29.49	0.10	0.06	QP
6	0.213	25.65	-27.44	53.09	25.49	0.10	0.06	Average
7	0.263	28.80	-32.54	61.34	28.61	0.10	0.09	QP
8	0.263	25.30	-26.04	51.34	25.11	0.10	0.09	Average
9	0.305	26.40	-23.71	50.11	26.19	0.10	0.11	Average
10	0.305	29.24	-30.87	60.11	29.03	0.10	0.11	QP
11	13.060	45.65	-14.35	60.00	45.20	0.20	0.25	QP
12	13.060	41.65	-8.35	50.00	41.20	0.20	0.25	Average

Site	: C001-HY							
Condition	: CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL							
EUT	: Bluetooth Earphone							
Power	: USB 5Vdc, 110Vac							
Model	: BK1010							
Memo	: Mode 3, Tx CH78							
	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.164	37.35	-27.91	65.26	37.20	0.10	0.05	QP
2	0.164	29.14	-26.12	55.26	28.99	0.10	0.05	Average
3	0.188	37.11	-27.01	64.12	36.96	0.10	0.05	QP
4	0.188	34.21	-19.91	54.12	34.06	0.10	0.05	Average
5	0.239	29.56	-32.57	62.13	29.38	0.10	0.08	QP
6	0.239	25.26	-26.87	52.13	25.08	0.10	0.08	Average
7	0.264	30.18	-31.12	61.30	29.99	0.10	0.09	QP
8	0.264	26.16	-25.14	51.30	25.97	0.10	0.09	Average
9	0.305	29.26	-30.85	60.11	29.05	0.10	0.11	QP
10	0.305	26.45	-23.66	50.11	26.24	0.10	0.11	Average
11	13.258	43.25	-6.75	50.00	42.72	0.27	0.26	Average
12	13.260	47.26	-12.74	60.00	46.73	0.27	0.26	QP

Test Engineer: _____

Hendry Yang

5.9. Test of Radiated Emission

Radiated emissions from 30 MHz to 26.5 GHz were measured according to the methods defines in ANSI C63.4-2001. The EUT was placed on a nonmetallic stand, 0.8 meter above the ground plane, as shown in section 5.9.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions


5.9.1. Major Measuring Instruments

● Amplifier	(MITEQ AFS44)
RF Gain	40 dB
Signal Input	100 MHz to 26.5 GHz
● Amplifier	(HP 8447D)
RF Gain	30 dB
Signal Input	100 KHz to 1.3 GHz
● Spectrum analyzer	(R&S FSP40)
Attenuation	10 dB
Start Frequency	1 GHz
Stop Frequency	24 GHz
Resolution Bandwidth	1 MHz
Video Bandwidth	1 MHz
Signal Input	9 KHz to 40 GHz
● Test Receiver	(SCHAFFNER SCR3501)
Resolution Bandwidth	120 KHz
Frequency Band	9 K – 1 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode OFF for Peak Mode

5.9.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.9.3. Typical Test Setup Layout of Radiated Emission

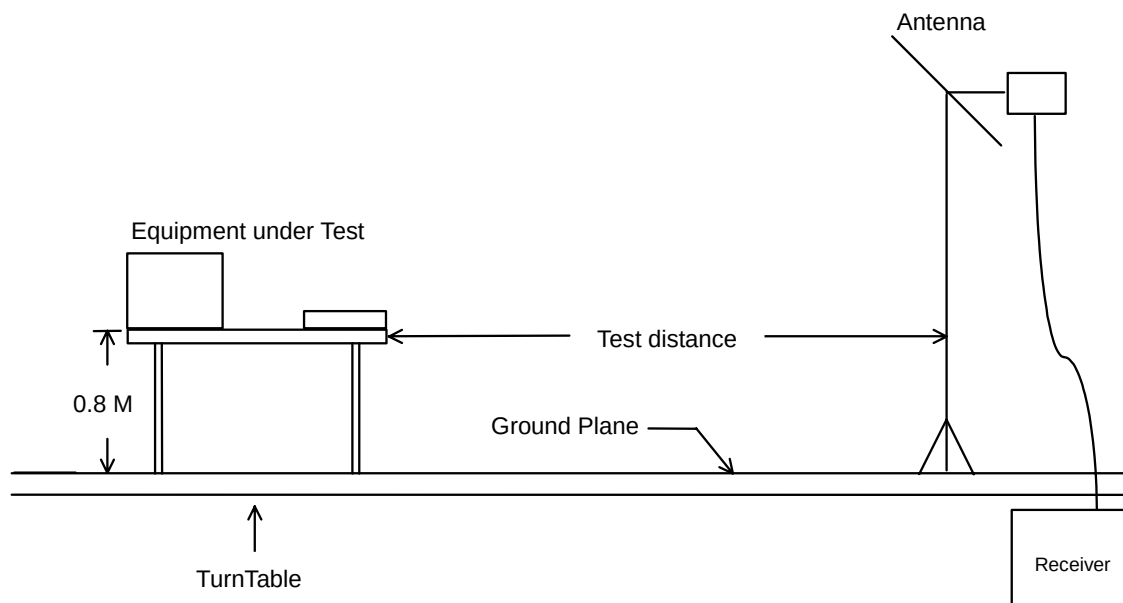

5.9.4. Test Result of Radiated Emission

- Test Mode: Mode 1
- Test Distance: 3 M
- Temperature: 28 °C
- Relative Humidity: 55 %
- Test Date: Sep. 21, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 101 m, turn table degree is 83°.

- Spurious Emission

- For 30MHz to 1GHz

Frequency		Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity		Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
30.810	H	14.92	1.02	19.70	40.00	100.00	35.64	60.53	-4.36	Peak
30.810	V	14.92	1.02	22.92	40.00	100.00	38.86	87.70	-1.14	Peak
32.970	V	14.15	1.03	23.73	40.00	100.00	38.91	88.21	-1.09	Peak
38.370	V	11.61	1.05	25.75	40.00	100.00	38.41	83.27	-1.59	Peak
47.820	V	8.01	1.10	29.70	40.00	100.00	38.81	87.20	-1.19	Peak
66.180	V	4.68	1.18	25.12	40.00	100.00	30.98	35.40	-9.02	Peak

- For above 1GHz

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect	
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
3966.000	H	32.55	9.28	9.46	74.00	5011.87	51.29	366.86	-22.71	Peak
3948.000	V	32.50	9.24	10.34	74.00	5011.87	52.08	401.79	-21.92	Peak
3948.000	V	32.50	9.24	-3.88	54.00	501.19	37.86	78.16	-16.14	A.V.


- For 5GHz ~ 26.5GHz

Remark: Frequency from 5000MHz to 26500MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect	
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
2404.000	H	28.23	6.21	39.14	-	-	73.58	4775.29	Peak	
2404.000	H	28.23	6.21	32.39	-	-	66.83	2195.33	A.V.	
2404.000	V	28.23	6.21	40.77	-	-	75.21	5761.03	Peak	
2404.000	V	28.23	6.21	27.10	-	-	61.54	1193.99	A.V.	
4804.000	H	33.03	9.05	7.38	74.00	5011.87	49.46	297.17	-24.54	Peak
4804.000	H	33.03	9.05	0.98	54.00	501.19	43.06	142.23	-10.94	A.V.
4804.000	V	33.03	9.05	9.11	74.00	5011.87	51.19	362.66	-22.81	Peak
4804.000	V	33.03	9.05	2.21	54.00	501.19	44.29	163.87	-9.71	A.V.
7206.000	H	35.81	12.33	5.40	74.00	5011.87	53.54	475.34	-20.46	Peak
7206.000	H	35.81	12.33	-5.57	54.00	501.19	42.57	134.43	-11.43	A.V.
7206.000	V	35.81	12.33	7.28	74.00	5011.87	55.42	590.20	-18.58	Peak
7206.000	V	35.81	12.33	-5.58	54.00	501.19	42.56	134.28	-11.44	A.V.
9608.000	V/H						-			Peak, A.V.
12010.000	V/H						-			Peak, A.V.
14412.000	V/H						-			Peak, A.V.
16814.000	V/H						-			Peak, A.V.
19216.000	V/H						-			Peak, A.V.
21618.000	V/H						-			Peak, A.V.
24020.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: 

Hendry Yang

- Test Mode: Mode 2
- Test Distance: 3 M
- Temperature: 28 °C
- Relative Humidity: 55 %
- Test Date: Sep. 21, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 100 m, turn table degree is 91°.

- Spurious Emission

- For 30MHz to 1GHz

FOR COMM-15.2014										
Frequency		Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity		Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
85.890	H	7.61	1.28	18.37	40.00	100.00	27.26	23.07	-12.74	Peak
143.940	H	9.93	9.93	11.32	43.50	149.62	31.18	36.22	-12.32	Peak
528.200	H	16.38	16.38	0.03	46.00	199.53	32.79	43.60	-13.21	Peak
43.500	V	10.67	1.08	24.25	40.00	100.00	36.00	63.10	-4.00	Peak
56.460	V	5.61	1.14	23.39	40.00	100.00	30.14	32.14	-9.86	Peak
70.770	V	4.61	1.20	25.54	40.00	100.00	31.35	36.94	-8.65	Peak

- For above 1GHz

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
3942.000	H	32.48	9.22	9.72	74.00	5011.87	51.42	372.39	-22.58 Peak
6482.000	H	34.30	11.02	7.82	74.00	5011.87	53.14	453.94	-20.86 Peak
7142.000	H	35.66	12.28	7.24	74.00	5011.87	55.18	574.12	-18.82 Peak
3966.000	V	32.55	9.28	9.80	74.00	5011.87	51.63	381.50	-22.37 Peak


- For 5GHz ~ 26.5GHz

Remark: Frequency from 5000MHz to 26500MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
2444.000	H	28.31	6.27	36.48	-	-	71.06	3572.73	Peak	
2444.000	H	28.31	6.27	30.20	-	-	64.78	1733.80	A.V.	
2444.000	V	28.31	6.27	39.11	-	-	73.69	4836.15	Peak	
2444.000	V	28.31	6.27	30.71	-	-	65.29	1838.65	A.V.	
4882.000	H	33.19	9.10	-5.20	74.00	5011.87	37.09	71.53	-36.91	Peak
4882.000	H	33.19	9.10	6.98	54.00	501.19	49.27	290.74	-4.73	A.V.
4882.000	V	33.19	9.10	6.50	74.00	5011.87	48.79	275.11	-25.21	Peak
4882.000	V	33.19	9.10	-5.44	54.00	501.19	36.85	69.58	-17.15	A.V.
7323.000	V/H						-			Peak, A.V.
9764.000	V/H						-			Peak, A.V.
12205.000	V/H						-			Peak, A.V.
14646.000	V/H						-			Peak, A.V.
17087.000	V/H						-			Peak, A.V.
19528.000	V/H						-			Peak, A.V.
21969.000	V/H						-			Peak, A.V.
24410.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: 

Hendry Yang

- Test Mode: Mode 3
- Test Distance: 3 M
- Temperature: 28 °C
- Relative Humidity: 55 %
- Test Date: Sep. 21, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 143_m, turn table degree is 67°.

- Spurious Emission

- For 30MHz to 1GHz

Frequency		Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity		Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
81.570	H	6.33	1.25	18.37	40.00	100.00	25.95	19.84	-14.05	Peak
143.940	H	9.93	1.55	19.78	43.50	149.62	31.26	36.56	-12.24	Peak
528.200	H	16.38	3.36	12.93	46.00	199.53	32.67	43.00	-13.33	Peak
36.210	V	12.75	1.04	20.79	40.00	100.00	34.58	53.58	-5.42	Peak
41.610	V	10.87	1.07	24.06	40.00	100.00	36.00	63.10	-4.00	Peak
53.220	V	6.05	1.12	22.50	40.00	100.00	29.67	30.44	-10.33	Peak

- For above 1GHz

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
3974.000	V	32.57	9.30	50.22	74.00	5011.87	50.22	324.34	-23.78 Peak.


- For 5GHz ~ 26.5GHz

Remark: Frequency from 5000MHz to 26500MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
	Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
2478.000	H	28.38	6.31	35.98	-	-	70.67	3415.86	Peak	
2478.000	H	28.31	6.31	29.52	-	-	64.14	1610.65	A.V.	
2478.000	V	28.38	6.31	36.37	-	-	71.06	3572.73	Peak	
2478.000	V	28.38	6.31	30.09	-	-	64.78	1733.80	A.V.	
4960.000	H	33.34	9.14	6.52	74.00	5011.87	49.00	281.84	-25.00	Peak
4960.000	H	33.34	9.14	-2.46	54.00	501.19	40.02	100.23	-13.98	A.V.
4960.000	V	33.40	9.14	4.67	74.00	5011.87	47.21	229.35	-26.79	Peak
4960.000	V	33.34	9.14	-3.33	54.00	501.19	39.15	90.68	-14.85	A.V.
7440.000	V/H						-			Peak, A.V.
9920.000	V/H						-			Peak, A.V.
12400.000	V/H						-			Peak, A.V.
14880.000	V/H						-			Peak, A.V.
17360.000	V/H						-			Peak, A.V.
19840.000	V/H						-			Peak, A.V.
22320.000	V/H						-			Peak, A.V.
24800.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: 

Hendry Yang

- Test Mode: Mode 4
- Test Distance: 3 M
- Temperature: 28 °C
- Relative Humidity: 55 %
- Test Date: Sep. 21, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 101 m, turn table degree is 58°.

- Spurious Emission

- For 30MHz to 1GHz

FOR COMMERCIAL USE										
Frequency		Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity		Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
32.970	H	14.15	1.03	24.79	40.00	100.00	39.97	99.66	-0.03	Peak
60.780	H	5.11	1.16	19.91	40.00	100.00	26.18	20.37	-13.82	Peak
77.250	H	5.51	1.24	18.43	40.00	100.00	25.18	18.16	-14.82	Peak
81.570	H	6.33	1.25	18.01	40.00	100.00	25.59	19.03	-14.41	Peak
85.890	H	7.61	1.28	17.53	40.00	100.00	26.42	20.94	-13.58	Peak
671.000	V	17.79	4.03	10.20	46.00	199.53	32.02	39.90	-13.98	Peak

- For above 1GHz

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect	
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
4022.000	H	32.59	9.33	50.22	74.00	5011.87	50.30	327.34	-23.70	Peak
3974.000	V	32.57	9.30	7.83	74.00	5011.87	49.70	305.49	-24.30	Peak.


- For 8GHz ~ 26.5GHz

Remark: Frequency from 8000MHz to 26500MHz, the emission emitted by the EUT is too low to be measured Field strength of fundamental and harmonics

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
2404.000	H	28.23	6.21	36.73	-	-	71.17	3618.26	Peak	
2404.000	H	28.23	6.31	28.39	-	-	62.93	1401.20	A.V.	
2404.000	V	28.23	6.21	34.07	-	-	68.51	2663.79	Peak	
2404.000	V	28.23	6.31	28.13	-	-	62.67	1359.88	A.V.	
4804.000	H	33.03	9.05	6.77	74.00	316.23	48.85	277.01	-25.15	Peak
4804.000	H	33.03	9.05	-0.32	54.00	316.23	41.76	122.46	-12.24	A.V.
4960.000	V	33.03	9.05	7.75	74.00	316.23	49.83	310.10	-24.17	Peak
4960.000	V	33.03	9.05	1.42	54.00	316.23	43.50	149.62	-10.50	A.V.
7206.000	H	35.81	12.33	5.40	74.00	5011.87	53.54	475.34	-20.46	Peak
7206.000	H	35.81	12.33	-5.57	54.00	501.19	42.57	134.43	-11.43	A.V.
7206.000	V	35.81	12.33	7.28	74.00	5011.87	55.42	590.20	-18.58	Peak
7206.000	V	35.81	12.33	-5.58	54.00	501.19	42.56	134.28	-11.44	A.V.
9608.000	V/H						-			Peak, A.V.
12010.000	V/H						-			Peak, A.V.
14412.000	V/H						-			Peak, A.V.
16814.000	V/H						-			Peak, A.V.
19216.000	V/H						-			Peak, A.V.
21618.000	V/H						-			Peak, A.V.
24020.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: 

Hendry Yang

- Test Mode: Mode 5
- Test Distance: 3 M
- Temperature: 28 °C
- Relative Humidity: 55 %
- Test Date: Sep. 21, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 100 m, turn table degree is 43°.

- Spurious Emission

- For 30MHz to 1GHz

FOR COMM-101-12										
Frequency		Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity		Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
59.970	H	5.16	1.15	20.86	40.00	100.00	27.17	22.83	-12.83	Peak
68.610	H	4.49	1.19	22.31	40.00	100.00	27.99	25.09	-12.01	Peak
81.570	H	6.33	1.25	17.80	40.00	100.00	25.38	18.58	-14.62	Peak
30.810	V	14.92	1.02	16.67	40.00	100.00	32.61	42.71	-7.39	Peak
59.970	V	5.16	1.15	19.64	40.00	100.00	25.95	19.84	-14.05	Peak
77.250	V	5.51	1.24	17.90	40.00	100.00	24.65	17.08	-15.35	Peak

- For above 1GHz

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect	
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
3980.000	H	32.59	9.32	50.22	74.00	5011.87	50.68	341.98	-23.32 3980.000
2438.000	V	28.30	6.26	33.51	74.00	5011.87	68.07	2532.21	-5.93 2438.000

- For 5GHz ~ 26.5GHz


Remark: Frequency from 5000MHz to 26500MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
	Polarity	Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
2444.000	H	28.23	6.21	36.73	-	-	71.17	3618.26		Peak
2444.000	H	28.23	6.21	28.49	-	-	62.93	1401.20		A.V.
2444.000	V	28.23	6.21	34.07	-	-	68.51	2663.79		Peak
2444.000	V	28.23	6.21	28.23	-	-	62.67	1359.88		A.V.
4882.000	H	33.19	9.10	6.50	74.00	316.23	48.79	275.11	-25.21	Peak
4882.000	H	33.19	9.10	-5.92	54.00	316.23	36.37	65.84	-17.63	A.V.
4882.000	V	33.19	9.10	7.54	74.00	316.23	49.83	310.10	-24.17	Peak
4882.000	V	33.19	9.10	1.21	54.00	316.23	43.50	149.62	-10.50	A.V.
7323.000	V/H						-			Peak, A.V.
9764.000	V/H						-			Peak, A.V.
12205.000	V/H						-			Peak, A.V.
14646.000	V/H						-			Peak, A.V.
17087.000	V/H						-			Peak, A.V.
19528.000	V/H						-			Peak, A.V.
21969.000	V/H						-			Peak, A.V.
24410.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer



Hendry Yang

- Test Mode: Mode 6
- Test Distance: 3 M
- Temperature: 28 °C
- Relative Humidity: 55 %
- Test Date: Sep. 21, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked by the frame in the following test record

- Spurious Emission

■ The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 101 m, turn table degree is 83°.

- Spurious Emission

- For 30MHz to 1GHz

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect	
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
937.000	H	19.54	5.28	5.23	46.00	199.53	30.05	31.81	-15.95 Peak
30.000	V	15.35	1.19	1.01	40.00	100.00	32.38	41.59	-7.62 Peak
55.650	V	5.73	1.25	1.13	40.00	100.00	28.04	25.23	-11.96 Peak
91.020	V	8.82	1.02	1.30	43.50	149.62	32.76	43.45	-10.74 Peak
92.370	V	8.91	1.15	1.31	43.50	149.62	31.31	36.77	-12.19 Peak
101.820	V	9.43	1.24	1.35	43.50	149.62	28.28	25.94	-15.22 Peak

- For above 1GHz

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
1726.000	V	26.29	5.15	50.22	74.00	5011.87	46.21	204.41	-27.79 Peak
3916.000	V	32.41	9.16	9.75	74.00	5011.87	51.32	368.13	-22.68 Peak.

- For 5GHz ~ 26.5GHz


Remark: Frequency from 5000MHz to 26500MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
2478.000	H	28.38	6.31	30.66	-	-	65.35	1851.40	Peak	
2478.000	H	28.23	6.21	24.53	-	-	58.97	888.18	A.V.	
2478.000	V	28.38	6.31	28.77	-	-	63.46	1489.36	Peak	
2478.000	V	28.23	6.31	21.72	-	-	56.26	650.13	A.V.	
4960.000	H	33.34	9.14	5.52	50.00	316.23	48.00	251.19	-2.00	Peak
7440.000	V/H						-			Peak, A.V.
9920.000	V/H						-			Peak, A.V.
12400.000	V/H						-			Peak, A.V.
14880.000	V/H						-			Peak, A.V.
17360.000	V/H						-			Peak, A.V.
19840.000	V/H						-			Peak, A.V.
22320.000	V/H						-			Peak, A.V.
24800.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer



Hendry Yang

- Test Mode: Mode 7
- Test Distance: 3 M
- Temperature: 28 °C
- Relative Humidity: 55 %
- Test Date: Sep. 21, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 112 m, turn table degree is 158°.

- Spurious Emission

- For 30MHz to 1GHz

FOR COMM-2012										
Frequency		Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity		Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
30.000	H	15.35	1.01	9.67	40.00	100.00	26.03	20.02	-13.97	Q.P
143.940	H	9.93	1.55	17.51	43.50	149.62	28.99	28.15	-14.51	Peak
383.300	H	14.12	2.67	13.64	46.00	199.53	30.43	33.23	-15.57	Peak
30.000	V	15.35	1.01	17.15	40.00	100.00	33.51	47.37	-6.49	Peak
47.820	V	8.01	1.10	28.08	40.00	100.00	37.19	72.36	-2.81	Peak
55.380	V	5.76	1.13	25.68	40.00	100.00	32.57	42.51	-7.43	Peak

- For above 1GHz

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
1268.000	H	24.77	4.35	17.27	74.00	5011.87	46.39	208.69	-27.61 Peak
1868.000	H	26.88	5.43	16.88	74.00	5011.87	49.19	288.07	-24.81 Peak
1836.000	V	26.74	5.37	13.68	74.00	5011.87	45.79	194.76	-28.21 Peak
2982.000	V	29.95	7.20	10.86	74.00	5011.87	48.01	251.48	-25.99 Peak


- For 5GHz ~ 26.5GHz

Remark: Frequency from 5000MHz to 26500MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
	Polarity	Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
2404.000	H	28.23	6.21	46.05	-	-	80.49	10580.35		Peak
2404.000	H	28.23	6.21	39.16	-	-	73.60	4786.30		A.V.
2404.000	V	28.23	6.21	41.96	-	-	76.40	6606.93		Peak
2404.000	V	28.23	6.21	37.05	-	-	71.49	3754.05		A.V.
4960.000	H						-			Peak
4960.000	H						-			A.V.
4960.000	V						-			Peak
4960.000	V						-			A.V.
7440.000	V/H						-			Peak, A.V.
9920.000	V/H						-			Peak, A.V.
12400.000	V/H						-			Peak, A.V.
14880.000	V/H						-			Peak, A.V.
17360.000	V/H						-			Peak, A.V.
19840.000	V/H						-			Peak, A.V.
22320.000	V/H						-			Peak, A.V.
24800.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: 

Hendry Yang

- Test Mode: Mode 8
- Test Distance: 3 M
- Temperature: 28 °C
- Relative Humidity: 55 %
- Test Date: Sep. 21, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 107 m, turn table degree is 163°.

- Spurious Emission

- For 30MHz to 1GHz

FOR COMMERCIAL USE										
Frequency		Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity		Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
30.000	H	15.35	1.01	12.41	40.00	100.00	28.77	27.45	-11.23	Peak
47.820	H	7.42	1.10	15.67	40.00	100.00	24.19	16.20	-15.81	Peak
30.000	V	15.35	1.01	19.42	40.00	100.00	35.78	61.52	-4.22	Peak
47.820	V	8.01	1.10	24.46	40.00	100.00	33.57	47.70	-6.43	Peak
55.650	V	5.73	1.13	26.57	40.00	100.00	33.43	46.94	-6.57	Peak
86.700	V	7.82	1.28	14.75	40.00	100.00	23.85	15.58	-16.15	Peak

- For above 1GHz

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
1086.000	V	24.33	4.07	20.68	74.00	5011.87	49.08	284.45	-24.92 Peak
1390.000	V	25.07	4.53	18.06	74.00	5011.87	47.66	241.55	-26.34 Peak.


- For 5GHz ~ 26.5GHz

Remark: Frequency from 5000MHz to 26500MHz, the emission emitted by the EUT is too low to be measured Field strength of fundamental and harmonics

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
	Polarity	Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
2444.000	H	28.31	6.27	46.86	-	-	81.44	11803.21		Peak
2444.000	H	28.31	6.27	40.13	-	-	74.71	5438.76		A.V.
2444.000	V	28.31	6.27	45.50	-	-	80.08	10092.53		Peak
2444.000	V	28.31	6.27	37.02	-	-	71.60	3801.89		A.V.
4960.000	H						-			Peak
4960.000	H						-			A.V.
4960.000	V						-			Peak
4960.000	V						-			A.V.
7440.000	V/H						-			Peak, A.V.
9920.000	V/H						-			Peak, A.V.
12400.000	V/H						-			Peak, A.V.
14880.000	V/H						-			Peak, A.V.
17360.000	V/H						-			Peak, A.V.
19840.000	V/H						-			Peak, A.V.
22320.000	V/H						-			Peak, A.V.
24800.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: 

Hendry Yang

- Test Mode: Mode 9
- Test Distance: 3 M
- Temperature: 28 °C
- Relative Humidity: 55 %
- Test Date: Sep. 21, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 149 m, turn table degree is 152°.

- Spurious Emission

- For 30MHz to 1GHz

FOR CONDUCTING EMISSION TESTS										
Frequency		Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity		Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
30.000	H	15.35	1.01	10.38	40.00	100.00	26.74	21.73	-13.26	Peak
310.500	H	11.71	1.10	18.43	46.00	199.53	31.24	36.48	-14.76	Peak
598.900	H	17.28	1.01	12.93	46.00	199.53	31.22	36.39	-14.78	Peak
30.000	V	15.35	1.01	17.23	40.00	100.00	33.59	47.81	-6.41	Peak
47.010	V	8.53	1.09	27.14	40.00	100.00	36.76	68.87	-3.24	Peak
55.380	V	5.76	1.13	24.93	40.00	100.00	31.82	38.99	-8.18	Peak

- For above 1GHz

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
3580.000	H	31.45	8.32	15.75	74.00	5011.87	55.52	597.04	-18.48 Peak
1390.000	V	25.07	4.53	17.57	74.00	5011.87	47.17	228.30	-26.83 Peak
1850.000	V	26.80	5.40	18.97	74.00	5011.87	51.17	361.83	-22.83 A.V.


- For 5GHz ~ 26.5GHz

Remark: Frequency from 5000MHz to 26500MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect	
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB) Mode	
2478.000	H	28.38	6.31	41.64	-	-	76.33	6553.90	Peak
2478.000	H	28.38	6.31	35.04	-	-	69.73	3065.49	A.V.
2478.000	V	28.38	6.31	46.81	-	-	81.50	11885.02	Peak
2478.000	V	28.38	6.31	39.05	-	-	73.74	4864.07	A.V.
4804.000	V/H					-			Peak, A.V.
7206.000	V/H					-			Peak, A.V.
9608.000	V/H					-			Peak, A.V.
12010.000	V/H					-			Peak, A.V.
14412.000	V/H					-			Peak, A.V.
16814.000	V/H					-			Peak, A.V.
19216.000	V/H					-			Peak, A.V.
21618.000	V/H					-			Peak, A.V.
24020.000	V/H					-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: 

Hendry Yang

6. EMI Suppression Component List

No EMI suppression components.

7. Antenna Requirements

The EUT use a Embedded antenna. It is considered meet antenna requirement of FCC.

7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

7.2. Antenna Connected Construction

The maximum Gain antenna used in this product is Embedded antenna.

8. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.01	1000	24.10	3.92
35	13.63	1.03	2000	27.40	5.66
40	11.11	1.06	3000	30.00	7.20
45	10.59	1.08	4000	32.60	9.36
50	6.47	1.11	5000	33.40	9.16
55	5.83	1.13	6000	34.20	10.70
60	5.18	1.15	7000	35.30	12.16
65	4.81	1.18	8000	36.90	13.12
70	4.43	1.20	9000	38.10	13.81
75	5.10	1.22	10000	39.00	14.83
80	5.91	1.24	11000	38.60	15.83
85	7.33	1.27	12000	39.50	17.11
90	8.74	1.29	13000	39.30	17.62
95	9.05	1.32	14000	41.60	18.37
100	9.36	1.34	15000	40.60	19.10
110	9.65	1.39	16000	37.20	19.72
120	9.97	1.43	17000	40.20	21.98
130	10.51	1.48	18000	48.90	21.22
140	10.32	1.53	19000	37.60	23.90
150	9.42	1.57	20000	37.30	24.07
160	8.09	1.62	21000	37.00	25.49
170	7.43	1.67	22000	38.00	24.92
180	7.60	1.72	23000	38.70	25.60
190	7.43	1.76	24000	38.60	25.70
200	7.26	1.81	25000	38.90	26.54
220	9.11	1.91			
240	10.88	2.00			
260	11.75	2.09			
280	11.55	2.19			
300	11.36	2.28			
320	12.03	2.38			
340	12.69	2.47			
360	13.33	2.57			
380	14.00	2.66			
400	14.63	2.76			
450	15.33	2.99			
500	16.03	3.22			
550	16.65	3.46			
600	17.29	3.70			
650	17.64	3.93			
700	18.00	4.17			
750	18.39	4.40			
800	18.79	4.64			
850	19.10	4.87			
900	19.42	5.11			
950	19.58	5.35			
1000	19.75	5.58			

9. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 12, 2003	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Jan. 07, 2003	Conduction (CO01-HY)
50 ohm BNC type Terminal	NOBLE	50ohm	TM009	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100004	9KHz~40GHz	Aug. 07, 2003	Radiation (03CH03-HY)
Receiver	SCHAFFNER	SCR 3501	417	9 KHz –1GHz	Feb. 20, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Oct. 21, 2002	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz –2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 10, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
Temp. and Humidity	KSON	THS-C3L	612	N/A	Oct. 02, 2002	Conducted
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted

※ Calibration Interval of instruments listed above is one year.

10. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1\Gamma_2)$	U-shaped	±0.54
combined standard uncertainty $U_e(y)$	normal	±2.7
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±5.4

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.2 \text{ for 10m test distance}$$

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.7 \text{ for 3m test distance}$$

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1\Gamma_2)$	U-shaped	0.2
combined standard uncertainty $U_e(y)$	normal	±1.66
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±3.32

$$U = \sqrt{\{(0.3/2)^2 + (2^2 + 1.5^2 + 0.2^2)/3 + (0.2)^2/2\}} = 1.66$$