



SAR EVALUATION REPORT

IEEE Std 1528-2013

For

GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT, & NFC

FCC ID: PY7-03571V

Report Number: R14639470-S1 v3

Issue Date: 3/30/2023

Prepared for

Sony Corporation

1-7-1 Konan Minato-ku

Tokyo, 108-0075, Japan

Prepared by

UL LLC

12 LABORATORY DR

RTP, NC 27709, U.S.A.

TEL: (919) 549-1400



Revision History

Rev.	Date	Revisions	Revised By
V1	3/24/2023	Initial Issue	--
V2	3/28/2023	Added note to §10.9 stating that NFC was measured due to too large of a spot check delta. Added note to §9 stating that WWAN output power is leveraged from FCC ID: PY7-12907W.	Sarah Kuhaneck
V3	3/30/2023	Added DL CA to §6.2, CD_41C to §9.4	Richard Jankovics

Table of Contents

1. Attestation of Test Results	5
2. Test Specification, Methods and Procedures.....	7
3. Facilities and Accreditation.....	8
4. SAR Measurement System & Test Equipment.....	9
4.1. SAR Measurement System.....	9
4.2. SAR Scan Procedures.....	10
4.3. Test Equipment.....	12
5. Measurement Uncertainty.....	14
6. Device Under Test (DUT) Information	15
6.1. DUT Description	15
6.2. Wireless Technologies.....	16
6.3. General LTE SAR Test and Reporting Considerations.....	17
6.4. LTE (TDD) Considerations.....	19
6.5. Power Back-off Operation.....	20
7. RF Exposure Conditions (Test Configurations).....	21
8. Dielectric Property Measurements & System Check	22
8.1. Dielectric Property Measurements	22
8.2. System Check.....	24
9. Conducted Output Power Measurements.....	26
9.1. GSM	26
9.2. W-CDMA	29
9.3. LTE.....	34
9.4. LTE Down-Link Carrier Aggregation	45
9.5. WLAN 2.4GHz & WLAN 5GHz & Bluetooth.....	46
10. Measured and Reported (Scaled) SAR Results.....	47
10.1. GSM850.....	49
10.2. GSM1900.....	49
10.3. W-CDMA Band 2.....	49
10.4. W-CDMA Band 4.....	50
10.5. W-CDMA Band 5.....	50
10.6. LTE Band 4 (20MHz Bandwidth)	50
10.7. LTE Band 5 (10MHz Bandwidth)	51
10.8. LTE Band 12 (10MHz Bandwidth)	51

10.9. *LTE Band 13 (10MHz Bandwidth)* 52

10.10. *LTE Band 41 (20MHz Bandwidth)* 52

10.11. *WLAN & Bluetooth Spot Check Verification*..... 53

10.12. *NFC*..... 53

11. SAR Measurement Variability..... **54**

12. Simultaneous Transmission Conditions **55**

12.1. *Simultaneous transmission SAR test exclusion considerations* 55

12.2. *Sum of the SAR for WWAN CELL Main1 & Wi-Fi Normal State & BT*..... 56

12.3. *Sum of the SAR for WWAN CELL Main1 & Wi-Fi Simultaneous 2G_5G State* 56

12.4. *Sum of the SAR for WWAN CELL Main2 & Wi-Fi Normal State & BT*..... 56

12.5. *Sum of the SAR for WWAN CELL Main2 & Wi-Fi Simultaneous 2G_5G State* 56

12.6. *Sum of the SAR for Wi-Fi Normal State & NFC*..... 56

Appendixes **57**

Appendix A: SAR Setup Photos 57

Appendix B: SAR System Check Plots..... 57

Appendix C: SAR Highest Test Plots..... 57

Appendix D: SAR Tissue Ingredients..... 57

Appendix E: SAR Probe Certificates..... 57

Appendix F: SAR Dipole Certificates 57

1. Attestation of Test Results



Applicant Name		Sony Corporation				
FCC ID		PY7-03571V				
Applicable Standards		Published RF exposure KDB procedures IEEE Std 1528-2013				
Exposure Category		SAR Limits (W/Kg)				
		Peak spatial-average (1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)		
General population / Uncontrolled exposure		1.6		4		
RF Exposure Conditions		Equipment Class - Highest Reported SAR (W/kg)				
		PCE	DTS	NII	DSS	NFC
Head		0.140	0.469	0.241	0.265	N/A
Body-worn*		0.465	0.077	0.089	0.058	N/A
Hotspot/BT Tethering		0.465	0.121	0.077	0.093	N/A
Extremity (10g)		N/A	N/A	0.397	N/A	0.033
Simultaneous TX	Head/Body- Worn/Hotspot/ BT Tethering (1g)	0.735	0.686	0.735	0.735	N/A
	Extremity (10g)	N/A	N/A	0.641	N/A	0.641
Date Tested		2/21/2023 to 3/30/2023				
Test Results		Pass				
<p>*Note: The Body-worn minimum separation distance is 10 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 10 mm.</p>						
<p>Note: WLAN and Bluetooth SAR data is referenced from FCC ID: PY7-12907W (UL report #14634918-S1) and is leveraged to cover variant FCC ID: PY7-03571V. All circuitry and features for WLAN and Bluetooth operations are identical between the two variants. The data reuse test plan was approved via manufacturer, with spot check measurements on worst case conditions. Worst case SAR results for WLAN and Bluetooth from referenced variant FCC ID: PY7-12907W are listed above. WLAN and Bluetooth SAR results from FCC ID: PY7-12907W have been used in this report for Simultaneous Transmission analysis.</p>						
(continued next page)						

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

This report contains data provided by the customer which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the U.S. Government, or any agency of the U.S. government.

<p>Approved & Released By:</p> 	<p>Prepared By:</p> 
<p>Devin Chang Senior Test Engineer UL Verification Services Inc.</p>	<p>Richard Jankovics Operations Leader UL LLC</p>

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE Std 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- [TCB Workshop](#) October 2014; RF Exposure Procedures (Other LTE Considerations)
- [TCB Workshop](#) April 2015; RF Exposure Procedures (Overlapping LTE Bands)
- [TCB Workshop](#) October 2015; RF Exposure Procedures (KDB 941225 D05A)
- [TCB Workshop](#) October 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB Workshop](#) October 2016; RF Exposure Procedures (DUT Holder Perturbations)
- [TCB Workshop](#) May 2017; RF Exposure Procedures (Broadband Liquid Above 3 GHz)
- [TCB Workshop](#) April 2019; RF Exposure Procedures (Tissue Simulating Liquids (TSL))
- [TCB Workshop](#) April 2019; RF Exposure Procedures (802.11ax SAR Testing)

3. Facilities and Accreditation

UL LLC is accredited by A2LA, cert. # 0751.06 for all testing performed within the scope of this report. Testing was performed at the locations noted below.

The test sites and measurement facilities used to collect data are located at 2800 Perimeter Park Dr, Morrisville, NC, USA.


- SAR Lab 1A
- SAR Lab 2A
- SAR Lab 2B

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building: 12 Laboratory Dr RTP, NC 27709, U.S.A	US0067	2180C	825374
<input checked="" type="checkbox"/>	Building: 2800 Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

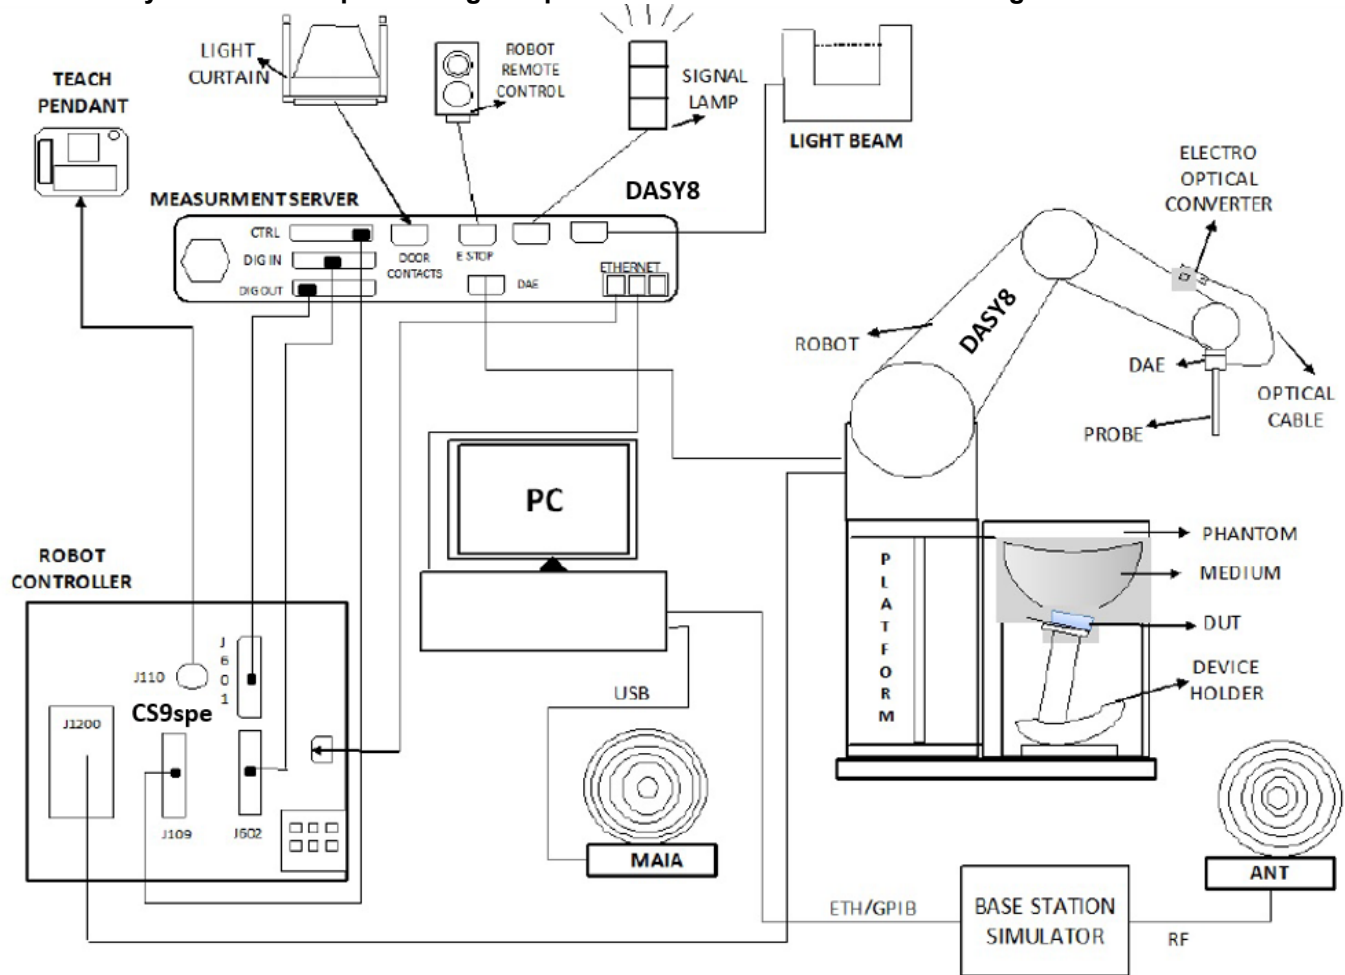

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 and the DASY8¹ software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

¹ DASY8 software used: DASY16.0.2.83 and older generations.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEC/IEEE 62209-1528, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm $3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Keysight	E5063A	MY54100681	9/30/2023
Dielectric Probe	SPEAG	DAKS-3.5	1051	10/17/2023
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 DA	10/17/2023
Dielectric Probe	SPEAG	DAK-12	1128	1/30/2024
Shorting Block	SPEAG	DAK-12 Short	N/A	1/30/2024
Thermometer	Fisher Scientific	15-078-181	210204689	3/31/2023

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Keysight	N5181A	MY50140788	1/12/2024
3-Path Diode Power Sensor	Rohde & Schwarz	NRP8S	112236	5/31/2023
3-Path Diode Power Sensor	Rohde & Schwarz	NRP8S	112237	5/31/2023
Amplifier	MITEQ	AMF-4D-00400600-50-30P	N/A	N/A
Directional Coupler	Mini-Circuits	ZUDC10-183+	1438	NA
Dual Directional Coupler	Werlatone	C5100-10	92249	N/A
DC Power Supply	Miteq	PS 15V1	1990186	N/A
RF Power Source	Speag	PowerSource1	4278	6/21/2023

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe	SPEAG	EX3DV4	7709	12/12/2023
E-Field Probe	SPEAG	EX3DV4	7710	2/3/2024
E-Field Probe ¹	SPEAG	EX3DV4	7711	3/11/2023
Data Acquisition Electronics ¹	SPEAG	DAE4	1716	3/8/2023
Data Acquisition Electronics	SPEAG	DAE4	1714	11/23/2023
Data Acquisition Electronics	SPEAG	DAE4	1715	1/23/2024
System Validation Dipole	SPEAG	CLA13	1008	1/12/2024
System Validation Dipole	SPEAG	D750V3	1139	10/12/2023
System Validation Dipole	SPEAG	D900V2	1d180	10/12/2023
System Validation Dipole	SPEAG	D1750V2	1136	10/17/2023
System Validation Dipole	SPEAG	D1900V2	5d202	10/12/2023
System Validation Dipole	SPEAG	D2450V2	963	10/18/2023
System Validation Dipole	SPEAG	D2600V2	1104	10/21/2023
System Validation Dipole	SPEAG	D5GHzV2	1213	10/11/2023
Environmental Indicator	Control Company	06-662-4	200037610	2/24/2024
Environmental Indicator	Control Company	06-662-4	200037635	2/24/2024

Notes:

1. Items past calibration were not used past due date.

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
RF Power Meter	Keysight	N1911a	MY55116002	9/10/2023
RF Power Meter	Keysight	N1911a	MY55116004	9/02/2023
RF Power Sensor	Keysight	N1921a	MY55120011	7/07/2023
RF Power Sensor	Keysight	N1921a	MY55090025	9/27/2023
RF Power Sensor	Keysight	N1921a	MY55090030	6/15/2023
RF Power Sensor	Keysight	N1921a	MY55090023	3/22/2023
RF Power Sensor ¹	ETS Lindgren	7002-006	160129	3/11/2023
RF Power Sensor	Boonton Electronics	RTP5008	11835	10/20/2023
RF Power Sensor ¹	Boonton Electronics	RTP5008	12002	3/11/2023
Base Station Simulator	R & S	CMW 500	170733	12/14/2023
Base Station Simulator	R & S	CMW 500	170732	9/13/2023
Base Station Simulator	R & S	CMW 500	170193	4/29/2023
Base Station Simulator	Anritsu	MT8821C	6262116751	5/14/2023
DC Power Supply	Keysight	E3633A	MY58426145	N/A
DC Power Supply	Keysight	E3633A	MY62176088	N/A
DC Power Supply	Keysight	E3633A	MY62176089	N/A
DC Power Supply	Keysight	E3633A	MY61466084	N/A

Notes:

1. Items past calibration were not used past due date.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	This is a Phablet Device (display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm) Refer to Appendix A																
Back Cover	The Back Cover is not removable																
Battery Options	The rechargeable battery is not user accessible.																
Accessory	Headset and wireless power charger																
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 5.2 GHz and 5.8 GHz)																
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other Per Manufacturer, the DUT support only as a group client and not support as a group owner.																
Bluetooth Tethering (Hotspot)	BT Tethering mode permits the device to share its cellular data connection with other devices. <input checked="" type="checkbox"/> BT Tethering (Bluetooth 2.4 GHz)																
Test sample information	<table border="1"> <thead> <tr> <th>S/N</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>QV77008AFR</td> <td>RF/SAR WLAN/BT – 2.4GHz/5GHz (Conducted)</td> </tr> <tr> <td>QV77001HFR</td> <td>WLAN/BT - 2.4GHz/5GHz (SAR)</td> </tr> <tr> <td>QV7700A3FR</td> <td>FCC SAR #1</td> </tr> <tr> <td>QV7700KBFR</td> <td>FCC SAR #2</td> </tr> <tr> <td>QV7700CSFR</td> <td>FCC SAR #3</td> </tr> <tr> <td>QV770060FR</td> <td>FCC SAR #4</td> </tr> <tr> <td>QV7700DUFR</td> <td>NFC - SpotCheck + FCC Part 15B</td> </tr> </tbody> </table>	S/N	Notes	QV77008AFR	RF/SAR WLAN/BT – 2.4GHz/5GHz (Conducted)	QV77001HFR	WLAN/BT - 2.4GHz/5GHz (SAR)	QV7700A3FR	FCC SAR #1	QV7700KBFR	FCC SAR #2	QV7700CSFR	FCC SAR #3	QV770060FR	FCC SAR #4	QV7700DUFR	NFC - SpotCheck + FCC Part 15B
S/N	Notes																
QV77008AFR	RF/SAR WLAN/BT – 2.4GHz/5GHz (Conducted)																
QV77001HFR	WLAN/BT - 2.4GHz/5GHz (SAR)																
QV7700A3FR	FCC SAR #1																
QV7700KBFR	FCC SAR #2																
QV7700CSFR	FCC SAR #3																
QV770060FR	FCC SAR #4																
QV7700DUFR	NFC - SpotCheck + FCC Part 15B																
Hardware Version	A																
Software Version	WLAN Conducted: 0.93 SAR Measurements: 0.88 NFC SAR Measurements: 0.140																

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EDGE (8PSK)	GSM Class : B Multi-Slot Class: Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6)		100%
LTE	FDD Band 4 FDD Band 5 FDD Band 12 FDD Band 13 FDD Band 17 TDD Band 41	QPSK 16QAM 64QAM Rel. 15 Carrier Aggregation (1 Uplink and 2 Downlinks)		100% (FDD) 63.3% (TDD) ^{Power Class 3}
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20) 802.11ac (VHT20) 802.11ax (HE20)		99.9% ^{(802.11b)¹} 99.1% ^{(802.11g)¹}
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80) 802.11ac (VHT160) 802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80) 802.11ax (HE160)		99.7% ^{(802.11n 40MHz BW)¹} 99.7% ^{(802.11ac 80MHz BW)¹} 99.6% ^{(802.11ac 160MHz BW)¹}
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Does this device support Band gap channel(s)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				
Bluetooth	2.4 GHz	BR, EDR, LE		77.2% ¹
NFC	13.56 MHz	Type A/B/F /V		N/A

Notes:

2. Duty cycle is referenced from the Section 9.

6.3. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 4	Frequency range: 1710 - 1755 MHz (BW = 45 MHz)					
		Channel Bandwidth					
		20 MHz ¹	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz (BW = 25 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 12	Frequency range: 699 – 716 MHz (BW = 17 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz (BW = 10 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz ¹	3 MHz	1.4 MHz
	Low				23205/ 779.5		
	Mid			23230/ 782	23230/ 782		
	High				23255/ 784.5		
	Band 17	Frequency range: 704 - 716 MHz (BW = 12 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz ¹	3 MHz	1.4 MHz
	Low			23780/ 709	23755/ 706.5		
Mid			23790/ 710	23790/ 710			
High			23800/ 711	23825/ 713.5			
Band 41 ²	Frequency range: 2496 - 2690 MHz (BW = 194 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
	Low	39750 / 2506.0					
	Mid- Low	40185 / 2549.5					
	Mid	40620 / 2593.0					
	Mid-High	41055 / 2636.5					
High	41490 / 2680.0						
LTE transmitter and antenna implementation	Refer to Appendix A.						

<p>Maximum power reduction (MPR)</p>	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> <p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
<p>Power reduction</p>	<p>No</p>																																																														
<p>Spectrum plots for RB configurations</p>	<p>A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.</p>																																																														

6.4. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$20480 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		
10	$13168 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-

Table 4.2-2: Uplink-downlink configurations & Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.3%
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.3%
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.3%
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.3%

Calculated Duty Cycle = Extended cyclic prefix in uplink * (T_s) * # of S + # of U / period

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle.

6.5. Power Back-off Operation

The DUT supports power reduction when Simultaneous WLAN transmission is active (i.e. WLAN WiFi Main and WiFi Sub Antenna transmitting simultaneously).

Power Back-off mode	Technologies Supported	Exposure Conditions Active			
		Head	Body-worn	Hotspot	Phablet SAR (Extremity 10g)
WLAN Simultaneous Tx	Wi-Fi 2.4GHz Wi-Fi 5GHz	✓	✓	✓	✓

Note(s):

Tune-Up Limits for WLAN (Simultaneous 2G_5G state) is Reduced Average Power. Please refer to §9 for all conducted power measurements.

Phablet SAR (Extremity 10g):

When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Antenna	Band	Head	Rear	Front	Edge 1	Edge 2	Edge 3	Edge 4	Extremity (0 mm)
					(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)	
Cellular Main Antenna 1	GSM 850 WCDMA B5 LTE B5/12/13	Yes	Yes	Yes	No	No	Yes	Yes	No
Cellular Main Antenna 2	GSM 1900 WCDMA B2/4 LTE B4/41	Yes	Yes	Yes	No	Yes	Yes	No	No
Wi-Fi Main Antenna	Wi-Fi 2.4GHz Wi-Fi 5GHz Bluetooth	Yes	Yes	Yes	Yes	No	No	Yes	Yes
Wi-Fi Sub Antenna	Wi-Fi 2.4GHz Wi-Fi 5GHz Bluetooth	Yes	Yes	Yes	No	No	Yes	Yes	Yes

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- The Body-worn minimum separation distance is 10 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 10 mm.
- When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- Please note that Wi-Fi Main Antenna is also referred to as WLAN Chain0/GPS/BT Antenna
- Please note that Wi-Fi Sub Antenna is also referred to as WLAN Chain 1/BT Antenna

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
1A	2023-02-20	1750	Head	1750	39.41	40.08	-1.68	1.38	1.37	1.10
				1710	39.43	40.15	-1.78	1.36	1.35	1.01
				1755	39.41	40.08	-1.66	1.39	1.37	1.04
1A	2023-02-24	5600	Head	5600	35.90	35.53	1.03	5.10	5.06	0.81
				5500	36.17	35.65	1.46	4.98	4.96	0.36
				5725	35.62	35.39	0.65	5.26	5.19	1.29
1A	2023-03-13	5600	Head	5600	34.23	35.53	-3.67	4.97	5.06	-1.80
				5500	34.41	35.65	-3.47	4.86	4.96	-2.02
				5725	33.99	35.39	-3.96	5.12	5.19	-1.37
1A	2023-03-23	13	Head	13	57.60	55.00	4.73	0.74	0.75	-1.99
				12	57.60	55.00	4.73	0.74	0.75	-1.99
				14	57.58	55.00	4.69	0.74	0.75	-1.99
2A	2023-02-20	900	Head	900	42.96	41.50	3.52	0.96	0.97	-1.35
				825	43.16	41.58	3.81	0.93	0.90	3.63
				915	42.93	41.50	3.45	0.97	0.98	-1.44
2A	2023-02-24	750	Head	750	43.42	41.96	3.48	0.87	0.89	-2.73
				700	43.61	42.22	3.30	0.85	0.89	-4.84
				800	43.27	41.71	3.75	0.88	0.90	-1.83
2B	2023-02-20	1900	Head	1900	38.90	40.00	-2.75	1.41	1.40	0.57
				1850	39.09	40.00	-2.27	1.36	1.40	-2.93
				1920	38.84	40.00	-2.90	1.43	1.40	1.93
2B	2023-02-24	2450	Head	2450	41.14	39.20	4.95	1.82	1.80	1.28
				2400	41.22	39.30	4.89	1.78	1.75	1.73
				2480	41.11	39.16	4.97	1.84	1.83	0.58
2B	2023-02-24	2600	Head	2600	40.92	39.01	4.89	1.94	1.96	-1.08
				2495	41.08	39.14	4.95	1.85	1.85	0.29
				2690	40.78	38.90	4.84	2.02	2.06	-2.16

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 50 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type_Serial #	Dipole Cal. Due Data	Dipole Power (dBm)	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
						Zoom Scan	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
1A	2/20/2023	Head	D1750V2 SN: 1136	10/17/2023	17.0	1.780	35.52	36.10	-1.62	0.948	18.92	19.10	-0.97	1
1A	2/24/2023	Head	D5GHzV2 SN: 1213 (5.60 GHz)	10/11/2023	17.0	3.850	76.82	82.40	-6.77	1.090	21.75	23.50	-7.45	2
1A	3/13/2023	Head	D5GHzV2 SN: 1213 (5.60 GHz)	10/11/2023	17.0	3.950	78.81	82.40	-4.35	1.110	22.15	23.50	-5.76	
1A	3/23/2023	Head	CLA13 SN: 1008	1/12/2024	16.5	0.024	0.54	0.54	-1.23	0.015	0.34	0.34	-0.65	3
2A	2/20/2023	Head	D900V2 SN: 1d180	10/12/2023	17.00	0.523	10.44	10.90	-4.26	0.339	6.76	6.99	-3.23	4
2A	2/24/2023	Head	D750V3 SN: 1139	10/12/2023	17.0	0.396	7.90	8.51	-7.15	0.262	5.23	5.58	-6.32	5
2B	2/20/2023	Head	D1900V2 SN: 5d202	10/12/2023	17.0	1.910	38.11	39.20	-2.78	0.992	19.79	20.40	-2.98	6
2B	2/24/2023	Head	D2450V2 SN: 963	10/18/2023	17.0	2.410	48.09	52.40	-8.23	1.120	22.35	24.50	-8.79	7
2B	2/24/2023	Head	D2600V2 SN: 1104	10/21/2023	17.0	2.730	54.47	56.70	-3.93	1.220	24.34	25.30	-3.79	8

9. Conducted Output Power Measurements

Tune-Up Power Limits provided by the manufacturer are used to scale measured SAR values.

Note: All WWAN Conducted output power was leveraged from FCC ID: PY7-12907W, which is electrically identical to this model (FCC ID: PY7-03571V).

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GSMK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance

Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

Maximum Output Power (Tune-up Limit) for GSM

SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

RF Air interface	Mode	GSM Burst Power Tune-up Limit (dBm)		GSM DTM CS Burst Power Tune-Up Limit (dBm)		GSM DTM PS Burst Power Tune-Up Limit (dBm)	
		CELL Main1	CELL Main2	CELL Main1	CELL Main2	CELL Main1	CELL Main2
		Normal	Normal	Normal	Normal	Normal	Normal
GSM850	Voice/GPRS (1 slot)	32.9		32.9			
	GPRS 2 slots	29.9		29.9		29.9	
	GPRS 3 slots	28.1		28.1		28.1	
	GPRS 4 slots	26.9					
	EGPRS 1 slot	28.0		32.9			
	EGPRS 2 slot	25.0		29.9		25.0	
	EGPRS 3 slot	23.2		28.1		23.2	
	EGPRS 4 slots	22.0					
GSM1900	Voice/GPRS (1 slot)		28.0		28.0		
	GPRS 2 slots		25.0		25.0		25.0
	GPRS 3 slots		23.2		23.2		23.2
	GPRS 4 slots		22.0				
	EGPRS 1 slot		27.0		28.0		
	EGPRS 2 slot		24.0		25.0		24.0
	EGPRS 3 slot		22.2		23.2		22.2
	EGPRS 4 slots		21.0				

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Normal Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	128	824.2	32.1	23.0	32.9	23.9
			190	836.6	32.3	23.3		
			251	848.8	32.3	23.3		
		2	128	824.2	28.9	22.9	29.9	23.9
			190	836.6	29.0	23.0		
			251	848.8	29.0	23.0		
		3	128	824.2	27.1	22.8	28.1	23.8
			190	836.6	27.4	23.2		
			251	848.8	27.3	23.1		
		4	128	824.2	26.0	23.0	26.9	23.9
			190	836.6	26.2	23.1		
			251	848.8	26.1	23.1		
EDGE (8PSK)	MCS5	1	128	824.2	26.7	17.7	28.0	19.0
			190	836.6	26.8	17.7		
			251	848.8	26.7	17.7		
		2	128	824.2	24.0	17.9	25.0	19.0
			190	836.6	24.0	18.0		
			251	848.8	24.0	17.9		
		3	128	824.2	22.1	17.9	23.2	18.9
			190	836.6	22.1	17.8		
			251	848.8	22.1	17.8		
		4	128	824.2	21.1	18.1	22.0	19.0
			190	836.6	21.0	18.0		
			251	848.8	21.0	18.0		

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Normal Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	512	1850.2	27.0	17.9	28.0	19.0
			661	1880.0	27.5	18.4		
			810	1909.8	27.6	18.6		
		2	512	1850.2	24.0	17.9	25.0	19.0
			661	1880.0	24.1	18.1		
			810	1909.8	24.3	18.3		
		3	512	1850.2	22.2	17.9	23.2	18.9
			661	1880.0	22.4	18.1		
			810	1909.8	22.6	18.3		
		4	512	1850.2	21.1	18.0	22.0	19.0
			661	1880.0	21.1	18.1		
			810	1909.8	21.4	18.4		
EDGE (8PSK)	MCS5	1	512	1850.2	26.1	17.0	27.0	18.0
			661	1880.0	26.2	17.1		
			810	1909.8	26.4	17.4		
		2	512	1850.2	22.9	16.9	24.0	18.0
			661	1880.0	23.0	17.0		
			810	1909.8	23.2	17.2		
		3	512	1850.2	21.0	16.8	22.2	17.9
			661	1880.0	21.3	17.1		
			810	1909.8	21.5	17.2		
		4	512	1850.2	19.8	16.8	21.0	18.0
			661	1880.0	19.8	16.8		
			810	1909.8	20.0	17.0		

GSM850 DTM Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Normal Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS/EDGE (GMSK)	CS1	1	128	824.2	32.2		23.2		32.9		23.9	
			190	836.6	32.3		23.3					
			251	848.8	32.4		23.4					
		2	128	824.2	28.9	29.1	22.9	23.0	29.9	29.9	23.9	23.9
			190	836.6	29.1	29.2	23.0	23.1				
			251	848.8	29.1	29.2	23.1	23.2				
		3	128	824.2	27.0	27.0	22.8	22.8	28.1	28.1	23.8	23.8
			190	836.6	27.2	27.2	23.0	22.9				
			251	848.8	27.2	27.1	22.9	22.9				
GSM (Voice) + EDGE (8PSK)	MCS5	1	128	824.2	32.2		23.2		32.9		23.9	
			190	836.6	32.3		23.2					
			251	848.8	32.4		23.4					
		2	128	824.2	29.0	23.8	23.0	17.7	29.9	25.0	23.9	19.0
			190	836.6	29.1	23.8	23.1	17.8				
			251	848.8	29.2	23.9	23.2	17.9				
		3	128	824.2	27.2	21.8	22.9	17.5	28.1	23.2	23.8	18.9
			190	836.6	27.2	21.9	23.0	17.6				
			251	848.8	27.1	21.8	22.9	17.6				

GSM1900 DTM Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Normal Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS/EDGE (GMSK)	CS1	1	512	1850.2	27.2		18.2		28.0		19.0	
			661	1880.0	27.5		18.4					
			810	1909.8	27.5		18.5					
		2	512	1850.2	23.6	23.8	17.6	17.8	25.0	25.0	19.0	19.0
			661	1880.0	23.6	23.7	17.6	17.7				
			810	1909.8	23.7	23.7	17.7	17.7				
		3	512	1850.2	21.8	21.9	17.6	17.6	23.2	23.2	18.9	18.9
			661	1880.0	22.2	22.2	18.0	17.9				
			810	1909.8	22.5	22.5	18.3	18.3				
GSM (Voice) + EDGE (8PSK)	MCS5	1	512	1850.2	27.2		18.2		28.0		19.0	
			661	1880.0	27.5		18.4					
			810	1909.8	27.5		18.5					
		2	512	1850.2	23.8	23.2	17.8	17.1	25.0	24.0	19.0	18.0
			661	1880.0	23.8	23.1	17.7	17.1				
			810	1909.8	23.9	23.1	17.9	17.1				
		3	512	1850.2	21.9	20.8	17.7	16.6	23.2	22.2	18.9	17.9
			661	1880.0	22.1	21.0	17.8	16.7				
			810	1909.8	21.3	21.1	17.0	16.9				

9.2. W-CDMA

Per KDB 941225 D01 3G SAR Procedures for W-CDMA:

Maximum output power is verified on the high, middle and low channels and using the appropriate 12.2 kbps RMC with TPC (transmit power control) set to all "1's"

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1. A summary of these settings is illustrated below:

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to procedures in table C.10.1.4 of 3GPP TS 34.121-1. A summary of these settings is illustrated below:

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to procedures in table C.11.1.3 of 3GPP TS 34.121-1. A summary of these settings is illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{HS} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPCCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPCCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPCCH power scaling at max power which could results in slightly smaller MPR values.

DC-HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests for DC-HSDPA were completed according to procedures in table C08.1.12 of 3GPP TS 34.121-1. A summary of subtest settings is illustrated below:

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

HSPA+ Setup Procedures used to establish the test signals

The following 1 Sub-test was completed according to procedures in table C.11.1.4 of 3GPP TS34.121. A summary of these settings is illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CGI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

Maximum Output Power (Tune-up Limit) for W-CDMA

SAR measurement is not required for the HSDPA, HSUPA. When primary mode and the adjusted SAR is ≤ 1.2 W/kg and secondary mode is $\leq 1/4$ dB higher than the primary mode

RF Air interface	Mode	Tune-up PowerLimit (dBm)	
		CELL Main1	CELL Main2
		Normal	Normal
W-CDMA Band 2	R99		19.7
	HSDPA		19.0
	HSUPA		19.0
W-CDMA Band 4	R99		18.7
	HSDPA		18.0
	HSUPA		18.0
W-CDMA Band 5	R99	22.7	
	HSDPA	22.0	
	HSUPA	22.0	

W-CDMA Band II Measured Results

Mode		UL Ch No.	Freq. (MHz)	Normal Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	18.8	N/A	19.7
		9400	1880.0	18.8		
		9538	1907.6	18.8		
HSDPA	Subtest 1	9262	1852.4	17.8	0	19.0
		9400	1880.0	17.8		
		9538	1907.6	17.8		
	Subtest 2	9262	1852.4	17.8	0	19.0
		9400	1880.0	17.8		
		9538	1907.6	17.8		
	Subtest 3	9262	1852.4	17.3	0.5	18.5
		9400	1880.0	17.3		
		9538	1907.6	17.3		
	Subtest 4	9262	1852.4	17.5	0.5	18.5
		9400	1880.0	17.3		
		9538	1907.6	17.3		
HSUPA	Subtest 1	9262	1852.4	17.8	0	19.0
		9400	1880.0	17.8		
		9538	1907.6	17.8		
	Subtest 2	9262	1852.4	15.8	2	17.0
		9400	1880.0	15.8		
		9538	1907.6	15.8		
	Subtest 3	9262	1852.4	16.8	1	18.0
		9400	1880.0	16.8		
		9538	1907.6	16.8		
	Subtest 4	9262	1852.4	15.8	2	17.0
		9400	1880.0	15.8		
		9538	1907.6	15.8		
	Subtest 5	9262	1852.4	17.3	0	19.0
		9400	1880.0	17.4		
		9538	1907.6	17.4		

W-CDMA Band IV Measured Results

Mode		UL Ch No.	Freq. (MHz)	Normal Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	17.8	N/A	18.7
		1413	1732.6	17.8		
		1513	1752.6	17.8		
HSDPA	Subtest 1	1312	1712.4	16.8	0	18.0
		1413	1732.6	16.8		
		1513	1752.6	16.8		
	Subtest 2	1312	1712.4	16.8	0	18.0
		1413	1732.6	16.8		
		1513	1752.6	16.8		
	Subtest 3	1312	1712.4	16.5	0.5	17.5
		1413	1732.6	16.3		
		1513	1752.6	16.3		
	Subtest 4	1312	1712.4	16.3	0.5	17.5
		1413	1732.6	16.4		
		1513	1752.6	16.4		
HSUPA	Subtest 1	1312	1712.4	16.7	0	18.0
		1413	1732.6	16.8		
		1513	1752.6	16.8		
	Subtest 2	1312	1712.4	14.8	2	16.0
		1413	1732.6	14.8		
		1513	1752.6	14.8		
	Subtest 3	1312	1712.4	15.8	1	17.0
		1413	1732.6	15.8		
		1513	1752.6	15.8		
	Subtest 4	1312	1712.4	14.8	2	16.0
		1413	1732.6	14.8		
		1513	1752.6	14.8		
	Subtest 5	1312	1712.4	16.3	0	18.0
		1413	1732.6	16.4		
		1513	1752.6	16.4		

W-CDMA Band V Measured Results

Mode		UL Ch No.	Freq. (MHz)	Normal Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	22.3	N/A	22.7
		4183	836.6	22.2		
		4233	846.6	21.6		
HSDPA	Subtest 1	4132	826.4	21.2	0	22.0
		4183	836.6	21.2		
		4233	846.6	20.6		
	Subtest 2	4132	826.4	21.2	0	22.0
		4183	836.6	21.0		
		4233	846.6	20.6		
	Subtest 3	4132	826.4	20.5	0.5	21.5
		4183	836.6	20.5		
		4233	846.6	20.1		
	Subtest 4	4132	826.4	20.6	0.5	21.5
		4183	836.6	20.5		
		4233	846.6	20.1		
HSUPA	Subtest 1	4132	826.4	21.3	0	22.0
		4183	836.6	21.3		
		4233	846.6	20.5		
	Subtest 2	4132	826.4	19.3	2	20.0
		4183	836.6	19.2		
		4233	846.6	18.6		
	Subtest 3	4132	826.4	20.3	1	21.0
		4183	836.6	20.3		
		4233	846.6	19.6		
	Subtest 4	4132	826.4	19.3	2	20.0
		4183	836.6	19.3		
		4233	846.6	18.6		
	Subtest 5	4132	826.4	21.2	0	22.0
		4183	836.6	21.3		
		4233	846.6	20.5		

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A

Maximum Output Power (Tune-up Limit) for LTE

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be \leq the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.
 - LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

For some LTE Bands, certain channel bandwidths do not support at least three non-overlapping channels. When a device supports overlapping channel assignments in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices. Please refer to section 6.3. for a detailed list of LTE test channels

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

SAR measurement is not required for the 16QAM and 64QAM. When the highest maximum output power for 16QAM and 64QAM is $\leq \frac{1}{2}$ dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.

RF Air interface	Mode	Tune-up Power Limit (dBm)	
		CELL Main1	CELL Main2
		Normal	Normal
LTE Band 4	QPSK		19.0
LTE Band 5	QPSK	22.0	
LTE Band 12	QPSK	22.0	
LTE Band 13	QPSK	22.0	
LTE Band 17	QPSK	22.0	
LTE Band 41	QPSK		20.0

LTE Band 4 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				20050	20175	20300	MPR	Tune-up Limit
				1720 MHz	1732.5 MHz	1745 MHz		
20 MHz	QPSK	1	0	18.0	18.1	18.0	0	19
		1	49	18.0	18.1	18.0	0	19
		1	99	18.0	18.1	18.0	0	19
		50	0	18.0	18.1	18.0	0	19
		50	24	18.0	18.1	18.0	0	19
		50	50	18.0	18.1	18.0	0	19
	16QAM	1	0	18.0	18.1	18.0	0	19
		1	49	18.0	18.1	18.0	0	19
		1	99	18.0	18.1	18.0	0	19
		50	0	18.0	18.1	18.0	0	19
		50	24	18.0	18.1	18.0	0	19
		50	50	18.0	18.1	18.0	0	19
	64QAM	1	0	18.2	18.2	18.4	0	19
		1	49	18.4	18.3	18.4	0	19
		1	99	18.3	18.3	18.3	0	19
		50	0	17.9	18.0	18.0	0	19
		50	24	18.0	18.0	18.1	0	19
		50	50	18.0	18.1	18.1	0	19
15 MHz	QPSK	1	0	18.0	18.0	18.0	0	19
		1	37	18.0	18.0	17.9	0	19
		1	74	18.0	18.0	18.0	0	19
		36	0	18.0	18.0	18.0	0	19
		36	20	18.0	18.0	18.0	0	19
		36	39	18.0	18.0	18.0	0	19
	16QAM	1	0	18.0	18.0	18.0	0	19
		1	37	18.0	18.0	18.0	0	19
		1	74	18.0	18.0	18.0	0	19
		36	0	18.0	18.0	18.0	0	19
		36	20	18.0	18.0	18.0	0	19
		36	39	18.0	18.0	18.0	0	19
	64QAM	1	0	18.3	18.2	18.1	0	19
		1	37	18.3	18.3	18.2	0	19
		1	74	18.3	18.4	18.2	0	19
		36	0	18.0	18.1	18.0	0	19
		36	20	18.0	18.0	18.0	0	19
		36	39	18.0	18.1	18.1	0	19
10 MHz	QPSK	1	0	18.2	18.2	18.2	0	19
		1	25	18.2	18.2	18.1	0	19
		1	49	18.2	18.2	18.1	0	19
		25	0	18.2	18.2	18.1	0	19
		25	12	18.2	18.2	18.1	0	19
		25	25	18.1	18.2	18.1	0	19
	16QAM	1	0	18.2	18.2	18.1	0	19
		1	25	18.2	18.2	18.1	0	19
		1	49	18.2	18.2	18.1	0	19
		25	0	18.2	18.2	18.1	0	19
		25	12	18.2	18.2	18.1	0	19
		25	25	18.2	18.2	18.1	0	19
	64QAM	1	0	18.3	18.5	18.4	0	19
		1	25	18.3	18.5	18.4	0	19
		1	49	18.3	18.5	18.4	0	19
		25	0	18.2	18.2	18.1	0	19
		25	12	18.2	18.2	18.2	0	19
		25	25	18.2	18.3	18.2	0	19

LTE Band 4 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)					
				19975	20175	20375	MPR	Tune-up Limit	
				1712.5 MHz	1732.5 MHz	1752.5 MHz			
5 MHz	QPSK	1	0	18.1	18.2	18.2	0	19	
		1	12	18.1	18.2	18.2	0	19	
		1	24	18.1	18.2	18.2	0	19	
		12	0	18.1	18.2	18.1	0	19	
		12	7	18.1	18.2	18.2	0	19	
		12	13	18.1	18.2	18.2	0	19	
		25	0	18.1	18.2	18.2	0	19	
	16QAM	1	0	18.1	18.1	18.2	0	19	
		1	12	18.1	18.2	18.2	0	19	
		1	24	18.1	18.1	18.2	0	19	
		12	0	18.1	18.1	18.2	0	19	
		12	7	18.1	18.2	18.2	0	19	
		12	13	18.1	18.2	18.2	0	19	
		25	0	18.1	18.2	18.1	0	19	
	64QAM	1	0	18.5	18.4	18.4	0	19	
		1	12	18.6	18.5	18.5	0	19	
		1	24	18.5	18.5	18.4	0	19	
		12	0	18.2	18.2	18.2	0	19	
		12	7	18.2	18.2	18.2	0	19	
		12	13	18.2	18.3	18.2	0	19	
		25	0	18.1	18.1	18.2	0	19	
	BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
					19965	20175	20385	MPR	Tune-up Limit
					1711.5 MHz	1732.5 MHz	1753.5 MHz		
	3 MHz	QPSK	1	0	18.1	18.1	18.1	0	19
1			8	18.0	18.1	18.1	0	19	
1			14	18.1	18.1	18.1	0	19	
8			0	18.0	18.1	18.1	0	19	
8			4	18.1	18.0	18.1	0	19	
8			7	18.1	18.1	18.0	0	19	
15			0	18.0	18.1	18.1	0	19	
16QAM		1	0	18.1	18.1	18.1	0	19	
		1	8	18.1	18.1	18.1	0	19	
		1	14	18.1	18.1	18.1	0	19	
		8	0	18.1	18.0	18.1	0	19	
		8	4	18.1	18.0	18.1	0	19	
		8	7	18.1	18.0	18.1	0	19	
		15	0	18.1	18.0	18.1	0	19	
64QAM		1	0	18.1	18.4	18.3	0	19	
		1	8	18.3	18.5	18.4	0	19	
		1	14	18.2	18.4	18.3	0	19	
		8	0	18.1	18.2	18.2	0	19	
		8	4	18.2	18.2	18.2	0	19	
		8	7	18.2	18.3	18.2	0	19	
		15	0	18.1	18.1	18.2	0	19	
BW (MHz)		Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
					19957	20175	20393	MPR	Tune-up Limit
					1710.7 MHz	1732.5 MHz	1754.3 MHz		
1.4 MHz		QPSK	1	0	18.0	18.0	18.0	0	19
	1		3	18.0	18.0	18.0	0	19	
	1		5	18.0	18.0	18.0	0	19	
	3		0	18.0	18.0	18.0	0	19	
	3		1	18.0	18.0	18.0	0	19	
	3		3	18.0	18.0	18.0	0	19	
	6		0	18.0	18.0	18.0	0	19	
	16QAM	1	0	18.0	18.0	18.1	0	19	
		1	3	18.0	18.0	18.1	0	19	
		1	5	18.0	18.0	18.0	0	19	
		3	0	18.0	18.0	18.0	0	19	
		3	1	18.0	18.0	18.0	0	19	
		3	3	18.0	18.0	18.0	0	19	
		6	0	18.0	18.0	18.0	0	19	
	64QAM	1	0	18.2	18.3	18.4	0	19	
		1	3	18.3	18.4	18.4	0	19	
		1	5	18.2	18.3	18.4	0	19	
		3	0	18.2	18.2	18.2	0	19	
		3	1	18.2	18.2	18.2	0	19	
		3	3	18.2	18.2	18.2	0	19	
		6	0	18.0	18.3	18.1	0	19	

LTE Band 5 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				20450	20525	20600	MPR	Tune-up Limit
				829 MHz	836.5 MHz	844 MHz		
10 MHz	QPSK	1	0	21.3	21.2	21.3	0	22
		1	25	21.2	21.2	21.3	0	22
		1	49	21.3	21.2	21.2	0	22
		25	0	21.2	21.2	21.2	0	22
		25	12	21.3	21.3	21.2	0	22
		25	25	21.3	21.2	21.3	0	22
	16QAM	1	0	21.6	21.6	21.6	0	22
		1	25	21.6	21.5	21.5	0	22
		1	49	21.6	21.6	21.5	0	22
		25	0	21.3	21.2	21.3	0	22
		25	12	21.3	21.3	21.3	0	22
		25	25	21.3	21.3	21.3	0	22
	64QAM	1	0	21.6	21.4	21.6	0	22
		1	25	21.6	21.4	21.6	0	22
		1	49	21.6	21.4	21.5	0	22
		25	0	21.3	21.2	21.2	0	22
		25	12	21.3	21.3	21.3	0	22
		25	25	21.3	21.2	21.3	0	22
5 MHz	QPSK	1	0	21.2	21.1	21.1	0	22
		1	12	21.3	21.3	21.3	0	22
		1	24	21.1	21.1	21.1	0	22
		12	0	21.2	21.1	21.1	0	22
		12	7	21.3	21.2	21.1	0	22
		12	13	21.2	21.2	21.2	0	22
	16QAM	25	0	21.2	21.2	21.1	0	22
		1	0	21.5	21.5	21.5	0	22
		1	12	21.7	21.7	21.6	0	22
		1	24	21.5	21.5	21.5	0	22
		12	0	21.3	21.2	21.2	0	22
		12	7	21.4	21.2	21.3	0	22
	64QAM	12	13	21.3	21.3	21.3	0	22
		25	0	21.2	21.2	21.1	0	22
		1	0	21.4	21.4	21.3	0	22
		1	12	21.5	21.5	21.5	0	22
		1	24	21.5	21.4	21.3	0	22
		12	0	21.3	21.1	21.2	0	22
3 MHz	QPSK	12	7	21.3	21.2	21.2	0	22
		12	13	21.3	21.2	21.3	0	22
		25	0	21.2	21.2	21.1	0	22
		1	0	21.4	21.4	21.3	0	22
		1	12	21.5	21.5	21.5	0	22
		1	24	21.5	21.4	21.3	0	22
	16QAM	12	0	21.3	21.1	21.2	0	22
		12	7	21.3	21.2	21.2	0	22
		12	13	21.3	21.2	21.3	0	22
		25	0	21.2	21.2	21.1	0	22
		1	0	21.5	21.5	21.4	0	22
		1	8	21.6	21.6	21.5	0	22
	64QAM	1	14	21.5	21.4	21.3	0	22
		8	0	21.2	21.2	21.2	0	22
		8	4	21.3	21.2	21.2	0	22
		8	7	21.3	21.3	21.2	0	22
		15	0	21.2	21.2	21.2	0	22
		1	0	21.4	21.4	21.3	0	22
16QAM	1	8	21.6	21.5	21.4	0	22	
	1	14	21.4	21.4	21.3	0	22	
	8	0	21.3	21.2	21.2	0	22	
	8	4	21.3	21.2	21.3	0	22	
	8	7	21.3	21.3	21.2	0	22	
	15	0	21.2	21.2	21.2	0	22	

LTE Band 5 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				20407	20525	20643	MPR	Tune-up Limit
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	21.2	21.1	21.1	0	22
		1	3	21.2	21.1	21.1	0	22
		1	5	21.2	21.1	21.1	0	22
		3	0	21.2	21.1	21.1	0	22
		3	1	21.2	21.2	21.1	0	22
		3	3	21.2	21.1	21.1	0	22
	16QAM	6	0	21.2	21.1	21.1	0	22
		1	0	21.5	21.5	21.5	0	22
		1	3	21.6	21.5	21.5	0	22
		1	5	21.5	21.5	21.5	0	22
		3	0	21.4	21.3	21.3	0	22
		3	1	21.4	21.3	21.3	0	22
	64QAM	3	3	21.4	21.3	21.3	0	22
		6	0	21.3	21.2	21.2	0	22
		1	0	21.4	21.4	21.4	0	22
		1	3	21.5	21.4	21.4	0	22
		1	5	21.4	21.4	21.4	0	22
		3	0	21.3	21.2	21.3	0	22
		3	1	21.3	21.3	21.3	0	22
		3	3	21.3	21.3	21.3	0	22
		6	0	21.1	21.3	21.1	0	22

LTE Band 12 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				23060	23095	23130	MPR	Tune-up Limit
				704 MHz	707.5 MHz	711 MHz		
10 MHz	QPSK	1	0	21.4	21.4	21.2	0	22
		1	25	21.3	21.4	21.3	0	22
		1	49	21.3	21.4	21.1	0	22
		25	0	21.1	21.3	21.2	0	22
		25	12	21.2	21.4	21.2	0	22
		25	25	21.2	21.4	21.2	0	22
	16QAM	1	0	21.7	21.7	21.5	0	22
		1	25	21.7	21.7	21.4	0	22
		1	49	21.5	21.7	21.6	0	22
		25	0	21.1	21.4	21.1	0	22
		25	12	21.1	21.4	21.2	0	22
		25	25	21.2	21.5	21.3	0	22
	64QAM	1	0	21.0	21.3	21.2	0	22
		1	25	21.3	21.6	21.4	0	22
		1	49	21.5	21.6	21.5	0	22
		25	0	21.2	20.9	21.1	0	22
		25	12	21.2	20.9	21.2	0	22
		25	25	21.3	20.9	21.3	0	22
5 MHz	QPSK	1	0	21.3	21.3	21.3	0	22
		1	12	21.4	21.5	21.5	0	22
		1	24	21.3	21.3	21.4	0	22
		12	0	21.4	21.3	21.3	0	22
		12	7	21.4	21.3	21.4	0	22
		12	13	21.4	21.4	21.4	0	22
	16QAM	25	0	21.4	21.3	21.4	0	22
		1	0	21.7	21.7	21.8	0	22
		1	12	21.8	21.8	21.9	0	22
		1	24	21.7	21.7	21.8	0	22
		12	0	21.5	21.4	21.4	0	22
		12	7	21.5	21.5	21.4	0	22
	64QAM	12	13	21.5	21.5	21.5	0	22
		25	0	21.4	21.3	21.4	0	22
		1	0	21.7	21.6	21.7	0	22
		1	12	21.8	21.7	21.7	0	22
		1	24	21.7	21.6	21.7	0	22
		12	0	21.0	20.8	20.9	0	22
3 MHz	QPSK	12	7	21.0	20.8	21.0	0	22
		12	13	21.0	20.9	21.0	0	22
		25	0	20.9	20.8	20.9	0	22
		1	0	21.4	21.3	21.3	0	22
		1	8	21.4	21.4	21.5	0	22
		1	14	21.3	21.3	21.3	0	22
	16QAM	8	0	21.4	21.4	21.3	0	22
		8	4	21.4	21.4	21.4	0	22
		8	7	21.4	21.4	21.4	0	22
		15	0	21.4	21.3	21.3	0	22
		1	0	21.7	21.7	21.7	0	22
		1	8	21.8	21.9	21.8	0	22
	64QAM	1	14	21.6	21.7	21.7	0	22
		8	0	21.5	21.4	21.5	0	22
		8	4	21.5	21.5	21.5	0	22
		8	7	21.5	21.5	21.6	0	22
		15	0	21.5	21.4	21.4	0	22
		1	0	21.5	21.6	21.7	0	22
16QAM	1	8	21.6	21.7	21.7	0	22	
	1	14	21.5	21.5	21.6	0	22	
	8	0	21.0	20.9	20.9	0	22	
	8	4	21.0	20.9	20.9	0	22	
	8	7	21.0	21.0	21.0	0	22	
	15	0	20.9	20.9	20.9	0	22	

LTE Band 12 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				23017	23095	23173	MPR	Tune-up Limit
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	21.3	21.4	21.4	0	22
		1	3	21.4	21.4	21.4	0	22
		1	5	21.3	21.4	21.4	0	22
		3	0	21.3	21.4	21.4	0	22
		3	1	21.4	21.4	21.4	0	22
		3	3	21.4	21.4	21.4	0	22
	16QAM	6	0	21.3	21.4	21.4	0	22
		1	0	21.5	21.7	21.7	0	22
		1	3	21.6	21.7	21.8	0	22
		1	5	21.6	21.7	21.7	0	22
		3	0	21.5	21.5	21.6	0	22
		3	1	21.6	21.5	21.6	0	22
	64QAM	3	3	21.5	21.6	21.6	0	22
		6	0	21.4	21.4	21.5	0	22
		1	0	21.6	21.5	21.6	0	22
		1	3	21.7	21.6	21.7	0	22
		1	5	21.6	21.6	21.6	0	22
		3	0	21.4	21.5	21.5	0	22
		3	1	21.4	21.5	21.5	0	22
		3	3	21.5	21.5	21.5	0	22
		6	0	21.0	21.0	20.8	0	22

LTE Band 13 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)			MPR	Tune-up Limit
				23230	782 MHz			
10 MHz	QPSK	1	0	21.4			0	22
		1	25	21.4			0	22
		1	49	21.3			0	22
		25	0	21.3			0	22
		25	12	21.3			0	22
		25	25	21.4			0	22
	16QAM	1	0	21.7			0	22
		1	25	21.7			0	22
		1	49	21.7			0	22
		25	0	21.4			0	22
		25	12	21.4			0	22
		25	25	21.4			0	22
	64QAM	1	0	21.4			0	22
		1	25	21.6			0	22
		1	49	21.6			0	22
		25	0	21.0			0	22
		25	12	21.0			0	22
		25	25	21.0			0	22
50	0	21.0			0	22		
	0	21.0			0	22		
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)			MPR	Tune-up Limit
				23205	23230	23255		
5 MHz	QPSK	1	0	21.1	21.3	21.0	0	22
		1	12	21.1	21.5	21.1	0	22
		1	24	21.0	21.3	20.9	0	22
		12	0	21.1	21.3	20.9	0	22
		12	7	21.1	21.3	21.0	0	22
		12	13	21.0	21.4	21.0	0	22
	16QAM	25	0	21.1	21.3	20.9	0	22
		1	0	21.4	21.7	21.4	0	22
		1	12	21.5	21.8	21.4	0	22
		1	24	21.3	21.7	21.4	0	22
		12	0	21.2	21.4	21.0	0	22
		12	7	21.2	21.4	21.0	0	22
	64QAM	12	13	21.1	21.4	21.1	0	22
		25	0	21.0	21.3	21.0	0	22
		1	0	21.3	21.6	21.2	0	22
		1	12	21.3	21.6	21.2	0	22
		1	24	21.2	21.6	21.2	0	22
		12	0	21.1	20.9	20.9	0	22
	25	12	7	21.2	20.9	21.0	0	22
		12	13	21.1	21.0	21.0	0	22
		25	0	21.1	20.9	20.9	0	22
		0	21.1	20.9	20.9	0	22	
		0	21.1	20.9	20.9	0	22	

LTE Band 41 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)					MPR	Tune-up Limit	
				39750	40185	40620	41055	41490			
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			
20 MHz	QPSK	1	0	19.3	19.2	19.3	19.3	19.3	0	20	
		1	49	19.3	19.2	19.3	19.3	19.2	0	20	
		1	99	19.2	19.2	19.4	19.4	19.2	0	20	
		50	0	19.3	19.2	19.2	19.4	19.3	0	20	
		50	24	19.4	19.3	19.3	19.4	19.3	0	20	
		50	50	19.4	19.3	19.4	19.4	19.3	0	20	
	16QAM	100	0	19.4	19.3	19.3	19.4	19.2	0	20	
		1	0	19.4	19.4	19.3	19.4	19.4	0	20	
		1	49	19.7	19.5	19.7	19.5	19.5	0	20	
		1	99	19.4	19.3	19.4	19.5	19.3	0	20	
		50	0	19.3	19.2	19.2	19.4	19.3	0	20	
		50	24	19.4	19.3	19.3	19.4	19.3	0	20	
	64QAM	50	50	19.4	19.2	19.3	19.4	19.3	0	20	
		100	0	19.4	19.3	19.3	19.4	19.2	0	20	
		1	0	19.2	19.2	19.3	19.4	19.2	0	20	
		1	49	19.3	19.3	19.4	19.5	19.3	0	20	
		1	99	19.1	19.1	19.5	19.5	19.3	0	20	
		50	0	19.3	19.2	19.2	19.4	19.2	0	20	
	15 MHz	QPSK	50	24	19.4	19.3	19.4	19.4	19.2	0	20
			50	50	19.4	19.2	19.3	19.4	19.3	0	20
			100	0	19.4	19.3	19.3	19.4	19.2	0	20
			1	0	19.3	19.2	19.2	19.2	19.3	0	20
			1	37	19.2	19.2	19.3	19.3	19.3	0	20
			1	74	19.1	19.3	19.3	19.3	19.3	0	20
16QAM		36	0	19.3	19.2	19.2	19.4	19.3	0	20	
		36	20	19.4	19.3	19.3	19.4	19.2	0	20	
		36	39	19.3	19.3	19.3	19.4	19.3	0	20	
		75	0	19.4	19.3	19.3	19.4	19.2	0	20	
		1	0	19.3	19.3	19.2	19.3	19.3	0	20	
		1	37	19.3	19.3	19.2	19.3	19.3	0	20	
64QAM		1	74	19.3	19.3	19.2	19.3	19.3	0	20	
		1	74	19.3	19.4	19.3	19.4	19.3	0	20	
		36	0	19.3	19.2	19.2	19.4	19.3	0	20	
		36	20	19.4	19.3	19.3	19.4	19.3	0	20	
		36	39	19.4	19.3	19.3	19.4	19.3	0	20	
		75	0	19.4	19.3	19.3	19.4	19.2	0	20	
10 MHz		QPSK	1	0	19.4	19.4	19.4	19.4	19.4	0	20
			1	25	19.5	19.4	19.4	19.5	19.5	0	20
			1	49	19.4	19.3	19.4	19.5	19.4	0	20
			25	0	19.5	19.4	19.4	19.5	19.5	0	20
			25	12	19.6	19.5	19.5	19.6	19.6	0	20
			25	25	19.5	19.4	19.5	19.6	19.5	0	20
	16QAM	50	0	19.5	19.5	19.5	19.6	19.5	0	20	
		1	0	19.6	19.2	19.3	19.5	19.6	0	20	
		1	25	19.6	19.3	19.4	19.6	19.6	0	20	
		1	49	19.6	19.2	19.3	19.5	19.6	0	20	
		25	0	19.6	19.4	19.4	19.5	19.6	0	20	
		25	12	19.6	19.5	19.5	19.6	19.6	0	20	
	64QAM	25	25	19.6	19.4	19.4	19.5	19.6	0	20	
		50	0	19.5	19.4	19.5	19.5	19.5	0	20	
		1	0	19.5	19.4	19.3	19.4	19.4	0	20	
		1	25	19.5	19.4	19.5	19.5	19.5	0	20	
		1	49	19.5	19.3	19.4	19.4	19.4	0	20	
		25	0	19.6	19.4	19.4	19.5	19.4	0	20	
	10 MHz	64QAM	25	12	19.6	19.4	19.5	19.6	19.4	0	20
			25	25	19.6	19.4	19.5	19.6	19.5	0	20
			25	25	19.6	19.4	19.5	19.6	19.5	0	20
			50	0	19.5	19.4	19.5	19.5	19.5	0	20
			50	0	19.5	19.4	19.5	19.5	19.4	0	20
			50	0	19.5	19.4	19.5	19.5	19.4	0	20

LTE Band 41 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	19.4	19.3	19.4	19.4	19.4	0	20
		1	12	19.6	19.5	19.5	19.6	19.5	0	20
		1	24	19.5	19.4	19.4	19.5	19.4	0	20
		12	0	19.5	19.4	19.4	19.5	19.4	0	20
		12	7	19.5	19.4	19.5	19.5	19.4	0	20
		12	13	19.6	19.4	19.4	19.5	19.5	0	20
		25	0	19.5	19.4	19.4	19.5	19.4	0	20
	16QAM	1	0	19.4	19.5	19.5	19.4	19.4	0	20
		1	12	19.5	19.6	19.6	19.5	19.6	0	20
		1	24	19.5	19.5	19.6	19.4	19.4	0	20
		12	0	19.5	19.4	19.4	19.5	19.3	0	20
		12	7	19.5	19.5	19.5	19.5	19.4	0	20
		12	13	19.5	19.4	19.5	19.5	19.4	0	20
		25	0	19.5	19.4	19.4	19.5	19.3	0	20
	64QAM	1	0	19.5	19.3	19.4	19.5	19.3	0	20
		1	12	19.5	19.4	19.5	19.7	19.5	0	20
		1	24	19.5	19.3	19.4	19.6	19.5	0	20
		12	0	19.4	19.2	19.3	19.4	19.4	0	20
		12	7	19.5	19.3	19.4	19.4	19.5	0	20
		12	13	19.4	19.2	19.4	19.4	19.5	0	20
		25	0	19.5	19.4	19.4	19.5	19.4	0	20

9.4. LTE Down-Link Carrier Aggregation

This device supports LTE downlink carrier aggregation (CA) CA_41C.

Power measurements were performed on the channel with the highest maximum output power from Tune-up Procedure on CELL Main2.

When carrier aggregation is limited to downlink only, uplink maximum output power (single carrier) is measured for the supported combinations of downlink carrier aggregation listed in the table below. In applying the power measurement procedures of KDB 941225 D05A and April 2018 TCB workshop for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs (far right most configuration highlighted in the table below).

In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the CA configuration with the largest aggregated DL CA BW in each frequency band, independently for contiguous and non-contiguous CA; however, if the same frequency band is used for both contiguous and non-contiguous CA, power measurement was performed using the configuration with the largest aggregated BW and maximum output power among contiguous and non-contiguous CA.

2CC DL CA Measured Results

E-UTRA CA configuration	CC1 (UL)					CC2 (DL)			Aggregated BW	CA Inactive (dBm)	CA Active (dBm)	Delta	2CC #
	Mode	BW (MHz)	Channel	Freq (MHz)	RB, Offset	BW (MHz)	Channel	Freq (MHz)					
CA_41C	QPSK	20	40521	2583.1	1,0	20	40719	2602.9	40	19.13	19.28	0.15	15

9.5. WLAN 2.4GHz & WLAN 5GHz & Bluetooth

Data Reuse Testing Rational

This application is using the data reuse procedure from TCB workshop April 2021; RF Exposure Procedures (Remarks on Test Reductions via Data Referencing for Closely Related Products). WLAN and Bluetooth SAR data is referenced from FCC ID: PY7-12907W and is leveraged to cover variant FCC ID: PY7-03571V. All circuitry and features for WLAN and Bluetooth operations are identical between the two variants. The data reuse test plan was approved via manufacturer KDB inquiry.

Data Reuse SAR Test Approach

Full RF exposure testing was performed for WLAN and Bluetooth on the parent variant (FCC ID: PY7-12907W). The configurations with the highest SAR values for each equipment class were identified. These configurations were then tested on the variant model (FCC ID: PY7-03571V).

The variation in SAR values were well within the uncertainty budget of the SAR test equipment. The variant SAR results and worst case parent SAR values are summarized in section 1.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN and Bluetooth = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

For smart phones, with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm.

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	CELL Main 1	0	Left Cheek	190	836.6	26.9	26.2	0.076	0.089	1
				Left Tilt	190	836.6	26.9	26.2	0.037	0.043	
				Right Cheek	190	836.6	26.9	26.2	0.107	0.126	
				Right Tilt	190	836.6	26.9	26.2	0.039	0.046	
Body-Worn & Hotspot	GPRS 4 Slots	CELL Main 1	10	Back	190	836.6	26.9	26.2	0.307	0.361	2
				Front	190	836.6	26.9	26.2	0.249	0.293	
Hotspot	GPRS 4 Slots	CELL Main 1	10	Edge Bottom	190	836.6	26.9	26.2	0.122	0.143	
				Edge Left	190	836.6	26.9	26.2	0.046	0.054	
Body-Worn & Hotspot	DTM Edge 2 Slots	CELL Main 1	10	Back	190	836.6	29.9	29.2	0.396	0.465	3

10.2. GSM1900

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	CELL Main 2	0	Left Cheek	810	1909.8	22.0	21.4	0.018	0.021	4
				Left Tilt	810	1909.8	22.0	21.4	0.014	0.016	
				Right Cheek	810	1909.8	22.0	21.4	0.024	0.028	
				Right Tilt	810	1909.8	22.0	21.4	0.010	0.011	
Body-Worn & Hotspot	GPRS 4 Slots	CELL Main 2	10	Back	810	1909.8	22.0	21.4	0.139	0.160	5
				Front	810	1909.8	22.0	21.4	0.115	0.132	
Hotspot	GPRS 4 Slots	CELL Main 2	10	Edge Right	810	1909.8	22.0	21.4	0.048	0.055	
				Edge Bottom	810	1909.8	22.0	21.4	0.202	0.232	
Body-Worn & Hotspot	DTM Edge 2 Slots	CELL Main 2	10	Edge Bottom	810	1909.8	25.0	23.7	0.196	0.264	7

10.3. W-CDMA Band 2

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel. 99 RMC 12.2 kbps	CELL Main 2	0	Left Cheek	9400	1880.0	19.7	18.8	0.035	0.043	8
				Left Tilt	9400	1880.0	19.7	18.8	0.026	0.032	
				Right Cheek	9400	1880.0	19.7	18.8	0.044	0.054	
				Right Tilt	9400	1880.0	19.7	18.8	0.020	0.025	
Body-Worn & Hotspot	Rel. 99 RMC 12.2 kbps	CELL Main 2	10	Back	9400	1880.0	19.7	18.8	0.183	0.225	9
				Front	9400	1880.0	19.7	18.8	0.188	0.231	
Hotspot	Rel. 99 RMC 12.2 kbps	CELL Main 2	10	Edge Right	9400	1880.0	19.7	18.8	0.090	0.111	
				Edge Bottom	9400	1880.0	19.7	18.8	0.305	0.375	

10.4. W-CDMA Band 4

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel. 99 RMC 12.2 kbps	CELL Main 2	0	Left Cheek	1413	1732.6	18.7	17.8	0.022	0.027	11
				Left Tilt	1413	1732.6	18.7	17.8	0.014	0.017	
				Right Cheek	1413	1732.6	18.7	17.8	0.027	0.033	
				Right Tilt	1413	1732.6	18.7	17.8	0.012	0.015	
Body-Worn & Hotspot	Rel. 99 RMC 12.2 kbps	CELL Main 2	10	Back	1413	1732.6	18.7	17.8	0.146	0.180	12
				Front	1413	1732.6	18.7	17.8	0.128	0.157	
Hotspot	Rel. 99 RMC 12.2 kbps	CELL Main 2	10	Edge Right	1413	1732.6	18.7	17.8	0.069	0.085	
				Edge Bottom	1413	1732.6	18.7	17.8	0.150	0.185	

10.5. W-CDMA Band 5

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel. 99 RMC 12.2 kbps	CELL Main 1	0	Left Cheek	4183	836.6	22.7	22.2	0.092	0.103	13
				Left Tilt	4183	836.6	22.7	22.2	0.055	0.062	
				Right Cheek	4183	836.6	22.7	22.2	0.125	0.140	
				Right Tilt	4183	836.6	22.7	22.2	0.056	0.063	
Body-Worn & Hotspot	Rel. 99 RMC 12.2 kbps	CELL Main 1	10	Back	4183	836.6	22.7	22.2	0.323	0.362	14
				Front	4183	836.6	22.7	22.2	0.237	0.266	
Hotspot	Rel. 99 RMC 12.2 kbps	CELL Main 1	10	Edge Bottom	4183	836.6	22.7	22.2	0.180	0.202	
				Edge Left	4183	836.6	22.7	22.2	0.070	0.079	

10.6. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	CELL Main2	0	Left Cheek	20175	1732.5	1	0	19.0	18.1	0.019	0.023	15
							50	0	19.0	18.1	0.015	0.018	
				Left Tilt	20175	1732.5	1	0	19.0	18.1	0.012	0.015	
							50	0	19.0	18.1	0.009	0.011	
				Right Cheek	20175	1732.5	1	0	19.0	18.1	0.025	0.031	
							50	0	19.0	18.1	0.020	0.025	
Right Tilt	20175	1732.5	1	0	19.0	18.1	0.009	0.011					
			50	0	19.0	18.1	0.006	0.007					
Body-worn & Hotspot	QPSK	CELL Main2	10	Back	20175	1732.5	1	0	19.0	18.1	0.100	0.123	16
							50	0	19.0	18.1	0.079	0.097	
				Front	20175	1732.5	1	0	19.0	18.1	0.094	0.116	
							50	0	19.0	18.1	0.074	0.091	
Hotspot	QPSK	CELL Main2	10	Edge Right	20175	1732.5	1	0	19.0	18.1	0.055	0.068	17
							50	0	19.0	18.1	0.044	0.054	
				Edge Bottom	20175	1732.5	1	0	19.0	18.1	0.176	0.217	
							50	0	19.0	18.1	0.142	0.175	

10.7. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	CELL Main 1	0	Left Cheek	20525	836.5	1	0	22.0	21.2	0.068	0.082	
									22.0	21.3	0.053	0.062	
				Left Tilt	20525	836.5	1	0	22.0	21.2	0.036	0.043	
				Right Cheek	20525	836.5	1	0	22.0	21.2	0.084	0.101	18
Right Tilt	20525	836.5	1	0	22.0	21.2	0.039	0.047					
										22.0	21.3	0.031	0.036
Body-worn & Hotspot	QPSK	CELL Main 1	10	Back	20525	836.5	1	0	22.0	21.2	0.254	0.305	19
									22.0	21.3	0.200	0.235	
				Front	20525	836.5	1	0	22.0	21.2	0.200	0.240	
Hotspot	QPSK	CELL Main 1	10	Edge Bottom	20525	836.5	1	0	22.0	21.2	0.136	0.164	
									22.0	21.3	0.107	0.126	
				Edge Left	20525	836.5	1	0	22.0	21.2	0.069	0.083	

10.8. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	CELL Main 1	0	Left Cheek	23095	707.5	1	0	22.0	21.4	0.037	0.042	
									22.0	21.4	0.029	0.033	
				Left Tilt	23095	707.5	1	0	22.0	21.4	0.017	0.020	
				Right Cheek	23095	707.5	1	0	22.0	21.4	0.041	0.047	20
Right Tilt	23095	707.5	1	0	22.0	21.4	0.016	0.018					
										22.0	21.4	0.012	0.014
Body-worn & Hotspot	QPSK	CELL Main 1	10	Back	23095	707.5	1	0	22.0	21.4	0.122	0.140	21
									22.0	21.4	0.100	0.115	
				Front	23095	707.5	1	0	22.0	21.4	0.117	0.134	
Hotspot	QPSK	CELL Main 1	10	Edge Bottom	23095	707.5	1	0	22.0	21.4	0.052	0.060	
									22.0	21.4	0.043	0.049	
				Edge Left	23095	707.5	1	0	22.0	21.4	0.066	0.076	

10.9. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	CELL Main 1	0	Left Cheek	23230	782.0	1	0	22.0	21.4	0.048	0.055	
							25	25	22.0	21.4	0.042	0.048	
				Left Tilt	23230	782.0	1	0	22.0	21.4	0.024	0.028	
							25	25	22.0	21.4	0.021	0.024	
				Right Cheek	23230	782.0	1	0	22.0	21.4	0.057	0.065	22
							25	25	22.0	21.4	0.049	0.056	
Right Tilt	23230	782.0	1	0	22.0	21.4	0.022	0.025					
			25	25	22.0	21.4	0.020	0.023					
Body-worn & Hotspot	QPSK	CELL Main 1	10	Back	23230	782.0	1	0	22.0	21.4	0.165	0.189	23
							25	25	22.0	21.4	0.142	0.163	
				Front	23230	782.0	1	0	22.0	21.4	0.148	0.170	
							25	25	22.0	21.4	0.126	0.145	
Hotspot	QPSK	CELL Main 1	10	Edge Bottom	23230	782.0	1	0	22.0	21.4	0.085	0.098	
							25	25	22.0	21.4	0.072	0.083	
				Edge Left	23230	782.0	1	0	22.0	21.4	0.059	0.068	
							25	25	22.0	21.4	0.050	0.057	

10.10. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	CELL Main 2	0	Left Cheek	40620	2593.0	1	99	20.0	19.4	0.011	0.013	
							50	50	20.0	19.4	0.008	0.009	
				Left Tilt	40620	2593.0	1	99	20.0	19.4	0.010	0.011	
							50	50	20.0	19.4	0.007	0.008	
				Right Cheek	40620	2593.0	1	99	20.0	19.4	0.022	0.025	24
							50	50	20.0	19.4	0.016	0.018	
Right Tilt	40620	2593.0	1	99	20.0	19.4	0.003	0.003					
			50	50	20.0	19.4	0.003	0.003					
Body-worn & Hotspot	QPSK	CELL Main 2	10	Back	40620	2593.0	1	99	20.0	19.4	0.074	0.085	
							50	50	20.0	19.4	0.058	0.067	
				Front	40620	2593.0	1	99	20.0	19.4	0.118	0.135	25
							50	50	20.0	19.4	0.095	0.109	
Hotspot	QPSK	CELL Main 2	10	Edge Right	40620	2593.0	1	99	20.0	19.4	0.036	0.041	
							50	50	20.0	19.4	0.028	0.032	
				Edge Bottom	40620	2593.0	1	99	20.0	19.4	0.089	0.102	
							50	50	20.0	19.4	0.070	0.080	

10.11. WLAN & Bluetooth Spot Check Verification

WLAN Spot Check Results for Variant FCC ID: PY7-03571V

Technology	RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		FCC ID: PY7-12907W		FCC ID: PY7-03571V		Delta	Plot No.
									Tune-up Limit	Meas.	1-g SAR (W/kg)		1-g SAR (W/kg)			
											Meas.	Scaled	Meas.	Scaled		
WLAN 2.4 GHz	Head	802.11b	WiFi Main	0	Right Cheek	1	2412	99.9%	14.0	13.4	0.387	0.445	0.408	0.469	5%	26
WLAN 5.5 GHz	Head	802.11ac (VHT160)	WiFi Main	0	Right Cheek	114	5570	99.6%	11.5	10.4	0.186	0.241	0.167	0.216	-10%	

WLAN Spot Check Results for Variant FCC ID: PY7-03571V (Extremity)

Technology	RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		FCC ID: PY7-12907W		FCC ID: PY7-03571V		Delta	Plot No.
									Tune-up Limit	Meas.	10-g SAR (W/kg)		10-g SAR (W/kg)			
											Meas.	Scaled	Meas.	Scaled		
WLAN 5.5 GHz	Extremity	802.11ac (VHT160)	WiFi Main	0	Edge Left	114	5570	99.6%	11.5	10.4	0.262	0.339	0.307	0.397	17%	27

Bluetooth Spot Check Results for Variant FCC ID: PY7-03571V

Technology	RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		FCC ID: PY7-12907W		FCC ID: PY7-03571V		Delta	Plot No.
									Tune-up Limit	Meas.	1-g SAR (W/kg)		1-g SAR (W/kg)			
											Meas.	Scaled	Meas.	Scaled		
Bluetooth	Head	GFSK	WiFi Main	0	Right Cheek	78	2480	N/A	14.0	14	0.265	0.265	0.263	0.263	-1%	

10.12. NFC

RF Exposure Conditions	Mode	Dist. (mm)	Freq. (MHz)	Tolerance Scaling ¹ (dB)	Test Position	10-g SAR (W/kg)		Plot No.
						Meas.	Scaled	
Extremity	Type A PRBS9 106k	0	13.56	2	Rear	0.021	0.033	28
					Front	0.000	0.000	
					Left	0.000	0.000	

Note(s):

- The SAR values for the NFC are not scaled for maximum production power because measurements of actual output power are not practical. The values were measured with the device operated within expected tolerances of the transmitter specifications and after accounting for production tolerances the contribution to the RF exposure budget from the NFC transmitter would remain negligible.
- The data reuse KDB inquiry test plan indicated the leveraging of NFC data, however the delta between the leveraged data and spot check measurements exceeded the approved 30%. Therefore, full testing was performed on PY7-03571V.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note(s):

Repeated measurement is not required since the original highest measured SAR is < 0.8 W/kg (1-g) or 2 W/kg (10-g) .

12. Simultaneous Transmission Conditions

RF Exposure Condition	Tx Mode	WWAN		WiFi Main			Wi-Fi Sub			NFC
		CELL Main1	CELL Main2	2.4 GHz Wi-Fi	5 GHz Wi-Fi	Bluetooth	2.4 GHz Wi-Fi	5 GHz Wi-Fi	Bluetooth	
Head, Body-worn, & Hotspot	1	✓		✓			✓			
	2	✓			✓			✓		
	3	✓			✓	✓		✓		
	4	✓			✓			✓	✓	
	5	✓		✓	✓		✓	✓		
	6		✓	✓			✓			
	7		✓		✓			✓		
	8		✓		✓	✓		✓		
	9		✓		✓			✓	✓	
	10		✓	✓	✓		✓	✓		
Extremity	11				✓			✓		✓

Note(s):
 -WLAN 2.4 GHz and Bluetooth radio cannot transmit simultaneously
 -WLAN 2.4 GHz and WLAN 5 GHz radio can transmit simultaneously
 -10-g extremity SAR is not required since hotspot mode 1-g reported SAR < 1.2 W/kg for all bands that support hotspot

12.1. Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

12.2. Sum of the SAR for WWAN CELL Main1 & Wi-Fi Normal State & BT

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)				
	WWAN	WLAN 2.4 GHz			WLAN 5 GHz		BT		WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT
	CELL Main1 ①	WiFi Main ②	WiFi Sub ③	WiFi Main ④	WiFi Sub ⑤	WiFi Main ⑥	WiFi Sub ⑦	① + ② + ③	① + ④ + ⑤	① + ④ + ⑤ + ⑥	① + ④ + ⑤ + ⑦	
Head	0.140	0.469	0.077	0.241	0.089	0.265	0.058	0.686	0.470	0.735	0.528	
Body	0.465	0.074	0.077	0.041	0.089	0.036	0.058	0.616	0.595	0.631	0.653	
Hotspot	0.465	0.121	0.077	0.077	0.070	0.093	0.002	0.663	0.612	0.705	0.614	

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.3. Sum of the SAR for WWAN CELL Main1 & Wi-Fi Simultaneous 2G_5G State

RF Exposure Conditions	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)
	WWAN	WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4 GHz + WLAN 5 GHz
	CELL Main1 ①	WiFi Main ②	WiFi Sub ③	WiFi Main ④	WiFi Sub ⑤	① + ② + ③ + ④ + ⑤
Head	0.140	0.145	0.036	0.164	0.050	0.535
Body	0.465	0.031	0.036	0.034	0.050	0.616
Hotspot	0.465	0.056	0.036	0.058	0.041	0.656

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.4. Sum of the SAR for WWAN CELL Main2 & Wi-Fi Normal State & BT

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)				
	WWAN	WLAN 2.4 GHz			WLAN 5 GHz		BT		WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT
	CELL Main2 ①	WiFi Main ②	WiFi Sub ③	WiFi Main ④	WiFi Sub ⑤	WiFi Main ⑥	WiFi Sub ⑦	① + ② + ③	① + ④ + ⑤	① + ④ + ⑤ + ⑥	① + ④ + ⑤ + ⑦	
Head	0.054	0.469	0.077	0.241	0.089	0.265	0.058	0.600	0.384	0.649	0.442	
Body	0.264	0.074	0.077	0.041	0.089	0.036	0.058	0.415	0.394	0.430	0.452	
Hotspot	0.375	0.121	0.077	0.077	0.070	0.093	0.002	0.573	0.522	0.615	0.524	

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.5. Sum of the SAR for WWAN CELL Main2 & Wi-Fi Simultaneous 2G_5G State

RF Exposure Conditions	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)
	WWAN	WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4 GHz + WLAN 5 GHz
	CELL Main2 ①	WiFi Main ②	WiFi Sub ③	WiFi Main ④	WiFi Sub ⑤	① + ② + ③ + ④ + ⑤
Head	0.054	0.145	0.036	0.164	0.050	0.449
Body	0.264	0.031	0.036	0.034	0.050	0.415
Hotspot	0.375	0.056	0.036	0.058	0.041	0.566

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.6. Sum of the SAR for Wi-Fi Normal State & NFC

RF Exposure Conditions	Standalone SAR (W/kg)			Σ 10-g SAR (W/kg)
	WLAN 5 GHz		NFC	WLAN 5 GHz + NFC
	WiFi Main ①	WiFi Sub ②	NFC ③	① + ② + ③
Extremity	0.397	0.211	0.033	0.641

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 10-g SAR is < 4.0 W/kg or the SPLSR is < 0.1 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

Appendix A: SAR Setup Photos

Appendix B: SAR System Check Plots

Appendix C: SAR Highest Test Plots

Appendix D: SAR Tissue Ingredients

Appendix E: SAR Probe Certificates

Appendix F: SAR Dipole Certificates

END OF REPORT