



CERTIFICATION TEST REPORT

Report Number. : 12395502-E5V1

Applicant : SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN

FCC ID : PY7-04685Y

EUT Description : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac &
NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:

July 31, 2018

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

REPORT REVISION HISTORY

| Rev. | Issue Date | Revisions | Revised By |
|------|------------|---------------|------------|
| V1 | 7/31/2018 | Initial Issue | |

TABLE OF CONTENTS

| | |
|---|-----------|
| REPORT REVISION HISTORY | 2 |
| TABLE OF CONTENTS | 3 |
| 1. ATTESTATION OF TEST RESULTS | 4 |
| 2. TEST METHODOLOGY | 5 |
| 3. FACILITIES AND ACCREDITATION | 5 |
| 4. CALIBRATION AND UNCERTAINTY | 6 |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | <i>6</i> |
| 4.2. <i>SAMPLE CALCULATION</i> | <i>6</i> |
| 4.3. <i>MEASUREMENT UNCERTAINTY.....</i> | <i>6</i> |
| 5. EQUIPMENT UNDER TEST..... | 7 |
| 5.1. <i>EUT DESCRIPTION.....</i> | <i>7</i> |
| 6. REUSE OF TEST DATA..... | 8 |
| 6.1. <i>INTRODUCTION.....</i> | <i>8</i> |
| 6.2. <i>DEVICES DIFFERENCES.....</i> | <i>8</i> |
| 6.3. <i>SPOT CHECK VERIFICATION RESULTS SUMMARY.....</i> | <i>8</i> |
| 6.4. <i>REFERENCE DETAIL.....</i> | <i>8</i> |
| 7. SPOT CHECK DATA..... | 9 |
| 7.1. <i>TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....</i> | <i>9</i> |
| 7.1.1. <i>BANDEDGE (LOW CHANNEL).....</i> | <i>9</i> |
| 7.2. <i>TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....</i> | <i>11</i> |
| 7.2.1. <i>HARMONICS AND SPURIOUS EMISSIONS.....</i> | <i>11</i> |
| 8. SETUP PHOTOS..... | 13 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

SERIAL NUMBER: BH93003WDH, BH93004BDH (Radiated)

DATE TESTED: JULY 30 – 31, 2018

| APPLICABLE STANDARDS | |
|--------------------------|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 Part 15 Subpart E | Complies |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:

Reviewed By:



Dan Corona
CONSUMER TECHNOLOGY DIVISION
Operations Leader
UL Verification Services Inc.

Kiya Kedida
CONSUMER TECHNOLOGY DIVISION
Project Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v02/D03 v01r02/D06 v02, FCC KDB 789033 D02 v02r01, FCC KDB 644545 D03 v01, ANSI C63.10-2013, FCC 06-96, and FCC KDB 905462 D02 and D03.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street | 47266 Benicia Street | 47658 Kato Rd. |
|--|---|---|
| <input checked="" type="checkbox"/> Chamber A (ISED:2324B-1) | <input type="checkbox"/> Chamber D (ISED:22541-1) | <input type="checkbox"/> Chamber K (ISED: 2324A-1) |
| <input checked="" type="checkbox"/> Chamber B (ISED:2324B-2) | <input type="checkbox"/> Chamber E (ISED:22541-2) | <input checked="" type="checkbox"/> Chamber L (ISED: 2324A-3) |
| <input type="checkbox"/> Chamber C (ISED:2324B-3) | <input type="checkbox"/> Chamber F (ISED:22541-3) | |
| | <input type="checkbox"/> Chamber G (ISED:22541-4) | |
| | <input type="checkbox"/> Chamber H (ISED:22541-5) | |

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED company address code 22541 with site numbers 22541 -1 through 22541-5, respectively. Chambers K and L are covered under ISED company address code 2324A with site numbers 2324A-1 and 2324A-3, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|---|-------------|
| Worst Case Conducted Disturbance, 9KHz to 0.15 MHz | 3.84 dB |
| Worst Case Conducted Disturbance, 0.15 to 30 MHz | 3.65 dB |
| Worst Case Radiated Disturbance, 9KHz to 30 MHz | 3.15 dB |
| Worst Case Radiated Disturbance, 30 to 1000 MHz | 5.36 dB |
| Worst Case Radiated Disturbance, 1000 to 18000 MHz | 4.32 dB |
| Worst Case Radiated Disturbance, 18000 to 26000 MHz | 4.45 dB |
| Worst Case Radiated Disturbance, 26000 to 40000 MHz | 5.24 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC.

6. REUSE OF TEST DATA

6.1. INTRODUCTION

According to the manufacturer, the WLAN, Bluetooth and NFC hardware of PY7-04685Y are identical to PY7-12644J. In addition PY7-04685Y digital circuit is identical to PY7-12644J. Therefore the following report/data of PY7-04685Y may be represented from PY7-12644J, along with the spot check verification data.

- WLAN
- Bluetooth
- NFC
- 15B

6.2. DEVICES DIFFERENCES

Difference between PY7-04685Y and PY7-12644J:

Sony Mobile Communications Inc. hereby declares that the difference between PY7-04685Y and PY7-12644J is related only to the cellular part. Therefore the WLAN/Bluetooth/NFC/15B report/data of PY7-12644J may represent for PY7-04685Y.

6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device PY7-04685Y for radiated harmonic spurious and radiated band-edge. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary and appendix A.


6.4. REFERENCE DETAIL

| Equipment Class | Reference FCC ID | Report Title/Section |
|-----------------|------------------|------------------------------------|
| NII (UNII WLAN) | PY7-12644J | 12380932-E5V1 FCC Report UNII WLAN |

7. SPOT CHECK DATA

7.1. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND

7.1.1. BANDEDGE (LOW CHANNEL)

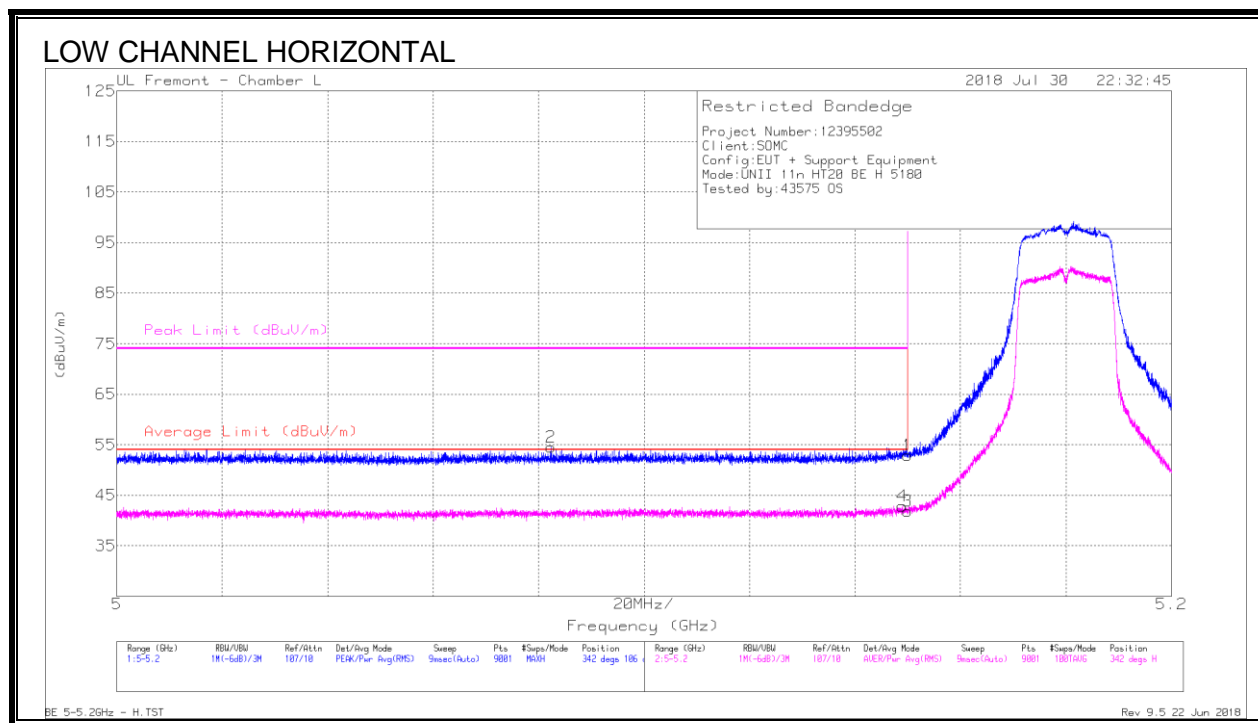


Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF EMC4294 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|-------------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 5.15 | 37.67 | Pk | 34.4 | -19.2 | 0 | 52.87 | - | - | 74 | -21.13 | 342 | 106 | H |
| 2 | * 5.082 | 39.15 | Pk | 34.4 | -19 | 0 | 54.55 | - | - | 74 | -19.45 | 342 | 106 | H |
| 3 | * 5.15 | 26.56 | RMS | 34.4 | -19.2 | .1 | 41.86 | 54 | -12.14 | - | - | 342 | 106 | H |
| 4 | * 5.149 | 27.57 | RMS | 34.4 | -19.2 | .1 | 42.87 | 54 | -11.13 | - | - | 342 | 106 | H |

* - indicates frequency in CFR47 Pt 15 Restricted Band

Pk - Peak detector

RMS - RMS detection

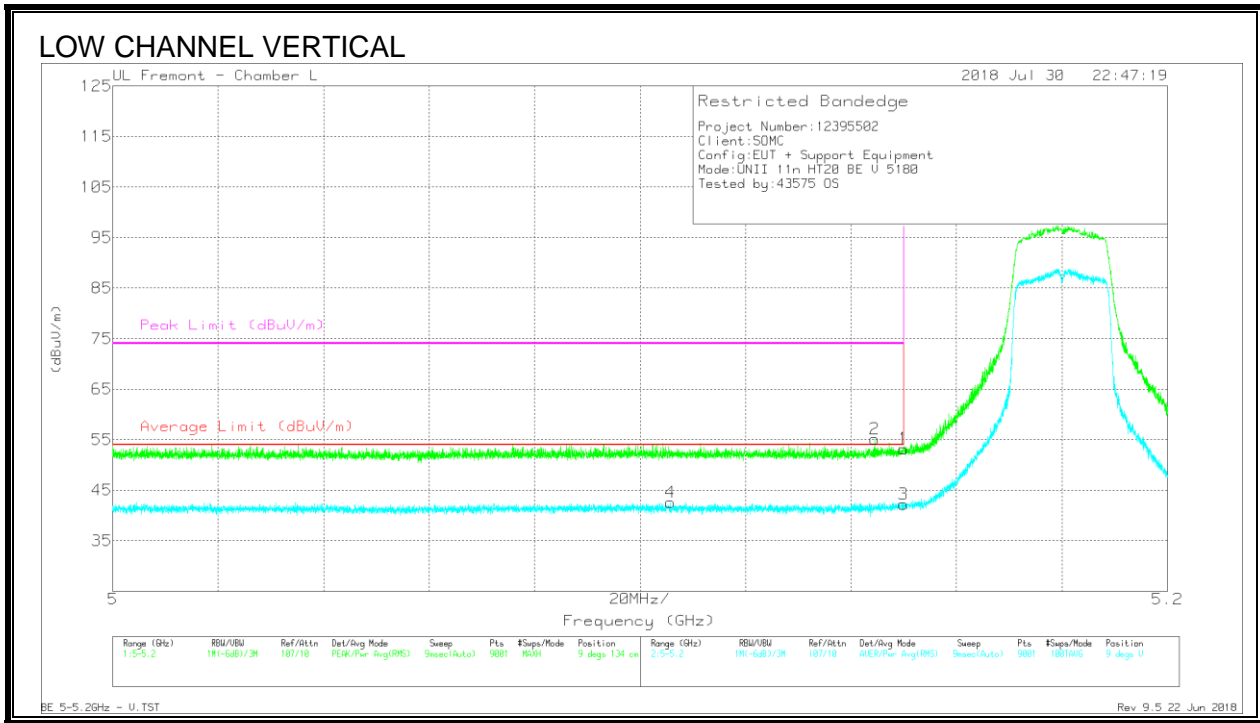

Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF EMC4294 (dB/m) | Amp/Cb/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|-------------------|-----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 5.15 | 38.01 | Pk | 34.4 | -19.2 | 0 | 53.21 | - | - | 74 | -20.79 | 9 | 134 | V |
| 2 | * 5.144 | 39.96 | Pk | 34.4 | -19.2 | 0 | 55.16 | - | - | 74 | -18.84 | 9 | 134 | V |
| 3 | * 5.15 | 26.96 | RMS | 34.4 | -19.2 | .1 | 42.26 | 54 | -11.74 | - | - | 9 | 134 | V |
| 4 | * 5.106 | 27.14 | RMS | 34.4 | -19 | .1 | 42.64 | 54 | -11.36 | - | - | 9 | 134 | V |



* - indicates frequency in CFR47 Pt 15 Restricted Band

Pk - Peak detector

RMS - RMS detection

7.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

7.2.1. HARMONICS AND SPURIOUS EMISSIONS

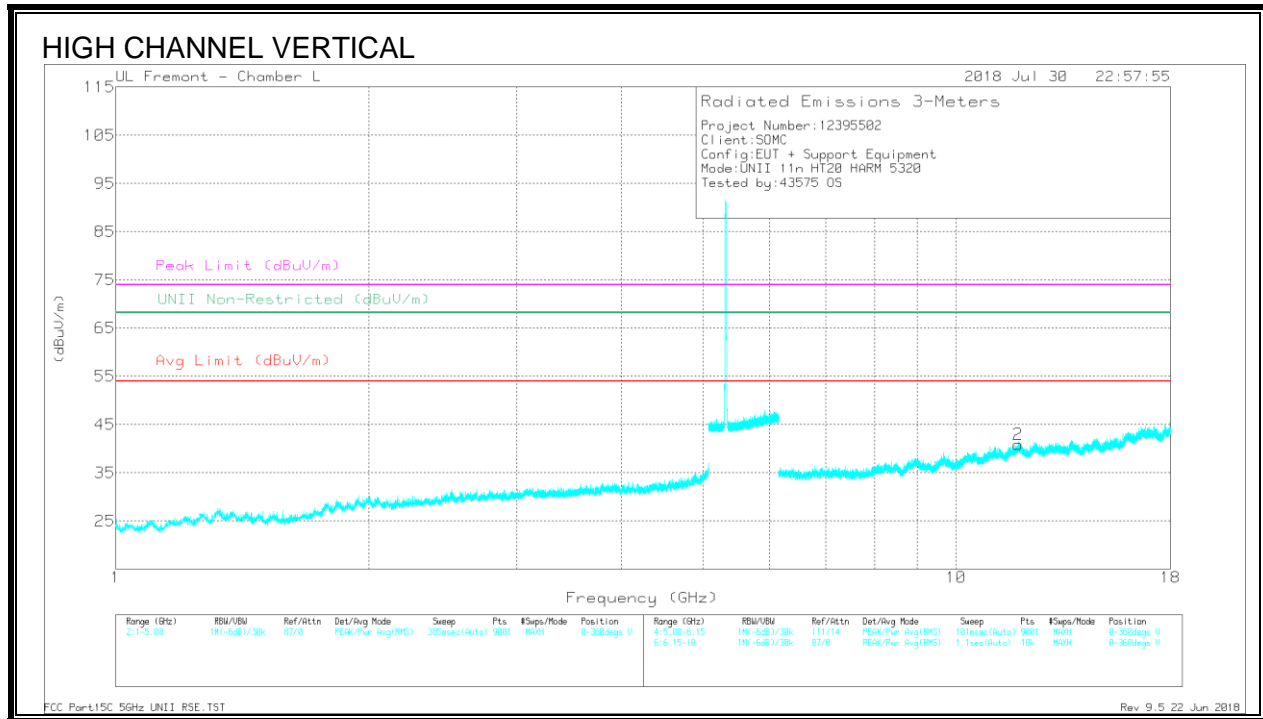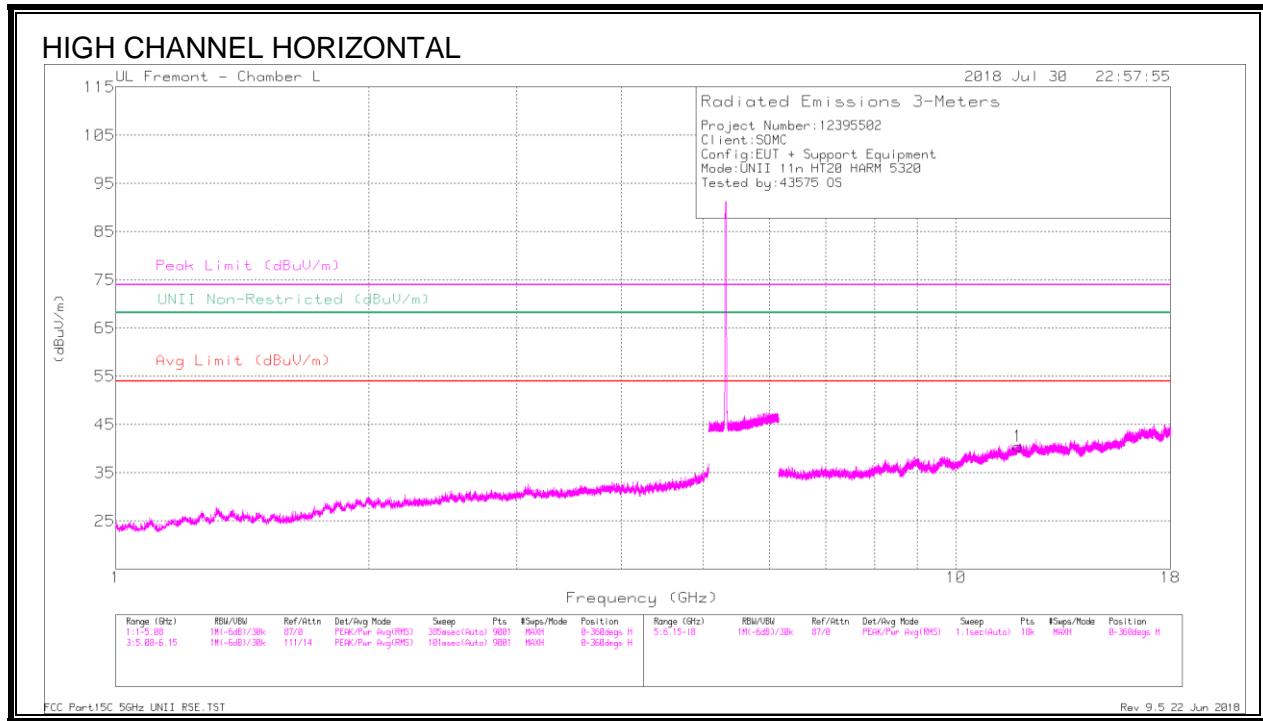

Radiated Emissions

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF EMC4294 (dB/m) | Amp/Cbl/Fitr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | UNII Non-Restricted (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|-------------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|------------------------------|----------------|----------------|-------------|----------|
| 1 | * 11.857 | 29.96 | PK-U | 38.6 | -21.2 | 0 | 47.36 | - | - | 74 | -26.64 | - | - | 152 | 118 | H |
| | * 11.853 | 20.19 | ADR | 38.6 | -21.1 | .1 | 37.79 | 54 | -16.21 | - | - | - | - | 152 | 118 | H |
| 2 | * 11.859 | 29.84 | PK-U | 38.6 | -21.2 | 0 | 47.24 | - | - | 74 | -26.76 | - | - | 40 | 146 | V |
| | * 11.857 | 20.42 | ADR | 38.6 | -21.2 | .1 | 37.92 | 54 | -16.08 | - | - | - | - | 40 | 146 | V |

* - indicates frequency in CFR47 Pt 15 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

APPENDIX A

| PY7-04685Y SPOT CHECK RESULTS | | | | | | | | | | |
|--------------------------------------|----------|-----------|---------|--------------------|------------|-------|------------|-------|------------|-------|
| Technology | Mode | Test Item | Channel | Measured Frequency | PY7-12644J | | PY7-04685Y | | Delta (dB) | |
| | | | | | Peak | Ave | Peak | Ave | Peak | Ave |
| UNII | 11n HT20 | RBE | 36 | 5149MHz | 58.25 | 48.28 | 55.16 | 42.64 | -3.09 | -5.64 |
| | 11n HT20 | RSE | 64 | 11851MHz | 52.31 | 41.17 | 47.24 | 37.92 | -5.07 | -3.25 |

END OF REPORT