



CERTIFICATION TEST REPORT

Report Number. : 12132731-E5V3

Applicant : SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

FCC ID : PY7-68553C

EUT Description : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac &
NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:

May 04, 2018

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	4/20/2018		
V2	5/2/2018	Updated Section 5.5, 6, 8.5, 8.5.7, 8.5.13, 8.5.14, 8.5.15, 8.5.16	Kiya Kedida
V3	5/4/2018	Updated Section 5.7	Kiya Kedida

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST.....	9
5.1. EUT DESCRIPTION.....	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	10
5.4. SOFTWARE AND FIRMWARE.....	10
5.5. LIST OF TEST REDUCTION AND MODES.....	10
5.6. WORST-CASE CONFIGURATION AND MODE.....	11
5.7. DESCRIPTION OF TEST SETUP.....	12
6. MEASUREMENT METHOD.....	15
7. TEST AND MEASUREMENT EQUIPMENT	16
8. ANTENNA PORT TEST RESULTS	17
8.1. ON TIME AND DUTY CYCLE.....	17
8.2. 26 dB BANDWIDTH.....	19
8.2.1. 802.11a MODE IN THE 5.2 GHz BAND.....	20
8.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	23
8.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	26
8.2.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND	28
8.2.5. 802.11a MODE IN THE 5.3 GHz BAND.....	29
8.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND	32
8.2.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND	35
8.2.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND	37
8.2.9. 802.11a MODE IN THE 5.6 GHz BAND.....	38
8.2.10. 802.11n HT20 MODE IN THE 5.6 GHz BAND	42
8.2.11. 802.11n HT40 MODE IN THE 5.6 GHz BAND	46
8.2.12. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND	50
8.2.13. 802.11a MODE IN THE 5.8 GHz BAND.....	53
8.2.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND	56
8.2.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND	59

8.2.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	61
8.3.	99% BANDWIDTH.....	62
8.3.1.	802.11a MODE IN THE 5.2 GHz BAND	63
8.3.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	66
8.3.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	69
8.3.4.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	71
8.3.5.	802.11a MODE IN THE 5.3 GHz BAND	72
8.3.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	75
8.3.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	78
8.3.8.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	80
8.3.9.	802.11a MODE IN THE 5.6 GHz BAND	81
8.3.10.	802.11n HT20 MODE IN THE 5.6 GHz BAND	85
8.3.11.	802.11n HT40 MODE IN THE 5.6 GHz BAND	89
8.3.12.	802.11ac VHT80 MODE IN THE 5.6 GHz BAND	93
8.3.13.	802.11a MODE IN THE 5.8 GHz BAND	96
8.3.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	99
8.3.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	102
8.3.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	104
8.4.	6 dB BANDWIDTH.....	105
8.4.1.	802.11a MODE IN THE 5.8 GHz BAND	106
8.4.2.	802.11n HT20 MODE IN THE 5.8 GHz BAND	110
8.4.3.	802.11n HT40 MODE IN THE 5.8 GHz BAND	114
8.4.4.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	117
8.5.	OUTPUT POWER AND PSD.....	119
8.5.1.	802.11a MODE IN THE 5.2 GHz BAND	123
8.5.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	126
8.5.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	130
8.5.4.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	133
8.5.5.	802.11a MODE IN THE 5.3 GHz BAND	135
8.5.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	142
8.5.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	149
8.5.8.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	154
8.5.9.	802.11a MODE IN THE 5.6 GHz BAND	157
8.5.10.	802.11n HT20 MODE IN THE 5.6 GHz BAND	162
8.5.11.	802.11n HT40 MODE IN THE 5.6 GHz BAND	167
8.5.12.	802.11ac VHT80 MODE IN THE 5.6 GHz BAND	172
8.5.13.	802.11a MODE IN THE 5.8 GHz BAND	176
8.5.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	181
8.5.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	186
8.5.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	190
9.	RADIATED TEST RESULTS.....	193
9.1.	TRANSMITTER ABOVE 1 GHz.....	194
9.1.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND	194
9.1.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	202
9.1.3.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	210
9.1.4.	TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.2 GHz BAND	216
9.1.5.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND	220
9.1.6.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	228
9.1.7.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND.....	236
9.1.8.	TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.3 GHz BAND	242

9.1.9.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND	246
9.1.10.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND.....	258
9.1.11.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND.....	270
9.1.12.	TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.6 GHz BAND	282
9.1.13.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND	292
9.1.14.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND.....	302
9.1.15.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND.....	312
9.1.16.	TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND	320
9.2.	<i>WORST-CASE BELOW 30 MHz</i>	326
9.3.	<i>Worst Case Below 1 GHz</i>	327
9.4.	<i>Worst Case 18-26 GHz</i>	329
9.5.	<i>Worst Case 26-40 GHz</i>	331
10.	AC POWER LINE CONDUCTED EMISSIONS	333
10.1.1.	AC Power Line Norm	334
11.	SETUP PHOTOS	336

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

SERIAL NUMBER: CB512FHBVC& CB512FHBWD (CONDUCTED)
CB512FH69H& CB512FH68P (RADIATED)

DATE TESTED: March 27 - April 20, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E (EXCEPT DFS)	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:

Reviewed By:



Dan Corona
CONSUMER TECHNOLOGY DIVISION
Operations Leader
UL Verification Services Inc.

Kiya Kedida
CONSUMER TECHNOLOGY DIVISION
Project Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC KDB 662911 D01 v02r01, FCC KDB 789033 D02 v02r01, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A (ISED:2324B-1)	<input type="checkbox"/> Chamber D (ISED:22541-1)
<input checked="" type="checkbox"/> Chamber B (ISED:2324B-2)	<input type="checkbox"/> Chamber E (ISED:22541-2)
<input checked="" type="checkbox"/> Chamber C (ISED:2324B-3)	<input type="checkbox"/> Chamber F (ISED:22541-3)
	<input type="checkbox"/> Chamber G (ISED:22541-4)
	<input type="checkbox"/> Chamber H (ISED:22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a CDD 2TX	13.04	20.14
	802.11n HT20 CDD 2TX	14.05	25.41
5190 - 5230	802.11n HT40 CDD 2TX	13.76	23.77
5210	802.11ac VHT80 CDD 2TX	12.46	17.62

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a CDD 2TX	13.01	20.00
	802.11n HT20 CDD 2TX	13.96	24.89
5270 - 5310	802.11n HT40 CDD 2TX	13.75	23.71
5290	802.11ac VHT80 CDD 2TX	12.02	15.92

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5720	802.11a CDD 2TX	12.33	17.10
5500 - 5720	802.11n HT20 CDD 2TX	11.91	15.52
5510 - 5710	802.11n HT40 CDD 2TX	12.32	17.06
5530-5690	802.11ac VHT80 CDD 2TX	12.18	16.52

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a CDD 2TX	13.29	21.33
5745 - 5825	802.11n HT20 CDD 2TX	13.93	24.72
5755 - 5795	802.11n HT40 CDD 2TX	12.90	19.50
5775	802.11ac VHT80 CDD 2TX	13.10	20.42

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a loop antenna for chain 0 and a monopole antenna for chain 1, with the maximum gains:

Frequency (GHz)	Peak Antenna Gain (dBi)	
	Main (Chain 0)	Sub (Chain 1)
5180-5320	-3.6	-4.9
5500-5700	-4.7	-6.1
5725-5850	-3.4	-5.8

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was s_atp_XXX_0_00403_A_9.
 The test utility software used during testing was Tera Term Ver 4.79.

5.5. LIST OF TEST REDUCTION AND MODES

Antenna port & Radiated Testing	
Mode	Covered by
802.11a Legacy	802.11a 2TX CDD
802.11HT20 2TX STBC	802.11n HT20 2TX CDD
802.11ac VHT20 2TX STBC	802.11n HT20 2TX CDD
802.11n HT40 2TX STBC	802.11n HT40 2TX CDD
802.11ac VHT40 2TX STBC	802.11n HT40 2TX CDD
802.11ac VHT80 2TX STBC	802.11ac VHT80 2TX CDD

5.6. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 30MHz, 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, & Z, and it was determined that Y-Axis with AC/DC Adapter was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y-Axis with AC/DC Adapter orientation.

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: 13 Mbps (MCS8)
802.11n HT40 mode: 27 Mbps (MCS8)
802.11ac VHT80 mode: 58.5 Mbps (MCS0)

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

The simultaneous mode (SISO 2.4GHz Chain 0 and 5GHz chain 1) was checked and stand-alone (MIMO) 2.4 GHz / 5GHz remain worst case.

NOTE: SISO mode is covered by MIMO mode due to same maximum tune-up limit (power).

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	20B7S0A200	PC015REW	NA
AC Adapter	SONY	UCH12	4016W40310044	NA
DC Power Supply	Ametek	XT 15-4	T463	N/A

I/O CABLES (CONDUCTED TEST)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	RF	Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	DC	1	DC	Shielded	0.3	N/A

I/O CABLES (RADIATED AND CONDUCTED EMISSIONS)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Shielded	3	N/A


TEST SETUP

CONDCUTED TEST SETUP DIAGRAM

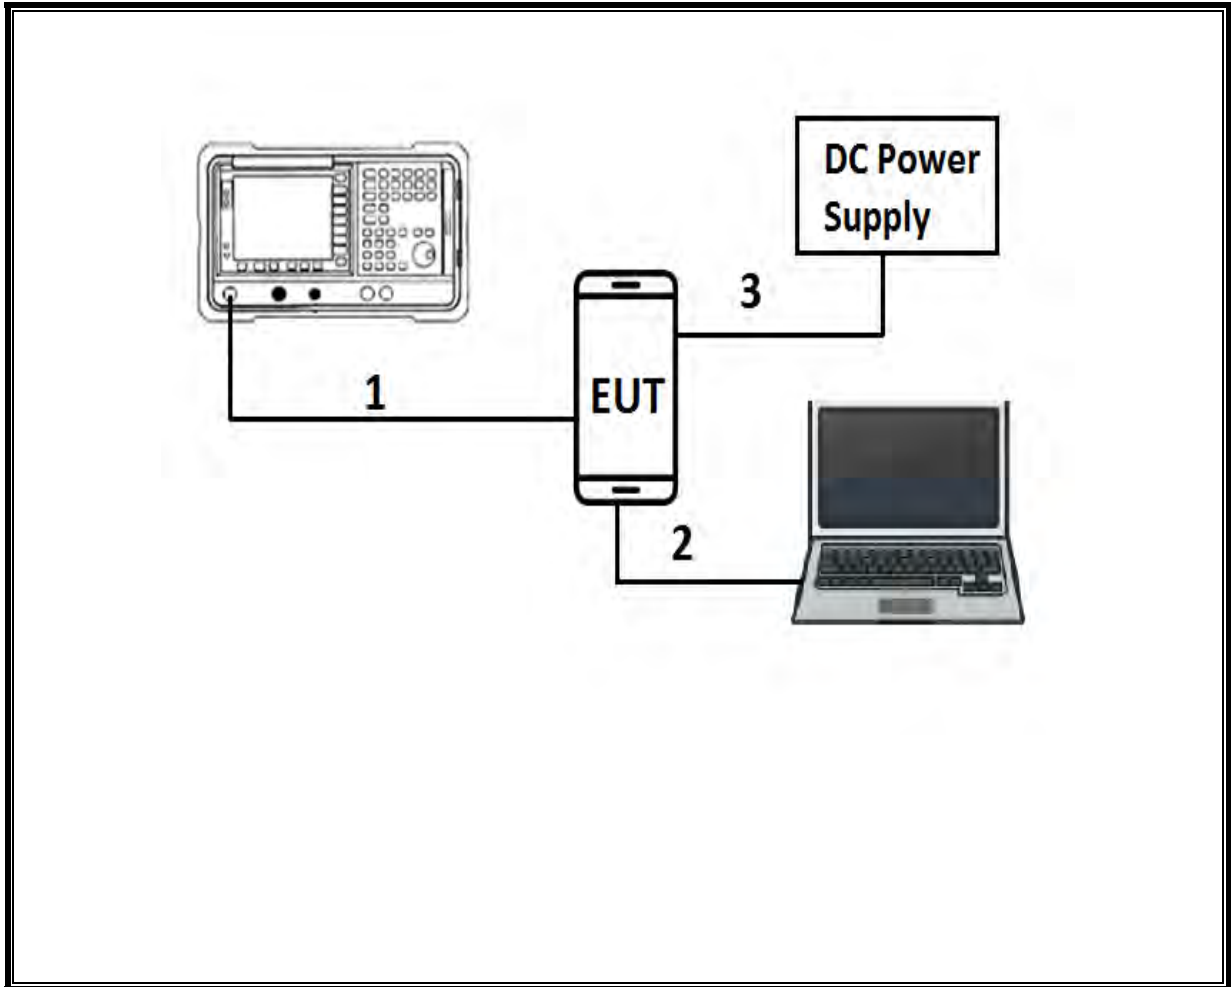

TEST SETUP

RADIATED AND AC LINE CONDUCTED EMISSIONS SETUP DIAGRAM

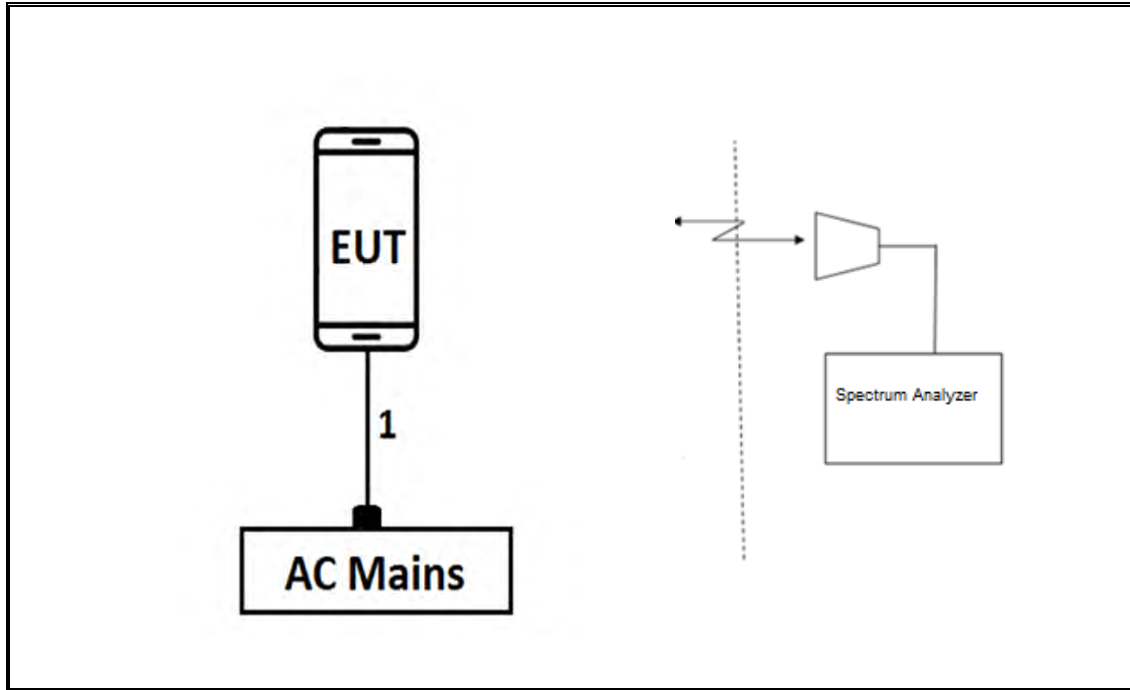

6. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 789033 D02 v02r01, Section II.B.

6 dB Emission BW: KDB 789033 D02 v02r01, Section II.C.2.

26 dB Emission BW: KDB 789033 D02 v02r01, Section II.C.1.

99% Occupied BW: KDB 789033 D02 v02r01, Section II.D.

Conducted Output Power: KDB 789033 D02 v02r01, Section II.E.3.b (Method PM-G).

Power Spectral Density: KDB 789033 D02 v02r01, Section II.F.

Unwanted emissions in restricted bands: KDB 789033 D02 v02r01, Sections II.G.3, II.G.4, II.G.5, and II.G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v02r01, Sections II.G.3, II.G.4, and II.G.5.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	ID Num	Cal Due
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	493	06/23/18
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	1165	11/25/18
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T931	06/21/18
Amplifier, 10KHz to 1GHz, 32dB	Keysight	8447D	15	08/17/18
RF Preamplifier, 1 - 26GHz	Agilent	8449B	404	07/23/18
Amplifier- 26.5-40GHz	Mlteq	NSP 4000 SP2	T88	04/29/18
Antenna, Broadband Hybrid 30MHz to 2000MHz	Sunol Science	JB1	243	11/02/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	120	06/26/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	862	06/09/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	06/09/18
Antenna, Horn 18-26.5GHz	ARA	MWH-1826	T89	01/04/19
Antenna, Horn 26.5 - 40GHz	ARA	MWH-2640	T90	08/25/18
Antenna, Active Loop 9kHz-30MHz	Com-Power Corp.	AL-130R	T1866	10/10/18
Power Meter, P-series single channel	Agilent (Keysight) Technologies	N1911A	T1268	06/15/18
Power Sensor, P – series, 50MHz to 18GHz, Wideband	Agilent (Keysight) Technologies	N1921A	T1223	03/29/19
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1454	01/08/19
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1113	12/21/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1450	02/05/19
Test Receiver, EMI, 10Hz-7GHz	Rhode&Schwarz	ESR	T1436	01/06/19
LISN	FISCHER	FCC-LISN-50/250-25-2-01	T1310	01/17/19

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, Dec 1, 2016
Antenna Port Software	UL	UL RF	Ver 7.9, Jan 25, 2018

NOTE: *testing is completed before equipment calibration expiration date.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a CDD	2.025	2.062	0.982	98.21%	0.00	0.010
802.11n HT20 CDD	2.505	2.562	0.978	97.78%	0.10	0.399
802.11n HT40 CDD	1.227	1.320	0.930	92.95%	0.32	0.815
802.11ac VHT80 CDD	0.592	0.683	0.867	86.69%	0.62	1.689

DUTY CYCLE PLOTS



8.2. 26 dB BANDWIDTH

LIMITS


None; for reporting purposes only.

RESULTS


8.2.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5180	21.65	20.75
Mid	5200	22.60	21.70
High	5240	21.30	21.05



LOW CHANNEL

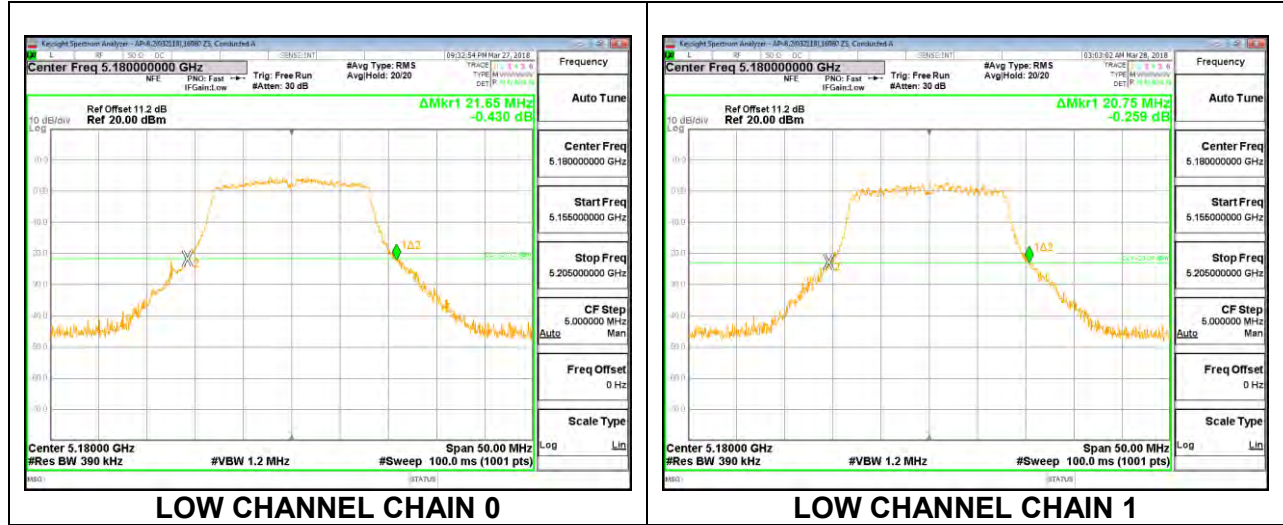

MID CHANNEL

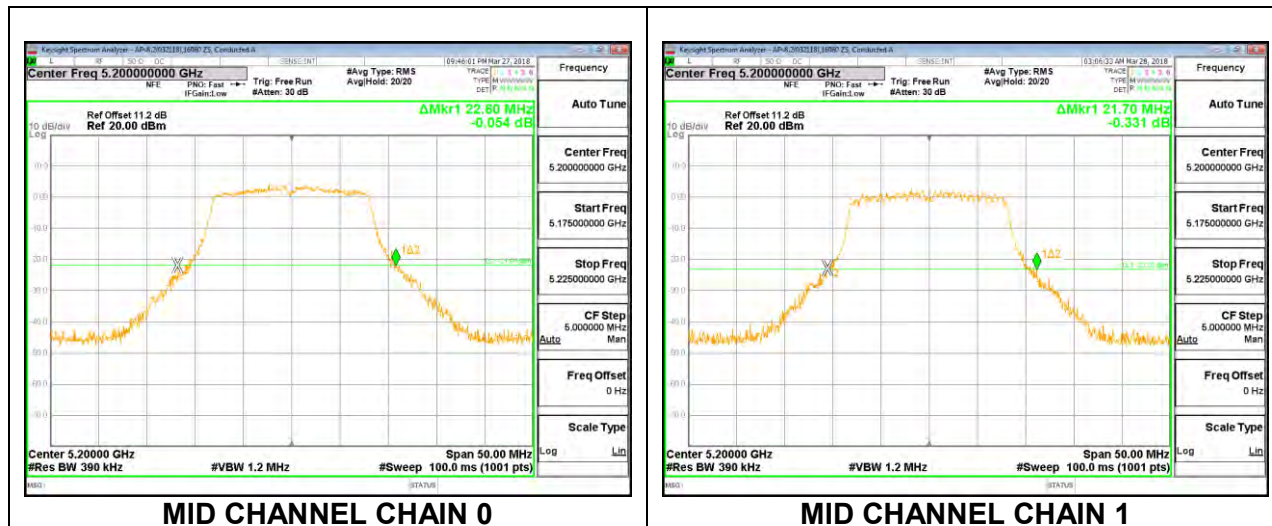


HIGH CHANNEL

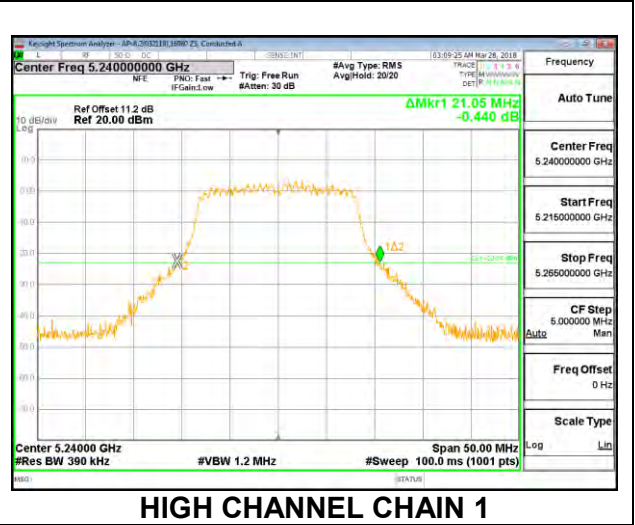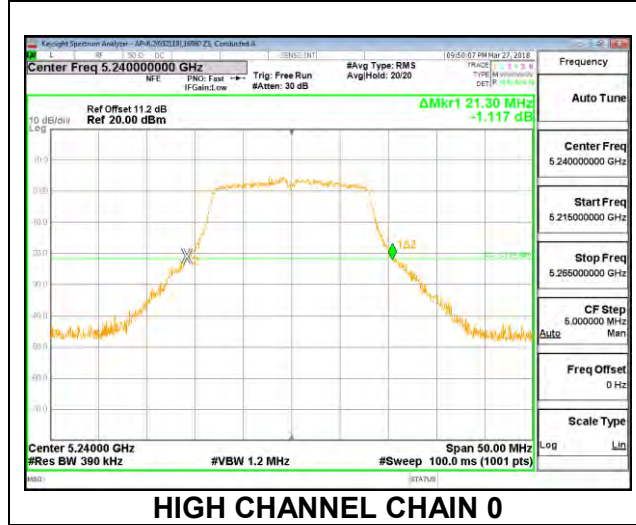



8.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5180	22.40	22.15
Mid	5200	22.70	22.15
High	5240	22.70	22.15



LOW CHANNEL

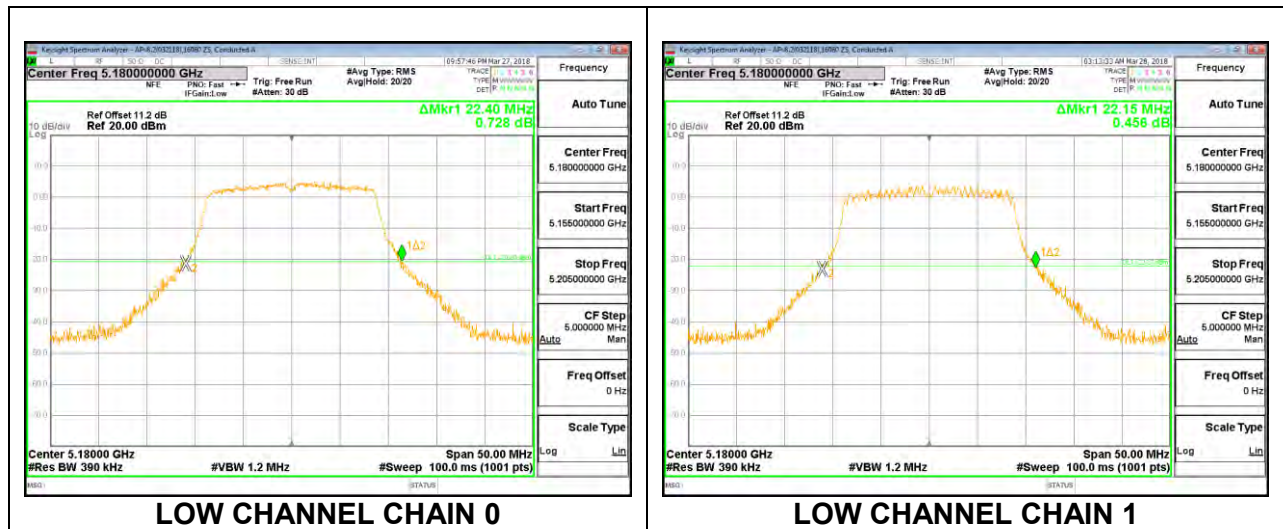

MID CHANNEL

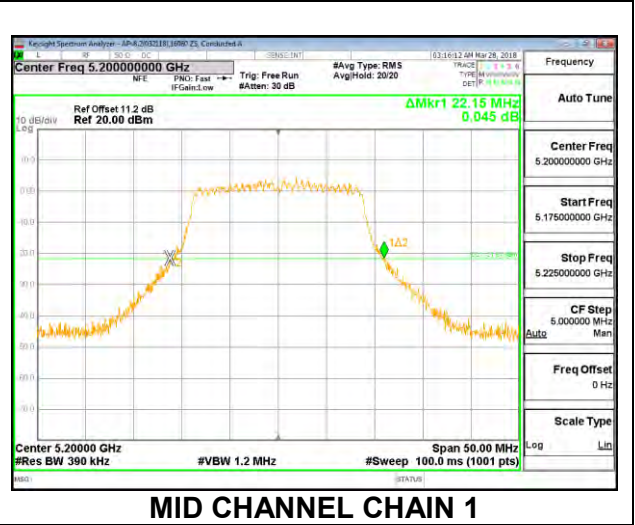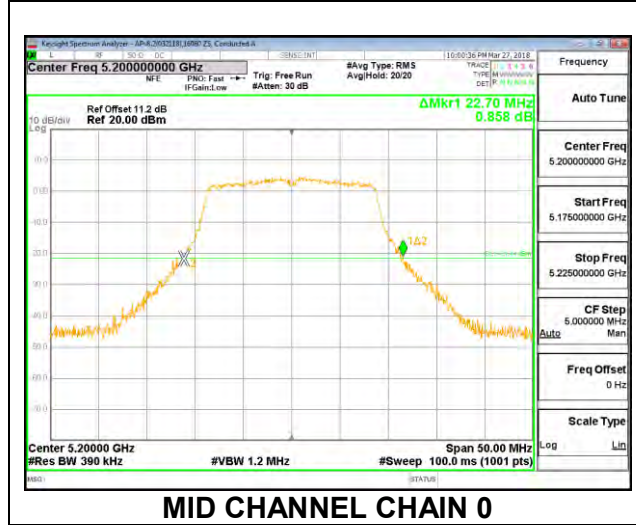


HIGH CHANNEL

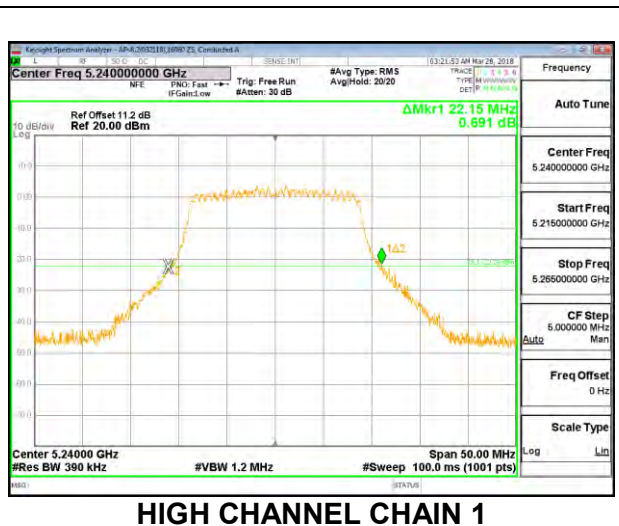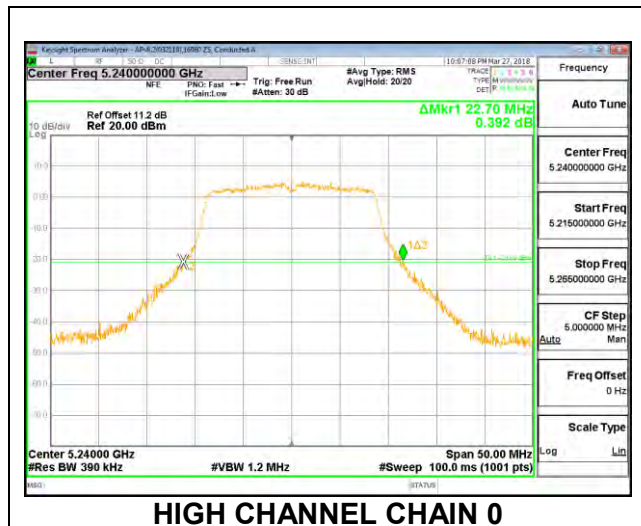


8.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5190	41.40	41.00
High	5230	41.70	40.90

LOW CHANNEL

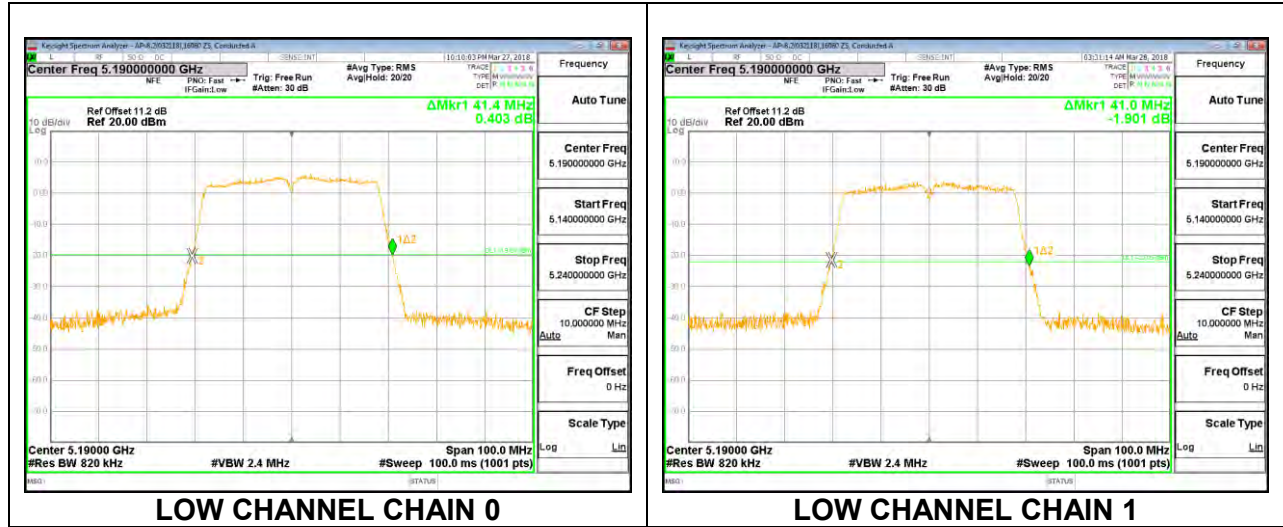


HIGH CHANNEL

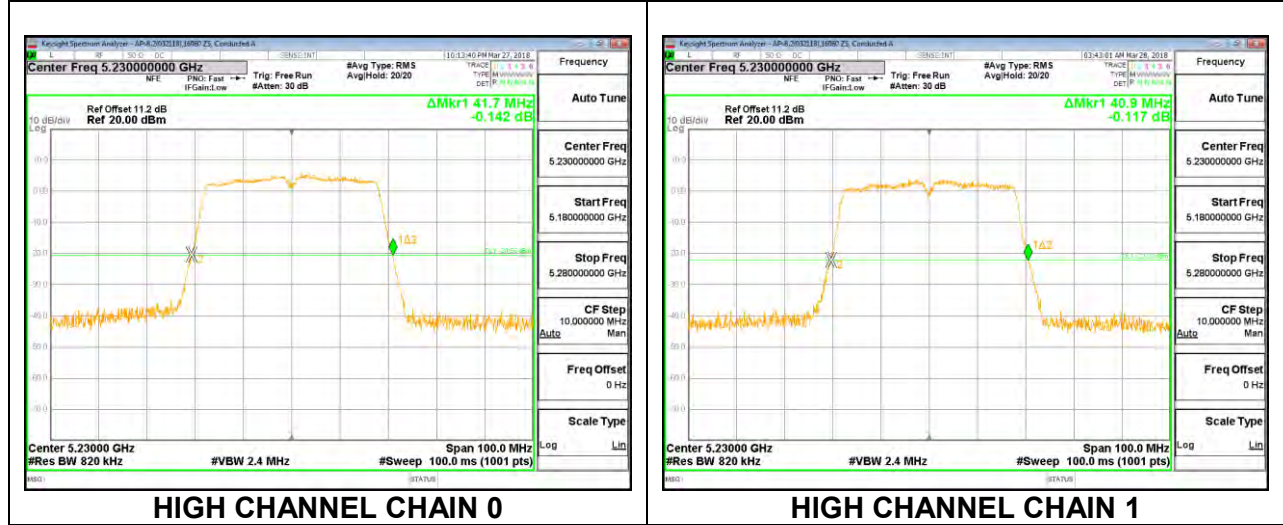

8.2.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Mid	5210	83.60	83.40


MID CHANNEL

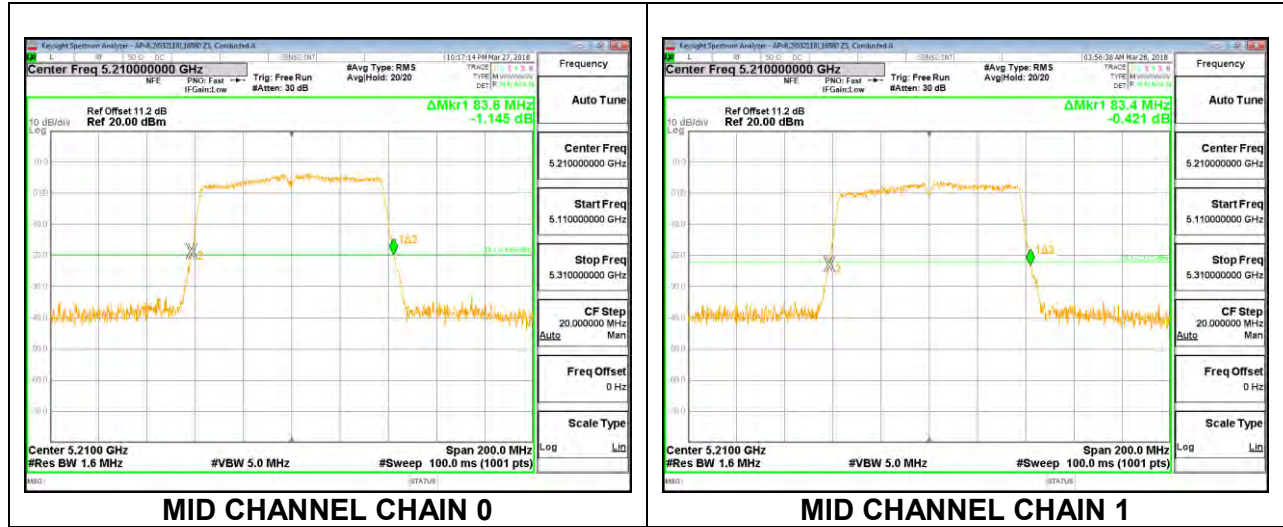



8.2.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5260	21.20	21.00
Mid	5300	21.95	21.50
High	5320	21.45	20.90



LOW CHANNEL

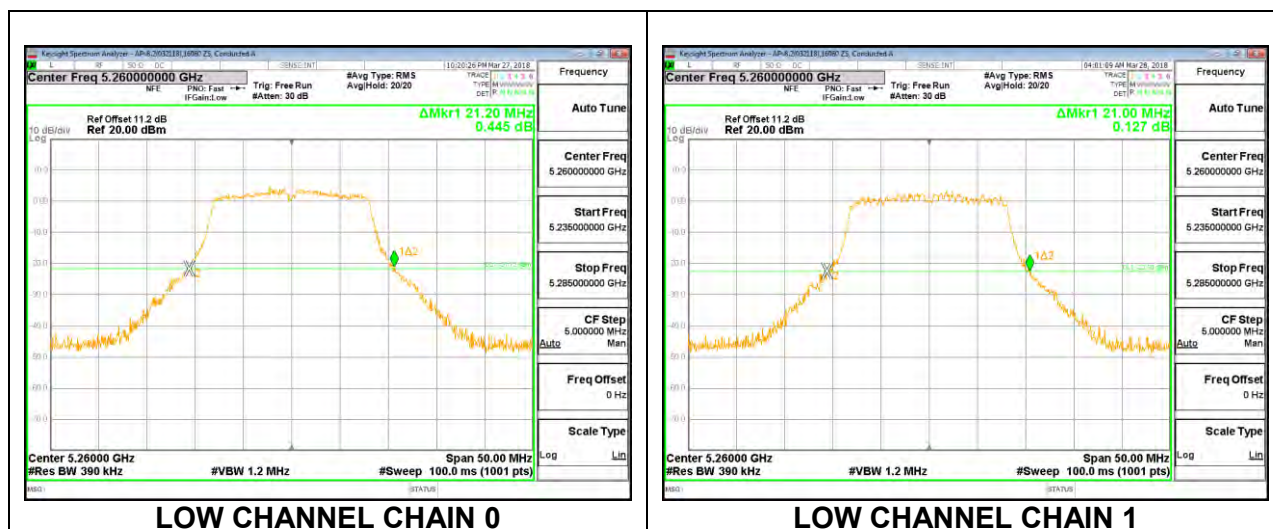

MID CHANNEL

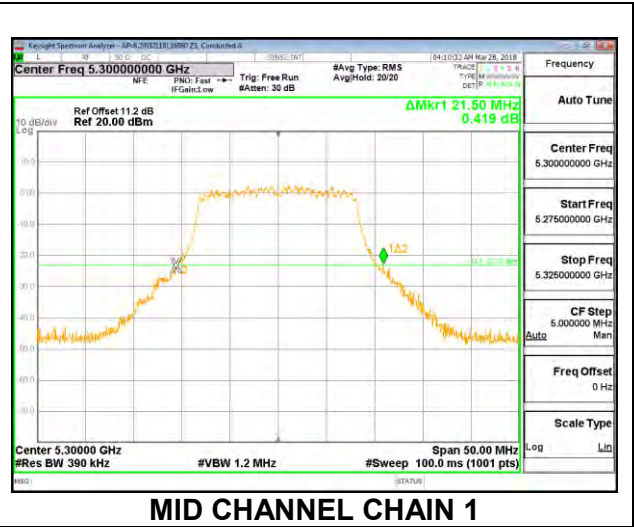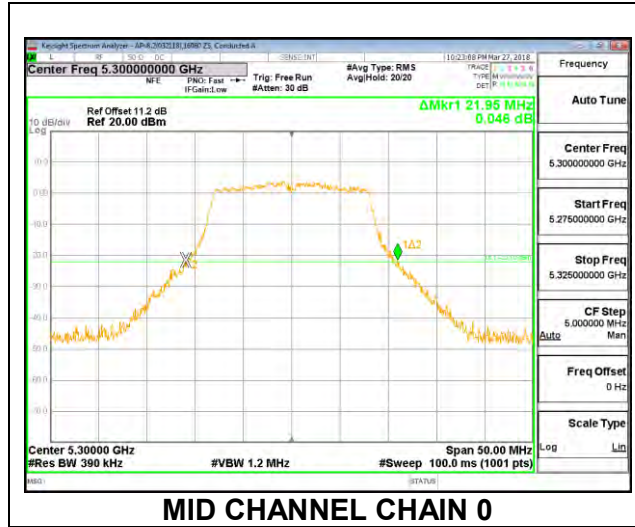


HIGH CHANNEL

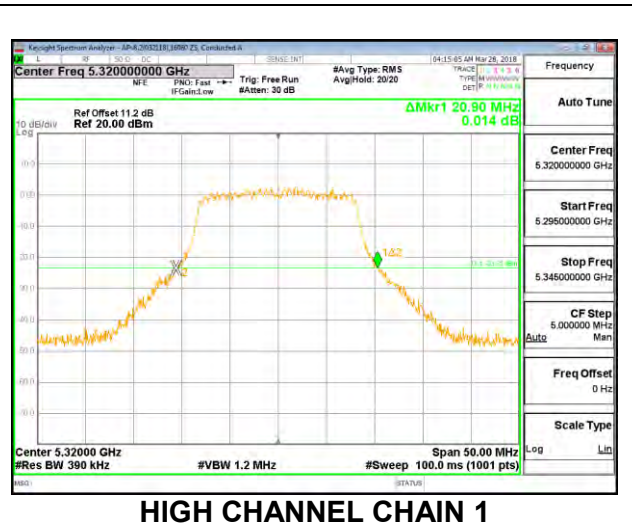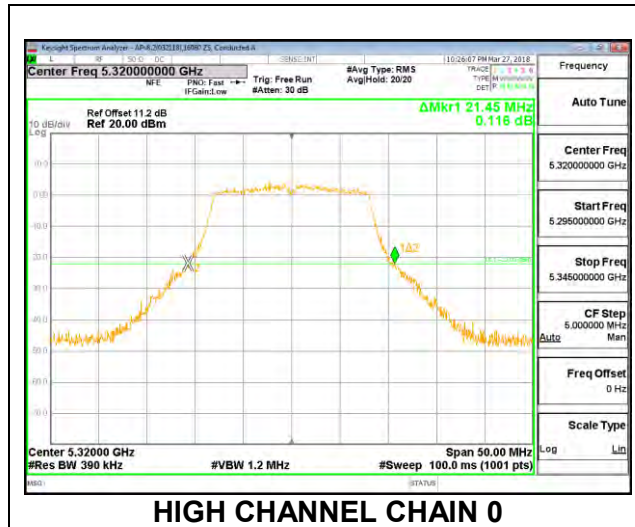


8.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5260	22.40	22.15
Mid	5300	22.65	22.30
High	5320	22.85	22.35


LOW CHANNEL

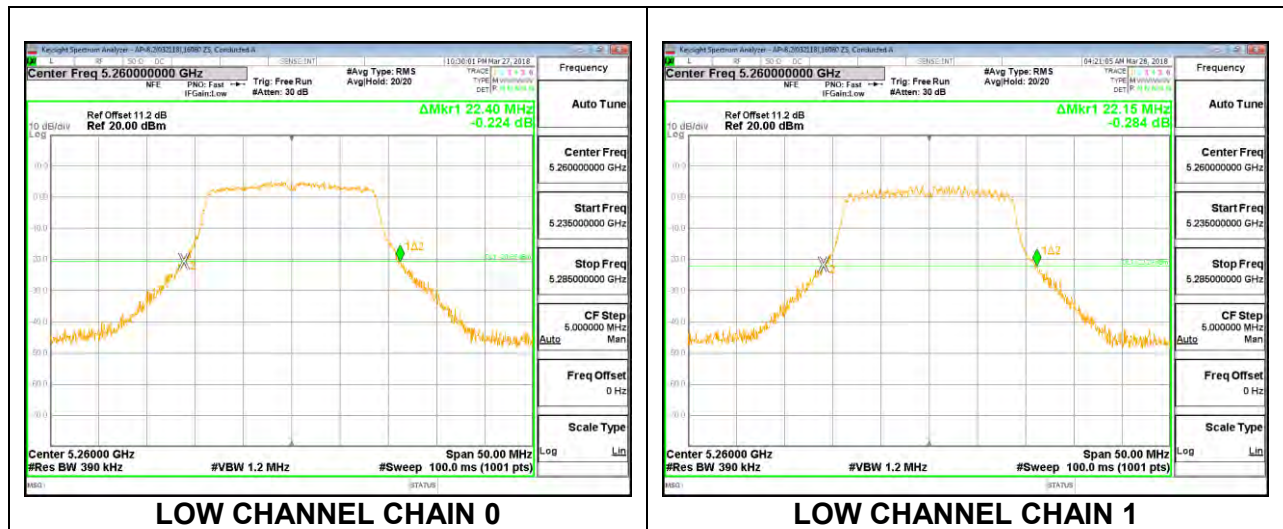

MID CHANNEL

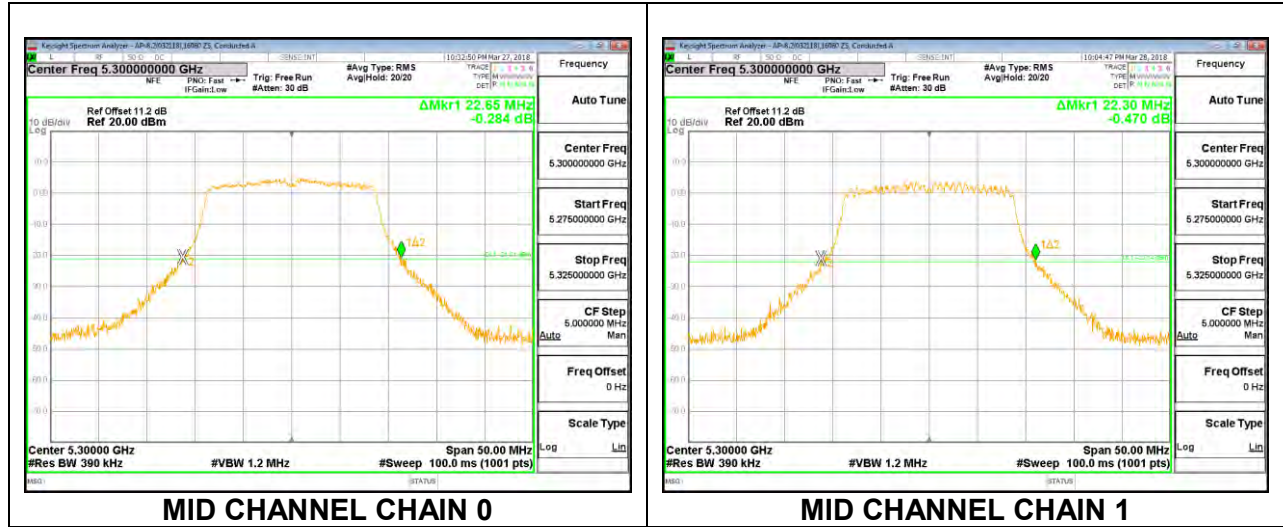


HIGH CHANNEL

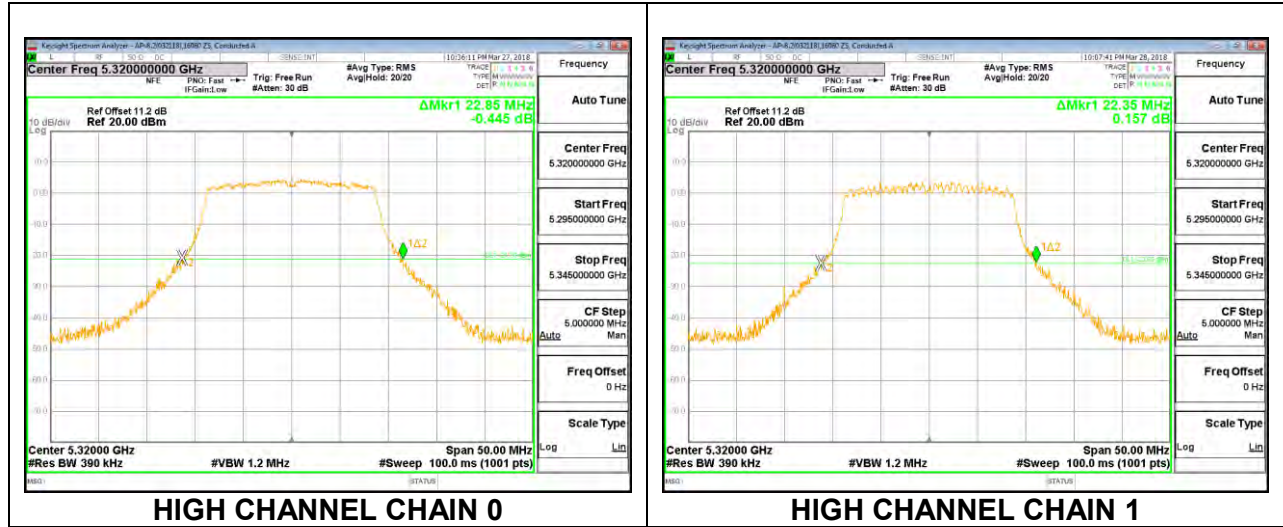



8.2.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5270	41.40	41.00
High	5310	41.70	41.00

LOW CHANNEL

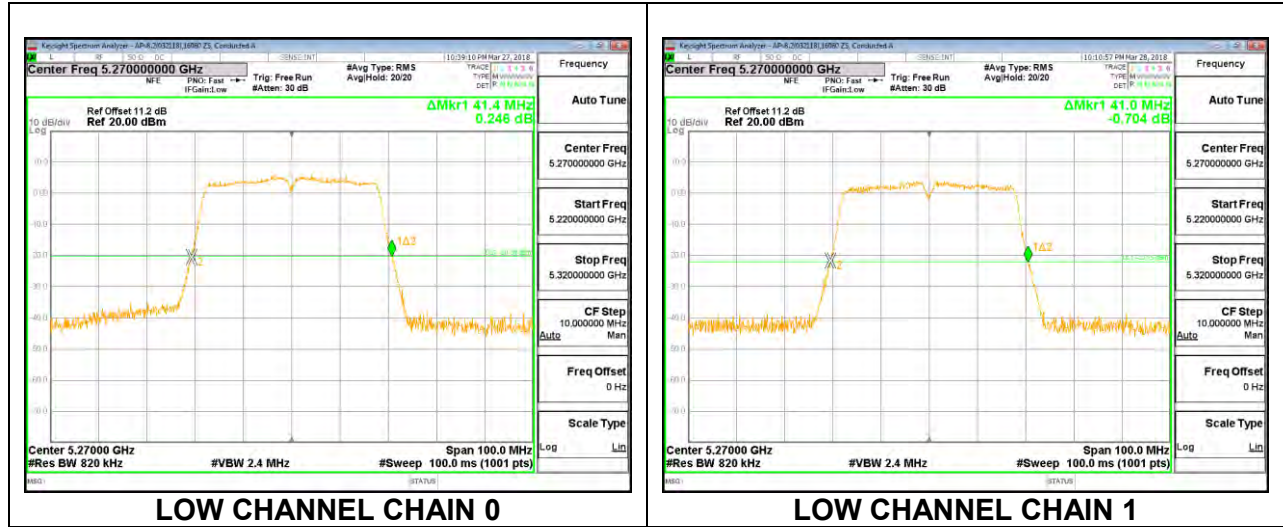


HIGH CHANNEL

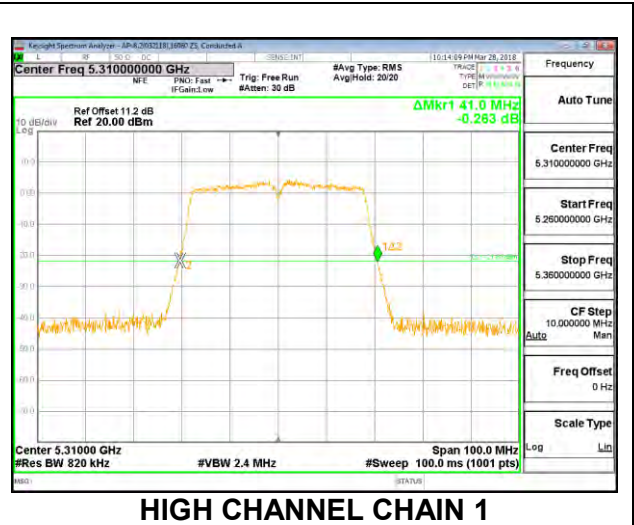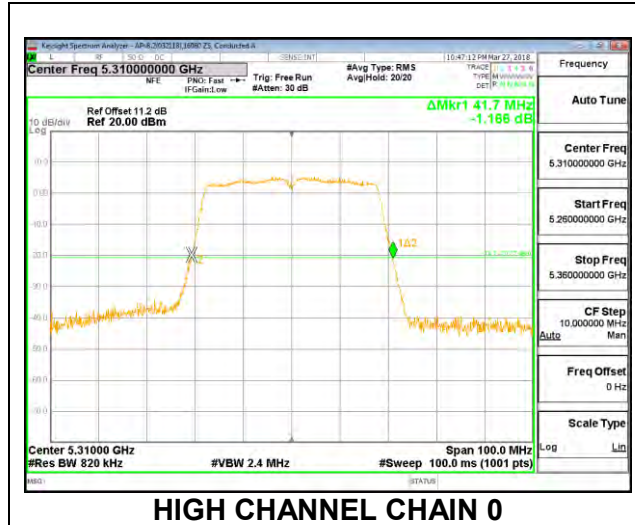

8.2.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Mid	5290	83.80	83.60


MID CHANNEL

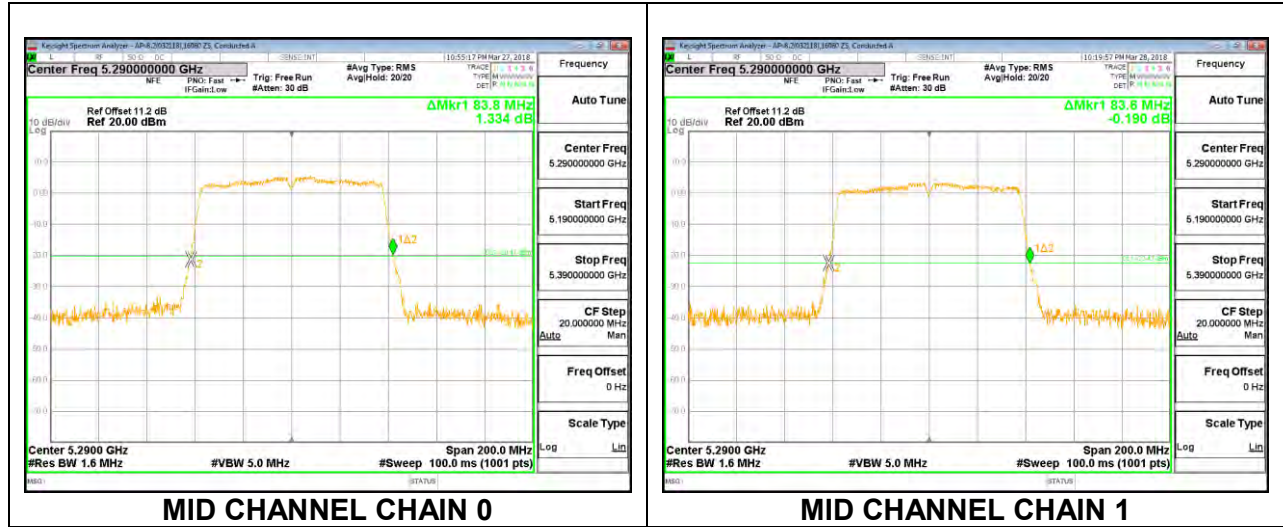



8.2.9. 802.11a MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5500	21.20	21.05
Mid	5580	21.35	20.95
High	5700	22.05	21.65
144	5720	21.95	22.45



LOW CHANNEL

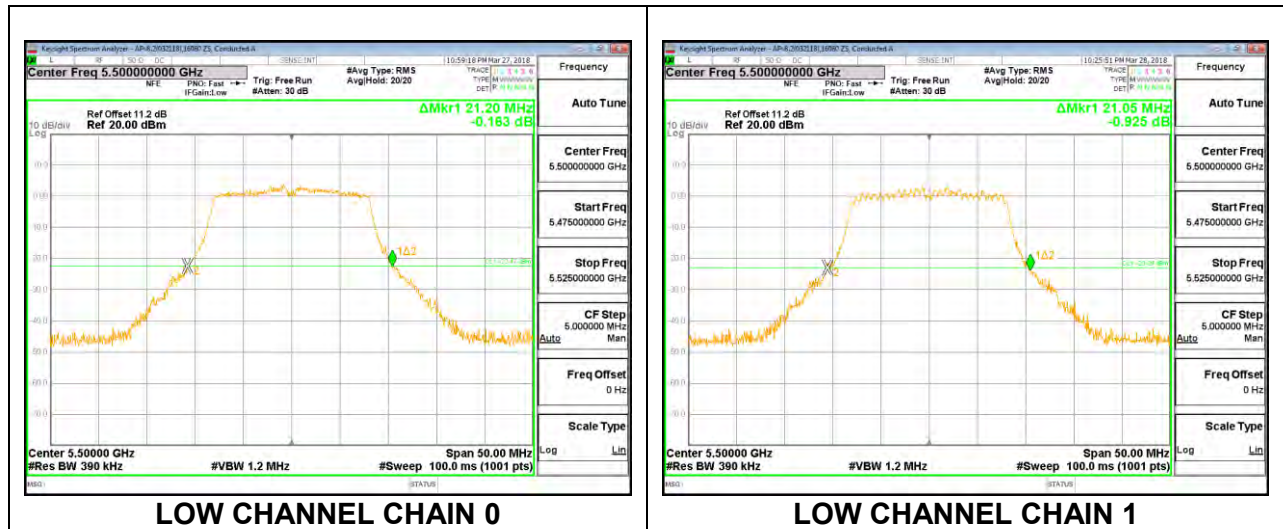



MID CHANNEL

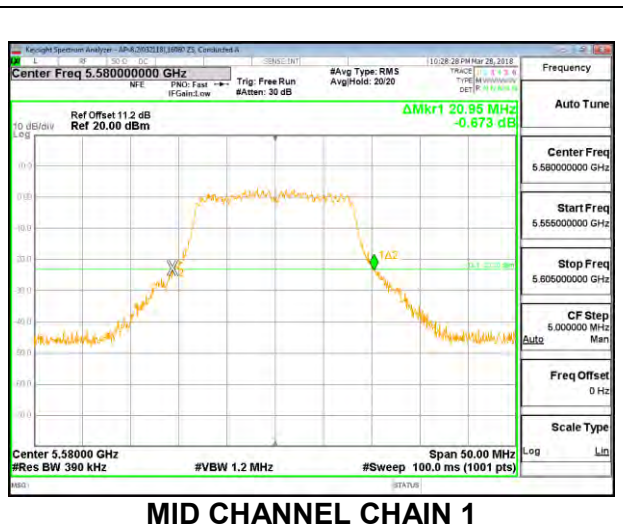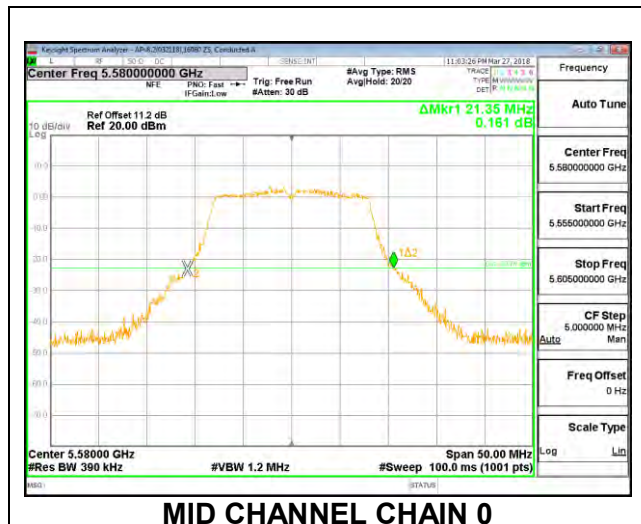

HIGH CHANNEL

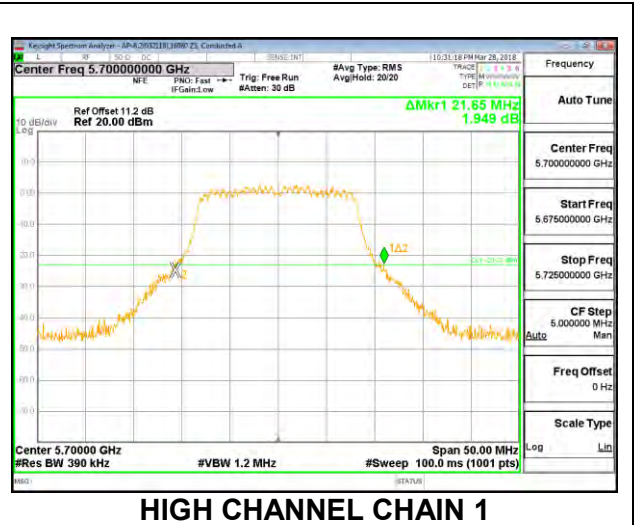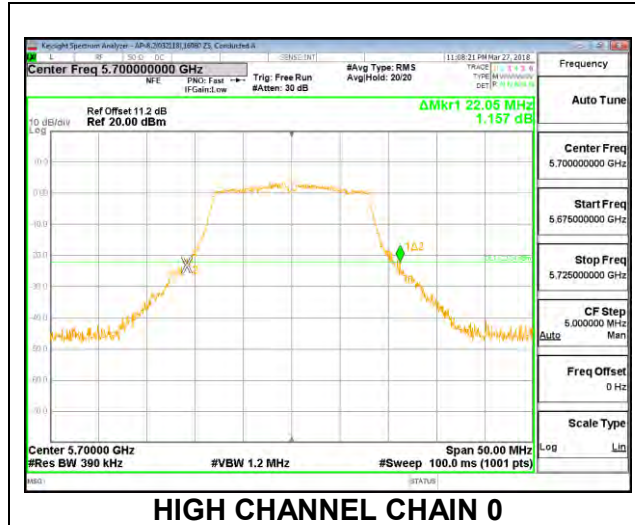


CHANNEL 144

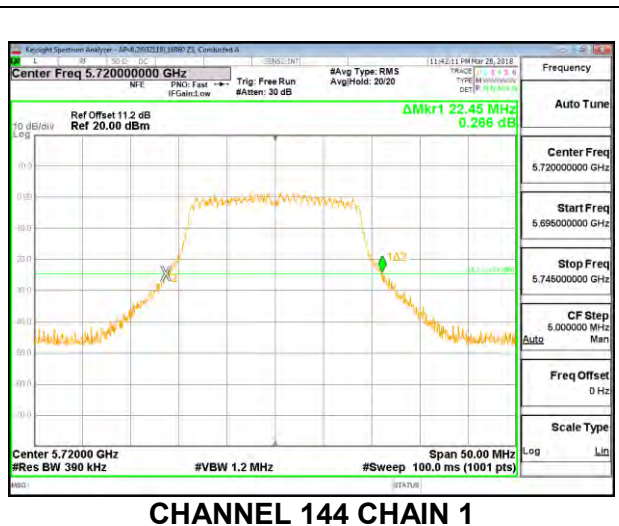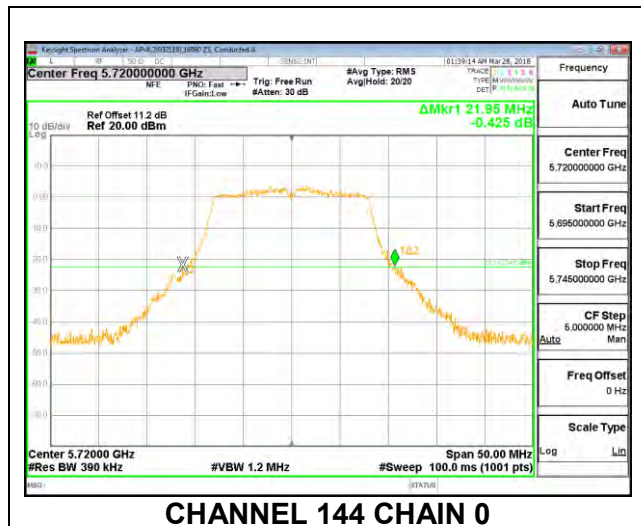



8.2.10. 802.11n HT20 MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5500	22.80	21.95
Mid	5580	22.90	22.45
High	5700	22.50	22.35
144	5720	22.55	22.05



LOW CHANNEL

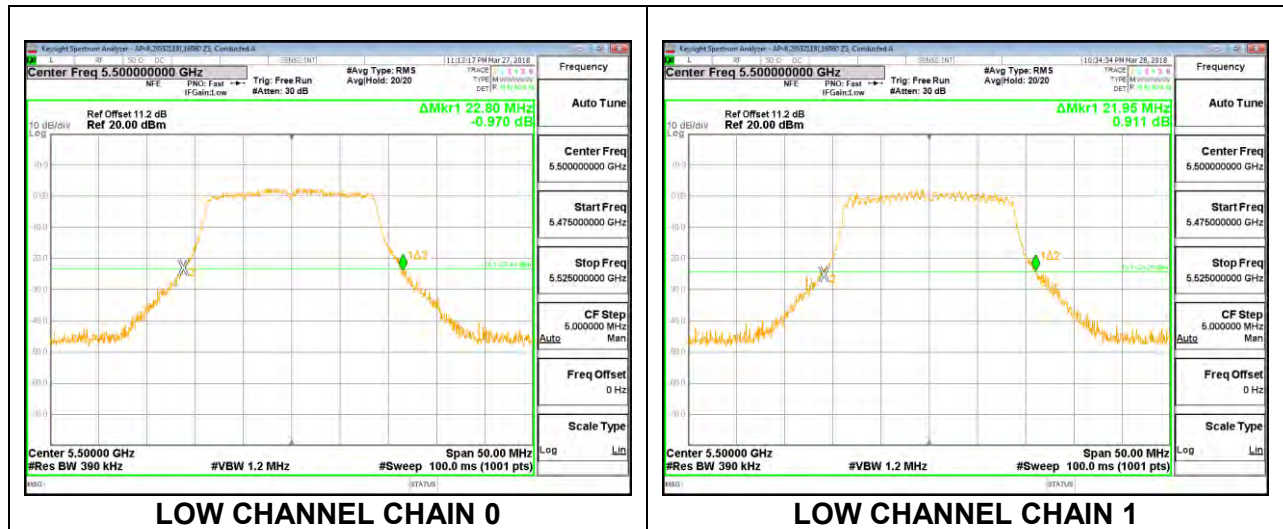



MID CHANNEL

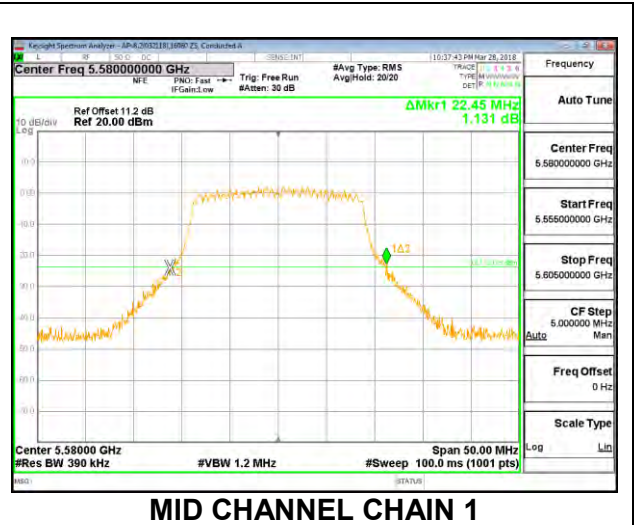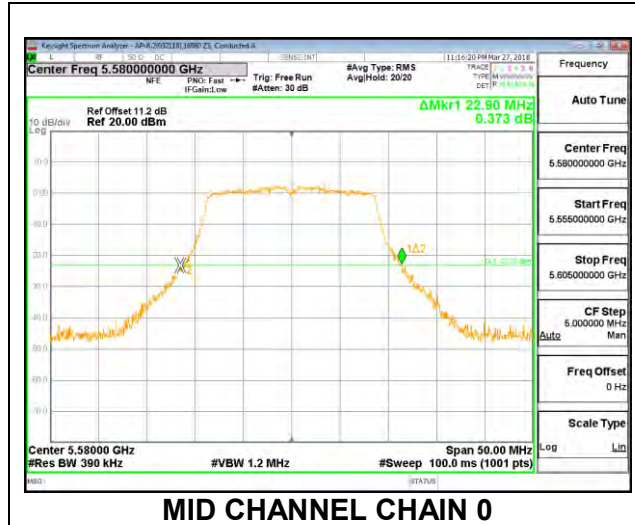

HIGH CHANNEL

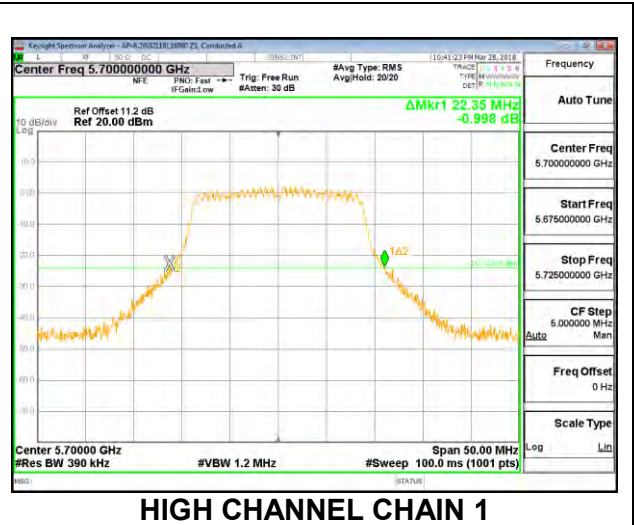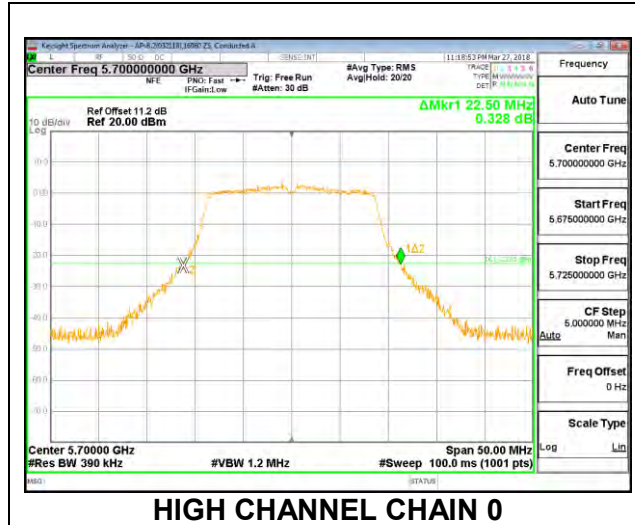


CHANNEL 144

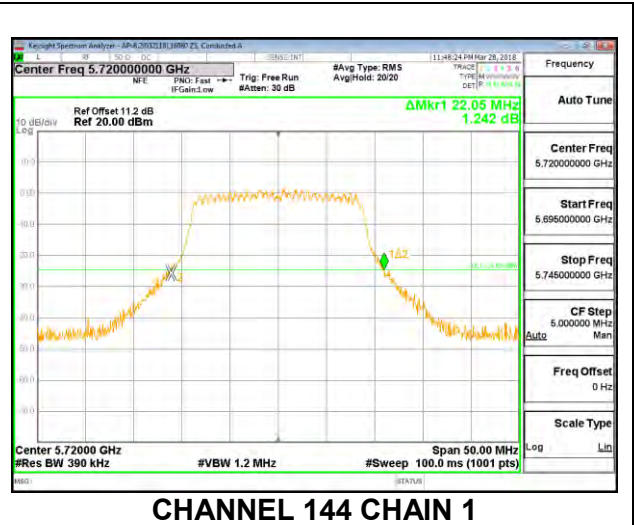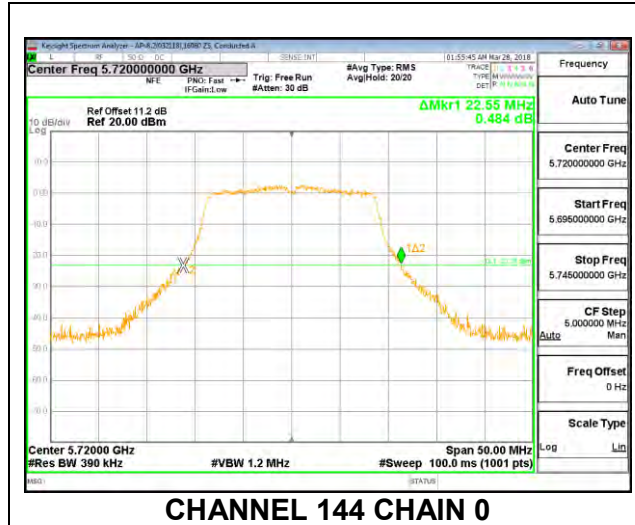



8.2.11. 802.11n HT40 MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5510	41.50	41.00
Mid	5550	41.50	41.30
High	5670	41.70	40.80
142	5710	41.50	41.00


LOW CHANNEL

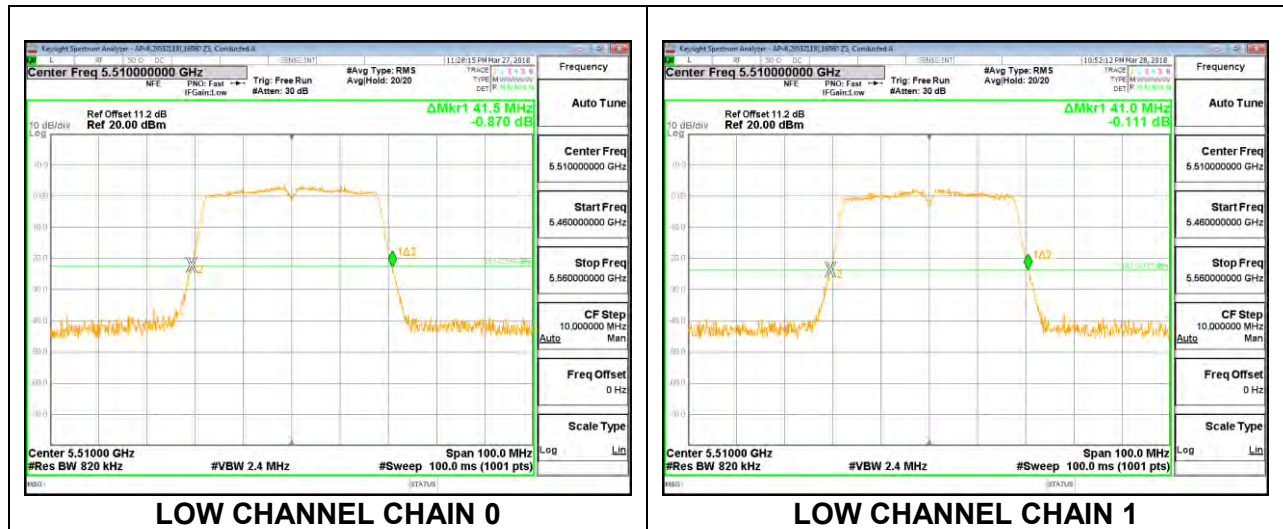



MID CHANNEL

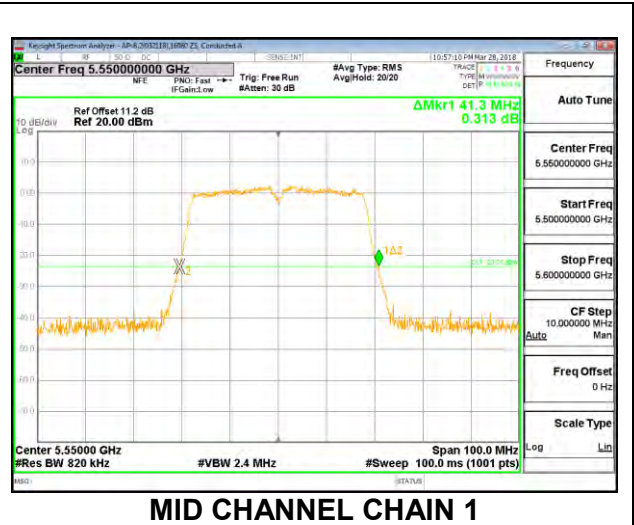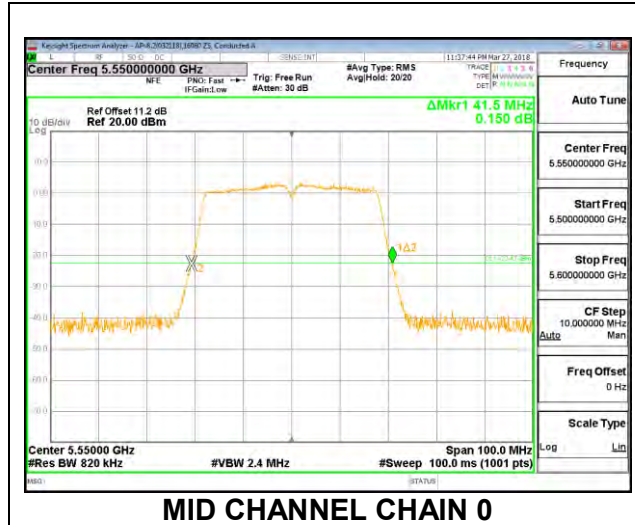

HIGH CHANNEL

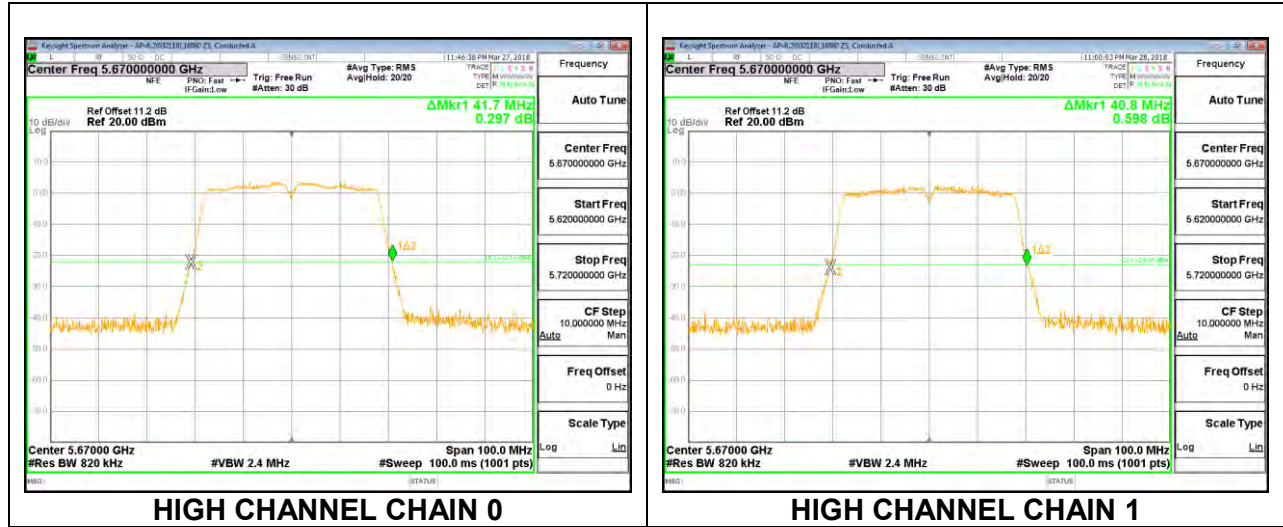


CHANNEL 142

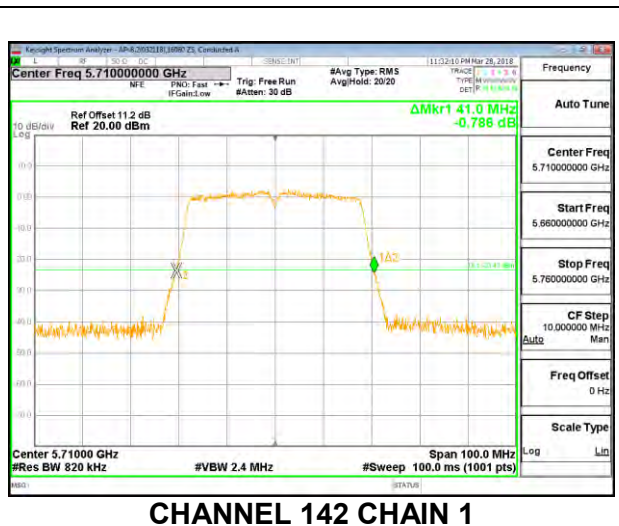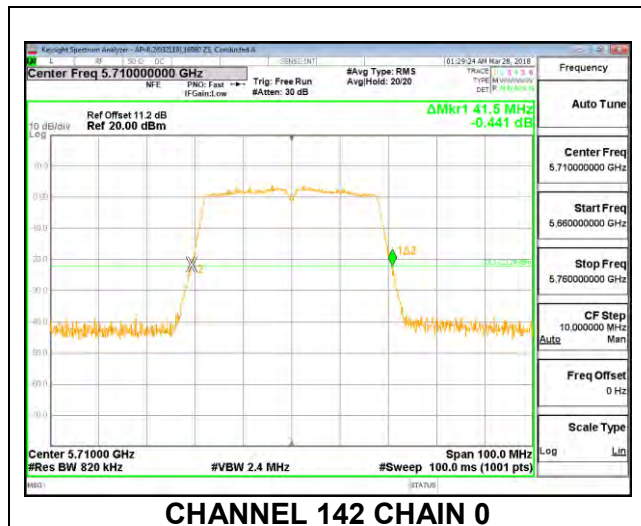


8.2.12. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5530	83.80	83.20
High	5610	84.40	83.40
138	5690	84.20	83.40



LOW CHANNEL

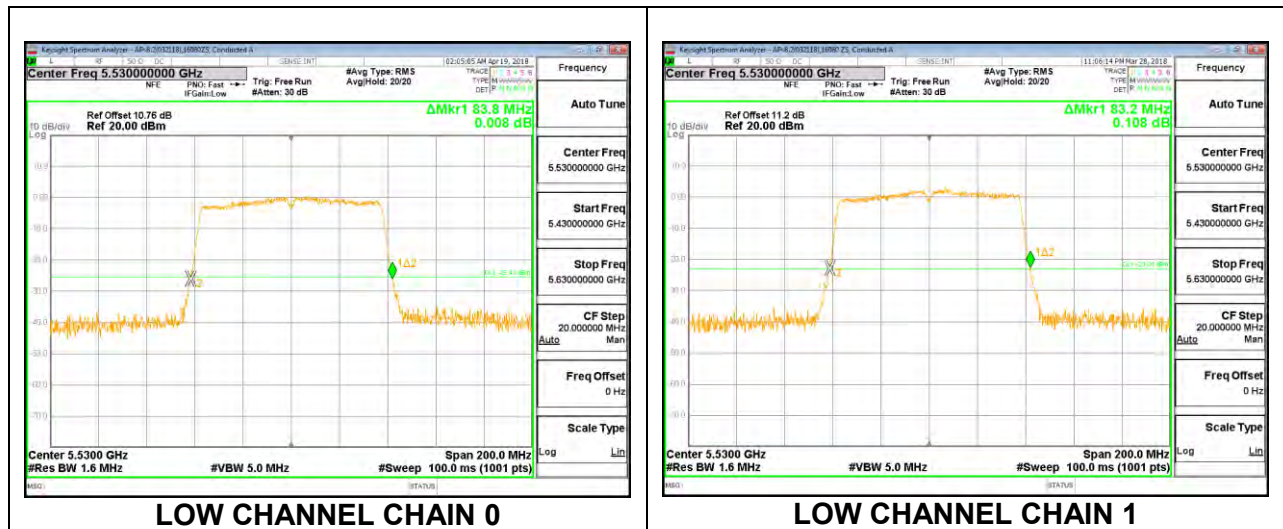

HIGH CHANNEL

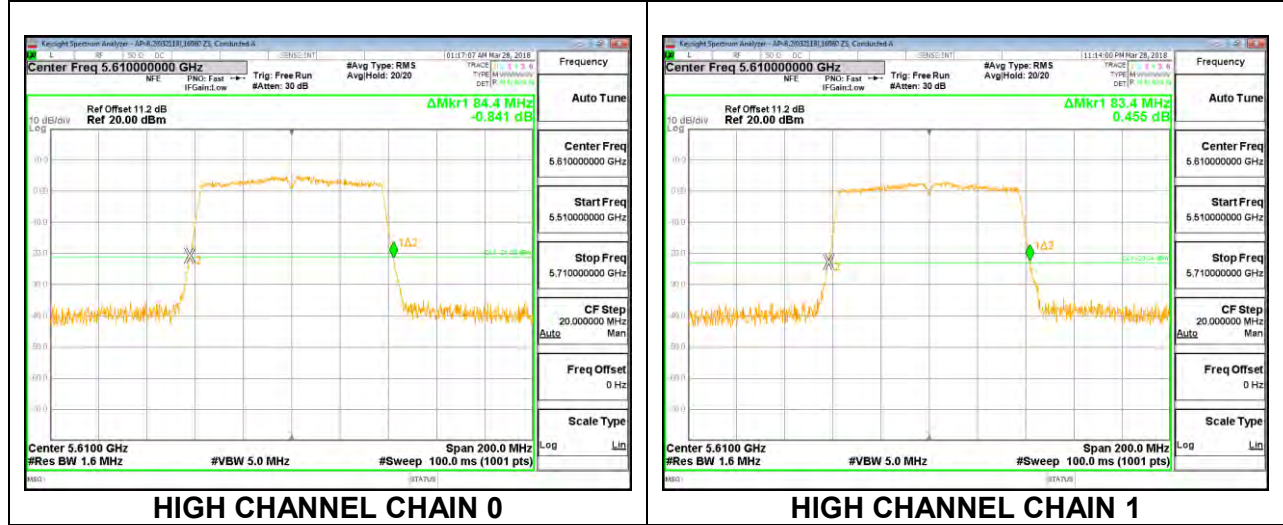


CHANNEL 138

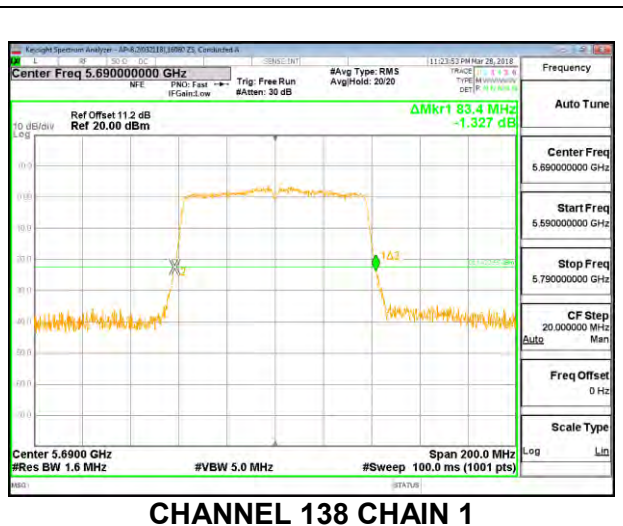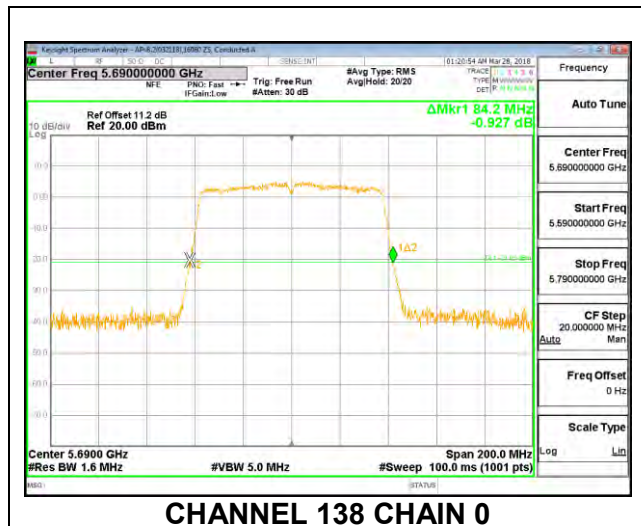


8.2.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5745	21.35	21.25
Mid	5785	22.00	21.60
High	5825	21.70	21.60


LOW CHANNEL

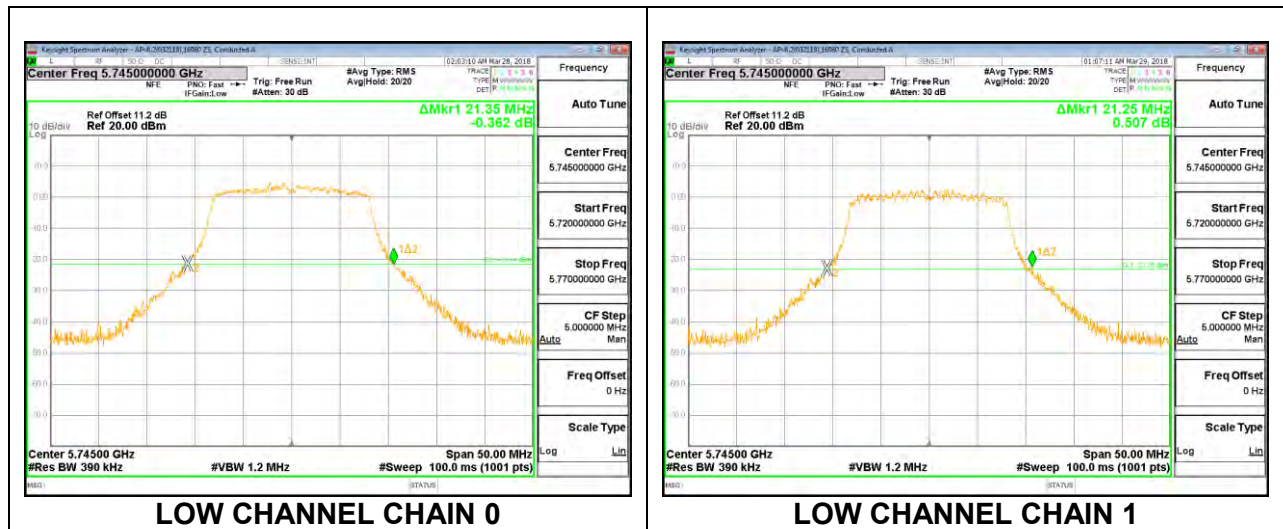

MID CHANNEL

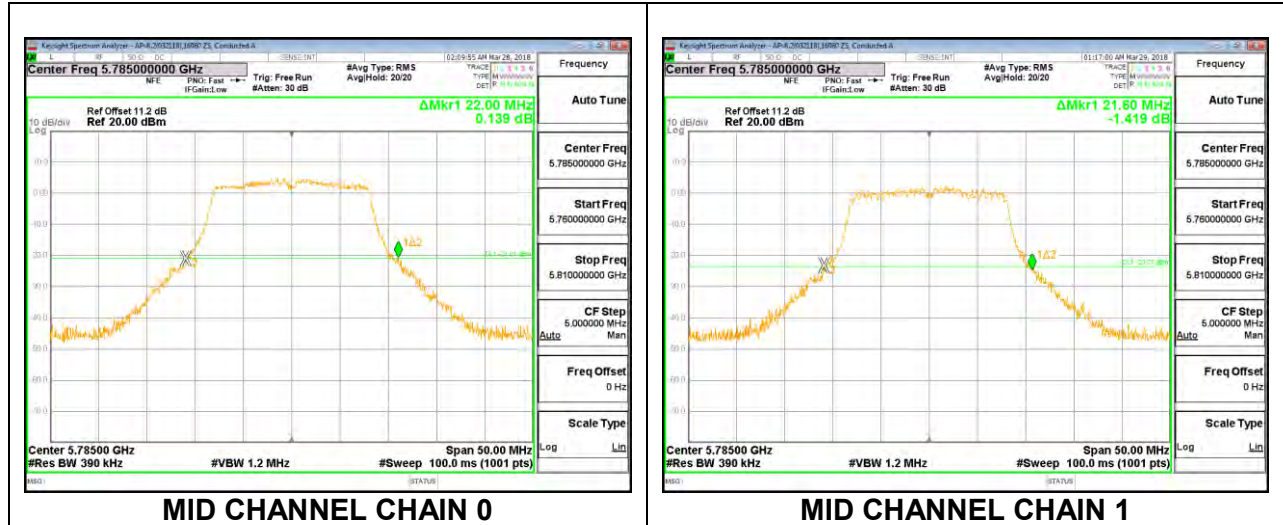


HIGH CHANNEL

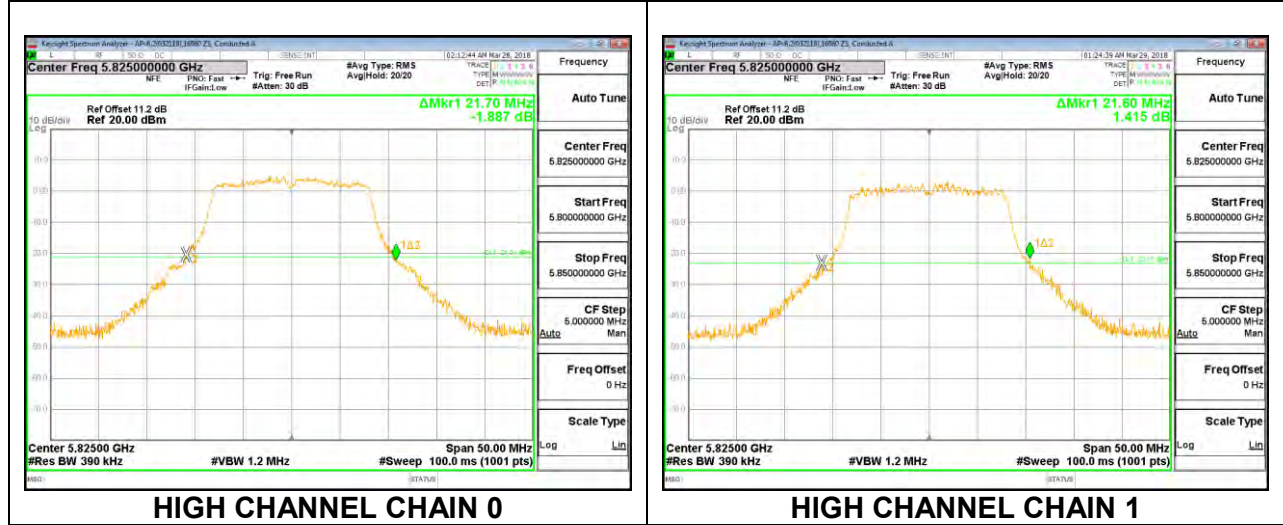


8.2.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5745	23.00	22.25
Mid	5785	22.95	22.90
High	5825	22.95	22.20



LOW CHANNEL

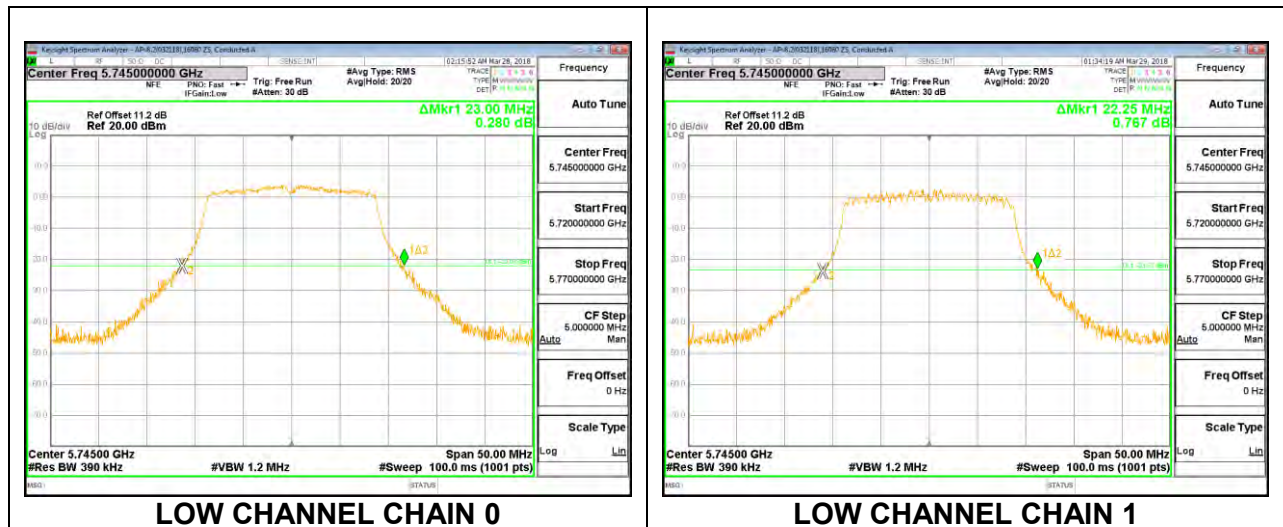

MID CHANNEL

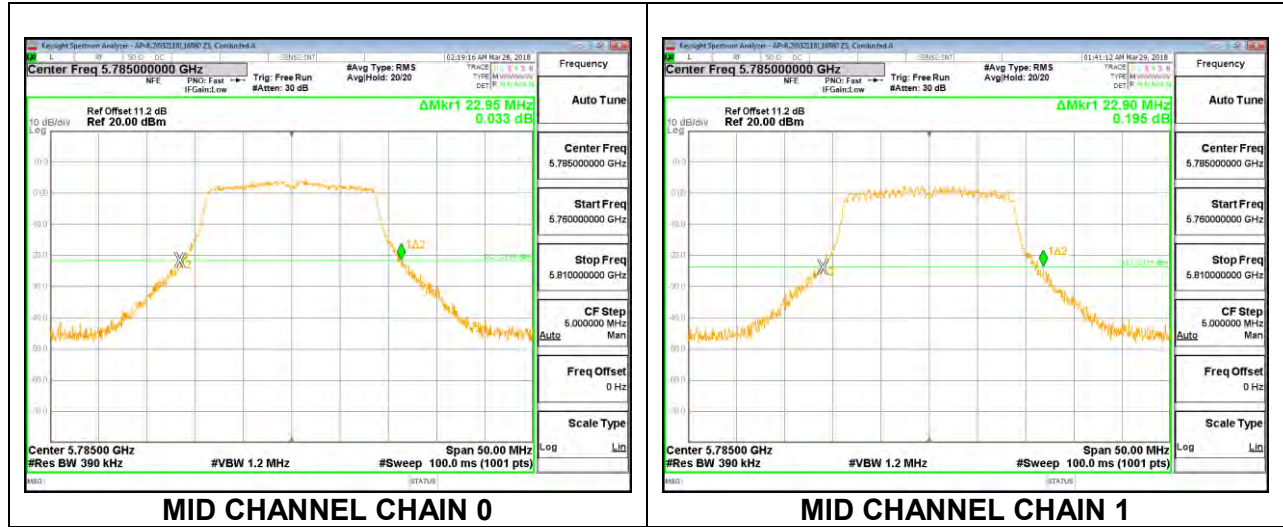


HIGH CHANNEL

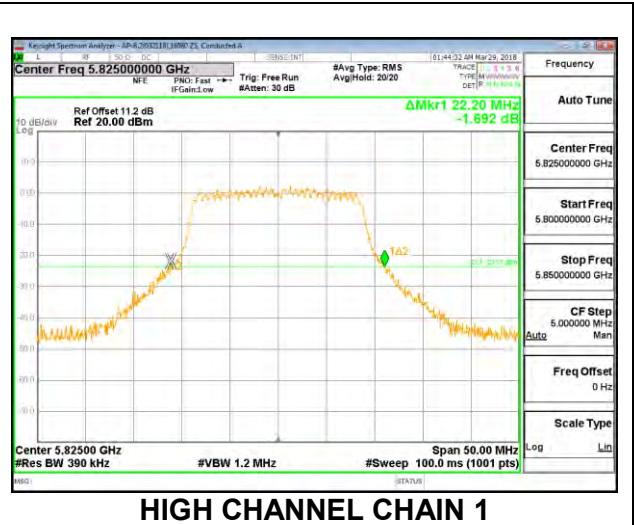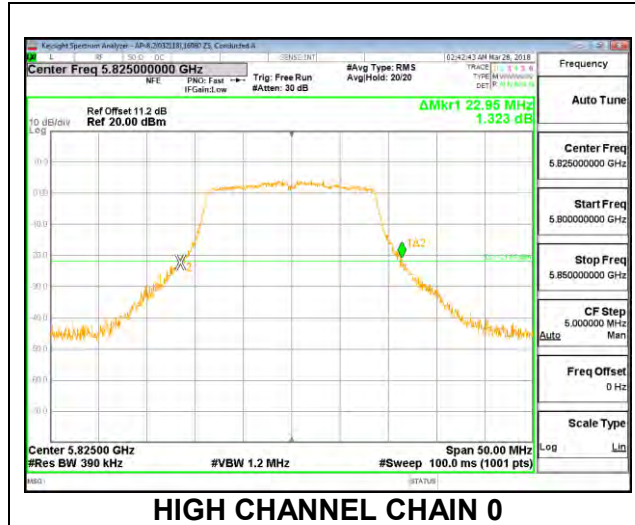


8.2.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5755	41.60	41.10
High	5795	41.80	40.90

LOW CHANNEL

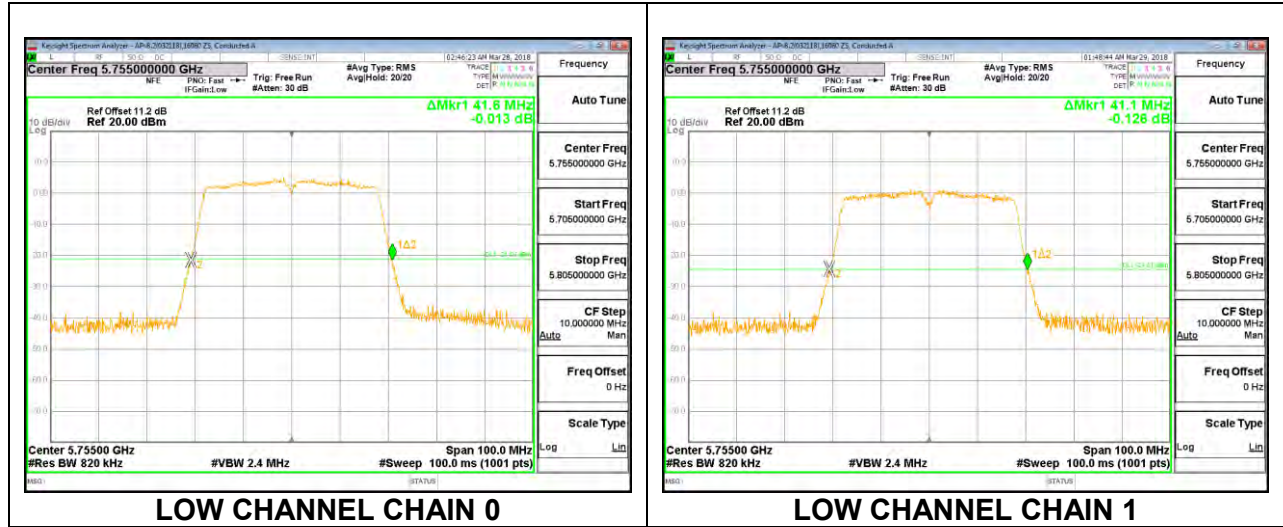


HIGH CHANNEL

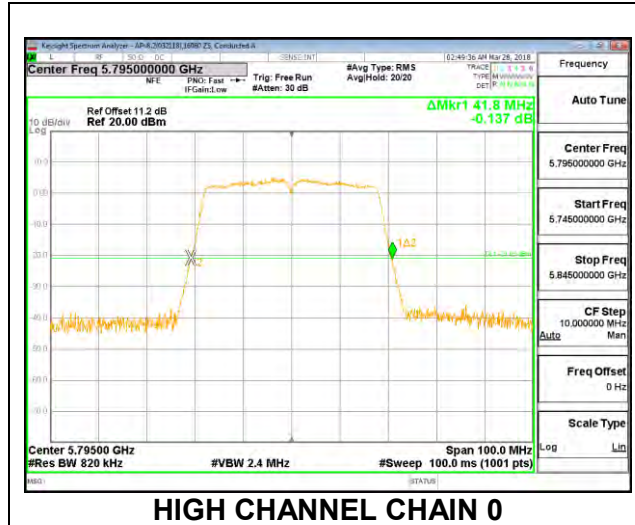

8.2.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Mid	5775	84.00	83.80

MID CHANNEL

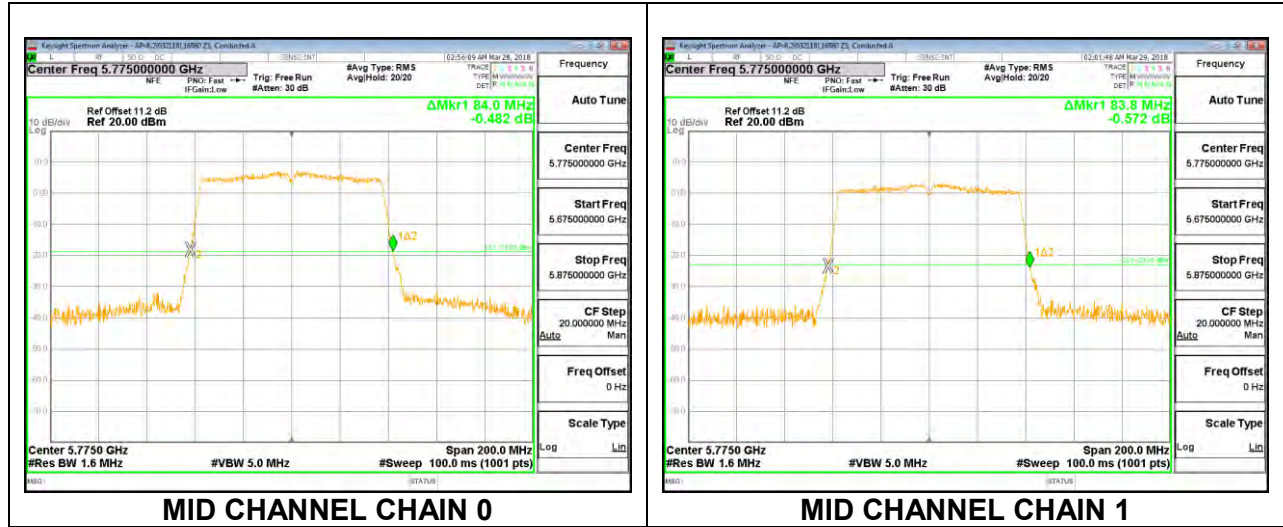

8.3. 99% BANDWIDTH

LIMITS


None; for reporting purposes only.

RESULTS



8.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5180	16.508	16.446
Mid	5200	16.531	16.519
High	5240	16.467	16.487



LOW CHANNEL

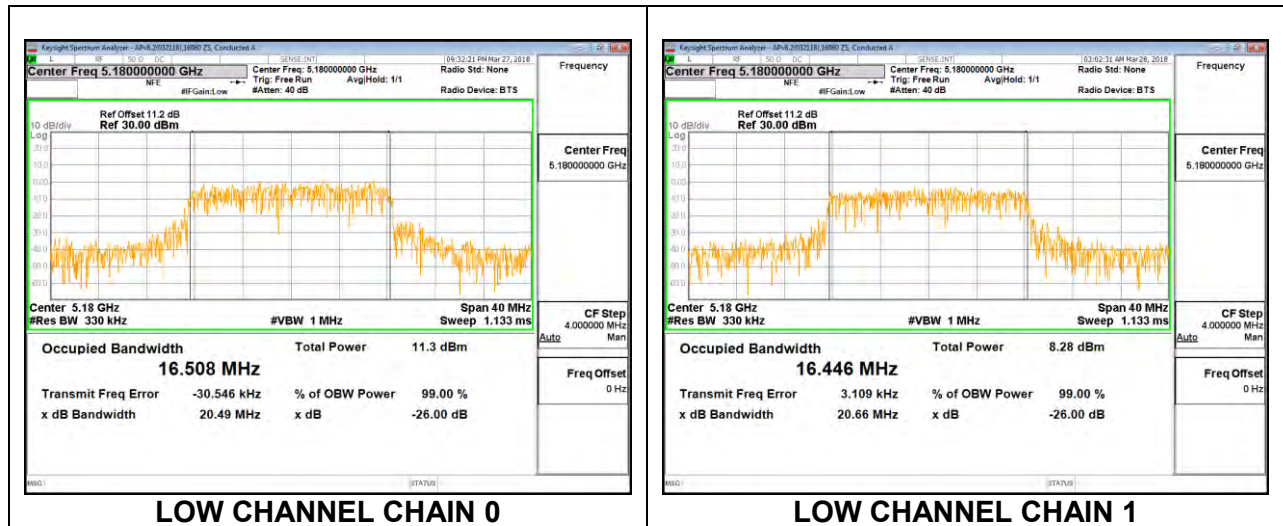

MID CHANNEL

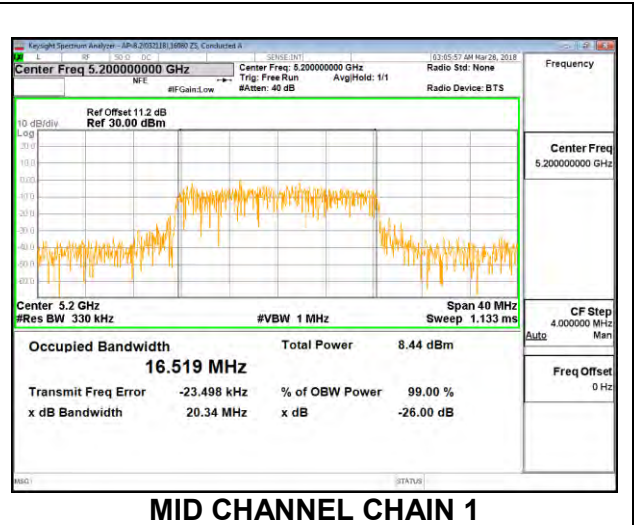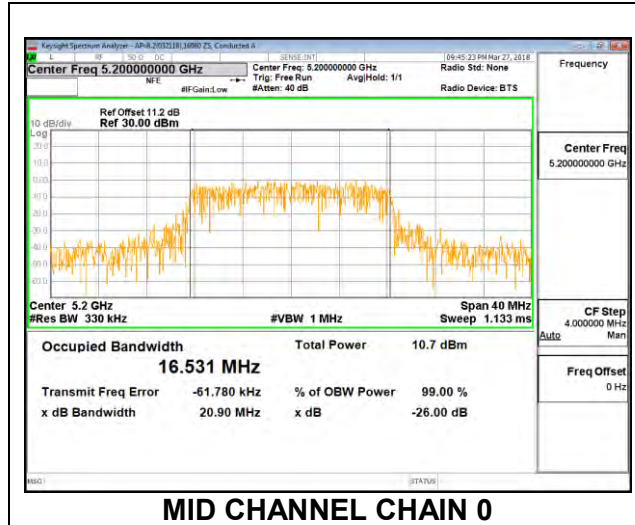


HIGH CHANNEL

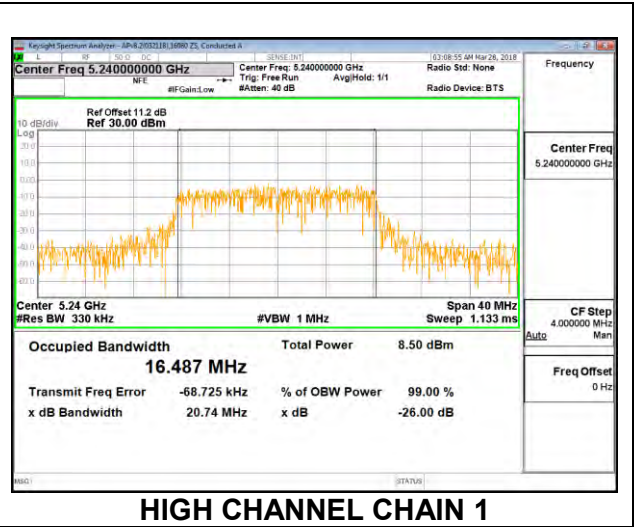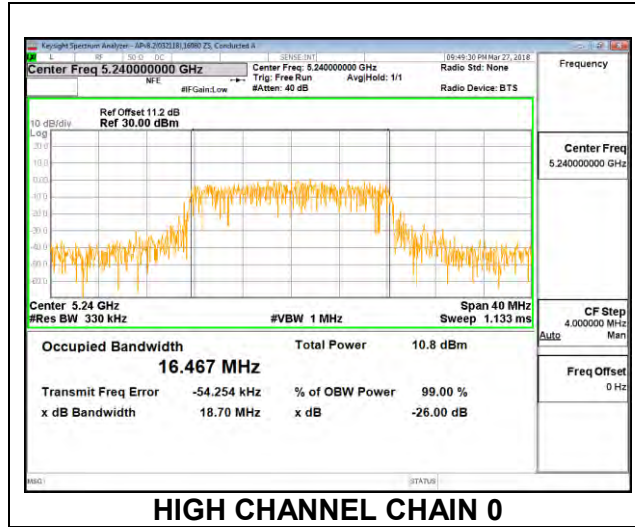


8.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5180	17.624	17.653
Mid	5200	17.737	17.739
High	5240	17.736	17.772

LOW CHANNEL


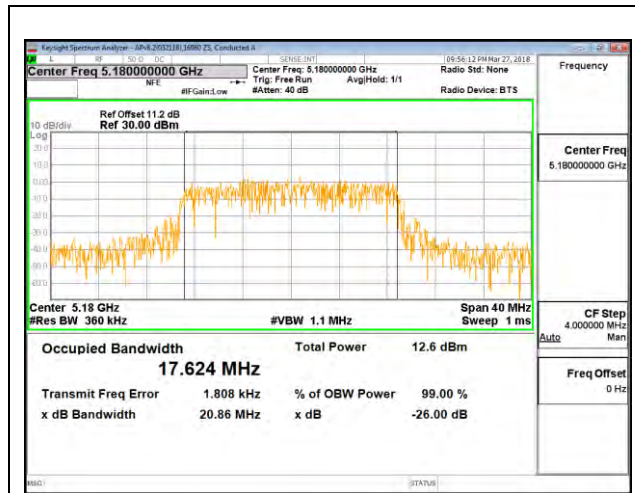


LOW CHANNEL CHAIN 0


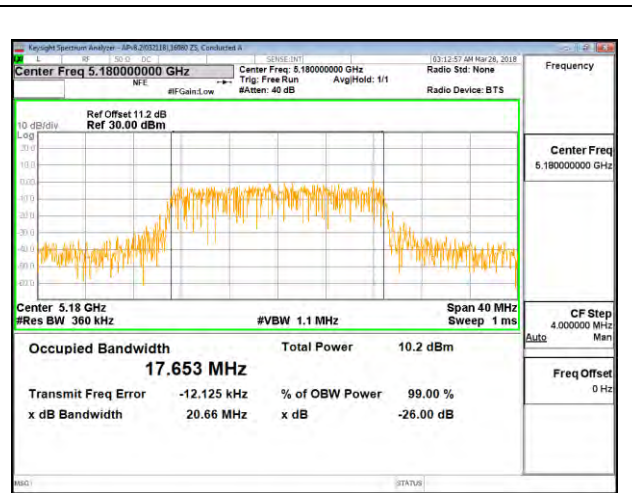


LOW CHANNEL CHAIN 1

MID CHANNEL

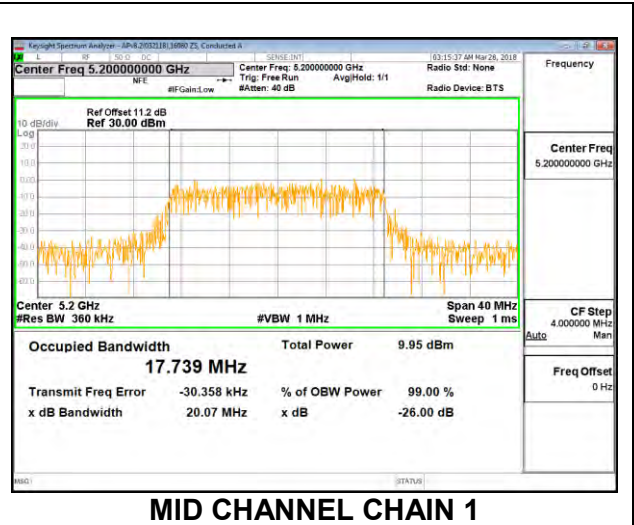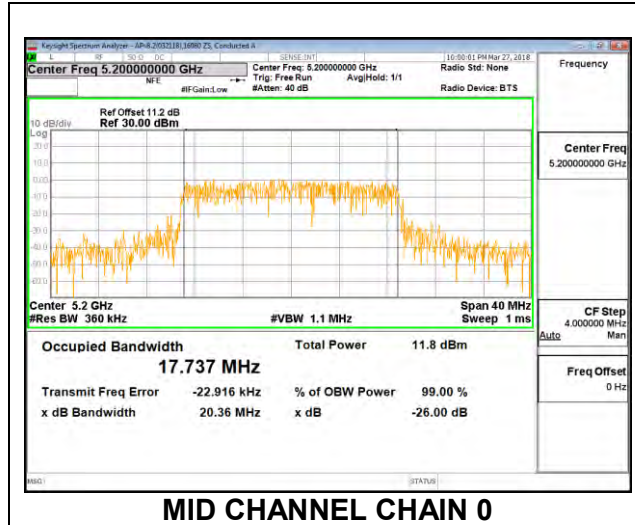


HIGH CHANNEL

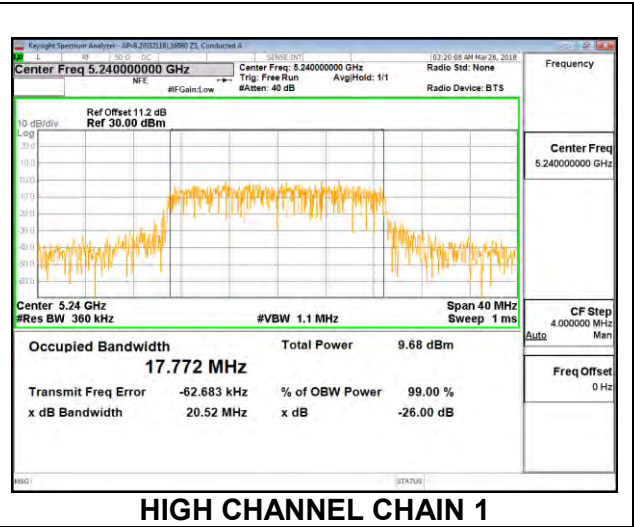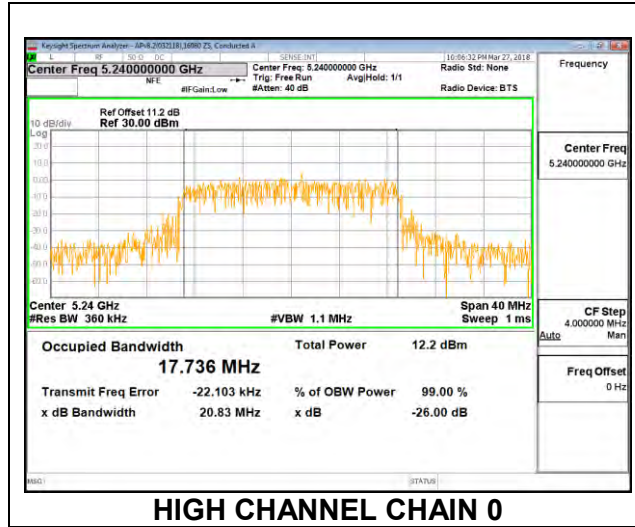



8.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5190	36.328	36.287
High	5230	36.313	36.189

LOW CHANNEL

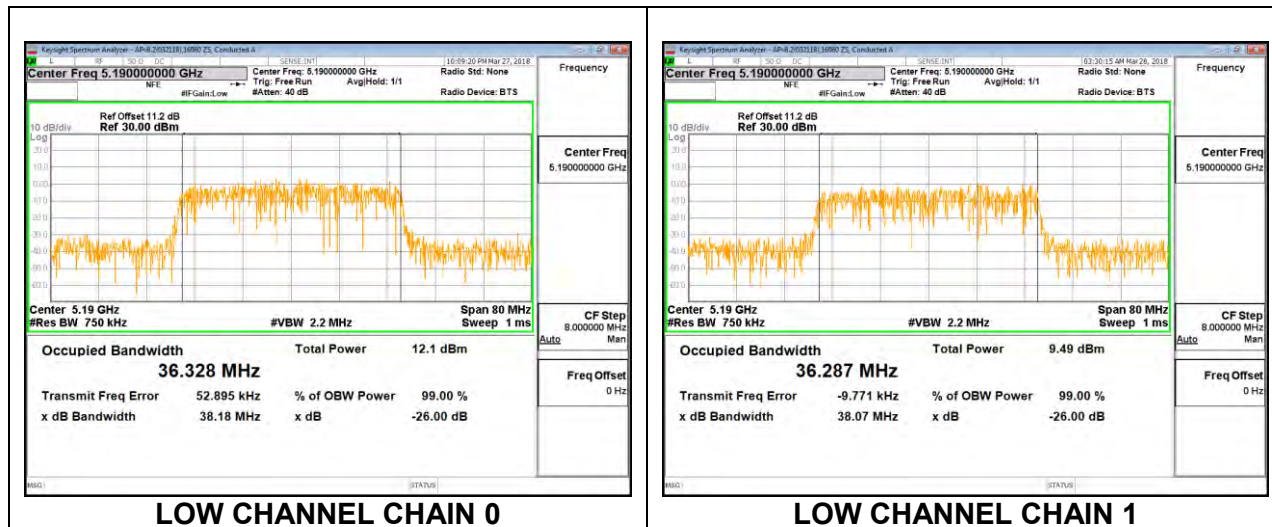

HIGH CHANNEL

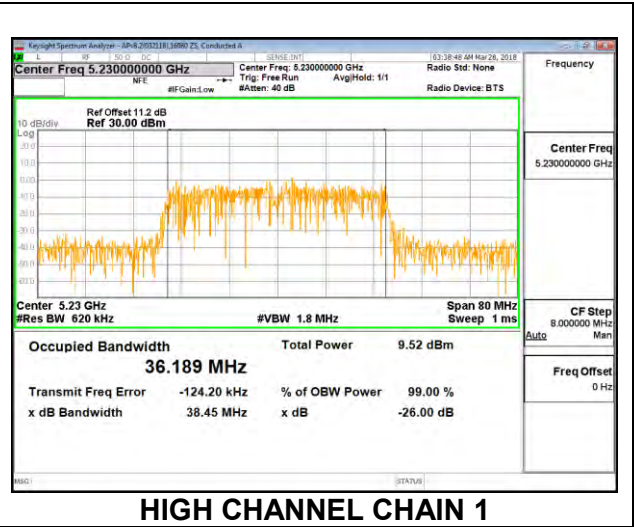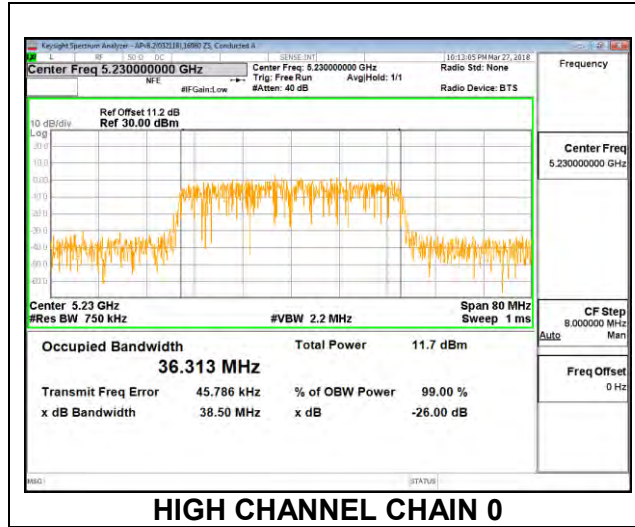

8.3.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Mid	5210	76.089	75.828


MID CHANNEL





8.3.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5260	16.484	16.500
Mid	5300	16.459	16.483
High	5320	16.583	16.465



LOW CHANNEL

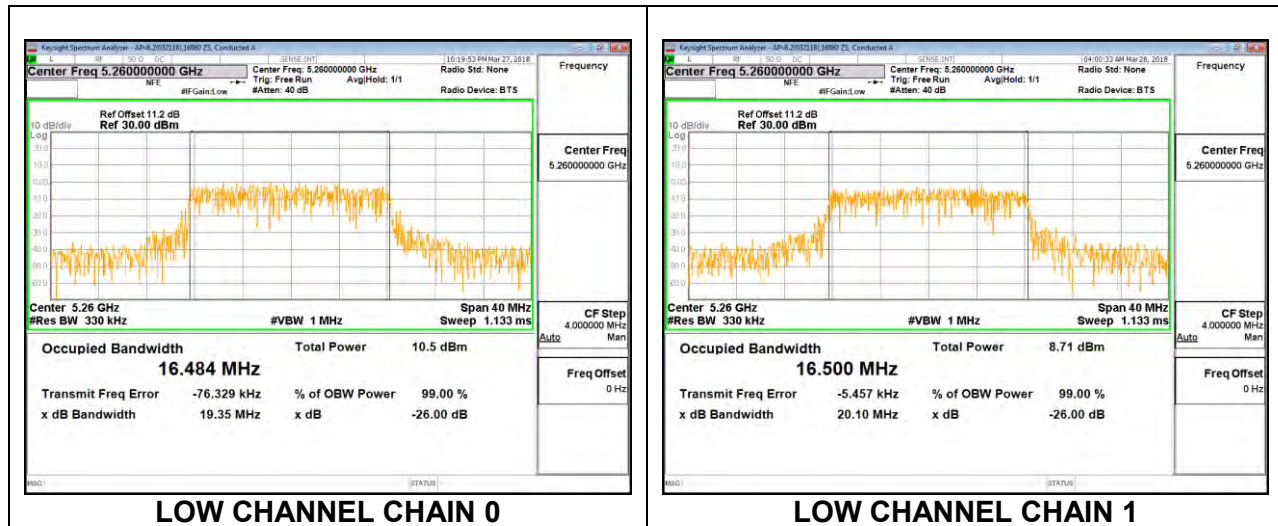

MID CHANNEL

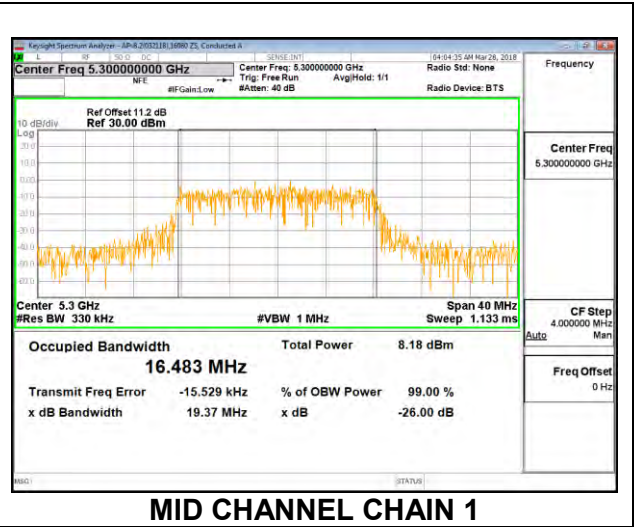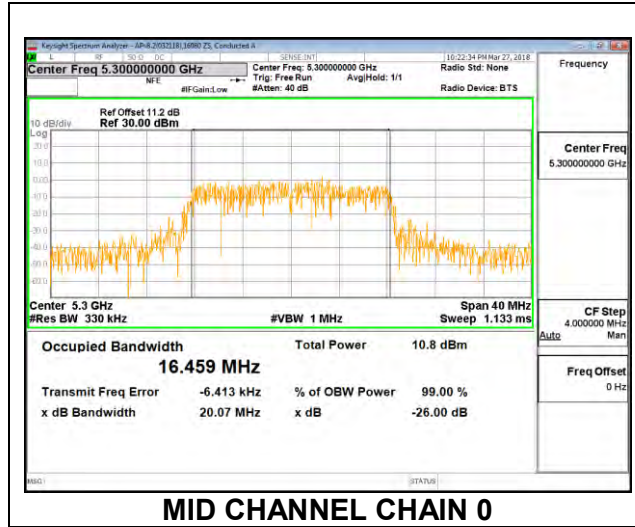



HIGH CHANNEL

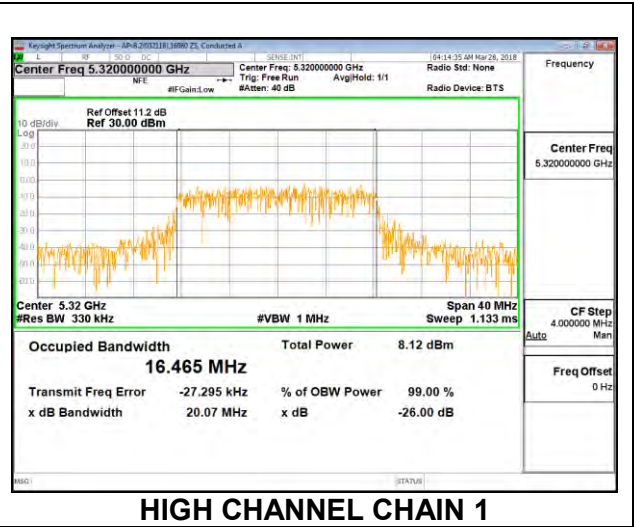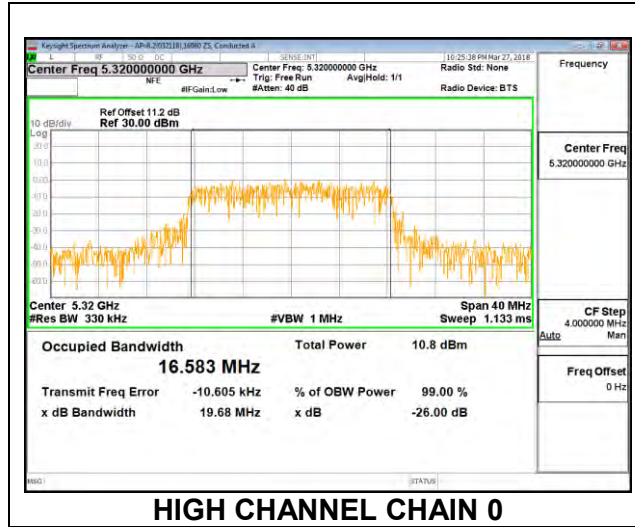



8.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5260	17.605	17.735
Mid	5300	17.643	17.629
High	5320	17.641	17.690



LOW CHANNEL

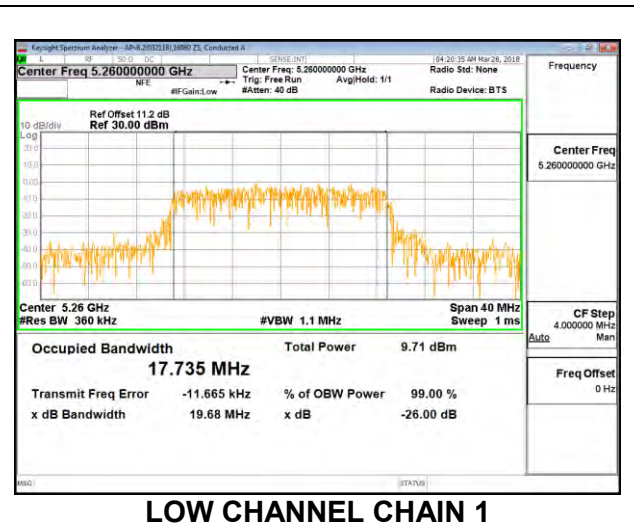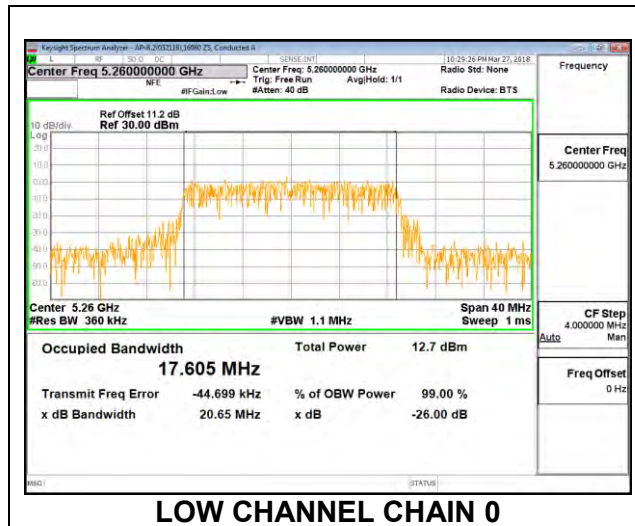

MID CHANNEL

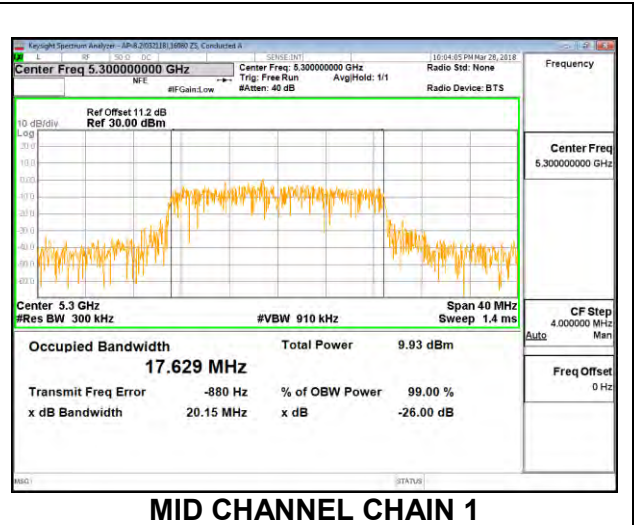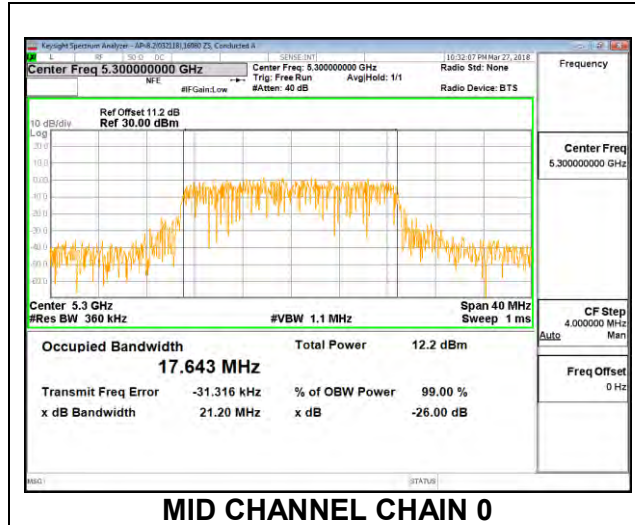


HIGH CHANNEL

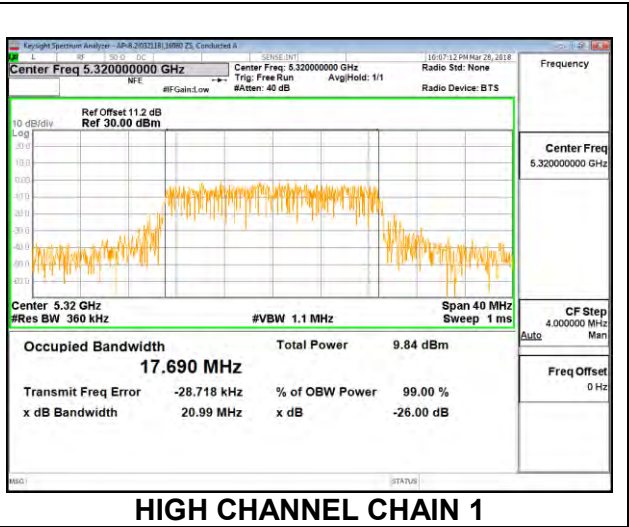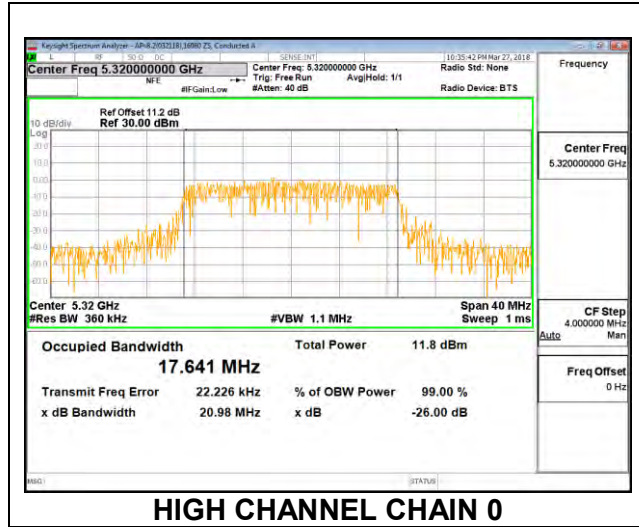



8.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5270	36.189	36.422
High	5310	36.359	36.446

LOW CHANNEL

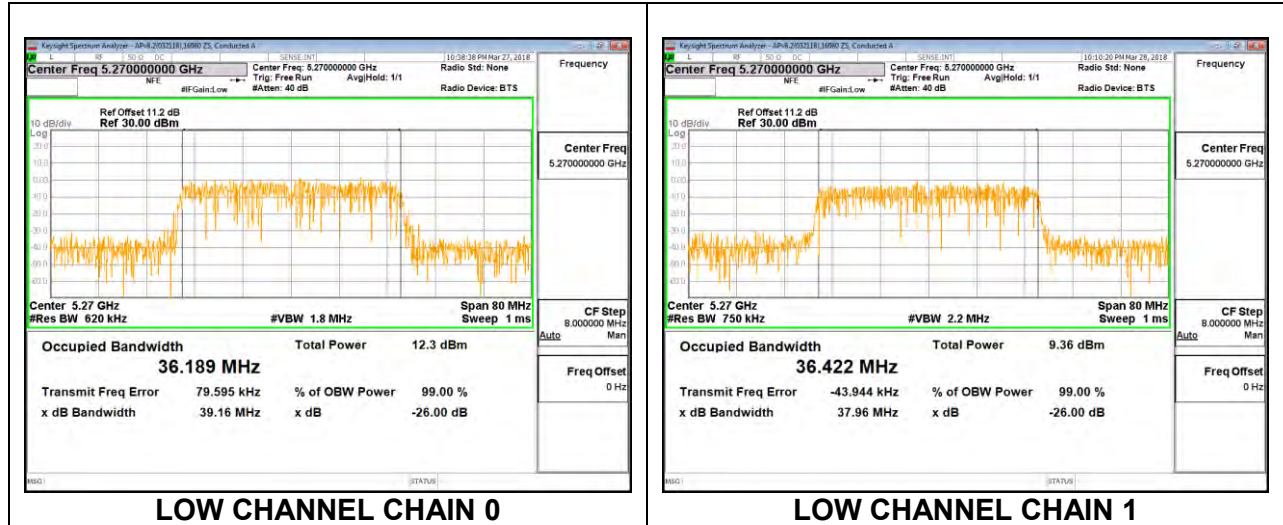


HIGH CHANNEL

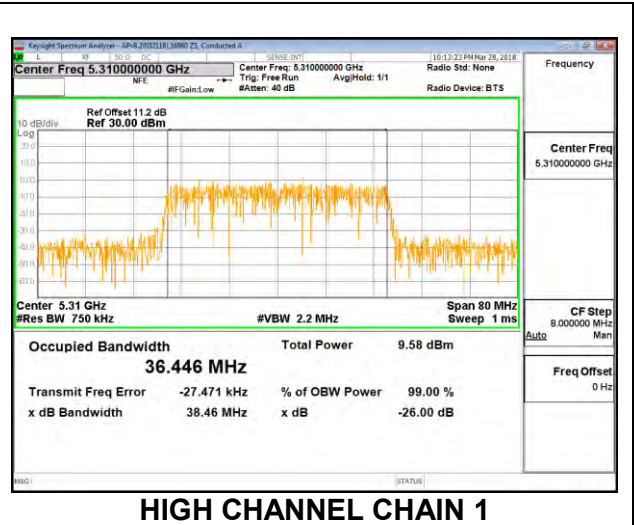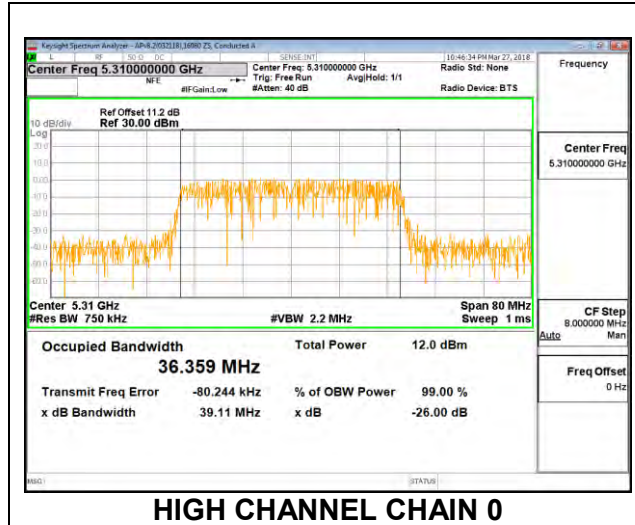

8.3.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Mid	5290	75.867	75.956


MID CHANNEL

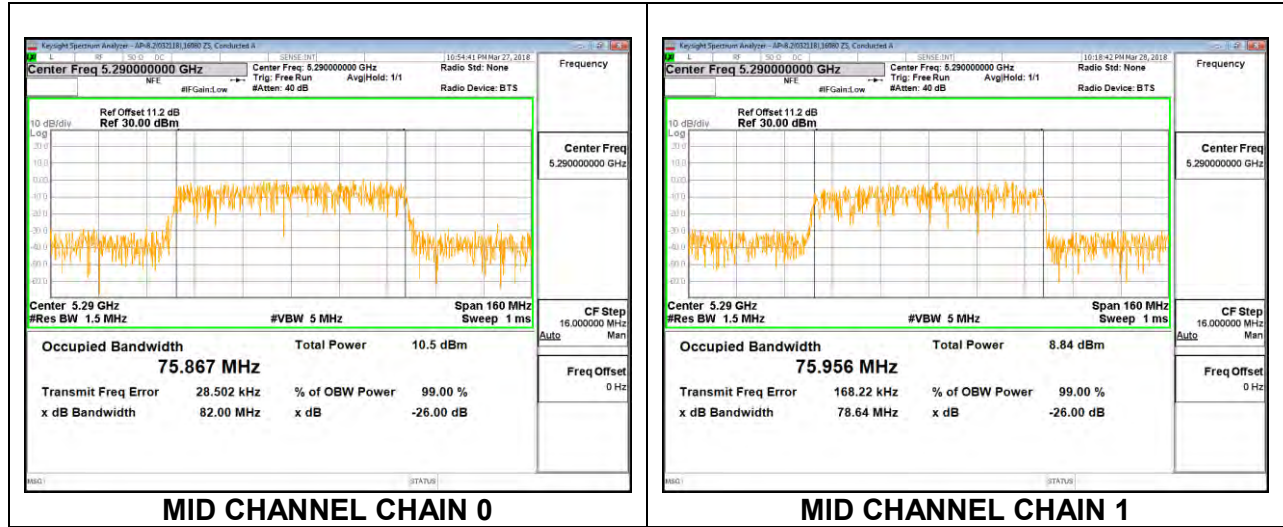



8.3.9. 802.11a MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5500	16.527	16.566
Mid	5580	16.423	16.519
High	5700	16.511	16.464
144	5720	16.553	17.700



LOW CHANNEL

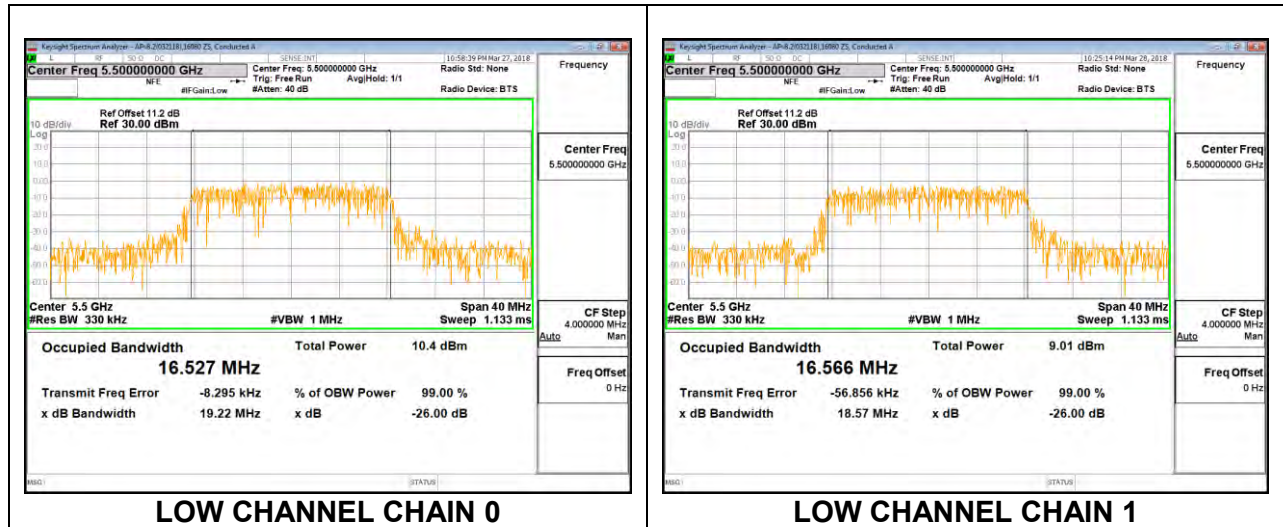



MID CHANNEL

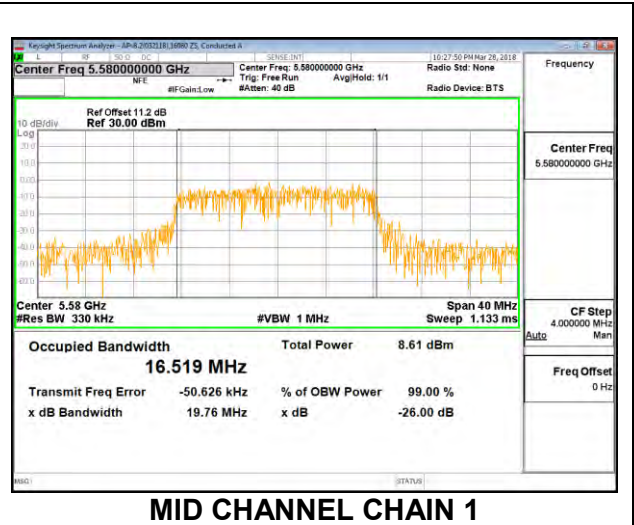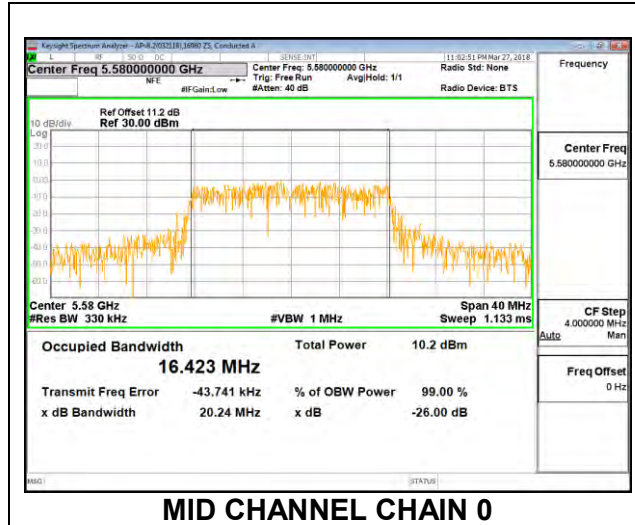

HIGH CHANNEL

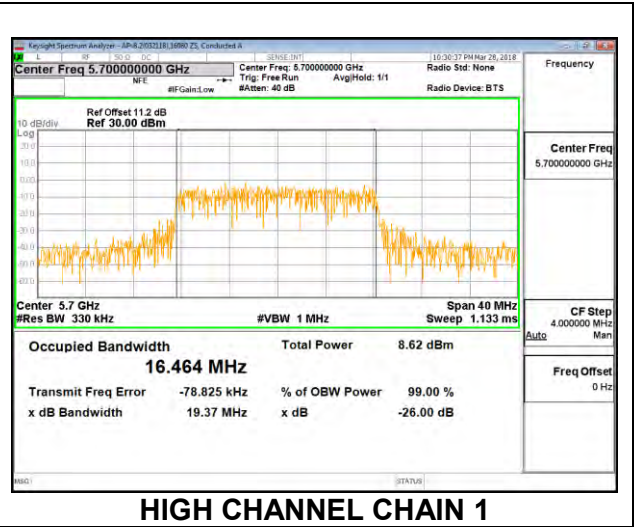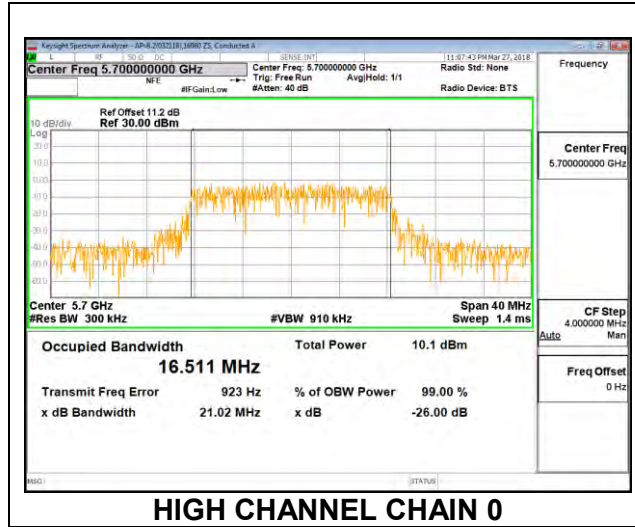



CHANNEL 144

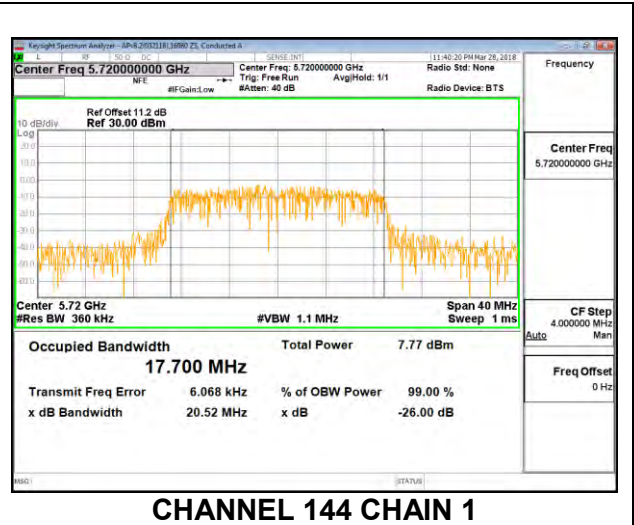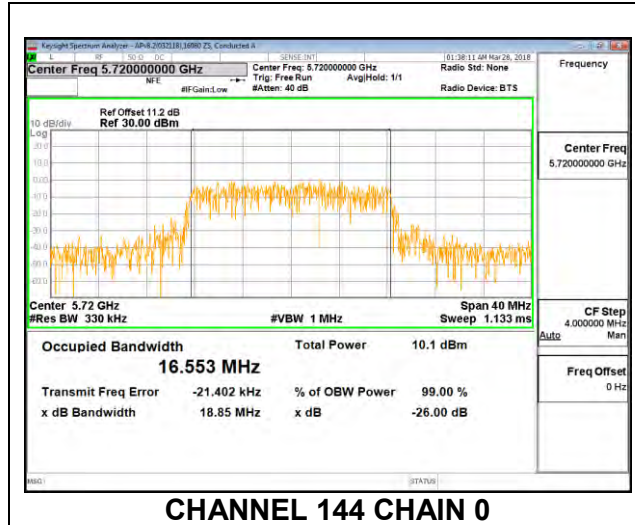



8.3.10. 802.11n HT20 MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5500	17.726	17.683
Mid	5580	17.681	17.710
High	5700	17.634	17.724
144	5720	17.780	17.698


LOW CHANNEL

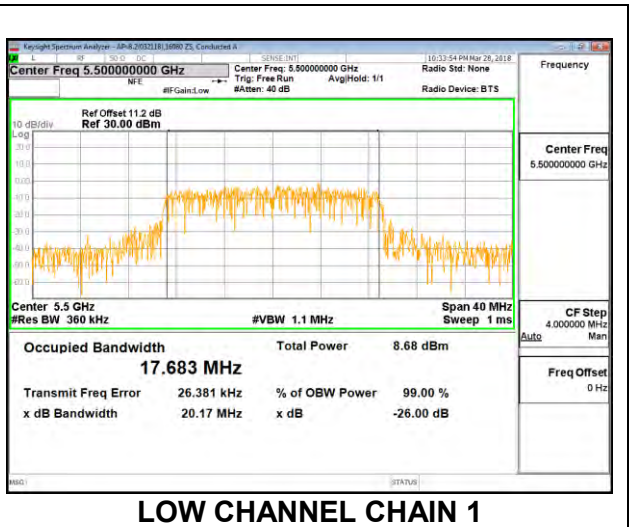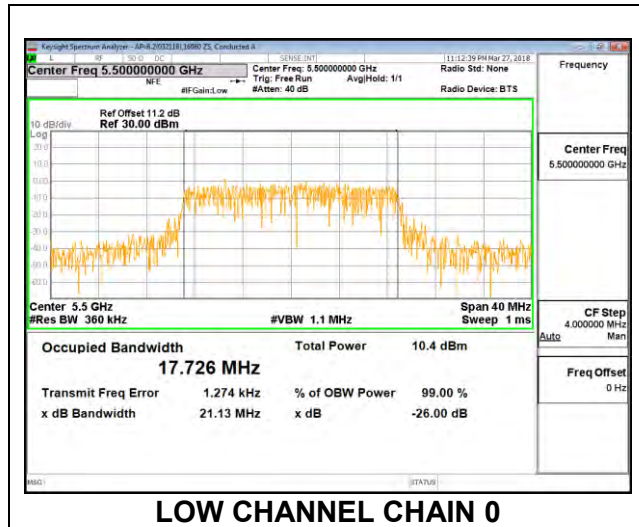



MID CHANNEL

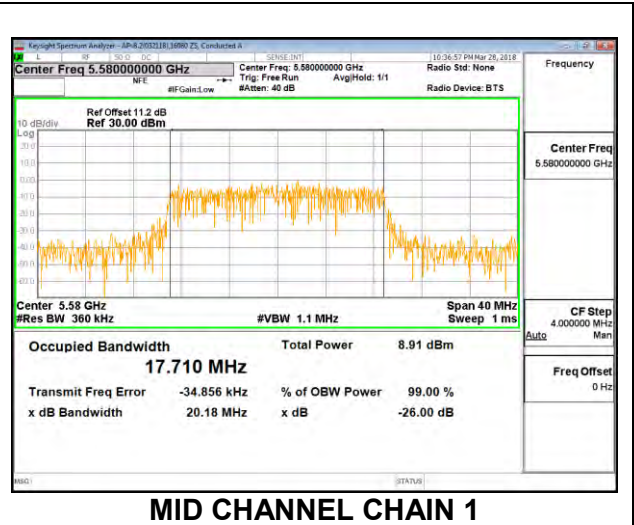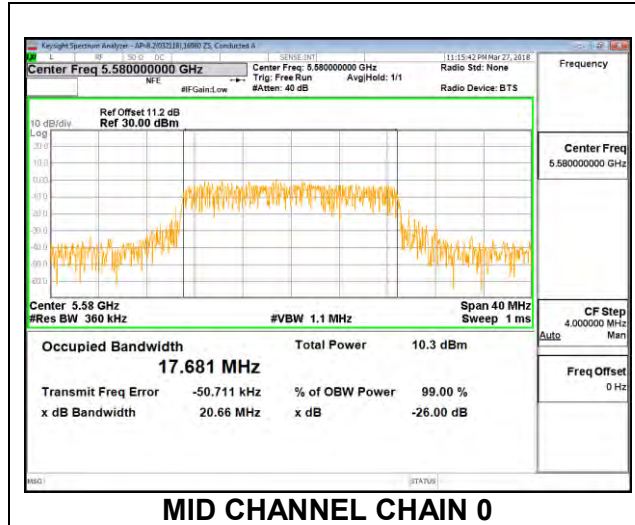

HIGH CHANNEL

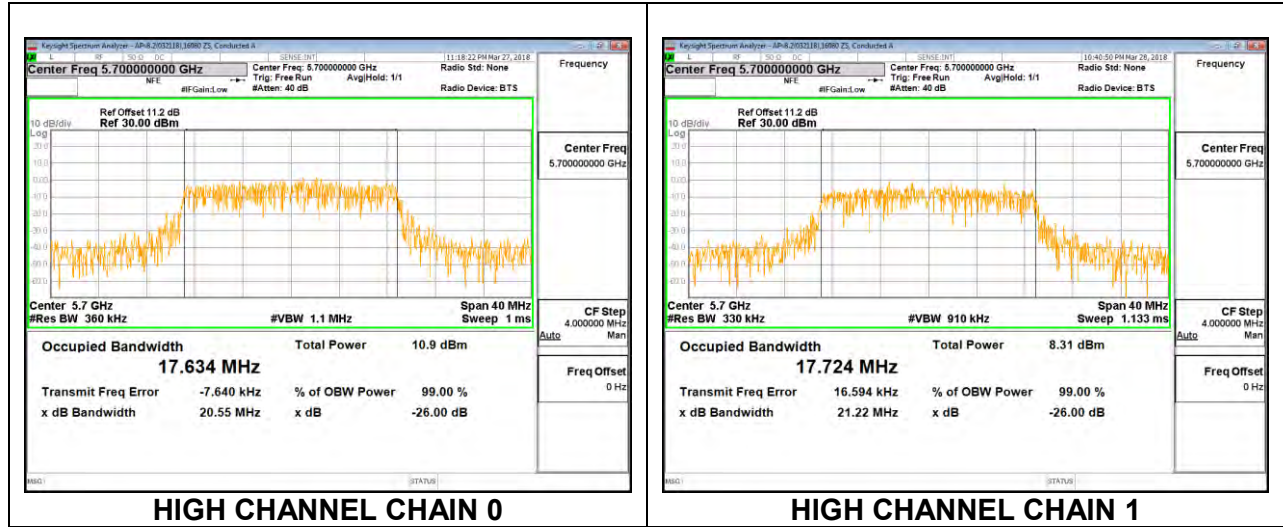


CHANNEL 144

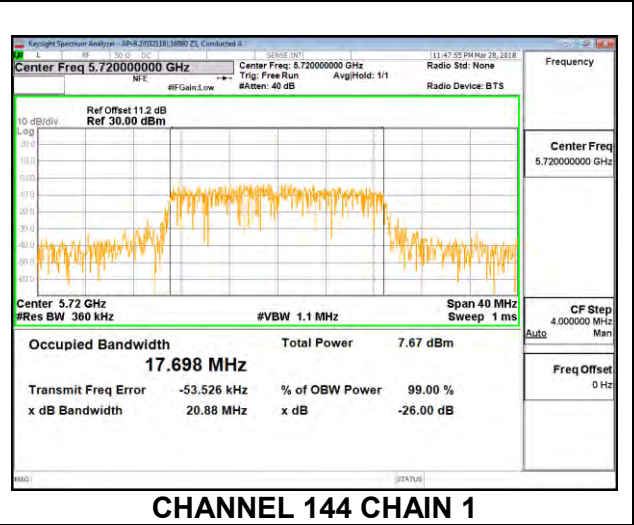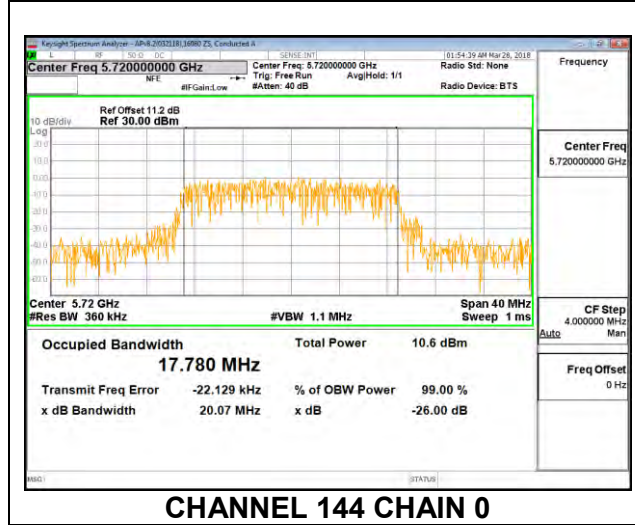


8.3.11. 802.11n HT40 MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5510	36.297	36.355
Mid	5550	36.408	36.289
High	5670	36.478	36.536
142	5710	36.347	36.339



LOW CHANNEL

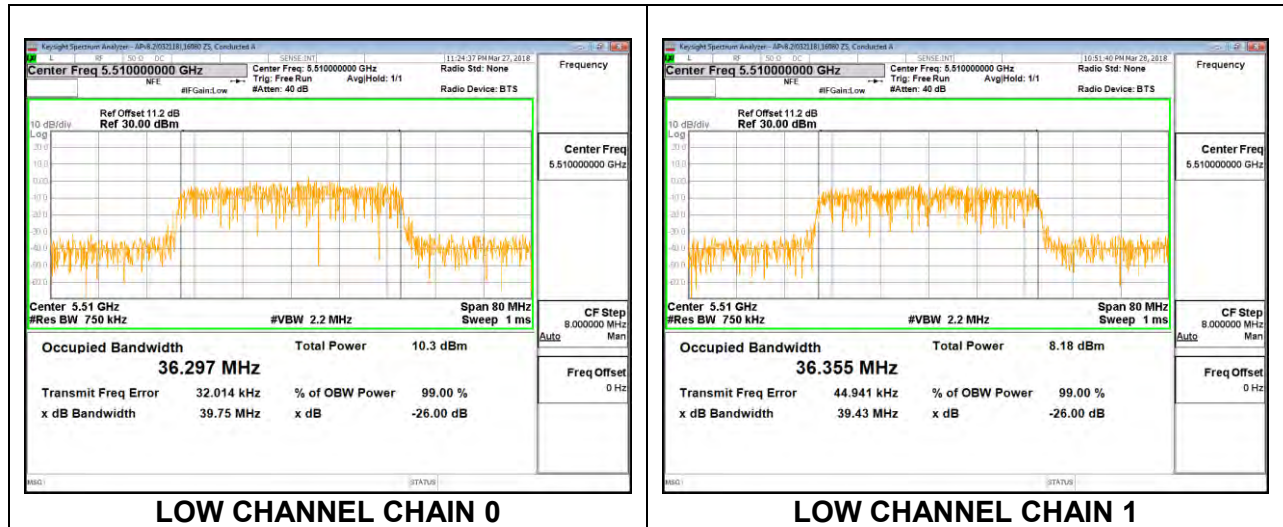



MID CHANNEL

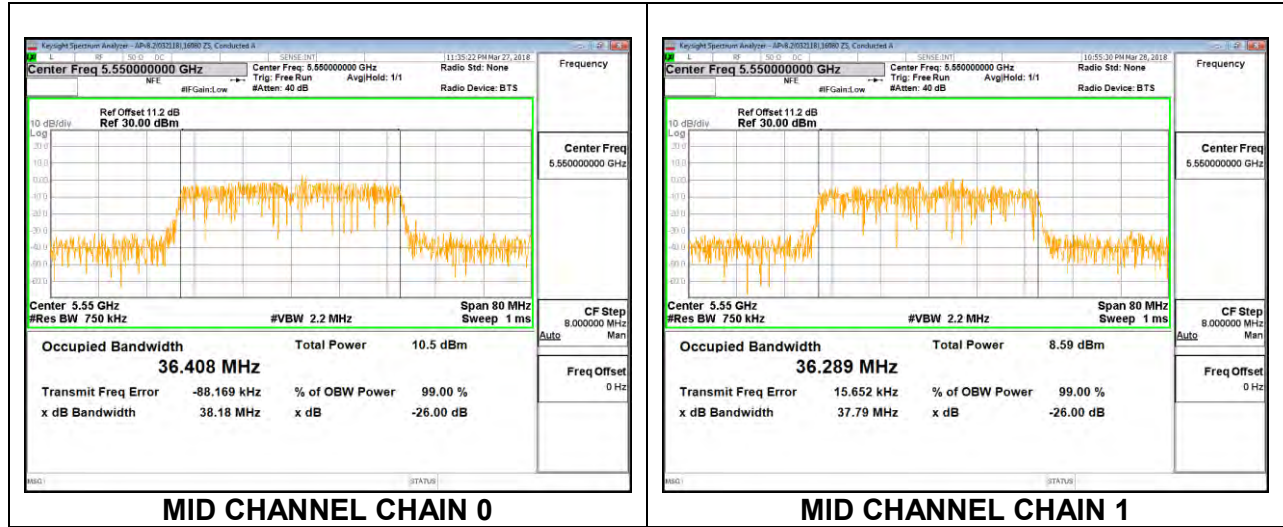

HIGH CHANNEL

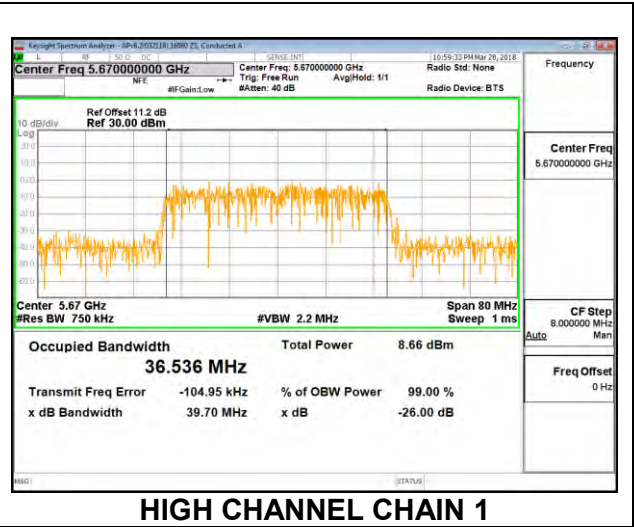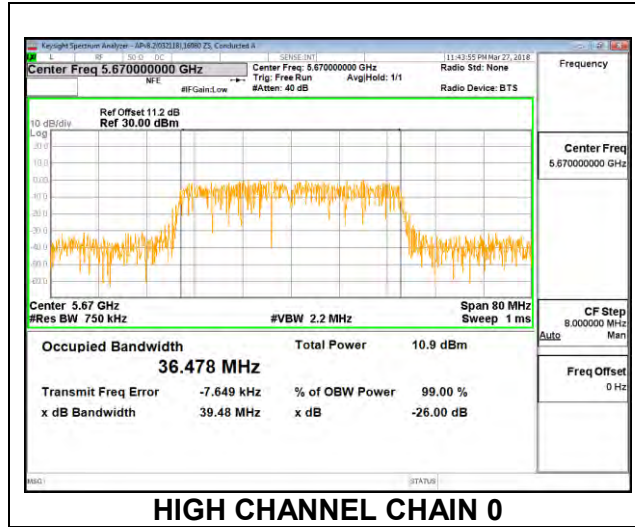


CHANNEL 142

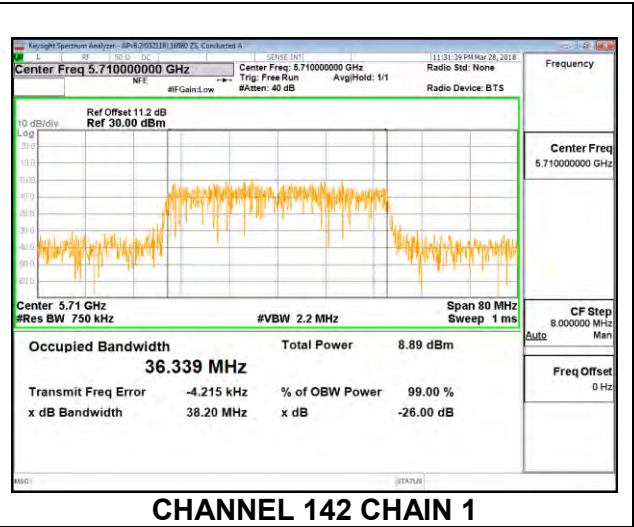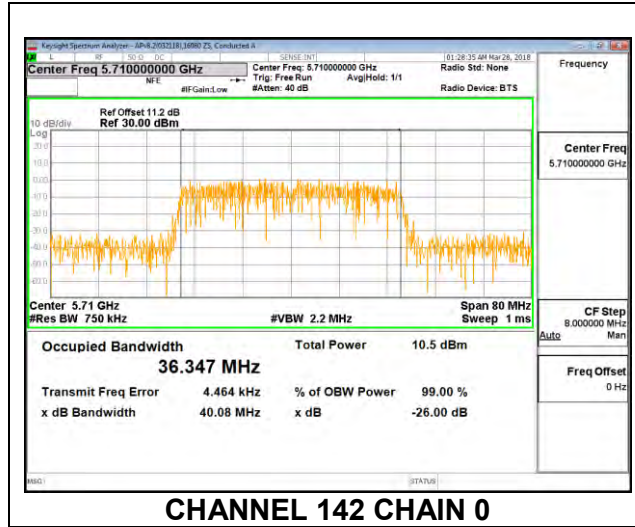


8.3.12. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5530	76.304	76.322
High	5610	76.164	76.147
138	5690	76.264	75.852

LOW CHANNEL


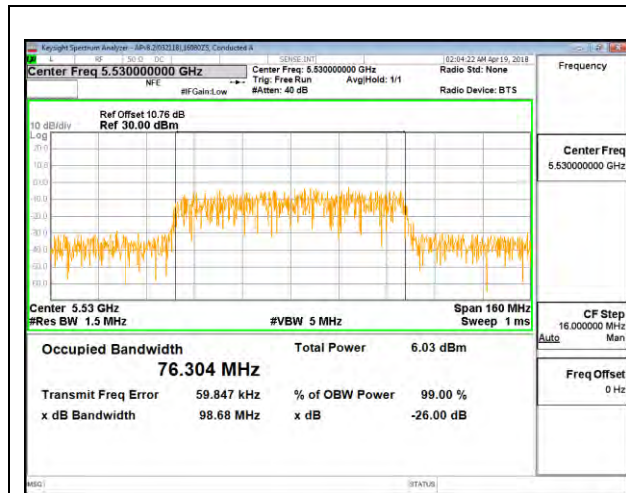


LOW CHANNEL CHAIN 0


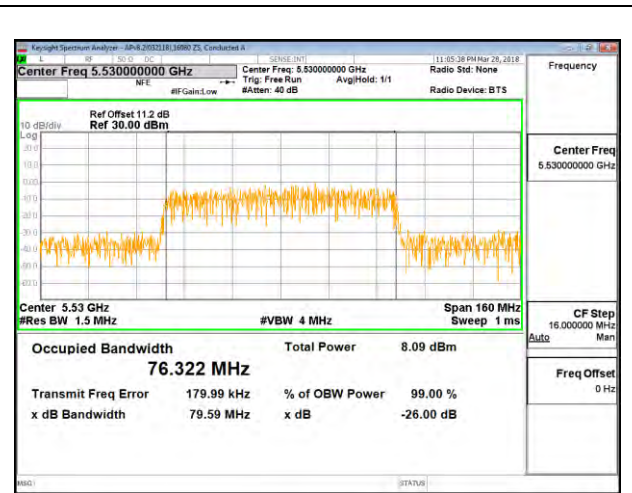


LOW CHANNEL CHAIN 1

HIGH CHANNEL

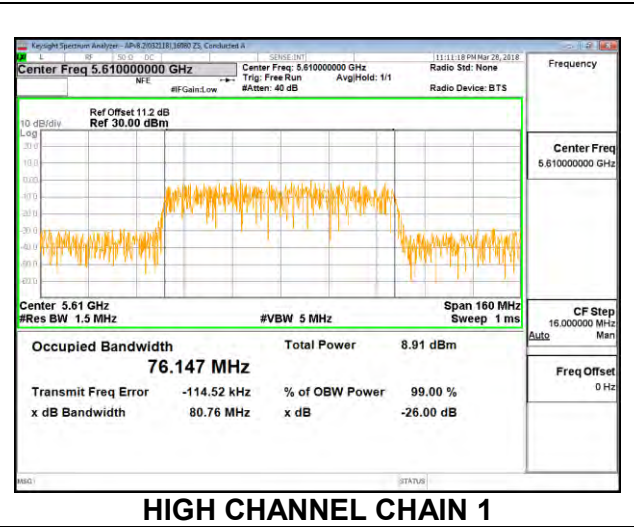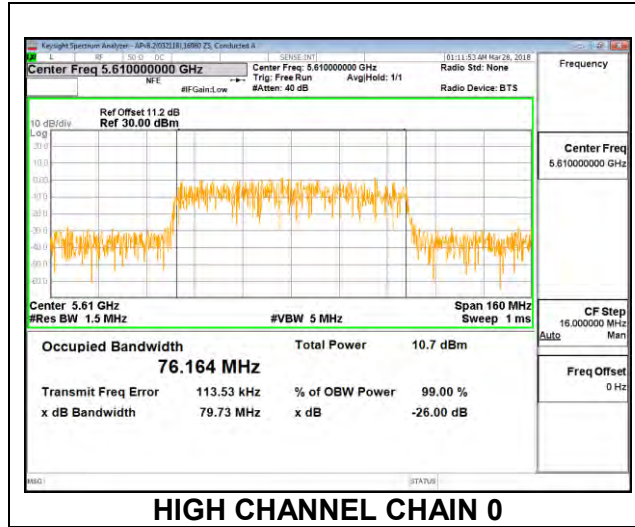



CHANNEL 138

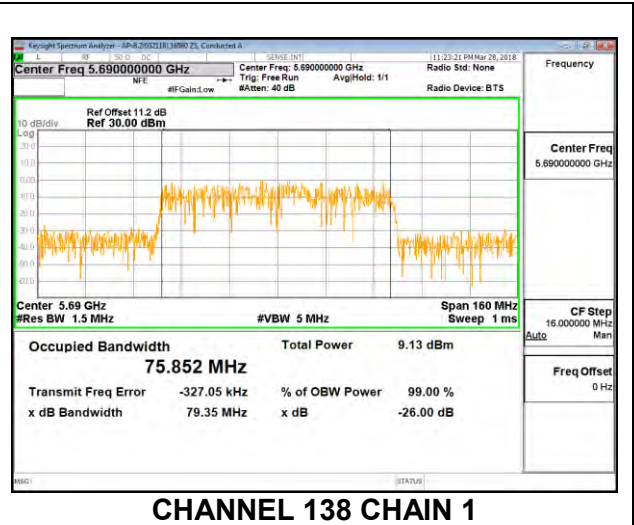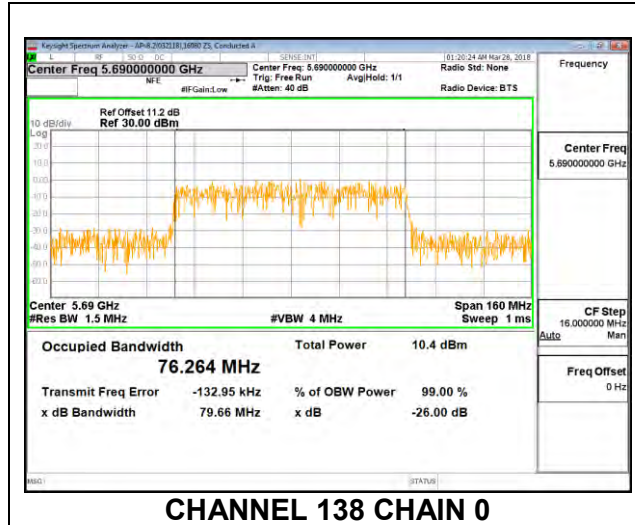


8.3.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5745	16.469	16.502
Mid	5785	16.457	16.438
High	5825	16.491	16.543



LOW CHANNEL

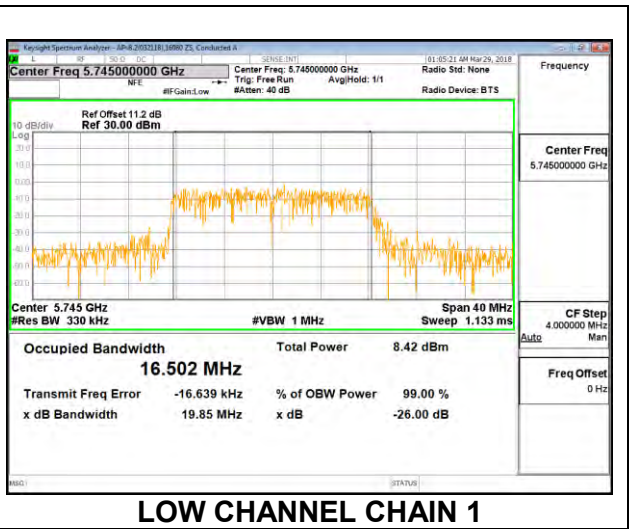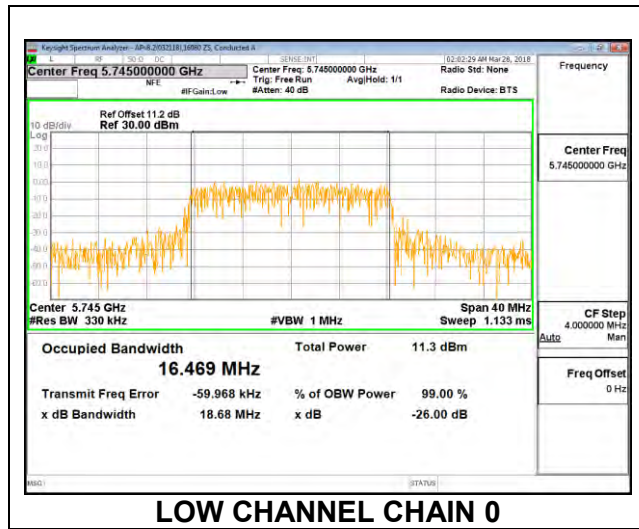

MID CHANNEL

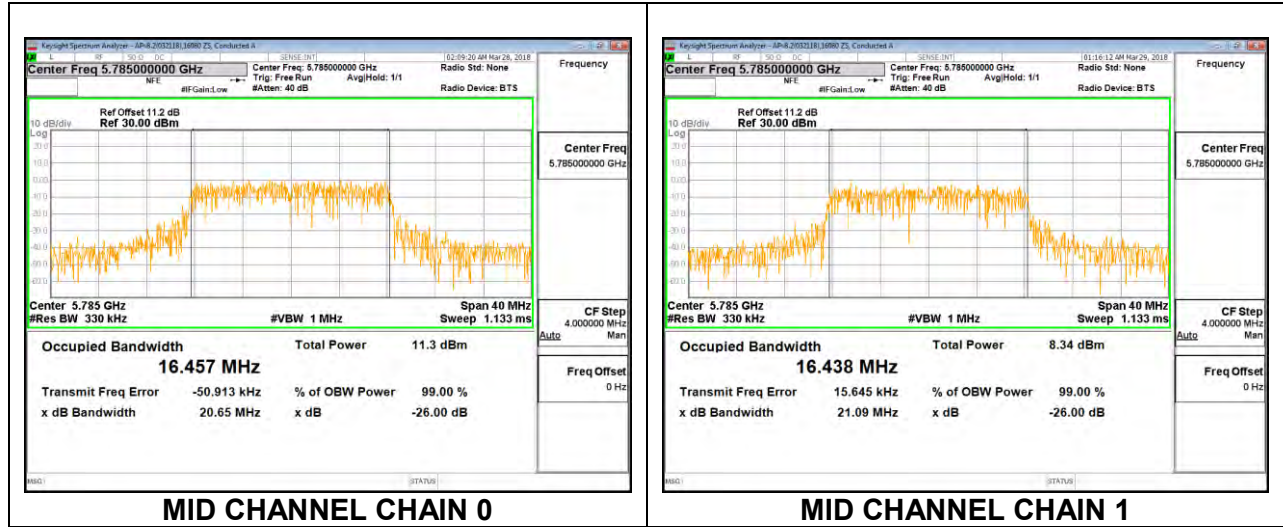



HIGH CHANNEL

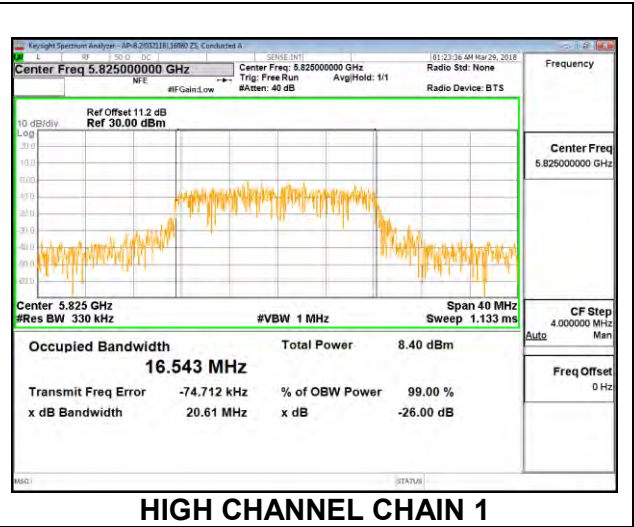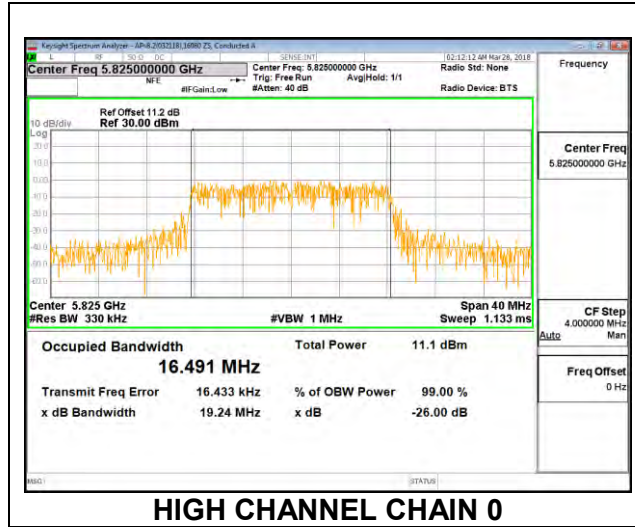



8.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5745	17.685	17.792
Mid	5785	17.681	17.669
High	5825	17.777	17.753



LOW CHANNEL

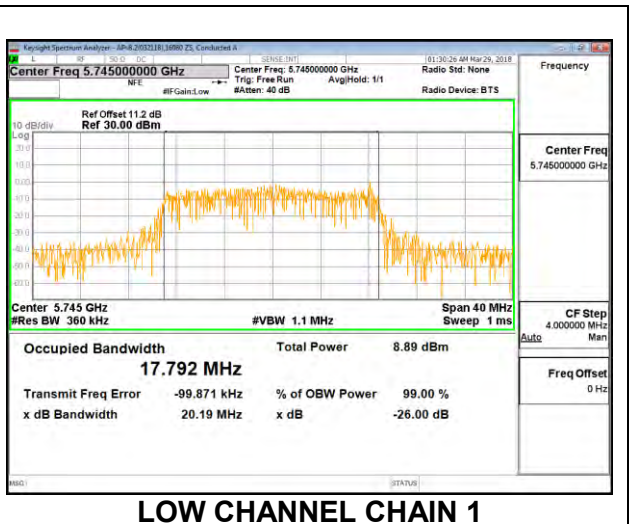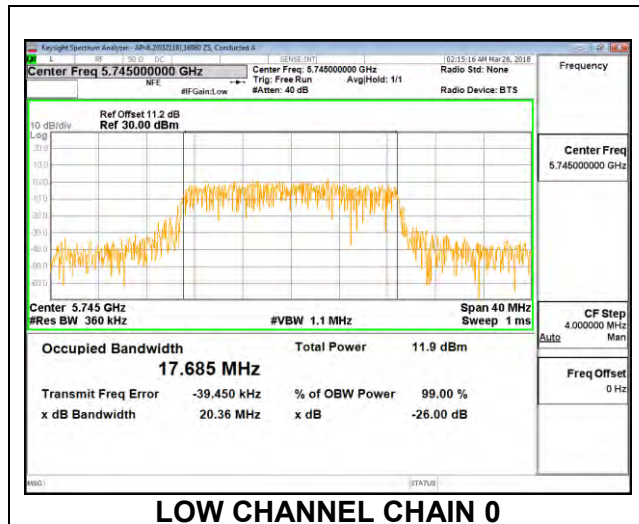

MID CHANNEL

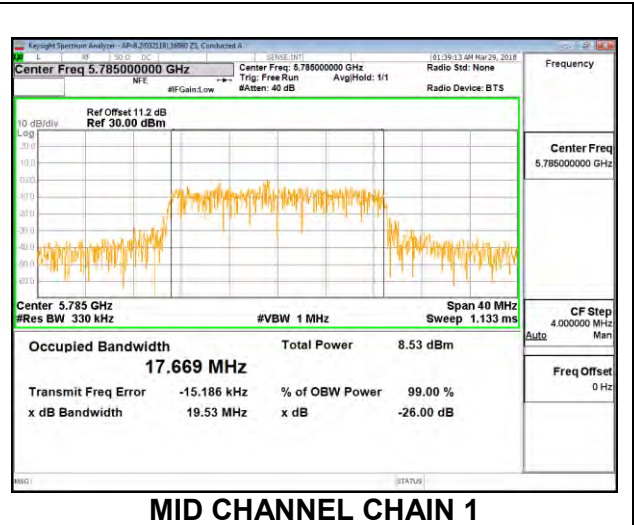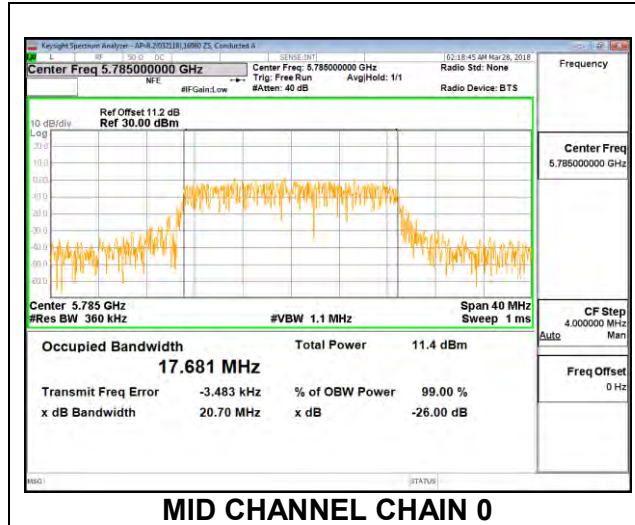


HIGH CHANNEL

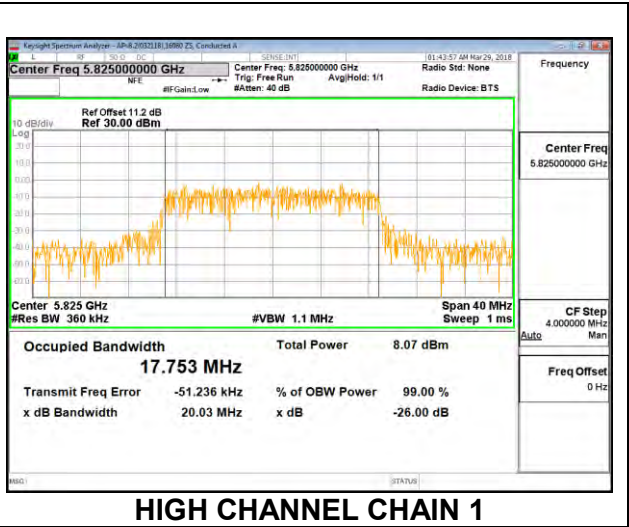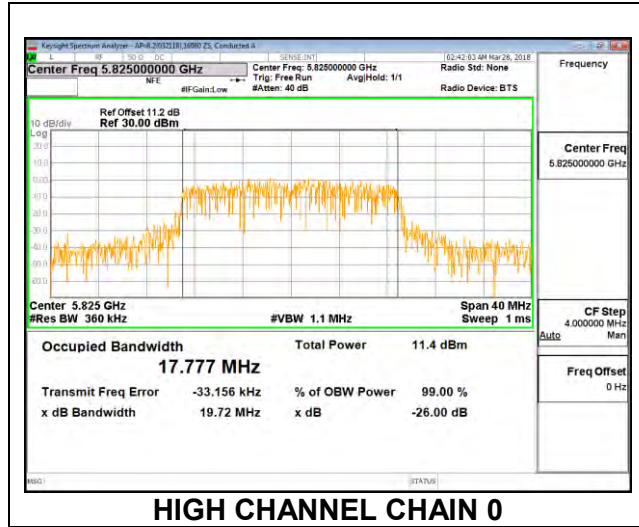



8.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5755	36.364	36.269
High	5795	36.310	36.302

LOW CHANNEL

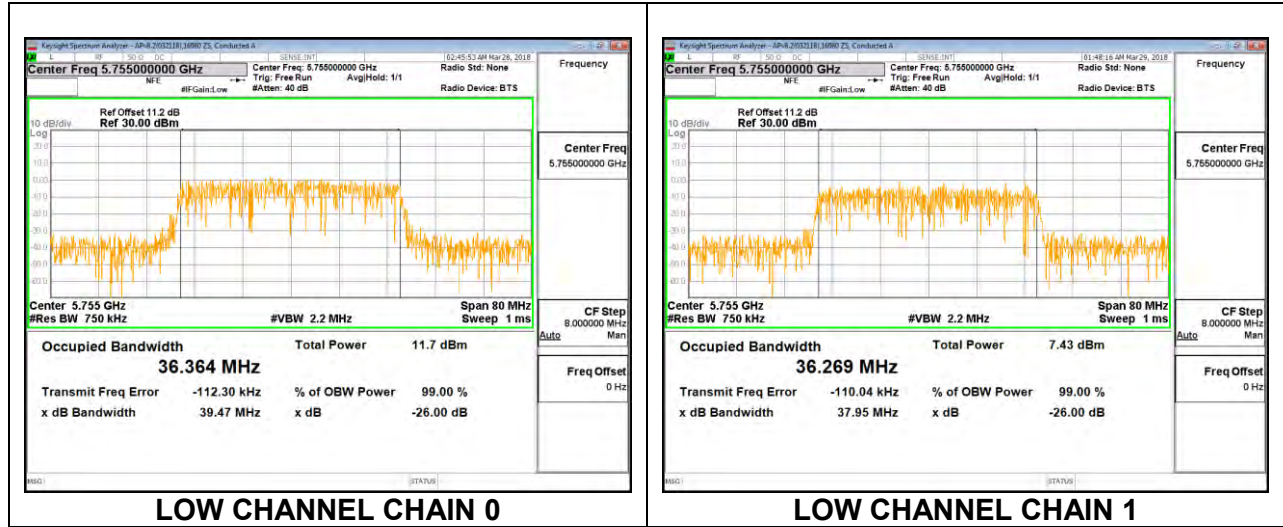

HIGH CHANNEL

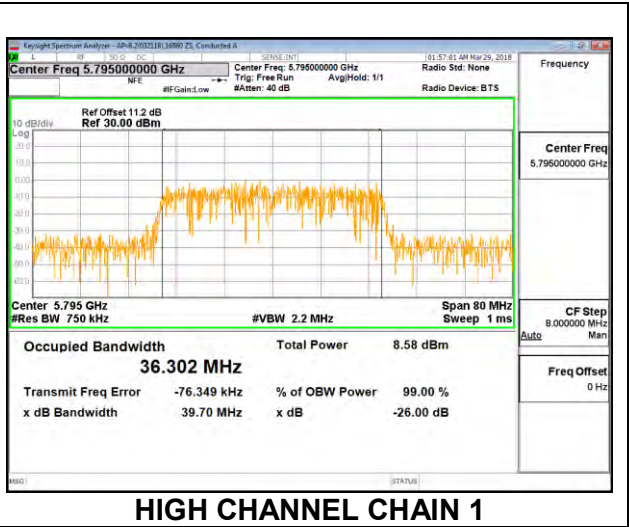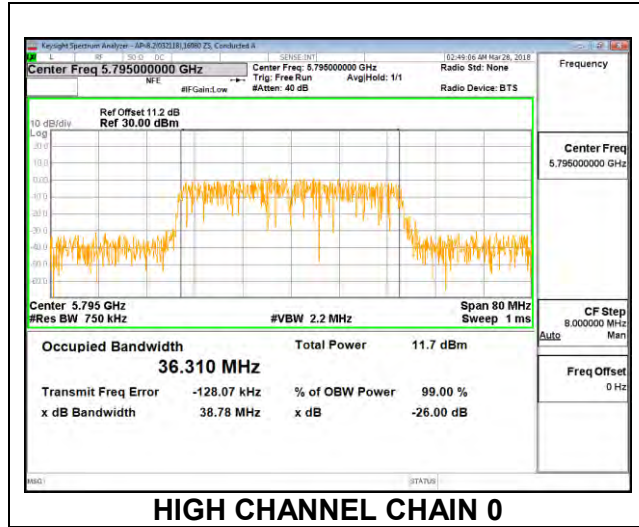

8.3.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Mid	5775	76.032	76.178

MID CHANNEL



8.4. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


8.4.1. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low	5745	16.055	16.045	0.5
Mid	5785	16.365	16.490	0.5
High	5825	16.295	16.330	0.5
144	5720	3.230	3.865	0.5


LOW CHANNEL

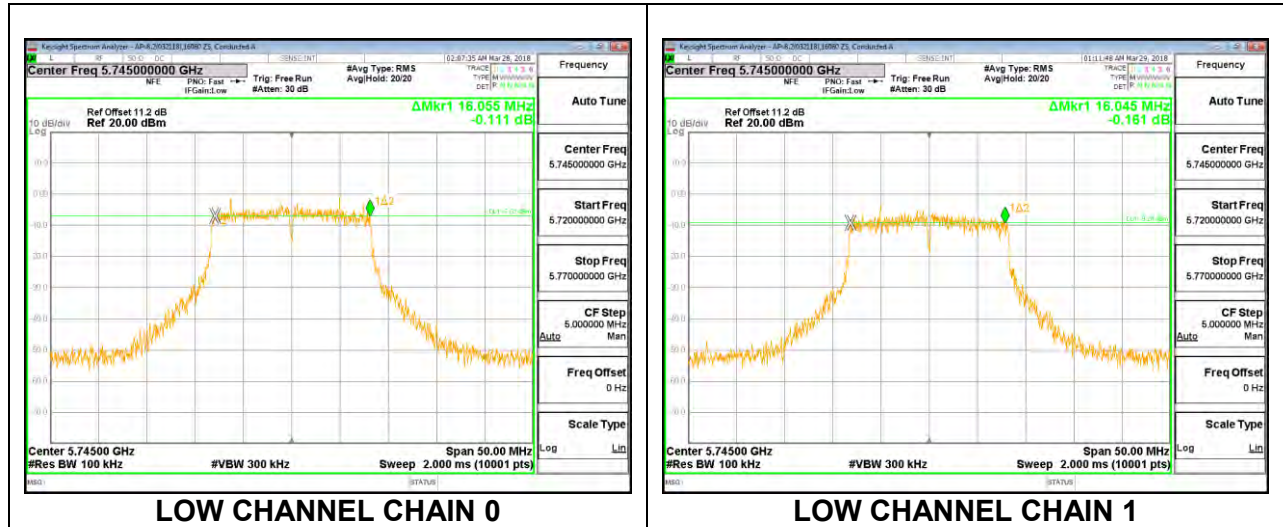


MID CHANNEL

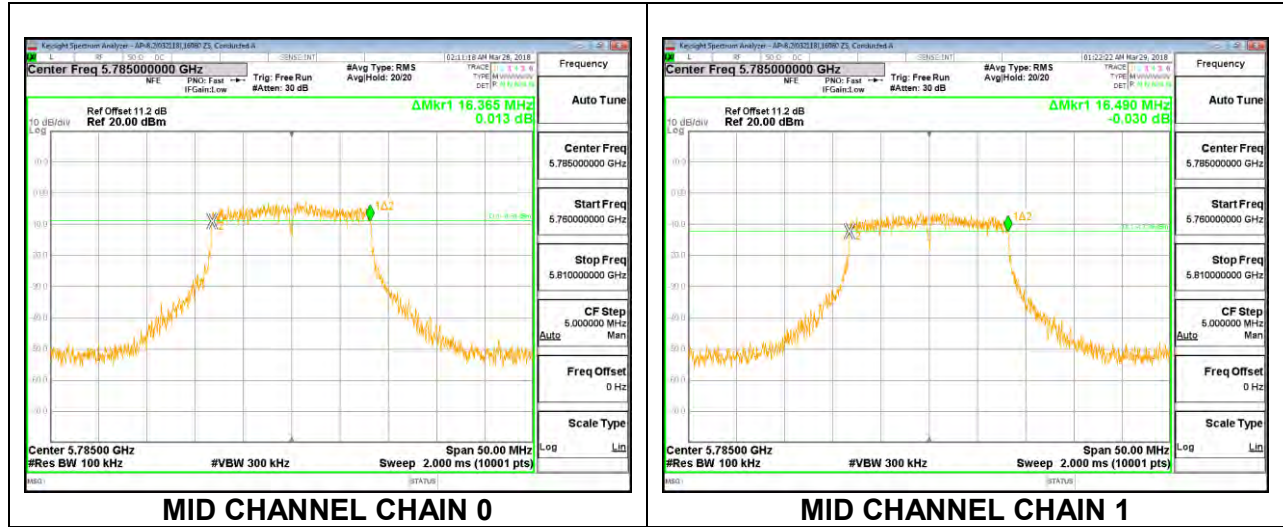

HIGH CHANNEL

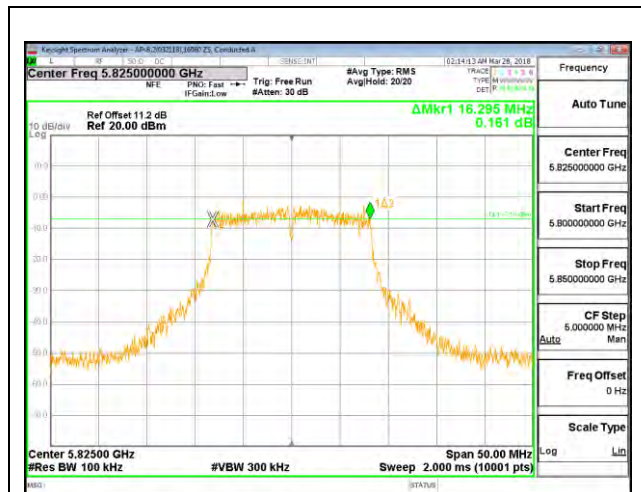


HIGH CHANNEL CHAIN 0

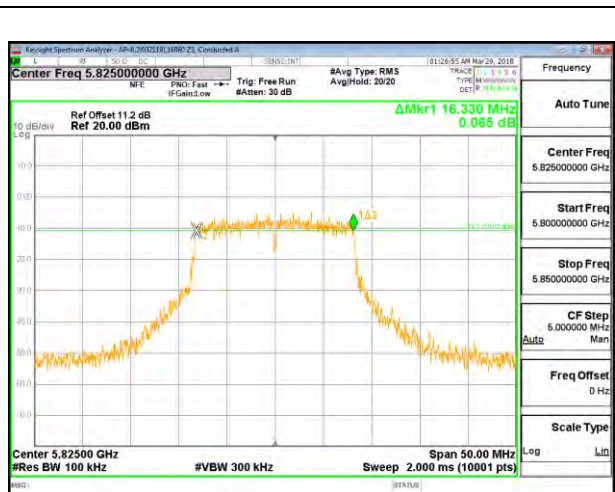

HIGH CHANNEL CHAIN 1

CHANNEL 144

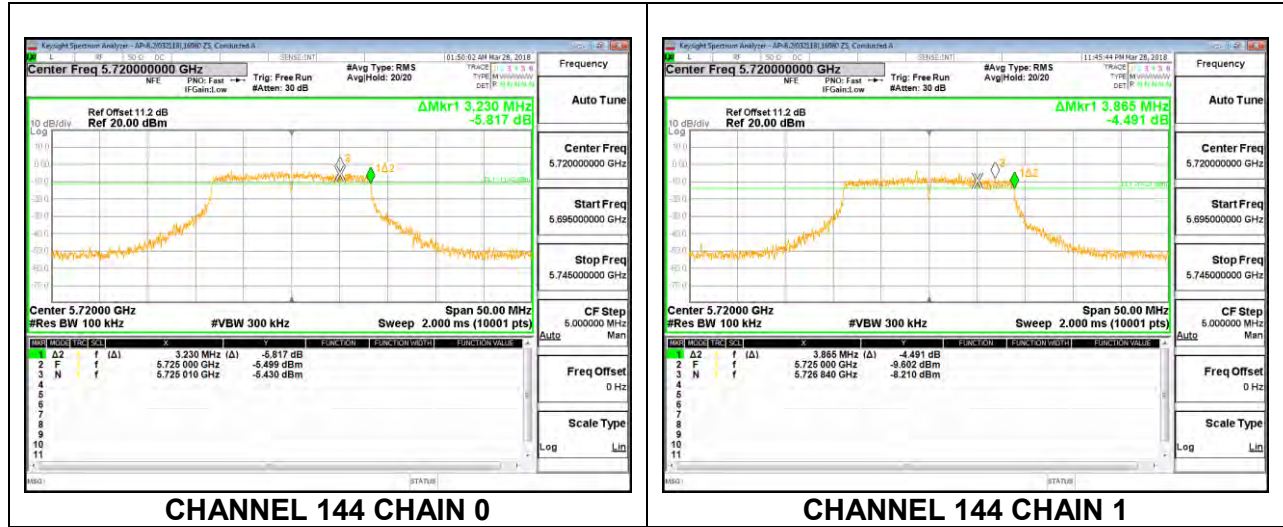

8.4.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low	5745	17.590	17.630	0.5
Mid	5785	17.580	17.625	0.5
High	5825	17.625	17.570	0.5
144	5720	3.880	3.800	0.5

LOW CHANNEL

