



FCC RADIO TEST REPORT

FCC ID	: PY7-07452G
Equipment	: GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPC and NFC
Brand Name	: Sony
Applicant	: Sony Corporation
	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer	: Sony Corporation
	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Standard	: FCC 47 CFR Part 2, and 90(S)

The product was received on Dec. 31, 2020 and testing was started from Feb. 22, 2021 and completed on Mar. 15, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu Sporton International Inc. EMC & Wireless Communications Laboratory No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)






Table of Contents

His	story o	of this test report	3
Su	mmar	y of Test Result	4
1	Gene	eral Description	5
	1.1	Feature of Equipment Under Test	5
	1.2	Modification of EUT	5
	1.3	Emission Designator	6
	1.4	Testing Site	7
	1.5	Applied Standards	8
2	Test	Configuration of Equipment Under Test	9
	2.1	Test Mode	9
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration and system	10
	2.4	Measurement Results Explanation Example	10
	2.5	Frequency List of Low/Middle/High Channels	11
3	Cond	ducted Test Items	12
	3.1	Measuring Instruments	
	3.2	Conducted Output Power Measurement and ERP Measurement	
	3.3	Peak-to-Average Ratio	
	3.4	99% Occupied Bandwidth and 26dB Bandwidth Measurement	15
	3.5	Emissions Mask Measurement	16
	3.6	Emissions Mask – Out Of Band Emissions Measurement	17
	3.7	Frequency Stability Measurement	
	3.8	Field Strength of Spurious Radiation Measurement	19
4	List	of Measuring Equipment	22
5	Unce	ertainty of Evaluation	24
Ap	pendi	x A. Test Results of Conducted Test	

Appendix B. Test Results of Radiated Test



History of this test report

Version	Description	Issued Date
01	Initial issue of report	Apr. 09, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046 §90.635	Conducted Output Power and Effective Radiated Power	Pass	-
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	-
3.5	§2.1051 §90.691	Emission masks – In-band emissions	Pass	-
3.6	§2.1051 §90.691	Emission masks – Out of band emissions	Pass	-
3.7	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	Pass	-
3.8	§2.1053 §90.691	Field Strength of Spurious Radiation	Pass	Under limit 36.72 dB at 2448.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Lucy Wu



1 General Description

1.1 Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac/ax, NFC, WPC/WPT, and GNSS.

Product Specification subjective to this standard						
Antenna Type	Loop Antenna					
Antenna Gain	-2.07 dBi					

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

EUT Information List									
HW Version	SW Version	S/N	Performed Test Item						
	0.225	0)/72004NE7	Conducted Measurement						
А	0.325	QV72004N5Z	ERP Test						
	0.550	QV72004K6T	Radiated Spurious Emission						

Accessory List						
AC Adaptar	Model Name : XQZ-UC1					
AC Adapter	S/N: 0020W51300095					
Family and	Model Name : MH750					
Earphone	S/N : N/A					
	Model Name : XQZ-UB1					
USB Cable	S/N : N/A					

Note:

- 1. Above EUT list used are electrically identical per declared by manufacturer.
- 2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report.
- 3. For other wireless features of this EUT, test report will be issued separately.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Emission Designator

Ľ	TE Band 26		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Conducted Power (W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Conducted Power (W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Conducted Power (W)	
1.4	814.7~823.3	1M08G7D	-	0.0991	1M09W7D	-	0.0782	1M09W7D	-	0.0782	
3	815.5~822.5	2M72G7D	-	0.0991	2M70W7D	-	0.0794	2M73W7D	-	0.0794	
5	816.5~821.5	4M49G7D	-	0.0993	4M48W7D	-	0.0794	4M51W7D	-	0.0624	
10	819.0	9M07G7D	0.0089	0.0979	8M99W7D	-	0.0776	9M05W7D	-	0.0604	
15	821.5	13M4G7D	0.0185	0.0995	13M4W7D	-	0.0760	13M4W7D	-	0.0585	
Ľ	TE Band 26		QPSK		16QAM			64QAM			
BW (MHz)	Frequency Range (MHz)	Designator Tolerance Conducted Designator Tolerance		Conducted Power (W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Conducted Power (W)				
1.4	824	1M09G7D	-	0.0951	1M09W7D	-	0.0746	1M09W7D	-	0.0581	
3	824	2M72G7D	-	0.0953	2M73W7D	-	0.0764	2M73W7D	-	0.0590	
5	824	4M50G7D	-	0.0962	4M51W7D	-	0.0708	4M47W7D	-	0.0564	
10	824	8M97G7D	-	0.0946	9M01W7D	-	0.0703	8M99W7D	-	0.0585	
15	824	13M4G7D	-	0.0944	13M5W7D	-	0.0735	13M4W7D	-	0.0570	



1.4 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory						
	No.52, Huaya 1st Rd., Guishan Dist.,						
Test Site Location	Taoyuan City 333, Taiwan (R.O.C.)						
Test Site Location	TEL: +886-3-327-3456						
	FAX: +886-3-328-4978						
Test Site No.	Sporton Site No.						
lest Site No.	TH05-HY						
Test Engineer	Luffy LiN						
Temperature	23~25 ℃						
Relative Humidity	52~55%						
Test Site	Sporton International Inc. Wensan Laboratory						
	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist.,						
Test Site Location	Taoyuan City 333010, Taiwan (R.O.C.)						
Test Site Location	TEL: +886-3-327-0868						
	FAX: +886-3-327-0855						
Test Site No.	Sporton Site No.						
Test Sile NO.	03CH12-HY (TAF Code: 3786)						
Test Engineer	Jack Cheng, Lance Chiang and Chuan Chu						
Temperature	21.8~26.2 ℃						
Relative Humidity	58.7~66.8%						
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory						

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007







1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the

following standards:

- FCC 47 CFR Part 2, 90
- ANSI / TIA-603-E
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- FCC KDB 414788 D01 Radiated Test Site v01r01
- Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
- 3. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.


Conducted			Ba	ndwic	lth (Mł	lz)		Ν	Modulation RB #			Tes	Test Channel			
Test Cases	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	Н
Max. Output Power	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	26				v		-	v	v	v			v		v	
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	v	v			v	v	v	
Emission masks In-band emissions	26	v	v	v	v	v	-	v	v	v	v		v	v		v
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v			v			v	v	×
Frequency Stability	26				v	v	-	v					v	v	v	
E.R.P.	26	v	v	v	v	v	-	v	v	v	Max Power					
Radiated Spurious Emission	26						Wo	rst Case						v	v	v
Remark	 The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. Since the output power worst case in other WWAN function, after assessing, WPC charging mode test data will be issued in other report. 															

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

TEL : 886-3-327-3456	Page Number	: 9 of 24
FAX : 886-3-328-4978	Issued Date	: Apr. 09, 2021
Report Template No.: BU5-FGLTE90S Version 2.4	Report Version	: 01



2.2 Connection Diagram of Test System

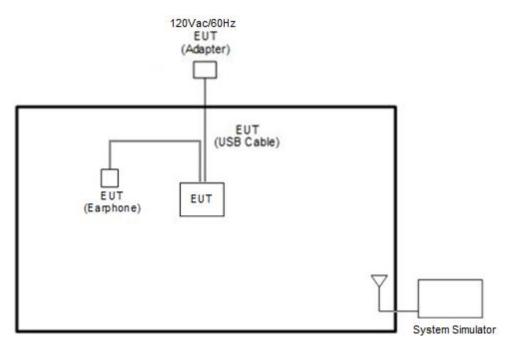

2.3 Support Unit used in test configuration and system

ltem	Equipment Brand Name		Model No. FCC ID		Data Cable	Power Cord	
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m	

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)



2.5 Frequency List of Low/Middle/High Channels

	LTE Band 26 Ch	annel and Frequen	cy List			
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest		
15	Channel	26765	-	-		
15	Frequency	821.5	-	-		
40	Channel	-	26740	-		
10	Frequency	-	819	-		
5	Channel	26715	26740	26765		
5	Frequency		819	821.5		
3	Channel	26705	26740	26775		
3	Frequency	815.5	819	822.5		
	Channel	26697	26740	26783		
1.4	Frequency	814.7	819	823.3		




3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, Emissions Mask – Out Of Band Emissions, and Conducted Spurious Emission



3.1.4 Frequency Stability



3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power Measurement and ERP Measurement

3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 26.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, where

- P_T = transmitter output power in dBm
- G_T = gain of the transmitting antenna in dBi

 L_{C} = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Reporting only

3.3.2 Test Procedures

- 1. The EUT was connected to spectrum and system simulator via a power divider.
- 2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 4. Record the deviation as Peak to Average Ratio.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.4.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.



3.5 Emissions Mask Measurement

3.5.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC

Part 90.691.(a)

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log_{10} (f/6.1) decibels or 50 + 10 Log_{10} (P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{Log}_{10}(\text{P})$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.5.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- 3. Set RBW and VBW 3 times of RBW to make the measurement with the spectrum analyzer's, and according to KDB 971168 D02 Misc Rev Approve License Devices v02r01 standards, set RBW = 300 Hz to make offsets less than 37.5 kHz from a channel edge, RBW = 100 kHz to make offsets greater than 37.5 kHz, that is allowed.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.6 Emissions Mask – Out Of Band Emissions Measurement

3.6.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least $43 + 10 \log (P) dB$. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10^{th} harmonic.

3.6.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. For testing below 1GHz, make the measurement with the spectrum analyzer's RBW = 100 kHz, VBW = 3MHz, taking the record of maximum spurious emission.
- For testing above 1GHz, make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 8. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)



3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the base station.
- 2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

3.8 Field Strength of Spurious Radiation Measurement

3.8.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43+10log₁₀(P[Watts]) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.8.2 Test Procedures

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- For testing below 1GHz, make the measurement with the spectrum analyzer's RBW = 100 kHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. For testing above 1GHz, make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12. ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)




3.8.3 Test Setup

For radiated test below 30MHz

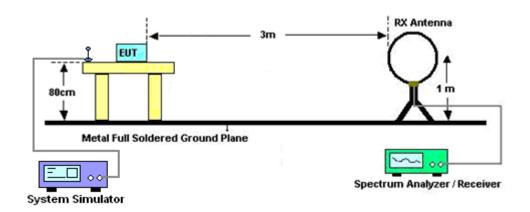


For radiated test from 30MHz to 1GHz

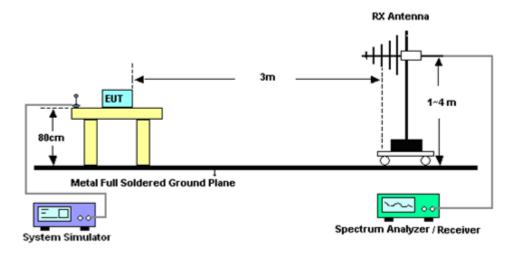



For radiated test above 1GHz

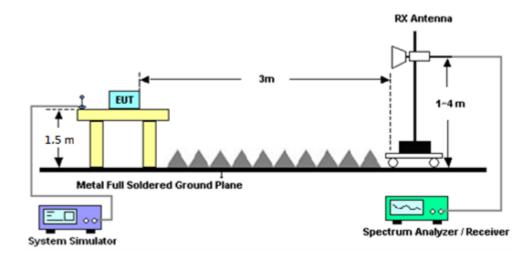

3.8.4 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Mar. 12, 2021~ Mar. 15, 2021	Jan. 03, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 29, 2020	Mar. 12, 2021~ Mar. 15, 2021	Apr. 28, 2021	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 8	1GHz~18GHz	Nov. 23, 2020	Mar. 12, 2021~ Mar. 15, 2021	Nov. 22, 2021	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-121 2	1GHz~18GHz	May 20, 2020	Mar. 12, 2021~ Mar. 15, 2021	May 19, 2021	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2020	Mar. 12, 2021~ Mar. 15, 2021	Mar. 24, 2021	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY572801 20	1GHz~26.5GHz	Jul. 20, 2020	Mar. 12, 2021~ Mar. 15, 2021	Jul. 19, 2021	Radiation (03CH12-HY)
Preamplifier	E-INSTRUME NT TECH LTD.	ERA-100M-18 G-56-01-A70	EC190024 9	1GHz-18GHz	Dec. 05, 2020	Mar. 12, 2021~ Mar. 15, 2021	Dec. 04, 2021	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY534701 18	10Hz~44GHz	Jan. 15, 2021	Mar. 12, 2021~ Mar. 15, 2021	Jan. 14, 2022	Radiation (03CH12-HY)
Signal Generator	Rohde & Schwarz	SMB100A	101107	100kHz~40GHz	Dec. 04, 2020	Mar. 12, 2021~ Mar. 15, 2021	Dec. 03, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz~30MHz	Mar. 11, 2021	Mar. 12, 2021~ Mar. 15, 2021	Mar. 10, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 11, 2020	Mar. 12, 2021~ Mar. 15, 2021	Dec. 10, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 22, 2021	Mar. 12, 2021~ Mar. 15, 2021	Feb. 21, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 22, 2021	Mar. 12, 2021~ Mar. 15, 2021	Feb. 21, 2022	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0SS	SN1	1.2GHz High Pass Filter	Mar. 18, 2020	Mar. 12, 2021~ Mar. 15, 2021	Mar. 17, 2021	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN2	3GHz High Pass Filter	Jul. 14, 2020	Mar. 12, 2021~ Mar. 15, 2021	Jul. 13, 2021	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Mar. 12, 2021~ Mar. 15, 2021	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Mar. 12, 2021~ Mar. 15, 2021	N/A	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 12, 2021~ Mar. 15, 2021	N/A	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP140349	N/A	Oct. 02, 2020	Mar. 12, 2021~ Mar. 15, 2021	Oct. 01, 2021	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-00098 9	N/A	N/A	Mar. 12, 2021~ Mar. 15, 2021	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WLKS1200-12 SS	SN2	1.2GHz Low Pass Filter	Mar. 21, 2020	Mar. 12, 2021~ Mar. 15, 2021	Mar. 20, 2021	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN2	3GHz High Pass Filter	Jul. 14, 2020	Mar. 12, 2021~ Mar. 15, 2021	Jul. 13, 2021	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN2	6.75GHz High Pass Filter	Mar. 18, 2020	Mar. 12, 2021~ Mar. 15, 2021	Mar. 17, 2021	Radiation (03CH12-HY)
Base Station (Measure)	Anritsu	MT8821C	626200253 41	N/A	Oct. 06, 2020	Feb. 22, 2021~ Feb. 26, 2021	Oct. 05, 2021	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 27, 2020	Feb. 22, 2021~ Feb. 26, 2021	Nov. 26, 2021	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40° ℃ ~90°℃	Sep. 14, 2020	Feb. 22, 2021~ Feb. 26, 2021	Sep. 13, 2021	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 05, 2020	Feb. 22, 2021~ Feb. 26, 2021	Oct. 04, 2021	Conducted (TH05-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 09, 2021	Feb. 22, 2021~ Feb. 26, 2021	Jan. 08, 2022	Conducted (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.07
Confidence of 95% (U = 2Uc(y))	3.07

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Confidence of 95% (U = 2Uc(y))

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power & ERP)

	LTE E	Band 26 Ma	aximum Av	verage Pov	ver [dBm]	(GT - LC =	-2.07 dB)	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
15	1	0		24.20	-	-		
15	1	37		24.06	-	-		
15	1	74		24.04	-	-		
15	36	0	QPSK	23.20	-	-	19.98	0.0995
15	36	20		23.24	-	-		
15	36	39		23.23	-	-		
15	75	0		23.24	-	-		
15	1	0		23.03	-	-		
15	1	37		22.98	-	-		
15	1	74		22.98	-	-		
15	36	0	16-QAM	21.81	-	-	18.81	0.0760
15	36	20		21.85	-	-		
15	36	39		21.87	-	-		
15	75	0		21.86	-	-		
15	1	0		21.85	-	-		
15	1	37		21.89	-	-		
15	1	74		21.86	-	-		
15	36	0	64-QAM	20.87	-	-	17.67	0.0585
15	36	20		20.88	-	-		
15	36	39		20.89	-	-		
15	75	0		20.85	-	-		
Limit	E	RP < 100V	V		Result		Pa	ISS



	LTE E	Band 26 Ma	aximum Av	verage Pov	ver [dBm]	(GT - LC =	-2.07 dB)	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
10	1	0		-	24.12	-		
10	1	25		-	24.09	-		
10	1	49		-	24.13	-		
10	25	0	QPSK	-	23.19	-	19.91	0.0979
10	25	12		-	23.28	-		
10	25	25		-	23.16	-		
10	50	0		-	23.22	-		
10	1	0		-	23.08	-		
10	1	25		-	23.09	-		
10	1	49		-	23.12	-		
10	25	0	16-QAM	-	21.78	-	18.90	0.0776
10	25	12		-	21.87	-		
10	25	25		-	21.74	-		
10	50	0		-	21.84	-		
10	1	0		-	21.96	-		
10	1	25		-	22.01	-		
10	1	49		-	22.03	-		
10	25	0	64-QAM	-	20.81	-	17.81	0.0604
10	25	12		-	20.90	-		
10	25	25		-	20.83	-		
10	50	0		-	20.87	-		
Limit	E	ERP < 100V	V		Result		Pa	SS



	LTE E	Band 26 Ma	aximum Av	verage Pov	ver [dBm]	(GT - LC =	-2.07 dB)	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
5	1	0		24.19	24.10	24.15		
5	1	12		24.18	24.15	24.16		
5	1	24		24.08	24.14	24.14		
5	12	0	QPSK	23.31	23.21	23.32	19.97	0.0993
5	12	7		23.30	23.23	23.27		
5	12	13		23.22	23.20	23.19		
5	25	0		23.25	23.21	23.26		
5	1	0		23.22	23.04	23.20		
5	1	12		23.15	23.06	23.12		
5	1	24		23.04	23.10	23.08		
5	12	0	16-QAM	21.95	21.80	21.93	19.00	0.0794
5	12	7		21.90	21.83	21.91		
5	12	13		21.84	21.80	21.79		
5	25	0		21.87	21.86	21.88		
5	1	0		22.17	21.97	22.11		
5	1	12		22.08	21.99	22.01		
5	1	24		21.96	21.99	22.00		
5	12	0	64-QAM	21.00	20.85	20.95	17.95	0.0624
5	12	7		20.96	20.92	20.95		
5	12	13		20.86	20.88	20.85		
5	25	0		20.88	20.83	20.90		
Limit	E	ERP < 100V	V		Result		Pa	SS



	LTE E	Band 26 Ma	aximum Av	verage Pov	ver [dBm]	(GT - LC =	-2.07 dB)	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
3	1	0		24.17	24.10	24.18		
3	1	8		24.17	24.15	24.18		
3	1	14		24.11	24.13	24.09		
3	8	0	QPSK	23.32	23.20	23.26	19.96	0.0991
3	8	4		23.32	23.26	23.25		
3	8	7		23.24	23.17	23.17		
3	15	0		23.29	23.19	23.23		
3	1	0		23.19	23.01	23.13		
3	1	8		23.22	23.17	23.13		
3	1	14		23.04	23.09	23.01		
3	8	0	16-QAM	21.96	21.83	21.93	19.00	0.0794
3	8	4		21.99	21.89	21.90		
3	8	7		21.88	21.85	21.84		
3	15	0		21.92	21.82	21.88		
3	1	0		23.19	23.01	23.13		
3	1	8		23.22	23.17	23.13		
3	1	14		23.04	23.09	23.01		
3	8	0	64-QAM	21.96	21.83	21.93	19.00	0.0794
3	8	4		21.99	21.89	21.90		
3	8	7		21.88	21.85	21.84		
3	15	0		21.92	21.82	21.88		
Limit	E	RP < 100V	V		Result		Pa	ISS



	LTE E	Band 26 Ma	aximum Av	verage Pov	ver [dBm]	(GT - LC =	-2.07 dB)	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
1.4	1	0		24.16	24.04	24.07		
1.4	1	3		24.16	24.12	24.10		
1.4	1	5		24.10	24.04	24.02		
1.4	3	0	QPSK	24.18	24.05	24.10	19.96	0.0991
1.4	3	1		24.18	24.09	24.13		
1.4	3	3		24.16	24.08	24.05		
1.4	6	0		23.24	23.15	23.13		
1.4	1	0		23.11	22.95	23.01		
1.4	1	3		23.15	23.05	23.06		
1.4	1	5		23.03	22.97	22.95		
1.4	3	0	16-QAM	22.89	22.76	22.79	18.93	0.0782
1.4	3	1		22.93	22.80	22.83		
1.4	3	3		22.85	22.74	22.75		
1.4	6	0		21.90	21.84	21.79		
1.4	1	0		23.11	22.95	23.01		
1.4	1	3		23.15	23.05	23.06		
1.4	1	5		23.03	22.97	22.95		
1.4	3	0	64-QAM	22.89	22.76	22.79	18.93	0.0782
1.4	3	1		22.93	22.80	22.83		
1.4	3	3		22.85	22.74	22.75		
1.4	6	0		21.90	21.84	21.79		
Limit	E	ERP < 100V	V		Result		Pa	SS



	LTE E	Band 26 Ma	aximum Av	verage Pov	wer [dBm]	(GT - LC =	-2.07 dB)	
BW [MHz]	RB Size	RB Offset	Mod	-	824MHz	-	ERP (dBm)	ERP (W)
15	1	0		-	23.97	-		
15	1	37		-	23.94	-		
15	1	74		-	23.93	-		
15	36	0	QPSK	-	23.07	-	19.75	0.0944
15	36	20		-	23.14	-		
15	36	39		-	23.05	-		
15	75	0	- 23.11 -					
15	1	0		-	22.88	-		
15	1	37		-	22.85	-		
15	1	74		-	22.83	-		
15	36	0	16-QAM	-	21.70	-	18.66	0.0735
15	36	20		-	21.71	-		
15	36	39		-	21.65	-		
15	75	0		-	21.72	-		
15	1	0		-	21.72	-		
15	1	37		-	21.78	-		
15	1	74		-	21.68	-		
15	36	0	64-QAM	-	20.72	-	17.56	0.0570
15	36	20		-	20.75	-		
15	36	39	-	-	20.73	-		
15	75	0		-	20.74	-	1	
Limit	E	ERP < 100V	V		Result		Pa	SS



	LTE E	Band 26 Ma	aximum Av	verage Pov	ver [dBm]	(GT - LC =	-2.07 dB)	
BW [MHz]	RB Size	RB Offset	Mod	-	824MHz	-	ERP (dBm)	ERP (W)
10	1	0		-	23.98	-		
10	1	25	-	-	23.93	-		
10	1	49		-	23.91	-		
10	25	0	QPSK	-	22.83	-	19.76	0.0946
10	25	12		-	22.83	-		
10	25	25		-	22.76	-		
10	50	0		-	22.94	-		
10	1	0		-	22.65	-		
10	1	25		-	22.69	-		
10	1	49		-	22.62	-		
10	25	0	16-QAM	-	21.42	-	18.47	0.0703
10	25	12		-	21.53	-		
10	25	25		-	21.38	-		
10	50	0		-	21.44	-		
10	1	0		-	21.89	-		
10	1	25		-	21.85	-		
10	1	49		-	21.80	-		
10	25	0	64-QAM	-	20.70	-	17.67	0.0585
10	25	12		-	20.75	-		
10	25	25		-	20.67	-		
10	50	0		-	20.72	-	1	
Limit	E	ERP < 100V	V		Result		Pa	SS



LTE Band 26 Maximum Average Power [dBm] (GT - LC = -2.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	-	824MHz	-	ERP (dBm)	ERP (W)
5	1	0		-	24.00	-		
5	1	12		-	24.05	-		
5	1	24		-	23.98	-	19.83	0.0962
5	12	0	QPSK	-	22.79	-		
5	12	7		-	22.84	-		
5	12	13		-	22.78	-		
5	25	0		-	22.82	-		
5	1	0		-	22.66	-		
5	1	12		-	22.71	-	18.50	0.0708
5	1	24	16-QAM	-	22.72	-		
5	12	0		-	21.46	-		
5	12	7		-	21.50	-		
5	12	13		-	21.44	-		
5	25	0		-	21.49	-		
5	1	0		-	21.70	-		
5	1	12	64-QAM	-	21.72	-		
5	1	24		-	21.73	-		
5	12	0		-	20.60	-	17.51	0.0564
5	12	7		-	20.60	-		
5	12	13		-	20.56	-		
5	25	0		-	20.56	-		
Limit	Limit ERP < 100W				Result		Pa	SS



LTE Band 26 Maximum Average Power [dBm] (GT - LC = -2.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	-	824MHz	-	ERP (dBm)	ERP (W)
3	1	0		-	23.72	-		
3	1	8		-	23.79	-		
3	1	14		-	24.01	-	19.79	0.0953
3	8	0	QPSK	-	23.02	-		
3	8	4		-	23.08	-		
3	8	7		-	23.05	-		
3	15	0		-	23.09	-		
3	1	0		-	22.90	-		
3	1	8		-	23.05	-		
3	1	14	16-QAM	-	22.93	-	18.83	0.0764
3	8	0		-	21.74	-		
3	8	4		-	21.79	-		
3	8	7		-	21.70	-		
3	15	0		-	21.75	-		
3	1	0		-	21.83	-		
3	1	8		-	21.93	-		
3	1	14		-	21.91	-		
3	8	0	64-QAM	-	20.76	-	17.71	0.0590
3	8	4		-	20.79	-		
3	8	7		-	20.71	-		
3	15	0		-	20.69	-		
Limit	E	ERP < 100V	V		Result		Pa	SS



LTE Band 26 Maximum Average Power [dBm] (GT - LC = -2.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	-	824MHz	-	ERP (dBm)	ERP (W)
1.4	1	0		-	23.90	-		
1.4	1	3		-	23.97	-		
1.4	1	5		-	23.89	-		
1.4	3	0	QPSK	-	24.00	-	19.78	0.0951
1.4	3	1		-	24.00	-		
1.4	3	3		-	23.96	-		
1.4	6	0		-	23.02	-		
1.4	1	0		-	22.80	-		
1.4	1	3		-	22.95	-		
1.4	1	5	16-QAM	-	22.84	-	18.73	0.0746
1.4	3	0		-	22.68	-		
1.4	3	1		-	22.69	-		
1.4	3	3		-	22.64	-		
1.4	6	0		-	21.70	-		
1.4	1	0		-	21.77	-		
1.4	1	3		-	21.86	-		
1.4	1	5		-	21.78	-		
1.4	3	0	64-QAM	-	21.74	-	17.64	0.0581
1.4	3	1		-	21.83	-		
1.4	3	3		-	21.76	-		
1.4	6	0		-	20.64	-		
Limit	Limit ERP < 100W				Result		Pa	ISS




LTE Band 26

Peak-to-Average Ratio

Mode					
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.93	5.68	6.52	-	PASS



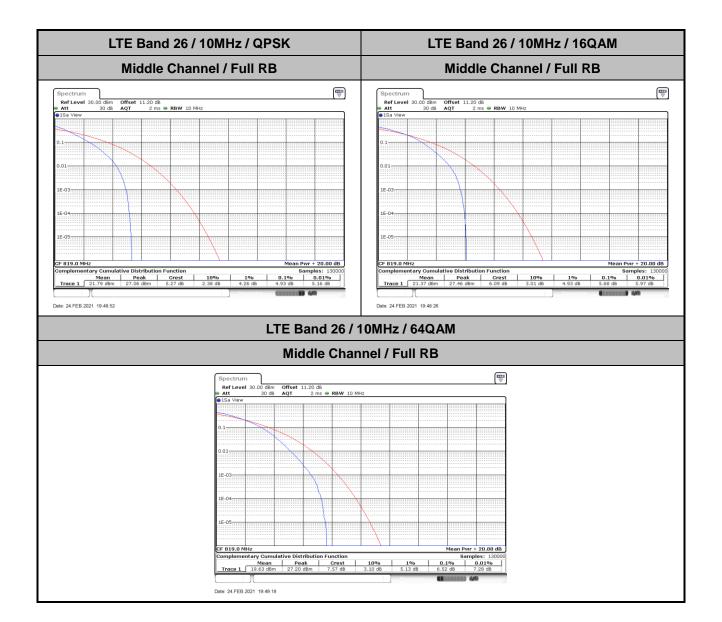





26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.23	1.24	3.05	3.03	4.92	4.80	9.71	9.67	-	-	-	-
Low CH	-	-	-	-	-	-	-	-	14.18	14.45	-	-
Mode	LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM	256 QAM	64QAM	256 QAM	64QAM	256 QAM	64QAM	256 QAM	64QAM	256 QAM	64QAM	256 QAM
Middle CH	1.23	-	2.97	-	4.89	-	9.71	-	-	-	-	-
Low CH	-	-	-	-	-	-	-	-	14.33	-	-	-




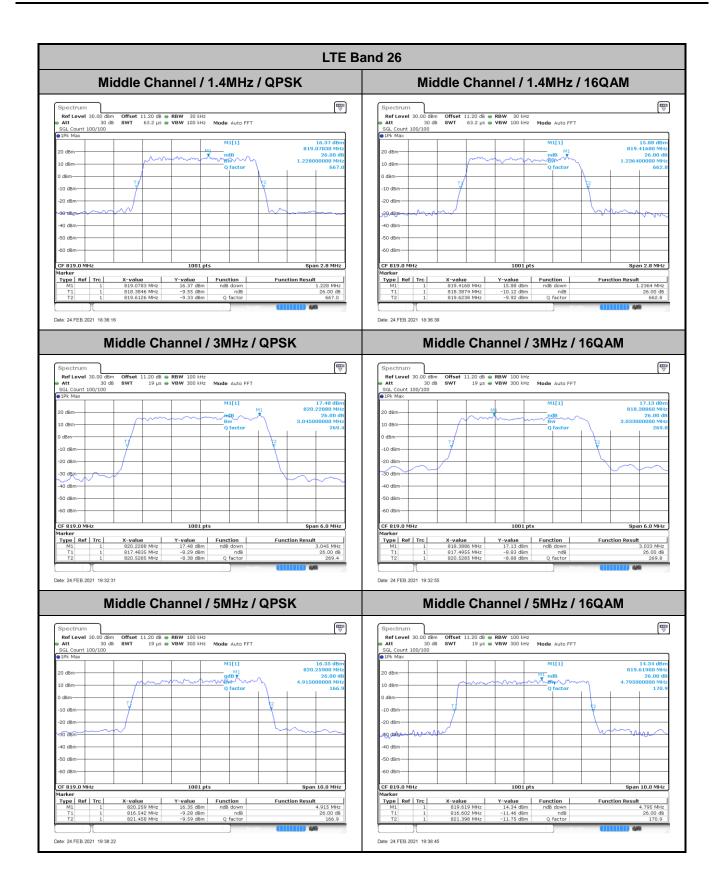



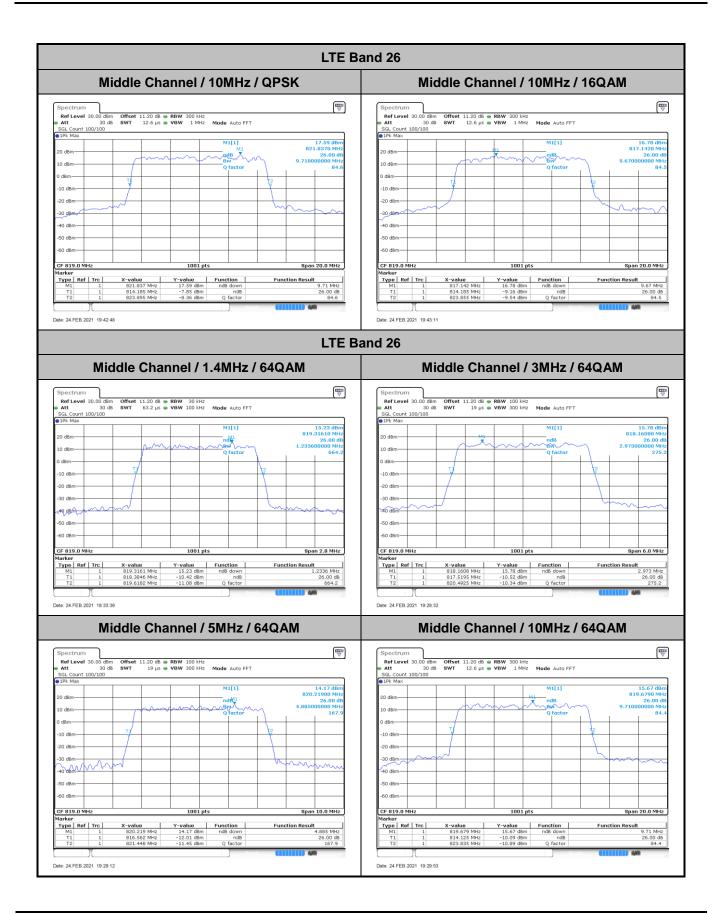



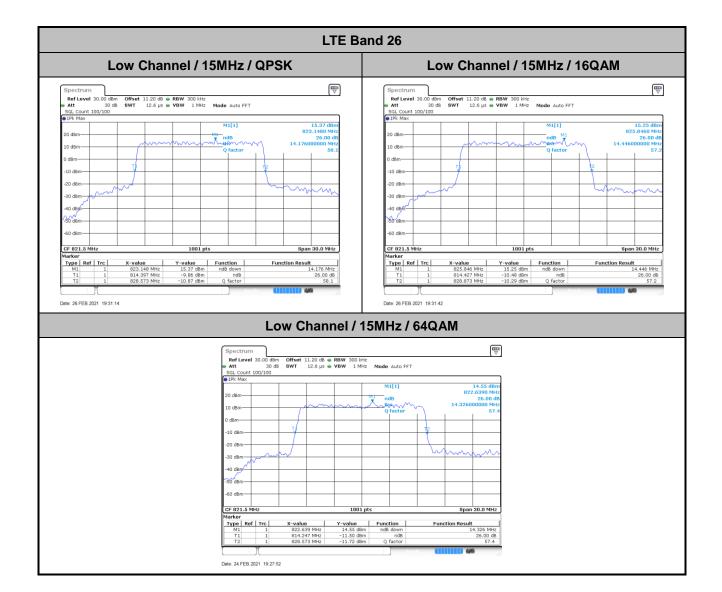





Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.08	1.09	2.72	2.70	4.49	4.48	9.07	8.99	-	-	-	-
Low CH	-	-	-	-	-	-	-	-	13.43	13.37	-	-
Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM	256 QAM	64QAM	256 QAM	64QAM	256 QAM	64QAM	256 QAM	64QAM	256 QAM	64QAM	256 QAM
Middle CH	1.09	-	2.73	-	4.51	-	9.05	-	-	-	-	-
Low CH	-	-	-	-	-	-	-	-	13.40	-	-	-




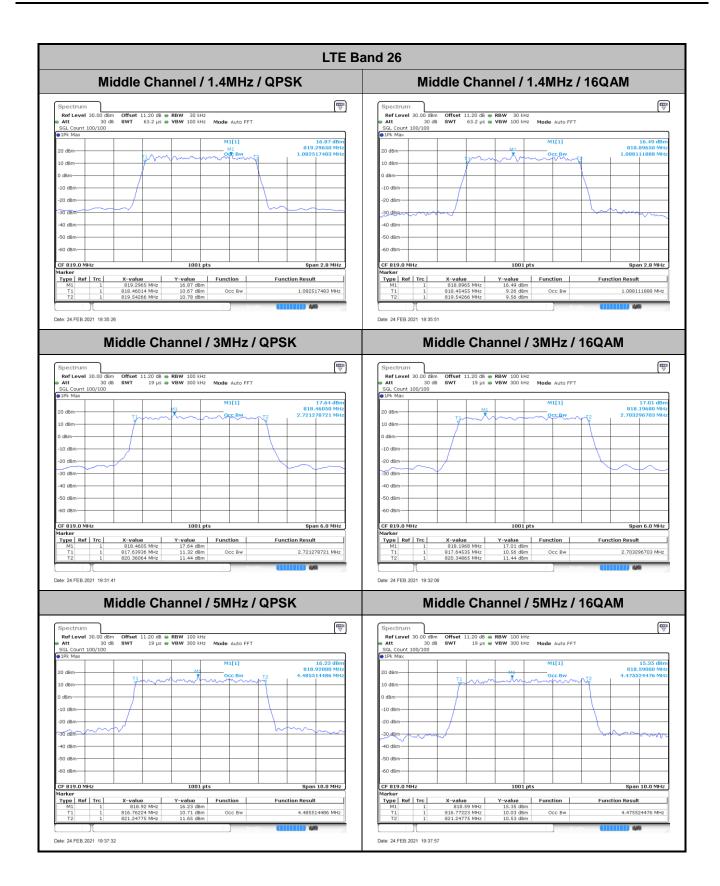



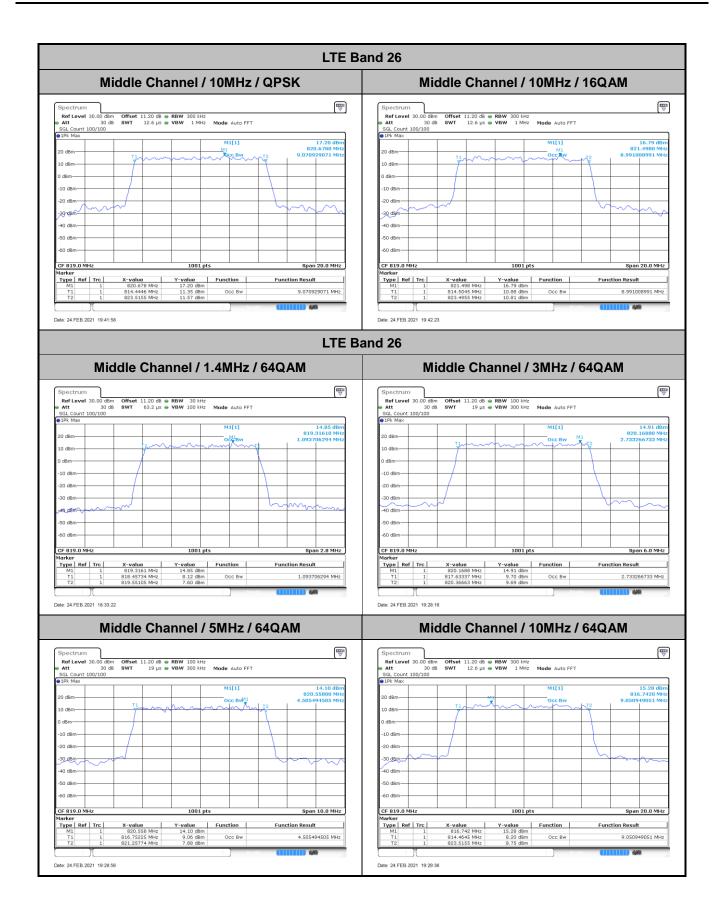



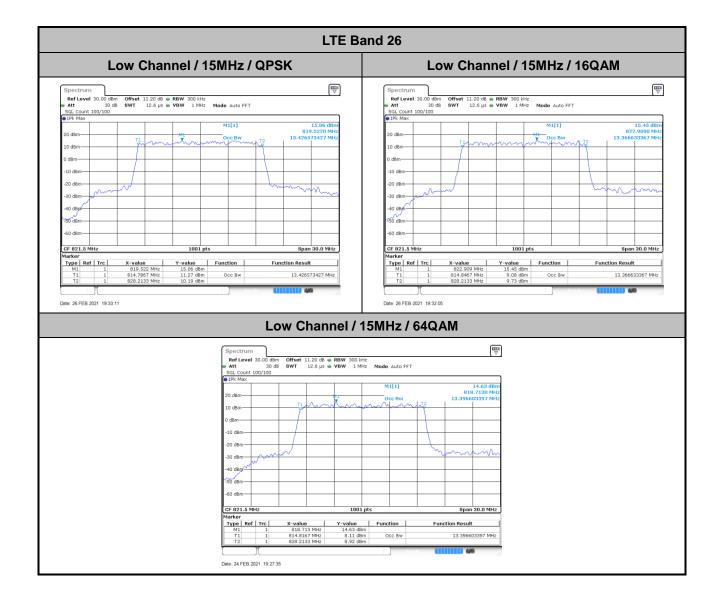



Emission masks – In-band emissions

