



CERTIFICATION TEST REPORT

Report Number. : 11760905-E4V1

Applicant : SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

FCC ID : PY7-32042D

EUT Description : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

July 26, 2017

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	07/26/17	Initial Issue	D. Corona

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
4.2. <i>SAMPLE CALCULATION</i>	7
4.3. <i>MEASUREMENT UNCERTAINTY</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>MAXIMUM OUTPUT POWER</i>	8
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	8
5.4. <i>SOFTWARE AND FIRMWARE</i>	8
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	9
5.6. <i>DESCRIPTION OF TEST SETUP</i>	10
6. TEST AND MEASUREMENT EQUIPMENT	13
7. MEASUREMENT METHODS	14
8. SUMMARY TABLE	15
9. ANTENNA PORT TEST RESULTS	16
9.1. <i>ON TIME AND DUTY CYCLE</i>	16
9.2. <i>11b 2TX MIMO MODE IN THE 2.4GHz BAND</i>	19
9.2.1. 6 dB BANDWIDTH	19
9.2.2. 99% BANDWIDTH	25
9.2.3. OUTPUT POWER	31
9.2.4. POWER SPECTRAL DENSITY	33
9.2.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	39
9.3. <i>11g 2TX CDD MIMO MODE IN THE 2.4GHz BAND</i>	49
9.3.1. 6 dB BANDWIDTH	49
9.3.2. 99% BANDWIDTH	56
9.3.3. OUTPUT POWER	63
9.3.4. POWER SPECTRAL DENSITY	65
9.3.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	72
9.4. <i>11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND</i>	84
9.4.1. 6 dB BANDWIDTH	84
9.4.2. 99% BANDWIDTH	91

9.4.3.	OUTPUT POWER	98
9.4.4.	POWER SPECTRAL DENSITY	100
9.4.5.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	107
10.	RADIATED TEST RESULTS.....	119
10.1.	LIMITS AND PROCEDURE.....	119
10.2.	TRANSMITTER ABOVE 1 GHz.....	120
10.2.1	11b MIMO MODE IN THE 2.4GHz BAND.....	120
10.2.2	11g MIMO MODE IN THE 2.4GHz BAND.....	134
10.2.3	11n-HT20 MIMO MODE IN THE 2.4GHz BAND.....	150
10.3	WORST-CASE BELOW 30 MHz.....	166
10.4	WORST-CASE BELOW 1 GHz.....	167
10.5.	WORST-CASE 18 to 26 GHz	169
11.	AC POWER LINE CONDUCTED EMISSIONS	171
12.	SETUP PHOTOS.....	174

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC

SERIAL NUMBER: RADIATED: BH9000HG8, BH90009E85
CONDUCTED: BH9000U97W, BH9000TU7W

DATE TESTED: JULY 08 - 21, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:



DAN CORONIA
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC.

GLENN ESCANO
WISE LABORATORY ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v04, KDB 662911 D01 Multiple Transmitter Output v02r01 and ANSI C63.10-2013,

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 22541-1)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 22541-2)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 22541-3)
	<input type="checkbox"/> Chamber G(IC: 22541-4)
	<input type="checkbox"/> Chamber H(IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. Chambers A through C are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under Industry Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b 2TX	16.33	42.95
2412 - 2472	802.11g 2TX	16.52	44.87
2412 - 2472	802.11n HT20 2TX CDD	16.35	43.15

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	Chain 0	Chain 1
2.4	-3.70	-5.50

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was SONY, s_atp_1_00139_B_10_5.
The test utility software used during testing was Tera Term Ver 4.79.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated bandedge, harmonics, and spurious emissions from 1 GHz to 18GHz were performed. The EUT was set to transmit at the Low/Middle/High channels.

Radiated emission below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT was set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that Z orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Z orientation.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20mode: MCS0

The simultaneous mode (SISO 2.4GHz Chain 0 and 5GHz chain 1) was checked and stand-alone (MIMO) 2.4 GHz / 5GHz remain worst case.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	20B7S0A200	PC015REW	NA
AC Adapter	SONY	UCH 20	3416W45305756	NA
Headphones	SONY	N/A	N/A	N/A

I/O CABLES (CONDUCTED TEST)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	RF	Shielded	0.2	To Spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	DC	1	DC	Shielded	0.3	N/A

I/O CABLES (RADIATED AND CONDUCTED EMISSIONS)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Shielded	3	N/A
2	Audio	1	3.5mm	Shielded	1	N/A


TEST SETUP

CONDUCTED TEST SETUP DIAGRAM

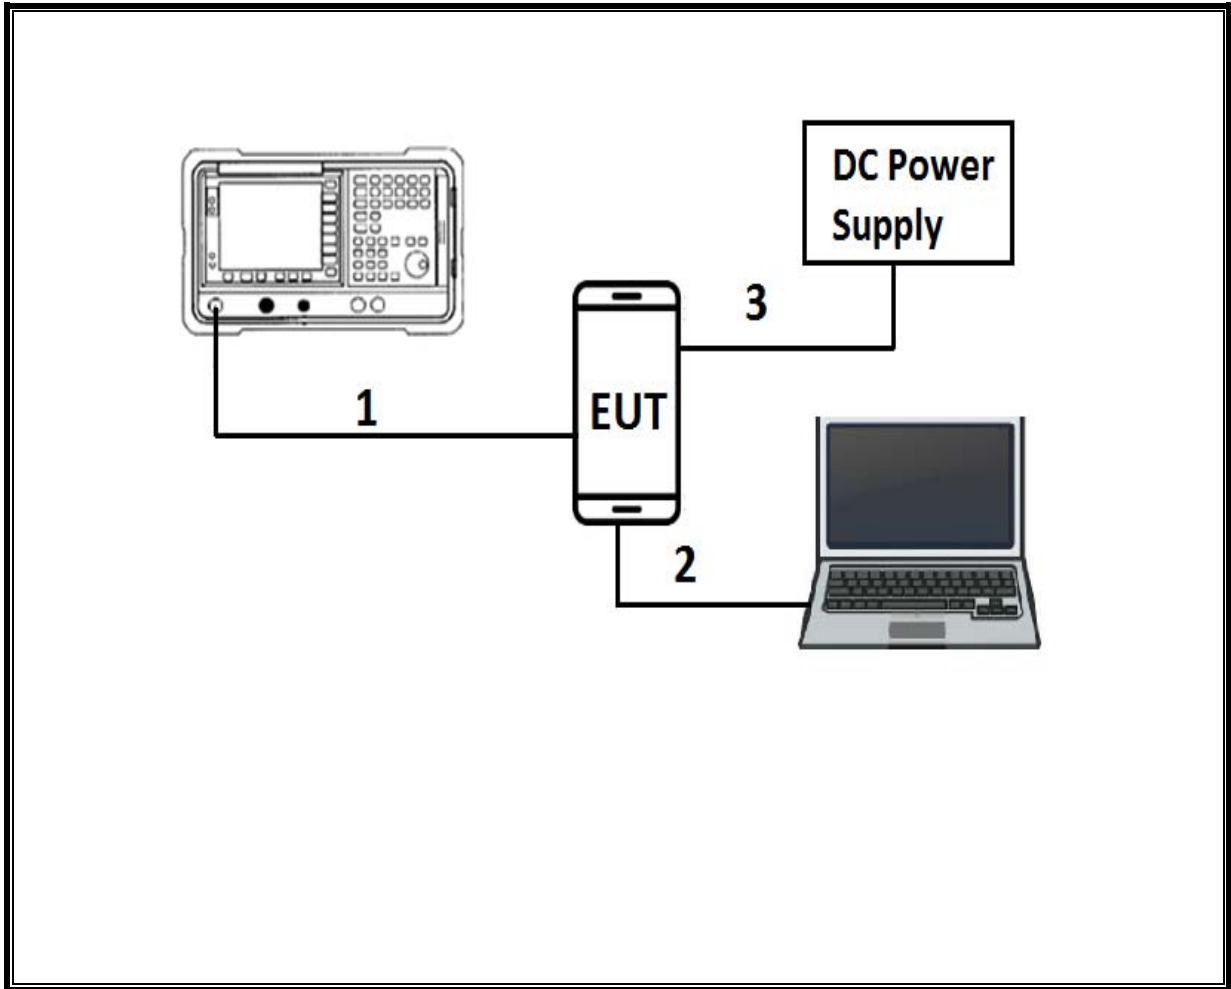

TEST SETUP

RADIATED AND AC LINE CONDUCTED EMISSIONS SETUP DIAGRAM

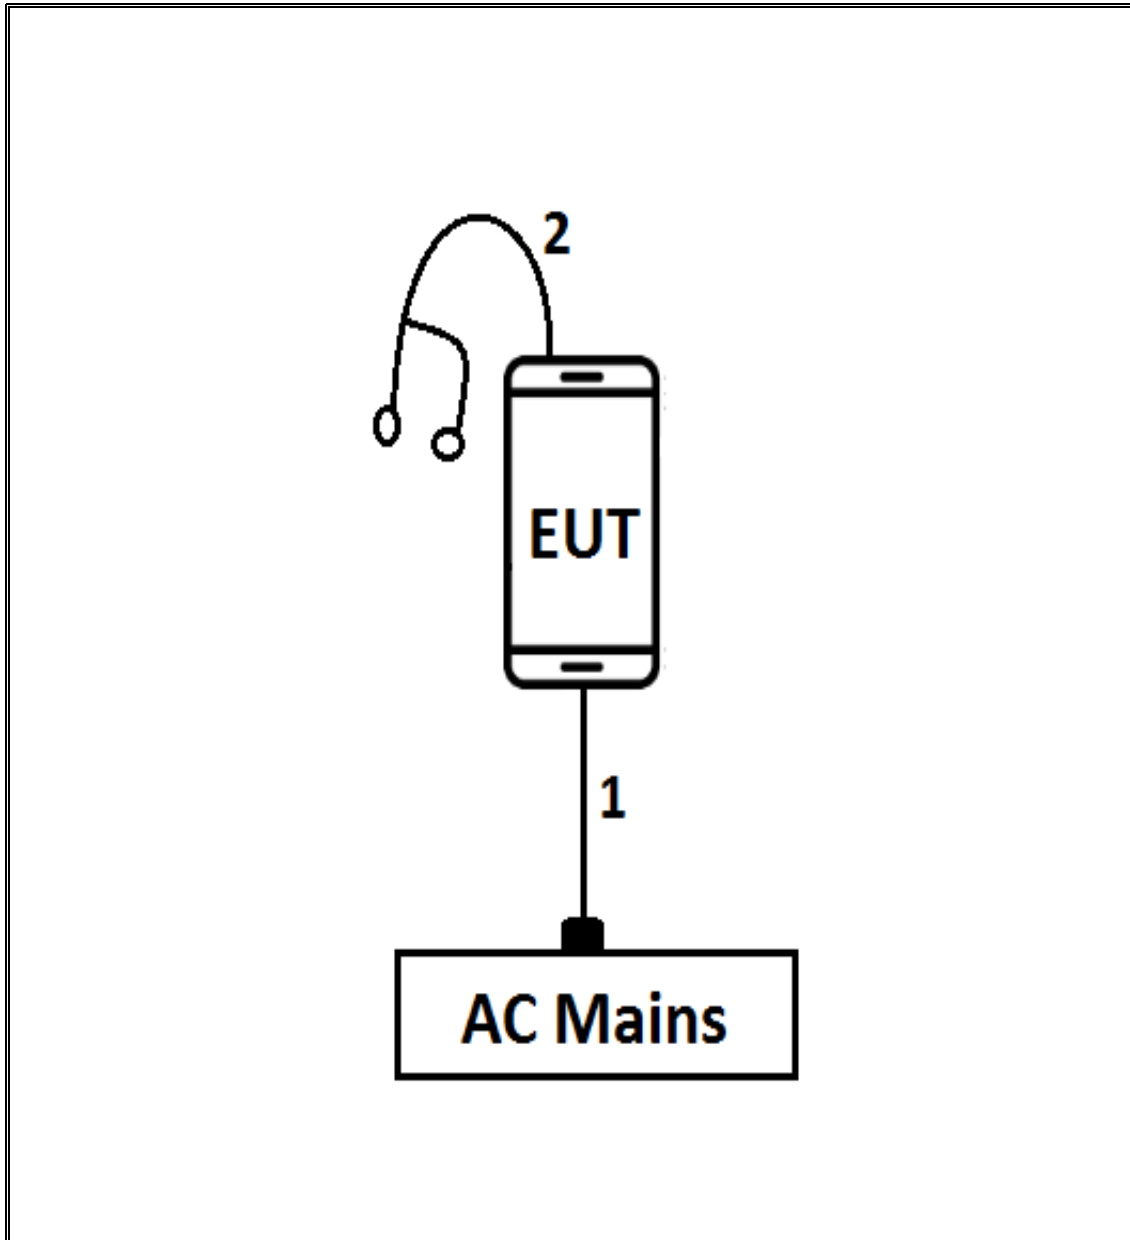

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Broadband Hybrid, 30MHz to 2000MHz w/4dB Pad	Sunol Sciences Corp.	JB3	T477	06/22/2018
Antenna, Active Loop 9kHz-30MHz	ETS-Lindgren	6502	T1683	02/17/2018
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T712	01/30/2018
Antenna, Horn 18-26.5GHz	ARA	MWH-1826/B	T449	06/12/2018
Power Meter, P-series single channel	Agilent (Keysight) Technologies	N1911A	T1264	07/08/2018
Power Sensor, P – series, 50MHz to 18GHz, Wideband	Agilent (Keysight) Technologies	N1921A	T413	06/20/2018
Amplifier, 1-26.5GHz	MITEQ	AFS42-00101800-25-S-42	T1165	08/01/2017
Amplifier, 1-26.5GHz	Agilent (Keysight) Technologies	8449B	T404	07/05/2018
Amplifier, 10kHz-1GHz	Agilent (Keysight) Technologies	8447D	T15	08/26/2017
Amplifier, 1-8 GHz	MITEQ	AMF-4D-01000800-30-29P	T1170	04/28/2018
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Agilent (Keysight) Technologies	E4440A	T199	07/22/2018
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Agilent (Keysight) Technologies	E4440A	T908	04/13/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T907	01/23/2018
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Agilent (Keysight) Technologies	E9030A	T905	01/11/2018
LISN	FISCHER	FCC-LISN-50/250-25-2-01	T1310	06/08/2018

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, Apr 26, 2016
Antenna Port Software	UL	UL RF	Ver 5.1.1, July 15, 2016

The following test and measurement equipment was utilized for the tests documented in this report:

NOTE: *testing is completed before equipment calibration expiration date.

7. MEASUREMENT METHODS

On Time and Duty Cycle: KDB 558074 D01 v04, Section 6.

6 dB BW: KDB 558074 D01 v04, Section 8.1.

99% BW: ANSI C63.10-2013, Section 6.9.3.

Output Power: KDB 558074 D01 v04, Section 9.2.3.2.

Power Spectral Density: KDB 558074 D01 v04, Section 10.3.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v04, Section 11.1 (b).

Out-of-band emissions in restricted bands: KDB 558074 D01 v04, Section 12.1.

Band-edge: KDB 558074 D01 v04, Section 12.1.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

8. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-30dBc		Pass
15.247 (b) (3)	TX conducted output power	<30dBm		Pass
15.247 (e)	PSD	<8dBm		Pass
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	Pass
15.205, 15.209, 15.247(d)	Radiated Spurious Emission	< 54dBuV/m		Pass

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE



KDB 558074 Zero-Span Spectrum Analyzer Method.


ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
802.11b	12.21	12.32	0.99	99.11%	0.00	0.01
802.11g	2.03	2.14	0.95	94.54%	0.24	0.49
802.11n HT20 CDD	2.51	2.63	0.96	95.58%	0.20	0.40

Note: Chain 1 was tested to represent the worst chain.

DUTY CYCLE PLOTS

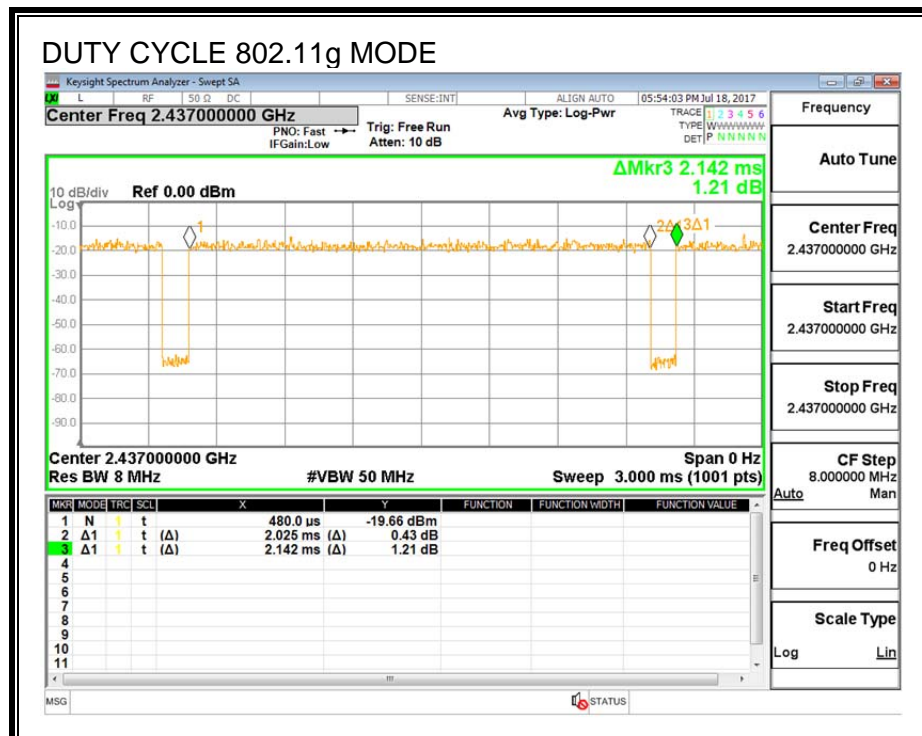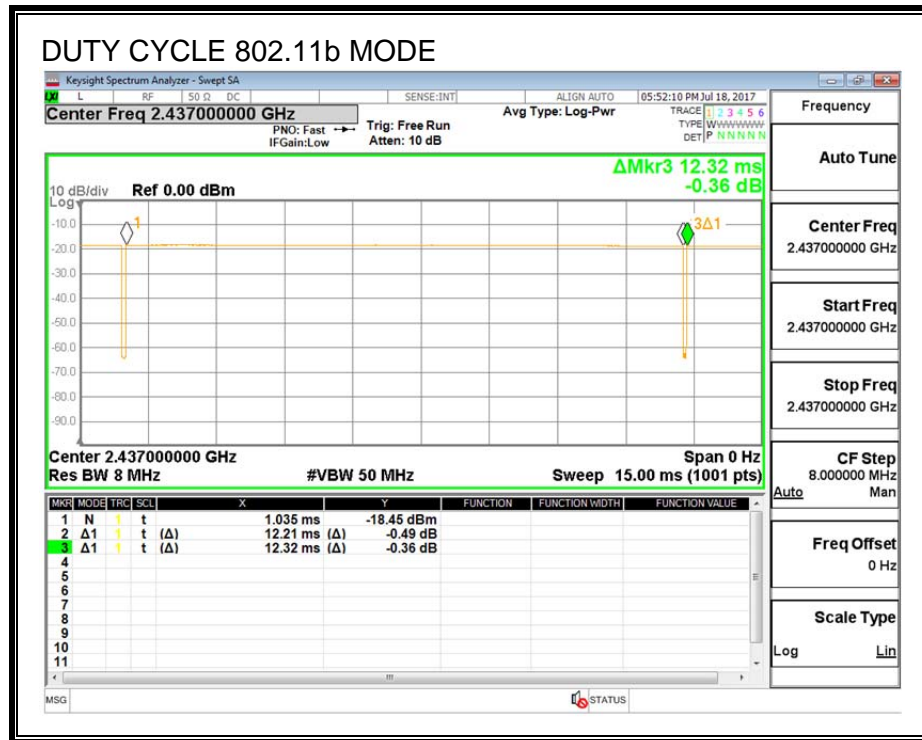

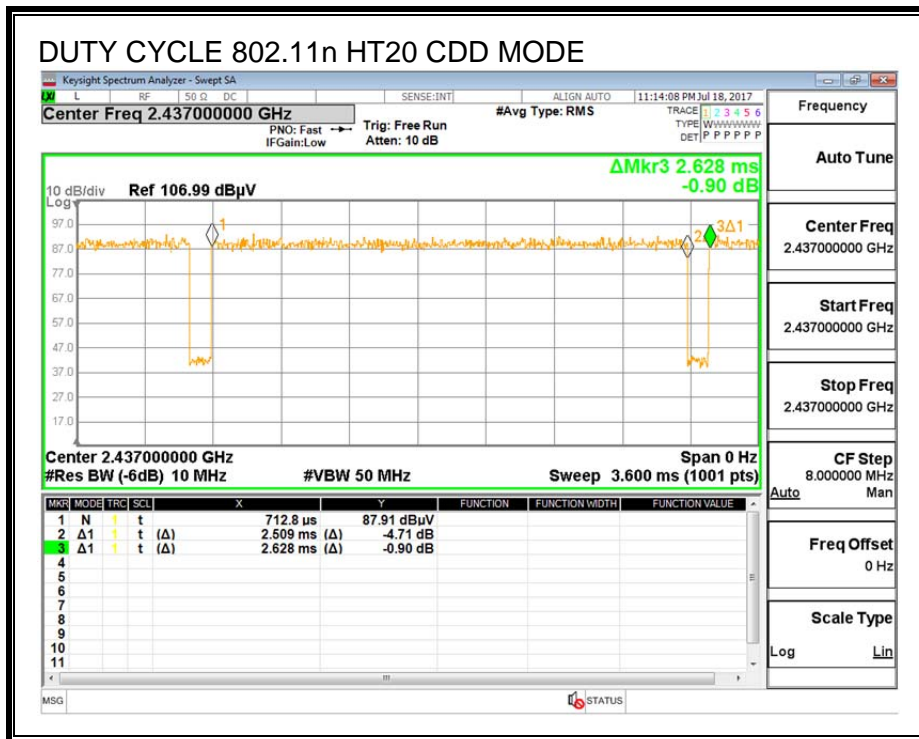

9.2. 11b 2TX MIMO MODE IN THE 2.4GHz BAND

9.2.1. 6 dB BANDWIDTH



LIMITS



FCC §15.247 (a) (2)



The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS



Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
CH1	2412	7.16	7.04	0.5
CH6	2437	7.12	7.12	0.5
CH11	2462	7.04	7.08	0.5
CH12	2467	7.56	7.56	0.5
CH13	2472	7.08	8.04	0.5

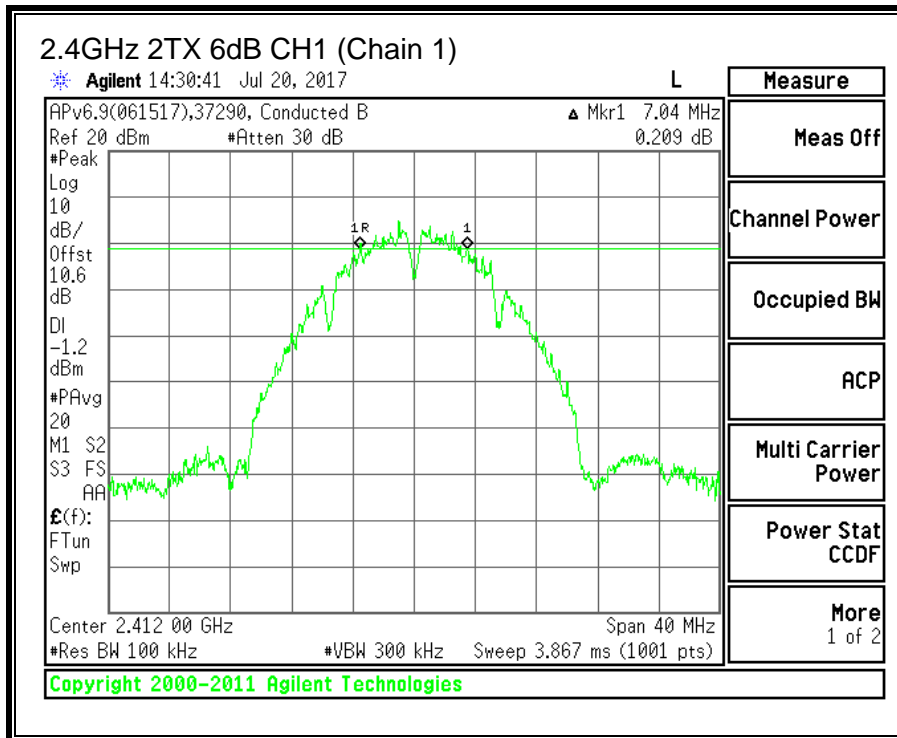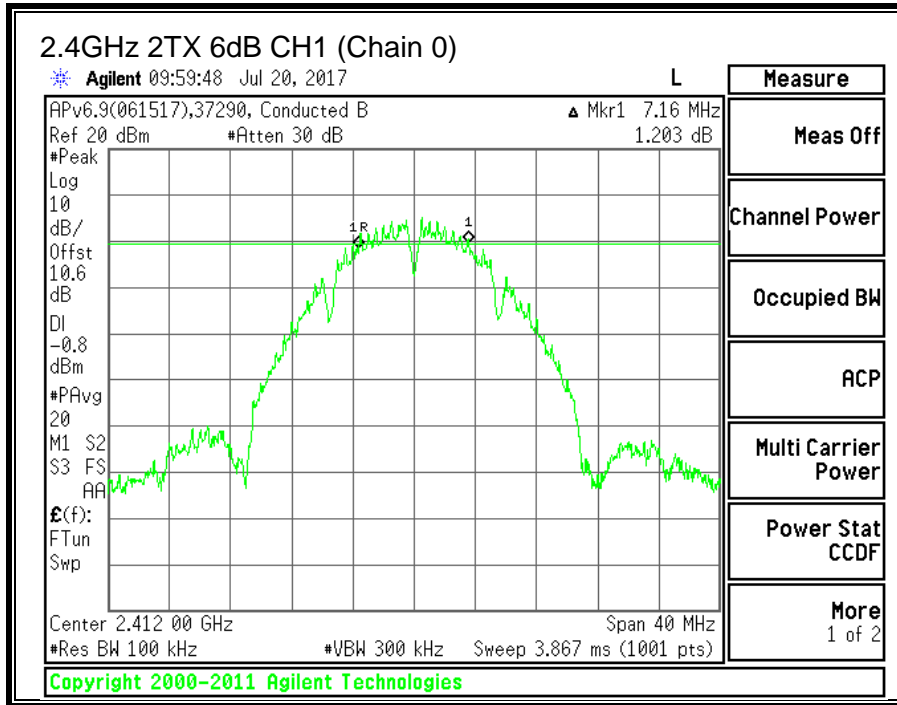

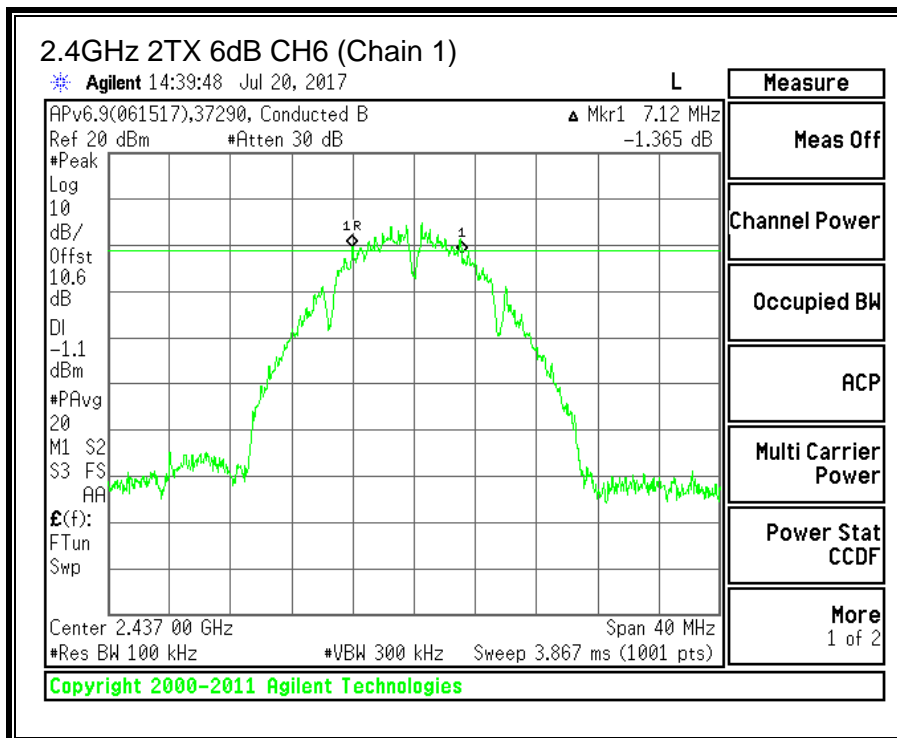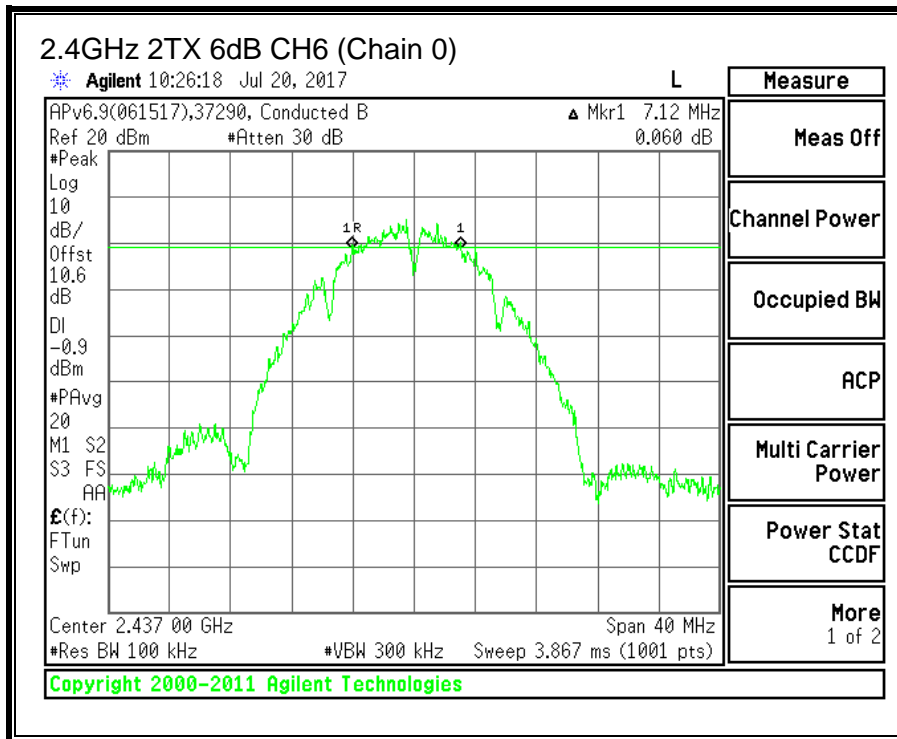

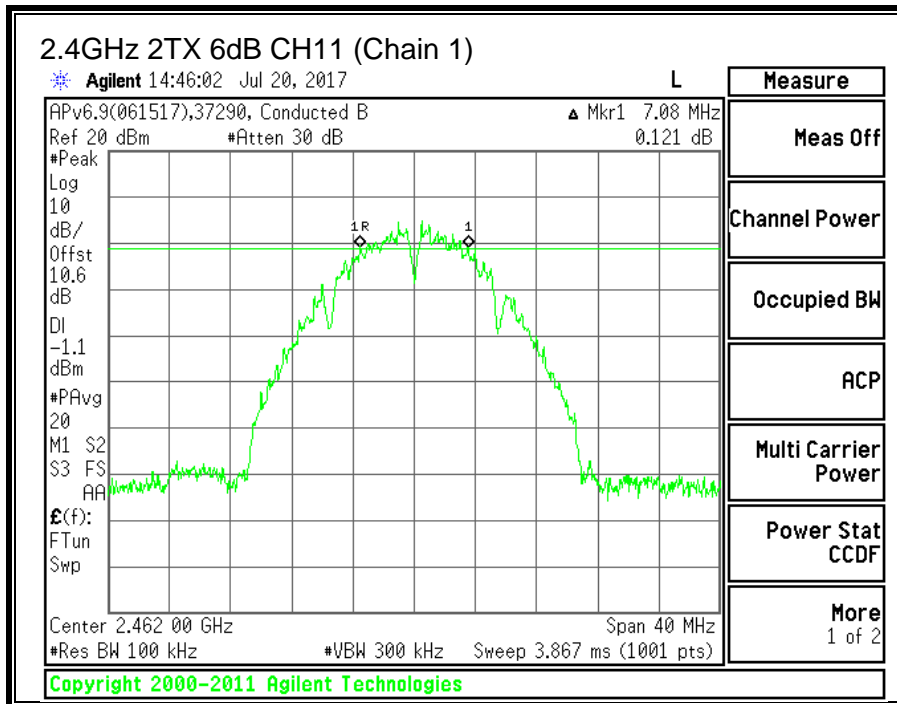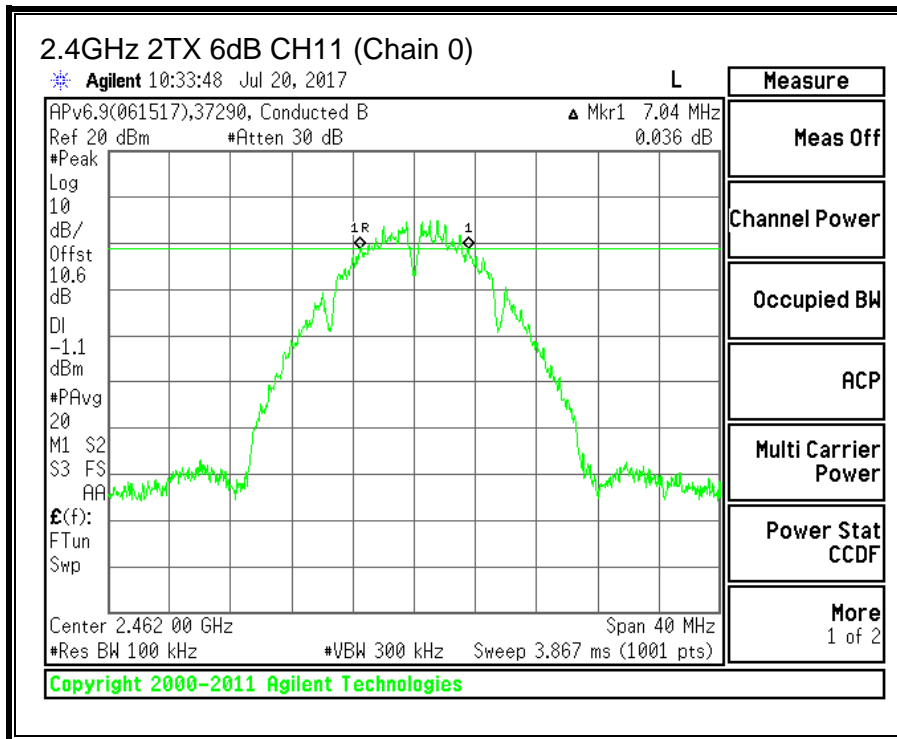

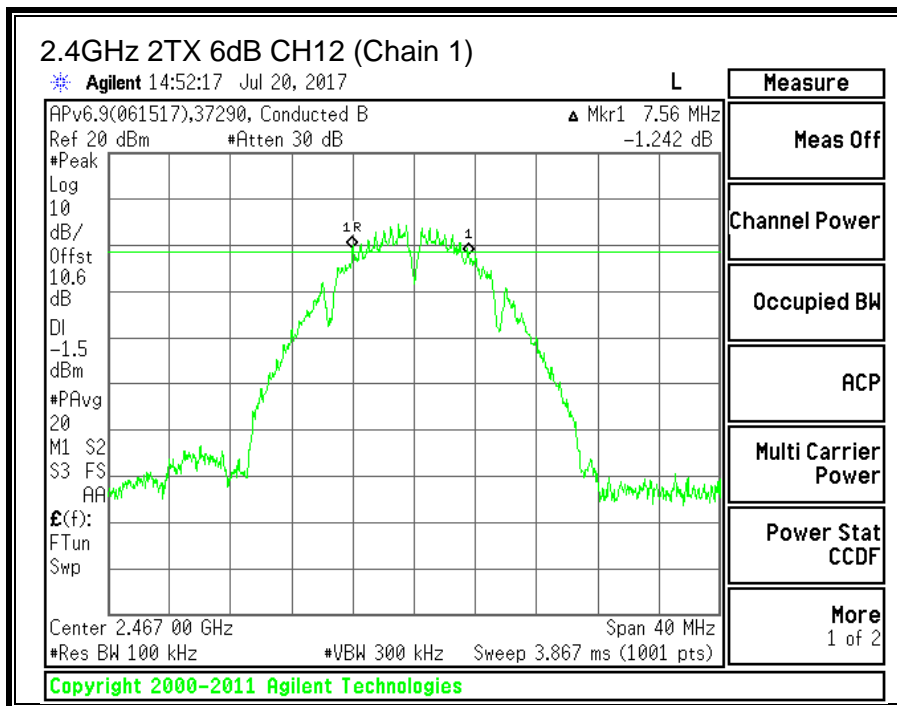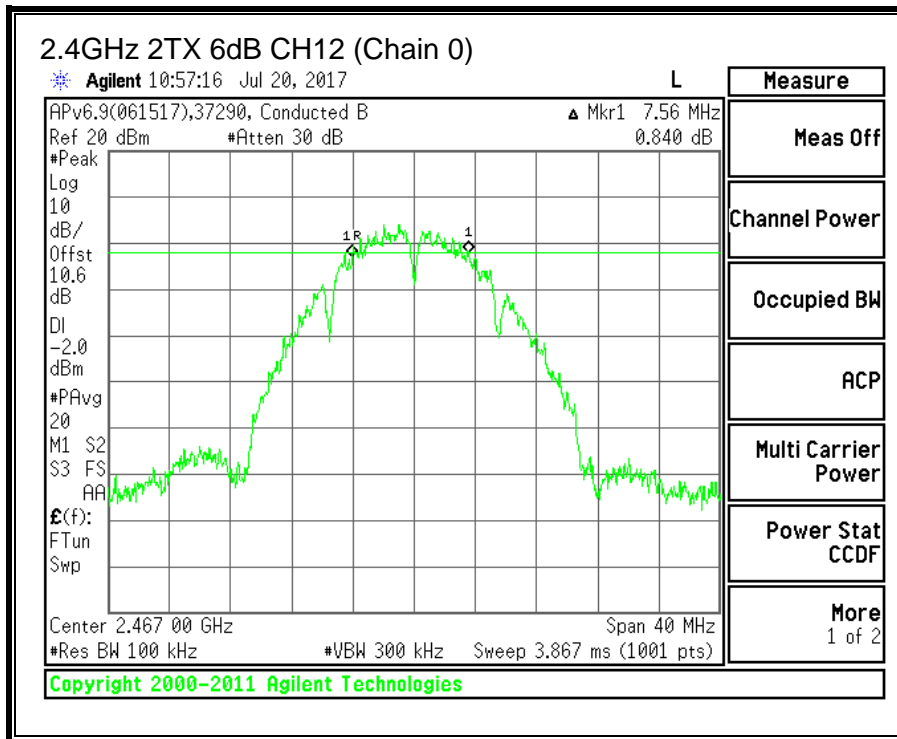

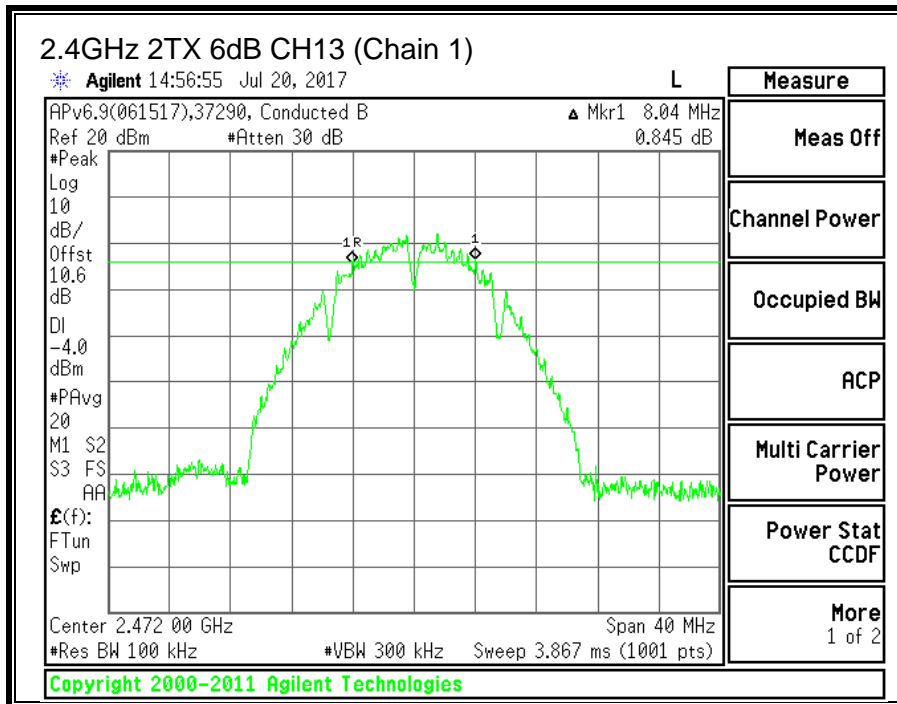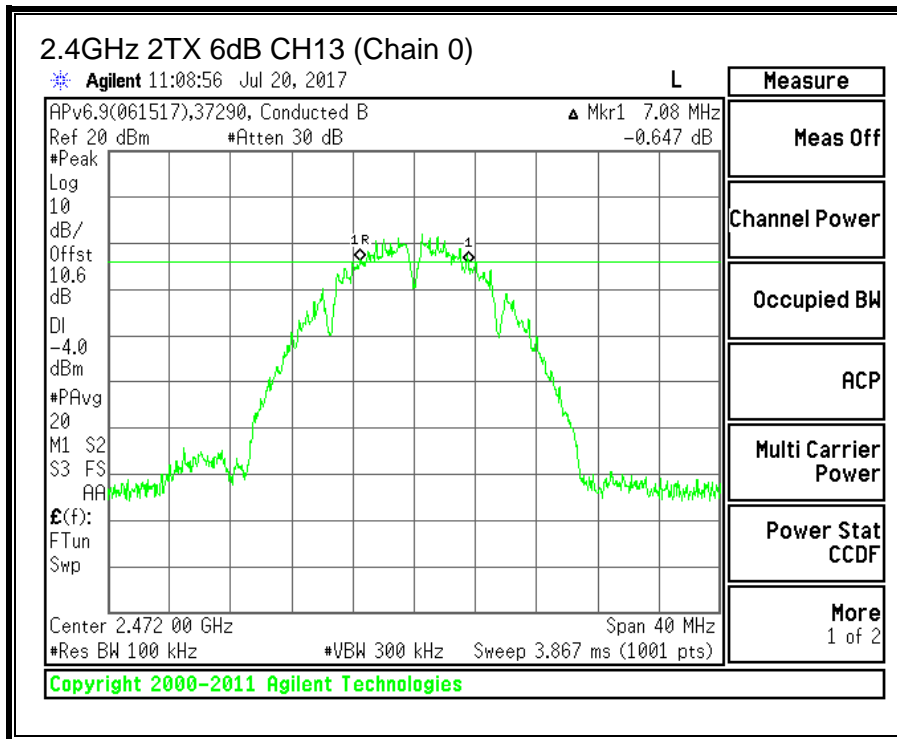



9.2.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.



RESULTS



Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
CH1	2412	12.995	12.773
CH6	2437	12.817	12.707
CH11	2462	12.266	12.388
CH12	2467	12.621	12.666
CH13	2472	13.166	12.838

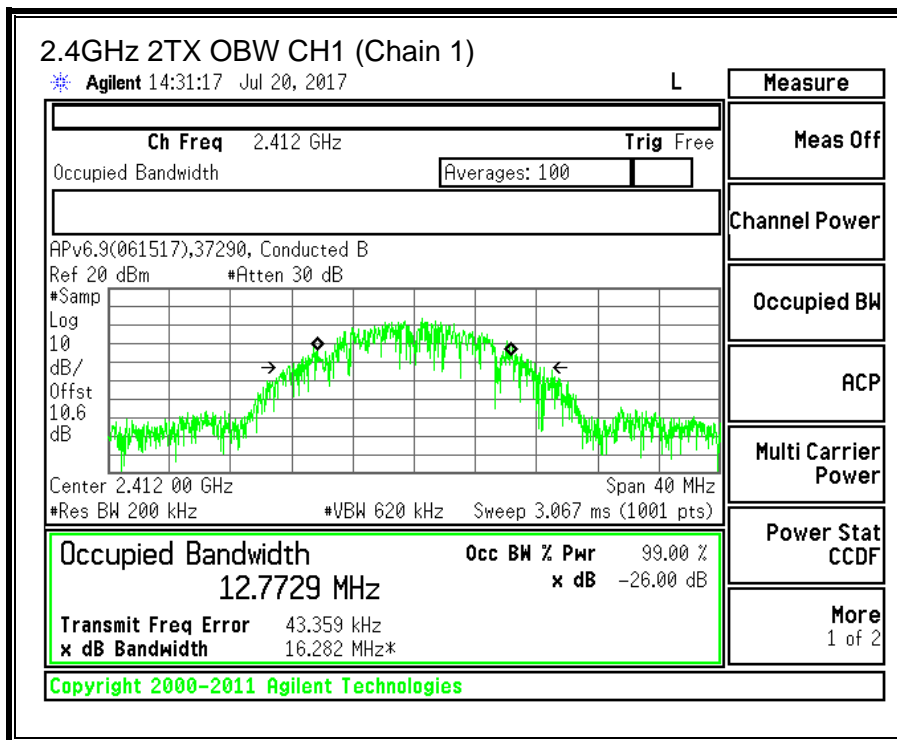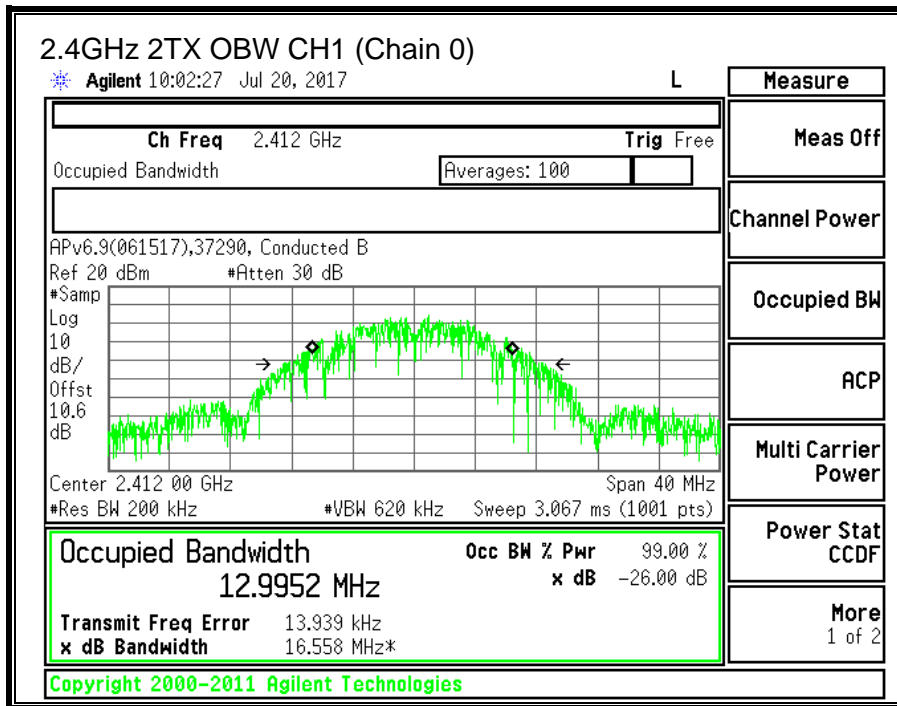

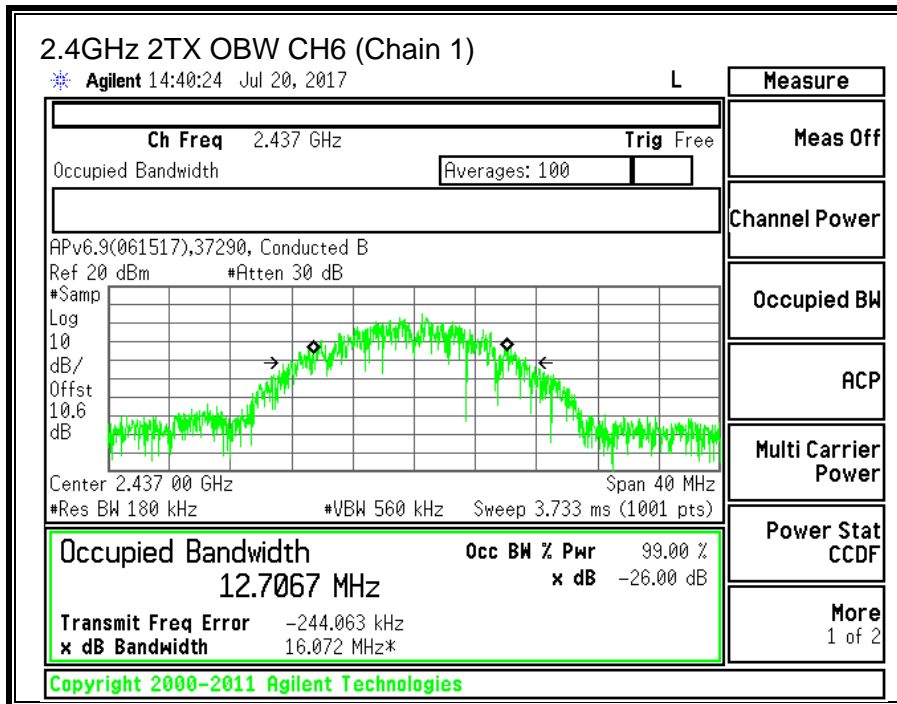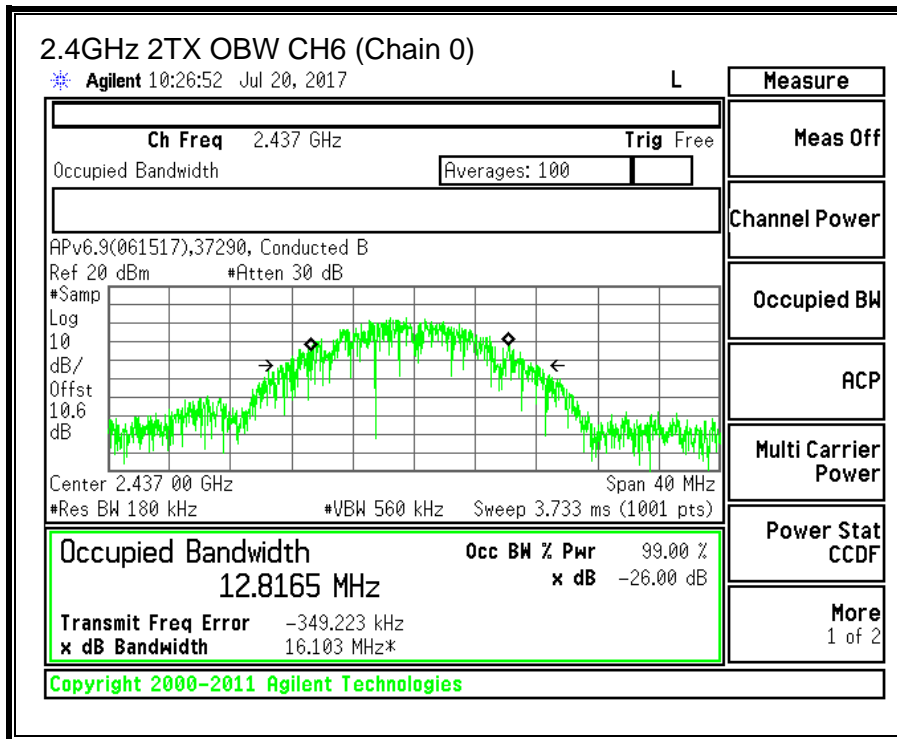

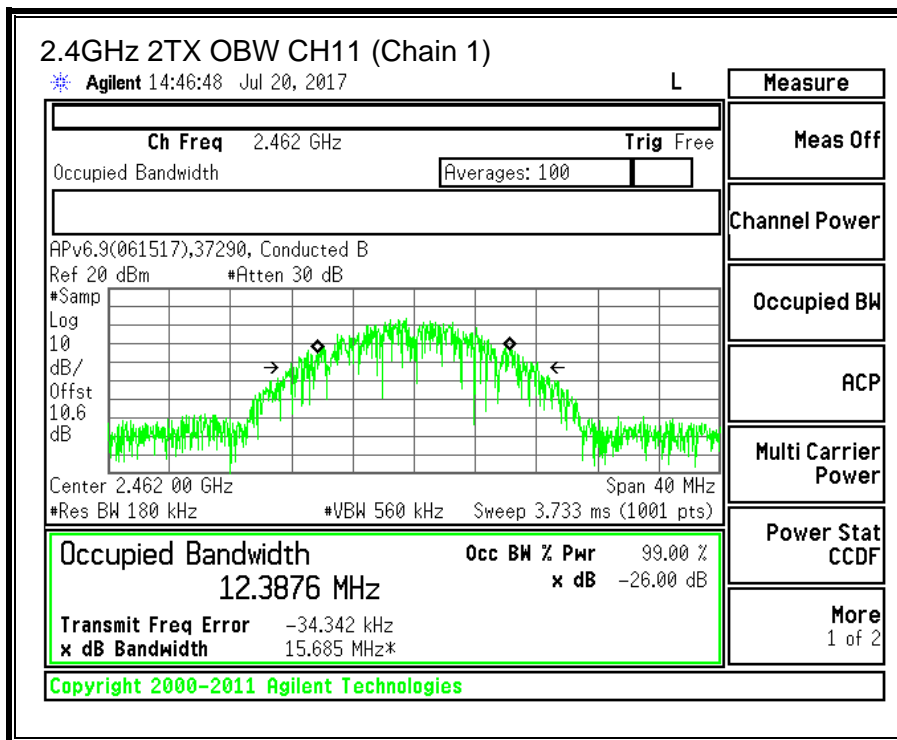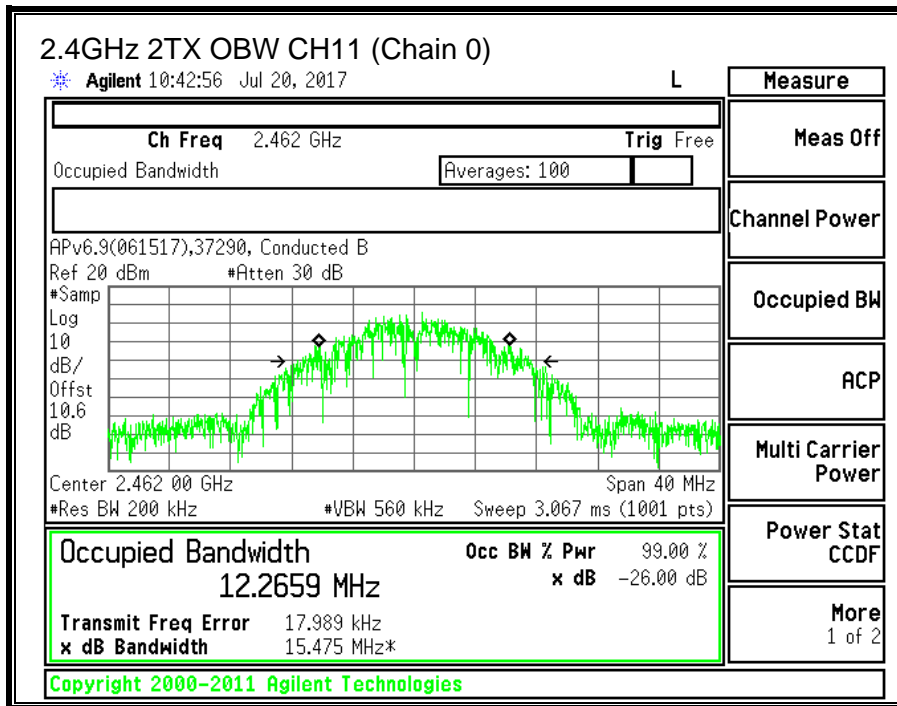

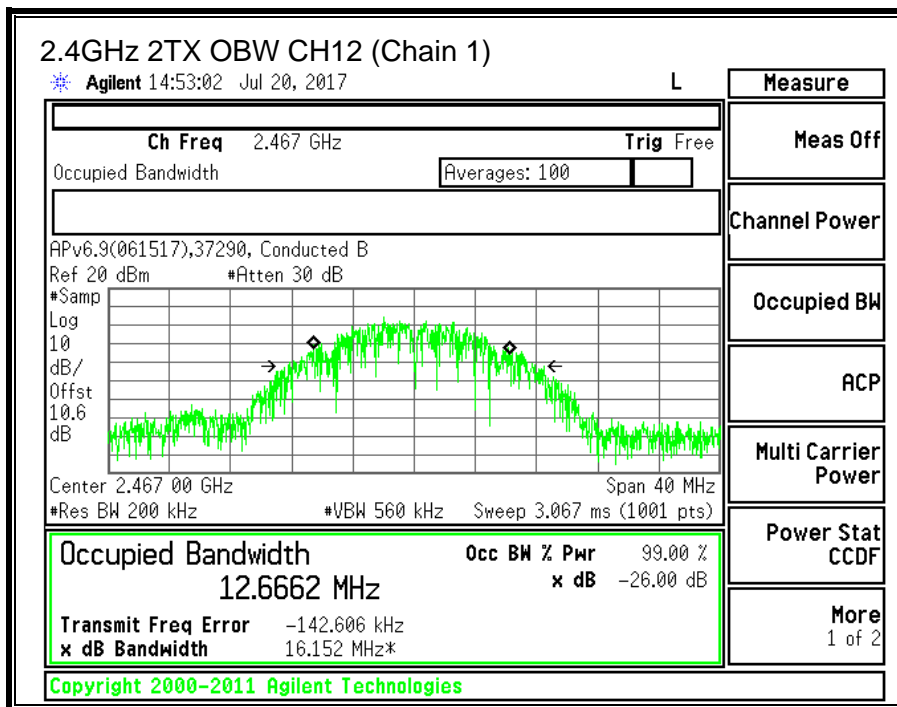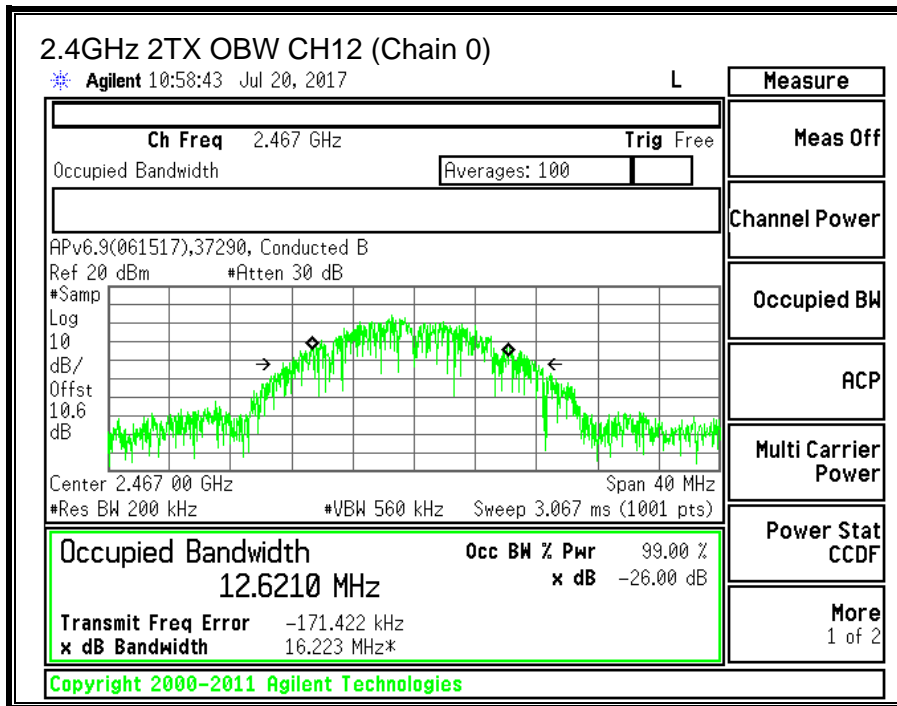

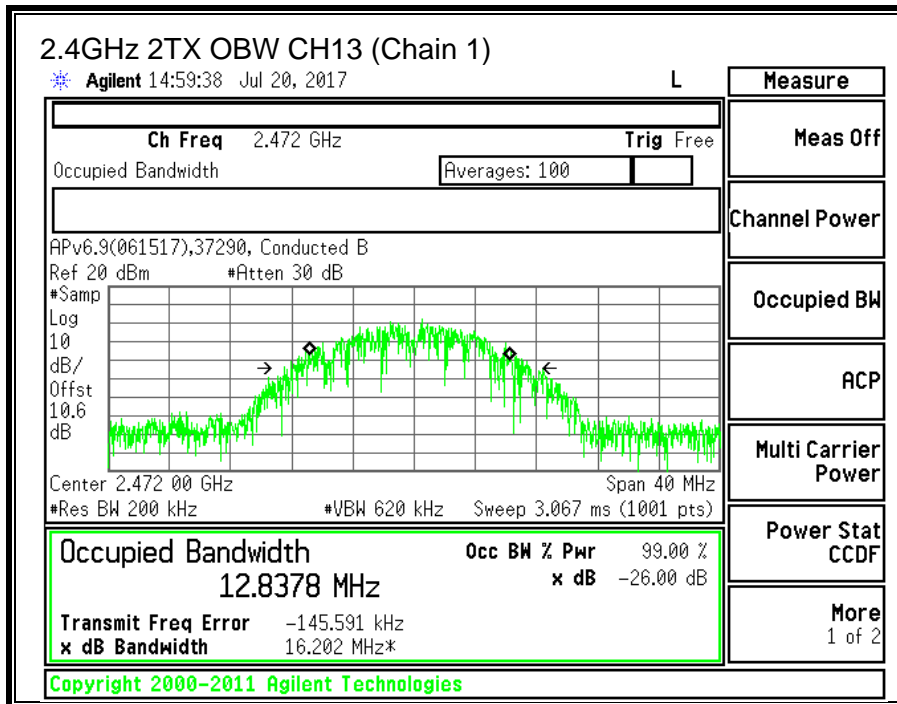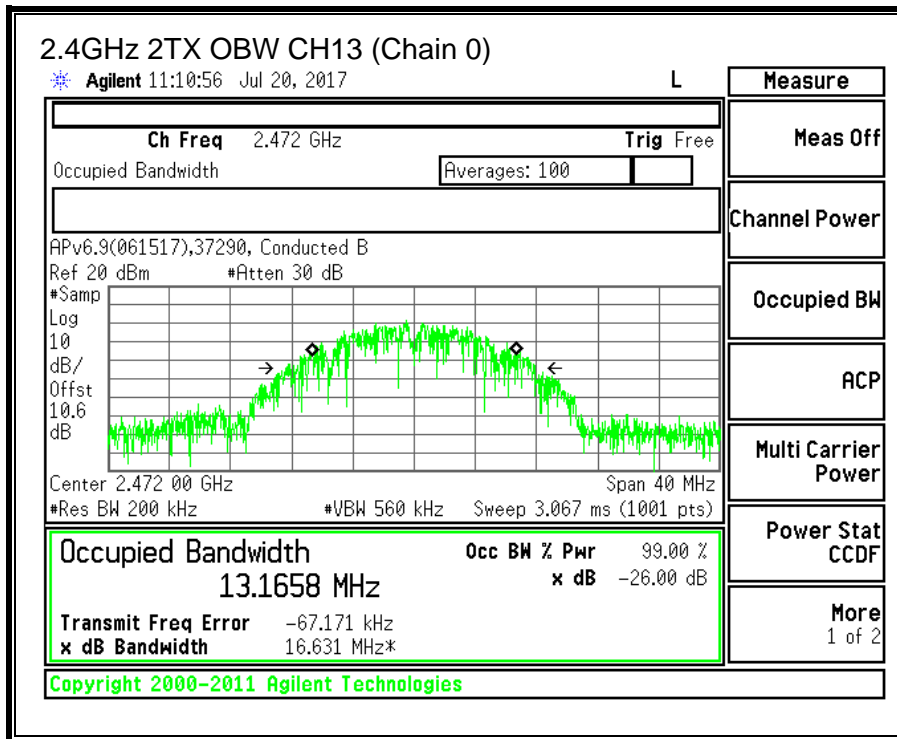

9.2.3. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

KDB 58074 D01 v04 Section 9.2.3.2

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-3.70	-5.50	-4.51

RESULTS

ID:	39317	Date:	07/21/17
------------	-------	--------------	----------

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
CH1	2412	4.51	30.00	30	36	30.00
CH6	2437	4.51	30.00	30	36	30.00
CH11	2462	4.51	30.00	30	36	30.00
CH12	2467	4.51	30.00	30	36	30.00
CH13	2472	4.51	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
CH1	2412	13.42	13.08	16.26	30.00	-13.74
CH6	2437	13.23	13.23	16.24	30.00	-13.76
CH11	2462	13.36	13.27	16.33	30.00	-13.67
CH12	2467	13.12	12.87	16.01	30.00	-13.99
CH13	2472	10.96	11.12	14.05	30.00	-15.95

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

9.2.4. POWER SPECTRAL DENSITY



LIMITS



FCC §15.247 (e)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD				
PSD Results						
Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Chain 1 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
CH1	2412	-8.209	-8.960	-5.56	8.0	-13.6
CH6	2437	-7.750	-8.621	-5.15	8.0	-13.2
CH11	2462	-7.985	-8.184	-5.07	8.0	-13.1
CH12	2467	-8.028	-8.439	-5.22	8.0	-13.2
CH13	2472	-10.870	-10.889	-7.87	8.0	-15.9

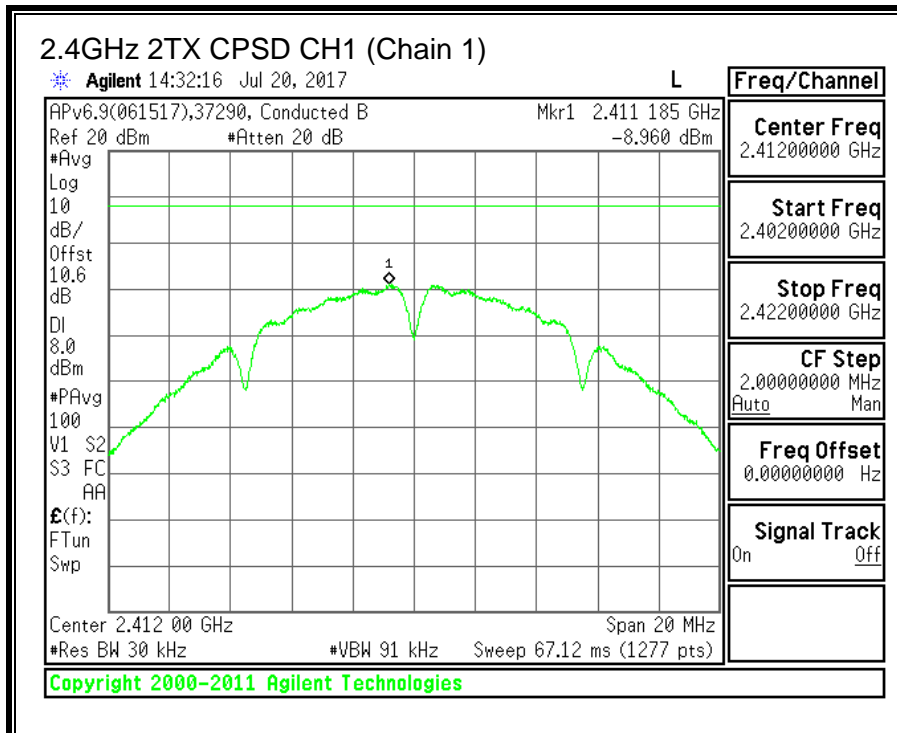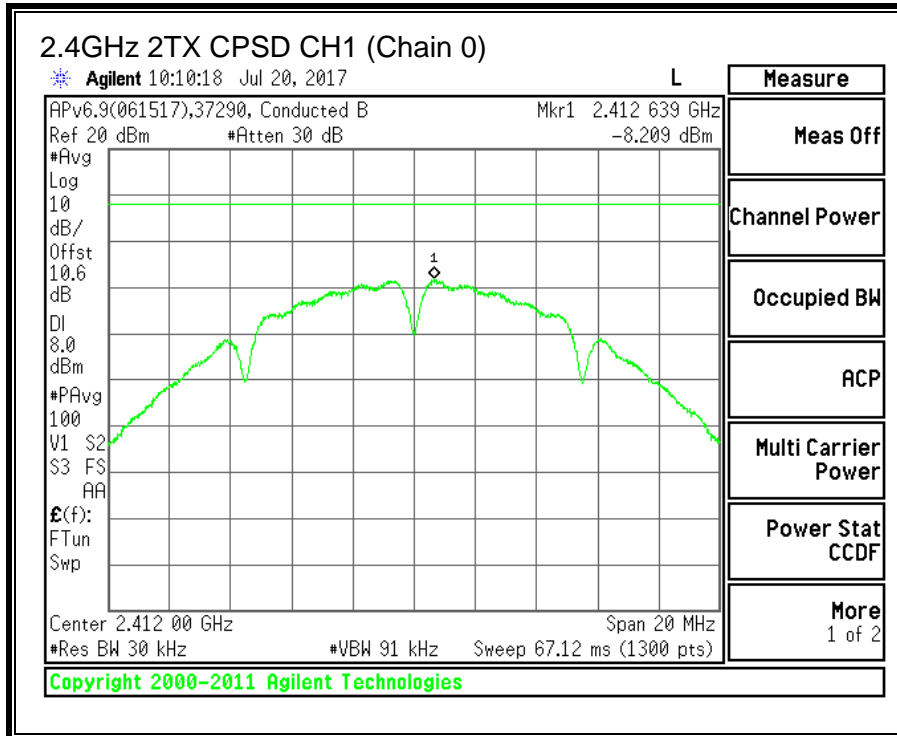

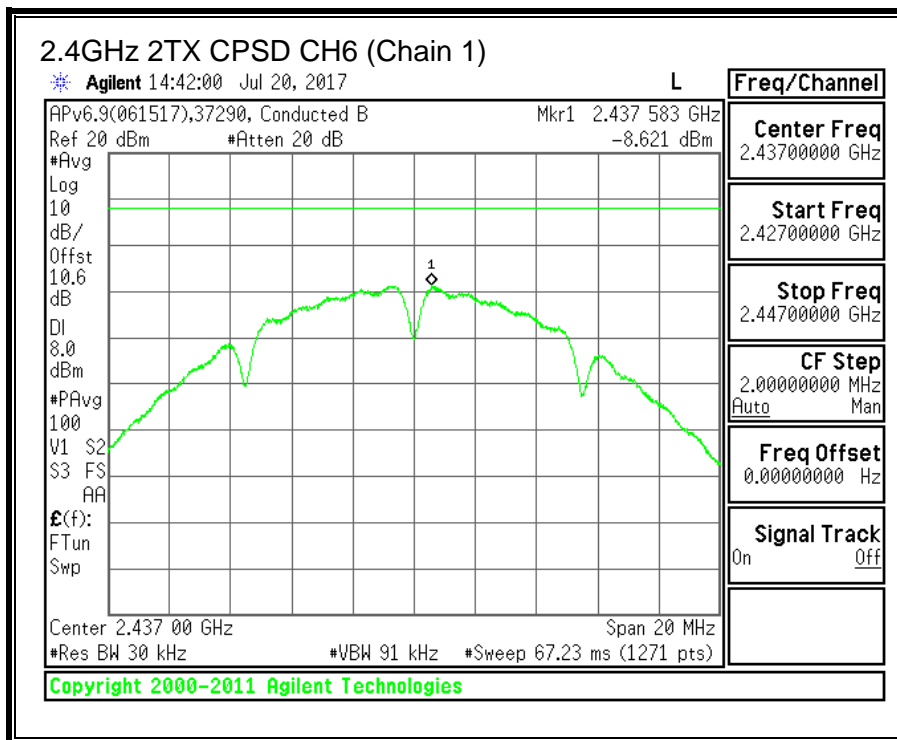
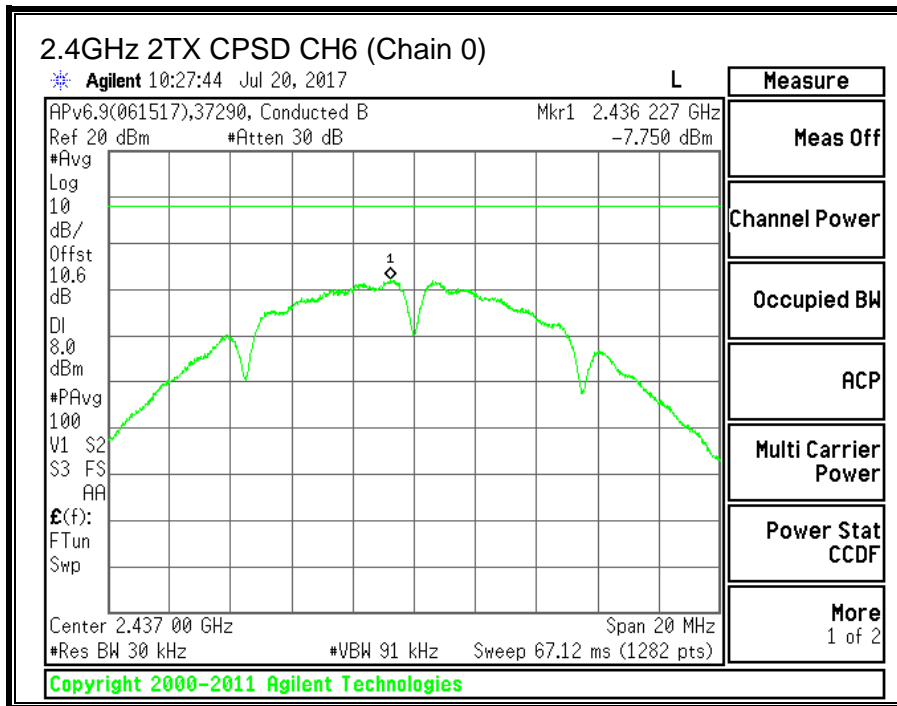


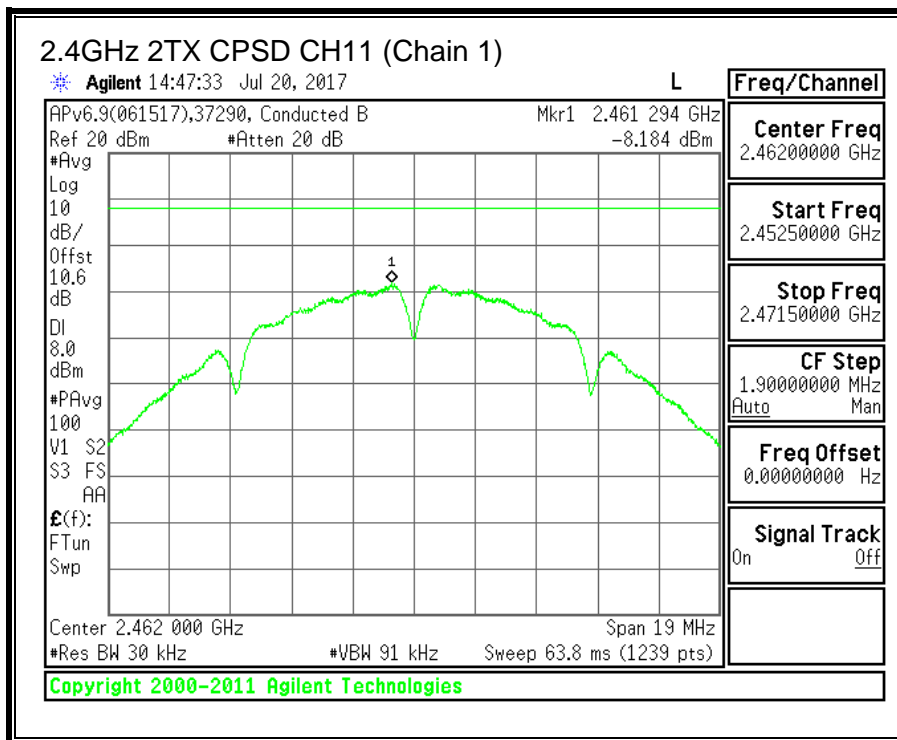
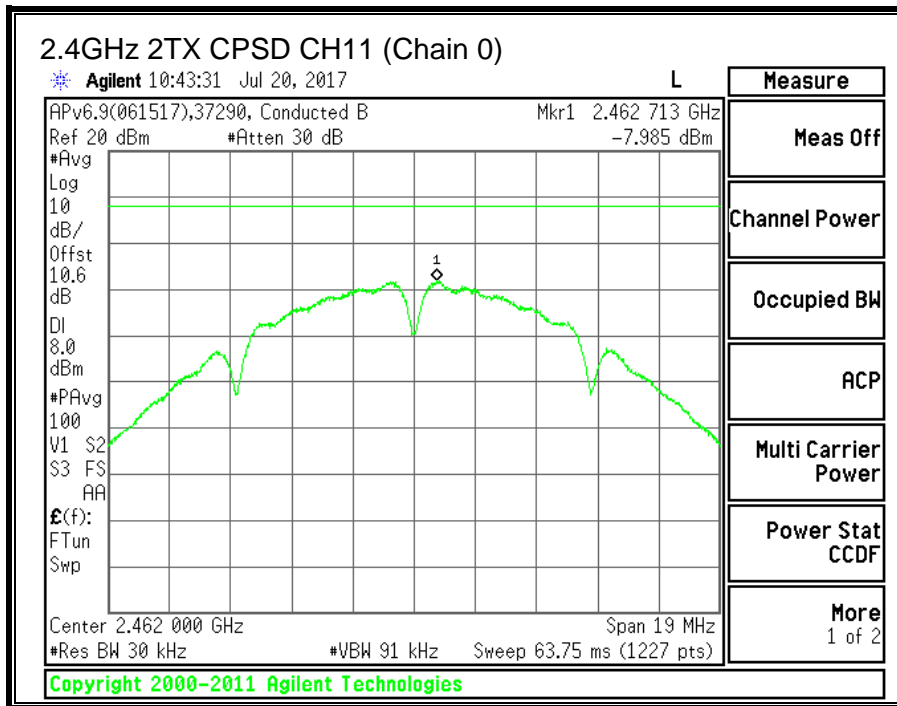


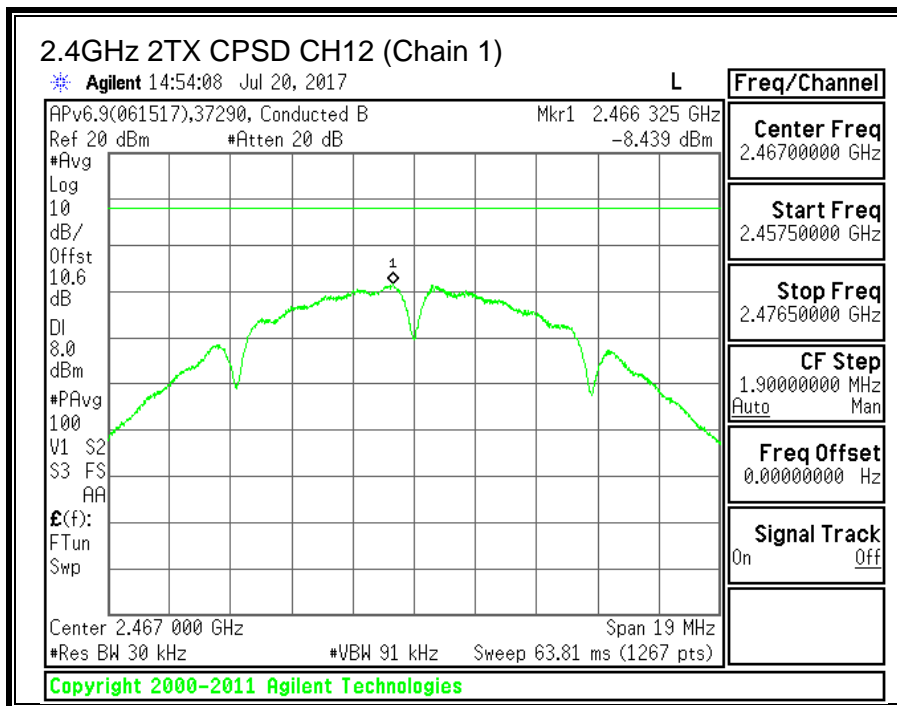
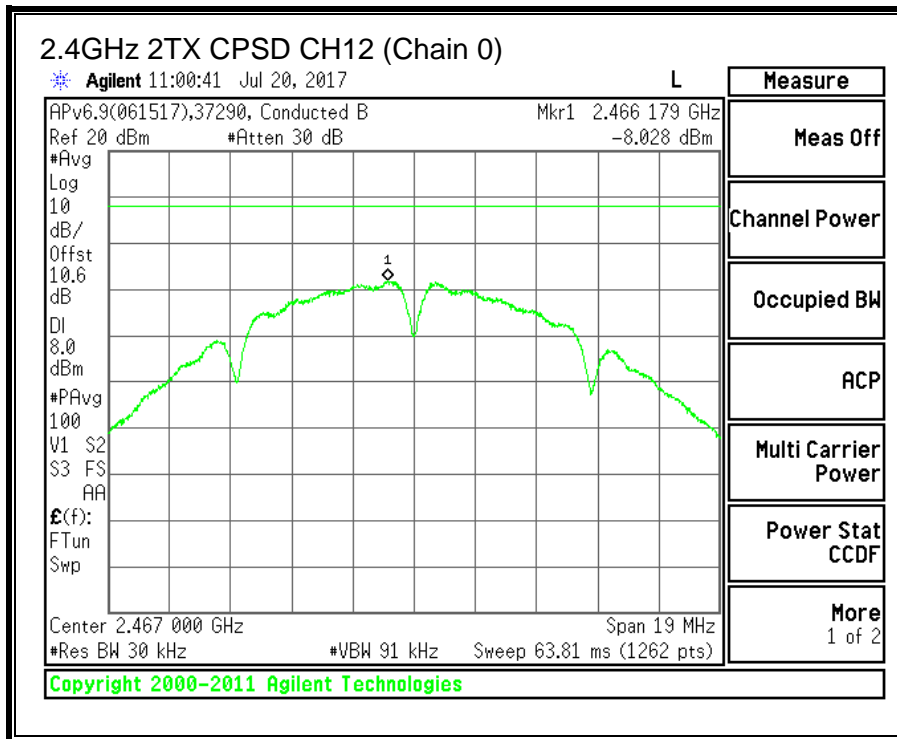


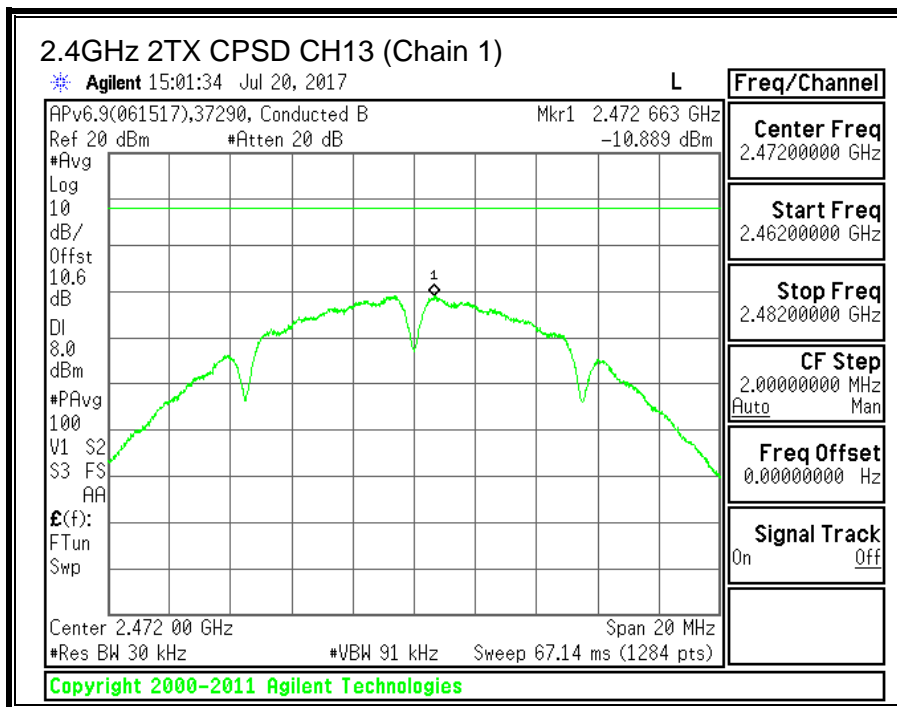
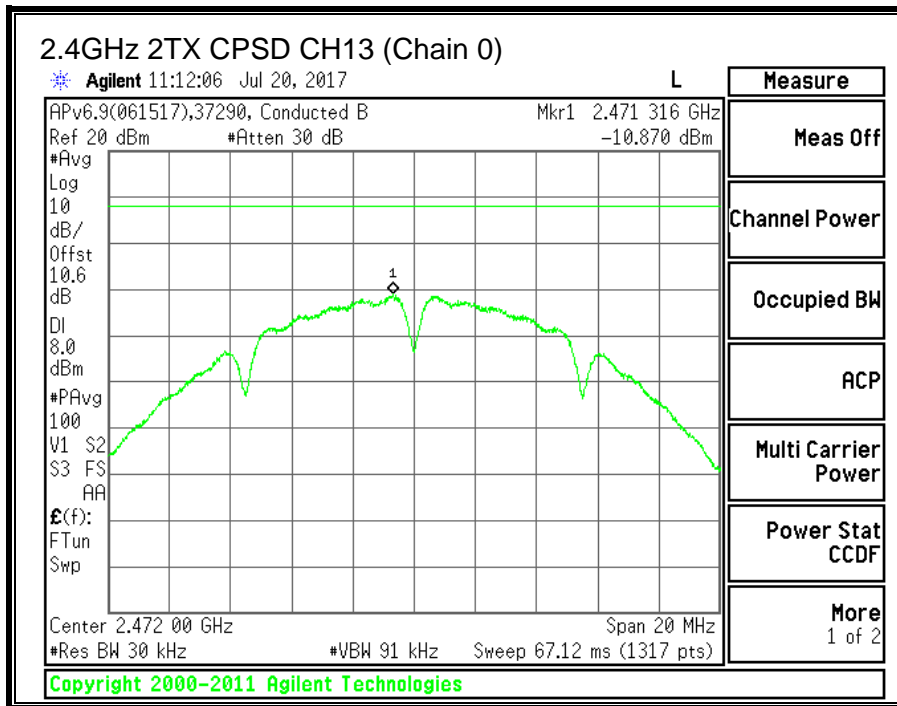




9.2.5. CONDUCTED BANEDGE AND SPURIOUS EMISSIONS

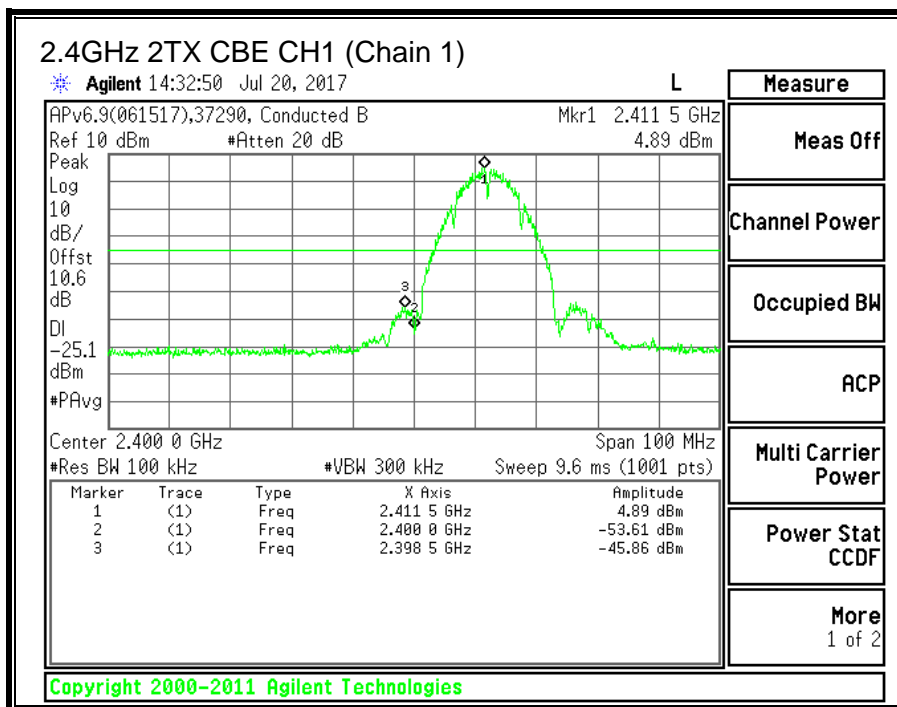
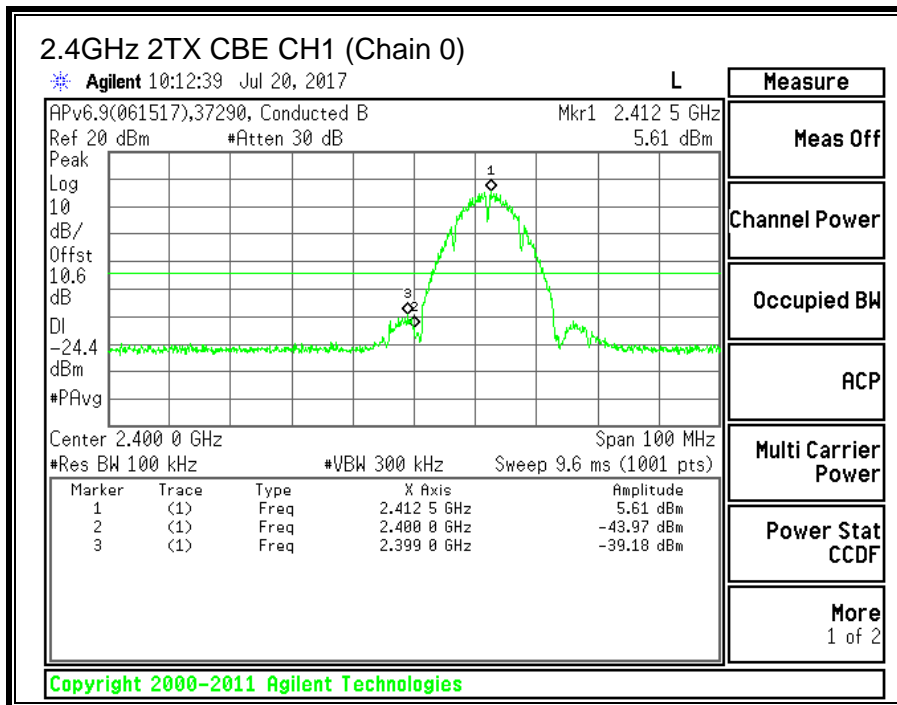


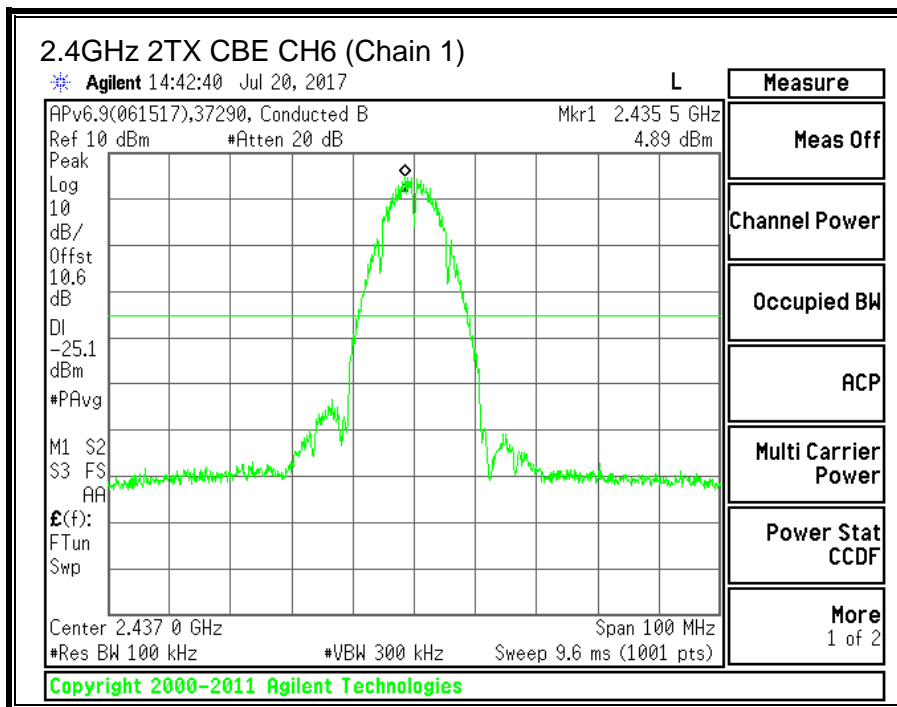
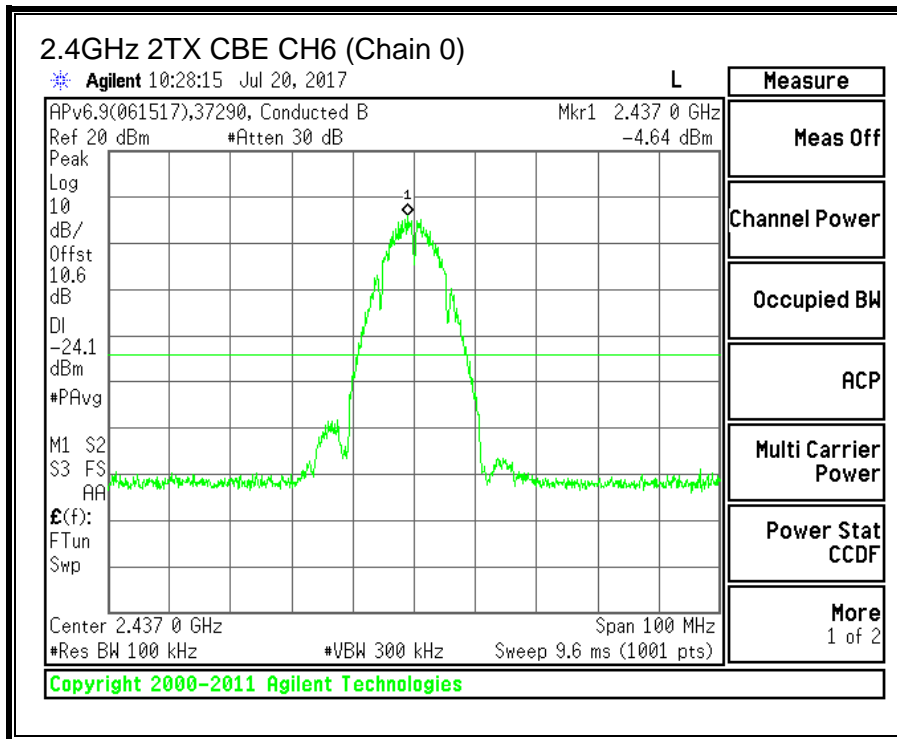


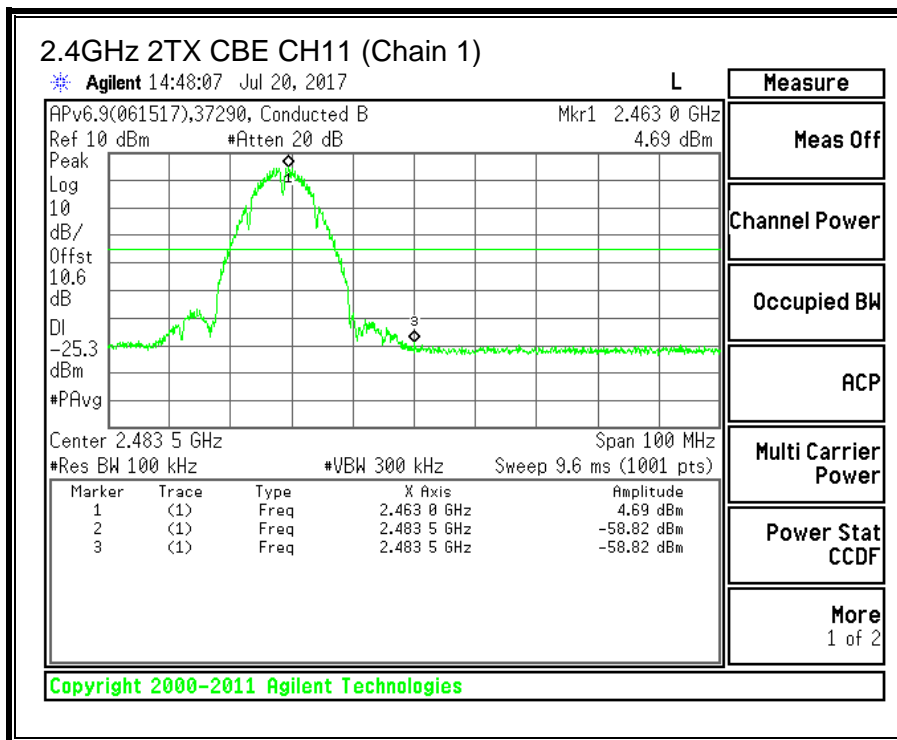
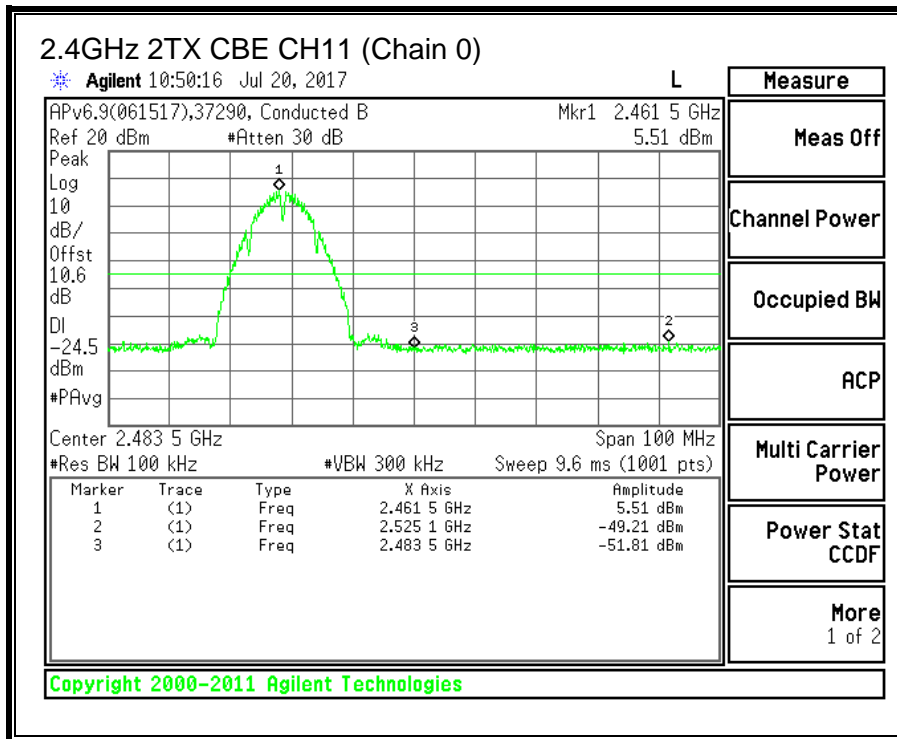


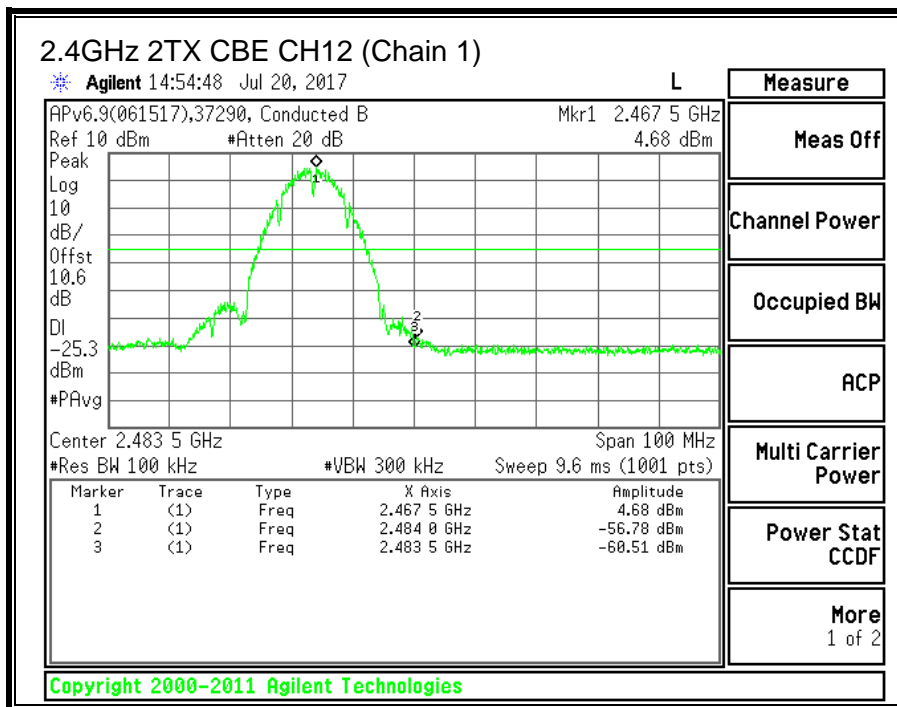
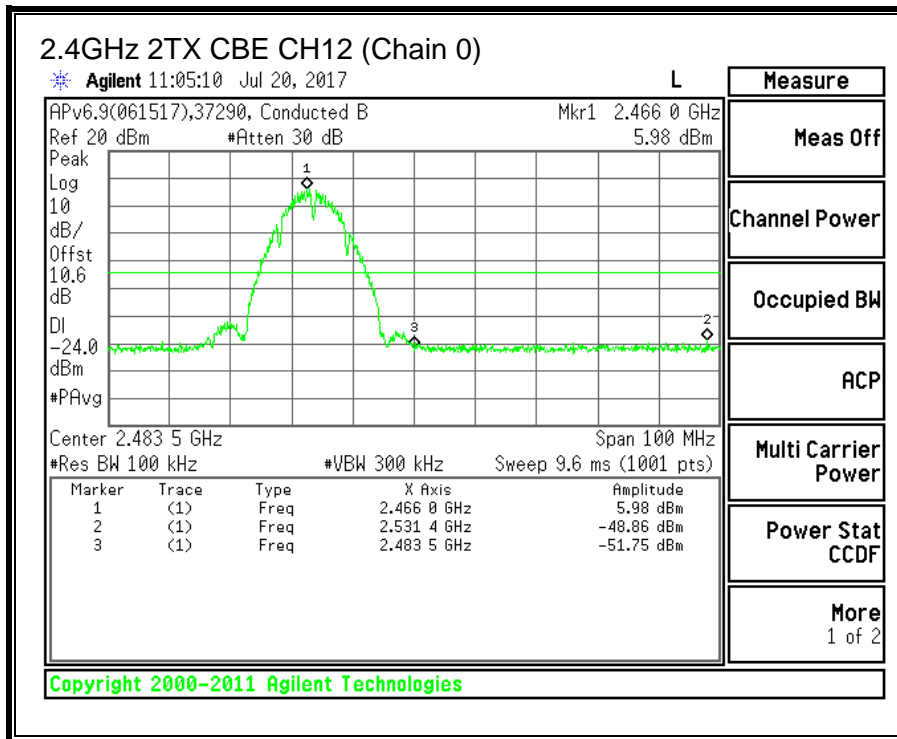


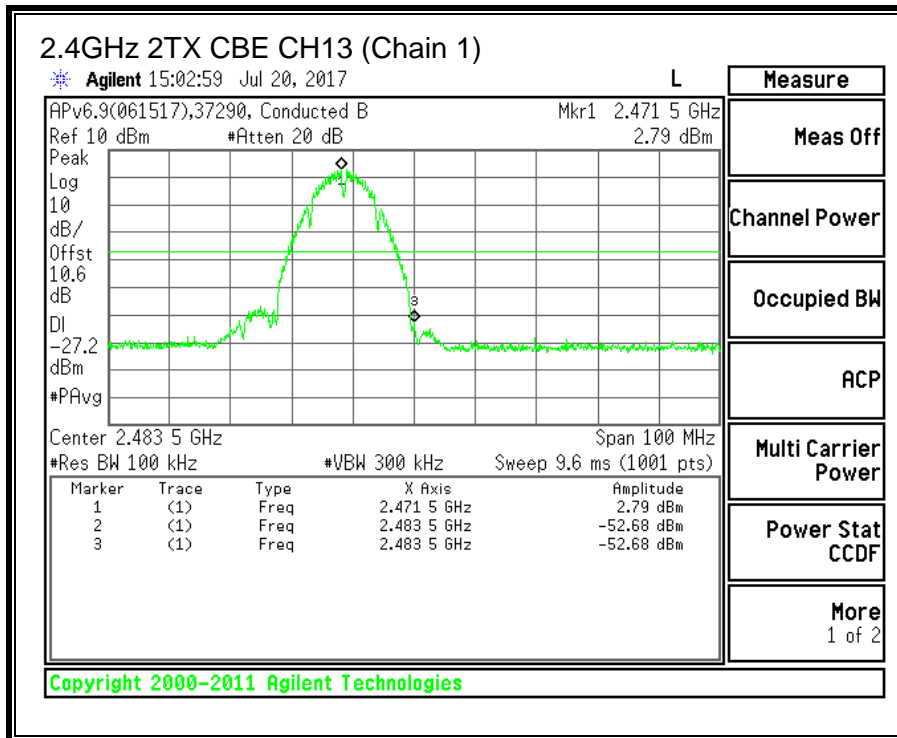
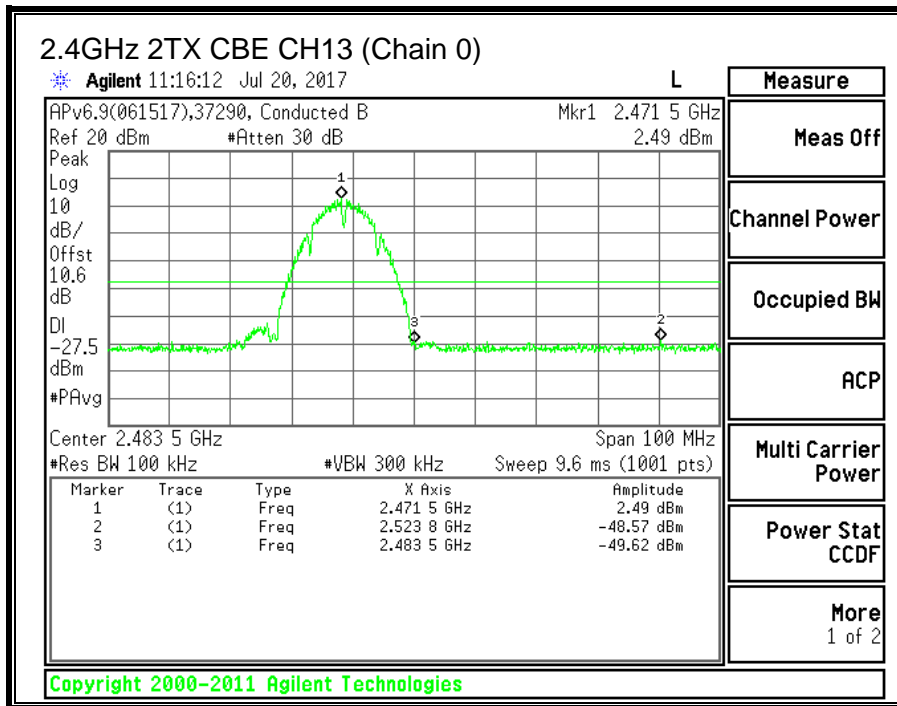


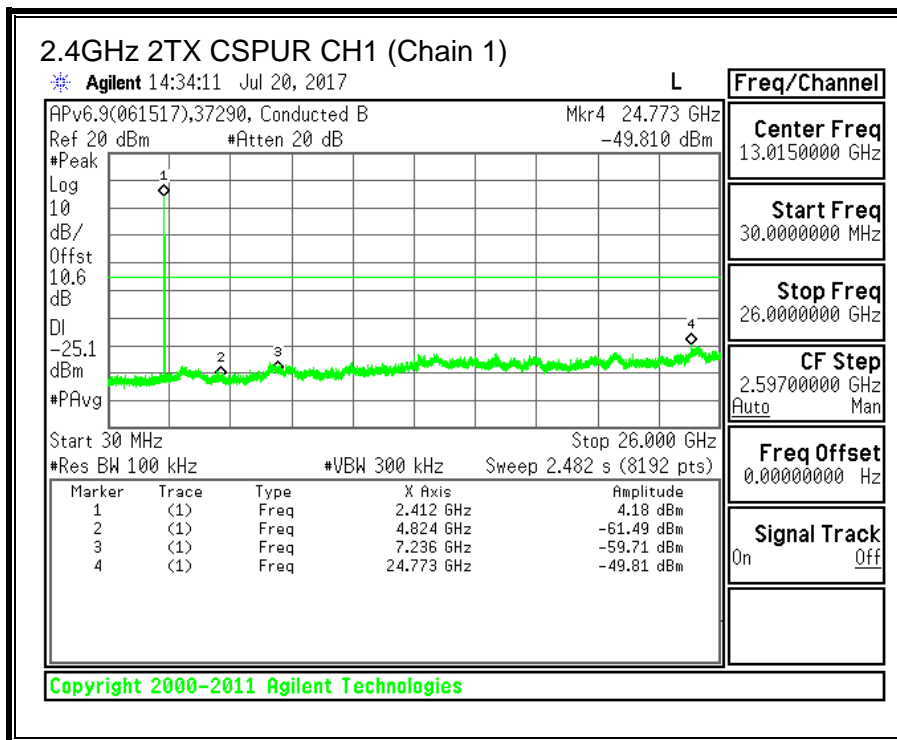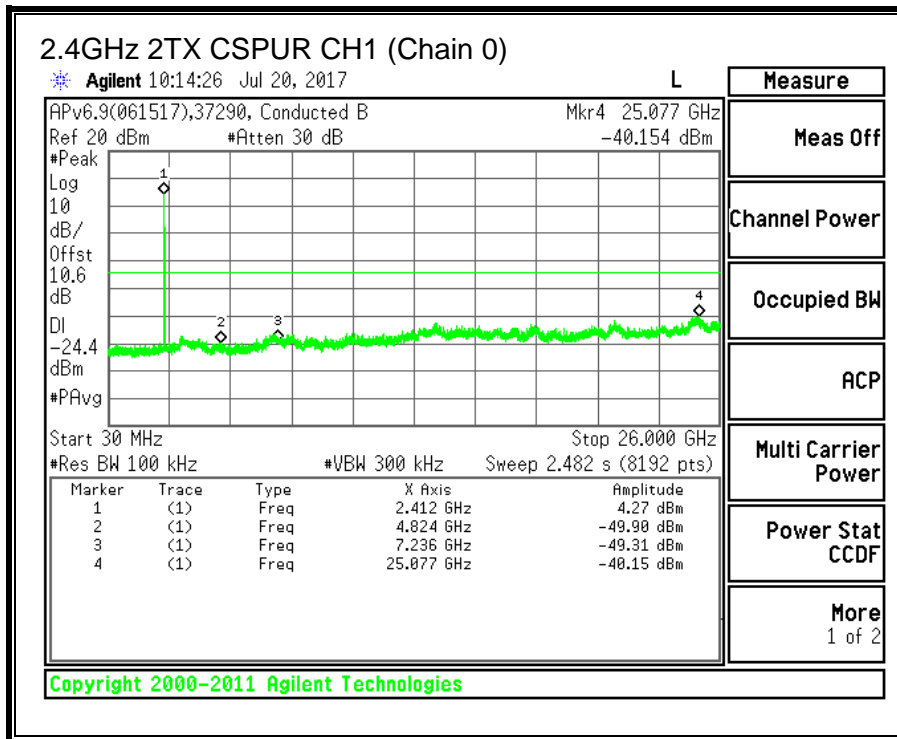

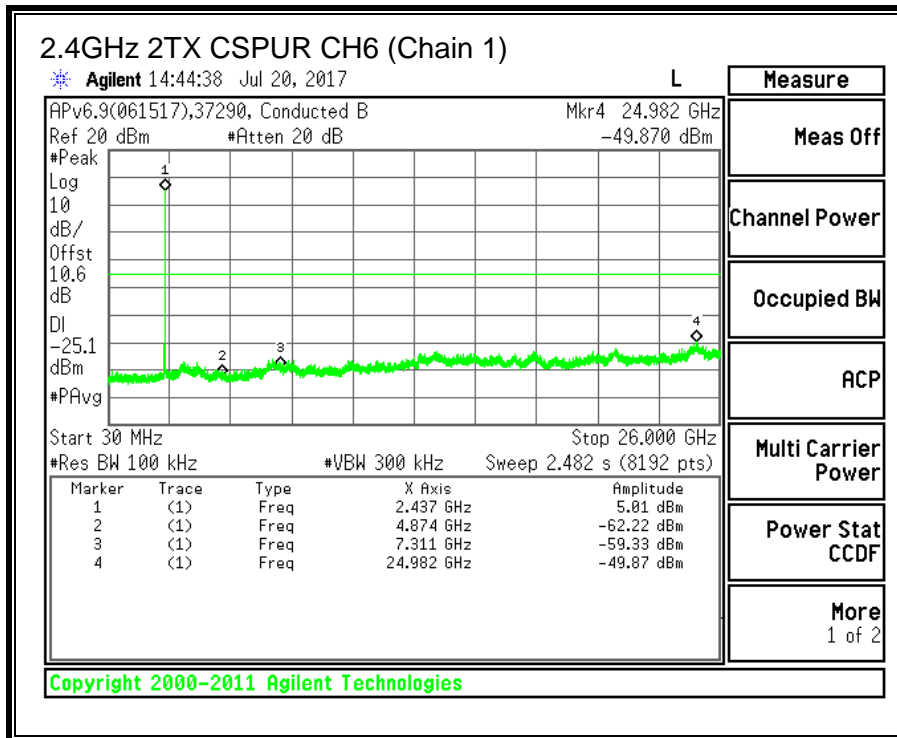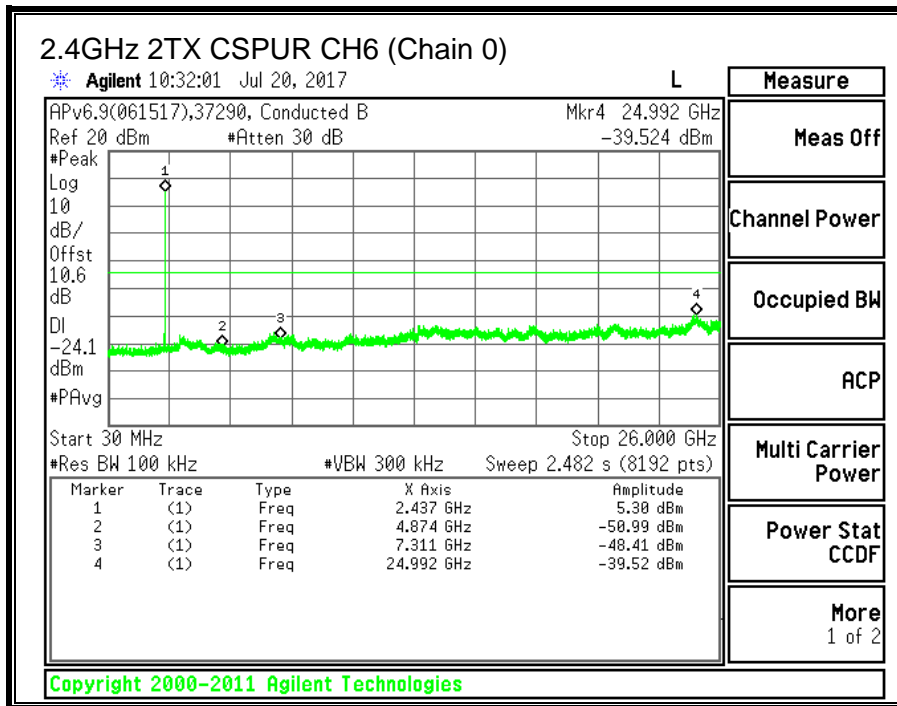

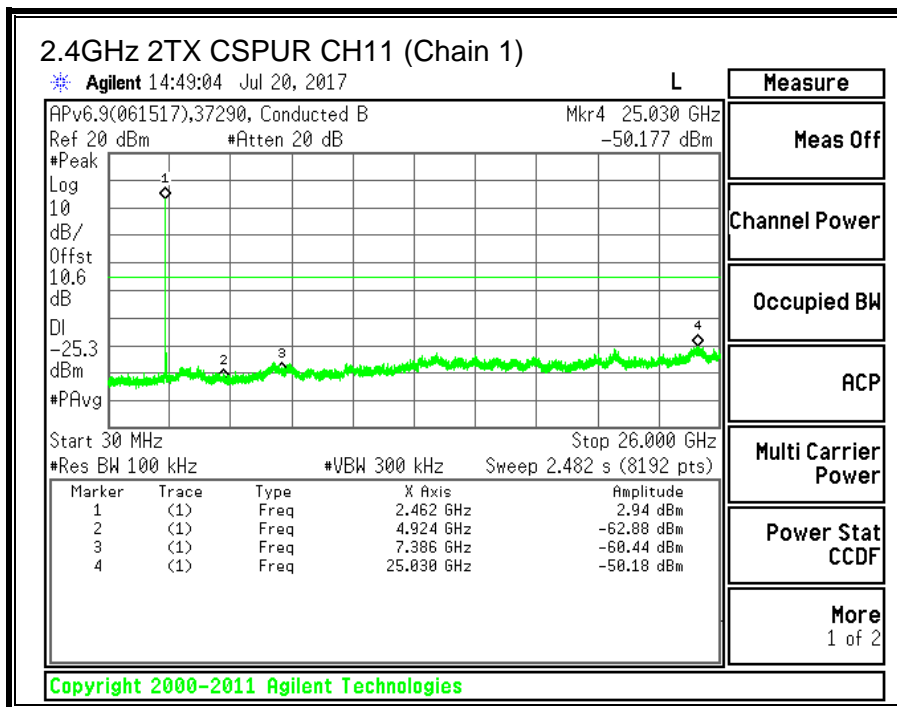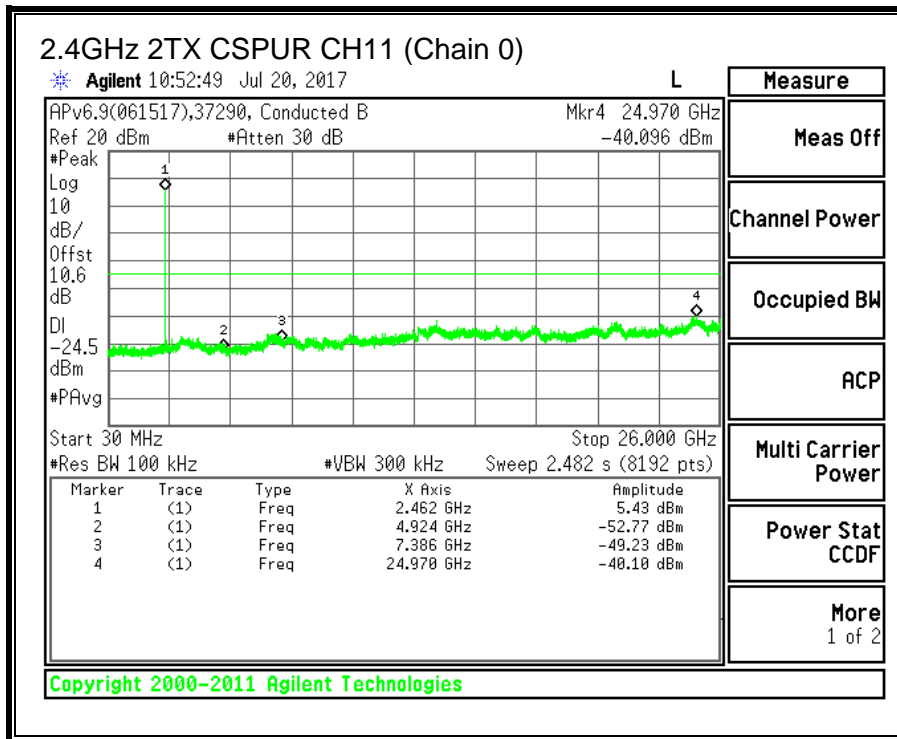

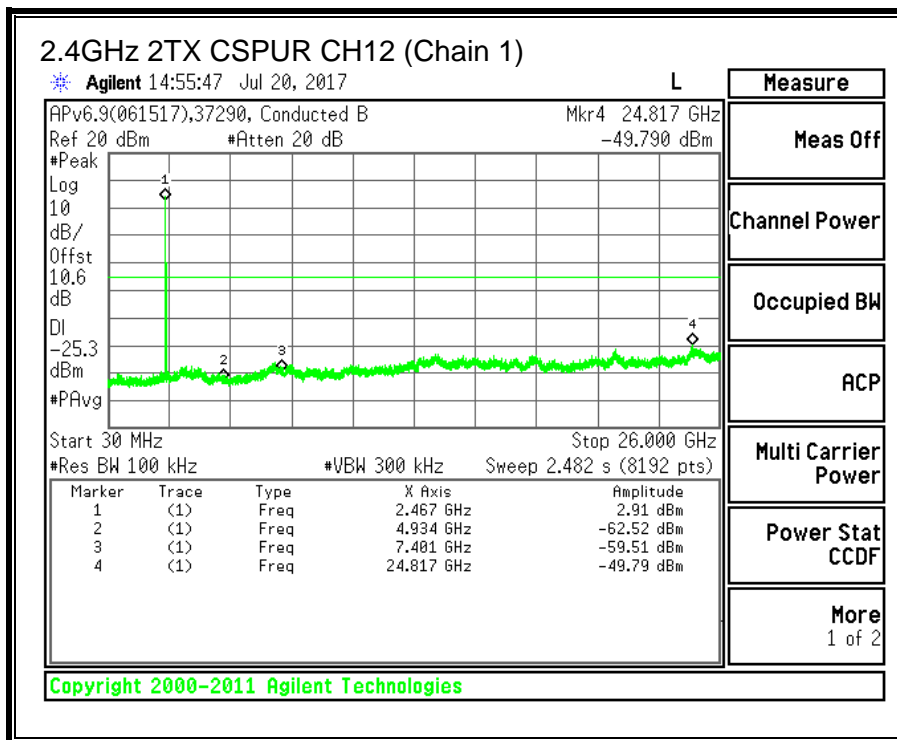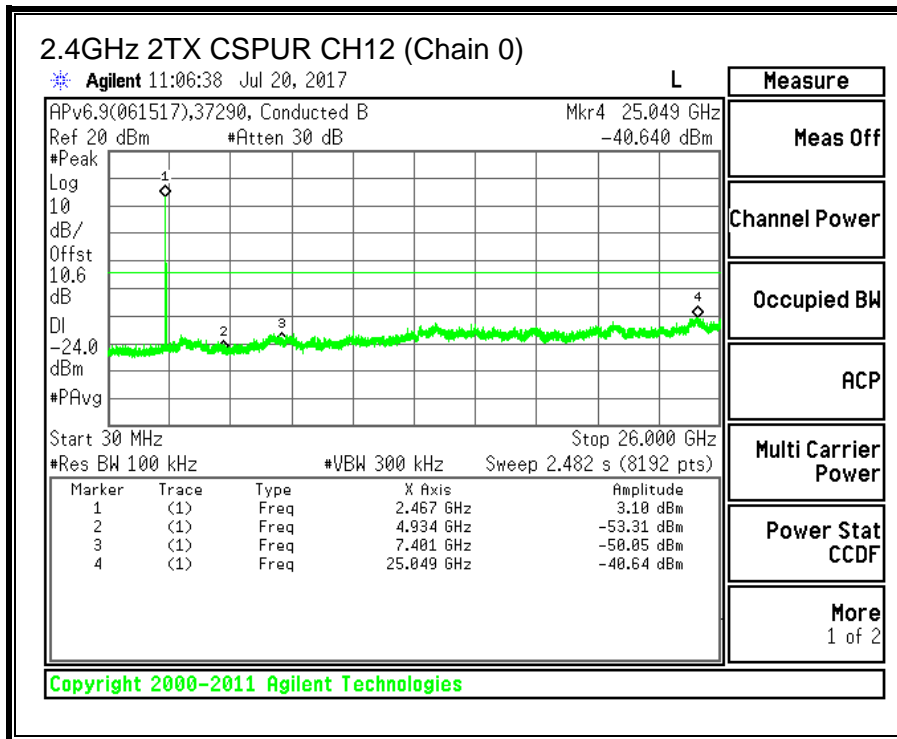

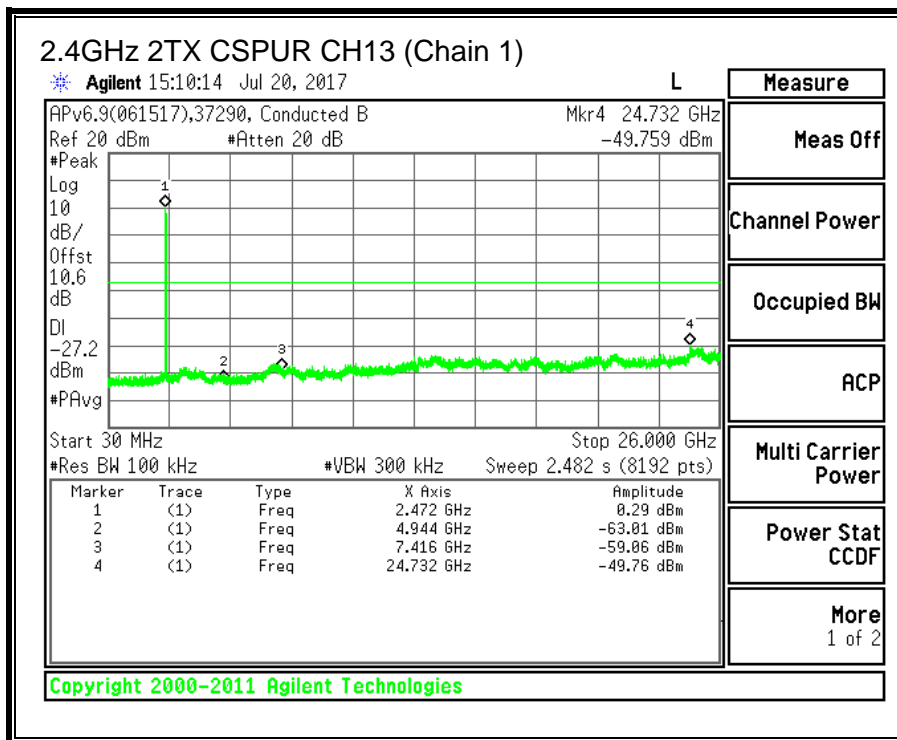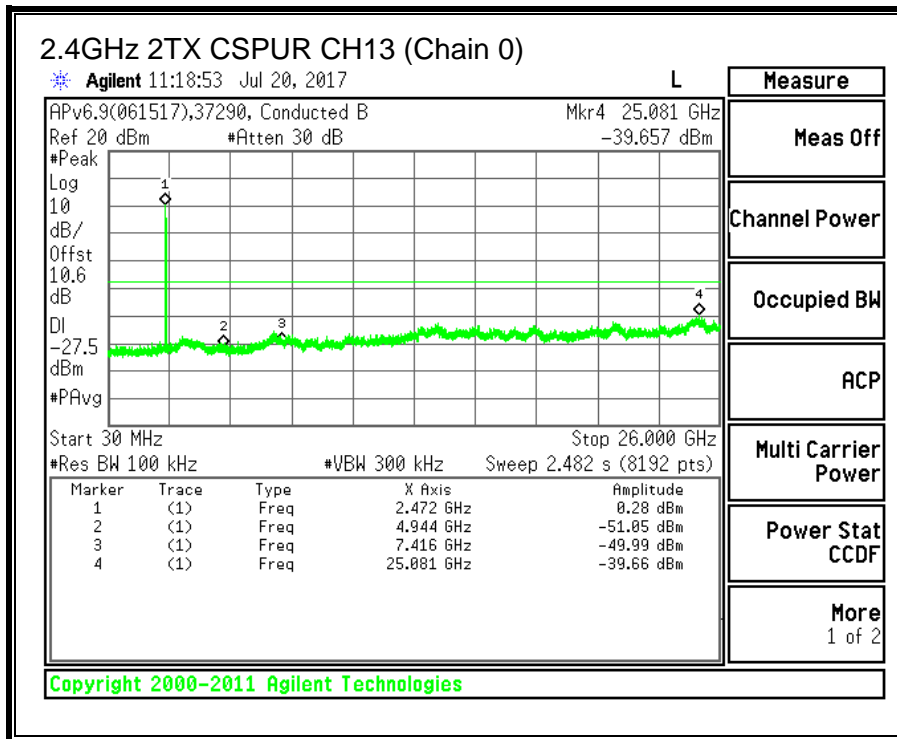

9.3. 11g 2TX CDD MIMO MODE IN THE 2.4GHZ BAND

9.3.1. 6 dB BANDWIDTH



LIMITS



FCC §15.247 (a) (2)



The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS



Channel	Frequency	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
CH1	2412	16.40	16.40	0.5
CH2	2417	16.40	16.36	0.5
CH6	2437	15.72	16.40	0.5
CH11	2462	16.32	16.36	0.5
CH12	2467	15.48	16.44	0.5
CH13	2472	16.40	16.32	0.5

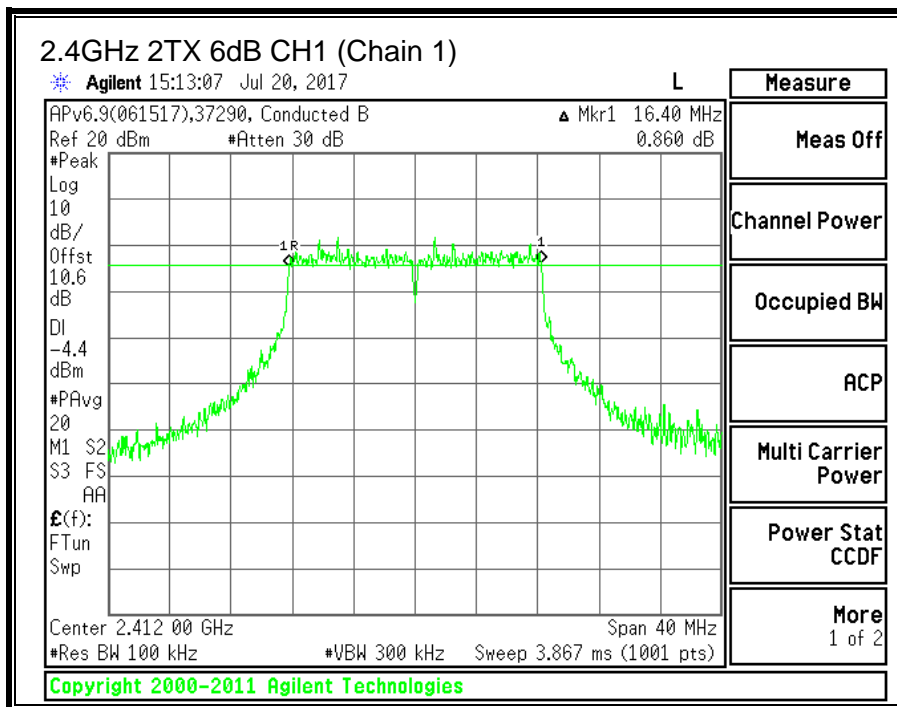
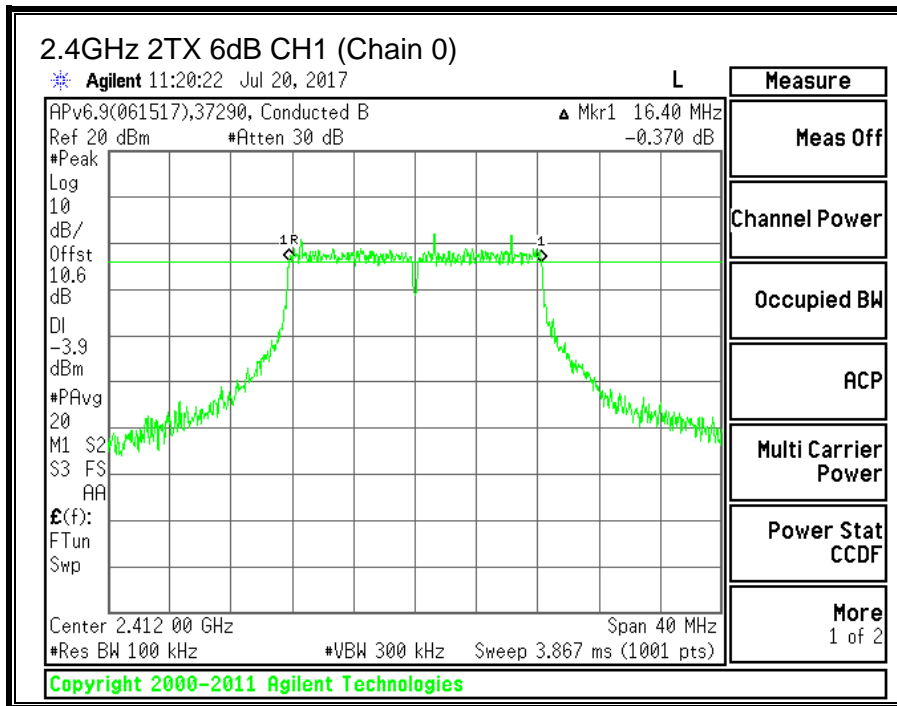


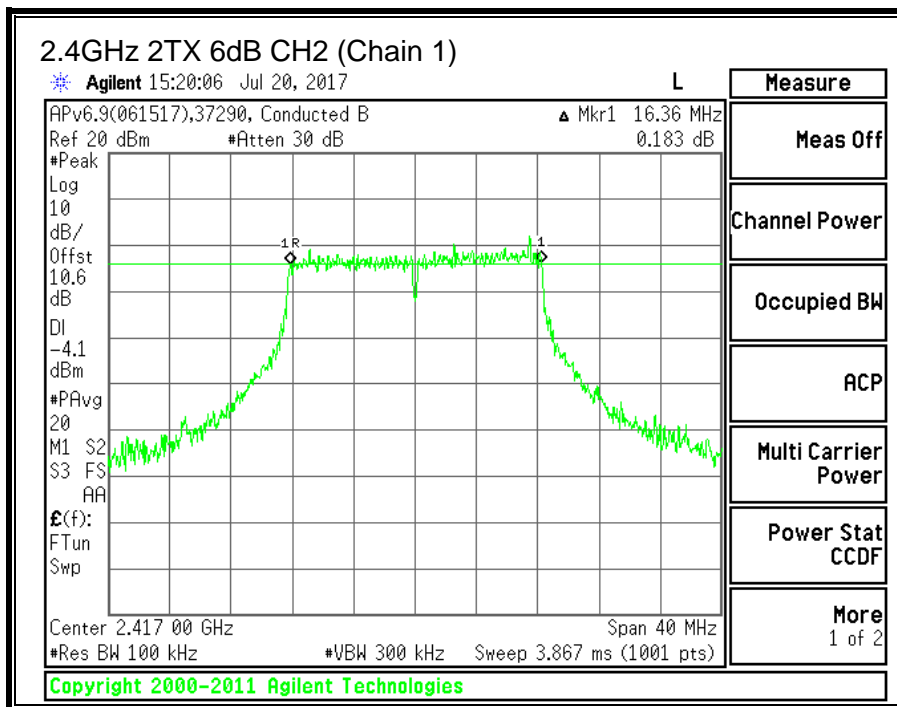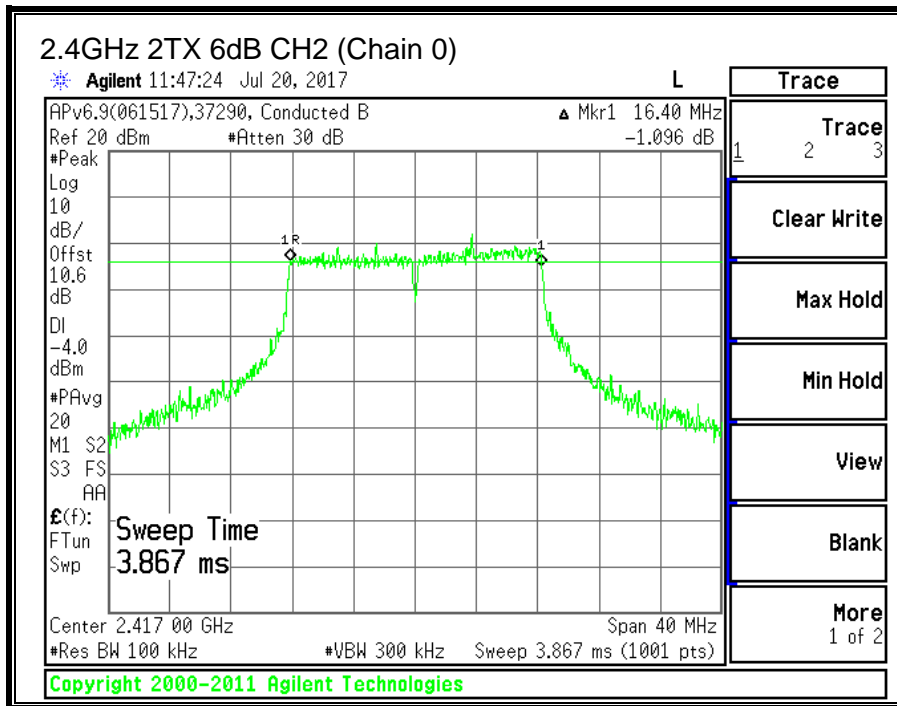

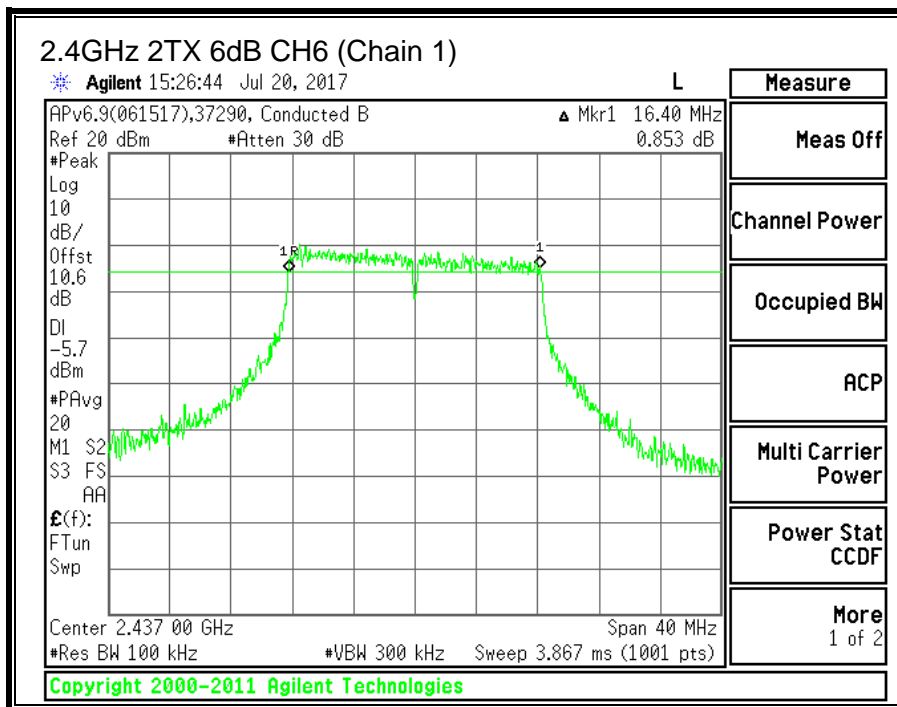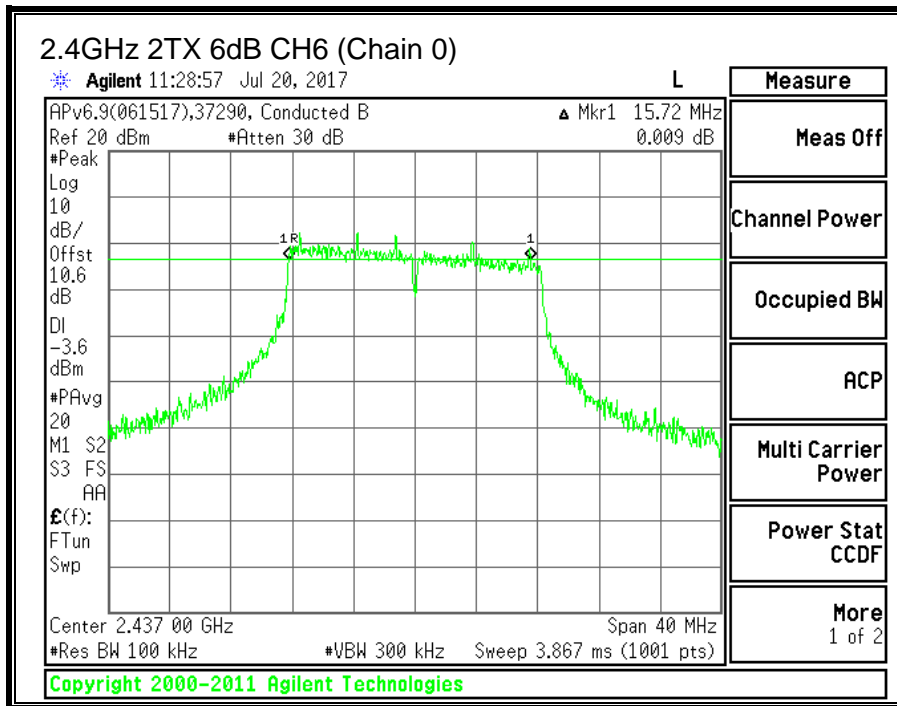

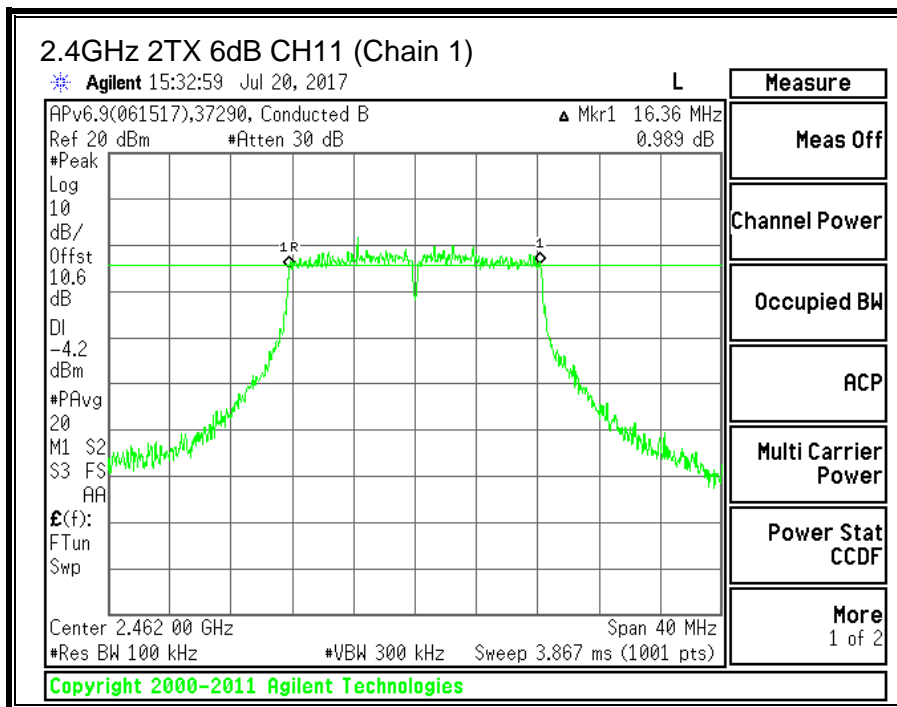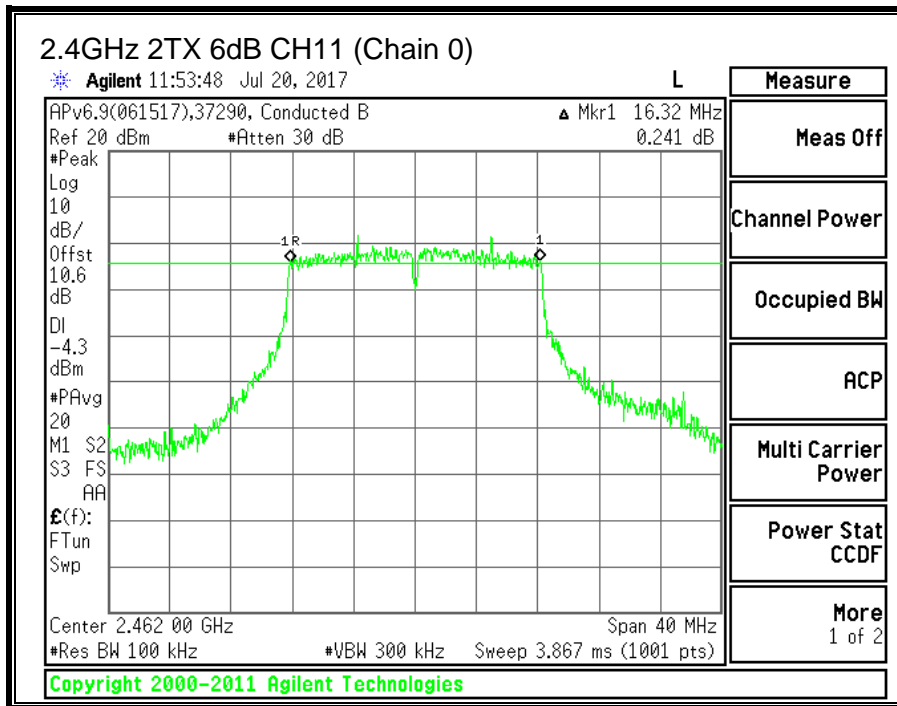

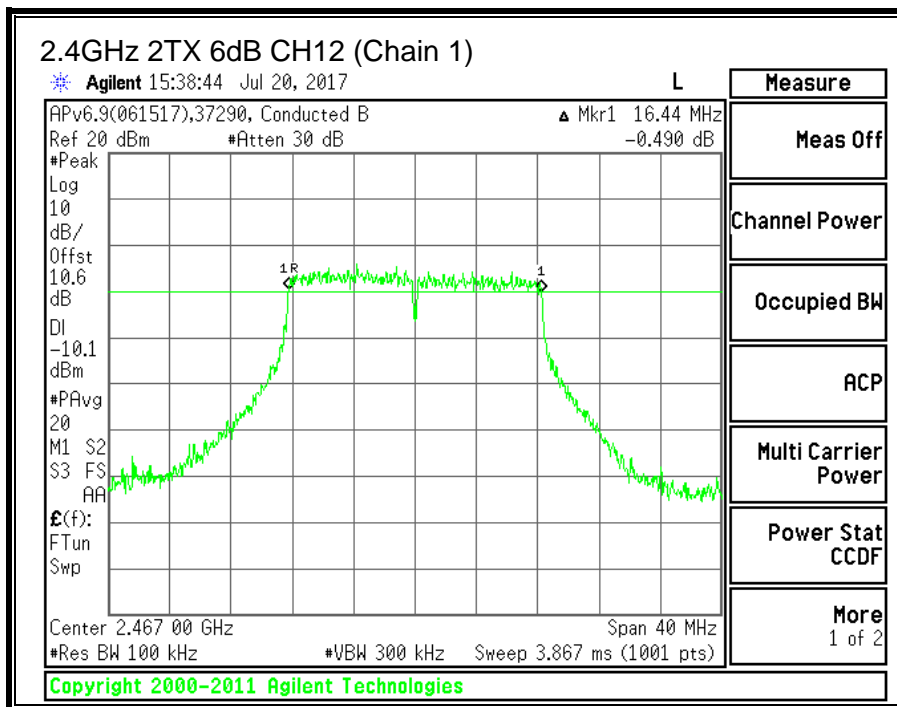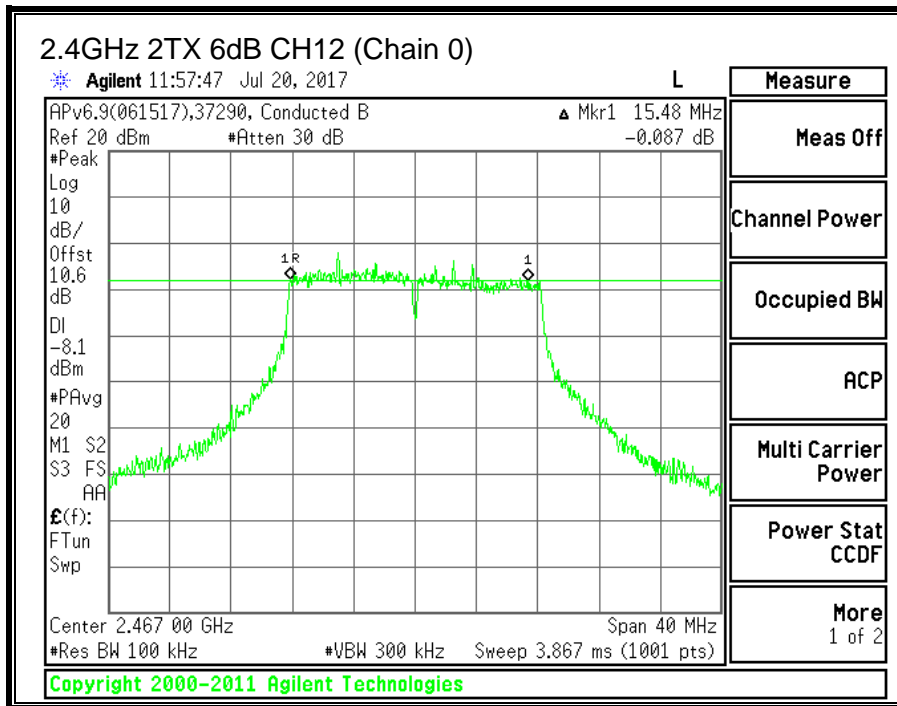

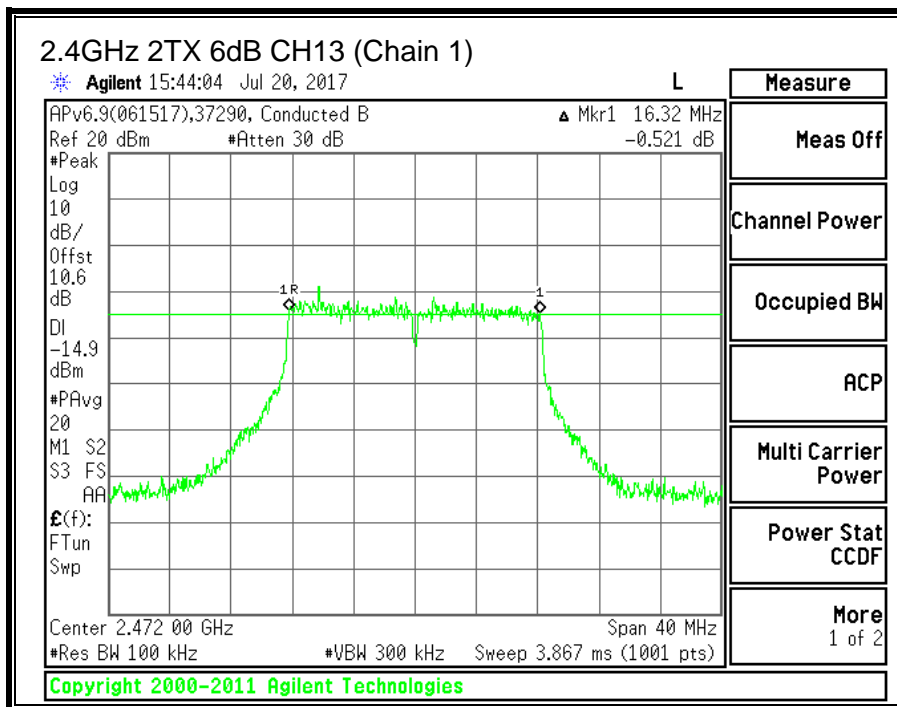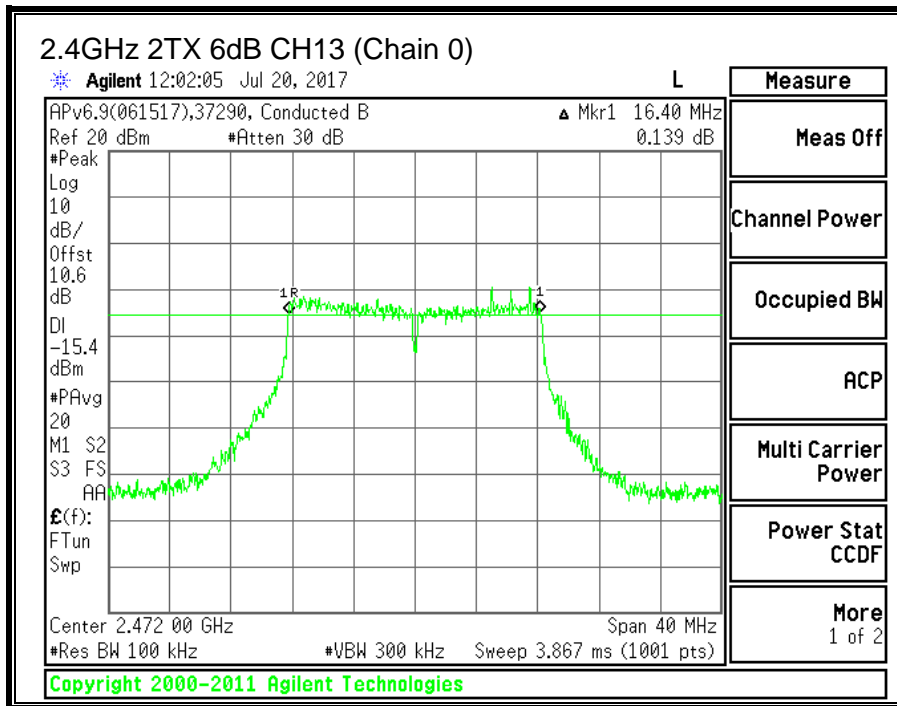



9.3.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.



RESULTS



Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
CH1	2412	16.375	16.229
CH2	2417	16.353	16.278
CH6	2437	16.326	16.282
CH11	2462	16.186	16.189
CH12	2467	16.048	16.240
CH13	2472	16.310	16.520

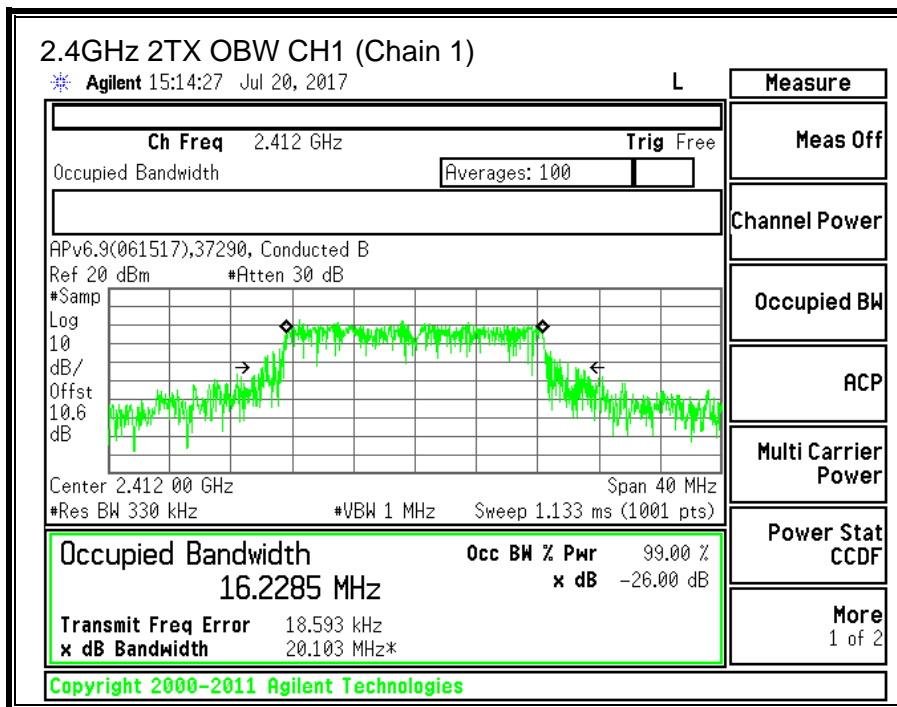
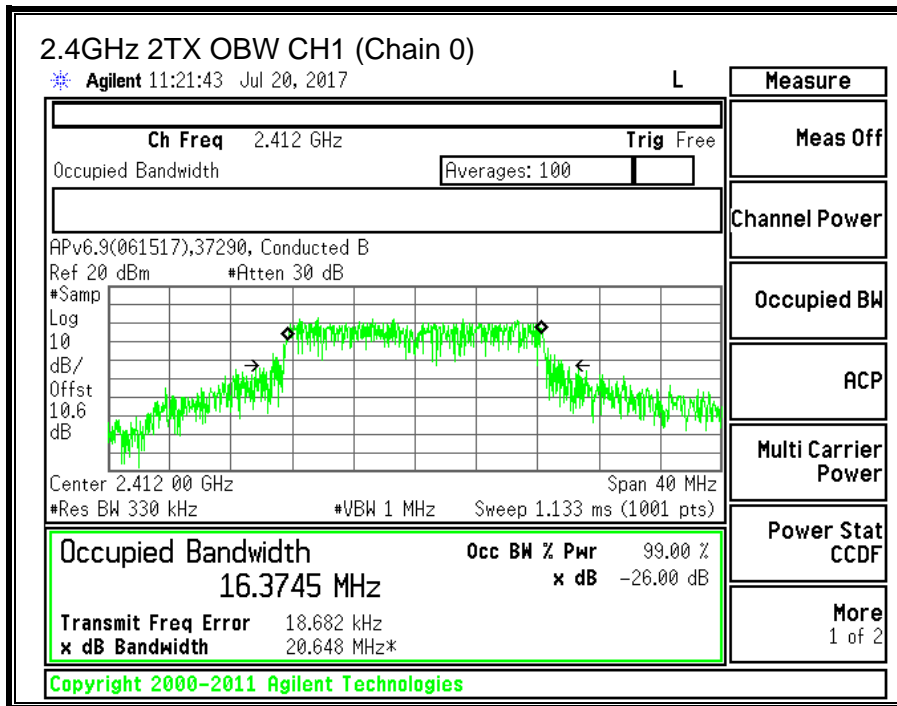


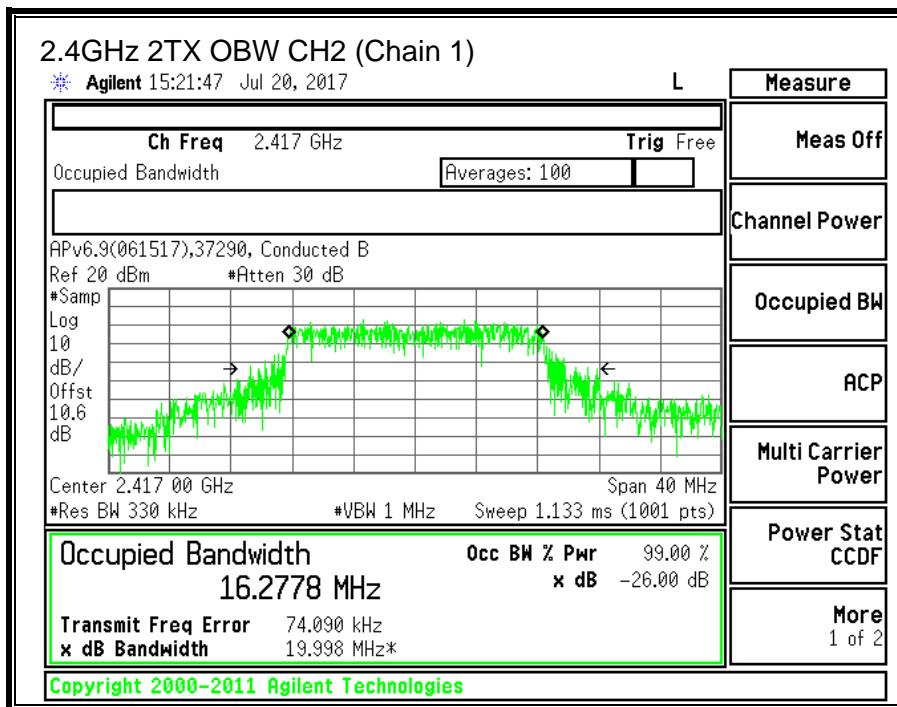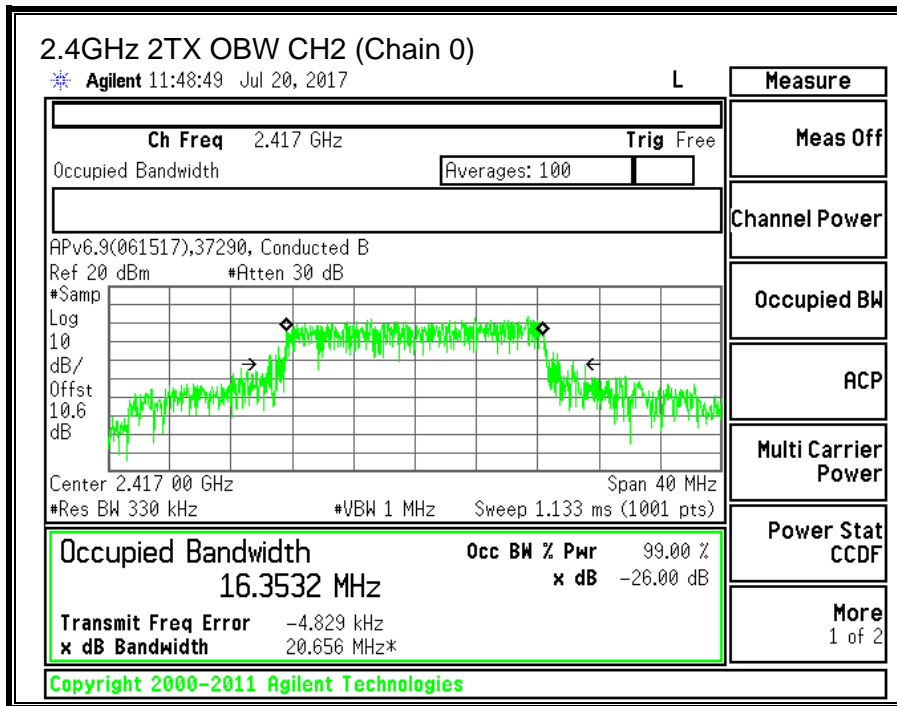

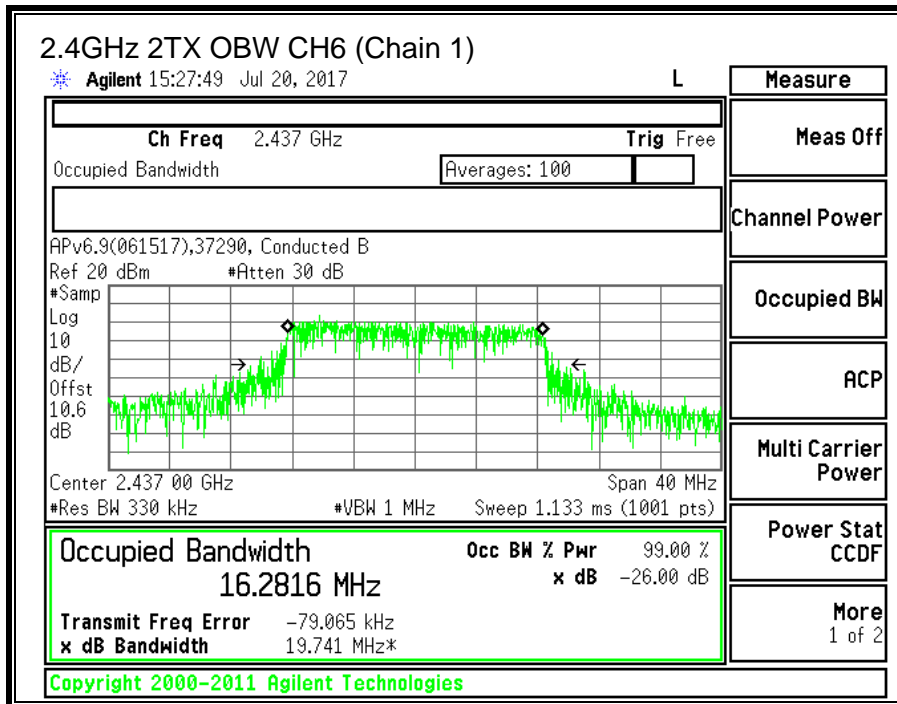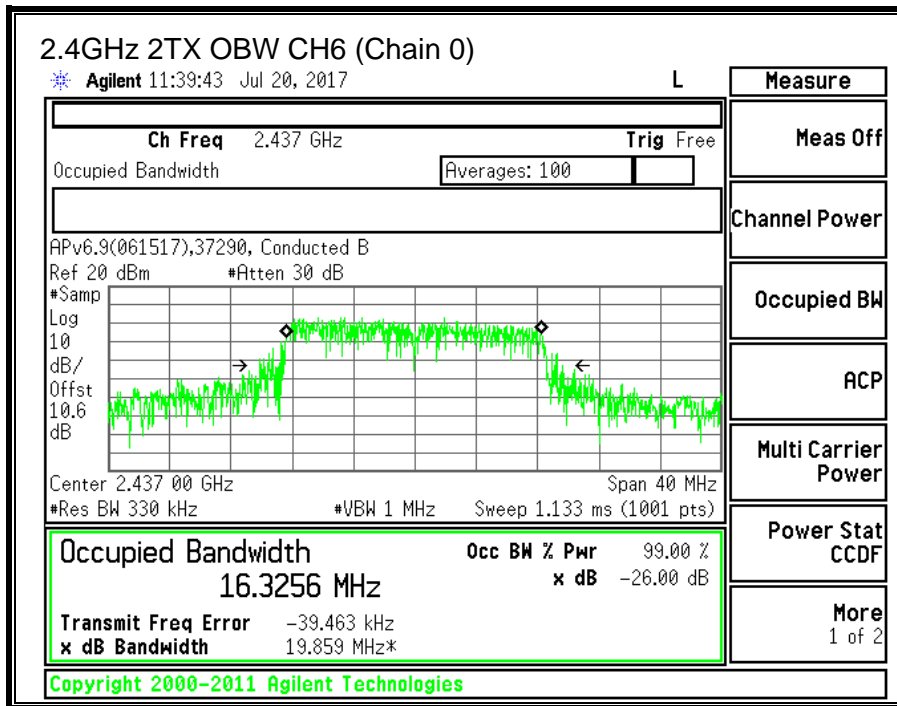

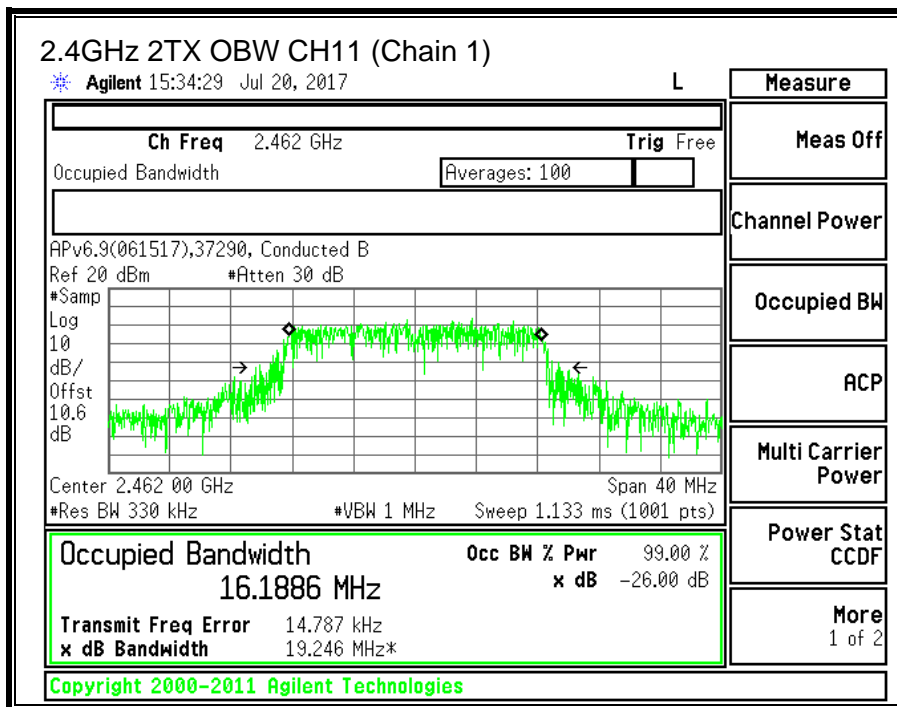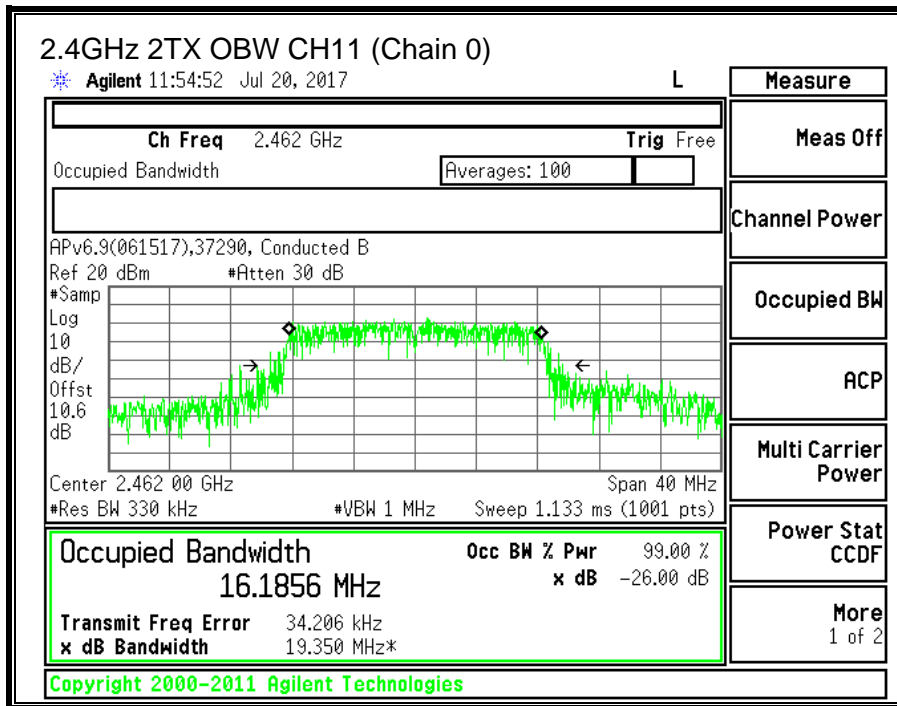

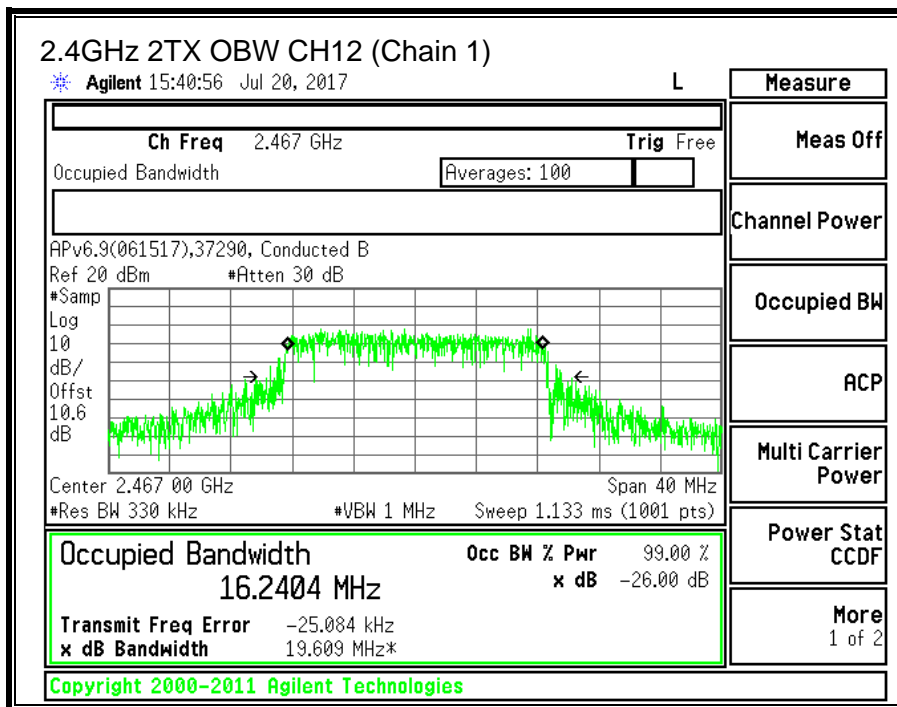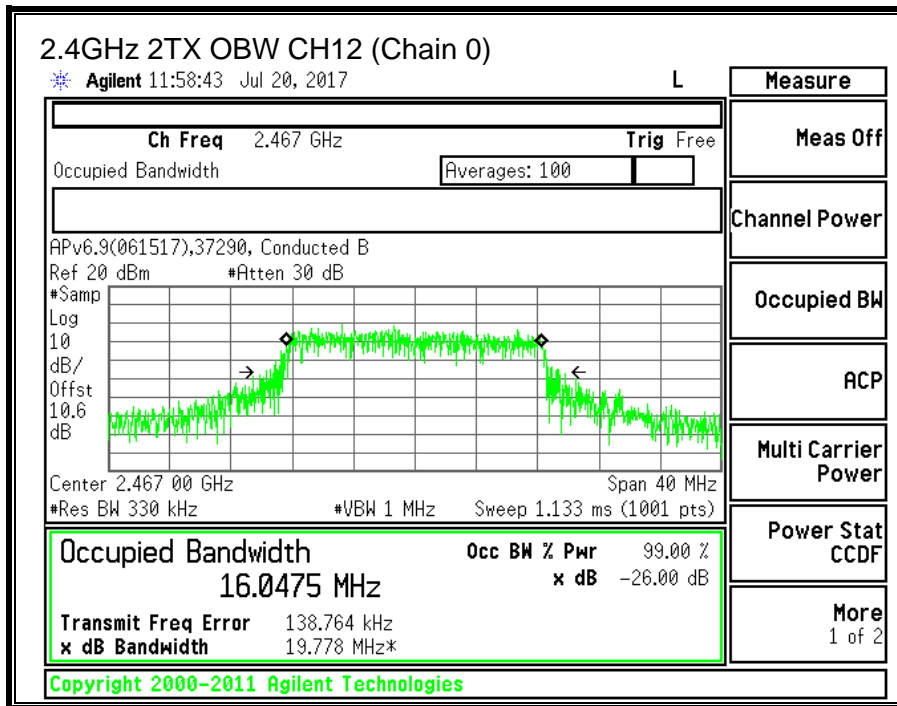

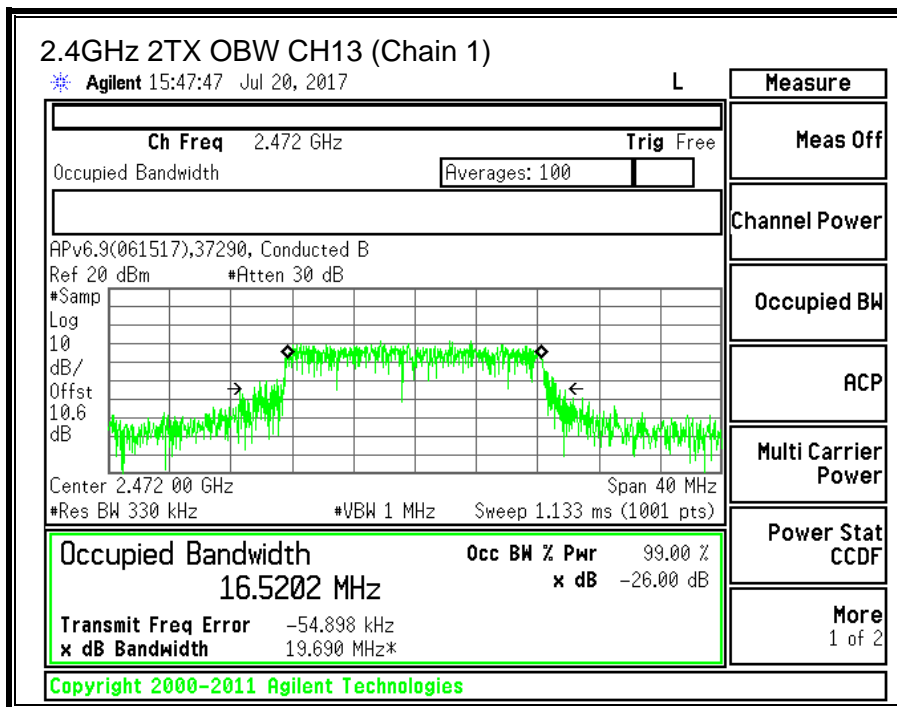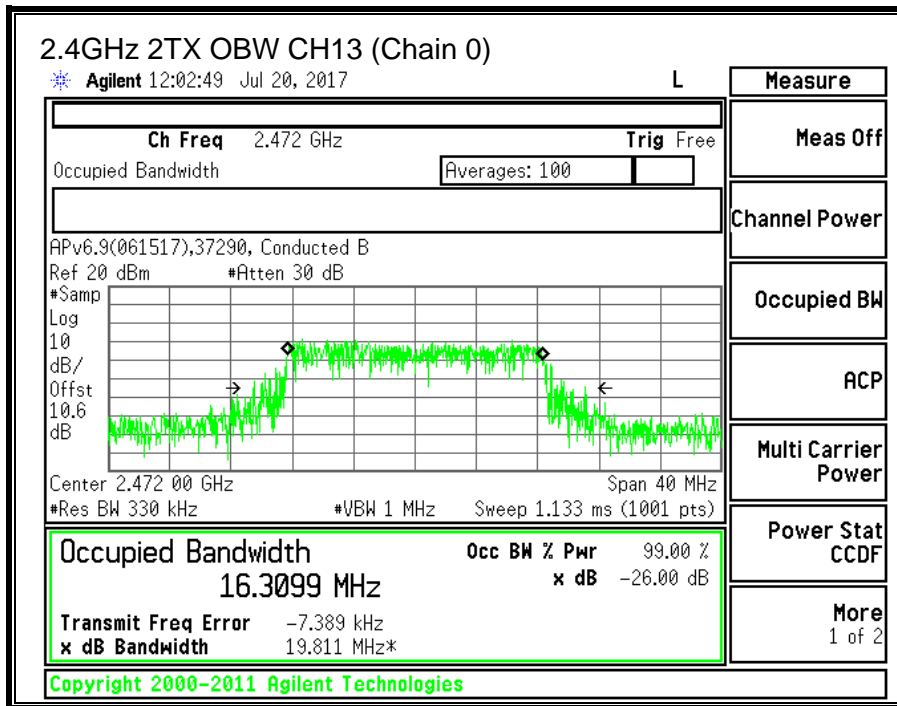

9.3.3. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

KDB 58074 D01 v04 Section 9.2.3.2

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-3.70	-5.50	-4.51

RESULTS

ID:	39317	Date:	07/21/17
------------	-------	--------------	----------

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
CH1	2412	-4.51	30.00	30	36	30.00
CH2	2417	-4.51	30.00	30	36	30.00
CH6	2437	-4.51	30.00	30	36	30.00
CH11	2462	-4.51	30.00	30	36	30.00
CH12	2467	-4.51	30.00	30	36	30.00
CH13	2472	-4.51	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
CH1	2412	13.18	12.88	16.04	30.00	-13.96
CH2	2417	13.65	13.36	16.52	30.00	-13.48
CH6	2437	12.96	13.37	16.18	30.00	-13.82
CH11	2462	13.24	13.11	16.19	30.00	-13.81
CH12	2467	8.57	8.67	11.63	30.00	-18.37
CH13	2472	2.07	2.32	5.21	30.00	-24.79

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

9.3.4. POWER SPECTRAL DENSITY



LIMITS



FCC §15.247 (e)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



Duty Cycle CF (dB)		0.24	Included in Calculations of Corr'd PSD			
PSD Results						
Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Chain 1 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
CH1	2412	-11.212	-11.843	-8.27	8.0	-16.3
CH2	2412	-10.574	-11.919	-7.94	8.0	-15.9
CH6	2437	-10.825	-11.222	-7.77	8.0	-15.8
CH11	2462	-11.019	-11.898	-8.19	8.0	-16.2
CH12	2467	-16.623	-16.130	-13.12	8.0	-21.1
CH13	2472	-22.152	-22.714	-19.17	8.0	-27.2

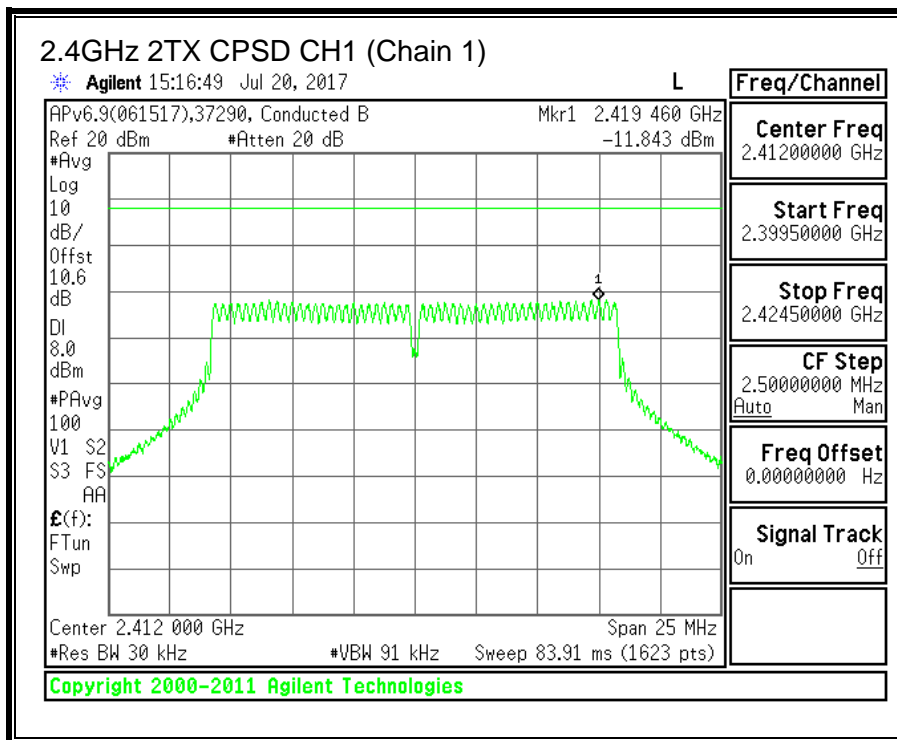
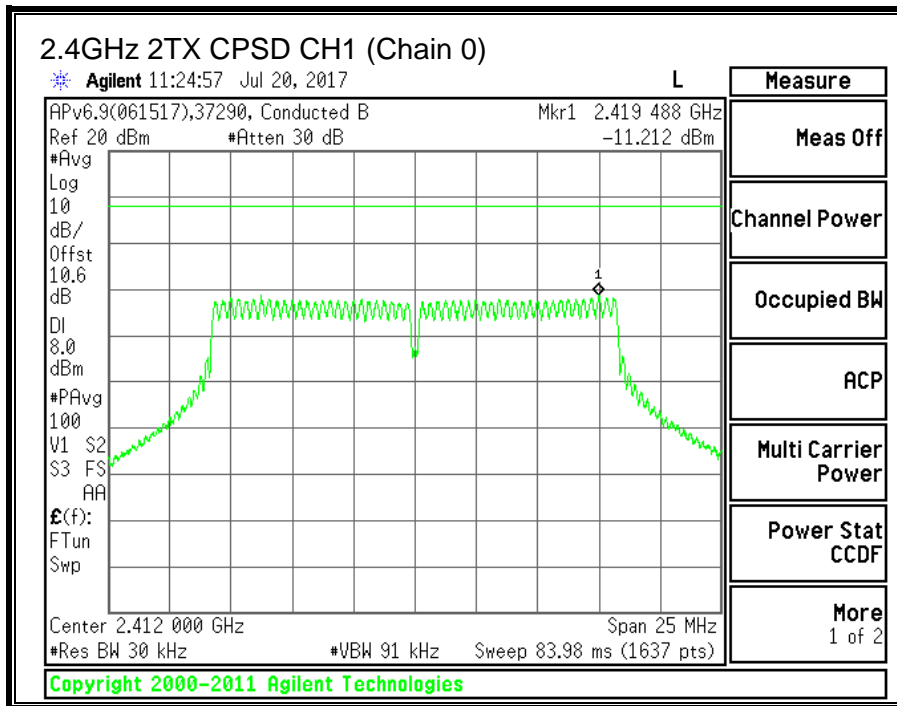


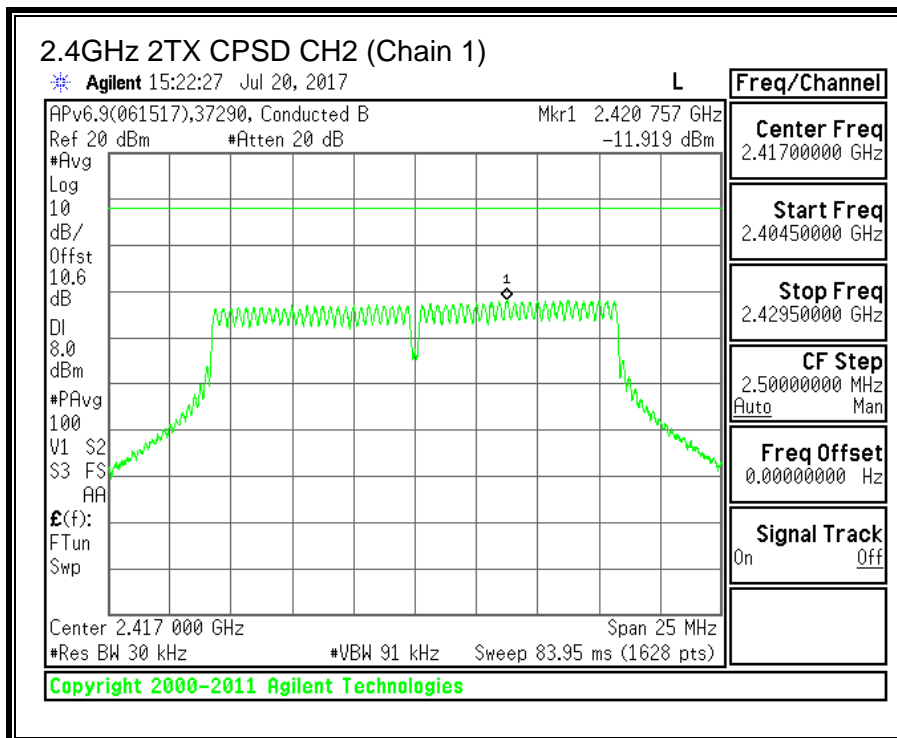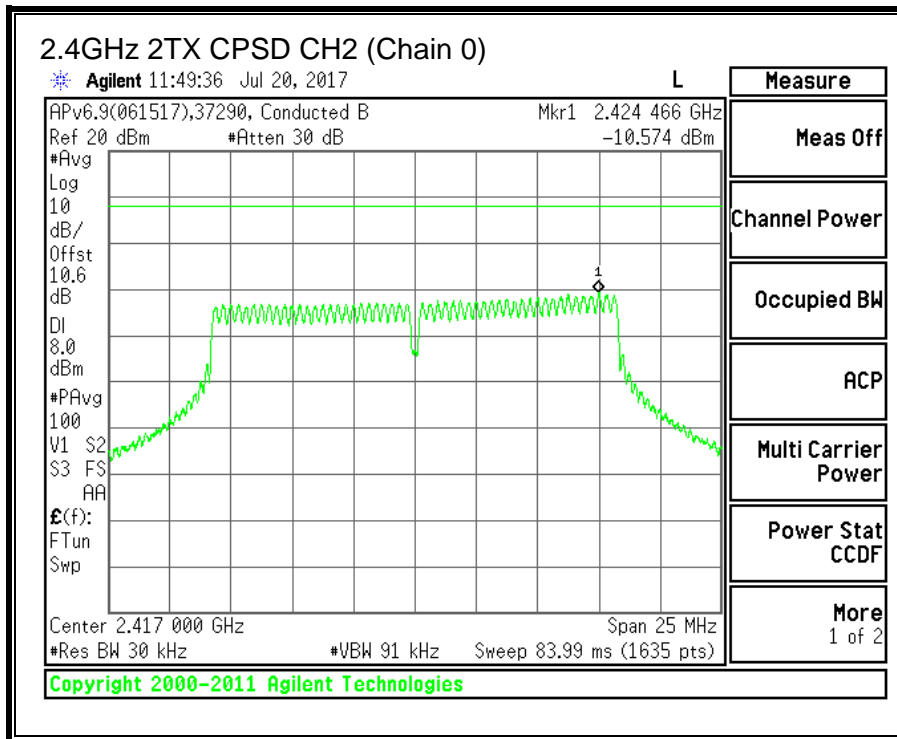

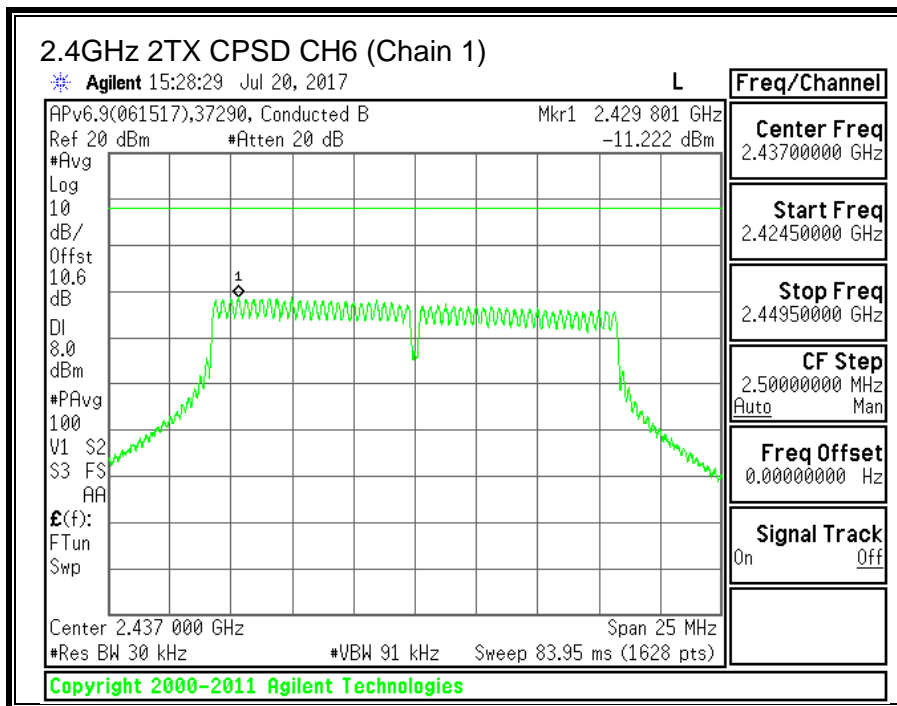
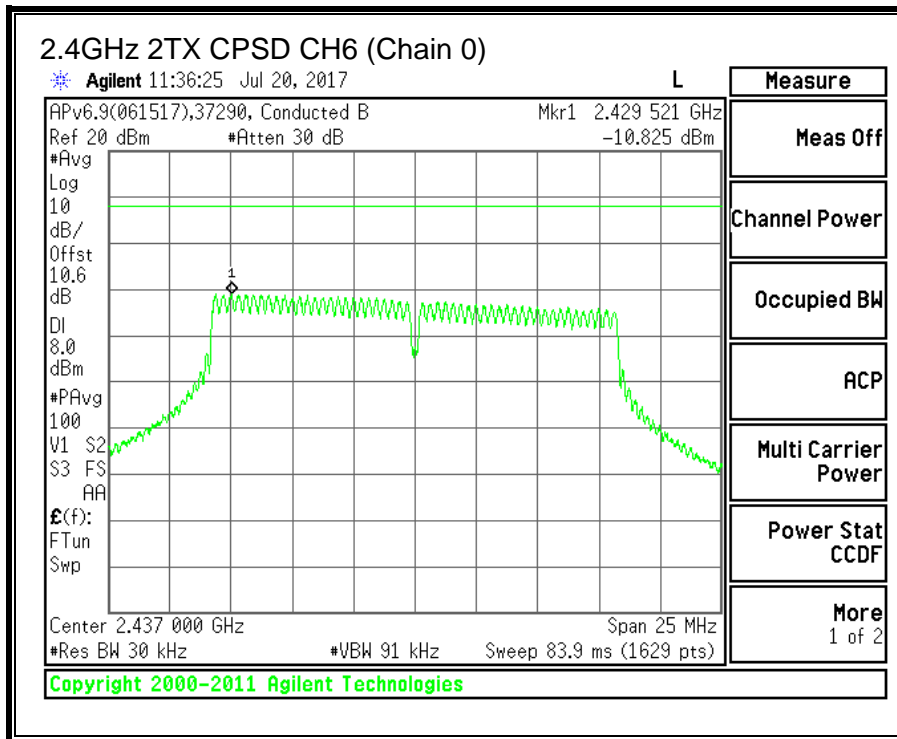


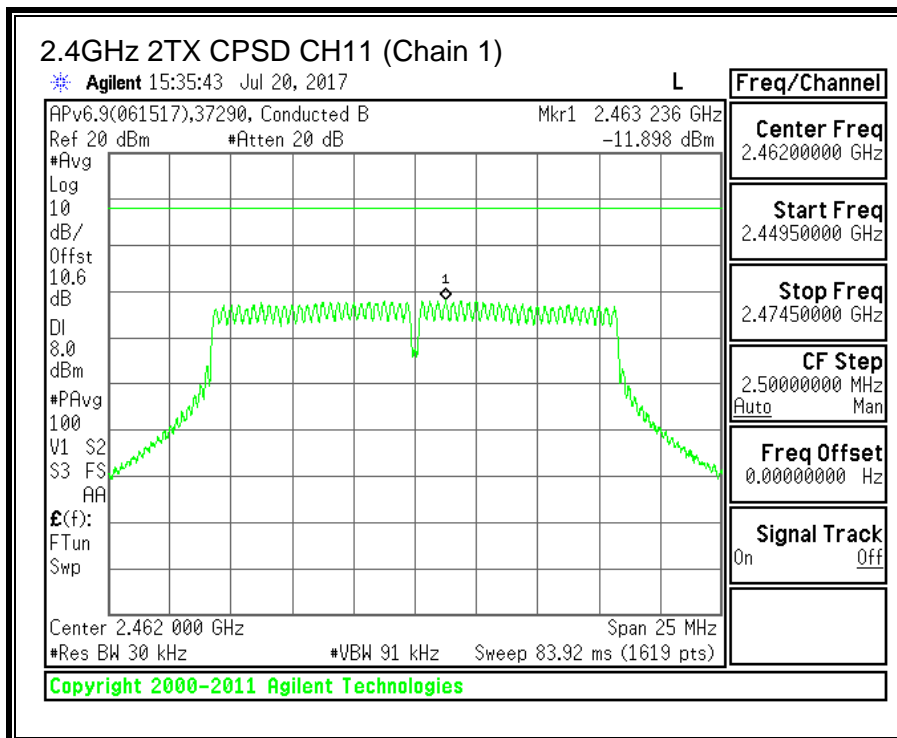
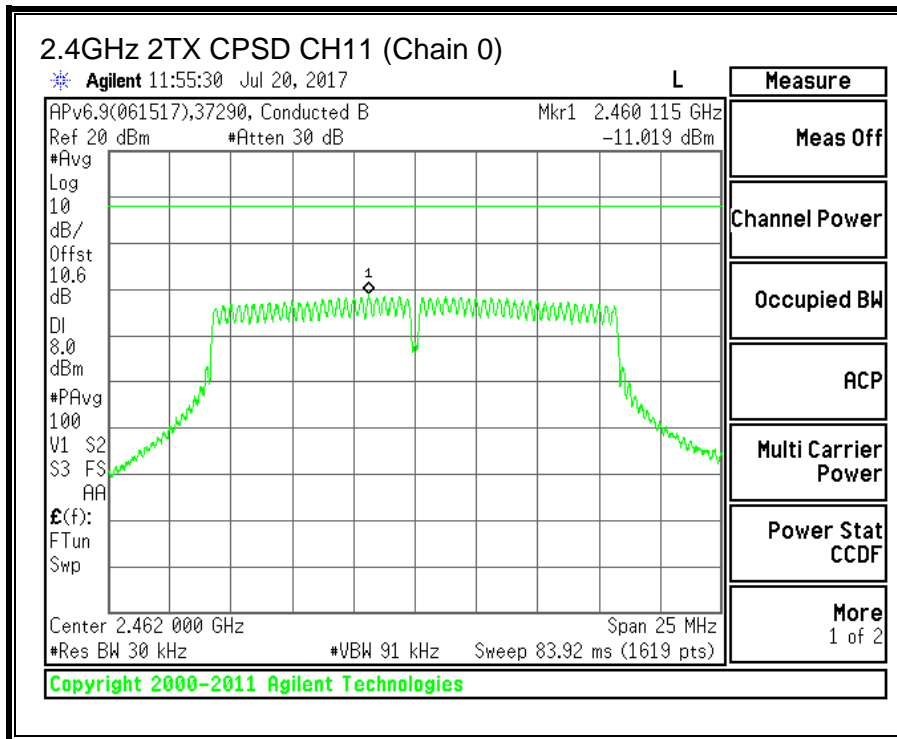


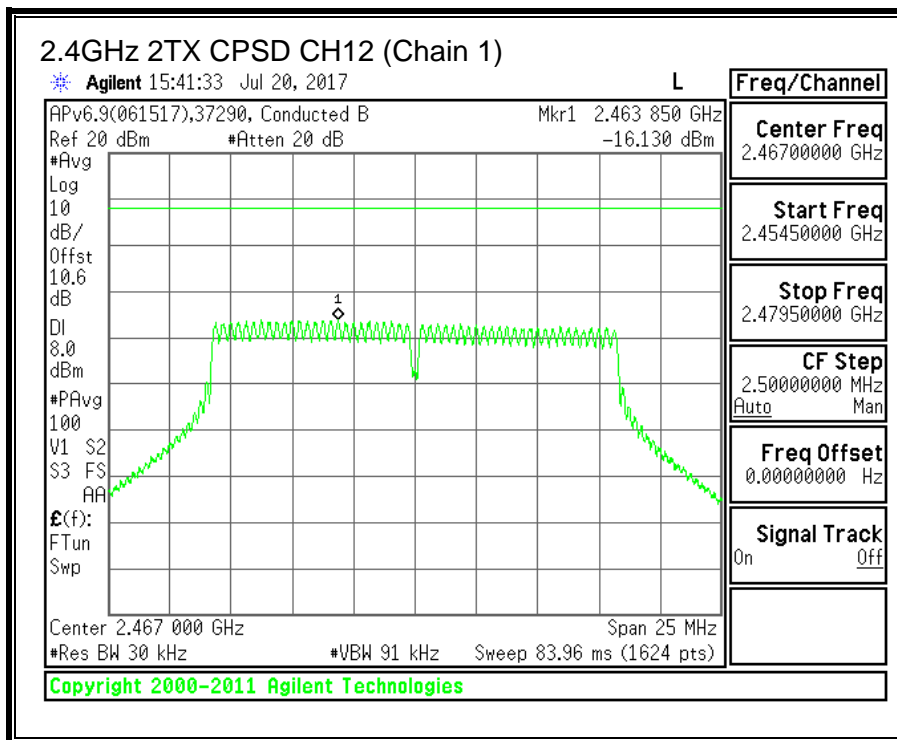
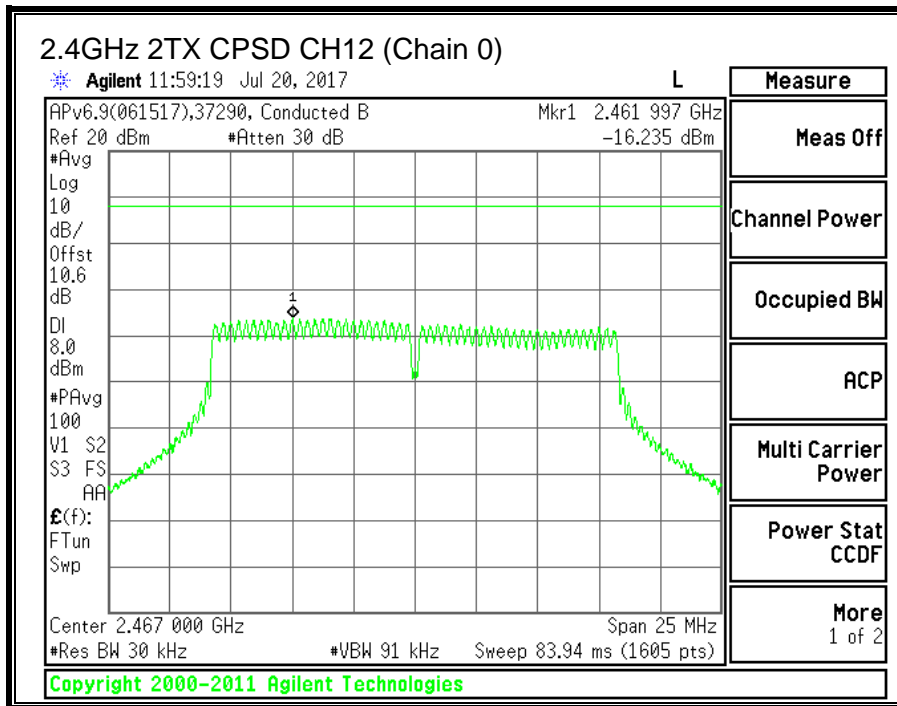


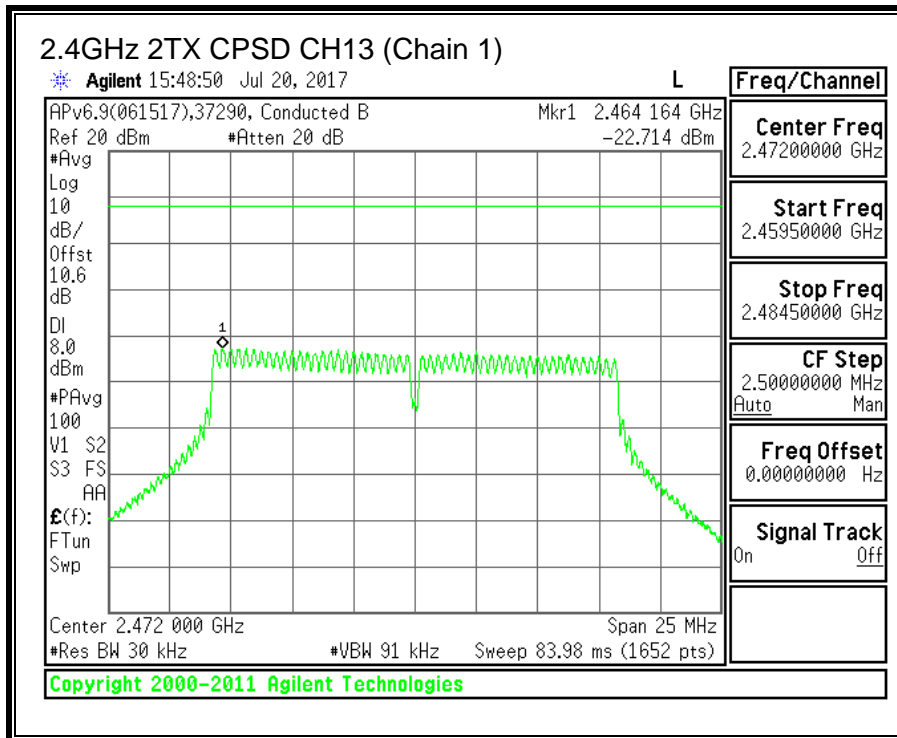
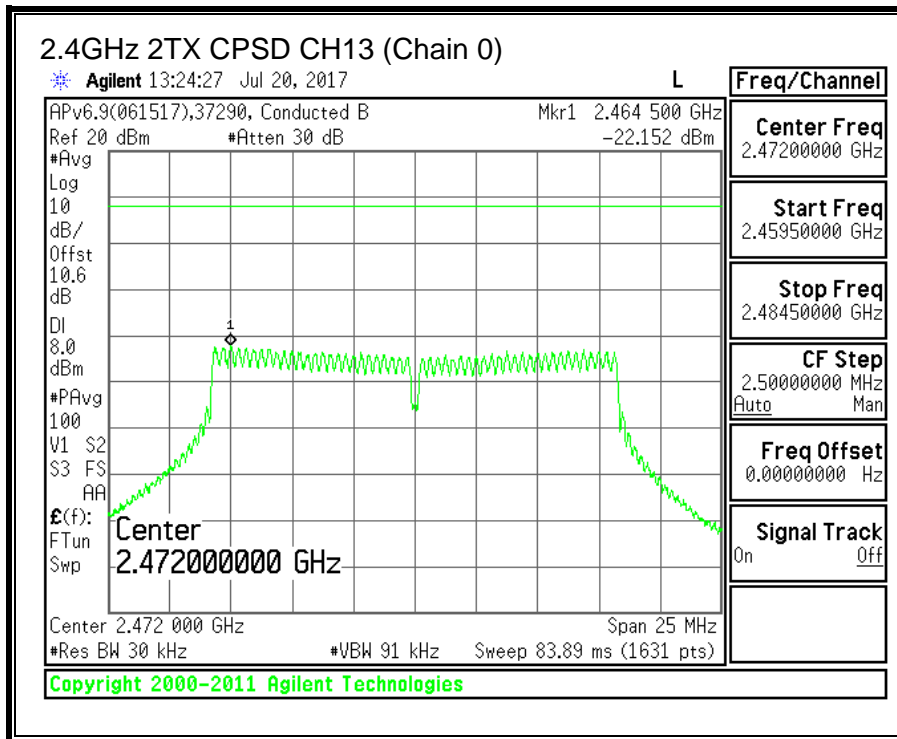




9.3.5. CONDUCTED BANEDGE AND SPURIOUS EMISSIONS

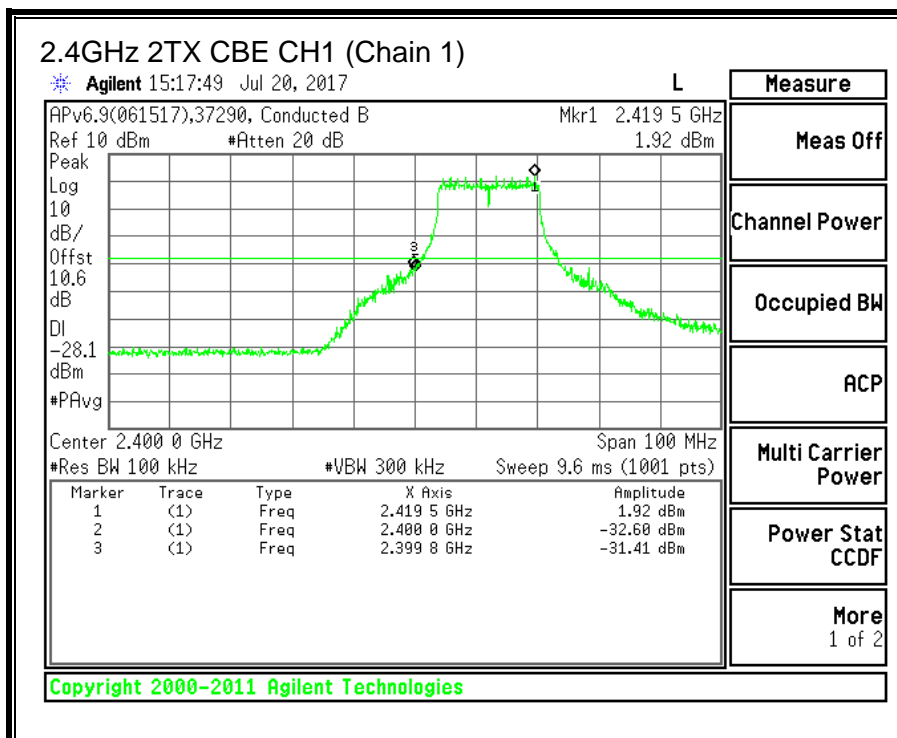
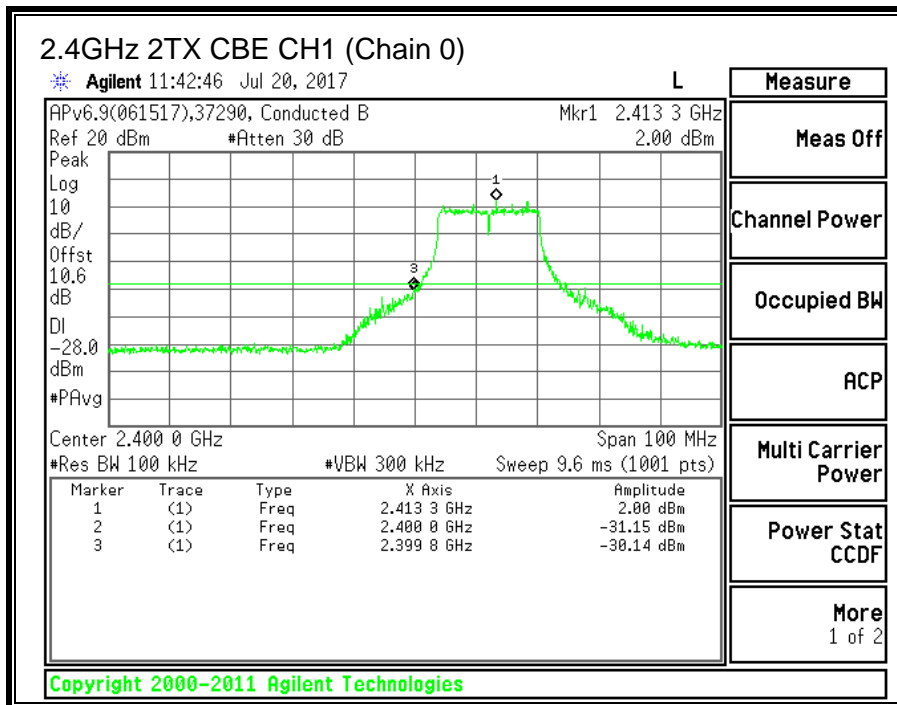


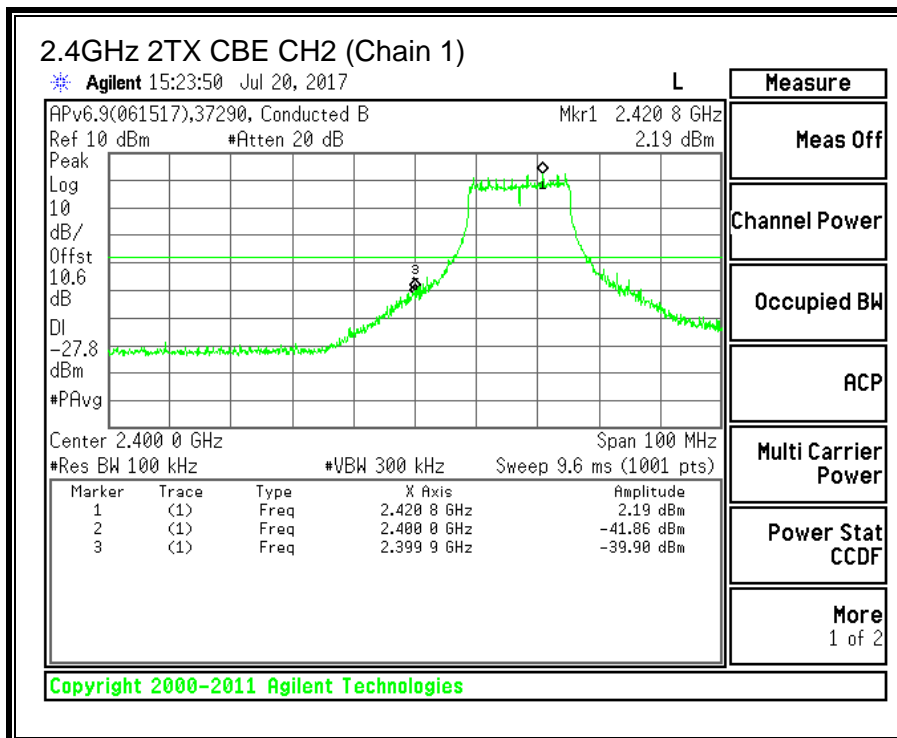
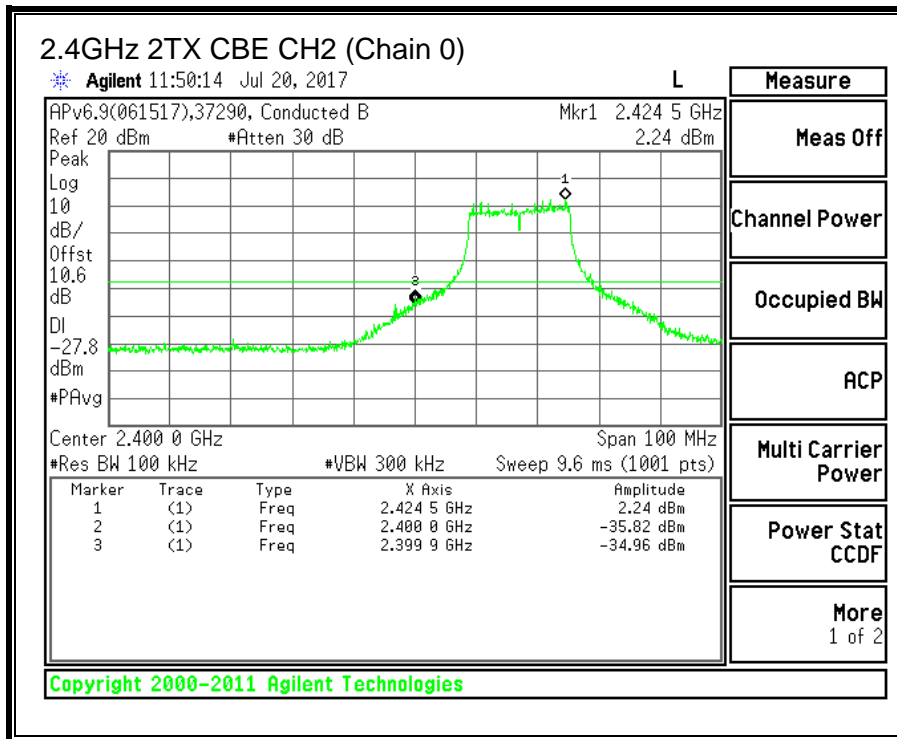


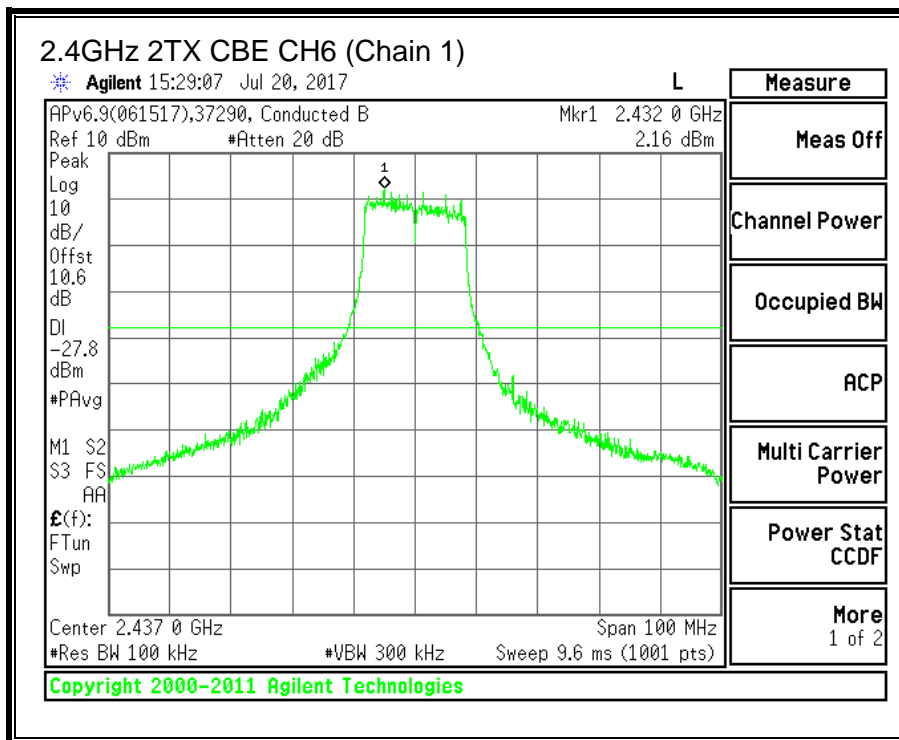
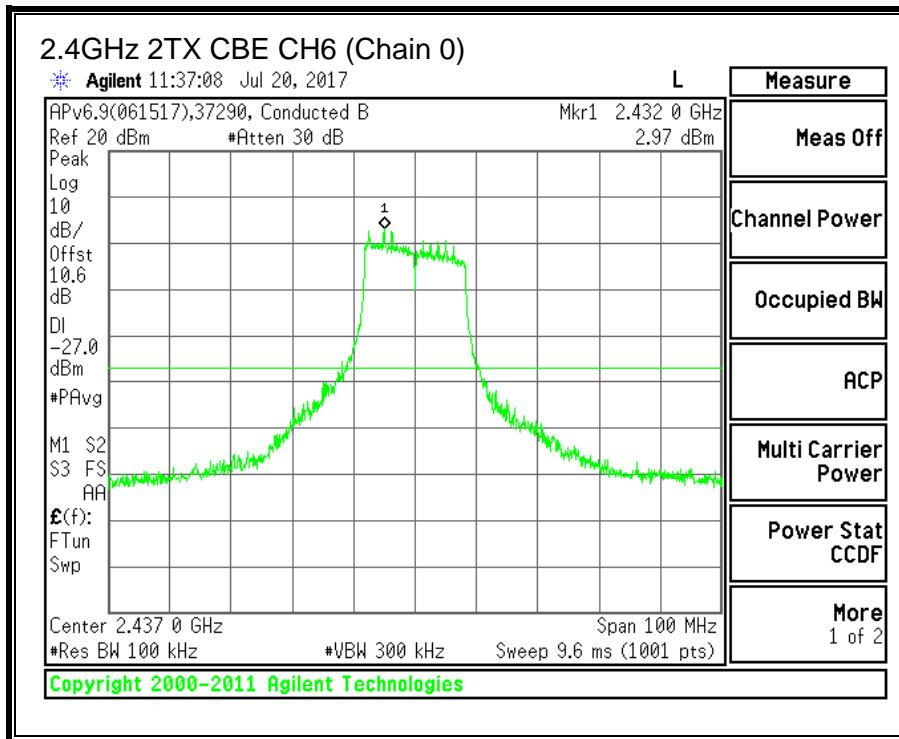


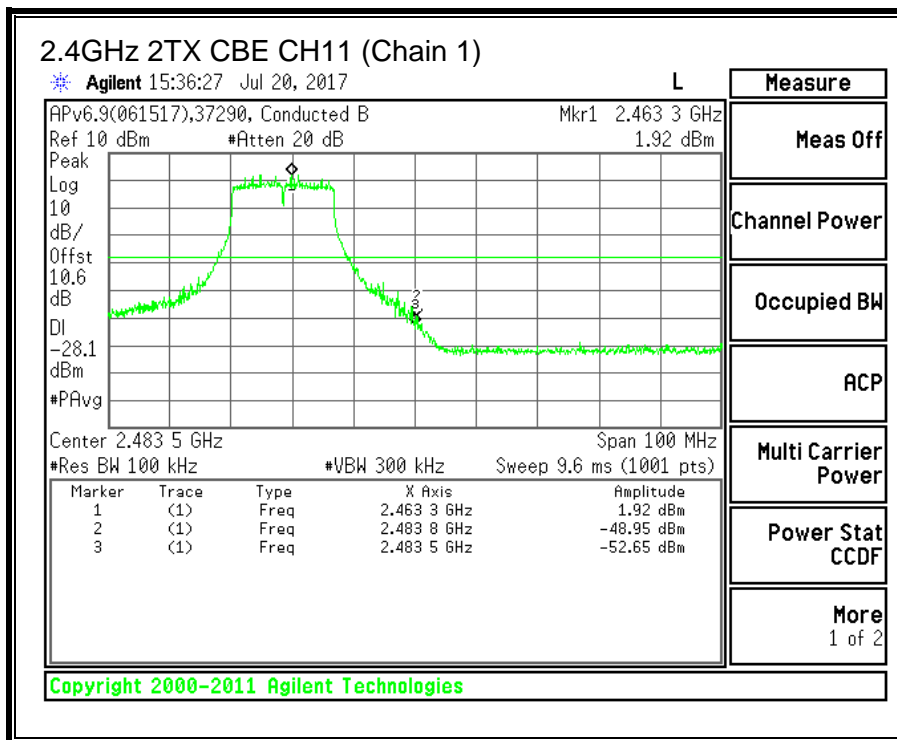
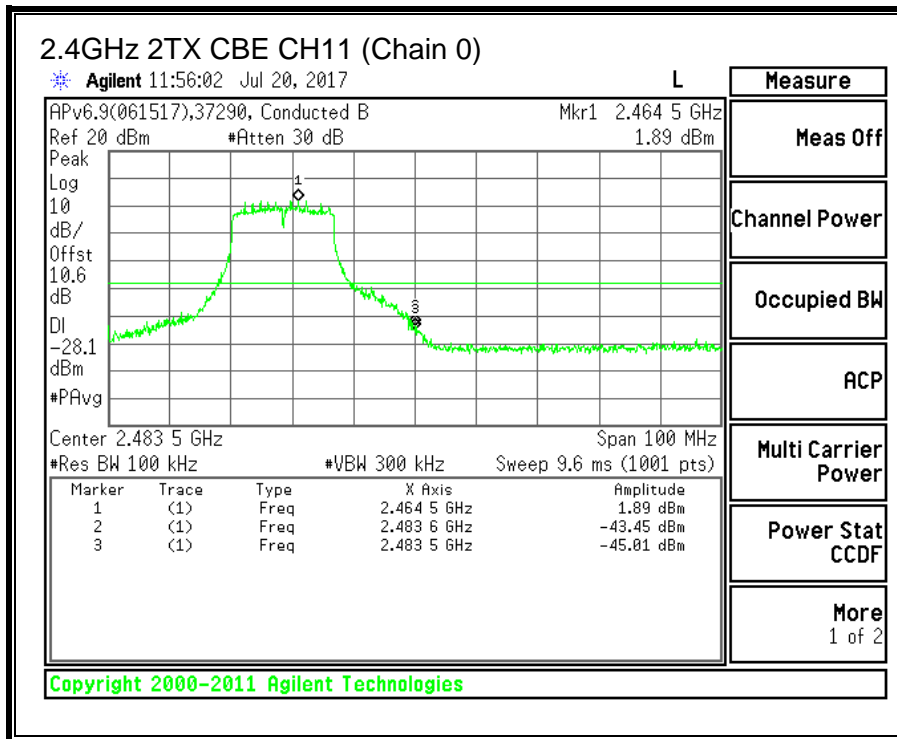


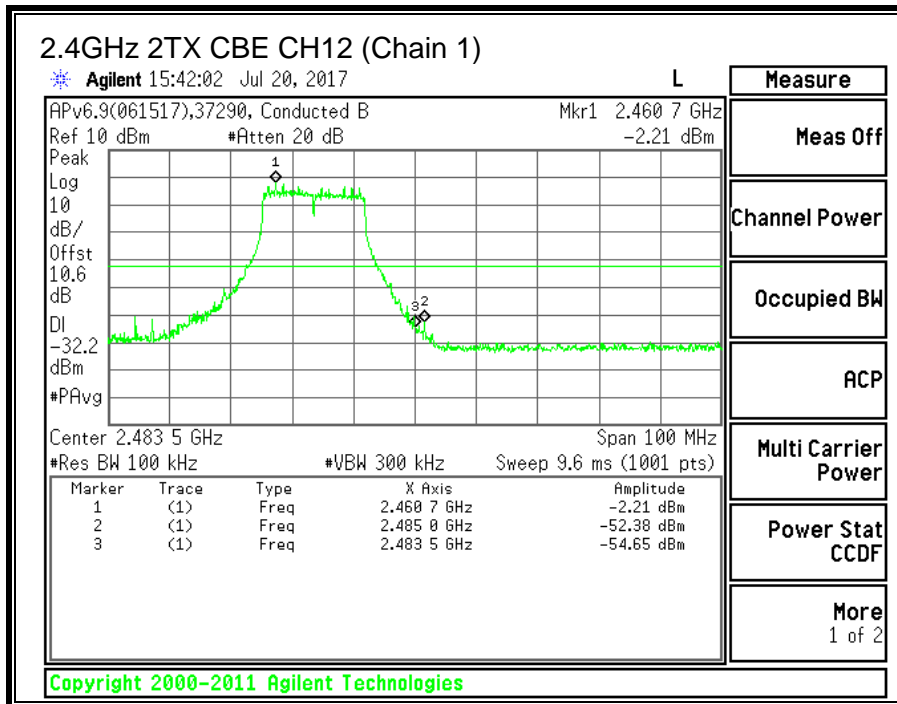
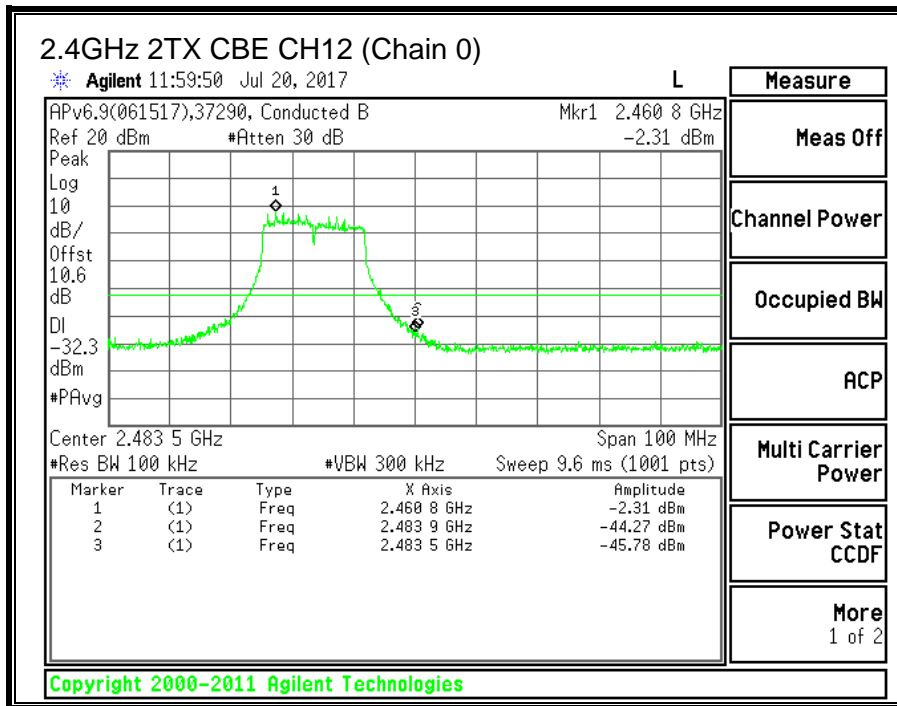


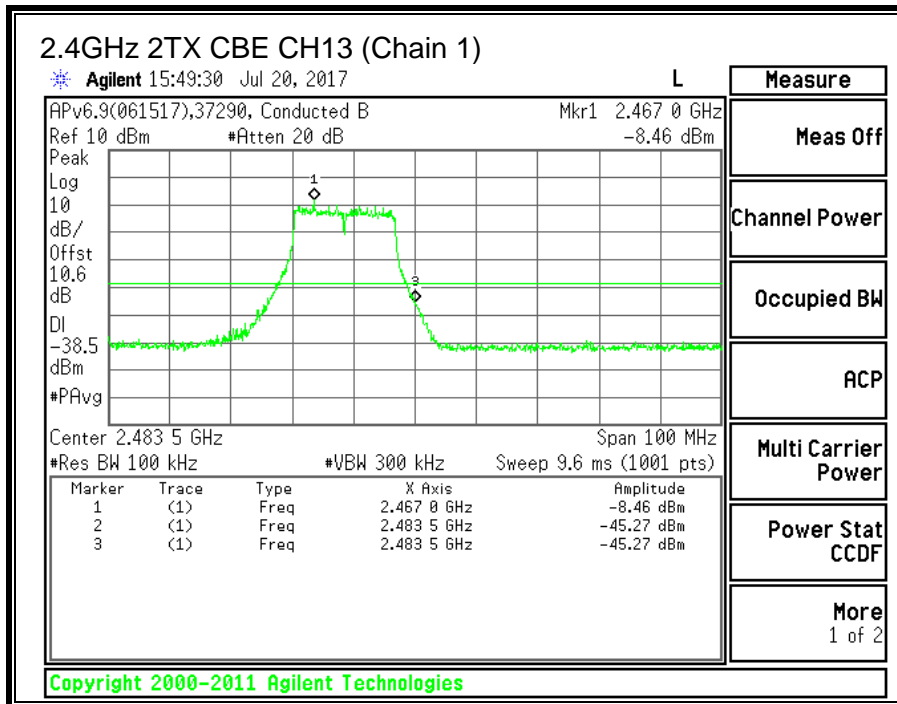
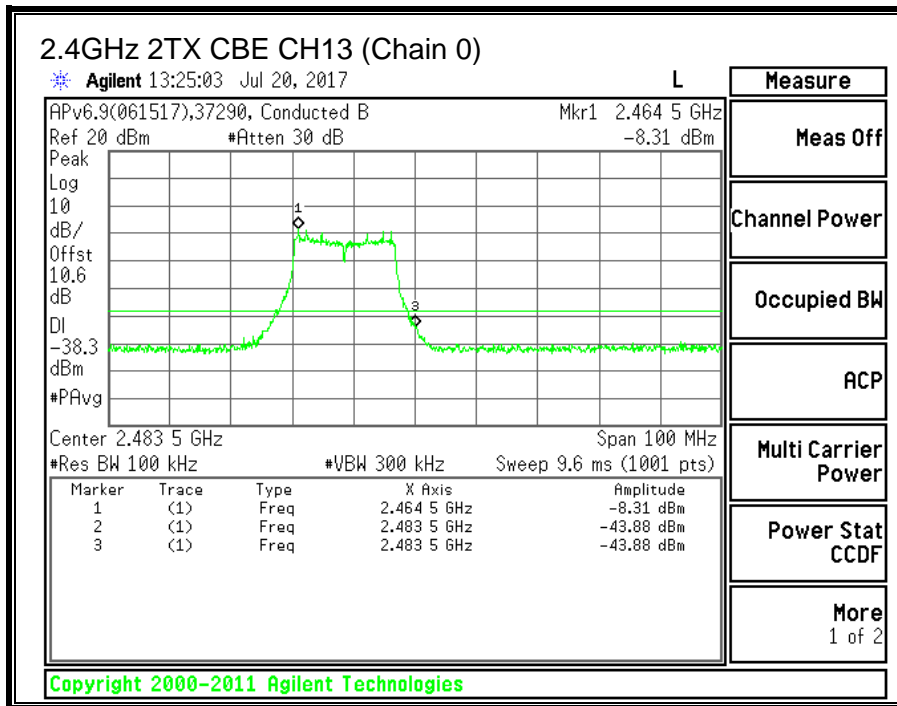


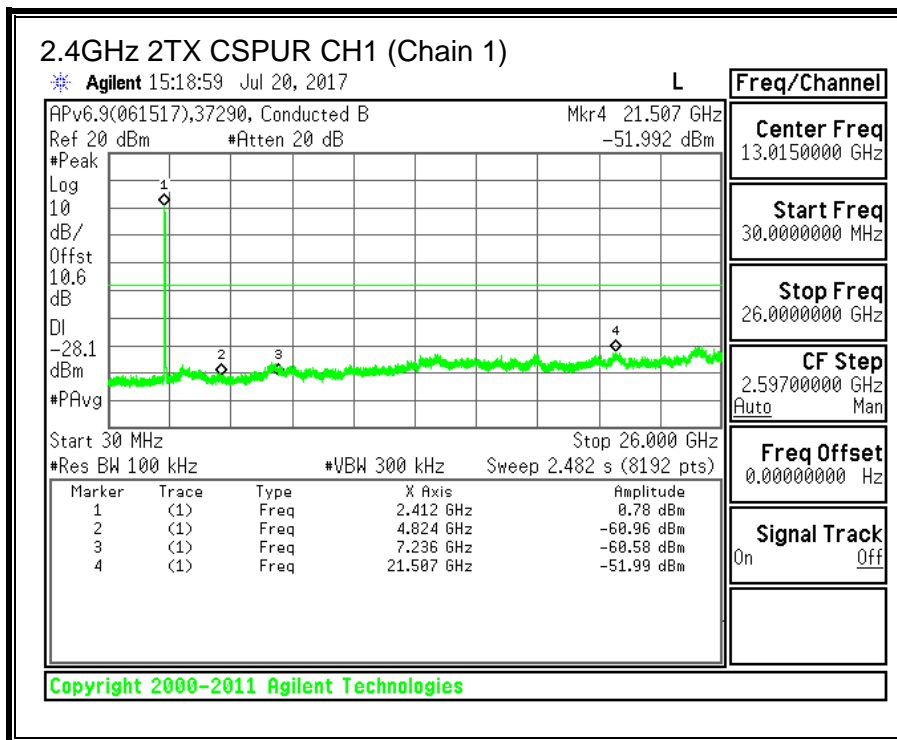
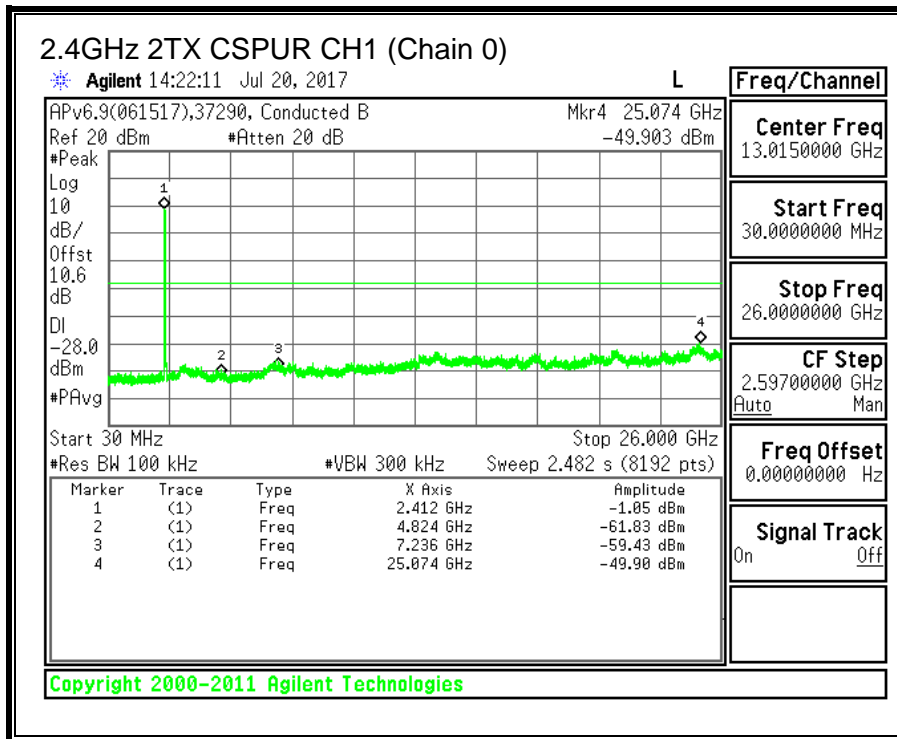


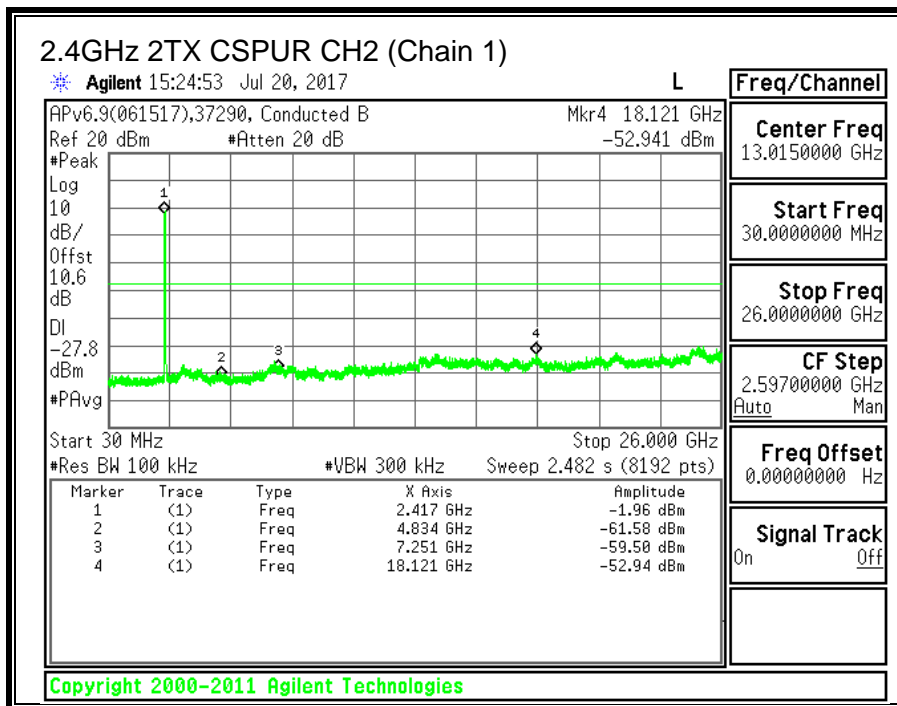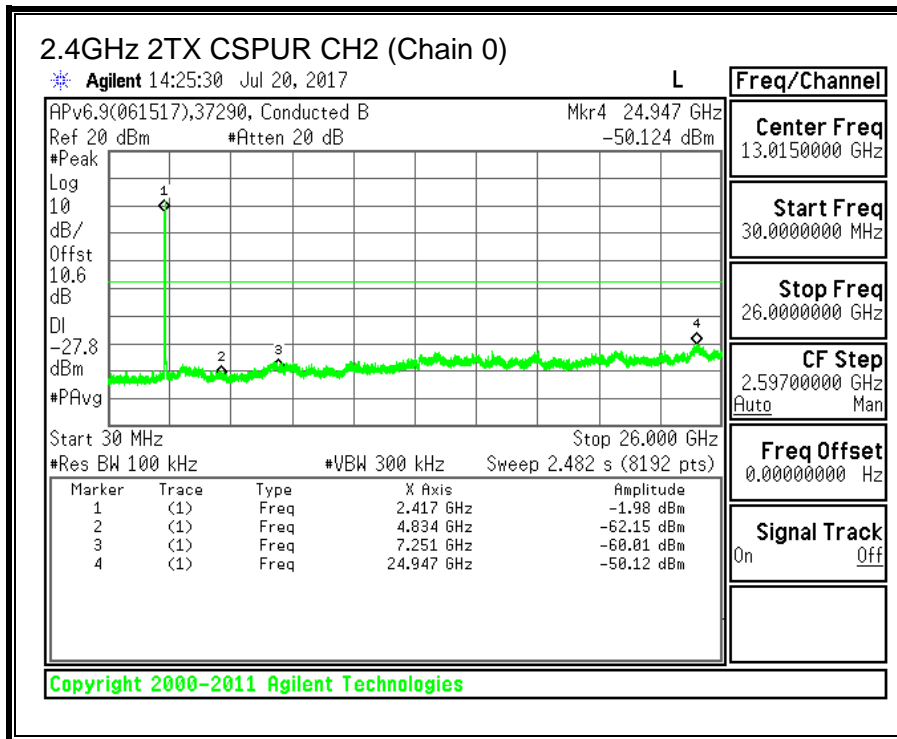

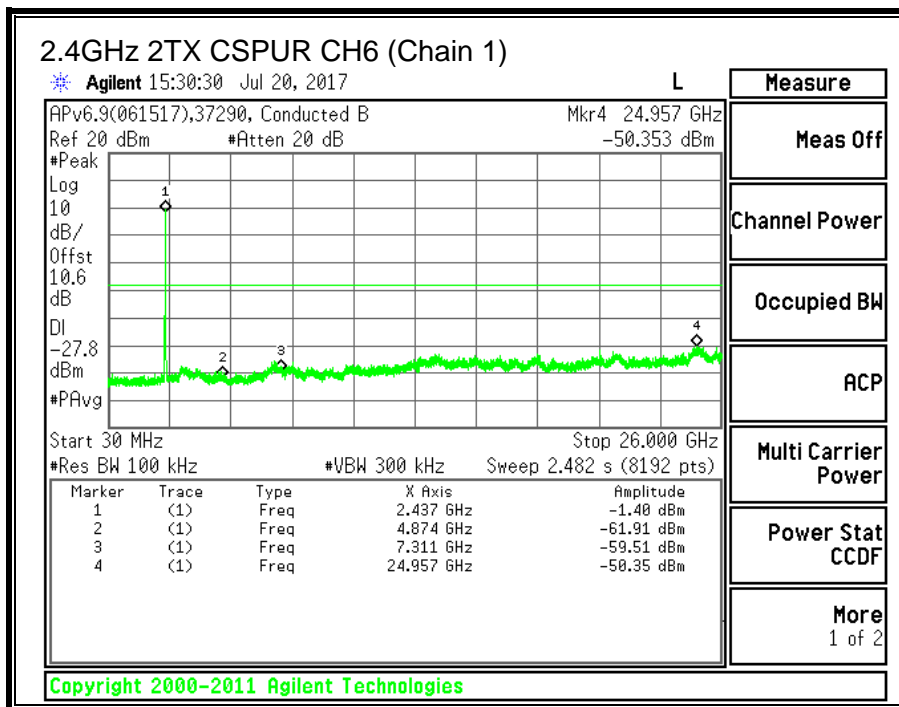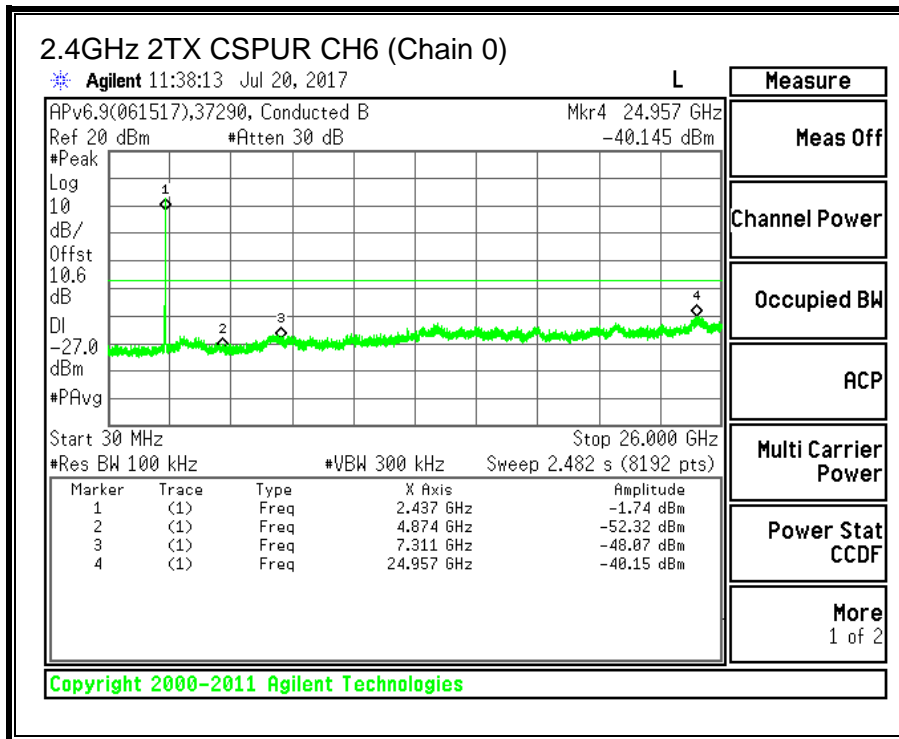

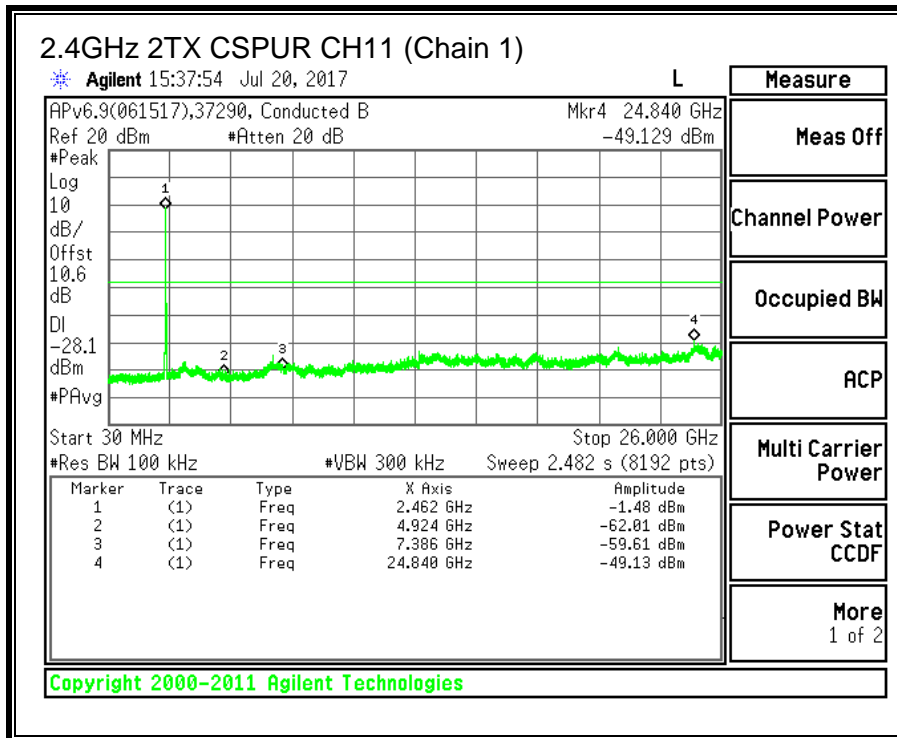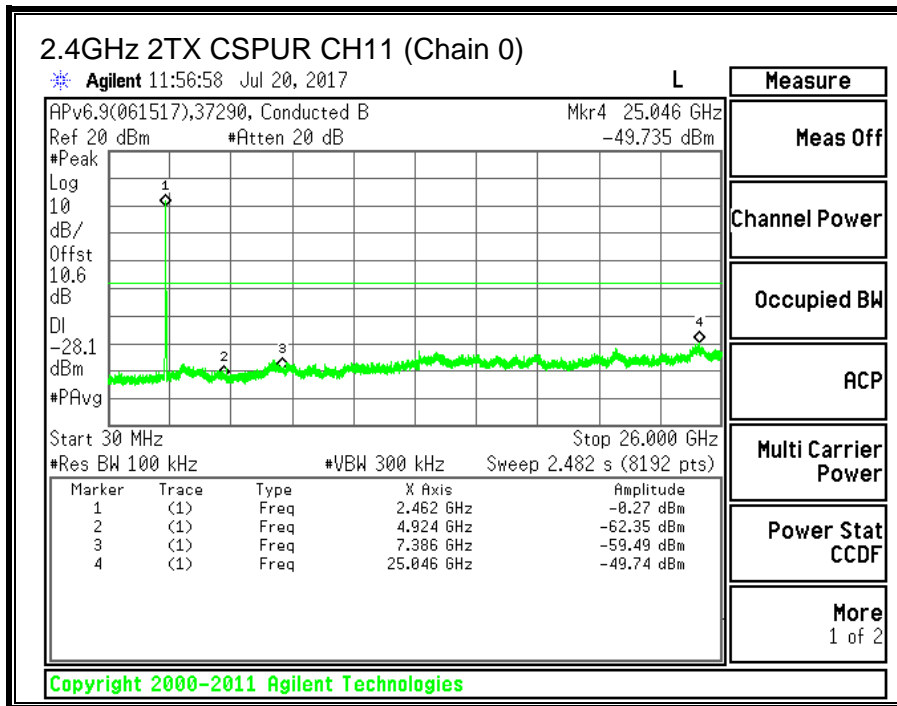

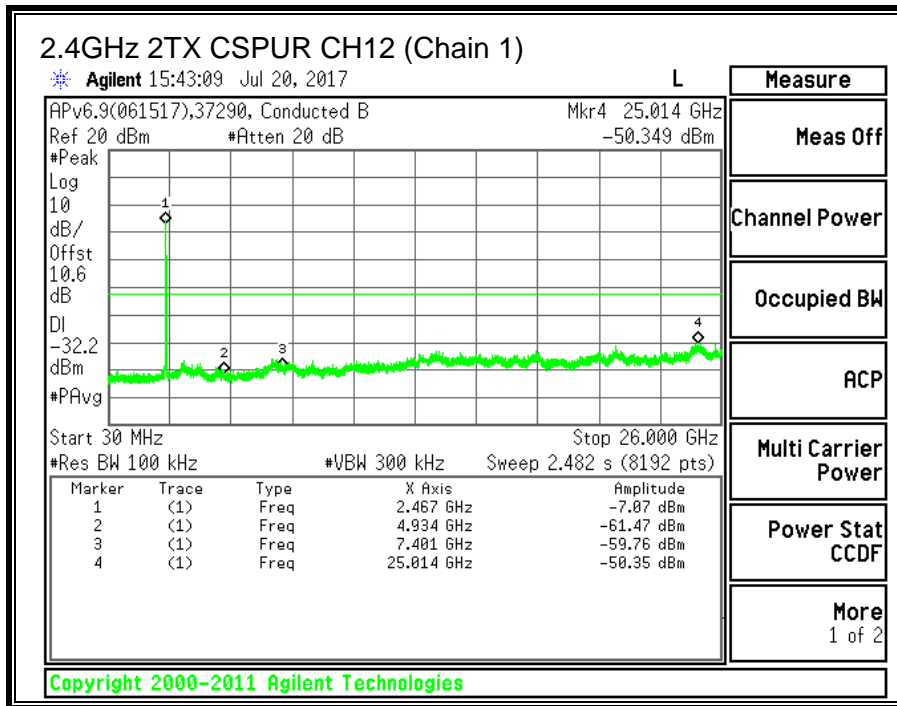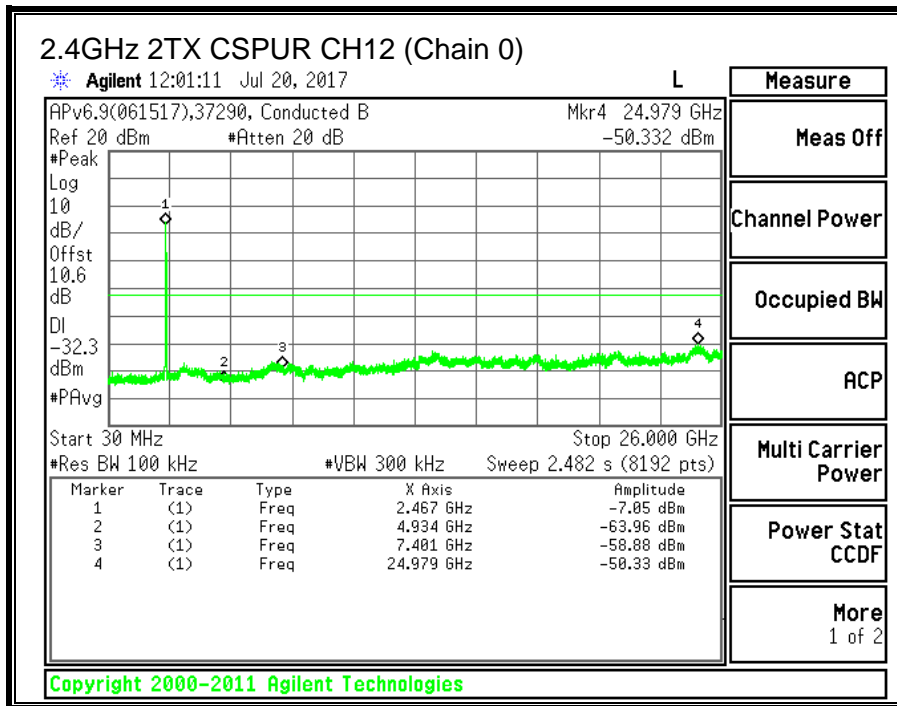

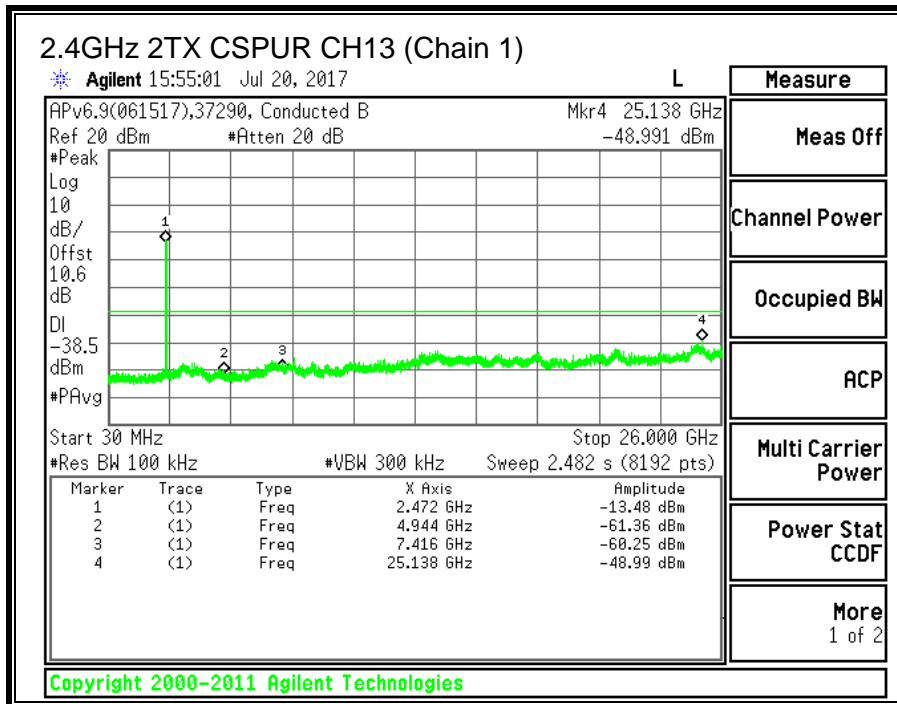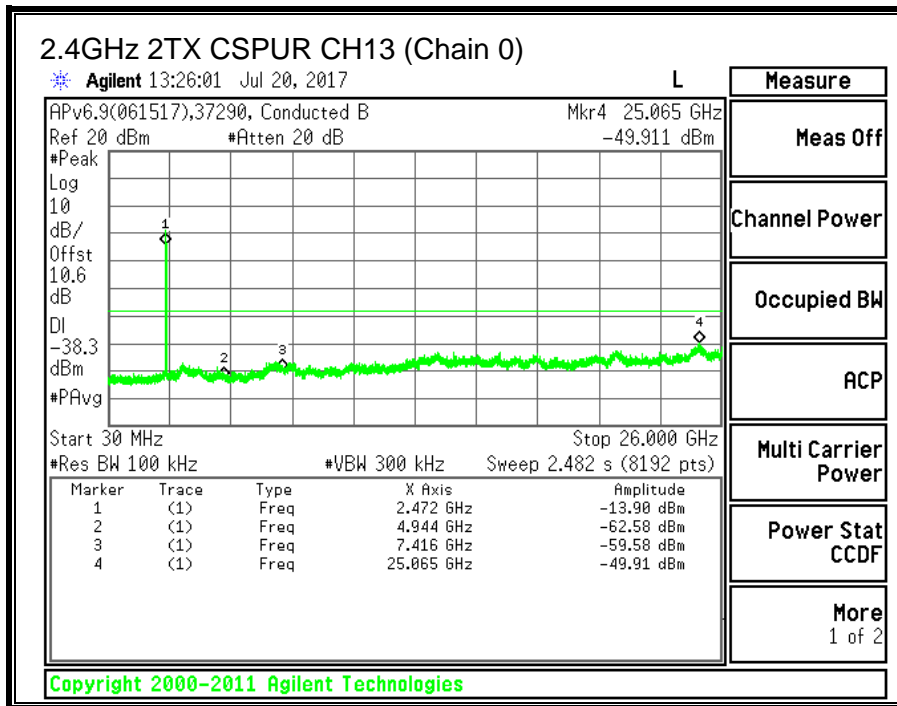

9.4. 11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND

9.4.1. 6 dB BANDWIDTH



LIMITS



FCC §15.247 (a) (2)



The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS



Channel	Frequency	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
CH1	2412	17.64	17.64	0.5
CH2	2417	17.64	17.60	0.5
CH6	2437	16.28	17.68	0.5
CH11	2462	17.68	17.68	0.5
CH12	2467	17.76	17.64	0.5
CH13	2472	17.76	17.68	0.5

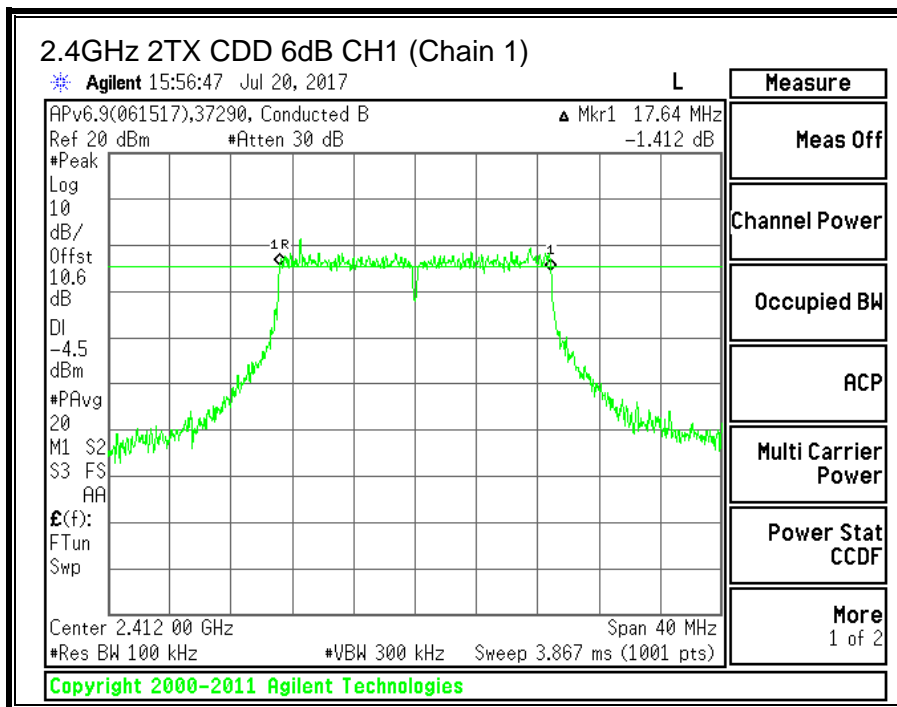
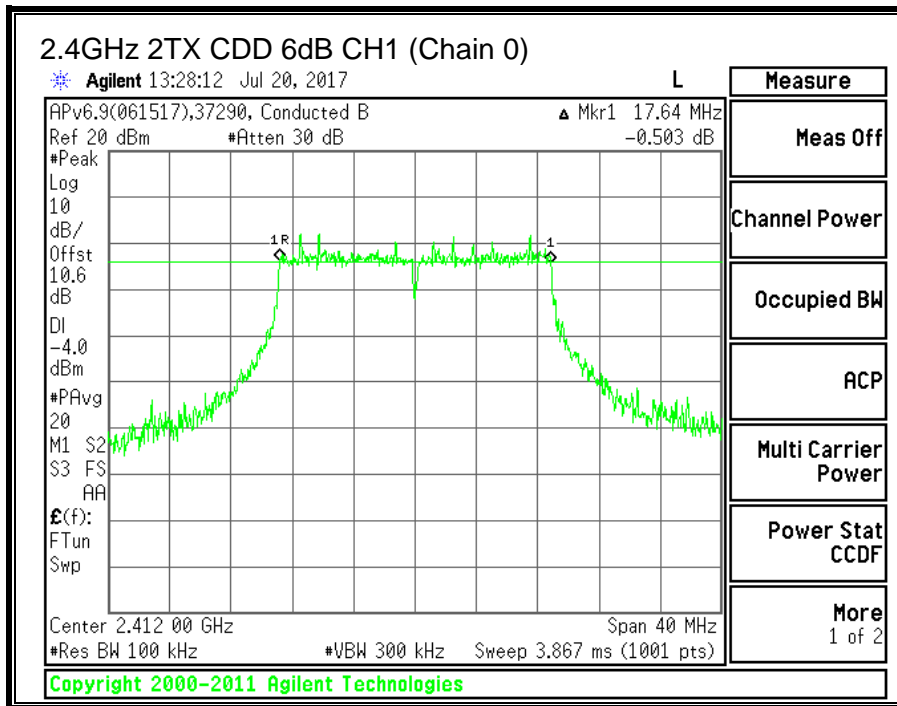


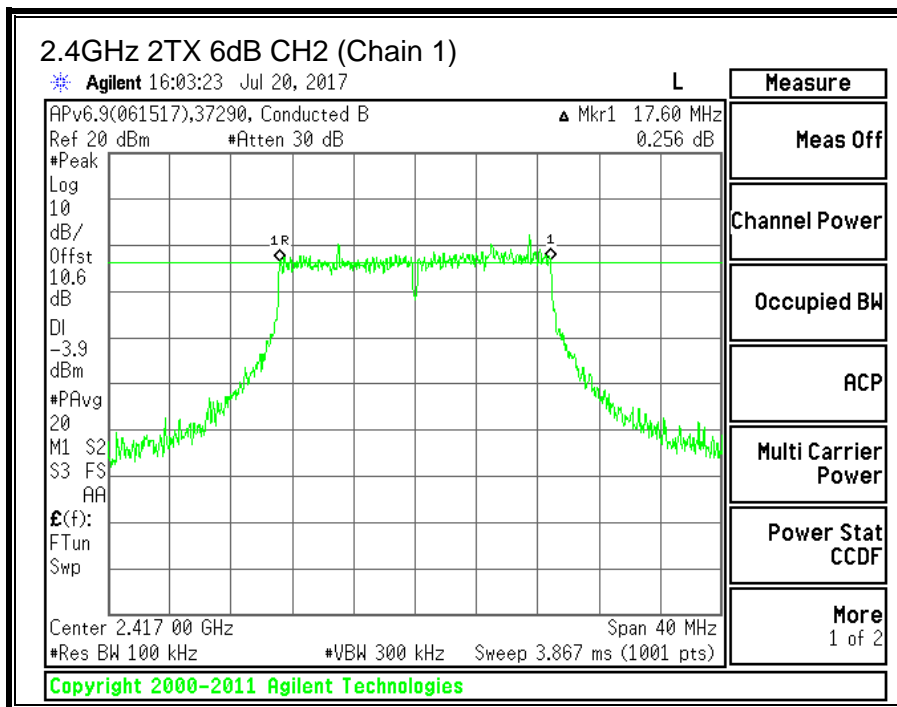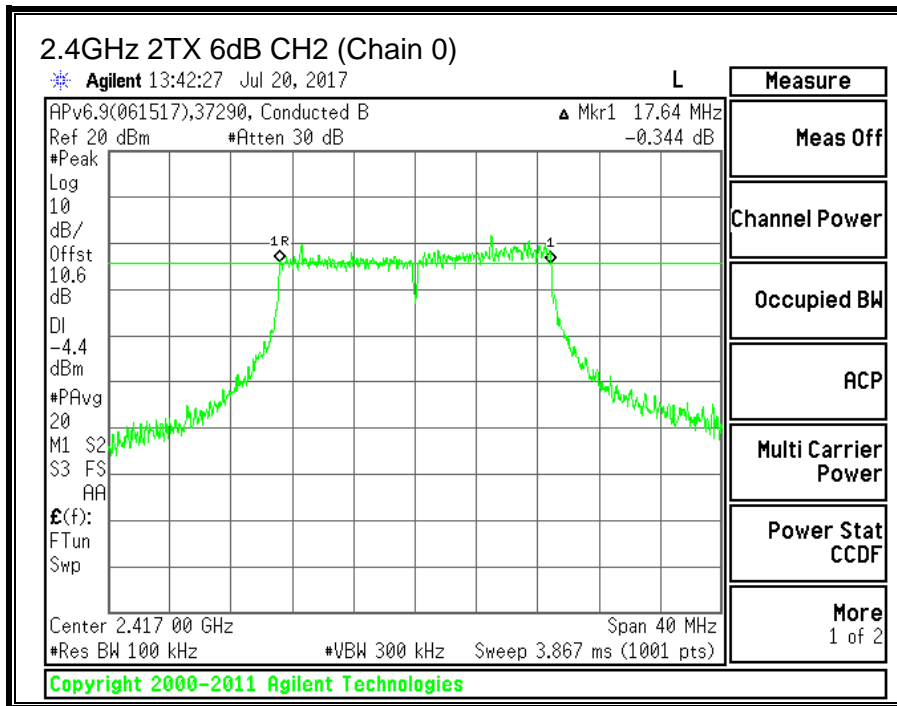

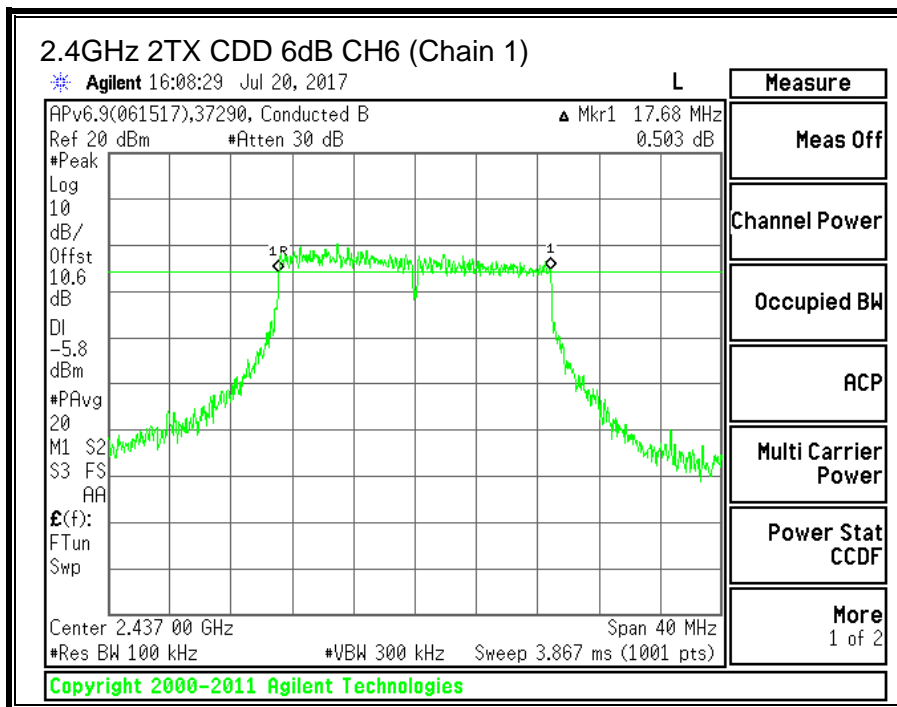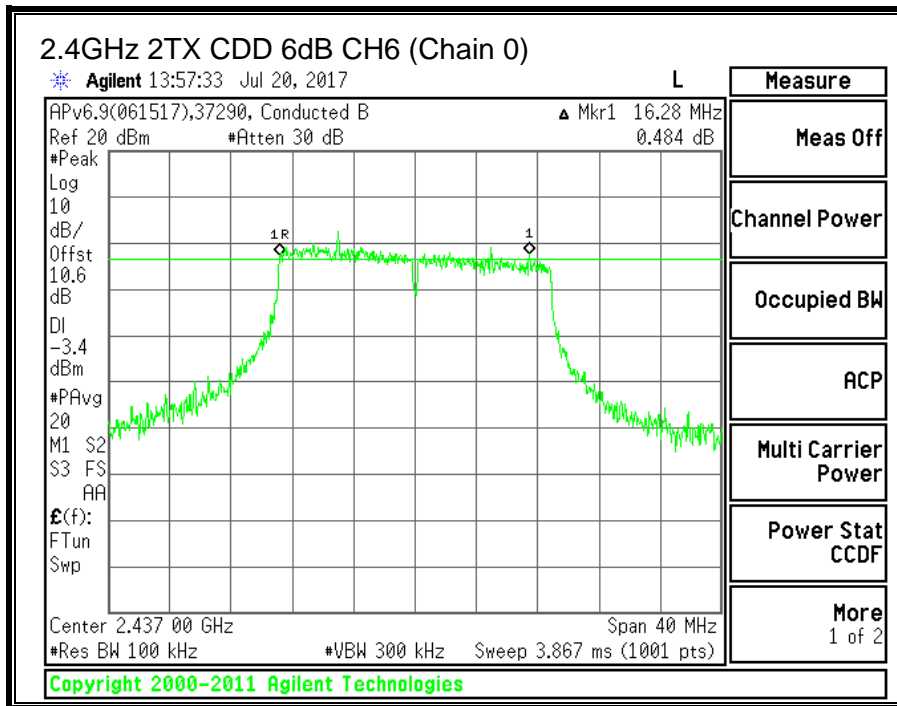

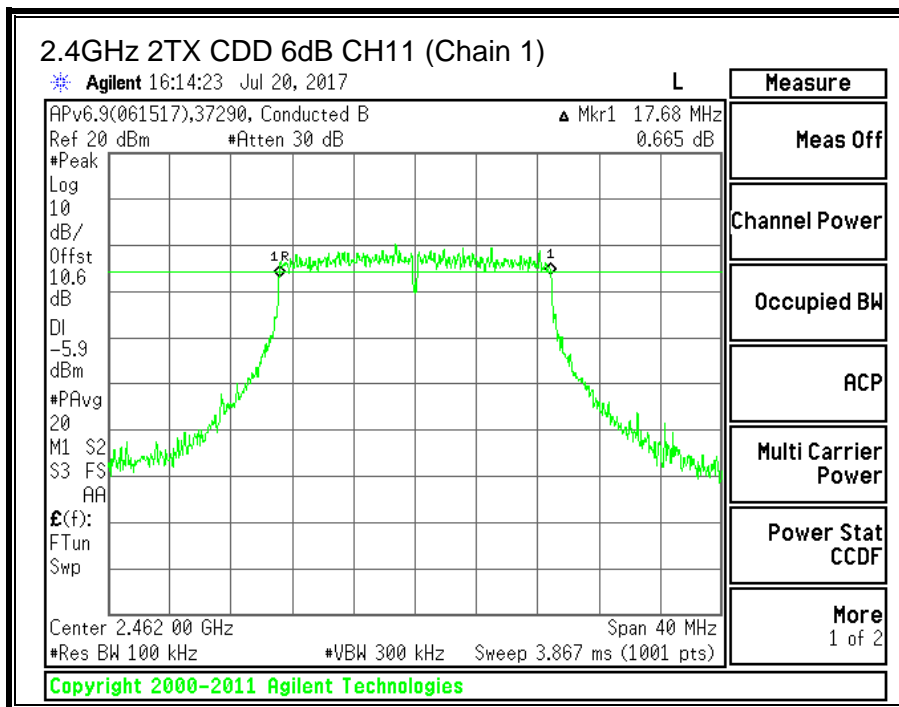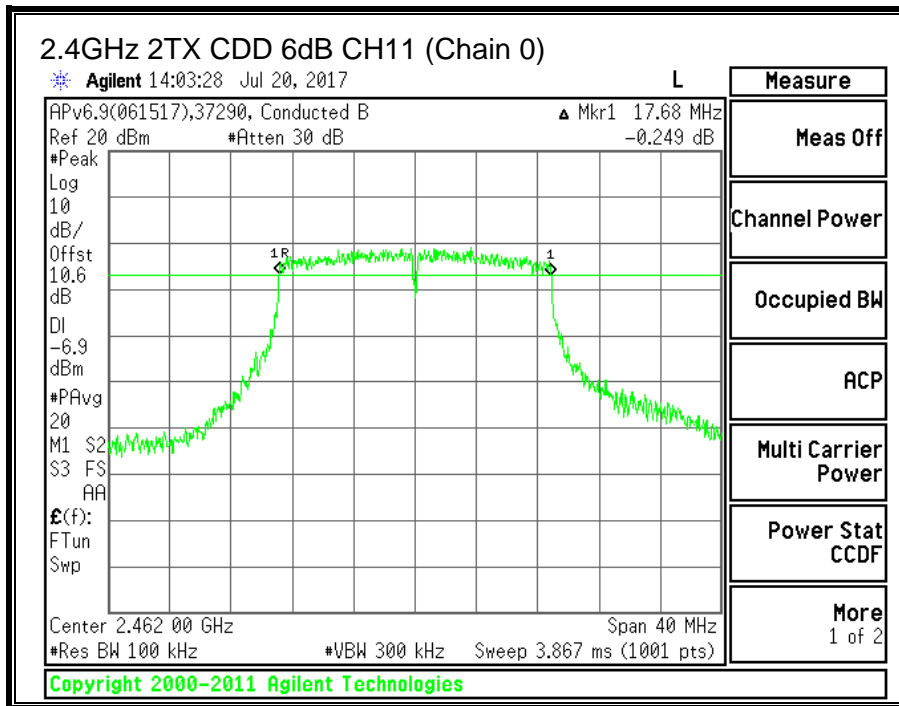

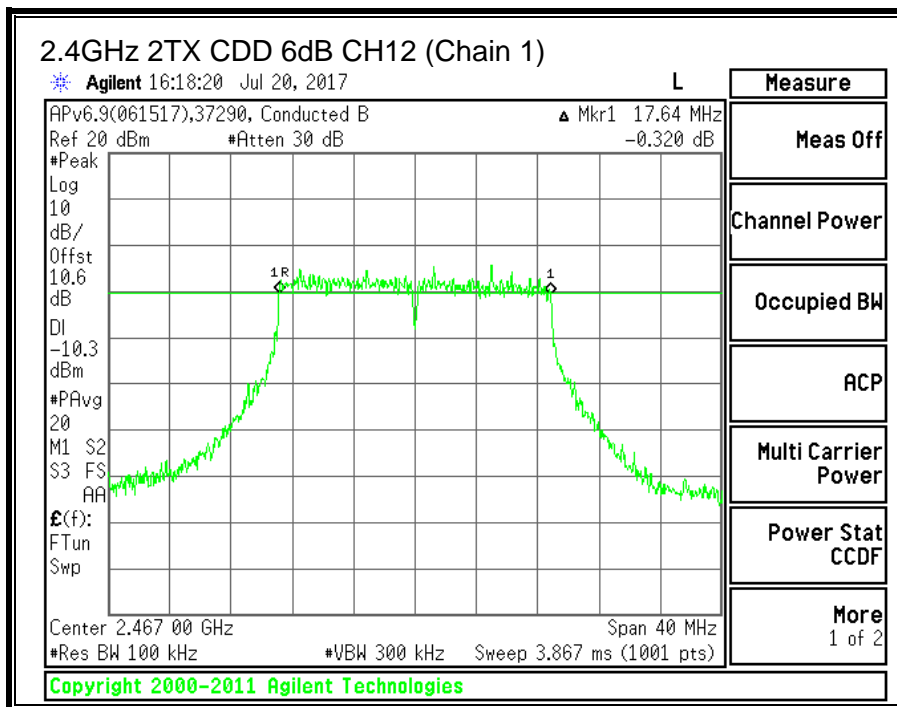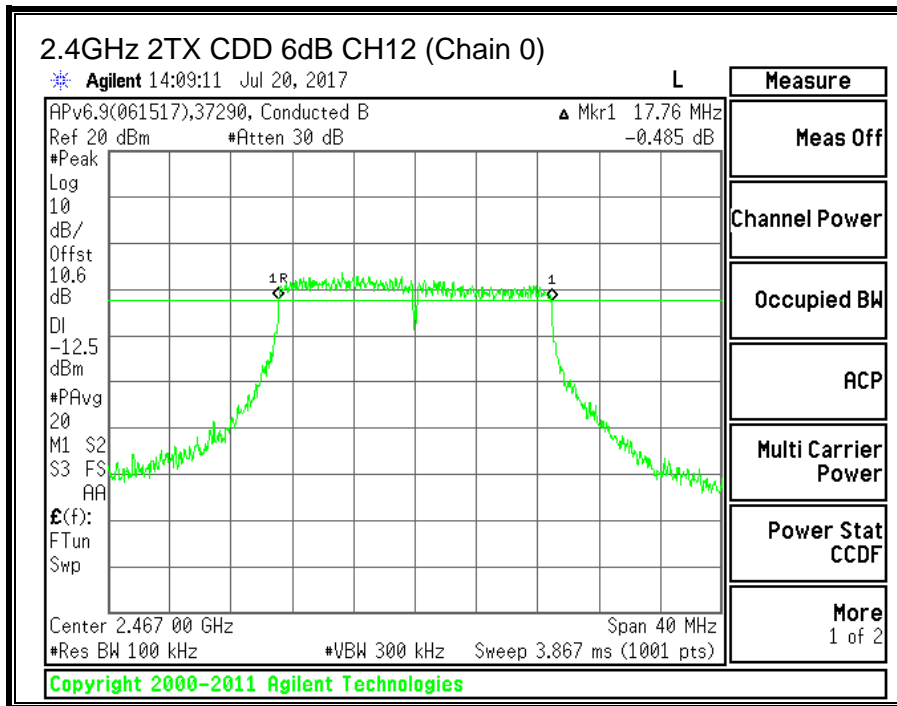

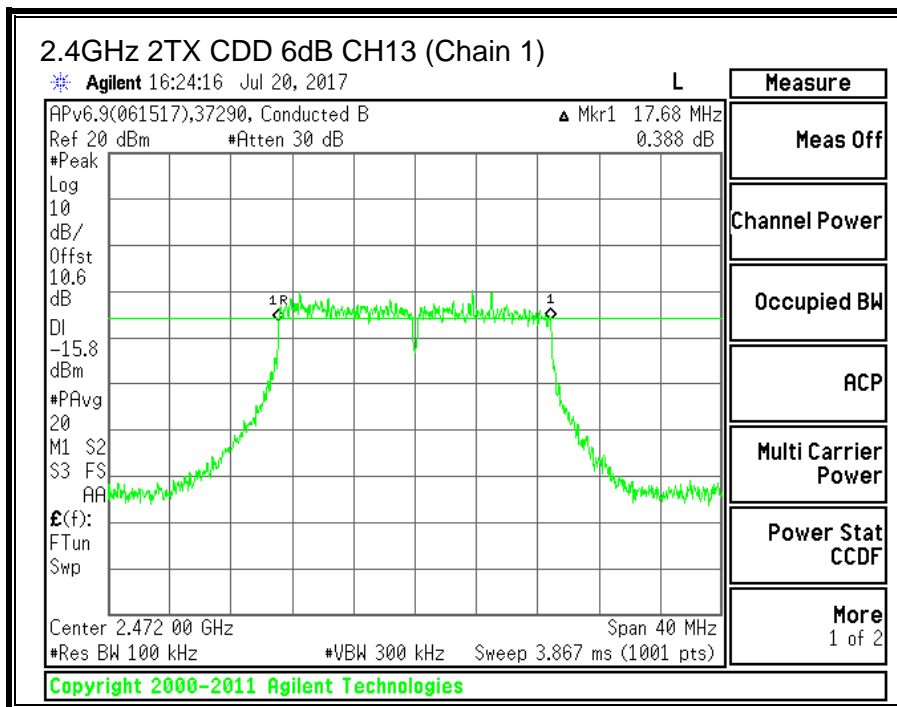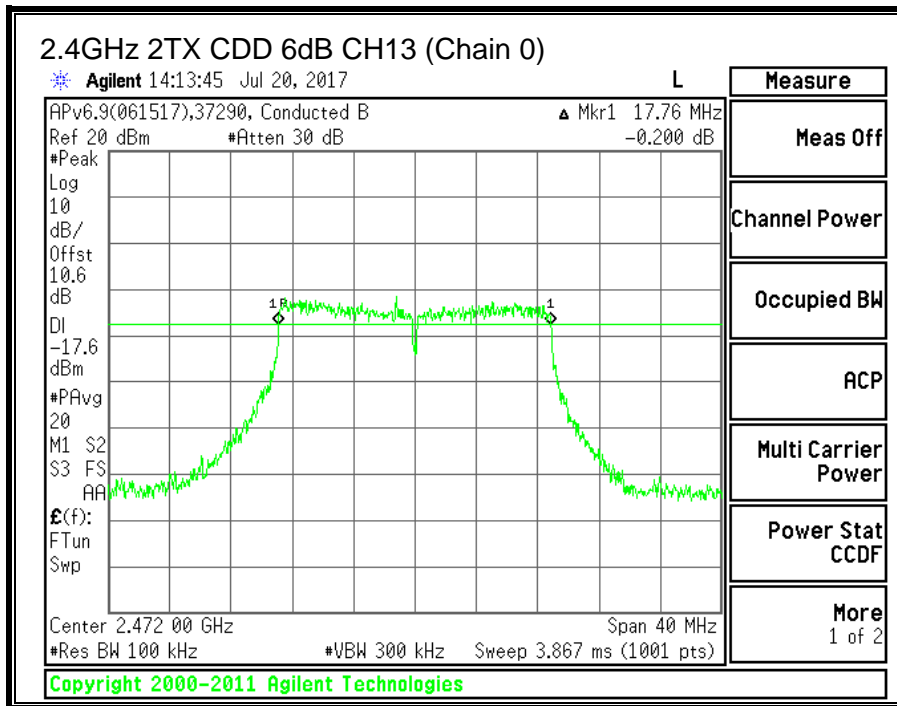



9.4.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.



RESULTS



Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
CH1	2412	17.615	17.403
CH2	2417	17.559	17.574
CH6	2437	17.483	17.384
CH11	2462	17.384	17.408
CH12	2467	17.427	17.485
CH13	2472	17.531	17.502

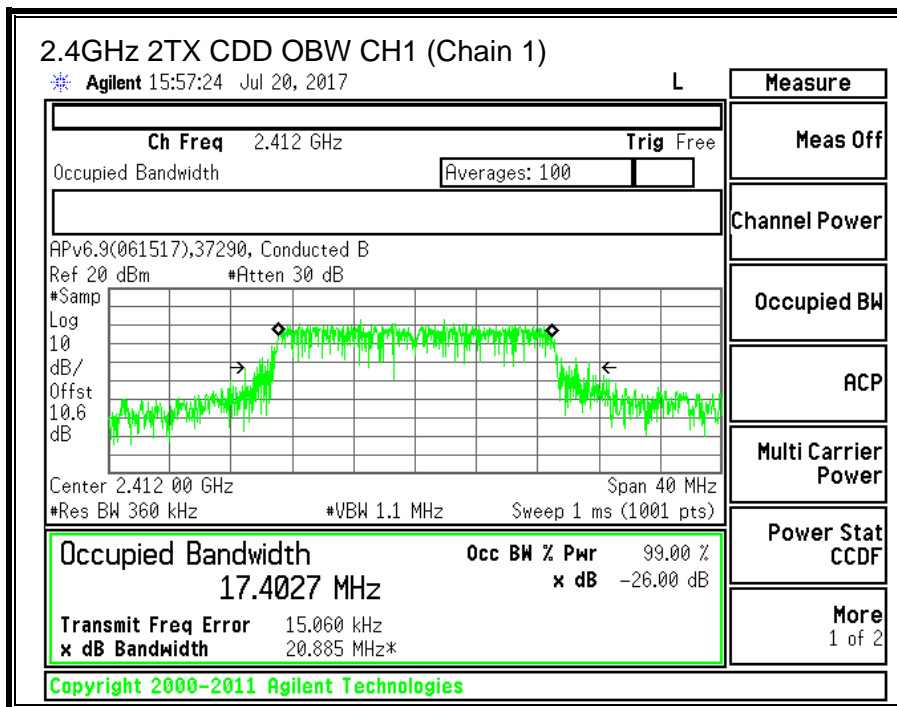
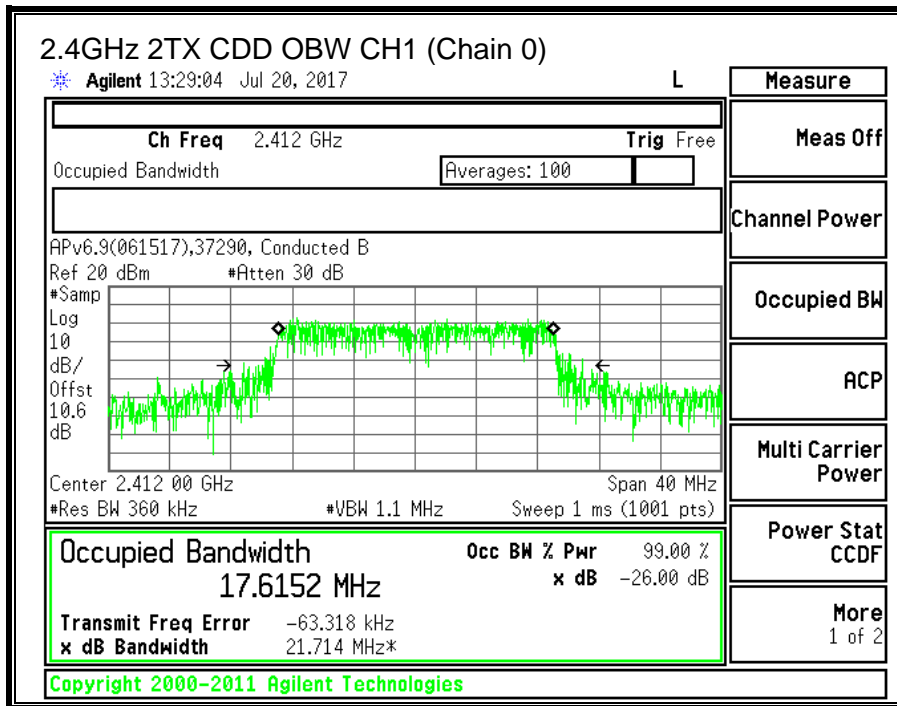


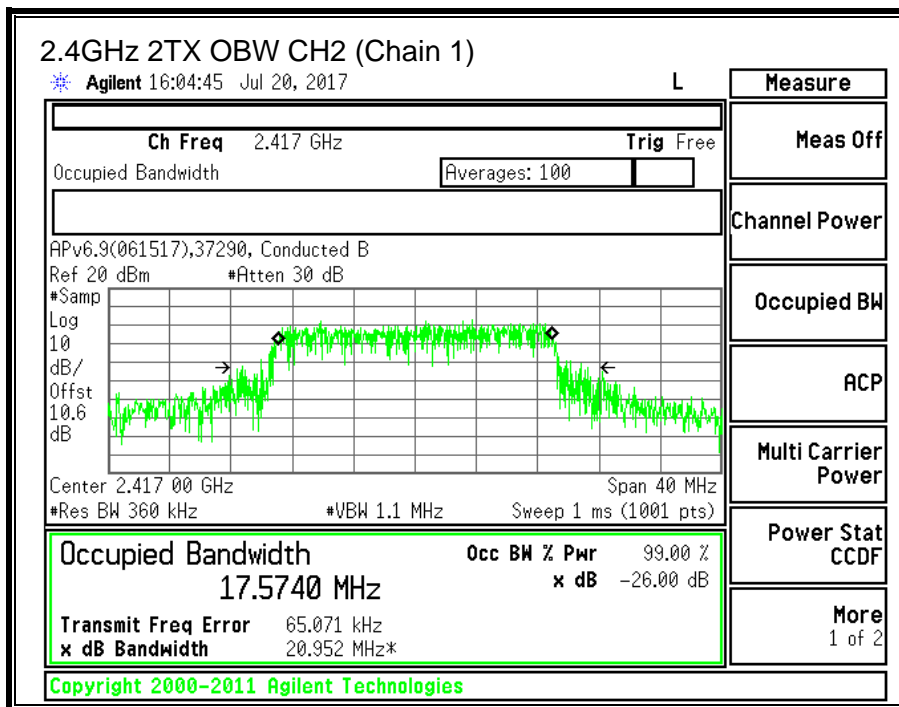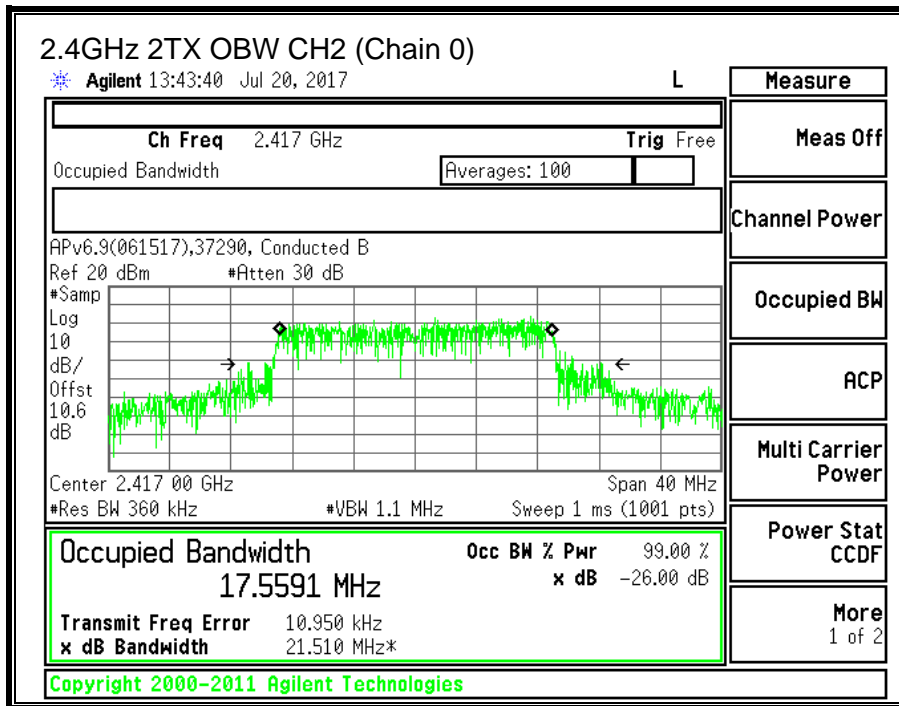

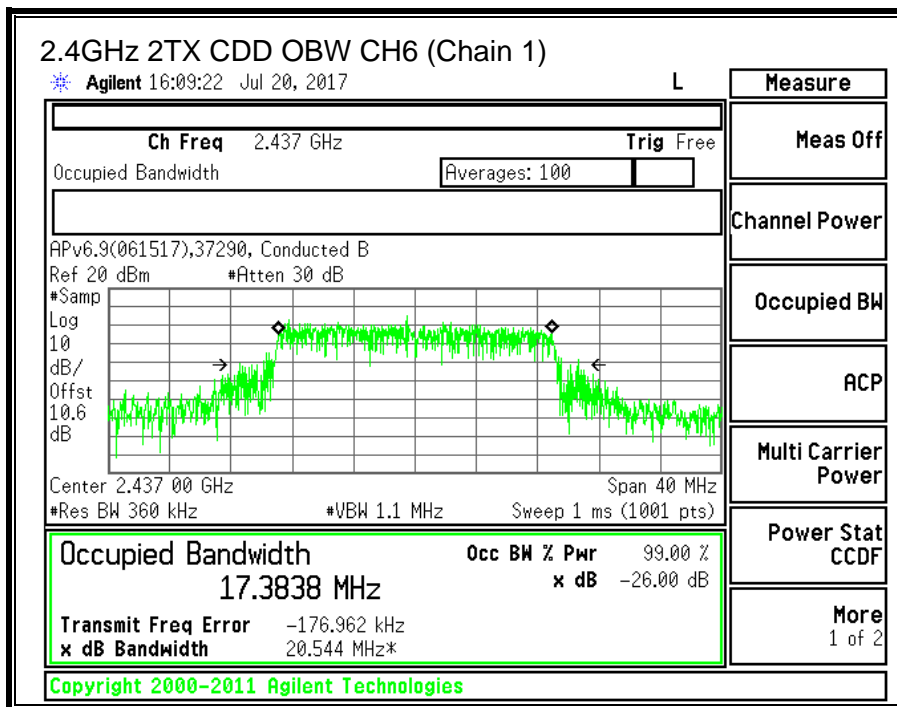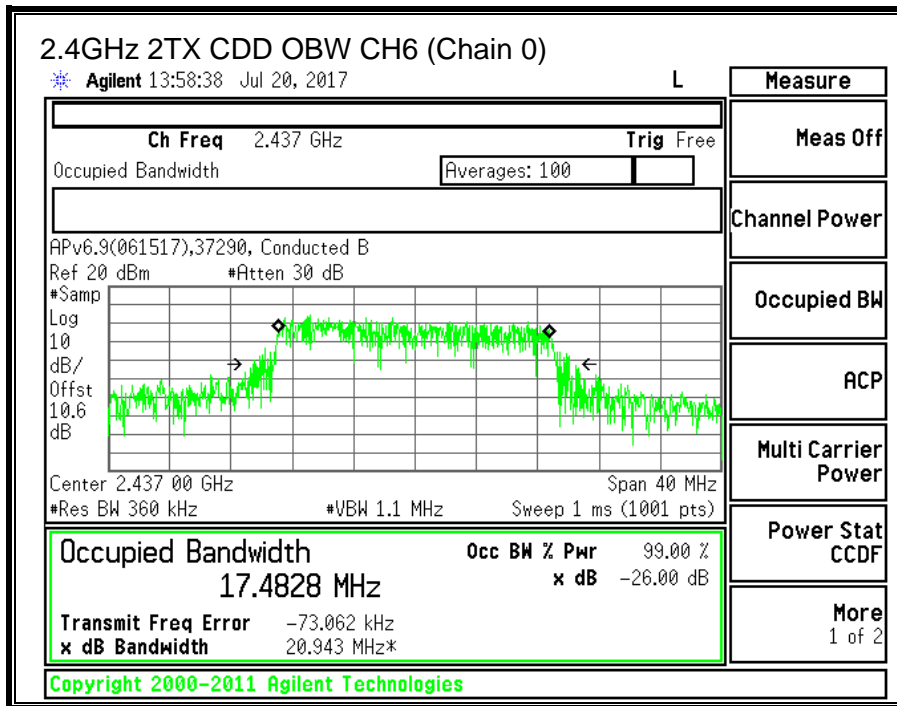

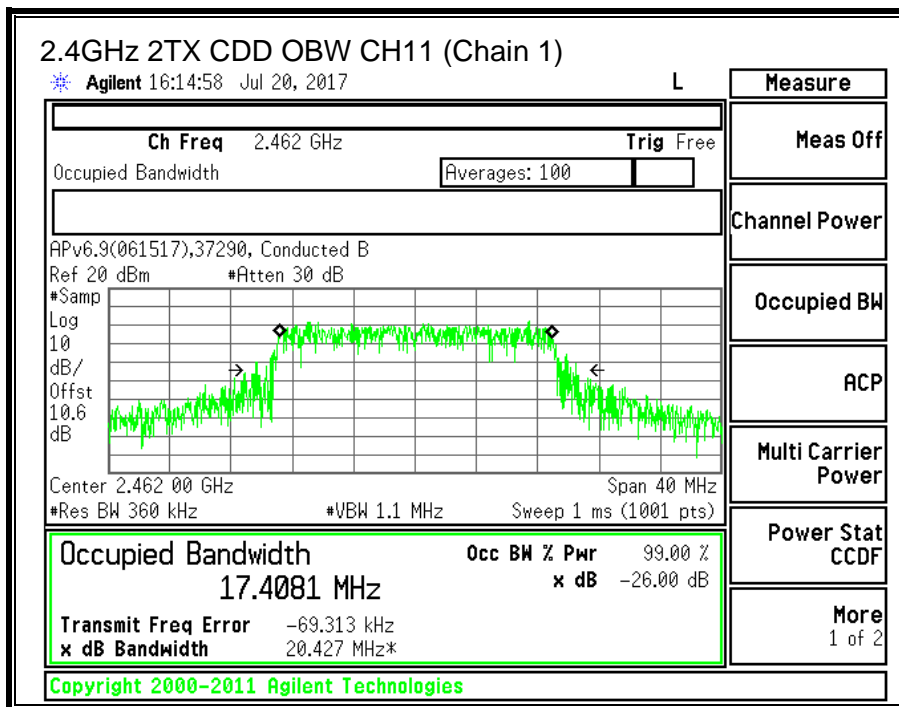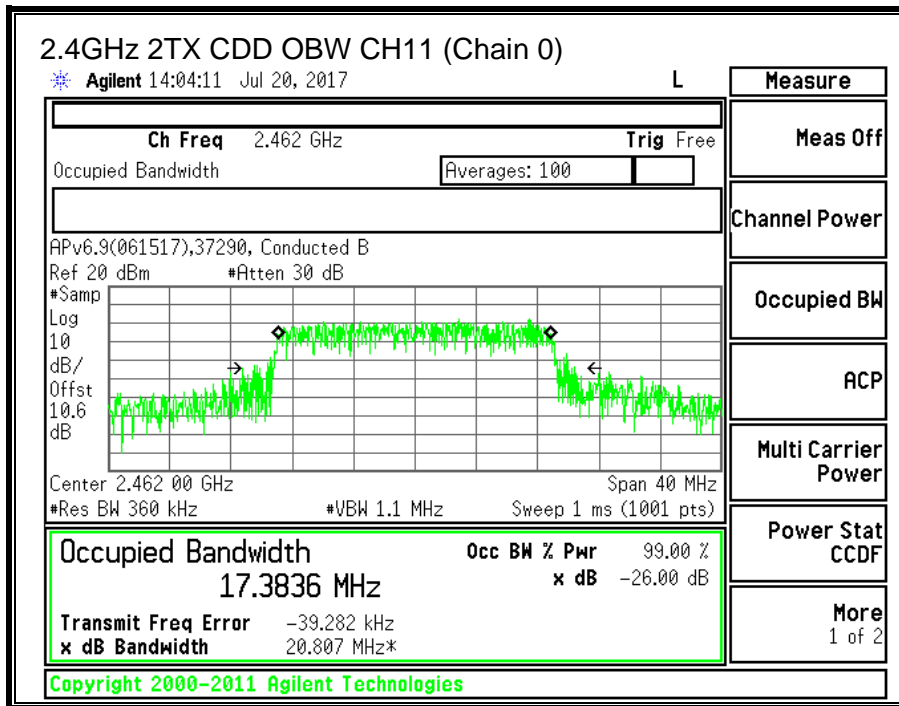

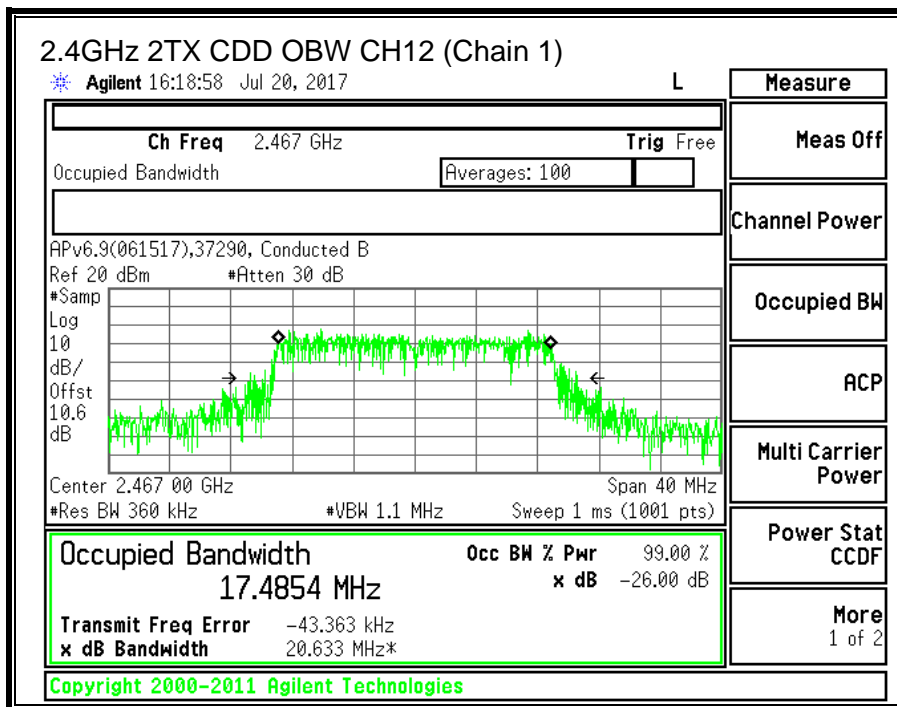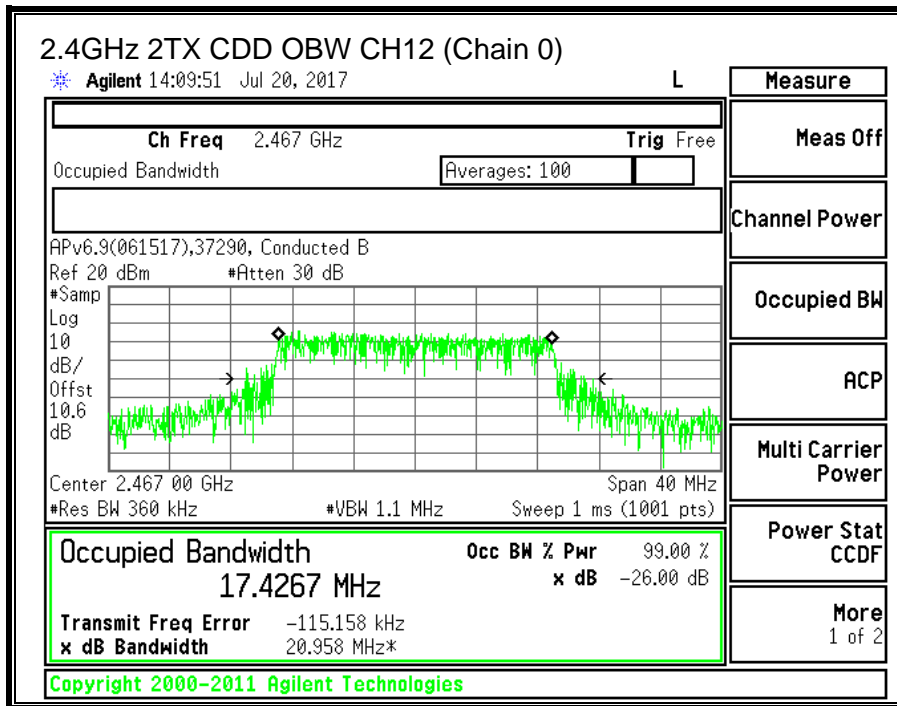

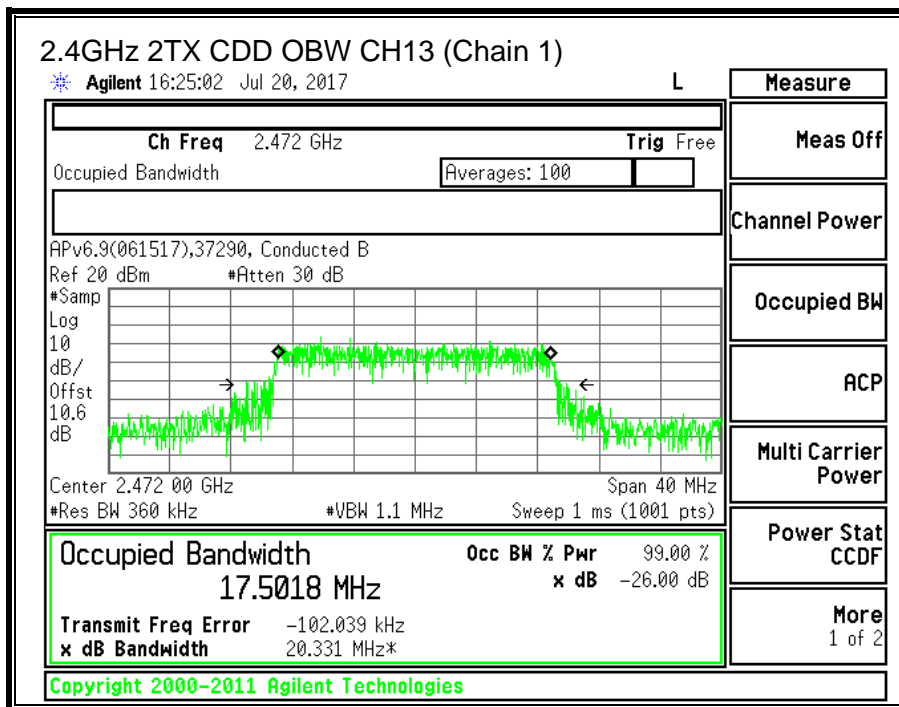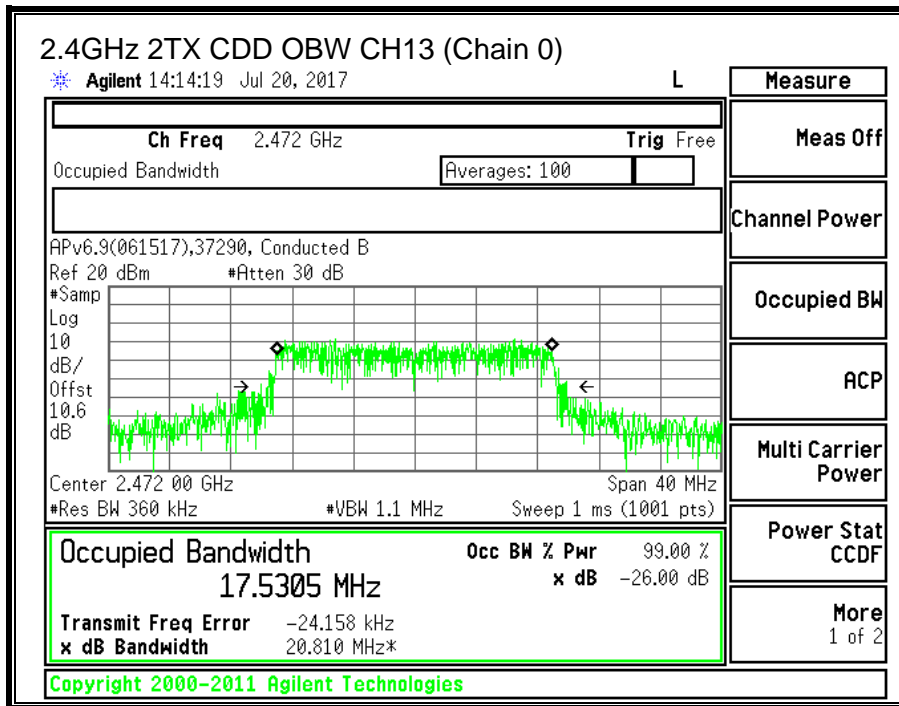

9.4.3. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

KDB 58074 D01 v04 Section 9.2.3.2

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-3.70	-5.50	-4.51

RESULTS

ID:	39317	Date:	07/21/17
------------	-------	--------------	----------

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
CH1	2412	-4.51	30.00	30	36	30.00
CH2	2417	-4.51	30.00	30	36	30.00
CH6	2437	-4.51	30.00	30	36	30.00
CH11	2462	-4.51	30.00	30	36	30.00
CH12	2467	-4.51	30.00	30	36	30.00
CH13	2472	-4.51	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
CH1	2412	13.44	13.23	16.35	30.00	-13.65
CH2	2417	13.26	13.02	16.15	30.00	-13.85
CH6	2437	13.37	13.04	16.22	30.00	-13.78
CH11	2462	13.22	13.32	16.28	30.00	-13.72
CH12	2467	7.63	7.95	10.80	30.00	-19.20
CH13	2472	2.14	2.39	5.28	30.00	-24.72

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

9.4.4. POWER SPECTRAL DENSITY



LIMITS



FCC §15.247 (e)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



Duty Cycle CF (dB)		0.20	Included in Calculations of Corr'd PSD			
PSD Results						
Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Chain 1 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
CH1	2412	-11.776	-12.445	-8.89	8.0	-16.9
CH2	2417	-11.074	-11.876	-8.25	8.0	-16.2
CH6	2437	-11.175	-11.514	-8.13	8.0	-16.1
CH11	2462	-11.510	-12.001	-8.54	8.0	-16.5
CH12	2467	-17.401	-17.415	-14.20	8.0	-22.2
CH13	2472	-22.391	-22.941	-19.45	8.0	-27.4

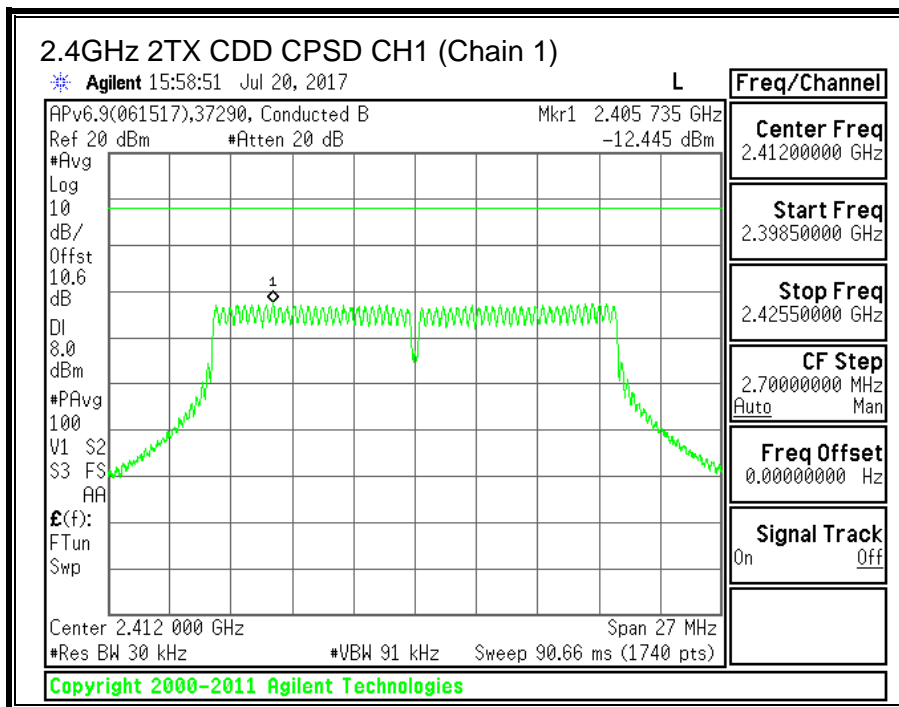
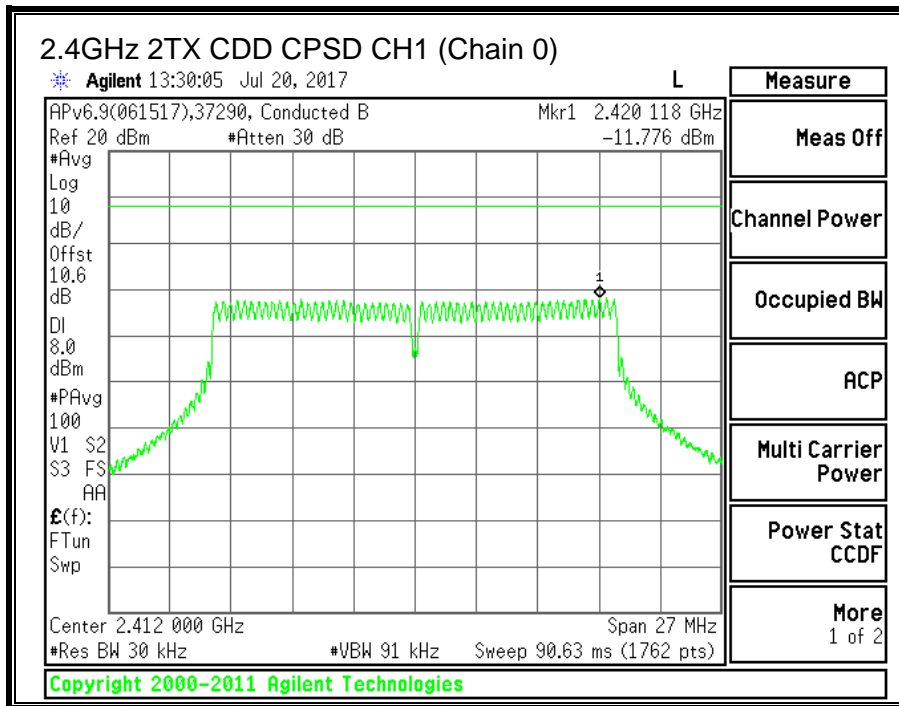


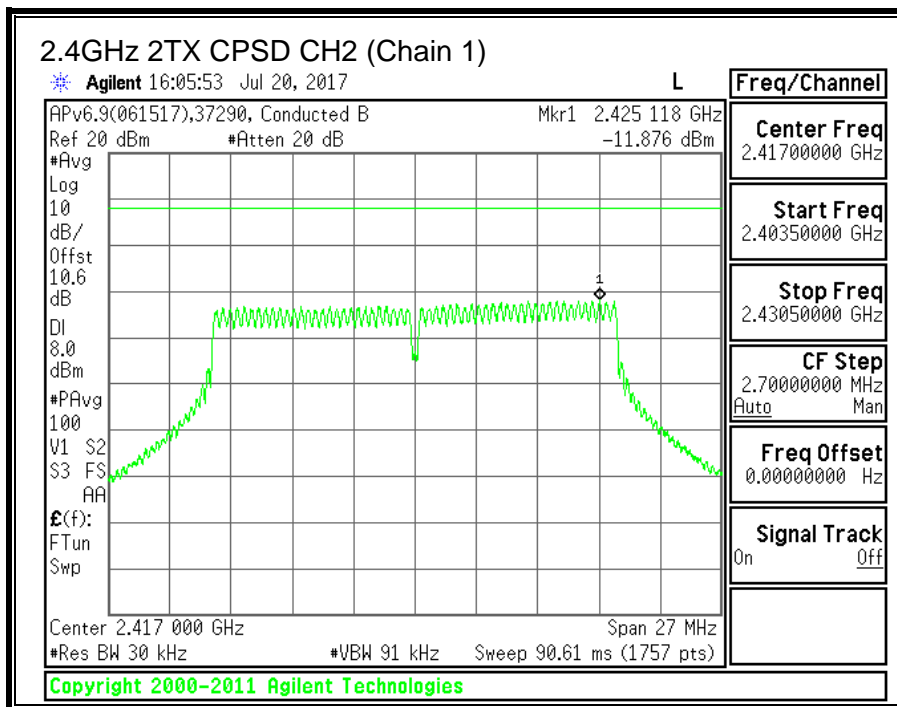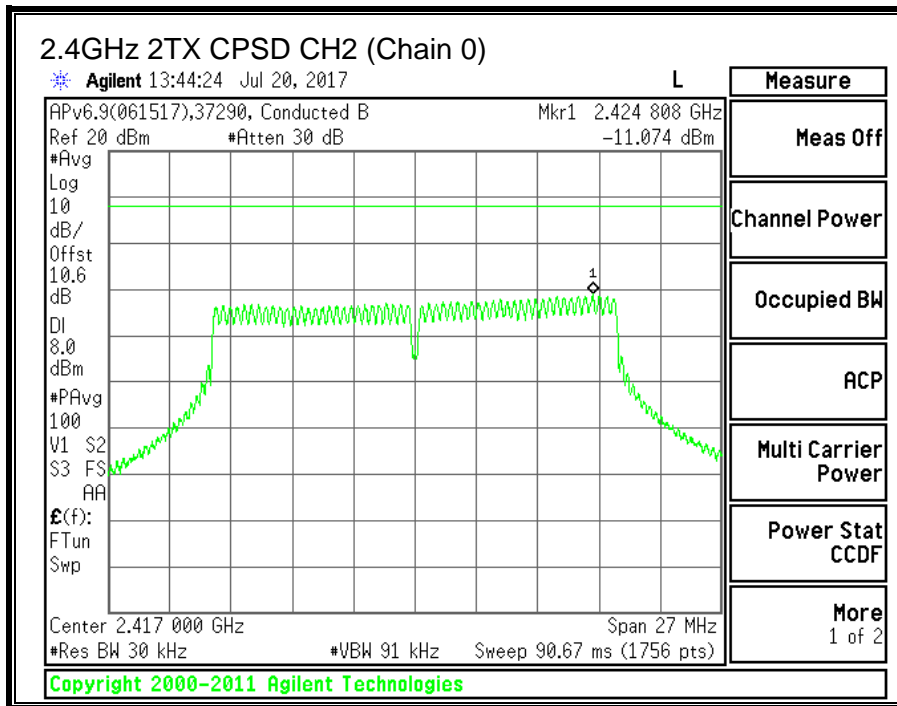

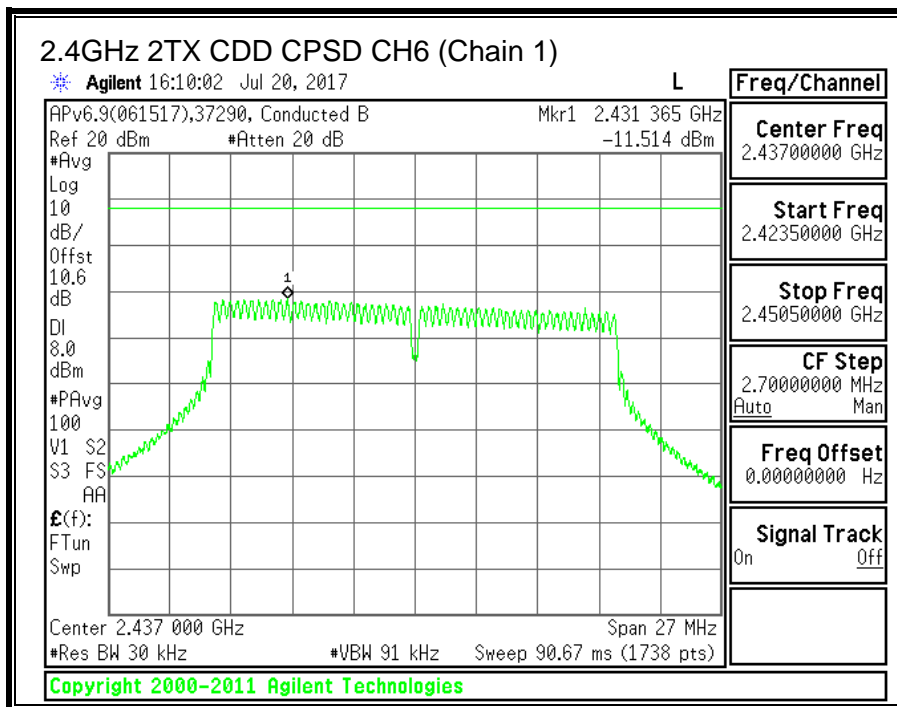
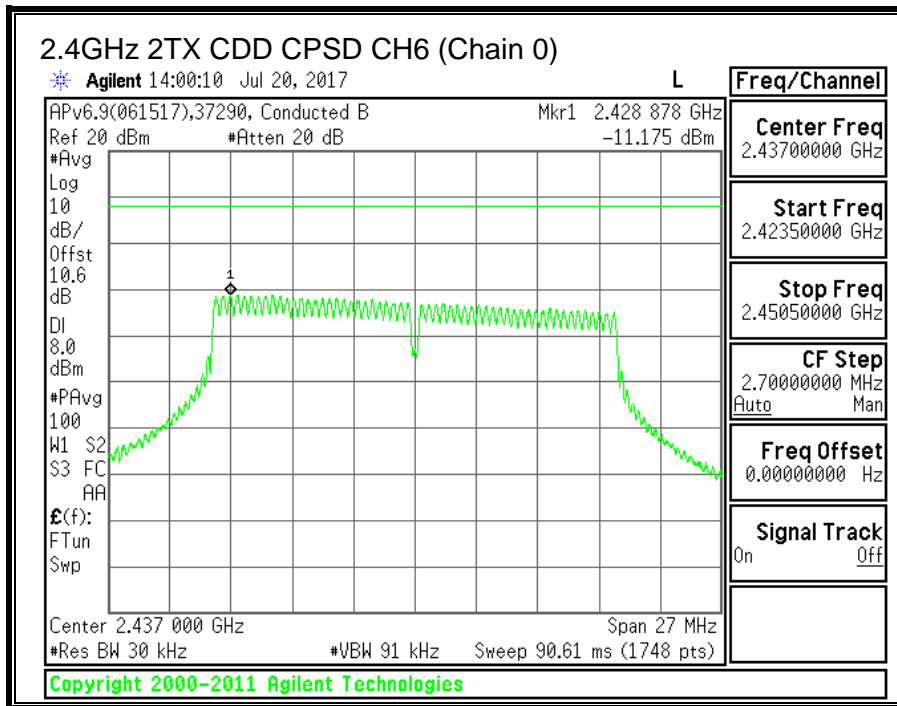


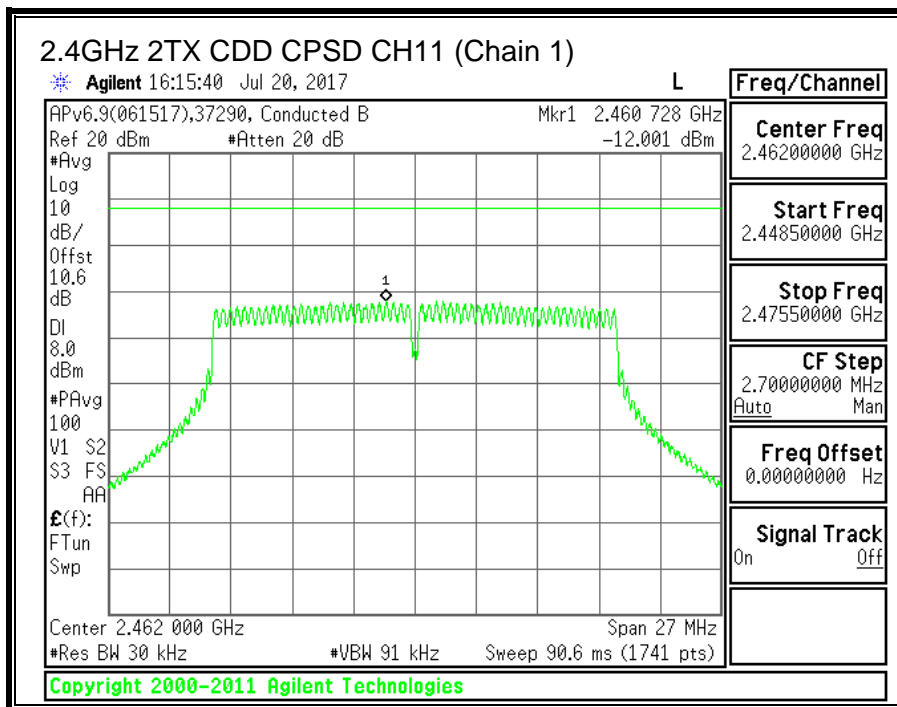
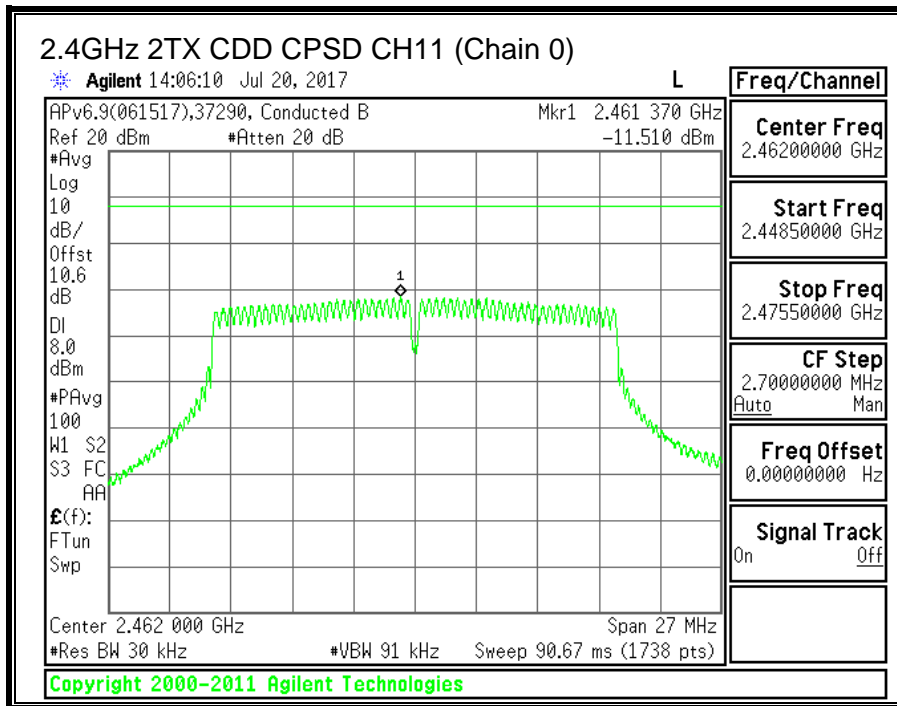


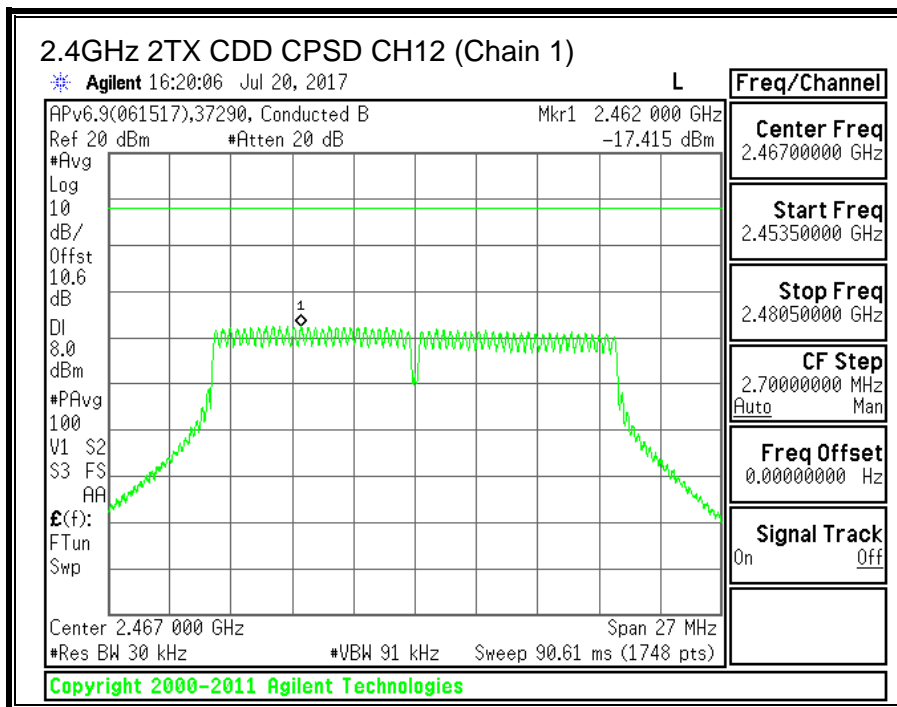
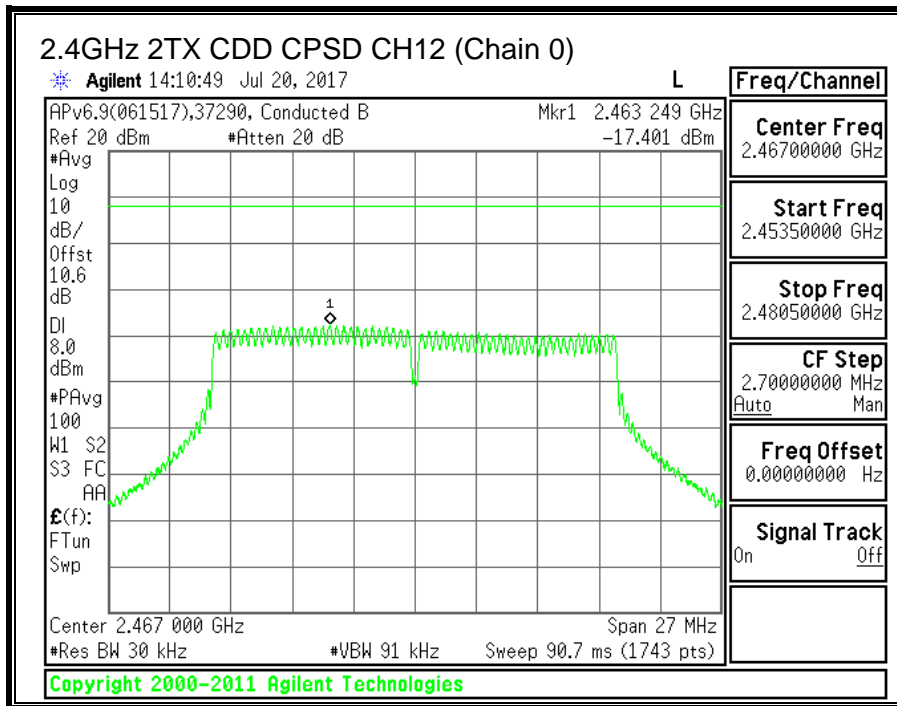


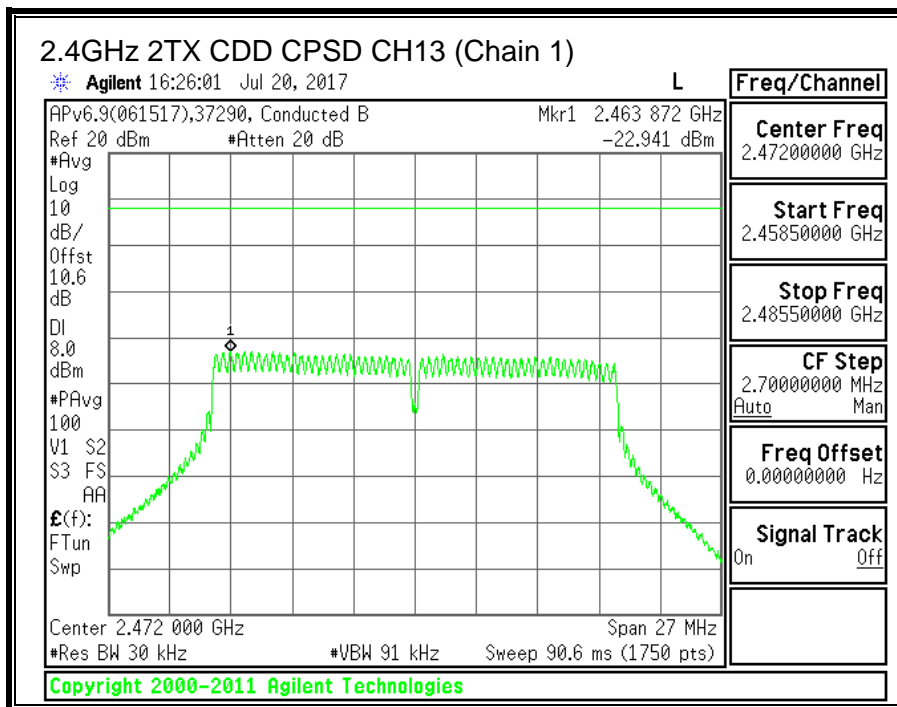
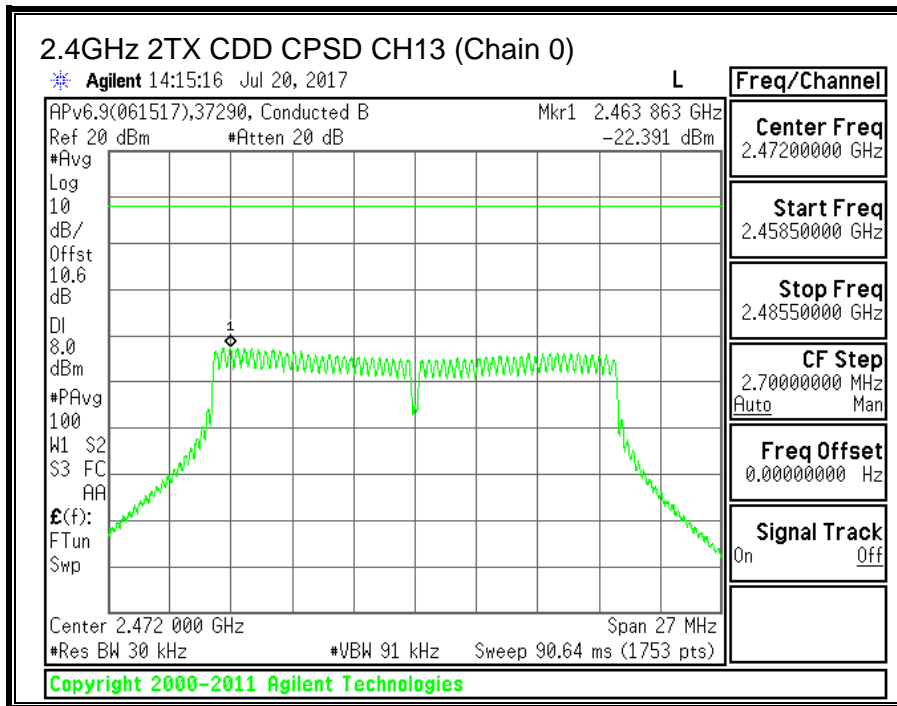




9.4.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

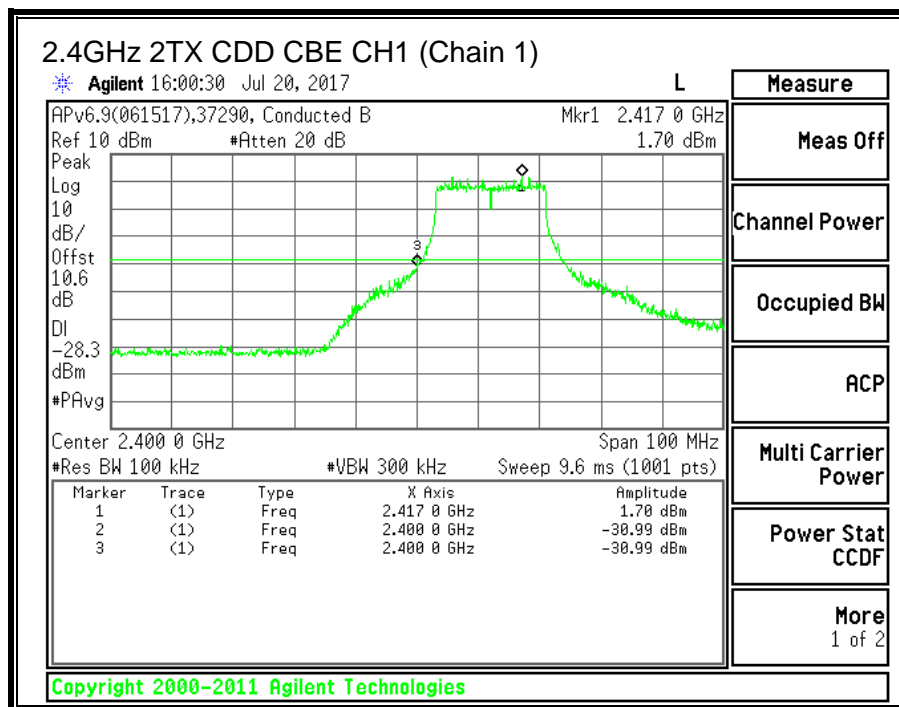
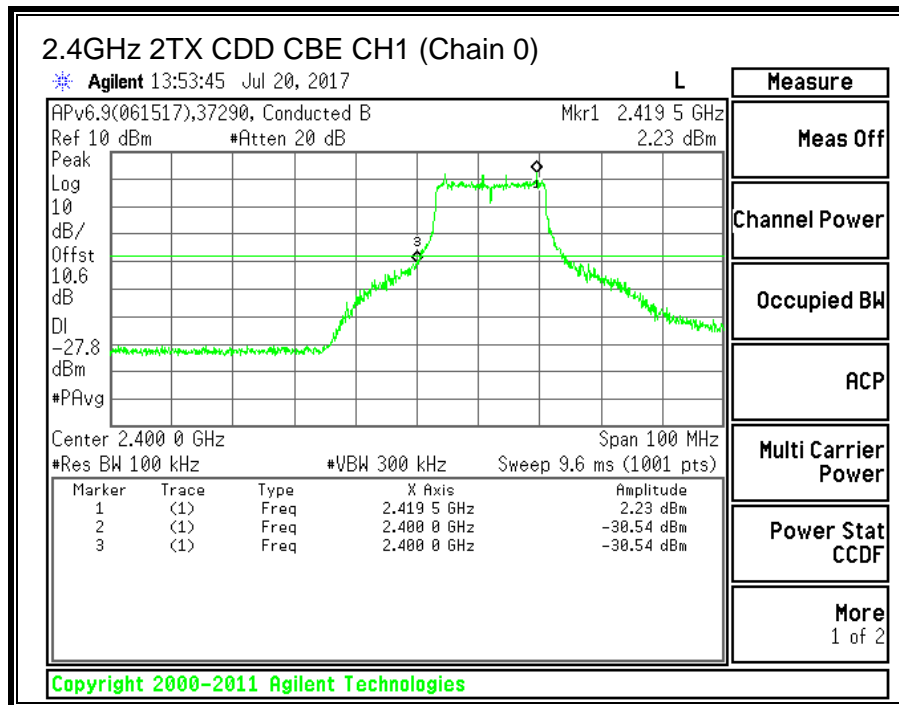


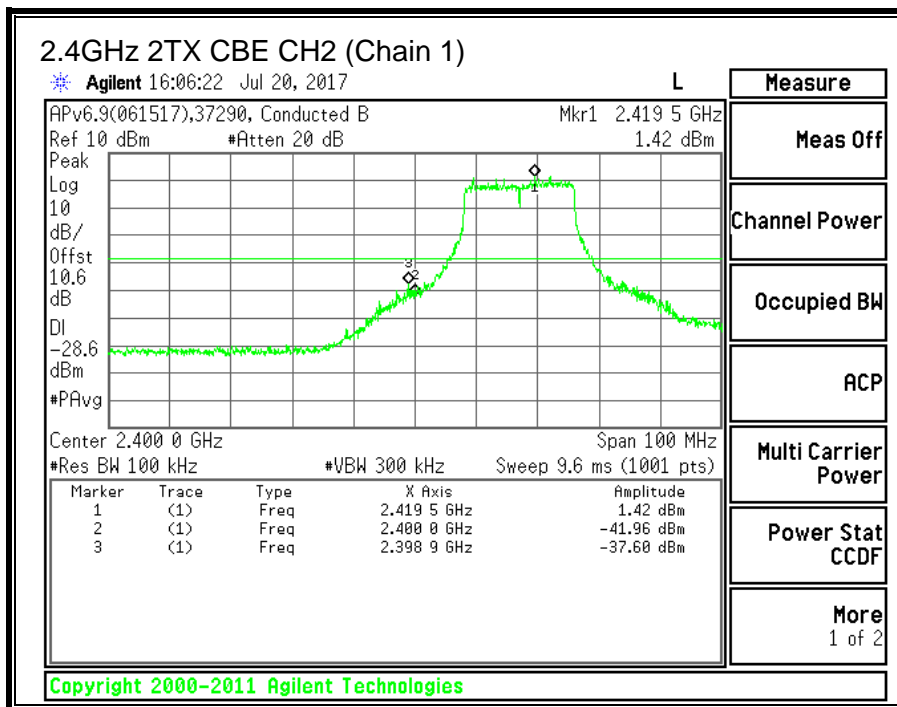
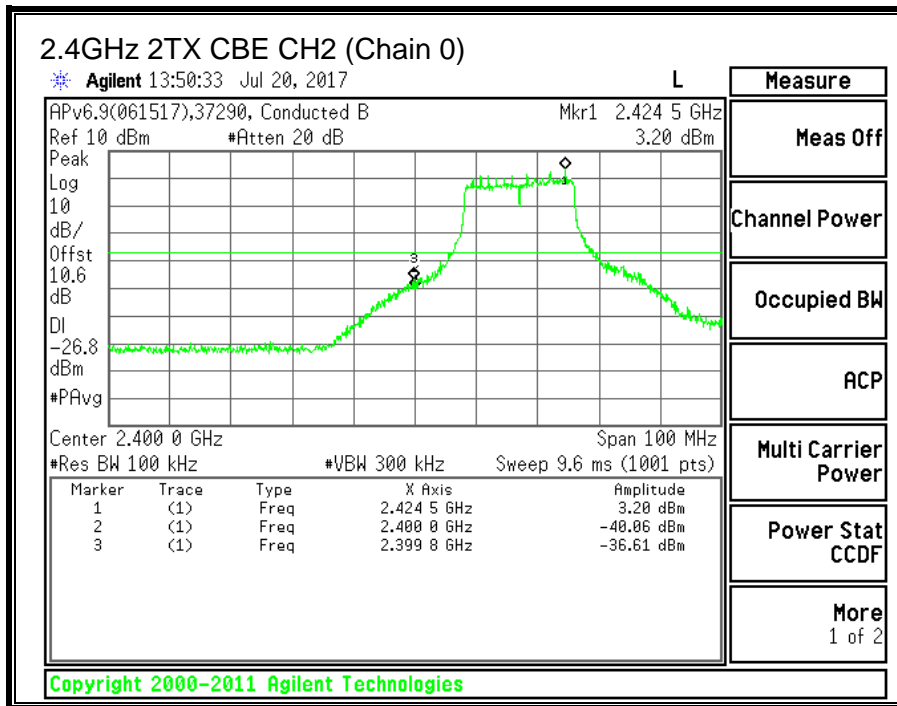


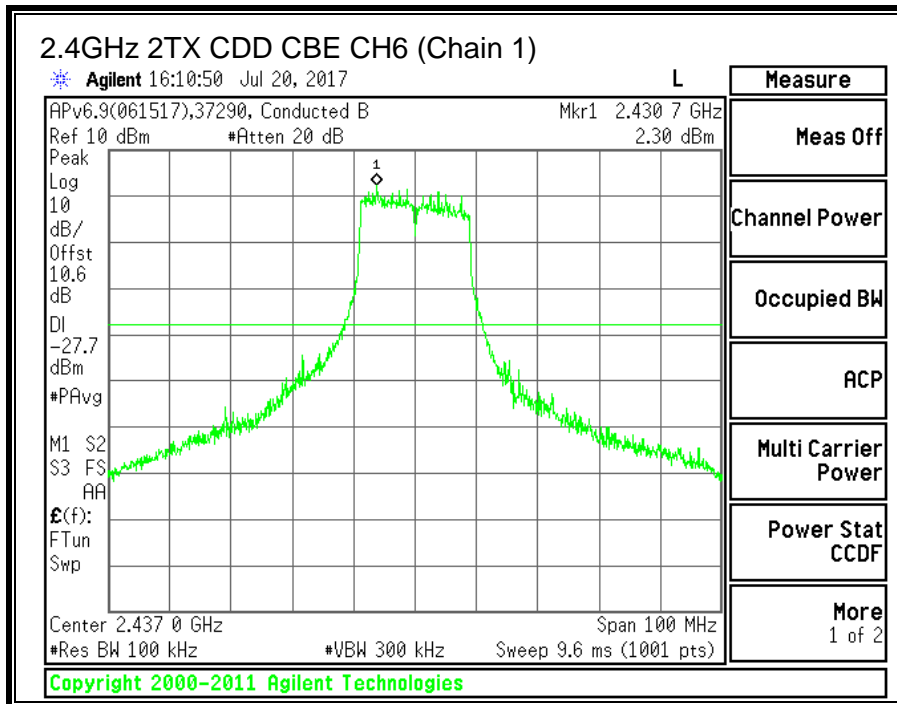
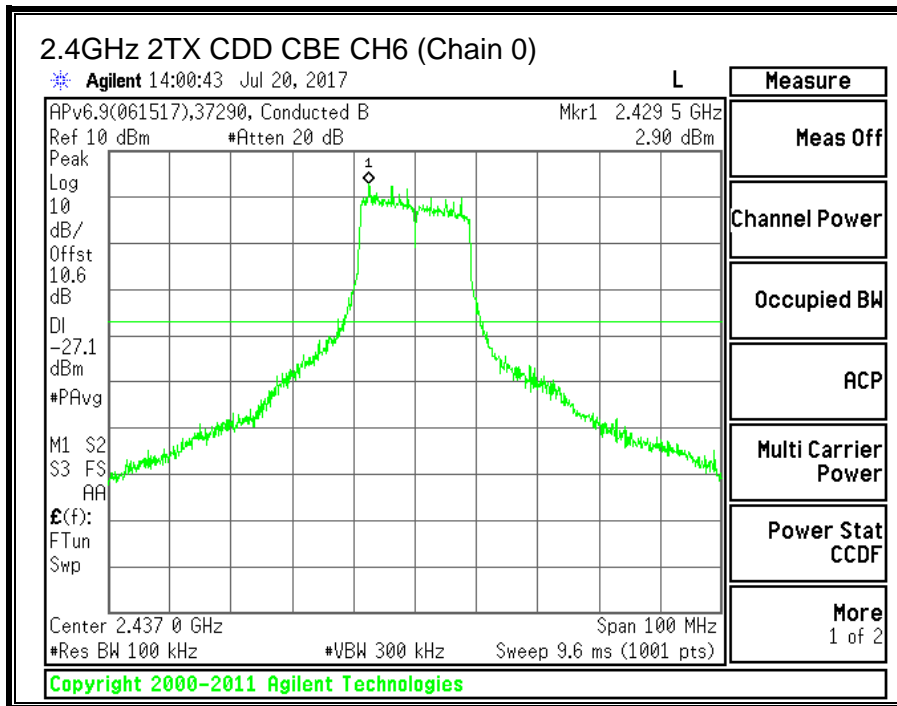


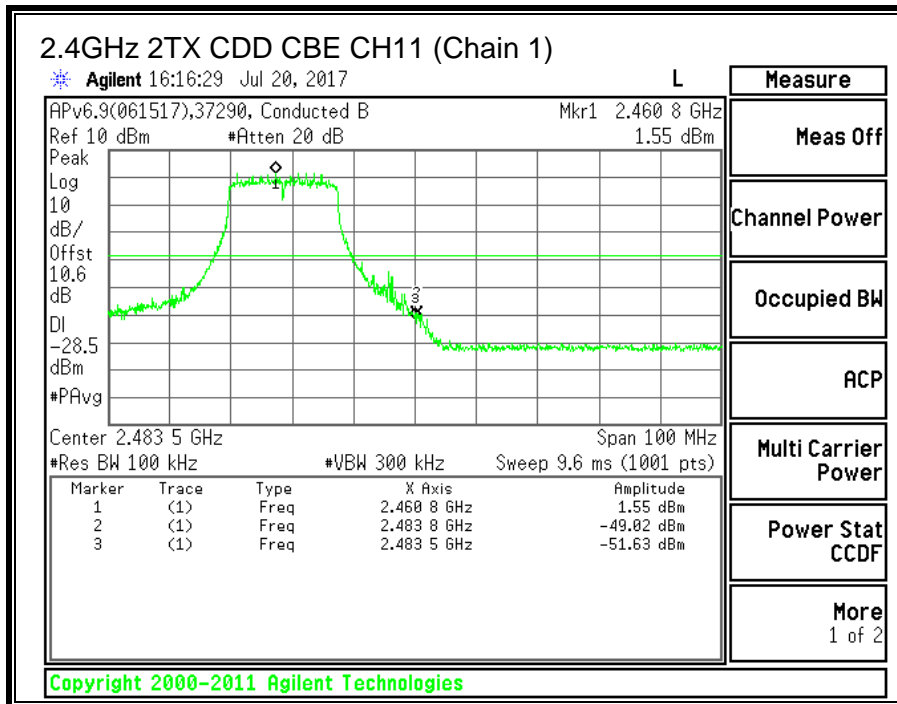
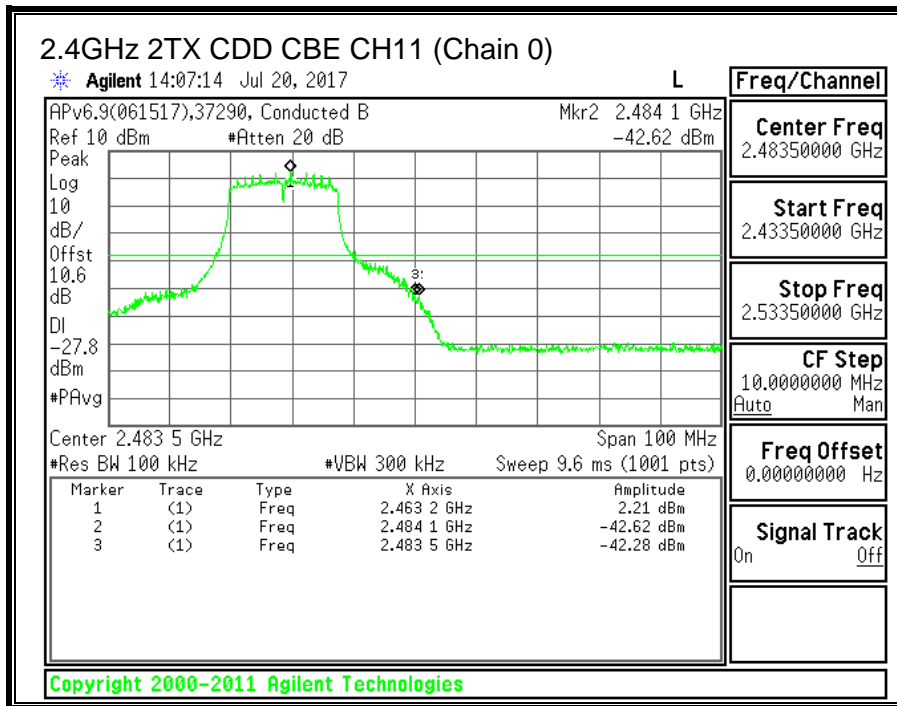


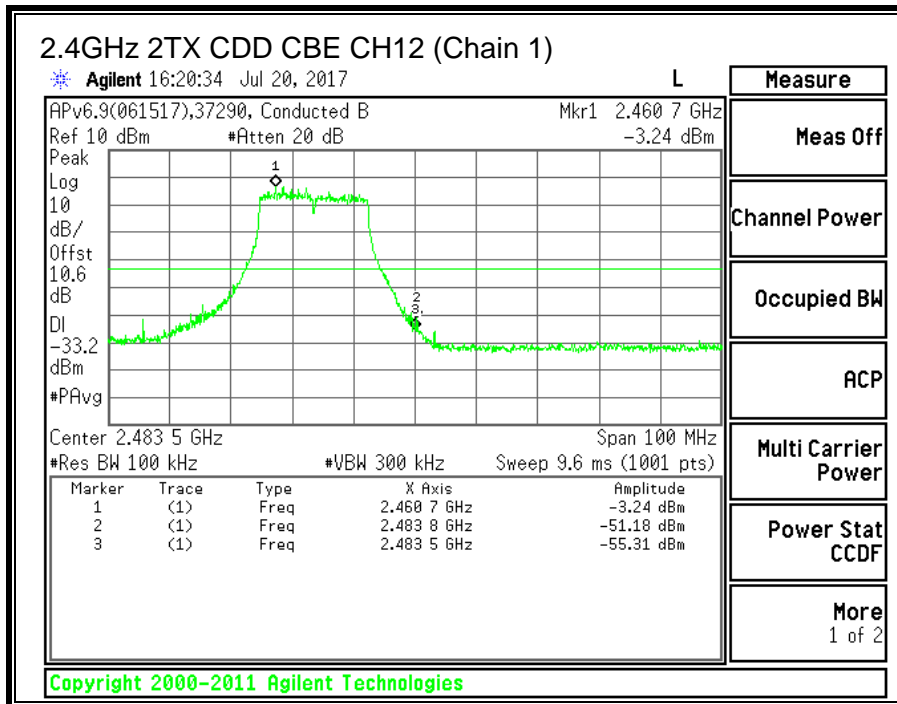
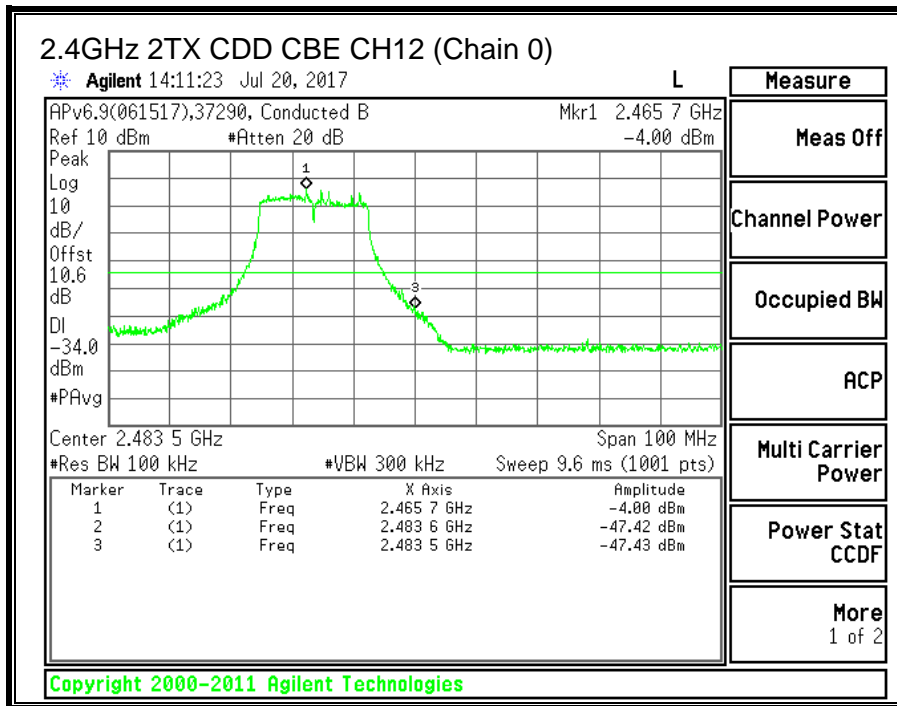


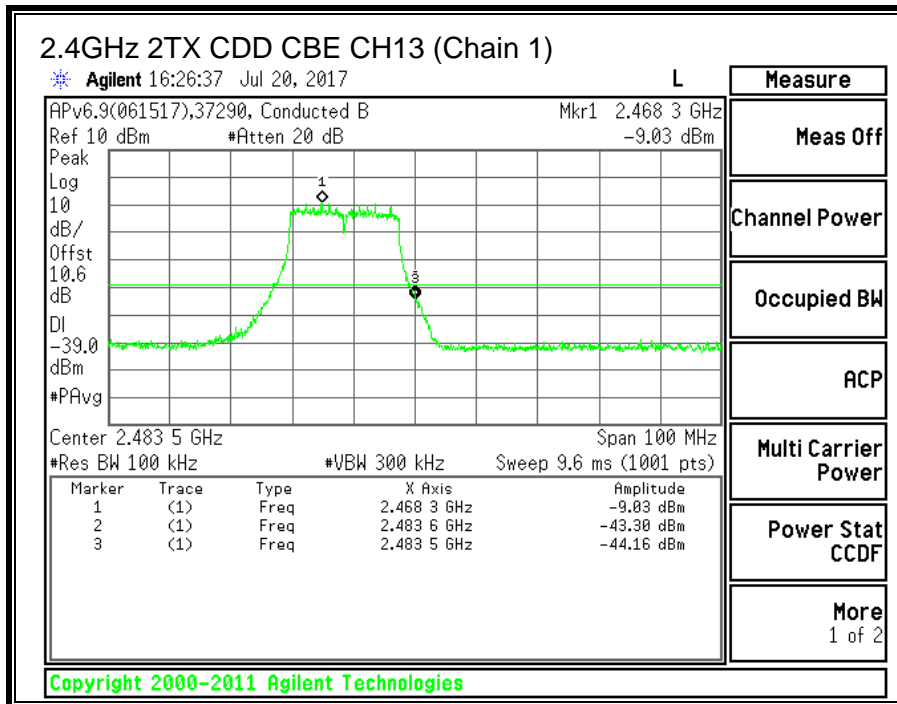
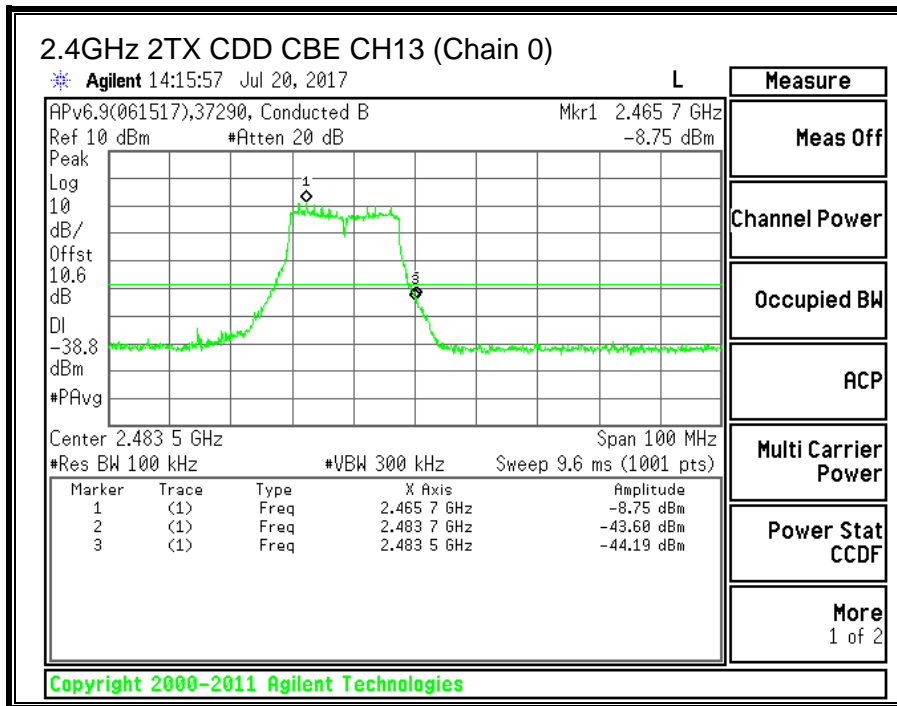


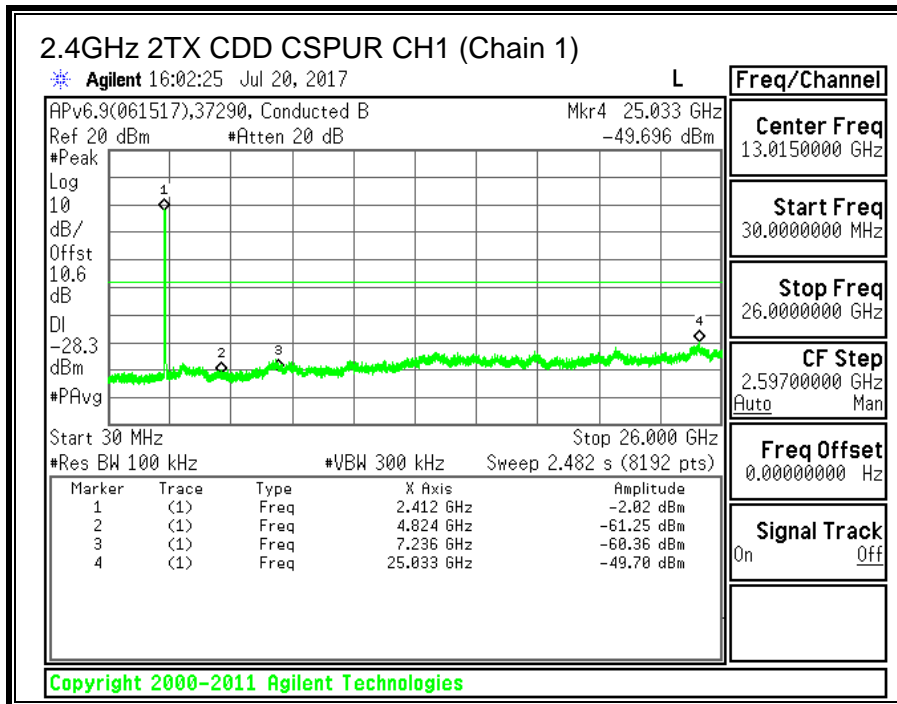
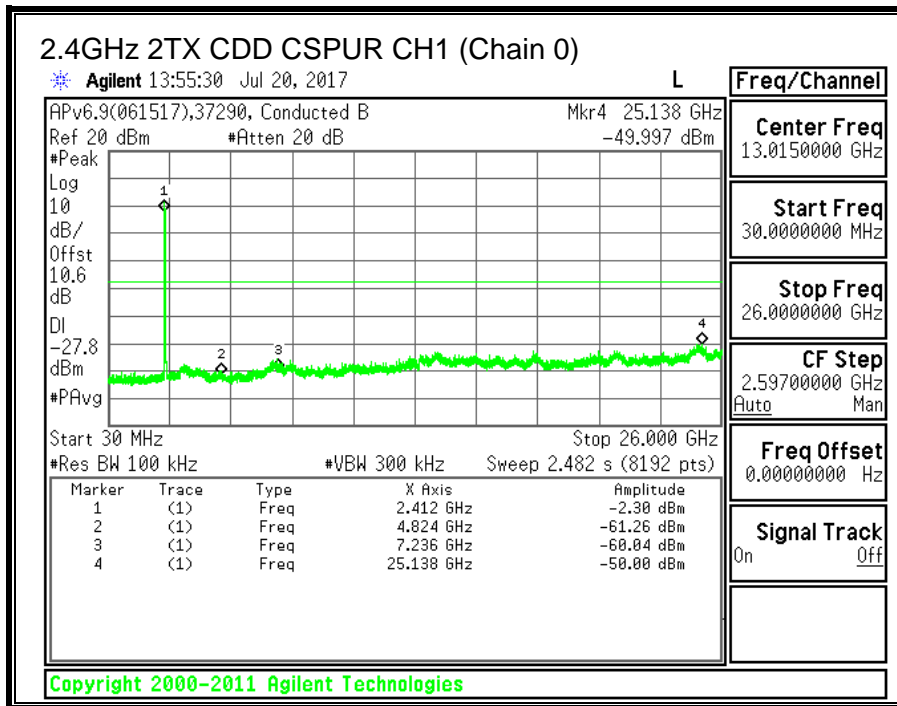


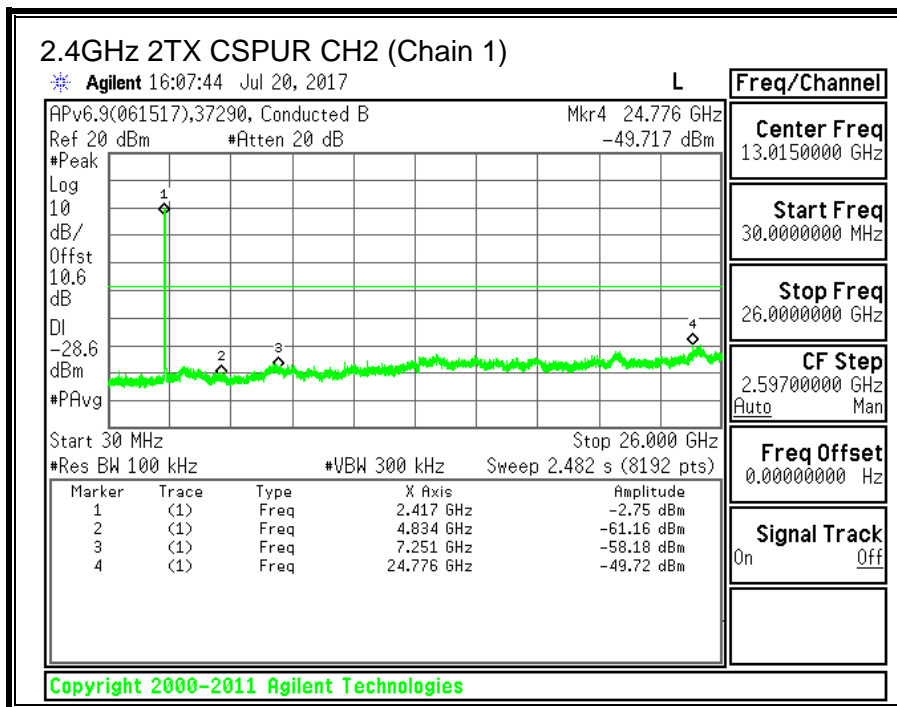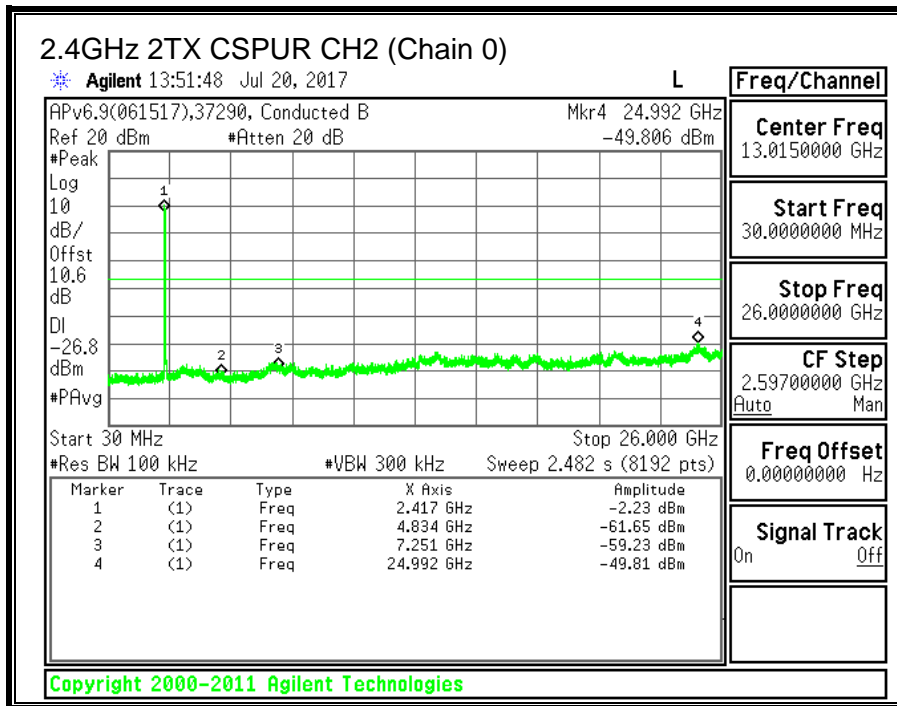

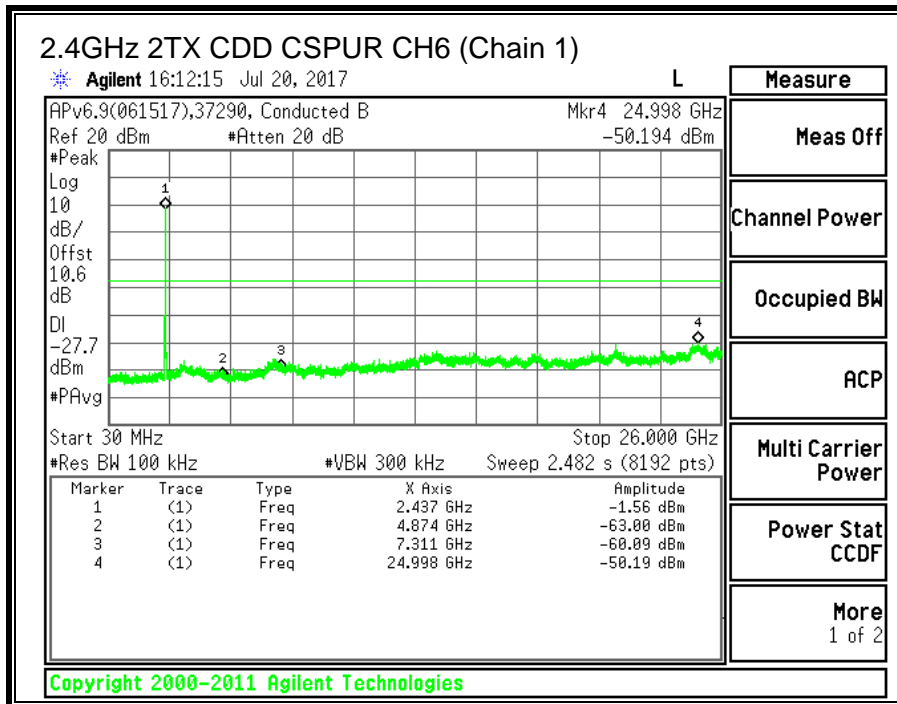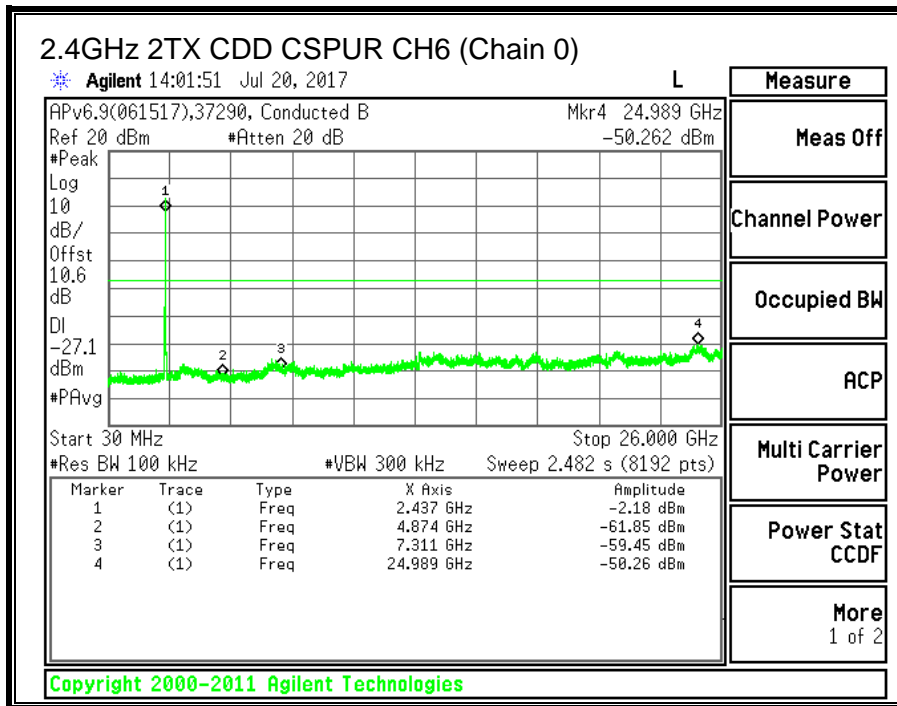

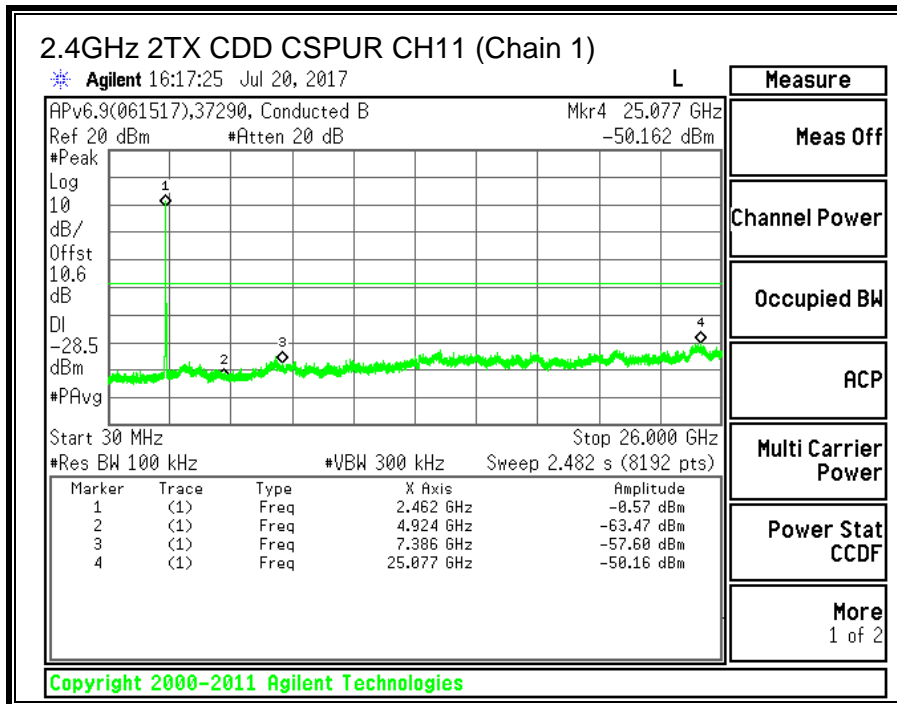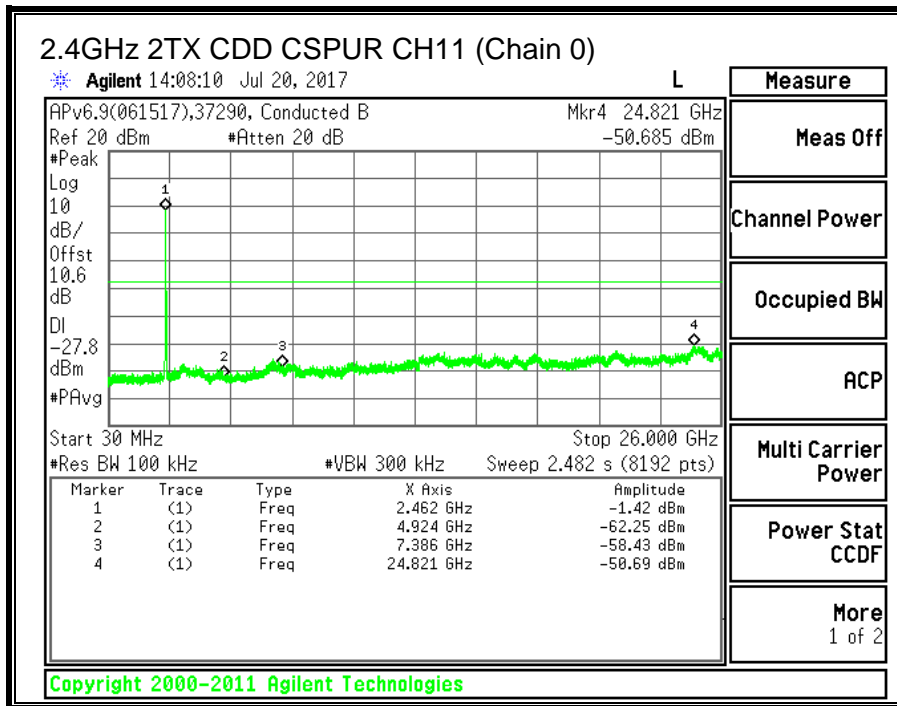

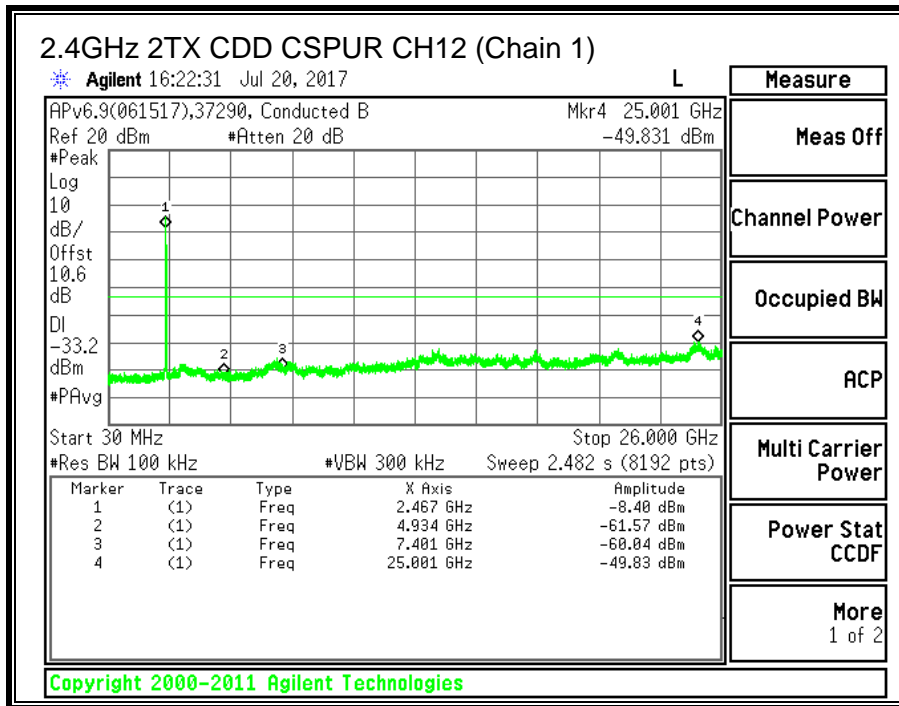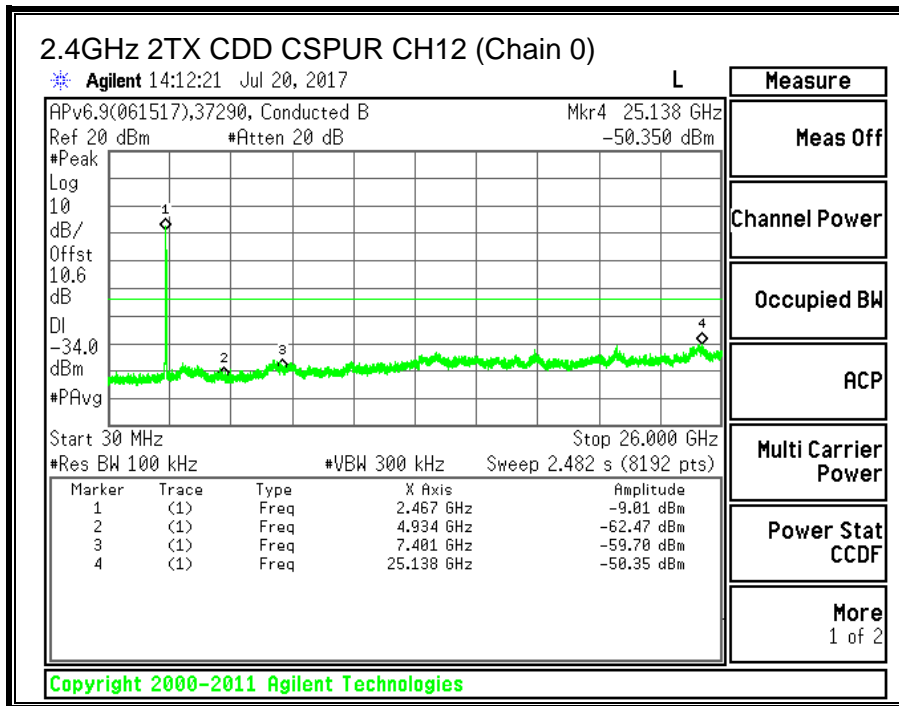

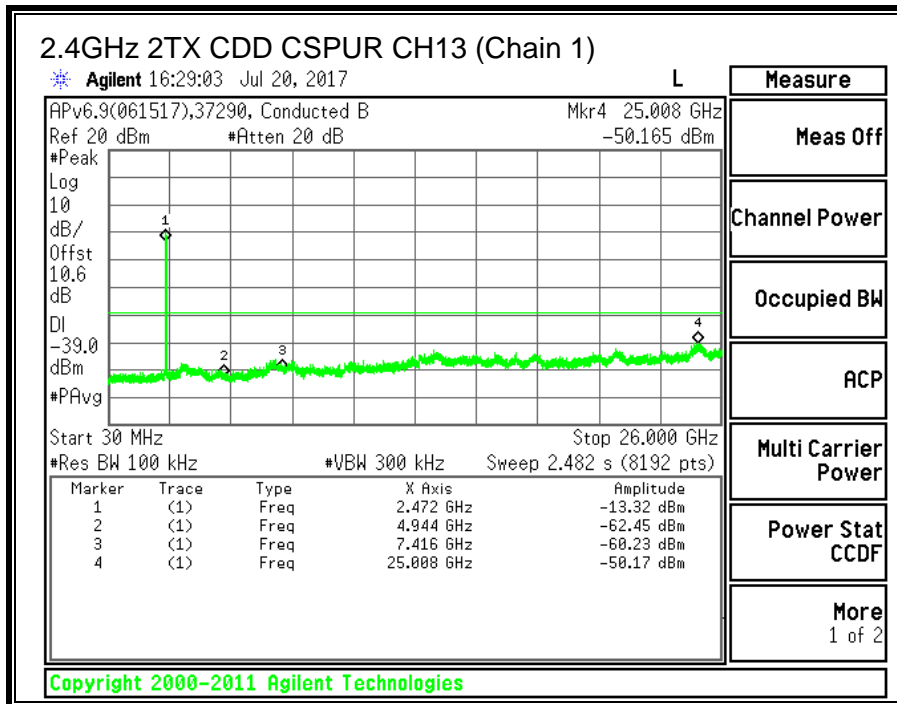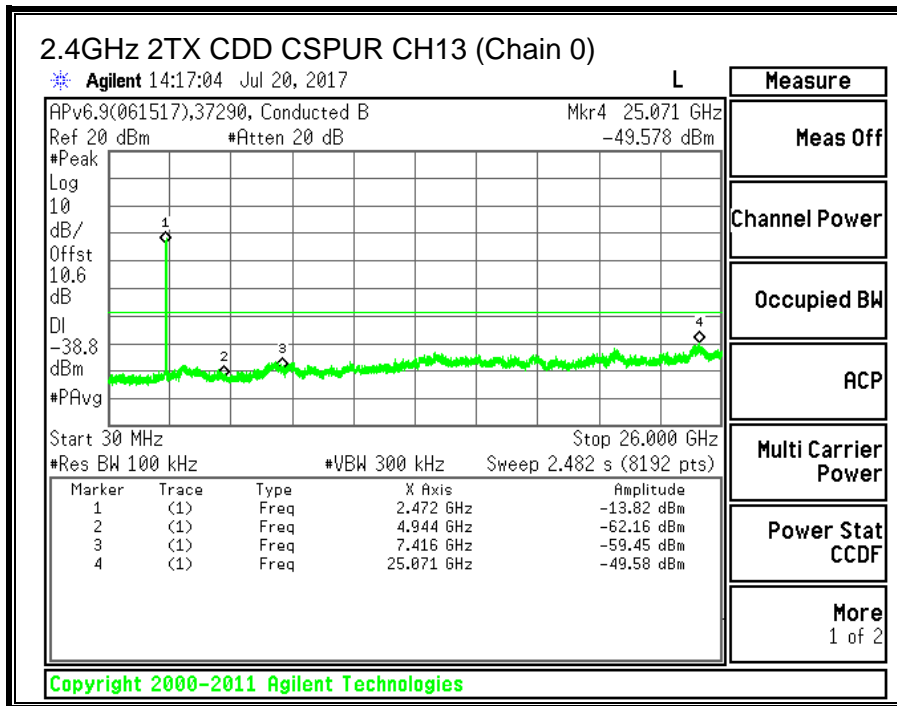

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements for the 30-1000 MHz range, 9 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements for the 0.15-30 MHz range and 200 Hz for peak detection measurements or 200 Hz for quasi-peak detection measurements for the 9 to 150 kHz range. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements.


The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions

10.2. TRANSMITTER ABOVE 1 GHz

10.2.1 11b MIMO MODE IN THE 2.4GHz BAND

AUTHORIZED BANDEGE (LOW CHANNEL, CH 1)

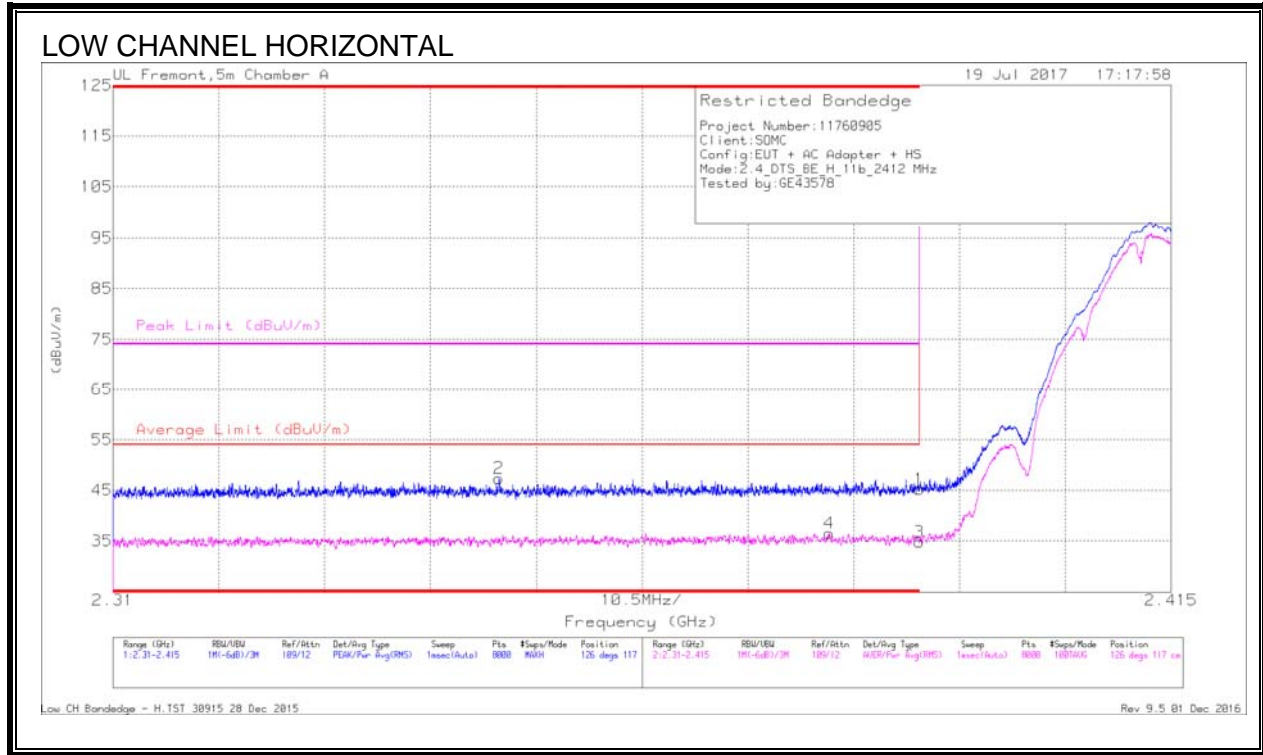


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cd/Fix/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	36.62	Pk	31.8	-23.2	0	45.22	-	-	74	-28.78	126	117	H
2	* 2.348	38.97	Pk	31.6	-23.2	0	47.37	-	-	74	-26.63	126	117	H
3	* 2.39	26.18	RMS	31.8	-23.2	0	34.78	54	-19.22	-	-	126	117	H
4	* 2.381	28.02	RMS	31.7	-23.2	0	36.52	54	-17.48	-	-	126	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

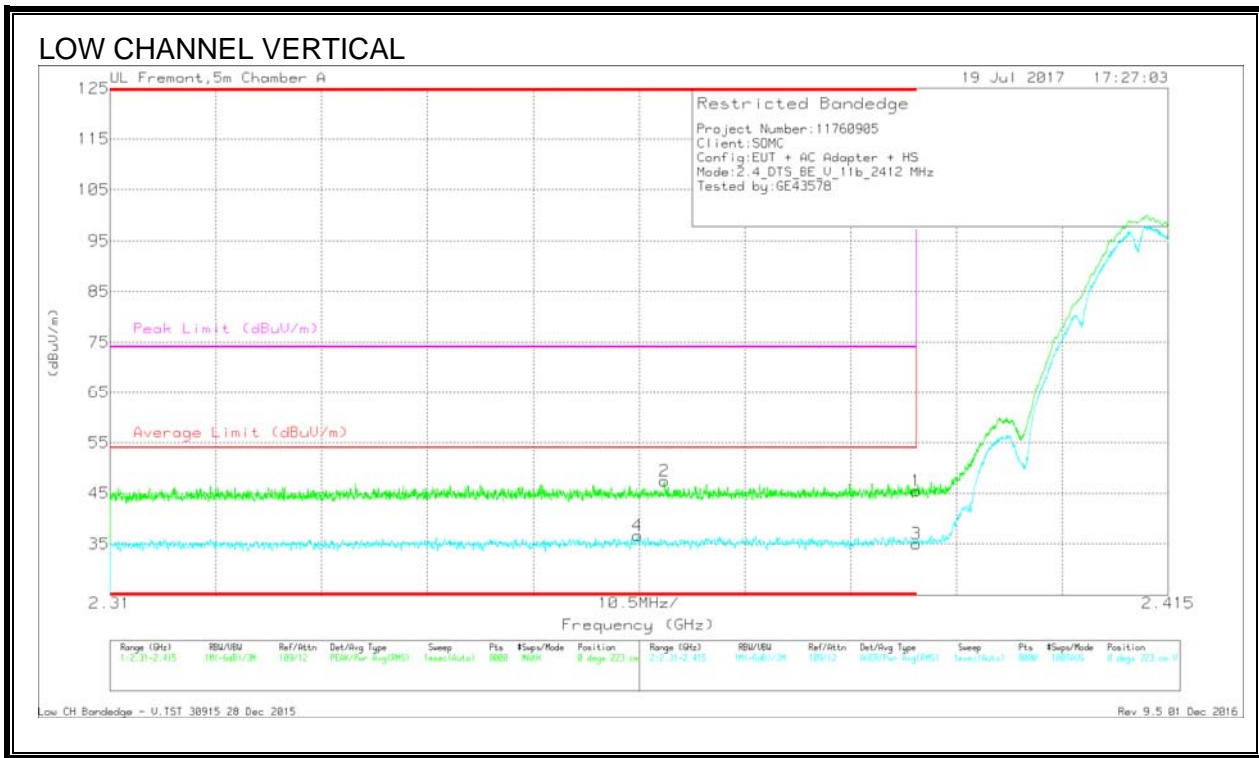


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF TBEZ (dB/m)	Amp/Ch/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	36.83	Pk	31.8	-23.2	0	45.43	-	-	74	-28.57	0	223	V
2	* 2.365	38.99	Pk	31.6	-23.2	0	47.39	-	-	74	-26.61	0	223	V
3	* 2.39	26.41	RMS	31.8	-23.2	0	35.01	54	-18.99	-	-	0	223	V
4	* 2.362	28.26	RMS	31.6	-23.2	0	36.66	54	-17.34	-	-	0	223	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection


AUTHORIZED BANDEGE (HIGH CHANNEL, CH 11)

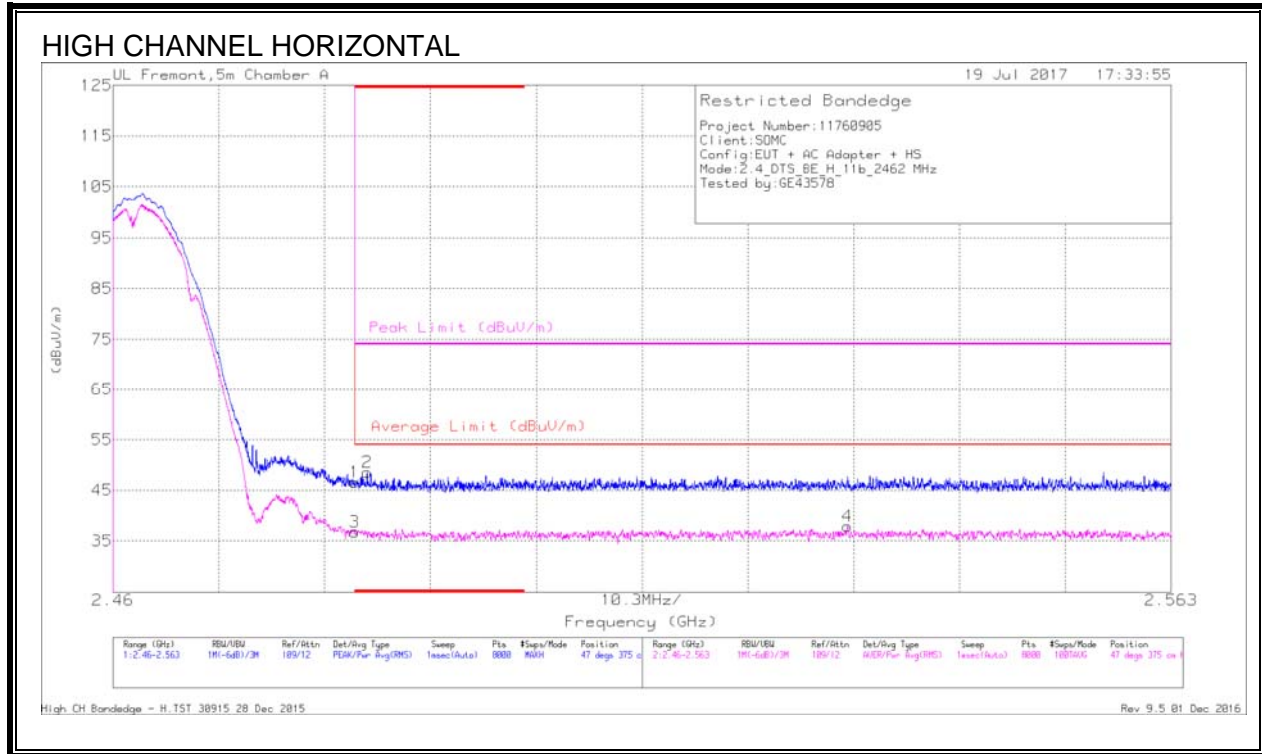

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Af T862 (dB/m)	Amp/Cb/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.4	Pk	32.3	-23.1	0	46.6	-	-	74	-27.4	47	375	H
2	* 2.485	39.31	Pk	32.3	-23.1	0	48.51	-	-	74	-25.49	47	375	H
3	* 2.484	27.55	RMS	32.3	-23.1	0	36.75	54	-17.25	-	-	47	375	H
4	2.532	28.45	RMS	32.4	-23	0	37.85	54	-16.15	-	-	47	375	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

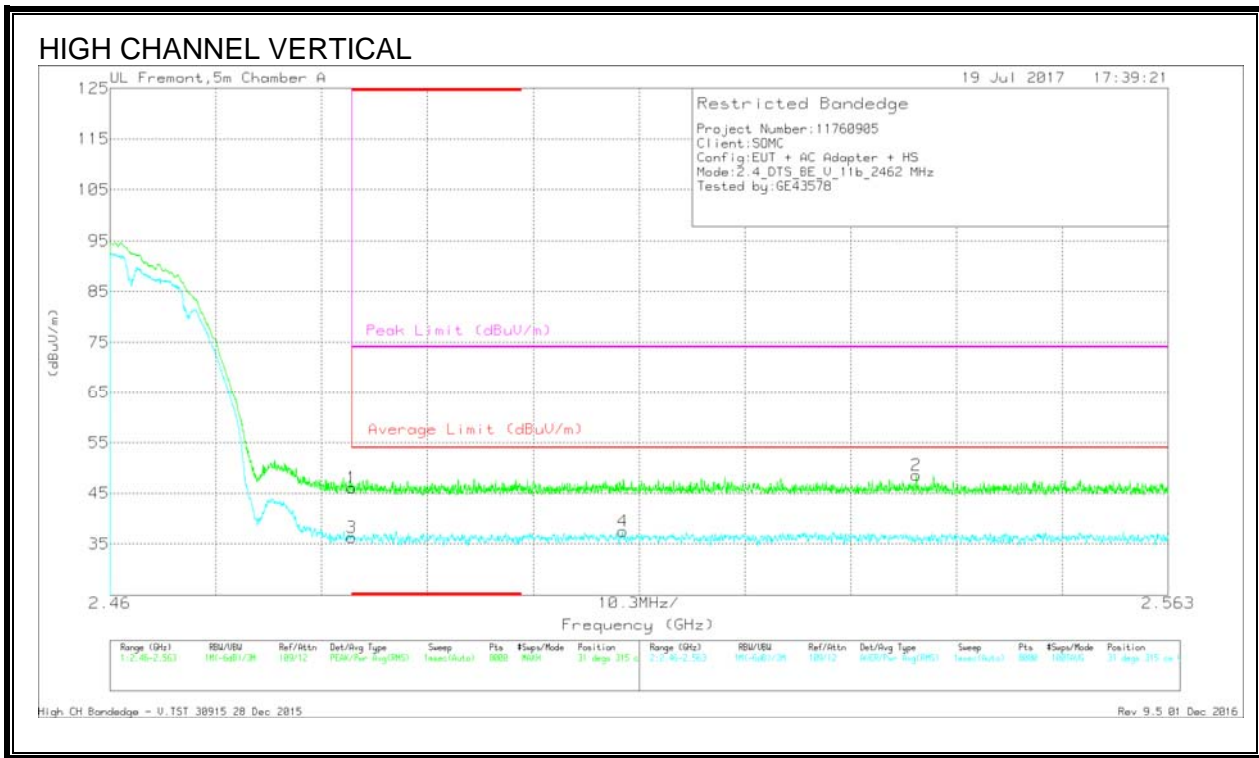

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF TBEZ (dB/m)	Amp/Ch/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.86	Pk	32.3	-23.1	0	46.06	-	-	74	-27.94	31	315	V
3	* 2.484	27.06	RMS	32.3	-23.1	0	36.26	54	-17.74	-	-	31	315	V
4	2.51	28.2	RMS	32.4	-23.1	0	37.5	54	-16.5	-	-	31	315	V
2	2.538	39.21	Pk	32.4	-23	0	48.61	-	-	74	-25.39	31	315	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


AUTHORIZED BANDEGE (HIGH CHANNEL, CH 12)

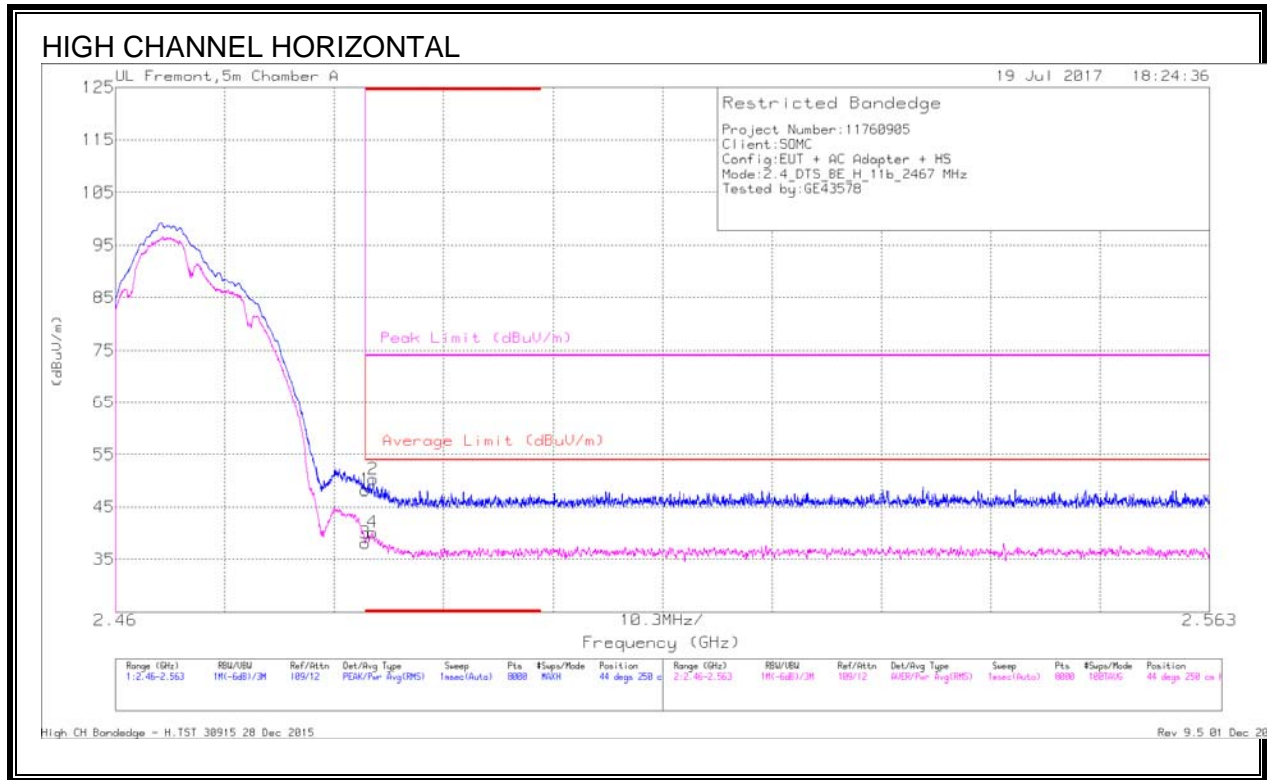

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF TBE2 (dB/m)	Amp/Ch/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.04	Pk	32.3	-23.1	0	48.24	-	-	74	-25.76	44	250	H
2	* 2.484	41.13	Pk	32.3	-23.1	0	50.33	-	-	74	-23.67	44	250	H
3	* 2.484	28.87	RMS	32.3	-23.1	0	38.07	54	-15.93	-	-	44	250	H
4	* 2.484	30.86	RMS	32.3	-23.1	0	40.06	54	-13.94	-	-	44	250	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

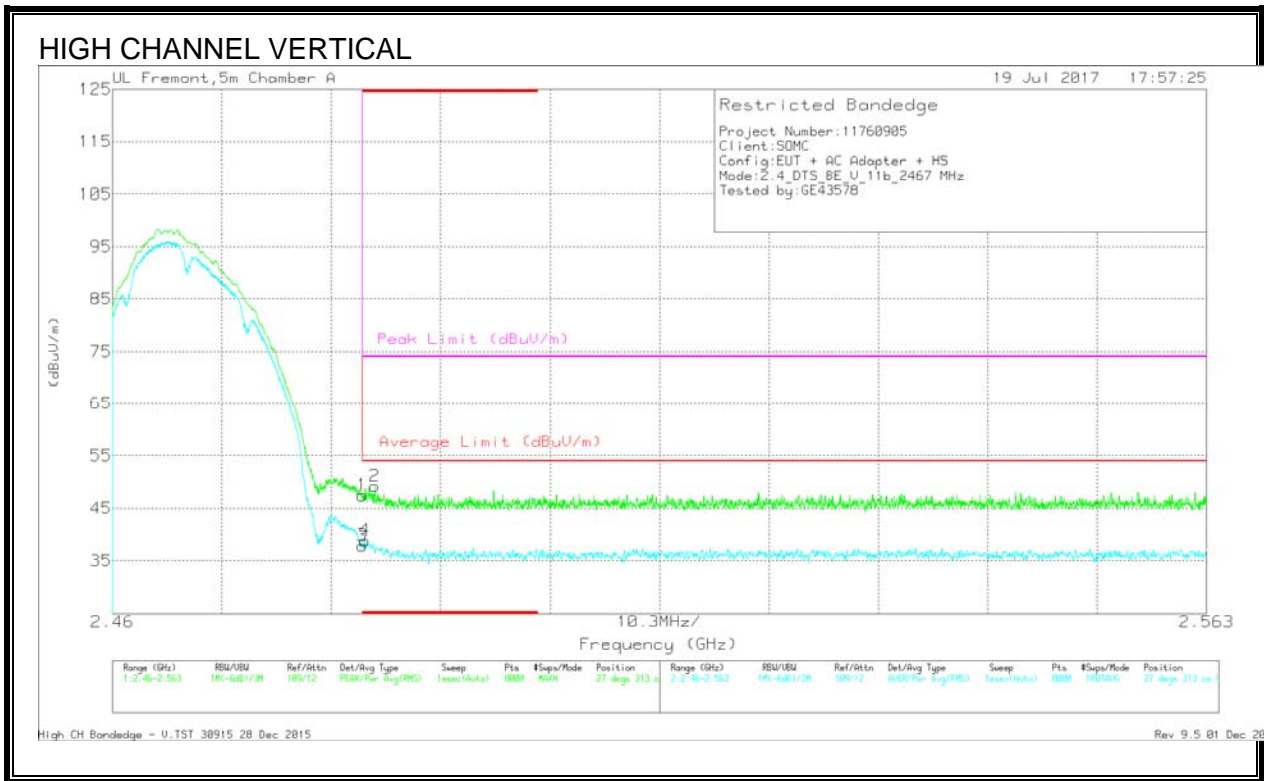

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.27	Pk	32.3	-23.1	0	47.47	-	-	74	-26.53	27	313	V
3	* 2.484	28.65	RMS	32.3	-23.1	0	37.85	54	-16.15	-	-	27	313	V
4	* 2.484	29.68	RMS	32.3	-23.1	0	38.88	54	-15.12	-	-	27	313	V
2	* 2.485	39.99	Pk	32.3	-23.1	0	49.19	-	-	74	-24.81	27	313	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL, CH 13)

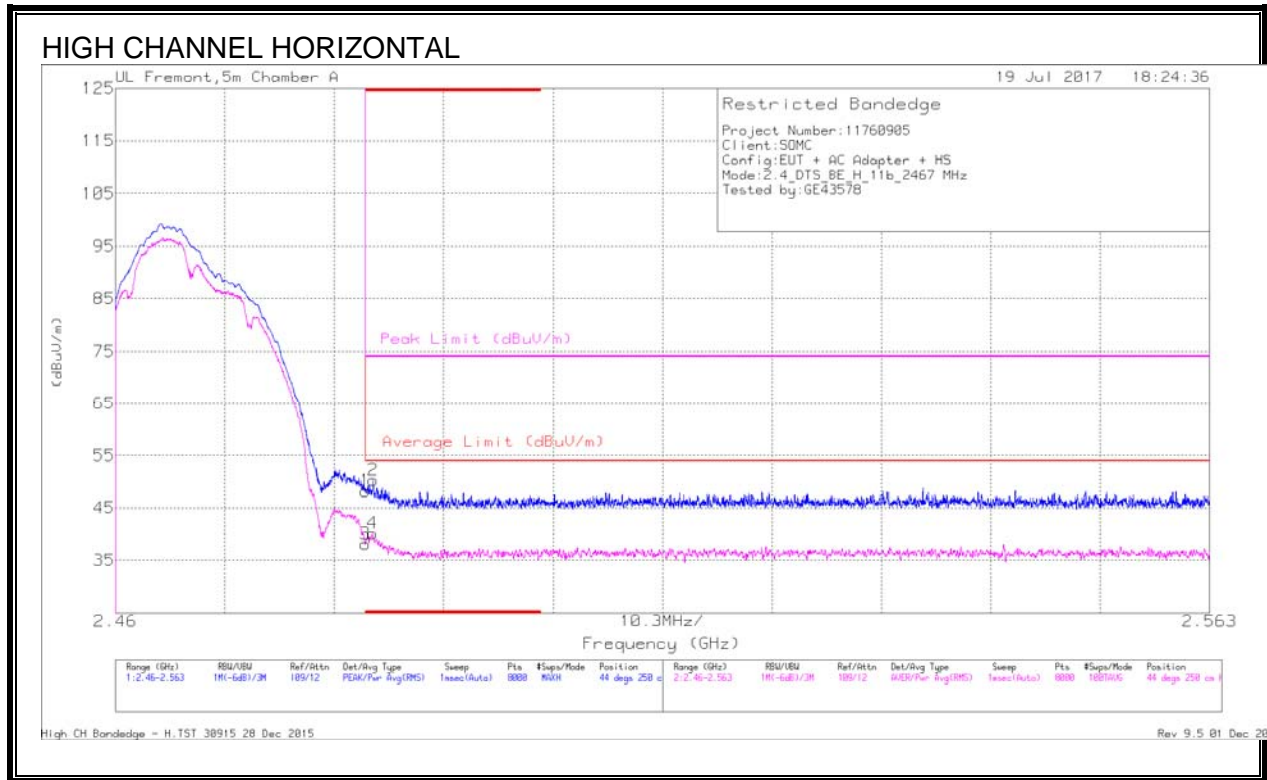


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Ptr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.04	Pk	32.3	-23.1	0	48.24	-	-	74	-25.76	44	250	H
2	* 2.484	41.13	Pk	32.3	-23.1	0	50.33	-	-	74	-23.67	44	250	H
3	* 2.484	28.87	RMS	32.3	-23.1	0	38.07	54	-15.93	-	-	44	250	H
4	* 2.484	30.86	RMS	32.3	-23.1	0	40.06	54	-13.94	-	-	44	250	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

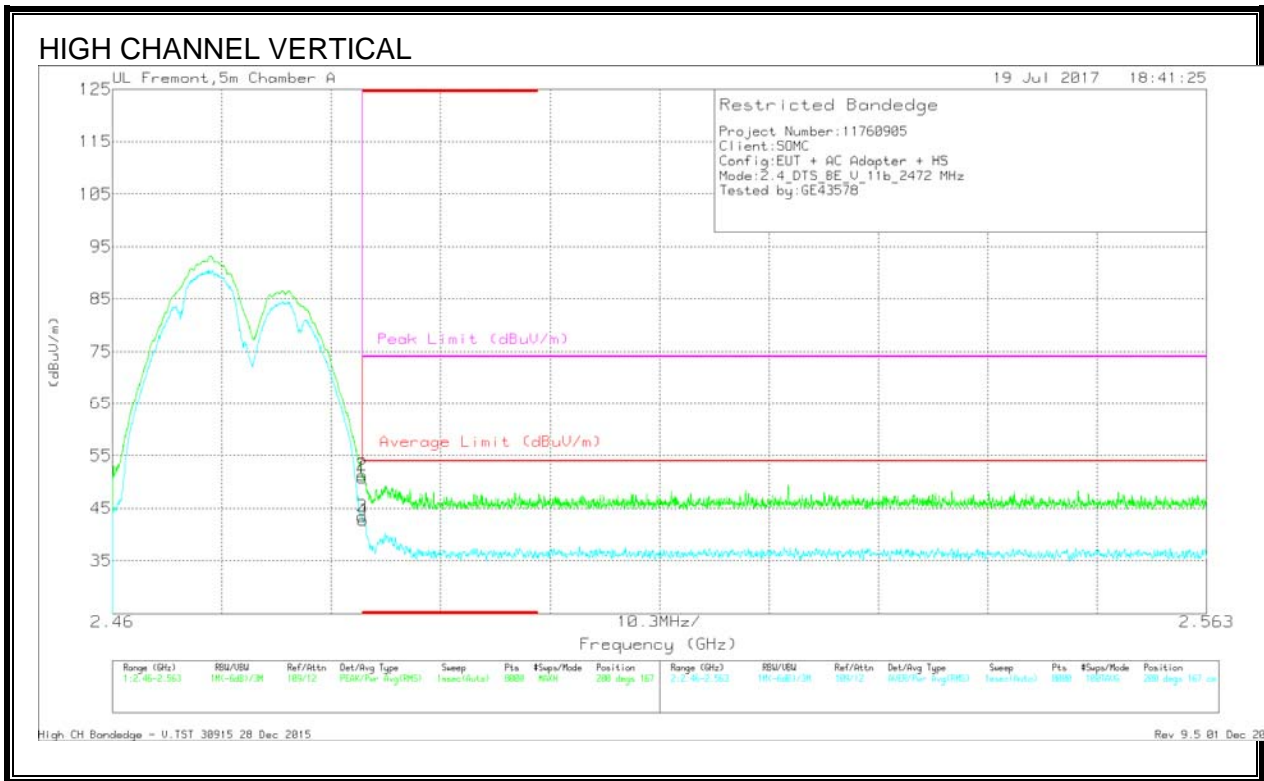

Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.6	Pk	32.3	-23.1	0	50.8	-	-	74	-23.2	200	167	V
2	* 2.484	42.09	Pk	32.3	-23.1	0	51.29	-	-	74	-22.71	200	167	V
3	* 2.484	34.21	RMS	32.3	-23.1	0	43.41	54	-10.59	-	-	200	167	V
4	* 2.484	33.51	RMS	32.3	-23.1	0	42.71	54	-11.29	-	-	200	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, CH 1)

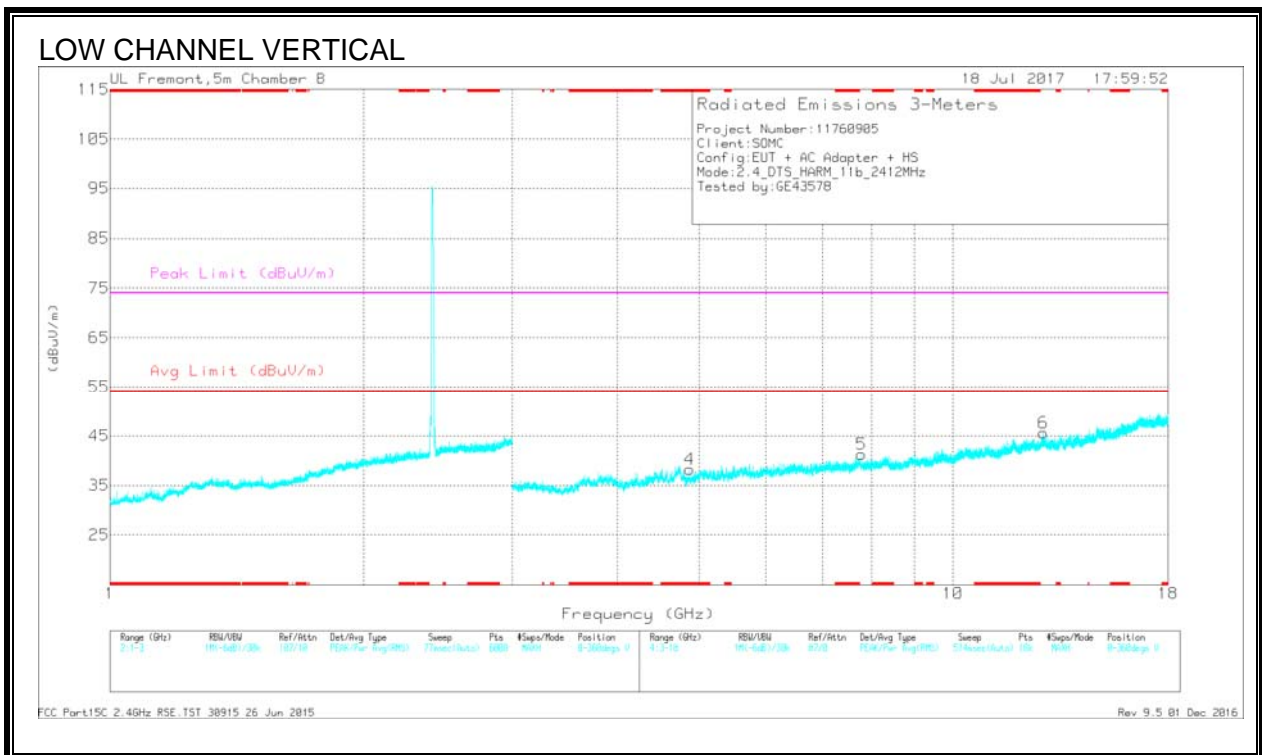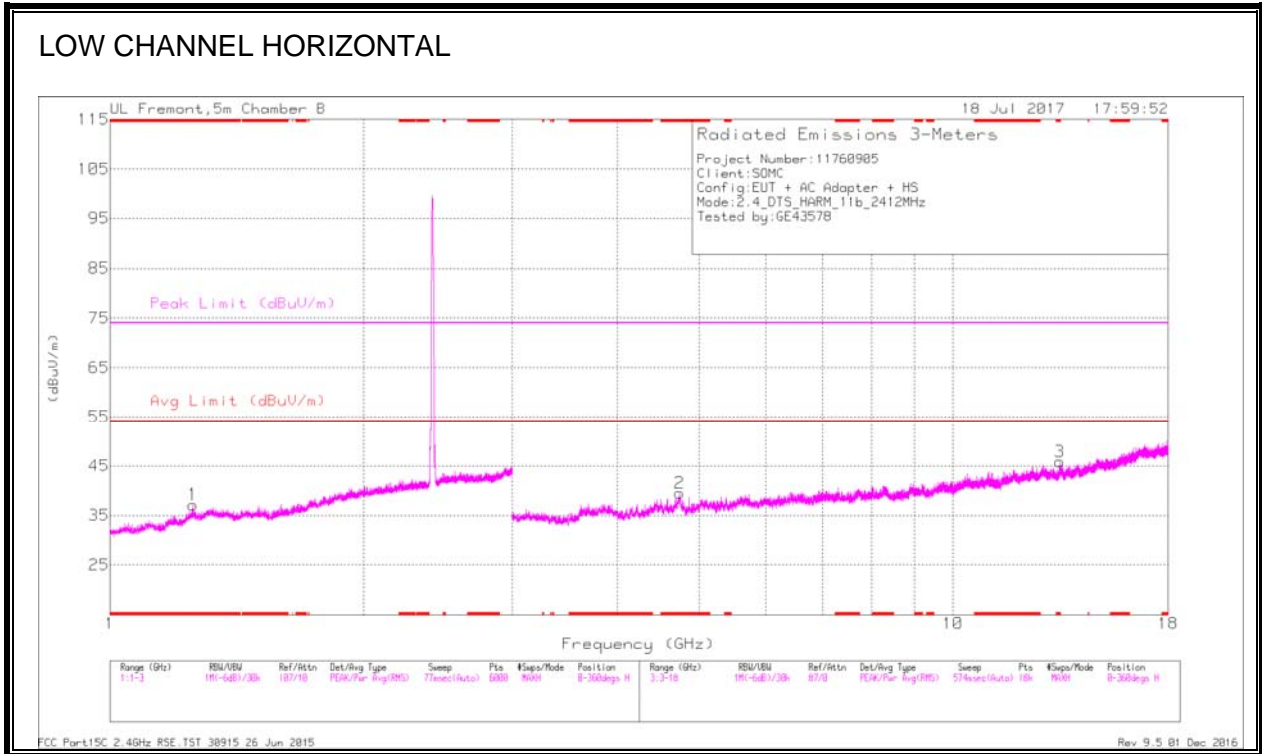

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.254	35.93	PK2	28.8	-21.9	0	42.83	-	-	74	-31.17	358	101	H
* 1.253	23.53	MAv1	28.8	-22	0	30.33	54	-23.67	-	-	358	101	H
* 4.741	39.62	PK2	34.2	-28.3	0	45.52	-	-	74	-28.48	168	101	H
* 4.741	27.89	MAv1	34.2	-28.3	0	33.79	54	-20.21	-	-	168	101	H
* 13.398	33.34	PK2	39.3	-21.3	0	51.34	-	-	74	-22.66	337	101	H
* 13.398	21.23	MAv1	39.3	-21.3	0	39.23	54	-14.77	-	-	337	101	H
* 4.868	39.11	PK2	34.4	-30	0	43.51	-	-	74	-30.49	135	200	V
* 4.868	27.27	MAv1	34.4	-30	0	31.67	54	-22.33	-	-	135	200	V
7.789	35.73	PK2	36	-26.1	0	45.63	-	-	-	-	9	200	V
12.8	32.7	PK2	39.4	-21.6	0	50.5	-	-	-	-	71	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 6)

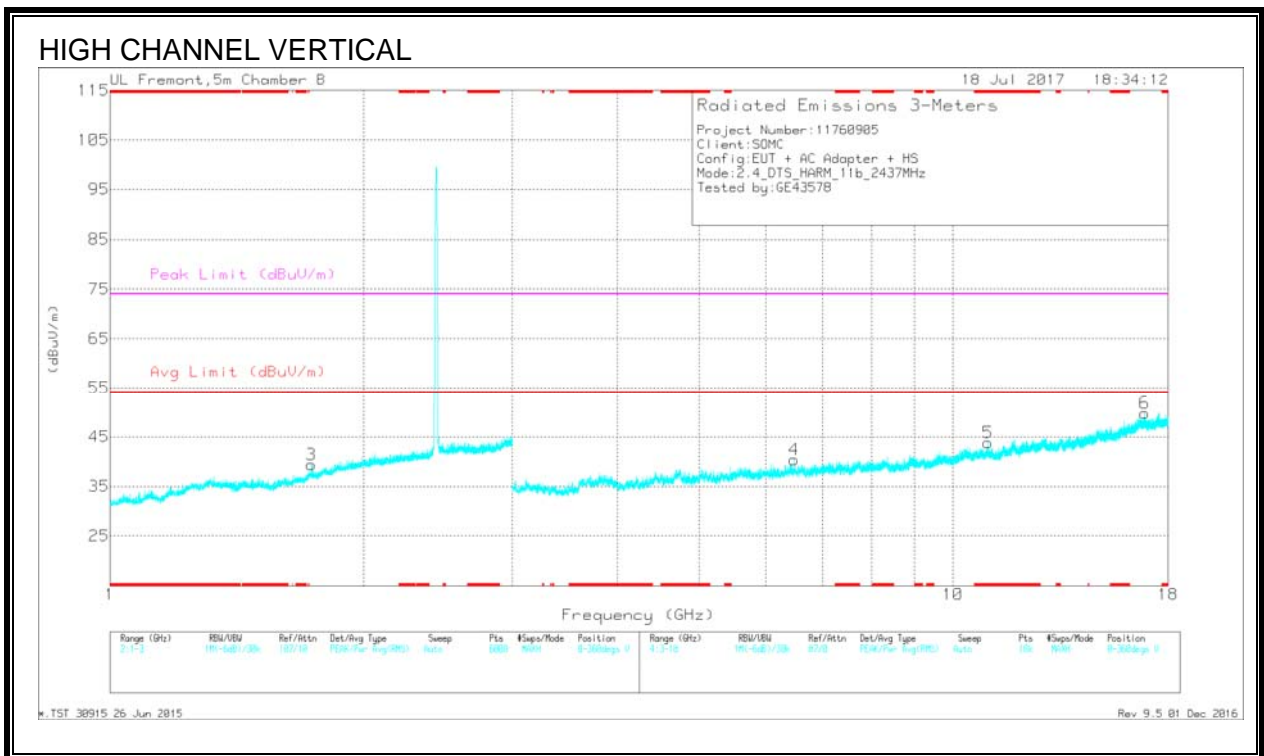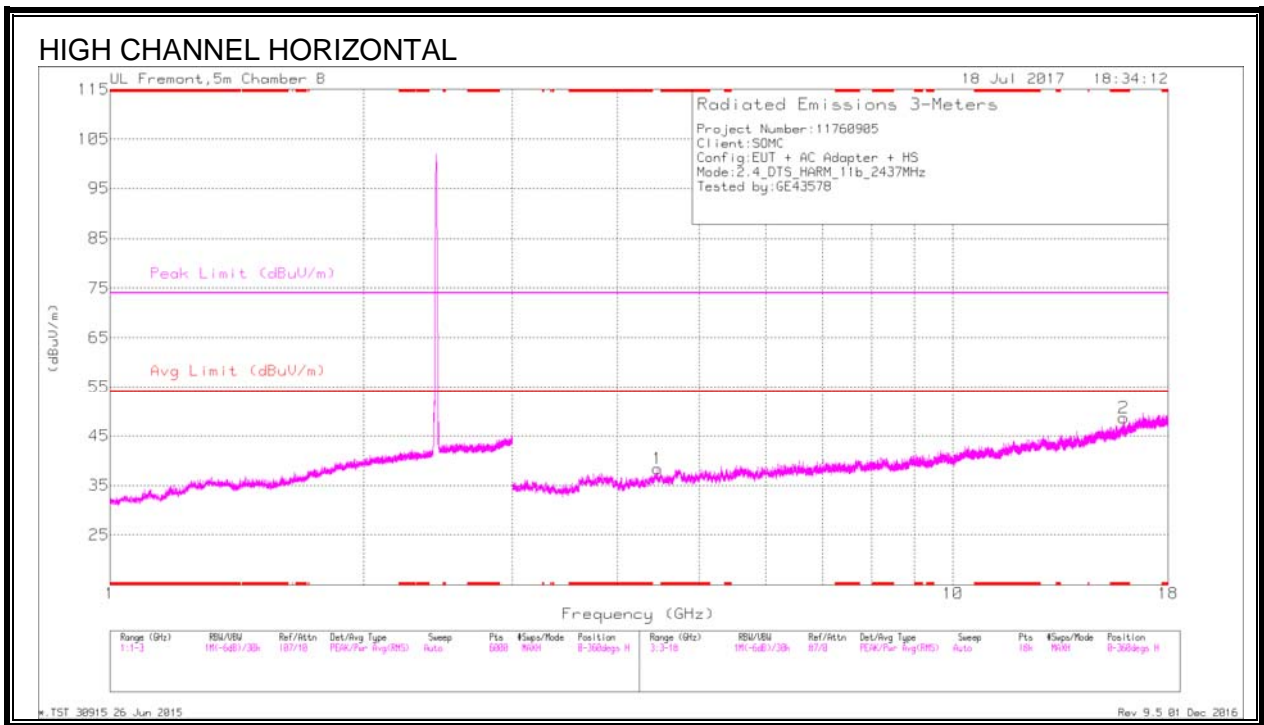

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 15.941	31.69	PK2	41.1	-19.5	0	53.29	-	-	74	-20.71	273	101	H
* 15.94	19.89	MAv1	41.1	-19.5	0	41.49	54	-12.51	-	-	273	101	H
* 11.002	33.89	PK2	37.7	-21.9	0	49.69	-	-	74	-24.31	57	199	V
* 11.003	21.52	MAv1	37.7	-21.9	0	37.32	54	-16.68	-	-	57	199	V
1.734	35.25	PK2	29.5	-20.9	0	43.85	-	-	-	-	40	101	V
4.464	38.06	PK2	33.8	-28.6	0	43.26	-	-	-	-	173	101	H
6.482	37.56	PK2	35.7	-28	0	45.26	-	-	-	-	2	199	V
16.885	31.23	PK2	42.3	-18.9	0	54.63	-	-	-	-	14	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 11)

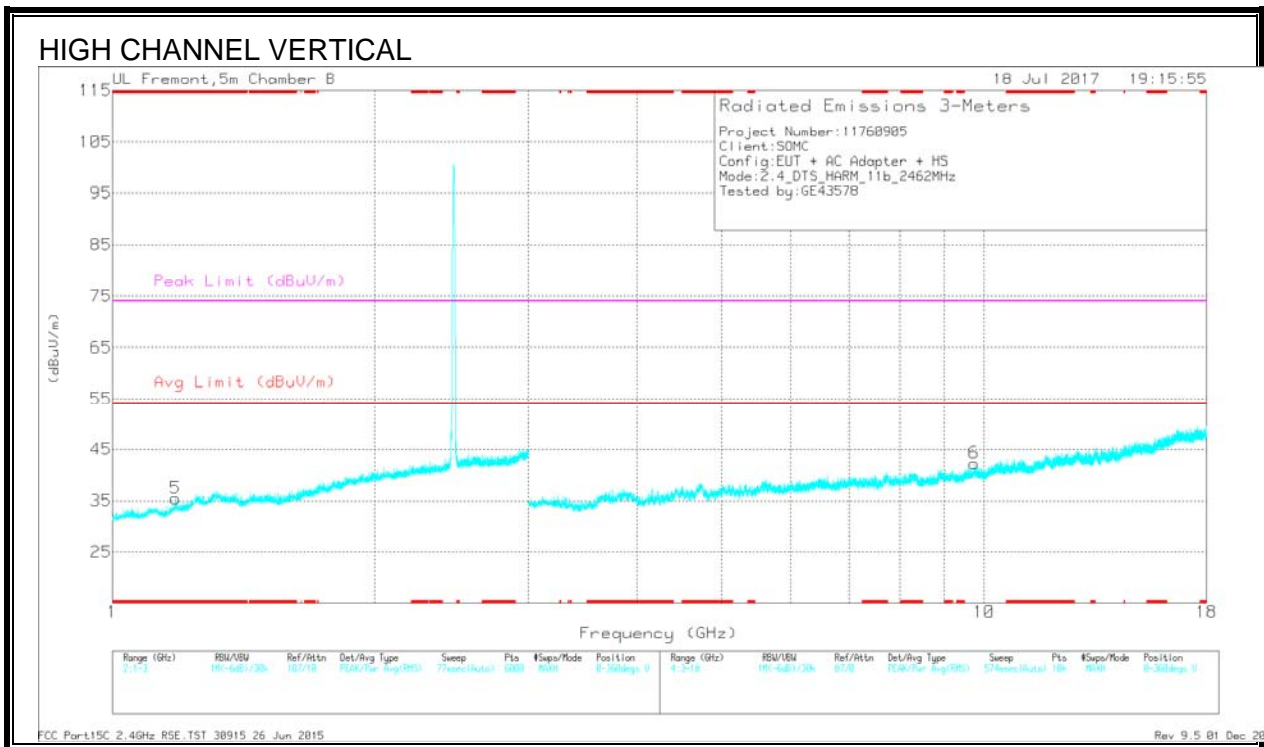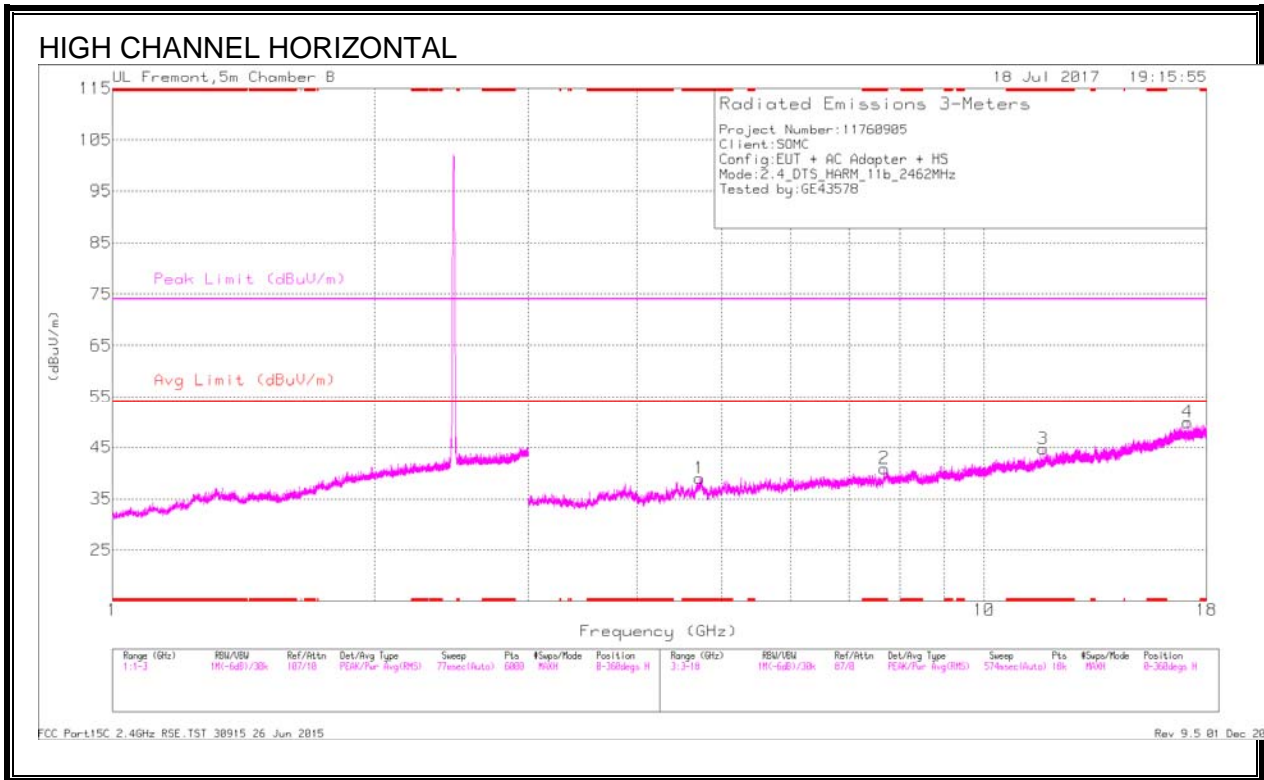

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AFT863 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.182	35.52	PK2	27.8	-22.4	0	40.92	-	-	74	-33.08	260	199	V
* 1.181	23.59	MAv1	27.8	-22.4	0	28.99	54	-25.01	-	-	260	199	V
* 4.719	39.69	PK2	34.2	-28.8	0	45.09	-	-	74	-28.91	131	104	H
* 4.719	27.71	MAv1	34.2	-28.8	0	33.11	54	-20.89	-	-	131	104	H
* 7.688	36.59	PK2	36	-26	0	46.59	-	-	74	-27.41	302	104	H
* 7.689	24.63	MAv1	36	-26	0	34.63	54	-19.37	-	-	302	104	H
* 11.691	34.06	PK2	38.4	-22.8	0	49.66	-	-	74	-24.34	99	104	H
* 11.693	21.77	MAv1	38.4	-22.7	0	37.47	54	-16.53	-	-	99	104	H
9.743	34.36	PK2	36.9	-23.4	0	47.86	-	-	-	-	309	104	V
17.11	31.94	PK2	41.9	-19.5	0	54.34	-	-	-	-	79	104	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2.2 11g MIMO MODE IN THE 2.4GHz BAND

AUTHORIZED BANDEGE (LOW CHANNEL, CH 1)

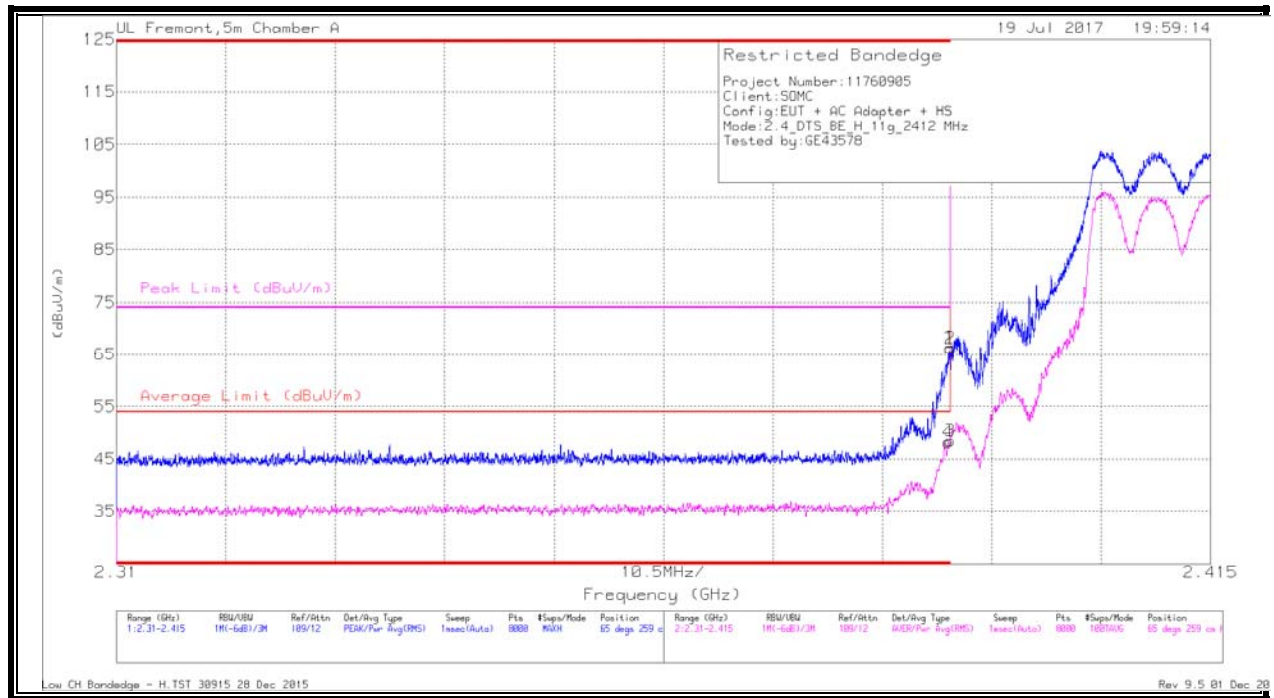


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ch/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Admth (Degs)	Height (cm)	Polarity
1	* 2.39	57.74	Pk	31.8	-23.2	0	66.34	-	-	74	-7.66	65	259	H
2	* 2.39	57.55	Pk	31.8	-23.2	0	66.15	-	-	74	-7.85	65	259	H
3	* 2.39	39.54	RMS	31.8	-23.2	.24	48.38	54	-5.62	-	-	65	259	H
4	* 2.39	39.34	RMS	31.8	-23.2	.24	48.18	54	-5.82	-	-	65	259	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

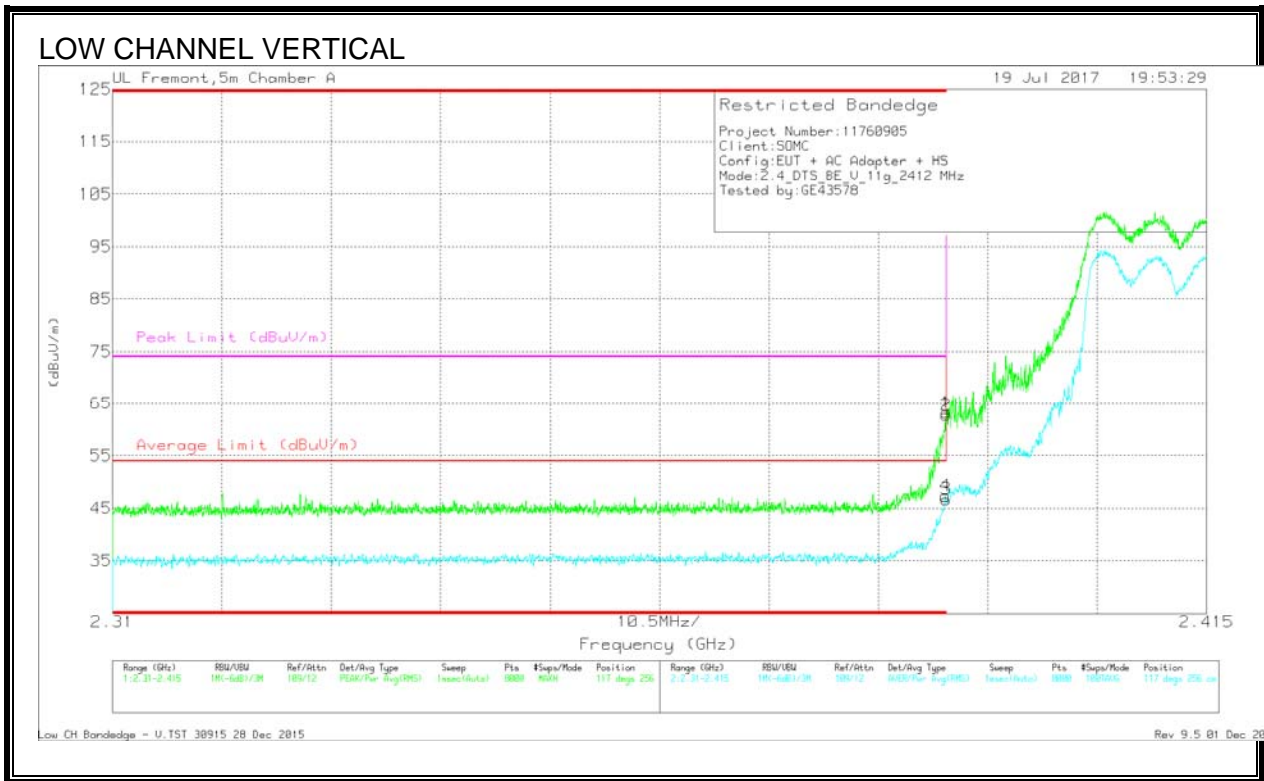

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.58	Pk	31.8	-23.2	0	63.18	-	-	74	-10.82	117	256	V
2	* 2.39	54.06	Pk	31.8	-23.2	0	62.66	-	-	74	-11.34	117	256	V
3	* 2.39	37.82	RMS	31.8	-23.2	.24	46.66	54	-7.34	-	-	117	256	V
4	* 2.39	38.5	RMS	31.8	-23.2	.24	47.34	54	-6.66	-	-	117	256	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (LOW CHANNEL, CH 2)

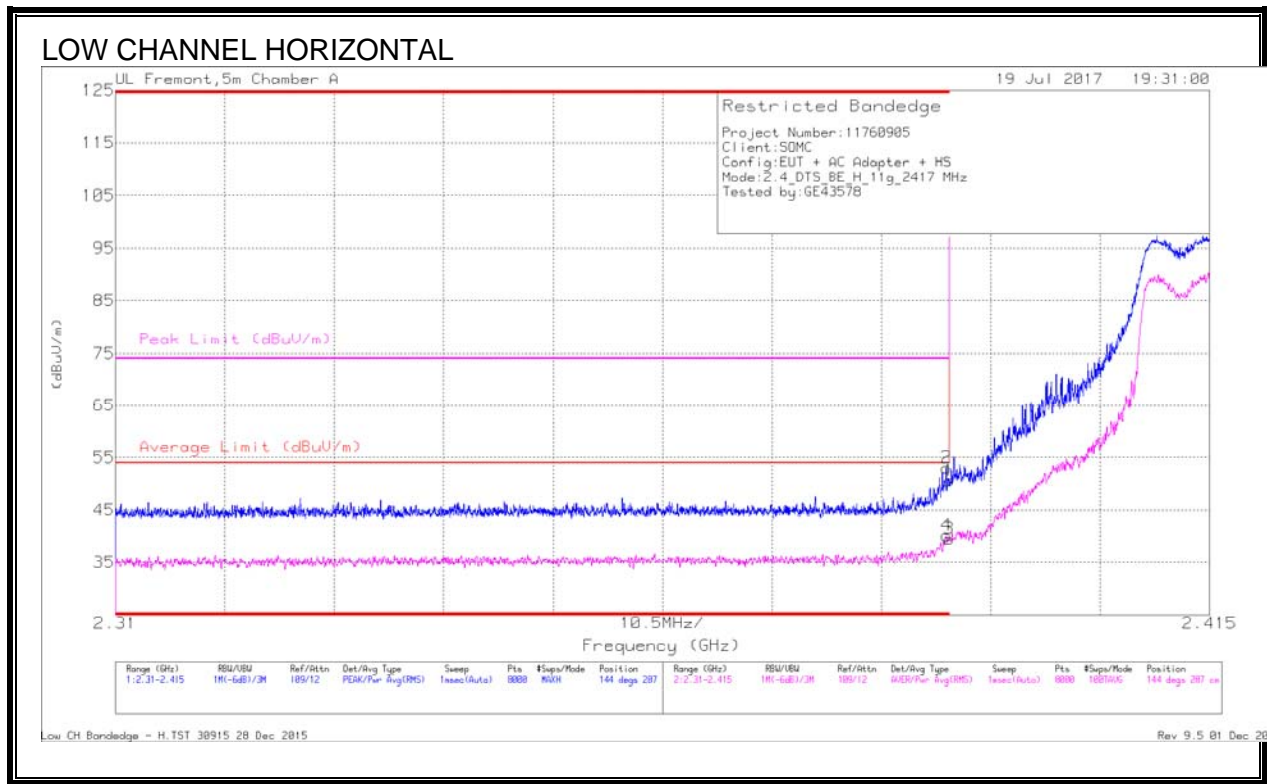


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ch/Flt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.92	Pk	31.8	-23.2	0	50.52	-	-	74	-23.48	144	287	H
2	* 2.39	44.43	Pk	31.8	-23.2	0	53.03	-	-	74	-20.97	144	287	H
3	* 2.39	30.6	RMS	31.8	-23.2	.24	39.44	54	-14.56	-	-	144	287	H
4	* 2.39	31.27	RMS	31.8	-23.2	.24	40.11	54	-13.89	-	-	144	287	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

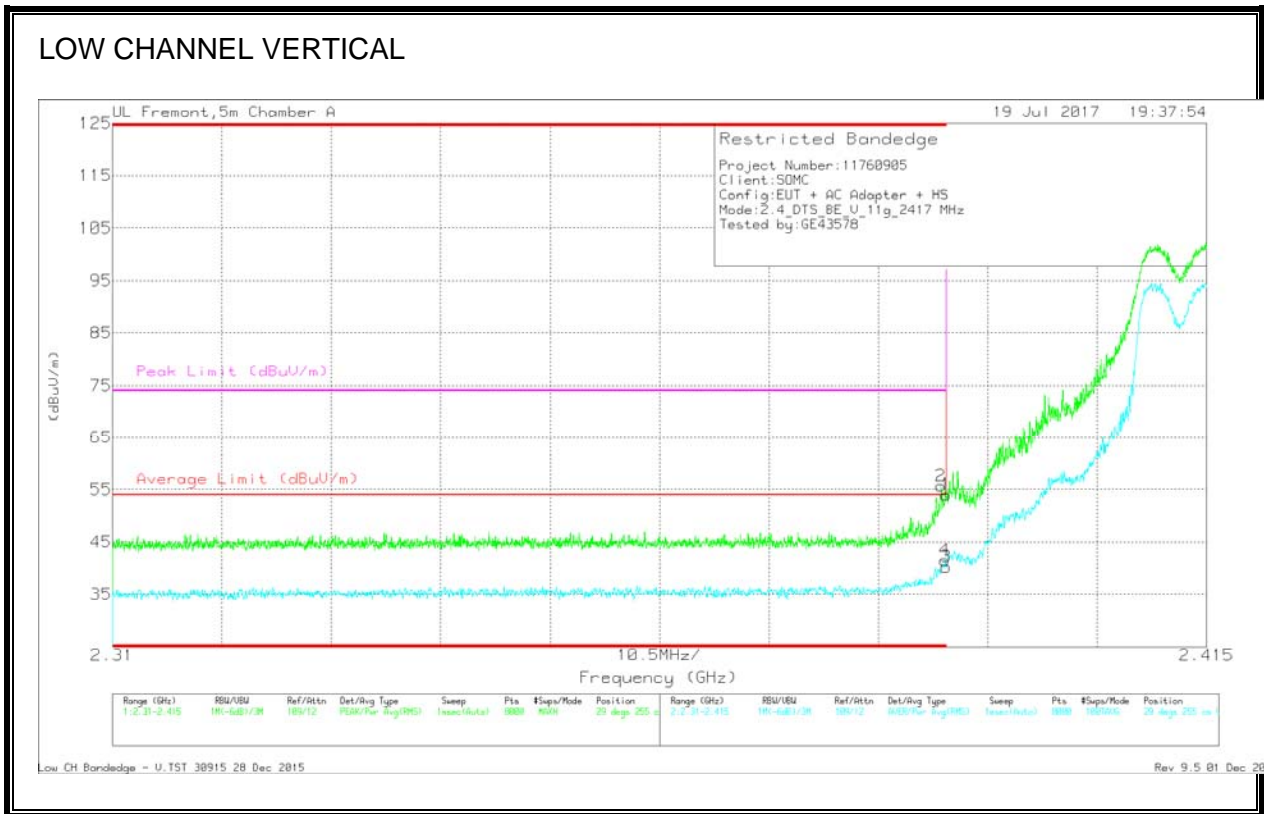

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.47	Pk	31.8	-23.2	0	54.07	-	-	74	-19.93	29	255	V
2	* 2.39	47.05	Pk	31.8	-23.2	0	55.65	-	-	74	-18.35	29	255	V
3	* 2.39	31.44	RMS	31.8	-23.2	.24	40.28	54	-13.72	-	-	29	255	V
4	* 2.39	32.6	RMS	31.8	-23.2	.24	41.44	54	-12.56	-	-	29	255	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 11)

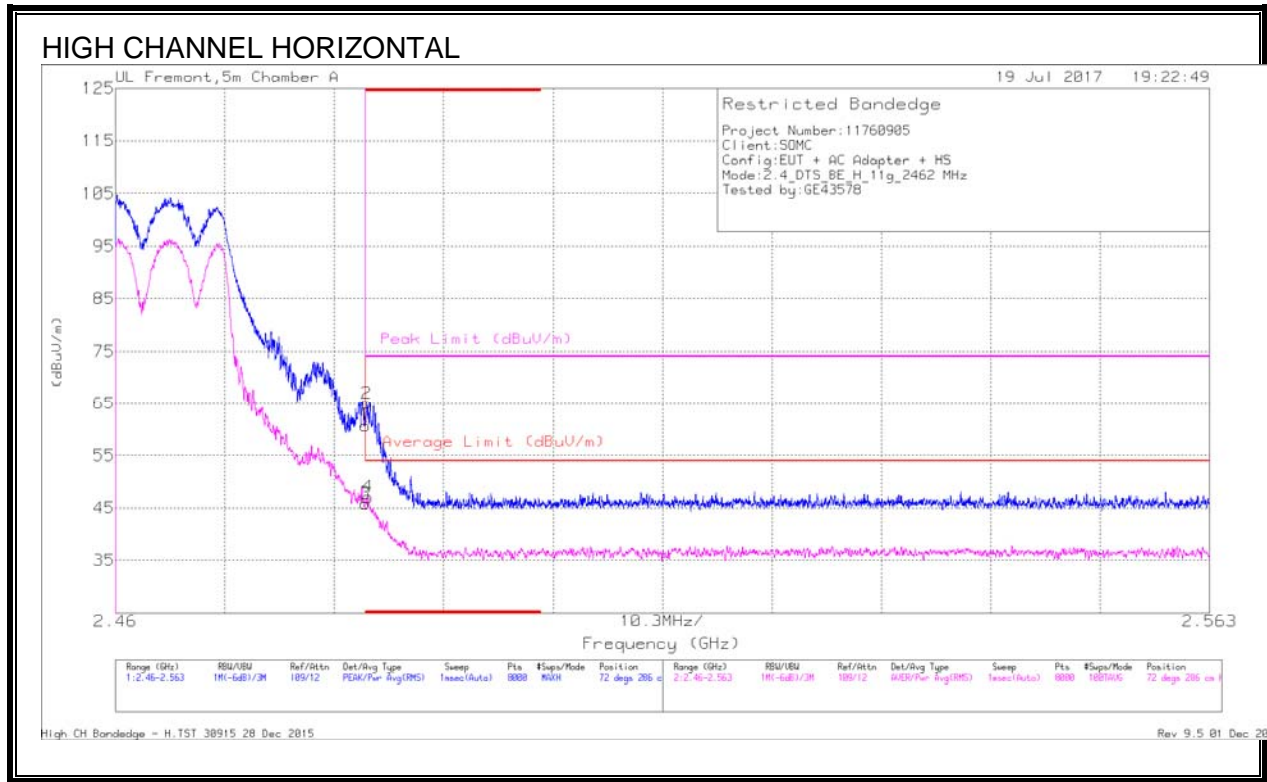


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Af T862 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Admth (Degs)	Height (cm)	Polarity
1	* 2.484	51.49	Pk	32.3	-23.1	0	60.69	-	-	74	-13.31	72	286	H
2	* 2.484	55.88	Pk	32.3	-23.1	0	65.08	-	-	74	-8.92	72	286	H
3	* 2.484	36.4	RMS	32.3	-23.1	.24	45.84	54	-8.16	-	-	72	286	H
4	* 2.484	37.6	RMS	32.3	-23.1	.24	47.04	54	-6.96	-	-	72	286	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

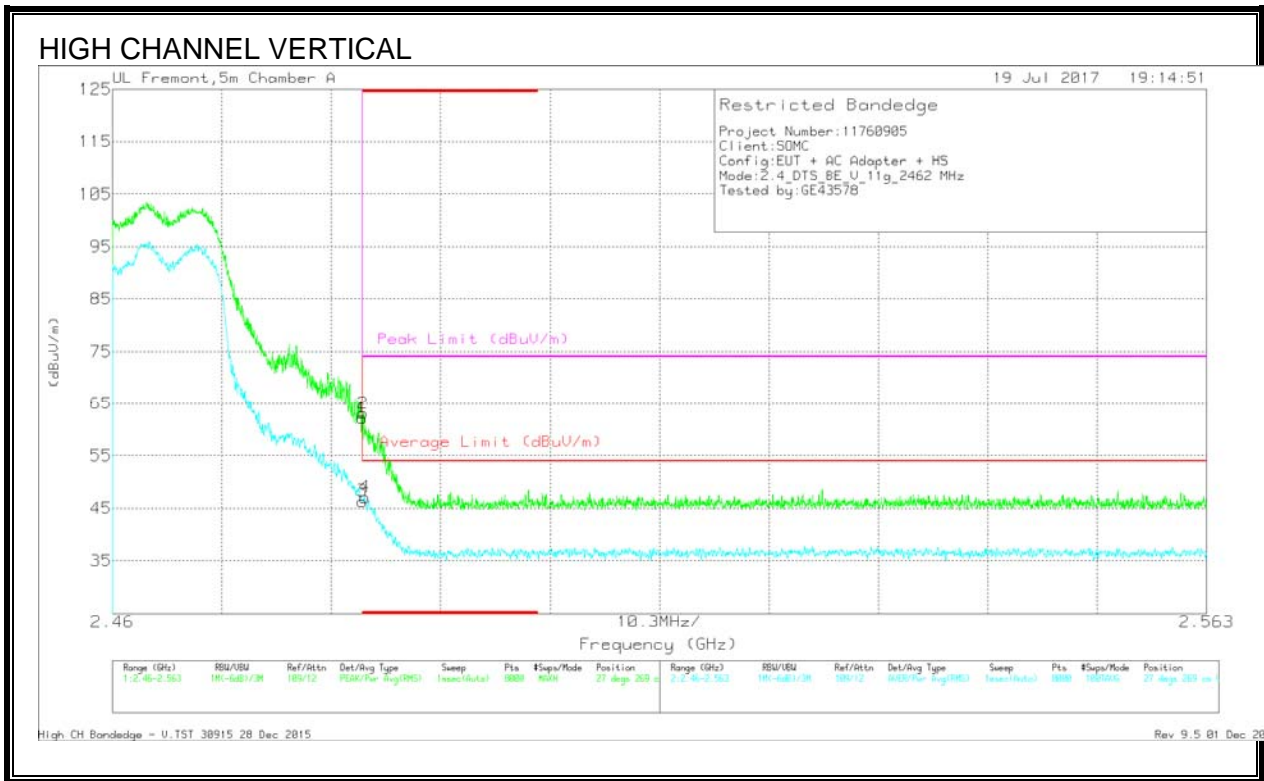

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.05	PK	32.3	-23.1	0	62.25	-	-	74	-11.75	27	269	V
2	* 2.484	53.88	PK	32.3	-23.1	0	63.08	-	-	74	-10.92	27	269	V
3	* 2.484	36.85	RMS	32.3	-23.1	.24	46.29	54	-7.71	-	-	27	269	V
4	* 2.484	37.58	RMS	32.3	-23.1	.24	47.02	54	-6.98	-	-	27	269	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL, CH 12)

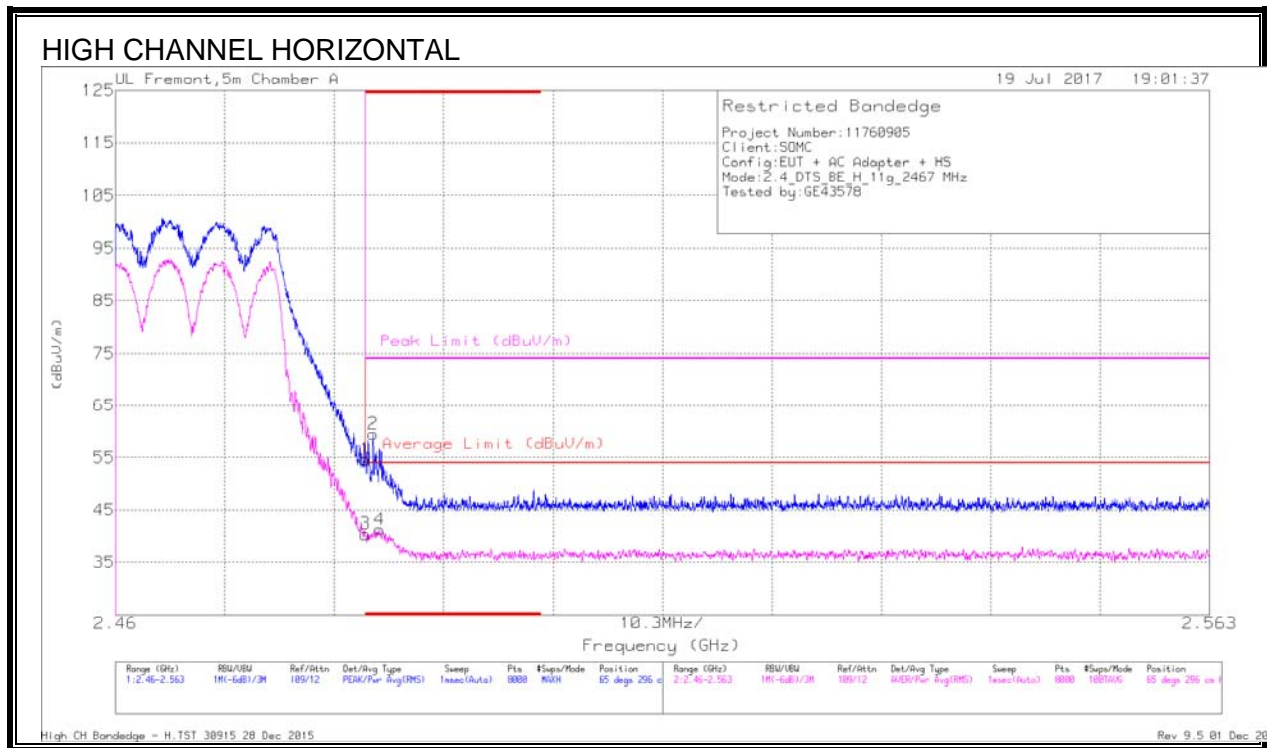


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.47	Pk	32.3	-23.1	0	54.67	-	-	74	-19.33	65	296	H
2	* 2.484	50.28	Pk	32.3	-23.1	0	59.48	-	-	74	-14.52	65	296	H
3	* 2.484	30.98	RMS	32.3	-23.1	.24	40.42	54	-13.58	-	-	65	296	H
4	* 2.485	31.78	RMS	32.3	-23.1	.24	41.22	54	-12.78	-	-	65	296	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

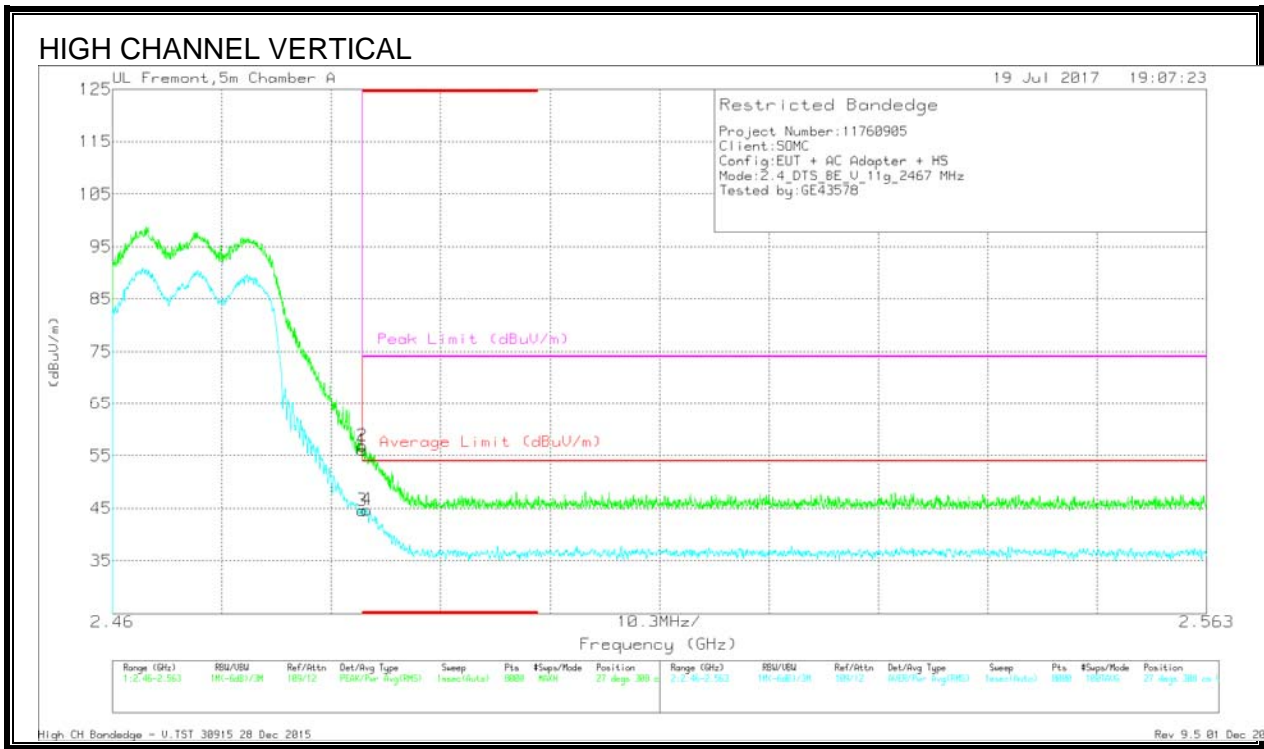

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dB/m)	Amp/Cb/Plr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	46.84	PK	32.3	-23.1	0	56.04	-	-	74	-17.96	27	308	V
2	* 2.484	47.7	PK	32.3	-23.1	0	56.9	-	-	74	-17.1	27	308	V
3	* 2.484	35.17	RMS	32.3	-23.1	.24	44.61	54	-9.39	-	-	27	308	V
4	* 2.484	35.26	RMS	32.3	-23.1	.24	44.7	54	-9.3	-	-	27	308	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL, CH 13)

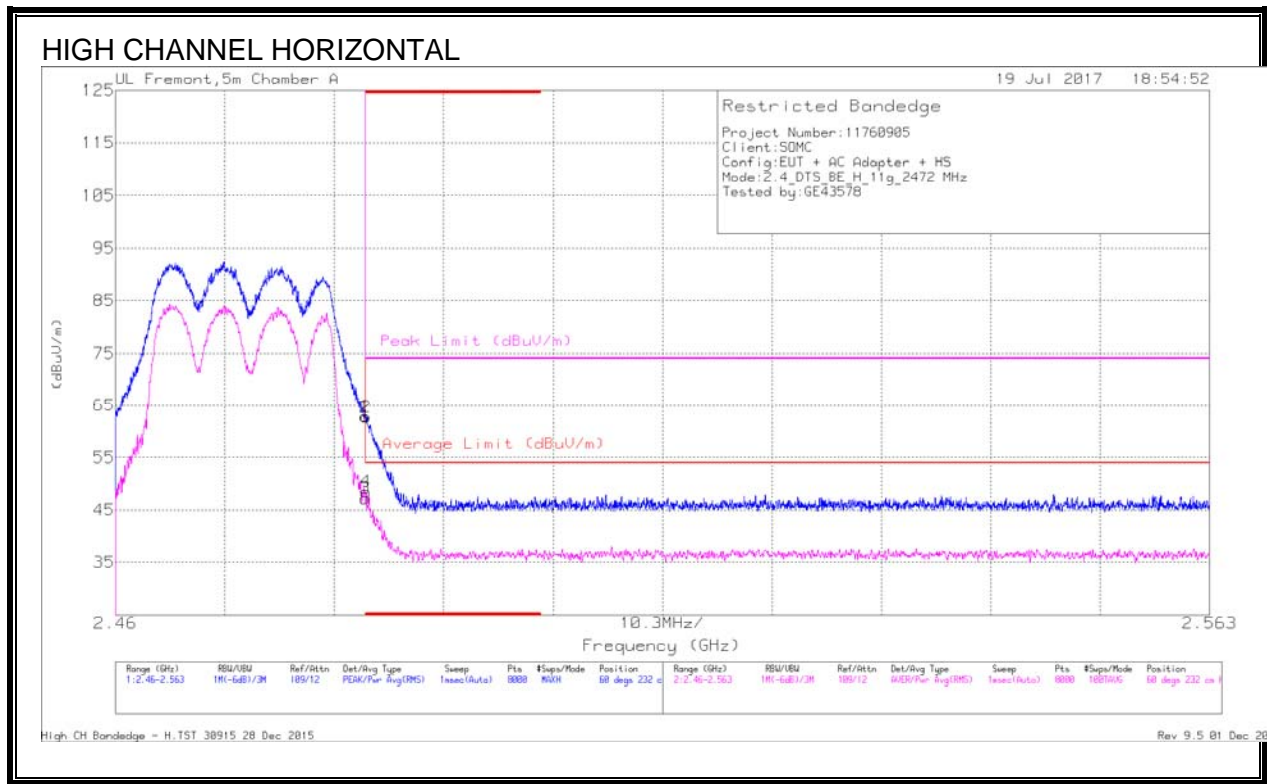


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Af T862 (dB/m)	Amp/Ch/Flr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	53.67	Pk	32.3	-23.1	0	62.87	-	-	74	-11.13	60	232	H
2	* 2.484	53.48	Pk	32.3	-23.1	0	62.68	-	-	74	-11.32	60	232	H
3	* 2.484	37.79	RMS	32.3	-23.1	.24	47.23	54	-6.77	-	-	60	232	H
4	* 2.484	39	RMS	32.3	-23.1	.24	48.44	54	-5.56	-	-	60	232	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

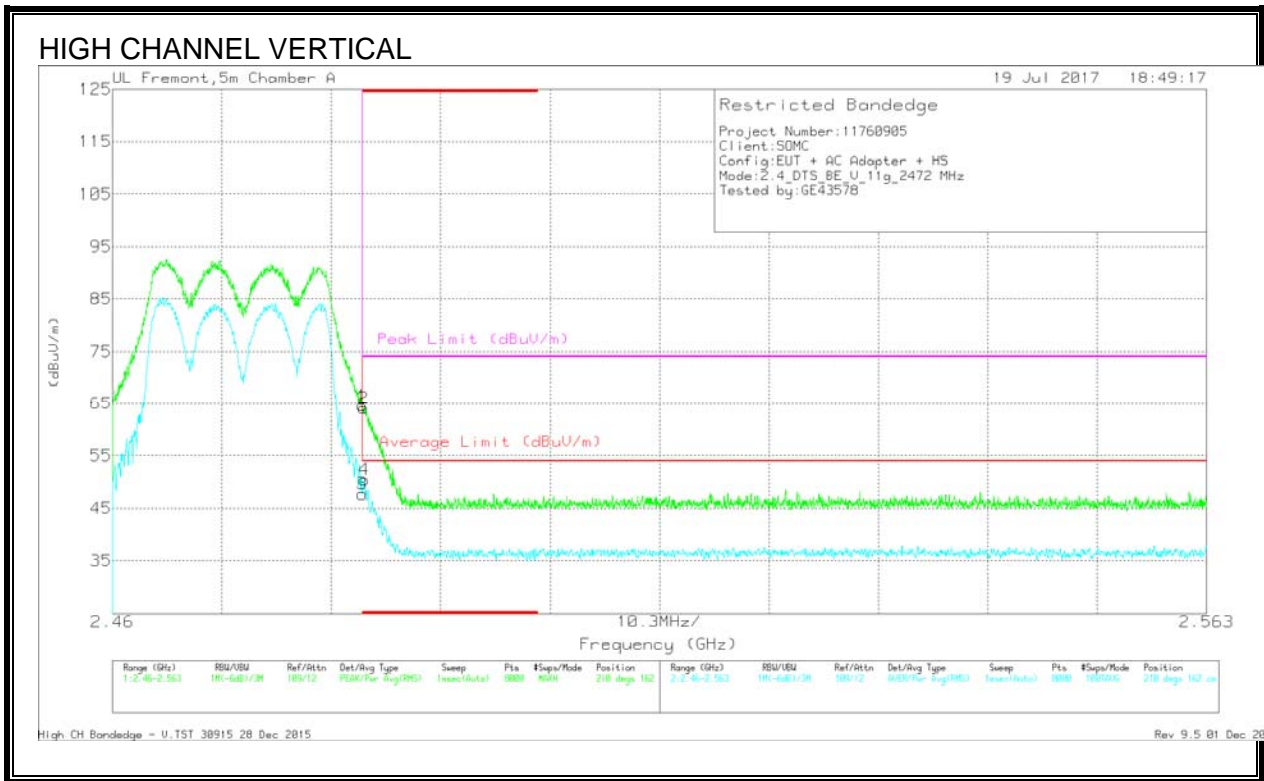

Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.35	Pk	32.3	-23.1	0	64.55	-	-	74	-9.45	210	162	V
2	* 2.484	54.89	Pk	32.3	-23.1	0	64.09	-	-	74	-9.91	210	162	V
3	* 2.484	38.22	RMS	32.3	-23.1	.24	47.66	54	-6.34	-	-	210	162	V
4	* 2.484	40.92	RMS	32.3	-23.1	.24	50.36	54	-3.64	-	-	210	162	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, CH 1)

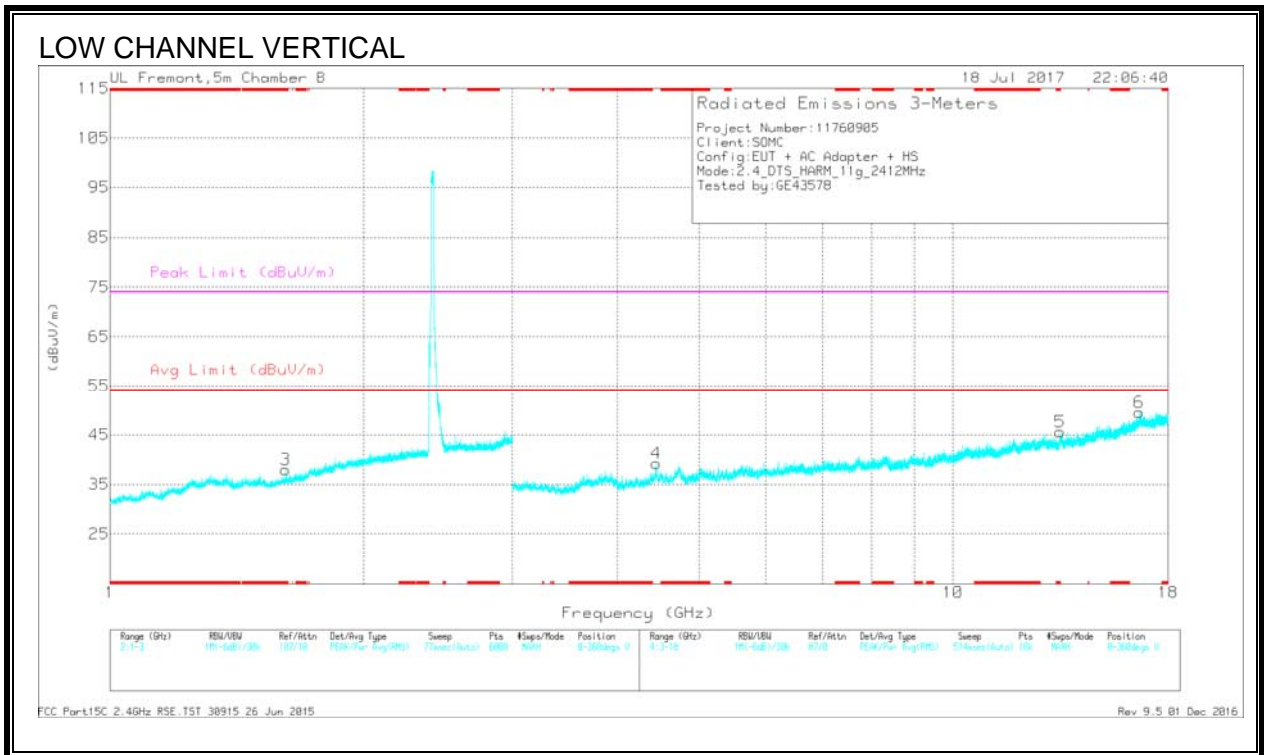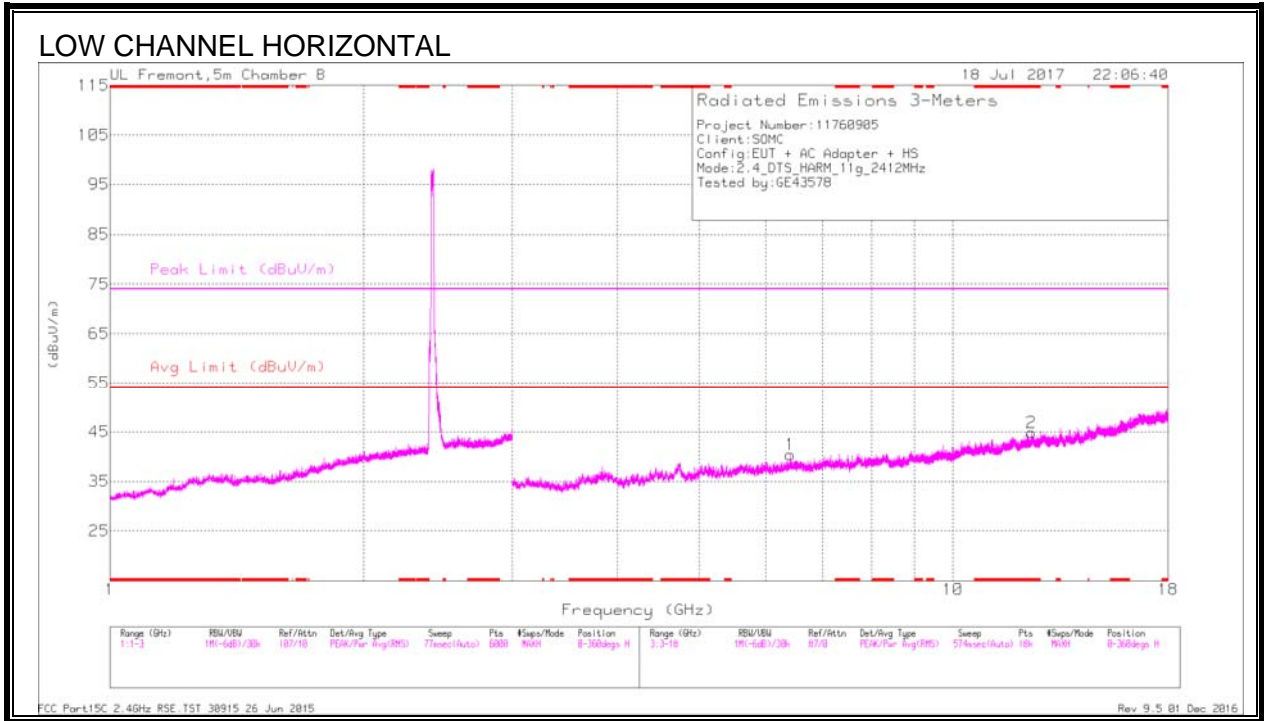

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.617	36	PK2	28.4	-21.4	0	43	-	-	74	-31	171	200	V
* 1.616	23.47	MAv1	28.4	-21.4	.24	30.71	54	-23.29	-	-	171	200	V
* 12.398	33.89	PK2	39	-22.2	0	50.69	-	-	74	-23.31	219	200	H
* 12.398	22.39	MAv1	39	-22.2	.24	39.43	54	-14.57	-	-	219	200	H
* 13.4	33.47	PK2	39.3	-21.3	0	51.47	-	-	74	-22.53	83	200	V
* 13.4	22.03	MAv1	39.3	-21.3	.24	40.27	54	-13.73	-	-	83	200	V
4.447	38.9	PK2	33.8	-28.3	0	44.4	-	-	-	-	145	104	V
6.411	38.84	PK2	35.7	-28.4	0	46.14	-	-	-	-	46	104	H
16.638	31.55	PK2	42.1	-19	0	54.65	-	-	-	-	30	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 6)

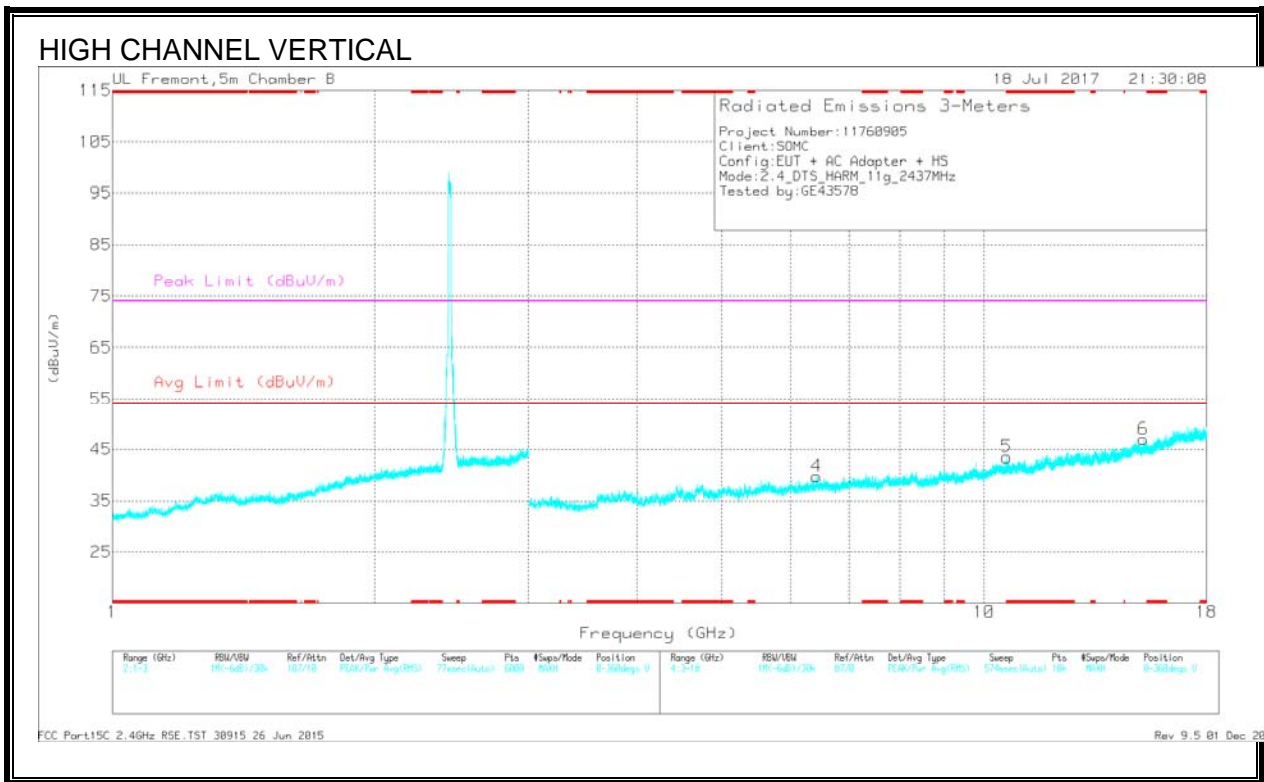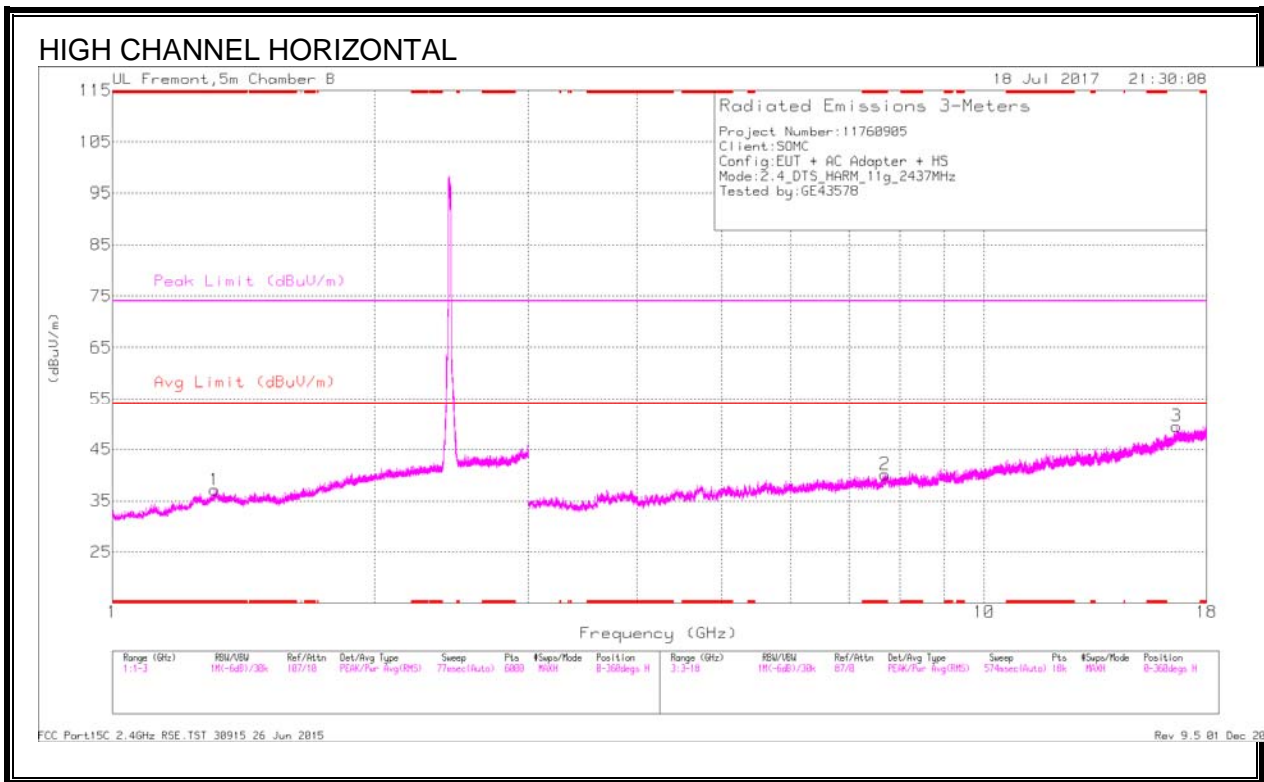

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AFT863 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.31	35.56	PK2	28.9	-21.8	0	42.66	-	-	74	-31.34	24	101	H
* 1.31	23.49	MAv1	28.9	-21.8	.24	30.83	54	-23.17	-	-	24	101	H
* 7.693	36.42	PK2	36	-25.9	0	46.52	-	-	74	-27.48	181	101	H
* 7.694	24.45	MAv1	36	-25.9	.24	34.79	54	-19.21	-	-	181	101	H
* 10.611	34	PK2	37.6	-22.8	0	48.8	-	-	74	-25.2	31	200	V
* 10.61	21.57	MAv1	37.6	-22.8	.24	36.61	54	-17.39	-	-	31	200	V
6.427	37.89	PK2	35.7	-28	0	45.59	-	-	-	-	79	104	V
15.23	31.05	PK2	40.5	-19.9	0	51.65	-	-	-	-	351	104	V
16.634	31.41	PK2	42.1	-18.9	0	54.61	-	-	-	-	227	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 11)

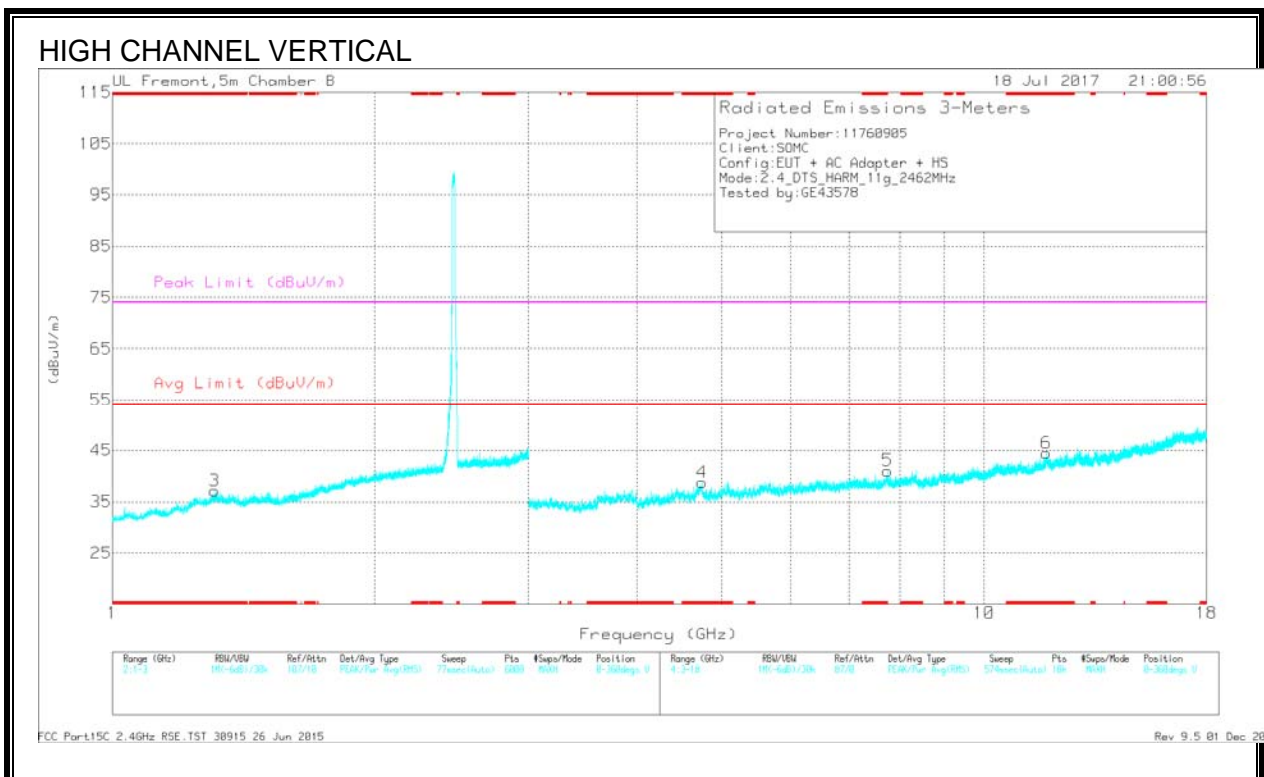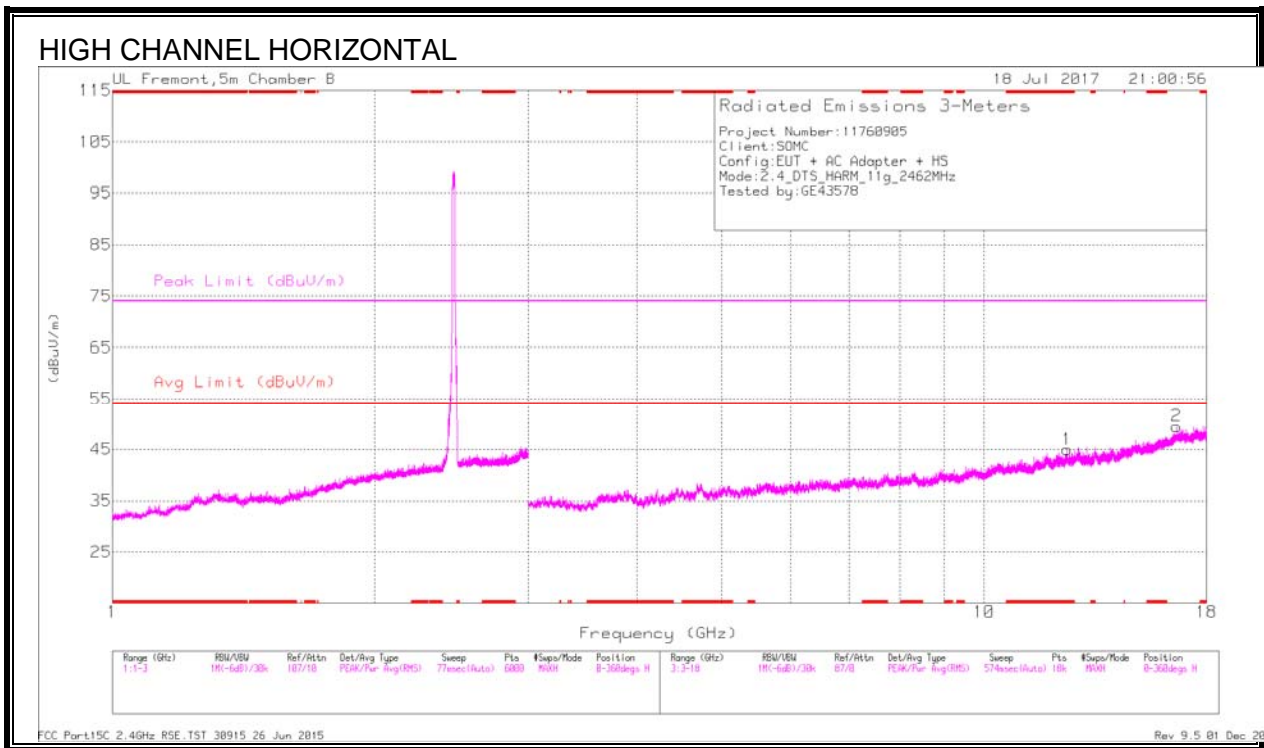

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/Par d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.31	35.36	PK2	28.9	-21.8	0	42.46	-	-	74	-31.54	0	102	V
* 1.31	23.47	MAV1	28.9	-21.8	.24	30.81	54	-23.19	-	-	0	102	V
* 12.464	33.68	PK2	39.1	-22.1	0	50.68	-	-	74	-23.32	301	102	H
* 12.463	21.46	MAV1	39.1	-22.1	.24	38.7	54	-15.3	-	-	301	102	H
* 4.747	39.17	PK2	34.2	-28.4	0	44.97	-	-	74	-29.03	321	199	V
* 4.747	27.39	MAV1	34.2	-28.4	.24	33.43	54	-20.57	-	-	321	199	V
* 11.782	33.48	PK2	38.6	-21.6	0	50.48	-	-	74	-23.52	359	199	V
* 11.782	21.33	MAV1	38.6	-21.7	.24	38.47	54	-15.53	-	-	359	199	V
7.751	36.45	PK2	36	-25.5	0	46.95	-	-	-	-	330	199	V
16.631	31.4	PK2	42.1	-18.6	0	54.9	-	-	-	-	97	199	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

10.2.3 11n-HT20 MIMO MODE IN THE 2.4GHz BAND

AUTHORIZED BANDEDGE (LOW CHANNEL, CH 1)

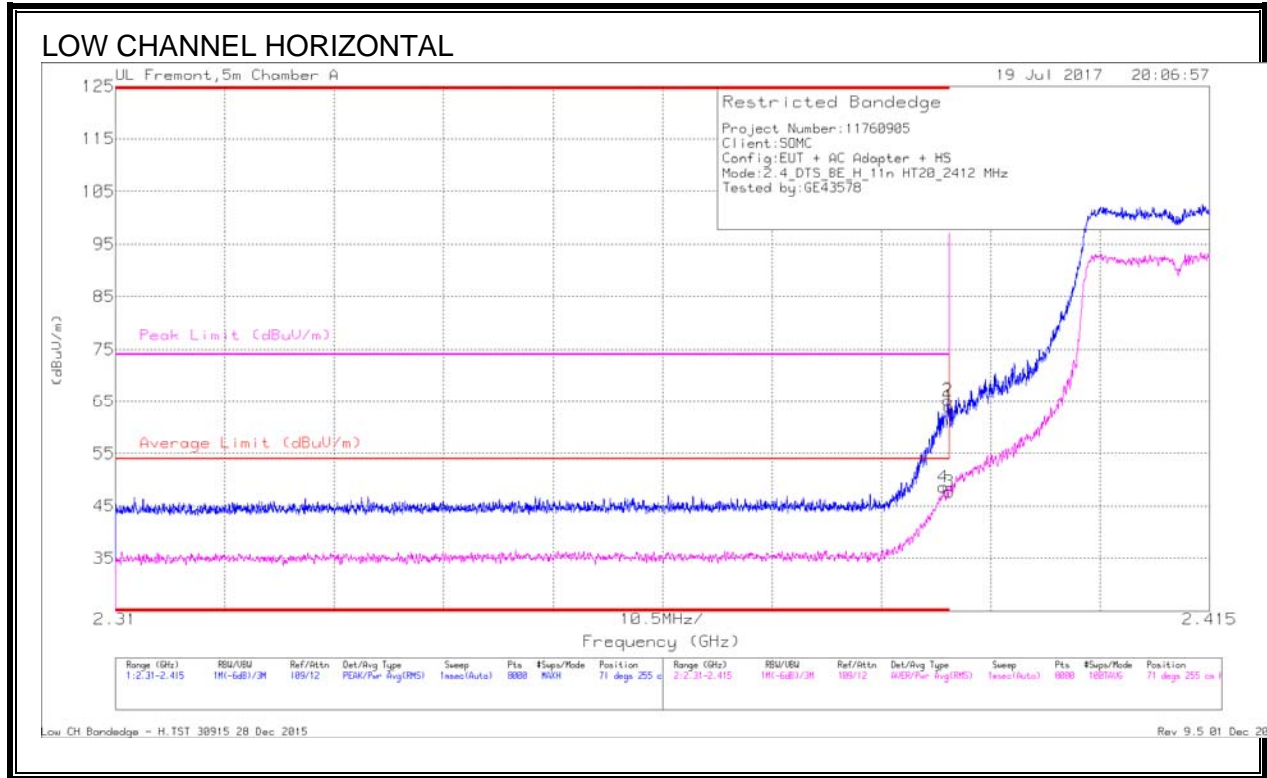


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Y862 (dB/m)	Amp/CB/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4	* 2.389	39.76	RMS	31.8	-23.2	.2	48.56	54	-5.44	-	-	71	255	H
1	* 2.39	55.41	Pk	31.8	-23.2	0	64.01	-	-	74	-9.99	71	255	H
2	* 2.39	56.65	Pk	31.8	-23.2	0	65.25	-	-	74	-8.75	71	255	H
3	* 2.39	38.88	RMS	31.8	-23.2	.2	47.68	54	-6.32	-	-	71	255	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

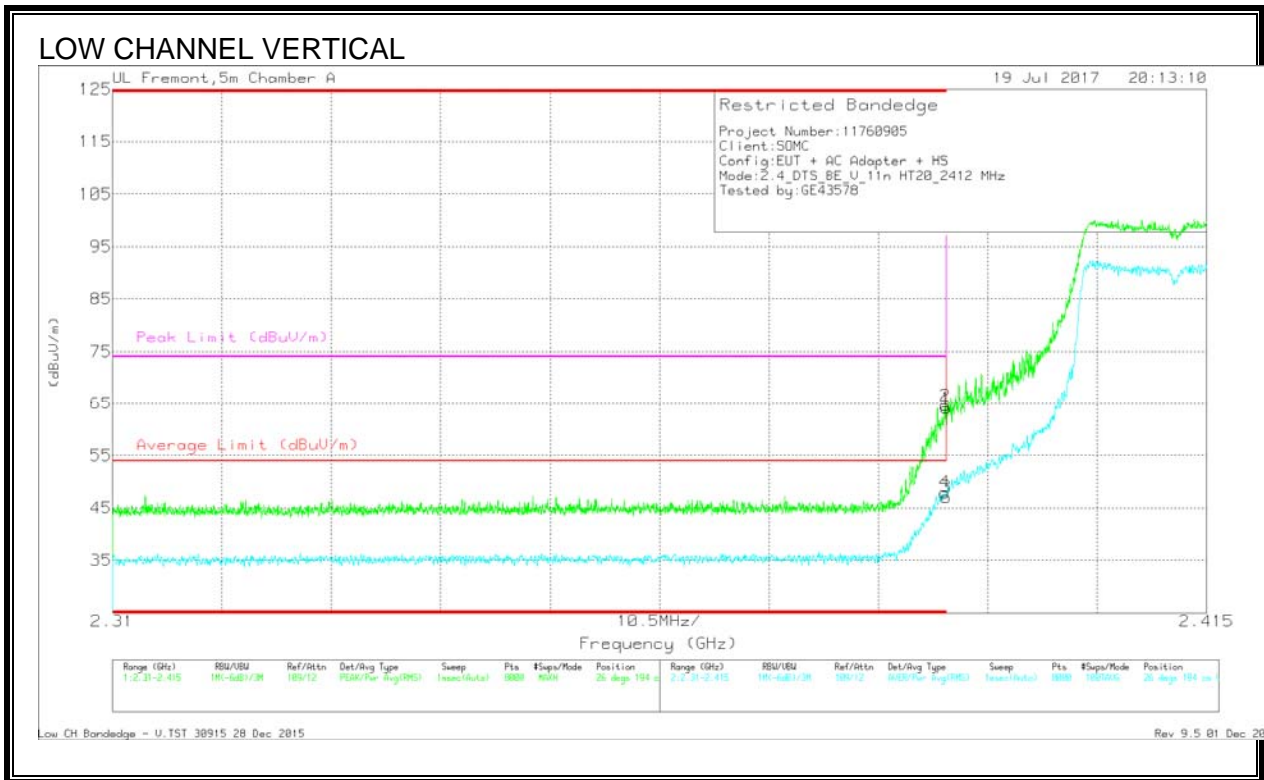

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.46	Pk	31.8	-23.2	0	64.06	-	-	74	-9.94	26	194	V
2	* 2.39	55.92	Pk	31.8	-23.2	0	64.52	-	-	74	-9.48	26	194	V
3	* 2.39	38.26	RMS	31.8	-23.2	.2	47.06	54	-6.94	-	-	26	194	V
4	* 2.39	39.16	RMS	31.8	-23.2	.2	47.96	54	-6.04	-	-	26	194	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEGE (LOW CHANNEL, CH 2)

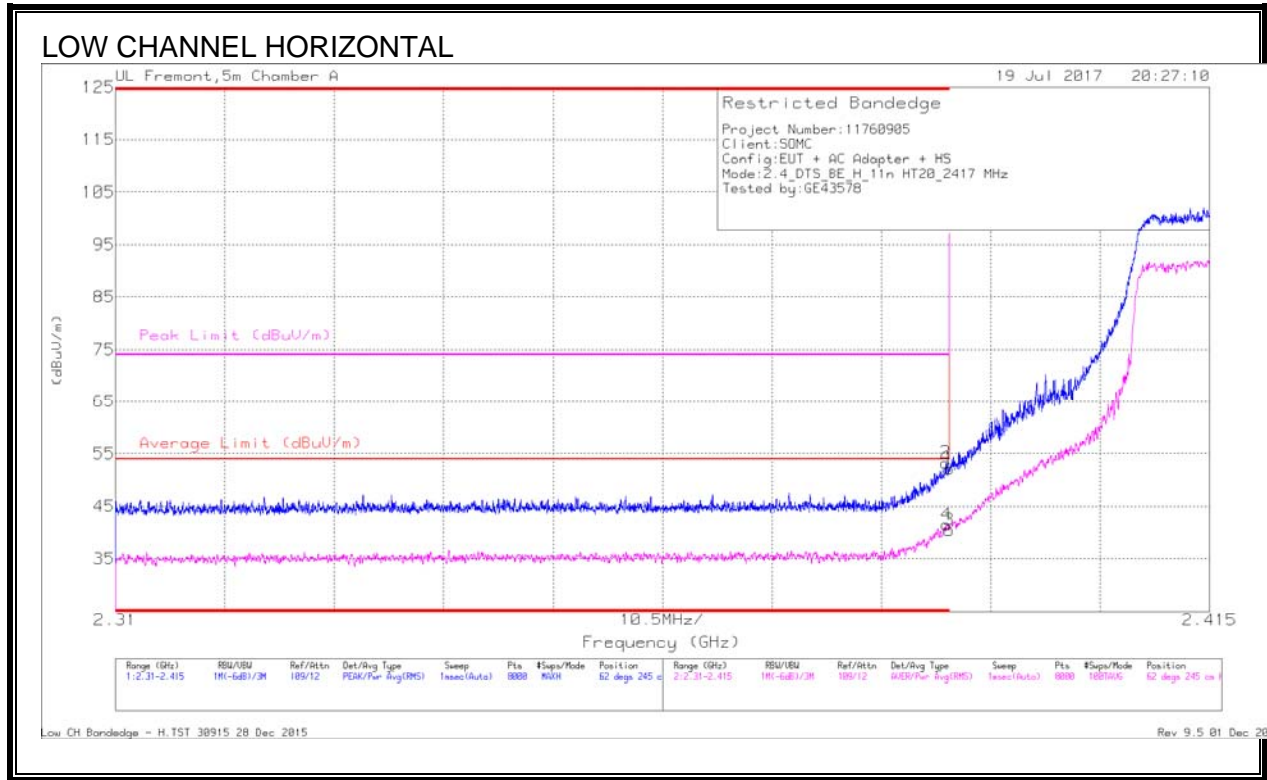


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.53	PK	31.8	-23.2	0	52.13	-	-	74	-21.87	62	245	H
2	* 2.39	44.65	PK	31.8	-23.2	0	53.25	-	-	74	-20.75	62	245	H
3	* 2.39	31.71	RMS	31.8	-23.2	.2	40.51	54	-13.49	-	-	62	245	H
4	* 2.39	32.73	RMS	31.8	-23.2	.2	41.53	54	-12.47	-	-	62	245	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

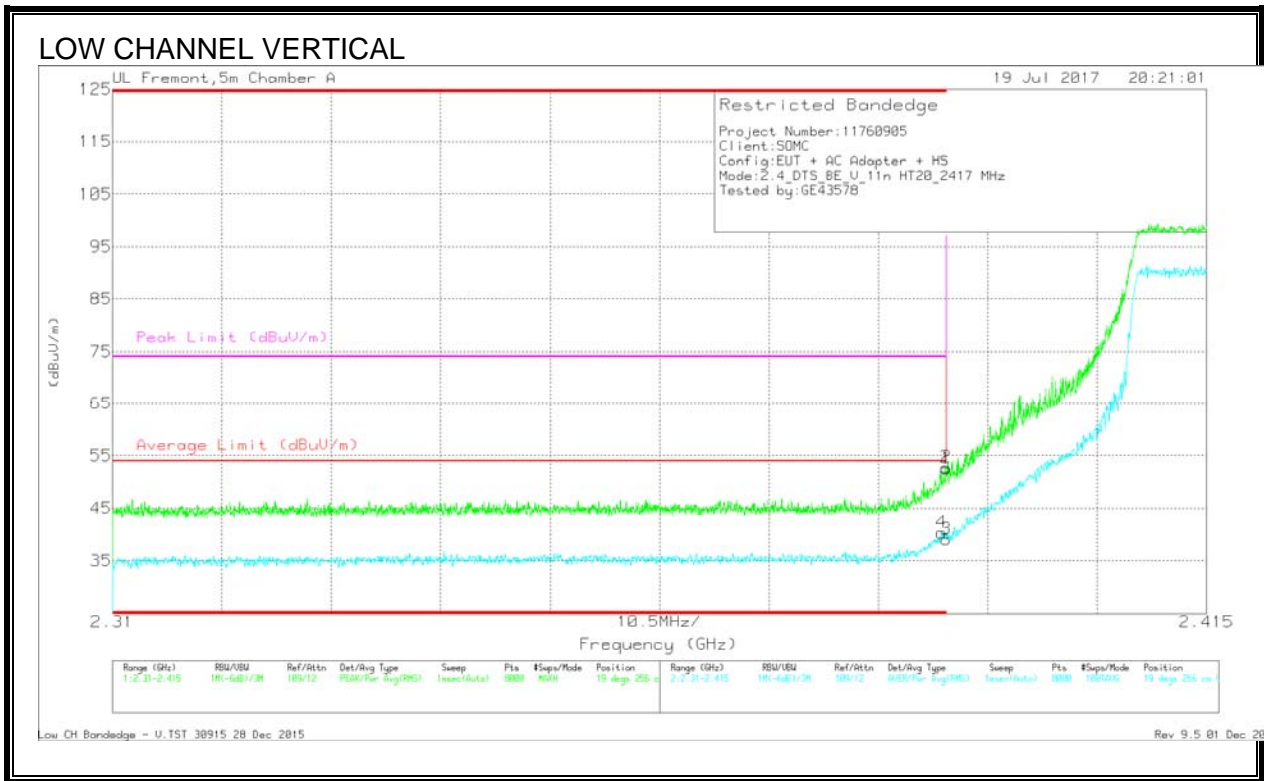

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.88	PK	31.8	-23.2	0	52.48	-	-	74	-21.52	19	256	V
2	* 2.39	44.16	PK	31.8	-23.2	0	52.76	-	-	74	-21.24	19	256	V
3	* 2.39	30.36	RMS	31.8	-23.2	.2	39.16	54	-14.84	-	-	19	256	V
4	* 2.39	31.54	RMS	31.8	-23.2	.2	40.34	54	-13.66	-	-	19	256	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL, CH 11)

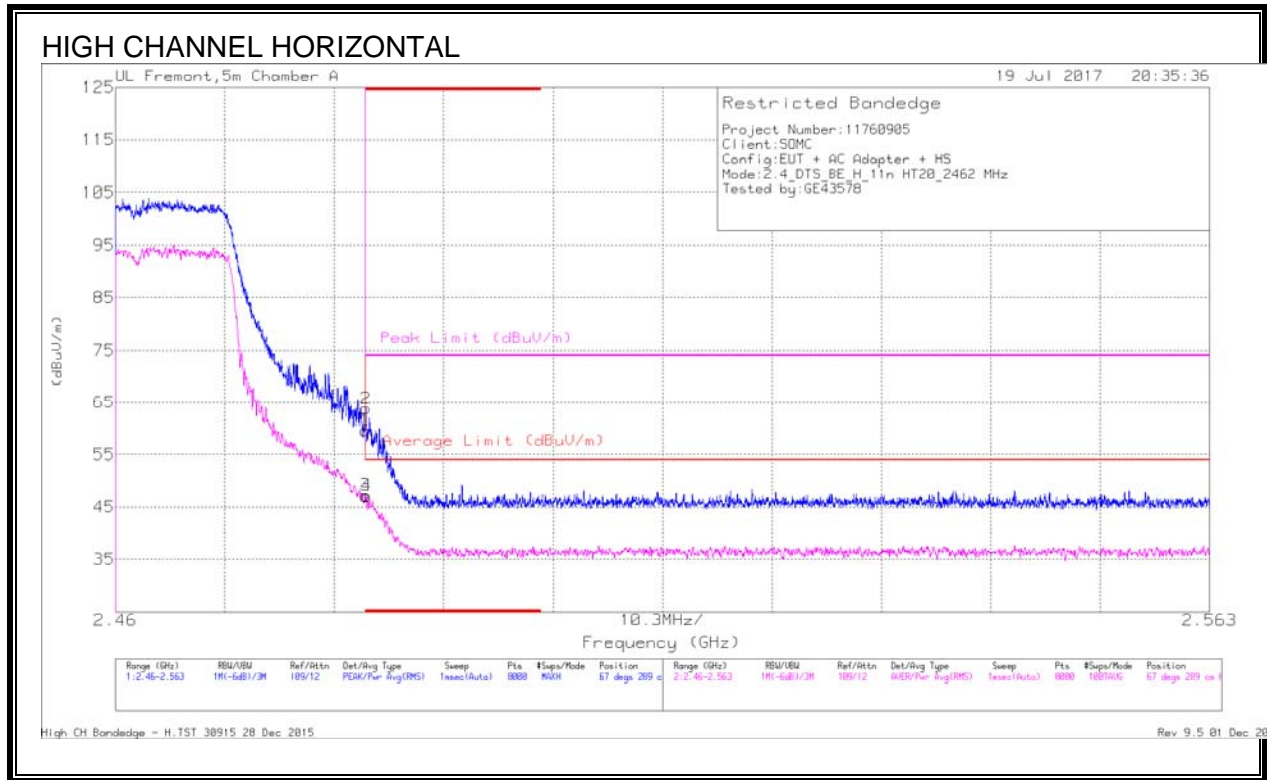


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Af T862 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.43	PK	32.3	-23.1	0	59.63	-	-	74	-14.37	67	289	H
2	* 2.484	54.61	PK	32.3	-23.1	0	63.81	-	-	74	-10.19	67	289	H
3	* 2.484	37.77	RMS	32.3	-23.1	.2	47.17	54	-6.83	-	-	67	289	H
4	* 2.484	37.68	RMS	32.3	-23.1	.2	47.08	54	-6.92	-	-	67	289	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

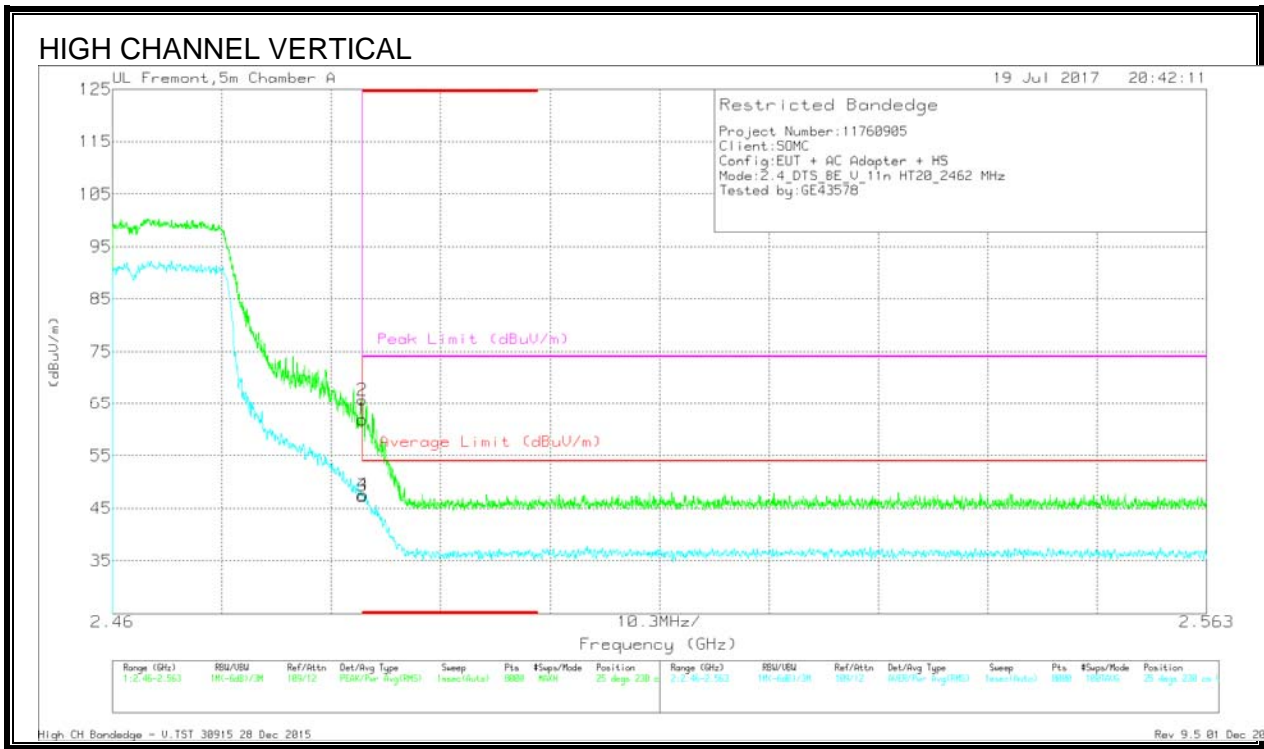

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dB/m)	Amp/Ch/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.69	PK	32.3	-23.1	0	61.89	-	-	74	-12.11	25	230	V
2	* 2.484	56.46	PK	32.3	-23.1	0	65.66	-	-	74	-8.34	25	230	V
3	* 2.484	37.83	RMS	32.3	-23.1	.2	47.23	54	-6.77	-	-	25	230	V
4	* 2.484	38.17	RMS	32.3	-23.1	.2	47.57	54	-6.43	-	-	25	230	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 12)

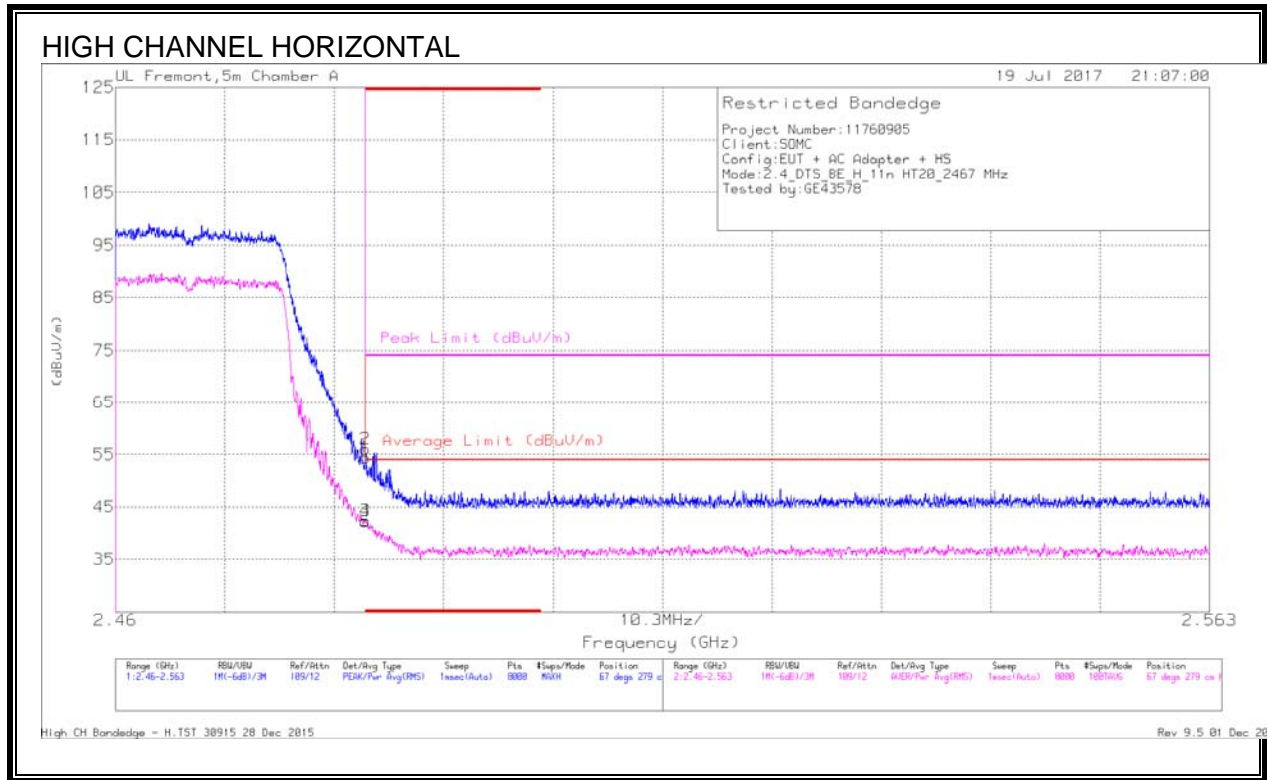


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Af T862 (dB/m)	Amp/Ch/Flr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.18	Pk	32.3	-23.1	0	54.38	-	-	74	-19.62	67	279	H
2	* 2.484	46.84	Pk	32.3	-23.1	0	56.04	-	-	74	-17.96	67	279	H
3	* 2.484	32.89	RMS	32.3	-23.1	.2	42.29	54	-11.71	-	-	67	279	H
4	* 2.484	32.79	RMS	32.3	-23.1	.2	42.19	54	-11.81	-	-	67	279	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

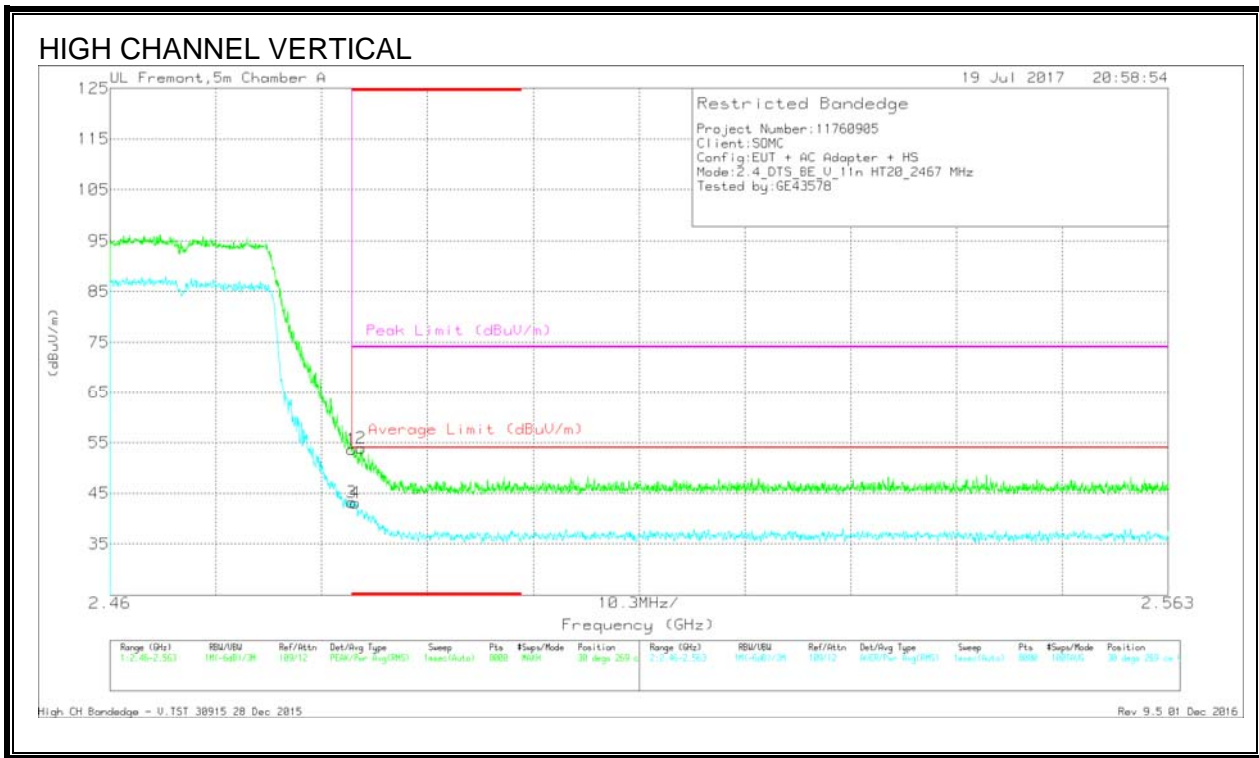

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF TBEZ (dB/m)	Amp/Chl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.49	Pk	32.3	-23.1	0	53.69	-	-	74	-20.31	30	269	V
2	* 2.484	44.74	Pk	32.3	-23.1	0	53.94	-	-	74	-20.06	30	269	V
3	* 2.484	33.77	RMS	32.3	-23.1	.2	43.17	54	-10.83	-	-	30	269	V
4	* 2.484	33.71	RMS	32.3	-23.1	.2	43.11	54	-10.89	-	-	30	269	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL, CH 13)

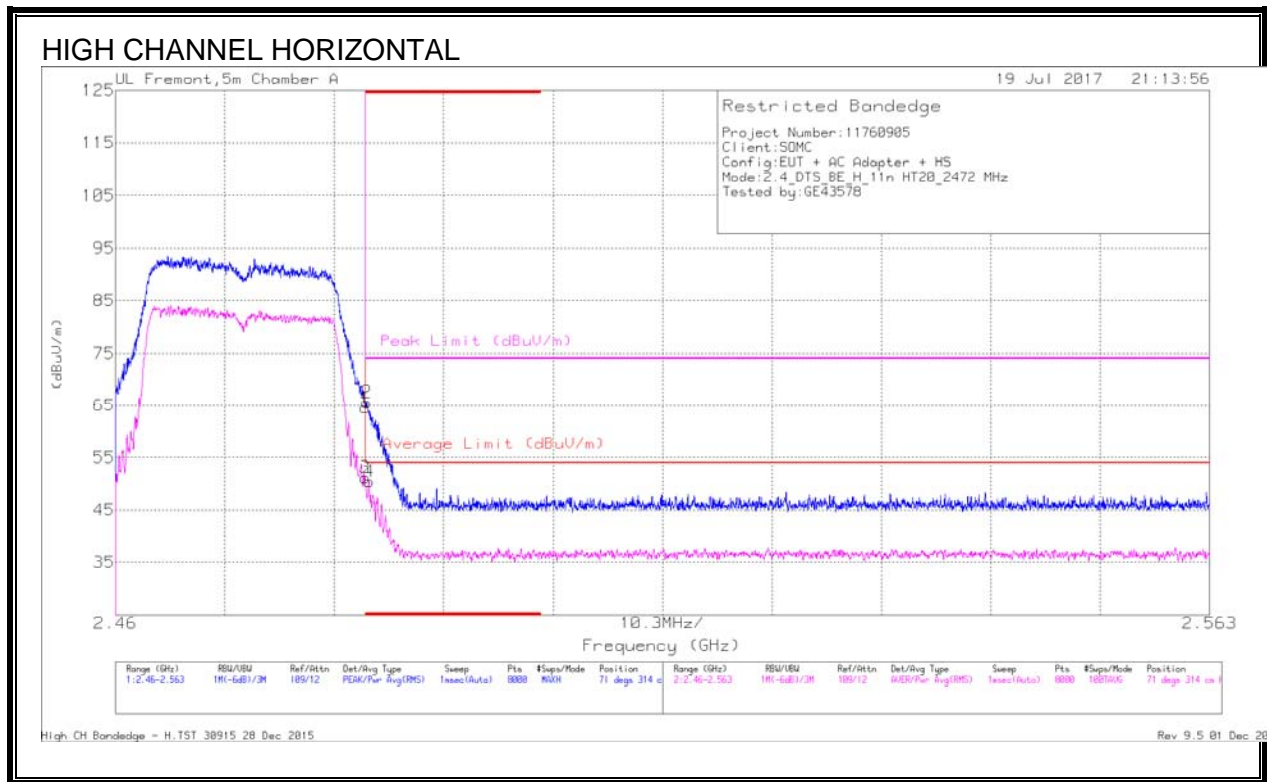


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ch/Flt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	55.36	Pk	32.3	-23.1	0	64.56	-	-	74	-9.44	71	314	H
2	* 2.484	56.42	Pk	32.3	-23.1	0	65.62	-	-	74	-8.38	71	314	H
3	* 2.484	41.72	RMS	32.3	-23.1	.2	51.12	54	-2.88	-	-	71	314	H
4	* 2.484	41.05	RMS	32.3	-23.1	.2	50.45	54	-3.55	-	-	71	314	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

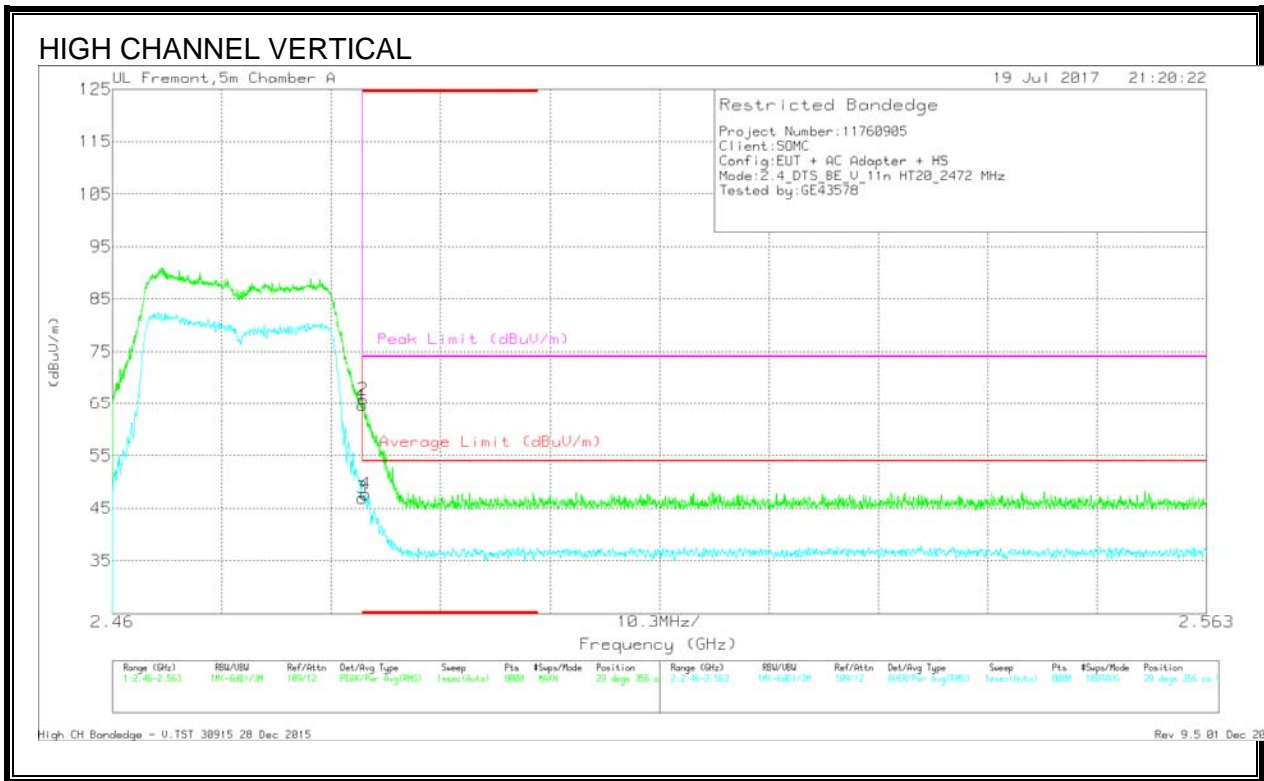

Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.33	PK	32.3	-23.1	0	64.53	-	-	74	-9.47	29	356	V
2	* 2.484	56.6	PK	32.3	-23.1	0	65.8	-	-	74	-8.2	29	356	V
3	* 2.484	37.52	RMS	32.3	-23.1	.2	46.92	54	-7.08	-	-	29	356	V
4	* 2.484	38.33	RMS	32.3	-23.1	.2	47.73	54	-6.27	-	-	29	356	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, CH 1)

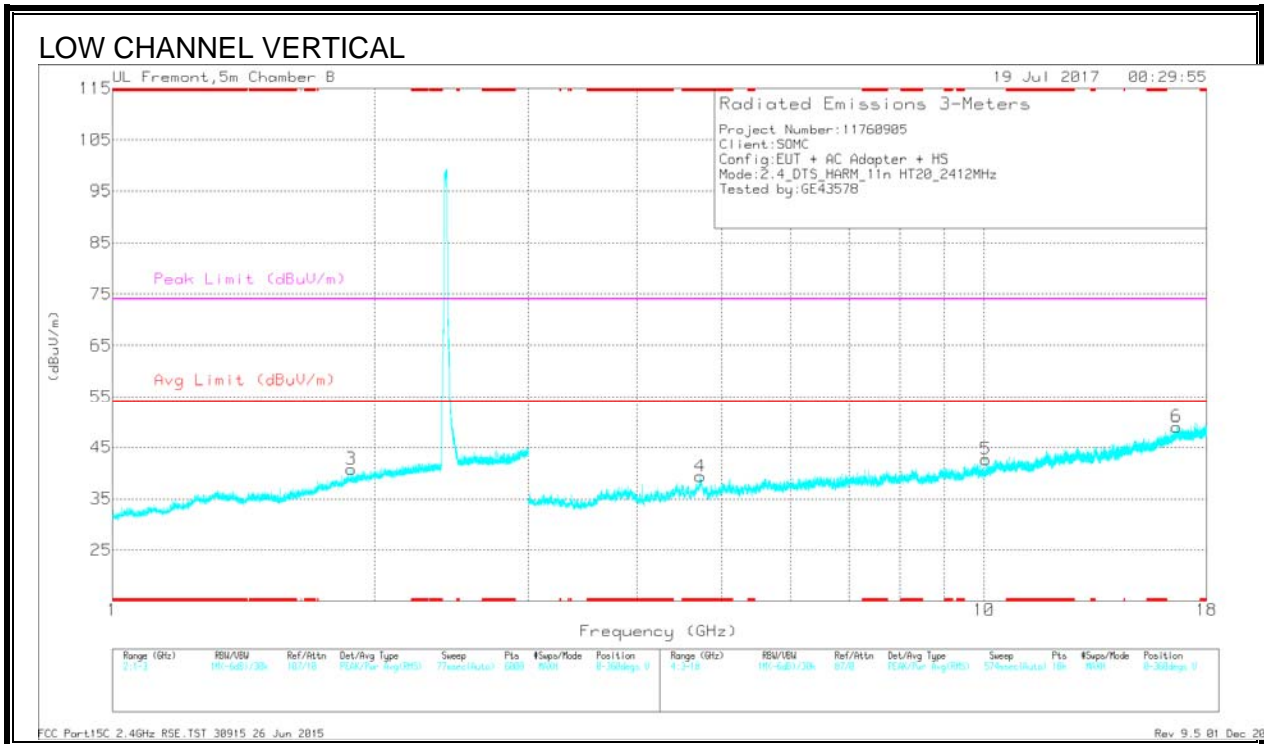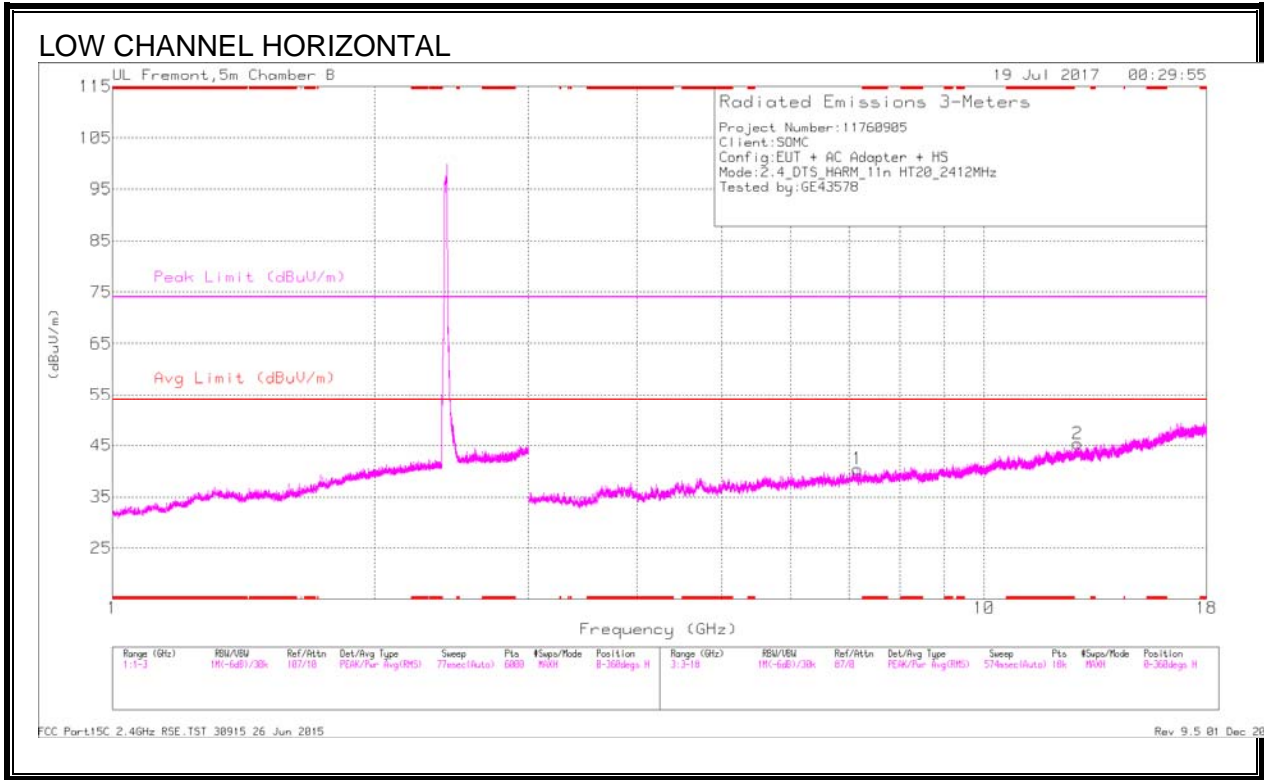

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AFT863 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.726	40.4	PK2	34.2	-28.6	0	46	-	-	74	-28	55	104	V
* 4.727	28.52	MAv1	34.2	-28.6	.2	34.32	54	-19.68	-	-	55	104	V
1.88	35.45	PK2	30.9	-21	0	45.35	-	-	-	-	151	200	V
7.163	36.42	PK2	35.9	-26.1	0	46.22	-	-	-	-	104	104	H
10.042	33.66	PK2	37.2	-23.8	0	47.06	-	-	-	-	199	200	V
12.813	32.88	PK2	39.4	-21.4	0	50.88	-	-	-	-	34	199	H
16.634	31.8	PK2	42.1	-18.9	0	55	-	-	-	-	310	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 6)

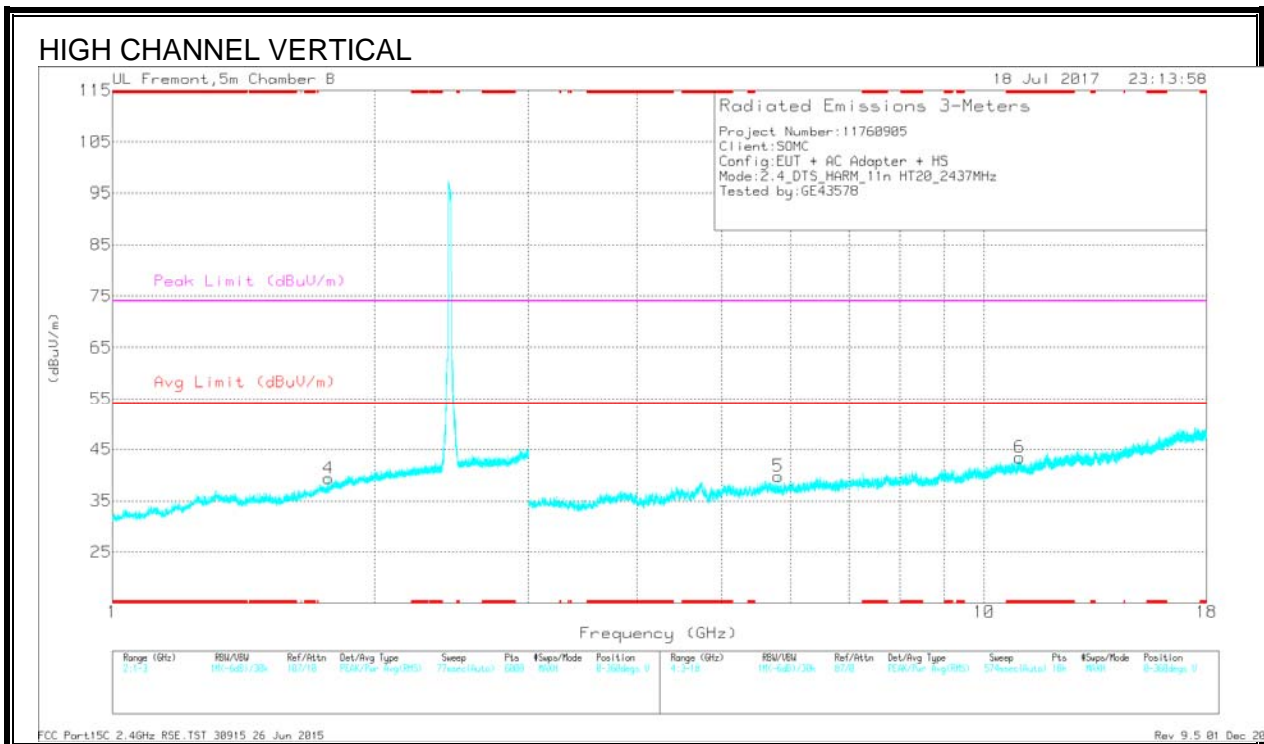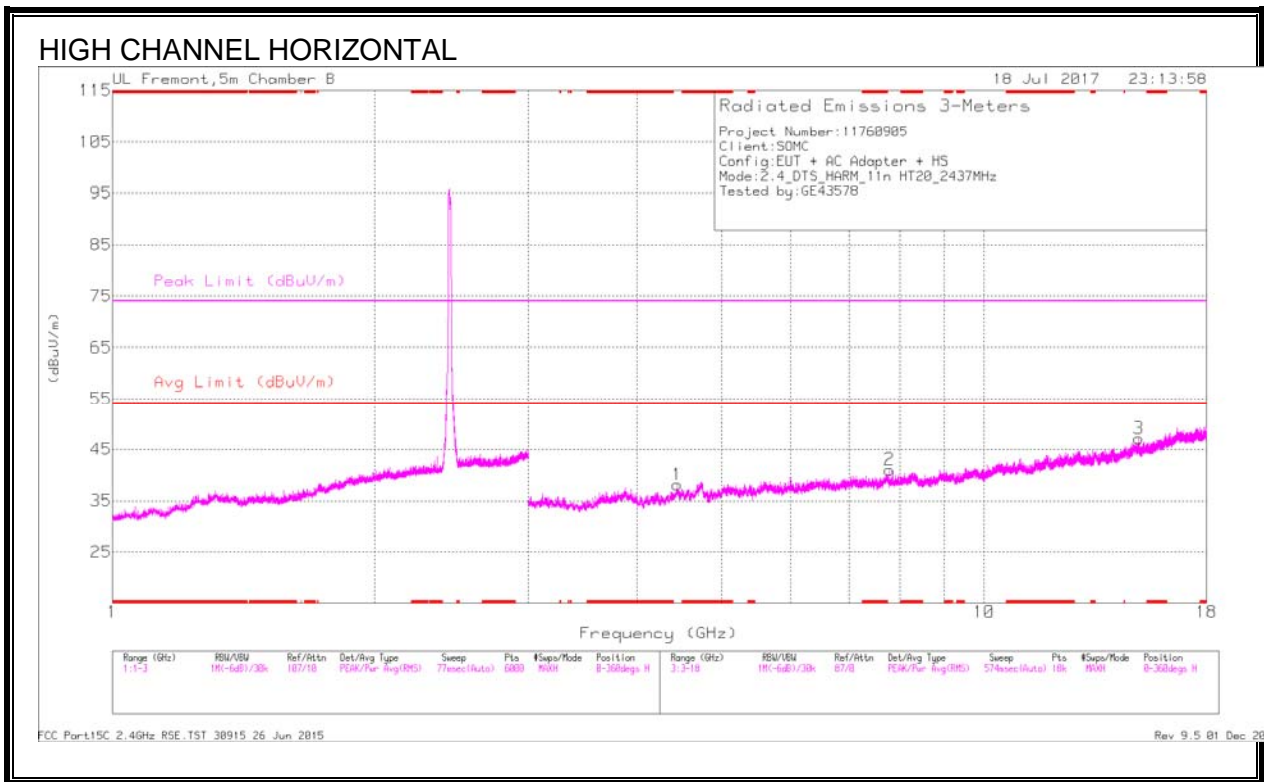

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AFT863 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 10.988	33.66	PK2	37.7	-22.4	0	48.96	-	-	74	-25.04	325	198	V
* 10.988	22.39	MAv1	37.7	-22.4	.2	37.89	54	-16.11	-	-	325	198	V
1.768	35.31	PK2	29.9	-21.1	0	44.11	-	-	-	-	147	101	V
4.444	38.51	PK2	33.8	-28.2	0	44.11	-	-	-	-	197	198	H
5.809	38.7	PK2	35	-29.4	0	44.3	-	-	-	-	285	198	V
7.786	35.63	PK2	36	-25.7	0	45.93	-	-	-	-	281	198	H
15.049	31.73	PK2	40.5	-20.4	0	51.83	-	-	-	-	254	198	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 11)

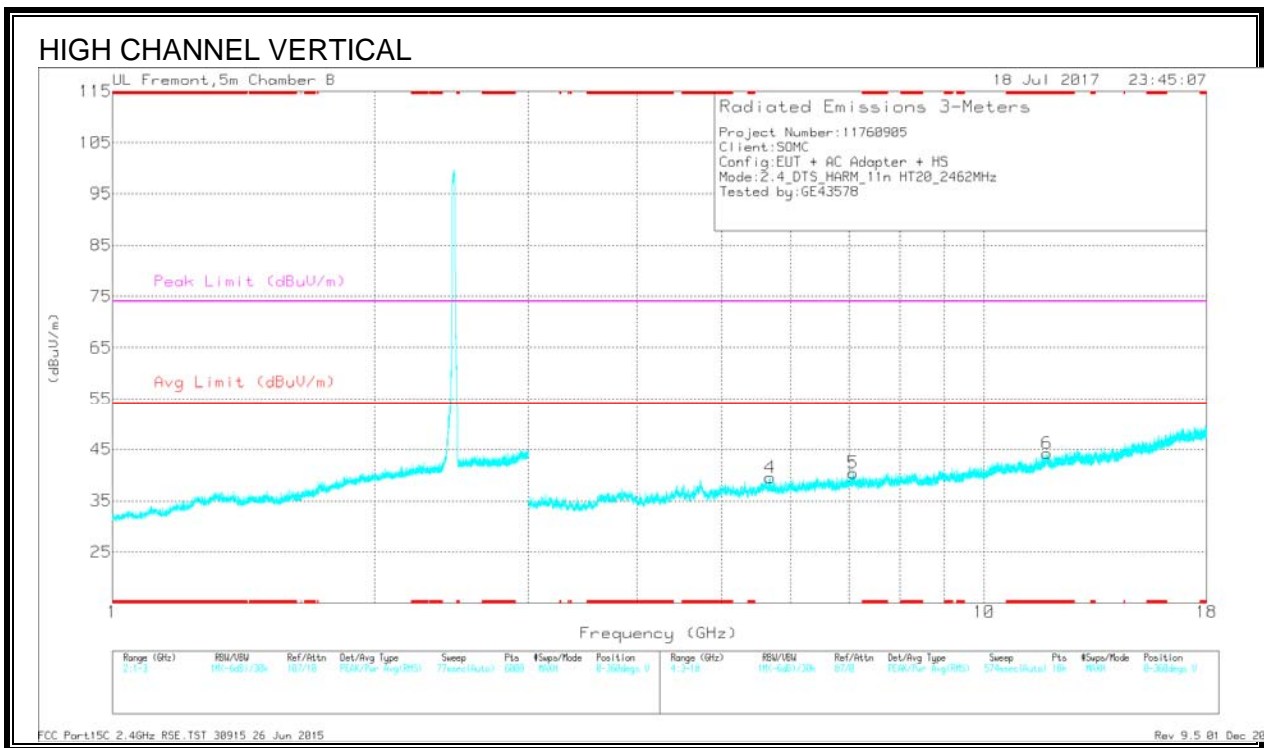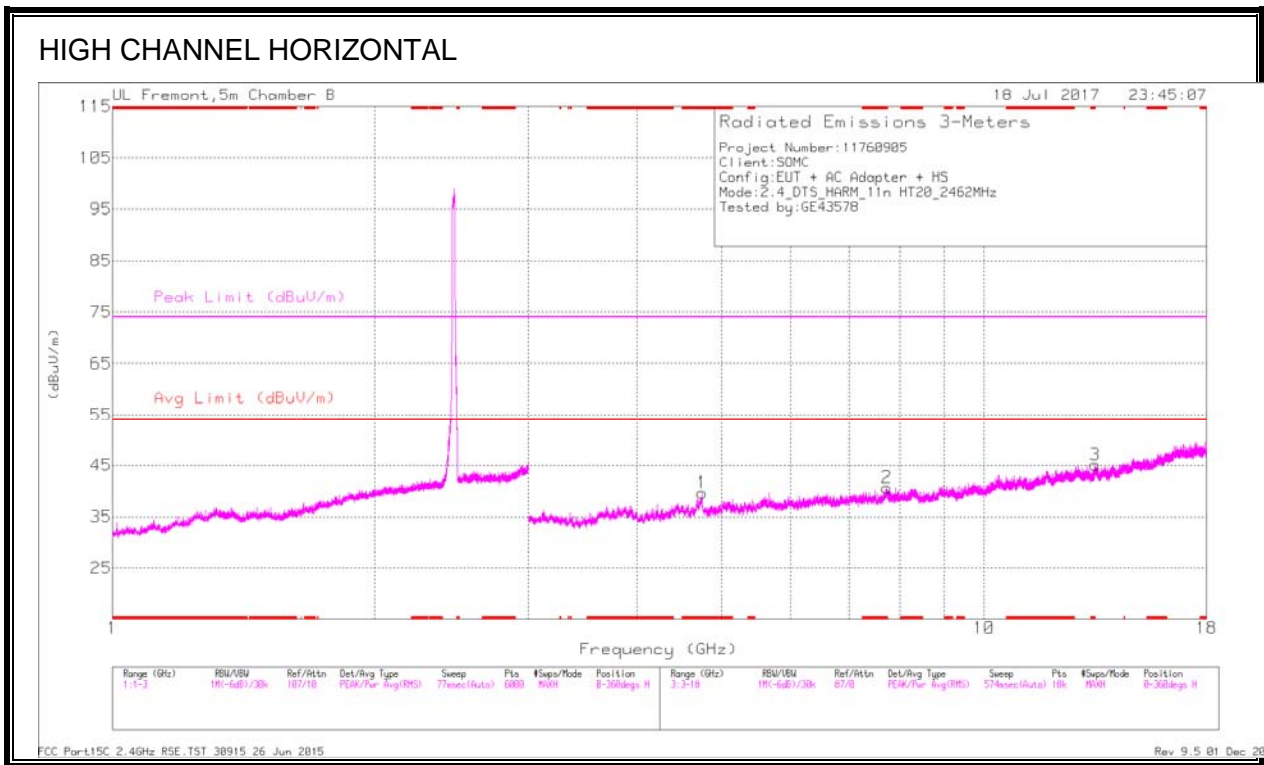

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AFT863 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.747	40.06	PK2	34.2	-28.4	0	45.86	-	-	74	-28.14	245	199	H
* 4.748	27.65	MAv1	34.2	-28.5	.2	33.55	54	-20.45	-	-	245	199	H
* 7.737	35.97	PK2	36	-24.9	0	47.07	-	-	74	-26.93	22	199	H
* 7.738	23.87	MAv1	36	-25	.2	35.07	54	-18.93	-	-	22	199	H
* 11.811	33.48	PK2	38.6	-21.6	0	50.48	-	-	74	-23.52	261	200	V
* 11.811	21.38	MAv1	38.6	-21.6	.2	38.58	54	-15.42	-	-	261	200	V
5.682	39.05	PK2	35.1	-28	0	46.15	-	-	-	-	92	104	V
7.075	37.44	PK2	35.9	-26.7	0	46.64	-	-	-	-	328	104	V
13.404	32.69	PK2	39.3	-21.3	0	50.69	-	-	-	-	263	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.3 WORST-CASE BELOW 30 MHz

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL AND VERTICAL PLOTS

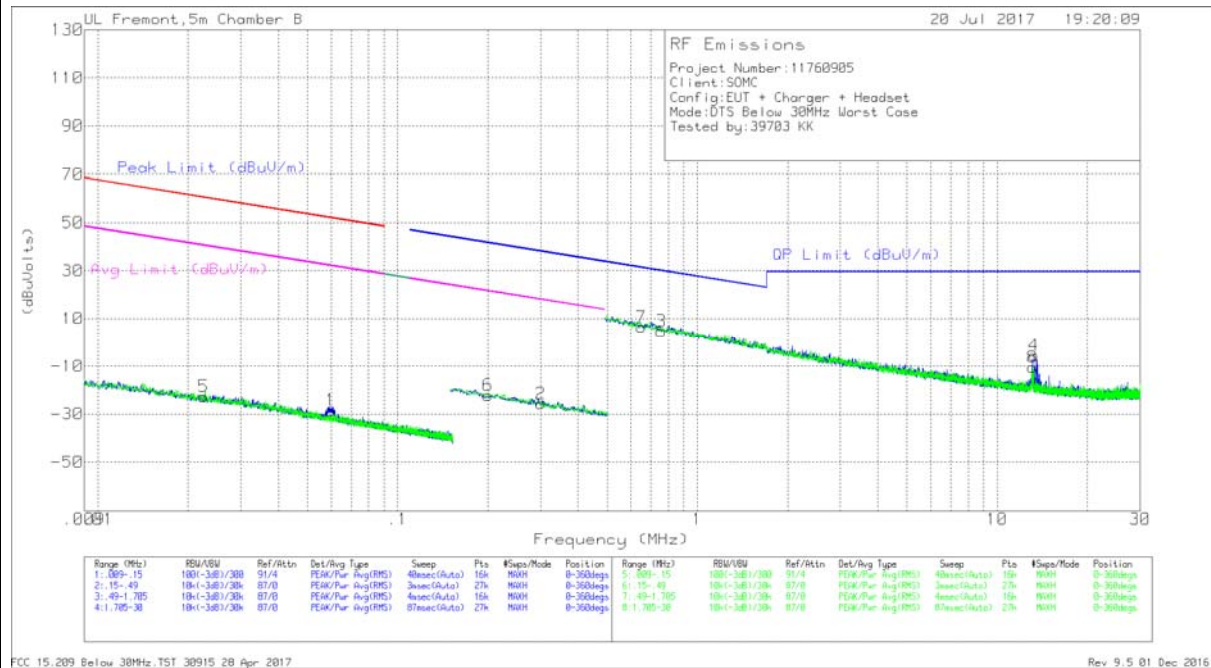

NOTE: KDB 414788 OATS and Chamber Correlation Justification

- Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 300m (dB)	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
5	.02251	40.77	Pk	15.1	1.4	-80	-22.73	60.54	-83.27	40.54	-63.27	-	-	-	-	0-360
1	.05975	37.93	Pk	12.2	1.4	-80	-28.47	52.06	-80.53	32.06	-60.53	-	-	-	-	0-360
6	.20023	44.82	Pk	11.5	1.5	-80	-22.18	-	-	-	-	41.59	-63.77	21.59	-43.77	0-360
2	.30027	41.36	Pk	11.5	1.5	-80	-25.64	-	-	-	-	38.06	-63.7	18.06	-43.7	0-360

Pk - Peak detector


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 40Log (dB)	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
7	.65089	33.51	Pk	11.5	1.5	-40	6.51	31.34	-24.83	0-360
3	.75763	31.74	Pk	11.5	1.5	-40	4.74	30.03	-25.29	0-360
8	13.13554	17.46	Pk	10.4	1.6	-40	-10.54	29.5	-40.04	0-360
4	13.24191	22.45	Pk	10.4	1.6	-40	-5.55	29.5	-35.05	0-360

Pk - Peak detector


10.4 WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL PLOT

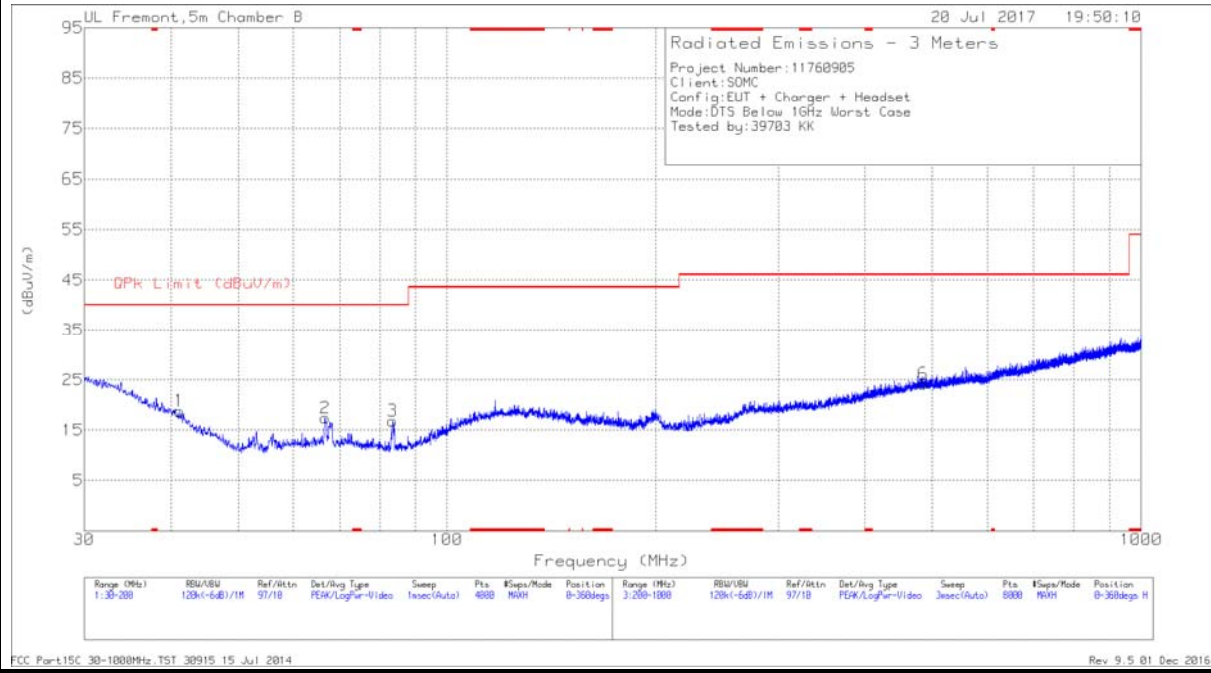

VERTICAL PLOT

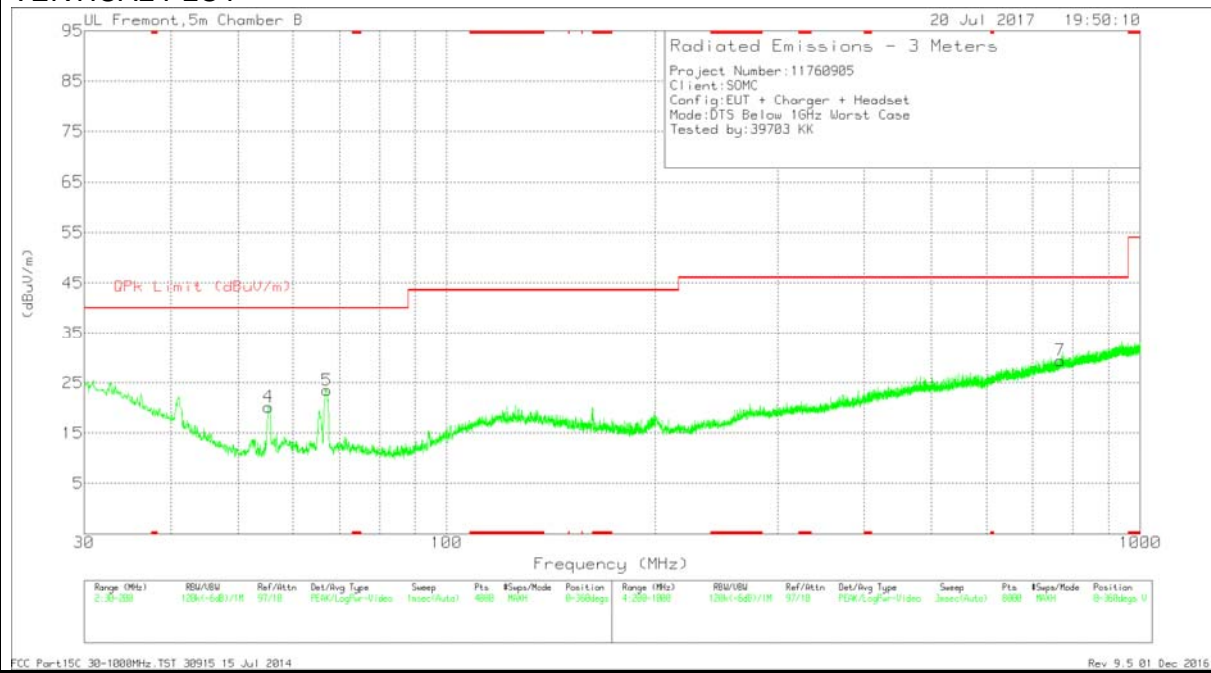



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T899 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	41.1379	30.23	Pk	17.3	-28.7	18.83	40	-21.17	0-360	400	H
4	55.3153	37.6	Pk	11	-28.4	20.2	40	-19.8	0-360	100	V
2	66.7295	33.6	Pk	12.1	-28.3	17.4	40	-22.6	0-360	400	H
5	67.1971	39.7	Pk	12.1	-28.3	23.5	40	-16.5	0-360	100	V
3	83.5213	33.93	Pk	11	-28.1	16.83	40	-23.17	0-360	400	H
6	485.3371	28.48	Pk	21.6	-25.9	24.18	46.02	-21.84	0-360	100	H
7	767.3737	29.16	Pk	24.9	-24.6	29.46	46.02	-16.56	0-360	300	V

Pk - Peak detector

10.5. WORST-CASE 18 to 26 GHz

SPURIOUS EMISSIONS 18 TO 26 GHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

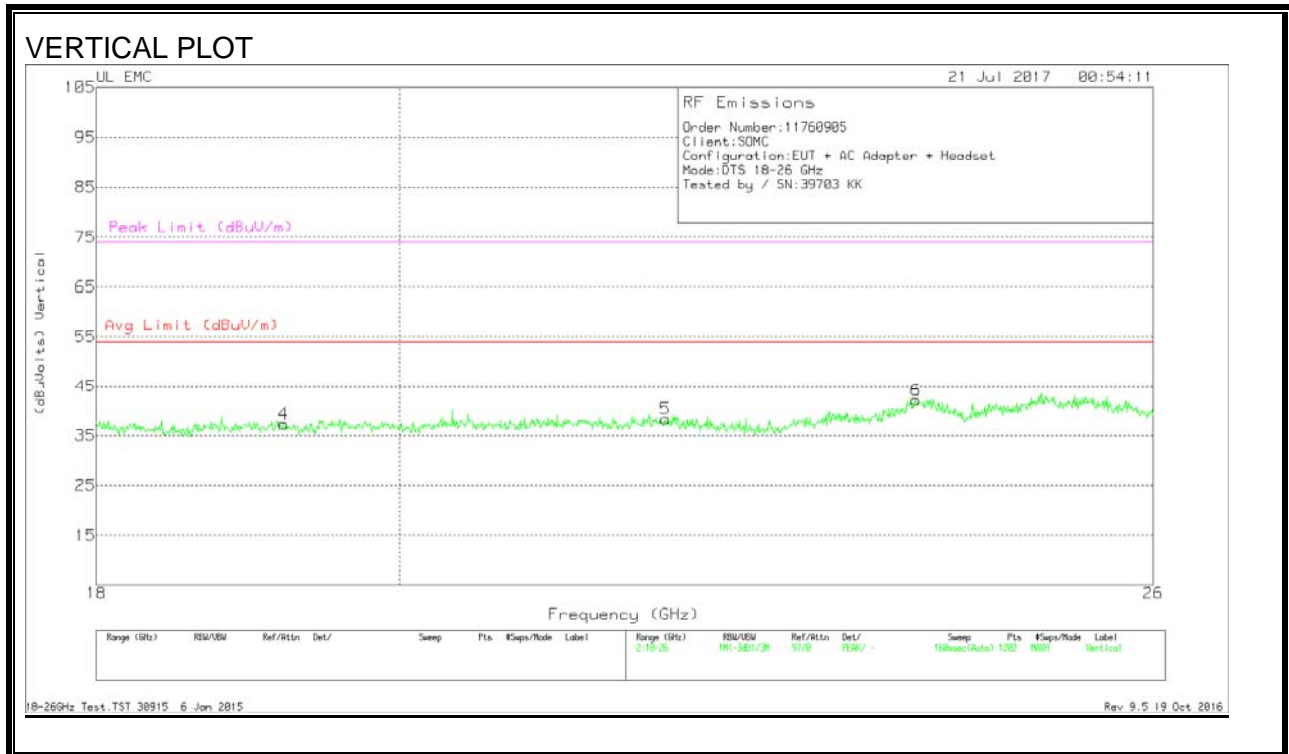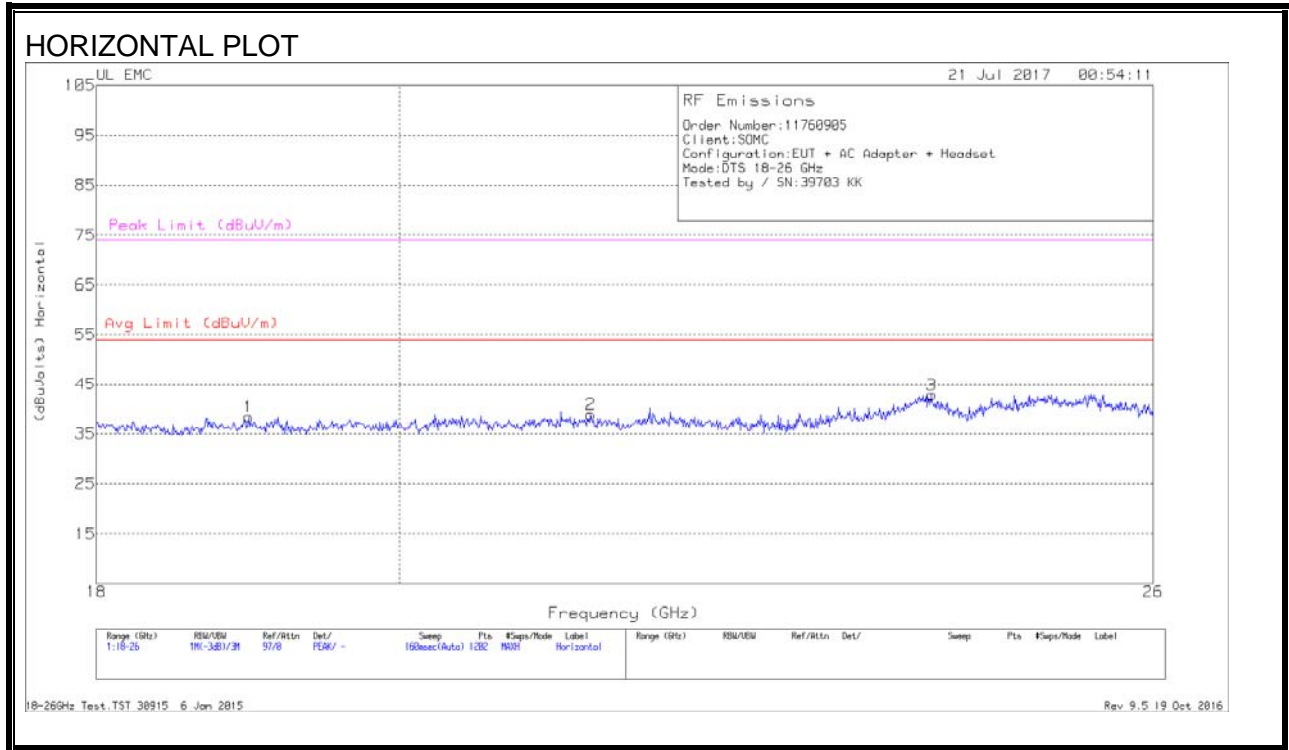

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T449 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.979	40.63	Pk	32.4	-25.2	-9.5	38.33	54	-15.67	74	-35.67
2	21.377	40.63	Pk	33.1	-25.4	-9.5	38.83	54	-15.17	74	-35.17
3	24.068	42.93	Pk	33.9	-24.5	-9.5	42.83	54	-11.17	74	-31.17
4	19.212	39.13	Pk	32.6	-24.9	-9.5	37.33	54	-16.67	74	-36.67
5	21.943	39.73	Pk	33.4	-25.3	-9.5	38.33	54	-15.67	74	-35.67
6	23.942	41.97	Pk	33.9	-24.2	-9.5	42.17	54	-11.83	74	-31.83

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

LINE 1 RESULTS

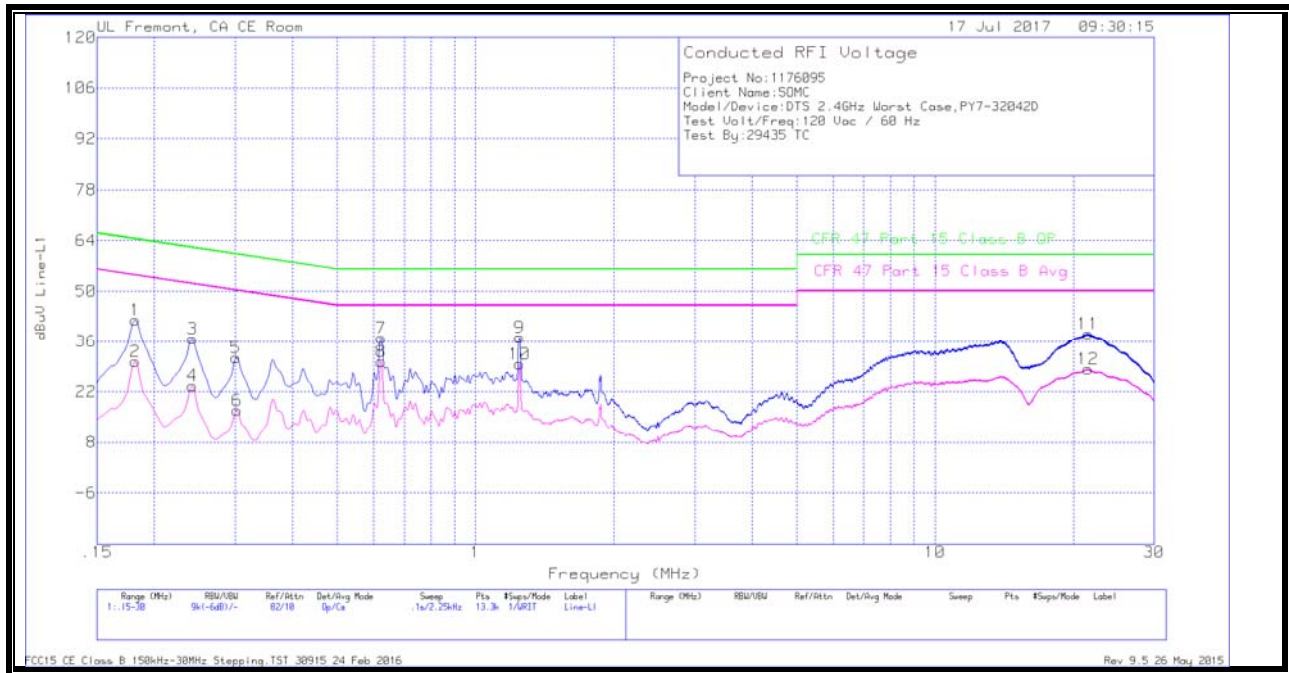


WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.1815	31.81	Qp	0	.1	10.1	42.01	64.42	-22.41	-	-
2	.1815	20.15	Ca	0	.1	10.1	30.35	-	-	54.42	-24.07
3	.24225	26.59	Qp	0	.1	10.1	36.79	62.02	-25.23	-	-
4	.24225	13.46	Ca	0	.1	10.1	23.66	-	-	52.02	-28.36
5	.30075	21.23	Qp	0	.1	10.1	31.43	60.22	-28.79	-	-
6	.303	6.6	Ca	0	.1	10.1	16.8	-	-	50.16	-33.36
7	.6225	26.71	Qp	0	.1	10.1	36.91	56	-19.09	-	-
8	.6225	20.23	Ca	0	.1	10.1	30.43	-	-	46	-15.57
9	1.248	26.87	Qp	0	.1	10.1	37.07	56	-18.93	-	-
10	1.248	19.53	Ca	0	.1	10.1	29.73	-	-	46	-16.27
11	21.5385	27.42	Qp	.1	.3	10.4	38.22	60	-21.78	-	-
12	21.52725	17.44	Ca	.1	.3	10.4	28.24	-	-	50	-21.76

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

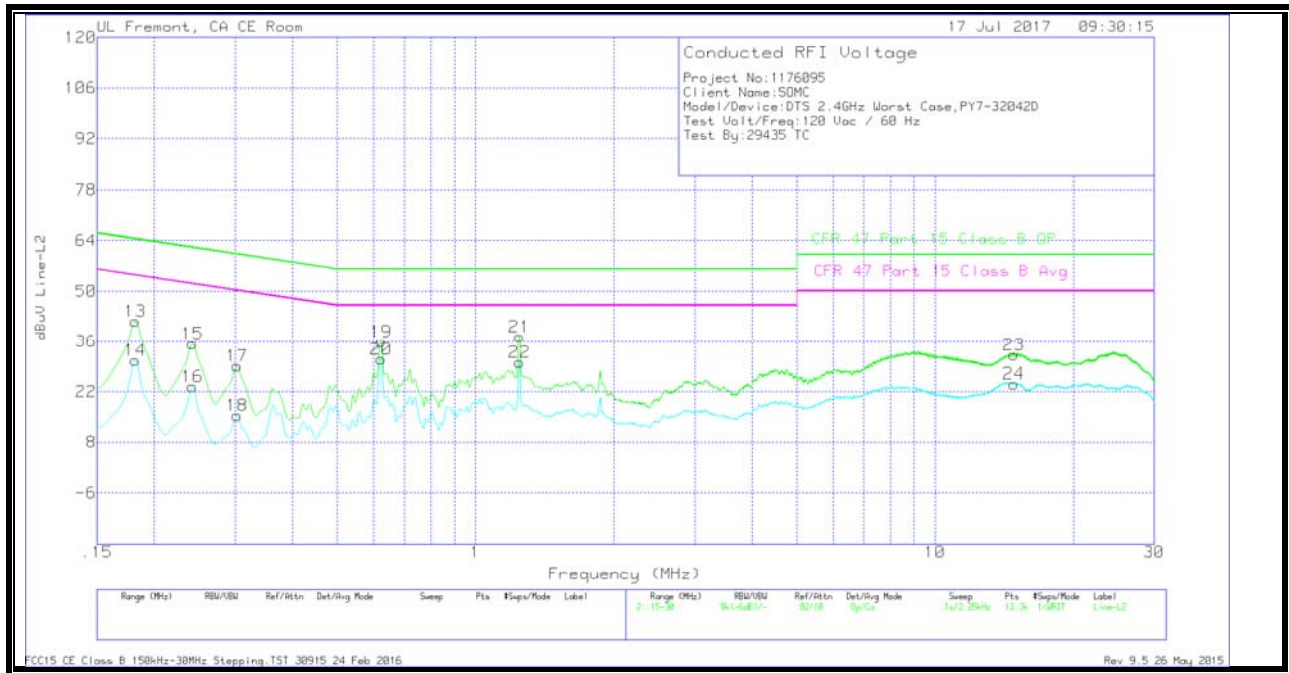

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.1815	31.46	Qp	0	.1	10.1	41.66	64.42	-22.76	-	-
14	.1815	20.5	Ca	0	.1	10.1	30.7	-	-	54.42	-23.72
15	.24225	25.21	Qp	0	.1	10.1	35.41	62.02	-26.61	-	-
16	.24225	13.21	Ca	0	.1	10.1	23.41	-	-	52.02	-28.61
17	.303	18.93	Qp	0	.1	10.1	29.13	60.16	-31.03	-	-
18	.303	5.25	Ca	0	.1	10.1	15.45	-	-	50.16	-34.71
19	.6225	25.68	Qp	0	.1	10.1	35.88	56	-20.12	-	-
20	.6225	20.8	Ca	0	.1	10.1	31	-	-	46	-15
21	1.24575	27.13	Qp	0	.1	10.1	37.33	56	-18.67	-	-
22	1.24575	20.06	Ca	0	.1	10.1	30.26	-	-	46	-15.74
23	14.83575	21.84	Qp	.1	.2	10.2	32.34	60	-27.66	-	-
24	14.847	13.68	Ca	.1	.2	10.2	24.18	-	-	50	-25.82

Qp - Quasi-Peak detector

Ca - CISPR average detection