



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC

FCC ID: PY7-10720W

**Report Number: 11775548-S1V2
Issue Date: 8/25/2017**

Prepared for
**SONY MOBILE COMMUNICATIONS INC.
4-12-3 HIGASHI-SHINAGAWA
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	8/21/2017	Initial Issue	--
V2	8/25/2017	Appendix F: Removed D1800 Dipole	Coltyce Sanders

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation.....	6
4.	SAR Measurement System & Test Equipment	7
4.1.	<i>SAR Measurement System.....</i>	7
4.2.	<i>SAR Scan Procedures.....</i>	8
4.3.	<i>Test Equipment.....</i>	10
5.	Measurement Uncertainty.....	11
6.	Device Under Test (DUT) Information	12
6.1.	<i>DUT Description</i>	12
6.2.	<i>Wireless Technologies.....</i>	13
6.3.	<i>Maximum Output Power from Tune-up Procedure.....</i>	14
6.4.	<i>General LTE SAR Test and Reporting Considerations.....</i>	16
6.5.	<i>LTE (TDD) Considerations.....</i>	18
7.	RF Exposure Conditions (Test Configurations).....	19
8.	Dielectric Property Measurements & System Check	20
8.1.	<i>Dielectric Property Measurements</i>	20
8.2.	<i>System Check.....</i>	23
9.	Conducted Output Power Measurements.....	25
9.1.	<i>GSM</i>	25
9.2.	<i>W-CDMA</i>	28
9.3.	<i>LTE.....</i>	31
9.4.	<i>Wi-Fi 2.4GHz (DTS Band)</i>	43
9.5.	<i>Wi-Fi 5GHz (U-NII Bands).....</i>	44
9.6.	<i>Bluetooth</i>	44
10.	Measured and Reported (Scaled) SAR Results.....	45
10.1.	<i>GSM850.....</i>	47
10.2.	<i>GSM1900.....</i>	47
10.3.	<i>W-CDMA Band V</i>	47
10.4.	<i>LTE Band 4 (20MHz Bandwidth)</i>	48
10.5.	<i>LTE Band 5 (10MHz Bandwidth)</i>	48
10.6.	<i>LTE Band 7 (20MHz Bandwidth)</i>	49
10.7.	<i>LTE Band 12 (10MHz Bandwidth)</i>	49

10.8. LTE Band 13 (10MHz Bandwidth) 50

10.9. LTE Band 17 (10MHz Bandwidth) 50

10.10. LTE Band 38 (20MHz Bandwidth) 50

10.11. LTE Band 41 (20MHz Bandwidth) 51

10.12. Wi-Fi (DTS Band)..... 51

10.13. Wi-Fi (U-NII Band)..... 52

10.14. Bluetooth..... 52

10.15. Standalone SAR Test Exclusion Considerations & Estimated SAR 53

11. SAR Measurement Variability..... 54

12. Simultaneous Transmission SAR Analysis..... 55

12.1. Sum of the SAR for WWAN & Wi-Fi & BT..... 56

Appendixes 57

11775548-S1V1 SAR_App A Setup Photos 57

11775548-S1V1 SAR_App B System Check Plots 57

11775548-S1V1 SAR_App C Highest Test Plots..... 57

11775548-S1V1 SAR_App D Tissue Ingredients..... 57

11775548-S1V1 SAR_App E Probe Cal. Certificates 57



11775548-S1V2 SAR_App F Dipole Cal. Certificates..... 57

1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS INC.			
FCC ID	PY7-10720W			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg)			
	Peak spatial-average(1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6		4	
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	PCE	DTS	NII	DSS
Head	0.372	0.408	0.359	N/A
Body-worn	0.402	0.042	0.212	N/A
Hotspot/Wi-Fi Direct	0.664	0.125	N/A	N/A
Simultaneous TX	1.133	1.133	1.133	0.874
Date Tested	7/31/2017 to 8/10/2017			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By: 	Prepared By: 
David Weaver Program Manager UL Verification Services Inc.	Tony Soares Laboratory Technician UL Verification Services Inc.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; Page 36, RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October, 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October, 2015; Page 6, RF Exposure Procedures (KDB 941225 D05A)
- [TCB workshop](#) April, 2016; Page 13, RF Exposure Procedures (LTE Carrier Aggregation)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

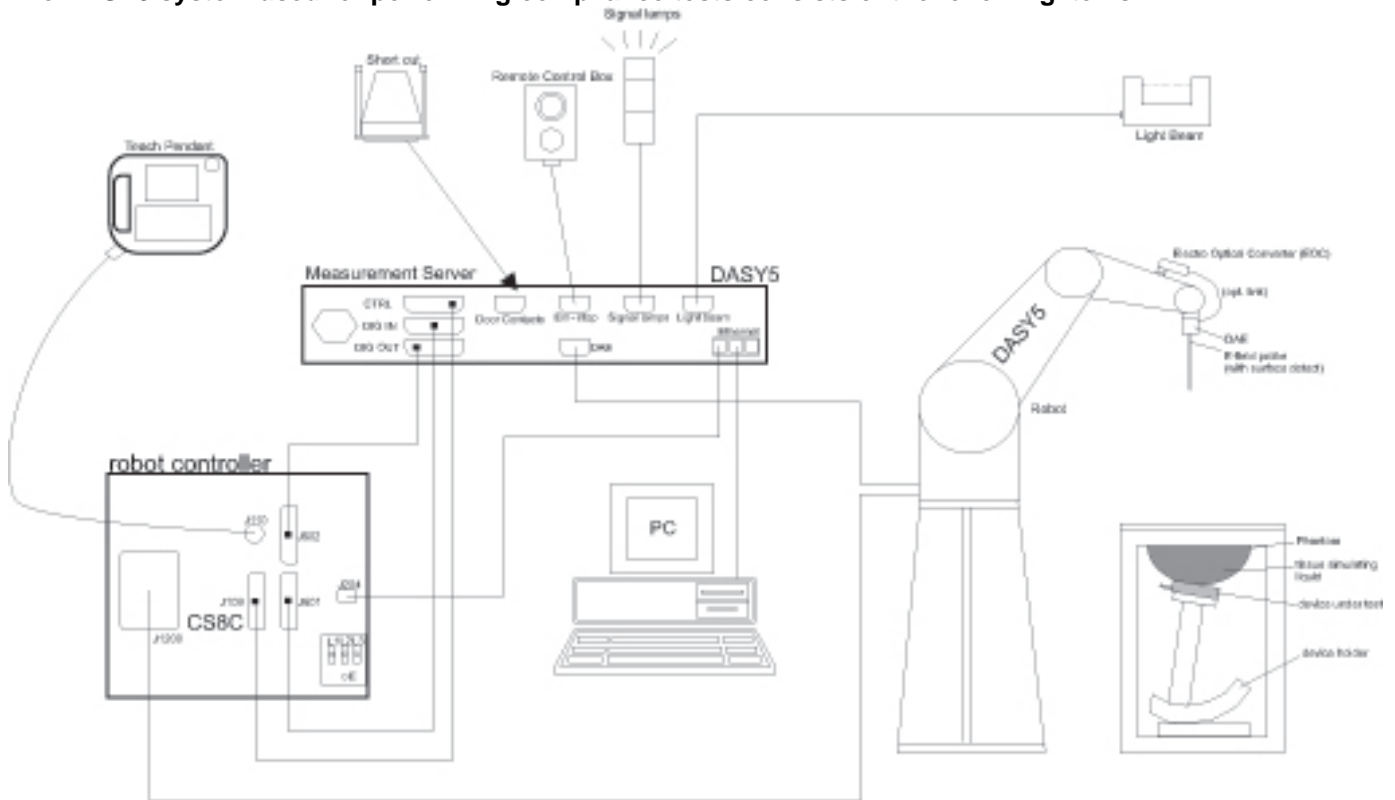

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
S-Parameter Network Analyzer	Agilent	8753ES	MY40000980	5/10/2018
Dielectric Probe kit	SPEAG	DAK-3.5	1103	2/17/2018
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	11/8/2017
Thermometer	Control Company	Traceable 4242	122529162	11/11/2017
Thermometer (Liquid Check)	Traceable	15557603	160643192	7/25/2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	N5181A	MY50140610	5/31/2018
Power Meter	Agilent	N1912A	MY50001018	10/11/2017
Power Sensor	Agilent	N1921A	MY52260009	1/5/2018
Power Sensor	Agilent	N1921A	MY53020038	4/13/2018
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2149	N/A
DC Power Supply	BK Precision	1611	215-02292	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 2)	SPEAG	EX3DV4	3991	5/30/2018
E-Field Probe (SAR Lab 3)	SPEAG	EX3DV4	3871	8/25/2017
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3990	3/15/2018
Data Acquisition Electronics (SAR Lab 2)	SPEAG	DAE4	1433	3/8/2018
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1343	8/15/2017
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1258	5/12/2018
System Validation Dipole	SPEAG	D750V3	1024	5/12/2018
System Validation Dipole	SPEAG	D900V2	108	11/8/2017
System Validation Dipole	SPEAG	D1750V2	1053	8/16/2017
System Validation Dipole	SPEAG	D1900V2	5d163	9/19/2017
System Validation Dipole	SPEAG	D1950V3	1136	4/17/2018
System Validation Dipole	SPEAG	D2450V2	899	3/10/2018
System Validation Dipole	SPEAG	D2600V2	1036	3/10/2018
System Validation Dipole	SPEAG	D5GHzV2	1138	9/22/2017
Thermometer (SAR Lab 2)	EXTECH	445703	CCS-237	7/13/2018
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-234	6/14/2018
Thermometer (SAR Lab 4)	Traceable	15557603	170024385	12/23/2017

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY55196004	7/14/2018
Power Sensor	Agilent	N1921A	MY53260001	10/17/2017
Power Sensor	Agilent	N1921A	MY53020038	4/13/2018
Base Station Simulator	R & S	CMW500	125236	3/6/2018
Base Station Simulator	R & S	CMW500	132909	3/14/2018
Base Station Simulator	Agilent	E5515C	GB47050526	2/21/2018

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 129.4 mm x 64.4 mm Overall Diagonal: 143.46 mm Display Diagonal: 115.65 mm																																																			
Back Cover	<input checked="" type="checkbox"/> The Back Cover is not removable.																																																			
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.																																																			
Accessory	Headset																																																			
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)																																																			
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz)																																																			
Test sample information	<table border="1"> <thead> <tr> <th>S/N</th> <th>Technology</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>BH9000697X</td> <td>GSM/UMTS</td> <td>Conducted</td> </tr> <tr> <td>BH90005C7X</td> <td>LTE LB/MB</td> <td>Conducted</td> </tr> <tr> <td>BH90009W7X</td> <td>LTE HB/UHB</td> <td>Conducted</td> </tr> <tr> <td>BH9000587X</td> <td>WLAN 2.4G/BT</td> <td>Conducted</td> </tr> <tr> <td>BH90006H7X</td> <td>WLAN 5G</td> <td>Conducted</td> </tr> <tr> <td>BH90002Y88</td> <td>GSM/UMTS #1</td> <td>Radiated</td> </tr> <tr> <td>BH9000HV88</td> <td>GSM/UMTS #2</td> <td>Radiated</td> </tr> <tr> <td>BH9000J288</td> <td>LTE LB/MB #1</td> <td>Radiated</td> </tr> <tr> <td>BH9000HZ88</td> <td>LTE LB/MB #2</td> <td>Radiated</td> </tr> <tr> <td>BH9000CR88</td> <td>LTE HB/UHB #1</td> <td>Radiated</td> </tr> <tr> <td>BH9000JW88</td> <td>LTE HB/UHB #2</td> <td>Radiated</td> </tr> <tr> <td>BH9000HL88</td> <td>WLAN 2.4G/BT #1</td> <td>Radiated</td> </tr> <tr> <td>BH9000KL88</td> <td>WLAN 2.4G/BT #2</td> <td>Radiated</td> </tr> <tr> <td>BH9000F588</td> <td>WLAN 5G #1</td> <td>Radiated</td> </tr> <tr> <td>BH9000TP88</td> <td>WLAN 5G #2</td> <td>Radiated</td> </tr> <tr> <td>BH9000F888</td> <td>WLAN 5G #3</td> <td>Radiated</td> </tr> </tbody> </table>	S/N	Technology	Notes	BH9000697X	GSM/UMTS	Conducted	BH90005C7X	LTE LB/MB	Conducted	BH90009W7X	LTE HB/UHB	Conducted	BH9000587X	WLAN 2.4G/BT	Conducted	BH90006H7X	WLAN 5G	Conducted	BH90002Y88	GSM/UMTS #1	Radiated	BH9000HV88	GSM/UMTS #2	Radiated	BH9000J288	LTE LB/MB #1	Radiated	BH9000HZ88	LTE LB/MB #2	Radiated	BH9000CR88	LTE HB/UHB #1	Radiated	BH9000JW88	LTE HB/UHB #2	Radiated	BH9000HL88	WLAN 2.4G/BT #1	Radiated	BH9000KL88	WLAN 2.4G/BT #2	Radiated	BH9000F588	WLAN 5G #1	Radiated	BH9000TP88	WLAN 5G #2	Radiated	BH9000F888	WLAN 5G #3	Radiated
S/N	Technology	Notes																																																		
BH9000697X	GSM/UMTS	Conducted																																																		
BH90005C7X	LTE LB/MB	Conducted																																																		
BH90009W7X	LTE HB/UHB	Conducted																																																		
BH9000587X	WLAN 2.4G/BT	Conducted																																																		
BH90006H7X	WLAN 5G	Conducted																																																		
BH90002Y88	GSM/UMTS #1	Radiated																																																		
BH9000HV88	GSM/UMTS #2	Radiated																																																		
BH9000J288	LTE LB/MB #1	Radiated																																																		
BH9000HZ88	LTE LB/MB #2	Radiated																																																		
BH9000CR88	LTE HB/UHB #1	Radiated																																																		
BH9000JW88	LTE HB/UHB #2	Radiated																																																		
BH9000HL88	WLAN 2.4G/BT #1	Radiated																																																		
BH9000KL88	WLAN 2.4G/BT #2	Radiated																																																		
BH9000F588	WLAN 5G #1	Radiated																																																		
BH9000TP88	WLAN 5G #2	Radiated																																																		
BH9000F888	WLAN 5G #3	Radiated																																																		
Hardware Version	A																																																			
Software Version	0.195																																																			

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: <input type="checkbox"/> Class 8 - 1 Up, 4 Down <input type="checkbox"/> Class 10 - 2 Up, 4 Down <input type="checkbox"/> Class 12 - 4 Up, 4 Down <input checked="" type="checkbox"/> Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
W-CDMA (UMTS)	Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6)		100%
LTE	FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 13 FDD Band 17 TDD Band 38 TDD Band 41	QPSK 16QAM <input checked="" type="checkbox"/> Rel.11 Does not support Carrier Aggregation (CA).		100% (FDD) 63.3% (TDD)
	Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		100%
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
	Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Bluetooth	2.4 GHz	Version 5.0 LE		N/A

6.3. Maximum Output Power from Tune-up Procedure

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)	
			Tune-up Limit	Frame Power
GSM 850	Voice/GPRS	1	33.2	24.17
	GPRS	2	30.2	24.18
	GPRS	3	28.5	24.24
	GPRS	4	27.2	24.19
	EGPRS	1	28.0	18.97
	EGPRS	2	26.5	20.48
	EGPRS	3	24.5	20.24
	EGPRS	4	23.6	20.59
GSM1900	Voice/GPRS	1	29.2	20.17
	GPRS	2	26.2	20.18
	GPRS	3	24.5	20.24
	GPRS	4	23.2	20.19
	EGPRS	1	27.0	17.97
	EGPRS	2	25.4	19.38
	EGPRS	3	23.3	19.04
	EGPRS	4	22.5	19.49

RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)			
			CS		PS	
			Tune-up Limit	Frame Power	Tune-up Limit	Frame Power
DTM GSM 850	Voice + GPRS	1	33.2	24.2		
	Voice + GPRS	2	30.2	24.2	30.2	24.2
	Voice + GPRS	3	28.5	24.2	28.5	24.2
	Voice + EGPRS	1	33.2	24.2		
	Voice + EGPRS	2	30.2	24.2	26.5	20.5
	Voice + EGPRS	3	28.5	24.2	24.5	20.2
DTM GSM 1900	Voice + GPRS	1	29.2	20.2		
	Voice + GPRS	2	26.2	20.2	26.2	20.2
	Voice + GPRS	3	24.5	20.2	24.5	20.2
	Voice + EGPRS	1	29.2	20.2		
	Voice + EGPRS	2	26.2	20.2	25.4	19.4
	Voice + EGPRS	3	24.5	20.2	23.3	19.0

RF Air interface	Mode		Max. RF Output Power (dBm)
W-CDMA Band V	Release 99		22.9
	HSDPA	Subtest 1/2	22.2
		Subtest 3/4	21.7
	HSUPA	Subtest 1/5	21.7
		Subtest 2/4	20.2
		Subtest 3	21.2

RF Air interface	Mode	Max. RF Output Power (dBm)
LTE Band 4	QPSK	21.0
	16QAM	21.0
LTE Band 5	QPSK	23.0
	16QAM	23.0
LTE Band 7	QPSK	25.0
	16QAM	24.0
LTE Band 12	QPSK	25.0
	16QAM	24.0
LTE Band 13	QPSK	24.0
	16QAM	23.0
LTE Band 17	QPSK	24.0
	16QAM	24.0
LTE Band 38	QPSK	25.0
	16QAM	24.0
LTE Band 41	QPSK	25.0
	16QAM	24.0

RF Air interface	Mode	Channel	Max. RF Output Power (dBm)	
			Chain 0	Chain 1
WiFi 2.4 GHz	802.11b	1-11	13.70	13.50
		12	13.70	13.50
		13	11.30	11.69
	802.11g	1-11	13.70	13.50
		12	9.20	9.40
		13	2.70	2.90
	802.11n HT20	1-11	13.70	13.50
		12	8.23	8.43
		13	2.73	2.93
WiFi 5 GHz	802.11a	All	13.50	14.00
	802.11n HT20	All	13.50	14.00
	802.11n HT40	All	13.50	14.00
	802.11ac VHT20	All	13.50	14.00
	802.11ac VHT40	All	13.50	14.00
	802.11ac VHT80	All	13.50	14.00
Bluetooth	Low		8.29	
	Mid		9.88	
	High		9.45	
Bluetooth LE	Low		1.20	
	Mid		3.23	
	High		3.83	

6.4. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 4	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 7	Frequency range: 2500 - 2570 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5		
	Mid	21100 2535	21100 2535	21100 2535	21100 2535		
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5		
	Band 12	Frequency range: 699 – 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low				23205/ 779.5		
Mid			23230/ 782	23230/ 782			
High				23255/ 784.5			
Band 17	Frequency range: 704 - 716 MHz						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low			23780/ 709	23755/ 706.5			
Mid			23790/ 710	23790/ 710			
High			23800/ 711	23825/ 713.5			

General LTE SAR Test and Reporting Considerations (Continued)

Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 38	Frequency range: 2570 - 2620 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low	37850/ 2580	37825/ 2577.5	37800/ 2575	37775/ 2572.5																																								
	Mid	38000/ 2595	38000/ 2595	38000/ 2595	38000/ 2595																																								
	High	38150/ 2610	38175/ 2612.5	38200/ 2615	38225/ 2617.5																																								
	Band 41	Frequency range: 2496 - 2690 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low	39750 / 2506.0																																											
	Low-Mid	40185 / 2549.5																																											
Mid	40620 / 2593.0																																												
Mid-High	41055 / 2636.5																																												
High	41490 / 2680.0																																												
LTE transmitter and antenna implementation	Refer to Appendix A.																																												
Maximum power reduction (MPR)	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p>							Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																						
Power reduction	No																																												
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																												

6.5. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special Subframe configurations.

Table 4.2-1: Configuration of Special Subframe (lengths of DwPTS/GP/UpPTS).

Special Subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle and Special Subframe 7.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required
WWAN	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body-worn	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	> 25 mm	No
			Edge 2 (Right)	< 25 mm	Yes
			Edge 3 (Bottom)	< 25 mm	Yes
			Edge 4 (Left)	< 25 mm	Yes
WLAN/BT Main (Chain 0)	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body-worn	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	< 25 mm	Yes
			Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	> 25 mm	No
WLAN Sub (Chain 1)	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	> 25 mm	No
			Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	< 25 mm	Yes

Notes:

- SAR is not required when the distance from the antenna to the edge is > 25 mm per KDB 941225 D06 Hot Spot SAR.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
2	8/2/2017	1750	Body	1750	53.17	53.44	-0.51	1.53	1.49	2.82
				1710	53.47	53.54	-0.14	1.48	1.46	1.13
				1755	53.20	53.43	-0.43	1.54	1.49	3.27
2	8/3/2017	1750	Head	1750	38.12	40.08	-4.90	1.38	1.37	0.66
				1710	38.31	40.15	-4.57	1.34	1.35	-0.25
				1755	38.08	40.08	-4.98	1.38	1.37	0.53
2	8/5/2017	1900	Body	1900	54.61	53.30	2.46	1.53	1.52	0.59
				1850	54.84	53.30	2.89	1.48	1.52	-2.37
				1920	54.51	53.30	2.27	1.55	1.52	2.13
2	8/7/2017	750	Head	750	40.44	41.96	-3.63	0.95	0.89	6.77
				695	41.14	42.24	-2.61	0.90	0.89	0.97
				790	38.89	41.76	-6.86	0.98	0.90	9.84
2	8/8/2017	750	Head	750	39.45	41.96	-5.99	0.94	0.89	5.42
				695	39.74	42.24	-5.93	0.86	0.89	-3.67
				790	38.96	41.76	-6.70	0.99	0.90	9.98
2	8/8/2018	750	Body	750	52.94	55.55	-4.69	0.91	0.96	-5.63
				695	53.65	55.76	-3.78	0.89	0.96	-7.46
				790	52.23	55.39	-5.71	0.97	0.97	0.51
2	8/9/2017	750	Body	750	50.94	55.55	-8.29	0.93	0.96	-3.06
				695	51.67	55.76	-7.33	0.90	0.96	-6.61
				790	50.14	55.39	-9.48	0.97	0.97	0.07
2	8/9/2017	2600	Head	2600	37.65	39.01	-3.49	2.00	1.96	1.72
				2495	38.07	39.14	-2.74	1.87	1.85	1.15
				2690	37.30	38.90	-4.11	2.10	2.06	2.07
3	7/31/2017	5200	Head	5200	37.51	35.99	4.22	4.50	4.65	-3.29
				5150	37.57	36.05	4.22	4.42	4.60	-3.84
				5350	37.33	35.82	4.22	4.63	4.80	-3.65
3	7/31/2017	5600	Head	5600	36.94	35.53	3.96	4.87	5.06	-3.70
				5500	37.06	35.65	3.96	4.76	4.96	-4.01
				5725	36.73	35.39	3.78	4.97	5.19	-4.17
3	7/31/2017	5800	Head	5800	36.60	35.30	3.68	5.07	5.27	-3.76
				5700	36.81	35.42	3.92	4.97	5.16	-3.83
				5850	36.47	35.30	3.31	5.13	5.27	-2.58
3	7/31/2017	5200	Body	5200	47.49	49.02	-3.12	5.27	5.29	-0.47
				5150	47.37	49.09	-3.50	5.17	5.24	-1.23
				5350	47.14	48.82	-3.43	5.43	5.47	-0.69

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
3	7/31/2017	5600	Body	5600	46.70	48.48	-3.67	5.77	5.76	0.23
				5500	46.75	48.61	-3.83	5.63	5.64	-0.22
				5725	46.19	48.31	-4.39	5.91	5.91	0.00
3	7/31/2017	5800	Body	5800	46.21	48.20	-4.13	6.07	6.00	1.22
				5700	46.39	48.34	-4.04	5.92	5.88	0.74
				5850	45.96	48.20	-4.65	6.15	6.00	2.45
3	8/3/2017	1950	Head	1950	38.41	40.00	-3.98	1.43	1.40	2.07
				1850	38.86	40.00	-2.86	1.34	1.40	-4.29
				1980	38.34	40.00	-4.15	1.46	1.40	4.29
3	8/5/2017	900	Head	900	41.90	41.50	0.96	0.96	0.97	-0.74
				805	42.95	41.68	3.05	0.89	0.90	-0.77
				915	41.72	41.50	0.53	0.98	0.98	0.18
3	8/5/2017	900	Body	900	52.99	55.00	-3.65	1.05	1.05	0.00
				880	53.19	55.07	-3.42	1.03	1.02	0.64
				915	52.87	55.00	-3.87	1.07	1.06	0.75
3	8/8/2017	2450	Head	2450	38.34	39.20	-2.19	1.76	1.80	-2.50
				2400	38.42	39.30	-2.23	1.69	1.75	-3.35
				2480	38.20	39.16	-2.46	1.79	1.83	-2.37
3	8/9/2017	2450	Body	2450	50.66	52.70	-3.87	1.96	1.95	0.56
				2400	50.78	52.77	-3.78	1.89	1.90	-0.42
				2480	50.63	52.66	-3.86	2.00	1.99	0.14
4	8/5/2017	2600	Head	2600	39.06	39.01	0.13	2.04	1.96	3.71
				2495	39.41	39.14	0.68	1.92	1.85	3.59
				2690	38.72	38.90	-0.46	2.14	2.06	3.67
4	8/9/2017	2600	Body	2600	53.09	52.51	1.10	2.25	2.16	3.99
				2495	53.47	52.64	1.57	2.09	2.01	3.86
				2690	52.75	52.40	0.67	2.34	2.29	2.17

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 \pm 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be \geq 15.0 cm for SAR measurements \leq 3 GHz and \geq 10.0 cm for measurements $>$ 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab	Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
2	8/2/2017	Body	D1750V2 SN:1053	8/16/2017	3.900	39.00	37.40	4.28	2.060	20.60	19.70	4.57	1,2
2	8/3/2017	Head	D1750V2 SN:1053	8/16/2017	3.630	36.30	37.40	-2.94	1.910	19.10	19.70	-3.05	
2	8/5/2017	Body	D1900V2 SN:5d163	9/19/2017	4.070	40.70	39.60	2.78	2.080	20.80	21.00	-0.95	3,4
2	8/7/2017	Head	D750V3 SN:1024	5/12/2018	0.917	9.17	8.47	8.26	0.606	6.06	5.53	9.58	5,6
2	8/8/2017	Head	D750V3 SN:1024	5/12/2018	0.863	8.63	8.47	1.89	0.571	5.71	5.53	3.25	
2	8/8/2017	Body	D750V3 SN:1024	5/12/2018	0.856	8.56	8.59	-0.35	0.568	5.68	5.65	0.53	
2	8/9/2017	Body	D2600V2 SN:1036	3/10/2018	5.800	58.00	54.60	6.23	2.520	25.20	24.50	2.86	7,8
3	7/31/2017	Head	D5GHzV2 SN:1138 (5.2 GHz)	9/22/2017	7.280	72.80	78.30	-7.02	2.080	20.80	22.40	-7.14	9,10
3	7/31/2017	Head	D5GHzV2 SN:1138 (5.6 GHz)	9/22/2017	8.350	83.50	82.30	1.46	2.390	23.90	23.50	1.70	
3	7/31/2017	Head	D5GHzV2 SN:1138 (5.8 GHz)	9/22/2017	7.650	76.50	79.40	-3.65	2.200	22.00	22.70	-3.08	
3	7/31/2017	Body	D5GHzV2 SN:1138 (5.2 GHz)	9/22/2017	7.720	77.20	74.20	4.04	2.190	21.90	20.90	4.78	
3	7/31/2017	Body	D5GHzV2 SN:1138 (5.6 GHz)	9/22/2017	8.160	81.60	78.80	3.55	2.320	23.20	22.00	5.45	
3	7/31/2017	Body	D5GHzV2 SN:1138 (5.8 GHz)	9/22/2017	7.750	77.50	75.70	2.38	2.220	22.20	21.10	5.21	
3	8/3/2017	Head	D1950V3 SN:1136	4/17/2018	3.980	39.80	40.50	-1.73	2.020	20.20	21.20	-4.72	11,12
3	8/5/2017	Head	D900V2 SN:108	11/8/2017	1.070	10.70	10.80	-0.93	0.691	6.91	6.94	-0.43	
3	8/5/2017	Body	D900V2 SN:108	11/8/2017	1.080	10.80	11.10	-2.70	0.701	7.01	7.23	-3.04	13,14
3	8/8/2017	Head	D2450V2 SN:899	3/10/2018	5.600	56.00	52.60	6.46	2.560	25.60	24.60	4.07	15,16
3	8/9/2017	Body	D2450V2 SN:899	3/10/2018	5.340	53.40	50.30	6.16	2.460	24.60	23.70	3.80	
4	8/5/2017	Head	D2600V2 SN:1036	3/10/2018	5.670	56.70	57.50	-1.39	2.470	24.70	25.60	-3.52	
4	8/9/2017	Body	D2600V2 SN:1036	3/10/2018	5.880	58.80	54.60	7.69	2.560	25.60	24.50	4.49	17,18

9. Conducted Output Power Measurements

9.1. GSM

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Meas. Avg Pwr	
						Burst (dBm)	Frame (dBm)
850	GPRS (GMSK)	CS4	1	128	824.2	32.7	23.7
				190	836.6	32.8	23.8
				251	848.8	32.8	23.8
			2	128	824.2	29.7	23.7
				190	836.6	29.8	23.8
				251	848.8	29.9	23.9
			3	128	824.2	27.7	23.4
				190	836.6	27.9	23.6
				251	848.8	27.8	23.5
			4	128	824.2	26.3	23.3
				190	836.6	26.5	23.5
				251	848.8	26.5	23.5
	EGPRS (8PSK)	MCS9	1	128	824.2	26.9	17.9
				190	836.6	27.0	18.0
				251	848.8	27.0	18.0
			2	128	824.2	25.2	19.2
				190	836.6	25.3	19.3
				251	848.8	25.3	19.3
			3	128	824.2	23.3	19.0
				190	836.6	23.5	19.2
				251	848.8	23.4	19.1
			4	128	824.2	22.2	19.2
				190	836.6	22.4	19.4
				251	848.8	22.3	19.3

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 3 time slots for Max power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ db higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Meas. Avg Pwr	
						Burst (dBm)	Frame (dBm)
1900	GPRS (GMSK)	CS4	1	512	1850.2	28.6	19.6
				661	1880.0	28.4	19.4
				810	1909.8	28.6	19.6
			2	512	1850.2	25.6	19.6
				661	1880.0	25.5	19.5
				810	1909.8	25.7	19.7
			3	512	1850.2	23.8	19.5
				661	1880.0	23.7	19.4
				810	1909.8	23.9	19.6
			4	512	1850.2	22.7	19.7
				661	1880.0	22.5	19.5
				810	1909.8	22.6	19.6
	EGPRS (8PSK)	MCS9	1	512	1850.2	25.7	16.7
				661	1880.0	25.6	16.6
				810	1909.8	25.8	16.8
			2	512	1850.2	25.4	19.4
				661	1880.0	25.4	19.4
				810	1909.8	25.4	19.4
			3	512	1850.2	23.2	18.9
				661	1880.0	23.1	18.8
				810	1909.8	23.2	18.9
			4	512	1850.2	22.1	19.1
				661	1880.0	22.0	19.0
				810	1909.8	22.0	19.0

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 3 time slots, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ db higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

GSM850 DTM Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Meas. Avg Pwr			
						CS		PS	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
850	GSM(Voice) + GPRS(GMSK)	CS4	1	128	824.2	32.7	23.7		
				190	836.6	32.8	23.8		
				251	848.8	32.8	23.8		
			2	128	824.2	29.4	23.4	29.4	23.4
				190	836.6	29.5	23.5	29.5	23.5
				251	848.8	29.6	23.6	29.6	23.6
			3	128	824.2	27.6	23.3	27.6	23.3
				190	836.6	27.7	23.4	27.7	23.4
				251	848.8	27.7	23.4	27.7	23.4
	GSM(Voice) + EGPRS(8PSK)	MCS9	1	128	824.2	32.7	23.7		
				190	836.6	32.8	23.8		
				251	848.8	32.8	23.8		
			2	128	824.2	29.6	23.6	25.1	19.1
				190	836.6	29.7	23.7	25.2	19.2
				251	848.8	29.7	23.7	25.2	19.2
			3	128	824.2	27.8	23.5	23.2	18.9
				190	836.6	28.0	23.7	23.3	19.0
				251	848.8	27.9	23.6	23.3	19.0

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) with 1 time slot + GMSK(GPRS) mode with 3 time slots for Max power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for GSM(Voice) + EGPRS (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4db higher than that of GSM(Voice) + GMSK (GPRS) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GMSK (GPRS) is ≤ 1.2W/kg.

GSM1900 DTM Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Meas. Avg Pwr			
						CS		PS	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
1900	GSM(Voice) + GPRS(GMSK)	CS4	1	512	1850.2	28.6	19.6		
				661	1880.0	28.4	19.4		
				810	1909.8	28.6	19.6		
			2	512	1850.2	25.2	19.2	25.6	19.6
				661	1880.0	25.0	19.0	25.4	19.4
				810	1909.8	25.2	19.2	25.7	19.7
			3	512	1850.2	23.3	19.0	23.7	19.4
				661	1880.0	23.4	19.1	23.8	19.5
				810	1909.8	23.6	19.3	23.9	19.6
	GSM(Voice) + EGPRS(8PSK)	MCS9	1	512	1850.2	28.6	19.6		
				661	1880.0	28.4	19.4		
				810	1909.8	28.6	19.6		
			2	512	1850.2	25.3	19.3	25.4	19.4
				661	1880.0	25.2	19.2	25.3	19.3
				810	1909.8	25.4	19.4	25.4	19.4
			3	512	1850.2	23.4	19.1	23.2	18.9
				661	1880.0	23.3	19.0	23.1	18.8
				810	1909.8	23.5	19.2	23.2	18.9

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) with 1 time slot + GMSK(GPRS) mode with 3 time slots, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for GSM(Voice) + EGPRS (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4db higher than that of GSM(Voice) + GMSK (GPRS) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GMSK (GPRS) is ≤ 1.2W/kg.

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs}=\beta_{hs}/\beta_c$	30/15				

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in Table C.11.1.3 of 3GPP TS 34.121-1 v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	A _{hs} = β_{hs}/β_c	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Meas. Avg Pwr (dBm)	
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	22.5	
			4183	836.6	N/A	22.5	
			4233	846.6	N/A	22.2	
	HSDPA	Subtest 1	4132	826.4	0	21.6	
			4183	836.6	0	21.4	
			4233	846.6	0	21.1	
		Subtest 2	4132	826.4	0	21.6	
			4183	836.6	0	21.4	
			4233	846.6	0	21.1	
		Subtest 3	4132	826.4	0.5	21.0	
			4183	836.6	0.5	20.9	
			4233	846.6	0.5	20.7	
		Subtest 4	4132	826.4	0.5	21.0	
			4183	836.6	0.5	20.9	
			4233	846.6	0.5	20.7	
		HSUPA	Subtest 1	4132	826.4	0	21.6
				4183	836.6	0	21.5
				4233	846.6	0	21.4
	Subtest 2		4132	826.4	2	19.7	
			4183	836.6	2	19.6	
			4233	846.6	2	19.3	
	Subtest 3		4132	826.4	1	20.7	
			4183	836.6	1	20.6	
			4233	846.6	1	20.3	
	Subtest 4		4132	826.4	2	19.7	
			4183	836.6	2	19.6	
			4233	846.6	2	19.3	
	Subtest 5		4132	826.4	0	21.6	
			4183	836.6	0	21.5	
			4233	846.6	0	21.4	

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	21.0	20.9	20.9
			1	49	0	20.8	20.7	20.7
			1	99	0	20.8	20.7	20.8
			50	0	0	21.0	20.9	21.0
			50	24	0	20.9	20.9	20.9
			50	50	0	20.8	20.8	20.8
			100	0	0	20.9	20.9	20.9
		16QAM	1	0	0	21.0	21.0	21.0
			1	49	0	21.0	21.0	21.0
			1	99	0	21.0	21.0	21.0
			50	0	0	21.0	21.0	21.0
			50	24	0	20.9	20.9	21.0
			50	50	0	20.8	20.8	20.9
			100	0	0	20.9	20.9	21.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	21.0	20.9	21.0
			1	37	0	20.8	20.8	20.7
			1	74	0	20.8	20.8	20.8
			36	0	0	20.9	20.9	20.9
			36	20	0	20.9	20.8	20.9
			36	39	0	20.9	20.8	20.8
			75	0	0	20.9	20.8	20.8
		16QAM	1	0	0	21.0	21.0	21.0
			1	37	0	21.0	21.0	20.7
			1	74	0	21.0	21.0	20.8
			36	0	0	20.9	21.0	20.9
			36	20	0	20.9	21.0	20.9
			36	39	0	20.9	20.8	20.8
			75	0	0	20.9	20.9	20.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	20.8	20.8	20.7
			1	25	0	20.7	20.7	20.6
			1	49	0	20.7	20.6	20.7
			25	0	0	20.8	20.8	20.7
			25	12	0	20.7	20.8	20.7
			25	25	0	20.8	20.7	20.6
			50	0	0	20.8	20.7	20.7
		16QAM	1	0	0	20.9	21.0	20.7
			1	25	0	20.8	21.0	20.5
			1	49	0	20.7	20.9	20.7
			25	0	0	20.9	20.8	20.8
			25	12	0	20.9	20.8	20.8
			25	25	0	20.9	20.8	20.7
			50	0	0	20.8	20.8	20.8

LTE Band 4 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	5	QPSK	1	0	0	20.8	20.8	20.8
			1	12	0	20.7	20.7	20.6
			1	24	0	20.7	20.7	20.7
			12	0	0	20.7	20.7	20.7
			12	7	0	20.7	20.7	20.7
			12	13	0	20.7	20.6	20.6
			25	0	0	20.7	20.7	20.6
		16QAM	1	0	0	21.0	20.9	20.8
			1	12	0	21.0	20.8	20.8
			1	24	0	21.0	20.9	20.9
			12	0	0	20.9	20.8	20.8
			12	7	0	20.9	20.8	20.8
			12	13	0	20.9	20.8	20.8
			25	0	0	20.8	20.7	20.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	20.6	20.6	20.7
			1	8	0	20.7	20.7	20.9
			1	14	0	20.6	20.6	20.7
			8	0	0	20.6	20.6	20.7
			8	4	0	20.7	20.6	20.7
			8	7	0	20.7	20.6	20.7
			15	0	0	20.7	20.6	20.7
		16QAM	1	0	0	20.7	21.0	20.5
			1	8	0	20.8	21.0	20.7
			1	14	0	20.7	20.9	20.6
			8	0	0	20.7	20.8	20.7
			8	4	0	20.8	20.7	20.8
			8	7	0	20.7	20.7	20.8
			15	0	0	20.7	20.7	20.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	20.6	20.6	20.6
			1	3	0	20.6	20.6	20.7
			1	5	0	20.6	20.6	20.6
			3	0	0	20.6	20.6	20.6
			3	1	0	20.6	20.6	20.7
			3	3	0	20.6	20.6	20.7
			6	0	0	20.6	20.6	20.6
		16QAM	1	0	0	20.7	21.0	20.7
			1	3	0	20.7	21.0	20.8
			1	5	0	20.7	20.9	20.7
			3	0	0	20.8	20.8	20.8
			3	1	0	20.9	20.8	20.8
			3	3	0	20.9	20.8	20.8
			6	0	0	20.8	20.5	20.8

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	22.4	22.6	22.3
			1	25	0	22.3	22.5	22.2
			1	49	0	22.3	22.4	22.1
			25	0	0	22.4	22.5	22.3
			25	12	0	22.4	22.5	22.3
			25	25	0	22.3	22.4	22.2
			50	0	0	22.4	22.5	22.3
		16QAM	1	0	0	22.5	22.9	22.3
			1	25	0	22.4	22.8	22.1
			1	49	0	22.4	22.7	22.0
			25	0	0	22.5	22.6	22.4
			25	12	0	22.5	22.5	22.3
			25	25	0	22.4	22.5	22.2
			50	0	0	22.4	22.5	22.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.6	22.4	22.4
			1	12	0	22.5	22.4	22.2
			1	24	0	22.5	22.4	22.2
			12	0	0	22.5	22.4	22.2
			12	7	0	22.5	22.5	22.2
			12	13	0	22.5	22.5	22.2
			25	0	0	22.5	22.5	22.2
		16QAM	1	0	0	22.7	23.0	22.4
			1	12	0	22.6	23.0	22.4
			1	24	0	22.6	23.0	22.3
			12	0	0	22.6	22.5	22.3
			12	7	0	22.6	22.6	22.3
			12	13	0	22.6	22.6	22.3
			25	0	0	22.5	22.5	22.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	22.5	22.4	22.2
			1	8	0	22.6	22.6	22.2
			1	14	0	22.4	22.4	22.1
			8	0	0	22.5	22.5	22.2
			8	4	0	22.5	22.5	22.2
			8	7	0	22.5	22.5	22.2
			15	0	0	22.5	22.5	22.2
		16QAM	1	0	0	22.6	22.8	22.2
			1	8	0	22.6	23.0	22.2
			1	14	0	22.5	22.8	22.0
			8	0	0	22.6	22.6	22.4
			8	4	0	22.6	22.6	22.3
			8	7	0	22.6	22.6	22.4
			15	0	0	22.5	22.5	22.3

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	22.4	22.4	22.1
			1	3	0	22.5	22.5	22.1
			1	5	0	22.4	22.4	22.1
			3	0	0	22.4	22.4	22.1
			3	1	0	22.5	22.5	22.1
			3	3	0	22.5	22.4	22.1
		16QAM	6	0	0	22.4	22.4	22.1
			1	0	0	22.5	22.8	22.2
			1	3	0	22.6	22.8	22.3
			1	5	0	22.5	22.8	22.2
			3	0	0	22.6	22.6	22.1
			3	1	0	22.7	22.6	22.2
			3	3	0	22.7	22.6	22.2
			6	0	0	22.7	22.3	22.2

LTE Band 7 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						2510 MHz	2535 MHz	2560 MHz
LTE Band 7	20	QPSK	1	0	0	24.6	24.6	23.4
			1	49	0	23.8	24.5	24.4
			1	99	0	24.2	24.4	24.3
			50	0	1	23.5	23.6	23.5
			50	24	1	23.1	23.6	23.5
			50	50	1	23.2	23.5	23.4
			100	0	1	23.4	23.5	23.4
		16QAM	1	0	1	24.0	24.0	24.0
			1	49	1	23.2	24.0	23.9
			1	99	1	23.7	24.0	24.0
			50	0	2	22.5	22.6	22.6
			50	24	2	22.1	22.6	22.6
			50	50	2	22.2	22.5	22.5
			100	0	2	22.4	22.5	22.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						2507.5 MHz	2535 MHz	2562.5 MHz
LTE Band 7	15	QPSK	1	0	0	23.6	23.6	23.8
			1	37	0	23.4	23.5	23.6
			1	74	0	23.3	23.5	23.3
			36	0	1	23.4	23.5	23.6
			36	20	1	23.3	23.6	23.6
			36	39	1	23.0	23.6	23.3
			75	0	1	23.3	23.6	23.6
		16QAM	1	0	1	23.8	24.0	23.8
			1	37	1	23.4	23.9	23.5
			1	74	1	23.3	23.8	22.2
			36	0	2	22.4	22.6	22.6
			36	20	2	22.2	22.6	22.6
			36	39	2	22.0	22.6	22.3
			75	0	2	22.3	22.6	22.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						2505 MHz	2535 MHz	2565 MHz
LTE Band 7	10	QPSK	1	0	0	23.5	23.5	23.6
			1	25	0	23.5	23.5	23.4
			1	49	0	23.4	23.5	23.3
			25	0	1	23.4	23.5	23.4
			25	12	1	23.3	23.6	23.4
			25	25	1	23.2	23.5	22.9
			50	0	1	23.3	23.6	23.4
		16QAM	1	0	1	23.7	23.5	23.5
			1	25	1	23.6	23.5	23.3
			1	49	1	23.2	23.4	22.4
			25	0	2	22.4	22.6	22.5
			25	12	2	22.4	22.6	22.5
			25	25	2	22.2	22.6	22.1
			50	0	2	22.3	22.6	22.4

LTE Band 7 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						2502.5 MHz	2535 MHz	2567.5 MHz
LTE Band 7	5	QPSK	1	0	0	24.2	24.3	24.3
			1	12	0	24.3	24.4	23.8
			1	24	0	24.3	24.4	23.4
			12	0	1	23.2	23.5	23.1
			12	7	1	23.3	23.5	22.9
			12	13	1	23.3	23.4	22.7
			25	0	1	23.3	23.4	22.9
		16QAM	1	0	1	23.3	23.9	23.4
			1	12	1	23.4	23.9	22.9
			1	24	1	23.3	23.9	22.6
			12	0	2	22.2	22.6	22.3
			12	7	2	22.4	22.6	22.1
			12	13	2	22.3	22.6	21.9
			25	0	2	22.3	22.5	22.0

LTE Band 12 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						704 MHz	707.5 MHz	711 MHz
LTE Band 12	10	QPSK	1	0	0		24.6	
			1	25	0		24.5	
			1	49	0		24.4	
			25	0	1		23.4	
			25	12	1		23.5	
			25	25	1		23.4	
		16QAM	50	0	1		23.5	
			1	0	1		23.9	
			1	25	1		23.8	
			1	49	1		23.7	
			25	0	2		22.5	
			25	12	2		22.5	
			25	25	2		22.4	
			50	0	2		22.5	

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	24.1	23.9	23.9
			1	12	0	24.0	23.9	23.8
			1	24	0	24.0	23.9	23.8
			12	0	1	23.4	23.5	23.5
			12	7	1	23.5	23.5	23.5
			12	13	1	23.4	23.5	23.4
			25	0	1	23.5	23.5	23.5
		16QAM	1	0	1	23.7	23.6	24.0
			1	12	1	23.6	23.6	24.0
			1	24	1	23.6	23.5	23.9
			12	0	2	22.5	22.6	22.6
			12	7	2	22.5	22.5	22.6
			12	13	2	22.5	22.5	22.6
			25	0	2	22.5	22.4	22.5

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						700.5 MHz	707.5 MHz	714.5 MHz
LTE Band 12	3	QPSK	1	0	0	24.5	24.4	24.4
			1	8	0	24.5	24.6	24.5
			1	14	0	24.4	24.5	24.4
			8	0	1	23.5	23.4	23.5
			8	4	1	23.5	23.5	23.5
			8	7	1	23.5	23.4	23.5
			15	0	1	23.4	23.4	23.5
		16QAM	1	0	1	23.6	23.8	23.4
			1	8	1	23.6	23.9	23.4
			1	14	1	23.5	23.8	23.2
			8	0	2	22.5	22.6	22.6
			8	4	2	22.5	22.6	22.6
			8	7	2	22.5	22.5	22.6
			15	0	2	22.4	22.5	22.5

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 12 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						699.7 MHz	707.5 MHz	715.3 MHz
LTE Band 12	1.4	QPSK	1	0	0	24.4	24.4	24.4
			1	3	0	24.5	24.5	24.4
			1	5	0	24.4	24.4	24.4
			3	0	0	24.4	24.4	24.4
			3	1	0	24.5	24.5	24.4
			3	3	0	24.5	24.5	24.3
			6	0	1	23.4	23.4	23.4
		16QAM	1	0	1	23.5	23.8	23.5
			1	3	1	23.5	23.8	23.5
			1	5	1	23.5	23.8	23.4
			3	0	1	23.6	23.6	23.5
			3	1	1	23.7	23.7	23.5
			3	3	1	23.7	23.6	23.5
			6	0	2	22.6	22.3	22.5

LTE Band 13 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)
						782 MHz
LTE Band 13	10	QPSK	1	0	0	23.5
			1	25	0	23.4
			1	49	0	23.5
			25	0	1	22.5
			25	12	1	22.5
			25	25	1	22.5
		16QAM	50	0	1	22.4
			1	0	1	22.5
			1	25	1	22.4
			1	49	1	22.4
			25	0	2	21.5
			25	12	2	21.5
			25	25	2	21.5
			50	0	2	21.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)
						782 MHz
LTE Band 13	5	QPSK	1	0	0	23.6
			1	12	0	23.5
			1	24	0	23.5
			12	0	1	22.5
			12	7	1	22.5
			12	13	1	22.5
		16QAM	25	0	1	22.4
			1	0	1	22.6
			1	12	1	22.5
			1	24	1	22.6
			12	0	2	21.5
			12	7	2	21.5
			12	13	2	21.6
			25	0	2	21.4

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 17 Measured Results

SAR for LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 38 Measured Results

SAR for LTE Band 38 (Frequency range: 2570-2620 MHz) is covered by LTE Band 41 (Frequency range: 2496-2690 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 41 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)				
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	20	QPSK	1	0	0	24.6	24.7	25.0	24.8	24.8
			1	49	0	24.4	24.4	24.8	24.7	24.5
			1	99	0	24.3	24.4	24.7	24.5	24.4
			50	0	1	23.4	23.6	23.9	23.8	23.7
			50	24	1	23.4	23.5	23.8	23.7	23.6
			50	50	1	23.3	23.4	23.7	23.5	23.5
			100	0	1	23.4	23.5	23.8	23.5	23.7
		16QAM	1	0	1	23.2	23.4	23.9	23.5	23.7
			1	49	1	23.0	23.2	23.7	23.3	23.3
			1	99	1	22.9	23.1	23.6	23.1	23.2
			50	0	2	22.4	22.5	22.9	22.8	22.7
			50	24	2	22.4	22.5	22.8	22.7	22.6
			50	50	2	22.3	22.4	22.8	22.6	22.5
			100	0	2	22.4	22.5	22.8	22.6	22.6
LTE Band 41	15	QPSK	1	0	0	23.7	23.7	24.1	24.0	24.1
			1	37	0	23.5	23.5	23.8	23.9	23.8
			1	74	0	23.4	23.4	23.8	23.8	23.7
			36	0	1	23.4	23.5	23.8	23.7	23.7
			36	20	1	23.5	23.4	23.8	23.7	23.7
			36	39	1	23.4	23.4	23.7	23.6	23.6
			75	0	1	23.4	23.4	23.8	23.4	23.6
		16QAM	1	0	1	23.4	23.4	23.7	23.6	23.7
			1	37	1	23.3	23.2	23.5	23.5	23.4
			1	74	1	23.2	23.0	23.5	23.4	23.3
			36	0	2	22.5	22.5	22.8	22.7	22.7
			36	20	2	22.5	22.5	22.8	22.7	22.6
			36	39	2	22.4	22.4	22.7	22.6	22.6
			75	0	2	22.4	22.5	22.8	22.6	22.6
LTE Band 41	10	QPSK	1	0	0	23.4	23.7	24.0	24.0	24.0
			1	25	0	23.3	23.6	23.9	23.9	23.9
			1	49	0	23.3	23.6	23.8	23.8	23.8
			25	0	1	23.4	23.5	23.8	23.6	23.7
			25	12	1	23.4	23.5	23.8	23.5	23.7
			25	25	1	23.3	23.5	23.7	23.5	23.6
			50	0	1	23.3	23.5	23.8	23.3	23.6
		16QAM	1	0	1	23.5	23.6	23.8	23.8	23.7
			1	25	1	23.5	23.5	23.8	23.7	23.5
			1	49	1	23.4	23.5	23.7	23.7	23.5
			25	0	2	22.4	22.6	22.8	22.7	22.7
			25	12	2	22.4	22.5	22.8	22.7	22.6
			25	25	2	22.3	22.5	22.8	22.6	22.6
			50	0	2	22.4	22.5	22.8	22.5	22.6

LTE Band 41 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)				
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	5	QPSK	1	0	0	24.3	24.7	24.7	24.7	24.6
			1	12	0	24.3	24.6	24.7	24.6	24.6
			1	24	0	24.2	24.6	24.6	24.6	24.6
			12	0	1	23.3	23.6	23.8	23.7	23.7
			12	7	1	23.4	23.6	23.8	23.7	23.7
			12	13	1	23.3	23.6	23.8	23.6	23.6
			25	0	1	23.3	23.5	23.8	23.6	23.6
		16QAM	1	0	1	23.3	23.8	23.7	23.7	23.7
			1	12	1	23.3	23.8	23.7	23.6	23.7
			1	24	1	23.2	23.8	23.6	23.7	23.7
			12	0	2	22.3	22.8	22.8	22.6	22.7
			12	7	2	22.4	22.7	22.8	22.6	22.7
			12	13	2	22.3	22.7	22.8	22.6	22.7
			25	0	2	22.3	22.6	22.8	22.7	22.6

9.4. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)
					Chain 0	Chain 1	Chain 0	Chain 1	
2.4	802.11b	1 Mbps	1	2412	13.2	12.5	13.7	13.5	Yes
			6	2437	13.4	12.5			
			11	2462	13.3	12.8			
	802.11g	6 Mbps	1	2412	13.1	12.3	13.7	13.5	No
			6	2437	13.2	12.4			
			11	2462	13.3	12.8			
	802.11n (HT20)	6.5 Mbps	1	2412	13.3	12.4	13.7	13.5	No
			6	2437	13.4	12.6			
			11	2462	13.4	12.9			

Note(s):

- SAR not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.

9.5. Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)		
					Chain 0	Chain 1	Chain 0	Chain 1			
5.3 U-NII-2A	802.11a	6 Mbps	52	5260	Not Required	Not Required	13.5	14.0	No		
			56	5280							
			60	5300							
			64	5320							
	802.11n (HT20)	6.5 Mbps	52	5260							
			56	5280							
			60	5300							
	802.11n (HT40)	13.5 Mbps	54	5270							
			62	5310							
			52	5260							
	802.11ac (VHT20)	6.5 Mbps	56	5280							
			60	5300							
			64	5320							
	802.11ac (VHT40)	13.5 Mbps	54	5270							
62			5310								
802.11ac (VHT80)	29.3 Mbps	58	5290	13.1	13.4	13.5	14.0	Yes			
5.5 U-NII-2C	802.11a	6 Mbps	100	5500	Not Required	Not Required	13.5	14.0	No		
			116	5580							
			124	5620							
			140	5700							
	802.11n (HT20)	6.5 Mbps	100	5500							
			116	5580							
			124	5620							
	802.11n (HT40)	13.5 Mbps	102	5510							
			118	5590							
			134	5670							
	802.11ac (VHT20)	6.5 Mbps	100	5500							
			116	5580							
			124	5620							
	802.11ac (VHT40)	13.5 Mbps	102	5510							
			118	5590							
			134	5670							
	802.11ac (VHT80)	29.3 Mbps	106	5530			13.5	13.3	13.5	14.0	Yes
			122	5610			12.8	13.1			
138			5690	12.5	13.1						
5.8 U-NII-3	802.11a	6 Mbps	149	5745	Not Required	Not Required	13.5	14.0	No		
			157	5785							
			165	5825							
	802.11n (HT20)	6.5 Mbps	149	5745							
			157	5785							
			165	5825							
	802.11n (HT40)	13.5 Mbps	151	5755							
			159	5795							
	802.11ac (VHT20)	6.5 Mbps	149	5745							
			157	5785							
			165	5825							
	802.11ac (VHT40)	13.5 Mbps	151	5755							
			159	5795							
	802.11ac (VHT80)	29.3 Mbps	155	5775			12.4	13.0	13.5	14.0	Yes

Note(s):

- For "Not required", SAR Test reduction was applied per KDB 248227.
- When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the largest channel bandwidth configuration is selected for SAR evaluation.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest *reported* SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.6. Bluetooth

Maximum tune-up tolerance limit is 9.88 dBm. This power level qualifies for exclusion of SAR testing. Refer to §10.21 for Standalone SAR Test Exclusion Considerations & Estimated SAR.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the *reported* SAR for the *initial test position* is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 3 Slots	OFF	0	Left Touch	190	836.6	28.5	27.9	0.274	0.315	1
				Left Tilt	190	836.6	28.5	27.9	0.087	0.100	
				Right Touch	190	836.6	28.5	27.9	0.247	0.284	
				Right Tilt	190	836.6	28.5	27.9	0.114	0.131	
Body-worn	GPRS 3 Slots	OFF	15	Rear	190	836.6	28.5	27.9	0.306	0.351	2
				Front	190	836.6	28.5	27.9	0.225	0.258	
Hotspot	GPRS 3 Slots	OFF	10	Rear	190	836.6	28.5	27.9	0.354	0.406	3
				Front	190	836.6	28.5	27.9	0.272	0.312	
				Edge 2	190	836.6	28.5	27.9	0.109	0.125	
				Edge 3	190	836.6	28.5	27.9	0.036	0.041	
				Edge 4	190	836.6	28.5	27.9	0.244	0.280	
	DTM CS+PS 2 Slot	OFF	10	Front	190	836.6	28.5	27.7	0.284	0.341	

10.2. GSM1900

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 3 Slots	OFF	0	Left Touch	661	1880.0	24.5	23.7	0.297	0.357	4
				Left Tilt	661	1880.0	24.5	23.7	0.121	0.145	
				Right Touch	661	1880.0	24.5	23.7	0.115	0.138	
				Right Tilt	661	1880.0	24.5	23.7	0.101	0.121	
Body-worn	GPRS 3 Slots	OFF	15	Rear	661	1880.0	24.5	23.7	0.138	0.166	
				Front	661	1880.0	24.5	23.7	0.142	0.171	5
Hotspot	GPRS 3 Slots	OFF	10	Rear	661	1880.0	24.5	23.7	0.255	0.307	
				Front	661	1880.0	24.5	23.7	0.303	0.364	
				Edge 2	661	1880.0	24.5	23.7	0.051	0.061	
				Edge 3	661	1880.0	24.5	23.7	0.390	0.469	
				Edge 4	661	1880.0	24.5	23.7	0.196	0.236	
	DTM CS+PS 2 Slot	OFF	10	Edge 3	661	1880.0	24.5	23.8	0.424	0.498	6

10.3. W-CDMA Band V

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	OFF	0	Left Touch	4183	836.6	22.7	22.5	0.262	0.274	7
				Left Tilt	4183	836.6	22.7	22.5	0.087	0.091	
				Right Touch	4183	836.6	22.7	22.5	0.234	0.245	
				Right Tilt	4183	836.6	22.7	22.5	0.111	0.116	
Body-worn	Rel 99 RMC	OFF	15	Rear	4183	836.6	22.7	22.5	0.311	0.326	8
				Front	4183	836.6	22.7	22.5	0.252	0.264	
Hotspot	Rel 99 RMC	OFF	10	Rear	4183	836.6	22.7	22.5	0.369	0.386	9
				Front	4183	836.6	22.7	22.5	0.292	0.306	
				Edge 2	4183	836.6	22.7	22.5	0.122	0.128	
				Edge 3	4183	836.6	22.7	22.5	0.031	0.033	
				Edge 4	4183	836.6	22.7	22.5	0.263	0.275	

10.4. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	20175	1732.5	1	0	21.0	20.9	0.353	0.362	10
							50	0	21.0	20.9	0.361	0.366	
				Left Tilt	20175	1732.5	1	0	21.0	20.9	0.245	0.251	
							50	0	21.0	20.9	0.246	0.249	
				Right Touch	20175	1732.5	1	0	21.0	20.9	0.166	0.170	
							50	0	21.0	20.9	0.170	0.172	
Right Tilt	20175	1732.5	1	0	21.0	20.9	0.192	0.197					
			50	0	21.0	20.9	0.207	0.210					
Body-worn	QPSK	OFF	15	Rear	20175	1732.5	1	0	21.0	20.9	0.241	0.247	11
							50	0	21.0	20.9	0.247	0.250	
				Front	20175	1732.5	1	0	21.0	20.9	0.258	0.265	
							50	0	21.0	20.9	0.252	0.255	
Hotspot	QPSK	OFF	10	Rear	20175	1732.5	1	0	21.0	20.9	0.550	0.564	12
							50	0	21.0	20.9	0.522	0.529	
				Front	20175	1732.5	1	0	21.0	20.9	0.648	0.664	
							50	0	21.0	20.9	0.640	0.649	
				Edge 2	20175	1732.5	1	0	21.0	20.9	0.081	0.083	
							50	0	21.0	20.9	0.080	0.081	
				Edge 3	20175	1732.5	1	0	21.0	20.9	0.574	0.588	
							50	0	21.0	20.9	0.565	0.573	
				Edge 4	20175	1732.5	1	0	21.0	20.9	0.207	0.212	
							50	0	21.0	20.9	0.202	0.205	

10.5. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	20525	836.5	1	0	23.0	22.6	0.262	0.288	13
							25	0	23.0	22.5	0.253	0.281	
				Left Tilt	20525	836.5	1	0	23.0	22.6	0.158	0.174	
							25	0	23.0	22.5	0.142	0.158	
				Right Touch	20525	836.5	1	0	23.0	22.6	0.206	0.227	
							25	0	23.0	22.5	0.202	0.225	
Right Tilt	20525	836.5	1	0	23.0	22.6	0.141	0.155					
			25	0	23.0	22.5	0.140	0.156					
Body-worn	QPSK	OFF	15	Rear	20525	836.5	1	0	23.0	22.6	0.365	0.402	14
							25	0	23.0	22.5	0.357	0.397	
				Front	20525	836.5	1	0	23.0	22.6	0.307	0.338	
							25	0	23.0	22.5	0.302	0.336	
Hotspot	QPSK	OFF	10	Rear	20525	836.5	1	0	23.0	22.6	0.409	0.450	15
							25	0	23.0	22.5	0.404	0.449	
				Front	20525	836.5	1	0	23.0	22.6	0.338	0.372	
							25	0	23.0	22.5	0.331	0.368	
				Edge 2	20525	836.5	1	0	23.0	22.6	0.118	0.130	
							25	0	23.0	22.5	0.120	0.133	
				Edge 3	20525	836.5	1	0	23.0	22.6	0.031	0.034	
							25	0	23.0	22.5	0.030	0.033	
				Edge 4	20525	836.5	1	0	23.0	22.6	0.249	0.274	
							25	0	23.0	22.5	0.256	0.285	

10.6. LTE Band 7 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up limit	Meas.	Meas.	Scaled		
Head	QPSK	OFF	0	Left Touch	21100	2535.0	1	0	25.0	24.6	0.223	0.243	16	
							50	24	24.0	23.6	0.157	0.172		
				Left Tilt	21100	2535.0	1	0	25.0	24.6	0.069	0.075		0.055
							50	24	24.0	23.6	0.050	0.055		
				Right Touch	21100	2535.0	1	0	25.0	24.6	0.341	0.372		0.275
							50	24	24.0	23.6	0.251	0.275		
Right Tilt	21100	2535.0	1	0	25.0	24.6	0.117	0.128	0.047					
			50	24	24.0	23.6	0.043	0.047						
Body-worn	QPSK	OFF	15	Rear	21100	2535.0	1	0	25.0	24.6	0.160	0.174	17	
							50	24	24.0	23.6	0.127	0.139		
				Front	21100	2535.0	1	0	25.0	24.6	0.173	0.189		0.151
							50	24	24.0	23.6	0.138	0.151		
Hotspot	QPSK	OFF	10	Rear	21100	2535.0	1	0	25.0	24.6	0.309	0.337	18	
							50	24	24.0	23.6	0.241	0.264		
				Front	21100	2535.0	1	0	25.0	24.6	0.358	0.390		0.335
							50	24	24.0	23.6	0.305	0.335		
				Edge 2	21100	2535.0	1	0	25.0	24.6	0.329	0.359		0.284
							50	24	24.0	23.6	0.259	0.284		
				Edge 3	21100	2535.0	1	0	25.0	24.6	0.209	0.228		0.182
							50	24	24.0	23.6	0.166	0.182		
				Edge 4	21100	2535.0	1	0	25.0	24.6	0.044	0.048		0.049
							50	24	24.0	23.6	0.045	0.049		

10.7. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up limit	Meas.	Meas.	Scaled		
Head	QPSK	OFF	0	Left Touch	23095	707.5	1	0	25.0	24.6	0.174	0.189	19	
							25	12	24.0	23.5	0.156	0.175		
				Left Tilt	23095	707.5	1	0	25.0	24.6	0.092	0.100		0.093
							25	12	24.0	23.5	0.083	0.093		
				Right Touch	23095	707.5	1	0	25.0	24.6	0.160	0.174		0.149
							25	12	24.0	23.5	0.133	0.149		
Right Tilt	23095	707.5	1	0	25.0	24.6	0.085	0.093	0.075					
			25	12	24.0	23.5	0.067	0.075						
Body-worn	QPSK	OFF	15	Rear	23095	707.5	1	0	25.0	24.6	0.181	0.197	20	
							25	12	24.0	23.5	0.155	0.173		
				Front	23095	707.5	1	0	25.0	24.6	0.170	0.185		0.162
							25	12	24.0	23.5	0.145	0.162		
Hotspot	QPSK	OFF	10	Rear	23095	707.5	1	0	25.0	24.6	0.251	0.273	21	
							25	12	24.0	23.5	0.212	0.237		
				Front	23095	707.5	1	0	25.0	24.6	0.212	0.231		0.196
							25	12	24.0	23.5	0.175	0.196		
				Edge 2	23095	707.5	1	0	25.0	24.6	0.147	0.160		0.143
							25	12	24.0	23.5	0.128	0.143		
				Edge 3	23095	707.5	1	0	25.0	24.6	0.037	0.040		0.036
							25	12	24.0	23.5	0.032	0.036		
				Edge 4	23095	707.5	1	0	25.0	24.6	0.221	0.241		0.229
							25	12	24.0	23.5	0.205	0.229		

10.8. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	23230	782.0	1	0	24.0	23.5	0.322	0.360	22
							25	0	23.0	22.5	0.256	0.289	
				Left Tilt	23230	782.0	1	0	24.0	23.5	0.123	0.138	
							25	0	23.0	22.5	0.098	0.111	
				Right Touch	23230	782.0	1	0	24.0	23.5	0.247	0.276	
							25	0	23.0	22.5	0.207	0.233	
				Right Tilt	23230	782.0	1	0	24.0	23.5	0.135	0.151	
							25	0	23.0	22.5	0.107	0.121	
Body-worn	QPSK	OFF	15	Rear	23230	782.0	1	0	24.0	23.5	0.303	0.339	23
							25	0	23.0	22.5	0.244	0.275	
				Front	23230	782.0	1	0	24.0	23.5	0.248	0.277	
							25	0	23.0	22.5	0.201	0.227	
Hotspot	QPSK	OFF	10	Rear	23230	782.0	1	0	24.0	23.5	0.388	0.434	24
							25	0	23.0	22.5	0.312	0.352	
				Front	23230	782.0	1	0	24.0	23.5	0.301	0.337	
							25	0	23.0	22.5	0.243	0.274	
				Edge 2	23230	782.0	1	0	24.0	23.5	0.132	0.148	
							25	0	23.0	22.5	0.112	0.126	
				Edge 3	23230	782.0	1	0	24.0	23.5	0.046	0.051	
							25	0	23.0	22.5	0.036	0.041	
				Edge 4	23230	782.0	1	0	24.0	23.5	0.300	0.336	
							25	0	23.0	22.5	0.253	0.285	

10.9. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 (Frequency Range: 704-716 MHz) is covered by LTE Band 12 (Frequency Range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.10. LTE Band 38 (20MHz Bandwidth)

SAR for LTE Band 38 (Frequency range: 2570-2620 MHz) is covered by LTE Band 41 (Frequency range: 2496-2690 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.11. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up limit	Meas.	Meas.	Scaled		
Head	QPSK	OFF	0	Left Touch	40620	2593.0	1	0	25.0	25.0	0.140	0.140	25	
							50	0	24.0	23.9	0.105	0.107		
				Left Tilt	40620	2593.0	1	0	25.0	25.0	0.050	0.050		
							50	0	24.0	23.9	0.039	0.040		
				Right Touch	40620	2593.0	1	0	25.0	25.0	0.114	0.114		
							50	0	24.0	23.9	0.088	0.090		
				Right Tilt	40620	2593.0	1	0	25.0	25.0	0.042	0.042		
							50	0	24.0	23.9	0.019	0.020		
Body-worn	QPSK	OFF	15	Rear	40620	2593.0	1	0	25.0	25.0	0.086	0.086		
							50	0	24.0	23.9	0.065	0.067		
				Front	40620	2593.0	1	0	25.0	25.0	0.087	0.087	26	
							50	0	24.0	23.9	0.067	0.069		
Hotspot	QPSK	OFF	10	Rear	40620	2593.0	1	0	25.0	25.0	0.138	0.138		
							50	0	24.0	23.9	0.109	0.112		
				Front	40620	2593.0	1	0	25.0	25.0	0.199	0.199	27	
							50	0	24.0	23.9	0.159	0.163		
				Edge 2	40620	2593.0	1	0	25.0	25.0	0.136	0.136		
							50	0	24.0	23.9	0.107	0.110		
				Edge 3	40620	2593.0	1	0	25.0	25.0	0.124	0.124		
							50	0	24.0	23.9	0.091	0.093		
				Edge 4	40620	2593.0	1	0	25.0	25.0	0.060	0.060		
							50	0	24.0	23.9	0.050	0.051		

10.12. Wi-Fi (DTS Band)

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	Chain 0	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	0.647	13.7	13.4	0.381	0.408	28
					Left Tilt	6	2437.0	0.359	13.7	13.4	0.156	0.167	
					Right Touch	6	2437.0	0.171	13.7	13.4			
					Right Tilt	6	2437.0	0.165	13.7	13.4			
			Body-worn	15	Rear	6	2437.0	0.063	13.7	13.4	0.039	0.042	29
					Front	6	2437.0	0.041	13.7	13.4			
			Hotspot & Wi-Fi Direct	10	Rear	6	2437.0	0.155	13.7	13.4			
					Front	6	2437.0	0.079	13.7	13.4			
					Edge 1	6	2437.0	0.095	13.7	13.4			
					Edge 2	6	2437.0	0.158	13.7	13.4	0.117	0.125	
2.4GHz	Chain 1	802.11b 1 Mbps	Head	0	Left Touch	11	2462.0	0.088	13.5	12.8	0.044	0.052	31
					Left Tilt	11	2462.0	0.004	13.5	12.8			
					Right Touch	11	2462.0	0.080	13.5	12.8			
					Right Tilt	11	2462.0	0.011	13.5	12.8			
			Body-worn	15	Rear	11	2462.0	0.022	13.5	12.8	0.014	0.016	32
					Front	11	2462.0	0.006	13.5	12.8			
			Hotspot & Wi-Fi Direct	10	Rear	11	2462.0	0.065	13.5	12.8	0.015	0.018	33
					Front	11	2462.0	0.010	13.5	12.8			
					Edge 1	11	2462.0	0.001	13.5	12.8			
					Edge 4	11	2462.0	0.045	13.5	12.8			

10.13. Wi-Fi (U-NII Band)

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	Chain 0	802.11ac VHT80 29.3 Mbps	Head	0	Left Touch	58	5290.0	0.508	13.5	13.1	0.197	0.216	34
					Left Tilt	58	5290.0	0.188	13.5	13.1			
					Right Touch	58	5290.0	0.131	13.5	13.1			
					Right Tilt	58	5290.0	0.107	13.5	13.1			
			Body-worn	15	Rear	58	5290.0	0.422	13.5	13.1	0.193	0.212	35
					Front	58	5290.0	0.075	13.5	13.1			
5.3 GHz U-NII 2A	Chain 1	802.11ac VHT80 29.3 Mbps	Head	0	Left Touch	58	5290.0	0.339	14.0	13.4	0.145	0.166	36
					Left Tilt	58	5290.0	0.041	14.0	13.4			
					Right Touch	58	5290.0	0.278	14.0	13.4			
					Right Tilt	58	5290.0	0.048	14.0	13.4			
			Body-worn	15	Rear	58	5290.0	0.210	14.0	13.4	0.069	0.079	37
					Front	58	5290.0	0.076	14.0	13.4			

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
5.5 GHz U-NII 2C	Chain 0	802.11ac VHT80 29.3 Mbps	Head	0	Left Touch	122	5610.0	0.379	13.5	13.5	0.170	0.170	38
					Left Tilt	122	5610.0	0.172	13.5	13.5			
					Right Touch	122	5610.0	0.112	13.5	13.5			
					Right Tilt	122	5610.0	0.101	13.5	13.5			
			Body-worn	15	Rear	122	5610.0	0.175	13.5	13.5	0.053	0.053	39
					Front	122	5610.0	0.016	13.5	13.5			
5.5 GHz U-NII 2C	Chain 1	802.11ac VHT80 29.3 Mbps	Head	0	Left Touch	122	5610.0	0.346	14.0	13.3			
					Left Tilt	122	5610.0	0.049	14.0	13.3			
					Right Touch	122	5610.0	0.394	14.0	13.3	0.241	0.283	40
					Right Tilt	122	5610.0	0.092	14.0	13.3			
			Body-worn	15	Rear	122	5610.0	0.190	14.0	13.3	0.068	0.080	41
					Front	122	5610.0	0.046	14.0	13.3			

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
5.8 GHz U-NII 3	Chain 0	802.11ac VHT80	Head	0	Left Touch	155	5775.0	0.301	13.5	12.4	0.131	0.169	42
					Left Tilt	155	5775.0	0.098	13.5	12.4			
					Right Touch	155	5775.0	0.075	13.5	12.4			
					Right Tilt	155	5775.0	0.071	13.5	12.4			
			Body-worn	15	Rear	155	5775.0	0.252	13.5	12.4	0.073	0.094	43
					Front	155	5775.0	0.023	13.5	12.4			
5.8 GHz U-NII 3	Chain 1	802.11ac VHT80	Head	0	Left Touch	155	5775.0	0.594	14.0	13.0	0.285	0.359	44
					Left Tilt	155	5775.0	0.041	14.0	13.0			
					Right Touch	155	5775.0	0.351	14.0	13.0			
					Right Tilt	155	5775.0	0.062	14.0	13.0			
			Body-worn	15	Rear	155	5775.0	0.153	14.0	13.0	0.077	0.097	45
					Front	155	5775.0	0.051	14.0	13.0			

10.14. Bluetooth

Maximum tune-up tolerance limit is 9.88 dBm. This power level qualifies for exclusion of SAR testing. Refer to §10.21 for Standalone SAR Test Exclusion Considerations & Estimated SAR.

10.15. Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$,
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}/x]$
W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Body-worn and Hotspot:

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 1-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Body-worn	2.480	9.88	10	15	1.0	0.140
Bluetooth	Hotspot	2.480	9.88	10	10	1.6	0.210

Conclusion:

*: The computed value is ≤ 3 ; therefore, this qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated		Second Repeated		Third Repeated
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)
700	LTE Band 12	Hotspot	Rear	No	0.251	N/A	N/A	N/A	N/A	N/A
	LTE Band 13	Hotspot	Rear	No	0.388	N/A	N/A	N/A	N/A	N/A
850	GSM 850	Hotspot	Rear	No	0.354	N/A	N/A	N/A	N/A	N/A
	LTE Band 5	Hotspot	Rear	No	0.409	N/A	N/A	N/A	N/A	N/A
	WCDMA Band V	Hotspot	Rear	No	0.369	N/A	N/A	N/A	N/A	N/A
1700	LTE Band 4	Hotspot	Front	No	0.648	N/A	N/A	N/A	N/A	N/A
1900	GSM 1900	Hotspot	Edge 3	No	0.424	N/A	N/A	N/A	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Head	Left Touch	No	0.381	N/A	N/A	N/A	N/A	N/A
2500	LTE Band 7	Hotspot	Front	No	0.358	N/A	N/A	N/A	N/A	N/A
2600	LTE Band 41	Hotspot	Front	No	0.199	N/A	N/A	N/A	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Head	Left Touch	No	0.197	N/A	N/A	N/A	N/A	N/A
5600	Wi-Fi 802.11a/n/ac	Head	Right Touch	No	0.241	N/A	N/A	N/A	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Head	Left Touch	No	0.285	N/A	N/A	N/A	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is < 1.20 .

12. Simultaneous Transmission SAR Analysis

Simultaneous Transmission Condition

Case	Cellular	WLAN Chain 0 / BT	WLAN Chain 1
1	GSM/GPRS/Edge	BT/BLE	(None)
2	GSM/GPRS/Edge	WLAN 2.4G	(None)
3	GSM/GPRS/Edge	WLAN 2.4G	WLAN 2.4G
4	GSM/GPRS/Edge	WLAN 2.4G	WLAN 5G
5	GSM/GPRS/Edge	WLAN 5G	WLAN 5G
6	GSM/GPRS/Edge	BT WLAN 5G	WLAN 5G
7	UMTS/HSPA	BT/BLE	(None)
8	UMTS/HSPA	WLAN 2.4G	(None)
9	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
10	UMTS/HSPA	WLAN 2.4G	WLAN 5G
11	UMTS/HSPA	WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT WLAN 5G	WLAN 5G
13	LTE	BT/BLE	(None)
14	LTE	WLAN 2.4G	(None)
15	LTE	WLAN 2.4G	WLAN 2.4G
16	LTE	WLAN 2.4G	WLAN 5G
17	LTE	WLAN 5G	WLAN 5G
18	LTE	BT WLAN 5G	WLAN 5G
19	(None)	BT WLAN 5G	WLAN 5G

12.1. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/kg)							
		WWAN		DTS		U-NII		BT	WWAN + BT	WWAN + DTS	WWAN + DTS	WWAN + U-NII	WWAN+DTS+U-NII	WWAN+U-NII+BT	U-NII+BT
		①	Chain 0 ②	Chain 1 ③	Chain 0 ④	Chain 1 ⑤	⑥	① + ⑥	① + ②	① + ② + ③	① + ④ + ⑤	① + ② + ⑤	① + ④ + ⑤ + ⑥	④ + ⑤ + ⑥	
Head	Left Touch	0.366	0.408	0.052	0.216	0.359			0.774	0.826	0.941	1.133		0.575	
	Left Tilt	0.251	0.167	0.052	0.216	0.283			0.418	0.470	0.750	0.701		0.499	
	Right Touch	0.372	0.167	0.052	0.216	0.283			0.539	0.591	0.871	0.822		0.499	
	Right Tilt	0.210	0.167	0.052	0.216	0.283			0.377	0.429	0.709	0.660		0.499	
Body-worn	Rear	0.402	0.042	0.016	0.212	0.097	0.140	0.542	0.444	0.460	0.711	0.541	0.851	0.449	
	Front	0.338	0.042	0.016	0.212	0.097	0.140	0.478	0.380	0.396	0.647	0.477	0.787	0.449	
Hotspot	Rear	0.564	0.125	0.018			0.210	0.774	0.689	0.707					
	Front	0.664	0.125	0.018			0.210	0.874	0.789	0.807					
	Edge 1		0.125	0.018			0.210	0.210	0.125	0.143					
	Edge 2	0.359	0.125				0.210		0.484	0.484					
	Edge 3	0.588						0.588	0.588	0.588					
	Edge 4	0.336		0.018				0.336	0.336	0.354					

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1-g SAR is < 1.6 W/kg.

Appendixes

Refer to separated files for the following appendixes.

11775548-S1V1 SAR_App A Setup Photos

11775548-S1V1 SAR_App B System Check Plots

11775548-S1V1 SAR_App C Highest Test Plots

11775548-S1V1 SAR_App D Tissue Ingredients

11775548-S1V1 SAR_App E Probe Cal. Certificates

11775548-S1V2 SAR_App F Dipole Cal. Certificates

END OF REPORT