




FCC SAR TEST REPORT

FCC ID : PY7-12644I
Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, and NFC
Brand Name : Sony
Applicant : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan
Manufacturer : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Jul. 21, 2020 and testing was started from Aug. 11, 2020 and completed on Aug. 13, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information 5
3.1 General Information 5
3.2 Device Serial Number 5
3.3 General LTE SAR Test and Reporting Considerations 6
4. RF Exposure Limits..... 8
4.1 Uncontrolled Environment..... 8
4.2 Controlled Environment..... 8
5. Specific Absorption Rate (SAR)..... 9
5.1 Introduction 9
5.2 SAR Definition..... 9
6. System Description and Setup10
6.1 Test Side Location.....10
6.2 E-Field Probe11
6.3 Data Acquisition Electronics (DAE)11
6.4 Phantom.....12
6.5 Device Holder.....13
7. Measurement Procedures14
7.1 Spatial Peak SAR Evaluation14
7.2 Power Reference Measurement.....15
7.3 Area Scan15
7.4 Zoom Scan.....16
7.5 Volume Scan Procedures16
7.6 Power Drift Monitoring.....16
8. Test Equipment List17
9. System Verification18
9.1 Tissue Simulating Liquids.....18
9.2 Tissue Verification19
9.3 System Performance Check Results.....20
10. RF Exposure Positions21
10.1 Ear and handset reference point.....21
10.2 Definition of the cheek position22
10.3 Definition of the tilt position23
10.4 Body Worn Accessory24
10.5 Product Specific Exposure24
10.6 Wireless Router.....25
11. UMTS/LTE Output Power (Unit: dBm)26
12. RF Exposure Conditions35
13. SAR Test Results36
13.1 Head SAR37
13.2 Hotspot SAR38
13.3 Body Worn Accessory SAR39
14. Simultaneous Transmission Analysis40
14.1 Head Exposure Conditions41
14.2 Hotspot Exposure Conditions.....42
14.3 Body-Worn Accessory Exposure Conditions44
14.4 Product Specific Exposure Conditions44
15. Uncertainty Assessment45
16. References45
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
FA042243-01	01	Initial issue of report	Sep. 11, 2020
FA042243-01	02	Update section11,13,14	Sep. 21, 2020



1. Statement of Compliance

Table with columns: Applicant Name, EUT Description, Brand Name, FCC ID, HW Version, SW Version, RF Exposure Conditions (Equipment Class: Licensed, DTS, NII, DSS), Head (1g SAR W/kg), Body-Worn (1g SAR W/kg), Wireless Router (1g SAR W/kg), Product Specific (10g SAR W/kg), Highest Simultaneous Transmission (1g SAR W/kg), Highest Simultaneous Transmission (10g SAR W/kg), Date Tested, Test Result, Remark.

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Wan Liu

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, if the KDB standards were not list within TAF approval, because it is include in the FCC KDB 447498.

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013
FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
FCC KDB 865664 D02 SAR Reporting v01r02
FCC KDB 447498 D01 General RF Exposure Guidance v06
FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
FCC KDB 941225 D01 3G SAR Procedures v03r01
FCC KDB 941225 D05 SAR for LTE Devices v02r05
FCC KDB 941225 D06 Hotspot Mode SAR v02r01
FCC KDB 941225 D07 UMPC Mini Tablet v01r02



3. Equipment Under Test (EUT) Information

3.1 General Information

Wireless Technologies	Frequency	Operating Mode	
GSM	850 1900	· GSM Voice · GPRS (GMSK) · EDGE (8PSK)	Multi-Slot Class: Class 33
	Does device support dual transfer mode? (Yes)		
W-CDMA (UMTS)	Band 2 Band 4 Band 5	· AMR / RMC 12.2Kbps · HSDPA(Rel.9) · HSUPA(Rel.9)	
LTE (FDD)	Band 4 Band 5 Band 7 Band 13 Band 17	· QPSK · 16QAM · 64QAM	
LTE (TDD)	Band 41		
WiFi	2.4GHz: 2412 MHz ~ 2462 MHz	· 11b · 11g · 11n (HT20) · 11ax (HE20)	
	5GHz: 5.2GHz: 5180 MHz ~ 5240 MHz 5.3GHz: 5260 MHz ~ 5320 MHz 5.5GHz: 5500 MHz ~ 5720 MHz 5.8GHz: 5745 MHz ~ 5825 MHz	· 11a · 11n (HT20) · 11n (HT40) · 11ac (VHT20) · 11ac (VHT40) · 11ac (VHT80) · 11ax (HE20) · 11ax (HE40) · 11ax (HE80)	
Bluetooth	2.4GHz	· BR / EDR / LE	
NFC	13.56MHz	· ASK	

3.2 Device Serial Number

Band	SN
WWAN	QV71002M3Z

Note: Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.



3.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	PY7-12644I																																																														
Equipment Name	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, and NFC																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 41: 2496 MHz ~ 2690 MHz																																																														
Channel Bandwidth	LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 10 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23230		782	
M	23230		782		23230		782		23230		782	
H	23255		784.5		23230		782		23230		782	
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 10 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709		23780		709	
M	23790		710		23790		710		23790		710	
H	23825		713.5		23800		711		23800		711	
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39750	2506	39750	2506
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40185	2549.5	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5	41055	2636.5
M	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41490	2680	41490	2680



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

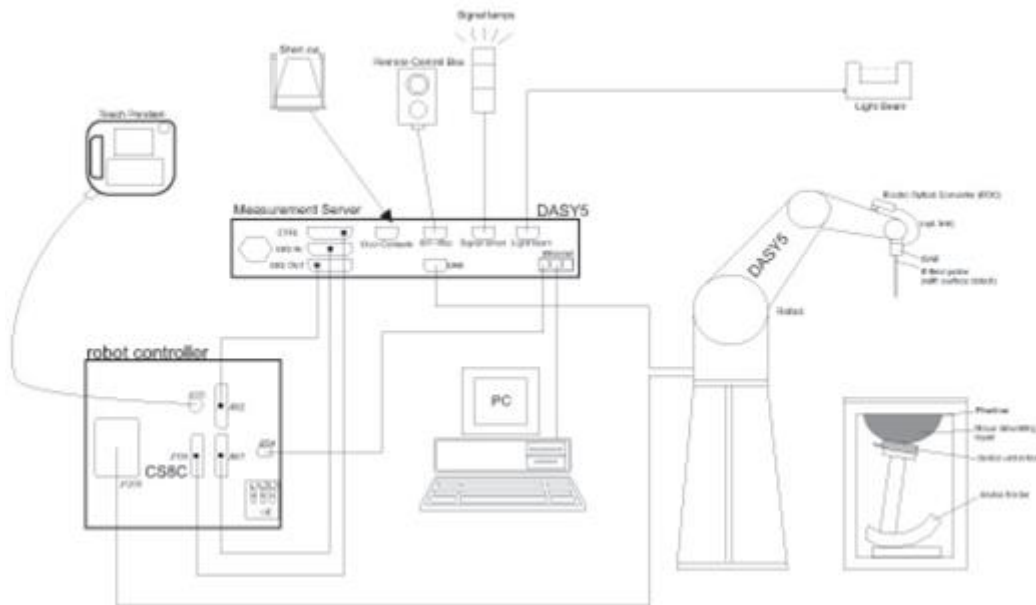

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Side Location


Sporton Lab and below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
Test Site No.	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		


6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit	D835V2	4d167	Nov. 25, 2019	Nov. 24, 2020
SPEAG	2600MHz System Validation Kit ⁽²⁾	D2600V2	1008	Aug. 31, 2018	Aug. 29, 2020
SPEAG	Data Acquisition Electronics	DAE4	699	Feb. 26, 2020	Feb. 25, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Feb. 04, 2020	Feb. 03, 2021
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2019	Nov. 11, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 31, 2019	Oct. 30, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50267236	Mar. 18, 2020	Mar. 17, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 06, 2019	Sep. 05, 2020
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 18, 2019	Sep. 17, 2020
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 18, 2019	Nov. 17, 2020
Anritsu	Power Meter	ML2495A	932001	Oct. 03, 2019	Oct. 02, 2020
Anritsu	Power Sensor	MA2411B	846202	Oct. 03, 2019	Oct. 02, 2020
Anritsu	Power Meter	ML2495A	1218006	Oct. 14, 2019	Oct. 13, 2020
Anritsu	Power Sensor	MA2411B	1207363	Oct. 14, 2019	Oct. 13, 2020
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2019	Aug. 26, 2020
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2019	Oct. 15, 2020
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 07, 2020	May. 06, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

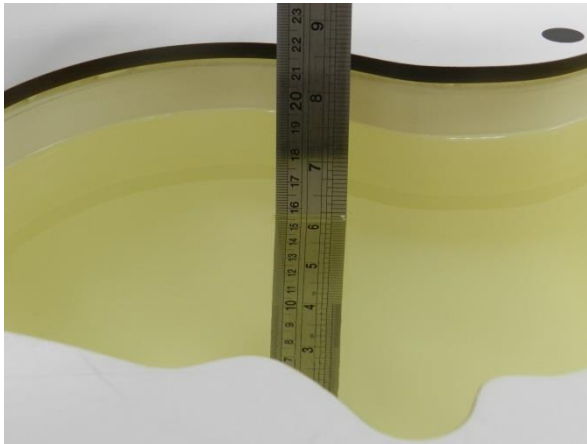


Fig 10.1 Photo of Liquid Height for Head SAR

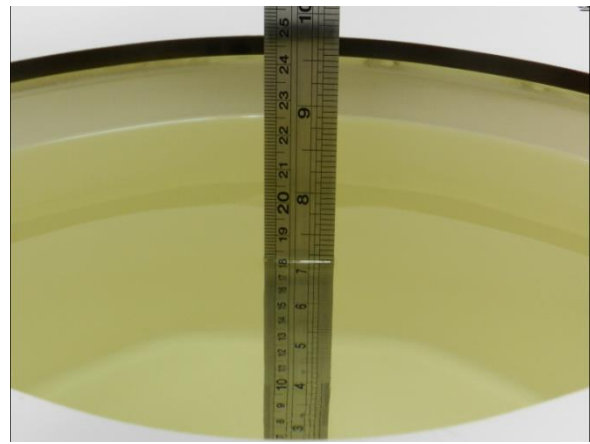


Fig 10.2 Photo of Liquid Height for Body SAR

9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Tissue check appears that head liquid is also used for body SAR test

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.2	0.895	42.188	0.89	41.90	0.56	0.69	±5	2020/8/12
835	22.4	0.926	43.406	0.90	41.50	2.89	4.59	±5	2020/8/11
2600	22.3	1.992	38.370	1.96	39.00	1.63	-1.62	±5	2020/8/13

9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/8/12	750	250	D750V3-1107	EX3DV4 - SN3728	DAE4 Sn699	2.10	8.32	8.4	0.96
2020/8/11	835	250	D835V2-4d167	EX3DV4 - SN3728	DAE4 Sn699	2.43	9.55	9.72	1.78
2020/8/13	2600	250	D2600V2-1008	EX3DV4 - SN3728	DAE4 Sn699	14.80	56.40	59.2	4.96

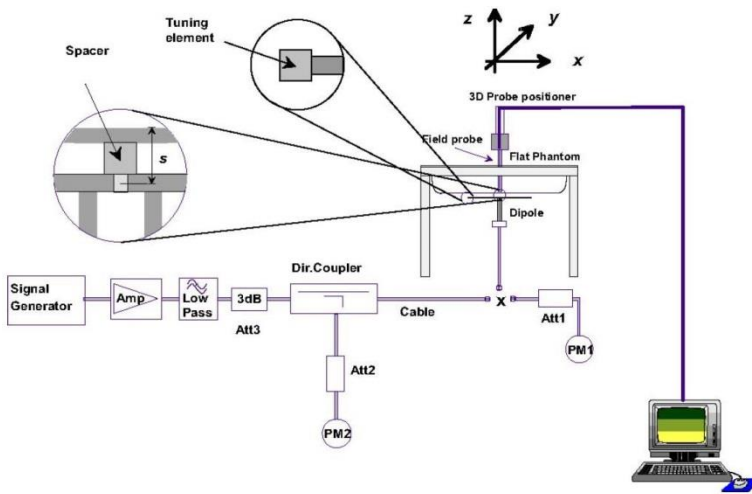


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

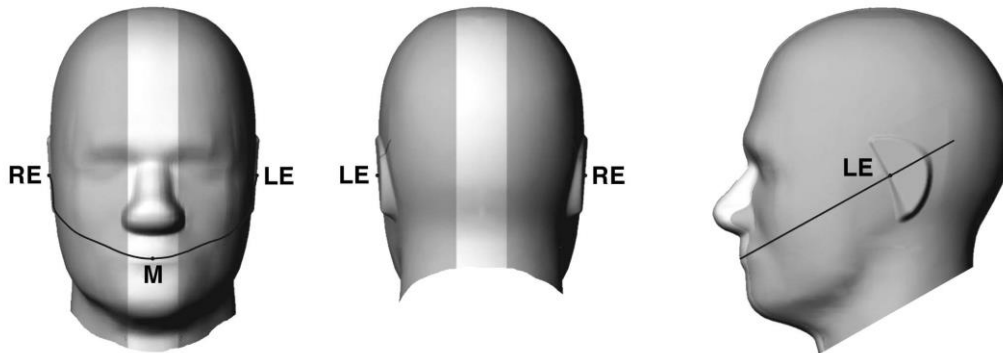


Fig 9.1.1 Front, back, and side views of SAM twin phantom

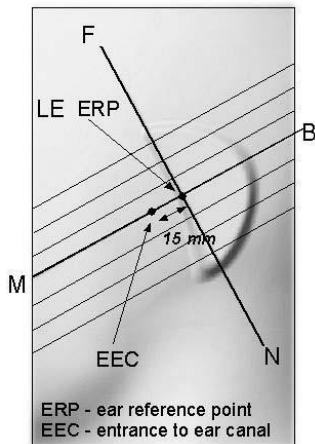


Fig 9.1.2 Close-up side view of phantom showing the ear region.

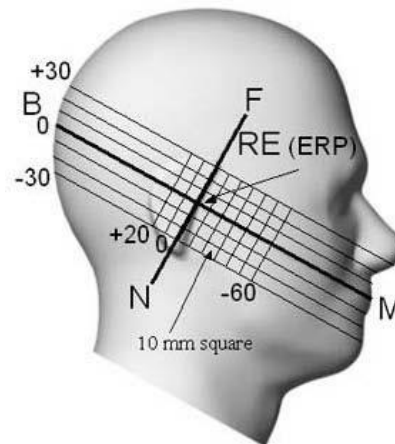


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

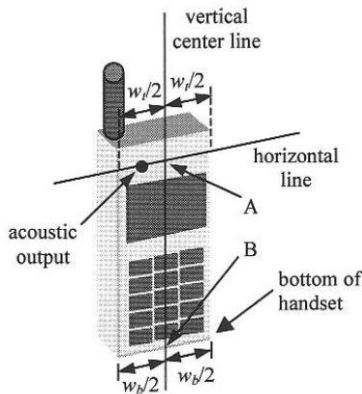


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

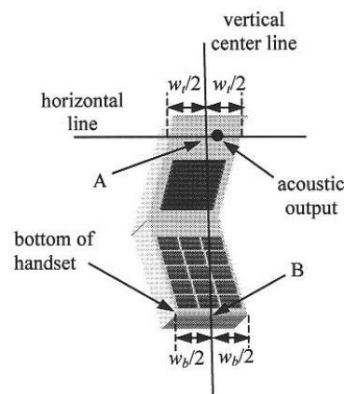


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

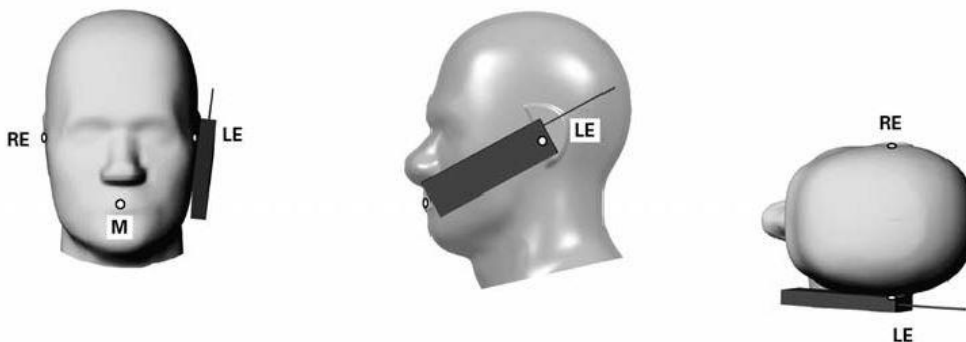


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

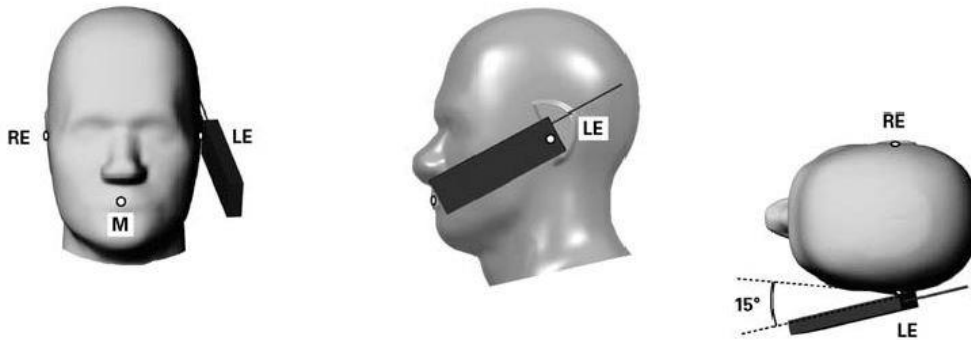


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

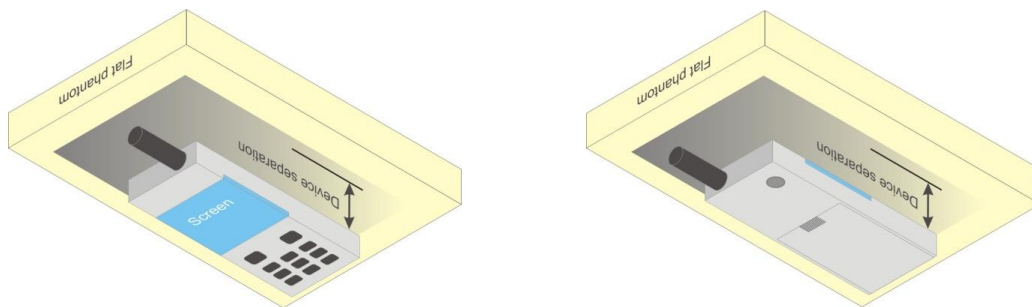


Fig 9.4 Body Worn Position

10.5 Product Specific Exposure

For smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$.



10.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W \geq 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11. UMTS/LTE Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration



<WCDMA Conducted Power>

General Note:


1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

Band		WCDMA V			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.81	23.72	23.81	24.70
3GPP Rel 99	RMC 12.2Kbps	23.84	23.79	23.82	24.70
3GPP Rel 6	HSDPA Subtest-1	23.32	23.28	23.26	24.00
3GPP Rel 6	HSDPA Subtest-2	23.34	23.29	23.31	24.00
3GPP Rel 6	HSDPA Subtest-3	22.83	22.78	22.77	23.50
3GPP Rel 6	HSDPA Subtest-4	22.81	22.77	22.81	23.50
3GPP Rel 6	HSUPA Subtest-1	23.33	23.28	23.28	24.00
3GPP Rel 6	HSUPA Subtest-2	21.36	21.31	21.29	22.00
3GPP Rel 6	HSUPA Subtest-3	22.32	22.24	22.28	23.00
3GPP Rel 6	HSUPA Subtest-4	21.34	21.26	21.30	22.00
3GPP Rel 6	HSUPA Subtest-5	23.30	23.30	23.30	24.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

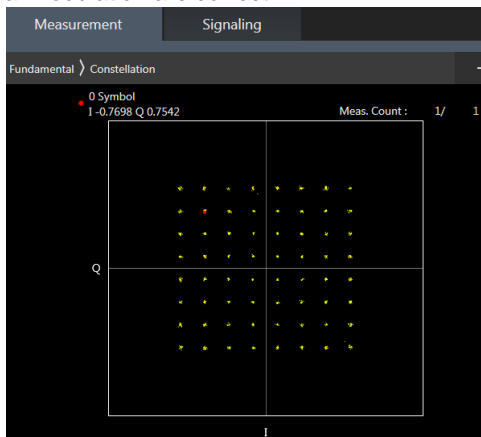

64QAM

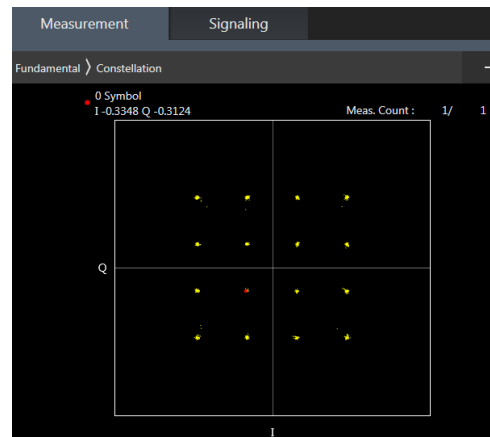

16QAM



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.54	23.50	23.49		
10	QPSK	1	25	23.42	23.40	23.42		
10	QPSK	1	49	23.41	23.38	23.32		
10	QPSK	25	0	22.65	22.63	22.55	24	1
10	QPSK	25	12	22.64	22.62	22.54		
10	QPSK	25	25	22.62	22.57	22.57		
10	QPSK	50	0	22.65	22.63	22.54	24	1
10	16QAM	1	0	22.93	22.83	22.88		
10	16QAM	1	25	22.82	22.79	22.80		
10	16QAM	1	49	22.81	22.76	22.70	23	2
10	16QAM	25	0	21.65	21.57	21.51		
10	16QAM	25	12	21.66	21.64	21.54		
10	16QAM	25	25	21.60	21.59	21.55	23	2
10	16QAM	50	0	21.65	21.63	21.52		
10	64QAM	1	0	21.78	21.74	21.73		
10	64QAM	1	25	21.78	21.73	21.72	23	2
10	64QAM	1	49	21.73	21.76	21.64		
10	64QAM	25	0	20.71	20.60	20.59		
10	64QAM	25	12	20.69	20.67	20.59	22	3
10	64QAM	25	25	20.63	20.59	20.60		
10	64QAM	50	0	20.71	20.66	20.59		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.50	23.48	23.53		
5	QPSK	1	12	23.41	23.49	23.44		
5	QPSK	1	24	23.34	23.46	23.32		
5	QPSK	12	0	22.60	22.56	22.59	24	1
5	QPSK	12	7	22.57	22.59	22.54		
5	QPSK	12	13	22.57	22.53	22.49		
5	QPSK	25	0	22.60	22.57	22.53	24	1
5	16QAM	1	0	22.86	22.80	22.90		
5	16QAM	1	12	22.74	22.79	22.74		
5	16QAM	1	24	22.80	22.77	22.69	23	2
5	16QAM	12	0	21.62	21.61	21.59		
5	16QAM	12	7	21.66	21.63	21.54		
5	16QAM	12	13	21.56	21.59	21.49	23	2
5	16QAM	25	0	21.65	21.63	21.57		
5	64QAM	1	0	21.69	21.85	21.79		
5	64QAM	1	12	21.70	21.72	21.64	23	2
5	64QAM	1	24	21.65	21.74	21.61		
5	64QAM	12	0	20.68	20.64	20.65		
5	64QAM	12	7	20.68	20.69	20.61	22	3
5	64QAM	12	13	20.55	20.65	20.53		
5	64QAM	25	0	20.67	20.65	20.56		
Channel				20415	20525	20635		
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.50	23.44	23.49		
3	QPSK	1	8	23.51	23.48	23.32		
3	QPSK	1	14	23.49	23.42	23.34		
3	QPSK	8	0	22.69	22.53	22.64	24	1
3	QPSK	8	4	22.70	22.61	22.56		



3	QPSK	8	7	22.62	22.54	22.57		
3	QPSK	15	0	22.64	22.58	22.61		
3	16QAM	1	0	22.91	22.79	22.91	24	1
3	16QAM	1	8	22.95	22.85	22.79		
3	16QAM	1	14	22.83	22.75	22.77		
3	16QAM	8	0	21.75	21.63	21.55	23	2
3	16QAM	8	4	21.76	21.63	21.63		
3	16QAM	8	7	21.70	21.63	21.54		
3	16QAM	15	0	21.71	21.57	21.60		
3	64QAM	1	0	21.88	21.69	21.74	23	2
3	64QAM	1	8	21.86	21.79	21.77		
3	64QAM	1	14	21.76	21.69	21.65		
3	64QAM	8	0	20.78	20.64	20.65	22	3
3	64QAM	8	4	20.77	20.63	20.68		
3	64QAM	8	7	20.69	20.59	20.57		
3	64QAM	15	0	20.71	20.59	20.70		
Channel				20407	20525	20643		
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.51	23.30	23.32	25	0
1.4	QPSK	1	3	23.51	23.42	23.31		
1.4	QPSK	1	5	23.47	23.38	23.22		
1.4	QPSK	3	0	23.53	23.38	23.26		
1.4	QPSK	3	1	23.50	23.48	23.34		
1.4	QPSK	3	3	23.48	23.37	23.30		
1.4	QPSK	6	0	22.60	22.51	22.41	24	1
1.4	16QAM	1	0	22.84	22.67	22.65	24	1
1.4	16QAM	1	3	22.90	22.78	22.68		
1.4	16QAM	1	5	22.79	22.67	22.59		
1.4	16QAM	3	0	22.64	22.45	22.43		
1.4	16QAM	3	1	22.65	22.55	22.28		
1.4	16QAM	3	3	22.57	22.49	22.38		
1.4	16QAM	6	0	21.70	21.61	21.49		
1.4	64QAM	1	0	21.78	21.64	21.54	23	2
1.4	64QAM	1	3	21.81	21.72	21.61		
1.4	64QAM	1	5	21.72	21.62	21.49		
1.4	64QAM	3	0	21.71	21.59	21.46		
1.4	64QAM	3	1	21.79	21.68	21.57		
1.4	64QAM	3	3	21.70	21.62	21.42		
1.4	64QAM	6	0	20.65	20.56	20.41		
1.4	64QAM	6	0	20.65	20.56	20.41		



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	17.81	17.90	18.09		
20	QPSK	1	49	17.85	17.99	18.06	19	0
20	QPSK	1	99	17.94	18.01	18.07		
20	QPSK	50	0	17.90	18.09	18.15		
20	QPSK	50	24	18.03	18.12	18.19	19	0
20	QPSK	50	50	18.06	18.17	18.24		
20	QPSK	100	0	17.99	18.06	18.16		
20	16QAM	1	0	18.14	18.27	18.40	19	0
20	16QAM	1	49	18.18	18.33	18.45		
20	16QAM	1	99	18.32	18.38	18.41		
20	16QAM	50	0	17.92	18.09	18.17	19	0
20	16QAM	50	24	18.05	18.12	18.19		
20	16QAM	50	50	18.10	18.23	18.26		
20	16QAM	100	0	18.00	18.08	18.14	19	0
20	64QAM	1	0	18.03	18.12	18.24		
20	64QAM	1	49	18.06	18.23	18.37		
20	64QAM	1	99	18.23	18.31	18.36	19	0
20	64QAM	50	0	17.94	18.13	18.19		
20	64QAM	50	24	18.06	18.18	18.23		
20	64QAM	50	50	18.09	18.23	18.30	19	0
20	64QAM	100	0	18.02	18.13	18.14		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.87	17.94	18.11		
15	QPSK	1	37	17.87	18.03	18.09	19	0
15	QPSK	1	74	17.93	18.08	18.13		
15	QPSK	36	0	17.94	18.08	18.16		
15	QPSK	36	20	18.04	18.15	18.28	19	0
15	QPSK	36	39	18.05	18.19	18.25		
15	QPSK	75	0	18.00	18.10	18.15		
15	16QAM	1	0	18.18	18.27	18.41	19	0
15	16QAM	1	37	18.22	18.35	18.41		
15	16QAM	1	74	18.23	18.41	18.44		
15	16QAM	36	0	17.96	18.12	18.18	19	0
15	16QAM	36	20	18.04	18.11	18.26		
15	16QAM	36	39	18.09	18.18	18.27		
15	16QAM	75	0	18.02	18.09	18.15	19	0
15	64QAM	1	0	18.01	18.20	18.29		
15	64QAM	1	37	18.15	18.33	18.36		
15	64QAM	1	74	18.12	18.30	18.34	19	0
15	64QAM	36	0	17.92	18.15	18.20		
15	64QAM	36	20	18.05	18.22	18.32		
15	64QAM	36	39	18.11	18.29	18.29	19	0
15	64QAM	75	0	18.00	18.12	18.18		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.77	17.93	18.07		
10	QPSK	1	25	17.77	17.93	18.04	19	0
10	QPSK	1	49	17.88	18.01	18.07		
10	QPSK	25	0	17.91	18.06	18.14		
10	QPSK	25	12	17.96	18.15	18.24	19	0



FCC SAR TEST REPORT

Report No. : FA042243-01

10	QPSK	25	25	18.00	18.17	18.24		
10	QPSK	50	0	17.91	18.10	18.13		
10	16QAM	1	0	18.11	18.23	18.36	19	0
10	16QAM	1	25	18.21	18.28	18.36		
10	16QAM	1	49	18.15	18.40	18.36		
10	16QAM	25	0	17.87	18.06	18.11	19	0
10	16QAM	25	12	18.00	18.03	18.25		
10	16QAM	25	25	18.01	18.10	18.19		
10	16QAM	50	0	18.01	18.05	18.07		
10	64QAM	1	0	17.96	18.13	18.28	19	0
10	64QAM	1	25	18.11	18.30	18.36		
10	64QAM	1	49	18.10	18.29	18.31		
10	64QAM	25	0	17.85	18.10	18.19	19	0
10	64QAM	25	12	18.05	18.15	18.31		
10	64QAM	25	25	18.10	18.19	18.24		
10	64QAM	50	0	17.97	18.02	18.17		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	17.80	17.92	18.04	19	0
5	QPSK	1	12	17.84	18.03	18.00		
5	QPSK	1	24	17.93	18.03	18.03		
5	QPSK	12	0	17.87	18.05	18.12	19	0
5	QPSK	12	7	18.04	18.06	18.21		
5	QPSK	12	13	17.95	18.16	18.19		
5	QPSK	25	0	17.94	18.01	18.08		
5	16QAM	1	0	18.14	18.25	18.41	19	0
5	16QAM	1	12	18.19	18.32	18.32		
5	16QAM	1	24	18.23	18.34	18.39		
5	16QAM	12	0	17.89	18.04	18.13	19	0
5	16QAM	12	7	18.00	18.03	18.23		
5	16QAM	12	13	18.04	18.14	18.17		
5	16QAM	25	0	17.98	17.99	18.11		
5	64QAM	1	0	17.93	18.11	18.21	19	0
5	64QAM	1	12	18.11	18.23	18.31		
5	64QAM	1	24	18.10	18.26	18.25		
5	64QAM	12	0	17.85	18.09	18.20	19	0
5	64QAM	12	7	18.05	18.21	18.24		
5	64QAM	12	13	18.02	18.25	18.24		
5	64QAM	25	0	17.90	18.03	18.13		



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.87		25	0
10	QPSK	1	25		23.82			
10	QPSK	1	49		23.82			
10	QPSK	25	0		22.93		24	1
10	QPSK	25	12		22.91			
10	QPSK	25	25		22.95			
10	QPSK	50	0		22.92		24	1
10	16QAM	1	0		22.94			
10	16QAM	1	25		22.97			
10	16QAM	1	49		22.94		23	2
10	16QAM	25	0		21.93			
10	16QAM	25	12		21.95			
10	16QAM	25	25		21.99		23	2
10	16QAM	50	0		21.97			
10	64QAM	1	0		21.95			
10	64QAM	1	25		21.94		23	2
10	64QAM	1	49		21.91			
10	64QAM	25	0		21.00			
10	64QAM	25	12		20.98		22	3
10	64QAM	25	25		20.92			
10	64QAM	50	0		20.98			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.87	23.86	23.80	25	0
5	QPSK	1	12	23.85	23.86	23.84		
5	QPSK	1	24	23.86	23.82	23.82		
5	QPSK	12	0	22.96	22.95	22.89	24	1
5	QPSK	12	7	22.97	22.92	22.88		
5	QPSK	12	13	22.98	22.97	22.92		
5	QPSK	25	0	22.98	22.89	22.86	24	1
5	16QAM	1	0	22.91	22.94	22.89		
5	16QAM	1	12	22.90	22.93	22.88		
5	16QAM	1	24	22.98	22.94	22.88	23	2
5	16QAM	12	0	21.77	21.74	21.72		
5	16QAM	12	7	21.78	21.75	21.70		
5	16QAM	12	13	21.78	21.78	21.74	23	2
5	16QAM	25	0	21.83	21.75	21.72		
5	64QAM	1	0	21.72	21.78	21.78		
5	64QAM	1	12	21.81	21.86	21.89	23	2
5	64QAM	1	24	21.90	21.86	21.79		
5	64QAM	12	0	20.82	20.84	20.79		
5	64QAM	12	7	20.86	20.80	20.74	22	3
5	64QAM	12	13	20.86	20.87	20.82		
5	64QAM	25	0	20.84	20.75	20.72		

12. RF Exposure Conditions

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN Chain 0	≤ 25mm	≤ 25mm	>25mm	>25mm	>25mm	≤ 25mm
WLAN Chain 1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN Chain 0	Yes	Yes	No	No	No	Yes
WLAN Chain 1	Yes	Yes	Yes	No	Yes	Yes

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge, The detail antenna location please refers to Appendix D.



13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - c. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA , and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

13.1 Head SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4132	826.4	23.84	24.70	1.219	0.01	0.132	0.161
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4132	826.4	23.84	24.70	1.219	0.1	0.058	0.071
01	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	23.84	24.70	1.219	0.03	0.160	0.195
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4132	826.4	23.84	24.70	1.219	-0.07	0.067	0.082

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	23.50	25.00	1.413	-0.05	0.123	0.174
	LTE Band 5	10M	QPSK	25	0	Right Cheek	0mm	20525	836.5	22.63	24.00	1.371	-0.07	0.102	0.140
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	20525	836.5	23.50	25.00	1.413	0.08	0.055	0.078
	LTE Band 5	10M	QPSK	25	0	Right Tilted	0mm	20525	836.5	22.63	24.00	1.371	-0.01	0.046	0.063
02	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	20525	836.5	23.50	25.00	1.413	-0.14	0.164	0.232
	LTE Band 5	10M	QPSK	25	0	Left Cheek	0mm	20525	836.5	22.63	24.00	1.371	-0.09	0.134	0.184
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	20525	836.5	23.50	25.00	1.413	-0.13	0.068	0.096
	LTE Band 5	10M	QPSK	25	0	Left Tilted	0mm	20525	836.5	22.63	24.00	1.371	-0.12	0.054	0.074
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	21350	2560	18.09	19.00	1.233	-0.07	0.014	0.017
	LTE Band 7	20M	QPSK	50	50	Right Cheek	0mm	21350	2560	18.24	19.00	1.191	-0.01	0.015	0.018
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	21350	2560	18.09	19.00	1.233	-0.15	0.013	0.016
	LTE Band 7	20M	QPSK	50	50	Right Tilted	0mm	21350	2560	18.24	19.00	1.191	-0.17	0.013	0.015
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	21350	2560	18.09	19.00	1.233	-0.02	0.015	0.018
03	LTE Band 7	20M	QPSK	50	50	Left Cheek	0mm	21350	2560	18.24	19.00	1.191	0.08	0.016	0.019
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	21350	2560	18.09	19.00	1.233	-0.04	0.010	0.012
	LTE Band 7	20M	QPSK	50	50	Left Tilted	0mm	21350	2560	18.24	19.00	1.191	-0.02	0.011	0.013
	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	23230	782	23.87	25.00	1.297	-0.07	0.148	0.192
	LTE Band 13	10M	QPSK	25	25	Right Cheek	0mm	23230	782	22.95	24.00	1.274	-0.06	0.123	0.157
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	23230	782	23.87	25.00	1.297	-0.03	0.066	0.086
	LTE Band 13	10M	QPSK	25	25	Right Tilted	0mm	23230	782	22.95	24.00	1.274	-0.11	0.057	0.073
04	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	23230	782	23.87	25.00	1.297	-0.16	0.192	0.249
	LTE Band 13	10M	QPSK	25	25	Left Cheek	0mm	23230	782	22.95	24.00	1.274	-0.06	0.154	0.196
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	23230	782	23.87	25.00	1.297	-0.14	0.069	0.090
	LTE Band 13	10M	QPSK	25	25	Left Tilted	0mm	23230	782	22.95	24.00	1.274	-0.04	0.067	0.085



13.2 Hotspot SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	10mm	4132	826.4	23.84	24.70	1.219	-0.04	0.247	0.301
	WCDMA V	RMC 12.2Kbps	Back	10mm	4132	826.4	23.84	24.70	1.219	-0.09	0.257	0.313
05	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4132	826.4	23.84	24.70	1.219	0.02	0.271	0.330
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	4132	826.4	23.84	24.70	1.219	-0.16	0.253	0.308
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	4132	826.4	23.84	24.70	1.219	0.05	0.031	0.038

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	0	Front	10mm	20525	836.5	23.50	25.00	1.413	-0.11	0.200	0.283
	LTE Band 5	10M	QPSK	25	0	Front	10mm	20525	836.5	22.63	24.00	1.371	-0.06	0.156	0.214
	LTE Band 5	10M	QPSK	1	0	Back	10mm	20525	836.5	23.50	25.00	1.413	0.14	0.214	0.302
	LTE Band 5	10M	QPSK	25	0	Back	10mm	20525	836.5	22.63	24.00	1.371	-0.13	0.167	0.229
	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	20525	836.5	23.50	25.00	1.413	-0.03	0.195	0.275
	LTE Band 5	10M	QPSK	25	0	Left Side	10mm	20525	836.5	22.63	24.00	1.371	-0.03	0.150	0.206
06	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	20525	836.5	23.50	25.00	1.413	-0.05	0.232	0.328
	LTE Band 5	10M	QPSK	25	0	Right Side	10mm	20525	836.5	22.63	24.00	1.371	-0.06	0.194	0.266
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	20525	836.5	23.50	25.00	1.413	-0.07	0.031	0.044
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10mm	20525	836.5	22.63	24.00	1.371	0.03	0.024	0.033
	LTE Band 7	20M	QPSK	1	0	Front	10mm	21350	2560	18.09	19.00	1.233	-0.04	0.160	0.197
	LTE Band 7	20M	QPSK	50	50	Front	10mm	21350	2560	18.24	19.00	1.191	-0.15	0.166	0.198
	LTE Band 7	20M	QPSK	1	0	Back	10mm	21350	2560	18.09	19.00	1.233	-0.01	0.153	0.189
	LTE Band 7	20M	QPSK	50	50	Back	10mm	21350	2560	18.24	19.00	1.191	-0.05	0.159	0.189
	LTE Band 7	20M	QPSK	1	0	Left Side	10mm	21350	2560	18.09	19.00	1.233	0.15	0.093	0.115
	LTE Band 7	20M	QPSK	50	50	Left Side	10mm	21350	2560	18.24	19.00	1.191	0.05	0.106	0.126
	LTE Band 7	20M	QPSK	1	0	Right Side	10mm	21350	2560	18.09	19.00	1.233	-0.03	0.037	0.046
	LTE Band 7	20M	QPSK	50	50	Right Side	10mm	21350	2560	18.24	19.00	1.191	-0.09	0.040	0.048
07	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	21350	2560	18.09	19.00	1.233	-0.01	0.367	0.453
	LTE Band 7	20M	QPSK	50	50	Bottom Side	10mm	21350	2560	18.24	19.00	1.191	-0.04	0.373	0.444
	LTE Band 13	10M	QPSK	1	0	Front	10mm	23230	782	23.87	25.00	1.297	-0.06	0.249	0.323
	LTE Band 13	10M	QPSK	25	25	Front	10mm	23230	782	22.95	24.00	1.274	-0.14	0.208	0.265
	LTE Band 13	10M	QPSK	1	0	Back	10mm	23230	782	23.87	25.00	1.297	-0.11	0.237	0.307
	LTE Band 13	10M	QPSK	25	25	Back	10mm	23230	782	22.95	24.00	1.274	-0.14	0.195	0.248
08	LTE Band 13	10M	QPSK	1	0	Left Side	10mm	23230	782	23.87	25.00	1.297	-0.05	0.333	0.432
	LTE Band 13	10M	QPSK	25	25	Left Side	10mm	23230	782	22.95	24.00	1.274	-0.06	0.283	0.360
	LTE Band 13	10M	QPSK	1	0	Right Side	10mm	23230	782	23.87	25.00	1.297	-0.04	0.252	0.327
	LTE Band 13	10M	QPSK	25	25	Right Side	10mm	23230	782	22.95	24.00	1.274	-0.05	0.224	0.285
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10mm	23230	782	23.87	25.00	1.297	-0.16	0.046	0.060
	LTE Band 13	10M	QPSK	25	25	Bottom Side	10mm	23230	782	22.95	24.00	1.274	-0.04	0.036	0.046



13.3 Body Worn Accessory SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
09	WCDMA V	RMC 12.2Kbps	Front	15mm	4132	826.4	23.84	24.70	1.219	-0.06	0.248	0.302
	WCDMA V	RMC 12.2Kbps	Back	15mm	4132	826.4	23.84	24.70	1.219	-0.17	0.248	0.302

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	0	Front	15mm	20525	836.5	23.50	25.00	1.413	-0.01	0.194	0.274
	LTE Band 5	10M	QPSK	25	0	Front	15mm	20525	836.5	22.63	24.00	1.371	-0.09	0.152	0.208
10	LTE Band 5	10M	QPSK	1	0	Back	15mm	20525	836.5	23.50	25.00	1.413	-0.02	0.199	0.281
	LTE Band 5	10M	QPSK	25	0	Back	15mm	20525	836.5	22.63	24.00	1.371	-0.07	0.155	0.212
	LTE Band 7	20M	QPSK	1	0	Front	15mm	21350	2560	18.09	19.00	1.233	0.04	0.069	0.085
	LTE Band 7	20M	QPSK	50	50	Front	15mm	21350	2560	18.24	19.00	1.191	0.14	0.073	0.087
	LTE Band 7	20M	QPSK	1	0	Back	15mm	21350	2560	18.09	19.00	1.233	0.01	0.077	0.095
11	LTE Band 7	20M	QPSK	50	50	Back	15mm	21350	2560	18.24	19.00	1.191	-0.03	0.080	0.095
12	LTE Band 13	10M	QPSK	1	0	Front	15mm	23230	782	23.87	25.00	1.297	-0.17	0.245	0.318
	LTE Band 13	10M	QPSK	25	25	Front	15mm	23230	782	22.95	24.00	1.274	-0.07	0.210	0.267
	LTE Band 13	10M	QPSK	1	0	Back	15mm	23230	782	23.87	25.00	1.297	-0.15	0.232	0.301
	LTE Band 13	10M	QPSK	25	25	Back	15mm	23230	782	22.95	24.00	1.274	-0.13	0.200	0.255

14. Simultaneous Transmission Analysis

Case	Cellular	WLAN Chain0 / BT	WLAN Chain1
1	GSM/GPRS/EDGE	BT/BLE	(None)
2	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 2.4G
3	GSM/GPRS/EDGE	WLAN 5G	WLAN 5G
4	UMTS/HSPA	BT/BLE	(None)
5	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
6	UMTS/HSPA	WLAN 5G	WLAN 5G
7	LTE	BT/BLE	(None)
8	LTE	WLAN 2.4G	WLAN 2.4G
9	LTE	WLAN 5G	WLAN 5G
10	None	BT/BLE WLAN 5G	WLAN 5G
11	GSM/GPRS/EDGE	BT/BLE WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT/BLE WLAN 5G	WLAN 5G
13	LTE	BT/BLE WLAN 5G	WLAN 5G

General Note:

1. This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.
2. WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.



14.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth Chain 0		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Right Cheek	0.216	0.465	0.080	0.158	0.258	0.641	0.761	1.273
	Right Tilted	0.076	0.085	0.074	0.001	0.211	0.137	0.235	0.425
	Left Cheek	0.250	0.087	0.031	0.061	0.082	0.134	0.368	0.527
	Left Tilted	0.089	0.026	0.030	0.001	0.082	0.040	0.145	0.212
GSM1900	Right Cheek	0.026	0.465	0.080	0.158	0.258	0.641	0.571	1.083
	Right Tilted	0.020	0.085	0.074	0.001	0.211	0.137	0.179	0.369
	Left Cheek	0.028	0.087	0.031	0.061	0.082	0.134	0.146	0.305
	Left Tilted	0.015	0.026	0.030	0.001	0.082	0.040	0.071	0.138
WCDMA II	Right Cheek	0.034	0.465	0.080	0.158	0.258	0.641	0.579	1.091
	Right Tilted	0.023	0.085	0.074	0.001	0.211	0.137	0.182	0.372
	Left Cheek	0.055	0.087	0.031	0.061	0.082	0.134	0.173	0.332
	Left Tilted	0.026	0.026	0.030	0.001	0.082	0.040	0.082	0.149
WCDMA IV	Right Cheek	0.052	0.465	0.080	0.158	0.258	0.641	0.597	1.109
	Right Tilted	0.026	0.085	0.074	0.001	0.211	0.137	0.185	0.375
	Left Cheek	0.044	0.087	0.031	0.061	0.082	0.134	0.162	0.321
	Left Tilted	0.026	0.026	0.030	0.001	0.082	0.040	0.082	0.149
WCDMA V	Right Cheek	0.161	0.465	0.080	0.158	0.258	0.641	0.706	1.218
	Right Tilted	0.071	0.085	0.074	0.001	0.211	0.137	0.230	0.420
	Left Cheek	0.195	0.087	0.031	0.061	0.082	0.134	0.313	0.472
	Left Tilted	0.082	0.026	0.030	0.001	0.082	0.040	0.138	0.205
LTE Band 4	Right Cheek	0.043	0.465	0.080	0.158	0.258	0.641	0.588	1.100
	Right Tilted	0.023	0.085	0.074	0.001	0.211	0.137	0.182	0.372
	Left Cheek	0.034	0.087	0.031	0.061	0.082	0.134	0.152	0.311
	Left Tilted	0.018	0.026	0.030	0.001	0.082	0.040	0.074	0.141
LTE Band 5	Right Cheek	0.174	0.465	0.080	0.158	0.258	0.641	0.719	1.231
	Right Tilted	0.078	0.085	0.074	0.001	0.211	0.137	0.237	0.427
	Left Cheek	0.232	0.087	0.031	0.061	0.082	0.134	0.350	0.509
	Left Tilted	0.096	0.026	0.030	0.001	0.082	0.040	0.152	0.219
LTE Band 7	Right Cheek	0.018	0.465	0.080	0.158	0.258	0.641	0.563	1.075
	Right Tilted	0.016	0.085	0.074	0.001	0.211	0.137	0.175	0.365
	Left Cheek	0.019	0.087	0.031	0.061	0.082	0.134	0.137	0.296
	Left Tilted	0.013	0.026	0.030	0.001	0.082	0.040	0.069	0.136
LTE Band 13	Right Cheek	0.192	0.465	0.080	0.158	0.258	0.641	0.737	1.249
	Right Tilted	0.086	0.085	0.074	0.001	0.211	0.137	0.245	0.435
	Left Cheek	0.249	0.087	0.031	0.061	0.082	0.134	0.367	0.526
	Left Tilted	0.090	0.026	0.030	0.001	0.082	0.040	0.146	0.213
LTE Band 17	Right Cheek	0.112	0.465	0.080	0.158	0.258	0.641	0.657	1.169
	Right Tilted	0.027	0.085	0.074	0.001	0.211	0.137	0.186	0.376
	Left Cheek	0.127	0.087	0.031	0.061	0.082	0.134	0.245	0.404
	Left Tilted	0.044	0.026	0.030	0.001	0.082	0.040	0.100	0.167
LTE Band 41	Right Cheek	0.012	0.465	0.080	0.158	0.258	0.641	0.557	1.069
	Right Tilted	0.011	0.085	0.074	0.001	0.211	0.137	0.170	0.360
	Left Cheek	0.011	0.087	0.031	0.061	0.082	0.134	0.129	0.288
	Left Tilted	0.007	0.026	0.030	0.001	0.082	0.040	0.063	0.130



14.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	6	1+2+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	Bluetooth Chain 0 1g SAR (W/kg)		
GSM850	Front	0.220	0.048	0.001	0.085	0.269	0.305
	Back	0.229	0.111	0.009	0.186	0.349	0.415
	Left side	0.249	0.107	0.001	0.209	0.357	0.458
	Right side	0.235		0.001		0.236	0.235
	Top side			0.001		0.001	0.000
	Bottom side	0.040				0.040	0.040
GSM1900	Front	0.269	0.048	0.001	0.085	0.318	0.354
	Back	0.314	0.111	0.009	0.186	0.434	0.500
	Left side	0.035	0.107	0.001	0.209	0.143	0.244
	Right side	0.043		0.001		0.044	0.043
	Top side			0.001		0.001	0.000
	Bottom side	0.435				0.435	0.435
WCDMA II	Front	0.519	0.048	0.001	0.085	0.568	0.604
	Back	0.600	0.111	0.009	0.186	0.720	0.786
	Left side	0.063	0.107	0.001	0.209	0.171	0.272
	Right side	0.078		0.001		0.079	0.078
	Top side			0.001		0.001	0.000
	Bottom side	0.798				0.798	0.798
WCDMA IV	Front	0.392	0.048	0.001	0.085	0.441	0.477
	Back	0.496	0.111	0.009	0.186	0.616	0.682
	Left side	0.032	0.107	0.001	0.209	0.140	0.241
	Right side	0.088		0.001		0.089	0.088
	Top side			0.001		0.001	0.000
	Bottom side	0.633				0.633	0.633
WCDMA V	Front	0.301	0.048	0.001	0.085	0.350	0.386
	Back	0.313	0.111	0.009	0.186	0.433	0.499
	Left side	0.330	0.107	0.001	0.209	0.438	0.539
	Right side	0.308		0.001		0.309	0.308
	Top side			0.001		0.001	0.000
	Bottom side	0.038				0.038	0.038
LTE Band 4	Front	0.384	0.048	0.001	0.085	0.433	0.469
	Back	0.538	0.111	0.009	0.186	0.658	0.724
	Left side	0.030	0.107	0.001	0.209	0.138	0.239
	Right side	0.072		0.001		0.073	0.072
	Top side			0.001		0.001	0.000
	Bottom side	0.588				0.588	0.588
LTE Band 5	Front	0.283	0.048	0.001	0.085	0.332	0.368
	Back	0.302	0.111	0.009	0.186	0.422	0.488
	Left side	0.275	0.107	0.001	0.209	0.383	0.484
	Right side	0.328		0.001		0.329	0.328
	Top side			0.001		0.001	0.000
	Bottom side	0.044				0.044	0.044
LTE Band 7	Front		0.048	0.001	0.085	0.049	0.085
	Back		0.111	0.009	0.186	0.120	0.186
	Left side		0.107	0.001	0.209	0.108	0.209
	Right side			0.001		0.001	0.000
	Top side			0.001		0.001	0.000
	Bottom side					0.000	0.000



LTE Band 13	Front	0.323	0.048	0.001	0.085	0.372	0.408
	Back	0.307	0.111	0.009	0.186	0.427	0.493
	Left side	0.432	0.107	0.001	0.209	0.540	0.641
	Right side	0.327		0.001		0.328	0.327
	Top side			0.001		0.001	0.000
	Bottom side	0.060				0.060	0.060
LTE Band 17	Front	0.195	0.048	0.001	0.085	0.244	0.280
	Back	0.236	0.111	0.009	0.186	0.356	0.422
	Left side	0.206	0.107	0.001	0.209	0.314	0.415
	Right side	0.156		0.001		0.157	0.156
	Top side			0.001		0.001	0.000
	Bottom side	0.044				0.044	0.044
LTE Band 41	Front	0.081	0.048	0.001	0.085	0.130	0.166
	Back	0.139	0.111	0.009	0.186	0.259	0.325
	Left side	0.096	0.107	0.001	0.209	0.204	0.305
	Right side	0.018		0.001		0.019	0.018
	Top side			0.001		0.001	0.000
	Bottom side	0.178				0.178	0.178



14.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth Chain 0		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Front	0.205	0.019	0.001	0.001	0.001	0.036	0.225	0.243
	Back	0.206	0.023	0.003	0.034	0.090	0.084	0.232	0.414
GSM1900	Front	0.135	0.019	0.001	0.001	0.001	0.036	0.155	0.173
	Back	0.156	0.023	0.003	0.034	0.090	0.084	0.182	0.364
WCDMA II	Front	0.261	0.019	0.001	0.001	0.001	0.036	0.281	0.299
	Back	0.307	0.023	0.003	0.034	0.090	0.084	0.333	0.515
WCDMA IV	Front	0.202	0.019	0.001	0.001	0.001	0.036	0.222	0.240
	Back	0.263	0.023	0.003	0.034	0.090	0.084	0.289	0.471
WCDMA V	Front	0.302	0.019	0.001	0.001	0.001	0.036	0.322	0.340
	Back	0.302	0.023	0.003	0.034	0.090	0.084	0.328	0.510
LTE Band 4	Front	0.192	0.019	0.001	0.001	0.001	0.036	0.212	0.230
	Back	0.269	0.023	0.003	0.034	0.090	0.084	0.295	0.477
LTE Band 5	Front	0.274	0.019	0.001	0.001	0.001	0.036	0.294	0.312
	Back	0.281	0.023	0.003	0.034	0.090	0.084	0.307	0.489
LTE Band 7	Front	0.087	0.019	0.001	0.001	0.001	0.036	0.107	0.125
	Back	0.095	0.023	0.003	0.034	0.090	0.084	0.121	0.303
LTE Band 13	Front	0.318	0.019	0.001	0.001	0.001	0.036	0.338	0.356
	Back	0.301	0.023	0.003	0.034	0.090	0.084	0.327	0.509
LTE Band 17	Front	0.151	0.019	0.001	0.001	0.001	0.036	0.171	0.189
	Back	0.172	0.023	0.003	0.034	0.090	0.084	0.198	0.380
LTE Band 41	Front	0.032	0.019	0.001	0.001	0.001	0.036	0.052	0.070
	Back	0.053	0.023	0.003	0.034	0.090	0.084	0.079	0.261

14.4 Product Specific Exposure Conditions

Exposure Position	1	2	3	4	5	6	1+2+3 Summed 10g SAR (W/kg)	1+4+5+6 Summed 10g SAR (W/kg)
	WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth Chain 0		
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)		
Front				0.112	0.126		0.000	0.238
Back				0.227	0.390		0.000	0.617
Left side				0.089	0.058		0.000	0.147
Right side					0.001		0.000	0.001
Top side					0.027		0.000	0.027
Bottom side							0.000	0.000

Test Engineer : Ginger Chiang, Ray Sun, Jordar Jhuang, Willy Yu, Tommy Chen and York Lu



15. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 941225 D07 v01r02, " SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.