



**SAR EVALUATION REPORT**

**FCC 47 CFR § 2.1093  
IEEE Std 1528-2013**

*For*  
**GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC**

**FCC ID: PY7-12644J**

**Report Number: 12380932-S1V2  
Issue Date: 8/13/2018**

*Prepared for*  
**SONY MOBILE COMMUNICATIONS INC.  
4-12-3 HIGASHI-SHINAGAWA  
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

**Revision History**

Rev.	Date	Revisions	Revised By
V1	8/1/2018	Initial Issue	--
V2	8/13/2018	Section 1: Updated NII results Section 6.2: Corrected Duty Cycle for U-NII Section 10.12: Corrected Duty Cycles for U-NII Section 12.2: Updated U-NII test results	Lance Fleischer

## Table of Contents

<b>1.</b>	<b>Attestation of Test Results .....</b>	<b>5</b>
<b>2.</b>	<b>Test Specification, Methods and Procedures.....</b>	<b>6</b>
<b>3.</b>	<b>Facilities and Accreditation.....</b>	<b>6</b>
<b>4.</b>	<b>SAR Measurement System &amp; Test Equipment .....</b>	<b>7</b>
4.1.	<i>SAR Measurement System.....</i>	<i>7</i>
4.2.	<i>SAR Scan Procedures.....</i>	<i>8</i>
4.3.	<i>Test Equipment.....</i>	<i>10</i>
<b>5.</b>	<b>Measurement Uncertainty.....</b>	<b>11</b>
<b>6.</b>	<b>Device Under Test (DUT) Information .....</b>	<b>12</b>
6.1.	<i>DUT Description .....</i>	<i>12</i>
6.2.	<i>Wireless Technologies.....</i>	<i>13</i>
6.3.	<i>General LTE SAR Test and Reporting Considerations.....</i>	<i>14</i>
6.4.	<i>LTE (TDD) Considerations.....</i>	<i>16</i>
<b>7.</b>	<b>RF Exposure Conditions (Test Configurations).....</b>	<b>17</b>
<b>8.</b>	<b>Dielectric Property Measurements &amp; System Check .....</b>	<b>18</b>
8.1.	<i>Dielectric Property Measurements .....</i>	<i>18</i>
8.2.	<i>System Check.....</i>	<i>21</i>
<b>9.</b>	<b>Conducted Output Power Measurements.....</b>	<b>23</b>
9.1.	<i>GSM .....</i>	<i>23</i>
9.2.	<i>W-CDMA .....</i>	<i>26</i>
9.3.	<i>LTE.....</i>	<i>29</i>
9.4.	<i>Wi-Fi 2.4GHz (DTS Band) .....</i>	<i>40</i>
9.5.	<i>Wi-Fi 5GHz (U-NII Bands).....</i>	<i>41</i>
9.6.	<i>Bluetooth .....</i>	<i>43</i>
<b>10.</b>	<b>Measured and Reported (Scaled) SAR Results.....</b>	<b>44</b>
10.1.	<i>GSM850.....</i>	<i>45</i>
10.2.	<i>GSM1900.....</i>	<i>45</i>
10.3.	<i>W-CDMA Band V .....</i>	<i>46</i>
10.4.	<i>LTE Band 4 (20MHz Bandwidth) .....</i>	<i>46</i>
10.5.	<i>LTE Band 5 (10MHz Bandwidth) .....</i>	<i>47</i>
10.6.	<i>LTE Band 7 (20MHz Bandwidth) .....</i>	<i>47</i>
10.7.	<i>LTE Band 12 (10MHz Bandwidth) .....</i>	<i>48</i>
10.8.	<i>LTE Band 13 (10MHz Bandwidth) .....</i>	<i>48</i>



10.9.	<i>LTE Band 17 (10MHz Bandwidth)</i> .....	49
10.10.	<i>LTE Band 41 (20MHz Bandwidth)</i> .....	49
10.11.	<i>Wi-Fi (DTS Band)</i> .....	50
10.12.	<i>Wi-Fi (U-NII Band)</i> .....	51
10.13.	<i>Bluetooth</i> .....	52
<b>11.</b>	<b>SAR Measurement Variability</b> .....	<b>53</b>
<b>12.</b>	<b>Simultaneous Transmission Conditions</b> .....	<b>54</b>
12.1.	<i>Simultaneous transmission SAR test exclusion considerations</i> .....	54
12.1.1.	Sum of SAR .....	54
12.2.	<i>Sum of the SAR for WWAN &amp; Wi-Fi &amp; BT</i> .....	54
<b>Appendixes</b>	.....	<b>55</b>
12380932-S1V1 Appendix A:	<i>SAR Setup Photos</i> .....	55
12380932-S1V1 Appendix B:	<i>SAR System Check Plots</i> .....	55
12380932-S1V1 Appendix C:	<i>Highest SAR Test Plots</i> .....	55
12380932-S1V1 Appendix D:	<i>SAR Liquid Tissue Ingredients</i> .....	55
12380932-S1V1 Appendix E:	<i>SAR Probe Calibration Certificates</i> .....	55
12380932-S1V1 Appendix F:	<i>SAR Dipole Calibration Certificates</i> .....	55

# 1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS INC.			
FCC ID	PY7-12644J			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg)			
	Peak spatial-average (1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6		4	
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	PCE	DTS	NII	DSS
Head	0.103	0.543	0.587	0.180
Body-worn	0.335	0.049	0.050	0.022
Hotspot/Wi-Fi Direct	0.975	0.167	N/A	0.063
Product Specific 10g SAR	N/A	N/A	0.468	N/A
Simultaneous TX	0.922	0.922	0.871	0.869
Date Tested	7/9/2018 to 7/17/2018			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By: 	Prepared By: 
Dave Weaver Operations Leader UL Verification Services Inc.	Coltyce Sanders Test Engineer UL Verification Services Inc.

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01

In addition to the above, the following information was used:

- [TCB workshop](#) April 2015; Page 33, RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October 2015; Page 6, RF Exposure Procedures (KDB 941225 D05A)
- [TCB workshop](#) April 2016; Page 13, RF Exposure Procedures (LTE Carrier Aggregation for DL)
- [TCB workshop](#) October 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB workshop](#) October 2016; Page 18, RF Exposure Procedures (DUT Holder Perturbations)
- [TCB workshop](#) May 2017; Page 9, Broadband Liquid Above 3 GHz

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	SAR Lab 6
SAR Lab G	SAR Lab 7
SAR Lab H	SAR Lab 8

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

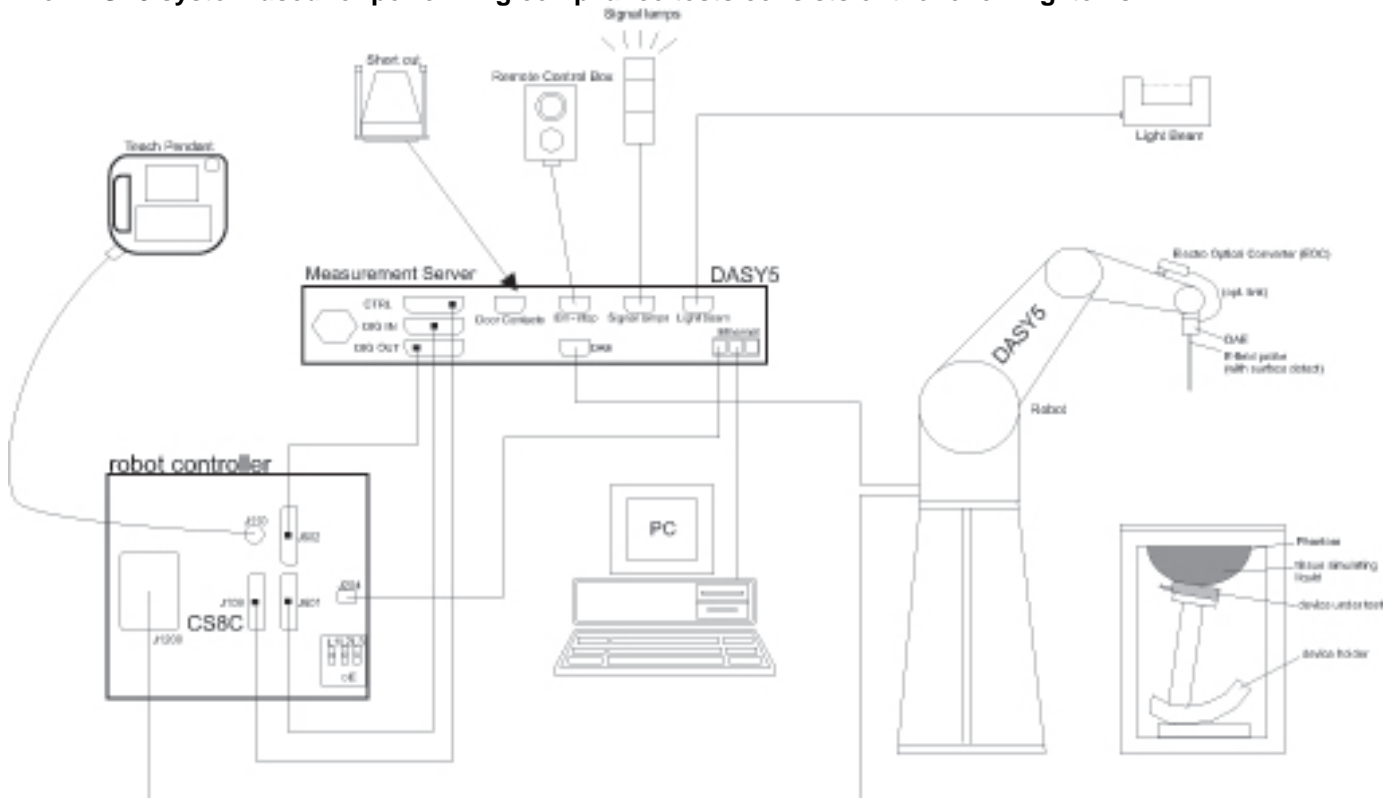

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		$\leq 3$ GHz	$> 3$ GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

#### Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
S-Parameter Network Analyzer	Agilent	8753ES	MY40000980	5/14/2019
Dielectric Probe kit	SPEAG	DAK-3.5	1082	10/17/2018
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	10/17/2018
Thermometer	Fisher Scientific	Traceable	140562250	11/7/2018

#### System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Agilent	N5181A	MY50140610	6/7/2019
Power Meter	Keysight	N1912A	MY55196004	7/31/2018
Power Sensor	Agilent	N1921A	MY53020038	4/23/2019
Power Sensor	Agilent	N1921A	MY5226009	1/8/2019
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2149	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
Synthesized Signal Generator	Agilent	N5181A	MY50140630	5/25/2019
Power Meter	HP	437B	3125U12345	8/10/2018
Power Meter	HP	437B	3125U11347	8/15/2018
Power Sensor	HP	8481A	1926A27048	8/10/2018
Power Sensor	HP	8481A	3318A92374	8/15/2018
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2141	N/A
DC Power Supply	BK Precision	1611	215-02292	N/A

#### Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 5)	SPEAG	EX3DV4	7498	5/4/2019
E-Field Probe (SAR Lab 6)	SPEAG	EX3DV4	3885	10/24/2018
E-Field Probe (SAR Lab 7)	SPEAG	EX3DV4	7500	5/4/2019
E-Field Probe (SAR Lab 8)	SPEAG	EX3DV4	7501	5/4/2019
Data Acquisition Electronics (SAR Lab 5)	SPEAG	DAE4	1546	5/3/2019
Data Acquisition Electronics (SAR Lab 6)	SPEAG	DAE4	1545	4/13/2019
Data Acquisition Electronics (SAR Lab 7)	SPEAG	DAE4	1547	5/3/2019
Data Acquisition Electronics (SAR Lab 8)	SPEAG	DAE4	1258	5/22/2019
System Validation Dipole	SPEAG	D750V3	1071	11/21/2018
System Validation Dipole	SPEAG	D835V2	4d142	10/12/2018
System Validation Dipole	SPEAG	D1750V2	1050	4/10/2019
System Validation Dipole	SPEAG	D1900V2	5d043	11/22/2018
System Validation Dipole	SPEAG	D2450V2	899	3/16/2019
System Validation Dipole	SPEAG	D2600V2	1036	3/16/2019
System Validation Dipole	SPEAG	D5GHzV2	1003	3/13/2019
System Validation Dipole	SPEAG	D5GHzV2	1138	10/26/2018
Thermometer (SAR Lab 5/6/7/8)	Fisher Scientific	Traceable	181062300	2/26/2019

**Other**

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Keysight	N1912A	MY55196007	7/17/2018
Power Sensor	Agilent	N1921A	MY53260010	10/17/2018
Base Station Simulator	R & S	R & S	164541-CI	2/19/2019
Base Station Simulator	Agilent	8960	GB47050526	3/22/2019

**5. Measurement Uncertainty**

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

Device Dimension	This is a Phablet Device (display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm) Refer to Appendix A		
Back Cover	The Back Cover is not removable		
Battery Options	The rechargeable battery is not user accessible.		
Accessory	Headset		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz)		
Test sample information	<b>S/N</b>	<b>IMEI</b>	<b>Notes</b>
	BH930019DB	004402542052380	FCC SAR GSM/UMTS Conducted
	BH93007GDB	004402542052257	FCC SAR LTE LB/MB Conducted
	BH93004ADB	004402542052315	WLAN 2.4GHz Conducted #1
	BH93000ADB	004402542052117	WLAN 2.4GHz Conducted #2
	BH93001BDB	004402542052141	WLAN 5GHz Conducted #1
	BH93004YDB	004402542052125	WLAN 5GHz Conducted #2
	BH93006EDB	004402542052349	FCC SAR LTE HB Conducted
	BH930027D8	004402542052398	WLAN - 2.4GHz (Radiated) #1
	BH93004RD8	004402542051382	WLAN - 2.4GHz (Radiated) #2
	BH930076D8	004402542051614	FCC/CE SAR GSM/UMTS Radiated #1
	BH930051D8	004402542051697	FCC/CE SAR LTE(LB/MB)(Radiated) #1
	BH93004TD8	004402542051648	FCC SAR LTE(HB)(Radiated) #1
	BH930057D8	004402542051655	FCC/CE SAR GSM/UMTS Radiated #2
	BH930056D8	004402542051630	FCC CE SAR LTE LB/MB Radiated #2
	BH9001DD8	004402542051705	FCC SAR LTE HB Radiated #2
	BH930043D8	004402542051747	WLAN Radiated 5GHz #2
BH93004BD8	004402542051713	WLAN Radiated 5GHz #3	
Hardware Version	A		
Software Version	2.20		

## 6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EDGE (8PSK)	Multi-Slot Class: Class 33 - 4 Up, 5 Down	GPRS: 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
W-CDMA (UMTS)	Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) HSPA+ (Rel. 7)		100%
LTE	FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 13 FDD Band 17 TDD Band 41	QPSK 16QAM 64AQM Rel. 12 Does not support Carrier Aggregation (CA)		100% (FDD) 63.3% (TDD) <sup>3</sup> Refer to §6.4
	Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		802.11b <sup>1</sup> : 100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		802.11n (HT40) <sup>1</sup> : 93.66% 802.11ac (VHT80) <sup>1</sup> : 87.72%
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
	Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Bluetooth	2.4 GHz	Version 5.0 LE		GFSK <sup>2</sup> : 77.4% EDR, LE: N/A <sup>4</sup>

**Notes:**

1. Duty Cycles for Wi-Fi are referenced from the DTS report 12380932-E4 and U-NII report 12380932-E5.
2. Duty Cycle for Bluetooth GFSK mode is referenced from the BT report 12380932-E2.
3. This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (Subframe Number 0 at 63.3%).
4. Measured Duty Cycle is not required due to SAR test exemption.

### 6.3. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 4 <sup>2</sup>	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5 <sup>2</sup>	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 7	Frequency range: 2500 - 2570 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5		
	Mid	21100 2535	21100 2535	21100 2535	21100 2535		
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5		
	Band 12 <sup>2</sup>	Frequency range: 699 – 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13 <sup>2</sup>	Frequency range: 777 - 787 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low				23205/ 779.5		
Mid			23230/ 782	23230/ 782			
High				23255/ 784.5			

**General LTE SAR Test and Reporting Considerations (Continued)**

Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 17 <sup>2,4</sup>	Frequency range: 704 - 716 MHz																																																																		
		Channel Bandwidth																																																																		
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																													
	Low			23780/ 709	23755/ 706.5																																																															
	Mid			23790/ 710	23790/ 710																																																															
	High			23800/ 711	23825/ 713.5																																																															
	Band 41 <sup>1</sup>	Frequency range: 2496 - 2690 MHz																																																																		
		Channel Bandwidth																																																																		
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																													
	Low	39750 / 2506.0																																																																		
	Low-Mid	40185 / 2549.5																																																																		
Mid	40620 / 2593.0																																																																			
Mid-High	41055 / 2636.5																																																																			
High	41490 / 2680.0																																																																			
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																			
Maximum power reduction (MPR)	<p><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> <p>MPR Built-in by design                      The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values.                      A-MPR (additional MPR) was disabled during SAR testing</p>						Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )							MPR (dB)																																																												
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																														
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																													
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																													
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																													
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																													
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																													
256 QAM	≥ 1						≤ 5																																																													
Power reduction	No																																																																			
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																			

**Notes:**

- LTE band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths. This band was tested using Uplink-Downlink Configuration 0 at 63.3% duty cycle and Special Subframe 7.
- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
- LTE QPSK configuration has the highest maximum average output power per 3GPP standard.
- LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.
- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 6.4. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

#### Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x ( $T_s$ ) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$  seconds

**Note(s):**

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: **Uplink-Downlink Configuration 0** at **63.3% duty cycle** and **Special Subframe 7**.



## 7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (Main Ant. 1 & 2)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
WLAN/BT (Chain 0)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct (2.4 GHz only)	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
	Product Specific (5 GHz bands only)	0 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	
			Edge 3 (Bottom)	> 25 mm	No	
			Edge 4 (Left)	< 25 mm	Yes	2
WLAN (Chain 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct (2.4 GHz only)	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	> 25 mm	No	1
	Product Specific (5 GHz bands only)	0 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
			Edge 1 (Top)	> 25 mm	No	
			Edge 2 (Right)	< 25 mm	Yes	2
			Edge 3 (Bottom)	> 25 mm	No	
			Edge 4 (Left)	> 25 mm	No	

**Notes:**

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- For Phablet devices: when Hotspot Mode is not supported, Product Specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- For Phablet devices: when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
- The WWAN Sub Antenna (AS-Div) does not support FCC bands.

## 8. Dielectric Property Measurements & System Check

### 8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant ( $\epsilon_r$ ) and conductivity ( $\sigma$ ) of typical tissue-equivalent media recipes are expected to be within  $\pm 5\%$  of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for  $\epsilon_r$  and  $\sigma$  may be relaxed to  $\pm 10\%$ . This is limited to frequencies  $\leq 3$  GHz.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

#### IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:**

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity ( $\epsilon_r$ )			Conductivity ( $\sigma$ )		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
5	7/9/2018	2600	Head	2600	39.43	39.01	1.07	1.92	1.96	-2.25
				2495	39.65	39.14	1.29	1.84	1.85	-0.74
				2690	39.31	38.90	1.06	1.98	2.06	-4.00
5	7/9/2018	2600	Body	2600	50.32	52.51	-4.17	2.16	2.16	-0.08
				2495	50.50	52.64	-4.07	2.06	2.01	2.07
				2690	50.15	52.40	-4.29	2.23	2.29	-2.59
5	7/12/2018	2600	Head	2600	37.27	39.01	-4.46	1.96	1.96	-0.16
				2495	37.36	39.14	-4.56	1.87	1.85	1.32
				2690	37.10	38.90	-4.62	2.03	2.06	-1.48
5	7/12/2018	2600	Body	2600	50.72	52.51	-3.41	2.19	2.16	1.49
				2495	50.85	52.64	-3.41	2.09	2.01	3.86
				2690	50.61	52.40	-3.41	2.29	2.29	-0.10
6	7/11/2018	5200	Body	5200	47.56	49.02	-2.98	5.09	5.29	-3.94
				5150	47.82	49.09	-2.58	5.09	5.24	-2.87
				5350	47.06	48.82	-3.60	5.31	5.47	-2.86
6	7/11/2018	5600	Body	5600	46.65	48.48	-3.77	5.64	5.76	-2.10
				5500	46.74	48.61	-3.85	5.57	5.64	-1.41
				5725	46.51	48.31	-3.72	5.80	5.91	-1.84
6	7/11/2018	5800	Body	5800	46.70	48.20	-3.11	5.98	6.00	-0.42
				5700	46.78	48.34	-3.23	5.76	5.88	-2.07
				5850	46.45	48.20	-3.63	5.96	6.00	-0.63
7	7/10/2018	835	Head	835	40.66	41.50	-2.02	0.94	0.90	3.90
				805	40.64	41.68	-2.49	0.93	0.90	3.73
				915	40.43	41.50	-2.58	0.97	0.98	-1.21
7	7/10/2018	835	Body	835	54.01	55.20	-2.16	0.99	0.97	2.09
				805	54.14	55.33	-2.16	0.99	0.97	1.95
				915	53.87	55.00	-2.05	1.03	1.06	-2.92
7	7/11/2018	750	Body	750	52.92	55.55	-4.73	0.98	0.96	1.79
				695	53.11	55.76	-4.75	0.96	0.96	0.36
				790	52.90	55.39	-4.50	0.99	0.97	2.90
7	7/11/2018	750	Head	750	40.19	41.96	-4.22	0.91	0.89	2.32
				695	40.48	42.24	-4.17	0.90	0.89	1.05
				790	40.17	41.76	-3.80	0.93	0.90	3.78
7	7/12/2018	1900	Head	1900	38.34	40.00	-4.15	1.47	1.40	4.93
				1850	38.46	40.00	-3.85	1.44	1.40	3.00
				1980	38.23	40.00	-4.43	1.52	1.40	8.64
7	7/13/2018	1900	Body	1900	50.69	53.30	-4.90	1.62	1.52	6.38
				1850	50.89	53.30	-4.52	1.58	1.52	4.21
				1920	50.67	53.30	-4.93	1.63	1.52	7.43
7	7/16/2018	1750	Head	1750	38.40	40.08	-4.20	1.30	1.37	-4.82
				1710	38.48	40.15	-4.15	1.28	1.35	-4.64
				1785	38.36	40.03	-4.17	1.33	1.39	-4.59
7	7/16/2018	1750	Body	1750	51.07	53.44	-4.44	1.45	1.49	-2.57
				1710	51.07	53.54	-4.62	1.43	1.46	-2.43
				1755	51.00	53.43	-4.54	1.45	1.49	-2.37

**Dielectric Property Measurements Results (continued):**

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity ( $\epsilon_r$ )			Conductivity ( $\sigma$ )		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
8	7/11/2018	2450	Head	2450	38.94	39.20	-0.66	1.77	1.80	-1.56
				2400	39.01	39.30	-0.73	1.74	1.75	-0.44
				2480	38.91	39.16	-0.64	1.79	1.83	-2.15
8	7/13/2018	2450	Body	2450	50.47	52.70	-4.23	2.01	1.95	3.08
				2400	50.58	52.77	-4.15	1.97	1.90	4.00
				2480	50.43	52.66	-4.24	2.04	1.99	2.20
8	7/16/2018	5250	Head	5250	35.21	35.93	-2.01	4.50	4.70	-4.24
				5150	35.40	36.05	-1.80	4.40	4.60	-4.39
				5350	35.08	35.82	-2.06	4.62	4.80	-3.80
8	7/16/2018	5600	Head	5600	34.62	35.53	-2.57	4.88	5.06	-3.58
				5500	34.85	35.65	-2.24	4.82	4.96	-2.74
				5725	34.56	35.39	-2.35	5.06	5.19	-2.47
8	7/16/2018	5750	Head	5750	34.51	35.36	-2.41	5.09	5.21	-2.37
				5700	34.56	35.42	-2.43	5.00	5.16	-3.25
				5850	34.35	35.30	-2.69	5.19	5.27	-1.61

## 8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness:  $2.0 \pm 0.2$  mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0$  cm for SAR measurements  $\leq 3$  GHz and  $\geq 10.0$  cm for measurements  $> 3$  GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

**System Check Results**

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within  $\pm 10\%$  of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type Serial #	Dipole Cal. Due Date	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
5	7/9/2018	Body	D2600V2 SN:1036	3/16/2019	5.560	55.60	56.13	-0.94	2.430	24.30	25.04	-2.96	
5	7/9/2018	Head	D2600V2 SN:1036	3/16/2019	5.570	55.70	54.54	2.13	2.500	25.00	24.56	1.79	
5	7/12/2018	Head	D2600V2 SN:1036	3/16/2019	5.730	57.30	54.54	<b>5.06</b>	2.580	25.80	24.56	5.05	1,2
5	7/12/2018	Body	D2600V2 SN:1036	3/16/2019	5.720	57.20	56.13	1.91	2.550	25.50	25.04	1.84	
6	7/11/2018	Body	D5GHzV2 SN:1138 (5.2 GHz)	10/26/2018	6.920	69.20	73.40	<b>-5.72</b>	1.940	19.40	20.60	-5.83	3,4
6	7/11/2018	Body	D5GHzV2 SN:1138 (5.6 GHz)	10/26/2018	8.250	82.50	79.50	<b>3.77</b>	2.280	22.80	22.30	2.24	5,6
6	7/11/2018	Body	D5GHzV2 SN:1138 (5.8 GHz)	10/26/2018	7.310	73.10	76.80	<b>-4.82</b>	2.020	20.20	21.30	-5.16	7,8
7	7/10/2018	Head	D835V2 SN:4d142	10/12/2018	0.977	9.77	9.64	<b>1.35</b>	0.635	6.35	6.22	2.09	9,10
7	7/10/2018	Body	D835V2 SN:4d142	10/12/2018	0.974	9.74	9.63	1.14	0.642	6.42	6.27	2.39	
7	7/11/2018	Body	D750V3 SN:1071	11/21/2018	0.910	9.10	8.52	<b>6.81</b>	0.604	6.04	5.69	6.15	11,12
7	7/11/2018	Head	D750V3 SN:1071	11/21/2018	0.834	8.34	8.59	-2.91	0.545	5.45	5.73	-4.89	
7	7/12/2018	Head	D1900V2 SN:5d043	11/22/2018	4.190	41.90	42.99	-2.54	2.150	21.50	22.17	-3.02	
7	7/13/2018	Body	D1900V2 SN:5d043	11/22/2018	4.420	44.20	41.00	<b>7.80</b>	2.290	22.90	20.90	9.57	13,14
7	7/16/2018	Head	D1750V2 SN:1050	4/10/2019	3.480	34.80	36.50	<b>-4.66</b>	1.830	18.30	19.42	-5.77	15,16
7	7/16/2018	Body	D1750V2 SN:1050	4/10/2019	3.730	37.30	37.18	0.32	1.980	19.80	19.74	0.30	
8	7/11/2018	Head	D2450V2 SN:899	3/16/2019	4.890	48.90	51.75	-5.51	2.280	22.80	24.20	-5.79	
8	7/13/2018	Body	D2450V2 SN:899	3/16/2019	4.620	46.20	50.55	<b>-8.61</b>	2.150	21.50	23.20	-7.33	17,18
8	7/16/2018	Head	D5GHzV2 SN:1003 (5.25 GHz)	3/13/2019	7.660	76.60	80.60	<b>-4.96</b>	2.190	21.90	23.20	-5.60	19,20
8	7/16/2018	Head	D5GHzV2 SN:1003 (5.60 GHz)	3/13/2019	8.330	83.30	84.50	<b>-1.42</b>	2.360	23.60	24.00	-1.67	21,22
8	7/16/2018	Head	D5GHzV2 SN:1003 (5.75 GHz)	3/13/2019	7.390	73.90	78.40	<b>-5.74</b>	2.100	21.00	22.20	-5.41	23,24

## 9. Conducted Output Power Measurements

### 9.1. GSM

#### Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance

#### Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

#### GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)				
					Measured		Tune-up Limit		
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	
GSM/GPRS	CS1	1	128	824.2	31.35	22.32	32.20	23.17	
			190	836.6	31.56	22.53			
			251	848.8	31.59	22.56			
GPRS (GMSK)		2	2	128	824.2	29.43	23.41	30.20	24.18
				190	836.6	29.69	23.67		
				251	848.8	29.73	23.71		
		3	3	128	824.2	27.45	23.19	28.20	23.94
				190	836.6	27.70	23.44		
				251	848.8	27.71	23.45		
		4	4	128	824.2	26.33	23.32	27.20	24.19
				190	836.6	26.53	23.52		
				251	848.8	26.48	23.47		
GSM/EDGE	MCS5	1	128	824.2	26.63	17.60	28.00	18.97	
			190	836.6	26.77	17.74			
			251	848.8	26.76	17.73			
EDGE (8PSK)		2	2	128	824.2	24.77	18.75	26.50	20.48
				190	836.6	24.90	18.88		
				251	848.8	24.91	18.89		
		3	3	128	824.2	23.62	19.36	24.50	20.24
				190	836.6	23.83	19.57		
				251	848.8	23.84	19.58		
		4	4	128	824.2	21.72	18.71	23.50	20.49
				190	836.6	21.79	18.78		
				251	848.8	21.85	18.84		

#### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS (GMSK) mode with 4 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is  $\leq 1/4$ dB higher than GPRS (GMSK) or the adjusted SAR of the highest reported SAR of GPRS (GMSK) is  $\leq 1.2$ W/kg.

**GSM850 DTM Measured Results**

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS (GMSK)	CS1	1	128	824.2	31.30		22.27		32.20		23.17	
			190	836.6	31.53		22.50					
			251	848.8	31.50		22.47					
		2	128	824.2	29.20	29.40	23.18	23.38	30.20	30.20	24.2	24.2
			190	836.6	29.56	29.70	23.54	23.68				
			251	848.8	29.50	29.70	23.48	23.68				
		3	128	824.2	27.30	27.40	23.04	23.14	28.20	28.20	23.94	23.94
			190	836.6	27.46	27.59	23.20	23.33				
			251	848.8	27.47	27.60	23.21	23.34				
GSM (Voice) + EDGE (8PSK)	MCS5	1	128	824.2	31.30		22.27		32.20		23.17	
			190	836.6	31.53		22.50					
			251	848.8	31.50		22.47					
		2	128	824.2	29.31	24.62	23.29	18.60	30.20	26.50	24.2	20.48
			190	836.6	29.33	24.68	23.31	18.66				
			251	848.8	29.52	24.80	23.50	18.78				
		3	128	824.2	27.30	23.50	23.04	19.24	28.20	24.50	23.94	20.24
			190	836.6	27.40	23.60	23.14	19.34				
			251	848.8	27.52	23.74	23.26	19.48				

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) + GPRS (GMSK) with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for GSM(Voice) + EDGE (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4dB higher than that of GSM(Voice) + GPRS (GMSK) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GPRS (GMSK) is ≤ 1.2W/kg.



**GSM1900 Measured Results**

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)				
					Measured		Tune-up Limit		
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	
GSM/GPRS	CS1	1	512	1850.2	29.89	20.86	30.70	21.67	
			661	1880.0	29.97	20.94			
			810	1909.8	30.04	21.01			
GPRS (GMSK)		2	2	512	1850.2	28.10	22.08	28.70	22.68
				661	1880.0	28.11	22.09		
				810	1909.8	28.26	22.24		
		3	3	512	1850.2	26.21	21.95	26.70	22.44
				661	1880.0	26.23	21.97		
				810	1909.8	26.37	22.11		
	4	4	512	1850.2	25.12	22.11	25.70	22.69	
			661	1880.0	25.27	22.26			
			810	1909.8	25.25	22.24			
GSM/EDGE	MCS5	1	512	1850.2	25.87	16.84	27.00	17.97	
			661	1880.0	25.86	16.83			
			810	1909.8	25.94	16.91			
EDGE (8PSK)		2	2	512	1850.2	23.83	17.81	25.50	19.48
				661	1880.0	23.84	17.82		
				810	1909.8	23.94	17.92		
		3	3	512	1850.2	22.72	18.46	23.50	19.24
				661	1880.0	22.74	18.48		
				810	1909.8	22.81	18.55		
		4	4	512	1850.2	21.66	18.65	22.50	19.49
				661	1880.0	21.66	18.65		
				810	1909.8	21.71	18.70		

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS (GMSK) mode with 4 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4dB higher than GPRS (GMSK) or the adjusted SAR of the highest reported SAR of GPRS (GMSK) is ≤ 1.2W/kg.

**GSM1900 DTM Measured Results**

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)								
					Measured				Tune-up Limit				
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	
GSM (Voice) + GPRS (GMSK)	CS1	1	512	1850.2	29.88		20.85		30.70		21.67		
			661	1880.0	29.88		20.85						
			810	1909.8	29.87		20.84						
		2	2	512	1850.2	27.80	27.96	21.78	21.94	28.70	28.70	22.7	22.7
				661	1880.0	27.82	27.99	21.80	21.97				
				810	1909.8	27.87	28.04	21.85	22.02				
		3	3	512	1850.2	25.90	26.04	21.64	21.78	26.70	26.70	22.44	22.44
				661	1880.0	25.85	25.98	21.59	21.72				
				810	1909.8	25.90	26.10	21.64	21.84				
GSM (Voice) + EDGE (8PSK)	MCS5	1	512	1850.2	29.88		20.85		30.70		21.67		
			661	1880.0	29.88		20.85						
			810	1909.8	29.87		20.84						
		2	2	512	1850.2	27.70	23.60	21.68	17.58	28.70	25.50	22.68	19.48
				661	1880.0	27.78	23.68	21.76	17.66				
				810	1909.8	27.86	23.76	21.84	17.74				
		3	3	512	1850.2	25.70	22.60	21.44	18.34	26.70	23.50	22.44	19.24
				661	1880.0	25.80	22.60	21.54	18.34				
				810	1909.8	25.90	22.60	21.64	18.34				

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) + GPRS (GMSK) with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for GSM(Voice) + EDGE (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4dB higher than that of GSM(Voice) + GPRS (GMSK) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GPRS (GMSK) is ≤ 1.2W/kg.

## 9.2. W-CDMA

### Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

### HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings is illustrated below:

**Table C.10.2.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	11/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	11/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	$D_{ACK}$	8			
	$D_{NAK}$	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs}=\beta_{hs}/\beta_c$	30/15				

**HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals**

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1  
A summary of these settings is illustrated below:

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Mode	HSPA					
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
	$\beta_{ed}$	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

**HSPA+ Release 7**

Since 16QAM is not used for uplink, RF conducted power measurements are not required for HSPA+.

**W-CDMA Band V Measured Results**

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	23.16	N/A	23.70
		4183	836.6	23.13		
		4233	846.6	23.24		
HSDPA	Subtest 1	4132	826.4	22.19	0	23.00
		4183	836.6	22.23		
		4233	846.6	22.28		
	Subtest 2	4132	826.4	22.21	0	23.00
		4183	836.6	22.23		
		4233	846.6	22.29		
	Subtest 3	4132	826.4	21.66	0.5	22.50
		4183	836.6	21.73		
		4233	846.6	21.78		
	Subtest 4	4132	826.4	21.70	0.5	22.50
		4183	836.6	21.72		
		4233	846.6	21.78		
HSUPA	Subtest 1	4132	826.4	22.21	0	23.00
		4183	836.6	22.26		
		4233	846.6	22.31		
	Subtest 2	4132	826.4	20.31	2	21.00
		4183	836.6	20.27		
		4233	846.6	20.33		
	Subtest 3	4132	826.4	21.29	1	22.00
		4183	836.6	21.25		
		4233	846.6	21.37		
	Subtest 4	4132	826.4	20.22	2	21.00
		4183	836.6	20.29		
		4233	846.6	20.30		
	Subtest 5	4132	826.4	22.25	0	23.00
		4183	836.6	22.27		
		4233	846.6	22.29		

### 9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3**

Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N <sub>RB</sub> )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>8	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50 (NOTE 1)	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
			10,15,20	≥ 50	≤ 1 (NOTE 1)
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.2	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10	6.2.2	20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1, 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
				Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9	
				Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
				Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
				10, 15, 20	≥ 1
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2, 6.6.2.2.1, 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
				Table 6.2.4-15	
NS_21	6.6.2.2.1, 6.6.3.3.15	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

**LTE Band 4 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					
				20050	20175	20300	MPR	Tune-up Limit	
				1720 MHz	1732.5 MHz	1745 MHz			
20 MHz	QPSK	1	0		22.71		0	23	
		1	49		22.53		0	23	
		1	99		22.60		0	23	
		50	0		22.70		0	23	
		50	24		22.73		0	23	
		50	50		22.70		0	23	
	16QAM	100	0		22.72		0	23	
		1	0		22.70		0	23	
		1	49		22.47		0	23	
		1	99		22.58		0	23	
		50	0		22.26		0	23	
		50	24		22.29		0	23	
	64QAM	50	50		22.24		0	23	
		100	0		22.30		0	23	
		1	0		22.51		0	23	
		1	49		22.30		0	23	
		1	99		22.40		0	23	
		50	0		21.25		1	22	
15 MHz	QPSK	50	24		21.30		1	22	
		50	50		21.26		1	22	
		100	0		21.29		1	22	
		1	0		22.74	22.75	22.61	0	23
		1	37		22.69	22.59	22.47	0	23
		1	74		22.66	22.65	22.43	0	23
16QAM	36	0		22.69	22.62	22.51	0	23	
	36	20		22.75	22.68	22.51	0	23	
	36	39		22.70	22.67	22.48	0	23	
	75	0		22.76	22.68	22.50	0	23	
	1	0		22.27	22.71	22.55	0	23	
	1	37		22.21	22.52	22.41	0	23	
64QAM	1	74		22.20	22.61	22.40	0	23	
	36	0		22.30	22.19	22.21	0	23	
	36	20		22.35	22.23	22.12	0	23	
	36	39		22.29	22.21	22.11	0	23	
	75	0		22.36	22.26	22.11	0	23	
	1	0		22.64	22.85	22.28	0	23	
10 MHz	QPSK	1	37		22.59	22.71	22.12	0	23
		1	74		22.60	22.79	22.12	0	23
		36	0		21.32	21.20	21.18	1	22
		36	20		21.36	21.25	21.12	1	22
		36	39		21.33	21.20	21.08	1	22
		75	0		21.35	21.29	21.09	1	22
20 MHz	QPSK	1	0		22.55	22.62	22.49	0	23
		1	25		22.46	22.53	22.39	0	23
		1	49		22.59	22.60	22.42	0	23
		25	0		22.59	22.63	22.51	0	23
		25	12		22.58	22.67	22.53	0	23
		25	25		22.65	22.67	22.48	0	23
	16QAM	50	0		22.67	22.67	22.50	0	23
		1	0		22.23	22.54	22.03	0	23
		1	25		22.12	22.45	21.93	0	23
		1	49		22.19	22.53	21.91	0	23
		25	0		22.28	22.21	22.12	0	23
		25	12		22.26	22.30	22.12	0	23
	64QAM	25	25		22.35	22.30	22.08	0	23
		50	0		22.32	22.30	22.09	0	23
		1	0		22.46	22.36	22.17	0	23
		1	25		22.37	22.26	22.09	0	23
		1	49		22.50	22.35	22.10	0	23
		25	0		21.20	21.24	21.14	1	22
10 MHz	QPSK	25	12		21.20	21.32	21.12	1	22
		25	25		21.28	21.29	21.09	1	22
		50	0		21.27	21.23	21.07	1	22

**Note(s):**  
 20 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

**LTE Band 4 Measured Results (continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					
				19975	20175	20375	MPR	Tune-up Limit	
				1712.5 MHz	1732.5 MHz	1752.5 MHz			
5 MHz	QPSK	1	0	22.60	22.64	22.45	0	23	
		1	12	22.55	22.57	22.42	0	23	
		1	24	22.57	22.67	22.44	0	23	
		12	0	22.62	22.52	22.43	0	23	
		12	7	22.62	22.60	22.42	0	23	
		12	13	22.60	22.59	22.41	0	23	
	16QAM	25	0	22.61	22.63	22.42	0	23	
		1	0	22.73	22.28	22.13	0	23	
		1	12	22.67	22.21	22.07	0	23	
		1	24	22.67	22.33	22.08	0	23	
		12	0	22.35	22.20	22.08	0	23	
		12	7	22.35	22.28	22.07	0	23	
	64QAM	12	13	22.31	22.25	22.06	0	23	
		25	0	22.27	22.22	21.98	0	23	
		1	0	22.19	22.39	22.32	0	23	
		1	12	22.14	22.35	22.29	0	23	
		1	24	22.15	22.46	22.25	0	23	
		12	0	21.29	21.19	20.98	1	22	
	3 MHz	QPSK	12	7	21.29	21.28	20.97	1	22
			12	13	21.26	21.26	20.96	1	22
			25	0	21.23	21.24	20.97	1	22
Maximum Average Power (dBm)					MPR	Tune-up Limit			
19965			20175	20385					
1711.5 MHz			1732.5 MHz	1753.5 MHz					
3 MHz		QPSK	1	0	22.58	22.50	22.30	0	23
			1	8	22.62	22.59	22.41	0	23
			1	14	22.50	22.56	22.31	0	23
			8	0	22.60	22.47	22.38	0	23
			8	4	22.61	22.50	22.38	0	23
			8	7	22.60	22.56	22.35	0	23
		16QAM	15	0	22.60	22.56	22.39	0	23
			1	0	22.23	22.41	21.87	0	23
			1	8	22.28	22.51	21.94	0	23
			1	14	22.18	22.48	21.82	0	23
			8	0	22.21	22.12	22.06	0	23
			8	4	22.24	22.15	22.09	0	23
		64QAM	8	7	22.23	22.23	22.08	0	23
			15	0	22.13	22.18	22.01	0	23
			1	0	22.27	22.37	22.16	0	23
1	8		22.39	22.45	22.21	0	23		
1	14		22.28	22.45	22.11	0	23		
8	0		21.22	21.13	20.92	1	22		
1.4 MHz	QPSK	8	4	21.27	21.18	20.96	1	22	
		8	7	21.25	21.25	20.95	1	22	
		15	0	21.24	21.17	21.01	1	22	
		Maximum Average Power (dBm)					MPR	Tune-up Limit	
		19957	20175	20393					
		1710.7 MHz	1732.5 MHz	1754.3 MHz					
	1.4 MHz	QPSK	1	0	22.52	22.45	22.39	0	23
			1	3	22.56	22.51	22.42	0	23
			1	5	22.47	22.44	22.36	0	23
			3	0	22.53	22.49	22.34	0	23
			3	1	22.60	22.52	22.38	0	23
			3	3	22.59	22.54	22.39	0	23
		16QAM	6	0	22.54	22.44	22.34	0	23
			1	0	22.12	22.38	22.03	0	23
			1	3	22.20	22.45	22.09	0	23
1			5	22.15	22.35	22.03	0	23	
3			0	22.34	22.24	22.01	0	23	
3			1	22.40	22.28	22.05	0	23	
64QAM		3	3	22.40	22.28	22.04	0	23	
		6	0	22.29	21.95	22.06	0	23	
		1	0	22.47	22.16	21.97	0	23	
		1	3	22.57	22.23	22.07	0	23	
		1	5	22.45	22.17	21.94	0	23	
		3	0	22.45	21.95	22.02	0	23	
64QAM	3	1	22.52	22.02	22.09	0	23		
	3	3	22.50	22.04	22.11	0	23		
	6	0	21.07	21.09	21.18	1	22		

**LTE Band 5 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					
				20450	20525	20600	MPR	Tune-up Limit	
				829 MHz	836.5 MHz	844 MHz			
10 MHz	QPSK	1	0		23.53		0	24	
		1	25		23.47		0	24	
		1	49		23.52		0	24	
		25	0		23.59		0	24	
		25	12		23.55		0	24	
		25	25		23.51		0	24	
	16QAM	50	0		23.56		0	24	
		1	0		23.05		0	24	
		1	25		22.98		0	24	
		1	49		23.00		0	24	
		25	0		22.17		1	23	
		25	12		22.18		1	23	
	64QAM	25	25		22.12		1	23	
		50	0		22.15		1	23	
		1	0		22.43		1	23	
		1	25		22.32		1	23	
		1	49		22.35		1	23	
		25	0		21.21		2	22	
5 MHz	QPSK	25	12		21.20		2	22	
		25	25		21.12		2	22	
		50	0		21.11		2	22	
		1	0		23.57	23.64	23.55	0	24
		1	12		23.51	23.54	23.58	0	24
		1	24		23.50	23.66	23.54	0	24
	16QAM	12	0		23.59	23.51	23.49	0	24
		12	7		23.61	23.52	23.50	0	24
		12	13		23.60	23.50	23.50	0	24
		25	0		23.61	23.55	23.50	0	24
		1	0		23.65	23.24	23.20	0	24
		1	12		23.62	23.19	23.23	0	24
	64QAM	1	24		23.59	23.31	23.19	0	24
		12	0		22.32	22.18	22.15	1	23
		12	7		22.34	22.20	22.14	1	23
		12	13		22.32	22.19	22.14	1	23
		25	0		22.23	22.13	22.06	1	23
		1	0		22.45	22.04	22.35	1	23
3 MHz	QPSK	1	12		22.41	21.97	22.35	1	23
		1	24		22.41	22.05	22.32	1	23
		12	0		21.13	21.16	21.15	2	22
		12	7		21.14	21.17	21.17	2	22
		12	13		21.13	21.13	21.14	2	22
		25	0		21.13	21.10	21.11	2	22
	16QAM	1	0		23.47	23.50	23.48	0	24
		1	8		23.52	23.54	23.56	0	24
		1	14		23.44	23.43	23.47	0	24
		8	0		23.49	23.46	23.49	0	24
		8	4		23.53	23.50	23.55	0	24
		8	7		23.52	23.48	23.55	0	24
	64QAM	15	0		23.52	23.47	23.51	0	24
		1	0		23.15	23.42	23.00	0	24
		1	8		23.17	23.45	23.08	0	24
		1	14		23.09	23.35	22.96	0	24
		8	0		22.11	22.14	22.20	1	23
		8	4		22.15	22.15	22.24	1	23
16QAM	8	7		22.14	22.14	22.23	1	23	
	15	0		22.08	22.11	22.16	1	23	
	1	0		22.24	22.35	22.28	1	23	
	1	8		22.32	22.40	22.34	1	23	
	1	14		22.22	22.29	22.22	1	23	
	8	0		21.19	21.13	20.99	2	22	
64QAM	8	4		21.21	21.16	21.14	2	22	
	8	7		21.20	21.16	21.14	2	22	
	15	0		21.18	21.09	21.10	2	22	

**Note(s):**  
 10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices



**LTE Band 5 Measured Results (continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20407	20525	20643	MPR	Tune-up Limit
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	23.46	23.40	23.50	0	24
		1	3	23.51	23.47	23.53	0	24
		1	5	23.44	23.40	23.47	0	24
		3	0	23.50	23.45	23.44	0	24
		3	1	23.56	23.50	23.49	0	24
		3	3	23.54	23.49	23.50	0	24
	6	0	23.48	23.41	23.49	0	24	
	16QAM	1	0	23.11	23.32	23.12	0	24
		1	3	23.16	23.39	23.15	0	24
		1	5	23.10	23.33	23.10	0	24
		3	0	23.27	23.19	23.11	0	24
		3	1	23.34	23.25	23.15	0	24
		3	3	23.33	23.25	23.14	0	24
	64QAM	6	0	22.27	21.96	22.20	1	23
		1	0	22.45	22.15	22.12	1	23
		1	3	22.54	22.20	22.20	1	23
		1	5	22.43	22.15	22.07	1	23
		3	0	22.41	21.93	22.15	1	23
		3	1	22.47	22.01	22.23	1	23
	3	3	22.46	22.01	22.24	1	23	
	6	0	21.08	21.09	21.36	2	22	

**LTE Band 7 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					
				20850	21100	21350	MPR	Tune-up Limit	
				2510 MHz	2535 MHz	2560 MHz			
20 MHz	QPSK	1	0	22.66	22.68	22.52	0	23	
		1	49	22.49	22.60	22.45	0	23	
		1	99	22.41	22.65	22.37	0	23	
		50	0	22.74	22.73	22.49	0	23	
		50	24	22.69	22.70	22.59	0	23	
		50	50	22.52	22.63	22.51	0	23	
	16QAM	100	0	22.68	22.66	22.45	0	23	
		1	0	22.82	22.63	22.59	0	23	
		1	49	22.58	22.56	22.53	0	23	
		1	99	22.50	22.59	22.47	0	23	
		50	0	22.37	22.30	22.13	0	23	
		50	24	22.34	22.27	22.22	0	23	
	64QAM	50	50	22.13	22.19	22.11	0	23	
		100	0	22.32	22.28	22.07	0	23	
		1	0	22.62	22.70	22.48	0	23	
		1	49	22.89	22.66	22.44	0	23	
		1	99	22.82	22.73	22.36	0	23	
		50	0	21.48	21.52	21.22	1	22	
15 MHz	QPSK	50	24	21.43	21.49	21.32	1	22	
		50	50	21.27	21.43	21.24	1	22	
		100	0	21.37	21.42	21.17	1	22	
		1	0	22.67	22.71	22.78	0	23	
		1	37	22.54	22.66	22.66	0	23	
		1	74	22.46	22.65	22.60	0	23	
15 MHz	QPSK	36	0	22.70	22.74	22.66	0	23	
		36	20	22.67	22.70	22.64	0	23	
		36	39	22.50	22.65	22.59	0	23	
		75	0	22.64	22.72	22.63	0	23	
		1	0	22.62	22.22	22.77	0	23	
		1	37	22.45	22.19	22.62	0	23	
	16QAM	1	74	22.38	22.23	22.59	0	23	
		36	0	22.35	22.39	22.26	0	23	
		36	20	22.32	22.36	22.26	0	23	
		36	39	22.14	22.32	22.20	0	23	
		75	0	22.28	22.34	22.25	0	23	
		1	0	22.39	22.63	22.98	0	23	
64QAM	1	37	22.24	22.59	22.84	0	23		
	1	74	22.18	22.64	22.81	0	23		
	36	0	21.38	21.42	21.33	1	22		
	36	20	21.34	21.41	21.31	1	22		
	36	39	21.18	21.33	21.24	1	22		
	75	0	21.28	21.35	21.33	1	22		
10 MHz	QPSK	1	0	22.54	22.62	22.74	0	23	
		1	25	22.59	22.64	22.66	0	23	
		1	49	22.49	22.69	22.61	0	23	
		25	0	22.70	22.73	22.70	0	23	
		25	12	22.69	22.71	22.70	0	23	
		25	25	22.64	22.67	22.68	0	23	
	16QAM	50	0	22.66	22.72	22.70	0	23	
		1	0	22.10	22.24	22.65	0	23	
		1	25	22.15	22.30	22.60	0	23	
		1	49	21.99	22.32	22.57	0	23	
		25	0	22.31	22.45	22.35	0	23	
		25	12	22.31	22.43	22.37	0	23	
	64QAM	25	25	22.27	22.35	22.32	0	23	
		50	0	22.23	22.37	22.31	0	23	
		1	0	22.33	22.55	22.52	0	23	
		1	25	22.36	22.60	22.45	0	23	
		1	49	22.25	22.65	22.40	0	23	
		25	0	21.36	21.43	21.41	1	22	
	10 MHz	64QAM	25	12	21.35	21.41	21.41	1	22
			25	25	21.33	21.36	21.33	1	22
			50	0	21.30	21.37	21.29	1	22

**LTE Band 7 Measured Results (continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20775	21100	21425	MPR	Tune-up Limit
				2502.5 MHz	2535 MHz	2567.5 MHz		
5 MHz	QPSK	1	0	22.76	22.62	22.61	0	23
		1	12	22.81	22.67	22.56	0	23
		1	24	22.81	22.65	22.55	0	23
		12	0	22.75	22.70	22.64	0	23
		12	7	22.77	22.70	22.62	0	23
		12	13	22.73	22.67	22.58	0	23
	25	0	22.77	22.69	22.60	0	23	
	16QAM	1	0	22.42	22.29	22.65	0	23
		1	12	22.48	22.36	22.65	0	23
		1	24	22.48	22.35	22.64	0	23
		12	0	22.44	22.36	22.33	0	23
		12	7	22.46	22.37	22.36	0	23
		12	13	22.44	22.38	22.32	0	23
	25	0	22.40	22.26	22.27	0	23	
	64QAM	1	0	22.23	22.45	22.58	0	23
		1	12	22.29	22.54	22.57	0	23
		1	24	22.27	22.55	22.50	0	23
		12	0	21.42	21.38	21.24	1	22
		12	7	21.44	21.41	21.25	1	22
		12	13	21.40	21.38	21.24	1	22
		25	0	21.35	21.36	21.24	1	22

**LTE Band 12 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23060	23095	23130	MPR	Tune-up Limit
				704 MHz	707.5 MHz	711 MHz		
10 MHz	QPSK	1	0		24.65		0	25
		1	25		24.68		0	25
		1	49		24.64		0	25
		25	0		23.78		1	24
		25	12		23.80		1	24
		25	25		23.73		1	24
	16QAM	50	0		23.73		1	24
		1	0		23.18		1	24
		1	25		23.18		1	24
		1	49		23.12		1	24
		25	0		22.36		2	23
		25	12		22.39		2	23
	64QAM	25	25		22.31		2	23
		50	0		22.33		2	23
		1	0		22.56		2	23
		1	25		22.58		2	23
		1	49		22.53		2	23
		25	0		21.40		3	22
10 MHz	64QAM	25	12		21.39		3	22
		25	25		21.32		3	22
		50	0		21.34		3	22

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23035	23095	23155	MPR	Tune-up Limit
				701.5 MHz	707.5 MHz	713.5 MHz		
5 MHz	QPSK	1	0	24.66	24.78	24.76	0	25
		1	12	24.60	24.78	24.69	0	25
		1	24	24.62	24.76	24.69	0	25
		12	0	23.70	23.75	23.69	1	24
		12	7	23.70	23.74	23.72	1	24
		12	13	23.67	23.74	23.69	1	24
	16QAM	25	0	23.69	23.78	23.68	1	24
		1	0	23.75	23.41	23.38	1	24
		1	12	23.71	23.42	23.30	1	24
		1	24	23.66	23.44	23.31	1	24
		12	0	22.38	22.40	22.32	2	23
		12	7	22.38	22.42	22.34	2	23
	64QAM	12	13	22.36	22.40	22.30	2	23
		25	0	22.30	22.35	22.22	2	23
		1	0	22.56	22.17	22.53	2	23
		1	12	22.49	22.20	22.43	2	23
		1	24	22.45	22.22	22.43	2	23
		12	0	21.21	21.36	21.35	3	22
5 MHz	64QAM	12	7	21.18	21.38	21.34	3	22
		12	13	21.16	21.36	21.32	3	22
		25	0	21.19	21.28	21.30	3	22

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23025	23095	23165	MPR	Tune-up Limit
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	24.70	24.63	24.66	0	25
		1	8	24.74	24.78	24.70	0	25
		1	14	24.63	24.70	24.58	0	25
		8	0	23.68	23.73	23.66	1	24
		8	4	23.67	23.75	23.70	1	24
		8	7	23.69	23.75	23.70	1	24
	16QAM	15	0	23.66	23.75	23.69	1	24
		1	0	23.60	23.14	23.31	1	24
		1	8	23.67	23.29	23.31	1	24
		1	14	23.57	23.16	23.19	1	24
		8	0	22.32	22.41	22.27	2	23
		8	4	22.31	22.44	22.31	2	23
	64QAM	8	7	22.32	22.45	22.33	2	23
		15	0	22.28	22.37	22.23	2	23
		1	0	22.35	22.51	22.47	2	23
		1	8	22.42	22.66	22.46	2	23
		1	14	22.30	22.55	22.36	2	23
		8	0	21.25	21.35	21.20	3	22
3 MHz	64QAM	8	4	21.30	21.41	21.24	3	22
		8	7	21.28	21.39	21.24	3	22
		15	0	21.27	21.31	21.28	3	22

**Note(s):**  
 10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

**LTE Band 12 Measured Results (continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23017	23095	23173	MPR	Tune-up Limit
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	24.73	24.61	24.56	0	25
		1	3	24.76	24.67	24.62	0	25
		1	5	24.73	24.59	24.54	0	25
		3	0	24.67	24.63	24.57	0	25
		3	1	24.73	24.70	24.63	0	25
		3	3	24.73	24.71	24.64	0	25
	6	0	23.69	23.64	23.56	1	24	
	16QAM	1	0	23.36	23.23	23.48	1	24
		1	3	23.43	23.29	23.54	1	24
		1	5	23.37	23.23	23.46	1	24
		3	0	23.35	23.41	23.36	1	24
		3	1	23.40	23.47	23.40	1	24
		3	3	23.40	23.47	23.38	1	24
	64QAM	6	0	22.41	22.40	22.08	2	23
		1	0	22.38	22.60	22.27	2	23
		1	3	22.47	22.72	22.35	2	23
		1	5	22.35	22.59	22.28	2	23
		3	0	22.42	22.57	22.09	2	23
		3	1	22.50	22.63	22.19	2	23
	64QAM	3	3	22.50	22.63	22.18	2	23
		6	0	21.59	21.22	21.23	3	22

**LTE Band 13 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			
				23230	782 MHz	MPR	Tune-up Limit
10 MHz	QPSK	1	0	24.50	0	25	
		1	25	24.43	0	25	
		1	49	24.58	0	25	
		25	0	23.55	1	24	
		25	12	23.69	1	24	
		25	25	23.61	1	24	
		50	0	23.64	1	24	
	16QAM	1	0	23.15	1	24	
		1	25	23.10	1	24	
		1	49	23.21	1	24	
		25	0	22.22	2	23	
		25	12	22.36	2	23	
		25	25	22.31	2	23	
		50	0	22.27	2	23	
	64QAM	1	0	22.34	2	23	
		1	25	22.29	2	23	
		1	49	22.43	2	23	
		25	0	21.24	3	22	
		25	12	21.35	3	22	
		25	25	21.32	3	22	
50		0	21.26	3	22		
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			
				23230	782 MHz	MPR	Tune-up Limit
5 MHz	QPSK	1	0	24.56	0	25	
		1	12	24.52	0	25	
		1	24	24.60	0	25	
		12	0	23.54	1	24	
		12	7	23.66	1	24	
		12	13	23.65	1	24	
		25	0	23.63	1	24	
	16QAM	1	0	23.24	1	24	
		1	12	23.18	1	24	
		1	24	23.26	1	24	
		12	0	22.16	2	23	
		12	7	22.30	2	23	
		12	13	22.29	2	23	
		25	0	22.18	2	23	
	64QAM	1	0	22.07	2	23	
		1	12	22.03	2	23	
		1	24	22.10	2	23	
		12	0	21.16	3	22	
		12	7	21.31	3	22	
		12	13	21.27	3	22	
25		0	21.21	3	22		

**Note(s):**  
 10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

**LTE Band 17 Measured Results**

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

**LTE Band 41 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)							
				39750	40185	40620	41055	41490	MPR	Tune-up Limit	
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			
20 MHz	QPSK	1	0	23.69	23.72	23.83	23.72	23.90	0	24	
		1	49	23.65	23.56	23.64	23.64	23.69	0	24	
		1	99	23.58	23.59	23.69	23.65	23.55	0	24	
		50	0	23.75	23.67	23.81	23.65	23.81	0	24	
		50	24	23.69	23.60	23.73	23.65	23.72	0	24	
		50	50	23.62	23.67	23.64	23.61	23.65	0	24	
	16QAM	100	0	23.67	23.72	23.71	23.58	23.73	0	24	
		1	0	23.16	23.39	23.38	23.13	23.58	0	24	
		1	49	23.06	23.22	23.21	23.04	23.34	0	24	
		1	99	23.01	23.29	23.19	23.07	23.21	0	24	
		50	0	22.33	22.26	22.31	22.25	22.42	1	23	
		50	24	22.26	22.24	22.29	22.25	22.33	1	23	
	64QAM	50	50	22.18	22.27	22.21	22.17	22.28	1	23	
		100	0	22.25	22.27	22.26	22.14	22.31	1	23	
		1	0	22.36	22.67	22.34	22.30	22.82	1	23	
		1	49	22.29	22.51	22.17	22.22	22.60	1	23	
		1	99	22.21	22.55	22.16	22.23	22.49	1	23	
		50	0	21.39	21.26	21.34	21.24	21.41	2	22	
	15 MHz	QPSK	50	24	21.32	21.21	21.29	21.25	21.34	2	22
			50	50	21.24	21.27	21.22	21.19	21.26	2	22
			100	0	21.31	21.30	21.28	21.17	21.29	2	22
1			0	23.62	23.68	23.77	23.64	23.80	0	24	
1			37	23.61	23.55	23.61	23.59	23.63	0	24	
1			74	23.53	23.59	23.64	23.54	23.54	0	24	
16QAM		36	0	23.68	23.62	23.73	23.60	23.75	0	24	
		36	20	23.64	23.57	23.71	23.66	23.69	0	24	
		36	39	23.60	23.61	23.62	23.60	23.61	0	24	
		75	0	23.63	23.69	23.70	23.54	23.69	0	24	
		1	0	23.22	23.29	23.35	23.21	23.45	0	24	
		1	37	23.17	23.16	23.21	23.14	23.26	0	24	
64QAM		1	74	23.14	23.22	23.23	23.09	23.18	0	24	
		36	0	22.24	22.21	22.30	22.18	22.35	1	23	
		36	20	22.20	22.20	22.29	22.21	22.31	1	23	
		36	39	22.16	22.24	22.19	22.15	22.25	1	23	
		75	0	22.21	22.26	22.26	22.14	22.29	1	23	
		1	0	22.14	21.82	22.65	22.09	21.96	1	23	
10 MHz		QPSK	1	37	22.09	21.69	22.46	22.01	21.80	1	23
			1	74	22.01	21.74	22.50	21.95	21.69	1	23
			36	0	21.27	21.22	21.37	21.13	21.40	2	22
	36		20	21.25	21.22	21.34	21.19	21.34	2	22	
	36		39	21.19	21.27	21.28	21.14	21.31	2	22	
	75		0	21.26	21.25	21.29	21.15	21.27	2	22	
10 MHz	QPSK	1	0	23.58	23.58	23.71	23.62	23.72	0	24	
		1	25	23.63	23.53	23.63	23.56	23.64	0	24	
		1	49	23.59	23.52	23.60	23.50	23.61	0	24	
		25	0	23.76	23.61	23.72	23.66	23.71	0	24	
		25	12	23.71	23.62	23.74	23.67	23.70	0	24	
		25	25	23.70	23.57	23.70	23.59	23.64	0	24	
	16QAM	50	0	23.73	23.56	23.72	23.63	23.69	0	24	
		1	0	23.17	23.14	23.46	23.20	23.32	0	24	
		1	25	23.21	23.09	23.34	23.11	23.19	0	24	
		1	49	23.19	23.06	23.30	23.09	23.16	0	24	
		25	0	22.30	22.16	22.31	22.23	22.27	1	23	
		25	12	22.30	22.17	22.31	22.24	22.25	1	23	
	64QAM	25	25	22.25	22.10	22.22	22.15	22.24	1	23	
		50	0	22.28	22.17	22.29	22.23	22.30	1	23	
		1	0	22.25	21.76	22.56	22.32	21.91	1	23	
		1	25	22.28	21.70	22.50	22.25	21.81	1	23	
		1	49	22.26	21.67	22.42	22.20	21.77	1	23	
		25	0	21.22	21.23	21.22	21.15	21.35	2	22	
		25	12	21.21	21.20	21.22	21.18	21.33	2	22	
		25	25	21.18	21.14	21.17	21.11	21.29	2	22	
		50	0	21.26	21.14	21.21	21.17	21.27	2	22	

**LTE Band 41 Measured Results (continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	23.66	23.48	23.71	23.60	23.59	0	24
		1	12	23.64	23.45	23.65	23.56	23.54	0	24
		1	24	23.64	23.43	23.67	23.58	23.53	0	24
		12	0	23.72	23.55	23.71	23.68	23.66	0	24
		12	7	23.73	23.58	23.74	23.67	23.69	0	24
		12	13	23.67	23.57	23.70	23.64	23.65	0	24
		25	0	23.68	23.58	23.68	23.64	23.70	0	24
	16QAM	1	0	23.37	23.05	23.22	23.29	23.14	0	24
		1	12	23.33	23.02	23.21	23.26	23.10	0	24
		1	24	23.33	22.98	23.19	23.25	23.06	0	24
		12	0	22.33	22.16	22.26	22.27	22.26	1	23
		12	7	22.33	22.17	22.24	22.28	22.30	1	23
		12	13	22.30	22.15	22.20	22.26	22.25	1	23
		25	0	22.26	22.15	22.30	22.22	22.24	1	23
	64QAM	1	0	22.40	21.83	22.64	22.35	21.96	1	23
		1	12	22.35	21.82	22.61	22.30	21.92	1	23
		1	24	22.32	21.80	22.61	22.26	21.88	1	23
		12	0	21.18	21.13	21.34	21.15	21.25	2	22
		12	7	21.18	21.13	21.33	21.14	21.26	2	22
		12	13	21.15	21.12	21.31	21.12	21.22	2	22
		25	0	21.14	21.20	21.19	21.09	21.29	2	22

**9.4. Wi-Fi 2.4GHz (DTS Band)**

**Wi-Fi 2.4GHz Measured Results**

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)		SAR Test (Yes/No)	Chain 1 Average Power (dBm)		SAR Test (Yes/No)
					Meas Pwr	Tune-up		Meas Pwr	Tune-up	
DSSS 2.4 GHz	802.11b	1 Mbps	1	2412	15.67	17.00	Yes	14.31	15.50	Yes
			6	2437	15.58	17.00		14.98	15.50	
			11	2462	15.59	17.00		14.84	15.50	
			12	2467	Not Required	16.23		14.68		
			13	2472		13.27		11.68		
OFDM 2.4 GHz	802.11g	6 Mbps	1	2412	Not Required	9.35	No	Not Required	7.39	No
			2	2417		16.35		14.39		
			3	2422	15.68	17.00		14.53	15.50	
			6	2437	15.73	17.00		14.98	15.50	
			10	2457	15.66	17.00		14.91	15.50	
			11	2467	15.35	13.39				
			12	2467	Not Required	10.85		Not Required	8.89	
	13	2472	4.85	2.89						
	802.11n (HT20)	6.5 Mbps	1	2412	Not Required	9.22	No	Not Required	7.35	No
			2	2417		16.22		14.35		
			3	2422	16.11	17.00		14.83	15.50	
			6	2437	16.09	17.00		14.90	15.50	
			10	2457	15.65	17.00		14.81	15.50	
11			2467	14.72	12.85					
12	2467	Not Required	9.22	Not Required	7.35					
13	2472	2.72	0.85							

**Note(s):**

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1).
- SAR is not required for Channels 12 and 13 because the tune-up limit for these two channels are lower than those for the default test channels.



### 9.5. Wi-Fi 5GHz (U-NII Bands)

#### Wi-Fi 5 GHz Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
U-NII 1 5.2 GHz	802.11a	6 Mbps	36	5180	Not Required	16.00	No	Not Required	14.00	No
			40	5200		16.00			14.00	
			44	5220		16.00			14.00	
			48	5240		16.00			14.00	
	802.11n (HT20)	6.5 Mbps	36	5180	Not Required	16.00	No	Not Required	14.00	No
			40	5200		16.00			14.00	
			44	5220		16.00			14.00	
			48	5240		16.00			14.00	
	802.11ac (VHT20)	6.5 Mbps	36	5180	Not Required	16.00	No	Not Required	14.00	No
			40	5200		16.00			14.00	
			44	5220		16.00			14.00	
			48	5240		16.00			14.00	
	802.11n (HT40)	13.5 Mbps	38	5190	Not Required	14.99	Yes	Not Required	9.24	Yes
			46	5230	15.05	16.00		13.16	14.00	
802.11ac (VHT40)	13.5 Mbps	38	5190	Not Required	14.95	No	Not Required	9.17	No	
		46	5230	15.03	16.00		13.09	14.00		
802.11ac (VHT80)	29.3 Mbps	42	5210	Not Required	14.09	No	Not Required	8.33	No	
Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
U-NII 2A 5.3 GHz	802.11a	6 Mbps	52	5260	Not Required	16.00	No	Not Required	14.00	No
			56	5280		16.00			14.00	
			60	5300		16.00			14.00	
			64	5320		16.00			14.00	
	802.11n (HT20)	6.5 Mbps	52	5260	Not Required	16.00	No	Not Required	14.00	No
			56	5280		16.00			14.00	
			60	5300		16.00			14.00	
			64	5320		16.00			14.00	
	802.11ac (VHT20)	6.5 Mbps	52	5260	Not Required	16.00	No	Not Required	14.00	No
			56	5280		16.00			14.00	
			60	5300		16.00			14.00	
	802.11n (HT40)	13.5 Mbps	54	5270	15.27	16.00	Yes	13.03	14.00	Yes
			62	5310	Not Required	14.87		Not Required	9.60	
	802.11ac (VHT40)	13.5 Mbps	54	5270	15.26	16.00	No	13.06	14.00	No
62			5310	Not Required	14.87	Not Required		9.60		
802.11ac (VHT80)	29.3 Mbps	58	5290	Not Required	13.87	No	Not Required	8.60	No	

**Note(s):**

- For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1).
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both U-NII band I and U-NII band 2A, begin SAR measurement in U-NII band 2A; and if the highest reported SAR for U-NII band 2A is
  - ≤ 1.2 W/kg, SAR is not required for U-NII band I
  - > 1.2 W/kg, both bands should be tested independently for SAR.

**Wi-Fi 5 GHz Measured Results (continued)**

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
U-NII 2C 5.5 GHz	802.11a	6 Mbps	100	5500	Not Required	16.00	No	Not Required	14.00	No
			116	5580		16.00			14.00	
			124	5620		16.00			14.00	
			144	5720		16.00			14.00	
	802.11n (HT20)	6.5 Mbps	100	5500	Not Required	16.00	No	Not Required	14.00	No
			116	5580		16.00			14.00	
			124	5620		16.00			14.00	
			144	5720		14.10			10.91	
	802.11ac (VHT20)	6.5 Mbps	100	5500	Not Required	16.00	No	Not Required	14.00	No
			116	5580		16.00			14.00	
			124	5620		16.00			14.00	
			144	5720		13.96			10.99	
	802.11n (HT40)	13.5 Mbps	102	5510	Not Required	14.10	No	Not Required	10.61	No
			118	5590		16.00			14.00	
			126	5630		16.00			14.00	
			142	5710		16.00			14.00	
	802.11ac (VHT40)	13.5 Mbps	102	5510	Not Required	13.96	No	Not Required	10.65	No
			118	5590		16.00			14.00	
			126	5630		16.00			14.00	
			142	5710		16.00			14.00	
802.11ac (VHT80)	29.3 Mbps	106	5530	Not Required	13.96	Yes	Not Required	10.03	Yes	
		122	5610	15.00	16.00		12.58	14.00		
		138	5690	14.99	16.00		12.62	14.00		
Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
U-NII 3 5.8 GHz	802.11a	6 Mbps	149	5745	Not Required	13.12	No	Not Required	11.72	No
			157	5785		16.00			14.00	
			165	5825		13.12			11.72	
	802.11n (HT20)	6.5 Mbps	149	5745	Not Required	13.05	No	Not Required	11.69	No
			157	5785		16.00			14.00	
			165	5825		13.05			11.69	
	802.11ac (VHT20)	6.5 Mbps	149	5745	Not Required	13.11	No	Not Required	11.38	No
			157	5785		16.00			14.00	
			165	5825		13.11			11.38	
	802.11n (HT40)	13.5 Mbps	151	5755	Not Required	13.05	Yes	Not Required	10.18	Yes
			159	5795	14.66	16.00		13.45	14.00	
	802.11ac (VHT40)	13.5 Mbps	151	5755	Not Required	13.11	No	Not Required	10.24	No
			159	5795	14.65	16.00		13.46	14.00	
	802.11ac (VHT80)	29.3 Mbps	155	5775	Not Required	13.11	No	Not Required	10.98	No

**Note(s):**

- For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1).
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

## 9.6. Bluetooth

### Bluetooth Measured Results

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)
2.4	GFSK	0	2402	10.43	11.71	Yes
		39	2441	11.18	12.37	
		78	2480	10.27	11.43	
	EDR, $\pi/4$ DQPSK	0	2402	9.02	9.30	No
		39	2441	9.75	10.00	
		78	2480	8.27	9.07	
	EDR, 8-DPSK	0	2402	8.04	9.30	No
		39	2441	8.78	10.00	
		78	2480	8.08	9.07	
	LE, GFSK 1 Mbps	0	2402	3.95	5.66	No
		19	2440	5.20	6.83	
		39	2480	4.94	5.93	
	LE, GFSK 2 Mbps	0	2402	3.92	5.66	No
		19	2440	5.18	6.83	
		39	2480	4.94	5.93	

## 10. Measured and Reported (Scaled) SAR Results

### SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR \*Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR \* Tune-up scaling factor \* Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

### KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

### KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

### KDB 648474 D04 Handset SAR (Phablet Only):

When hotspot mode does not apply, Product Specific 10-g SAR is required for all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg .

### KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

### KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is  $> 0.8$  W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are  $> 0.8$  W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

### KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode

configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). Initial Test Position SAR Test Reduction Procedure is outlined in KDB 248227 D01 §5.1.1. To determine the *initial test position*, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the *initial test position*.

## 10.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	0	Left Touch	190	836.6	27.2	26.5	0.046	0.054	1
			Left Tilt	190	836.6	27.2	26.5	0.018	0.021	
			Right Touch	190	836.6	27.2	26.5	0.063	<b>0.074</b>	
			Right Tilt	190	836.6	27.2	26.5	0.022	0.026	
Body-worn	GPRS 4 Slots	15	Rear	190	836.6	27.2	26.5	0.166	0.194	2
			Front	190	836.6	27.2	26.5	0.186	<b>0.217</b>	
Hotspot	GPRS 4 Slots	10	Rear	190	836.6	27.2	26.5	0.282	0.329	3
			Front	190	836.6	27.2	26.5	0.337	<b>0.393</b>	
			Edge 2	190	836.6	27.2	26.5	0.154	0.180	
			Edge 3	190	836.6	27.2	26.5	0.247	0.288	
			Edge 4	190	836.6	27.2	26.5	0.066	0.077	
Hotspot	DTM 2 Slots	10	Front	190	836.6	30.2	29.7	0.348	0.390	

## 10.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	0	Left Touch	661	1880.0	25.7	25.3	0.076	0.084	4
			Left Tilt	661	1880.0	25.7	25.3	0.036	0.040	
			Right Touch	661	1880.0	25.7	25.3	0.085	<b>0.094</b>	
			Right Tilt	661	1880.0	25.7	25.3	0.029	0.032	
Body-worn	GPRS 4 Slots	15	Rear	661	1880.0	25.7	25.3	0.267	0.295	5
			Front	661	1880.0	25.7	25.3	0.303	<b>0.335</b>	
Hotspot	GPRS 4 Slots	10	Rear	661	1880.0	25.7	25.3	0.497	0.549	6
			Front	661	1880.0	25.7	25.3	0.608	0.671	
			Edge 2	661	1880.0	25.7	25.3	0.060	0.066	
			Edge 3	512	1850.2	25.7	25.1	0.713	0.815	
				661	1880.0	25.7	25.3	0.814	0.899	
			Edge 4	661	1880.0	25.7	25.3	0.218	0.241	
Hotspot	DTM 2 Slots	10	Edge 3	512	1850.2	28.7	28.0	0.751	0.891	
				661	1880.0	28.7	28.0	0.768	0.904	
				810	1909.8	28.7	28.0	0.789	0.918	

### 10.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	23.7	23.1	0.067	0.076	7
			Left Tilt	4183	836.6	23.7	23.1	0.032	0.036	
			Right Touch	4183	836.6	23.7	23.1	0.085	<b>0.097</b>	
			Right Tilt	4183	836.6	23.7	23.1	0.034	0.039	
Body-worn	Rel 99 RMC	15	Rear	4183	836.6	23.7	23.1	0.209	0.238	8
			Front	4183	836.6	23.7	23.1	0.253	<b>0.288</b>	
Hotspot	Rel 99 RMC	10	Rear	4183	836.6	23.7	23.1	0.351	0.400	9
			Front	4183	836.6	23.7	23.1	0.445	<b>0.507</b>	
			Edge 2	4183	836.6	23.7	23.1	0.182	0.208	
			Edge 3	4183	836.6	23.7	23.1	0.284	0.324	
			Edge 4	4183	836.6	23.7	23.1	0.091	0.104	

### 10.4. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20175	1732.5	1	0	23.0	22.7	0.043	0.046	10
						50	24	23.0	22.7	0.042	0.045	
			Left Tilt	20175	1732.5	1	0	23.0	22.7	0.008	0.009	
						50	24	23.0	22.7	0.010	0.011	
			Right Touch	20175	1732.5	1	0	23.0	22.7	0.044	0.047	
						50	24	23.0	22.7	0.046	<b>0.049</b>	
			Right Tilt	20175	1732.5	1	0	23.0	22.7	0.007	0.008	
						50	24	23.0	22.7	0.006	0.007	
Body-worn	QPSK	15	Rear	20175	1732.5	1	0	23.0	22.7	0.215	0.230	11
						50	24	23.0	22.7	0.207	0.220	
			Front	20175	1732.5	1	0	23.0	22.7	0.249	<b>0.266</b>	
						50	24	23.0	22.7	0.246	0.262	
Hotspot	QPSK	10	Rear	20175	1732.5	1	0	23.0	22.7	0.427	0.456	12
						50	24	23.0	22.7	0.418	0.445	
			Front	20175	1732.5	1	0	23.0	22.7	0.495	<b>0.529</b>	
						50	24	23.0	22.7	0.489	0.520	
			Edge 2	20175	1732.5	1	0	23.0	22.7	0.021	0.022	
						50	24	23.0	22.7	0.020	0.021	
			Edge 3	20175	1732.5	1	0	23.0	22.7	0.463	0.495	
						50	24	23.0	22.7	0.469	0.499	
			Edge 4	20175	1732.5	1	0	23.0	22.7	0.140	0.150	
						50	24	23.0	22.7	0.142	0.151	

### 10.5. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20525	836.5	1	0	24.0	23.5	0.060	0.067	
						25	0	24.0	23.6	0.061	0.067	
			Left Tilt	20525	836.5	1	0	24.0	23.5	0.026	0.029	
						25	0	24.0	23.6	0.026	0.029	
			Right Touch	20525	836.5	1	0	24.0	23.5	0.087	<b>0.097</b>	13
						25	0	24.0	23.6	0.087	0.096	
			Right Tilt	20525	836.5	1	0	24.0	23.5	0.033	0.037	
						25	0	24.0	23.6	0.032	0.035	
Body-worn	QPSK	15	Rear	20525	836.5	1	0	24.0	23.5	0.216	0.241	
						25	0	24.0	23.6	0.221	0.243	
			Front	20525	836.5	1	0	24.0	23.5	0.244	0.272	
						25	0	24.0	23.6	0.249	<b>0.274</b>	
Hotspot	QPSK	10	Rear	20525	836.5	1	0	24.0	23.5	0.344	0.383	
						25	0	24.0	23.6	0.351	0.386	
			Front	20525	836.5	1	0	24.0	23.5	0.458	0.510	
						25	0	24.0	23.6	0.469	<b>0.515</b>	
			Edge 2	20525	836.5	1	0	24.0	23.5	0.184	0.205	
						25	0	24.0	23.6	0.189	0.208	
			Edge 3	20525	836.5	1	0	24.0	23.5	0.301	0.335	
						25	0	24.0	23.6	0.306	0.336	
			Edge 4	20525	836.5	1	0	24.0	23.5	0.097	0.108	
						25	0	24.0	23.6	0.097	0.107	

### 10.6. LTE Band 7 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	21100	2535.0	1	0	23.0	22.7	0.041	0.044	
						50	0	23.0	22.7	0.045	0.048	
			Left Tilt	21100	2535.0	1	0	23.0	22.7	0.010	0.010	
						50	0	23.0	22.7	0.009	0.010	
			Right Touch	21100	2535.0	1	0	23.0	22.7	0.096	<b>0.103</b>	16
						50	0	23.0	22.7	0.094	0.100	
			Right Tilt	21100	2535.0	1	0	23.0	22.7	0.004	0.005	
						50	0	23.0	22.7	0.005	0.006	
Body-worn	QPSK	15	Rear	21100	2535.0	1	0	23.0	22.7	0.052	0.056	
						50	0	23.0	22.7	0.045	0.048	
			Front	21100	2535.0	1	0	23.0	22.7	0.067	0.072	
						50	0	23.0	22.7	0.068	<b>0.072</b>	
Hotspot	QPSK	10	Rear	21100	2535.0	1	0	23.0	22.7	0.103	0.111	
						50	0	23.0	22.7	0.102	0.109	
			Front	21100	2535.0	1	0	23.0	22.7	0.104	0.112	
						50	0	23.0	22.7	0.116	0.123	
			Edge 2	21100	2535.0	1	0	23.0	22.7	0.148	0.159	
						50	0	23.0	22.7	0.148	0.157	
			Edge 3	21100	2535.0	1	0	23.0	22.7	0.272	<b>0.293</b>	18
						50	0	23.0	22.7	0.269	0.286	
			Edge 4	21100	2535.0	1	0	23.0	22.7	0.019	0.020	
						50	0	23.0	22.7	0.017	0.018	

**10.7. LTE Band 12 (10MHz Bandwidth)**

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23095	707.5	1	25	25.0	24.7	0.044	0.047	
						25	12	24.0	23.8	0.036	0.038	
			Left Tilt	23095	707.5	1	25	25.0	24.7	0.030	0.032	
						25	12	24.0	23.8	0.026	0.027	
			Right Touch	23095	707.5	1	25	25.0	24.7	0.050	<b>0.054</b>	19
						25	12	24.0	23.8	0.042	0.044	
			Right Tilt	23095	707.5	1	25	25.0	24.7	0.026	0.028	
						25	12	24.0	23.8	0.022	0.023	
Body-worn	QPSK	15	Rear	23095	707.5	1	25	25.0	24.7	0.084	<b>0.090</b>	20
						25	12	24.0	23.8	0.071	0.074	
			Front	23095	707.5	1	25	25.0	24.7	0.080	0.086	
						25	12	24.0	23.8	0.067	0.070	
Hotspot	QPSK	10	Rear	23095	707.5	1	25	25.0	24.7	0.093	0.100	
						25	12	24.0	23.8	0.078	0.082	
			Front	23095	707.5	1	25	25.0	24.7	0.104	0.112	
						25	12	24.0	23.8	0.085	0.089	
			Edge 2	23095	707.5	1	25	25.0	24.7	0.129	<b>0.139</b>	21
						25	12	24.0	23.8	0.108	0.113	
			Edge 3	23095	707.5	1	25	25.0	24.7	0.050	0.054	
						25	12	24.0	23.8	0.043	0.045	
			Edge 4	23095	707.5	1	25	25.0	24.7	0.069	0.074	
						25	12	24.0	23.8	0.059	0.062	

**10.8. LTE Band 13 (10MHz Bandwidth)**

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23230	782.0	1	49	25.0	24.6	0.059	0.065	
						25	12	24.0	23.7	0.059	0.063	
			Left Tilt	23230	782.0	1	49	25.0	24.6	0.036	0.040	
						25	12	24.0	23.7	0.031	0.033	
			Right Touch	23230	782.0	1	49	25.0	24.6	0.087	<b>0.096</b>	22
						25	12	24.0	23.7	0.073	0.078	
			Right Tilt	23230	782.0	1	49	25.0	24.6	0.031	0.034	
						25	12	24.0	23.7	0.028	0.030	
Body-worn	QPSK	15	Rear	23230	782.0	1	49	25.0	24.6	0.169	0.186	
						25	12	24.0	23.7	0.136	0.146	
			Front	23230	782.0	1	49	25.0	24.6	0.178	<b>0.196</b>	23
						25	12	24.0	23.7	0.144	0.155	
Hotspot	QPSK	10	Rear	23230	782.0	1	49	25.0	24.6	0.299	0.329	
						25	12	24.0	23.7	0.238	0.255	
			Front	23230	782.0	1	49	25.0	24.6	0.331	<b>0.364</b>	24
						25	12	24.0	23.7	0.264	0.283	
			Edge 2	23230	782.0	1	49	25.0	24.6	0.153	0.168	
						25	12	24.0	23.7	0.125	0.134	
			Edge 3	23230	782.0	1	49	25.0	24.6	0.253	0.278	
						25	12	24.0	23.7	0.204	0.219	
			Edge 4	23230	782.0	1	49	25.0	24.6	0.048	0.053	
						25	12	24.0	23.7	0.036	0.039	



### 10.9. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 (Frequency Range: 704-716 MHz) is covered by LTE Band 12 (Frequency Range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

### 10.10. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	40185	2549.5	1	0	24.0	23.7	0.057	0.061	25
						50	0	24.0	23.7	0.063	<b>0.068</b>	
			Left Tilt	40620	2593.0	1	0	24.0	23.8	0.013	0.014	
						50	0	24.0	23.8	0.012	0.013	
			Right Touch	40620	2593.0	1	0	24.0	23.8	0.048	0.050	
						50	0	24.0	23.8	0.044	0.046	
			Right Tilt	40620	2593.0	1	0	24.0	23.8	0.004	0.004	
						50	0	24.0	23.8	0.005	0.005	
Body-worn	QPSK	15	Rear	40620	2593.0	1	0	24.0	23.8	0.046	0.048	
						50	0	24.0	23.8	0.041	0.043	
			Front	40620	2593.0	1	0	24.0	23.8	0.050	<b>0.052</b>	26
						50	0	24.0	23.8	0.044	0.046	
Hotspot	QPSK	10	Rear	40620	2593.0	1	0	24.0	23.8	0.096	0.100	
						50	0	24.0	23.8	0.075	0.078	
			Front	40620	2593.0	1	0	24.0	23.8	0.085	0.088	
						50	0	24.0	23.8	0.079	0.083	
			Edge 2	40620	2593.0	1	0	24.0	23.8	0.016	0.017	
						50	0	24.0	23.8	0.014	0.015	
			Edge 3	40620	2593.0	1	0	24.0	23.8	0.251	<b>0.261</b>	27
						50	0	24.0	23.8	0.228	0.238	
			Edge 4	40620	2593.0	1	0	24.0	23.8	0.145	0.151	
						50	0	24.0	23.8	0.128	0.134	

### 10.11. Wi-Fi (DTS Band)

When the 802.11b reported SAR of the highest measured maximum output power channel is  $\leq 0.8$  W/kg, no further SAR testing is required. If SAR is  $> 0.8$  W/kg and  $\leq 1.2$  W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is  $> 1.2$  W/kg, SAR is required for the third channel.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.			
										Tune-up limit	Meas.	Meas.	Scaled				
2.4 GHz	Chain 0	802.11b 1 Mbps	Head	0	Left Touch	1	2412.0	100.00%	0.176	17.0	15.7						
					Left Tilt	1	2412.0	100.00%	0.186	17.0	15.7						
					Right Touch	1	2412.0	100.00%	0.590	17.0	15.7	0.400	<b>0.543</b>	28			
					Right Tilt	1	2412.0	100.00%	0.444	17.0	15.7	0.252	0.342				
			Body-worn	15	Rear	1	2412.0	100.00%	0.048	17.0	15.7						
					Front	1	2412.0	100.00%	0.057	17.0	15.7	0.036	<b>0.049</b>	29			
			Hotspot & Wi-Fi Direct	10	Rear	1	2412.0	100.00%	0.088	17.0	15.7						
					Front	1	2412.0	100.00%	0.105	17.0	15.7						
					Edge 1	1	2412.0	100.00%	0.040	17.0	15.7						
					Edge 4	1	2412.0	100.00%	0.166	17.0	15.7	0.123	<b>0.167</b>	30			
			2.4 GHz	Chain 1	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	100.00%	0.018	15.5	15.0			
								Left Tilt	6	2437.0	100.00%	0.004	15.5	15.0			
Right Touch	6	2437.0						100.00%	0.030	15.5	15.0	0.018	<b>0.020</b>	31			
Right Tilt	6	2437.0						100.00%	0.001	15.5	15.0						
Body-worn	15	Rear				6	2437.0	100.00%	0.045	15.5	15.0	0.026	<b>0.030</b>	32			
		Front				6	2437.0	100.00%	0.005	15.5	15.0						
Hotspot & Wi-Fi Direct	10	Rear				6	2437.0	100.00%	0.117	15.5	15.0	0.074	<b>0.084</b>	33			
		Front				6	2437.0	100.00%	0.012	15.5	15.0						
		Edge 2				6	2437.0	100.00%	0.036	15.5	15.0						

Adjusted SAR for OFDM Modes:

Antenna	802.11b Max. Power		802.11g Max. Power		802.11n HT20 Max. Power		Highest Reported SAR for 802.11b (W/kg)	Adjusted SAR for 802.11g (W/kg)	Adjusted SAR for 802.11n HT20 (W/kg)
	dBm	mW	dBm	mW	dBm	mW			
Chain 0	17.0	50	17.0	50	17.0	50	0.543	0.543	0.543
Chain 1	15.5	35.5	15.5	35.5	15.5	35.5	0.084	0.084	0.084

**Note(s):**

Adjusted SAR for OFDM modes is  $< 1.2$  W/kg, therefore SAR testing is not required for OFDM modes.

### 10.12. Wi-Fi (U-NII Band)

#### U-NII 1 & 2A

When the specified maximum output power is the same for both U-NII band 1 and U-NII band 2A, begin SAR measurement in U-NII band 2A; and if the highest reported SAR for U-NII band 2A is

- o  $\leq 1.2$  W/kg, SAR is not required for U-NII band 1
- o  $> 1.2$  W/kg, both bands should be tested independently for SAR.

Per KDB 248227 D01 §1: While 1-g SAR thresholds are specified in the procedures for SAR test reduction and exclusion, these thresholds should be multiplied by 2.5 when 10-g extremity SAR is considered.

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	Chain 0	802.11n HT40	Head	0	Left Touch	54	5270.0	93.66%	0.209	16.0	15.3			
					Left Tilt	54	5270.0	93.66%	0.176	16.0	15.3			
					Right Touch	54	5270.0	93.66%	0.853	16.0	15.3	0.465	<b>0.587</b>	34
					Right Tilt	54	5270.0	93.66%	0.590	16.0	15.3	0.308	0.389	
			Body-worn	15	Rear	54	5270.0	93.66%	0.047	16.0	15.3	0.023	<b>0.029</b>	35
					Front	54	5270.0	93.66%	0.042	16.0	15.3			
5.3 GHz U-NII 2A	Chain 1	802.11n HT40	Head	0	Left Touch	54	5270.0	93.66%	0.012	14.0	13.0			
					Left Tilt	54	5270.0	93.66%	0.010	14.0	13.0			
					Right Touch	54	5270.0	93.66%	0.024	14.0	13.0	0.000	<b>0.001</b>	36
					Right Tilt	54	5270.0	93.66%	0.008	14.0	13.0			
			Body-worn	15	Rear	54	5270.0	93.66%	0.041	14.0	13.0	0.023	<b>0.031</b>	37
					Front	54	5270.0	93.66%	0.001	14.0	13.0			

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	Chain 0	802.11n HT40	Product Specific 10g	0	Rear	54	5270.0	93.66%	0.604	16.0	15.3			
					Front	54	5270.0	93.66%	0.885	16.0	15.3			
					Edge 1	54	5270.0	93.66%	0.621	16.0	15.3			
					Edge 4	54	5270.0	93.66%	1.810	16.0	15.3	0.159	<b>0.201</b>	38
5.3 GHz U-NII 2A	Chain 1	802.11n HT40	Product Specific 10g	0	Rear	54	5270.0	93.66%	1.280	14.0	13.0	0.141	<b>0.188</b>	39
					Front	54	5270.0	93.66%	0.224	14.0	13.0			
					Edge 2	54	5270.0	93.66%	0.606	14.0	13.0			

**Note(s):**

1. Highest Reported 1-g SAR for U-NII 2A mode is  $< 1.2$  W/kg, therefore SAR testing is not required for U-NII 1 mode.
2. Highest Reported 10-g SAR for U-NII 2A mode is  $< 3.0$  W/kg, therefore SAR testing is not required for U-NII 1 mode.

#### U-NII 2C

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.6 GHz U-NII 2C	Chain 0	802.11ac VHT80	Head	0	Left Touch	122	5610.0	87.72%	0.138	16.0	15.0			
					Left Tilt	122	5610.0	87.72%	0.124	16.0	15.0			
					Right Touch	122	5610.0	87.72%	0.307	16.0	15.0	0.134	<b>0.192</b>	40
					Right Tilt	122	5610.0	87.72%	0.287	16.0	15.0			
			Body-worn	15	Rear	122	5610.0	87.72%	0.040	16.0	15.0	0.009	<b>0.013</b>	41
					Front	122	5610.0	87.72%	0.020	16.0	15.0			
5.6 GHz U-NII 2C	Chain 1	802.11ac VHT80	Head	0	Left Touch	138	5690.0	87.72%	0.009	14.0	12.6			
					Left Tilt	138	5690.0	87.72%	0.012	14.0	12.6			
					Right Touch	138	5690.0	87.72%	0.017	14.0	12.6	$<0.001$	<b>&lt;0.001</b>	42
					Right Tilt	138	5690.0	87.72%	0.013	14.0	12.6			
			Body-worn	15	Rear	138	5690.0	87.72%	0.097	14.0	12.6	0.032	<b>0.050</b>	43
					Front	138	5690.0	87.72%	0.016	14.0	12.6			

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.6 GHz U-NII 2C	Chain 0	802.11ac VHT80	Product Specific 10g	0	Rear	122	5610.0	87.72%	1.200	16.0	15.0			
					Front	122	5610.0	87.72%	0.587	16.0	15.0			
					Edge 1	122	5610.0	87.72%	0.353	16.0	15.0			
					Edge 4	122	5610.0	87.72%	4.930	16.0	15.0	0.300	<b>0.431</b>	44
5.6 GHz U-NII 2C	Chain 1	802.11ac VHT80	Product Specific 10g	0	Rear	138	5690.0	87.72%	0.433	14.0	12.6	0.064	<b>0.100</b>	45
					Front	138	5690.0	87.72%	0.193	14.0	12.6			
					Edge 2	138	5690.0	87.72%	0.372	14.0	12.6			

**U-NII 3**

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.8 GHz U-NII 3	Chain 0	802.11n HT40	Head	0	Left Touch	159	5795.0	93.66%	0.111	16.0	14.7			
					Left Tilt	159	5795.0	93.66%	0.132	16.0	14.7			
					Right Touch	159	5795.0	93.66%	0.220	16.0	14.7	0.131	<b>0.190</b>	46
					Right Tilt	159	5795.0	93.66%	0.219	16.0	14.7			
			Body-worn	15	Rear	159	5795.0	93.66%	0.052	16.0	14.7	0.020	<b>0.029</b>	47
					Front	159	5795.0	93.66%	0.016	16.0	14.7			
5.8 GHz U-NII 3	Chain 1	802.11n HT40	Head	0	Left Touch	159	5795.0	93.66%	0.007	14.0	13.5			
					Left Tilt	159	5795.0	93.66%	0.009	14.0	13.5			
					Right Touch	159	5795.0	93.66%	0.011	14.0	13.5	<0.001	<b>&lt;0.001</b>	48
					Right Tilt	159	5795.0	93.66%	0.009	14.0	13.5			
			Body-worn	15	Rear	159	5795.0	93.66%	0.035	14.0	13.5	<0.001	<b>&lt;0.001</b>	49
					Front	159	5795.0	93.66%	0.000	14.0	13.5			

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.8 GHz U-NII 3	Chain 0	802.11n HT40	Product Specific 10g	0	Rear	159	5795.0	93.66%	0.498	16.0	14.7			
					Front	159	5795.0	93.66%	0.519	16.0	14.7			
					Edge 1	159	5795.0	93.66%	0.281	16.0	14.7			
					Edge 4	159	5795.0	93.66%	4.450	16.0	14.7	0.322	<b>0.468</b>	50
5.8 GHz U-NII 3	Chain 1	802.11n HT40	Product Specific 10g	0	Rear	159	5795.0	93.66%	0.522	14.0	13.5	0.080	<b>0.097</b>	51
					Front	159	5795.0	93.66%	0.143	14.0	13.5			
					Edge 2	159	5795.0	93.66%	0.223	14.0	13.5			

**10.13. Bluetooth**

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Chain 0	GFSK	Head	0	Left Touch	39	2441.0	77.40%	12.4	11.2	0.035	0.059	
					Left Tilt	39	2441.0	77.40%	12.4	11.2	0.029	0.049	
					Right Touch	39	2441.0	77.40%	12.4	11.2	0.106	<b>0.180</b>	52
					Right Tilt	39	2441.0	77.40%	12.4	11.2	0.068	0.116	
			Body-worn	15	Rear	39	2441.0	77.40%	12.4	11.2	0.008	0.013	
					Front	39	2441.0	77.40%	12.4	11.2	0.013	<b>0.022</b>	53
			Hotspot	10	Rear	39	2441.0	77.40%	12.4	11.2	0.015	0.025	
					Front	39	2441.0	77.40%	12.4	11.2	0.020	0.033	
					Edge 1	39	2441.0	77.40%	12.4	11.2	0.010	0.017	
					Edge 4	39	2441.0	77.40%	12.4	11.2	0.037	<b>0.063</b>	54

## 11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.8$  or  $2 \text{ W/kg}$  (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.8$  or  $2 \text{ W/kg}$  (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  or  $3.6 \text{ W/kg}$  (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is  $\geq 1.5$  or  $3.75 \text{ W/kg}$  (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Hotspot	Edge 2	No	0.129	N/A	N/A
	LTE Band 13	Hotspot	Front	No	0.331	N/A	N/A
850	GSM 850	Hotspot	Front	No	0.348	N/A	N/A
	WCDMA Band V	Hotspot	Front	No	0.445	N/A	N/A
	LTE Band 5	Hotspot	Front	No	0.469	N/A	N/A
1700	LTE Band 4	Hotspot	Front	No	0.495	N/A	N/A
1900	GSM 1900	Hotspot	Edge 3	Yes	0.879	0.869	1.01
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	No	0.400	N/A	N/A
	BT	Head	Right Touch	No	0.106	N/A	N/A
2500	LTE Band 7	Hotspot	Edge 3	No	0.272	N/A	N/A
2600	LTE Band 41	Hotspot	Edge 3	No	0.251	N/A	N/A
5300	Wi-Fi 802.11n HT40	Head	Right Touch	No	0.465	N/A	N/A
5500	Wi-Fi 802.11ac VHT80	Head	Right Touch	No	0.134	N/A	N/A
5800	Wi-Fi 802.11n HT40	Head	Right Touch	No	0.131	N/A	N/A

### Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is  $< 1.20$ .

### Product Specific 10g SAR:

Frequency Band	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR	Highest Measured
5300	Wi-Fi 802.11n HT40	Product Specific	Edge 4	No	0.159
5500	Wi-Fi 802.11ac VHT80	Product Specific	Edge 4	No	0.300
5800	Wi-Fi 802.11n HT40	Product Specific	Edge 4	No	0.322

### Note(s):

Repeated Measurement is not required since the Highest measured SAR is  $< 2.0 \text{ W/kg}$ .

## 12. Simultaneous Transmission Conditions

Case	Cellular	WLAN Chain0 / BT	WLAN Chain1
1	GSM/GPRS/EDGE	BT/BLE	(None)
2	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 2.4G
3	GSM/GPRS/EDGE	WLAN 5G	WLAN 5G
4	UMTS/HSPA	BT/BLE	(None)
5	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
6	UMTS/HSPA	WLAN 5G	WLAN 5G
7	LTE	BT/BLE	(None)
8	LTE	WLAN 2.4G	WLAN 2.4G
9	LTE	WLAN 5G	WLAN 5G
10	(None)	BT/BLE WLAN 5G	WLAN 5G
11	GSM/GPRS/EDGE	BT/BLE WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT/BLE WLAN 5G	WLAN 5G
13	LTE	BT/BLE WLAN 5G	WLAN 5G
14	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 5G
15	UMTS/HSPA	WLAN 2.4G	WLAN 5G
16	LTE	WLAN 2.4G	WLAN 5G

### Note(s):

- BT and WLAN 2.4G function can be used at the same time, but the antenna switch is shared for both RF paths.
- Simultaneous cases other than Cases 1-16 (in above table) are not supported in this device.

### 12.1. Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

#### 12.1.1. Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

### 12.2. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/kg)						
		WWAN		DTS		U-NII		BT	WWAN + BT	WWAN + DTS	WWAN + DTS + U-NII	WWAN + U-NII	WWAN+U-NII+BT	U-NII+BT
		①	Chain 0 ②	Chain 1 ③	Chain 0 ④	Chain 1 ⑤	Chain 0 ⑥	①+⑥	①+②+③	①+②+⑤	①+④+⑤	①+④+⑤+⑥	④+⑤+⑥	
Head	Left Touch	0.084	0.342	0.020	0.389	0.001	0.059	0.143	0.446	0.427	0.474	0.533	0.449	
	Left Tilt	0.040	0.342	0.020	0.389	0.001	0.049	0.089	0.402	0.383	0.430	0.479	0.439	
	Right Touch	0.103	0.543	0.020	0.587	0.001	0.180	0.283	0.666	0.647	0.691	<b>0.871</b>	0.768	
	Right Tilt	0.039	0.342	0.020	0.389	0.001	0.116	0.155	0.401	0.382	0.429	0.545	0.506	
Body-worn	Rear	0.295	0.049	0.030	0.029	0.050	0.013	0.308	0.374	0.394	0.374	0.387	0.092	
	Front	0.335	0.049	0.030	0.029	0.050	0.022	0.357	0.414	0.434	0.414	0.436	0.101	
Hotspot	Rear	0.549	0.167	0.084			0.025	0.574	0.800					
	Front	0.671	0.167	0.084			0.033	0.704	<b>0.922</b>					
	Edge 1		0.167				0.017		0.167					
	Edge 2	0.208		0.084					0.292					
	Edge 3	0.975												
	Edge 4	0.241	0.167				0.063	0.304						

## **Appendixes**

**Refer to separated files for the following appendixes.**

**12380932-S1V1 Appendix A: SAR Setup Photos**

**12380932-S1V1 Appendix B: SAR System Check Plots**

**12380932-S1V1 Appendix C: Highest SAR Test Plots**

**12380932-S1V1 Appendix D: SAR Liquid Tissue Ingredients**

**12380932-S1V1 Appendix E: SAR Probe Calibration Certificates**

**12380932-S1V1 Appendix F: SAR Dipole Calibration Certificates**

**END OF REPORT**