
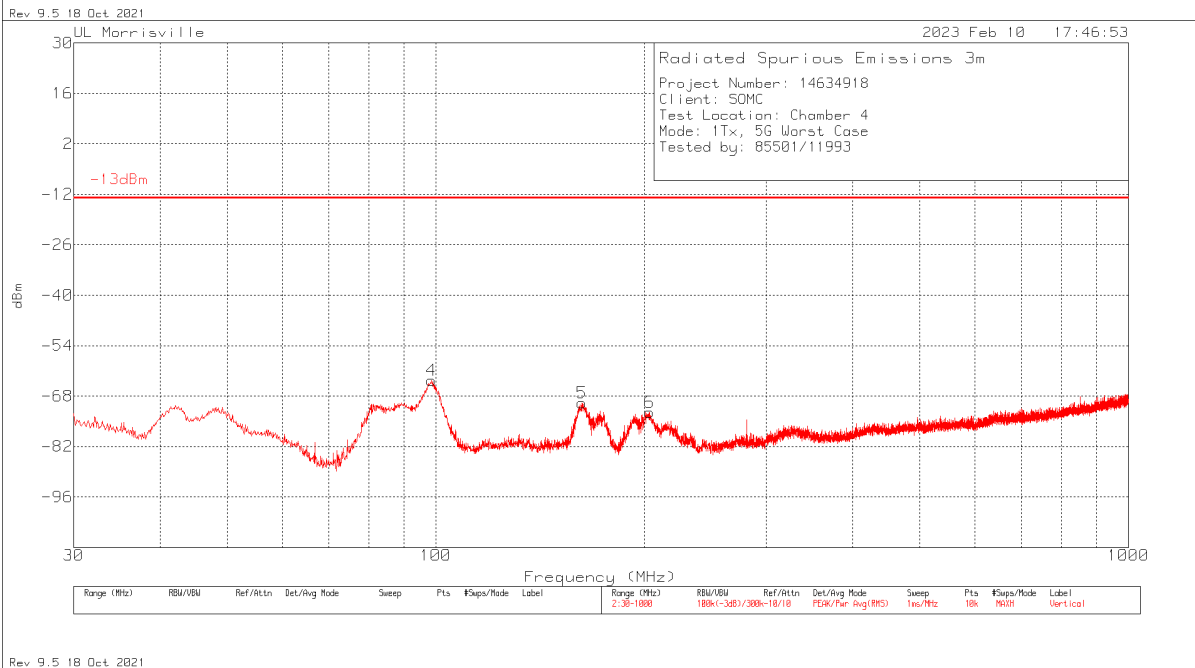



Spurious below 1GHz

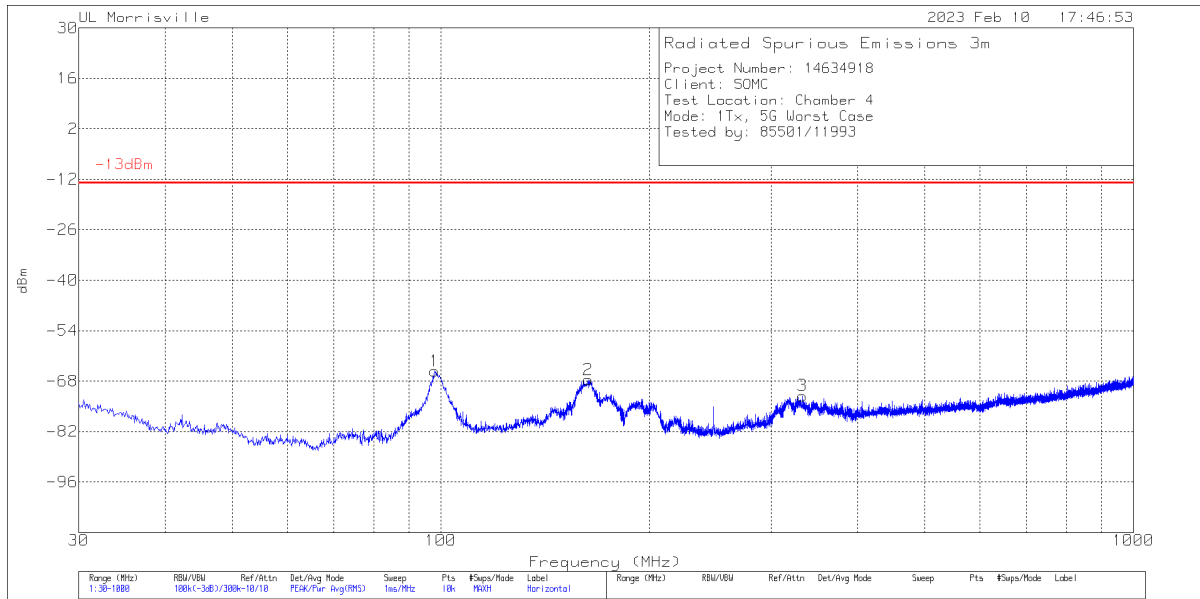


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	90629 (dB/m)	Gain/Loss (dB)	Filter (dB)	Conversion Factor (dB)	Corrected Reading dBm	-13dBm	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	97.9	-61.33	Pk	17	-30.7	.2	9.7	-65.13	-13	-52.13	0-360	200	H
4	98.579	-59.93	Pk	17.2	-30.8	.2	9.7	-63.63	-13	-50.63	0-360	100	V
5	162.502	-68.05	Pk	18.4	-30.2	.2	9.7	-69.95	-13	-56.95	0-360	100	V
2	163.084	-65.79	Pk	18.4	-30.1	.2	9.7	-67.59	-13	-54.59	0-360	100	H
6	203.63	-70.88	Pk	18.1	-29.7	.3	9.7	-72.48	-13	-59.48	0-360	100	V
3	332.64	-73.37	Pk	20.1	-28.8	.3	9.7	-72.07	-13	-59.07	0-360	100	H

Pk - Peak detector

Spurious 18GHz to 26GHz

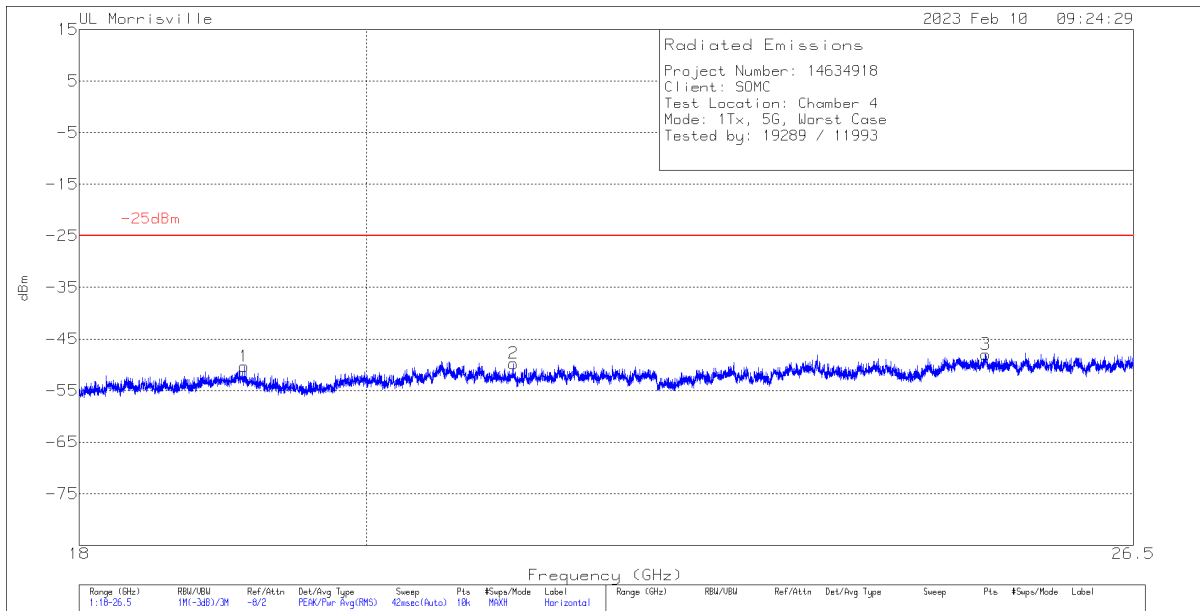

Rev 9.5 18 Oct 2021

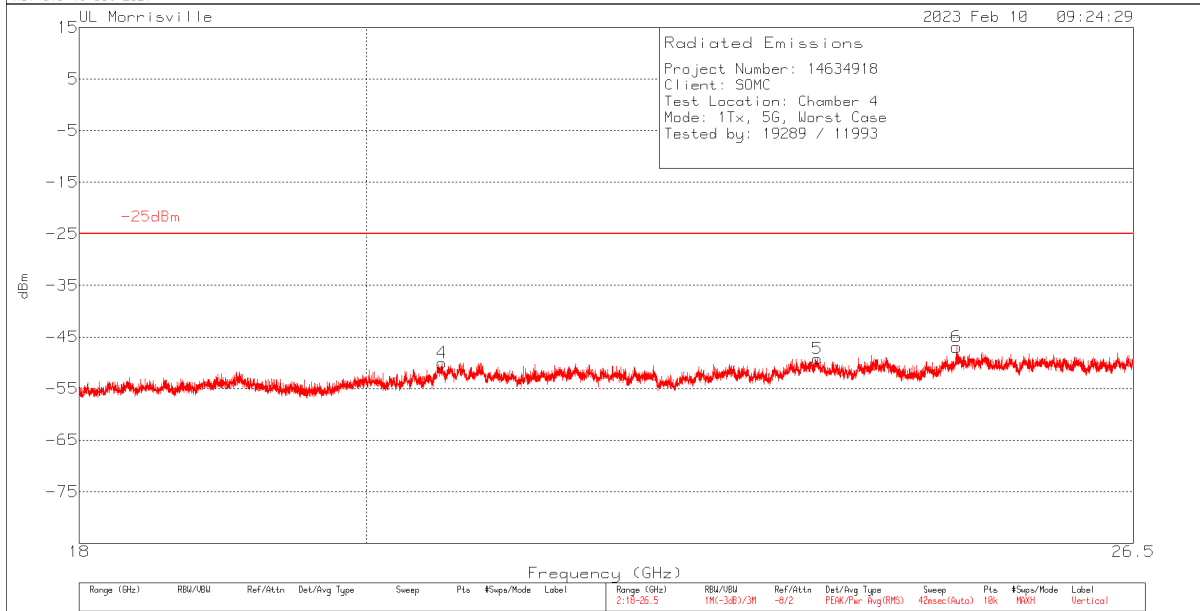


Rev 9.5 18 Oct 2021

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	204704 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading dBm	-25dBm	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	19.12274	-56.3	Pk	33.8	-39.6	11.8	-50.3	-25	-25.3	0-360	100	H
4	20.56249	-57.45	Pk	34.1	-38.5	11.8	-50.05	-25	-25.05	0-360	200	V
2	21.11069	-56.85	Pk	34	-38.7	11.8	-49.75	-25	-24.75	0-360	250	H
5	23.59924	-59.32	Pk	35.3	-37	11.8	-49.22	-25	-24.22	0-360	150	V
6	24.83587	-57.04	Pk	35.5	-37.2	11.8	-46.94	-25	-21.94	0-360	200	V
3	25.10104	-58.77	Pk	35.7	-36.7	11.8	-47.97	-25	-22.97	0-360	250	H


Pk - Peak detector

10.3. Simultaneous Transmission

10.3.1. Scan 1

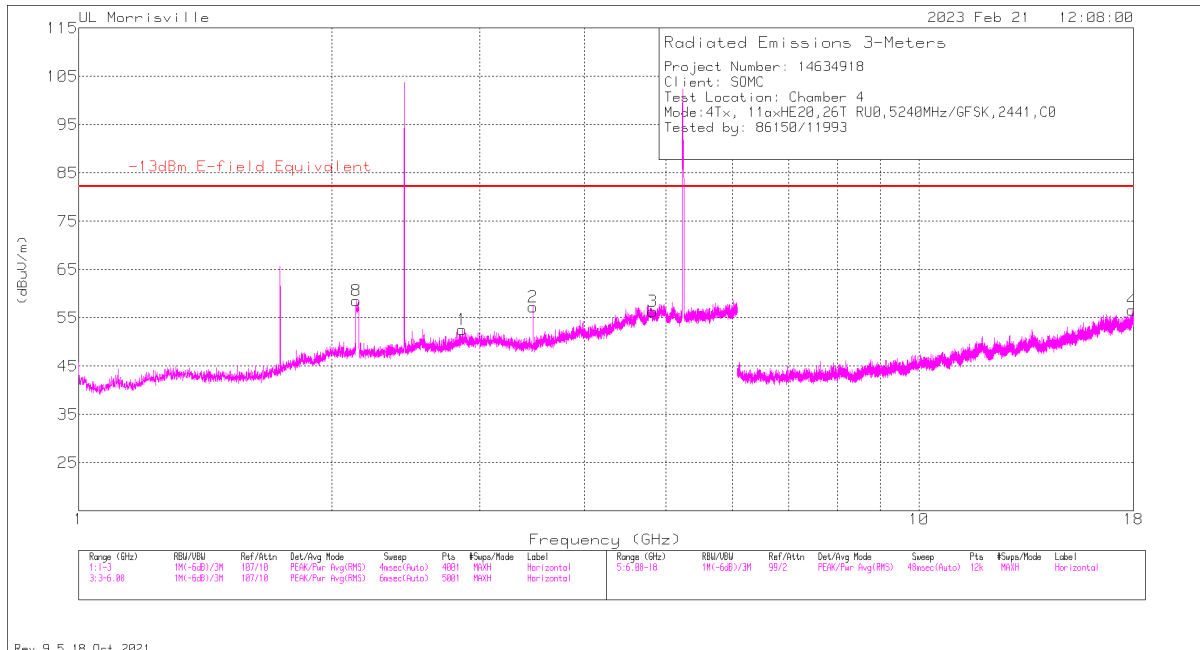

Rev 9.5 18 Oct 2021

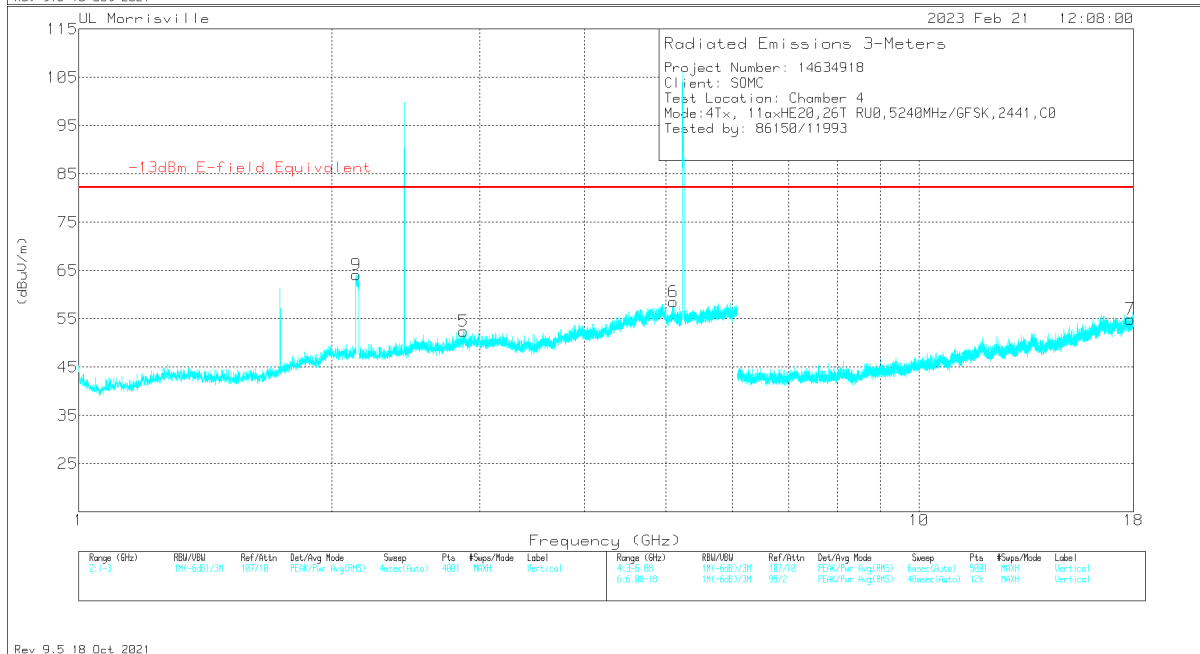

Rev 9.5 18 Oct 2021



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	-13dBm E-field Equivalent (dBuV)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.862	32.51	Pk	32.6	-12.9	.4	52.61	82.2	-29.59	0-360	100	H
8	** 2.139 (DL)	39.8	Pk	31.9	-14.1	1	58.6	-	-	0-360	100	H
5	*** 2.872	32.15	Pk	32.7	-12.7	.3	52.45	82.2	-29.75	0-360	200	V
9	** 2.1395 (DL)	45.37	Pk	31.9	-14.1	1	64.17	-	-	0-360	200	V
3	*** 4.81905	32.98	Pk	34.1	-10.7	0	56.38	82.2	-25.82	0-360	100	H
6	*** 5.09933	34.7	Pk	34.1	-10.2	0	58.6	82.2	-23.6	0-360	200	V
4	*** 17.93642	33.5	Pk	41.2	-18.1	0	56.6	82.2	-25.6	0-360	100	H
7	*** 17.85894	32.18	Pk	41.1	-18.3	0	54.98	82.2	-27.22	0-360	200	V
2	3.47186	36.8	Pk	32.6	-12.1	0	57.3	82.2	-24.9	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

10.3.2. Scan 2

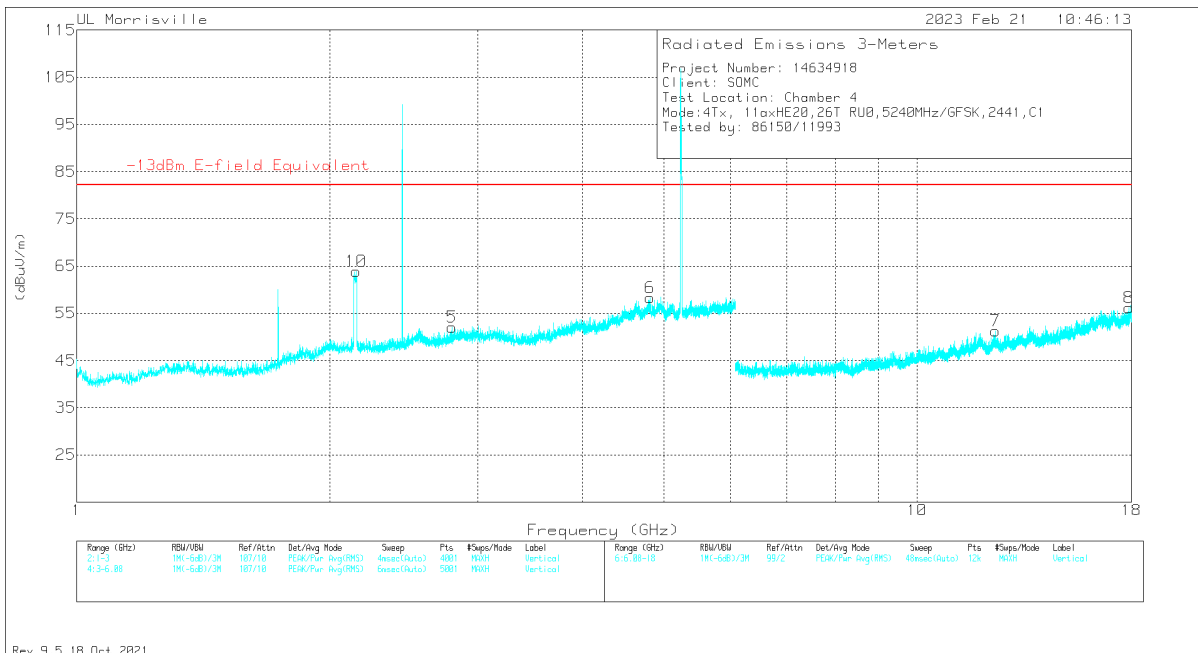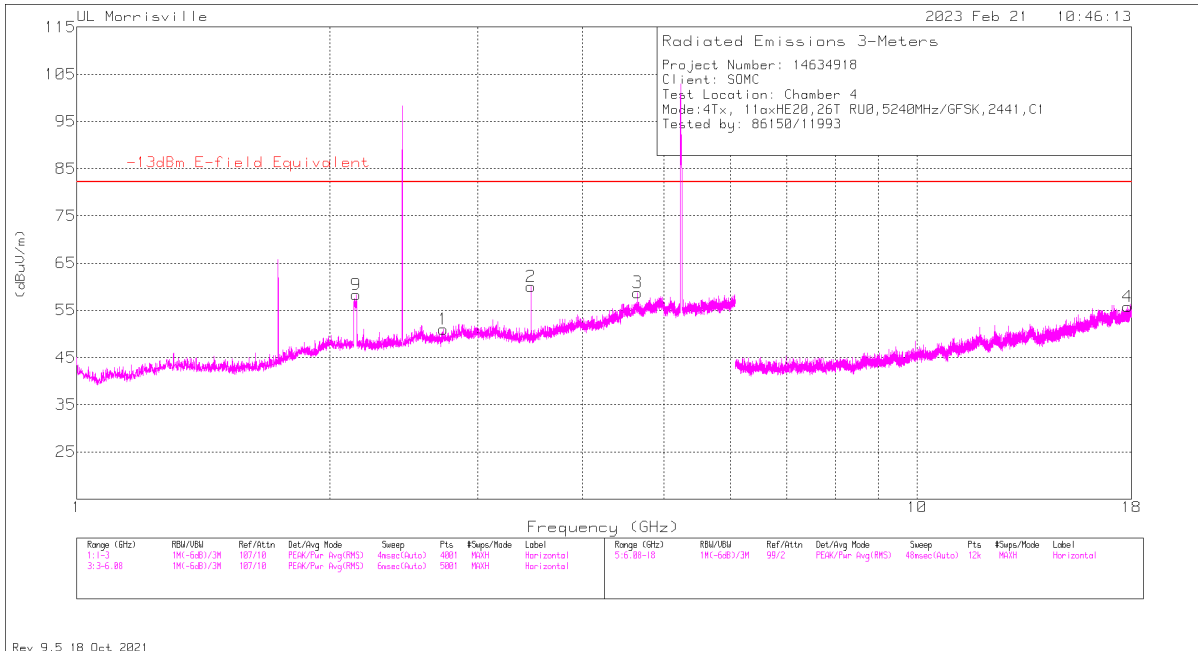

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	-13dBm E-field Equivalent (dBuV)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.7315	31.31	Pk	32.3	-13	.4	51.01	82.2	-31.19	0-360	100	H
9 (DL)	** 2.15	39.33	Pk	31.9	-13.9	1	58.33	-	-	0-360	100	H
5	*** 2.7975	32.08	Pk	32.6	-13	.4	52.08	82.2	-30.12	0-360	200	V
10 (DL)	** 2.152	44.89	Pk	31.9	-13.9	1	63.89	-	-	0-360	200	V
3	*** 4.6478	35.56	Pk	34	-10.8	0	58.76	82.2	-23.44	0-360	100	H
6	*** 4.81227	34.83	Pk	34.1	-10.6	0	58.33	82.2	-23.87	0-360	200	V
4	*** 17.82219	33.16	Pk	41	-18.4	0	55.76	82.2	-26.44	0-360	100	H
7	*** 12.39064	36.13	Pk	38.8	-23.7	0	51.23	82.2	-30.97	0-360	200	V
8	*** 17.8808	33.01	Pk	41.1	-18	0	56.11	82.2	-26.09	0-360	200	V
2	3.47186	39.52	Pk	32.6	-12.1	0	60.02	82.2	-22.18	0-360	100	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

DL - Downlink

10.3.4. Scan 3

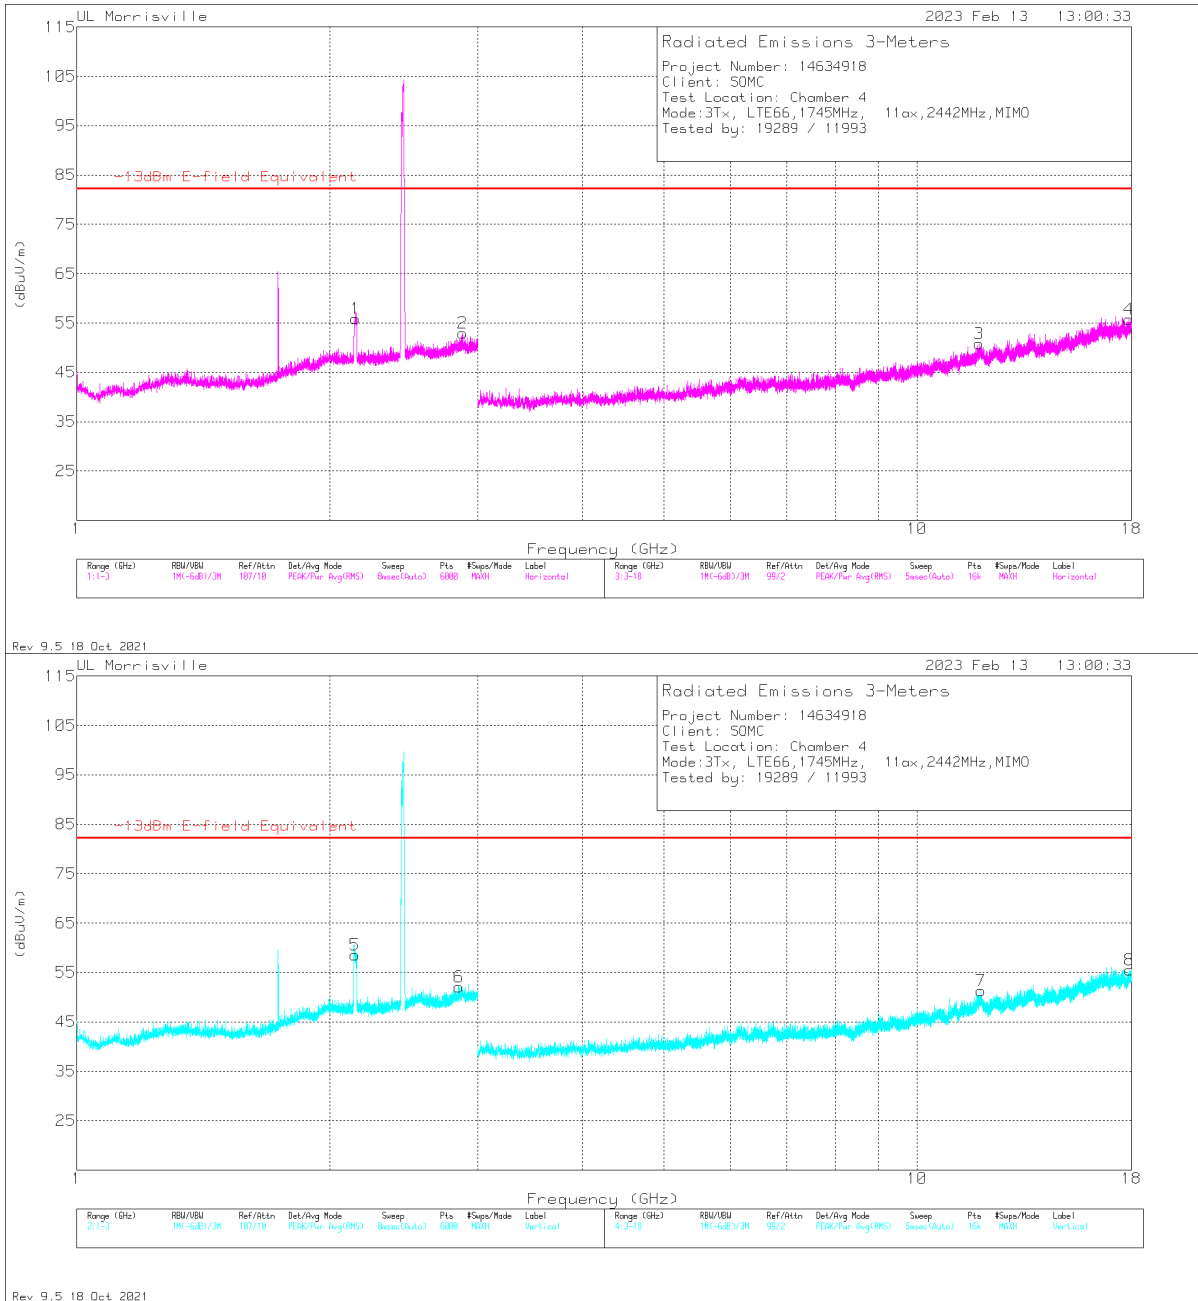


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	-13dBm E-field Equivalent (dBuV)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.87965	32.51	Pk	32.7	-12.6	.4	53.01	82.2	-29.19	0-360	100	H
6	* 2.84964	32.11	Pk	32.5	-12.8	.3	52.11	82.2	-30.09	0-360	200	V
3	* 11.85281	35.75	Pk	38.7	-23.7	0	50.75	82.2	-31.45	0-360	100	H
4	* 17.86594	32.71	Pk	41.1	-18.1	0	55.71	82.2	-26.49	0-360	100	H
7	* 11.91938	35.98	Pk	38.7	-23.4	0	51.28	82.2	-30.92	0-360	200	V
8	* 17.91656	32.66	Pk	41.2	-18.3	0	55.56	82.2	-26.64	0-360	200	V
5 ^{DL}	2.14452	39.7	Pk	31.9	-14	1	58.6	-	-	0-360	200	V
1 ^{DL}	2.14619	37	Pk	31.9	-14	1	55.9	-	-	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

DL- Downlink

10.3.5. Scan 4

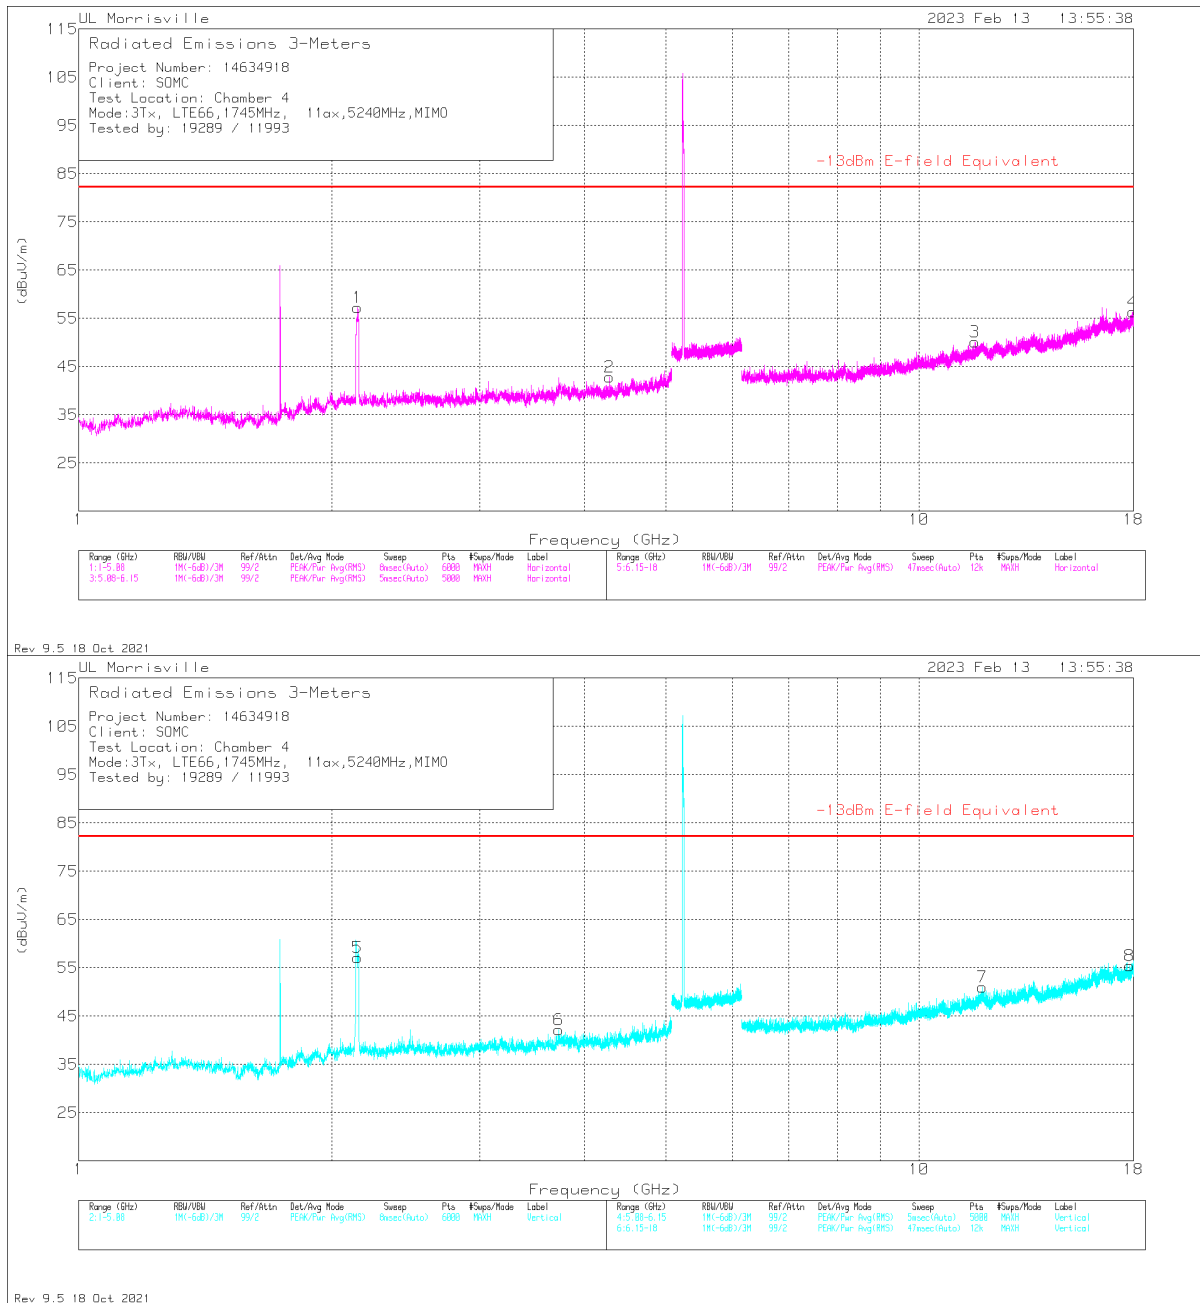



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	-13dBm E-field Equivalent (dBuV)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.28155	40.83	Pk	33.4	-32.1	.7	42.83	82.2	-39.37	0-360	100	H
6	* 3.72453	42.01	Pk	33.4	-33.8	.6	42.21	82.2	-39.99	0-360	200	V
3	* 11.6563	35.22	Pk	38.5	-23.6	0	50.12	82.2	-32.08	0-360	100	H
4	* 17.9763	33.45	Pk	41.3	-18.4	0	56.35	82.2	-25.85	0-360	100	H
7	* 11.90021	35.94	Pk	38.7	-23.6	0	51.04	82.2	-31.16	0-360	200	V
8	* 17.82126	32.8	Pk	41	-18.4	0	55.4	82.2	-26.8	0-360	200	V
5 ^{DL}	2.14599	60.2	Pk	31.9	-36	1	57.1	-	-	0-360	200	V
1 ^{DL}	2.14735	60.41	Pk	31.9	-36	1	57.31	-	-	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

DL - Downlink

10.3.6. Scan 5

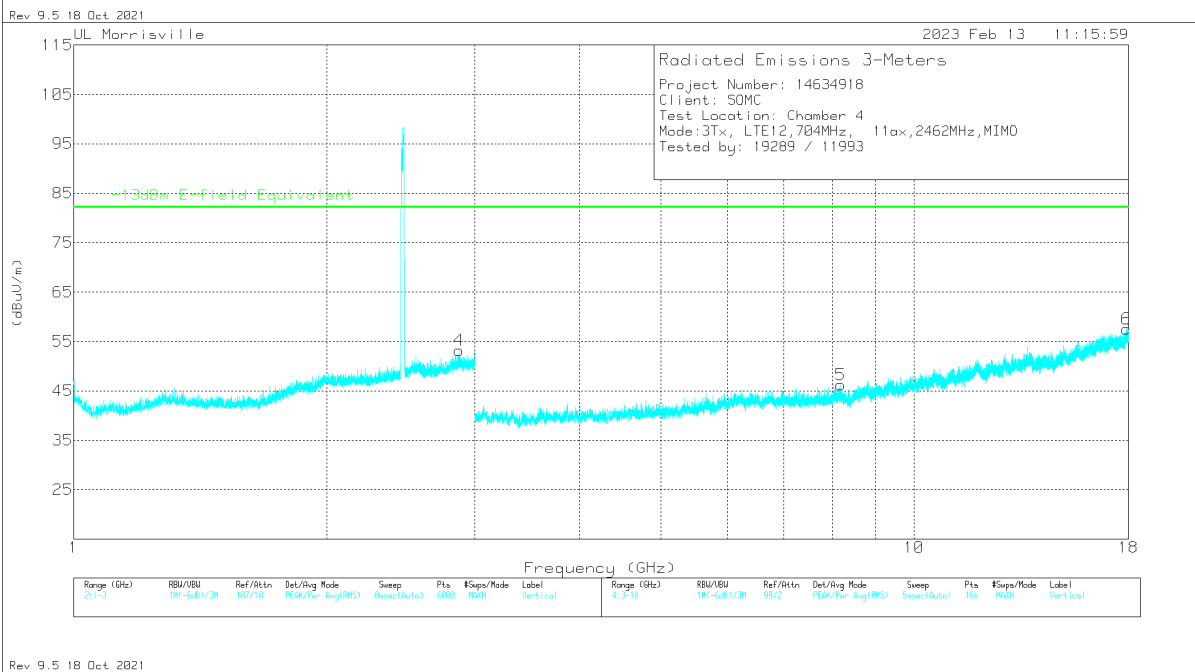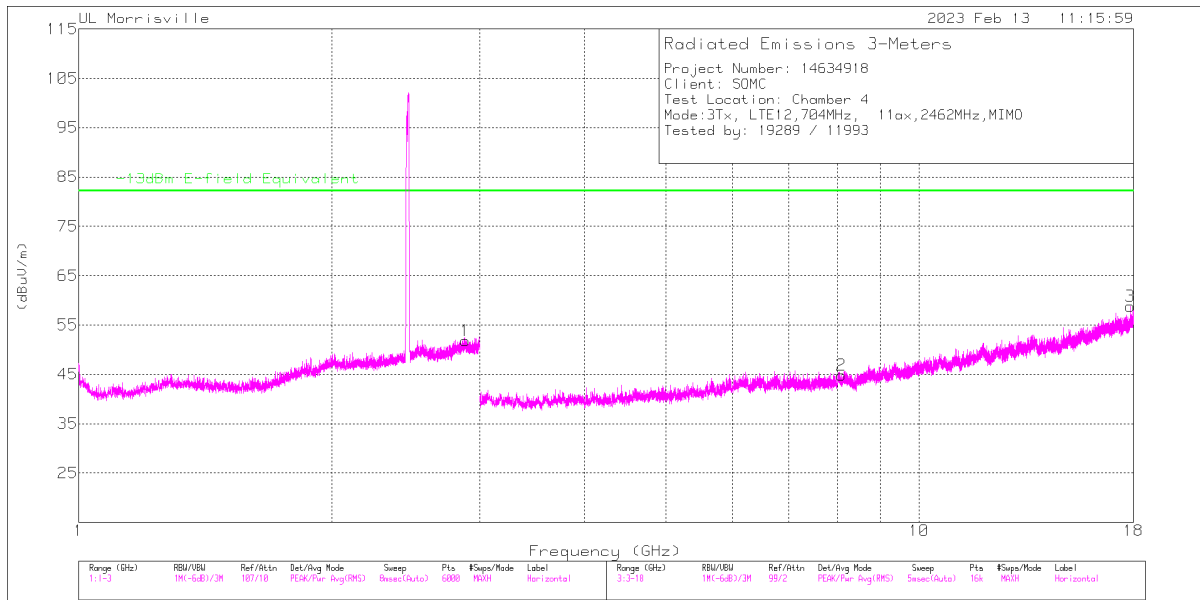

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	-13dBm E-field Equivalent (dBuV)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.88465	31.34	Pk	32.7	-12.7	.5	51.84	82.2	-30.36	0-360	100	H
4	* 2.87298	32.82	Pk	32.7	-12.7	.4	53.22	82.2	-28.98	0-360	200	V
2	* 8.08688	36.53	Pk	35.8	-27.9	.4	44.83	82.2	-37.37	0-360	100	H
3	* 17.83406	34.52	Pk	41.1	-18.3	1.5	58.82	82.2	-23.38	0-360	100	H
5	* 8.18813	37.35	Pk	35.7	-27.2	.4	46.25	82.2	-35.95	0-360	200	V
6	* 17.89313	32.99	Pk	41.2	-18.3	1.7	57.59	82.2	-24.61	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

11. SETUP PHOTOS

Please see R14634918-EP1 For Setup Photos and Setup Diagrams.

END OF REPORT