


# FCC SAR Test Report

APPLICANT : Sony Mobile Communications Inc.  
BRAND NAME : Sony  
FCC ID : PY7-22032B  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Manager



Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance ..... 4
2. Administration Data ..... 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information ..... 6
4.1 General Information ..... 6
4.2 Device Serial Number ..... 6
4.3 General LTE SAR Test and Reporting Considerations ..... 7
5. RF Exposure Limits..... 9
5.1 Uncontrolled Environment..... 9
5.2 Controlled Environment..... 9
6. Specific Absorption Rate (SAR).....10
6.1 Introduction .....10
6.2 SAR Definition.....10
7. System Description and Setup .....11
7.1 E-Field Probe .....12
7.2 Data Acquisition Electronics (DAE) .....12
7.3 Phantom.....13
7.4 Device Holder.....14
8. Measurement Procedures .....15
8.1 Spatial Peak SAR Evaluation .....15
8.2 Power Reference Measurement.....16
8.3 Area Scan .....16
8.4 Zoom Scan.....17
8.5 Volume Scan Procedures .....17
8.6 Power Drift Monitoring.....17
9. Test Equipment List .....18
10. System Verification .....19
10.1 Tissue Simulating Liquids.....19
10.2 Tissue Verification .....20
10.3 System Performance Check Results.....21
11. RF Exposure Positions .....23
11.1 Ear and handset reference point .....23
11.2 Definition of the cheek position.....24
11.3 Definition of the tilt position.....25
11.4 Body Worn Accessory .....26
11.5 Product specific Exposure Configurations .....27
11.6 Wireless Router.....27
12. Conducted RF Output Power (Unit: dBm).....28
13. Antenna Location .....50
14. SAR Test Results .....51
14.1 Head SAR .....53
14.2 Hotspot SAR .....57
14.3 Product Specific SAR.....60
14.4 Body Worn Accessory SAR.....61
14.5 Repeated SAR Measurement .....64
15. Simultaneous Transmission Analysis .....65
15.1 Head Exposure Conditions .....66
15.2 Hotspot Exposure Conditions.....68
15.3 Product Specific Exposure Conditions .....72
15.4 Body-Worn Accessory Exposure Conditions .....72
15.5 SPLSR Evaluation and Analysis.....74
16. Uncertainty Assessment .....76
17. References .....76
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Antenna Location & Test Setup Photos



### Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA782204	Rev. 01	Initial issue of report	Nov. 09, 2017
FA782204	Rev. 02	Updated section 16	Nov. 20, 2017



**1. Statement of Compliance**

Applicant Name	Sony Mobile Communications INC.			
EUT Description	GSM/WCDMA/LTE Phone+Bluetooth, DTS/UNII a/b/g/n and NFC			
Brand Name	Sony			
FCC ID	PY7-22032B			
HW Version	A			
SW Version	1.8			
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	U-NII	DSS
Head (1g SAR W/kg)	0.65	1.04	0.39	0.09
Body-Worn (1g SAR W/kg)	0.96	0.15	0.19	
Wireless Router (1g SAR W/kg)	1.10	0.29	0.33	
Product Specific (10g SAR W/kg)			0.83	
Highest Simultaneous Transmission (1g SAR W/kg)	Head: 1.29 Body-worn: 1.15 Hotspot: 1.41	Head: 1.29 Body-worn: 1.11 Hotspot: 1.38	Head: 1.04 Body-worn: 1.15 Hotspot: 1.41	Head: 0.75 Body-worn: 1.03 Hotspot: 1.19
Date Tested	2017/9/2 ~ 2017/10/27			
Test Result	Pass			
<b>Remark:</b>				
1. This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.				

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body, 4.0 W/kg for Product Specific) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



## 2. Administration Data

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Sony Mobile Communications Inc.
Address	4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

Manufacturer	
Company Name	Sony Mobile Communications Inc.
Address	4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

## 3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

## 4. Equipment Under Test (EUT) Information

### 4.1 General Information

Wireless Technologies	Frequency	Operating Mode	
GSM	850 1900	· GSM Voice · GPRS (GMSK) · EDGE (8PSK)	Multi-Slot Class: Class 12
	Does device support dual transfer mode? (No)		
W-CDMA (UMTS)	Band 2 Band 4 Band 5	· AMR / RMC 12.2Kbps · HSDPA · HSUPA · DC-HSDPA	
LTE	Band 2 Band 4 Band 5 Band 7 Band 12 Band 13 Band 17	· QPSK · 16QAM	
WiFi	2.4GHz: 2412 MHz ~ 2462 MHz	· 11b · 11g · 11n (HT20)	
	5GHz: 5.2GHz: 5180 MHz ~ 5240 MHz 5.3GHz: 5260 MHz ~ 5320 MHz 5.5GHz: 5500 MHz ~ 5720 MHz 5.8GHz: 5745 MHz ~ 5825 MHz	· 11a · 11n (HT20) · 11n (HT40) · WLAN operation in 5600 MHz ~ 5650 MHz is notched.	
Bluetooth	2.4GHz	· BR / EDR / LE	
NFC	13.56MHz	· ASK	

Accessories Information		
Battery	Model Name	LIP1654ERPC
	Type	Li-ion
Earphone	Model Name	MH410c
	Type Name	AG-1103

### 4.2 Device Serial Number

Band	SN
WWAN	WUJ01Q2CQE
	WUJ01Q2CQG
WLAN	WUJ01Q2CR4
	WUJ01Q2CD8

**Note:** Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

**4.3 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	PY7-22032B																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz																																																														
Channel Bandwidth	LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz																																																														
uplink modulations used	QPSK / 16QAM																																																														
UE Category	4																																																														
LTE Voice / Data requirements	Data only																																																														
LTE MPR permanently built-in by design	<p>MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR power table. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3-6.2.5 under Table 6.2.3-1.</p> <p><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band																
LTE Band 2																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860				
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880				
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900				
LTE Band 4																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720				
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5				
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745				
LTE Band 5																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844				
LTE Band 7																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560				
LTE Band 12																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711				
LTE Band 13																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23255		784.5		23280		787	
M	23230		782		23255		784.5		23280		787		23305		789.5	
H	23255		784.5		23280		787		23305		789.5		23330		792	
LTE Band 17																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23755		706.5		23780		709		23805		712		23830		715	
M	23790		710		23815		714		23840		718		23865		722	
H	23825		713.5		23850		717		23875		721		23900		725	





**5. RF Exposure Limits**

**5.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**5.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

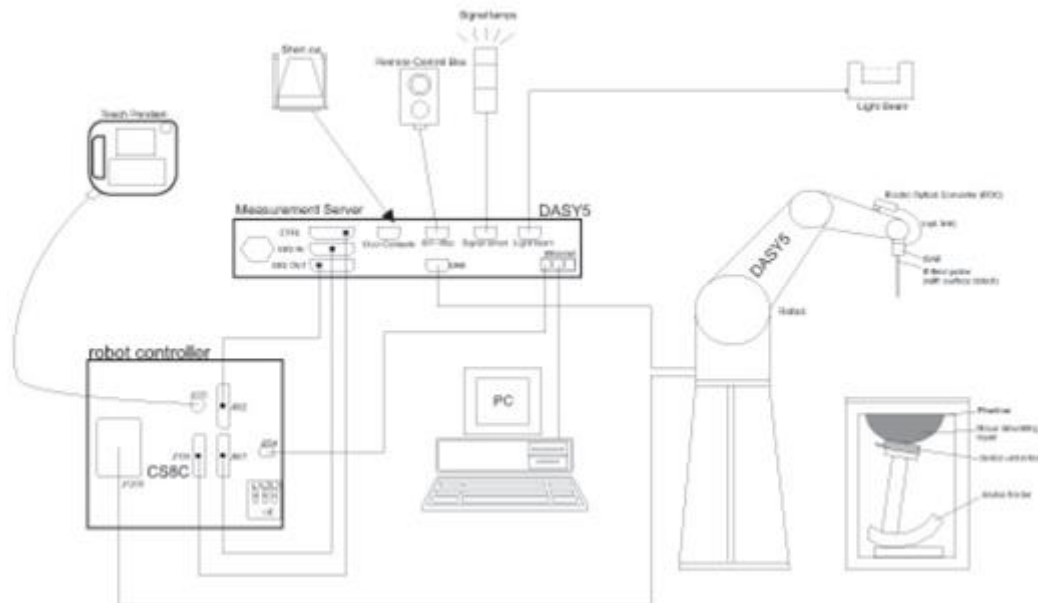


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


**7.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**7.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**7.3 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**
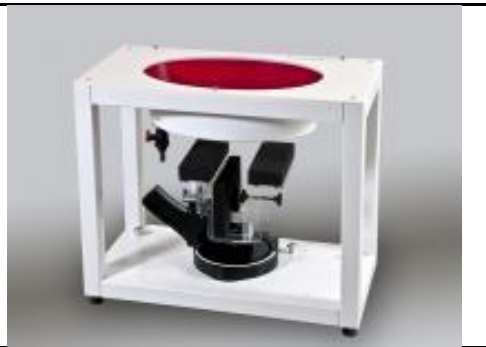
<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **7.4 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **8. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



**8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**8.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**8.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**8.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 22, 2017	May. 21, 2018
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 21, 2017	Mar. 20, 2018
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 16, 2016	Nov. 15, 2017
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 30, 2016	Sep. 29, 2017
SPEAG	2450MHz System Validation Kit	D2450V2	735	Dec. 23, 2016	Dec. 22, 2017
SPEAG	2600MHz System Validation Kit	D2600V2	1058	Jun. 27, 2017	Jun. 26, 2018
SPEAG	5GHz System Validation Kit	D5GHzV2	1171	Jul. 18, 2017	Jul. 17, 2018
SPEAG	Data Acquisition Electronics	DAE4	1424	Feb. 16, 2017	Feb. 15, 2018
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 17, 2016	Nov. 16, 2017
SPEAG	Data Acquisition Electronics	DAE4	916	Dec. 15, 2016	Dec. 14, 2017
SPEAG	Data Acquisition Electronics	DAE4	854	May. 02, 2017	May. 01, 2018
SPEAG	Data Acquisition Electronics	DAE4	778	May. 22, 2017	May. 21, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Feb. 21, 2017	Feb. 20, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 03, 2016	Oct. 02, 2017
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 11, 2017	May. 10, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 24, 2017	Jul. 23, 2018
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 25, 2017	Sep. 24, 2018
WonDer	Thermometer	WD-5016	TM281-1	Mar. 17, 2017	Mar. 16, 2018
WonDer	Thermometer	WD-5016	TM281-2	Mar. 17, 2017	Mar. 16, 2018
WonDer	Thermometer	WD-5016	TM560-1	Mar. 17, 2017	Mar. 16, 2018
WonDer	Thermometer	WD-5016	TM560-2	Mar. 17, 2017	Mar. 16, 2018
Anritsu	Radio Communication Analyzer	MT8820C	6201381760	May. 17, 2017	May. 16, 2018
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 30, 2017	May. 29, 2018
R&S	BT Base Station	CBT32	100522	Mar. 14, 2017	Mar. 13, 2018
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 09, 2016	Dec. 08, 2017
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 04, 2017	Jan. 03, 2018
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 18, 2017	Jul. 17, 2018
Anritsu	Power Meter	ML2495A	1438002	Dec. 06, 2016	Dec. 05, 2017
Anritsu	Power Meter	ML2495A	1419002	May. 15, 2017	May. 14, 2018
Anritsu	Power Sensor	MA2411B	1339195	Dec. 06, 2016	Dec. 05, 2017
Anritsu	Power Sensor	MA2411B	1339124	May. 15, 2017	May. 14, 2018
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 26, 2017	Jun. 25, 2018
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 26, 2017	Jun. 25, 2018
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 09, 2017	Mar. 08, 2018
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 09, 2017	Mar. 08, 2018
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

## 10. System Verification

### 10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

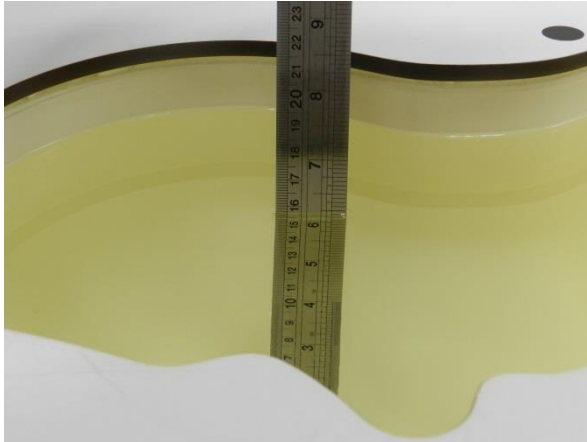


Fig 10.1 Photo of Liquid Height for Head SAR

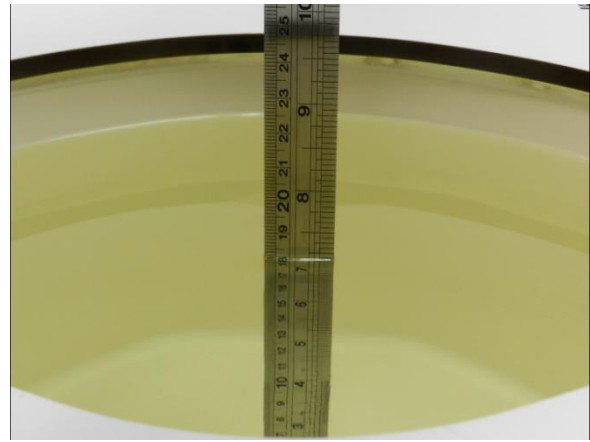


Fig 10.2 Photo of Liquid Height for Body SAR



**10.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )
<b>For Head</b>								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
<b>For Body</b>								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

**Simulating Liquid for 5GHz, Manufactured by SPEAG**

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

**<Tissue Dielectric Parameter Check Results>**

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
750	HSL	22.6	0.900	40.782	0.89	41.90	1.12	-2.67	±5	2017/9/8
750	HSL	22.5	0.896	40.595	0.89	41.90	0.67	-3.11	±5	2017/9/15
750	MSL	22.5	0.972	54.284	0.96	55.50	1.25	-2.19	±5	2017/9/4
750	MSL	22.6	0.976	54.334	0.96	55.50	1.67	-2.10	±5	2017/9/8
835	HSL	22.5	0.893	40.461	0.90	41.50	-0.78	-2.50	±5	2017/9/4
835	HSL	22.4	0.878	42.002	0.90	41.50	-2.44	1.21	±5	2017/10/27
835	MSL	22.3	1.008	56.150	0.97	55.20	3.92	1.72	±5	2017/9/3
1750	HSL	22.4	1.356	39.360	1.37	40.10	-1.02	-1.85	±5	2017/9/2
1750	MSL	22.3	1.482	55.184	1.49	53.40	-0.54	3.34	±5	2017/9/3
1900	HSL	22.4	1.439	39.113	1.40	40.00	2.79	-2.22	±5	2017/9/2
1900	HSL	22.7	1.442	40.927	1.40	40.00	3.00	2.32	±5	2017/9/9
1900	MSL	22.4	1.558	54.242	1.52	53.30	2.50	1.77	±5	2017/9/2
1900	MSL	22.5	1.552	54.953	1.52	53.30	2.11	3.10	±5	2017/9/6
2450	HSL	22.4	1.796	39.312	1.80	39.20	-0.22	0.29	±5	2017/9/8
2450	HSL	22.4	1.796	39.312	1.80	39.20	-0.22	0.29	±5	2017/9/8
2450	HSL	22.4	1.783	40.222	1.80	39.20	-0.94	2.61	±5	2017/10/27
2450	MSL	22.4	1.908	54.264	1.95	52.70	-2.15	2.97	±5	2017/9/8
2450	MSL	22.4	1.908	54.264	1.95	52.70	-2.15	2.97	±5	2017/9/8
2600	HSL	22.4	1.975	39.634	1.96	39.00	0.77	1.63	±5	2017/9/8
2600	MSL	22.7	2.080	52.254	2.16	52.50	-3.70	-0.47	±5	2017/9/7
5250	HSL	22.5	4.591	36.837	4.71	35.95	-2.53	2.47	±5	2017/9/15
5250	MSL	22.8	5.356	47.119	5.36	48.95	-0.07	-3.74	±5	2017/9/16
5600	HSL	22.5	4.937	36.361	5.07	35.50	-2.62	2.43	±5	2017/9/15
5600	MSL	22.8	5.797	46.562	5.77	48.50	0.47	-4.00	±5	2017/9/16
5750	HSL	22.5	5.094	36.142	5.22	35.35	-2.41	2.24	±5	2017/9/15
5750	MSL	22.8	5.994	46.379	5.94	48.28	0.91	-3.94	±5	2017/9/17




**10.3 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2017/9/8	750	HSL	250	D750V3-1012	EX3DV4 - SN3976	DAE4 Sn1424	1.96	8.22	7.84	-4.62
2017/9/15	750	HSL	250	D750V3-1012	EX3DV4 - SN3931	DAE4 Sn916	2.13	8.22	8.52	3.65
2017/9/4	750	MSL	250	D750V3-1012	ES3DV3 - SN3169	DAE4 Sn1399	2.27	8.71	9.08	4.25
2017/9/8	750	MSL	250	D750V3-1012	EX3DV4 - SN3976	DAE4 Sn1424	2.08	8.71	8.32	-4.48
2017/9/4	835	HSL	250	D835V2-499	ES3DV3 - SN3169	DAE4 Sn1399	2.42	9.45	9.68	2.43
2017/10/27	835	HSL	250	D835V2-499	ES3DV3 - SN3270	DAE4 Sn778	2.27	9.45	9.08	-3.92
2017/9/3	835	MSL	250	D835V2-499	ES3DV3 - SN3169	DAE4 Sn1399	2.57	9.67	10.28	6.31
2017/9/2	1750	HSL	250	D1750V2-1068	ES3DV3 - SN3169	DAE4 Sn1399	8.85	36.60	35.40	-3.28
2017/9/3	1750	MSL	250	D1750V2-1068	ES3DV3 - SN3169	DAE4 Sn1399	9.50	36.20	38.00	4.97
2017/9/2	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1399	10.20	40.50	40.80	0.74
2017/9/9	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1399	10.20	40.50	40.80	0.74
2017/9/2	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1399	9.93	38.80	39.72	2.37
2017/9/6	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn1424	10.60	38.80	42.40	9.28
2017/9/8	2450	HSL	250	D2450V2-735	EX3DV4 - SN3931	DAE4 Sn854	12.60	50.90	50.40	-0.98
2017/9/8	2450	HSL	250	D2450V2-735	EX3DV4 - SN7306	DAE4 Sn854	12.70	50.90	50.80	-0.20
2017/10/27	2450	HSL	250	D2450V2-735	ES3DV3 - SN3270	DAE4 Sn778	12.20	50.90	48.8	-4.13
2017/9/8	2450	MSL	250	D2450V2-735	EX3DV4 - SN3931	DAE4 Sn854	12.10	50.60	48.40	-4.35
2017/9/8	2450	MSL	250	D2450V2-735	EX3DV4 - SN7306	DAE4 Sn854	13.10	50.60	52.40	3.56
2017/9/8	2600	HSL	250	D2600V2-1058	ES3DV3 - SN3169	DAE4 Sn1399	14.50	57.00	58.00	1.75
2017/9/7	2600	MSL	250	D2600V2-1058	EX3DV4 - SN3976	DAE4 Sn1424	13.00	54.30	52.00	-4.24
2017/9/15	5250	HSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	7.60	81.20	76.00	-6.40
2017/9/16	5250	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	7.88	78.10	78.80	0.90
2017/9/15	5600	HSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	8.33	84.90	83.30	-1.88
2017/9/16	5600	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	8.10	81.00	81.00	0.00
2017/9/15	5750	HSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	7.89	82.20	78.90	-4.01
2017/9/17	5750	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	7.32	78.70	73.20	-6.99

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2017/9/8	750	HSL	250	D750V3-1012	EX3DV4 - SN3976	DAE4 Sn1424	1.29	5.35	5.16	-3.55
2017/9/15	750	HSL	250	D750V3-1012	EX3DV4 - SN3931	DAE4 Sn916	1.43	5.35	5.72	6.92
2017/9/4	750	MSL	250	D750V3-1012	ES3DV3 - SN3169	DAE4 Sn1399	1.53	5.72	6.12	6.99
2017/9/8	750	MSL	250	D750V3-1012	EX3DV4 - SN3976	DAE4 Sn1424	1.41	5.72	5.64	-1.40
2017/9/4	835	HSL	250	D835V2-499	ES3DV3 - SN3169	DAE4 Sn1399	1.59	6.14	6.36	3.58
2017/10/27	835	HSL	250	D835V2-499	ES3DV3 - SN3270	DAE4 Sn778	1.50	6.14	6.00	-2.28
2017/9/3	835	MSL	250	D835V2-499	ES3DV3 - SN3169	DAE4 Sn1399	1.68	6.35	6.72	5.83
2017/9/2	1750	HSL	250	D1750V2-1068	ES3DV3 - SN3169	DAE4 Sn1399	4.83	19.50	19.32	-0.92
2017/9/3	1750	MSL	250	D1750V2-1068	ES3DV3 - SN3169	DAE4 Sn1399	5.20	19.40	20.80	7.22
2017/9/2	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1399	5.38	21.40	21.52	0.56
2017/9/9	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1399	5.38	21.40	21.52	0.56
2017/9/2	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1399	5.22	20.60	20.88	1.36
2017/9/6	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn1424	5.55	20.60	22.20	7.77
2017/9/8	2450	HSL	250	D2450V2-735	EX3DV4 - SN3931	DAE4 Sn854	5.73	23.80	22.92	-3.70
2017/9/8	2450	HSL	250	D2450V2-735	EX3DV4 - SN7306	DAE4 Sn854	5.94	23.80	23.76	-0.17
2017/10/27	2450	HSL	250	D2450V2-735	ES3DV3 - SN3270	DAE4 Sn778	5.69	23.80	22.76	-4.37
2017/9/8	2450	MSL	250	D2450V2-735	EX3DV4 - SN3931	DAE4 Sn854	5.71	23.80	22.84	-4.03
2017/9/8	2450	MSL	250	D2450V2-735	EX3DV4 - SN7306	DAE4 Sn854	6.17	23.80	24.68	3.70
2017/9/8	2600	HSL	250	D2600V2-1058	ES3DV3 - SN3169	DAE4 Sn1399	6.55	25.50	26.20	2.75
2017/9/7	2600	MSL	250	D2600V2-1058	EX3DV4 - SN3976	DAE4 Sn1424	5.81	24.30	23.24	-4.36
2017/9/15	5250	HSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	2.14	23.30	21.40	-8.15
2017/9/16	5250	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	2.19	21.80	21.90	0.46
2017/9/15	5600	HSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	2.29	24.40	22.90	-6.15
2017/9/16	5600	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	2.25	22.80	22.50	-1.32
2017/9/15	5750	HSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	2.17	23.40	21.70	-7.26
2017/9/17	5750	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn916	2.04	21.90	20.40	-6.85

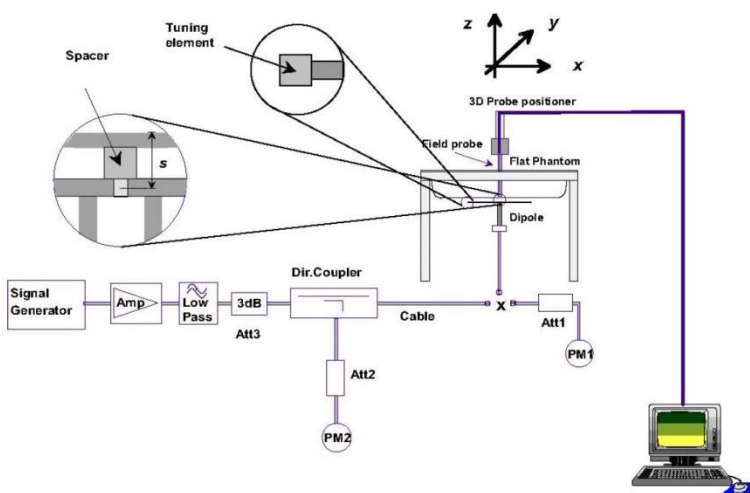

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**



## 11. RF Exposure Positions

### 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

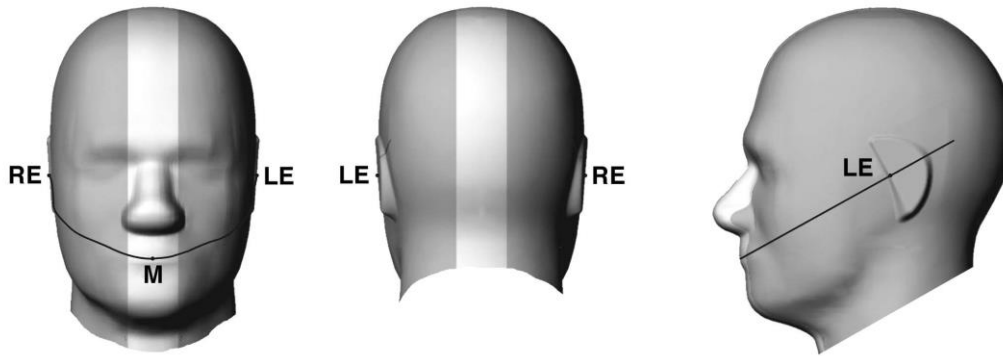


Fig 9.1.1 Front, back, and side views of SAM twin phantom

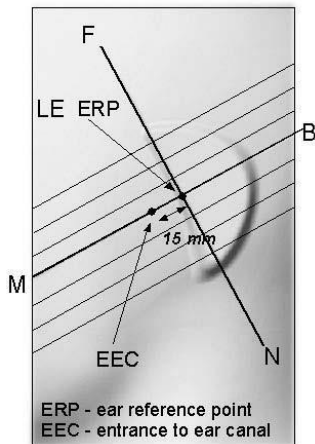


Fig 9.1.2 Close-up side view of phantom showing the ear region.


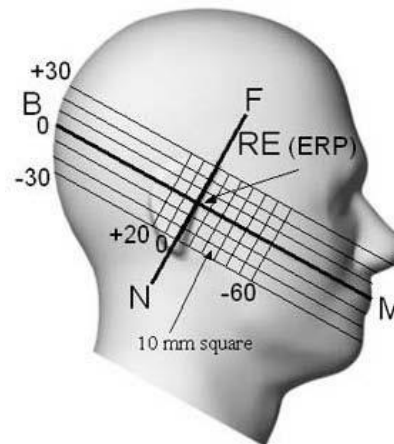



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**11.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

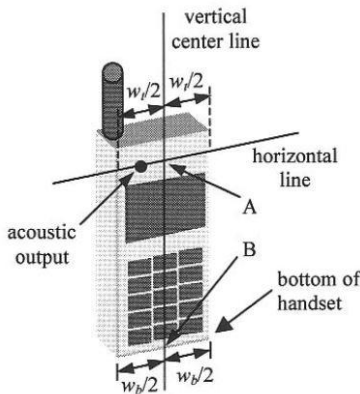

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

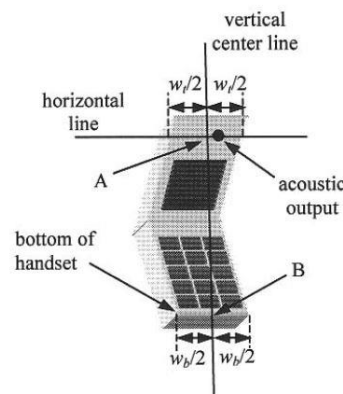

**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

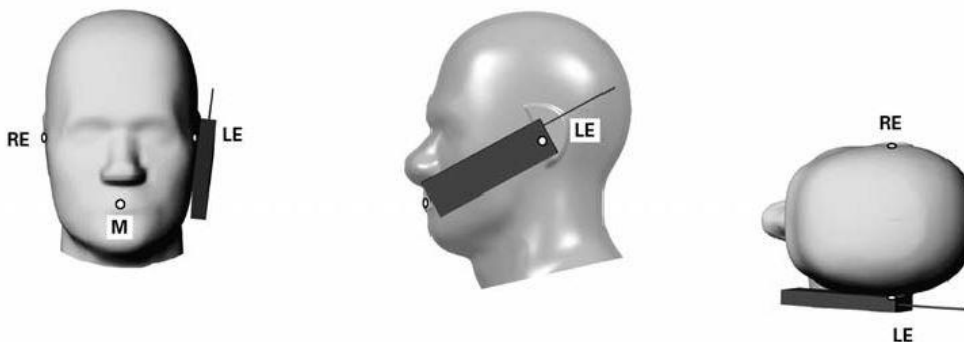


**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**



**11.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

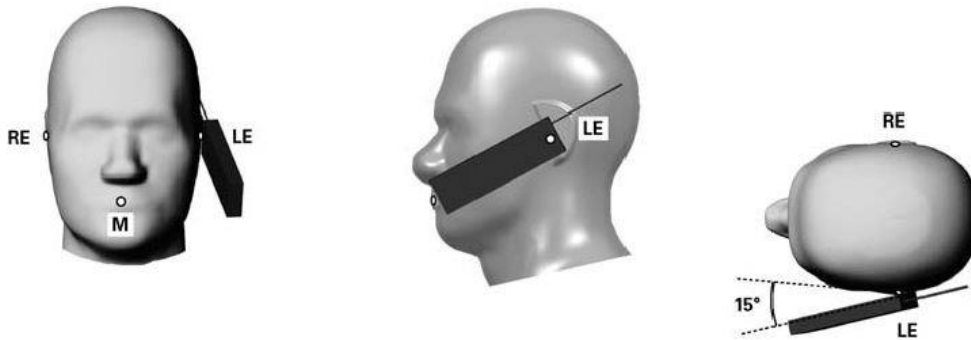


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

### **11.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

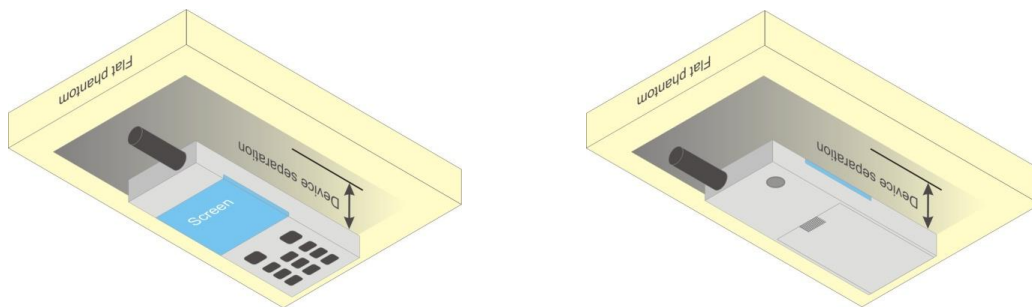

**Fig 9.4 Body Worn Position**



### **11.5 Product specific Exposure Configurations**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### **11.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W  $\geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## 12. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	33.25	33.30	33.35	34.00	24.25	24.30	24.35	25.00
GPRS 1 Tx slot	33.23	33.27	33.31	34.00	24.23	24.27	24.31	25.00
GPRS 2 Tx slots	29.77	29.82	29.94	31.00	23.77	23.82	23.94	25.00
GPRS 3 Tx slots	27.89	27.94	27.93	29.00	23.63	23.68	23.67	24.74
GPRS 4 Tx slots	26.81	26.88	26.98	28.00	23.81	23.88	23.98	25.00
EDGE 1 Tx slot	27.15	27.24	27.04	28.00	18.15	18.24	18.04	19.00
EDGE 2 Tx slots	24.28	24.37	24.54	25.00	18.28	18.37	18.54	19.00
EDGE 3 Tx slots	22.61	22.62	22.78	23.00	18.35	18.36	18.52	18.74
EDGE 4 Tx slots	21.54	21.57	21.74	22.00	18.54	18.57	18.74	19.00

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	30.54	30.76	30.51	31.00	21.54	21.76	21.51	22.00
GPRS 1 Tx slot	30.56	30.78	30.52	31.00	21.56	21.78	21.52	22.00
GPRS 2 Tx slots	27.22	27.66	27.47	28.00	21.22	21.66	21.47	22.00
GPRS 3 Tx slots	25.25	25.74	25.54	26.00	20.99	21.48	21.28	21.74
GPRS 4 Tx slots	24.12	24.60	24.38	25.00	21.12	21.60	21.38	22.00
EDGE 1 Tx slot	25.91	26.30	25.80	27.00	16.91	17.30	16.80	18.00
EDGE 2 Tx slots	23.42	23.95	23.36	24.00	17.42	17.95	17.36	18.00
EDGE 3 Tx slots	21.21	21.67	21.10	22.00	16.95	17.41	16.84	17.74
EDGE 4 Tx slots	20.12	20.60	20.03	21.00	17.12	17.60	17.03	18.00

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

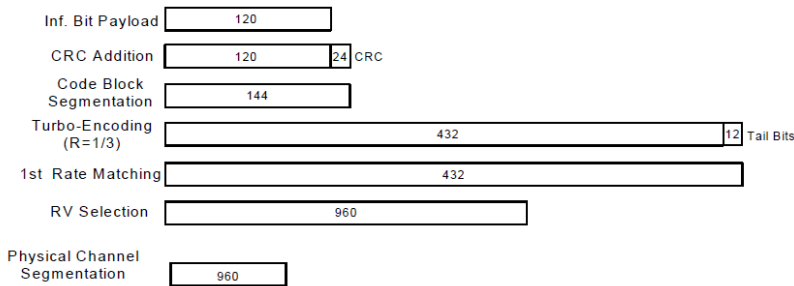

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**





**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458			
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	22.48	22.15	21.80	22.50	23.72	23.82	23.91	25.00	24.03	24.12	24.35	25.00
3GPP Rel 99	RMC 12.2Kbps	22.50	22.16	21.80	22.50	24.53	24.63	24.93	25.00	24.76	24.83	24.97	25.00
3GPP Rel 6	HSDPA Subtest-1	21.47	21.10	20.83	21.50	23.52	23.62	23.95	24.00	23.81	23.89	23.99	24.00
3GPP Rel 6	HSDPA Subtest-2	21.50	21.13	20.73	21.50	23.51	23.58	23.97	24.00	23.89	23.89	23.98	24.00
3GPP Rel 6	HSDPA Subtest-3	20.99	20.80	20.44	21.00	23.02	23.12	23.48	23.50	23.38	23.40	23.47	23.50
3GPP Rel 6	HSDPA Subtest-4	21.00	20.76	20.28	21.00	23.06	23.13	23.49	23.50	23.33	23.35	23.48	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.37	21.08	20.68	21.50	23.47	23.60	23.85	24.00	23.74	23.80	23.99	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.44	21.26	20.71	21.50	23.48	23.49	23.95	24.00	23.89	23.84	23.98	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.00	20.84	20.29	21.00	22.98	23.02	23.46	23.50	23.38	23.35	23.48	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	20.95	20.81	20.32	21.00	22.96	23.05	23.44	23.50	23.27	23.27	23.47	23.50
3GPP Rel 6	HSUPA Subtest-1	19.78	19.72	19.51	21.50	22.10	22.24	22.42	24.00	22.06	22.17	22.26	24.00
3GPP Rel 6	HSUPA Subtest-2	19.45	19.23	18.91	19.50	21.43	21.53	21.77	22.00	21.83	21.85	21.97	22.00
3GPP Rel 6	HSUPA Subtest-3	20.44	20.21	19.82	20.50	22.37	22.51	22.70	23.00	22.71	22.82	22.98	23.00
3GPP Rel 6	HSUPA Subtest-4	19.02	18.73	18.29	19.50	21.02	21.08	21.29	22.00	21.31	21.35	21.52	22.00
3GPP Rel 6	HSUPA Subtest-5	21.45	21.25	20.86	21.50	23.48	23.18	23.85	24.00	23.71	23.82	23.94	24.00



**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.38	22.05	21.54	22.5	0
20	QPSK	1	49	22.19	21.84	21.50		
20	QPSK	1	99	21.96	21.55	21.52		
20	QPSK	50	0	21.35	20.97	20.52	21.5	1
20	QPSK	50	24	21.21	20.81	20.53		
20	QPSK	50	50	21.12	20.69	20.55		
20	QPSK	100	0	21.21	20.81	20.60		
20	16QAM	1	0	21.50	21.37	20.88	21.5	1
20	16QAM	1	49	21.46	21.11	20.66		
20	16QAM	1	99	21.28	20.84	20.58		
20	16QAM	50	0	20.36	20.01	19.50	20.5	2
20	16QAM	50	24	20.23	19.85	19.55		
20	16QAM	50	50	20.15	19.71	19.65		
20	16QAM	100	0	20.22	19.83	19.52		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.27	21.98	21.37	22.5	0
15	QPSK	1	37	22.18	21.79	21.30		
15	QPSK	1	74	21.99	21.55	21.26		
15	QPSK	36	0	21.31	20.92	20.39	21.5	1
15	QPSK	36	20	21.21	20.81	20.38		
15	QPSK	36	39	21.10	20.68	20.33		
15	QPSK	75	0	21.19	20.79	20.35		
15	16QAM	1	0	21.48	21.29	20.73	21.5	1
15	16QAM	1	37	21.45	21.09	20.64		
15	16QAM	1	74	21.31	20.86	20.54		
15	16QAM	36	0	20.35	19.96	19.43	20.5	2
15	16QAM	36	20	20.26	19.86	19.44		
15	16QAM	36	39	20.16	19.72	19.36		
15	16QAM	75	0	20.23	19.85	19.40		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.35	21.96	21.37	22.5	0
10	QPSK	1	25	22.28	21.84	21.34		
10	QPSK	1	49	22.14	21.69	21.29		
10	QPSK	25	0	21.32	20.91	20.40	21.5	1
10	QPSK	25	12	21.27	20.83	20.37		
10	QPSK	25	25	21.22	20.77	20.38		
10	QPSK	50	0	21.28	20.84	20.39		
10	16QAM	1	0	21.48	21.26	20.71	21.5	1
10	16QAM	1	25	21.49	21.14	20.69		
10	16QAM	1	49	21.43	20.98	20.57		
10	16QAM	25	0	20.34	19.93	19.43	20.5	2
10	16QAM	25	12	20.29	19.86	19.39		
10	16QAM	25	25	20.24	19.77	19.40		
10	16QAM	50	0	20.29	19.87	19.42		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.32	21.89	21.31	22.5	0
5	QPSK	1	12	22.30	21.84	21.34		
5	QPSK	1	24	22.19	21.70	21.25		
5	QPSK	12	0	21.36	20.90	20.41	21.5	1
5	QPSK	12	7	21.33	20.86	20.41		
5	QPSK	12	13	21.29	20.81	20.37		
5	QPSK	25	0	21.30	20.80	20.35		
5	16QAM	1	0	21.44	21.16	20.67	21.5	1
5	16QAM	1	12	21.49	21.10	20.66		
5	16QAM	1	24	21.44	20.98	20.52		
5	16QAM	12	0	20.38	19.94	19.45	20.5	2
5	16QAM	12	7	20.35	19.90	19.44		
5	16QAM	12	13	20.33	19.86	19.41		
5	16QAM	25	0	20.32	19.82	19.37		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.24	21.77	21.21	22.5	0
3	QPSK	1	8	22.22	21.75	21.28		
3	QPSK	1	14	22.17	21.66	21.19		
3	QPSK	8	0	21.31	20.82	20.36	21.5	1
3	QPSK	8	4	21.30	20.81	20.34		
3	QPSK	8	7	21.27	20.81	20.31		
3	QPSK	15	0	21.29	20.80	20.32		
3	16QAM	1	0	21.49	21.06	20.53	21.5	1
3	16QAM	1	8	21.47	21.05	20.52		
3	16QAM	1	14	21.42	20.94	20.46		
3	16QAM	8	0	20.37	19.90	19.45	20.5	2
3	16QAM	8	4	20.37	19.88	19.40		
3	16QAM	8	7	20.34	19.88	19.38		
3	16QAM	15	0	20.30	19.83	19.34		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.24	21.77	21.24	22.5	0
1.4	QPSK	1	3	22.24	21.75	21.26		
1.4	QPSK	1	5	22.21	21.72	21.21		
1.4	QPSK	3	0	22.32	21.84	21.34		
1.4	QPSK	3	1	22.27	21.78	21.27		
1.4	QPSK	3	3	22.28	21.80	21.30		
1.4	QPSK	6	0	21.28	20.78	20.27	21.5	1
1.4	16QAM	1	0	21.47	21.04	20.49	21.5	1
1.4	16QAM	1	3	21.45	21.05	20.53		
1.4	16QAM	1	5	21.45	20.99	20.44		
1.4	16QAM	3	0	21.29	20.82	20.31		
1.4	16QAM	3	1	21.27	20.79	20.25		
1.4	16QAM	3	3	21.26	20.77	20.26		
1.4	16QAM	6	0	20.38	19.90	19.38		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.98	24.15	24.13	25	0
20	QPSK	1	49	23.75	24.01	24.02		
20	QPSK	1	99	23.60	23.52	23.68		
20	QPSK	50	0	22.79	23.29	22.97	24	1
20	QPSK	50	24	22.75	23.28	22.83		
20	QPSK	50	50	22.75	23.18	22.67		
20	QPSK	100	0	22.78	23.24	22.78		
20	16QAM	1	0	23.05	23.21	22.86	24	1
20	16QAM	1	49	22.99	23.42	23.03		
20	16QAM	1	99	22.83	22.99	22.84		
20	16QAM	50	0	21.80	22.15	22.17	23	2
20	16QAM	50	24	21.76	22.10	21.95		
20	16QAM	50	50	22.00	22.10	21.87		
20	16QAM	100	0	21.93	22.11	22.31		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	24.06	24.06	24.06	25	0
15	QPSK	1	37	24.04	24.00	24.02		
15	QPSK	1	74	23.98	23.97	23.92		
15	QPSK	36	0	23.19	23.16	23.16	24	1
15	QPSK	36	20	23.12	23.11	23.11		
15	QPSK	36	39	23.15	23.09	23.09		
15	QPSK	75	0	23.10	23.13	23.12		
15	16QAM	1	0	23.41	23.30	23.30	24	1
15	16QAM	1	37	23.45	23.22	23.32		
15	16QAM	1	74	23.32	23.19	23.24		
15	16QAM	36	0	22.17	22.15	22.20	23	2
15	16QAM	36	20	22.13	22.10	22.10		
15	16QAM	36	39	22.06	22.08	22.08		
15	16QAM	75	0	22.05	22.11	22.11		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.95	24.13	24.02	25	0
10	QPSK	1	25	23.70	24.08	24.01		
10	QPSK	1	49	23.39	24.04	24.01		
10	QPSK	25	0	22.59	23.09	23.28	24	1
10	QPSK	25	12	22.60	23.06	23.17		
10	QPSK	25	25	22.53	23.06	23.12		
10	QPSK	50	0	22.47	23.11	23.22		
10	16QAM	1	0	22.94	23.31	23.31	24	1
10	16QAM	1	25	22.89	23.23	23.49		
10	16QAM	1	49	22.73	23.18	23.18		
10	16QAM	25	0	21.84	22.09	22.44	23	2
10	16QAM	25	12	22.10	22.05	22.17		
10	16QAM	25	25	22.08	22.04	22.16		
10	16QAM	50	0	22.26	22.09	22.16		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	24.07	24.02	24.00	25	0
5	QPSK	1	12	23.72	24.05	24.01		
5	QPSK	1	24	23.55	24.07	23.97		
5	QPSK	12	0	22.82	23.07	23.28	24	1
5	QPSK	12	7	22.66	23.05	23.28		
5	QPSK	12	13	22.70	23.05	23.39		
5	QPSK	25	0	22.70	23.02	23.00	24	1
5	16QAM	1	0	22.89	23.20	23.19		
5	16QAM	1	12	22.94	23.18	23.12		
5	16QAM	1	24	22.72	23.10	23.07	23	2
5	16QAM	12	0	21.61	22.06	22.21		
5	16QAM	12	7	21.77	22.04	22.21		
5	16QAM	12	13	21.65	22.05	22.23	23	2
5	16QAM	25	0	21.97	22.02	22.28		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.97	23.53	23.94	25	0
3	QPSK	1	8	23.74	23.73	23.65		
3	QPSK	1	14	23.53	23.52	23.58		
3	QPSK	8	0	22.70	23.17	22.81	24	1
3	QPSK	8	4	22.74	23.15	22.83		
3	QPSK	8	7	22.65	23.09	22.80		
3	QPSK	15	0	22.76	23.22	22.81	24	1
3	16QAM	1	0	22.83	23.20	22.94		
3	16QAM	1	8	22.91	23.21	22.95		
3	16QAM	1	14	22.82	23.18	22.90	23	2
3	16QAM	8	0	21.80	22.08	21.83		
3	16QAM	8	4	21.81	22.07	21.81		
3	16QAM	8	7	21.77	22.05	21.82	23	2
3	16QAM	15	0	21.74	22.03	21.75		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.65	23.65	24.01	25	0
1.4	QPSK	1	3	23.72	23.73	23.63		
1.4	QPSK	1	5	23.64	23.61	23.64		
1.4	QPSK	3	0	23.75	23.80	23.80		
1.4	QPSK	3	1	23.73	23.77	23.75		
1.4	QPSK	3	3	23.75	24.01	23.77	24	1
1.4	QPSK	6	0	22.80	23.16	22.82		
1.4	16QAM	1	0	22.90	23.26	22.92	24	1
1.4	16QAM	1	3	22.98	23.20	23.01		
1.4	16QAM	1	5	22.90	23.15	22.94		
1.4	16QAM	3	0	22.76	22.99	22.80		
1.4	16QAM	3	1	22.72	22.94	22.77		
1.4	16QAM	3	3	22.72	22.96	22.73	23	2
1.4	16QAM	6	0	21.80	22.09	21.82		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	24.43	24.45	24.38		
10	QPSK	1	25	24.40	24.36	24.37	25	0
10	QPSK	1	49	24.29	24.30	24.31		
10	QPSK	25	0	23.47	23.46	23.45		
10	QPSK	25	12	23.44	23.42	23.44	24	1
10	QPSK	25	25	23.42	23.43	23.41		
10	QPSK	50	0	23.46	23.48	23.45		
10	16QAM	1	0	23.73	23.67	23.62	24	1
10	16QAM	1	25	23.70	23.64	23.67		
10	16QAM	1	49	23.59	23.58	23.60		
10	16QAM	25	0	22.45	22.42	22.46	23	2
10	16QAM	25	12	22.41	22.39	22.47		
10	16QAM	25	25	22.39	22.44	22.47		
10	16QAM	50	0	22.43	22.41	22.52		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	24.37	24.34	24.39		
5	QPSK	1	12	24.41	24.34	24.44	25	0
5	QPSK	1	24	24.29	24.22	24.30		
5	QPSK	12	0	23.51	23.46	23.52		
5	QPSK	12	7	23.50	23.44	23.53	24	1
5	QPSK	12	13	23.47	23.41	23.49		
5	QPSK	25	0	23.44	23.38	23.48		
5	16QAM	1	0	23.66	23.63	23.66	24	1
5	16QAM	1	12	23.70	23.63	23.74		
5	16QAM	1	24	23.60	23.50	23.57		
5	16QAM	12	0	22.48	22.43	22.56	23	2
5	16QAM	12	7	22.48	22.41	22.56		
5	16QAM	12	13	22.45	22.38	22.54		
5	16QAM	25	0	22.39	22.35	22.50		
Channel				20415	20525	20635		
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	24.33	24.26	24.36		
3	QPSK	1	8	24.37	24.29	24.36	25	0
3	QPSK	1	14	24.29	24.20	24.27		
3	QPSK	8	0	23.49	23.42	23.51		
3	QPSK	8	4	23.49	23.41	23.48	24	1
3	QPSK	8	7	23.47	23.38	23.48		
3	QPSK	15	0	23.49	23.41	23.52		
3	16QAM	1	0	23.62	23.56	23.64	24	1
3	16QAM	1	8	23.65	23.58	23.63		
3	16QAM	1	14	23.58	23.50	23.53		
3	16QAM	8	0	22.51	22.44	22.60	23	2
3	16QAM	8	4	22.50	22.43	22.57		
3	16QAM	8	7	22.50	22.40	22.57		
3	16QAM	15	0	22.46	22.39	22.55		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	24.35	24.29	24.35	25	0
1.4	QPSK	1	3	24.39	24.31	24.38		
1.4	QPSK	1	5	24.35	24.27	24.32		
1.4	QPSK	3	0	24.44	24.37	24.44		
1.4	QPSK	3	1	24.40	24.34	24.37		
1.4	QPSK	3	3	24.43	24.37	24.41		
1.4	QPSK	6	0	23.47	23.38	23.46	24	1
1.4	16QAM	1	0	23.62	23.58	23.63	24	1
1.4	16QAM	1	3	23.69	23.63	23.68		
1.4	16QAM	1	5	23.63	23.58	23.60		
1.4	16QAM	3	0	23.47	23.40	23.47		
1.4	16QAM	3	1	23.44	23.37	23.40		
1.4	16QAM	3	3	23.46	23.39	23.42		
1.4	16QAM	6	0	22.52	22.42	22.56	23	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	21.70	21.63	21.53	23	0
20	QPSK	1	49	21.64	21.59	21.50		
20	QPSK	1	99	21.60	21.62	21.48		
20	QPSK	50	0	20.66	20.63	20.49	22	1
20	QPSK	50	24	20.63	20.55	20.48		
20	QPSK	50	50	20.65	20.59	20.48		
20	QPSK	100	0	20.62	20.55	20.48		
20	16QAM	1	0	20.88	20.90	20.72	22	1
20	16QAM	1	49	20.86	20.88	20.72		
20	16QAM	1	99	20.96	20.92	20.68		
20	16QAM	50	0	19.67	19.56	19.50	21	2
20	16QAM	50	24	19.64	19.56	19.50		
20	16QAM	50	50	19.64	19.59	19.49		
20	16QAM	100	0	19.63	19.55	19.47		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	21.69	21.59	21.50	23	0
15	QPSK	1	37	21.68	21.60	21.49		
15	QPSK	1	74	21.67	21.62	21.46		
15	QPSK	36	0	20.67	20.64	20.51	22	1
15	QPSK	36	20	20.66	20.58	20.47		
15	QPSK	36	39	20.77	20.66	20.48		
15	QPSK	75	0	20.67	20.59	20.48		
15	16QAM	1	0	20.91	20.88	20.73	22	1
15	16QAM	1	37	20.91	20.92	20.72		
15	16QAM	1	74	20.99	20.93	20.67		
15	16QAM	36	0	19.67	19.57	19.51	21	2
15	16QAM	36	20	19.69	19.59	19.49		
15	16QAM	36	39	19.69	19.59	19.49		
15	16QAM	75	0	19.67	19.59	19.48		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.58	21.54	21.38	23	0
10	QPSK	1	25	21.57	21.57	21.36		
10	QPSK	1	49	21.55	21.56	21.34		
10	QPSK	25	0	20.55	20.63	20.37	22	1
10	QPSK	25	12	20.57	20.52	20.35		
10	QPSK	25	25	20.55	20.63	20.34		
10	QPSK	50	0	20.57	20.55	20.37		
10	16QAM	1	0	20.80	20.86	20.62	22	1
10	16QAM	1	25	20.82	20.89	20.60		
10	16QAM	1	49	20.79	20.87	20.57		
10	16QAM	25	0	19.58	19.56	19.38	21	2
10	16QAM	25	12	19.58	19.53	19.36		
10	16QAM	25	25	19.57	19.57	19.35		
10	16QAM	50	0	19.58	19.57	19.38		





Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.57	21.56	21.35	23	0
5	QPSK	1	12	21.60	21.59	21.37		
5	QPSK	1	24	21.53	21.53	21.29		
5	QPSK	12	0	20.60	20.65	20.37	22	1
5	QPSK	12	7	20.61	20.56	20.37		
5	QPSK	12	13	20.61	20.66	20.35		
5	QPSK	25	0	20.56	20.53	20.34		
5	16QAM	1	0	20.80	20.87	20.60	22	1
5	16QAM	1	12	20.82	20.90	20.61		
5	16QAM	1	24	20.74	20.84	20.52		
5	16QAM	12	0	19.63	19.59	19.40	21	2
5	16QAM	12	7	19.63	19.57	19.41		
5	16QAM	12	13	19.61	19.59	19.37		
5	16QAM	25	0	19.56	19.54	19.34		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.84	23.00	22.88	23.5	0
10	QPSK	1	25	22.90	22.91	22.87		
10	QPSK	1	49	22.89	22.91	22.84		
10	QPSK	25	0	21.89	21.97	21.91	22.5	1
10	QPSK	25	12	21.91	21.95	21.90		
10	QPSK	25	25	21.94	21.96	21.91		
10	QPSK	50	0	21.94	21.96	21.96		
10	16QAM	1	0	22.07	22.16	22.15	22.5	1
10	16QAM	1	25	22.16	22.20	22.15		
10	16QAM	1	49	22.17	22.18	22.06		
10	16QAM	25	0	20.93	20.97	20.94	21.5	2
10	16QAM	25	12	20.94	20.99	20.93		
10	16QAM	25	25	20.98	20.98	20.93		
10	16QAM	50	0	20.96	20.99	20.98		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.90	22.95	22.91	23.5	0
5	QPSK	1	12	22.97	22.99	22.97		
5	QPSK	1	24	22.94	22.92	22.85		
5	QPSK	12	0	21.99	22.03	21.98	22.5	1
5	QPSK	12	7	22.01	22.04	21.98		
5	QPSK	12	13	22.03	22.04	21.97		
5	QPSK	25	0	21.99	21.99	21.93		
5	16QAM	1	0	22.11	22.19	22.16	22.5	1
5	16QAM	1	12	22.21	22.24	22.22		
5	16QAM	1	24	22.19	22.17	22.05		
5	16QAM	12	0	21.02	21.07	21.02	21.5	2
5	16QAM	12	7	21.05	21.08	21.01		
5	16QAM	12	13	21.06	21.07	21.00		
5	16QAM	25	0	21.00	21.01	20.95		
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.81	22.87	22.88	23.5	0
3	QPSK	1	8	22.90	22.90	22.89		
3	QPSK	1	14	22.84	22.84	22.82		
3	QPSK	8	0	21.93	21.97	21.99	22.5	1
3	QPSK	8	4	21.95	21.98	21.96		
3	QPSK	8	7	21.95	21.98	21.94		
3	QPSK	15	0	21.95	21.97	21.97		
3	16QAM	1	0	22.05	22.12	22.14	22.5	1
3	16QAM	1	8	22.15	22.15	22.11		
3	16QAM	1	14	22.12	22.11	22.01		
3	16QAM	8	0	21.00	21.06	21.07	21.5	2
3	16QAM	8	4	21.02	21.06	21.03		
3	16QAM	8	7	21.02	21.06	21.01		
3	16QAM	15	0	20.97	21.01	20.99		



Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.83	22.88	22.86	23.5	0
1.4	QPSK	1	3	22.89	22.91	22.86		
1.4	QPSK	1	5	22.84	22.89	22.84		
1.4	QPSK	3	0	22.94	22.98	22.94		
1.4	QPSK	3	1	22.89	22.93	22.90		
1.4	QPSK	3	3	22.93	22.95	22.92		
1.4	QPSK	6	0	21.92	21.93	21.90	22.5	1
1.4	16QAM	1	0	22.04	22.12	22.07	22.5	1
1.4	16QAM	1	3	22.12	22.17	22.08		
1.4	16QAM	1	5	22.06	22.12	22.03		
1.4	16QAM	3	0	21.89	21.96	21.89		
1.4	16QAM	3	1	21.85	21.92	21.85		
1.4	16QAM	3	3	21.89	21.90	21.85		
1.4	16QAM	6	0	21.01	21.03	20.99	21.5	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	24.20			24.5	0
10	QPSK	1	25	24.12				
10	QPSK	1	49	24.11				
10	QPSK	25	0	23.25			23.5	1
10	QPSK	25	12	23.23				
10	QPSK	25	25	23.24				
10	QPSK	50	0	23.27				
10	16QAM	1	0	23.30			23.5	1
10	16QAM	1	25	23.35				
10	16QAM	1	49	23.31				
10	16QAM	25	0	22.22			22.5	2
10	16QAM	25	12	22.23				
10	16QAM	25	25	22.22				
10	16QAM	50	0	22.25				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	24.10	24.11	24.11	24.5	0
5	QPSK	1	12	24.17	24.13	24.13		
5	QPSK	1	24	24.07	24.06	24.04		
5	QPSK	12	0	23.26	23.23	23.22	23.5	1
5	QPSK	12	7	23.25	23.23	23.23		
5	QPSK	12	13	23.24	23.22	23.24		
5	QPSK	25	0	23.23	23.21	23.18		
5	16QAM	1	0	23.27	23.32	23.30	23.5	1
5	16QAM	1	12	23.36	23.33	23.32		
5	16QAM	1	24	23.27	23.26	23.24		
5	16QAM	12	0	22.27	22.24	22.22	22.5	2
5	16QAM	12	7	22.25	22.24	22.23		
5	16QAM	12	13	22.25	22.22	22.23		
5	16QAM	25	0	22.23	22.21	22.18		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.93	23.06	22.96		
10	QPSK	1	25	22.99	22.96	22.97	24.5	0
10	QPSK	1	49	22.95	22.95	22.93		
10	QPSK	25	0	22.00	22.00	21.98		
10	QPSK	25	12	22.00	21.99	21.98	23.5	1
10	QPSK	25	25	22.00	22.00	22.00		
10	QPSK	50	0	22.04	22.01	22.02		
10	16QAM	1	0	22.21	22.21	22.22	23.5	1
10	16QAM	1	25	22.24	22.23	22.23		
10	16QAM	1	49	22.21	22.19	22.16		
10	16QAM	25	0	21.02	21.02	21.00	22.5	2
10	16QAM	25	12	21.03	21.01	21.02		
10	16QAM	25	25	21.03	21.03	21.02		
10	16QAM	50	0	21.06	21.03	21.04		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.98	22.95	22.92	24.5	0
5	QPSK	1	12	23.05	22.97	22.94		
5	QPSK	1	24	22.96	22.92	22.85		
5	QPSK	12	0	22.06	22.03	21.99	23.5	1
5	QPSK	12	7	22.07	22.02	22.00		
5	QPSK	12	13	22.06	22.03	21.98		
5	QPSK	25	0	22.04	21.98	21.96	23.5	1
5	16QAM	1	0	22.21	22.22	22.18		
5	16QAM	1	12	22.28	22.23	22.18		
5	16QAM	1	24	22.22	22.18	22.05	22.5	2
5	16QAM	12	0	21.09	21.06	21.03		
5	16QAM	12	7	21.10	21.06	21.02		
5	16QAM	12	13	21.10	21.07	21.00		
5	16QAM	25	0	21.06	21.01	20.98		



**<WLAN Conducted Power>**

**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.<sup>18</sup> The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.



<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.74	17.00	100.00
		6	2437	16.72	17.00	
		11	2462	16.68	17.00	
	802.11g 6Mbps	1	2412	14.91	15.00	97.48
		6	2437	14.89	15.00	
		11	2462	14.78	15.00	
	802.11n-HT20 MCS0	1	2412	14.90	15.00	96.43
		6	2437	14.88	15.00	
		11	2462	14.83	15.00	

<5GHz WLAN >

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	12.80	13.00	97.22
		40	5200	12.73	13.00	
		44	5220	12.62	13.00	
		48	5240	12.53	13.00	
	802.11n-HT20 MCS0	36	5180	10.67	11.00	96.30
		40	5200	10.82	11.00	
		44	5220	10.66	11.00	
		48	5240	10.66	11.00	
	802.11n-HT40 MCS0	38	5190	10.81	11.00	93.83
		46	5230	10.78	11.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	12.51	13.00	97.22
		56	5280	12.81	13.00	
		60	5300	12.58	13.00	
		64	5320	12.72	13.00	
	802.11n-HT20 MCS0	52	5260	10.56	11.00	96.30
		56	5280	10.66	11.00	
		60	5300	10.61	11.00	
		64	5320	10.71	11.00	
	802.11n-HT40 MCS0	54	5270	10.72	11.00	93.83
		62	5310	10.71	11.00	





	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	12.73	13.00	97.22
		116	5580	12.72	13.00	
		132	5660	12.78	13.00	
		144	5720	12.57	13.00	
	802.11n-HT20 MCS0	100	5500	10.68	11.00	96.30
		116	5580	10.64	11.00	
		132	5660	10.62	11.00	
		144	5720	10.56	11.00	
	802.11n-HT40 MCS0	102	5510	10.60	11.00	93.83
		110	5550	10.63	11.00	
		134	5670	10.61	11.00	
		142	5710	10.56	11.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	12.94	13.00	97.22
		157	5785	12.72	13.00	
		165	5825	12.89	13.00	
	802.11n-HT20 MCS0	149	5745	10.74	11.00	96.30
		157	5785	10.71	11.00	
		165	5825	10.51	11.00	
	802.11n-HT40 MCS0	151	5755	10.89	11.00	93.83
		159	5795	10.82	11.00	




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	5.98	3.46	3.41
	CH 39	2441	6.97	4.96	4.93
	CH 78	2480	6.42	3.99	3.96
Tune-up Limit			7	5	5

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 00	2402	-1.62
	CH 19	2440	-0.02
	CH 39	2480	-1.25
Tune-up Limit			0

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
- The Bluetooth duty cycle is 76.6% as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

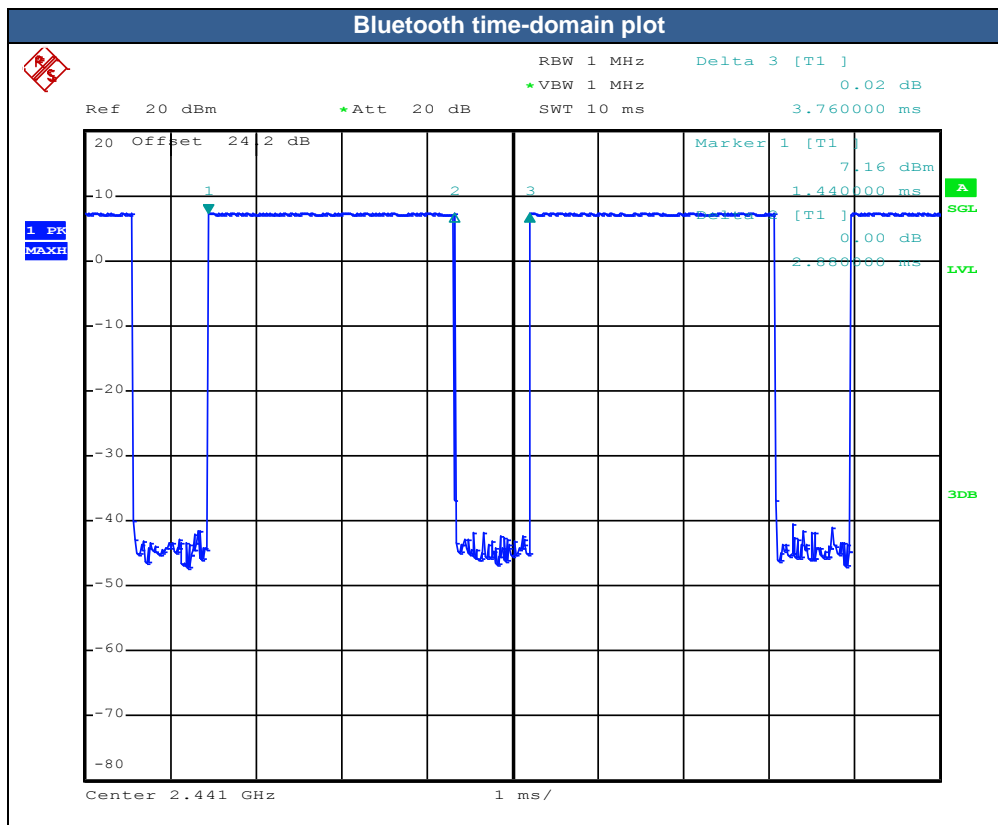

### 13. Antenna Location

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	No	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

**General Note:**

1. Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge
2. The detail antenna location please refers to Appendix D.



## 14. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15cm or an overall diagonal dimension > 16cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, in this report all the hotspot mode results are < 1.2W/kg.
6. For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16cm.
7. In this report, the 10g SAR results which is submitted voluntarily.

**GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

**UMTS Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	251	848.8	26.98	28.00	1.265	0.03	0.423	0.535	0.335	0.424
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	251	848.8	26.98	28.00	1.265	0.1	0.234	0.296	0.188	0.238
01	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	251	848.8	26.98	28.00	1.265	0.01	0.507	0.641	0.400	0.506
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	128	824.2	26.81	28.00	1.315	0.02	0.242	0.318	0.193	0.254
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	189	836.4	26.88	28.00	1.294	0	0.353	0.457	0.280	0.362
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	251	848.8	26.98	28.00	1.265	-0.01	0.273	0.345	0.218	0.276
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	661	1880	24.60	25.00	1.096	0.01	0.133	0.146	0.089	0.098
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	661	1880	24.60	25.00	1.096	-0.02	0.097	0.106	0.063	0.069
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	661	1880	24.60	25.00	1.096	-0.04	0.191	0.209	0.126	0.138
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	512	1850.2	24.12	25.00	1.225	-0.08	0.163	0.200	0.108	0.132
02	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	810	1909.8	24.38	25.00	1.153	-0.1	0.211	0.243	0.140	0.161
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	661	1880	24.60	25.00	1.096	0.17	0.050	0.055	0.031	0.034

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9262	1852.4	22.50	22.50	1.000	-0.05	0.135	0.135	0.095	0.095
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9262	1852.4	22.50	22.50	1.000	-0.04	0.124	0.124	0.079	0.079
03	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9262	1852.4	22.50	22.50	1.000	0.03	0.217	0.217	0.146	0.146
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	22.16	22.50	1.081	-0.04	0.189	0.204	0.124	0.134
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9538	1907.6	21.80	22.50	1.175	-0.04	0.139	0.163	0.092	0.108
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9262	1852.4	22.50	22.50	1.000	-0.02	0.065	0.065	0.044	0.044
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1513	1752.6	24.93	25.00	1.016	-0.03	0.159	0.162	0.105	0.107
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1513	1752.6	24.93	25.00	1.016	0.03	0.070	0.071	0.046	0.047
04	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1513	1752.6	24.93	25.00	1.016	0.19	0.230	0.234	0.159	0.162
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1312	1712.4	24.53	25.00	1.114	0.12	0.187	0.208	0.130	0.145
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1413	1732.6	24.63	25.00	1.089	0.07	0.207	0.225	0.143	0.156
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1513	1752.6	24.93	25.00	1.016	0.17	0.069	0.070	0.043	0.044
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4233	846.6	24.97	25.00	1.007	-0.1	0.562	0.566	0.446	0.449
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4233	846.6	24.97	25.00	1.007	-0.02	0.321	0.323	0.260	0.262
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4233	846.6	24.97	25.00	1.007	-0.08	0.586	0.590	0.466	0.469
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	24.76	25.00	1.057	-0.03	0.524	0.554	0.419	0.443
05	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4182	836.4	24.83	25.00	1.040	-0.01	0.628	0.653	0.507	0.527
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4233	846.6	24.97	25.00	1.007	-0.01	0.362	0.365	0.291	0.293



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	18700	1860	22.38	22.50	1.028	0.15	0.197	0.203	0.136	0.140
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	18700	1860	21.35	21.50	1.035	-0.01	0.155	0.160	0.111	0.115
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	18700	1860	22.38	22.50	1.028	0.04	0.133	0.137	0.084	0.086
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	18700	1860	21.35	21.50	1.035	0.02	0.103	0.107	0.064	0.066
06	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	18700	1860	22.38	22.50	1.028	0.1	0.223	0.229	0.149	0.153
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	18900	1880	22.05	22.50	1.109	0.16	0.206	0.228	0.137	0.152
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	19100	1900	21.54	22.50	1.247	0.11	0.160	0.200	0.105	0.131
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	18700	1860	21.35	21.50	1.035	-0.03	0.179	0.185	0.119	0.123
	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	18700	1860	22.38	22.50	1.028	-0.17	0.081	0.083	0.050	0.051
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	18700	1860	21.35	21.50	1.035	0.07	0.065	0.067	0.040	0.041
	LTE Band 4	20M	QPSK	1	0	Right Cheek	0mm	20175	1732.5	24.15	25.00	1.216	-0.04	0.128	0.156	0.082	0.100
	LTE Band 4	20M	QPSK	50	0	Right Cheek	0mm	20175	1732.5	23.29	24.00	1.178	-0.02	0.102	0.120	0.065	0.077
	LTE Band 4	20M	QPSK	1	0	Right Tilted	0mm	20175	1732.5	24.15	25.00	1.216	0.12	0.051	0.062	0.033	0.040
	LTE Band 4	20M	QPSK	50	0	Right Tilted	0mm	20175	1732.5	23.29	24.00	1.178	0.04	0.041	0.048	0.027	0.032
07	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	20175	1732.5	24.15	25.00	1.216	0.17	0.161	0.196	0.111	0.135
	LTE Band 4	20M	QPSK	50	0	Left Cheek	0mm	20175	1732.5	23.29	24.00	1.178	0.02	0.128	0.151	0.089	0.105
	LTE Band 4	20M	QPSK	1	0	Left Tilted	0mm	20175	1732.5	24.15	25.00	1.216	0.06	0.050	0.061	0.031	0.038
	LTE Band 4	20M	QPSK	50	0	Left Tilted	0mm	20175	1732.5	23.29	24.00	1.178	0.07	0.040	0.047	0.025	0.029
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	24.45	25.00	1.135	-0.08	0.491	0.557	0.388	0.440
	LTE Band 5	10M	QPSK	25	0	Right Cheek	0mm	20525	836.5	23.46	24.00	1.132	0.05	0.438	0.496	0.347	0.393
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	20525	836.5	24.45	25.00	1.135	-0.01	0.265	0.301	0.216	0.245
	LTE Band 5	10M	QPSK	25	0	Right Tilted	0mm	20525	836.5	23.46	24.00	1.132	-0.04	0.238	0.270	0.194	0.220
08	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	20525	836.5	24.45	25.00	1.135	-0.07	0.507	0.575	0.402	0.456
	LTE Band 5	10M	QPSK	25	0	Left Cheek	0mm	20525	836.5	23.46	24.00	1.132	0.02	0.475	0.538	0.378	0.428
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	20525	836.5	24.45	25.00	1.135	0.01	0.308	0.350	0.249	0.283
	LTE Band 5	10M	QPSK	25	0	Left Tilted	0mm	20525	836.5	23.46	24.00	1.132	-0.06	0.289	0.327	0.233	0.264
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	20850	2510	21.70	23.00	1.349	-0.02	0.092	0.124	0.055	0.074
	LTE Band 7	20M	QPSK	50	0	Right Cheek	0mm	20850	2510	20.66	22.00	1.361	0.04	0.071	0.097	0.042	0.057
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	20850	2510	21.70	23.00	1.349	-0.14	0.078	0.105	0.044	0.059
	LTE Band 7	20M	QPSK	50	0	Right Tilted	0mm	20850	2510	20.66	22.00	1.361	-0.05	0.066	0.090	0.037	0.050
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	20850	2510	21.70	23.00	1.349	-0.08	0.130	0.175	0.075	0.101
	LTE Band 7	20M	QPSK	50	0	Left Cheek	0mm	20850	2510	20.66	22.00	1.361	0.08	0.102	0.139	0.059	0.080
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	21100	2535	21.62	23.00	1.374	-0.12	0.132	0.181	0.077	0.106
09	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	21350	2560	21.53	23.00	1.403	-0.11	0.134	0.188	0.078	0.109
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	20850	2510	21.70	23.00	1.349	-0.14	0.067	0.090	0.040	0.054
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	20850	2510	20.66	22.00	1.361	0.04	0.056	0.076	0.033	0.045
	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	23.00	23.50	1.122	0.02	0.091	0.102	0.074	0.083
	LTE Band 12	10M	QPSK	25	0	Right Cheek	0mm	23095	707.5	21.97	22.50	1.130	-0.16	0.073	0.082	0.059	0.067
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	23095	707.5	23.00	23.50	1.122	0.09	0.050	0.056	0.043	0.048
	LTE Band 12	10M	QPSK	25	0	Right Tilted	0mm	23095	707.5	21.97	22.50	1.130	-0.18	0.040	0.045	0.034	0.038
10	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	23095	707.5	23.00	23.50	1.122	-0.07	0.098	0.110	0.080	0.090
	LTE Band 12	10M	QPSK	25	0	Left Cheek	0mm	23095	707.5	21.97	22.50	1.130	-0.14	0.080	0.090	0.066	0.075
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	23095	707.5	23.00	23.50	1.122	0.02	0.052	0.058	0.044	0.049
	LTE Band 12	10M	QPSK	25	0	Left Tilted	0mm	23095	707.5	21.97	22.50	1.130	-0.01	0.043	0.049	0.036	0.041





Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
11	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	23230	782	24.20	24.50	1.072	-0.1	0.245	0.263	0.194	0.208
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	23230	782	23.25	23.50	1.059	0.17	0.173	0.183	0.139	0.147
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	23230	782	24.20	24.50	1.072	0.09	0.120	0.129	0.099	0.106
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	23230	782	23.25	23.50	1.059	0.05	0.096	0.102	0.079	0.084
	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	23230	782	24.20	24.50	1.072	-0.12	0.233	0.250	0.191	0.205
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	23230	782	23.25	23.50	1.059	-0.16	0.191	0.202	0.157	0.166
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	23230	782	24.20	24.50	1.072	0.11	0.140	0.150	0.116	0.124
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	23230	782	23.25	23.50	1.059	-0.14	0.112	0.119	0.092	0.097
	LTE Band 17	10M	QPSK	1	0	Right Cheek	0mm	23790	710	23.06	24.50	1.393	-0.01	0.092	0.128	0.075	0.104
	LTE Band 17	10M	QPSK	25	0	Right Cheek	0mm	23790	710	22.00	23.50	1.413	-0.12	0.075	0.106	0.061	0.086
	LTE Band 17	10M	QPSK	1	0	Right Tilted	0mm	23790	710	23.06	24.50	1.393	-0.09	0.053	0.074	0.043	0.060
	LTE Band 17	10M	QPSK	25	0	Right Tilted	0mm	23790	710	22.00	23.50	1.413	0.09	0.042	0.059	0.035	0.049
12	LTE Band 17	10M	QPSK	1	0	Left Cheek	0mm	23790	710	23.06	24.50	1.393	-0.01	0.102	0.142	0.084	0.117
	LTE Band 17	10M	QPSK	25	0	Left Cheek	0mm	23790	710	22.00	23.50	1.413	-0.01	0.084	0.119	0.069	0.097
	LTE Band 17	10M	QPSK	1	0	Left Tilted	0mm	23790	710	23.06	24.50	1.393	0.01	0.056	0.078	0.047	0.065
	LTE Band 17	10M	QPSK	25	0	Left Tilted	0mm	23790	710	22.00	23.50	1.413	-0.13	0.046	0.065	0.039	0.055

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	1	2412	16.74	17.00	1.062	100	1.000	-0.03	0.360	0.382	0.194	0.206
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	1	2412	16.74	17.00	1.062	100	1.000	0.02	0.290	0.308	0.154	0.164
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	1	2412	16.74	17.00	1.062	100	1.000	-0.1	0.699	0.742	0.350	0.372
13	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	6	2437	16.72	17.00	1.067	100	1.000	0.06	0.970	1.035	0.510	0.544
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	11	2462	16.68	17.00	1.076	100	1.000	-0.01	0.934	1.005	0.462	0.497
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	1	2412	16.74	17.00	1.062	100	1.000	-0.01	0.457	0.485	0.234	0.248
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	56	5280	12.81	13.00	1.045	97.22	1.029	-0.17	0.227	0.244	0.073	0.078
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	56	5280	12.81	13.00	1.045	97.22	1.029	0.15	0.242	0.260	0.078	0.084
14	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	56	5280	12.81	13.00	1.045	97.22	1.029	0	0.359	0.386	0.115	0.124
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	64	5320	12.72	13.00	1.066	97.22	1.029	0.06	0.299	0.328	0.093	0.102
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	56	5280	12.81	13.00	1.045	97.22	1.029	-0.09	0.310	0.333	0.097	0.104
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	132	5660	12.78	13.00	1.052	97.22	1.029	-0.06	0.121	0.131	0.036	0.039
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	132	5660	12.78	13.00	1.052	97.22	1.029	-0.17	0.122	0.132	0.035	0.038
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	132	5660	12.78	13.00	1.052	97.22	1.029	0.17	0.139	0.150	0.039	0.042
15	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	100	5500	12.73	13.00	1.064	97.22	1.029	-0.15	0.198	0.217	0.057	0.062
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	116	5580	12.72	13.00	1.066	97.22	1.029	-0.06	0.188	0.206	0.053	0.058
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	144	5720	12.57	13.00	1.103	97.22	1.029	0.1	0.083	0.094	0.021	0.024
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	132	5660	12.78	13.00	1.052	97.22	1.029	-0.11	0.129	0.140	0.035	0.038
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	149	5745	12.94	13.00	1.013	97.22	1.029	0.17	0.053	0.055	0.012	0.013
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	149	5745	12.94	13.00	1.013	97.22	1.029	0.14	0.043	0.045	0.010	0.010
16	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	149	5745	12.94	13.00	1.013	97.22	1.029	-0.12	0.067	0.070	0.018	0.019
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	157	5785	12.72	13.00	1.066	97.22	1.029	-0.16	0.027	0.030	0.007	0.008
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	165	5825	12.89	13.00	1.025	97.22	1.029	-0.15	0.024	0.025	0.007	0.007
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	149	5745	12.94	13.00	1.013	97.22	1.029	-0.1	0.066	0.069	0.017	0.018



**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	39	2441	6.97	7.00	1.007	76.6	1.087	0.18	0.036	0.039	0.016	0.018
	Bluetooth	1Mbps	Right Tilted	0mm	39	2441	6.97	7.00	1.007	76.6	1.087	0.19	0.027	0.030	0.011	0.012
	Bluetooth	1Mbps	Left Cheek	0mm	39	2441	6.97	7.00	1.007	76.6	1.087	-0.02	0.071	0.078	0.035	0.038
17	Bluetooth	1Mbps	Left Cheek	0mm	0	2402	5.98	7.00	1.265	76.6	1.087	0.01	0.068	0.093	0.032	0.044
	Bluetooth	1Mbps	Left Cheek	0mm	78	2480	6.42	7.00	1.143	76.6	1.087	-0.05	0.044	0.055	0.020	0.025
	Bluetooth	1Mbps	Left Tilted	0mm	39	2441	6.97	7.00	1.007	76.6	1.087	0.02	0.041	0.045	0.021	0.023



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	251	848.8	26.98	28.00	1.265	-0.08	0.557	0.704	0.434	0.549
18	GSM850	GPRS (4 Tx slots)	Back	10mm	251	848.8	26.98	28.00	1.265	-0.07	0.611	0.773	0.473	0.598
	GSM850	GPRS (4 Tx slots)	Back	10mm	128	824.2	26.81	28.00	1.315	-0.19	0.303	0.399	0.238	0.313
	GSM850	GPRS (4 Tx slots)	Back	10mm	189	836.4	26.88	28.00	1.294	0.07	0.434	0.562	0.291	0.377
	GSM850	GPRS (4 Tx slots)	Left Side	10mm	251	848.8	26.98	28.00	1.265	-0.02	0.475	0.601	0.333	0.421
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	251	848.8	26.98	28.00	1.265	0	0.549	0.694	0.329	0.416
	GSM1900	GPRS (4 Tx slots)	Front	10mm	661	1880	24.60	25.00	1.096	0.07	0.532	0.583	0.287	0.315
	GSM1900	GPRS (4 Tx slots)	Back	10mm	661	1880	24.60	25.00	1.096	0	0.701	0.769	0.372	0.408
	GSM1900	GPRS (4 Tx slots)	Back	10mm	512	1850.2	24.12	25.00	1.225	0	0.520	0.637	0.282	0.345
19	GSM1900	GPRS (4 Tx slots)	Back	10mm	810	1909.8	24.38	25.00	1.153	-0.03	0.835	0.963	0.443	0.511
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	661	1880	24.60	25.00	1.096	0.01	0.237	0.260	0.141	0.155
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	661	1880	24.60	25.00	1.096	0.01	0.151	0.166	0.092	0.101
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	661	1880	24.60	25.00	1.096	0.05	0.612	0.671	0.329	0.361

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	9262	1852.4	22.50	22.50	1.000	0.19	0.715	0.715	0.391	0.391
	WCDMA II	RMC 12.2Kbps	Back	10mm	9262	1852.4	22.50	22.50	1.000	-0.16	0.937	0.937	0.507	0.507
20	WCDMA II	RMC 12.2Kbps	Back	10mm	9400	1880	22.16	22.50	1.081	-0.06	0.914	0.988	0.488	0.528
	WCDMA II	RMC 12.2Kbps	Back	10mm	9538	1907.6	21.80	22.50	1.175	-0.14	0.792	0.931	0.419	0.492
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	9262	1852.4	22.50	22.50	1.000	0	0.408	0.408	0.238	0.238
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	22.50	22.50	1.000	0.02	0.855	0.855	0.456	0.456
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	22.16	22.50	1.081	0.16	0.858	0.928	0.454	0.491
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	21.80	22.50	1.175	0.06	0.824	0.968	0.432	0.508
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1513	1752.6	24.93	25.00	1.016	0.07	0.702	0.713	0.398	0.404
21	WCDMA IV	RMC 12.2Kbps	Back	10mm	1513	1752.6	24.93	25.00	1.016	-0.06	0.899	0.914	0.510	0.518
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1312	1712.4	24.53	25.00	1.114	-0.01	0.759	0.846	0.435	0.485
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1413	1732.6	24.63	25.00	1.089	0.04	0.803	0.874	0.460	0.501
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	1513	1752.6	24.93	25.00	1.016	0.07	0.329	0.334	0.196	0.199
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1513	1752.6	24.93	25.00	1.016	0.07	0.766	0.778	0.431	0.438
	WCDMA V	RMC 12.2Kbps	Front	10mm	4233	846.6	24.97	25.00	1.007	-0.05	0.676	0.681	0.533	0.537
	WCDMA V	RMC 12.2Kbps	Back	10mm	4233	846.6	24.97	25.00	1.007	-0.01	0.778	0.783	0.610	0.614
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4233	846.6	24.97	25.00	1.007	-0.08	0.892	0.898	0.625	0.629
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4132	826.4	24.76	25.00	1.057	-0.03	0.898	0.949	0.632	0.668
22	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4182	836.4	24.83	25.00	1.040	0	1.060	1.102	0.742	0.772
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	4233	846.6	24.97	25.00	1.007	0.02	0.682	0.687	0.410	0.413



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	18700	1860	22.38	22.50	1.028	0.15	0.729	0.749	0.401	0.412
	LTE Band 2	20M	QPSK	50	0	Front	10mm	18700	1860	22.38	22.50	1.028	0.08	0.588	0.604	0.323	0.332
	LTE Band 2	20M	QPSK	1	0	Back	10mm	18700	1860	22.38	22.50	1.028	-0.03	0.895	0.920	0.483	0.497
23	LTE Band 2	20M	QPSK	1	0	Back	10mm	18900	1880	22.05	22.50	1.109	-0.03	0.933	1.035	0.499	0.553
	LTE Band 2	20M	QPSK	1	0	Back	10mm	19100	1900	21.54	22.50	1.247	0.18	0.828	1.033	0.435	0.543
	LTE Band 2	20M	QPSK	50	0	Back	10mm	18700	1860	21.35	21.50	1.035	-0.06	0.729	0.755	0.388	0.402
	LTE Band 2	20M	QPSK	100	0	Back	10mm	18700	1860	21.21	21.50	1.069	-0.07	0.710	0.759	0.378	0.404
	LTE Band 2	20M	QPSK	1	0	Left Side	10mm	18700	1860	22.38	22.50	1.028	-0.16	0.426	0.438	0.246	0.253
	LTE Band 2	20M	QPSK	50	0	Left Side	10mm	18700	1860	22.38	22.50	1.028	-0.05	0.326	0.335	0.188	0.193
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	18700	1860	22.38	22.50	1.028	-0.13	0.809	0.832	0.428	0.440
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	18900	1880	22.05	22.50	1.109	0.02	0.735	0.815	0.388	0.430
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	19100	1900	21.54	22.50	1.247	0.07	0.615	0.767	0.324	0.404
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	18700	1860	21.35	21.50	1.035	0.01	0.637	0.659	0.337	0.349
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10mm	18700	1860	21.21	21.50	1.069	0.12	0.697	0.745	0.371	0.397
	LTE Band 4	20M	QPSK	1	0	Front	10mm	20175	1732.5	24.15	25.00	1.216	0.02	0.526	0.640	0.297	0.361
	LTE Band 4	20M	QPSK	50	0	Front	10mm	20175	1732.5	23.29	24.00	1.178	-0.02	0.431	0.508	0.242	0.285
24	LTE Band 4	20M	QPSK	1	0	Back	10mm	20175	1732.5	24.15	25.00	1.216	-0.19	0.582	0.708	0.334	0.406
	LTE Band 4	20M	QPSK	50	0	Back	10mm	20175	1732.5	23.29	24.00	1.178	-0.01	0.475	0.559	0.272	0.320
	LTE Band 4	20M	QPSK	1	0	Left Side	10mm	20175	1732.5	24.15	25.00	1.216	-0.11	0.177	0.215	0.106	0.129
	LTE Band 4	20M	QPSK	50	0	Left Side	10mm	20175	1732.5	23.29	24.00	1.178	-0.06	0.147	0.173	0.088	0.104
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	20175	1732.5	24.15	25.00	1.216	0.18	0.539	0.656	0.302	0.367
	LTE Band 4	20M	QPSK	50	0	Bottom Side	10mm	20175	1732.5	23.29	24.00	1.178	0.14	0.437	0.515	0.244	0.287
	LTE Band 5	10M	QPSK	1	0	Front	10mm	20525	836.5	24.45	25.00	1.135	0.1	0.731	0.830	0.564	0.640
	LTE Band 5	10M	QPSK	25	0	Front	10mm	20525	836.5	23.46	24.00	1.132	-0.12	0.610	0.691	0.477	0.540
	LTE Band 5	10M	QPSK	50	0	Front	10mm	20525	836.5	23.48	24.00	1.127	-0.03	0.564	0.636	0.446	0.503
25	LTE Band 5	10M	QPSK	1	0	Back	10mm	20525	836.5	24.45	25.00	1.135	-0.02	0.816	0.926	0.644	0.731
	LTE Band 5	10M	QPSK	25	0	Back	10mm	20525	836.5	23.46	24.00	1.132	0.01	0.640	0.725	0.505	0.572
	LTE Band 5	10M	QPSK	50	0	Back	10mm	20525	836.5	23.48	24.00	1.127	-0.01	0.621	0.700	0.489	0.551
	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	20525	836.5	24.45	25.00	1.135	-0.18	0.767	0.871	0.542	0.615
	LTE Band 5	10M	QPSK	25	0	Left Side	10mm	20525	836.5	23.46	24.00	1.132	0.02	0.691	0.782	0.485	0.549
	LTE Band 5	10M	QPSK	50	0	Left Side	10mm	20525	836.5	23.48	24.00	1.127	-0.01	0.619	0.698	0.435	0.490
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	20525	836.5	24.45	25.00	1.135	0.18	0.640	0.726	0.392	0.445
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10mm	20525	836.5	23.46	24.00	1.132	0.07	0.570	0.645	0.350	0.396
	LTE Band 7	20M	QPSK	1	0	Front	10mm	20850	2510	21.70	23.00	1.349	-0.14	0.220	0.297	0.114	0.154
	LTE Band 7	20M	QPSK	50	0	Front	10mm	20850	2510	20.66	22.00	1.361	0.12	0.170	0.231	0.087	0.118
26	LTE Band 7	20M	QPSK	1	0	Back	10mm	20850	2510	21.70	23.00	1.349	0.07	0.804	1.085	0.358	0.483
	LTE Band 7	20M	QPSK	1	0	Back	10mm	21100	2535	21.63	23.00	1.371	0.06	0.705	0.966	0.313	0.429
	LTE Band 7	20M	QPSK	1	0	Back	10mm	21350	2560	21.53	23.00	1.403	0.02	0.652	0.915	0.287	0.403
	LTE Band 7	20M	QPSK	50	0	Back	10mm	20850	2510	20.66	22.00	1.361	0.14	0.592	0.806	0.266	0.362
	LTE Band 7	20M	QPSK	50	0	Back	10mm	21100	2535	20.63	22.00	1.371	-0.16	0.600	0.823	0.262	0.359
	LTE Band 7	20M	QPSK	50	0	Back	10mm	21350	2560	20.49	22.00	1.416	0.1	0.557	0.789	0.239	0.338
	LTE Band 7	20M	QPSK	100	0	Back	10mm	20850	2510	20.62	22.00	1.374	0.13	0.638	0.877	0.273	0.375
	LTE Band 7	20M	QPSK	1	0	Left Side	10mm	20850	2510	21.70	23.00	1.349	-0.14	0.155	0.209	0.083	0.112
	LTE Band 7	20M	QPSK	50	0	Left Side	10mm	20850	2510	20.66	22.00	1.361	-0.18	0.127	0.173	0.068	0.093
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	20850	2510	21.70	23.00	1.349	-0.11	0.488	0.658	0.237	0.320
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10mm	20850	2510	20.66	22.00	1.361	-0.06	0.393	0.535	0.190	0.259



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	10mm	23095	707.5	23.00	23.50	1.122	0.16	0.153	0.172	0.123	0.138
	LTE Band 12	10M	QPSK	25	0	Front	10mm	23095	707.5	21.97	22.50	1.130	0.01	0.110	0.124	0.088	0.099
27	LTE Band 12	10M	QPSK	1	0	Back	10mm	23095	707.5	23.00	23.50	1.122	0	0.215	0.241	0.171	0.192
	LTE Band 12	10M	QPSK	25	0	Back	10mm	23095	707.5	21.97	22.50	1.130	-0.16	0.160	0.181	0.126	0.142
	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	23095	707.5	23.00	23.50	1.122	-0.01	0.212	0.238	0.151	0.169
	LTE Band 12	10M	QPSK	25	0	Left Side	10mm	23095	707.5	21.97	22.50	1.130	-0.02	0.176	0.199	0.125	0.141
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	23095	707.5	23.00	23.50	1.122	0.11	0.078	0.088	0.047	0.053
	LTE Band 12	10M	QPSK	25	0	Bottom Side	10mm	23095	707.5	21.97	22.50	1.130	-0.18	0.065	0.073	0.039	0.044
	LTE Band 13	10M	QPSK	1	0	Front	10mm	23230	782	24.20	24.50	1.072	-0.03	0.282	0.302	0.226	0.242
	LTE Band 13	10M	QPSK	25	0	Front	10mm	23230	782	23.25	23.50	1.059	-0.18	0.225	0.238	0.180	0.191
	LTE Band 13	10M	QPSK	1	0	Back	10mm	23230	782	24.20	24.50	1.072	0	0.339	0.363	0.249	0.267
	LTE Band 13	10M	QPSK	25	0	Back	10mm	23230	782	23.25	23.50	1.059	0	0.264	0.280	0.209	0.221
28	LTE Band 13	10M	QPSK	1	0	Left Side	10mm	23230	782	24.20	24.50	1.072	0	0.375	0.402	0.252	0.270
	LTE Band 13	10M	QPSK	25	0	Left Side	10mm	23230	782	23.25	23.50	1.059	0.17	0.278	0.294	0.194	0.205
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10mm	23230	782	24.20	24.50	1.072	0.04	0.198	0.212	0.121	0.130
	LTE Band 13	10M	QPSK	25	0	Bottom Side	10mm	23230	782	23.25	23.50	1.059	0.05	0.164	0.174	0.100	0.106
	LTE Band 17	10M	QPSK	1	0	Front	10mm	23790	710	23.06	24.50	1.393	-0.05	0.143	0.199	0.115	0.160
	LTE Band 17	10M	QPSK	25	0	Front	10mm	23790	710	22.00	23.50	1.413	-0.16	0.119	0.168	0.096	0.136
	LTE Band 17	10M	QPSK	1	0	Back	10mm	23790	710	23.06	24.50	1.393	-0.05	0.210	0.293	0.147	0.205
	LTE Band 17	10M	QPSK	25	0	Back	10mm	23790	710	22.00	23.50	1.413	0.01	0.172	0.243	0.137	0.194
29	LTE Band 17	10M	QPSK	1	0	Left Side	10mm	23790	710	23.06	24.50	1.393	0.02	0.218	0.304	0.156	0.217
	LTE Band 17	10M	QPSK	25	0	Left Side	10mm	23790	710	22.00	23.50	1.413	0.01	0.185	0.261	0.132	0.186
	LTE Band 17	10M	QPSK	1	0	Bottom Side	10mm	23790	710	23.06	24.50	1.393	-0.11	0.076	0.106	0.046	0.064
	LTE Band 17	10M	QPSK	25	0	Bottom Side	10mm	23790	710	22.00	23.50	1.413	-0.19	0.070	0.099	0.042	0.059

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	1	2412	16.74	17.00	1.062	100	1.000	-0.08	0.168	0.178	0.092	0.098
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	16.74	17.00	1.062	100	1.000	0.08	0.200	0.212	0.106	0.113
30	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	6	2437	16.72	17.00	1.067	100	1.000	-0.15	0.273	0.291	0.148	0.158
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	11	2462	16.68	17.00	1.076	100	1.000	0.09	0.198	0.213	0.105	0.113
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	1	2412	16.74	17.00	1.062	100	1.000	-0.05	0.121	0.128	0.056	0.059
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	1	2412	16.74	17.00	1.062	100	1.000	-0.07	0.126	0.134	0.062	0.066
	WLAN5GHz	802.11a 6Mbps	Front	10mm	36	5180	12.80	13.00	1.047	97.22	1.029	-0.17	0.026	0.028	0.014	0.015
	WLAN5GHz	802.11a 6Mbps	Back	10mm	36	5180	12.80	13.00	1.047	97.22	1.029	0	0.294	0.317	0.097	0.104
31	WLAN5GHz	802.11a 6Mbps	Back	10mm	44	5220	12.62	13.00	1.091	97.22	1.029	-0.07	0.286	0.321	0.095	0.107
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	36	5180	12.80	13.00	1.047	97.22	1.029	0.03	0.114	0.123	0.051	0.055
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	36	5180	12.80	13.00	1.047	97.22	1.029	-0.12	0.149	0.160	0.055	0.059
	WLAN5GHz	802.11a 6Mbps	Front	10mm	149	5745	12.94	13.00	1.013	97.22	1.029	-0.14	0.102	0.106	0.056	0.059
32	WLAN5GHz	802.11a 6Mbps	Back	10mm	149	5745	12.94	13.00	1.013	97.22	1.029	0	0.312	0.325	0.114	0.119
	WLAN5GHz	802.11a 6Mbps	Back	10mm	157	5785	12.72	13.00	1.066	97.22	1.029	0.15	0.262	0.287	0.102	0.112
	WLAN5GHz	802.11a 6Mbps	Back	10mm	165	5825	12.89	13.00	1.025	97.22	1.029	0.13	0.294	0.310	0.113	0.119
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	149	5745	12.94	13.00	1.013	97.22	1.029	0.01	0.131	0.137	0.070	0.073
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	149	5745	12.94	13.00	1.013	97.22	1.029	0.16	0.161	0.168	0.076	0.079



**14.3 Product Specific SAR**

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Front	0mm	56	5280	12.81	13.00	1.045	97.22	1.029	-0.15	0.134	0.144
33	WLAN5GHz	802.11a 6Mbps	Back	0mm	56	5280	12.81	13.00	1.045	97.22	1.029	0.17	0.737	0.792
	WLAN5GHz	802.11a 6Mbps	Back	0mm	64	5320	12.72	13.00	1.066	97.22	1.029	-0.19	0.661	0.725
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	56	5280	12.81	13.00	1.045	97.22	1.029	-0.04	0.228	0.245
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	56	5280	12.81	13.00	1.045	97.22	1.029	0.1	0.318	0.342
	WLAN5GHz	802.11a 6Mbps	Front	0mm	132	5660	12.78	13.00	1.052	97.22	1.029	-0.1	0.053	0.057
	WLAN5GHz	802.11a 6Mbps	Back	0mm	132	5660	12.78	13.00	1.052	97.22	1.029	0.12	0.769	0.832
	WLAN5GHz	802.11a 6Mbps	Back	0mm	100	5500	12.73	13.00	1.064	97.22	1.029	0.12	0.568	0.622
	WLAN5GHz	802.11a 6Mbps	Back	0mm	116	5580	12.72	13.00	1.066	97.22	1.029	0.02	0.657	0.721
34	WLAN5GHz	802.11a 6Mbps	Back	0mm	144	5720	12.57	13.00	1.103	97.22	1.029	0.01	0.734	0.833
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	132	5660	12.78	13.00	1.052	97.22	1.029	0.1	0.098	0.106
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	132	5660	12.78	13.00	1.052	97.22	1.029	0	0.129	0.140



**14.4 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	15mm	251	848.8	26.98	28.00	1.265	0.01	0.439	0.555	0.344	0.435
35	GSM850	GPRS (4 Tx slots)	Back	15mm	251	848.8	26.98	28.00	1.265	0.04	0.462	0.584	0.362	0.458
	GSM850	GPRS (4 Tx slots)	Back	15mm	128	824.2	26.81	28.00	1.315	0	0.280	0.368	0.219	0.288
	GSM850	GPRS (4 Tx slots)	Back	15mm	189	836.4	26.88	28.00	1.294	-0.03	0.269	0.348	0.210	0.272
	GSM1900	GPRS (4 Tx slots)	Front	15mm	661	1880	24.60	25.00	1.096	-0.03	0.247	0.271	0.146	0.160
	GSM1900	GPRS (4 Tx slots)	Back	15mm	661	1880	24.60	25.00	1.096	0	0.323	0.354	0.189	0.207
	GSM1900	GPRS (4 Tx slots)	Back	15mm	512	1850.2	24.12	25.00	1.225	0.05	0.247	0.302	0.145	0.178
36	GSM1900	GPRS (4 Tx slots)	Back	15mm	810	1909.8	24.38	25.00	1.153	0	0.407	0.469	0.234	0.270

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	15mm	9262	1852.4	22.50	22.50	1.000	-0.06	0.357	0.357	0.212	0.212
	WCDMA II	RMC 12.2Kbps	Back	15mm	9262	1852.4	22.50	22.50	1.000	-0.14	0.462	0.462	0.271	0.271
37	WCDMA II	RMC 12.2Kbps	Back	15mm	9400	1880	22.16	22.50	1.081	-0.16	0.446	0.482	0.258	0.279
	WCDMA II	RMC 12.2Kbps	Back	15mm	9538	1907.6	21.80	22.50	1.175	-0.14	0.374	0.439	0.215	0.253
	WCDMA IV	RMC 12.2Kbps	Front	15mm	1513	1752.6	24.93	25.00	1.016	0.14	0.397	0.403	0.242	0.246
38	WCDMA IV	RMC 12.2Kbps	Back	15mm	1513	1752.6	24.93	25.00	1.016	0.01	0.429	0.436	0.262	0.266
	WCDMA IV	RMC 12.2Kbps	Back	15mm	1312	1712.4	24.53	25.00	1.114	-0.09	0.362	0.403	0.224	0.250
	WCDMA IV	RMC 12.2Kbps	Back	15mm	1413	1732.6	24.63	25.00	1.089	0.02	0.388	0.423	0.238	0.259
	WCDMA V	RMC 12.2Kbps	Front	15mm	4233	846.6	24.97	25.00	1.007	-0.12	0.709	0.714	0.555	0.559
	WCDMA V	RMC 12.2Kbps	Back	15mm	4233	846.6	24.97	25.00	1.007	-0.04	0.754	0.759	0.588	0.592
	WCDMA V	RMC 12.2Kbps	Back	15mm	4132	826.4	24.76	25.00	1.057	0	0.776	0.820	0.609	0.644
39	WCDMA V	RMC 12.2Kbps	Back	15mm	4182	836.4	24.83	25.00	1.040	0.03	0.924	0.961	0.722	0.751





<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Cap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	15mm	18700	1860	22.38	22.50	1.028	0.11	0.354	0.364	0.225	0.231
	LTE Band 2	20M	QPSK	50	0	Front	15mm	18700	1860	21.35	21.50	1.035	0.07	0.273	0.283	0.164	0.170
	LTE Band 2	20M	QPSK	1	0	Back	15mm	18700	1860	22.38	22.50	1.028	-0.04	0.463	0.476	0.270	0.278
40	LTE Band 2	20M	QPSK	1	0	Back	15mm	18900	1880	22.05	22.50	1.109	0	0.471	0.522	0.273	0.303
	LTE Band 2	20M	QPSK	1	0	Back	15mm	19100	1900	21.54	22.50	1.247	-0.02	0.415	0.518	0.240	0.299
	LTE Band 2	20M	QPSK	50	0	Back	15mm	18700	1860	21.35	21.50	1.035	-0.03	0.379	0.392	0.220	0.228
	LTE Band 4	20M	QPSK	1	0	Front	15mm	20175	1732.5	24.15	25.00	1.216	0.05	0.255	0.310	0.157	0.191
	LTE Band 4	20M	QPSK	50	0	Front	15mm	20175	1732.5	23.29	24.00	1.178	-0.01	0.208	0.245	0.128	0.151
41	LTE Band 4	20M	QPSK	1	0	Back	15mm	20175	1732.5	24.15	25.00	1.216	0	0.291	0.354	0.180	0.219
	LTE Band 4	20M	QPSK	50	0	Back	15mm	20175	1732.5	23.29	24.00	1.178	0.03	0.238	0.280	0.147	0.173
	LTE Band 5	10M	QPSK	1	0	Front	15mm	20525	836.5	24.45	25.00	1.135	0.18	0.744	0.844	0.587	0.666
	LTE Band 5	10M	QPSK	25	0	Front	15mm	20525	836.5	23.46	24.00	1.132	0.02	0.638	0.722	0.502	0.568
	LTE Band 5	10M	QPSK	50	0	Front	15mm	20525	836.5	23.48	24.00	1.127	-0.01	0.586	0.661	0.461	0.520
42	LTE Band 5	10M	QPSK	1	0	Back	15mm	20525	836.5	24.45	25.00	1.135	-0.06	0.795	0.902	0.623	0.707
	LTE Band 5	10M	QPSK	25	0	Back	15mm	20525	836.5	23.46	24.00	1.132	0.03	0.657	0.744	0.513	0.581
	LTE Band 5	10M	QPSK	50	0	Back	15mm	20525	836.5	23.48	24.00	1.127	-0.02	0.636	0.717	0.496	0.559
	LTE Band 7	20M	QPSK	1	0	Front	15mm	20850	2510	21.70	23.00	1.349	-0.01	0.123	0.166	0.068	0.092
	LTE Band 7	20M	QPSK	50	0	Front	15mm	20850	2510	20.66	22.00	1.361	-0.13	0.106	0.144	0.058	0.079
43	LTE Band 7	20M	QPSK	1	0	Back	15mm	20850	2510	21.70	23.00	1.349	-0.03	0.372	0.502	0.184	0.248
	LTE Band 7	20M	QPSK	1	0	Back	15mm	21100	2535	21.63	23.00	1.371	-0.11	0.338	0.463	0.165	0.226
	LTE Band 7	20M	QPSK	1	0	Back	15mm	21350	2560	21.53	23.00	1.403	-0.06	0.303	0.425	0.148	0.208
	LTE Band 7	20M	QPSK	50	0	Back	15mm	20850	2510	20.66	22.00	1.361	-0.19	0.307	0.418	0.151	0.206
	LTE Band 12	10M	QPSK	1	0	Front	15mm	23095	707.5	23.00	23.50	1.122	-0.11	0.129	0.145	0.103	0.116
	LTE Band 12	10M	QPSK	25	0	Front	15mm	23095	707.5	21.97	22.50	1.130	0.1	0.093	0.105	0.075	0.085
44	LTE Band 12	10M	QPSK	1	0	Back	15mm	23095	707.5	23.00	23.50	1.122	-0.1	0.174	0.195	0.138	0.155
	LTE Band 12	10M	QPSK	25	0	Back	15mm	23095	707.5	21.97	22.50	1.130	0.01	0.149	0.168	0.117	0.132
	LTE Band 13	10M	QPSK	1	0	Front	15mm	23230	782	24.20	24.50	1.072	0.01	0.301	0.323	0.238	0.255
	LTE Band 13	10M	QPSK	25	0	Front	15mm	23230	782	23.25	23.50	1.059	-0.09	0.240	0.254	0.190	0.201
45	LTE Band 13	10M	QPSK	1	0	Back	15mm	23230	782	24.20	24.50	1.072	0	0.333	0.357	0.261	0.280
	LTE Band 13	10M	QPSK	25	0	Back	15mm	23230	782	23.25	23.50	1.059	0.02	0.261	0.276	0.204	0.216
	LTE Band 17	10M	QPSK	1	0	Front	15mm	23790	710	23.06	24.50	1.393	0	0.123	0.171	0.098	0.137
	LTE Band 17	10M	QPSK	25	0	Front	15mm	23790	710	22.00	23.50	1.413	-0.13	0.103	0.145	0.083	0.117
46	LTE Band 17	10M	QPSK	1	0	Back	15mm	23790	710	23.06	24.50	1.393	-0.13	0.167	0.233	0.133	0.185
	LTE Band 17	10M	QPSK	25	0	Back	15mm	23790	710	22.00	23.50	1.413	-0.03	0.139	0.196	0.110	0.155



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	1	2412	16.74	17.00	1.062	100	1.000	0.02	0.095	0.101	0.053	0.056
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	1	2412	16.74	17.00	1.062	100	1.000	-0.02	0.104	0.110	0.051	0.054
47	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	6	2437	16.72	17.00	1.067	100	1.000	0.06	0.140	0.149	0.075	0.080
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	11	2462	16.68	17.00	1.076	100	1.000	0.14	0.108	0.116	0.057	0.061
	WLAN5GHz	802.11a 6Mbps	Front	15mm	56	5280	12.81	13.00	1.045	97.22	1.029	-0.18	0.040	0.043	0.014	0.015
48	WLAN5GHz	802.11a 6Mbps	Back	15mm	56	5280	12.81	13.00	1.045	97.22	1.029	-0.08	0.177	0.190	0.062	0.067
	WLAN5GHz	802.11a 6Mbps	Back	15mm	64	5320	12.72	13.00	1.066	97.22	1.029	-0.05	0.131	0.144	0.045	0.049
	WLAN5GHz	802.11a 6Mbps	Front	15mm	132	5660	12.78	13.00	1.052	97.22	1.029	-0.1	0.020	0.022	0.008	0.009
	WLAN5GHz	802.11a 6Mbps	Back	15mm	132	5660	12.78	13.00	1.052	97.22	1.029	0	0.133	0.144	0.043	0.047
	WLAN5GHz	802.11a 6Mbps	Back	15mm	100	5500	12.73	13.00	1.064	97.22	1.029	0.01	0.137	0.150	0.044	0.048
49	WLAN5GHz	802.11a 6Mbps	Back	15mm	116	5580	12.72	13.00	1.066	97.22	1.029	0.1	0.152	0.167	0.050	0.055
	WLAN5GHz	802.11a 6Mbps	Back	15mm	144	5720	12.57	13.00	1.103	97.22	1.029	0.11	0.125	0.142	0.039	0.044
	WLAN5GHz	802.11a 6Mbps	Front	15mm	149	5745	12.94	13.00	1.013	97.22	1.029	-0.13	0.013	0.014	0.005	0.005
50	WLAN5GHz	802.11a 6Mbps	Back	15mm	149	5745	12.94	13.00	1.013	97.22	1.029	-0.1	0.136	0.142	0.045	0.047
	WLAN5GHz	802.11a 6Mbps	Back	15mm	157	5785	12.72	13.00	1.066	97.22	1.029	0.13	0.111	0.122	0.036	0.039
	WLAN5GHz	802.11a 6Mbps	Back	15mm	165	5825	12.89	13.00	1.025	97.22	1.029	-0.02	0.134	0.141	0.044	0.046

**14.5 Repeated SAR Measurement**

No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	6	2437	16.72	17.00	1.067	100	1.000	0.06	0.970		1.035
2nd	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	6	2437	16.72	17.00	1.067	100	1.000	-0.1	0.961	1.01	1.025
1st	WCDMA IV	RMC 12.2Kbps	Back	10mm	1513	1752.6	24.93	25.00	1.016	-	1.000	-0.06	0.899		0.914
2nd	WCDMA IV	RMC 12.2Kbps	Back	10mm	1513	1752.6	24.93	25.00	1.016	-	1.000	0.12	0.821	1.10	0.834
1st	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4182	836.4	24.83	25.00	1.040	-	1.000	0	1.060		1.102
2nd	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4182	836.4	24.83	25.00	1.040	-	1.000	-0.01	1.050	1.01	1.092
1st	LTE Band 2	20M_QPSK_1_0	Back	10mm	18900	1880	22.05	22.50	1.109	-	1.000	-0.03	0.933		1.035
2nd	LTE Band 2	20M_QPSK_1_0	Back	10mm	18900	1880	22.05	22.50	1.109	-	1.000	0.04	0.822	1.13	0.912
1st	LTE Band 7	20M_QPSK_1_0	Back	10mm	20850	2510	21.70	23.00	1.349	-	1.000	0.07	0.804		1.085
2nd	LTE Band 7	20M_QPSK_1_0	Back	10mm	20850	2510	21.70	23.00	1.349	-	1.000	-0.11	0.797	1.01	1.075

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

### 15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset				Notes
		Head	Body-worn	Hotspot	Product Specific	
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		Yes	
2.	GPRS/EDGE + WLAN2.4GHz	Yes*	Yes*	Yes	Yes	*VOIP applications are considered.
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes	
4.	LTE + WLAN2.4GHz	Yes*	Yes*	Yes	Yes	*VOIP applications are considered.
5.	GSM Voice + Bluetooth	Yes^	Yes		Yes	^Bluetooth Tethering is considered.
6.	GPRS/EDGE + Bluetooth	Yes*^	Yes*	Yes^	Yes	*VOIP applications are considered. ^Bluetooth Tethering is considered.
7.	WCDMA+ Bluetooth	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered.
8.	LTE + Bluetooth	Yes*^	Yes*	Yes^	Yes	*VOIP applications are considered. ^Bluetooth Tethering is considered.
9.	GSM Voice + WLAN5GHz	Yes	Yes		Yes	
10.	GPRS/EDGE + WLAN5GHz	Yes*	Yes*	Yes	Yes	*VOIP applications are considered.
11.	WCDMA + WLAN5GHz	Yes	Yes	Yes	Yes	
12.	LTE + WLAN5GHz	Yes*	Yes*	Yes	Yes	*VOIP applications are considered.

**General Note:**

- In this report, the 10g SAR results which is submitted voluntarily.
- This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.
- For all different cellular bands share the same antenna, and can't operating simultaneously.
- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - Scalar SAR summation < 1.6W/kg.
  - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
  - The SPLSR calculated results please refer to section 15.5.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Hotspot	Body worn
	Test separation	10 mm	15 mm
7.0 dBm	Estimated 1g SAR (W/kg)	0.105 W/kg	0.07 W/kg

Bluetooth Max Power	Exposure Position	Product Specific
	Test separation	< 5 mm
7.0 dBm	Estimated 10g SAR (W/kg)	0.084 W/kg



15.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)					
GSM	GSM850	Right Cheek	0.535	0.382	0.244	0.039	0.92	0.78	0.57		
		Right Tilted	0.296	0.308	0.260	0.030	0.60	0.56	0.33		
		Left Cheek	0.641	1.035	0.386	0.093	1.68	1.03	0.73	0.030	Case 1
		Left Tilted	0.345	0.485	0.333	0.045	0.83	0.68	0.39		
	GSM1900	Right Cheek	0.146	0.382	0.244	0.039	0.53	0.39	0.19		
		Right Tilted	0.106	0.308	0.260	0.030	0.41	0.37	0.14		
		Left Cheek	0.243	1.035	0.386	0.093	1.28	0.63	0.34		
		Left Tilted	0.055	0.485	0.333	0.045	0.54	0.39	0.10		
WCDMA	WCDMA II	Right Cheek	0.135	0.382	0.244	0.039	0.52	0.38	0.17		
		Right Tilted	0.124	0.308	0.260	0.030	0.43	0.38	0.15		
		Left Cheek	0.217	1.035	0.386	0.093	1.25	0.60	0.31		
		Left Tilted	0.065	0.485	0.333	0.045	0.55	0.40	0.11		
	WCDMA IV	Right Cheek	0.162	0.382	0.244	0.039	0.54	0.41	0.20		
		Right Tilted	0.071	0.308	0.260	0.030	0.38	0.33	0.10		
		Left Cheek	0.234	1.035	0.386	0.093	1.27	0.62	0.33		
		Left Tilted	0.070	0.485	0.333	0.045	0.56	0.40	0.12		
	WCDMA V	Right Cheek	0.566	0.382	0.244	0.039	0.95	0.81	0.61		
		Right Tilted	0.323	0.308	0.260	0.030	0.63	0.58	0.35		
		Left Cheek	0.653	1.035	0.386	0.093	1.69	1.04	0.75	0.030	Case 2
		Left Tilted	0.365	0.485	0.333	0.045	0.85	0.70	0.41		
LTE	LTE Band 2	Right Cheek	0.203	0.382	0.244	0.039	0.59	0.45	0.24		
		Right Tilted	0.137	0.308	0.260	0.030	0.45	0.40	0.17		
		Left Cheek	0.229	1.035	0.386	0.093	1.26	0.62	0.32		
		Left Tilted	0.083	0.485	0.333	0.045	0.57	0.42	0.13		
	LTE Band 4	Right Cheek	0.156	0.382	0.244	0.039	0.54	0.40	0.20		
		Right Tilted	0.062	0.308	0.260	0.030	0.37	0.32	0.09		
		Left Cheek	0.196	1.035	0.386	0.093	1.23	0.58	0.29		
		Left Tilted	0.061	0.485	0.333	0.045	0.55	0.39	0.11		
	LTE Band 5	Right Cheek	0.557	0.382	0.244	0.039	0.94	0.80	0.60		
		Right Tilted	0.301	0.308	0.260	0.030	0.61	0.56	0.33		
		Left Cheek	0.575	1.035	0.386	0.093	1.61	0.96	0.67	0.030	Case 3
		Left Tilted	0.350	0.485	0.333	0.045	0.84	0.68	0.40		
	LTE Band 7	Right Cheek	0.124	0.382	0.244	0.039	0.51	0.37	0.16		
		Right Tilted	0.105	0.308	0.260	0.030	0.41	0.37	0.14		
		Left Cheek	0.188	1.035	0.386	0.093	1.22	0.57	0.28		
		Left Tilted	0.090	0.485	0.333	0.045	0.58	0.42	0.14		
	LTE Band 12	Right Cheek	0.102	0.382	0.244	0.039	0.48	0.35	0.14		
		Right Tilted	0.056	0.308	0.260	0.030	0.36	0.32	0.09		
		Left Cheek	0.110	1.035	0.386	0.093	1.15	0.50	0.20		
		Left Tilted	0.058	0.485	0.333	0.045	0.54	0.39	0.10		
	LTE Band 13	Right Cheek	0.263	0.382	0.244	0.039	0.65	0.51	0.30		
		Right Tilted	0.129	0.308	0.260	0.030	0.44	0.39	0.16		
		Left Cheek	0.250	1.035	0.386	0.093	1.29	0.64	0.34		
		Left Tilted	0.150	0.485	0.333	0.045	0.64	0.48	0.20		
	LTE Band 17	Right Cheek	0.128	0.382	0.244	0.039	0.51	0.37	0.17		
		Right Tilted	0.074	0.308	0.260	0.030	0.38	0.33	0.10		
		Left Cheek	0.142	1.035	0.386	0.093	1.18	0.53	0.24		
		Left Tilted	0.078	0.485	0.333	0.045	0.56	0.41	0.12		



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.424	0.206	0.078	0.018	<b>0.63</b>	<b>0.50</b>	<b>0.44</b>
		Right Tilted	0.238	0.164	0.084	0.012	<b>0.40</b>	<b>0.32</b>	<b>0.25</b>
		Left Cheek	0.506	0.544	0.124	0.044	<b>1.05</b>	<b>0.63</b>	<b>0.55</b>
		Left Tilted	0.276	0.248	0.104	0.023	<b>0.52</b>	<b>0.38</b>	<b>0.30</b>
	GSM1900	Right Cheek	0.098	0.206	0.078	0.018	<b>0.30</b>	<b>0.18</b>	<b>0.12</b>
		Right Tilted	0.069	0.164	0.084	0.012	<b>0.23</b>	<b>0.15</b>	<b>0.08</b>
		Left Cheek	0.161	0.544	0.124	0.044	<b>0.71</b>	<b>0.29</b>	<b>0.21</b>
		Left Tilted	0.034	0.248	0.104	0.023	<b>0.28</b>	<b>0.14</b>	<b>0.06</b>
WCDMA	WCDMA II	Right Cheek	0.095	0.206	0.078	0.018	<b>0.30</b>	<b>0.17</b>	<b>0.11</b>
		Right Tilted	0.079	0.164	0.084	0.012	<b>0.24</b>	<b>0.16</b>	<b>0.09</b>
		Left Cheek	0.146	0.544	0.124	0.044	<b>0.69</b>	<b>0.27</b>	<b>0.19</b>
		Left Tilted	0.044	0.248	0.104	0.023	<b>0.29</b>	<b>0.15</b>	<b>0.07</b>
	WCDMA IV	Right Cheek	0.107	0.206	0.078	0.018	<b>0.31</b>	<b>0.19</b>	<b>0.13</b>
		Right Tilted	0.047	0.164	0.084	0.012	<b>0.21</b>	<b>0.13</b>	<b>0.06</b>
		Left Cheek	0.162	0.544	0.124	0.044	<b>0.71</b>	<b>0.29</b>	<b>0.21</b>
		Left Tilted	0.044	0.248	0.104	0.023	<b>0.29</b>	<b>0.15</b>	<b>0.07</b>
	WCDMA V	Right Cheek	0.449	0.206	0.078	0.018	<b>0.66</b>	<b>0.53</b>	<b>0.47</b>
		Right Tilted	0.262	0.164	0.084	0.012	<b>0.43</b>	<b>0.35</b>	<b>0.27</b>
		Left Cheek	0.527	0.544	0.124	0.044	<b>1.07</b>	<b>0.65</b>	<b>0.57</b>
		Left Tilted	0.293	0.248	0.104	0.023	<b>0.54</b>	<b>0.40</b>	<b>0.32</b>
LTE	LTE Band 2	Right Cheek	0.140	0.206	0.078	0.018	<b>0.35</b>	<b>0.22</b>	<b>0.16</b>
		Right Tilted	0.086	0.164	0.084	0.012	<b>0.25</b>	<b>0.17</b>	<b>0.10</b>
		Left Cheek	0.153	0.544	0.124	0.044	<b>0.70</b>	<b>0.28</b>	<b>0.20</b>
		Left Tilted	0.051	0.248	0.104	0.023	<b>0.30</b>	<b>0.16</b>	<b>0.07</b>
	LTE Band 4	Right Cheek	0.100	0.206	0.078	0.018	<b>0.31</b>	<b>0.18</b>	<b>0.12</b>
		Right Tilted	0.040	0.164	0.084	0.012	<b>0.20</b>	<b>0.12</b>	<b>0.05</b>
		Left Cheek	0.135	0.544	0.124	0.044	<b>0.68</b>	<b>0.26</b>	<b>0.18</b>
		Left Tilted	0.038	0.248	0.104	0.023	<b>0.29</b>	<b>0.14</b>	<b>0.06</b>
	LTE Band 5	Right Cheek	0.440	0.206	0.078	0.018	<b>0.65</b>	<b>0.52</b>	<b>0.46</b>
		Right Tilted	0.245	0.164	0.084	0.012	<b>0.41</b>	<b>0.33</b>	<b>0.26</b>
		Left Cheek	0.456	0.544	0.124	0.044	<b>1.00</b>	<b>0.58</b>	<b>0.50</b>
		Left Tilted	0.283	0.248	0.104	0.023	<b>0.53</b>	<b>0.39</b>	<b>0.31</b>
	LTE Band 7	Right Cheek	0.074	0.206	0.078	0.018	<b>0.28</b>	<b>0.15</b>	<b>0.09</b>
		Right Tilted	0.059	0.164	0.084	0.012	<b>0.22</b>	<b>0.14</b>	<b>0.07</b>
		Left Cheek	0.109	0.544	0.124	0.044	<b>0.65</b>	<b>0.23</b>	<b>0.15</b>
		Left Tilted	0.054	0.248	0.104	0.023	<b>0.30</b>	<b>0.16</b>	<b>0.08</b>
	LTE Band 12	Right Cheek	0.083	0.206	0.078	0.018	<b>0.29</b>	<b>0.16</b>	<b>0.10</b>
		Right Tilted	0.048	0.164	0.084	0.012	<b>0.21</b>	<b>0.13</b>	<b>0.06</b>
		Left Cheek	0.090	0.544	0.124	0.044	<b>0.63</b>	<b>0.21</b>	<b>0.13</b>
		Left Tilted	0.049	0.248	0.104	0.023	<b>0.30</b>	<b>0.15</b>	<b>0.07</b>
	LTE Band 13	Right Cheek	0.208	0.206	0.078	0.018	<b>0.41</b>	<b>0.29</b>	<b>0.23</b>
		Right Tilted	0.106	0.164	0.084	0.012	<b>0.27</b>	<b>0.19</b>	<b>0.12</b>
		Left Cheek	0.205	0.544	0.124	0.044	<b>0.75</b>	<b>0.33</b>	<b>0.25</b>
		Left Tilted	0.124	0.248	0.104	0.023	<b>0.37</b>	<b>0.23</b>	<b>0.15</b>
LTE Band 17	Right Cheek	0.104	0.206	0.078	0.018	<b>0.31</b>	<b>0.18</b>	<b>0.12</b>	
	Right Tilted	0.060	0.164	0.084	0.012	<b>0.22</b>	<b>0.14</b>	<b>0.07</b>	
	Left Cheek	0.117	0.544	0.124	0.044	<b>0.66</b>	<b>0.24</b>	<b>0.16</b>	
	Left Tilted	0.065	0.248	0.104	0.023	<b>0.31</b>	<b>0.17</b>	<b>0.09</b>	



**15.2 Hotspot Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850	Front	0.704	0.178	0.106	0.105	<b>0.88</b>	<b>0.81</b>	<b>0.81</b>
		Back	0.773	0.291	0.325	0.105	<b>1.06</b>	<b>1.10</b>	<b>0.88</b>
		Left side	0.601				<b>0.60</b>	<b>0.60</b>	<b>0.60</b>
		Right side		0.128	0.137	0.105	<b>0.13</b>	<b>0.14</b>	<b>0.11</b>
		Top side		0.134	0.168	0.105	<b>0.13</b>	<b>0.17</b>	<b>0.11</b>
		Bottom side	0.694				<b>0.69</b>	<b>0.69</b>	<b>0.69</b>
	GSM1900	Front	0.583	0.178	0.106	0.105	<b>0.76</b>	<b>0.69</b>	<b>0.69</b>
		Back	0.963	0.291	0.325	0.105	<b>1.25</b>	<b>1.29</b>	<b>1.07</b>
		Left side	0.260				<b>0.26</b>	<b>0.26</b>	<b>0.26</b>
		Right side		0.128	0.137	0.105	<b>0.13</b>	<b>0.14</b>	<b>0.11</b>
		Top side		0.134	0.168	0.105	<b>0.13</b>	<b>0.17</b>	<b>0.11</b>
		Bottom side	0.671				<b>0.67</b>	<b>0.67</b>	<b>0.67</b>
WCDMA	WCDMA II	Front	0.715	0.178	0.106	0.105	<b>0.89</b>	<b>0.82</b>	<b>0.82</b>
		Back	0.988	0.291	0.325	0.105	<b>1.28</b>	<b>1.31</b>	<b>1.09</b>
		Left side	0.408				<b>0.41</b>	<b>0.41</b>	<b>0.41</b>
		Right side		0.128	0.137	0.105	<b>0.13</b>	<b>0.14</b>	<b>0.11</b>
		Top side		0.134	0.168	0.105	<b>0.13</b>	<b>0.17</b>	<b>0.11</b>
		Bottom side	0.968				<b>0.97</b>	<b>0.97</b>	<b>0.97</b>
	WCDMA IV	Front	0.713	0.178	0.106	0.105	<b>0.89</b>	<b>0.82</b>	<b>0.82</b>
		Back	0.914	0.291	0.325	0.105	<b>1.21</b>	<b>1.24</b>	<b>1.02</b>
		Left side	0.334				<b>0.33</b>	<b>0.33</b>	<b>0.33</b>
		Right side		0.128	0.137	0.105	<b>0.13</b>	<b>0.14</b>	<b>0.11</b>
		Top side		0.134	0.168	0.105	<b>0.13</b>	<b>0.17</b>	<b>0.11</b>
		Bottom side	0.778				<b>0.78</b>	<b>0.78</b>	<b>0.78</b>
	WCDMA V	Front	0.681	0.178	0.106	0.105	<b>0.86</b>	<b>0.79</b>	<b>0.79</b>
		Back	0.783	0.291	0.325	0.105	<b>1.07</b>	<b>1.11</b>	<b>0.89</b>
		Left side	1.102				<b>1.10</b>	<b>1.10</b>	<b>1.10</b>
		Right side		0.128	0.137	0.105	<b>0.13</b>	<b>0.14</b>	<b>0.11</b>
		Top side		0.134	0.168	0.105	<b>0.13</b>	<b>0.17</b>	<b>0.11</b>
		Bottom side	0.687				<b>0.69</b>	<b>0.69</b>	<b>0.69</b>





WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)				
LTE	LTE Band 2	Front	0.749	0.178	0.106	0.105	0.93	0.86	0.85
		Back	1.035	0.291	0.325	0.105	1.33	1.36	1.14
		Left side	0.438				0.44	0.44	0.44
		Right side		0.128	0.137	0.105	0.13	0.14	0.11
		Top side		0.134	0.168	0.105	0.13	0.17	0.11
		Bottom side	0.832				0.83	0.83	0.83
	LTE Band 4	Front	0.640	0.178	0.106	0.105	0.82	0.75	0.75
		Back	0.708	0.291	0.325	0.105	1.00	1.03	0.81
		Left side	0.215				0.22	0.22	0.22
		Right side		0.128	0.137	0.105	0.13	0.14	0.11
		Top side		0.134	0.168	0.105	0.13	0.17	0.11
		Bottom side	0.656				0.66	0.66	0.66
	LTE Band 5	Front	0.830	0.178	0.106	0.105	1.01	0.94	0.94
		Back	0.926	0.291	0.325	0.105	1.22	1.25	1.03
		Left side	0.871				0.87	0.87	0.87
		Right side		0.128	0.137	0.105	0.13	0.14	0.11
		Top side		0.134	0.168	0.105	0.13	0.17	0.11
		Bottom side	0.726				0.73	0.73	0.73
	LTE Band 7	Front	0.297	0.178	0.106	0.105	0.48	0.40	0.40
		Back	1.085	0.291	0.325	0.105	1.38	1.41	1.19
		Left side	0.209				0.21	0.21	0.21
		Right side		0.128	0.137	0.105	0.13	0.14	0.11
		Top side		0.134	0.168	0.105	0.13	0.17	0.11
		Bottom side	0.658				0.66	0.66	0.66
	LTE Band 12	Front	0.172	0.178	0.106	0.105	0.35	0.28	0.28
		Back	0.241	0.291	0.325	0.105	0.53	0.57	0.35
		Left side	0.238				0.24	0.24	0.24
		Right side		0.128	0.137	0.105	0.13	0.14	0.11
		Top side		0.134	0.168	0.105	0.13	0.17	0.11
		Bottom side	0.088				0.09	0.09	0.09
LTE Band 13	Front	0.302	0.178	0.106	0.105	0.48	0.41	0.41	
	Back	0.363	0.291	0.325	0.105	0.65	0.69	0.47	
	Left side	0.402				0.40	0.40	0.40	
	Right side		0.128	0.137	0.105	0.13	0.14	0.11	
	Top side		0.134	0.168	0.105	0.13	0.17	0.11	
	Bottom side	0.212				0.21	0.21	0.21	
LTE Band 17	Front	0.199	0.178	0.106	0.105	0.38	0.31	0.30	
	Back	0.293	0.291	0.325	0.105	0.58	0.62	0.40	
	Left side	0.304				0.30	0.30	0.30	
	Right side		0.128	0.137	0.105	0.13	0.14	0.11	
	Top side		0.134	0.168	0.105	0.13	0.17	0.11	
	Bottom side	0.106				0.11	0.11	0.11	

WWAN Band		Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)
			WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	5GHz WLAN 10g SAR (W/kg)		
GSM	GSM850	Front	0.549	0.098	0.059	<b>0.65</b>	<b>0.61</b>
		Back	0.598	0.158	0.119	<b>0.76</b>	<b>0.72</b>
		Left side	0.421			<b>0.42</b>	<b>0.42</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.416			<b>0.42</b>	<b>0.42</b>
	GSM1900	Front	0.315	0.098	0.059	<b>0.41</b>	<b>0.37</b>
		Back	0.511	0.158	0.119	<b>0.67</b>	<b>0.63</b>
		Left side	0.155			<b>0.16</b>	<b>0.16</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.361			<b>0.36</b>	<b>0.36</b>
WCDMA	WCDMA II	Front	0.391	0.098	0.059	<b>0.49</b>	<b>0.45</b>
		Back	0.528	0.158	0.119	<b>0.69</b>	<b>0.65</b>
		Left side	0.238			<b>0.24</b>	<b>0.24</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.508			<b>0.51</b>	<b>0.51</b>
	WCDMA IV	Front	0.404	0.098	0.059	<b>0.50</b>	<b>0.46</b>
		Back	0.518	0.158	0.119	<b>0.68</b>	<b>0.64</b>
		Left side	0.199			<b>0.20</b>	<b>0.20</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.438			<b>0.44</b>	<b>0.44</b>
	WCDMA V	Front	0.537	0.098	0.059	<b>0.64</b>	<b>0.60</b>
		Back	0.614	0.158	0.119	<b>0.77</b>	<b>0.73</b>
		Left side	0.772			<b>0.77</b>	<b>0.77</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.413			<b>0.41</b>	<b>0.41</b>



WWAN Band	Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	
		WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	5GHz WLAN 10g SAR (W/kg)			
LTE	LTE Band 2	Front	0.412	0.098	0.059	<b>0.51</b>	<b>0.47</b>
		Back	0.553	0.158	0.119	<b>0.71</b>	<b>0.67</b>
		Left side	0.253			<b>0.25</b>	<b>0.25</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.440			<b>0.44</b>	<b>0.44</b>
	LTE Band 4	Front	0.361	0.098	0.059	<b>0.46</b>	<b>0.42</b>
		Back	0.406	0.158	0.119	<b>0.56</b>	<b>0.53</b>
		Left side	0.129			<b>0.13</b>	<b>0.13</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.367			<b>0.37</b>	<b>0.37</b>
	LTE Band 5	Front	0.640	0.098	0.059	<b>0.74</b>	<b>0.70</b>
		Back	0.731	0.158	0.119	<b>0.89</b>	<b>0.85</b>
		Left side	0.615			<b>0.62</b>	<b>0.62</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.445			<b>0.45</b>	<b>0.45</b>
	LTE Band 7	Front	0.154	0.098	0.059	<b>0.25</b>	<b>0.21</b>
		Back	0.483	0.158	0.119	<b>0.64</b>	<b>0.60</b>
		Left side	0.112			<b>0.11</b>	<b>0.11</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.320			<b>0.32</b>	<b>0.32</b>
	LTE Band 12	Front	0.138	0.098	0.059	<b>0.24</b>	<b>0.20</b>
		Back	0.192	0.158	0.119	<b>0.35</b>	<b>0.31</b>
		Left side	0.169			<b>0.17</b>	<b>0.17</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.053			<b>0.05</b>	<b>0.05</b>
	LTE Band 13	Front	0.242	0.098	0.059	<b>0.34</b>	<b>0.30</b>
		Back	0.267	0.158	0.119	<b>0.43</b>	<b>0.39</b>
		Left side	0.270			<b>0.27</b>	<b>0.27</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.130			<b>0.13</b>	<b>0.13</b>
	LTE Band 17	Front	0.160	0.098	0.059	<b>0.26</b>	<b>0.22</b>
		Back	0.205	0.158	0.119	<b>0.36</b>	<b>0.32</b>
		Left side	0.217			<b>0.22</b>	<b>0.22</b>
		Right side		0.059	0.073	<b>0.06</b>	<b>0.07</b>
		Top side		0.066	0.079	<b>0.07</b>	<b>0.08</b>
		Bottom side	0.064			<b>0.06</b>	<b>0.06</b>

**15.3 Product Specific Exposure Conditions**

Exposure Position	1	2	3	4	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
	WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	Estimated 10g SAR (W/kg)			
Product Specific	-	-	0.833	0.084	-	<b>0.83</b>	<b>0.08</b>

**Remark:**

1. According to KDB 648474 D04v01r01, for WWAN / 2.4GHz WLAN hand SAR ("4") was excluded, since WWAN / 2.4GHz WLAN hotspot SAR was < 1.2W/kg.

**15.4 Body-Worn Accessory Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850	Front	0.555	0.101	0.043	0.070	<b>0.66</b>	<b>0.60</b>	<b>0.63</b>
		Back	0.584	0.149	0.190	0.070	<b>0.73</b>	<b>0.77</b>	<b>0.65</b>
	GSM1900	Front	0.271	0.101	0.043	0.070	<b>0.37</b>	<b>0.31</b>	<b>0.34</b>
		Back	0.469	0.149	0.190	0.070	<b>0.62</b>	<b>0.66</b>	<b>0.54</b>
WCDMA	WCDMA II	Front	0.357	0.101	0.043	0.070	<b>0.46</b>	<b>0.40</b>	<b>0.43</b>
		Back	0.482	0.149	0.190	0.070	<b>0.63</b>	<b>0.67</b>	<b>0.55</b>
	WCDMA IV	Front	0.403	0.101	0.043	0.070	<b>0.50</b>	<b>0.45</b>	<b>0.47</b>
		Back	0.436	0.149	0.190	0.070	<b>0.59</b>	<b>0.63</b>	<b>0.51</b>
	WCDMA V	Front	0.714	0.101	0.043	0.070	<b>0.82</b>	<b>0.76</b>	<b>0.78</b>
		Back	0.961	0.149	0.190	0.070	<b>1.11</b>	<b>1.15</b>	<b>1.03</b>
LTE	LTE Band 2	Front	0.364	0.101	0.043	0.070	<b>0.47</b>	<b>0.41</b>	<b>0.43</b>
		Back	0.522	0.149	0.190	0.070	<b>0.67</b>	<b>0.71</b>	<b>0.59</b>
	LTE Band 4	Front	0.310	0.101	0.043	0.070	<b>0.41</b>	<b>0.35</b>	<b>0.38</b>
		Back	0.354	0.149	0.190	0.070	<b>0.50</b>	<b>0.54</b>	<b>0.42</b>
	LTE Band 5	Front	0.844	0.101	0.043	0.070	<b>0.95</b>	<b>0.89</b>	<b>0.91</b>
		Back	0.902	0.149	0.190	0.070	<b>1.05</b>	<b>1.09</b>	<b>0.97</b>
	LTE Band 7	Front	0.166	0.101	0.043	0.070	<b>0.27</b>	<b>0.21</b>	<b>0.24</b>
		Back	0.502	0.149	0.190	0.070	<b>0.65</b>	<b>0.69</b>	<b>0.57</b>
	LTE Band 12	Front	0.145	0.101	0.043	0.070	<b>0.25</b>	<b>0.19</b>	<b>0.22</b>
		Back	0.195	0.149	0.190	0.070	<b>0.34</b>	<b>0.39</b>	<b>0.27</b>
	LTE Band 13	Front	0.323	0.101	0.043	0.070	<b>0.42</b>	<b>0.37</b>	<b>0.39</b>
		Back	0.357	0.149	0.190	0.070	<b>0.51</b>	<b>0.55</b>	<b>0.43</b>
	LTE Band 17	Front	0.171	0.101	0.043	0.070	<b>0.27</b>	<b>0.21</b>	<b>0.24</b>
		Back	0.233	0.149	0.190	0.070	<b>0.38</b>	<b>0.42</b>	<b>0.30</b>




WWAN Band		Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN		
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)		
GSM	GSM850	Front	0.435	0.056	0.015	<b>0.49</b>	<b>0.45</b>
		Back	0.458	0.080	0.067	<b>0.54</b>	<b>0.53</b>
	GSM1900	Front	0.160	0.056	0.015	<b>0.22</b>	<b>0.18</b>
		Back	0.270	0.080	0.067	<b>0.35</b>	<b>0.34</b>
WCDMA	WCDMA II	Front	0.212	0.056	0.015	<b>0.27</b>	<b>0.23</b>
		Back	0.279	0.080	0.067	<b>0.36</b>	<b>0.35</b>
	WCDMA IV	Front	0.246	0.056	0.015	<b>0.30</b>	<b>0.26</b>
		Back	0.266	0.080	0.067	<b>0.35</b>	<b>0.33</b>
	WCDMA V	Front	0.559	0.056	0.015	<b>0.62</b>	<b>0.57</b>
		Back	0.751	0.080	0.067	<b>0.83</b>	<b>0.82</b>
LTE	LTE Band 2	Front	0.231	0.056	0.015	<b>0.29</b>	<b>0.25</b>
		Back	0.303	0.080	0.067	<b>0.38</b>	<b>0.37</b>
	LTE Band 4	Front	0.191	0.056	0.015	<b>0.25</b>	<b>0.21</b>
		Back	0.219	0.080	0.067	<b>0.30</b>	<b>0.29</b>
	LTE Band 5	Front	0.666	0.056	0.015	<b>0.72</b>	<b>0.68</b>
		Back	0.707	0.080	0.067	<b>0.79</b>	<b>0.77</b>
	LTE Band 7	Front	0.092	0.056	0.015	<b>0.15</b>	<b>0.11</b>
		Back	0.248	0.080	0.067	<b>0.33</b>	<b>0.32</b>
	LTE Band 12	Front	0.116	0.056	0.015	<b>0.17</b>	<b>0.13</b>
		Back	0.155	0.080	0.067	<b>0.24</b>	<b>0.22</b>
	LTE Band 13	Front	0.255	0.056	0.015	<b>0.31</b>	<b>0.27</b>
		Back	0.280	0.080	0.067	<b>0.36</b>	<b>0.35</b>
	LTE Band 17	Front	0.137	0.056	0.015	<b>0.19</b>	<b>0.15</b>
		Back	0.185	0.080	0.067	<b>0.27</b>	<b>0.25</b>

**15.5 SPLSR Evaluation and Analysis**


**General Note:**

- SPLSR =  $(SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$ . If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary


Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				X	Y	Z				
	GSM850	Left Cheek	0.641	0	4.95	-4.54	-0.26	67.7	1.68	0.03	Not required
	WLAN2.4GHz		1.035	0	1.89	1.50	-0.35				

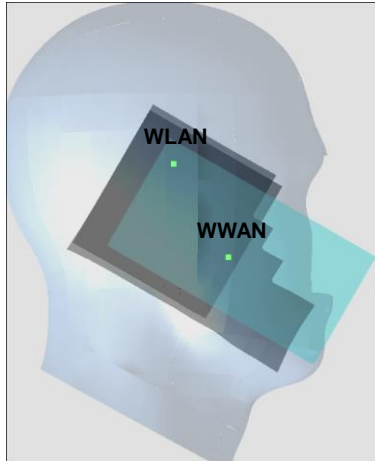

Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	WCDMA V	Left Cheek	0.653	0	4.67	-4.37	-0.28	65.0	1.69	0.03	Not required
	WLAN2.4GHz		1.035	0	1.89	1.50	-0.35				

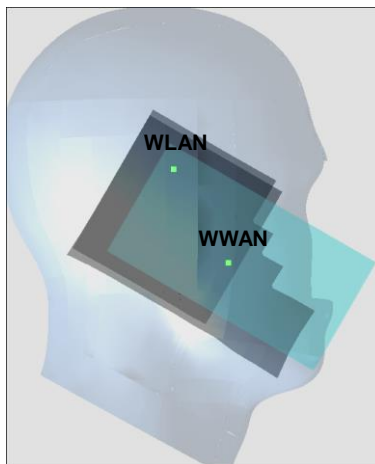

Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Left Cheek	0.575	0	5.44	-4.63	-0.19	78.3	1.61	0.03	Not required
	WLAN2.4GHz		1.035	0	1.75	2.28	-0.14				

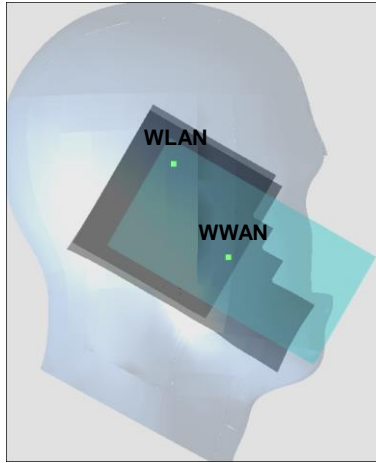

**Test Engineer :** Jay Jian White Huang Poa Pan Tommy Chen Iran Wang Tom Jiang San Lin and Nick Yu



## **16. Uncertainty Assessment**

Pre KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

## **17. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.