



CERTIFICATION TEST REPORT

Report Number. : 12118543-E8V2

Applicant : SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

FCC ID : PY7-24117Q

EUT Description : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART B

Date Of Issue:

May 11, 2018

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	4/12/18	Initial Issue	
V2	5/10/18	Updated Section 2 & Appendix A.	

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY	6
5. TEST AND MEASUREMENT EQUIPMENT	7
6. REUSE OF TEST DATA	8
6.1. INTRODUCTION.....	8
6.2. DEVICES DIFFERENCES.....	8
6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY.....	8
6.4. REFERENCE DETAIL.....	8
8. SPOT CHECK DATA.....	9
8.1. RADIATED EMISSIONS 30 TO 1000 MHz (CHARGE MODE).....	10
9. SETUP PHOTOS	12

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC.
SERIAL NUMBER: BH90004MB2
DATE TESTED: MARCH 20 to 21, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR PART 15 SUBPART B	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc By:

Reviewed By:



Dan Corona
Operations Leader
UL Verification Services Inc.

Kiya Kedida
Project Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2014 and KDB 484596 D01 Referencing Test Data v01.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 22541-1)
<input type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 22541-2)
<input type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 22541-3)
	<input checked="" type="checkbox"/> Chamber G(IC: 22541-4)
	<input type="checkbox"/> Chamber H(IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. Chambers A through C are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under Industry Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	ID Number	Cal Due
Amplifier, 10KHz to 1GHz, 32dB	Keysight	8447D	T10	02/15/2019
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	899	06/15/2018
PXA Spectrum Analyzer, 3Hz to 44GHz	Agilent	N9030A	907	02/07/2019

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, Dec 01, 2016

6. REUSE OF TEST DATA

6.1. INTRODUCTION

According to the manufacturer, FCC ID: PY7-72474U and FCC ID: PY7-24117Q unlicensed radios (WLAN/BT/BLE/NFC) are electrically identical. The FCC ID: PY7-72474U test data shall remain representative of FCC ID: PY7-24117Q so, FCC ID: PY7-24117Q leverages test data from FCC ID: PY7-72474U.

The applicant takes full responsibility that the test data as referenced in this section represents compliance for this FCC ID.

6.2. DEVICES DIFFERENCES

Difference between PY7-72474U and PY7-24117Q:

Sony Mobile Communications Inc. hereby declares that the difference between PY7-72474U and PY7-24117Q is related only to the cellular part and no change in non-cellular (WLAN/Bluetooth/NFC) parts. The non-cellular parts which are electrically identical, and therefore the following report/data of PY7-72474U may represent for PY7-24117Q.

6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device PY7-24117Q for radiated harmonic spurious. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary and appendix A.

6.4. REFERENCE DETAIL

Equipment Class	Reference FCC ID	Report Title/Section
JBP (Part 15B)	PY7-72474U	12097277-E8V1 FCC Report 15B

8. SPOT CHECK DATA

LIMIT

FCC Part 15 Subpart B

§15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Limits for radiated disturbance of Class B ITE at measuring distance of 3 m	
Frequency range (MHz)	Quasi-peak limits (dB μ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960 MHz	54

Note: The lower limit shall apply at the transition frequency.


TEST PROCEDURE


ANSI C63.4: 2014

The spectrum from 30MHz to 1 GHz is investigated with charging mode as worst case.

The antenna to EUT distance is 3 meters. The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.1. RADIATED EMISSIONS 30 TO 1000 MHz (CHARGE MODE)

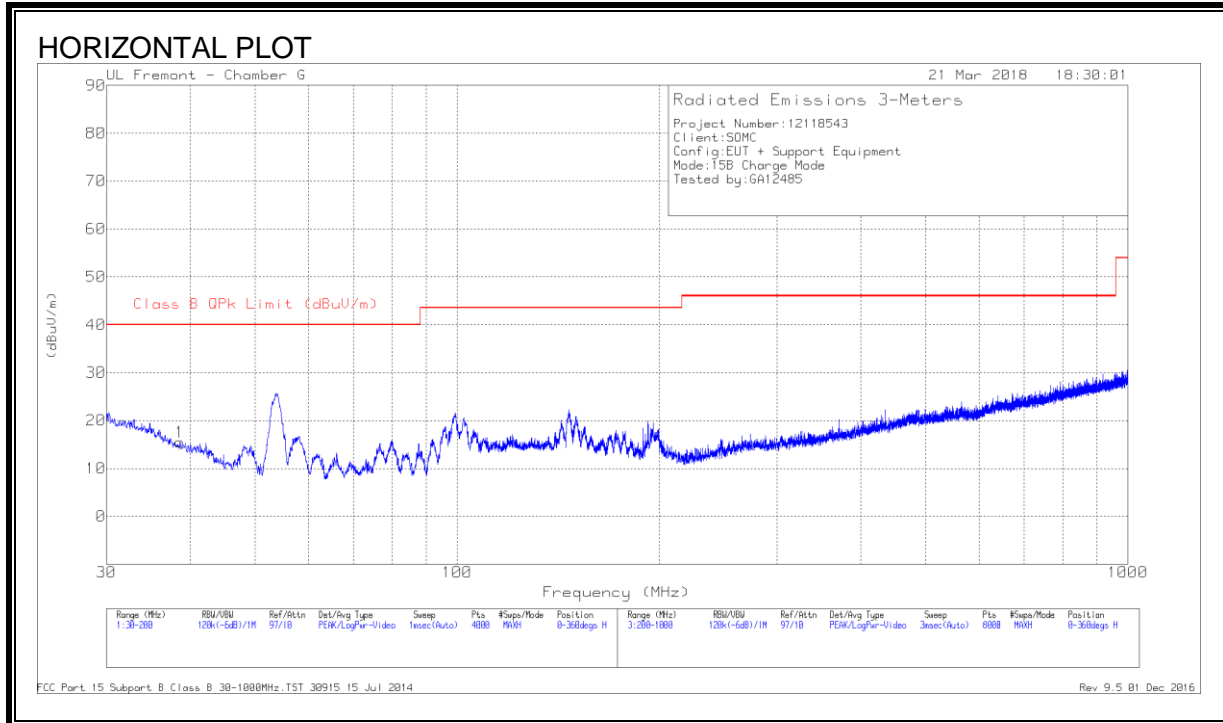

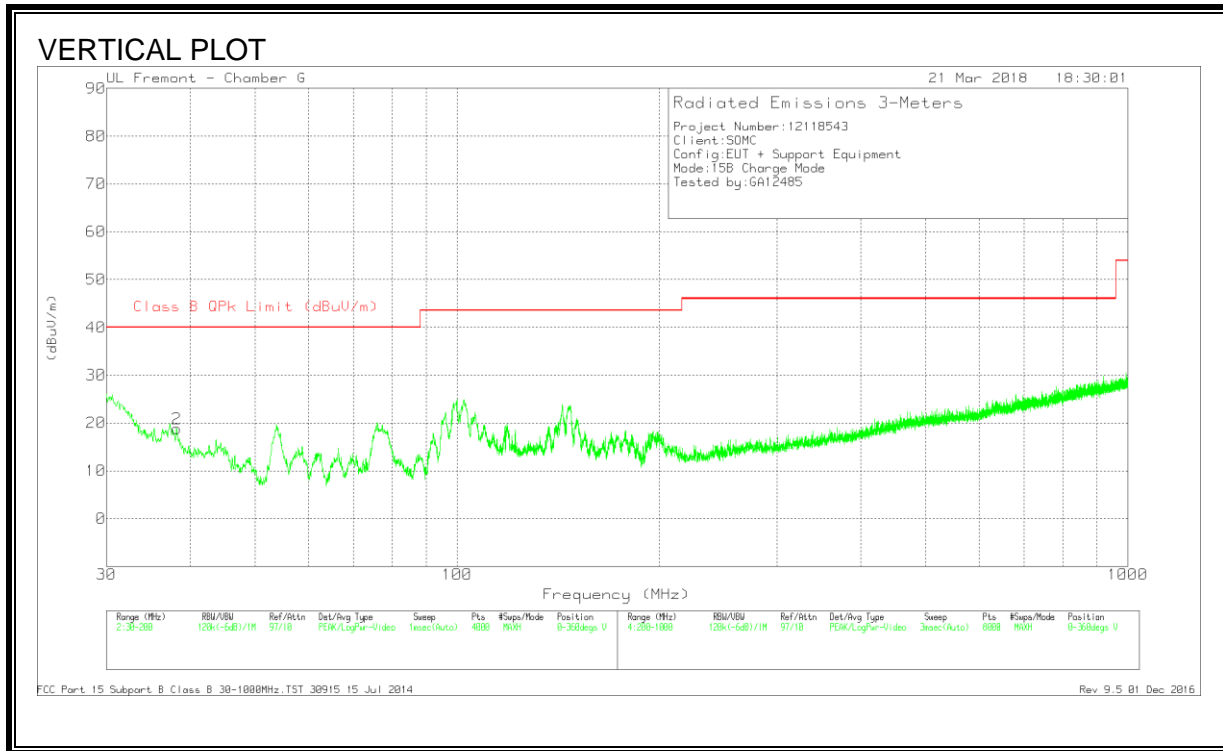

HORIZONTAL AND VERTICAL DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T899 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	38.1621	31.18	Pk	18.8	-31.1	18.88	40	-21.12	0-360	100	V
1	38.6297	28.12	Pk	18.5	-31.1	15.52	40	-24.48	0-360	98	H

Pk - Peak detector

Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T899 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	37.9375	31.34	Pk	18.9	-31.1	19.14	40	-20.86	171	126	V
	37.9375	16.66	Av	18.9	-31.1	4.46	-	-	171	126	V
1	38.6292	28.86	Pk	18.5	-31.1	16.26	40	-23.74	4	337	H
	38.6292	14.89	Av	18.5	-31.1	2.29	-	-	4	337	H

Pk - Peak detector

Qp - Quasi-Peak detector

APPENDIX A

PY7-24117Q SPOT CHECK RESULTS							
Technology	Mode	Test Item	Channel	Measured	PY7-72474U	PY7-24117Q	Delta (dB)
				Frequency	Peak	Peak	Peak
Part15B	Below 1GHz Charge Mode	RSE	N/A	38.3747MHz	29.69	19.14	-10.55
Note:							

END OF REPORT