




LTE B26 3MHz QPSK Low Channel RB1-0

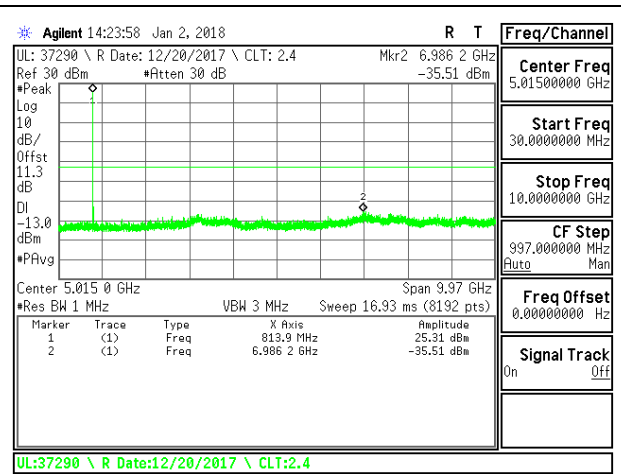


LTE B26 3MHz 16QAM Low Channel RB1-0

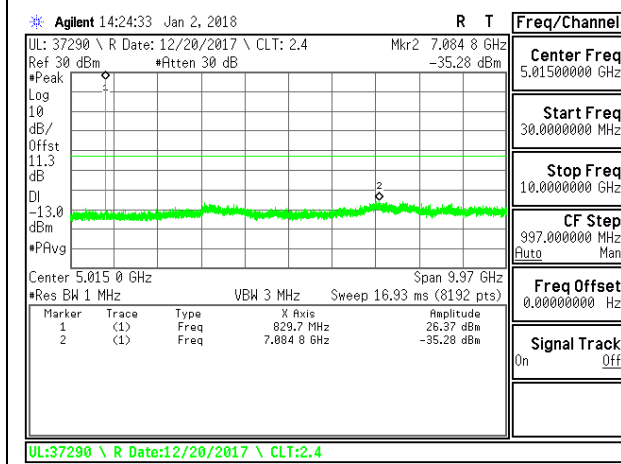


LTE B26 3MHz QPSK Middle Channel RB1-0

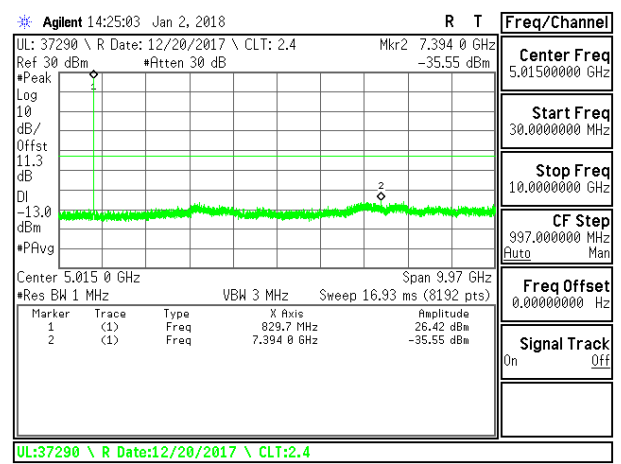


LTE B26 3MHz 16QAM Middle Channel RB1-0

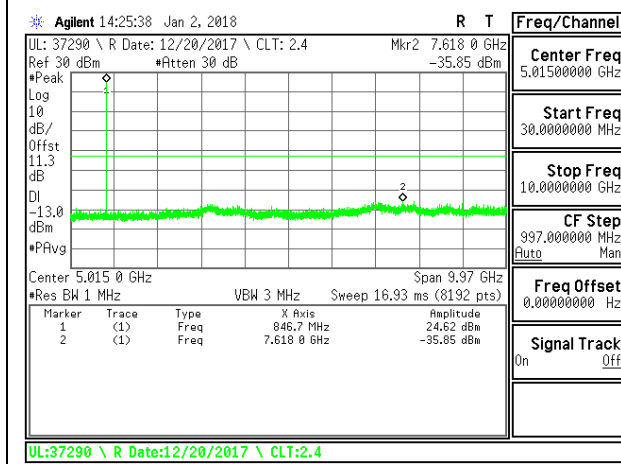


LTE B26 3MHz QPSK High Channel RB1-0

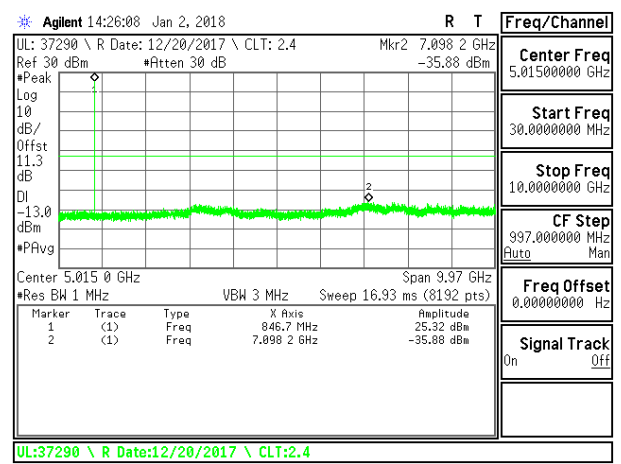


LTE B26 3MHz 16QAM High Channel RB1-0

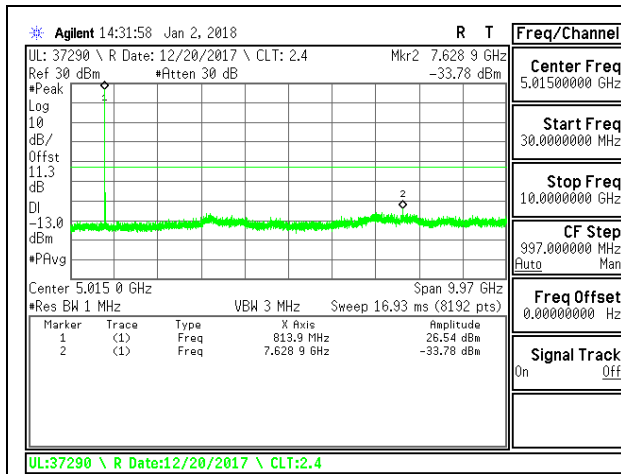


LTE B26 5MHz QPSK Low Channel RB1-0

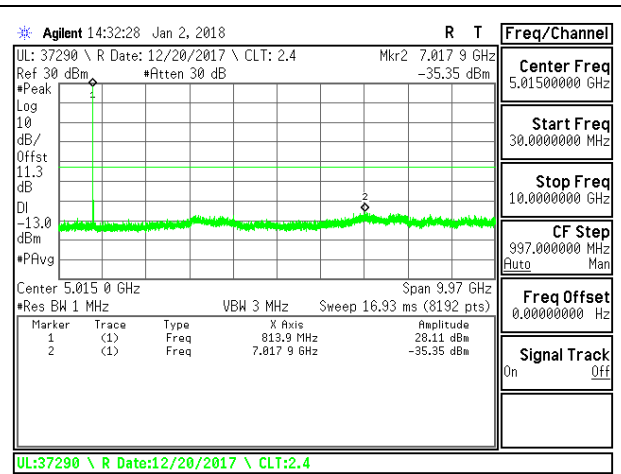


LTE B26 5MHz 16QAM Low Channel RB1-0

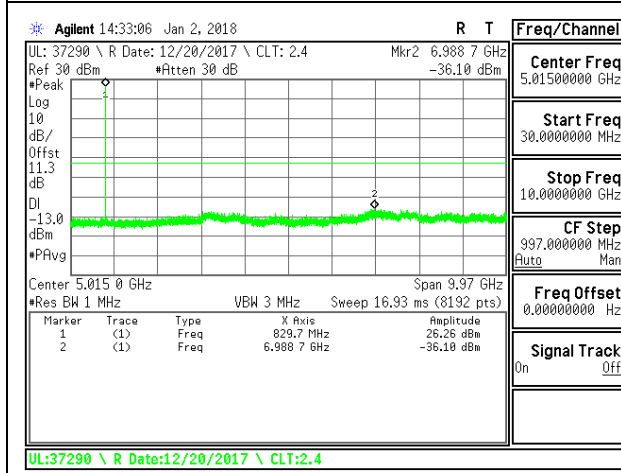


LTE B26 5MHz QPSK Middle Channel RB1-0

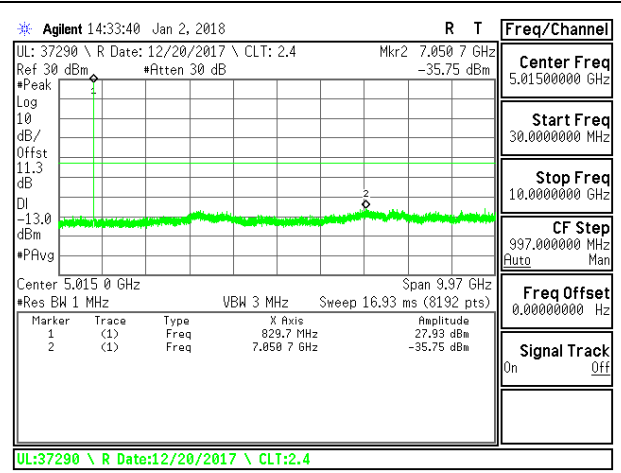


LTE B26 5MHz 16QAM Middle Channel RB1-0

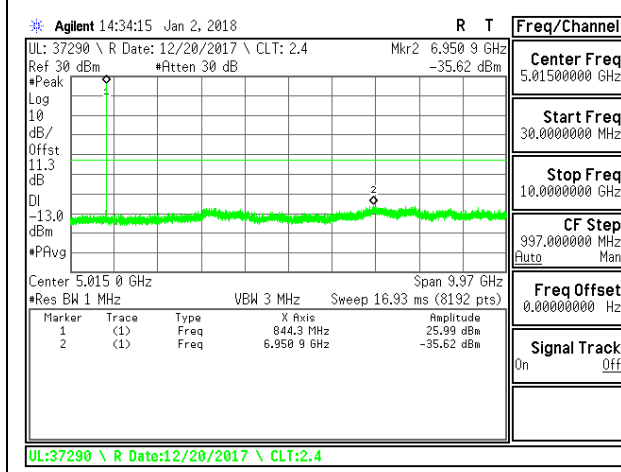


LTE B26 5MHz QPSK High Channel RB1-0

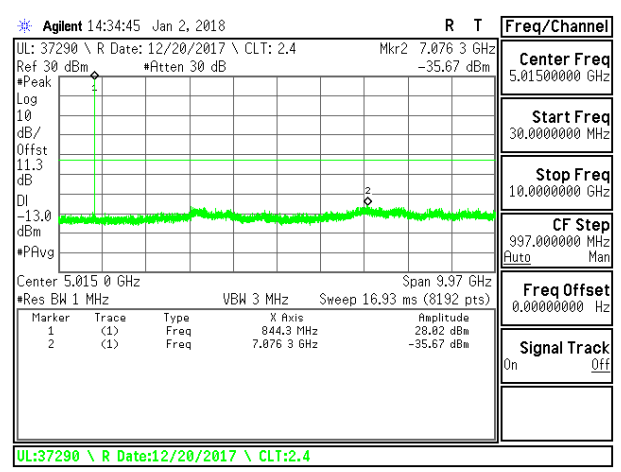


LTE B26 5MHz 16QAM High Channel RB1-0

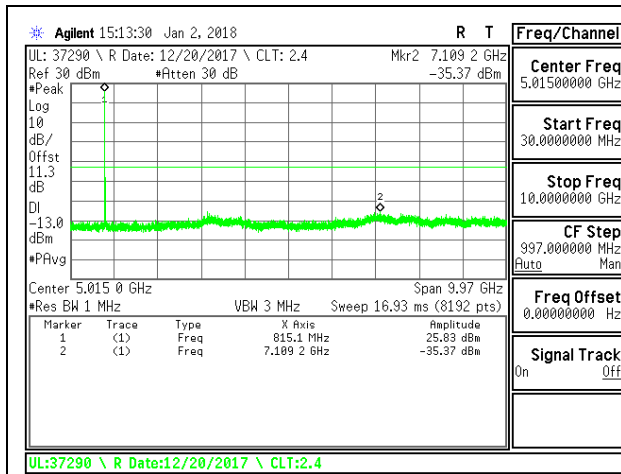


LTE B26 10MHz QPSK Low Channel RB1-0

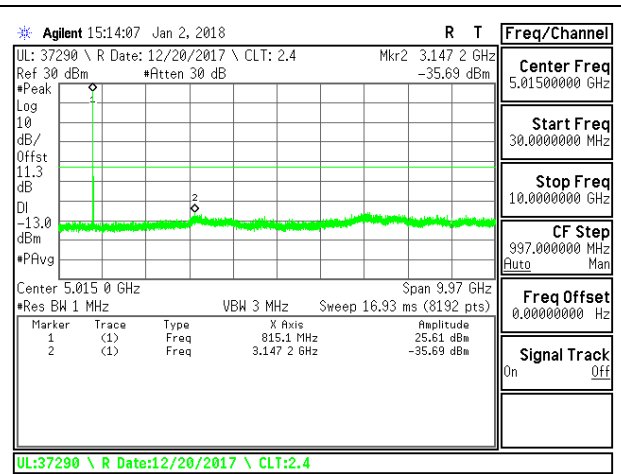


LTE B26 10MHz 16QAM Low Channel RB1-0

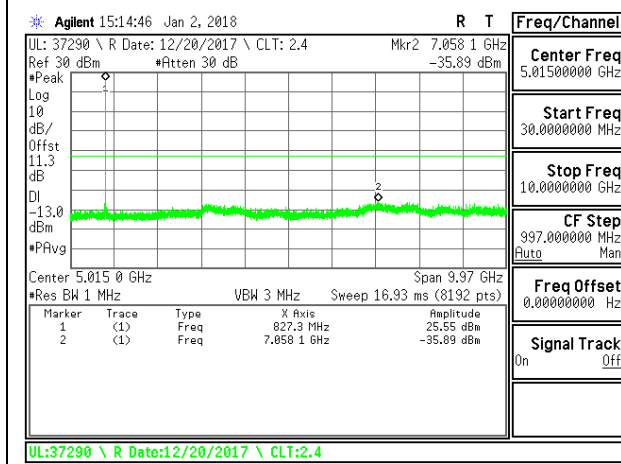


LTE B26 10MHz QPSK Middle Channel RB1-0

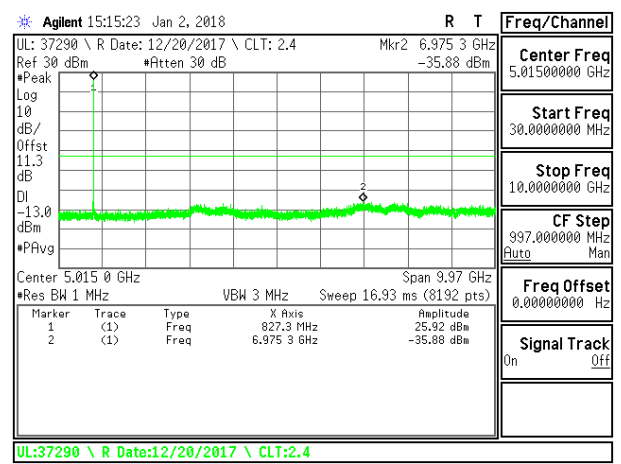


LTE B26 10MHz 16QAM Middle Channel RB1-0

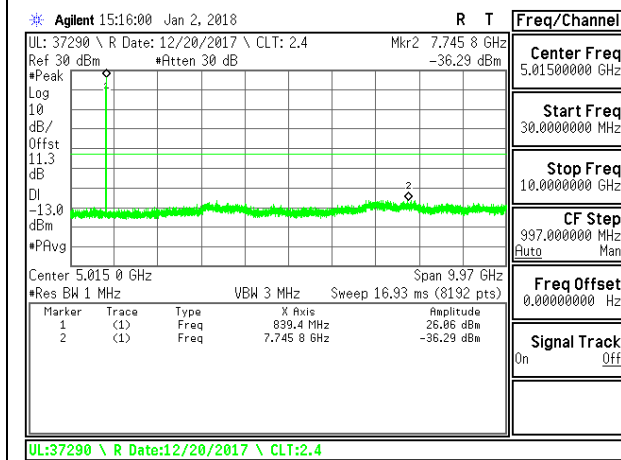


LTE B26 10MHz QPSK High Channel RB1-0

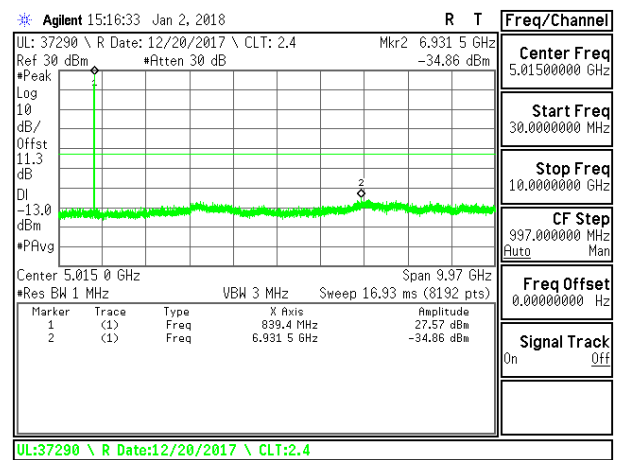


LTE B26 10MHz 16QAM High Channel RB1-0

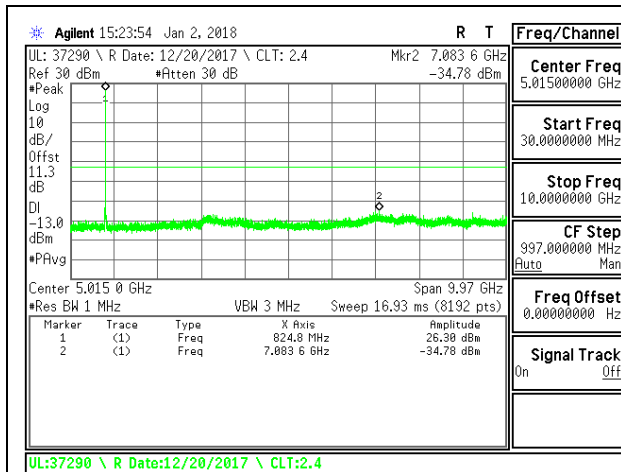


LTE B26 15MHz QPSK Low Channel RB1-0

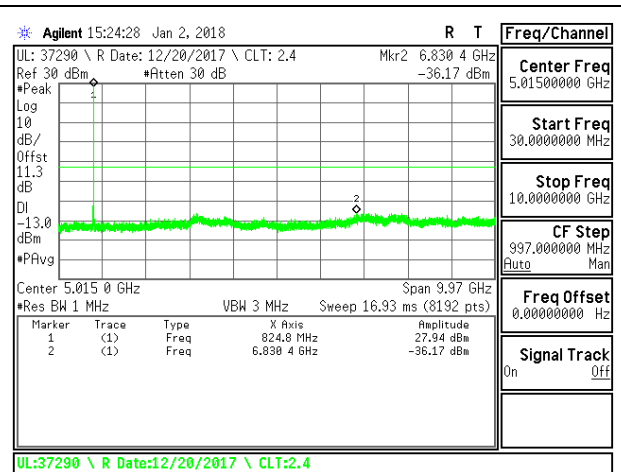


LTE B26 15MHz 16QAM Low Channel RB1-0

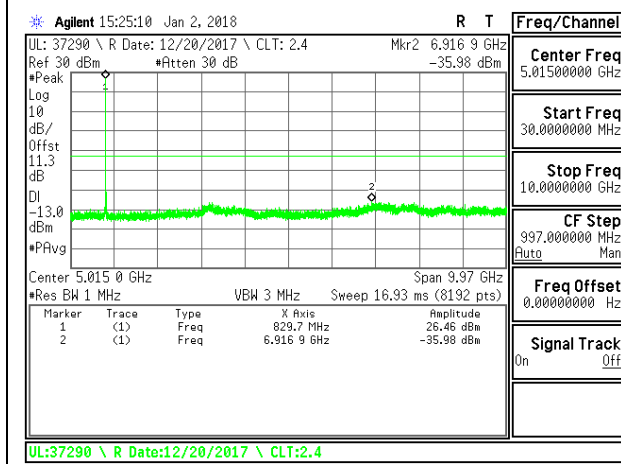


LTE B26 15MHz QPSK Middle Channel RB1-0

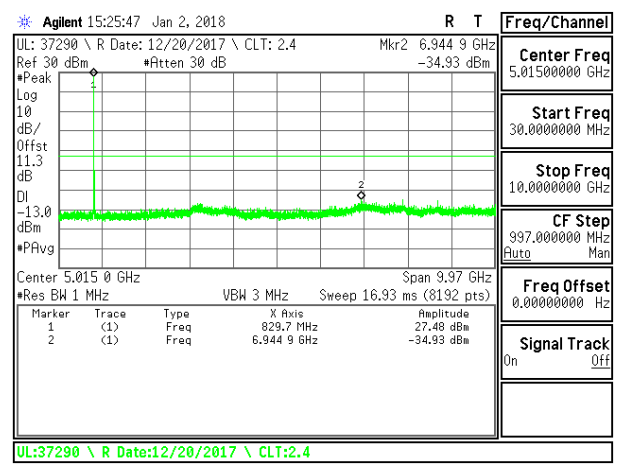

LTE B26 15MHz 16QAM Middle Channel RB1-0

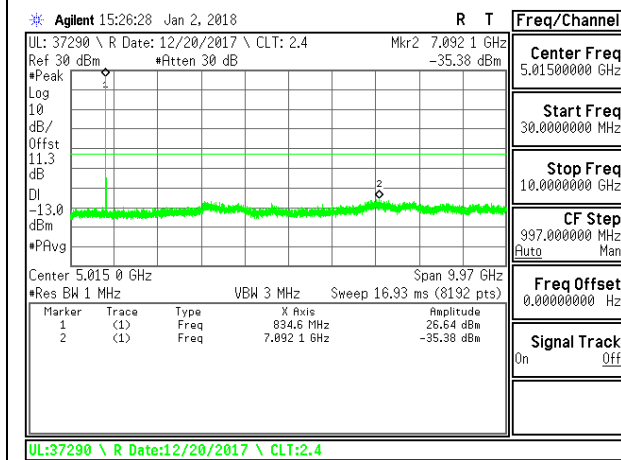


LTE B26 15MHz QPSK High Channel RB1-0

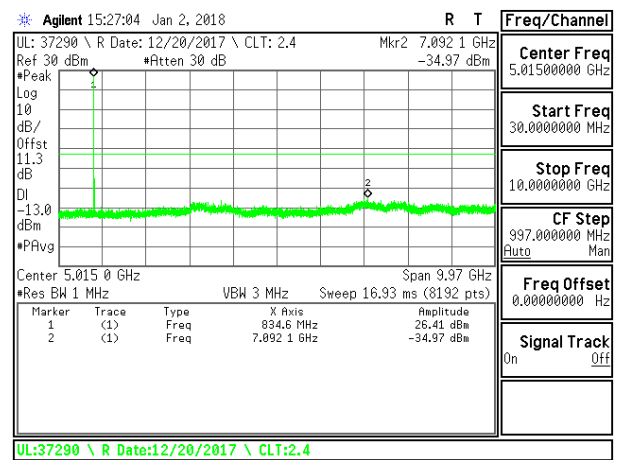


LTE B26 15MHz 16QAM High Channel RB1-0


8.3.9. LTE BAND 41

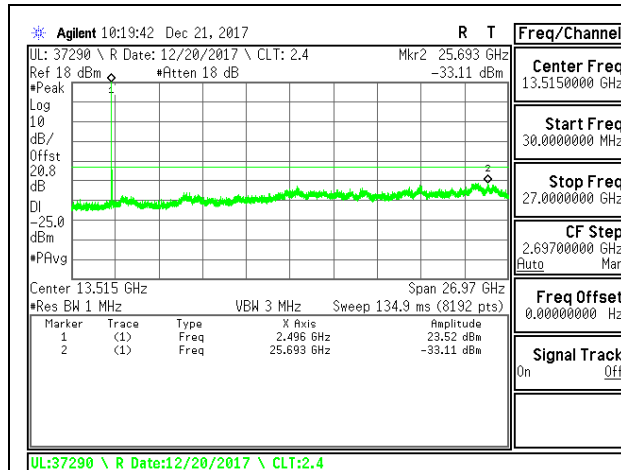


LTE B41 5MHz QPSK Low Channel RB1-0

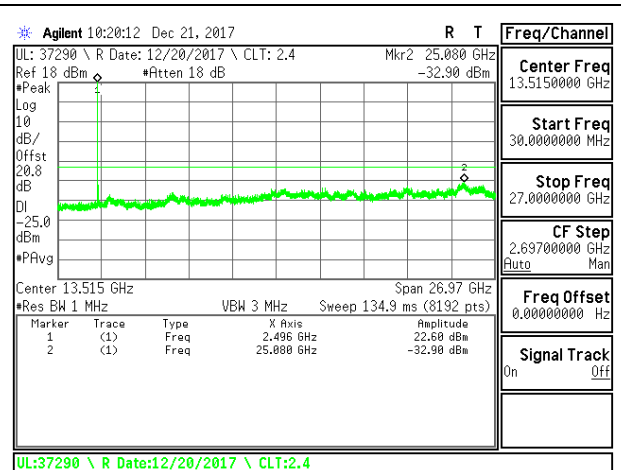


LTE B41 5MHz 16QAM Low Channel RB1-0

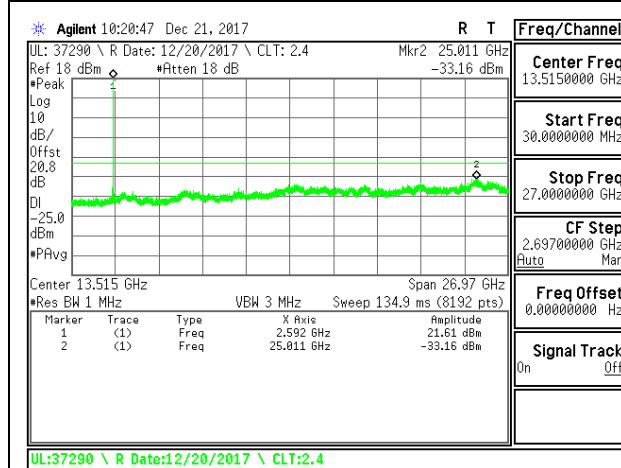


LTE B41 5MHz QPSK Middle Channel RB1-0

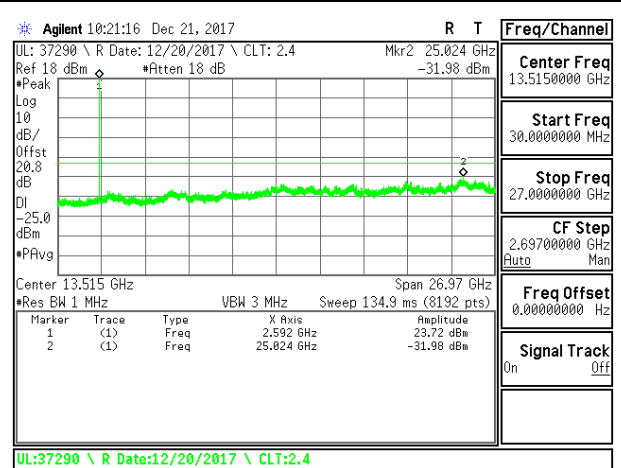


LTE B41 5MHz 16QAM Middle Channel RB1-0

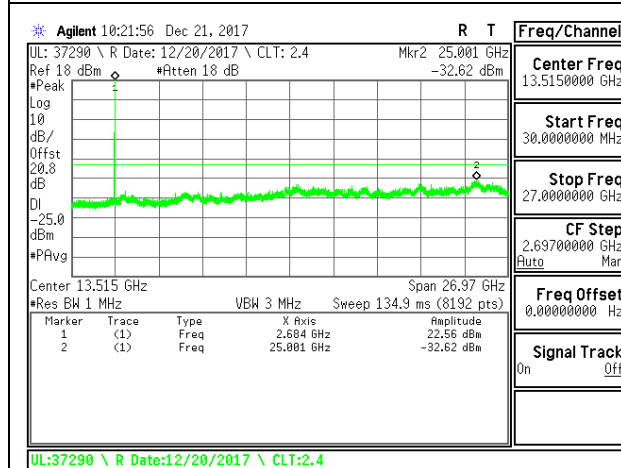


LTE B41 5MHz QPSK High Channel RB1-0

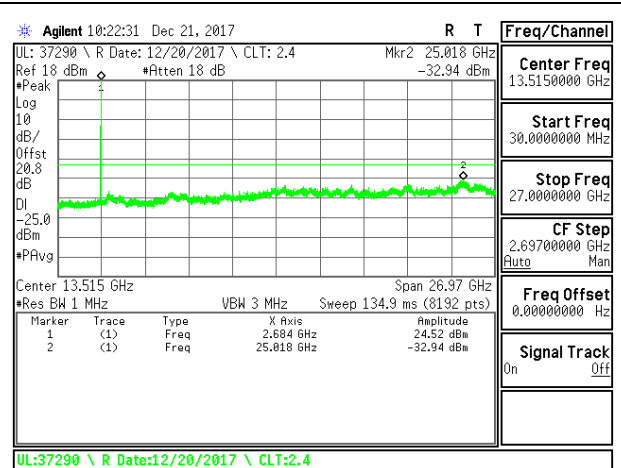


LTE B41 5MHz 16QAM High Channel RB1-0

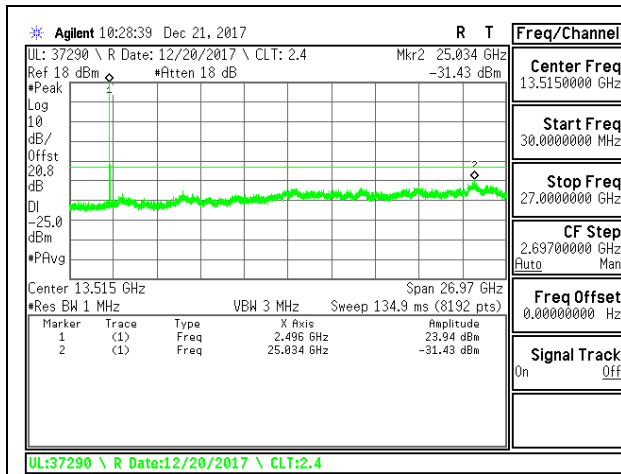


LTE B41 10MHz QPSK Low Channel RB1-0

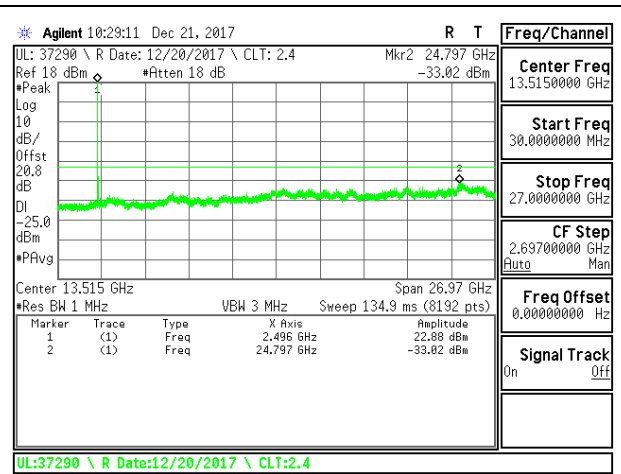


LTE B41 10MHz 16QAM Low Channel RB1-0

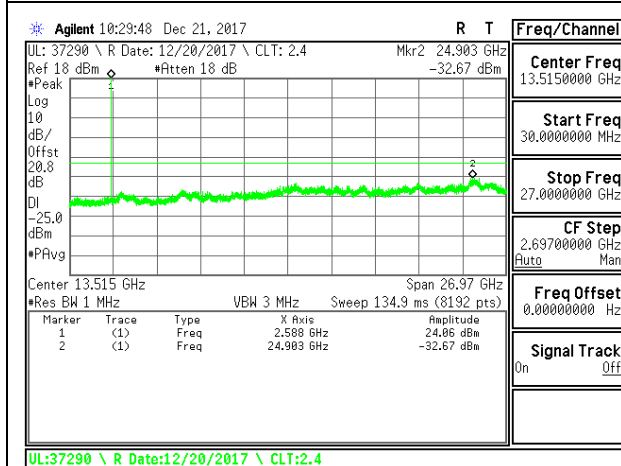


LTE B41 10MHz QPSK Middle Channel RB1-0

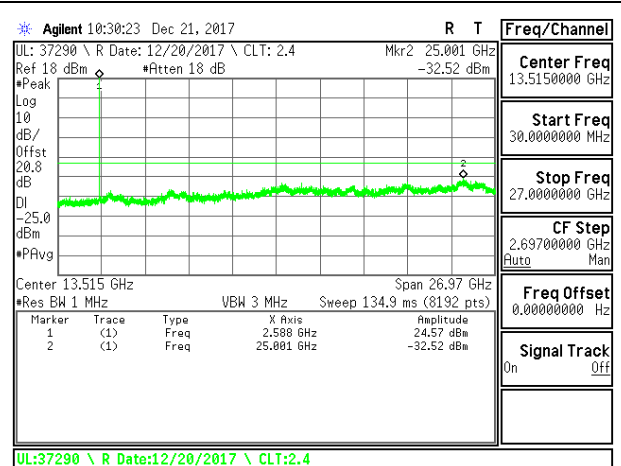


LTE B41 10MHz 16QAM Middle Channel RB1-0

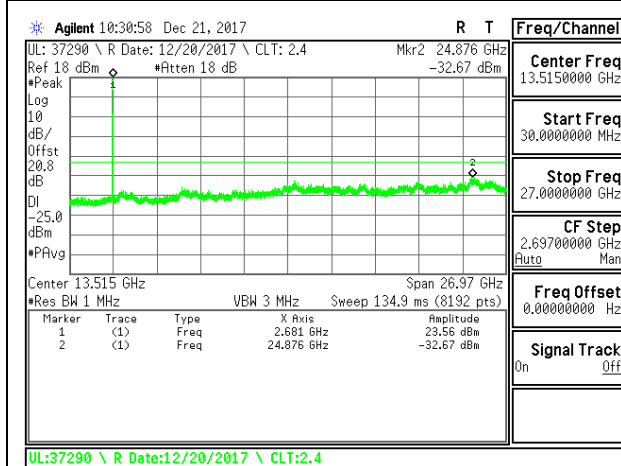


LTE B41 10MHz QPSK High Channel RB1-0

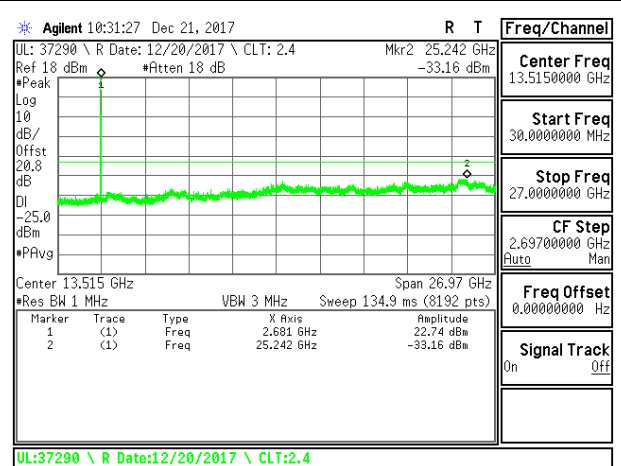


LTE B41 10MHz 16QAM High Channel RB1-0

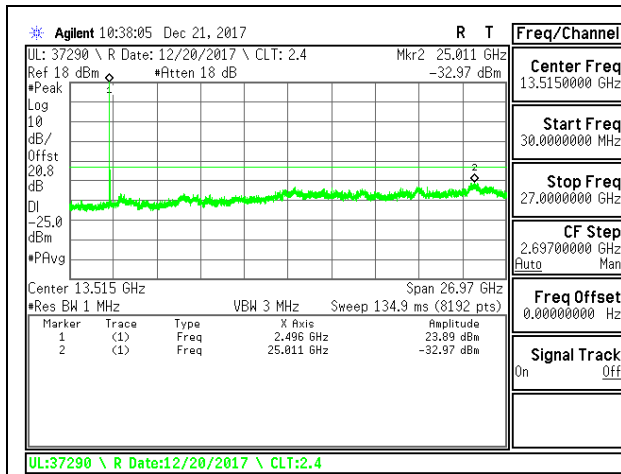


LTE B41 15MHz QPSK Low Channel RB1-0

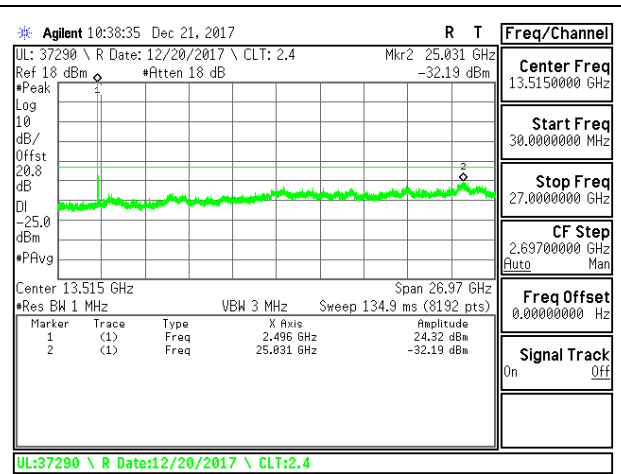


LTE B41 15MHz 16QAM Low Channel RB1-0

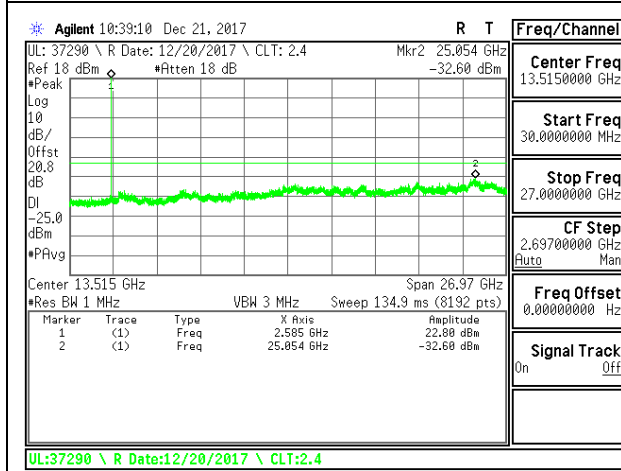


LTE B41 15MHz QPSK Middle Channel RB1-0

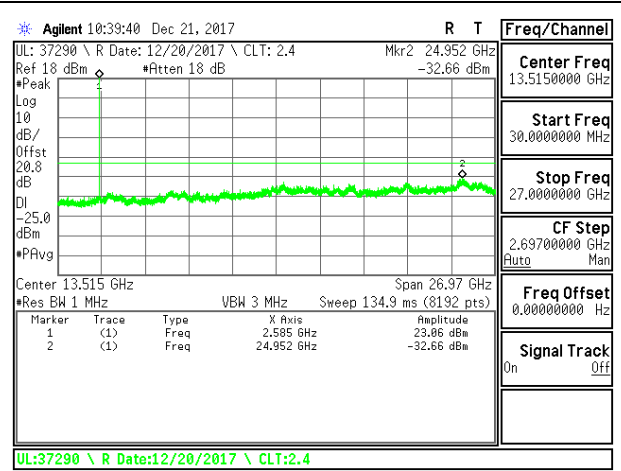


LTE B41 15MHz 16QAM Middle Channel RB1-0

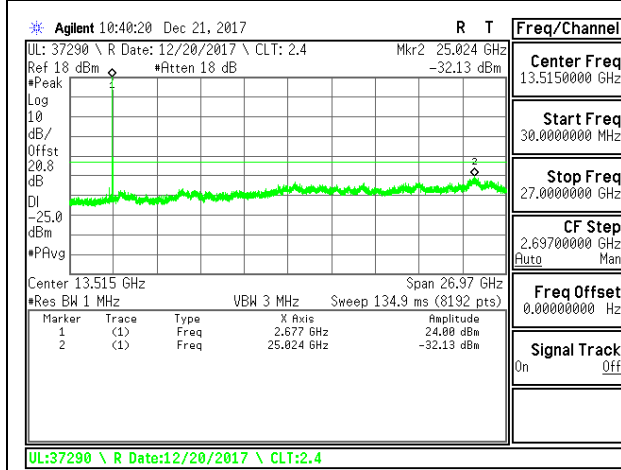


LTE B41 15MHz QPSK High Channel RB1-0

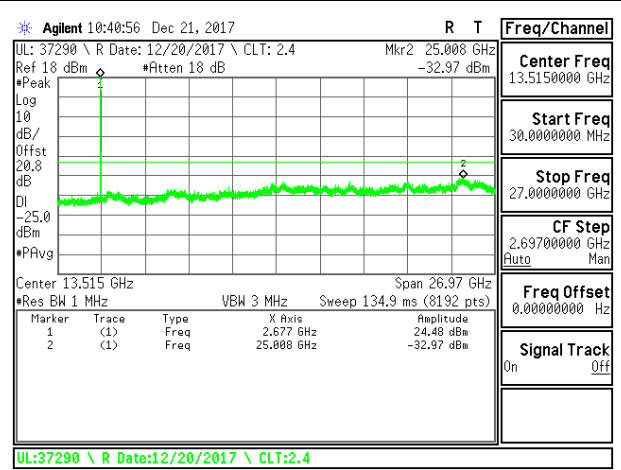


LTE B41 15MHz 16QAM High Channel RB1-0

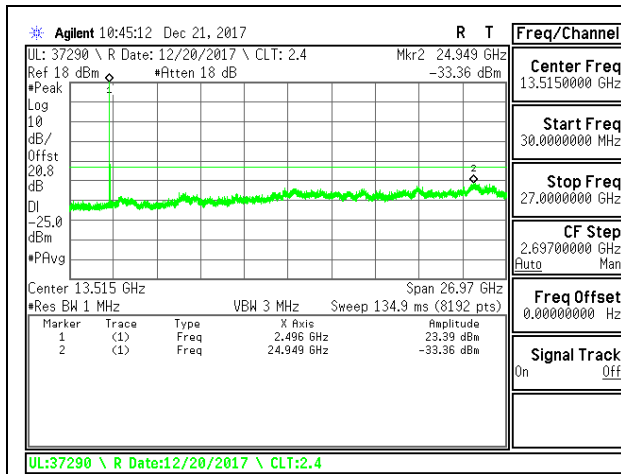


LTE B41 20MHz QPSK Low Channel RB1-0

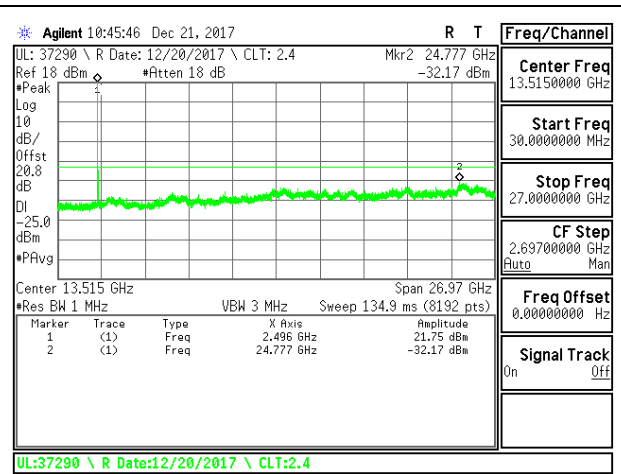


LTE B41 20MHz 16QAM Low Channel RB1-0

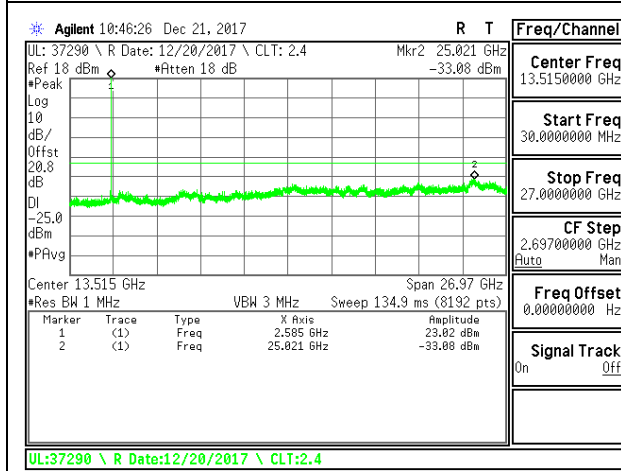


LTE B41 20MHz QPSK Middle Channel RB1-0

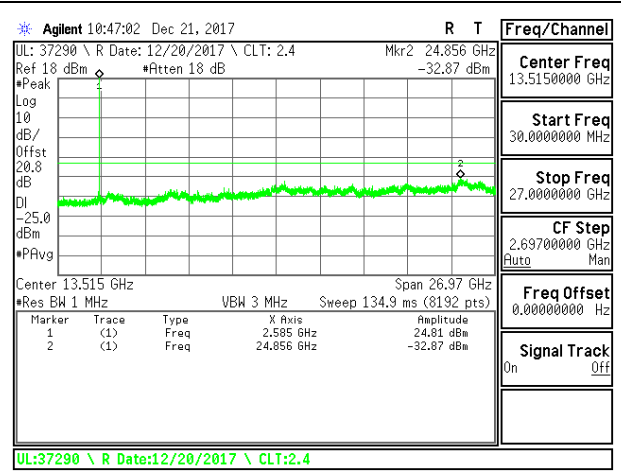

LTE B41 20MHz 16QAM Middle Channel RB1-0

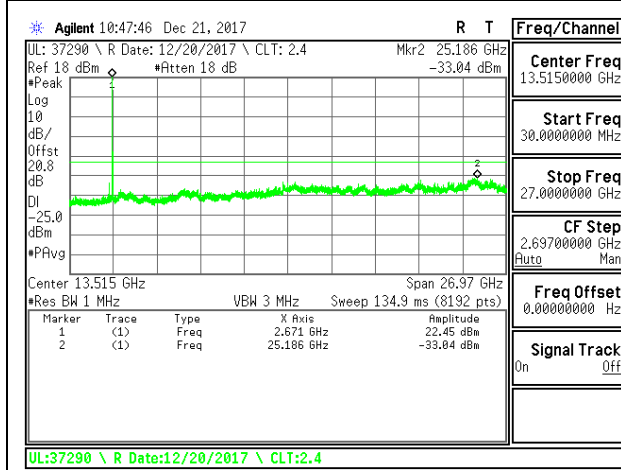



LTE B41 20MHz QPSK High Channel RB1-0

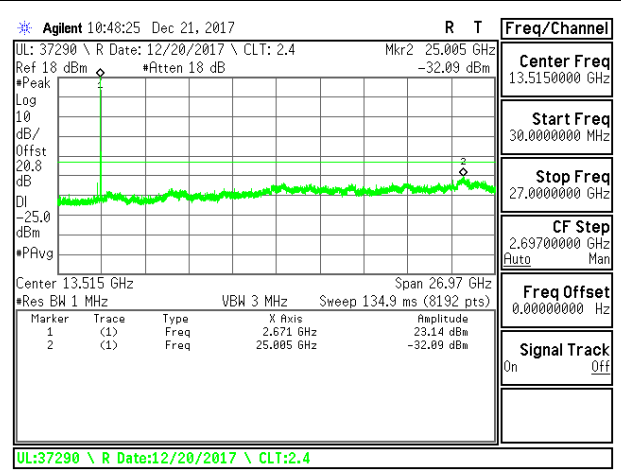


LTE B41 20MHz 16QAM High Channel RB1-0

8.3.10. LTE BAND 66

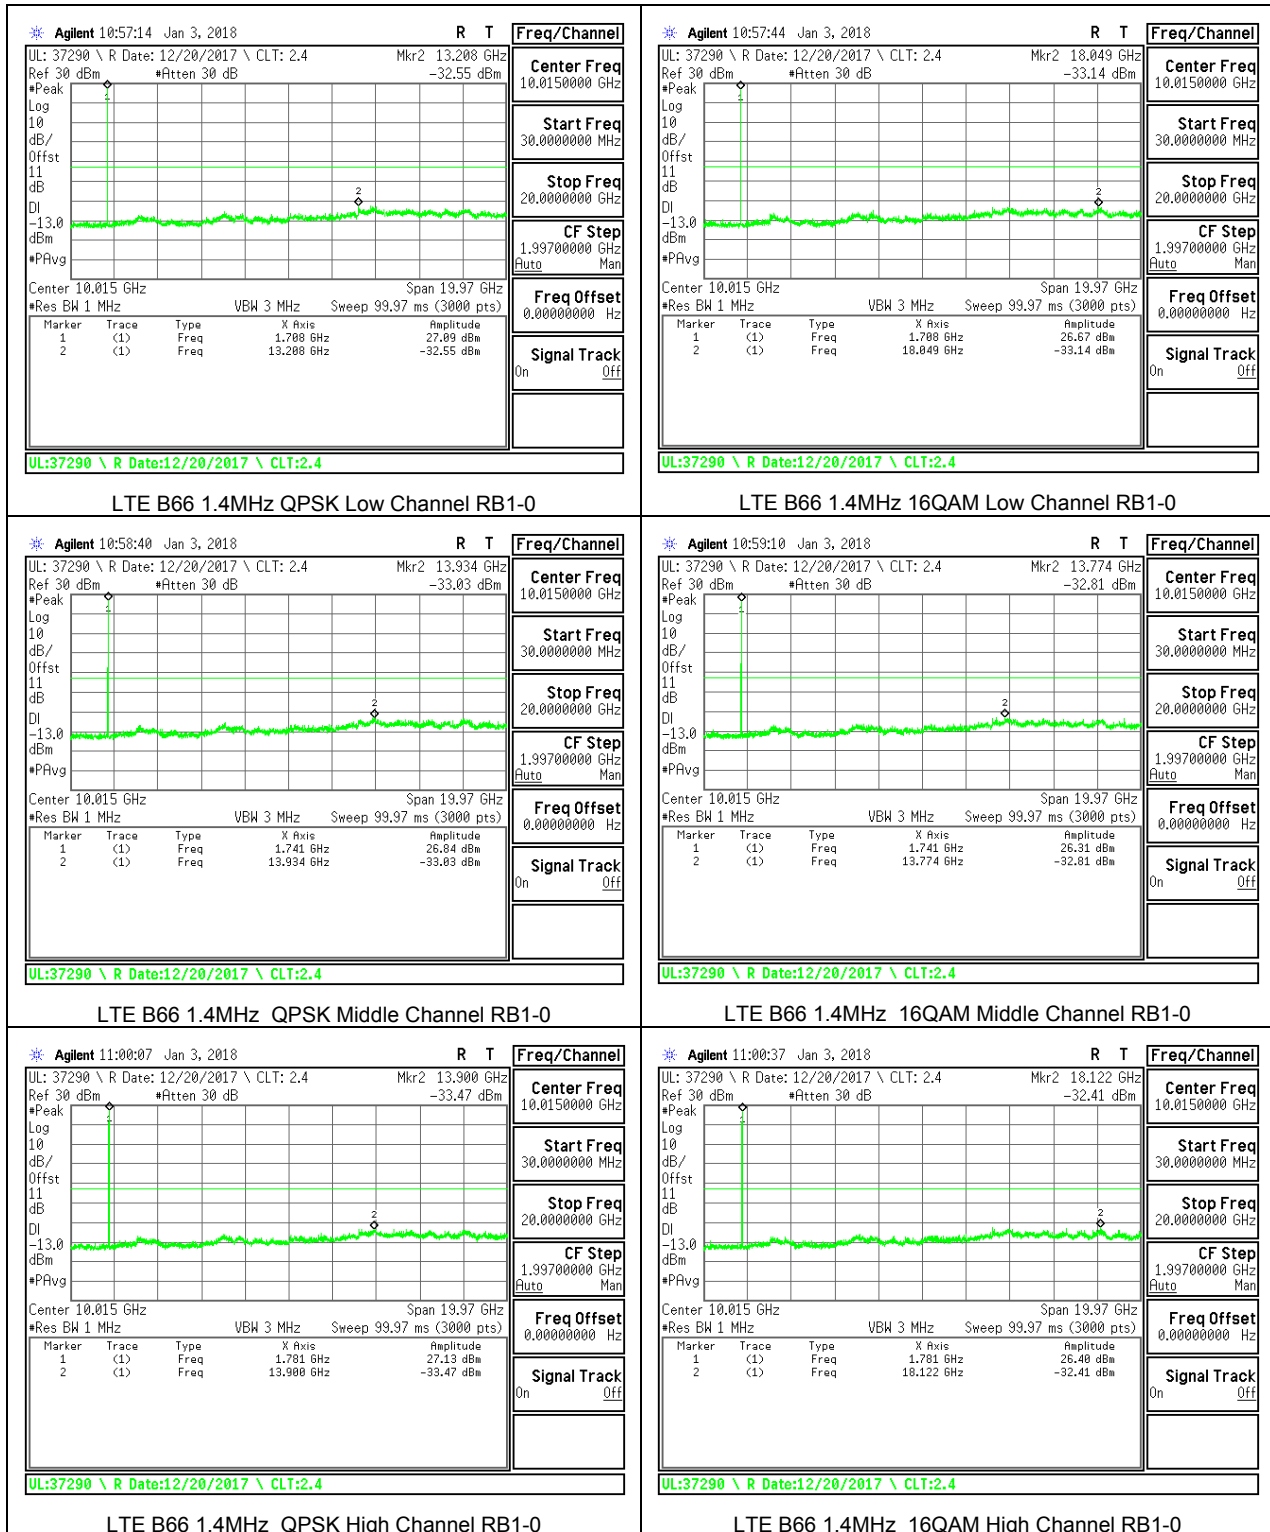


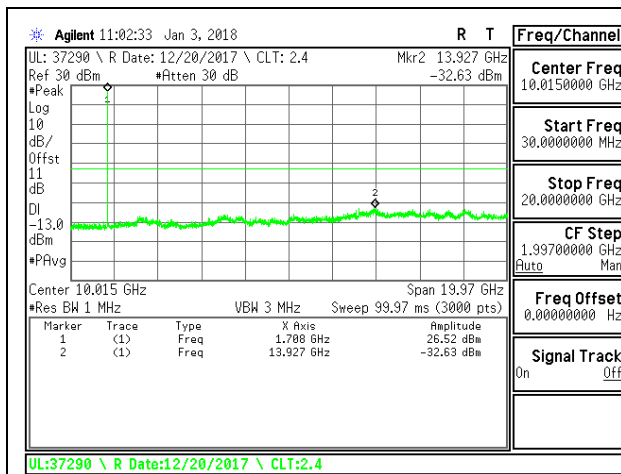


LTE B66 3MHz QPSK Low Channel RB1-0

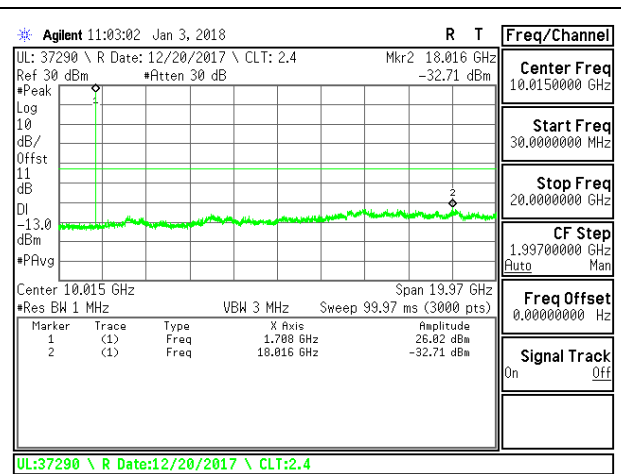


LTE B66 3MHz 16QAM Low Channel RB1-0

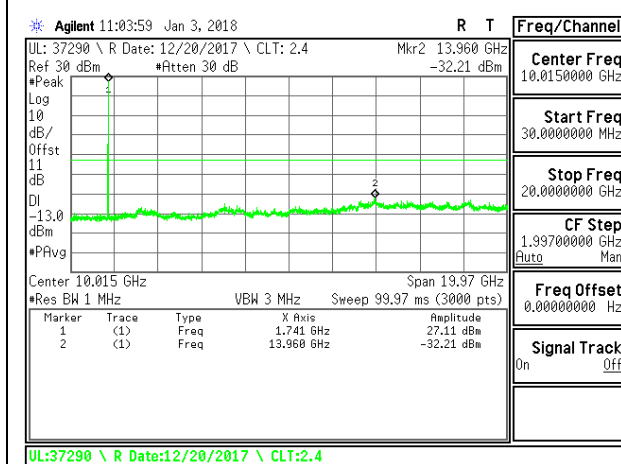


LTE B66 3MHz QPSK Middle Channel RB1-0

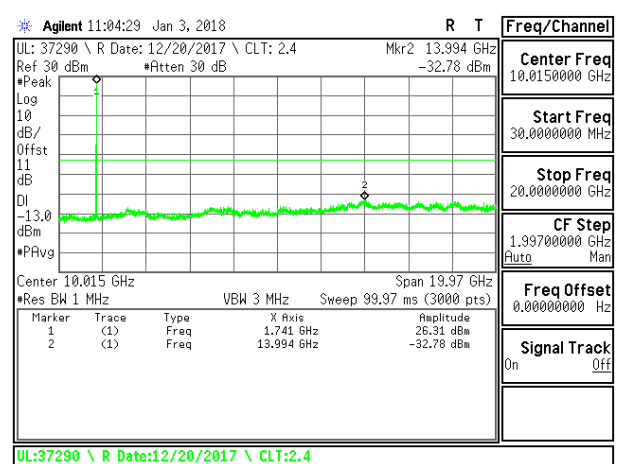


LTE B66 3MHz 16QAM Middle Channel RB1-0

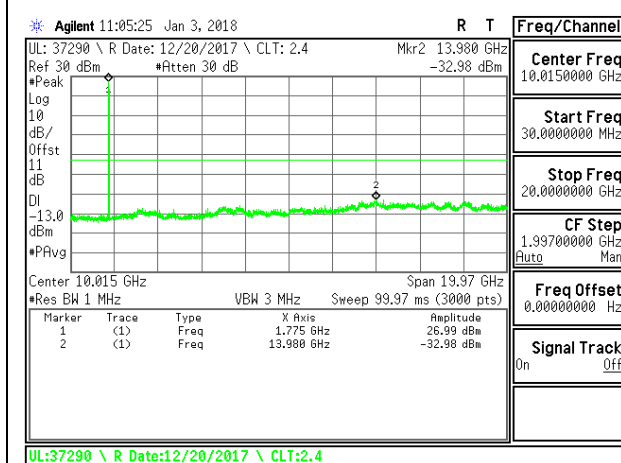


LTE B66 3MHz QPSK High Channel RB1-0

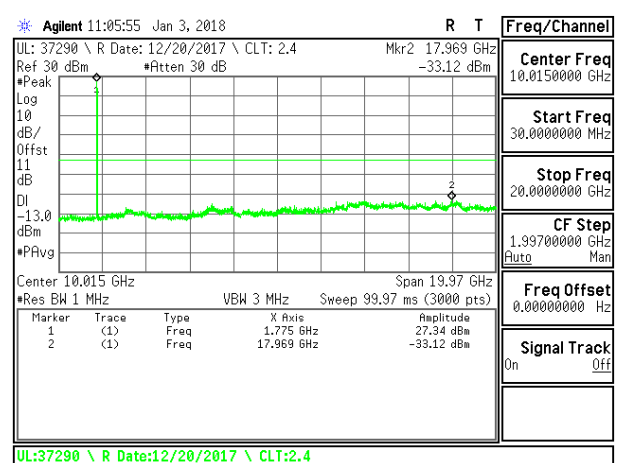


LTE B66 3MHz 16QAM High Channel RB1-0

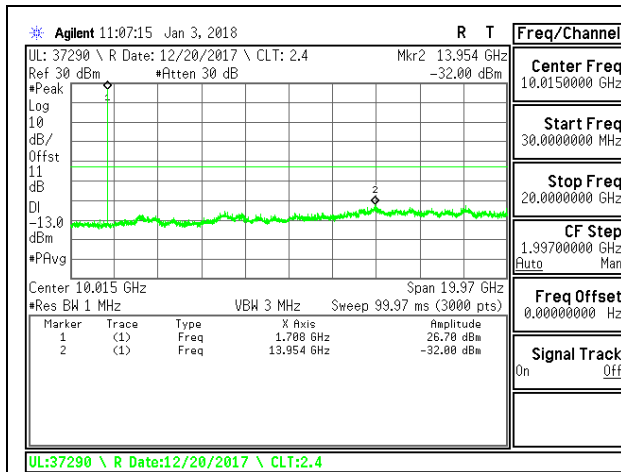


LTE B66 5MHz QPSK Low Channel RB1-0

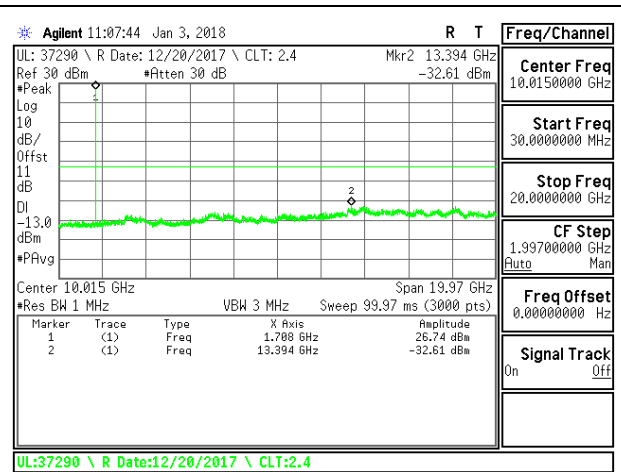


LTE B66 5MHz 16QAM Low Channel RB1-0

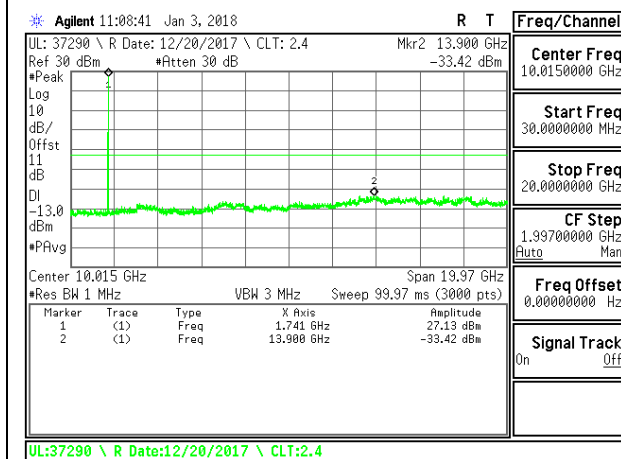


LTE B66 5MHz QPSK Middle Channel RB1-0

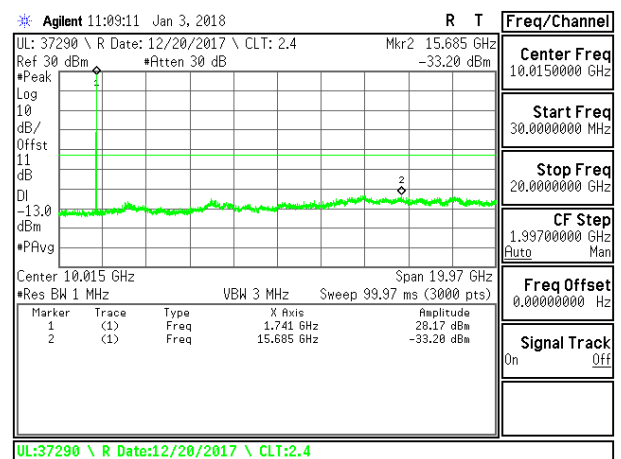


LTE B66 5MHz 16QAM Middle Channel RB1-0

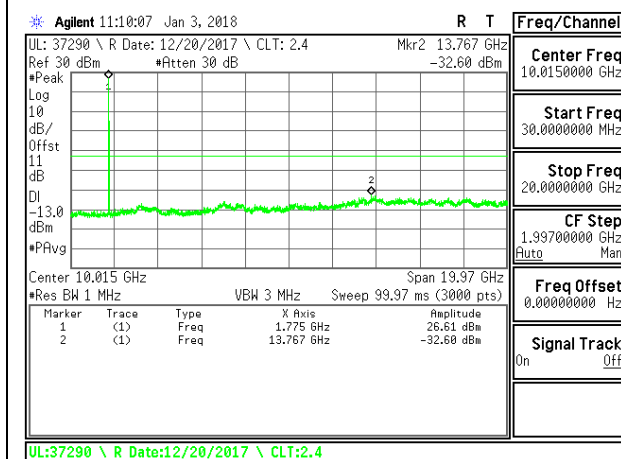


LTE B66 5MHz QPSK High Channel RB1-0

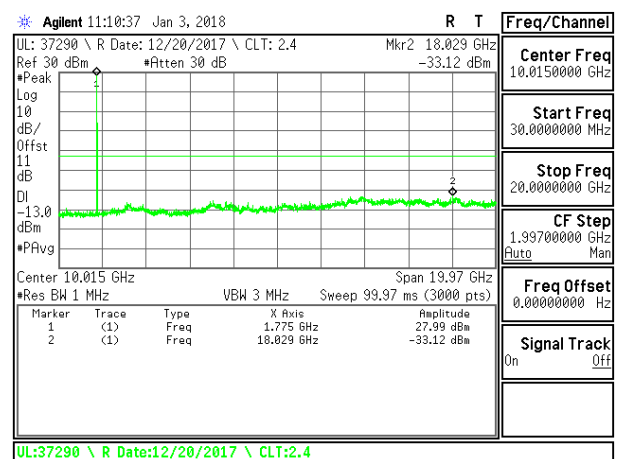


LTE B66 5MHz 16QAM High Channel RB1-0

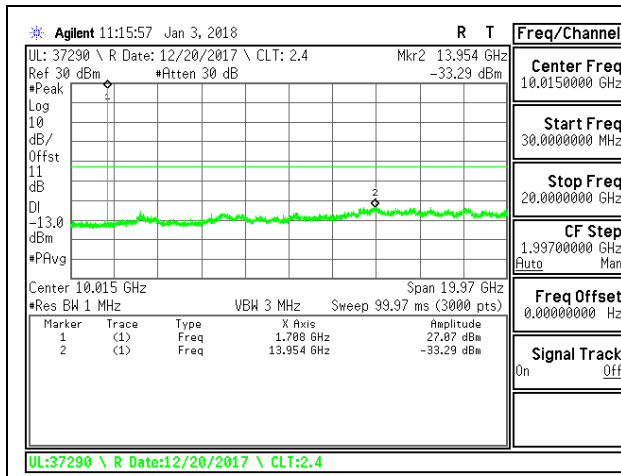


LTE B66 10MHz QPSK Low Channel RB1-0

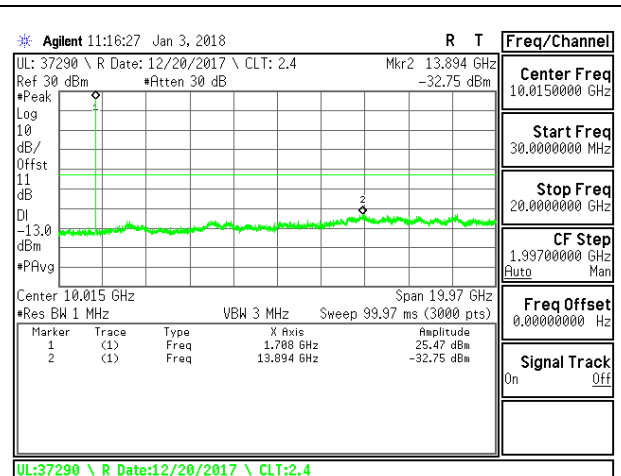


LTE B66 10MHz 16QAM Low Channel RB1-0

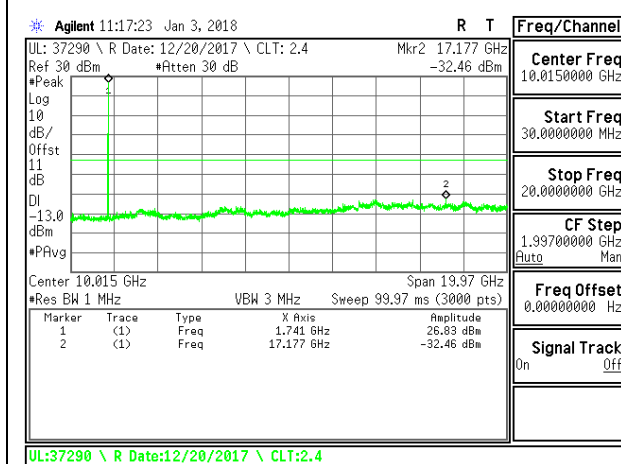


LTE B66 10MHz QPSK Middle Channel RB1-0

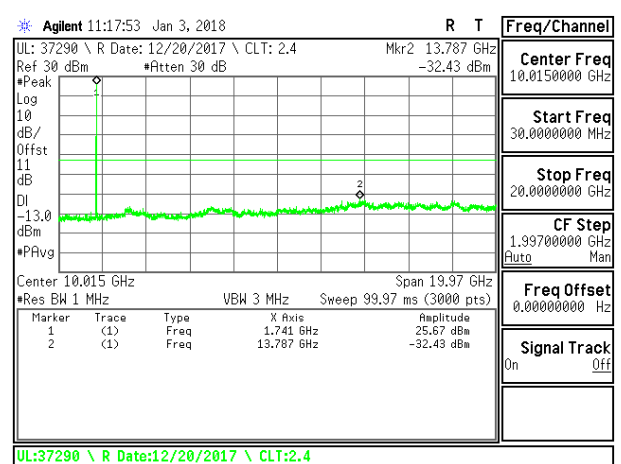


LTE B66 10MHz 16QAM Middle Channel RB1-0

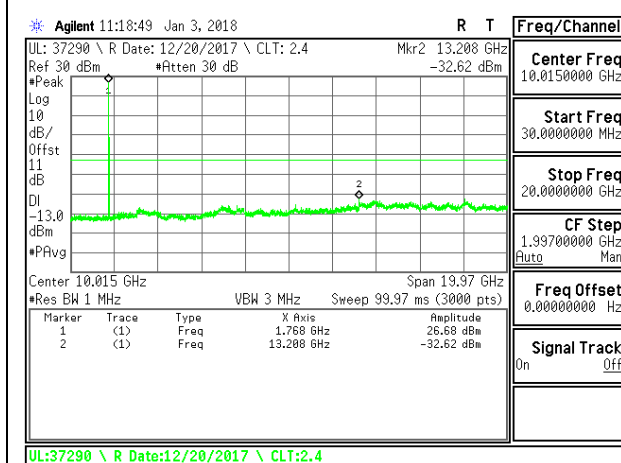


LTE B66 10MHz QPSK High Channel RB1-0

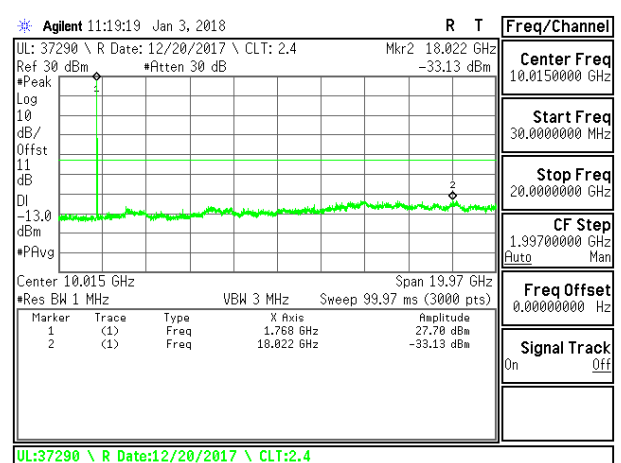


LTE B66 10MHz 16QAM High Channel RB1-0

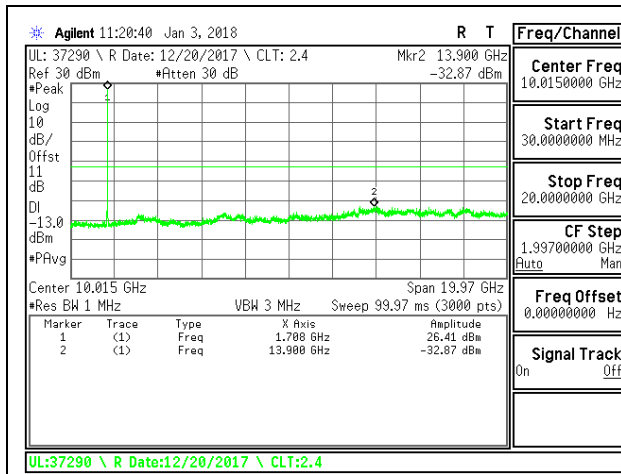


LTE B66 15MHz QPSK Low Channel RB1-0

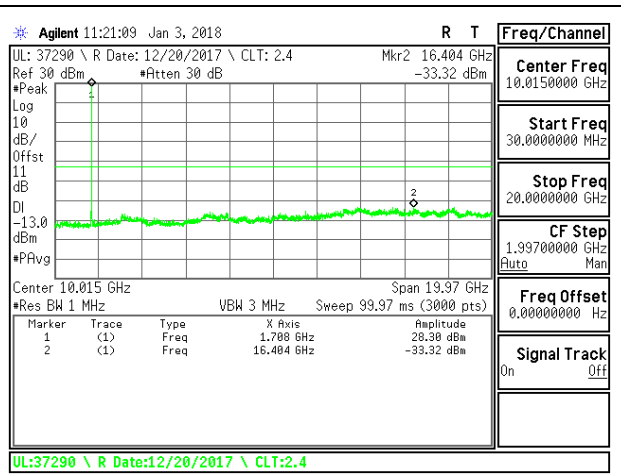


LTE B66 15MHz 16QAM Low Channel RB1-0

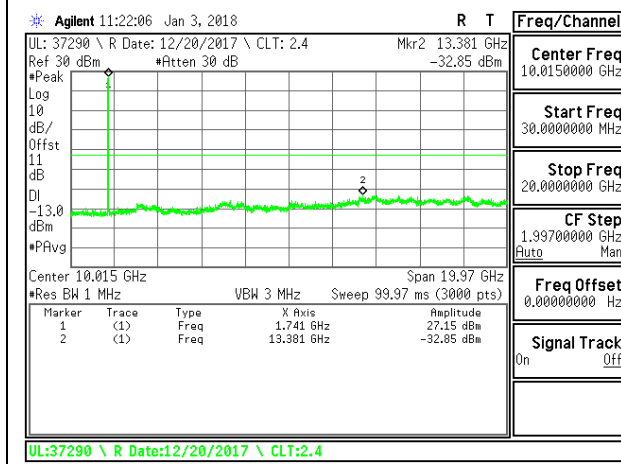


LTE B66 15MHz QPSK Middle Channel RB1-0

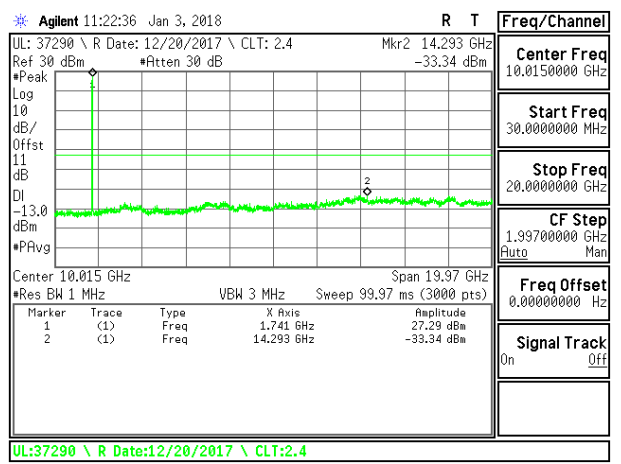


LTE B66 15MHz 16QAM Middle Channel RB1-0

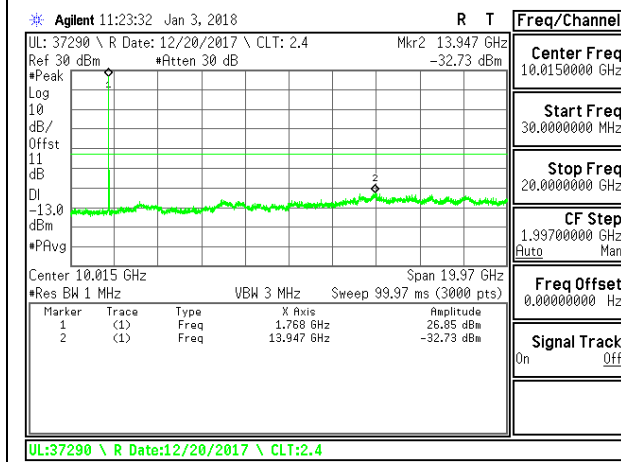


LTE B66 15MHz QPSK High Channel RB1-0

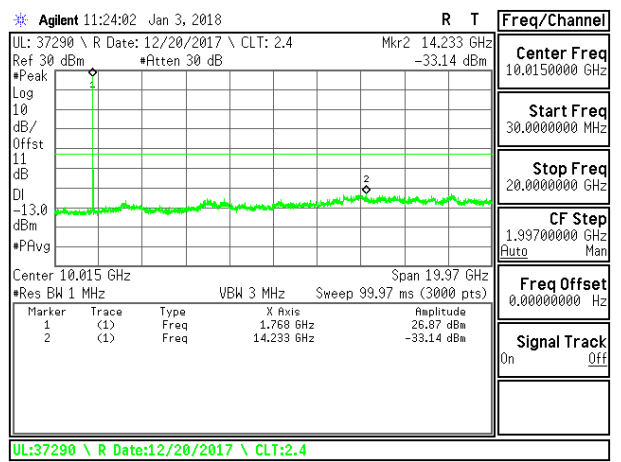


LTE B66 15MHz 16QAM High Channel RB1-0

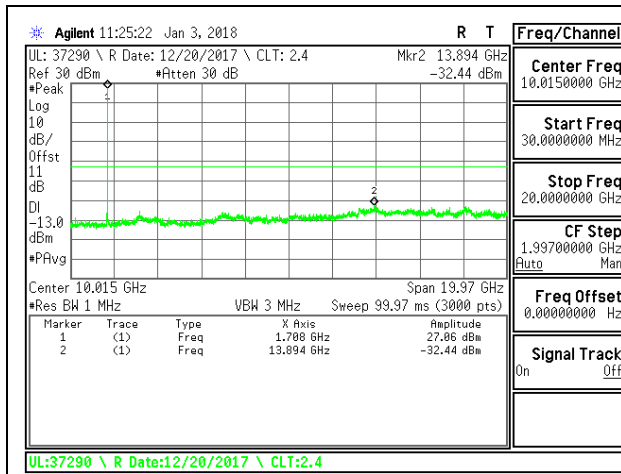


LTE B66 20MHz QPSK Low Channel RB1-0

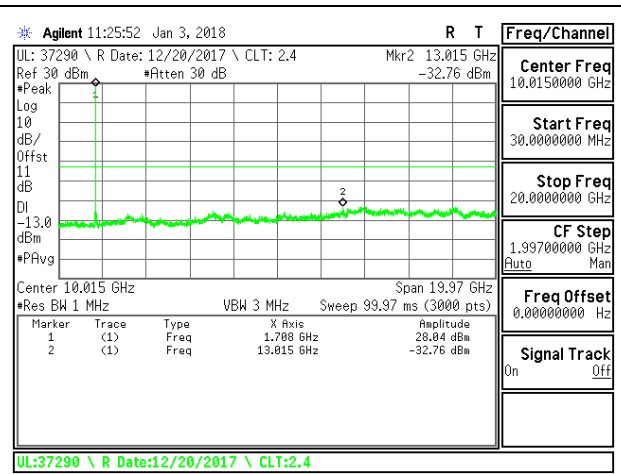


LTE B66 20MHz 16QAM Low Channel RB1-0

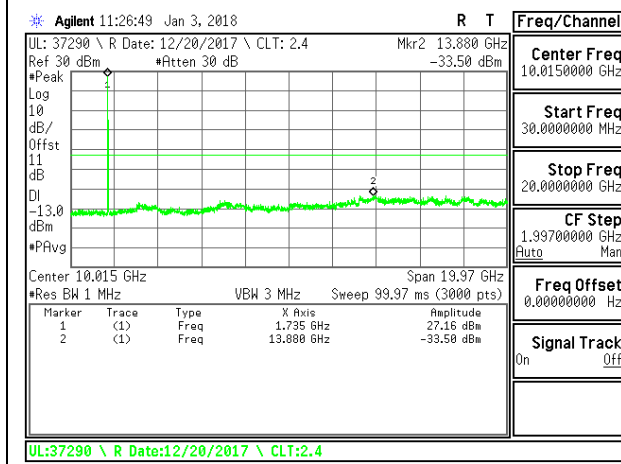


LTE B66 20MHz QPSK Middle Channel RB1-0

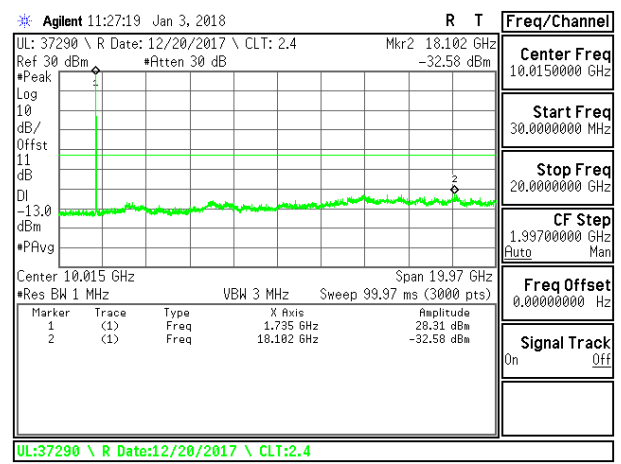

LTE B66 20MHz 16QAM Middle Channel RB1-0

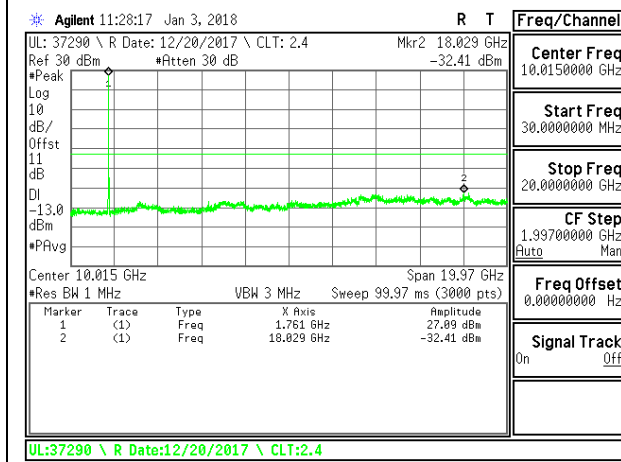

LTE B66 20MHz QPSK High Channel RB1-0

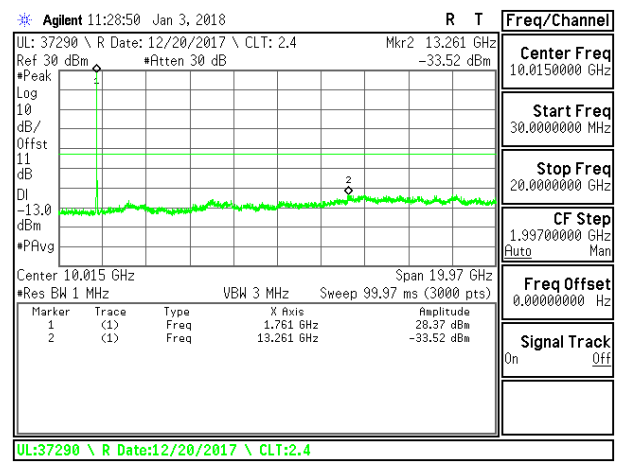

LTE B66 20MHz 16QAM High Channel RB1-0

8.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213

LIMITS

FCC: §22.355, §90.213

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC: §24.235 & §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30°C to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)
Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.
End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- LTE Band 2
- LTE Band 7
- LTE Band 13
- LTE Band 17
- LTE Band 26
- LTE Band 66

RESULTS

See the following pages.

Note(s):

GSM 850 Band Measured Results

GSM 850 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) no testing is necessary due to overlapping frequency range.

GSM 1900 Band Measured Results

GSM 1900 (Frequency range: 1850-1910 MHz) is covered by LTE Band 2 (Frequency range: 1850-1910 MHz) no testing is necessary due to overlapping frequency range.

WCDMA Band 5 Measured Results

WCDMA Band 5 (Frequency range: 826-84 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) no testing is necessary due to overlapping frequency range.

WCDMA Band 2 Measured Results

WCDMA Band 2 (Frequency range: 1850-1910 MHz) is covered by LTE Band 2 (Frequency range: 1850-1910 MHz) no testing is necessary due to overlapping frequency range.

WCDMA Band 4 Measured Results

WCDMA Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) no testing is necessary due to overlapping frequency range.

8.4.1. LTE BAND 2

ID:	43575	Date:	1/2/17
------------	-------	--------------	--------

QPSK, (20MHz BANDWIDTH)

Reference Frequency: LTE Band 2 Mid Channel		1880	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4700.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	1880.000015	0.000	2.5
3.85	40	1880.000015	0.000	2.5
3.85	30	1880.000016	0.000	2.5
3.85	20	1880.000016	0	2.5
3.85	10	1880.000017	-0.001	2.5
3.85	0	1880.000016	0.000	2.5
3.85	-10	1880.000018	-0.001	2.5
3.85	-20	1880.000015	0.000	2.5
3.85	-30	1880.000014	0.001	2.5

Reference Frequency: LTE Band 2 Mid Channel		1880	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4700.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	1880.000016	0	2.5
4.25	25	1880.000017	-0.001	2.5
3.65	25	1880.000018	-0.001	2.5

8.4.2. LTE BAND 7

ID:	43575	Date:	1/2/17
------------	-------	--------------	--------

QPSK, (20MHz BANDWIDTH)

Reference Frequency: LTE Band 7 Mid Channel		2535	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		6337.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	2534.999988	0.012	2.5
3.85	40	2534.999987	0.012	2.5
3.85	30	2535.000013	0.002	2.5
3.85	20	2535.000017	0	2.5
3.85	10	2535.000014	0.001	2.5
3.85	0	2535.000012	0.002	2.5
3.85	-10	2535.000012	0.002	2.5
3.85	-20	2535.000013	0.002	2.5
3.85	-30	2534.999989	0.011	2.5

Reference Frequency: LTE Band 7 Mid Channel		2535	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		6337.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	2535.000017	0	2.5
4.25	25	2535.000013	0.002	2.5
3.65	25	2535.000017	0.000	2.5

8.4.3. LTE BAND 13

ID:	43575	Date:	1/2/17
------------	-------	--------------	--------

QPSK, (10MHz BANDWIDTH)

Reference Frequency: LTE Band 13 Mid Channel		782	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		1955.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	782.000013	-0.028	2.5
3.85	40	781.999995	-0.005	2.5
3.85	30	781.999993	-0.002	2.5
3.85	20	781.999991	0	2.5
3.85	10	781.999991	0.000	2.5
3.85	0	781.999993	-0.002	2.5
3.85	-10	781.999992	-0.001	2.5
3.85	-20	782.000013	-0.028	2.5
3.85	-30	781.999993	-0.003	2.5

Reference Frequency: LTE Band 13 Mid Channel		782	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		1955.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	781.999991	0	2.5
4.25	25	781.999990	0.001	2.5
3.65	25	781.999989	0.002	2.5

8.4.4. LTE BAND 26

ID:	43575	Date:	1/2/17
------------	-------	--------------	--------

QPSK, (10MHz BANDWIDTH)

Reference Frequency: LTE Band 26 Mid Channel		831.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		2078.750	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	831.500004	0.007	2.5
3.85	40	831.500006	0.005	2.5
3.85	30	831.500010	0.000	2.5
3.85	20	831.500010	0	2.5
3.85	10	831.500008	0.002	2.5
3.85	0	831.500023	-0.015	2.5
3.85	-10	831.500013	-0.004	2.5
3.85	-20	831.500011	-0.001	2.5
3.85	-30	831.500010	0.001	2.5

Reference Frequency: LTE Band 26 Mid Channel		831.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		2078.750	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	831.500010	0	2.5
4.25	25	831.500008	0.002	2.5
3.65	25	831.500010	0.000	2.5

8.4.5. LTE BAND 66

ID:	43575	Date:	1/2/17
------------	-------	--------------	--------

QPSK, (20MHz BANDWIDTH)

Reference Frequency: LTE Band 66 Mid Channel		1745	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4362.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	1745.000010	-0.001	2.5
3.85	40	1745.000007	0.001	2.5
3.85	30	1745.000009	0.000	2.5
3.85	20	1745.000009	0	2.5
3.85	10	1745.000010	-0.001	2.5
3.85	0	1745.000012	-0.002	2.5
3.85	-10	1745.000007	0.001	2.5
3.85	-20	1745.000007	0.001	2.5
3.85	-30	1745.000009	0.000	2.5

Reference Frequency: LTE Band 66 Mid Channel		1745	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4362.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	1745.000009	0	2.5
4.25	25	1745.000009	0.000	2.5
3.65	25	1745.000011	-0.001	2.5

8.5. PEAK-TO-AVERAGE POWER RATIO


LIMIT

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.


RESULT

Full resource block (FRB) for each bandwidth was used to measure as the worst case. The results from all CCDF measurements are passed with 13dB peak-to-average power ratio criteria.


8.5.1. GSM

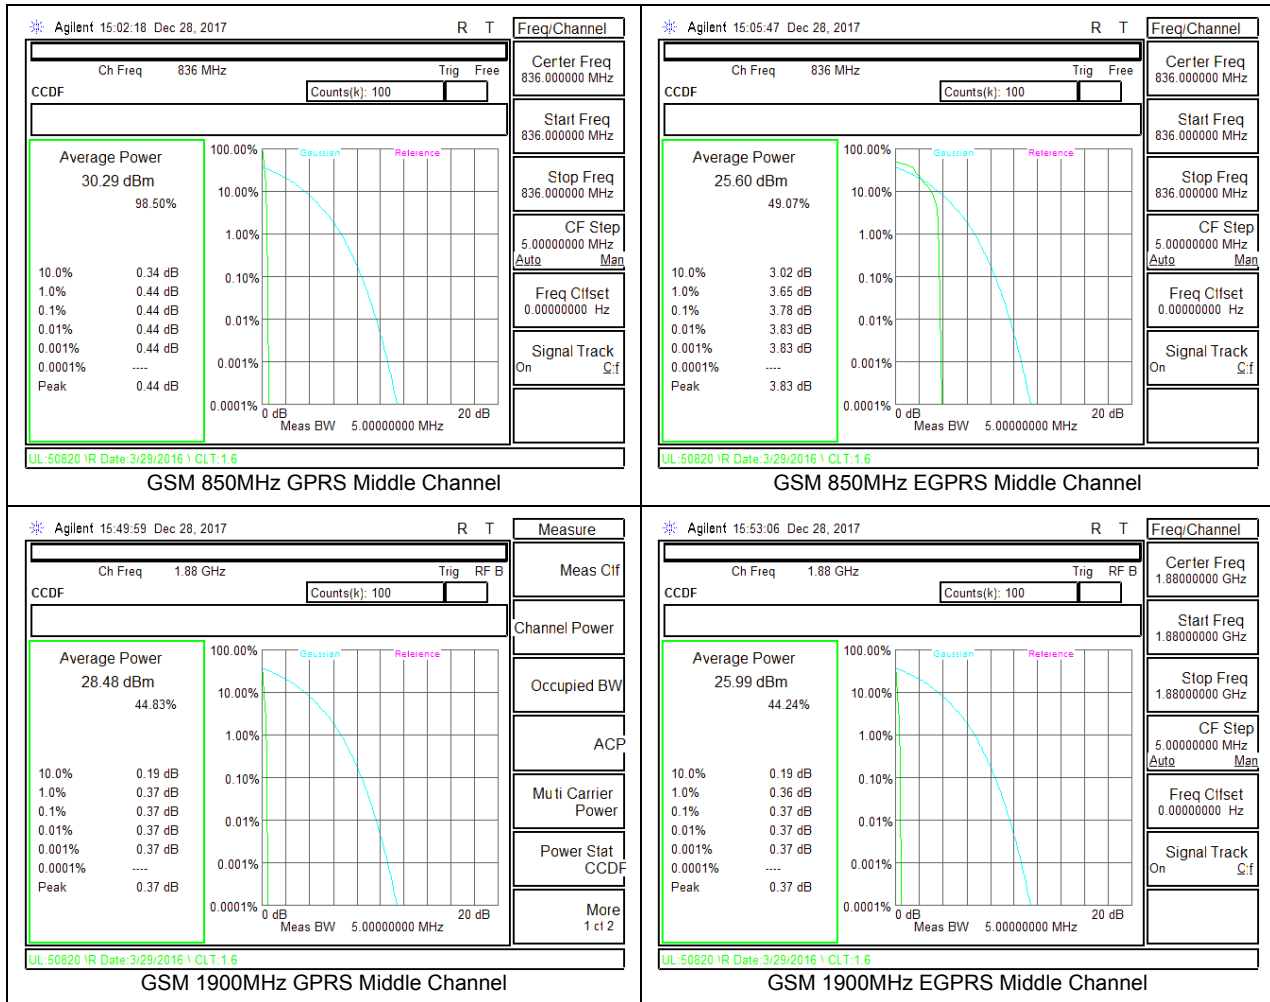


8.5.2. WCDMA

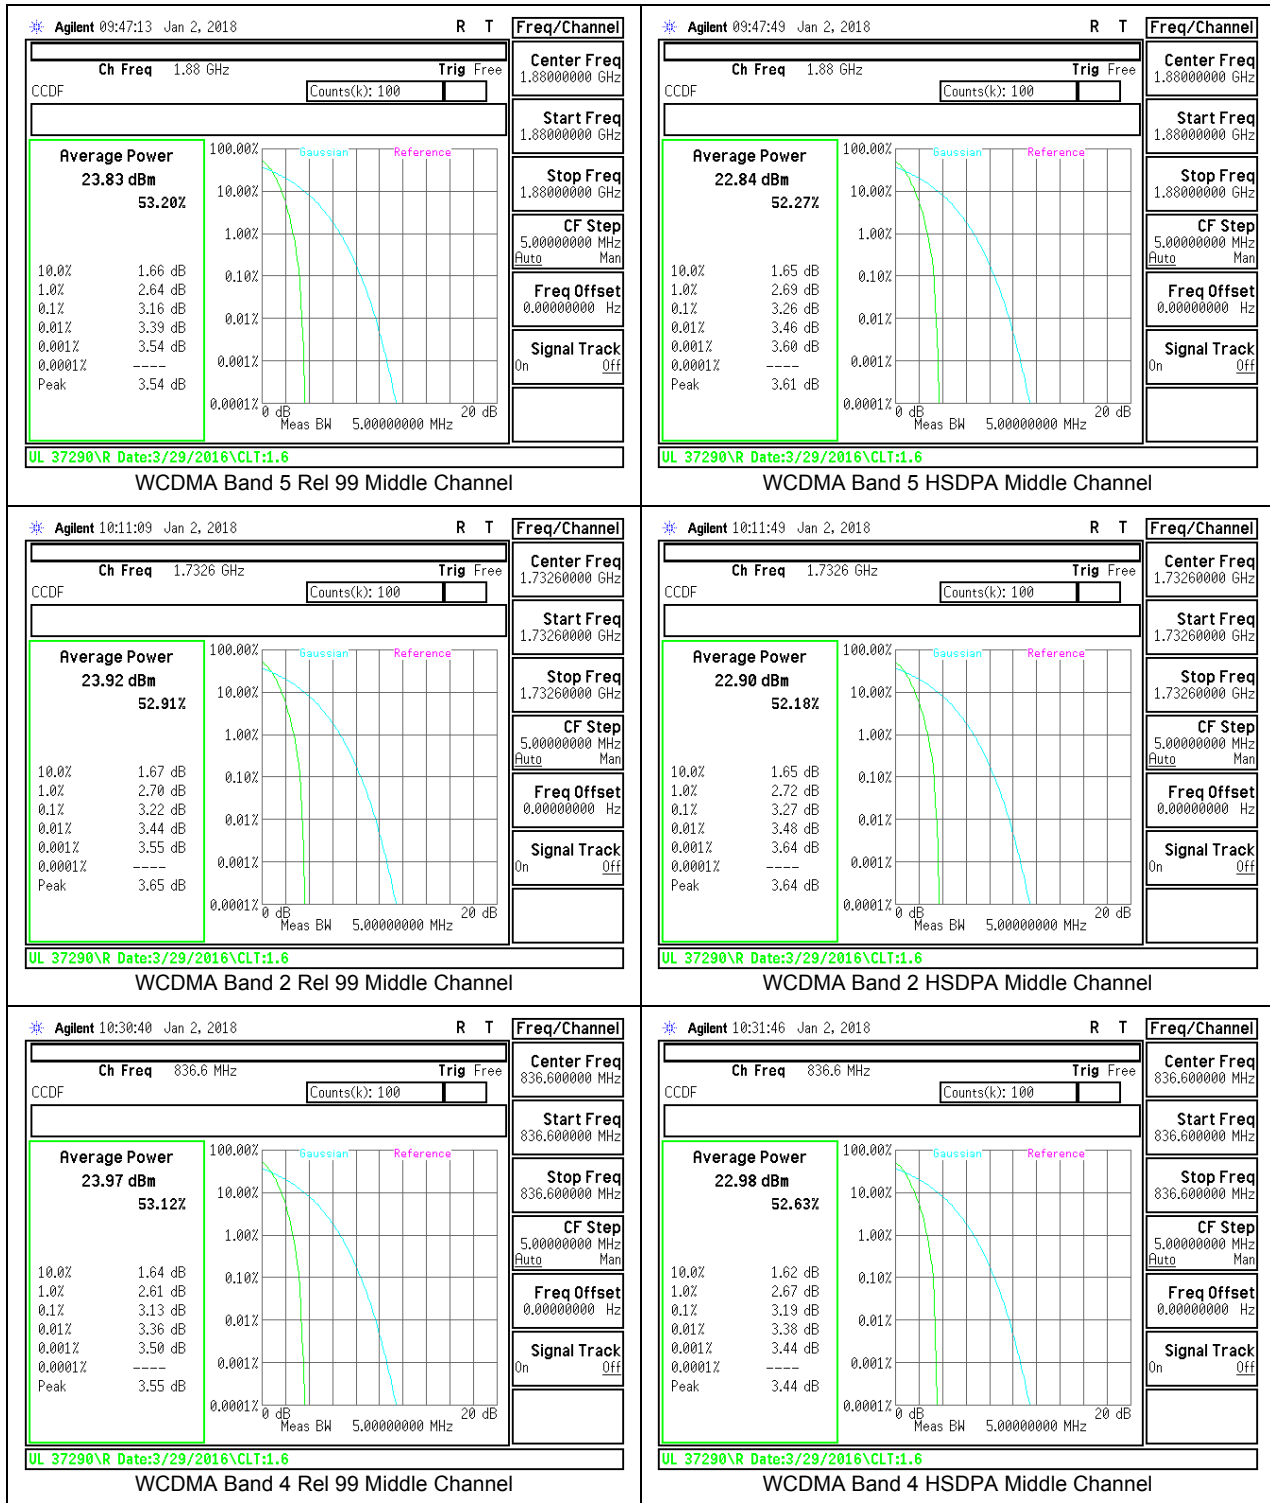


8.5.3. LTE BAND 2

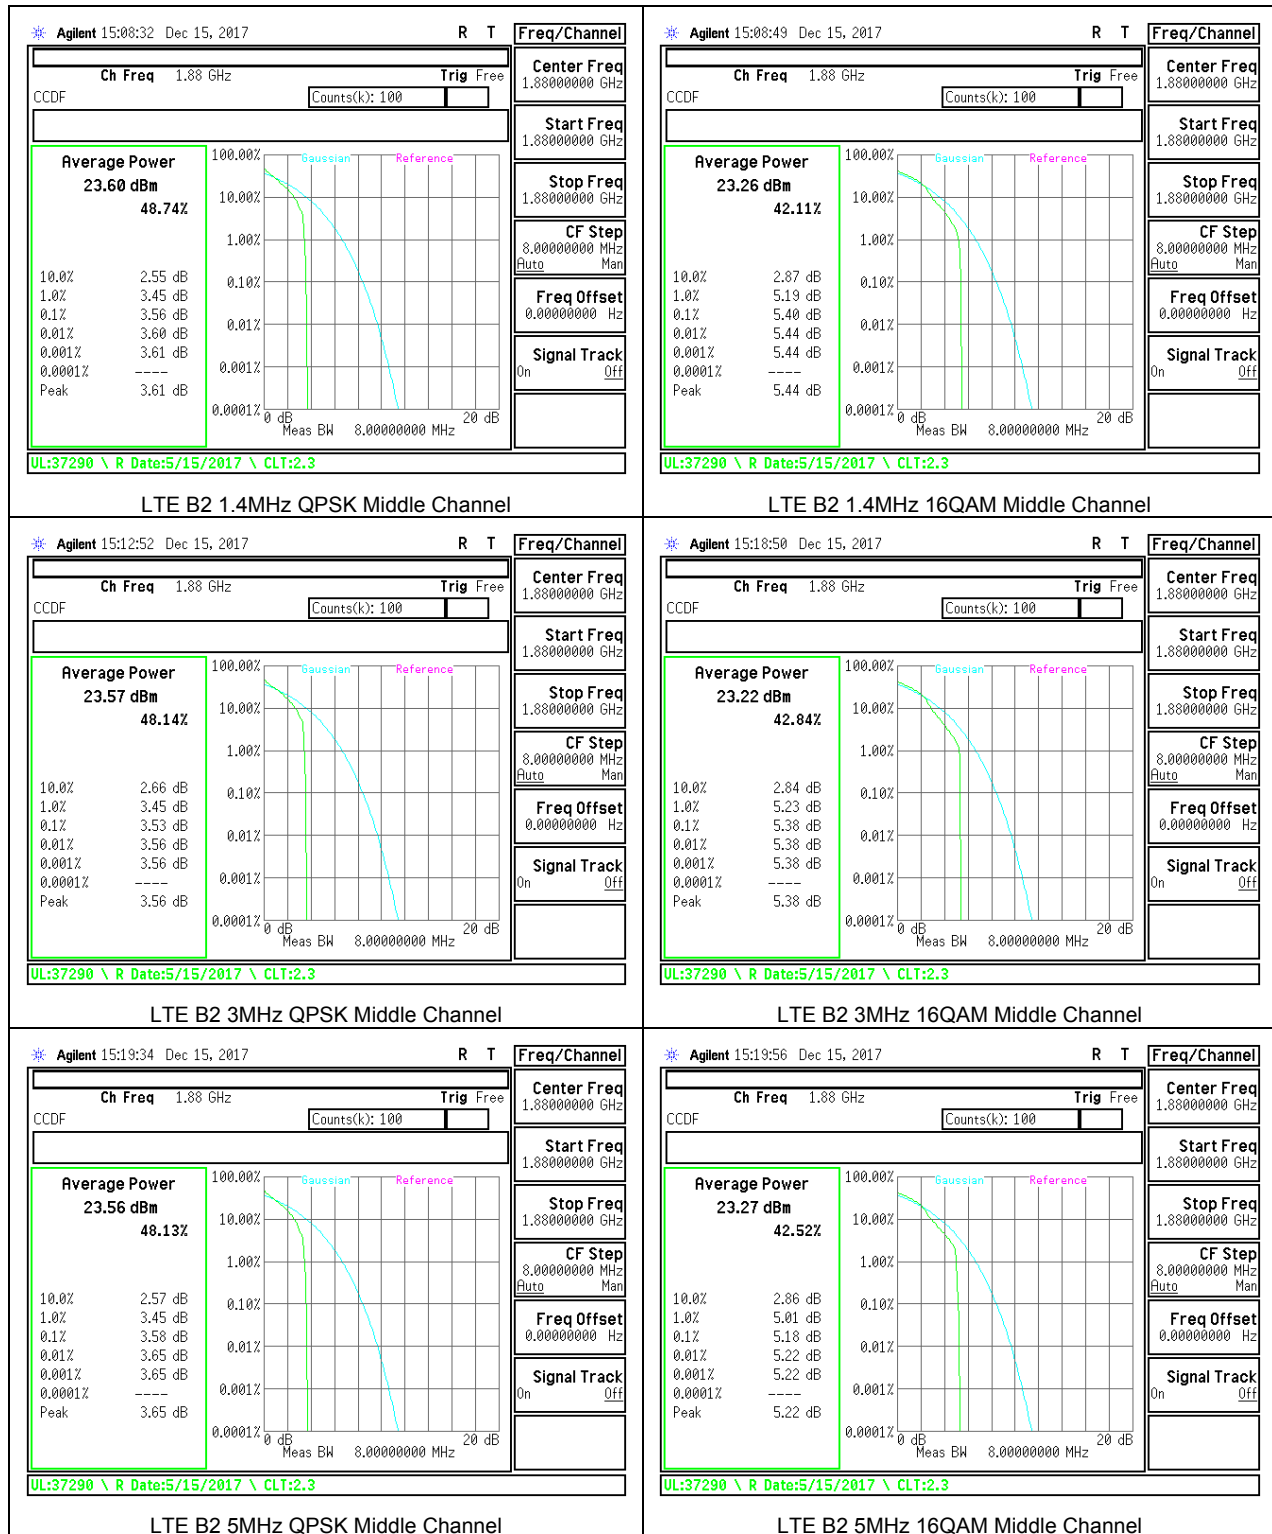


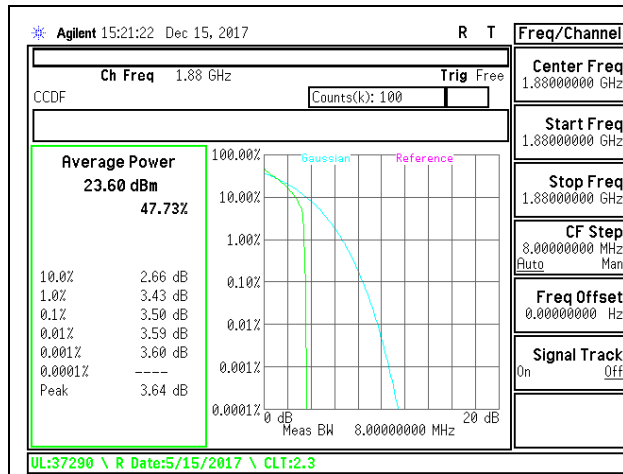


LTE B2 10MHz QPSK Middle Channel

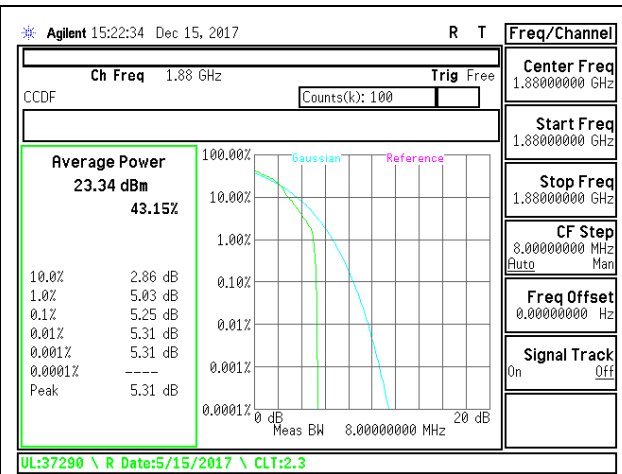


LTE B2 10MHz 16QAM Middle Channel

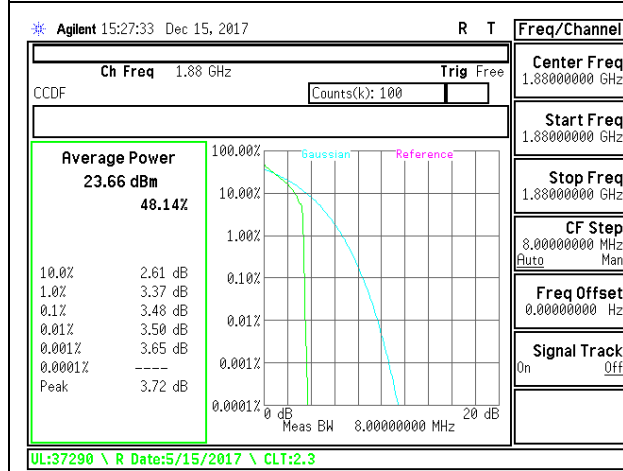


LTE B2 15MHz QPSK Middle Channel

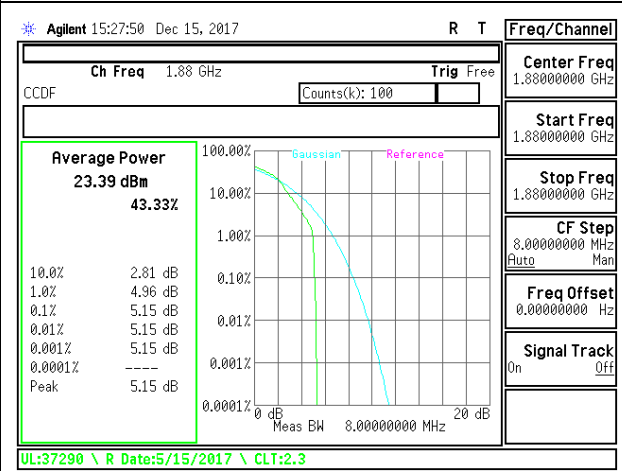

LTE B2 15MHz 16QAM Middle Channel

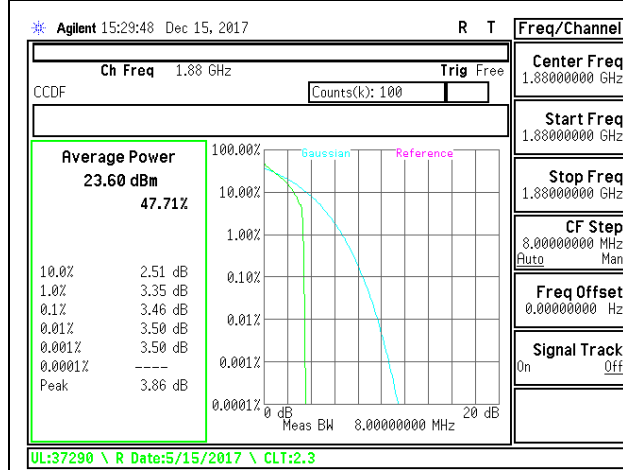




LTE B2 20MHz QPSK Middle Channel

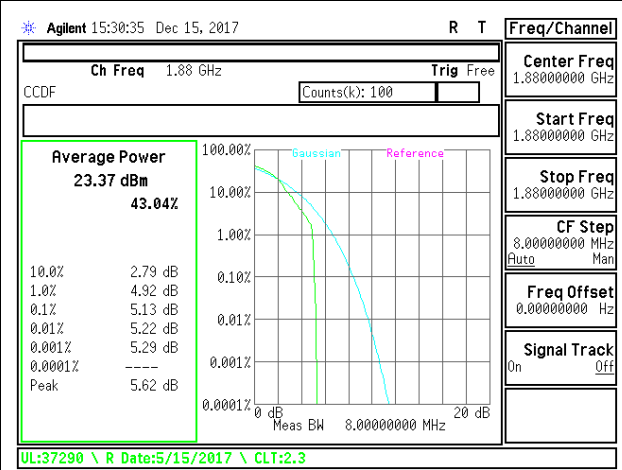


LTE B2 20MHz 16QAM Middle Channel



8.5.4. LTE BAND 5

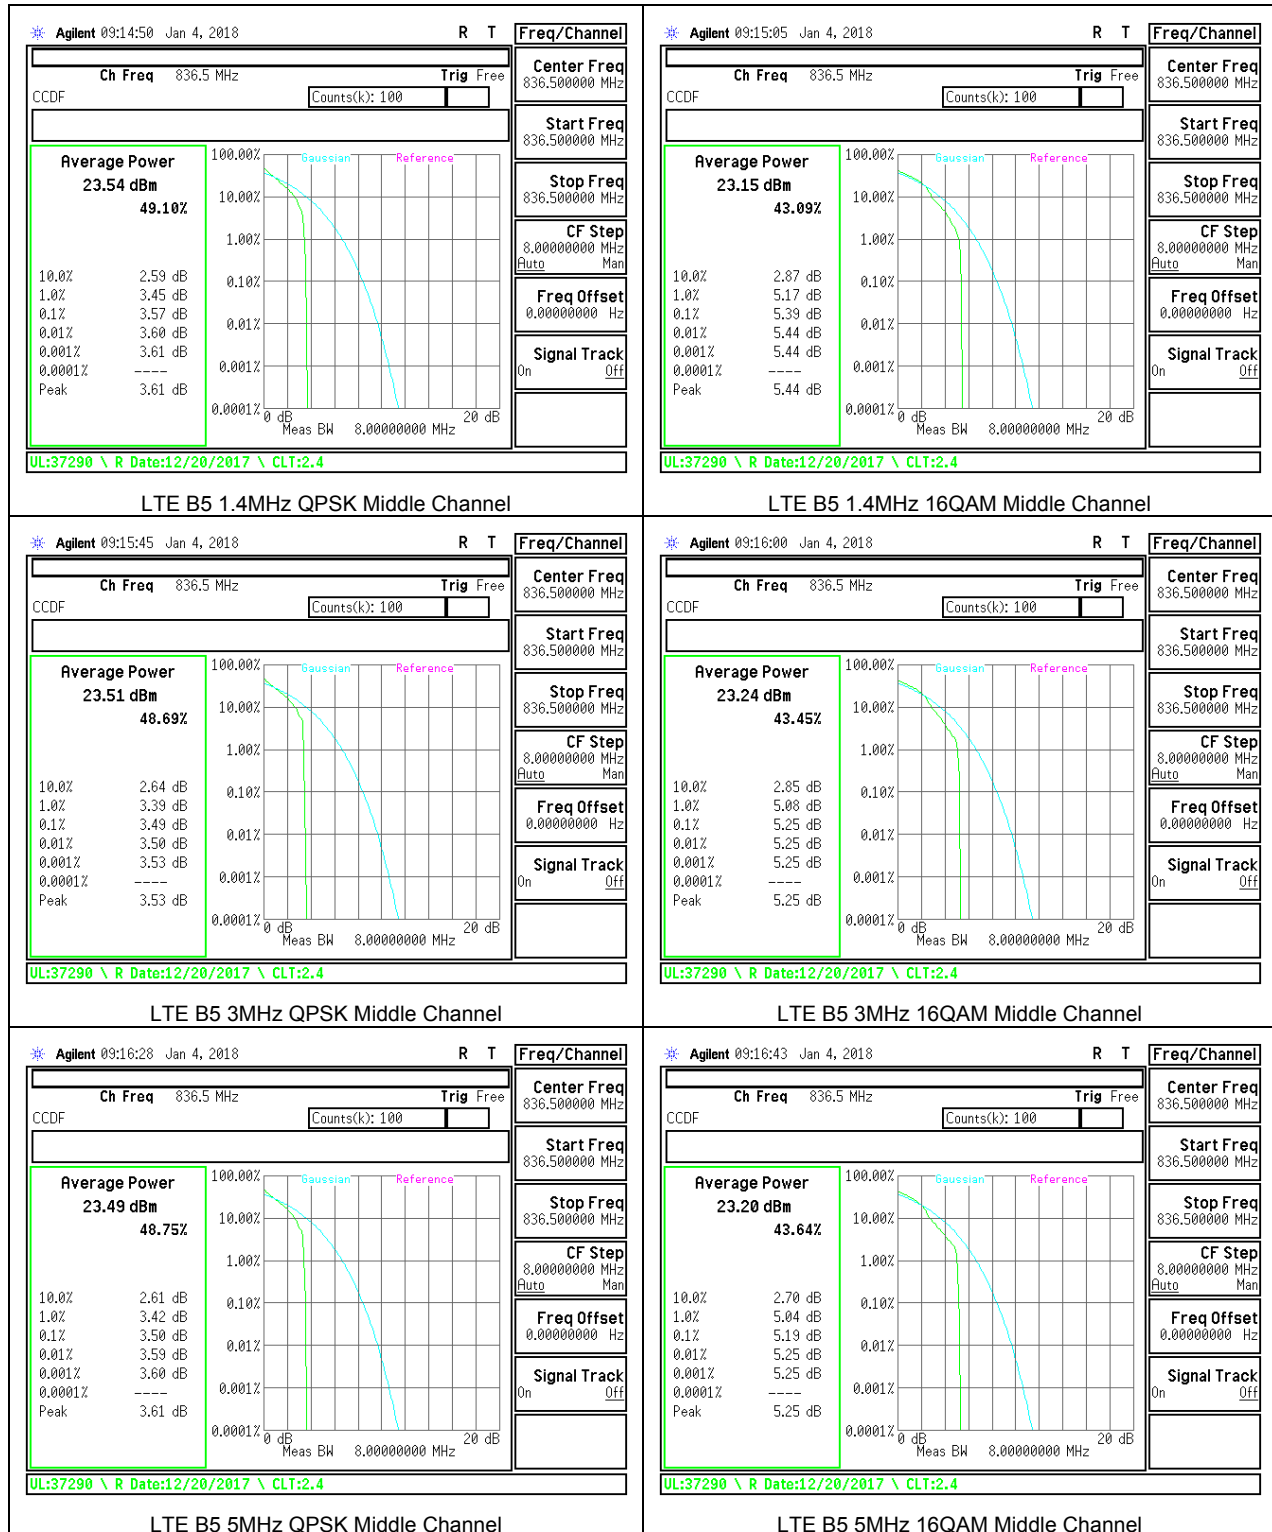

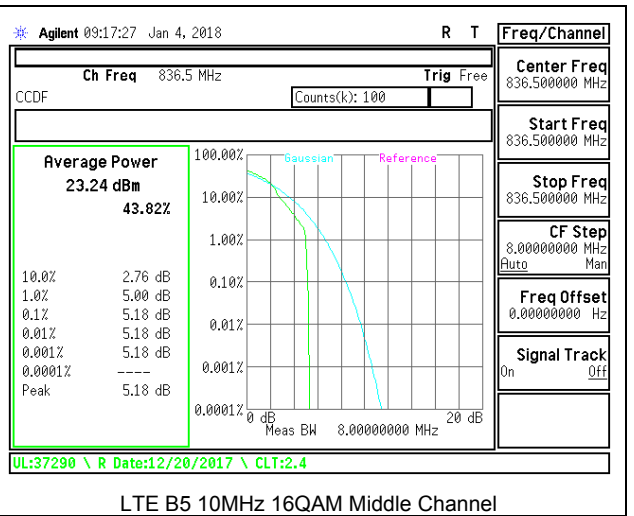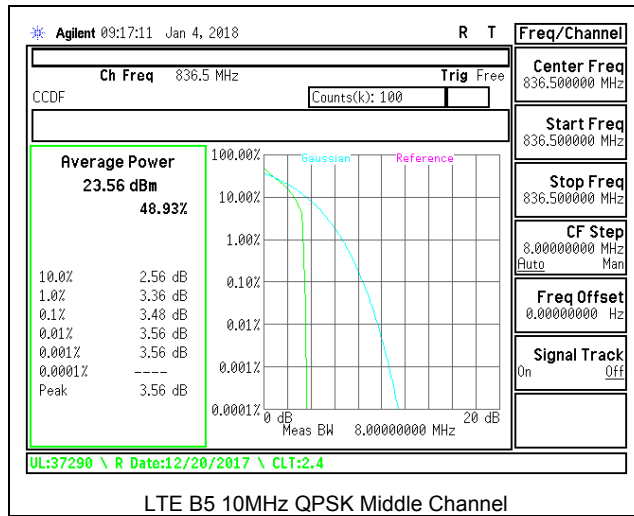




8.5.5. LTE BAND 7

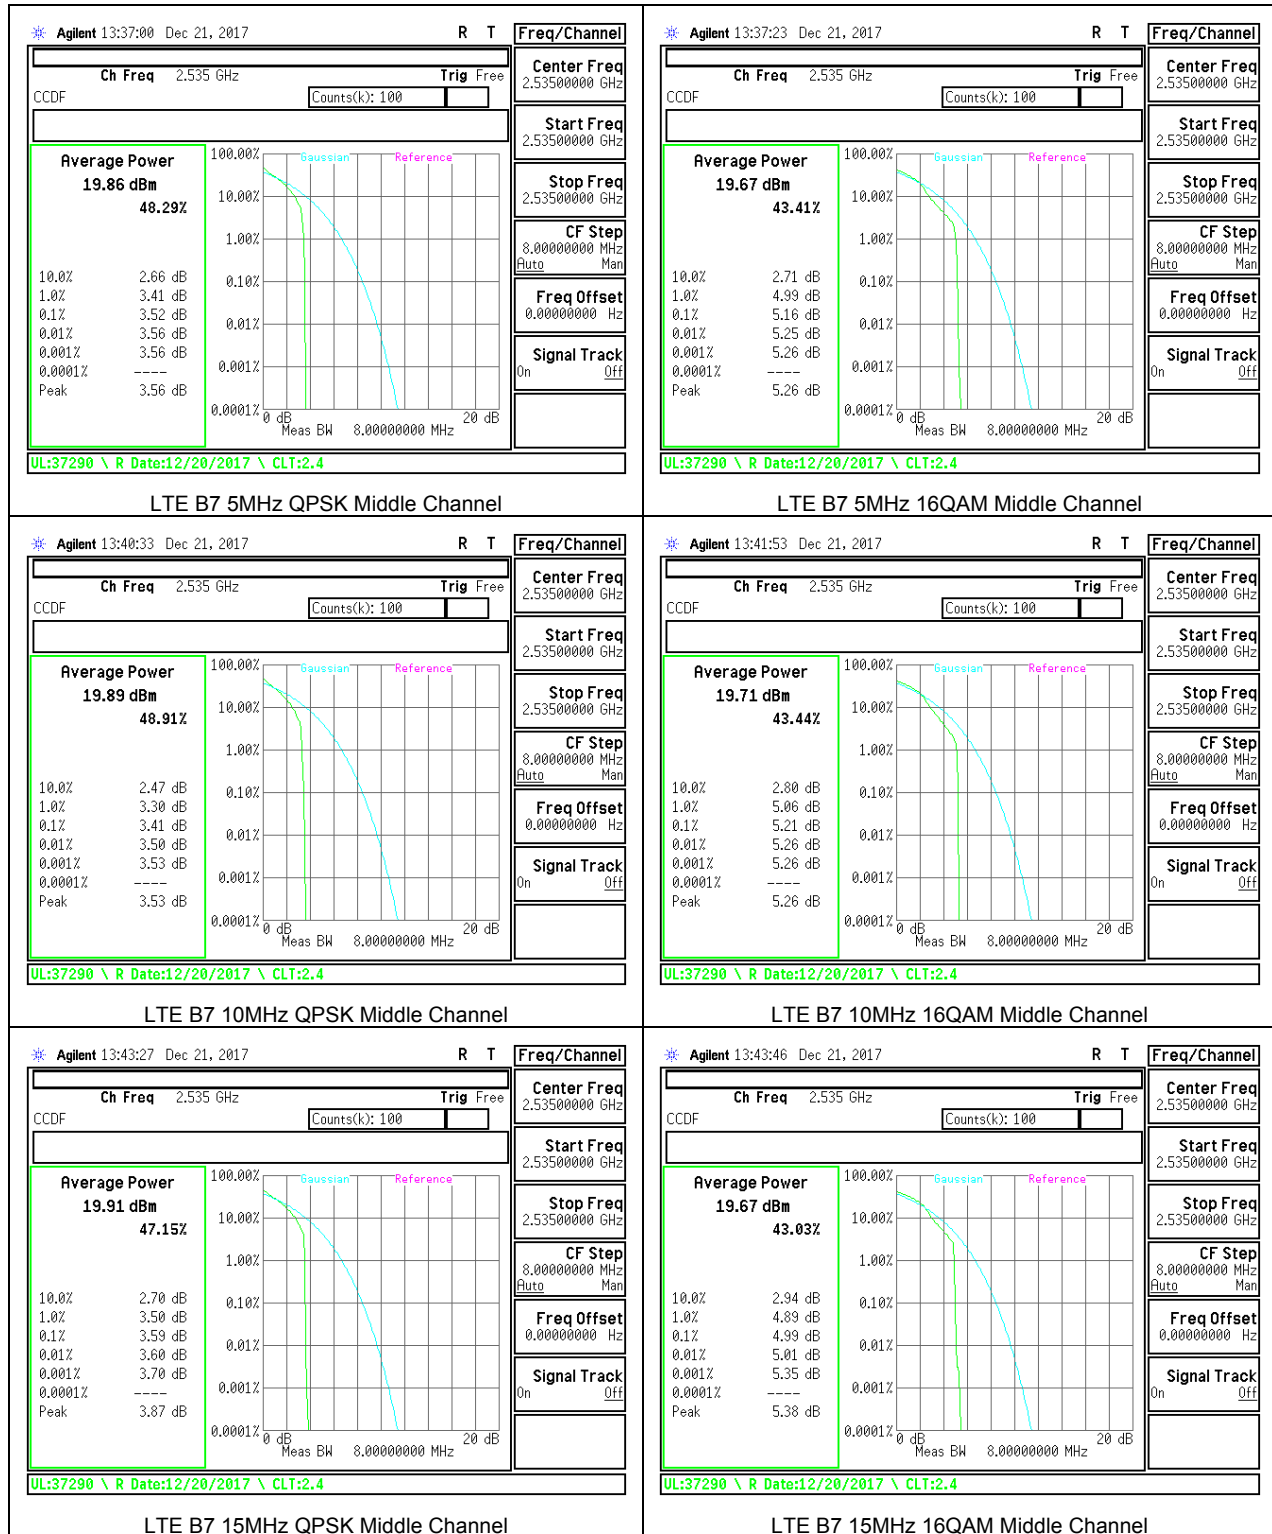

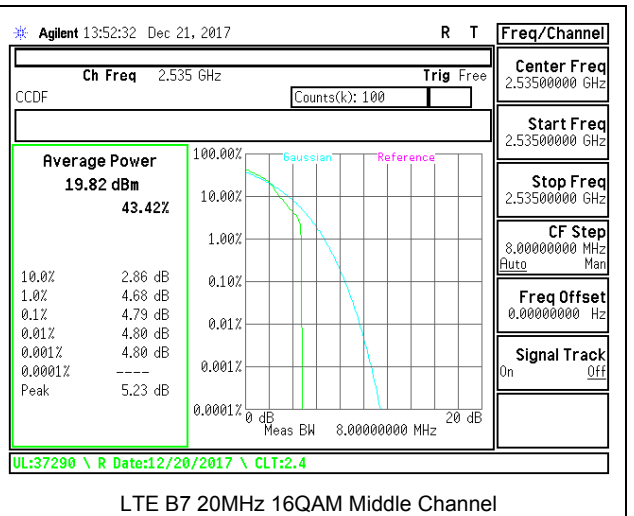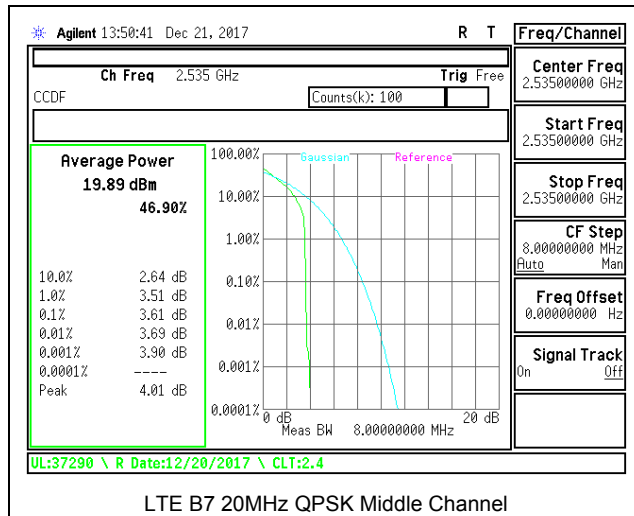


8.5.6. LTE BAND 12

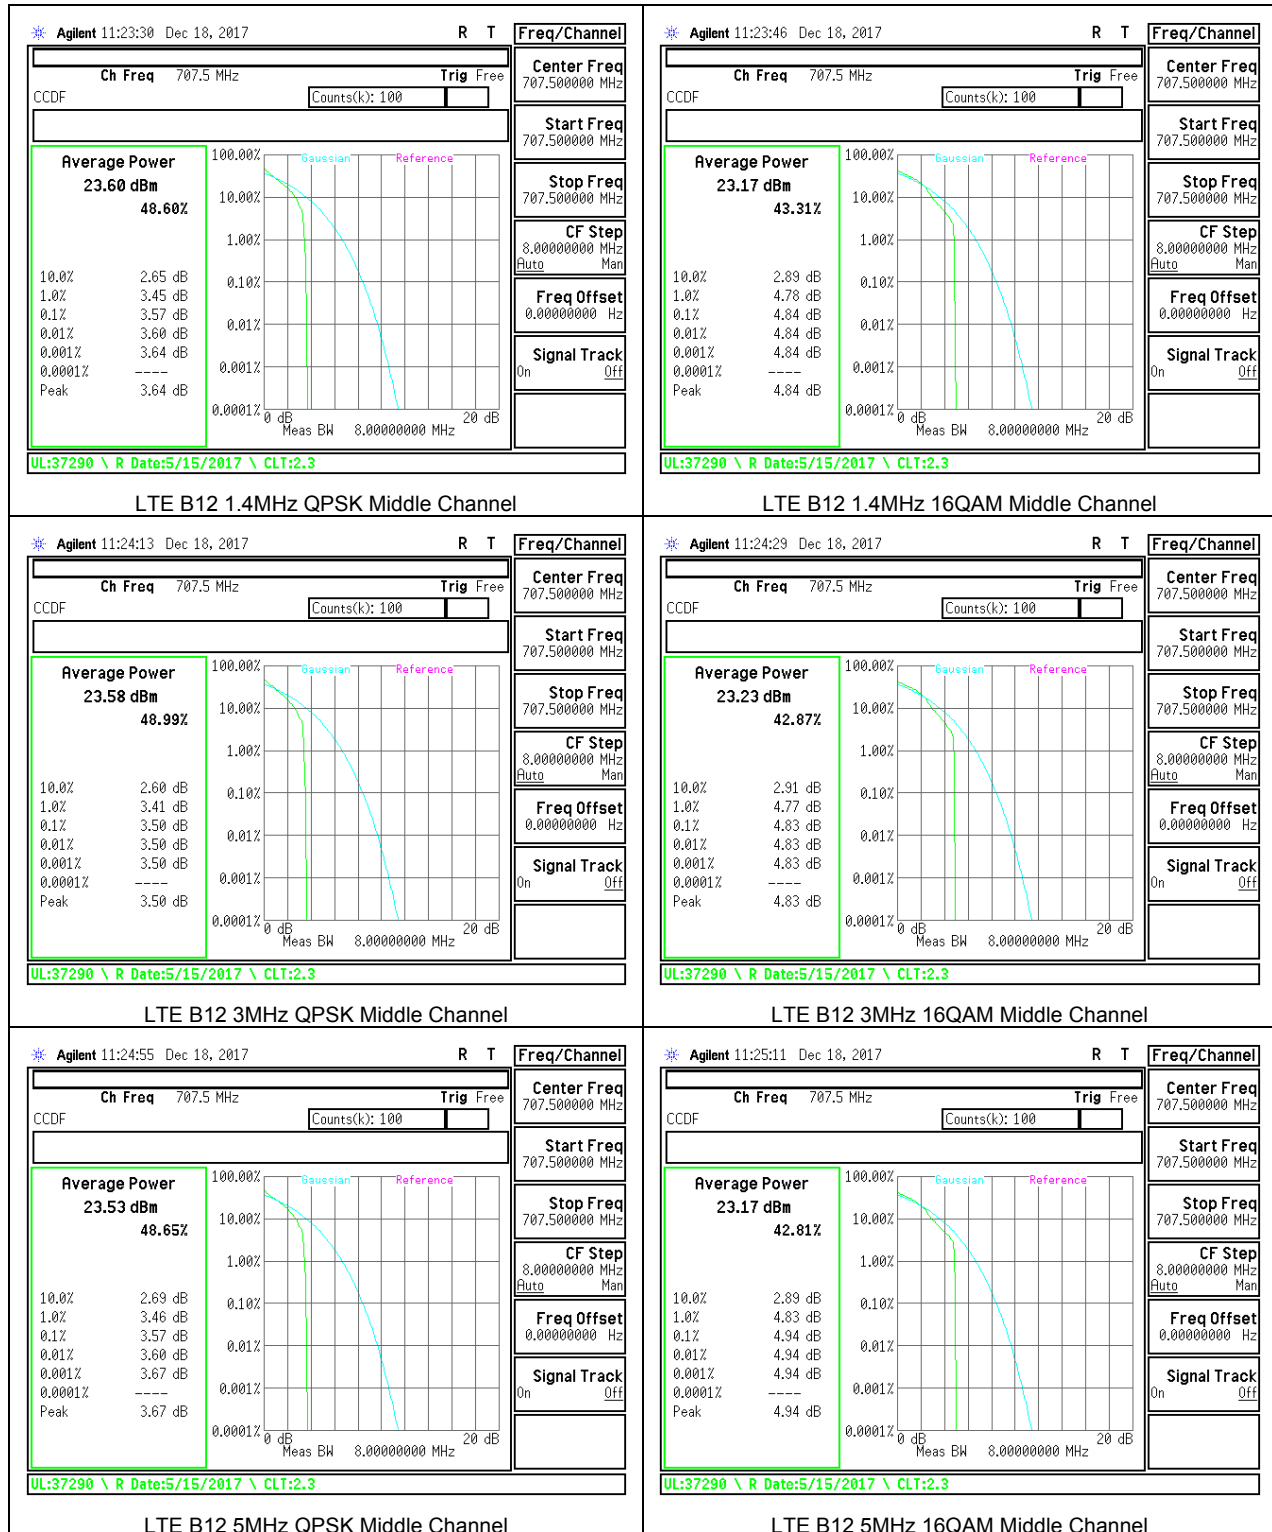


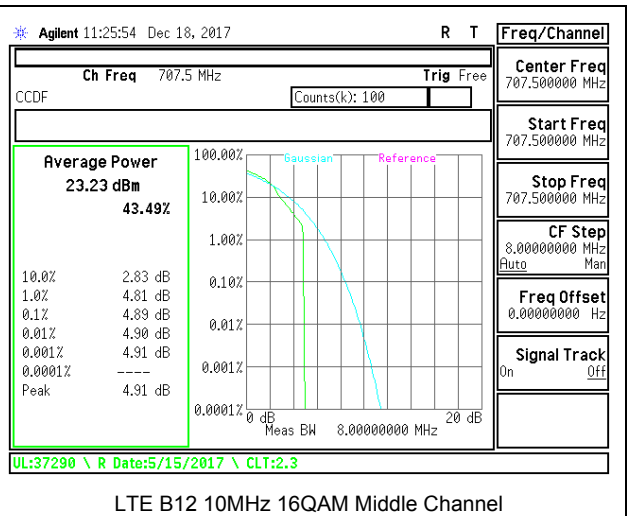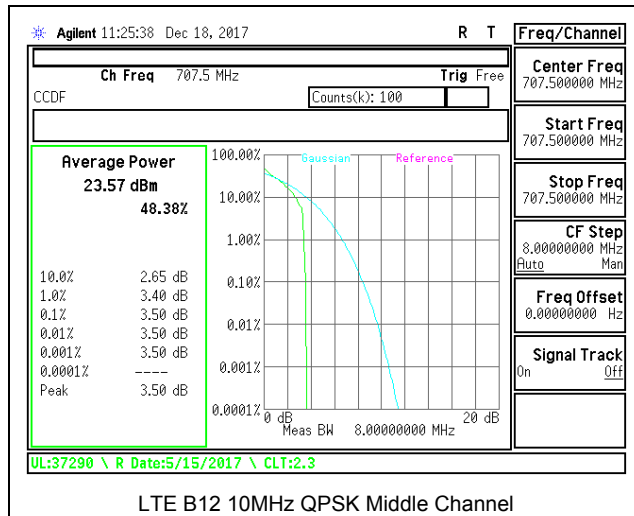


8.5.7. LTE BAND 13

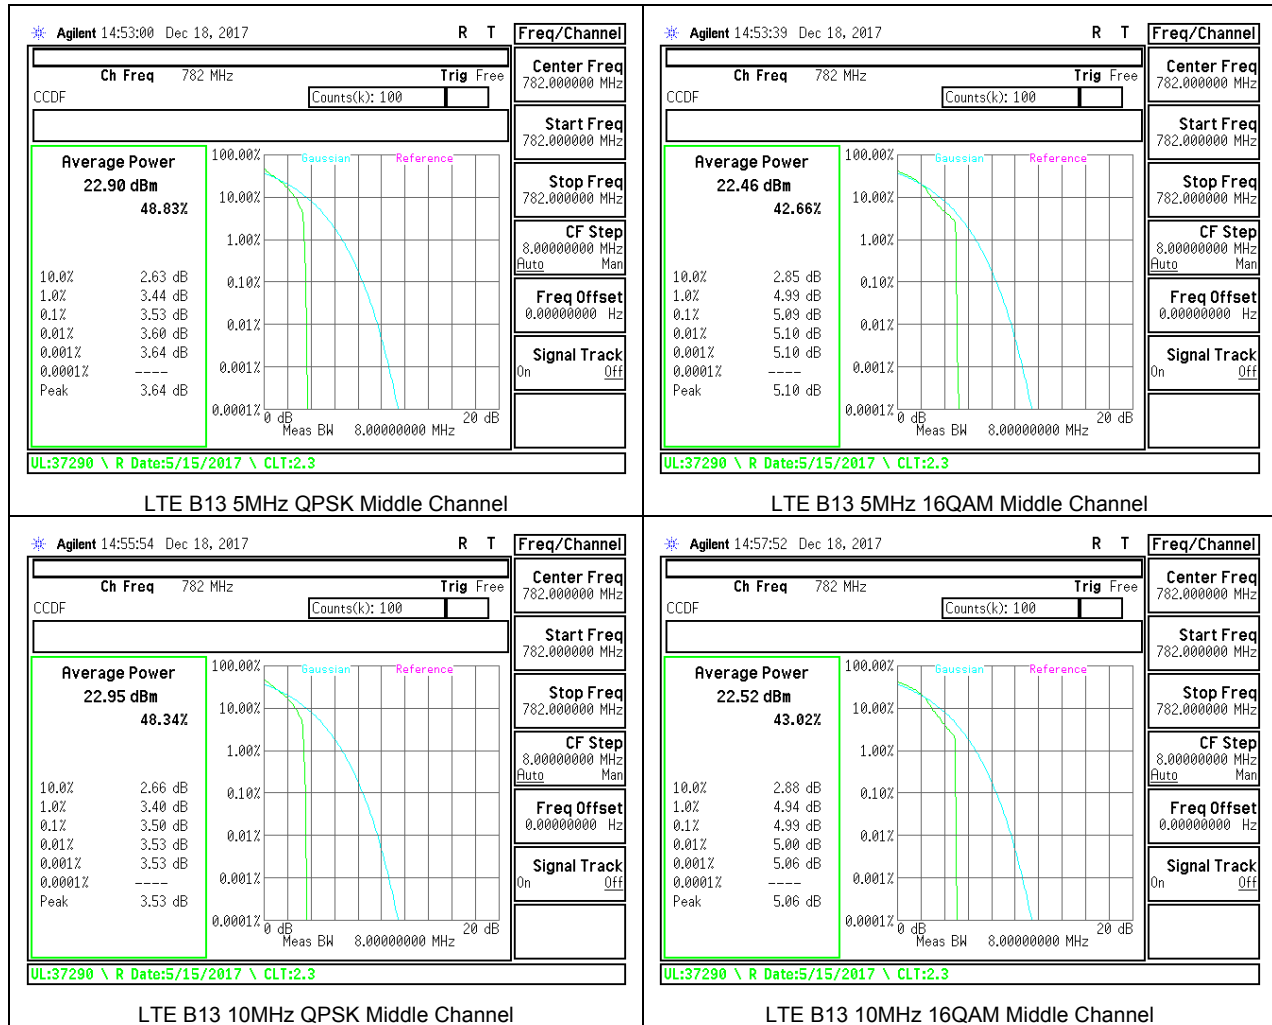


8.5.8. LTE BAND 26

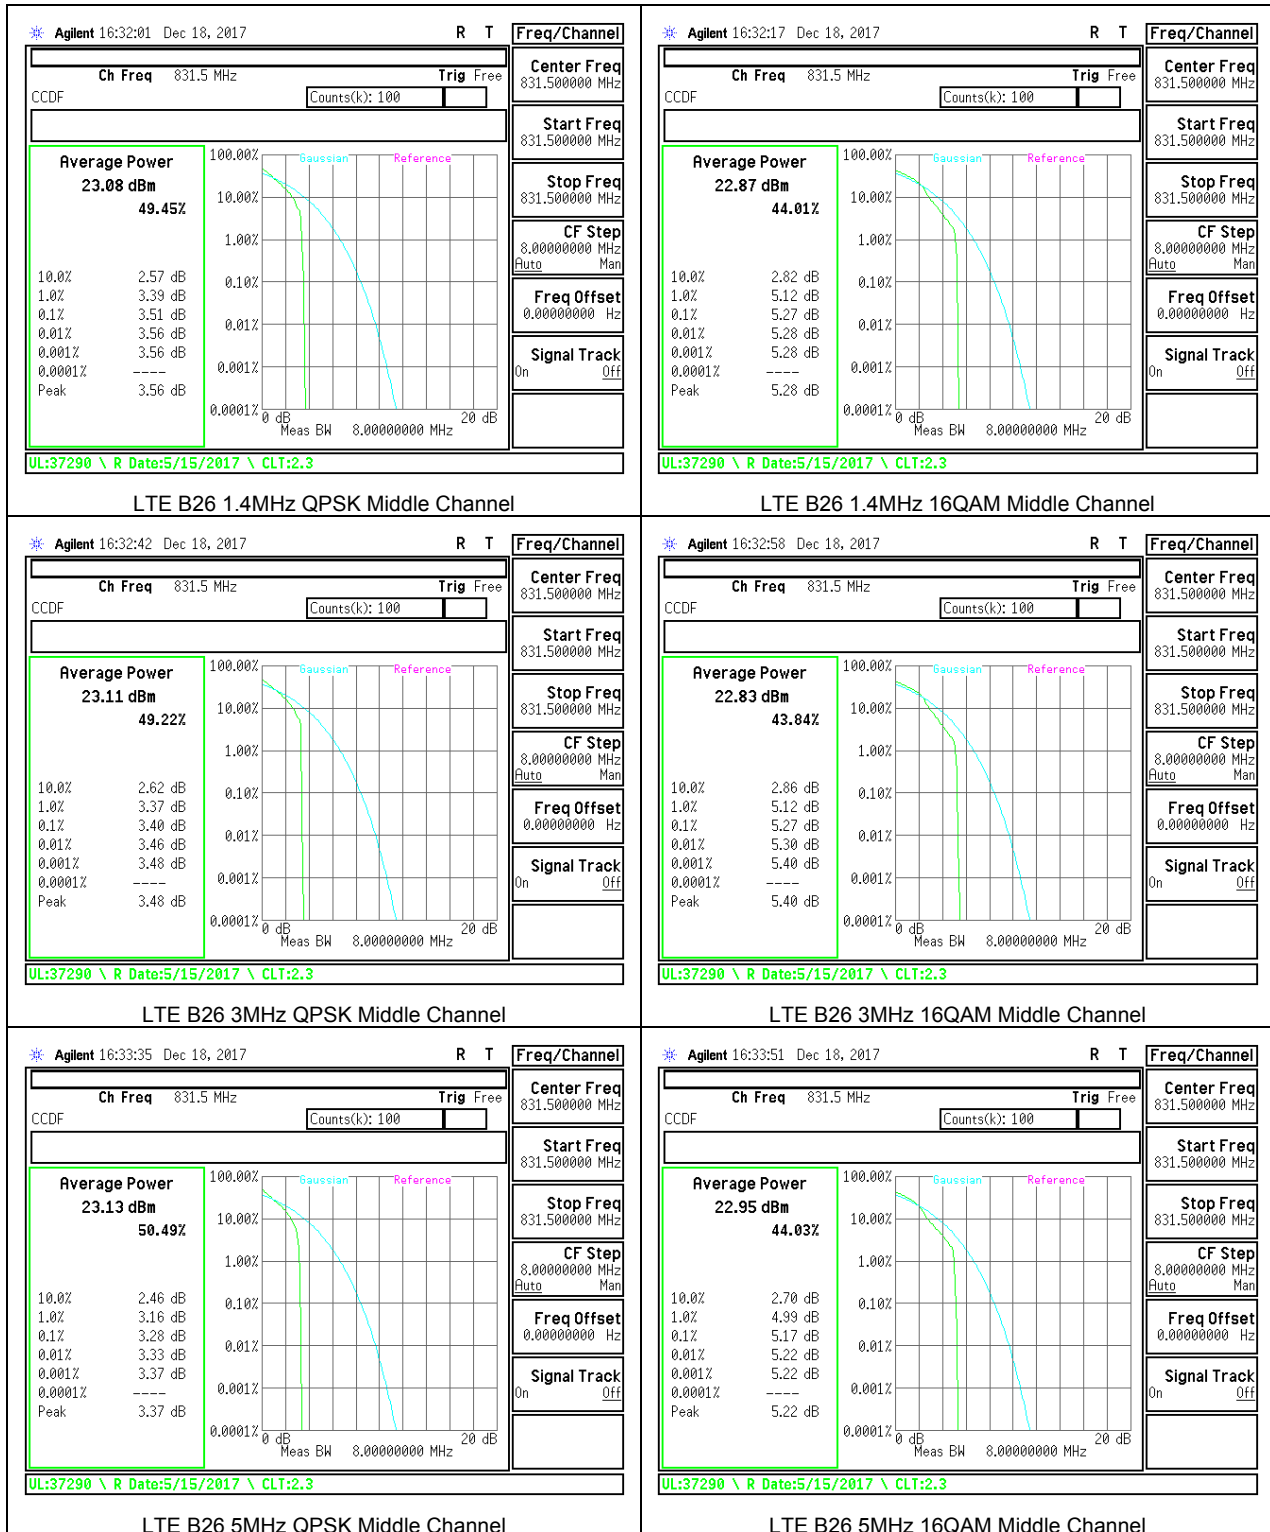


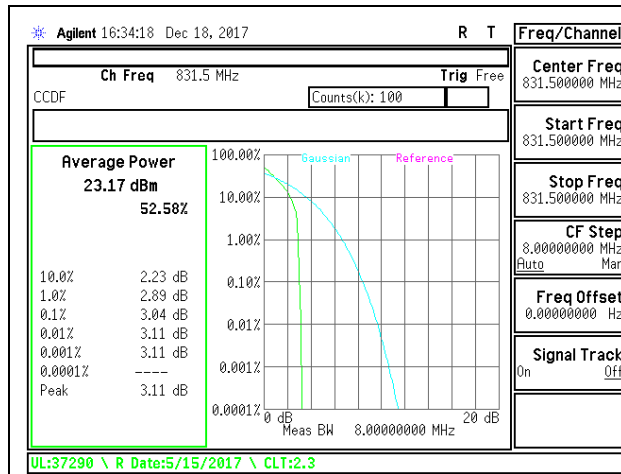


LTE B26 10MHz QPSK Middle Channel

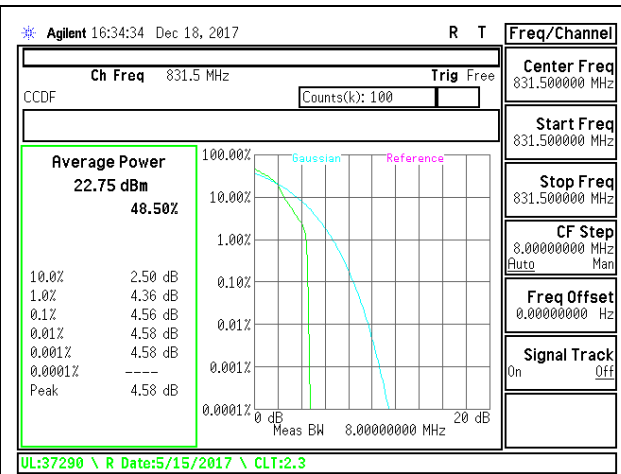

LTE B26 10MHz 16QAM Middle Channel

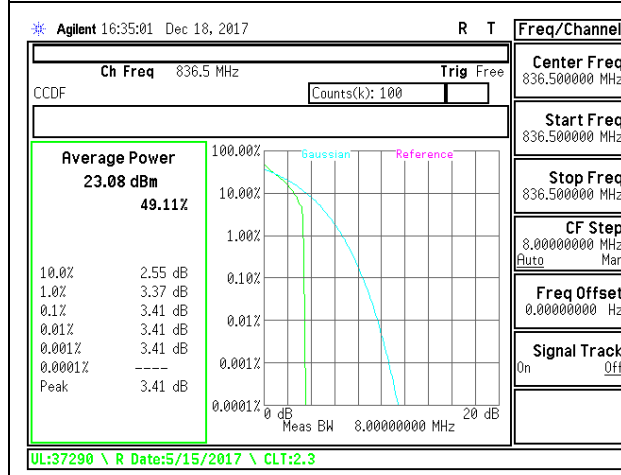




LTE B26 15MHz QPSK Middle Channel

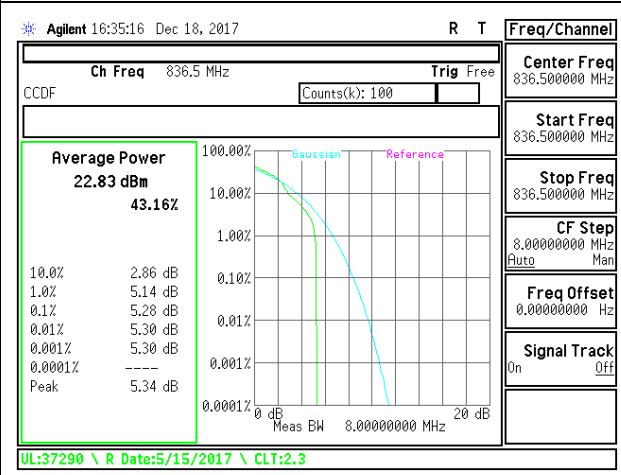


LTE B26 15MHz 16QAM Middle Channel


8.5.9. LTE BAND 41

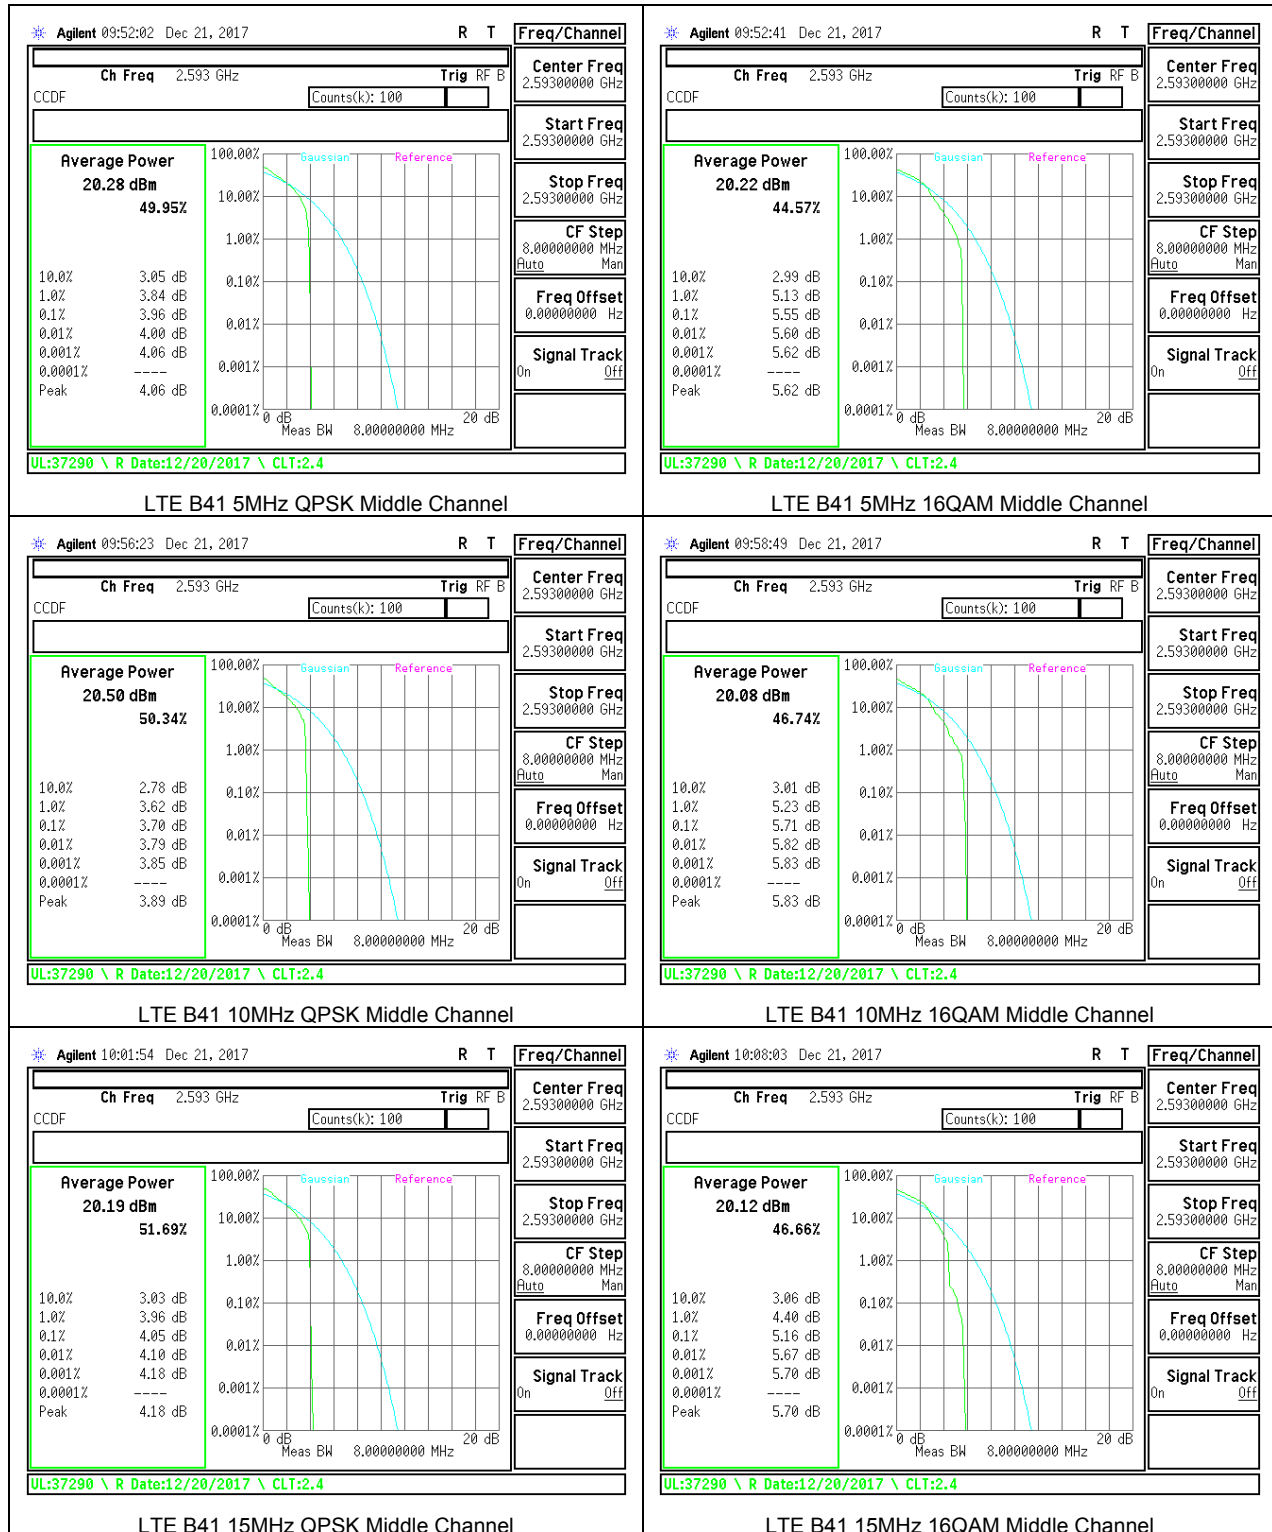

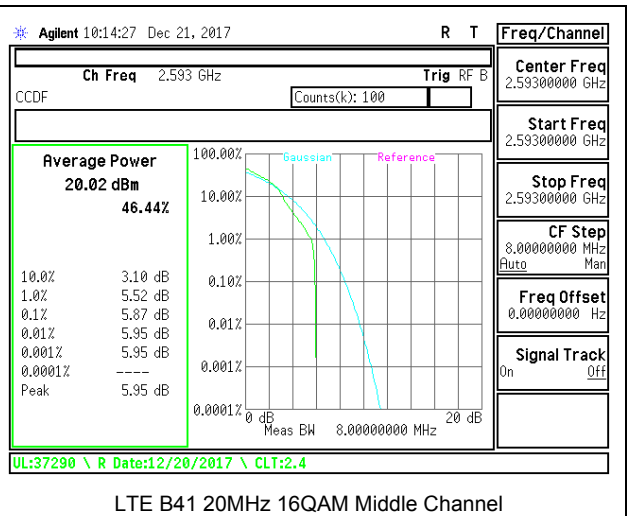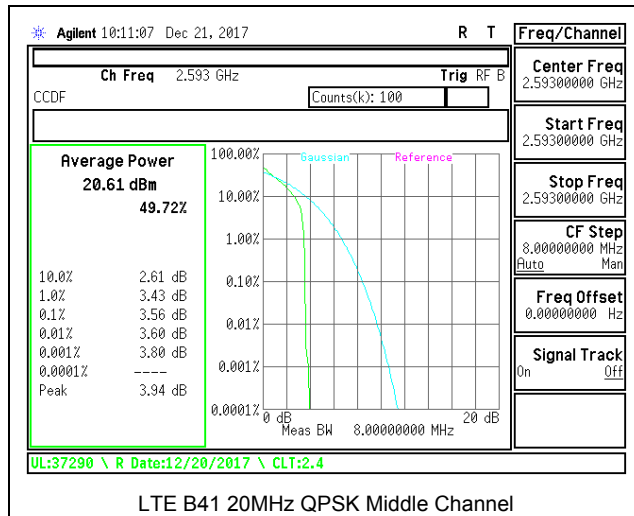


8.5.10. LTE BAND 66

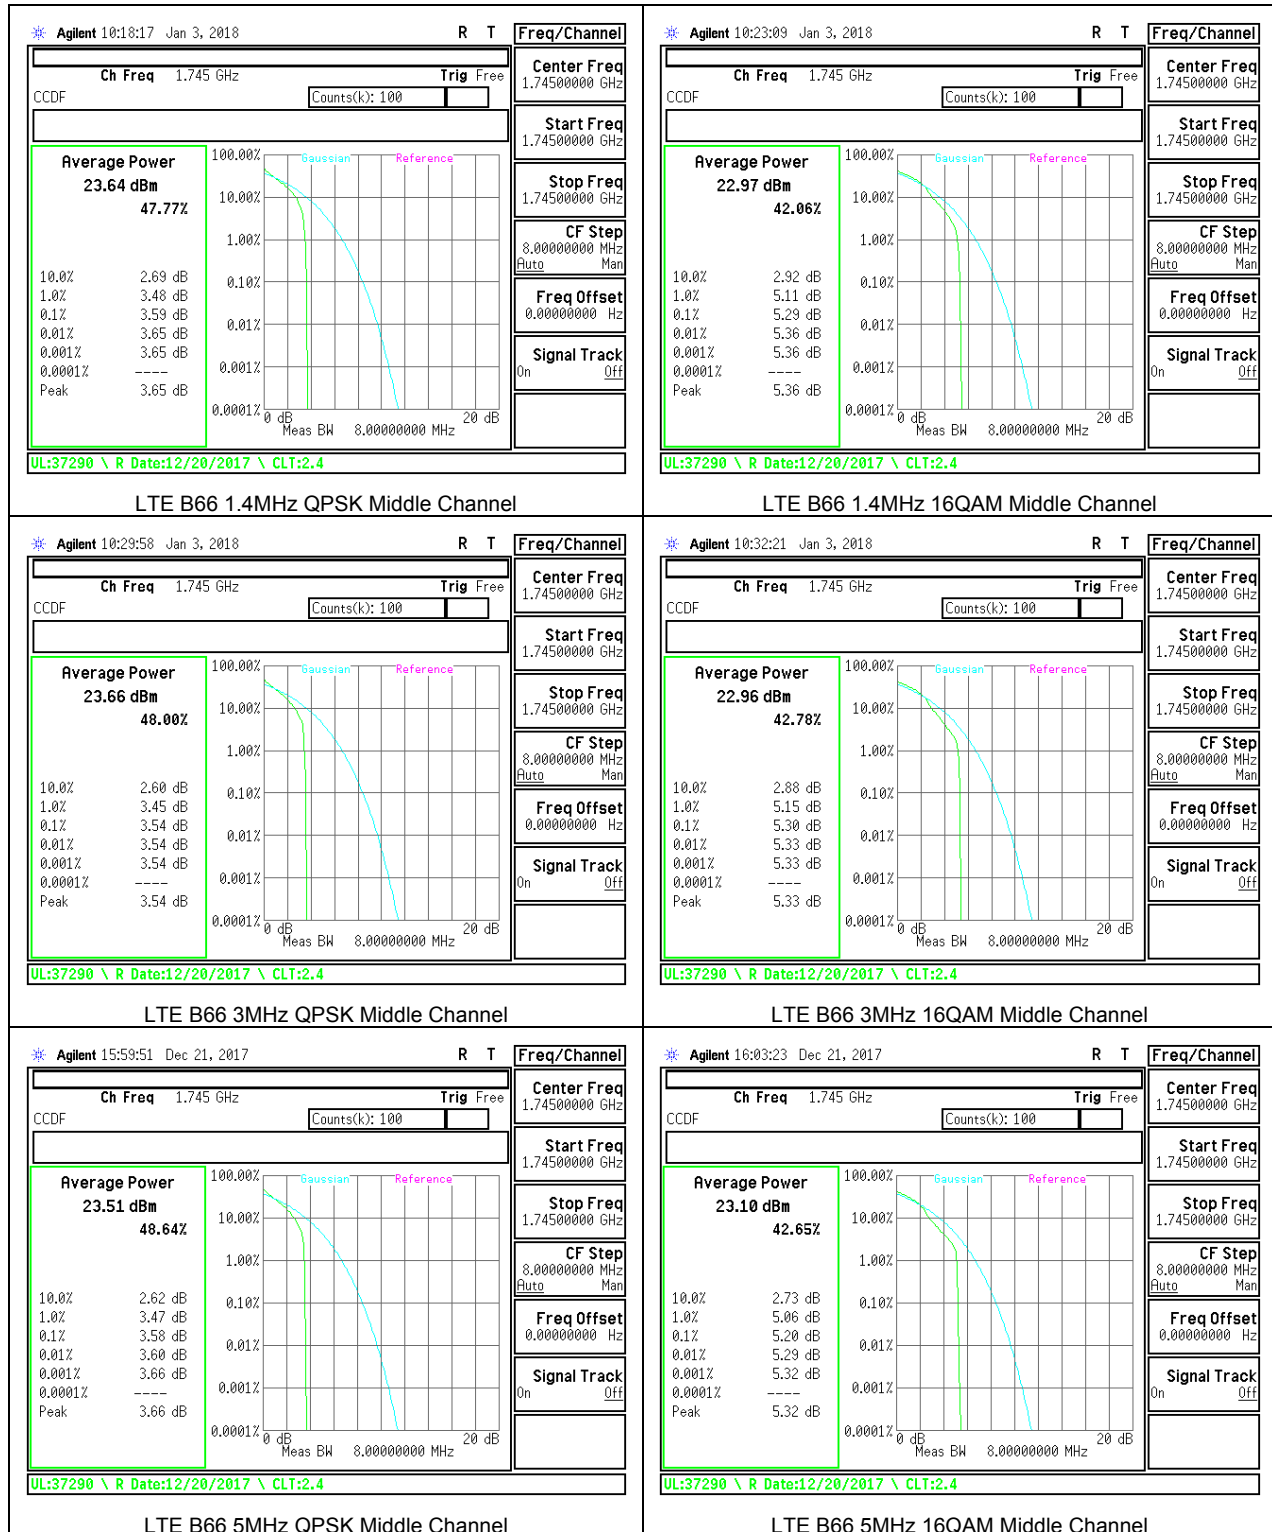


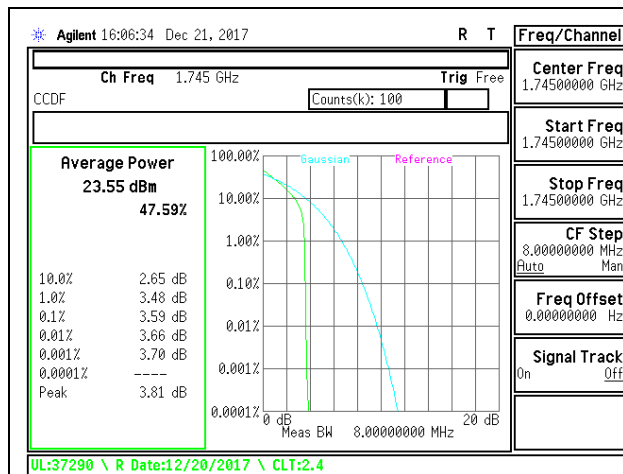


LTE B66 10MHz QPSK Middle Channel

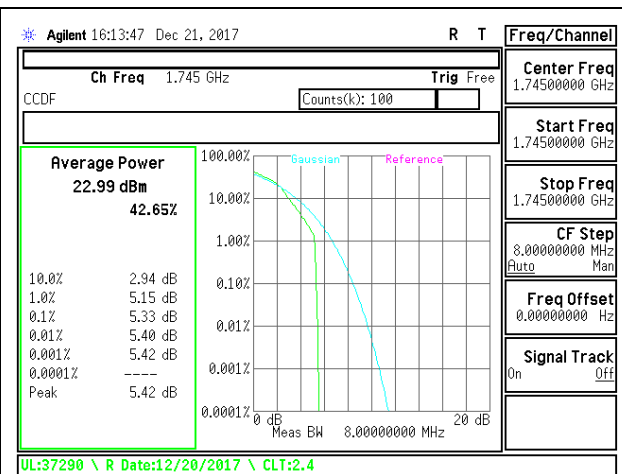


LTE B66 10MHz 16QAM Middle Channel

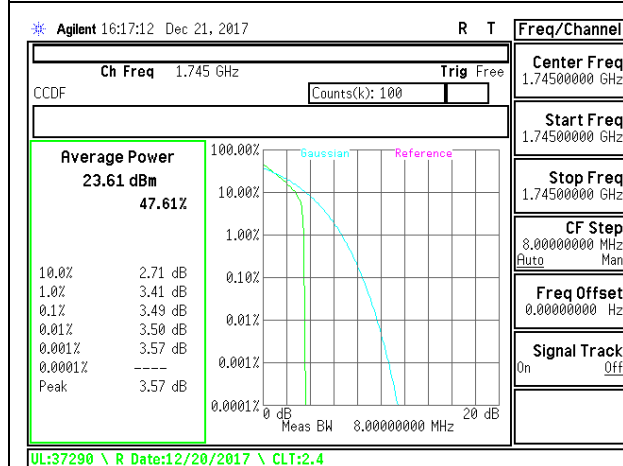


LTE B66 15MHz QPSK Middle Channel

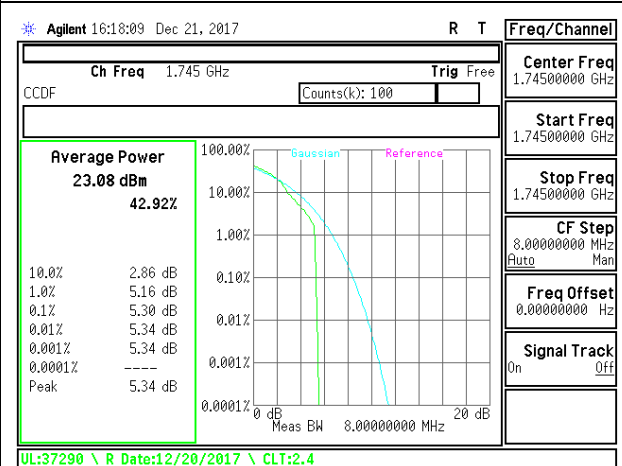

LTE B66 15MHz 16QAM Middle Channel

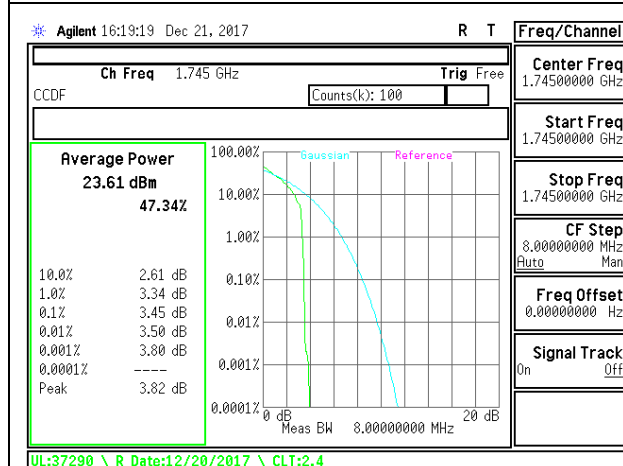

LTE B66 20MHz QPSK Middle Channel

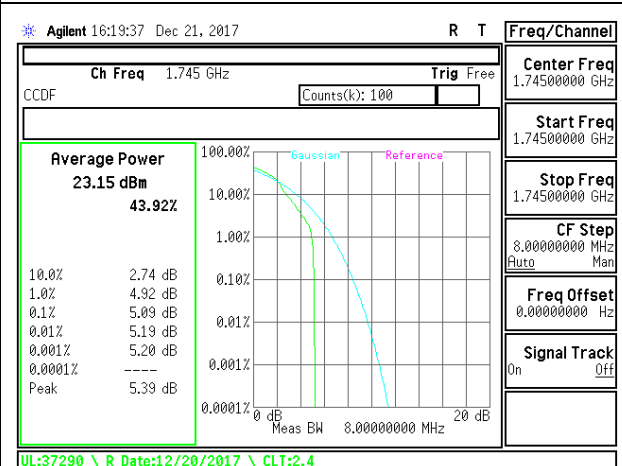

LTE B66 20MHz 16QAM Middle Channel

9. RADIATED TEST RESULTS

9.1. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53, §90.691

LIMIT

FCC: §22.917(a), §24.238(a), §27.53 (g), (h), §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53 (Band 13)

(c) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40 dBm/MHz).

FCC: §27.53 (a) (Band 30)

For mobile and portable stations operating in the 2305-2315 MHz: by a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

FCC: §27.53 (m) (Band 7, 41)

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

FCC: §96.41 (Band 42)

(e) 3.5 GHz Emissions and Interference Limits—

(2) Additional protection levels. Notwithstanding paragraph (d)(1) of this section, the conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

TEST PROCEDURE

FCC KDB 971168 D01 v03.

TIA-603-E, Section 2.2.12.

MODES TESTED

- GSM 850
- GSM 1900
- WCDM Band 2
- WCDM Band 4
- WCDM Band 5
- LTE Band 2
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 26
- LTE Band 41
- LTE Band 66

RESULTS

9.1.1. GSM

UL Verification Services, Inc.
 Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/22/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber C
Mode: GPRS 850 MHz Harmonics

F Mhz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz									
1648.40	-26.8	V	3.0	37.0	1.0	62.8	-13.0	-49.8	
2472.60	-4.9	V	3.0	36.4	1.0	-46.3	-13.0	-27.3	
3256.80	-23.3	V	3.0	36.2	1.0	-58.4	-13.0	-45.4	
1648.40	-29.2	H	3.0	37.0	1.0	65.3	-13.0	-52.3	
2472.60	-4.2	H	3.0	36.4	1.0	-39.6	-13.0	-26.6	
3256.80	-23.5	H	3.0	36.2	1.0	-58.7	-13.0	-45.7	
Mid Ch, 836.6MHz									
1673.20	-25.2	V	3.0	37.0	1.0	61.1	-13.0	-48.1	
2509.80	-4.8	V	3.0	36.4	1.0	40.2	-13.0	-27.2	
3346.40	-22.2	V	3.0	36.1	1.0	-57.3	-13.0	-44.3	
1673.20	-27.3	H	3.0	37.0	1.0	63.3	-13.0	-50.3	
2509.80	-7.6	H	3.0	36.4	1.0	43.0	-13.0	-30.0	
3346.40	-22.8	H	3.0	36.1	1.0	-57.9	-13.0	-44.9	
High Ch, 848.8MHz									
1697.60	-27.9	V	3.0	37.0	1.0	63.9	-13.0	-50.9	
2546.40	-7.4	V	3.0	36.4	1.0	42.8	-13.0	-29.8	
3395.20	-22.3	V	3.0	36.1	1.0	-57.4	-13.0	-44.4	
1697.60	-27.8	H	3.0	37.0	1.0	63.8	-13.0	-50.8	
2546.40	-8.5	H	3.0	36.4	1.0	43.9	-13.0	-30.9	
3395.20	-23.8	H	3.0	36.1	1.0	-58.9	-13.0	-45.9	

GSM 850MHz GPRS

UL Verification Services, Inc.
 Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/22/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: EGPRS 850 MHz Harmonics

F Mhz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz									
1648.40	-26.8	V	3.0	37.0	1.0	64.9	-13.0	-51.9	
2472.60	-16.0	V	3.0	36.4	1.0	-51.4	-13.0	-38.4	
3256.80	-24.0	V	3.0	36.2	1.0	-59.1	-13.0	-46.1	
1648.40	-29.0	H	3.0	37.0	1.0	65.1	-13.0	-52.1	
2472.60	-15.7	H	3.0	36.4	1.0	-51.1	-13.0	-38.1	
3256.80	-23.7	H	3.0	36.2	1.0	-58.8	-13.0	-45.8	
Mid Ch, 836.6MHz									
1673.20	-26.4	V	3.0	37.0	1.0	62.4	-13.0	-49.4	
2509.80	-18.1	V	3.0	36.4	1.0	-53.5	-13.0	-40.5	
3346.40	-23.6	V	3.0	36.1	1.0	-58.7	-13.0	-45.7	
1673.20	-29.1	H	3.0	37.0	1.0	65.1	-13.0	-52.1	
2509.80	-11.4	H	3.0	36.4	1.0	46.8	-13.0	-33.8	
3346.40	-24.7	H	3.0	36.1	1.0	-59.8	-13.0	-46.8	
High Ch, 848.8MHz									
1697.60	-29.3	V	3.0	37.0	1.0	65.2	-13.0	-52.2	
2546.40	-21.0	V	3.0	36.4	1.0	-56.4	-13.0	-43.4	
3395.20	-24.4	V	3.0	36.1	1.0	-59.5	-13.0	-46.5	
1697.60	-29.1	H	3.0	37.0	1.0	65.1	-13.0	-52.1	
2546.40	-14.5	H	3.0	36.4	1.0	49.9	-13.0	-36.9	
3395.20	-23.9	H	3.0	36.1	1.0	-59.0	-13.0	-46.0	

GSM 850MHz EGPRS

UL Verification Services, Inc.
 Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/22/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: GPRS 1900 MHz Harmonics

F Mhz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3700.40	-24.5	V	3.0	35.9	1.0	59.4	-13.0	-46.4	
5550.60	-12.3	V	3.0	35.5	1.0	46.8	-13.0	-33.8	
7400.80	-21.8	V	3.0	35.7	1.0	-56.6	-13.0	-43.6	
3700.40	-23.5	H	3.0	35.9	1.0	-58.4	-13.0	-45.4	
5550.60	-14.1	H	3.0	35.5	1.0	48.6	-13.0	-35.6	
7400.80	-22.3	H	3.0	35.7	1.0	-57.0	-13.0	-44.0	
Mid Ch, 1880MHz									
3760.00	-24.0	V	3.0	35.8	1.0	-58.8	-13.0	-45.8	
5640.00	-10.3	V	3.0	35.5	1.0	44.8	-13.0	-31.8	
7520.00	-21.4	V	3.0	35.7	1.0	-56.1	-13.0	-43.1	
3760.00	-24.1	H	3.0	35.8	1.0	-58.9	-13.0	-45.9	
5640.00	-16.8	H	3.0	35.5	1.0	51.3	-13.0	-38.3	
7520.00	-21.5	H	3.0	35.7	1.0	-56.2	-13.0	-43.2	
High Ch, 1909.8MHz									
3819.60	-23.7	V	3.0	35.8	1.0	-58.5	-13.0	-45.5	
5729.40	-11.1	V	3.0	35.5	1.0	45.6	-13.0	-32.6	
7639.20	-20.6	V	3.0	35.8	1.0	-55.4	-13.0	-42.4	
3819.60	-23.7	H	3.0	35.8	1.0	-58.4	-13.0	-45.4	
5729.40	-16.9	H	3.0	35.5	1.0	-51.4	-13.0	-38.4	
7639.20	-20.4	H	3.0	35.8	1.0	-55.1	-13.0	-42.1	

GSM 1900MHz GPRS

UL Verification Services, Inc.
 Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/22/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: EGPRS 1900 MHz Harmonics

F Mhz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3700.40	-24.1	V	3.0	35.9	1.0	59.0	-13.0	-46.0	
5550.60	-15.2	V	3.0	35.5	1.0	49.7	-13.0	-36.7	
7400.80	-21.6	V	3.0	35.7	1.0	-56.3	-13.0	-43.3	
3700.40	-24.1	H	3.0	35.9	1.0	-59.0	-13.0	-46.0	
5550.60	-18.1	H	3.0	35.5	1.0	52.6	-13.0	-39.6	
7400.80	-22.0	H	3.0	35.7	1.0	-56.8	-13.0	-43.8	
Mid Ch, 1880MHz									
3760.00	-23.8	V	3.0	35.8	1.0	-58.6	-13.0	-45.6	
5640.00	-10.1	V	3.0	35.5	1.0	44.6	-13.0	-31.6	
7520.00	-21.4	V	3.0	35.7	1.0	-56.2	-13.0	-43.2	
3760.00	-23.4	H	3.0	35.8	1.0	-58.2	-13.0	-45.2	
5640.00	-16.4	H	3.0	35.5	1.0	50.9	-13.0	-37.9	
7520.00	-22.1	H	3.0	35.7	1.0	-56.9	-13.0	-43.9	
High Ch, 1909.8MHz									
3819.60	-23.8	V	3.0	35.8	1.0	-58.5	-13.0	-45.5	
5729.40	-11.9	V	3.0	35.5	1.0	46.4	-13.0	-33.4	
7639.20	-20.3	V	3.0	35.8	1.0	-55.1	-13.0	-42.1	
3819.60	-23.8	H	3.0	35.8	1.0	-58.5	-13.0	-45.5	
5729.40	-18.3	H	3.0	35.5	1.0	-52.8	-13.0	-39.8	
7639.20	-21.1	H	3.0	35.8	1.0	-55.8	-13.0	-42.8	

GSM 1900MHz EGPRS

9.1.3. LTE BAND 2

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 2 Harmonics, 1.4MHz Bandwidth

F	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1850.7MHz									
3701.40	-17.2	V	3.0	35.9	1.0	52.1	-13.0	-39.1	
5552.10	-13.0	V	3.0	35.5	1.0	47.5	-13.0	-34.5	
7402.80	-14.1	V	3.0	35.7	1.0	48.9	-13.0	-35.9	
3701.40	-17.0	H	3.0	35.9	1.0	51.8	-13.0	-38.8	
5552.10	-15.0	H	3.0	35.5	1.0	49.4	-13.0	-36.4	
7402.80	-13.1	H	3.0	35.7	1.0	47.9	-13.0	-34.9	
Mid Ch, 1880MHz									
3760.00	-18.2	V	3.0	35.8	1.0	53.0	-13.0	-40.0	
5640.00	-7.8	V	3.0	35.5	1.0	42.3	-13.0	-29.3	
7520.00	-15.1	V	3.0	35.7	1.0	49.9	-13.0	-36.9	
3760.00	-17.4	H	3.0	35.8	1.0	52.2	-13.0	-39.2	
5640.00	-11.4	H	3.0	35.5	1.0	45.9	-13.0	-32.9	
7520.00	-13.3	H	3.0	35.7	1.0	48.1	-13.0	-35.1	
High Ch, 1909.5MHz									
3818.60	-17.8	V	3.0	35.8	1.0	52.6	-13.0	-39.6	
5727.90	-8.6	V	3.0	35.5	1.0	43.1	-13.0	-30.1	
7637.20	-15.2	V	3.0	35.8	1.0	50.0	-13.0	-37.0	
3818.60	-16.5	H	3.0	35.8	1.0	51.3	-13.0	-38.3	
5727.90	-13.0	H	3.0	35.5	1.0	47.5	-13.0	-34.5	
7637.20	-12.9	H	3.0	35.8	1.0	47.7	-13.0	-34.7	

LTE B2 1.4MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 2 Harmonics, 1.4MHz Bandwidth

F	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1850.7MHz									
3701.40	-18.1	V	3.0	35.9	1.0	53.0	-13.0	-40.0	
5552.10	-13.9	V	3.0	35.5	1.0	48.4	-13.0	-35.4	
7402.80	-15.0	V	3.0	35.7	1.0	49.7	-13.0	-36.7	
3701.40	-17.8	H	3.0	35.9	1.0	52.7	-13.0	-39.7	
5552.10	-15.8	H	3.0	35.5	1.0	50.3	-13.0	-37.3	
7402.80	-14.0	H	3.0	35.7	1.0	48.7	-13.0	-35.7	
Mid Ch, 1880MHz									
3760.00	-19.1	V	3.0	35.8	1.0	53.9	-13.0	-40.9	
5640.00	-8.7	V	3.0	35.5	1.0	43.2	-13.0	-30.2	
7520.00	-16.0	V	3.0	35.7	1.0	50.8	-13.0	-37.8	
3760.00	-18.2	H	3.0	35.8	1.0	53.0	-13.0	-40.0	
5640.00	-12.3	H	3.0	35.5	1.0	46.8	-13.0	-33.8	
7520.00	-14.2	H	3.0	35.7	1.0	49.0	-13.0	-36.0	
High Ch, 1909.5MHz									
3818.60	-18.7	V	3.0	35.8	1.0	53.5	-13.0	-40.5	
5727.90	-9.5	V	3.0	35.5	1.0	44.0	-13.0	-31.0	
7637.20	-16.1	V	3.0	35.8	1.0	50.9	-13.0	-37.9	
3818.60	-17.4	H	3.0	35.8	1.0	52.2	-13.0	-39.2	
5727.90	-13.8	H	3.0	35.5	1.0	48.3	-13.0	-35.3	
7637.20	-13.8	H	3.0	35.8	1.0	48.6	-13.0	-35.6	

LTE B2 1.4MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 2 Harmonics, 3MHz Bandwidth

F	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1851.5MHz									
3703.00	-17.0	V	3.0	35.9	1.0	51.8	-13.0	-38.8	
5554.50	-13.3	V	3.0	35.5	1.0	47.8	-13.0	-34.8	
7406.00	-15.7	V	3.0	35.7	1.0	50.4	-13.0	-37.4	
3703.00	-18.4	H	3.0	35.9	1.0	53.2	-13.0	-40.2	
5554.50	-15.5	H	3.0	35.5	1.0	50.0	-13.0	-37.0	
7406.00	-12.0	H	3.0	35.7	1.0	46.8	-13.0	-33.8	
Mid Ch, 1880MHz									
3760.00	-18.3	V	3.0	35.8	1.0	53.1	-13.0	-40.1	
5640.00	-8.0	V	3.0	35.5	1.0	42.5	-13.0	-29.5	
7520.00	-15.1	V	3.0	35.7	1.0	49.9	-13.0	-36.9	
3760.00	-17.1	H	3.0	35.8	1.0	52.0	-13.0	-39.0	
5640.00	-14.2	H	3.0	35.5	1.0	48.7	-13.0	-35.7	
7520.00	-14.1	H	3.0	35.7	1.0	49.8	-13.0	-36.8	
High Ch, 1908.5MHz									
3817.00	-18.0	V	3.0	35.8	1.0	52.8	-13.0	-39.8	
5725.50	-9.5	V	3.0	35.5	1.0	44.0	-13.0	-31.0	
7634.00	-14.7	V	3.0	35.8	1.0	49.4	-13.0	-36.4	
3817.00	-17.7	H	3.0	35.8	1.0	52.4	-13.0	-39.4	
5725.50	-12.6	H	3.0	35.5	1.0	47.1	-13.0	-34.1	
7634.00	-12.5	H	3.0	35.8	1.0	47.2	-13.0	-34.2	

LTE B2 3MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 2 Harmonics, 3MHz Bandwidth

F	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1851.5MHz									
3703.00	-17.9	V	3.0	35.9	1.0	52.8	-13.0	-39.8	
5554.50	-14.3	V	3.0	35.5	1.0	48.8	-13.0	-35.8	
7406.00	-16.6	V	3.0	35.7	1.0	51.4	-13.0	-38.4	
3703.00	-19.3	H	3.0	35.9	1.0	54.2	-13.0	-41.2	
5554.50	-16.5	H	3.0	35.5	1.0	50.9	-13.0	-37.9	
7406.00	-13.0	H	3.0	35.7	1.0	47.7	-13.0	-34.7	
Mid Ch, 1880MHz									
3760.00	-19.3	V	3.0	35.8	1.0	54.1	-13.0	-41.1	
5640.00	-9.0	V	3.0	35.5	1.0	43.5	-13.0	-30.5	
7520.00	-16.1	V	3.0	35.7	1.0	50.8	-13.0	-37.8	
3760.00	-18.1	H	3.0	35.8	1.0	52.9	-13.0	-39.9	
5640.00	-15.1	H	3.0	35.5	1.0	49.6	-13.0	-36.6	
7520.00	-15.0	H	3.0	35.7	1.0	49.8	-13.0	-36.8	
High Ch, 1908.5MHz									
3817.00	-19.0	V	3.0	35.8	1.0	53.8	-13.0	-40.8	
5725.50	-10.4	V	3.0	35.5	1.0	44.9	-13.0	-31.9	
7634.00	-15.6	V	3.0	35.8	1.0	50.4	-13.0	-37.4	
3817.00	-18.6	H	3.0	35.8	1.0	53.4	-13.0	-40.4	
5725.50	-13.6	H	3.0	35.5	1.0	48.1	-13.0	-35.1	
7634.00	-13.4	H	3.0	35.8	1.0	48.2	-13.0	-35.2	

LTE B2 3MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 2 Harmonics, 5MHz Bandwidth

F	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1852.5MHz									
3705.00	-17.9	V	3.0	35.9	1.0	52.7	-13.0	-39.7	
5557.50	-9.8	V	3.0	35.5	1.0	44.3	-13.0	-31.3	
7410.00	-11.6	V	3.0	35.7	1.0	46.3	-13.0	-33.3	
3705.00	-18.3	H	3.0	35.9	1.0	53.2	-13.0	-40.2	
5557.50	-13.7	H	3.0	35.5	1.0	48.2	-13.0	-35.2	
7410.00	-12.5	H	3.0	35.7	1.0	47.2	-13.0	-34.2	
Mid Ch, 1880MHz									
3760.00	-18.2	V	3.0	35.8	1.0	53.0	-13.0	-40.0	
5640.00	-10.8	V	3.0	35.5	1.0	45.3	-13.0	-32.3	
7520.00	-15.6	V	3.0	35.7	1.0	50.4	-13.0	-37.4	
3760.00	-17.7	H	3.0	35.8	1.0	52.5	-13.0	-39.5	
5640.00	-14.2	H	3.0	35.5	1.0	48.7	-13.0	-35.7	
7520.00	-14.7	H	3.0	35.7	1.0	49.4	-13.0	-36.4	
High Ch, 1907.5MHz									
3815.00	-17.7	V	3.0	35.8	1.0	52.5	-13.0	-39.5	
5722.50	-6.4	V	3.0	35.5	1.0	41.3	-13.0	-28.3	
7630.00	-14.8	V	3.0	35.8	1.0	49.6	-13.0	-36.6	
3815.00	-18.0	H	3.0	35.8	1.0	53.5	-13.0	-40.5	
5722.50	-12.0	H	3.0	35.5	1.0	46.5	-13.0	-33.5	
7630.00	-14.2	H	3.0	35.8	1.0	49.0	-13.0	-36.0	

LTE B2 5MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 2 Harmonics, 5MHz Bandwidth

F	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1852.5MHz									
3705.00	-19.1	V	3.0	35.9	1.0	54.0	-13.0	-41.0	
5557.50	-10.7	V	3.0	35.5	1.0	45.2	-13.0	-32.2	
7410.00	-12.1	V	3.0	35.7	1.0	46.8	-13.0	-33.8	
3705.00	-19.7	H	3.0	35.9	1.0	54.6	-13.0	-41.6	
5557.50	-15.4	H	3.0	35.5	1.0	49.9	-13.0	-36.9	
7410.00	-14.6	H	3.0	35.7	1.0	49.4	-13.0	-36.4	
Mid Ch, 1880MHz									
3760.00	-19.4	V	3.0	35.8	1.0	54.2	-13.0	-41.2	
5640.00	-11.7	V	3.0	35.5	1.0	46.2	-13.0	-33.2	
7520.00	-16.1	V	3.0	35.7	1.0	50.8	-13.0	-37.8	
3760.00	-19.2	H	3.0	35.8	1.0	54.0	-13.0	-41.0	
5640.00	-16.0	H	3.0	35.5	1.0	50.5	-13.0	-37.5	
7520.00	-16.8	H	3.0	35.7	1.0	51.5	-13.0	-38.5	
High Ch, 1907.5MHz									
3815.00	-18.9	V	3.0	35.8	1.0	53.7	-13.0	-40.7	
5722.50	-7.6	V	3.0	35.5	1.0	42.1	-13.0	-29.1	
7630.00	-15.3	V	3.0	35.8	1.0	50.0	-13.0	-37.0	
3815.00	-20.3	H	3.0	35.8	1.0	55.1	-13.0	-42.1	
5722.50	-13.8	H	3.0	35.5	1.0	48.3	-13.0	-35.3	
7630.00	-16.3	H	3.0	35.8	1.0	51.1	-13.0	-38.1	

LTE B2 5MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 2 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1855MHz									
3710.00	-18.9	V	3.0	35.9	1.0	53.7	-13.0	-40.7	
5665.00	-16.2	V	3.0	35.5	1.0	50.6	-13.0	-37.6	
7420.00	-14.4	V	3.0	35.7	1.0	49.2	-13.0	-36.2	
3710.00	-18.4	H	3.0	35.9	1.0	53.2	-13.0	-40.2	
5665.00	-15.0	H	3.0	35.5	1.0	49.5	-13.0	-36.5	
7420.00	-17.0	H	3.0	35.7	1.0	51.7	-13.0	-38.7	
Mid Ch, 1880MHz									
3760.00	-17.6	V	3.0	35.8	1.0	52.4	-13.0	-39.4	
5640.00	-16.5	V	3.0	35.5	1.0	51.0	-13.0	-38.0	
7520.00	-15.6	V	3.0	35.7	1.0	50.4	-13.0	-37.4	
3760.00	-17.9	H	3.0	35.8	1.0	52.8	-13.0	-39.8	
5640.00	-15.2	H	3.0	35.5	1.0	49.7	-13.0	-36.7	
7520.00	-15.0	H	3.0	35.7	1.0	49.8	-13.0	-36.8	
High Ch, 1905MHz									
3810.00	-18.4	V	3.0	35.8	1.0	53.2	-13.0	-40.2	
5715.00	-15.3	V	3.0	35.5	1.0	49.8	-13.0	-36.8	
7620.00	-14.4	V	3.0	35.8	1.0	49.2	-13.0	-36.2	
3810.00	-17.9	H	3.0	35.8	1.0	52.7	-13.0	-39.7	
5715.00	-15.3	H	3.0	35.5	1.0	49.8	-13.0	-36.8	
7620.00	-14.0	H	3.0	35.8	1.0	48.7	-13.0	-35.7	

LTE B2 10MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 2 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1855MHz									
3710.00	-18.9	V	3.0	35.9	1.0	54.7	-13.0	-41.7	
5665.00	-17.2	V	3.0	35.5	1.0	51.6	-13.0	-38.6	
7420.00	-15.4	V	3.0	35.7	1.0	50.2	-13.0	-37.2	
3710.00	-19.4	H	3.0	35.9	1.0	54.2	-13.0	-41.2	
5665.00	-16.1	H	3.0	35.5	1.0	50.5	-13.0	-37.5	
7420.00	-18.0	H	3.0	35.7	1.0	52.7	-13.0	-39.7	
Mid Ch, 1880MHz									
3760.00	-18.6	V	3.0	35.8	1.0	53.4	-13.0	-40.4	
5640.00	-17.5	V	3.0	35.5	1.0	52.0	-13.0	-39.0	
7520.00	-16.7	V	3.0	35.7	1.0	51.4	-13.0	-38.4	
3760.00	-19.0	H	3.0	35.8	1.0	53.8	-13.0	-40.8	
5640.00	-16.2	H	3.0	35.5	1.0	50.7	-13.0	-37.7	
7520.00	-16.0	H	3.0	35.7	1.0	50.8	-13.0	-37.8	
High Ch, 1905MHz									
3810.00	-19.4	V	3.0	35.8	1.0	54.2	-13.0	-41.2	
5715.00	-16.3	V	3.0	35.5	1.0	50.8	-13.0	-37.8	
7620.00	-15.4	V	3.0	35.8	1.0	50.2	-13.0	-37.2	
3810.00	-18.9	H	3.0	35.8	1.0	53.7	-13.0	-40.7	
5715.00	-16.3	H	3.0	35.5	1.0	50.8	-13.0	-37.8	
7620.00	-15.0	H	3.0	35.8	1.0	49.7	-13.0	-36.7	

LTE B2 10MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 2 Harmonics, 15MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1857.5MHz									
3715.00	-17.4	V	3.0	35.8	1.0	52.3	-13.0	-39.3	
5572.50	-15.7	V	3.0	35.5	1.0	50.2	-13.0	-37.2	
7430.00	-15.2	V	3.0	35.7	1.0	49.9	-13.0	-36.9	
3715.00	-18.0	H	3.0	35.8	1.0	52.8	-13.0	-39.8	
5572.50	-14.5	H	3.0	35.5	1.0	49.0	-13.0	-36.0	
7430.00	-15.3	H	3.0	35.7	1.0	50.1	-13.0	-37.1	
Mid Ch, 1880MHz									
3760.00	-17.8	V	3.0	35.8	1.0	52.6	-13.0	-39.6	
5640.00	-13.1	V	3.0	35.5	1.0	47.6	-13.0	-34.6	
7520.00	-15.1	V	3.0	35.7	1.0	49.8	-13.0	-36.8	
3760.00	-17.4	H	3.0	35.8	1.0	52.3	-13.0	-39.3	
5640.00	-15.1	H	3.0	35.5	1.0	49.6	-13.0	-36.6	
7520.00	-14.1	H	3.0	35.7	1.0	48.9	-13.0	-35.9	
High Ch, 1902.5MHz									
3805.00	-17.0	V	3.0	35.8	1.0	52.7	-13.0	-39.7	
5707.50	-15.9	V	3.0	35.5	1.0	50.4	-13.0	-37.4	
7610.00	-14.7	V	3.0	35.8	1.0	49.5	-13.0	-36.5	
3805.00	-15.9	H	3.0	35.8	1.0	50.7	-13.0	-37.7	
5707.50	-12.9	H	3.0	35.5	1.0	47.4	-13.0	-34.4	
7610.00	-13.5	H	3.0	35.8	1.0	48.3	-13.0	-35.3	

LTE B2 15MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 2 Harmonics, 15MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1857.5MHz									
3715.00	-18.6	V	3.0	35.8	1.0	53.4	-13.0	-40.4	
5572.50	-16.9	V	3.0	35.5	1.0	51.4	-13.0	-38.4	
7430.00	-16.4	V	3.0	35.7	1.0	51.1	-13.0	-38.1	
3715.00	-19.2	H	3.0	35.8	1.0	54.0	-13.0	-41.0	
5572.50	-15.7	H	3.0	35.5	1.0	50.2	-13.0	-37.2	
7430.00	-16.5	H	3.0	35.7	1.0	51.2	-13.0	-38.2	
Mid Ch, 1880MHz									
3760.00	-18.7	V	3.0	35.8	1.0	53.5	-13.0	-40.5	
5640.00	-13.9	V	3.0	35.5	1.0	48.4	-13.0	-35.4	
7520.00	-15.9	V	3.0	35.7	1.0	50.6	-13.0	-37.6	
3760.00	-18.3	H	3.0	35.8	1.0	53.1	-13.0	-40.1	
5640.00	-15.9	H	3.0	35.5	1.0	50.4	-13.0	-37.4	
7520.00	-15.0	H	3.0	35.7	1.0	49.7	-13.0	-36.7	
High Ch, 1902.5MHz									
3805.00	-18.0	V	3.0	35.8	1.0	53.8	-13.0	-40.8	
5707.50	-17.1	V	3.0	35.5	1.0	51.6	-13.0	-38.6	
7610.00	-15.9	V	3.0	35.8	1.0	50.6	-13.0	-37.6	
3805.00	-17.1	H	3.0	35.8	1.0	51.8	-13.0	-38.8	
5707.50	-14.1	H	3.0	35.5	1.0	48.6	-13.0	-35.6	
7610.00	-14.7	H	3.0	35.8	1.0	49.4	-13.0	-36.4	

LTE B2 15MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 14/20/18
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 2 Harmonics, 20MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1860MHz									
3720.00	-14.8	V	3.0	35.8	1.0	49.7	-13.0	-36.7	
5580.00	-13.3	V	3.0	35.5	1.0	47.7	-13.0	-34.7	
7440.00	-11.2	V	3.0	35.7	1.0	45.9	-13.0	-32.9	
3720.00	-16.2	H	3.0	35.8	1.0	51.0	-13.0	-38.0	
5580.00	-13.7	H	3.0	35.5	1.0	48.1	-13.0	-35.1	
7440.00	-11.1	H	3.0	35.7	1.0	45.8	-13.0	-32.8	
Mid Ch, 1880MHz									
3760.00	-14.5	V	3.0	35.8	1.0	49.3	-13.0	-36.3	
5640.00	-13.0	V	3.0	35.5	1.0	47.5	-13.0	-34.5	
7520.00	-10.7	V	3.0	35.7	1.0	45.5	-13.0	-32.5	
3760.00	-14.6	H	3.0	35.8	1.0	49.4	-13.0	-36.4	
5640.00	-12.5	H	3.0	35.5	1.0	47.0	-13.0	-34.0	
7520.00	-10.7	H	3.0	35.7	1.0	45.5	-13.0	-32.5	
High Ch, 1900MHz									
3800.00	-14.4	V	3.0	35.8	1.0	49.2	-13.0	-36.2	
5700.00	-11.6	V	3.0	35.5	1.0	46.1	-13.0	-33.1	
7600.00	-10.3	V	3.0	35.8	1.0	45.1	-13.0	-32.1	
3800.00	-13.9	H	3.0	35.8	1.0	48.7	-13.0	-35.7	
5700.00	-12.5	H	3.0	35.5	1.0	47.0	-13.0	-34.0	
7600.00	-9.3	H	3.0	35.8	1.0	44.1	-13.0	-31.1	

LTE B2 20MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 14/20/18
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 2 Harmonics, 20MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1860MHz									
3720.00	-15.5	V	3.0	35.8	1.0	50.3	-13.0	-37.3	
5580.00	-13.1	V	3.0	35.5	1.0	47.6	-13.0	-34.6	
7440.00	-11.4	V	3.0	35.7	1.0	46.2	-13.0	-33.2	
3720.00	-16.1	H	3.0	35.8	1.0	50.9	-13.0	-37.9	
5580.00	-13.2	H	3.0	35.5	1.0	47.7	-13.0	-34.7	
7440.00	-10.9	H	3.0	35.7	1.0	45.6	-13.0	-32.6	
Mid Ch, 1880MHz									
3760.00	-15.5	V	3.0	35.8	1.0	50.3	-13.0	-37.3	
5640.00	-13.3	V	3.0	35.5	1.0	47.8	-13.0	-34.8	
7520.00	-10.0	V	3.0	35.7	1.0	44.8	-13.0	-31.8	
3760.00	-14.6	H	3.0	35.8	1.0	49.5	-13.0	-36.5	
5640.00	-13.6	H	3.0	35.5	1.0	48.1	-13.0	-35.1	
7520.00	-10.3	H	3.0	35.7	1.0	45.1	-13.0	-32.1	
High Ch, 1900MHz									
3800.00	-15.7	V	3.0	35.8	1.0	50.5	-13.0	-37.5	
5700.00	-12.7	V	3.0	35.5	1.0	47.2	-13.0	-34.2	
7600.00	-9.8	V	3.0	35.8	1.0	44.6	-13.0	-31.6	
3800.00	-16.2	H	3.0	35.8	1.0	51.0	-13.0	-38.0	
5700.00	-12.3	H	3.0	35.5	1.0	46.8	-13.0	-33.8	
7600.00	-11.1	H	3.0	35.8	1.0	45.9	-13.0	-32.9	

LTE B2 20MHz 16QAM

9.1.4. LTE BAND 5

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 12081839
 Date: 12/22/2017
 Test Engineer: 43575 OS
 Configuration: EUT + HS + AC Adapter
 Location: Chamber C
 Mode: LTE_QPSK Band 5 Harmonics, 14MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7MHz									
1629.40	-29.3	V	3.0	37.1	1.0	65.3	-13.0	-52.3	
2444.10	-24.7	V	3.0	36.4	1.0	66.2	-13.0	-47.2	
3258.80	-23.2	V	3.0	36.2	1.0	58.4	-13.0	-45.4	
1629.40	-28.9	H	3.0	37.1	1.0	65.0	-13.0	-52.0	
2444.10	-26.7	H	3.0	36.4	1.0	62.2	-13.0	-49.2	
3258.80	-23.4	H	3.0	36.2	1.0	58.6	-13.0	-45.6	
Mid Ch, 836.5MHz									
1663.00	-28.8	V	3.0	37.0	1.0	64.8	-13.0	-51.8	
2494.50	-24.2	V	3.0	36.4	1.0	59.7	-13.0	-46.7	
3326.00	-22.9	V	3.0	36.1	1.0	58.0	-13.0	-45.0	
1663.00	-28.7	H	3.0	37.0	1.0	64.7	-13.0	-51.7	
2494.50	-25.7	H	3.0	36.4	1.0	61.2	-13.0	-48.2	
3326.00	-23.4	H	3.0	36.1	1.0	58.5	-13.0	-45.5	
High Ch, 848.3MHz									
1696.60	-27.7	V	3.0	37.0	1.0	63.6	-13.0	-50.6	
2544.90	-24.4	V	3.0	36.4	1.0	59.8	-13.0	-46.8	
3393.20	-23.0	V	3.0	36.1	1.0	58.0	-13.0	-45.0	
1696.60	-28.4	H	3.0	37.0	1.0	64.3	-13.0	-51.3	
2544.90	-24.4	H	3.0	36.4	1.0	59.8	-13.0	-46.8	
3393.20	-23.0	H	3.0	36.1	1.0	58.0	-13.0	-45.0	

LTE B5 1.4MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 12081839
 Date: 12/22/2017
 Test Engineer: 43575 OS
 Configuration: EUT + HS + AC Adapter
 Location: Chamber C
 Mode: LTE_16QAM Band 5 Harmonics, 14MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7MHz									
1629.40	-29.3	V	3.0	37.1	1.0	65.3	-13.0	-52.3	
2444.10	-25.3	V	3.0	36.4	1.0	60.7	-13.0	-47.7	
3258.80	-23.4	V	3.0	36.2	1.0	58.6	-13.0	-45.6	
1629.40	-28.9	H	3.0	37.1	1.0	64.9	-13.0	-51.9	
2444.10	-25.8	H	3.0	36.4	1.0	61.3	-13.0	-48.3	
3258.80	-23.4	H	3.0	36.2	1.0	58.6	-13.0	-45.6	
Mid Ch, 836.5MHz									
1663.00	-28.3	V	3.0	37.0	1.0	64.3	-13.0	-51.3	
2494.50	-24.6	V	3.0	36.4	1.0	60.0	-13.0	-47.0	
3326.00	-22.5	V	3.0	36.1	1.0	57.6	-13.0	-44.6	
1663.00	-28.2	H	3.0	37.0	1.0	64.2	-13.0	-51.2	
2494.50	-25.9	H	3.0	36.4	1.0	61.4	-13.0	-48.4	
3326.00	-22.9	H	3.0	36.1	1.0	58.0	-13.0	-45.0	
High Ch, 848.3MHz									
1696.60	-28.3	V	3.0	37.0	1.0	64.3	-13.0	-51.3	
2544.90	-24.6	V	3.0	36.4	1.0	60.0	-13.0	-47.0	
3393.20	-22.5	V	3.0	36.1	1.0	57.5	-13.0	-44.5	
1696.60	-28.7	H	3.0	37.0	1.0	64.7	-13.0	-51.7	
2544.90	-25.5	H	3.0	36.4	1.0	60.9	-13.0	-47.9	
3393.20	-22.6	H	3.0	36.1	1.0	57.7	-13.0	-44.7	

LTE B5 1.4MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 12081839
 Date: 12/22/2017
 Test Engineer: 43575 OS
 Configuration: EUT + HS + AC Adapter
 Location: Chamber C
 Mode: LTE_QPSK Band 5 Harmonics, 3MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 825.5MHz									
1631.00	-28.9	V	3.0	37.0	1.0	64.9	-13.0	-51.9	
2446.50	-24.9	V	3.0	36.4	1.0	60.3	-13.0	-47.3	
3262.00	-23.6	V	3.0	36.2	1.0	58.8	-13.0	-45.8	
1631.00	-29.3	H	3.0	37.0	1.0	65.3	-13.0	-52.3	
2446.50	-26.7	H	3.0	36.4	1.0	62.1	-13.0	-49.1	
3262.00	-23.3	H	3.0	36.2	1.0	58.5	-13.0	-45.5	
Mid Ch, 836.5MHz									
1663.00	-28.9	V	3.0	37.0	1.0	64.9	-13.0	-51.9	
2494.50	-24.7	V	3.0	36.4	1.0	60.1	-13.0	-47.1	
3326.00	-23.3	V	3.0	36.1	1.0	58.5	-13.0	-45.5	
1663.00	-29.4	H	3.0	37.0	1.0	65.4	-13.0	-52.4	
2494.50	-26.1	H	3.0	36.4	1.0	61.5	-13.0	-48.5	
3326.00	-23.7	H	3.0	36.1	1.0	58.8	-13.0	-45.8	
High Ch, 847.5MHz									
1695.00	-28.6	V	3.0	37.0	1.0	64.6	-13.0	-51.6	
2542.50	-24.5	V	3.0	36.4	1.0	59.9	-13.0	-46.9	
3390.00	-23.3	V	3.0	36.1	1.0	58.4	-13.0	-45.4	
1695.00	-28.4	H	3.0	37.0	1.0	64.4	-13.0	-51.4	
2542.50	-26.6	H	3.0	36.4	1.0	62.1	-13.0	-49.1	
3390.00	-22.4	H	3.0	36.1	1.0	57.5	-13.0	-44.5	

LTE B5 3MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 12081839
 Date: 12/22/2017
 Test Engineer: 43575 OS
 Configuration: EUT + HS + AC Adapter
 Location: Chamber C
 Mode: LTE_16QAM Band 5 Harmonics, 3MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 825.5MHz									
1631.00	-28.7	V	3.0	37.0	1.0	64.7	-13.0	-51.7	
2446.50	-24.4	V	3.0	36.4	1.0	59.9	-13.0	-46.9	
3262.00	-23.4	V	3.0	36.2	1.0	58.5	-13.0	-45.5	
1631.00	-29.5	H	3.0	37.0	1.0	65.6	-13.0	-52.6	
2446.50	-26.5	H	3.0	36.4	1.0	61.9	-13.0	-48.9	
3262.00	-23.2	H	3.0	36.2	1.0	58.4	-13.0	-45.4	
Mid Ch, 836.5MHz									
1663.00	-28.8	V	3.0	37.0	1.0	64.8	-13.0	-51.8	
2494.50	-24.4	V	3.0	36.4	1.0	59.8	-13.0	-46.8	
3326.00	-23.0	V	3.0	36.1	1.0	58.1	-13.0	-45.1	
1663.00	-29.0	H	3.0	37.0	1.0	65.1	-13.0	-52.1	
2494.50	-26.1	H	3.0	36.4	1.0	61.5	-13.0	-48.5	
3326.00	-23.2	H	3.0	36.1	1.0	58.4	-13.0	-45.4	
High Ch, 847.5MHz									
1695.00	-28.4	V	3.0	37.0	1.0	64.4	-13.0	-51.4	
2542.50	-24.1	V	3.0	36.4	1.0	59.5	-13.0	-46.5	
3390.00	-22.6	V	3.0	36.1	1.0	57.7	-13.0	-44.7	
1695.00	-28.0	H	3.0	37.0	1.0	64.0	-13.0	-51.0	
2542.50	-25.6	H	3.0	36.4	1.0	61.9	-13.0	-48.9	
3390.00	-22.8	H	3.0	36.1	1.0	57.9	-13.0	-44.9	

LTE B5 3MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 12081839
 Date: 12/22/2017
 Test Engineer: 43575 OS
 Configuration: EUT + HS + AC Adapter
 Location: Chamber C
 Mode: LTE_QPSK Band 5 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.5MHz									
1633.00	-28.8	V	3.0	37.0	1.0	64.8	-13.0	-51.8	
2449.50	-24.5	V	3.0	36.4	1.0	59.9	-13.0	-46.9	
3266.00	-22.5	V	3.0	36.2	1.0	57.7	-13.0	-44.7	
1633.00	-28.9	H	3.0	37.0	1.0	65.0	-13.0	-52.0	
2449.50	-26.5	H	3.0	36.4	1.0	62.0	-13.0	-49.0	
3266.00	-23.3	H	3.0	36.2	1.0	58.4	-13.0	-45.4	
Mid Ch, 836.5MHz									
1663.00	-28.4	V	3.0	37.0	1.0	64.4	-13.0	-51.4	
2494.50	-25.0	V	3.0	36.4	1.0	60.4	-13.0	-47.4	
3326.00	-22.9	V	3.0	36.1	1.0	58.1	-13.0	-45.1	
1663.00	-28.8	H	3.0	37.0	1.0	64.8	-13.0	-51.8	
2494.50	-26.2	H	3.0	36.4	1.0	61.6	-13.0	-48.6	
3326.00	-23.1	H	3.0	36.1	1.0	58.3	-13.0	-45.3	
High Ch, 846.5MHz									
1693.00	-28.4	V	3.0	37.0	1.0	64.4	-13.0	-51.4	
2539.50	-24.6	V	3.0	36.4	1.0	60.0	-13.0	-47.0	
3386.00	-22.4	V	3.0	36.1	1.0	57.5	-13.0	-44.5	
1693.00	-29.1	H	3.0	37.0	1.0	65.0	-13.0	-52.0	
2539.50	-26.0	H	3.0	36.4	1.0	61.4	-13.0	-48.4	
3386.00	-22.9	H	3.0	36.1	1.0	57.9	-13.0	-44.9	

LTE B5 5MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 12081839
 Date: 12/22/2017
 Test Engineer: 43575 OS
 Configuration: EUT + HS + AC Adapter
 Location: Chamber C
 Mode: LTE_16QAM Band 5 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.5MHz									
1633.00	-26.5	V	3.0	37.0	1.0	64.5	-13.0	-51.5	
2449.50	-24.5	V	3.0	36.4	1.0	60.0	-13.0	-47.0	
3266.00	-23.4	V	3.0	36.2	1.0	58.6	-13.0	-45.6	
1633.00	-29.0	H	3.0	37.0	1.0	65.0	-13.0	-52.0	
2449.50	-26.6	H	3.0	36.4	1.0	62.0	-13.0	-49.0	
3266.00	-23.2	H	3.0	36.2	1.0	58.8	-13.0	-45.8	
Mid Ch, 836.5MHz									
1663.00	-28.5	V	3.0	37.0	1.0	64.5	-13.0	-51.5	
2494.50	-23.4	V	3.0	36.4	1.0	58.9	-13.0	-45.9	
3326.00	-21.5	V	3.0	36.1	1.0	56.6	-13.0	-43.6	
1663.00	-28.8	H	3.0	37.0	1.0	64.8	-13.0	-51.8	
2494.50	-26.0	H	3.0	36.4	1.0	61.4	-13.0	-48.4	
3326.00	-23.2	H	3.0	36.1	1.0	58.4	-13.0	-45.4	
High Ch, 846.5MHz									
1693.00	-28.5	V	3.0	37.0	1.0	64.5	-13.0	-51.5	
2539.50	-25.0	V	3.0	36.4	1.0	60.4	-13.0	-47.4	
3386.00	-22.9	V	3.0	36.1	1.0	58.0	-13.0	-45.0	
1693.00	-28.2	H	3.0	37.0	1.0	64.2	-13.0	-51.2	
2539.50	-26.2	H	3.0	36.4	1.0	61.6	-13.0	-48.6	
3386.00	-23.3	H	3.0	36.1	1.0	58.3	-13.0	-45.3	

LTE B5 5MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/22/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber C
Mode: LTE_QPSK Band 5 Harmonics, 10MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 819MHz									
1638.00	-28.5	V	3.0	37.0	1.0	64.5	-13.0	-51.5	
2457.00	-25.0	V	3.0	36.4	1.0	60.4	-13.0	-47.4	
3276.00	-22.9	V	3.0	36.2	1.0	58.1	-13.0	-45.1	
1638.00	-29.2	H	3.0	37.0	1.0	65.2	-13.0	-52.2	
2457.00	-26.3	H	3.0	36.4	1.0	61.7	-13.0	-48.7	
3276.00	-23.1	H	3.0	36.2	1.0	58.3	-13.0	-45.3	
Mid Ch, 831.5MHz									
1663.00	-29.0	V	3.0	37.0	1.0	65.1	-13.0	-52.1	
2494.50	-24.7	V	3.0	36.4	1.0	60.2	-13.0	-47.2	
3326.00	-23.0	V	3.0	36.1	1.0	58.1	-13.0	-45.1	
1663.00	-28.3	H	3.0	37.0	1.0	64.4	-13.0	-51.4	
2494.50	-26.4	H	3.0	36.4	1.0	61.8	-13.0	-48.8	
3326.00	-22.8	H	3.0	36.1	1.0	58.0	-13.0	-45.0	
High Ch, 844MHz									
1688.00	-28.4	V	3.0	37.0	1.0	64.4	-13.0	-51.4	
2532.00	-24.5	V	3.0	36.4	1.0	59.9	-13.0	-46.9	
3376.00	-22.4	V	3.0	36.1	1.0	57.5	-13.0	-44.5	
1688.00	-29.0	H	3.0	37.0	1.0	65.0	-13.0	-52.0	
2532.00	-26.0	H	3.0	36.4	1.0	61.5	-13.0	-48.5	
3376.00	-23.0	H	3.0	36.1	1.0	58.1	-13.0	-45.1	

LTE B5 10MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/22/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber C
Mode: LTE_16QAM Band 5 Harmonics, 10MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 829MHz									
1638.00	-27.7	V	3.0	37.0	1.0	63.8	-13.0	-50.8	
2457.00	-24.3	V	3.0	36.4	1.0	59.8	-13.0	-46.8	
3276.00	-23.4	V	3.0	36.2	1.0	58.6	-13.0	-45.6	
1638.00	-29.1	H	3.0	37.0	1.0	65.1	-13.0	-52.1	
2457.00	-26.5	H	3.0	36.4	1.0	61.9	-13.0	-48.9	
3276.00	-23.2	H	3.0	36.2	1.0	58.4	-13.0	-45.4	
Mid Ch, 836.5MHz									
1663.00	-28.7	V	3.0	37.0	1.0	64.7	-13.0	-51.7	
2494.50	-23.2	V	3.0	36.4	1.0	58.6	-13.0	-45.6	
3326.00	-23.2	V	3.0	36.1	1.0	58.3	-13.0	-45.3	
1663.00	-29.4	H	3.0	37.0	1.0	65.4	-13.0	-52.4	
2494.50	-26.4	H	3.0	36.4	1.0	61.8	-13.0	-48.8	
3326.00	-23.2	H	3.0	36.1	1.0	58.4	-13.0	-45.4	
High Ch, 844MHz									
1688.00	-28.3	V	3.0	37.0	1.0	64.3	-13.0	-51.3	
2532.00	-24.5	V	3.0	36.4	1.0	60.0	-13.0	-47.0	
3376.00	-22.8	V	3.0	36.1	1.0	57.9	-13.0	-44.9	
1688.00	-28.7	H	3.0	37.0	1.0	64.6	-13.0	-51.6	
2532.00	-25.9	H	3.0	36.4	1.0	61.3	-13.0	-48.3	
3376.00	-23.2	H	3.0	36.1	1.0	58.2	-13.0	-45.2	

LTE B5 10MHz 16QAM

9.1.5. LTE BAND 7

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 7 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2502.5MHz									
5005.00	-18.0	V	3.0	35.5	1.0	-52.5	-25.0	-27.5	
7507.50	-15.2	V	3.0	35.7	1.0	-49.8	-25.0	-24.8	
10010.00	-17.4	V	3.0	36.0	1.0	-52.4	-25.0	-27.4	
5005.00	-16.9	H	3.0	35.5	1.0	-51.4	-25.0	-26.4	
7507.50	-15.7	H	3.0	35.7	1.0	-50.5	-25.0	-25.5	
10010.00	-16.3	H	3.0	36.0	1.0	-51.4	-25.0	-26.4	
Mid Ch, 2535MHz									
5070.00	-19.0	V	3.0	35.4	1.0	-53.4	-25.0	-28.4	
7605.00	-14.6	V	3.0	35.8	1.0	-49.4	-25.0	-24.4	
10140.00	-16.6	V	3.0	36.0	1.0	-51.5	-25.0	-26.5	
5070.00	-17.3	H	3.0	35.4	1.0	-51.8	-25.0	-26.8	
7605.00	-15.3	H	3.0	35.8	1.0	-50.1	-25.0	-25.1	
10140.00	-16.0	H	3.0	36.0	1.0	-51.0	-25.0	-26.0	
High Ch, 2567.5MHz									
5135.00	-17.3	V	3.0	35.4	1.0	-51.7	-25.0	-26.7	
7702.50	-17.7	V	3.0	35.8	1.0	-52.5	-25.0	-27.5	
10270.00	-15.7	V	3.0	35.9	1.0	-50.6	-25.0	-25.6	
5135.00	-16.1	H	3.0	35.4	1.0	-50.6	-25.0	-25.6	
7702.50	-15.3	H	3.0	35.8	1.0	-50.1	-25.0	-25.1	
10270.00	-16.0	H	3.0	35.9	1.0	-50.9	-25.0	-25.9	

LTE B7 5MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 7 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2502.5MHz									
5005.00	-18.3	V	3.0	35.5	1.0	-52.7	-25.0	-27.7	
7507.50	-12.9	V	3.0	35.7	1.0	-47.7	-25.0	-22.7	
10010.00	-17.3	V	3.0	36.0	1.0	-52.3	-25.0	-27.3	
5005.00	-17.0	H	3.0	35.5	1.0	-51.4	-25.0	-26.4	
7507.50	-14.1	H	3.0	35.7	1.0	-48.8	-25.0	-23.8	
10010.00	-15.5	H	3.0	36.0	1.0	-50.6	-25.0	-25.6	
Mid Ch, 2535MHz									
5070.00	-19.1	V	3.0	35.4	1.0	-53.6	-25.0	-28.6	
7605.00	-16.2	V	3.0	35.8	1.0	-50.9	-25.0	-25.9	
10140.00	-16.9	V	3.0	36.0	1.0	-51.9	-25.0	-26.9	
5070.00	-17.8	H	3.0	35.4	1.0	-52.2	-25.0	-27.2	
7605.00	-15.6	H	3.0	35.8	1.0	-50.3	-25.0	-25.3	
10140.00	-15.4	H	3.0	36.0	1.0	-50.3	-25.0	-25.3	
High Ch, 2567.5MHz									
5135.00	-17.5	V	3.0	35.4	1.0	-51.9	-25.0	-26.9	
7702.50	-17.2	V	3.0	35.8	1.0	-51.9	-25.0	-26.9	
10270.00	-15.6	V	3.0	35.9	1.0	-50.5	-25.0	-25.5	
5135.00	-16.1	H	3.0	35.4	1.0	-50.5	-25.0	-25.5	
7702.50	-15.0	H	3.0	35.8	1.0	-49.8	-25.0	-24.8	
10270.00	-15.8	H	3.0	35.9	1.0	-50.7	-25.0	-25.7	

LTE B7 5MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 7 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2505MHz									
5010.00	-18.8	V	3.0	35.5	1.0	-53.3	-25.0	-28.3	
7515.00	-15.1	V	3.0	35.7	1.0	-49.8	-25.0	-24.8	
10020.00	-17.4	V	3.0	36.0	1.0	-52.4	-25.0	-27.4	
5010.00	-18.0	H	3.0	35.5	1.0	-52.4	-25.0	-27.4	
7515.00	-15.6	H	3.0	35.7	1.0	-50.3	-25.0	-25.3	
10020.00	-16.0	H	3.0	36.0	1.0	-51.0	-25.0	-26.0	
Mid Ch, 2535MHz									
5070.00	-17.7	V	3.0	35.4	1.0	-52.1	-25.0	-27.1	
7605.00	-17.3	V	3.0	35.8	1.0	-52.0	-25.0	-27.0	
10140.00	-16.9	V	3.0	36.0	1.0	-51.9	-25.0	-26.9	
5070.00	-16.8	H	3.0	35.4	1.0	-51.2	-25.0	-26.2	
7605.00	-15.8	H	3.0	35.8	1.0	-50.6	-25.0	-25.6	
10140.00	-16.5	H	3.0	36.0	1.0	-51.4	-25.0	-26.4	
High Ch, 2565MHz									
5130.00	-18.0	V	3.0	35.4	1.0	-52.4	-25.0	-27.4	
7605.00	-17.8	V	3.0	35.8	1.0	-52.5	-25.0	-27.5	
10260.00	-16.4	V	3.0	35.9	1.0	-51.3	-25.0	-26.3	
5130.00	-17.9	H	3.0	35.4	1.0	-52.3	-25.0	-27.3	
7605.00	-15.6	H	3.0	35.8	1.0	-50.4	-25.0	-25.4	
10260.00	-16.1	H	3.0	35.9	1.0	-51.0	-25.0	-26.0	

LTE B7 10MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 7 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2505MHz									
5010.00	-18.3	V	3.0	35.5	1.0	-52.7	-25.0	-27.7	
7515.00	-14.6	V	3.0	35.7	1.0	-49.4	-25.0	-24.4	
10020.00	-17.5	V	3.0	36.0	1.0	-52.5	-25.0	-27.5	
5010.00	-18.6	H	3.0	35.5	1.0	-53.0	-25.0	-28.0	
7515.00	-16.0	H	3.0	35.7	1.0	-50.8	-25.0	-25.8	
10020.00	-16.3	H	3.0	36.0	1.0	-51.3	-25.0	-26.3	
Mid Ch, 2535MHz									
5070.00	-17.5	V	3.0	35.4	1.0	-51.9	-25.0	-26.9	
7605.00	-17.0	V	3.0	35.8	1.0	-51.8	-25.0	-26.8	
10140.00	-16.3	V	3.0	36.0	1.0	-51.3	-25.0	-26.3	
5070.00	-16.6	H	3.0	35.4	1.0	-51.0	-25.0	-26.0	
7605.00	-15.6	H	3.0	35.8	1.0	-50.4	-25.0	-25.4	
10140.00	-15.3	H	3.0	36.0	1.0	-50.3	-25.0	-25.3	
High Ch, 2565MHz									
5130.00	-18.9	V	3.0	35.4	1.0	-53.3	-25.0	-28.3	
7605.00	-17.4	V	3.0	35.8	1.0	-52.2	-25.0	-27.2	
10260.00	-17.2	V	3.0	35.9	1.0	-52.1	-25.0	-27.1	
5130.00	-17.5	H	3.0	35.4	1.0	-52.0	-25.0	-27.0	
7605.00	-15.9	H	3.0	35.8	1.0	-50.6	-25.0	-25.6	
10260.00	-14.4	H	3.0	35.9	1.0	-49.3	-25.0	-24.3	

LTE B7 10MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 7 Harmonics, 15MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2507.5MHz									
5015.00	-18.1	V	3.0	35.5	1.0	-52.5	-25.0	-27.5	
7522.50	-15.5	V	3.0	35.7	1.0	-50.3	-25.0	-25.3	
10030.00	-17.5	V	3.0	36.0	1.0	-52.5	-25.0	-27.5	
5015.00	-16.5	H	3.0	35.5	1.0	-50.9	-25.0	-25.9	
7522.50	-15.9	H	3.0	35.7	1.0	-50.7	-25.0	-25.7	
10030.00	-15.2	H	3.0	36.0	1.0	-50.2	-25.0	-25.2	
Mid Ch, 2535MHz									
5070.00	-18.8	V	3.0	35.4	1.0	-53.3	-25.0	-28.3	
7605.00	-17.3	V	3.0	35.8	1.0	-52.0	-25.0	-27.0	
10140.00	-16.9	V	3.0	36.0	1.0	-51.9	-25.0	-26.9	
5070.00	-17.6	H	3.0	35.4	1.0	-52.1	-25.0	-27.1	
7605.00	-15.2	H	3.0	35.8	1.0	-49.9	-25.0	-24.9	
10140.00	-16.2	H	3.0	36.0	1.0	-51.2	-25.0	-26.2	
High Ch, 2562.5MHz									
5125.00	-18.4	V	3.0	35.4	1.0	-52.9	-25.0	-27.9	
7607.50	-16.8	V	3.0	35.8	1.0	-51.6	-25.0	-26.6	
10250.00	-17.2	V	3.0	35.9	1.0	-52.1	-25.0	-27.1	
5125.00	-17.8	H	3.0	35.4	1.0	-52.3	-25.0	-27.3	
7607.50	-16.2	H	3.0	35.8	1.0	-51.0	-25.0	-26.0	
10250.00	-15.9	H	3.0	35.9	1.0	-50.8	-25.0	-25.8	

LTE B7 15MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 7 Harmonics, 15MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2507.5MHz									
5015.00	-18.3	V	3.0	35.5	1.0	-52.7	-25.0	-27.7	
7522.50	-16.6	V	3.0	35.7	1.0	-51.3	-25.0	-26.3	
10030.00	-18.1	V	3.0	36.0	1.0	-53.1	-25.0	-28.1	
5015.00	-17.5	H	3.0	35.5	1.0	-52.0	-25.0	-27.0	
7522.50	-15.7	H	3.0	35.7	1.0	-50.4	-25.0	-25.4	
10030.00	-16.1	H	3.0	36.0	1.0	-51.1	-25.0	-26.1	
Mid Ch, 2535MHz									
5070.00	-17.4	V	3.0	35.4	1.0	-51.8	-25.0	-26.8	
7605.00	-17.4	V	3.0	35.8	1.0	-52.1	-25.0	-27.1	
10140.00	-17.2	V	3.0	36.0	1.0	-52.2	-25.0	-27.2	
5070.00	-17.3	H	3.0	35.4	1.0	-51.7	-25.0	-26.7	
7605.00	-14.8	H	3.0	35.8	1.0	-48.4	-25.0	-23.4	
10140.00	-15.7	H	3.0	36.0	1.0	-50.7	-25.0	-25.7	
High Ch, 2562.5MHz									
5125.00	-17.8	V	3.0	35.4	1.0	-52.3	-25.0	-27.3	
7607.50	-17.9	V	3.0	35.8	1.0	-52.6	-25.0	-27.6	
10250.00	-15.4	V	3.0	35.9	1.0	-50.3	-25.0	-25.3	
5125.00	-17.4	H	3.0	35.4	1.0	-51.9	-25.0	-26.9	
7607.50	-15.9	H	3.0	35.8	1.0	-50.7	-25.0	-25.7	
10250.00	-16.1	H	3.0	35.9	1.0	-51.0	-25.0	-26.0	

LTE B7 15MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AG Adapter
Location: Chamber B
Mode: LTE_QPSK Band 7 Harmonics, 20MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2510MHz									
5020.00	-18.1	V	3.0	35.5	1.0	-52.5	-25.0	-27.5	
7530.00	-17.4	V	3.0	35.7	1.0	-52.1	-25.0	-27.1	
10040.00	-16.9	V	3.0	36.0	1.0	-51.9	-25.0	-26.9	
5020.00	-17.4	H	3.0	35.5	1.0	-51.9	-25.0	-26.9	
7530.00	-15.5	H	3.0	35.7	1.0	-50.3	-25.0	-25.3	
10040.00	-15.3	H	3.0	36.0	1.0	-50.3	-25.0	-25.3	
Mid Ch, 2535MHz									
5070.00	-18.3	V	3.0	35.4	1.0	-52.8	-25.0	-27.8	
7695.00	-18.0	V	3.0	35.8	1.0	-52.8	-25.0	-27.8	
10140.00	-17.3	V	3.0	36.0	1.0	-52.3	-25.0	-27.3	
5070.00	-17.9	H	3.0	35.4	1.0	-52.3	-25.0	-27.3	
7695.00	-15.4	H	3.0	35.8	1.0	-50.2	-25.0	-25.2	
10140.00	-15.9	H	3.0	36.0	1.0	-50.9	-25.0	-25.9	
High Ch, 2560MHz									
5120.00	-18.9	V	3.0	35.4	1.0	-53.3	-25.0	-28.3	
7680.00	-17.1	V	3.0	35.8	1.0	-51.9	-25.0	-26.9	
10240.00	-16.9	V	3.0	35.9	1.0	-51.8	-25.0	-26.8	
5120.00	-17.2	H	3.0	35.4	1.0	-51.6	-25.0	-26.6	
7680.00	-15.6	H	3.0	35.8	1.0	-50.4	-25.0	-25.4	
10240.00	-15.8	H	3.0	35.9	1.0	-50.7	-25.0	-25.7	

LTE B7 20MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AG Adapter
Location: Chamber B
Mode: LTE_16QAM Band 7 Harmonics, 20MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2510MHz									
5020.00	-17.1	V	3.0	35.5	1.0	-51.6	-25.0	-26.6	
7530.00	-17.3	V	3.0	35.7	1.0	-52.1	-25.0	-27.1	
10040.00	-16.5	V	3.0	36.0	1.0	-51.5	-25.0	-26.5	
5020.00	-17.5	H	3.0	35.5	1.0	-52.0	-25.0	-27.0	
7530.00	-15.2	H	3.0	35.7	1.0	-49.9	-25.0	-24.9	
10040.00	-15.3	H	3.0	36.0	1.0	-50.3	-25.0	-25.3	
Mid Ch, 2535MHz									
5070.00	-18.8	V	3.0	35.4	1.0	-53.3	-25.0	-28.3	
7695.00	-17.1	V	3.0	35.8	1.0	-51.9	-25.0	-26.9	
10140.00	-17.3	V	3.0	36.0	1.0	-52.2	-25.0	-27.2	
5070.00	-17.3	H	3.0	35.4	1.0	-51.7	-25.0	-26.7	
7695.00	-14.7	H	3.0	35.8	1.0	-49.5	-25.0	-24.5	
10140.00	-15.7	H	3.0	36.0	1.0	-50.6	-25.0	-25.6	
High Ch, 2560MHz									
5120.00	-18.6	V	3.0	35.4	1.0	-53.0	-25.0	-28.0	
7680.00	-17.5	V	3.0	35.8	1.0	-52.3	-25.0	-27.3	
10240.00	-16.1	V	3.0	35.9	1.0	-51.0	-25.0	-26.0	
5120.00	-17.8	H	3.0	35.4	1.0	-52.2	-25.0	-27.2	
7680.00	-16.4	H	3.0	35.8	1.0	-51.2	-25.0	-26.2	
10240.00	-15.6	H	3.0	35.9	1.0	-50.5	-25.0	-25.5	

LTE B7 20MHz 16QAM

9.1.6. LTE BAND 12

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 12 Harmonics, 1.4MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 699.7MHz									
1399.40	-30.2	V	3.0	37.4	1.0	66.6	-13.0	-53.6	
2099.10	-23.4	V	3.0	36.6	1.0	59.0	-13.0	-46.0	
2758.80	-22.6	V	3.0	36.4	1.0	58.0	-13.0	-45.0	
1399.40	-25.4	H	3.0	37.4	1.0	61.8	-13.0	-48.8	
2099.10	-22.9	H	3.0	36.6	1.0	58.5	-13.0	-45.5	
2758.80	-24.0	H	3.0	36.4	1.0	59.4	-13.0	-46.4	
Mid Ch, 707.5MHz									
1415.00	-30.3	V	3.0	37.4	1.0	66.6	-13.0	-53.6	
2122.50	-22.5	V	3.0	36.6	1.0	58.1	-13.0	-45.1	
2830.00	-23.3	V	3.0	36.4	1.0	57.7	-13.0	-44.7	
1415.00	-29.2	H	3.0	37.4	1.0	65.6	-13.0	-52.6	
2122.50	-22.1	H	3.0	36.6	1.0	57.7	-13.0	-44.7	
2830.00	-23.9	H	3.0	36.4	1.0	59.3	-13.0	-46.3	
High Ch, 715.3MHz									
1430.60	-29.4	V	3.0	37.3	1.0	65.8	-13.0	-52.8	
2145.90	-22.3	V	3.0	36.6	1.0	57.9	-13.0	-44.9	
2861.20	-22.7	V	3.0	36.4	1.0	58.1	-13.0	-45.1	
1430.60	-28.0	H	3.0	37.3	1.0	64.3	-13.0	-51.3	
2145.90	-23.4	H	3.0	36.6	1.0	58.9	-13.0	-45.9	
2861.20	-23.7	H	3.0	36.4	1.0	59.0	-13.0	-46.0	

LTE B12 1.4MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 12 Harmonics, 1.4MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 699.7MHz									
1399.40	-30.7	V	3.0	37.4	1.0	67.1	-13.0	-54.1	
2099.10	-23.0	V	3.0	36.6	1.0	59.5	-13.0	-46.5	
2758.80	-22.1	V	3.0	36.4	1.0	57.5	-13.0	-44.5	
1399.40	-24.5	H	3.0	37.4	1.0	60.8	-13.0	-47.8	
2099.10	-22.7	H	3.0	36.6	1.0	58.3	-13.0	-45.3	
2758.80	-23.8	H	3.0	36.4	1.0	59.2	-13.0	-46.2	
Mid Ch, 707.5MHz									
1415.00	-30.8	V	3.0	37.4	1.0	67.1	-13.0	-54.1	
2122.50	-23.0	V	3.0	36.6	1.0	58.6	-13.0	-45.6	
2830.00	-22.8	V	3.0	36.4	1.0	58.2	-13.0	-45.2	
1415.00	-29.5	H	3.0	37.4	1.0	65.9	-13.0	-52.9	
2122.50	-21.5	H	3.0	36.6	1.0	57.1	-13.0	-44.1	
2830.00	-23.7	H	3.0	36.4	1.0	59.1	-13.0	-46.1	
High Ch, 715.3MHz									
1430.60	-30.6	V	3.0	37.3	1.0	67.0	-13.0	-54.0	
2145.90	-22.2	V	3.0	36.6	1.0	57.8	-13.0	-44.8	
2861.20	-22.6	V	3.0	36.4	1.0	58.0	-13.0	-45.0	
1430.60	-29.1	H	3.0	37.3	1.0	65.5	-13.0	-52.5	
2145.90	-23.7	H	3.0	36.6	1.0	59.2	-13.0	-46.2	
2861.20	-23.9	H	3.0	36.4	1.0	59.2	-13.0	-46.2	

LTE B12 1.4MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 12 Harmonics, 3MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 700.5MHz									
1401.00	-30.0	V	3.0	37.4	1.0	66.4	-13.0	-53.4	
2101.50	-22.0	V	3.0	36.6	1.0	57.6	-13.0	-44.6	
2802.00	-23.6	V	3.0	36.4	1.0	59.0	-13.0	-46.0	
1401.00	-29.7	H	3.0	37.4	1.0	66.1	-13.0	-53.1	
2101.50	-22.5	H	3.0	36.6	1.0	58.0	-13.0	-45.0	
2802.00	-24.1	H	3.0	36.4	1.0	59.4	-13.0	-46.4	
Mid Ch, 707.5MHz									
1415.00	-30.7	V	3.0	37.4	1.0	67.0	-13.0	-54.0	
2122.50	-21.1	V	3.0	36.6	1.0	56.7	-13.0	-43.7	
2830.00	-22.4	V	3.0	36.4	1.0	57.8	-13.0	-44.8	
1415.00	-29.5	H	3.0	37.4	1.0	65.8	-13.0	-52.8	
2122.50	-21.6	H	3.0	36.6	1.0	57.2	-13.0	-44.2	
2830.00	-23.6	H	3.0	36.4	1.0	59.0	-13.0	-46.0	
High Ch, 714.5MHz									
1429.00	-27.1	V	3.0	37.3	1.0	63.4	-13.0	-50.4	
2143.50	-20.0	V	3.0	36.6	1.0	55.5	-13.0	-42.5	
2858.00	-21.9	V	3.0	36.4	1.0	57.3	-13.0	-44.3	
1429.00	-29.1	H	3.0	37.3	1.0	65.4	-13.0	-52.4	
2143.50	-22.3	H	3.0	36.6	1.0	57.9	-13.0	-44.9	
2858.00	-22.9	H	3.0	36.4	1.0	58.3	-13.0	-45.3	

LTE B12 3MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 12 Harmonics, 3MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 700.5MHz									
1401.00	-29.0	V	3.0	37.4	1.0	65.4	-13.0	-52.4	
2101.50	-23.5	V	3.0	36.6	1.0	59.1	-13.0	-46.1	
2802.00	-23.0	V	3.0	36.4	1.0	58.3	-13.0	-45.3	
1401.00	-29.2	H	3.0	37.4	1.0	65.6	-13.0	-52.6	
2101.50	-24.0	H	3.0	36.6	1.0	59.6	-13.0	-46.6	
2802.00	-23.8	H	3.0	36.4	1.0	59.2	-13.0	-46.2	
Mid Ch, 707.5MHz									
1415.00	-29.8	V	3.0	37.4	1.0	66.1	-13.0	-53.1	
2122.50	-20.8	V	3.0	36.6	1.0	66.4	-13.0	-53.4	
2830.00	-23.0	V	3.0	36.4	1.0	58.4	-13.0	-45.4	
1415.00	-28.8	H	3.0	37.4	1.0	65.2	-13.0	-52.2	
2122.50	-21.2	H	3.0	36.6	1.0	56.8	-13.0	-43.8	
2830.00	-23.9	H	3.0	36.4	1.0	59.2	-13.0	-46.2	
High Ch, 714.5MHz									
1429.00	-26.4	V	3.0	37.3	1.0	62.7	-13.0	-49.7	
2143.50	-20.7	V	3.0	36.6	1.0	56.3	-13.0	-43.3	
2858.00	-22.8	V	3.0	36.4	1.0	58.2	-13.0	-45.2	
1429.00	-28.8	H	3.0	37.3	1.0	65.1	-13.0	-52.1	
2143.50	-22.6	H	3.0	36.6	1.0	58.2	-13.0	-45.2	
2858.00	-23.2	H	3.0	36.4	1.0	58.6	-13.0	-45.6	

LTE B12 3MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 12 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 701.5MHz									
1403.00	-30.3	V	3.0	37.4	1.0	66.7	-13.0	-53.7	
2104.50	-23.6	V	3.0	36.6	1.0	59.2	-13.0	-46.2	
2806.00	-22.5	V	3.0	36.4	1.0	57.9	-13.0	-44.9	
1403.00	-29.3	H	3.0	37.4	1.0	65.7	-13.0	-52.7	
2104.50	-23.8	H	3.0	36.6	1.0	59.4	-13.0	-46.4	
2806.00	-23.8	H	3.0	36.4	1.0	59.1	-13.0	-46.1	
Mid Ch, 707.5MHz									
1415.00	-30.5	V	3.0	37.4	1.0	66.8	-13.0	-53.8	
2122.50	-19.7	V	3.0	36.6	1.0	55.3	-13.0	-42.3	
2830.00	-22.4	V	3.0	36.4	1.0	57.8	-13.0	-44.8	
1415.00	-29.7	H	3.0	37.4	1.0	65.6	-13.0	-52.6	
2122.50	-21.9	H	3.0	36.6	1.0	59.5	-13.0	-46.5	
2830.00	-23.4	H	3.0	36.4	1.0	58.8	-13.0	-45.8	
High Ch, 713.5MHz									
1427.00	-29.3	V	3.0	37.3	1.0	65.7	-13.0	-52.7	
2140.50	-21.1	V	3.0	36.6	1.0	56.7	-13.0	-43.7	
2854.00	-22.7	V	3.0	36.4	1.0	58.1	-13.0	-45.1	
1427.00	-29.9	H	3.0	37.3	1.0	62.2	-13.0	-49.2	
2140.50	-22.3	H	3.0	36.6	1.0	57.9	-13.0	-44.9	
2854.00	-23.2	H	3.0	36.4	1.0	58.6	-13.0	-45.6	

LTE B12 5MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 12 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 701.5MHz									
1403.00	-29.5	V	3.0	37.4	1.0	65.9	-13.0	-52.9	
2104.50	-22.7	V	3.0	36.6	1.0	58.3	-13.0	-45.3	
2806.00	-22.2	V	3.0	36.4	1.0	57.6	-13.0	-44.6	
1403.00	-29.0	H	3.0	37.4	1.0	65.4	-13.0	-52.4	
2104.50	-24.2	H	3.0	36.6	1.0	59.8	-13.0	-46.8	
2806.00	-24.0	H	3.0	36.4	1.0	59.4	-13.0	-46.4	
Mid Ch, 707.5MHz									
1415.00	-30.0	V	3.0	37.4	1.0	66.4	-13.0	-53.4	
2122.50	-18.6	V	3.0	36.6	1.0	54.2	-13.0	-41.2	
2830.00	-22.4	V	3.0	36.4	1.0	58.6	-13.0	-45.6	
1415.00	-29.1	H	3.0	37.4	1.0	65.5	-13.0	-52.5	
2122.50	-21.4	H	3.0	36.6	1.0	58.0	-13.0	-45.0	
2830.00	-23.8	H	3.0	36.4	1.0	59.2	-13.0	-46.2	
High Ch, 713.5MHz									
1427.00	-28.6	V	3.0	37.3	1.0	65.0	-13.0	-52.0	
2140.50	-20.8	V	3.0	36.6	1.0	56.4	-13.0	-43.4	
2854.00	-22.7	V	3.0	36.4	1.0	58.1	-13.0	-45.1	
1427.00	-29.1	H	3.0	37.3	1.0	65.1	-13.0	-52.1	
2140.50	-21.1	H	3.0	36.6	1.0	56.6	-13.0	-43.6	
2854.00	-23.3	H	3.0	36.4	1.0	58.7	-13.0	-45.7	

LTE B12 5MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_QPSK Band 12 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 704MHz									
1408.00	-29.7	V	3.0	37.4	1.0	-66.1	-13.0	-53.1	
2112.00	-22.9	V	3.0	36.6	1.0	-58.5	-13.0	-45.5	
2816.00	-22.6	V	3.0	36.4	1.0	-58.0	-13.0	-45.0	
1408.00	-28.9	H	3.0	37.4	1.0	-65.2	-13.0	-52.2	
2112.00	-22.9	H	3.0	36.6	1.0	-58.5	-13.0	-45.5	
2816.00	-24.1	H	3.0	36.4	1.0	-59.4	-13.0	-46.4	
Mid Ch, 707.5MHz									
1415.00	-29.2	V	3.0	37.4	1.0	-65.6	-13.0	-52.6	
2122.50	-23.2	V	3.0	36.6	1.0	-58.8	-13.0	-45.8	
2830.00	-22.8	V	3.0	36.4	1.0	-58.2	-13.0	-45.2	
1415.00	-29.1	H	3.0	37.4	1.0	-65.4	-13.0	-52.4	
2122.50	-22.3	H	3.0	36.6	1.0	-57.9	-13.0	-44.9	
2830.00	-23.7	H	3.0	36.4	1.0	-59.0	-13.0	-46.0	
High Ch, 711MHz									
1422.00	-29.0	V	3.0	37.3	1.0	-65.3	-13.0	-52.3	
2133.00	-23.0	V	3.0	36.6	1.0	-58.5	-13.0	-45.5	
2844.00	-22.2	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
1422.00	-26.5	H	3.0	37.3	1.0	-62.8	-13.0	-49.8	
2133.00	-22.7	H	3.0	36.6	1.0	-58.2	-13.0	-45.2	
2844.00	-23.9	H	3.0	36.4	1.0	-59.3	-13.0	-46.3	

LTE B12 10MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/21/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber B
Mode: LTE_16QAM Band 12 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 704MHz									
1408.00	-29.3	V	3.0	37.4	1.0	-65.7	-13.0	-52.7	
2112.00	-22.8	V	3.0	36.6	1.0	-58.4	-13.0	-45.4	
2816.00	-22.3	V	3.0	36.4	1.0	-57.7	-13.0	-44.7	
1408.00	-28.2	H	3.0	37.4	1.0	-64.5	-13.0	-51.5	
2112.00	-23.3	H	3.0	36.6	1.0	-58.9	-13.0	-45.9	
2816.00	-23.7	H	3.0	36.4	1.0	-59.1	-13.0	-46.1	
Mid Ch, 707.5MHz									
1415.00	-29.8	V	3.0	37.4	1.0	-66.1	-13.0	-53.1	
2122.50	-23.4	V	3.0	36.6	1.0	-59.0	-13.0	-46.0	
2830.00	-22.8	V	3.0	36.4	1.0	-57.4	-13.0	-44.4	
1415.00	-29.0	H	3.0	37.4	1.0	-65.4	-13.0	-52.4	
2122.50	-21.2	H	3.0	36.6	1.0	-56.7	-13.0	-43.7	
2830.00	-22.5	H	3.0	36.4	1.0	-57.9	-13.0	-44.9	
High Ch, 711MHz									
1422.00	-28.9	V	3.0	37.3	1.0	-65.2	-13.0	-52.2	
2133.00	-23.2	V	3.0	36.6	1.0	-58.8	-13.0	-45.8	
2844.00	-22.5	V	3.0	36.4	1.0	-57.9	-13.0	-44.9	
1422.00	-26.4	H	3.0	37.3	1.0	-61.8	-13.0	-48.8	
2133.00	-22.1	H	3.0	36.6	1.0	-57.7	-13.0	-44.7	
2844.00	-23.6	H	3.0	36.4	1.0	-59.0	-13.0	-46.0	

LTE B12 10MHz 16QAM

9.1.7. LTE BAND 13

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 12081839
 Date: 12/21/2017
 Test Engineer: 43575 OS
 Configuration: EUT + HS + AC Adapter
 Location: Chamber B
 Mode: LTE_QPSK Band 13 Harmonics, 5MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 779.5MHz									
1559.00	-28.3	V	3.0	37.1	1.0	-64.4	-13.0	-51.4	
2338.50	-19.1	V	3.0	36.5	1.0	-45.6	-13.0	-32.6	
3118.00	-22.4	V	3.0	36.3	1.0	-57.7	-13.0	-44.7	
1559.00	-26.8	H	3.0	37.1	1.0	-62.9	-13.0	-49.9	
2338.50	-12.1	H	3.0	36.5	1.0	-47.6	-13.0	-34.6	
3118.00	-22.4	H	3.0	36.3	1.0	-57.7	-13.0	-44.7	
Mid Ch, 782MHz									
1564.00	-28.4	V	3.0	37.1	1.0	-64.5	-13.0	-51.5	
2346.00	-9.7	V	3.0	36.5	1.0	-45.2	-13.0	-32.2	
3128.00	-22.9	V	3.0	36.3	1.0	-57.3	-13.0	-44.3	
1564.00	-25.3	H	3.0	37.1	1.0	-61.4	-13.0	-48.4	
2346.00	-12.5	H	3.0	36.5	1.0	-48.0	-13.0	-35.0	
3128.00	-22.3	H	3.0	36.3	1.0	-57.5	-13.0	-44.5	
High Ch, 784.5MHz									
1569.00	-28.7	V	3.0	37.1	1.0	-64.8	-13.0	-51.8	
2353.50	-19.2	V	3.0	36.5	1.0	-45.7	-13.0	-32.7	
3138.00	-21.6	V	3.0	36.3	1.0	-56.8	-13.0	-43.8	
1569.00	-27.5	H	3.0	37.1	1.0	-63.7	-13.0	-50.7	
2353.50	-13.0	H	3.0	36.5	1.0	-48.5	-13.0	-35.5	
3138.00	-22.5	H	3.0	36.3	1.0	-57.7	-13.0	-44.7	

LTE B13 5MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 12081839
 Date: 12/21/2017
 Test Engineer: 43575 OS
 Configuration: EUT + HS + AC Adapter
 Location: Chamber B
 Mode: LTE_QPSK Band 13 Harmonics, 5MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 779.5MHz									
1559.00	-28.3	V	3.0	37.1	1.0	-64.4	-13.0	-51.4	
2338.50	-19.1	V	3.0	36.5	1.0	-45.6	-13.0	-32.6	
3118.00	-22.4	V	3.0	36.3	1.0	-57.7	-13.0	-44.7	
1559.00	-26.8	H	3.0	37.1	1.0	-62.9	-13.0	-49.9	
2338.50	-12.1	H	3.0	36.5	1.0	-47.6	-13.0	-34.6	
3118.00	-22.4	H	3.0	36.3	1.0	-57.7	-13.0	-44.7	
Mid Ch, 782MHz									
1564.00	-28.4	V	3.0	37.1	1.0	-64.5	-13.0	-51.5	
2346.00	-9.7	V	3.0	36.5	1.0	-45.2	-13.0	-32.2	
3128.00	-22.9	V	3.0	36.3	1.0	-57.3	-13.0	-44.3	
1564.00	-25.3	H	3.0	37.1	1.0	-61.4	-13.0	-48.4	
2346.00	-12.5	H	3.0	36.5	1.0	-48.0	-13.0	-35.0	
3128.00	-22.3	H	3.0	36.3	1.0	-57.5	-13.0	-44.5	
High Ch, 784.5MHz									
1569.00	-28.7	V	3.0	37.1	1.0	-64.8	-13.0	-51.8	
2353.50	-19.2	V	3.0	36.5	1.0	-45.7	-13.0	-32.7	
3138.00	-21.6	V	3.0	36.3	1.0	-56.8	-13.0	-43.8	
1569.00	-27.5	H	3.0	37.1	1.0	-63.7	-13.0	-50.7	
2353.50	-13.0	H	3.0	36.5	1.0	-48.5	-13.0	-35.5	
3138.00	-22.5	H	3.0	36.3	1.0	-57.7	-13.0	-44.7	

LTE B13 5MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 12081839
 Date: 12/21/2017
 Test Engineer: 43575 OS
 Configuration: EUT + HS + AC Adapter
 Location: Chamber B
 Mode: LTE_QPSK Band 13 Harmonics, 10MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Mid Ch, 782MHz									
1564.00	-28.7	V	3.0	37.1	1.0	-64.8	-13.0	-51.8	
2346.00	-10.9	V	3.0	36.5	1.0	-46.4	-13.0	-33.4	
3128.00	-22.3	V	3.0	36.3	1.0	-57.6	-13.0	-44.6	
1564.00	-26.0	H	3.0	37.1	1.0	-62.2	-13.0	-49.2	
2346.00	-12.7	H	3.0	36.5	1.0	-48.2	-13.0	-35.2	
3128.00	-22.1	H	3.0	36.3	1.0	-57.4	-13.0	-44.4	

LTE B13 10MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 12081839
 Date: 12/21/2017
 Test Engineer: 43575 OS
 Configuration: EUT + HS + AC Adapter
 Location: Chamber B
 Mode: LTE_16QAM Band 13 Harmonics, 10MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Mid Ch, 782MHz									
1564.00	-28.7	V	3.0	37.1	1.0	-64.8	-13.0	-51.8	
2346.00	-8.3	V	3.0	36.5	1.0	-43.8	-13.0	-30.8	
3128.00	-22.4	V	3.0	36.3	1.0	-57.6	-13.0	-44.6	
1564.00	-25.1	H	3.0	37.1	1.0	-61.2	-13.0	-48.2	
2346.00	-19.0	H	3.0	36.5	1.0	-45.9	-13.0	-32.9	
3128.00	-22.8	H	3.0	36.3	1.0	-58.1	-13.0	-45.1	

LTE B13 10MHz 16QAM

9.1.8. LTE BAND 26

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		SOMC							
Project #:		12081839							
Date:		12/22/2017							
Test Engineer:		43575 OS							
Configuration:		EUT + HS + AC Adapter							
Location:		Chamber C							
Mode:		LTE_QPSK Band 26 Harmonics, 1.4MHz Bandwidth							
F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 814.7MHz									
1629.40	-29.3	V	3.0	37.1	1.0	65.3	-13.0	-52.3	
2444.10	-24.7	V	3.0	36.4	1.0	60.2	-13.0	-47.2	
3258.80	-23.2	V	3.0	36.2	1.0	58.4	-13.0	-45.4	
1629.40	-28.9	H	3.0	37.1	1.0	65.0	-13.0	-52.0	
2444.10	-26.7	H	3.0	36.4	1.0	62.2	-13.0	-49.2	
3258.80	-23.4	H	3.0	36.2	1.0	58.6	-13.0	-45.6	
Mid Ch, 831.5MHz									
1663.00	-28.8	V	3.0	37.0	1.0	64.8	-13.0	-51.8	
2494.50	-24.2	V	3.0	36.4	1.0	59.7	-13.0	-46.7	
3326.00	-22.9	V	3.0	36.1	1.0	58.0	-13.0	-45.0	
1663.00	-28.7	H	3.0	37.0	1.0	64.7	-13.0	-51.7	
2494.50	-25.7	H	3.0	36.4	1.0	61.2	-13.0	-48.2	
3326.00	-23.4	H	3.0	36.1	1.0	58.5	-13.0	-45.5	
High Ch, 848.3MHz									
1696.60	-27.7	V	3.0	37.0	1.0	63.6	-13.0	-50.6	
2544.90	-24.4	V	3.0	36.4	1.0	59.8	-13.0	-46.8	
3393.20	-23.0	V	3.0	36.1	1.0	58.0	-13.0	-45.0	
1696.60	-28.4	H	3.0	37.0	1.0	64.3	-13.0	-51.3	
2544.90	-24.4	H	3.0	36.4	1.0	59.8	-13.0	-46.8	
3393.20	-23.0	H	3.0	36.1	1.0	58.0	-13.0	-45.0	

LTE B26 1.4MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		SOMC							
Project #:		12081839							
Date:		12/22/2017							
Test Engineer:		43575 OS							
Configuration:		EUT + HS + AC Adapter							
Location:		Chamber C							
Mode:		LTE_QPSK Band 26 Harmonics, 1.4MHz Bandwidth							
F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 814.7MHz									
1629.40	-29.3	V	3.0	37.1	1.0	65.3	-13.0	-52.3	
2444.10	-25.3	V	3.0	36.4	1.0	60.7	-13.0	-47.7	
3258.80	-23.4	V	3.0	36.2	1.0	58.6	-13.0	-45.6	
1629.40	-28.9	H	3.0	37.1	1.0	64.9	-13.0	-51.9	
2444.10	-25.8	H	3.0	36.4	1.0	61.3	-13.0	-48.3	
3258.80	-23.4	H	3.0	36.2	1.0	58.6	-13.0	-45.6	
Mid Ch, 831.5MHz									
1663.00	-28.3	V	3.0	37.0	1.0	64.3	-13.0	-51.3	
2494.50	-24.6	V	3.0	36.4	1.0	60.0	-13.0	-47.0	
3326.00	-22.5	V	3.0	36.1	1.0	57.6	-13.0	-44.6	
1663.00	-28.2	H	3.0	37.0	1.0	64.2	-13.0	-51.2	
2494.50	-25.9	H	3.0	36.4	1.0	61.4	-13.0	-48.4	
3326.00	-22.9	H	3.0	36.1	1.0	58.0	-13.0	-45.0	
High Ch, 848.3MHz									
1696.60	-28.3	V	3.0	37.0	1.0	64.3	-13.0	-51.3	
2544.90	-24.6	V	3.0	36.4	1.0	60.0	-13.0	-47.0	
3393.20	-22.5	V	3.0	36.1	1.0	57.5	-13.0	-44.5	
1696.60	-28.7	H	3.0	37.0	1.0	64.7	-13.0	-51.7	
2544.90	-25.5	H	3.0	36.4	1.0	60.9	-13.0	-47.9	
3393.20	-22.6	H	3.0	36.1	1.0	57.7	-13.0	-44.7	

LTE B26 1.4MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		SOMC							
Project #:		12081839							
Date:		12/22/2017							
Test Engineer:		43575 OS							
Configuration:		EUT + HS + AC Adapter							
Location:		Chamber C							
Mode:		LTE_QPSK Band 26 Harmonics, 3MHz Bandwidth							
F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 815.5MHz									
1631.00	-28.9	V	3.0	37.0	1.0	64.9	-13.0	-51.9	
2446.50	-24.9	V	3.0	36.4	1.0	60.3	-13.0	-47.3	
3262.00	-23.6	V	3.0	36.2	1.0	58.8	-13.0	-45.8	
1631.00	-29.3	H	3.0	37.0	1.0	65.3	-13.0	-52.3	
2446.50	-26.7	H	3.0	36.4	1.0	62.1	-13.0	-49.1	
3262.00	-23.3	H	3.0	36.2	1.0	58.5	-13.0	-45.5	
Mid Ch, 831.5MHz									
1663.00	-28.9	V	3.0	37.0	1.0	64.9	-13.0	-51.9	
2494.50	-24.7	V	3.0	36.4	1.0	60.1	-13.0	-47.1	
3326.00	-23.3	V	3.0	36.1	1.0	58.5	-13.0	-45.5	
1663.00	-29.4	H	3.0	37.0	1.0	65.4	-13.0	-52.4	
2494.50	-26.1	H	3.0	36.4	1.0	61.5	-13.0	-48.5	
3326.00	-23.7	H	3.0	36.1	1.0	58.8	-13.0	-45.8	
High Ch, 847.5MHz									
1695.00	-28.6	V	3.0	37.0	1.0	64.6	-13.0	-51.6	
2542.50	-24.5	V	3.0	36.4	1.0	59.9	-13.0	-46.9	
3390.00	-23.3	V	3.0	36.1	1.0	58.4	-13.0	-45.4	
1695.00	-28.4	H	3.0	37.0	1.0	64.4	-13.0	-51.4	
2542.50	-26.6	H	3.0	36.4	1.0	62.1	-13.0	-49.1	
3390.00	-22.4	H	3.0	36.1	1.0	57.5	-13.0	-44.5	

LTE B26 3MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		SOMC							
Project #:		12081839							
Date:		12/22/2017							
Test Engineer:		43575 OS							
Configuration:		EUT + HS + AC Adapter							
Location:		Chamber C							
Mode:		LTE_QPSK Band 26 Harmonics, 3MHz Bandwidth							
F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 815.5MHz									
1631.00	-28.9	V	3.0	37.0	1.0	64.9	-13.0	-51.9	
2446.50	-24.4	V	3.0	36.4	1.0	60.3	-13.0	-47.3	
3262.00	-23.4	V	3.0	36.2	1.0	58.5	-13.0	-45.5	
1631.00	-29.5	H	3.0	37.0	1.0	65.5	-13.0	-52.5	
2446.50	-26.5	H	3.0	36.4	1.0	62.1	-13.0	-49.1	
3262.00	-23.2	H	3.0	36.2	1.0	58.4	-13.0	-45.4	
Mid Ch, 831.5MHz									
1663.00	-28.8	V	3.0	37.0	1.0	64.8	-13.0	-51.8	
2494.50	-24.4	V	3.0	36.4	1.0	60.1	-13.0	-47.1	
3326.00	-23.0	V	3.0	36.1	1.0	58.1	-13.0	-45.1	
1663.00	-29.0	H	3.0	37.0	1.0	65.1	-13.0	-52.1	
2494.50	-26.1	H	3.0	36.4	1.0	61.5	-13.0	-48.5	
3326.00	-23.2	H	3.0	36.1	1.0	58.4	-13.0	-45.4	
High Ch, 847.5MHz									
1695.00	-28.4	V	3.0	37.0	1.0	64.4	-13.0	-51.4	
2542.50	-24.1	V	3.0	36.4	1.0	60.4	-13.0	-47.4	
3390.00	-22.6	V	3.0	36.1	1.0	57.7	-13.0	-44.7	
1695.00	-28.0	H	3.0	37.0	1.0	64.0	-13.0	-51.0	
2542.50	-25.6	H	3.0	36.4	1.0	61.0	-13.0	-48.0	
3390.00	-22.8	H	3.0	36.1	1.0	57.9	-13.0	-44.9	

LTE B26 3MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		SOMC							
Project #:		12081839							
Date:		12/22/2017							
Test Engineer:		43575 OS							
Configuration:		EUT + HS + AC Adapter							
Location:		Chamber C							
Mode:		LTE_QPSK Band 26 Harmonics, 5MHz Bandwidth							
F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 816.5MHz									
1633.00	-28.8	V	3.0	37.0	1.0	64.8	-13.0	-51.8	
2449.50	-24.5	V	3.0	36.4	1.0	59.9	-13.0	-46.9	
3266.00	-22.5	V	3.0	36.2	1.0	57.7	-13.0	-44.7	
1633.00	-28.9	H	3.0	37.0	1.0	65.0	-13.0	-52.0	
2449.50	-26.5	H	3.0	36.4	1.0	62.0	-13.0	-49.0	
3266.00	-23.3	H	3.0	36.2	1.0	58.4	-13.0	-45.4	
Mid Ch, 831.5MHz									
1663.00	-28.4	V	3.0	37.0	1.0	64.4	-13.0	-51.4	
2494.50	-25.0	V	3.0	36.4	1.0	60.4	-13.0	-47.4	
3326.00	-22.9	V	3.0	36.1	1.0	58.1	-13.0	-45.1	
1663.00	-28.8	H	3.0	37.0	1.0	64.8	-13.0	-51.8	
2494.50	-26.0	H	3.0	36.4	1.0	61.6	-13.0	-48.6	
3326.00	-23.1	H	3.0	36.1	1.0	58.3	-13.0	-45.3	
High Ch, 846.5MHz									
1693.00	-28.4	V	3.0	37.0	1.0	64.4	-13.0	-51.4	
2539.50	-24.6	V	3.0	36.4	1.0	60.0	-13.0	-47.0	
3386.00	-22.4	V	3.0	36.1	1.0	57.5	-13.0	-44.5	
1693.00	-29.1	H	3.0	37.0	1.0	65.0	-13.0	-52.0	
2539.50	-26.0	H	3.0	36.4	1.0	61.4	-13.0	-48.4	
3386.00	-22.9	H	3.0	36.1	1.0	57.9	-13.0	-44.9	

LTE B26 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		SOMC							
Project #:		12081839							
Date:		12/22/2017							
Test Engineer:		43575 OS							
Configuration:		EUT + HS + AC Adapter							
Location:		Chamber C							
Mode:		LTE_QPSK Band 26 Harmonics, 5MHz Bandwidth							
F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 816.5MHz									
1633.00	-28.5	V	3.0	37.0	1.0	64.5	-13.0	-51.5	
2449.50	-24.5	V	3.0	36.4	1.0	60.0	-13.0	-47.0	
3266.00	-23.4	V	3.0	36.2	1.0	58.6	-13.0	-45.6	
1633.00	-29.0	H	3.0	37.0	1.0	65.0	-13.0	-52.0	
2449.50	-26.6	H	3.0	36.4	1.0	62.0	-13.0	-49.0	
3266.00	-23.7	H	3.0	36.2	1.0	58.8	-13.0	-45.8	
Mid Ch, 831.5MHz									
1663.00	-28.5	V	3.0	37.0	1.0	64.5	-13.0	-51.5	
2494.50	-23.4	V	3.0	36.4	1.0	58.9	-13.0	-45.9	
3326.00	-23.5	V	3.0	36.1	1.0	58.6	-13.0	-45.6	
1663.00	-28.8	H	3.0	37.0	1.0	64.8	-13.0	-51.8	
2494.50	-26.0	H	3.0	36.4	1.0	61.4	-13.0	-48.4	
3326.00	-23.2	H	3.0	36.1	1.0	58.4	-13.0	-45.4	
High Ch, 846.5MHz									
1693.00	-28.5	V	3.0	37.0	1.0	64.5	-13.0	-51.5	
2539.50	-25.0	V	3.0	36.4	1.0	60.4	-13.0	-47.4	
3386.00	-22.9	V	3.0	36.1	1.0	58.0			

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/22/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber C
Mode: LTE_QPSK Band 26 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 819MHz									
1638.00	-28.5	V	3.0	37.0	1.0	64.5	-13.0	-51.5	
2457.00	-25.0	V	3.0	36.4	1.0	60.4	-13.0	-47.4	
3276.00	-22.9	V	3.0	36.2	1.0	58.1	-13.0	-45.1	
1638.00	-29.2	H	3.0	37.0	1.0	65.2	-13.0	-52.2	
2457.00	-26.3	H	3.0	36.4	1.0	61.7	-13.0	-48.7	
3276.00	-23.1	H	3.0	36.2	1.0	58.3	-13.0	-45.3	
Mid Ch, 831.5MHz									
1663.00	-29.0	V	3.0	37.0	1.0	65.1	-13.0	-52.1	
2494.50	-24.7	V	3.0	36.4	1.0	60.2	-13.0	-47.2	
3326.00	-23.0	V	3.0	36.1	1.0	58.1	-13.0	-45.1	
1663.00	-28.3	H	3.0	37.0	1.0	64.4	-13.0	-51.4	
2494.50	-26.4	H	3.0	36.4	1.0	61.8	-13.0	-48.8	
3326.00	-22.8	H	3.0	36.1	1.0	58.0	-13.0	-45.0	
High Ch, 844MHz									
1688.00	-28.4	V	3.0	37.0	1.0	64.4	-13.0	-51.4	
2532.00	-24.5	V	3.0	36.4	1.0	59.9	-13.0	-46.9	
3376.00	-22.4	V	3.0	36.1	1.0	57.5	-13.0	-44.5	
1688.00	-29.0	H	3.0	37.0	1.0	65.0	-13.0	-52.0	
2532.00	-26.0	H	3.0	36.4	1.0	61.5	-13.0	-48.5	
3376.00	-23.0	H	3.0	36.1	1.0	58.1	-13.0	-45.1	

LTE B26 10MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/22/2017
Test Engineer: 43575 OS
Configuration: EUT + HS + AC Adapter
Location: Chamber C
Mode: LTE_16QAM Band 26 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 819MHz									
1638.00	-27.7	V	3.0	37.0	1.0	63.8	-13.0	-50.8	
2457.00	-24.3	V	3.0	36.4	1.0	59.8	-13.0	-46.8	
3276.00	-23.4	V	3.0	36.2	1.0	58.6	-13.0	-45.6	
1638.00	-29.1	H	3.0	37.0	1.0	65.1	-13.0	-52.1	
2457.00	-26.5	H	3.0	36.4	1.0	61.9	-13.0	-48.9	
3276.00	-23.2	H	3.0	36.2	1.0	58.4	-13.0	-45.4	
Mid Ch, 831.5MHz									
1663.00	-28.7	V	3.0	37.0	1.0	64.7	-13.0	-51.7	
2494.50	-23.2	V	3.0	36.4	1.0	60.6	-13.0	-47.6	
3326.00	-23.2	V	3.0	36.1	1.0	58.3	-13.0	-45.3	
1663.00	-29.4	H	3.0	37.0	1.0	65.4	-13.0	-52.4	
2494.50	-26.4	H	3.0	36.4	1.0	61.8	-13.0	-48.8	
3326.00	-23.2	H	3.0	36.1	1.0	58.4	-13.0	-45.4	
High Ch, 844MHz									
1688.00	-28.3	V	3.0	37.0	1.0	64.3	-13.0	-51.3	
2532.00	-24.5	V	3.0	36.4	1.0	60.0	-13.0	-47.0	
3376.00	-22.8	V	3.0	36.1	1.0	57.9	-13.0	-44.9	
1688.00	-28.7	H	3.0	37.0	1.0	64.6	-13.0	-51.6	
2532.00	-25.9	H	3.0	36.4	1.0	61.3	-13.0	-48.3	
3376.00	-23.2	H	3.0	36.1	1.0	58.2	-13.0	-45.2	

LTE B26 10MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 1/4/2018
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 26 Harmonics, 15MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 827.5MHz									
1663.00	-26.4	V	3.0	37.0	1.0	62.5	-13.0	-49.5	
2494.50	-20.6	V	3.0	36.4	1.0	56.0	-13.0	-43.0	
3326.00	-18.0	V	3.0	36.1	1.0	53.1	-13.0	-40.1	
3326.00	-19.0	H	3.0	36.1	1.0	54.2	-13.0	-41.2	
3326.00	-18.6	H	3.0	36.1	1.0	53.8	-13.0	-40.8	
3326.00	-17.6	H	3.0	36.1	1.0	52.8	-13.0	-39.8	
Mid Ch, 831.5MHz									
1673.00	-25.1	V	3.0	37.0	1.0	61.1	-13.0	-48.1	
2509.50	-18.8	V	3.0	36.4	1.0	54.2	-13.0	-41.2	
3346.00	-18.0	V	3.0	36.1	1.0	53.1	-13.0	-40.1	
3346.00	-18.4	H	3.0	36.1	1.0	53.5	-13.0	-40.5	
3346.00	-17.8	H	3.0	36.1	1.0	52.9	-13.0	-39.9	
3346.00	-17.0	H	3.0	36.1	1.0	52.1	-13.0	-39.1	
High Ch, 841.5MHz									
1663.00	-25.4	V	3.0	37.0	1.0	61.4	-13.0	-48.4	
2494.50	-20.7	V	3.0	36.4	1.0	56.1	-13.0	-43.1	
3326.00	-18.2	V	3.0	36.1	1.0	53.3	-13.0	-40.3	
3326.00	-17.9	H	3.0	36.1	1.0	53.0	-13.0	-40.0	
3326.00	-18.2	H	3.0	36.1	1.0	53.3	-13.0	-40.3	
3326.00	-17.3	H	3.0	36.1	1.0	52.4	-13.0	-39.4	

LTE B26 15MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 1/4/2018
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 26 Harmonics, 15MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 827.5MHz									
1663.00	-26.1	V	3.0	37.0	1.0	62.1	-13.0	-49.1	
2494.50	-20.9	V	3.0	36.4	1.0	56.3	-13.0	-43.3	
3326.00	-17.5	V	3.0	36.1	1.0	52.6	-13.0	-39.6	
3326.00	-18.3	H	3.0	36.1	1.0	53.4	-13.0	-40.4	
3326.00	-18.2	H	3.0	36.1	1.0	53.3	-13.0	-40.3	
3326.00	-17.6	H	3.0	36.1	1.0	52.7	-13.0	-39.7	
Mid Ch, 831.5MHz									
1673.00	-25.7	V	3.0	37.0	1.0	61.6	-13.0	-48.6	
2509.50	-19.9	V	3.0	36.4	1.0	55.3	-13.0	-42.3	
3346.00	-17.5	V	3.0	36.1	1.0	52.6	-13.0	-39.6	
3346.00	-18.6	H	3.0	36.1	1.0	53.7	-13.0	-40.7	
3346.00	-18.0	H	3.0	36.1	1.0	53.2	-13.0	-40.2	
3346.00	-17.9	H	3.0	36.1	1.0	53.0	-13.0	-40.0	
High Ch, 841.5MHz									
1663.00	-24.7	V	3.0	37.0	1.0	60.7	-13.0	-47.7	
2494.50	-20.8	V	3.0	36.4	1.0	56.2	-13.0	-43.2	
3326.00	-18.4	V	3.0	36.1	1.0	53.5	-13.0	-40.5	
3326.00	-18.5	H	3.0	36.1	1.0	53.7	-13.0	-40.7	
3326.00	-18.1	H	3.0	36.1	1.0	53.2	-13.0	-40.2	
3326.00	-18.3	H	3.0	36.1	1.0	53.5	-13.0	-40.5	

LTE B26 15MHz 16QAM

9.1.9. LTE BAND 41

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/16/17
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 41 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2498.5MHz									
4997.00	-18.1	V	3.0	35.5	1.0	52.5	-25.0	-27.5	
7495.50	-12.0	V	3.0	35.7	1.0	46.8	-25.0	-21.8	
9994.00	-13.7	V	3.0	36.0	1.0	48.7	-25.0	-23.7	
4997.00	-17.7	H	3.0	35.5	1.0	52.2	-25.0	-27.2	
7495.50	-15.9	H	3.0	35.7	1.0	50.6	-25.0	-25.6	
9994.00	-12.6	H	3.0	36.0	1.0	47.7	-25.0	-22.7	
Mid Ch, 2593MHz									
5186.00	-17.9	V	3.0	35.4	1.0	52.4	-25.0	-27.4	
7779.00	-10.6	V	3.0	35.8	1.0	45.4	-25.0	-20.4	
10372.00	-13.8	V	3.0	35.8	1.0	48.7	-25.0	-23.7	
5186.00	-18.3	H	3.0	35.4	1.0	52.7	-25.0	-27.7	
7779.00	-11.4	H	3.0	35.8	1.0	46.2	-25.0	-21.2	
10372.00	-13.3	H	3.0	35.8	1.0	48.2	-25.0	-23.2	
High Ch, 2687.5MHz									
5375.00	-19.1	V	3.0	35.4	1.0	53.6	-25.0	-28.6	
8062.50	-14.7	V	3.0	35.8	1.0	49.5	-25.0	-24.5	
10750.00	-13.8	V	3.0	35.7	1.0	47.6	-25.0	-22.6	
5375.00	-20.0	H	3.0	35.4	1.0	54.4	-25.0	-29.4	
8062.50	-16.3	H	3.0	35.8	1.0	51.1	-25.0	-26.1	
10750.00	-11.6	H	3.0	35.7	1.0	46.2	-25.0	-21.2	

LTE B41 5MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/16/17
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 41 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2498.5MHz									
4997.00	-18.7	V	3.0	35.5	1.0	53.2	-25.0	-28.2	
7495.50	-12.7	V	3.0	35.7	1.0	47.4	-25.0	-22.4	
9994.00	-14.3	V	3.0	36.0	1.0	49.3	-25.0	-24.3	
4997.00	-18.3	H	3.0	35.5	1.0	52.8	-25.0	-27.8	
7495.50	-16.6	H	3.0	35.7	1.0	51.3	-25.0	-26.3	
9994.00	-13.3	H	3.0	36.0	1.0	48.3	-25.0	-23.3	
Mid Ch, 2593MHz									
5186.00	-18.6	V	3.0	35.4	1.0	53.0	-25.0	-28.0	
7779.00	-11.3	V	3.0	35.8	1.0	46.1	-25.0	-21.1	
10372.00	-14.5	V	3.0	35.8	1.0	49.3	-25.0	-24.3	
5186.00	-18.9	H	3.0	35.4	1.0	53.4	-25.0	-28.4	
7779.00	-12.1	H	3.0	35.8	1.0	46.9	-25.0	-21.9	
10372.00	-14.0	H	3.0	35.8	1.0	48.9	-25.0	-23.9	
High Ch, 2687.5MHz									
5375.00	-19.8	V	3.0	35.4	1.0	54.2	-25.0	-29.2	
8062.50	-15.4	V	3.0	35.8	1.0	50.2	-25.0	-25.2	
10750.00	-13.6	V	3.0	35.7	1.0	48.3	-25.0	-23.3	
5375.00	-20.6	H	3.0	35.4	1.0	55.1	-25.0	-30.1	
8062.50	-17.0	H	3.0	35.8	1.0	51.8	-25.0	-26.8	
10750.00	-12.2	H	3.0	35.7	1.0	46.9	-25.0	-21.9	

LTE B41 5MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/16/17
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 41 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2501MHz									
5002.00	-17.8	V	3.0	35.5	1.0	52.3	-25.0	-27.3	
7503.00	-12.4	V	3.0	35.7	1.0	47.2	-25.0	-22.2	
10004.00	-13.7	V	3.0	36.0	1.0	48.7	-25.0	-23.7	
5002.00	-18.4	H	3.0	35.5	1.0	52.9	-25.0	-27.9	
7503.00	-15.4	H	3.0	35.7	1.0	50.1	-25.0	-25.1	
10004.00	-12.8	H	3.0	36.0	1.0	47.8	-25.0	-22.8	
Mid Ch, 2593MHz									
5186.00	-17.5	V	3.0	35.4	1.0	51.9	-25.0	-26.9	
7779.00	-10.0	V	3.0	35.8	1.0	44.8	-25.0	-19.8	
10372.00	-13.3	V	3.0	35.8	1.0	48.2	-25.0	-23.2	
5186.00	-17.9	H	3.0	35.4	1.0	52.4	-25.0	-27.4	
7779.00	-9.6	H	3.0	35.8	1.0	44.4	-25.0	-19.4	
10372.00	-12.9	H	3.0	35.8	1.0	47.7	-25.0	-22.7	
High Ch, 2685MHz									
5370.00	-19.1	V	3.0	35.4	1.0	53.5	-25.0	-28.5	
8055.00	-15.3	V	3.0	35.8	1.0	50.1	-25.0	-25.1	
10740.00	-11.8	V	3.0	35.7	1.0	46.5	-25.0	-21.5	
5370.00	-19.4	H	3.0	35.4	1.0	53.8	-25.0	-28.8	
8055.00	-15.4	H	3.0	35.8	1.0	50.2	-25.0	-25.2	
10740.00	-12.1	H	3.0	35.7	1.0	46.8	-25.0	-21.8	

LTE B41 10MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/16/17
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 41 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2501MHz									
5002.00	-18.6	V	3.0	35.5	1.0	53.0	-25.0	-28.0	
7503.00	-13.2	V	3.0	35.7	1.0	47.9	-25.0	-22.9	
10004.00	-14.4	V	3.0	36.0	1.0	49.5	-25.0	-24.5	
5002.00	-19.2	H	3.0	35.5	1.0	53.7	-25.0	-28.7	
7503.00	-16.1	H	3.0	35.7	1.0	50.9	-25.0	-25.9	
10004.00	-13.6	H	3.0	36.0	1.0	48.6	-25.0	-23.6	
Mid Ch, 2593MHz									
5186.00	-18.2	V	3.0	35.4	1.0	52.7	-25.0	-27.7	
7779.00	-10.7	V	3.0	35.8	1.0	45.9	-25.0	-20.9	
10372.00	-14.1	V	3.0	35.8	1.0	48.9	-25.0	-23.9	
5186.00	-18.7	H	3.0	35.4	1.0	53.1	-25.0	-28.1	
7779.00	-10.3	H	3.0	35.8	1.0	45.1	-25.0	-20.1	
10372.00	-13.6	H	3.0	35.8	1.0	48.9	-25.0	-23.9	
High Ch, 2685MHz									
5370.00	-19.8	V	3.0	35.4	1.0	54.3	-25.0	-29.3	
8055.00	-16.0	V	3.0	35.8	1.0	50.8	-25.0	-25.8	
10740.00	-12.6	V	3.0	35.7	1.0	47.3	-25.0	-22.3	
5370.00	-20.1	H	3.0	35.4	1.0	54.6	-25.0	-29.6	
8055.00	-16.1	H	3.0	35.8	1.0	50.9	-25.0	-25.9	
10740.00	-12.9	H	3.0	35.7	1.0	47.5	-25.0	-22.5	

LTE B41 10MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/16/17
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 41 Harmonics, 15MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2503.5MHz									
5007.00	-17.2	V	3.0	35.5	1.0	51.7	-25.0	-26.7	
7510.50	-12.5	V	3.0	35.7	1.0	47.3	-25.0	-22.3	
10014.00	-12.9	V	3.0	36.0	1.0	48.0	-25.0	-23.0	
5007.00	-17.6	H	3.0	35.5	1.0	52.0	-25.0	-27.0	
7510.50	-15.2	H	3.0	35.7	1.0	49.9	-25.0	-24.9	
10014.00	-12.7	H	3.0	36.0	1.0	47.7	-25.0	-22.7	
Mid Ch, 2593MHz									
5186.00	-17.4	V	3.0	35.4	1.0	51.9	-25.0	-26.9	
7779.00	-7.7	V	3.0	35.8	1.0	42.5	-25.0	-17.5	
10372.00	-11.2	V	3.0	35.8	1.0	46.1	-25.0	-21.1	
5186.00	-17.4	H	3.0	35.4	1.0	51.9	-25.0	-26.9	
7779.00	-10.3	H	3.0	35.8	1.0	45.1	-25.0	-20.1	
10372.00	-12.3	H	3.0	35.8	1.0	47.1	-25.0	-22.1	
High Ch, 2682.5MHz									
5365.00	-18.0	V	3.0	35.4	1.0	52.4	-25.0	-27.4	
8047.50	-14.4	V	3.0	35.8	1.0	49.2	-25.0	-24.2	
10730.00	-11.9	V	3.0	35.7	1.0	46.6	-25.0	-21.6	
5365.00	-19.0	H	3.0	35.4	1.0	53.5	-25.0	-28.5	
8047.50	-14.8	H	3.0	35.8	1.0	49.6	-25.0	-24.6	
10730.00	-11.8	H	3.0	35.7	1.0	46.5	-25.0	-21.5	

LTE B41 15MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/16/17
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 41 Harmonics, 15MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2503.5MHz									
5007.00	-18.1	V	3.0	35.5	1.0	52.6	-25.0	-27.6	
7510.50	-13.5	V	3.0	35.7	1.0	48.2	-25.0	-23.2	
10014.00	-13.9	V	3.0	36.0	1.0	48.9	-25.0	-23.9	
5007.00	-18.5	H	3.0	35.5	1.0	53.0	-25.0	-28.0	
7510.50	-16.1	H	3.0	35.7	1.0	50.9	-25.0	-25.9	
10014.00	-13.6	H	3.0	36.0	1.0	48.7	-25.0	-23.7	
Mid Ch, 2593MHz									
5186.00	-18.4	V	3.0	35.4	1.0	52.8	-25.0	-27.8	
7779.00	-8.6	V	3.0	35.8	1.0	43.4	-25.0	-18.4	
10372.00	-12.2	V	3.0	35.8	1.0	47.0	-25.0	-22.0	
5186.00	-18.4	H	3.0	35.4	1.0	52.8	-25.0	-27.8	
7779.00	-11.3	H	3.0	35.8	1.0	46.0	-25.0	-21.0	
10372.00	-13.2	H	3.0	35.8	1.0	48.1	-25.0	-23.1	
High Ch, 2682.5MHz									
5365.00	-18.9	V	3.0	35.4	1.0	53.4	-25.0	-28.4	
8047.50	-15.4	V	3.0	35.8	1.0	50.2	-25.0	-25.2	
10730.00	-12.8	V	3.0	35.7	1.0	47.5	-25.0	-22.5	
5365.00	-20.0	H	3.0	35.4	1.0	54.4	-25.0	-29.4	
8047.50	-15.8	H	3.0	35.8	1.0	50.6	-25.0	-25.6	
10730.00	-12.7	H	3.0	35.7	1.0	47.4	-25.0	-22.4	

LTE B41 15MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/12/17
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 41 Harmonics, 20MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2505MHz									
5012.00	-15.6	V	3.0	35.5	1.0	50.0	-25.0	-25.0	
7518.00	-14.0	V	3.0	35.7	1.0	48.7	-25.0	-23.7	
10024.00	-11.2	V	3.0	36.0	1.0	46.2	-25.0	-21.2	
5012.00	-14.9	H	3.0	35.5	1.0	49.3	-25.0	-24.3	
7518.00	-13.0	H	3.0	35.7	1.0	48.5	-25.0	-22.5	
10024.00	-12.2	H	3.0	36.0	1.0	47.2	-25.0	-22.2	
Mid Ch, 2593MHz									
5186.00	-17.5	V	3.0	35.4	1.0	51.9	-25.0	-26.9	
7779.00	-16.5	V	3.0	35.8	1.0	51.3	-25.0	-26.3	
10372.00	-13.2	V	3.0	35.8	1.0	48.0	-25.0	-23.0	
5186.00	-17.9	H	3.0	35.4	1.0	52.4	-25.0	-27.4	
7779.00	-13.2	H	3.0	35.8	1.0	48.0	-25.0	-23.0	
10372.00	-12.1	H	3.0	35.8	1.0	47.0	-25.0	-22.0	
High Ch, 2680MHz									
5360.00	-17.9	V	3.0	35.4	1.0	52.4	-25.0	-27.4	
8040.00	-14.3	V	3.0	35.8	1.0	49.1	-25.0	-24.1	
10720.00	-9.7	V	3.0	35.7	1.0	44.4	-25.0	-19.4	
5360.00	-16.1	H	3.0	35.4	1.0	50.6	-25.0	-25.6	
8040.00	-13.2	H	3.0	35.8	1.0	48.0	-25.0	-23.0	
10720.00	-8.5	H	3.0	35.7	1.0	43.2	-25.0	-18.2	

LTE B41 20MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/12/17
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 41 Harmonics, 20MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2505MHz									
5012.00	-16.3	V	3.0	35.5	1.0	50.8	-25.0	-25.8	
7518.00	-14.8	V	3.0	35.7	1.0	49.5	-25.0	-24.5	
10024.00	-11.9	V	3.0	36.0	1.0	46.9	-25.0	-21.9	
5012.00	-15.6	H	3.0	35.5	1.0	50.1	-25.0	-25.1	
7518.00	-14.5	H	3.0	35.7	1.0	49.3	-25.0	-24.3	
10024.00	-12.9	H	3.0	36.0	1.0	48.0	-25.0	-23.0	
Mid Ch, 2593MHz									
5186.00	-18.2	V	3.0	35.4	1.0	52.7	-25.0	-27.7	
7779.00	-17.3	V	3.0	35.8	1.0	52.0	-25.0	-27.0	
10372.00	-13.9	V	3.0	35.8	1.0	48.8	-25.0	-23.8	
5186.00	-18.7	H	3.0	35.4	1.0	53.1	-25.0	-28.1	
7779.00	-14.0	H	3.0	35.8	1.0	48.8	-25.0	-23.8	
10372.00	-12.9	H	3.0	35.8	1.0	47.7	-25.0	-22.7	
High Ch, 2680MHz									
5360.00	-18.7	V	3.0	35.4	1.0	53.1	-25.0	-28.1	
8040.00	-15.1	V	3.0	35.8	1.0	49.9	-25.0	-24.9	
10720.00	-10.5	V	3.0	35.7	1.0	45.1	-25.0	-20.1	
5360.00	-16.9	H	3.0	35.4	1.0	51.3	-25.0	-26.3	
8040.00	-14.0	H	3.0	35.8	1.0	48.0	-25.0	-23.0	
10720.00	-9.2	H	3.0	35.7	1.0	43.9	-25.0	-18.9	

LTE B41 20MHz 16QAM

9.1.10. LTE BAND 66

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/28/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 66 Harmonics, 1.4MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1711.5MHz									
3423.00	-24.3	V	3.0	36.1	1.0	-59.3	-13.0	-46.3	
5134.50	-21.9	V	3.0	35.4	1.0	-56.3	-13.0	-43.3	
6846.00	-21.5	V	3.0	35.7	1.0	-56.1	-13.0	-43.1	
3423.00	-25.0	H	3.0	36.1	1.0	-60.1	-13.0	-47.1	
5134.50	-21.4	H	3.0	35.4	1.0	-55.8	-13.0	-42.8	
6846.00	-19.5	H	3.0	35.7	1.0	-54.2	-13.0	-41.2	
Mid Ch, 1745MHz									
3490.00	-23.1	V	3.0	36.0	1.0	-58.1	-13.0	-45.1	
5235.00	-21.1	V	3.0	35.4	1.0	-55.5	-13.0	-42.5	
6980.00	-19.4	V	3.0	35.7	1.0	-54.1	-13.0	-41.1	
3490.00	-23.6	H	3.0	36.0	1.0	-58.7	-13.0	-45.7	
5235.00	-22.1	H	3.0	35.4	1.0	-56.5	-13.0	-43.5	
6980.00	-19.8	H	3.0	35.7	1.0	-54.5	-13.0	-41.5	
High Ch, 1778.5MHz									
3557.00	-23.8	V	3.0	36.0	1.0	-58.7	-13.0	-45.7	
5335.50	-20.0	V	3.0	35.4	1.0	-54.5	-13.0	-41.5	
7114.00	-20.1	V	3.0	35.7	1.0	-55.0	-13.0	-42.0	
3557.00	-23.6	H	3.0	36.0	1.0	-58.6	-13.0	-45.6	
5335.50	-22.2	H	3.0	35.4	1.0	-56.6	-13.0	-43.6	
7114.00	-19.2	H	3.0	35.7	1.0	-53.9	-13.0	-40.9	

LTE B66 1.4MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 66 Harmonics, 1.4MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1711.5MHz									
3423.00	-24.9	V	3.0	36.1	1.0	-60.0	-13.0	-47.0	
5134.50	-22.6	V	3.0	35.4	1.0	-57.0	-13.0	-44.0	
6846.00	-22.1	V	3.0	35.7	1.0	-56.8	-13.0	-43.8	
3423.00	-25.7	H	3.0	36.1	1.0	-60.7	-13.0	-47.7	
5134.50	-22.0	H	3.0	35.4	1.0	-56.5	-13.0	-43.5	
6846.00	-20.2	H	3.0	35.7	1.0	-54.8	-13.0	-41.8	
Mid Ch, 1745MHz									
3490.00	-23.7	V	3.0	36.0	1.0	-58.7	-13.0	-45.7	
5235.00	-21.7	V	3.0	35.4	1.0	-56.2	-13.0	-43.2	
6980.00	-20.1	V	3.0	35.7	1.0	-54.7	-13.0	-41.7	
3490.00	-24.3	H	3.0	36.0	1.0	-59.3	-13.0	-46.3	
5235.00	-22.7	H	3.0	35.4	1.0	-57.1	-13.0	-44.1	
6980.00	-20.5	H	3.0	35.7	1.0	-55.1	-13.0	-42.1	
High Ch, 1778.5MHz									
3557.00	-24.4	V	3.0	36.0	1.0	-59.4	-13.0	-46.4	
5335.50	-20.7	V	3.0	35.4	1.0	-55.1	-13.0	-42.1	
7114.00	-20.9	V	3.0	35.7	1.0	-56.6	-13.0	-43.6	
3557.00	-24.3	H	3.0	36.0	1.0	-59.2	-13.0	-46.2	
5335.50	-22.8	H	3.0	35.4	1.0	-57.3	-13.0	-44.3	
7114.00	-19.9	H	3.0	35.7	1.0	-54.6	-13.0	-41.6	

LTE B66 1.4MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber C
Mode: LTE_QPSK Band 66 Harmonics, 3MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1711.5MHz									
3423.00	0.0	V	3.0	36.1	1.0	-35.1	-13.0	-22.1	
5134.50	0.0	V	3.0	35.4	1.0	-34.4	-13.0	-21.4	
6846.00	0.0	V	3.0	35.7	1.0	-34.7	-13.0	-21.7	
3423.00	0.0	H	3.0	36.1	1.0	-35.1	-13.0	-22.1	
5134.50	0.0	H	3.0	35.4	1.0	-34.4	-13.0	-21.4	
6846.00	0.0	H	3.0	35.7	1.0	-34.7	-13.0	-21.7	
Mid Ch, 1745MHz									
3490.00	0.0	V	3.0	36.0	1.0	-35.0	-13.0	-22.0	
5235.00	0.0	V	3.0	35.4	1.0	-34.4	-13.0	-21.4	
6980.00	0.0	V	3.0	35.7	1.0	-34.7	-13.0	-21.7	
3490.00	0.0	H	3.0	36.0	1.0	-35.0	-13.0	-22.0	
5235.00	0.0	H	3.0	35.4	1.0	-34.4	-13.0	-21.4	
6980.00	0.0	H	3.0	35.7	1.0	-34.7	-13.0	-21.7	
High Ch, 1778.5MHz									
3557.00	0.0	V	3.0	36.0	1.0	-35.0	-13.0	-22.0	
5335.50	0.0	V	3.0	35.4	1.0	-34.4	-13.0	-21.4	
7114.00	0.0	V	3.0	35.7	1.0	-34.7	-13.0	-21.7	
3557.00	0.0	H	3.0	36.0	1.0	-35.0	-13.0	-22.0	
5335.50	0.0	H	3.0	35.4	1.0	-34.4	-13.0	-21.4	
7114.00	0.0	H	3.0	35.7	1.0	-34.7	-13.0	-21.7	

LTE B66 3MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber C
Mode: LTE_16QAM Band 66 Harmonics, 3MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1711.5MHz									
3423.00	0.0	V	3.0	36.1	1.0	-35.1	-13.0	-22.1	
5134.50	0.0	V	3.0	35.4	1.0	-34.4	-13.0	-21.4	
6846.00	0.0	V	3.0	35.7	1.0	-34.7	-13.0	-21.7	
3423.00	0.0	H	3.0	36.1	1.0	-35.1	-13.0	-22.1	
5134.50	0.0	H	3.0	35.4	1.0	-34.4	-13.0	-21.4	
6846.00	0.0	H	3.0	35.7	1.0	-34.7	-13.0	-21.7	
Mid Ch, 1745MHz									
3490.00	0.0	V	3.0	36.0	1.0	-35.0	-13.0	-22.0	
5235.00	0.0	V	3.0	35.4	1.0	-34.4	-13.0	-21.4	
6980.00	0.0	V	3.0	35.7	1.0	-34.7	-13.0	-21.7	
3490.00	0.0	H	3.0	36.0	1.0	-35.0	-13.0	-22.0	
5235.00	0.0	H	3.0	35.4	1.0	-34.4	-13.0	-21.4	
6980.00	0.0	H	3.0	35.7	1.0	-34.7	-13.0	-21.7	
High Ch, 1778.5MHz									
3557.00	0.0	V	3.0	36.0	1.0	-35.0	-13.0	-22.0	
5335.50	0.0	V	3.0	35.4	1.0	-34.4	-13.0	-21.4	
7114.00	0.0	V	3.0	35.7	1.0	-34.7	-13.0	-21.7	
3557.00	0.0	H	3.0	36.0	1.0	-35.0	-13.0	-22.0	
5335.50	0.0	H	3.0	35.4	1.0	-34.4	-13.0	-21.4	
7114.00	0.0	H	3.0	35.7	1.0	-34.7	-13.0	-21.7	

LTE B66 3MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 66 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1712.5MHz									
3425.00	-19.6	V	3.0	36.1	1.0	-54.6	-13.0	-41.6	
5137.50	-18.3	V	3.0	35.4	1.0	-52.7	-13.0	-39.7	
6850.00	-17.9	V	3.0	35.7	1.0	-52.5	-13.0	-39.5	
3425.00	-17.5	H	3.0	36.1	1.0	-52.6	-13.0	-39.6	
5137.50	-18.0	H	3.0	35.4	1.0	-52.5	-13.0	-39.5	
6850.00	-17.8	H	3.0	35.7	1.0	-52.5	-13.0	-39.5	
Mid Ch, 1745MHz									
3490.00	-19.1	V	3.0	36.0	1.0	-54.1	-13.0	-41.1	
5235.00	-16.9	V	3.0	35.4	1.0	-51.3	-13.0	-38.3	
6980.00	-17.0	V	3.0	35.7	1.0	-51.7	-13.0	-38.7	
3490.00	-23.3	H	3.0	36.0	1.0	-58.3	-13.0	-45.3	
5235.00	-19.3	H	3.0	35.4	1.0	-53.7	-13.0	-40.7	
6980.00	-17.2	H	3.0	35.7	1.0	-51.9	-13.0	-38.9	
High Ch, 1777.5MHz									
3555.00	-20.3	V	3.0	36.0	1.0	-55.3	-13.0	-42.3	
5332.50	-18.1	V	3.0	35.4	1.0	-52.5	-13.0	-39.5	
7110.00	-16.9	V	3.0	35.7	1.0	-51.6	-13.0	-38.6	
3555.00	-18.2	H	3.0	36.0	1.0	-53.2	-13.0	-40.2	
5332.50	-17.5	H	3.0	35.4	1.0	-51.9	-13.0	-38.9	
7110.00	-17.0	H	3.0	35.7	1.0	-51.7	-13.0	-38.7	

LTE B66 5MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 66 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1712.5MHz									
3425.00	-20.5	V	3.0	36.1	1.0	-55.5	-13.0	-42.5	
5137.50	-19.1	V	3.0	35.4	1.0	-53.6	-13.0	-40.6	
6850.00	-18.8	V	3.0	35.7	1.0	-53.4	-13.0	-40.4	
3425.00	-18.4	H	3.0	36.1	1.0	-53.5	-13.0	-40.5	
5137.50	-18.9	H	3.0	35.4	1.0	-53.4	-13.0	-40.4	
6850.00	-18.7	H	3.0	35.7	1.0	-53.4	-13.0	-40.4	
Mid Ch, 1745MHz									
3490.00	-20.0	V	3.0	36.0	1.0	-55.0	-13.0	-42.0	
5235.00	-17.8	V	3.0	35.4	1.0	-52.2	-13.0	-39.2	
6980.00	-17.9	V	3.0	35.7	1.0	-52.6	-13.0	-39.6	
3490.00	-24.2	H	3.0	36.0	1.0	-59.2	-13.0	-46.2	
5235.00	-20.2	H	3.0	35.4	1.0	-54.6	-13.0	-41.6	
6980.00	-18.1	H	3.0	35.7	1.0	-52.8	-13.0	-39.8	
High Ch, 1777.5MHz									
3555.00	-21.2	V	3.0	36.0	1.0	-56.2	-13.0	-43.2	
5332.50	-19.0	V	3.0	35.4	1.0	-53.4	-13.0	-40.4	
7110.00	-17.8	V	3.0	35.7	1.0	-52.5	-13.0	-39.5	
3555.00	-19.1	H	3.0	36.0	1.0	-54.1	-13.0	-41.1	
5332.50	-18.3	H	3.0	35.4	1.0	-52.8	-13.0	-39.8	
7110.00	-17.9	H	3.0	35.7	1.0	-52.6	-13.0	-39.6	

LTE B66 5MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 66 Harmonics, 5MHz Bandwidth

F	SG	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
MHz	reading (dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1715MHz									
3430.00	-18.0	V	3.0	36.1	1.0	-54.0	-13.0	-41.0	
5145.00	-16.8	V	3.0	35.4	1.0	-51.2	-13.0	-38.2	
6860.00	-16.4	V	3.0	35.7	1.0	-51.1	-13.0	-38.1	
3430.00	-17.5	H	3.0	36.1	1.0	-52.6	-13.0	-39.6	
5145.00	-16.9	H	3.0	35.4	1.0	-51.3	-13.0	-38.3	
6860.00	-17.0	H	3.0	35.7	1.0	-51.7	-13.0	-38.7	
Mid Ch, 1745MHz									
3490.00	-20.2	V	3.0	36.0	1.0	-55.2	-13.0	-42.2	
5235.00	-17.2	V	3.0	35.4	1.0	-51.6	-13.0	-38.6	
6980.00	-17.0	V	3.0	35.7	1.0	-51.7	-13.0	-38.7	
3490.00	-18.4	H	3.0	36.0	1.0	-53.4	-13.0	-40.4	
5235.00	-18.8	H	3.0	35.4	1.0	-53.2	-13.0	-40.2	
6980.00	-17.5	H	3.0	35.7	1.0	-51.8	-13.0	-38.8	
High Ch, 1775MHz									
3550.00	-20.9	V	3.0	36.0	1.0	-55.9	-13.0	-42.9	
5325.00	-18.1	V	3.0	35.4	1.0	-51.6	-13.0	-38.6	
7100.00	-15.7	V	3.0	35.7	1.0	-50.4	-13.0	-37.4	
3550.00	-19.2	H	3.0	36.0	1.0	-54.2	-13.0	-41.2	
5325.00	-18.6	H	3.0	35.4	1.0	-53.3	-13.0	-40.3	
7100.00	-15.8	H	3.0	35.7	1.0	-50.4	-13.0	-37.4	

LTE B66 10MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 66 Harmonics, 5MHz Bandwidth

F	SG	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
MHz	reading (dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1715MHz									
3430.00	-20.0	V	3.0	36.1	1.0	-55.0	-13.0	-42.0	
5145.00	-17.8	V	3.0	35.4	1.0	-52.2	-13.0	-39.2	
6860.00	-17.4	V	3.0	35.7	1.0	-52.1	-13.0	-39.1	
3430.00	-18.5	H	3.0	36.1	1.0	-53.6	-13.0	-40.6	
5145.00	-17.9	H	3.0	35.4	1.0	-52.3	-13.0	-39.3	
6860.00	-18.0	H	3.0	35.7	1.0	-52.7	-13.0	-39.7	
Mid Ch, 1745MHz									
3490.00	-21.2	V	3.0	36.0	1.0	-56.2	-13.0	-43.2	
5235.00	-18.1	V	3.0	35.4	1.0	-52.6	-13.0	-39.6	
6980.00	-18.0	V	3.0	35.7	1.0	-52.7	-13.0	-39.7	
3490.00	-19.3	H	3.0	36.0	1.0	-54.4	-13.0	-41.4	
5235.00	-19.7	H	3.0	35.4	1.0	-54.2	-13.0	-41.2	
6980.00	-18.1	H	3.0	35.7	1.0	-52.8	-13.0	-39.8	
High Ch, 1775MHz									
3550.00	-21.9	V	3.0	36.0	1.0	-56.8	-13.0	-43.8	
5325.00	-19.1	V	3.0	35.4	1.0	-52.6	-13.0	-39.6	
7100.00	-16.7	V	3.0	35.7	1.0	-51.4	-13.0	-38.4	
3550.00	-20.2	H	3.0	36.0	1.0	-55.1	-13.0	-42.1	
5325.00	-19.8	H	3.0	35.4	1.0	-54.2	-13.0	-41.2	
7100.00	-16.7	H	3.0	35.7	1.0	-51.4	-13.0	-38.4	

LTE B66 10MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 66 Harmonics, 15MHz Bandwidth

F	SG	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
MHz	reading (dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1717.5MHz									
3435.00	-18.2	V	3.0	36.1	1.0	-53.3	-13.0	-40.3	
5152.50	-16.7	V	3.0	35.4	1.0	-51.2	-13.0	-38.2	
6870.00	-17.1	V	3.0	35.7	1.0	-51.8	-13.0	-38.8	
3435.00	-20.1	H	3.0	36.1	1.0	-55.1	-13.0	-42.1	
5152.50	-16.6	H	3.0	35.4	1.0	-51.0	-13.0	-38.0	
6870.00	-16.4	H	3.0	35.7	1.0	-51.1	-13.0	-38.1	
Mid Ch, 1745MHz									
3490.00	-20.4	V	3.0	36.0	1.0	-55.4	-13.0	-42.4	
5235.00	-15.5	V	3.0	35.4	1.0	-49.9	-13.0	-36.9	
6980.00	-16.2	V	3.0	35.7	1.0	-50.9	-13.0	-37.9	
3490.00	-18.6	H	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5235.00	-15.5	H	3.0	35.4	1.0	-49.9	-13.0	-36.9	
6980.00	-16.1	H	3.0	35.7	1.0	-50.8	-13.0	-37.8	
High Ch, 1772.5MHz									
3545.00	-20.8	V	3.0	36.0	1.0	-55.7	-13.0	-42.7	
5317.50	-15.1	V	3.0	35.4	1.0	-49.5	-13.0	-36.5	
7090.00	-16.7	V	3.0	35.7	1.0	-51.4	-13.0	-38.4	
3545.00	-19.5	H	3.0	36.0	1.0	-54.5	-13.0	-41.5	
5317.50	-14.3	H	3.0	35.4	1.0	-48.7	-13.0	-35.7	
7090.00	-17.0	H	3.0	35.7	1.0	-51.7	-13.0	-38.7	

LTE B66 15MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 66 Harmonics, 15MHz Bandwidth

F	SG	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
MHz	reading (dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1717.5MHz									
3435.00	-19.1	V	3.0	36.1	1.0	-54.1	-13.0	-41.1	
5152.50	-17.6	V	3.0	35.4	1.0	-52.0	-13.0	-39.0	
6870.00	-18.0	V	3.0	35.7	1.0	-52.6	-13.0	-39.6	
3435.00	-20.9	H	3.0	36.1	1.0	-56.0	-13.0	-43.0	
5152.50	-17.5	H	3.0	35.4	1.0	-51.9	-13.0	-38.9	
6870.00	-17.3	H	3.0	35.7	1.0	-51.9	-13.0	-38.9	
Mid Ch, 1745MHz									
3490.00	-21.2	V	3.0	36.0	1.0	-56.2	-13.0	-43.2	
5235.00	-16.3	V	3.0	35.4	1.0	-50.8	-13.0	-37.8	
6980.00	-17.1	V	3.0	35.7	1.0	-51.8	-13.0	-38.8	
3490.00	-19.4	H	3.0	36.0	1.0	-54.4	-13.0	-41.4	
5235.00	-16.4	H	3.0	35.4	1.0	-50.8	-13.0	-37.8	
6980.00	-16.9	H	3.0	35.7	1.0	-51.6	-13.0	-38.6	
High Ch, 1772.5MHz									
3545.00	-21.6	V	3.0	36.0	1.0	-56.6	-13.0	-43.6	
5317.50	-15.9	V	3.0	35.4	1.0	-50.3	-13.0	-37.3	
7090.00	-17.6	V	3.0	35.7	1.0	-52.3	-13.0	-39.3	
3545.00	-20.4	H	3.0	36.0	1.0	-55.4	-13.0	-42.4	
5317.50	-15.2	H	3.0	35.4	1.0	-49.6	-13.0	-36.6	
7090.00	-17.8	H	3.0	35.7	1.0	-52.5	-13.0	-39.5	

LTE B66 15MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_QPSK Band 66 Harmonics, 20MHz Bandwidth

F	SG	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
MHz	reading (dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1720MHz									
3440.00	-22.3	V	3.0	36.0	1.0	-57.4	-13.0	-44.4	
5160.00	-18.5	V	3.0	35.4	1.0	-53.0	-13.0	-40.0	
6880.00	-18.6	V	3.0	35.7	1.0	-51.3	-13.0	-38.3	
3440.00	-22.9	H	3.0	36.0	1.0	-58.0	-13.0	-45.0	
5160.00	-19.8	H	3.0	35.4	1.0	-54.2	-13.0	-41.2	
6880.00	-17.9	H	3.0	35.7	1.0	-52.6	-13.0	-39.6	
Mid Ch, 1745MHz									
3490.00	-20.6	V	3.0	36.0	1.0	-55.6	-13.0	-42.6	
5235.00	-16.4	V	3.0	35.4	1.0	-50.8	-13.0	-37.8	
6980.00	-17.5	V	3.0	35.7	1.0	-52.2	-13.0	-39.2	
3490.00	-19.2	H	3.0	36.0	1.0	-54.3	-13.0	-41.3	
5235.00	-16.2	H	3.0	35.4	1.0	-50.6	-13.0	-37.6	
6980.00	-17.5	H	3.0	35.7	1.0	-52.2	-13.0	-39.2	
High Ch, 1770MHz									
3540.00	-22.1	V	3.0	36.0	1.0	-57.1	-13.0	-44.1	
5310.00	-18.6	V	3.0	35.4	1.0	-53.1	-13.0	-40.1	
7080.00	-17.3	V	3.0	35.7	1.0	-52.0	-13.0	-39.0	
3540.00	-21.5	H	3.0	36.0	1.0	-56.4	-13.0	-43.4	
5310.00	-18.8	H	3.0	35.4	1.0	-53.2	-13.0	-40.2	
7080.00	-16.5	H	3.0	35.7	1.0	-51.2	-13.0	-38.2	

LTE B66 20MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12081839
Date: 12/27/2017
Test Engineer: 39317
Configuration: EUT + HS + AC Adapter
Location: Chamber A
Mode: LTE_16QAM Band 66 Harmonics, 5MHz Bandwidth

F	SG	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
MHz	reading (dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1720MHz									
3440.00	-23.1	V	3.0	36.0	1.0	-58.1	-13.0	-45.1	
5160.00	-19.3	V	3.0	35.4	1.0	-53.7	-13.0	-40.7	
6880.00	-17.4	V	3.0	35.7	1.0	-52.1	-13.0	-39.1	
3440.00	-23.7	H	3.0	36.0	1.0	-58.8	-13.0	-45.8	
5160.00	-20.5	H	3.0	35.4	1.0	-55.0	-13.0	-42.0	
6880.00	-18.7	H	3.0	35.7	1.0	-53.4	-13.0	-40.4	
Mid Ch, 1745MHz									
3490.00	-21.3	V	3.0	36.0	1.0	-56.3	-13.0	-43.3	
5235.00	-17.2	V	3.0	35.4	1.0	-51.6	-13.0	-38.6	
6980.00	-18.3	V	3.0	35.7	1.0	-52.9	-13.0	-39.9	
3490.00	-20.0	H	3.0	36.0	1.0	-55.0	-13.0	-42.0	
5235.00	-17.8	H	3.0	35.4	1.0	-51.4	-13.0	-38.4	
6980.00	-18.3	H	3.0	35.7	1.0	-52.0	-13.0	-39.0	
High Ch, 1770MHz									
3540.00	-22.9	V	3.0	36.0	1.0	-57.9	-13.0	-44.9	
5310.00	-19.4	V	3.0	35.4	1.0	-53.8	-13.0	-40.8	
7080.00	-18.0	V	3.0	35.7	1.0	-52.7	-13.0	-39.7	
3540.00	-22.2	H	3.0	36.0	1.0	-57.2	-13.0	-44.2	
5310.00	-19.5	H	3.0	35.4	1.0	-54.0	-13.0	-41.0	
7080.00	-17.2	H	3.0	35.7	1.0	-51.9	-13.0	-38.9	

LTE B66 20MHz 16QAM