



TEST REPORT

Report Number. : R14176139-E4bV2

Applicant : Sony Corporation
1-7-1 Konan Minato-ku
Tokyo, 108-0076, Japan

FCC ID : PY7-83262V

EUT Description : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT, & NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C: 2022

Date Of Issue:

2022-03-25

Prepared by:

UL LLC

12 Laboratory Dr.

Research Triangle Park, NC 27709 U.S.A.

TEL: (919) 549-1400



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2022-03-16	Initial Issue	Haley Ackun
V2	2022-03-25	Harmonized all antenna descriptors to read as chain 0 and chain 1. Updated KDB 558074 version in section 3.	Brian Kiewra

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS.....	5
2. TEST RESULTS SUMMARY	6
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION.....	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY.....	8
5.1. METROLOGICAL TRACEABILITY	8
5.2. DECISION RULES	8
5.3. MEASUREMENT UNCERTAINTY	8
5.4. SAMPLE CALCULATION.....	8
6. EQUIPMENT UNDER TEST	9
6.1. EUT DESCRIPTION.....	9
6.2. MAXIMUM OUTPUT POWER.....	9
6.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	9
6.4. SOFTWARE AND FIRMWARE.....	9
6.5. WORST-CASE CONFIGURATION AND MODE.....	10
6.6. DESCRIPTION OF TEST SETUP.....	11
7. MEASUREMENT METHOD	12
8. TEST AND MEASUREMENT EQUIPMENT	13
9. ANTENNA PORT TEST RESULTS	16
9.1. ON TIME AND DUTY CYCLE	16
9.2. 6 dB BANDWIDTH	19
9.2.1. 802.11ax HE20 MODE 2TX	20
9.3. POWER SPECTRAL DENSITY	31
9.3.1. 802.11ax HE20 MODE 2TX	31
9.4. CONDUCTED SPURIOUS EMISSIONS.....	42
9.4.1. 802.11ax HE20 MODE 2TX	42
9.5. OUTPUT POWER	57
9.5.1. 802.11ax HE20 MODE 2TX	59
9.6. AVERAGE POWER.....	64
9.6.1. 802.11ax HE20 MODE 2TX	64

10. RADIATED TEST RESULTS	67
10.1. TRANSMITTER ABOVE 1 GHz.....	69
10.1.1. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 2.4GHz BAND.....	69
10.1. WORST CASE BELOW 30MHZ.....	101
10.2. WORST CASE BELOW 1 GHZ.....	102
10.3. WORST CASE 18-26 GHZ.....	104
11. AC POWER LINE CONDUCTED EMISSIONS.....	106
11.1.1. AC Power Line Norm.....	107
12. SETUP PHOTOS.....	109

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Sony Corporation
1-7-1 Konan Minato-ku
Tokyo, 108-0076, Japan

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT, & NFC

SERIAL NUMBER: QV770028AQ & QV77003RB8

SAMPLE RECEIPT DATE: 2022-01-13

DATE TESTED: 2022-02-09 to 2022-03-02

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C: 2022	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by a2La, NIST, or any agency of the U.S. government.

Approved & Released For
UL LLC. By:



Brian Kiewra
Project Engineer
Consumer Technology Division
UL LLC.

Prepared By:



Haley Ackun
Engineering Project Handler
Consumer Technology Division
UL LLC.

2. TEST RESULTS SUMMARY

FCC Clause	Requirement	Result	Comment
See Comment	Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
15.247 (a) (2)	6dB BW	Complies	None.
15.247 (b) (3)	Output Power	Complies	None.
See Comment	Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	PSD	Complies	None.
15.247 (d)	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	Radiated Emissions	Complies	None.
15.207	AC Mains Conducted Emissions	Complies	None.

This report contains data provided by the applicant which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15: 2022, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01.

The scope of this report covers the 802.11ax modes in the 2.4GHz band.

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification #0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building: 12 Laboratory Dr RTP, NC 27709, U.S.A	US0067	2180C	825374
<input checked="" type="checkbox"/>	Building: 2800 Perimeter Park Dr Morrisville, NC 27560, U.S.A		27265	

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Radio Frequency (Spectrum Analyzer)	141.2 Hz
Occupied Channel Bandwidth	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Power Spectral Density, conducted	2.47 dB
Unwanted Emissions, conducted	1.94 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	3.40 dB
Temperature	0.57°C
Humidity	3.39%
DC Supply voltages	1.70%

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Final Voltage (dBuV)} = \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \text{LISN Insertion Loss}$$

$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT, & NFC. This report covers full testing for 2.4 GHz WLAN for modulation types 802.11ax.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

2.4GHz BAND 802.11 ax MODE 2TX

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2TX CDD			
2412 - 2462	802.11ax HE20 RU size 242T	26.58	454.99
2412 - 2462	802.11ax HE20 RU size 106T	26.90	489.78
2412 - 2462	802.11ax HE20 RU size 52T	24.48	280.54
2412 - 2462	802.11ax HE20 RU size 26T	22.35	171.79

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows:
 The radio utilizes two loop antennas for diversity, with the following maximum gains:

Chain	Frequency Range (MHz)	Maximum Gain (dBi)
0	2402-2480	-2.3
1	2402-2480	-8.6

	Theory of Operation	Antenna	Manufacturer Tolerance	Block Diagram
Chain 0	WLAN Main/Bluetooth #1	WLAN Main/Bluetooth #1	Chain 0	WLAN Main/Bluetooth #1
Chain 1	WLAN Sub/Bluetooth #2	WLAN Sub/Bluetooth #2	Chain 1	WLAN Sub/Bluetooth #2

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.364 (conducted EUT) & 0.428 (radiated EUT).

6.5. WORST-CASE CONFIGURATION AND MODE

WORST-CASE CONFIGURATION AND MODE FOR FINAL TEST

Radiated emissions below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel/mode with highest output power/PSD as worst-case scenario.

All testing performed in 2Tx mode (NSS=1), where power per chain is equivalent to the 1Tx power on each chain. This allows 2Tx testing to cover all 1Tx testing.

Band edge was performed with the EUT set to transmit on low and high channels. Radiated spurious and harmonic emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the worst-case mode/channel based on power and PSD. For this report, the worst-case Radiated Emissions from 1-18 GHz was found to be HE20 106T and HE20 242T.

For MIMO, the fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Worst-case data rates as provided by the client were:

802.11ax HE20mode: MCS0 (Nss = 1)

Preliminary Investigation scans were completed to compare Full RU Tone modes and Single User Tone modes. It was found that Full RU Tone modes were worst case over Single User in every instance. Therefore, only full tone was testing as it is representative of SU worst case scenario.

802.11ax modes were determined by the following:

802.11ax HE20 26T/52T, 106T, and 242T modes tested.

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	HP	14-dk1003dx	5CG016B4XM	TX2-RTL8821CE
Headphones	Sony	MDR-EX15AP	NA	-
Adapter	Sony	XQZ-UC11-010-236-21	1821W34209742	-
Adapter	Sony	XQZ-UC11-010-236-21	1821W34209856	-
USB Cable	Sony	XQZ-UC1	NA	NA

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB-C	Non-shielded	<3m	Connected to Power Supply
2	3.5mm	1	3.5mm Audio	Non-shielded	<1m	Connected to headphones

TEST SETUP

Test software exercised the radio card.

SETUP DIAGRAM

Please refer to R14176139-EP2 for setup diagrams

7. MEASUREMENT METHOD

Duty Cycle: ANSI C63.10 Section 11.6

6 dB BW: ANSI C63.10 Subclause -11.8.2 RBW \leq DTS BW

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Method AVGPM-G (Measurement using a gated RF average-reading power meter)

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Subclause -11.11 and 6.10.4

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 and 6.10.5

General Radiated Spurious Emissions: ANSI C63.10-2013 Sections 6.3-6.6

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
HI0090	Environmental Meter	Fisher Scientific	15-077-963	2021-07-12	2022-07-12
PWM005	RF Power Meter	Keysight Technologies	N1912A	2021-07-27	2022-07-27
PWS001	Peak and Avg Power Sensor, 50MHz to 6GHz	Keysight Technologies	E9323A	2021-06-25	2022-06-25
PWS006	Peak and Avg Power Sensor, 50MHz to 6GHz	Keysight Technologies	N1921a	2021-12-17	2022-12-17
SA0025	Spectrum Analyzer	Keysight Technologies	N9030A	2021-04-01	2022-04-01
SOFTEMI	Antenna Port Software	UL	Version 2022.02.16 and 2021.11.3	NA	NA
	Additional Equipment used				
MM0167 (PRE0126458)	True RMS Multimeter	Agilent	U1232A	2021-08-17	2023-08-17
MY61466084	Power Supply	Keysight	E3633A	-	-

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 4)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	1-18 GHz				
206211	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2021-03-11	2022-03-11
	Gain-Loss Chains				
C4-SAC03	Gain-loss string: 1-18GHz	Various	Various	2021-05-07	2022-05-07
	Receiver & Software				
SA0026	Spectrum Analyzer	Agilent	N9030A	2021-07-16	2022-07-16
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
210642	Environmental Meter	Fisher Scientific	210701942	2021-8-16	2023-08-16

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 2)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	0.009-30MHz				
AT0079	Active Loop Antenna	ETS-Lindgren	6502	2021-08-19	2022-08-19
	30-1000 MHz				
AT0073	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2021-08-30	2022-08-30
	1-18 GHz				
AT0072	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2021-05-03	2022-05-03
	18-40 GHz				
AT0063	Horn Antenna, 18-26.5GHz	ARA	MWH-1826/B	2021-11-04	2022-11-04
	Gain-Loss Chains				
C2-SAC01	Gain-loss string: 0.009-30MHz	Various	Various	2021-07-09	2022-07-09
C2-SAC02	Gain-loss string: 25-1000MHz	Various	Various	2021-07-09	2022-07-09
C2-SAC03	Gain-loss string: 1-18GHz	Various	Various	2021-07-09	2022-07-09
C2-SAC04	Gain-loss string: 18-40GHz	Various	Various	2021-07-09	2022-07-09
	Receiver & Software				
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2021-03-10	2022-03-10
SA0020	Spectrum Analyzer	Agilent	E4446A	2021-05-25	2022-05-25
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
s/n 181474409	Environmental Meter	Fisher Scientific	15-077-963	2021-09-27	2022-09-27

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2021-04-05	2022-04-05
HI0091	Environmental Meter	Fisher Scientific	15-077-963	2021-8-16	2023-08-16
LISN003	LISN, 50-ohm/50-uH, 250uH 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50/250-25-2-01	2021-08-16	2022-08-16
75141	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2021-08-17	2022-08-17
ATA222	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2021-04-05	2022-04-05
PS214	AC Power Source	Elgar	CW2501M (s/n 1523A02396)	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

ANSI C63.10 Section 11.6

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS


Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
802.11ax HE20 OFDMA, RU size 242T, Antenna 1	2.388	2.409	0.991	99.13%	0.00	0.010
802.11ax HE20 OFDMA, RU size 106T, Antenna 1	2.184	2.206	0.990	99.00%	0.00	0.010
802.11ax HE20 OFDMA, RU size 52T, Antenna 1	2.323	2.346	0.990	99.02%	0.00	0.010
802.11ax HE20 OFDMA, RU size 26T, Antenna 1	2.327	2.350	0.990	99.02%	0.00	0.010
802.11ax HE20 OFDMA, RU size 242T, Antenna 2	2.388	2.409	0.991	99.13%	0.00	0.010
802.11ax HE20 OFDMA, RU size 106T, Antenna 2	2.184	2.206	0.990	99.00%	0.00	0.010
802.11ax HE20 OFDMA, RU size 52T, Antenna 2	2.324	2.345	0.991	99.10%	0.00	0.010
802.11ax HE20 OFDMA, RU size 26T, Antenna 2	2.327	2.349	0.991	99.06%	0.00	0.010

DUTY CYCLE PLOTS


Chain 0 (CDD OFDMA MIMO Mode)




Chain 1 (CDD OFDMA MIMO Mode)

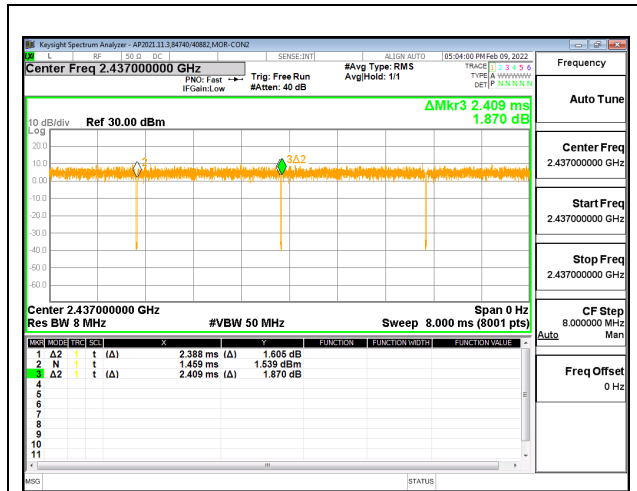

802.11ax HE20 OFDMA, RU index 242T
 MODE,2TX

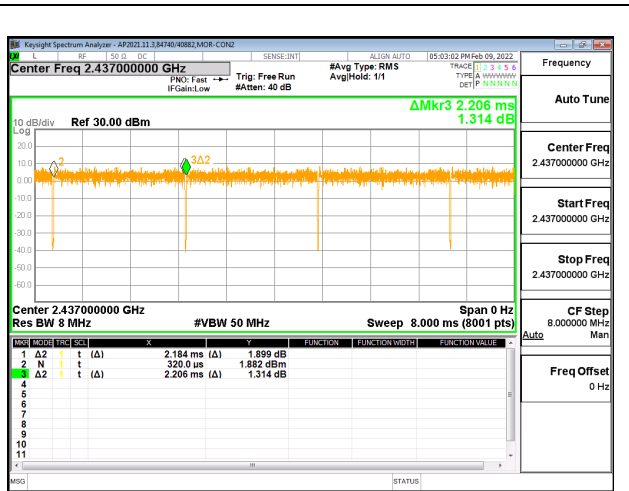

802.11ax HE20 OFDMA, RU index 106T
 MODE,2TX

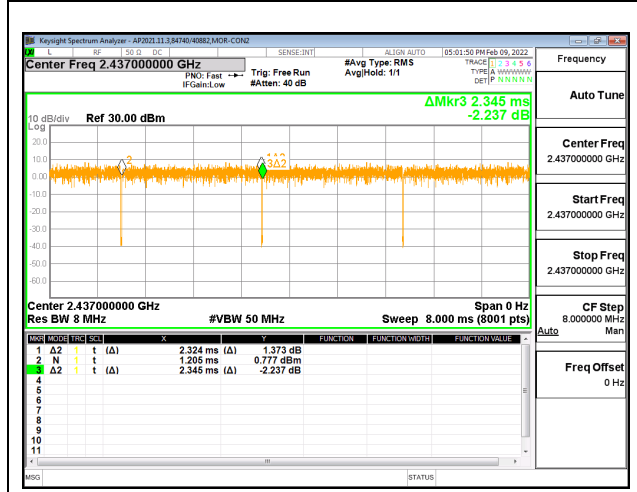

802.11ax HE20 OFDMA, RU index 52T
 MODE,2TX



802.11ax HE20 OFDMA, RU index 26T
 MODE,2TX

9.2. 6 dB BANDWIDTH LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS

9.2.1. 802.11ax HE20 MODE 2TX

2TX Chain 0 + Chain 1 CDD OFDMA MODE: 26-Tones, RU Index 0

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
Low 1	2412	2.12	2.16	0.5



LOW CHANNEL 1

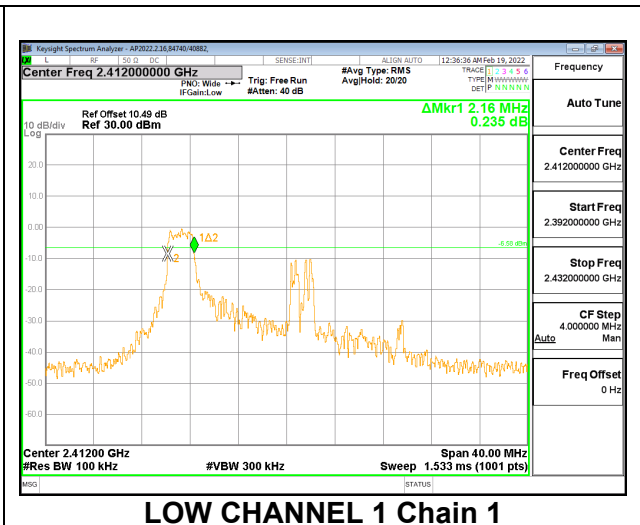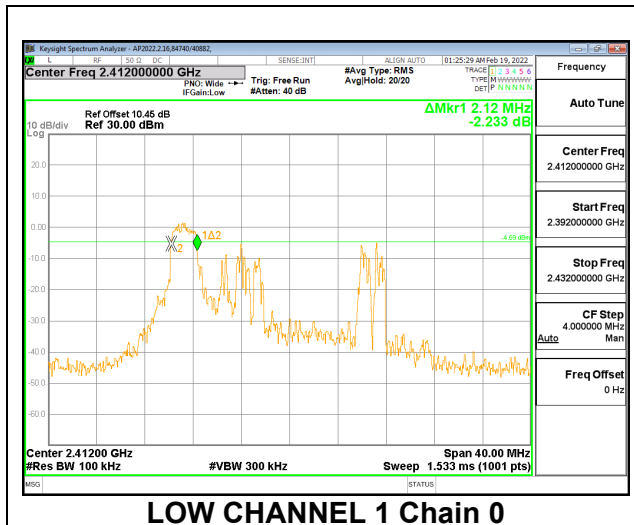

2TX Chain 0 + Chain 1 CDD OFDMA MODE: 26-Tones, RU Index 4

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
Mid 6	2437	2.64	2.68	0.5



MID CHANNEL 6

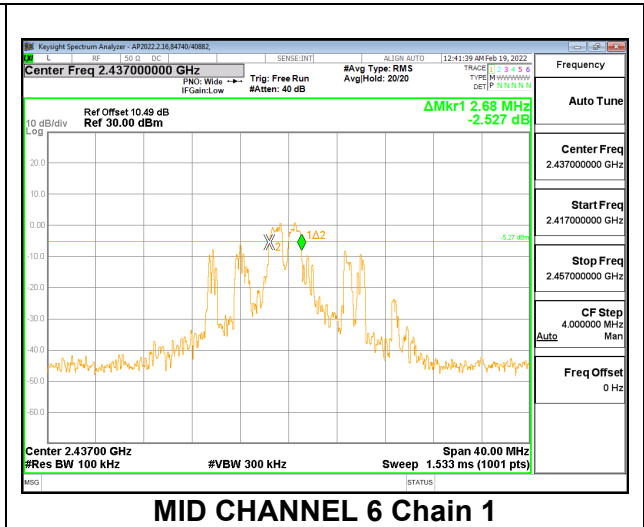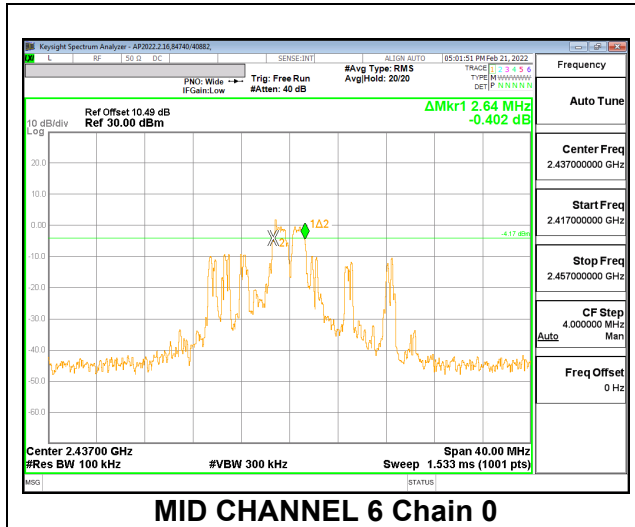

2TX Chain 0 + Chain 1 CDD OFDMA MODE: 26-Tones, RU Index 8

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
High 11	2462	2.04	2.12	0.5



HIGH CHANNEL 11

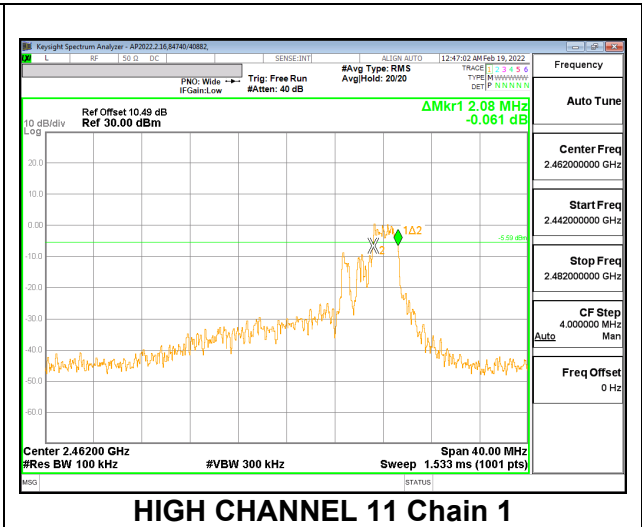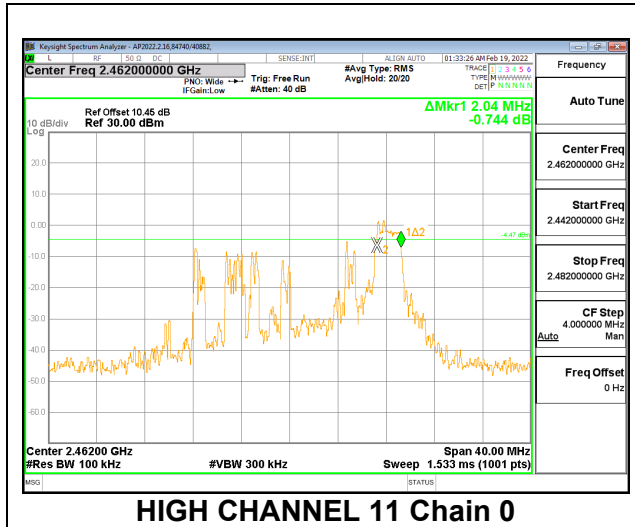

2TX Chain 0 + Chain 1 CDD OFDMA MODE: 52-Tones, RU Index 37

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
Low 1	2412	4.12	4.08	0.5



LOW CHANNEL 1

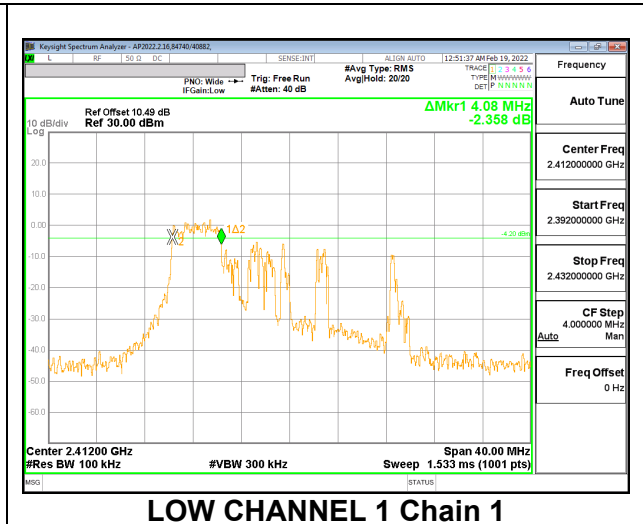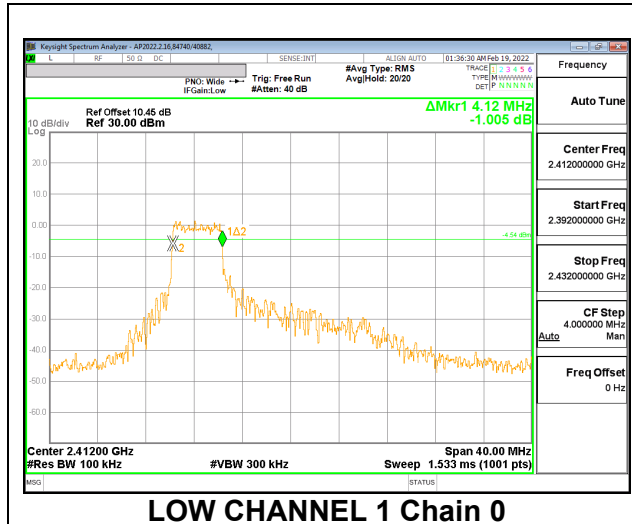

2TX Chain 0 + Chain 1 CDD OFDMA MODE: 52-Tones, RU Index 38

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
Mid 6	2437	4.12	4.12	0.5



MID CHANNEL 6

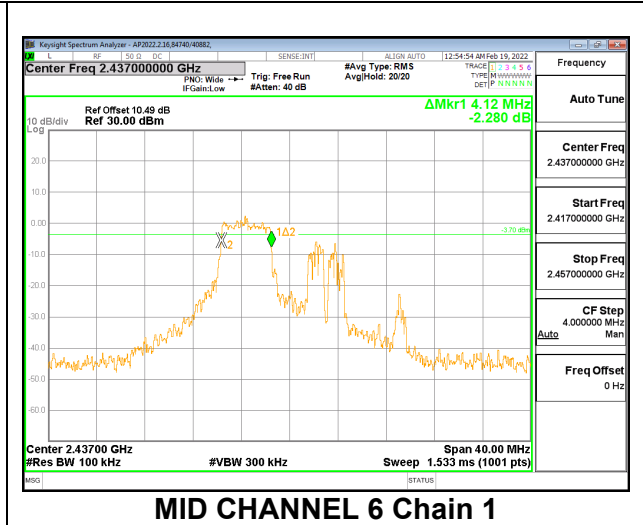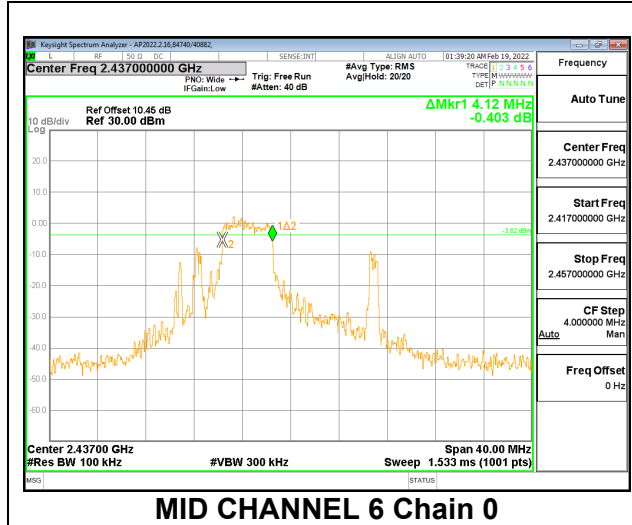

2TX Chain 0 + Chain 1 CDD OFDMA MODE: 52-Tones, RU Index 40

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
High 11	2462	4.12	4.12	0.5


HIGH CHANNEL 11

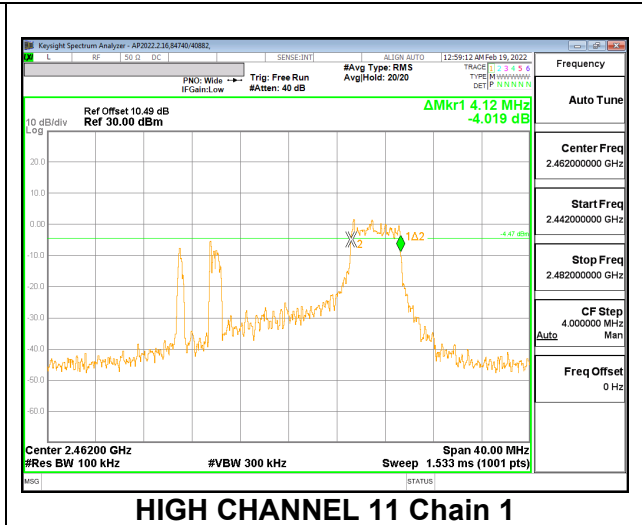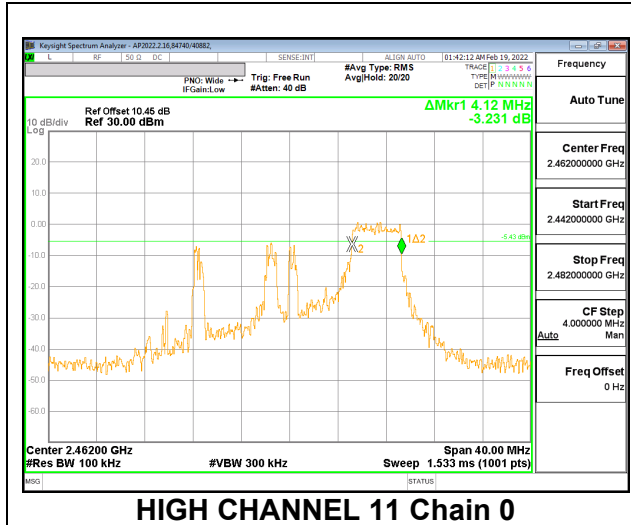


2TX Chain 0 + Chain 1 CDD OFDMA MODE: 106-Tones, RU Index 53

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
Low 1	2412	8.44	8.72	0.5
Mid 6	2437	8.32	8.40	0.5

LOW CHANNEL 1

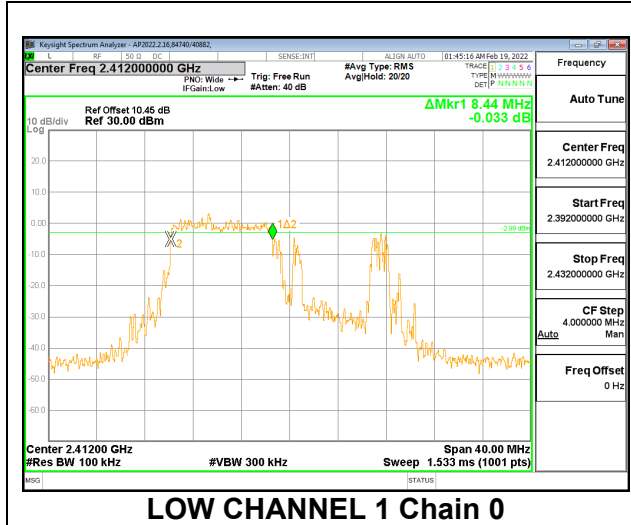


LOW CHANNEL 1 Chain 0

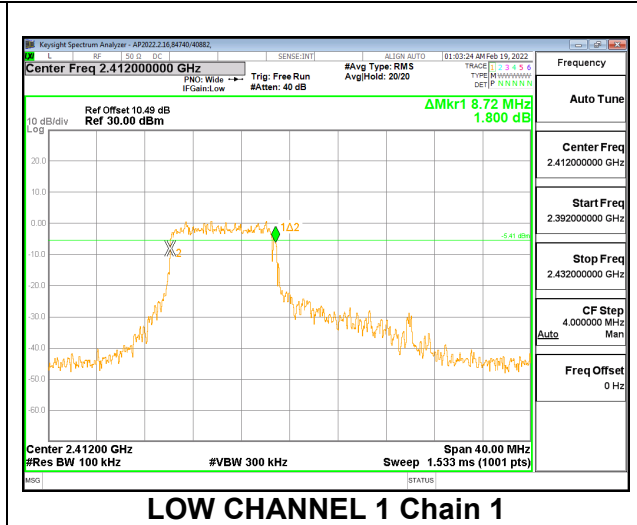


LOW CHANNEL 1 Chain 1

MID CHANNEL 6

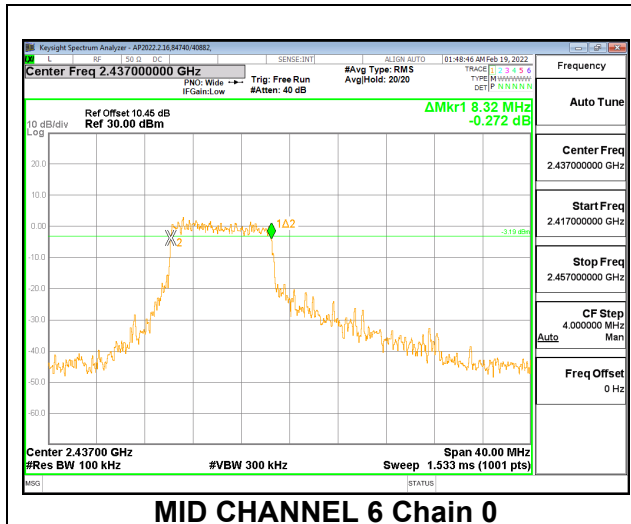

MID CHANNEL 6 Chain 0


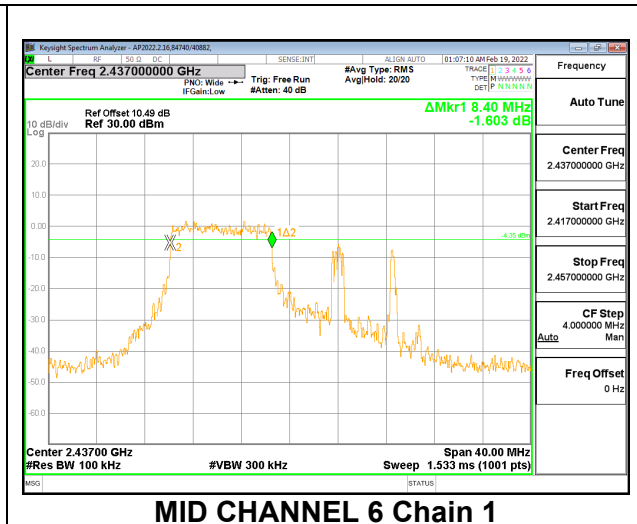


MID CHANNEL 6 Chain 1

2TX Chain 0 + Chain 1 CDD OFDMA MODE: 106-Tones, RU Index 54

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
High 11	2462	8.32	8.40	0.5



HIGH CHANNEL 11

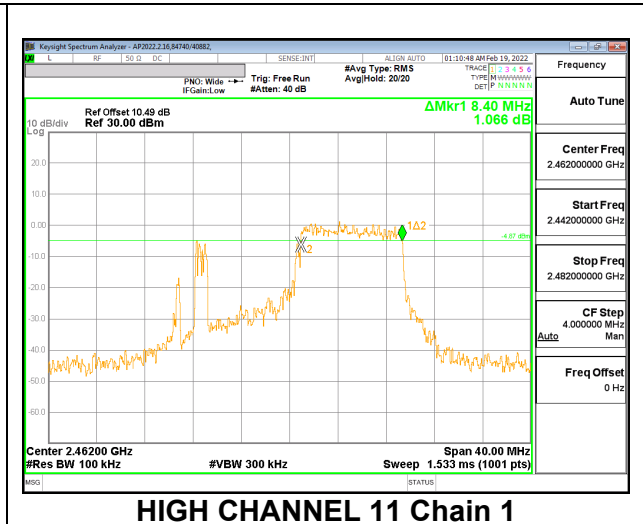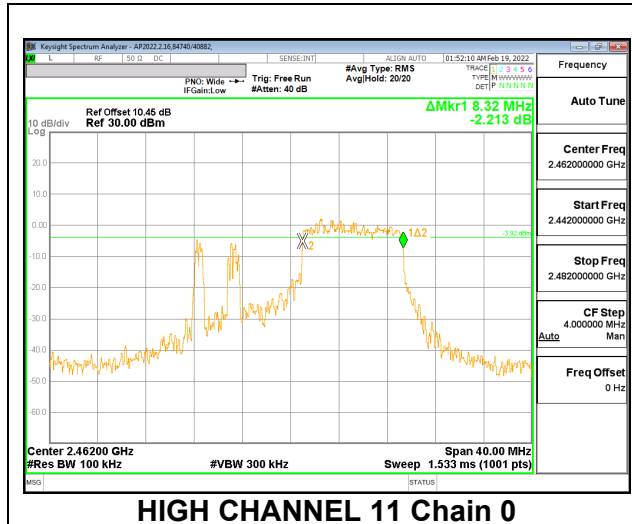



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 242-Tones, RU Index 61

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
Low 1	2412	19.20	19.04	0.5
Low 2	2417	18.88	19.20	0.5
Mid 6	2437	19.24	18.84	0.5
High 10	2457	19.20	18.92	0.5
High 11	2462	18.68	18.36	0.5



LOW CHANNEL 1

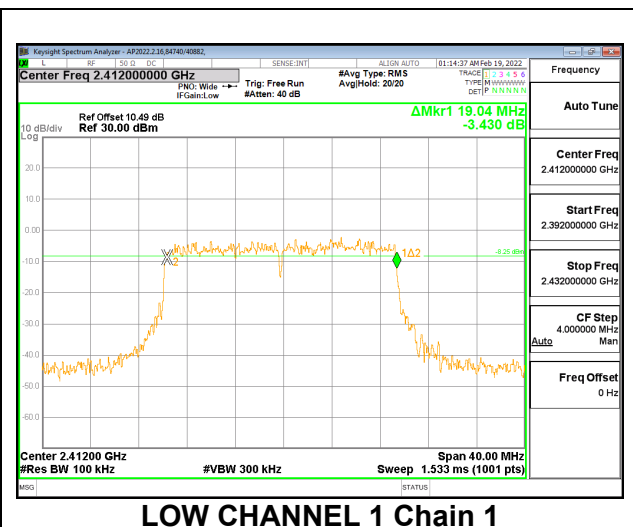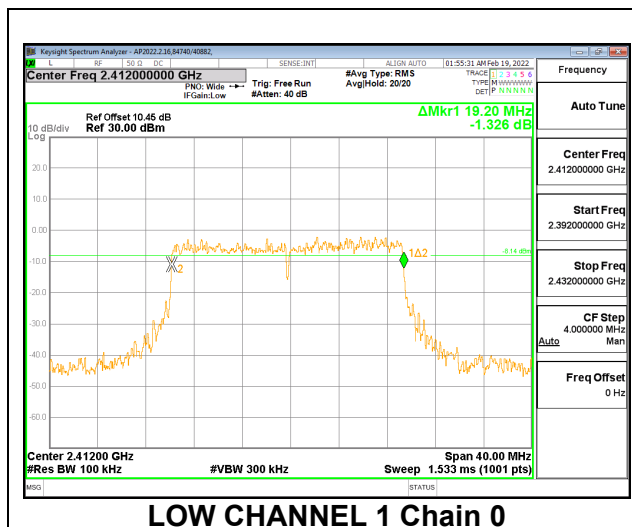



LOW CHANNEL 2

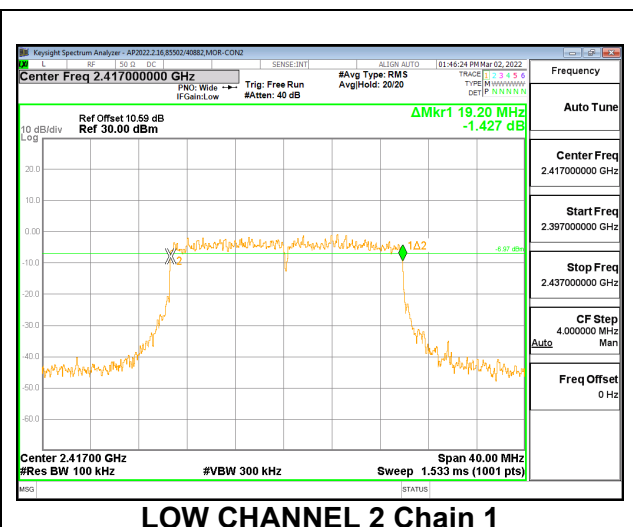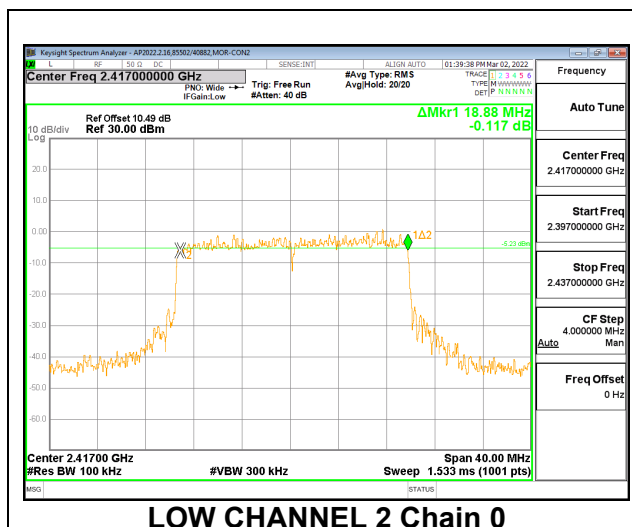



MID CHANNEL 6

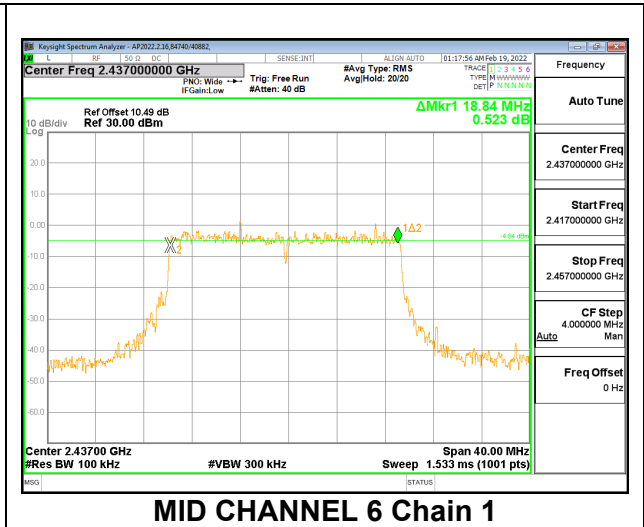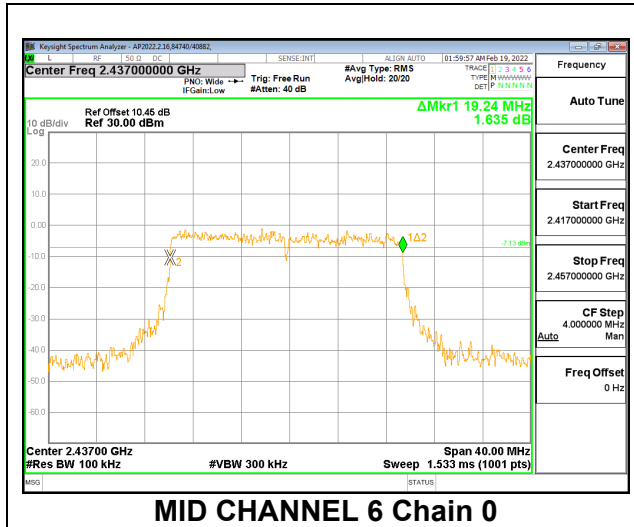

HIGH CHANNEL 10

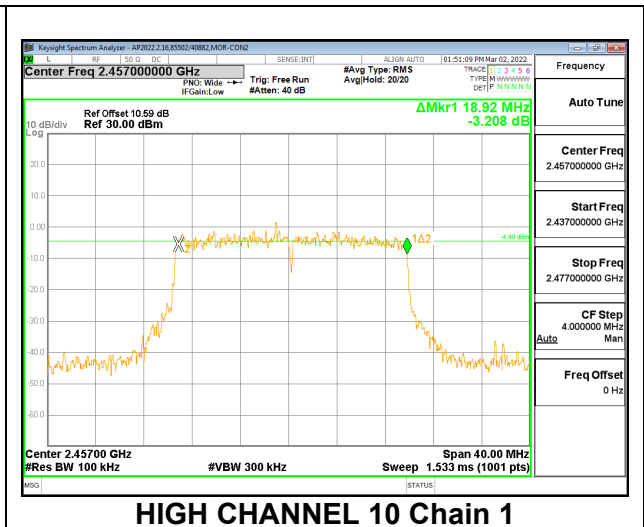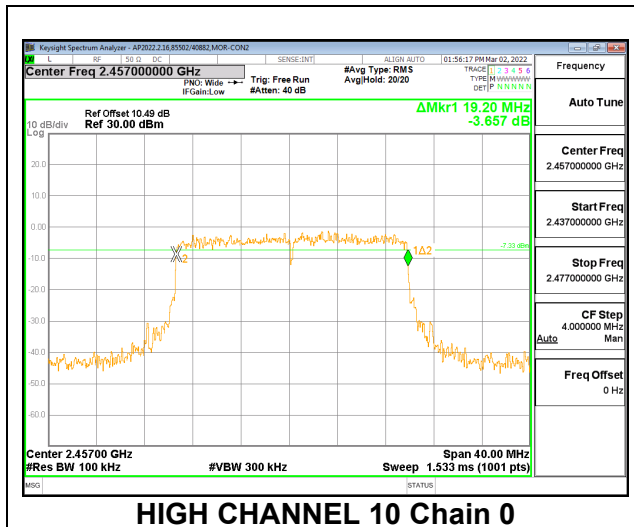

HIGH CHANNEL 11

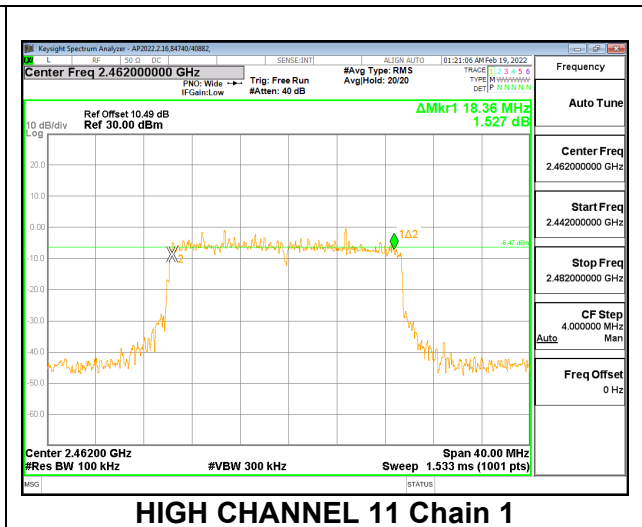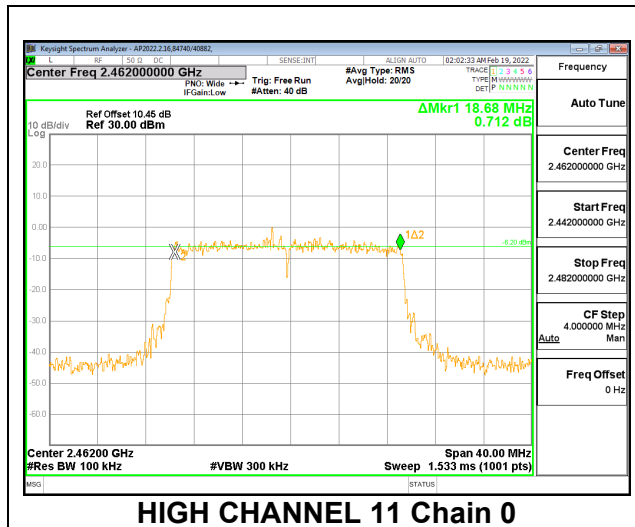

9.3. POWER SPECTRAL DENSITY

LIMITS

FCC §15.407 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

9.3.1. 802.11ax HE20 MODE 2TX



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 26-Tones, RU Index 0

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Antenna 1 Meas (dBm/3kHz)	Antenna 2 Meas (dBm/3kHz)	Total Corr'd PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low 1	2412	-11.859	-11.602	-8.72	8.0	-16.7

LOW CHANNEL 1

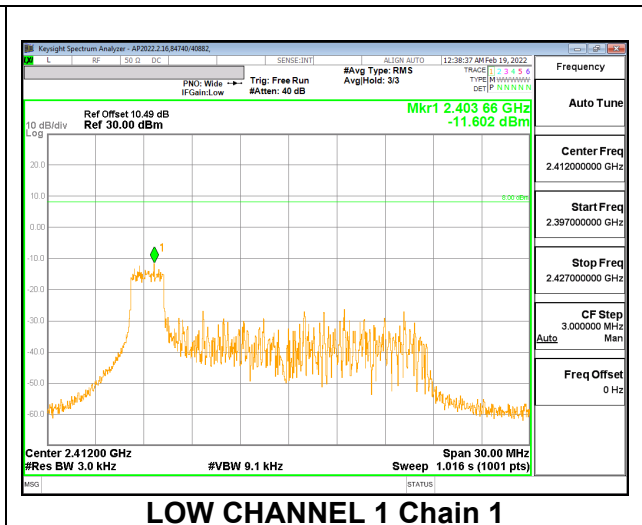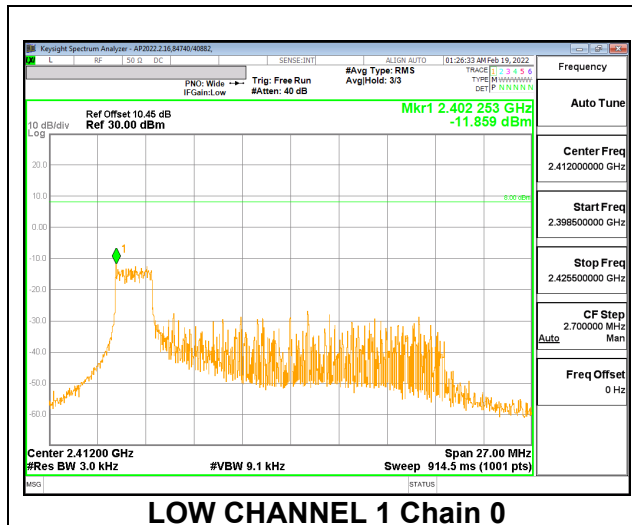



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 26-Tones, RU Index 4

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Antenna 1 Meas (dBm/ 3kHz)	Antenna 2 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Mid 6	2437	-11.640	-11.803	-8.71	8.0	-16.7

MID CHANNEL 6

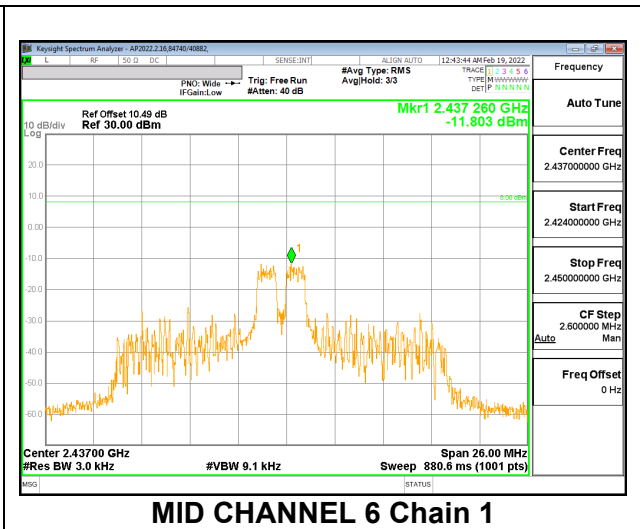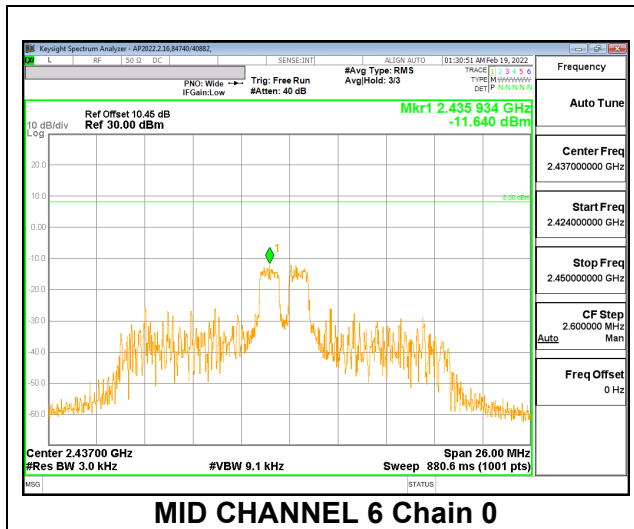



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 26-Tones, RU Index 8

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Antenna 1 Meas (dBm/ 3kHz)	Antenna 2 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
High 11	2462	-11.483	-12.363	-8.89	8.0	-16.9

HIGH CHANNEL 11

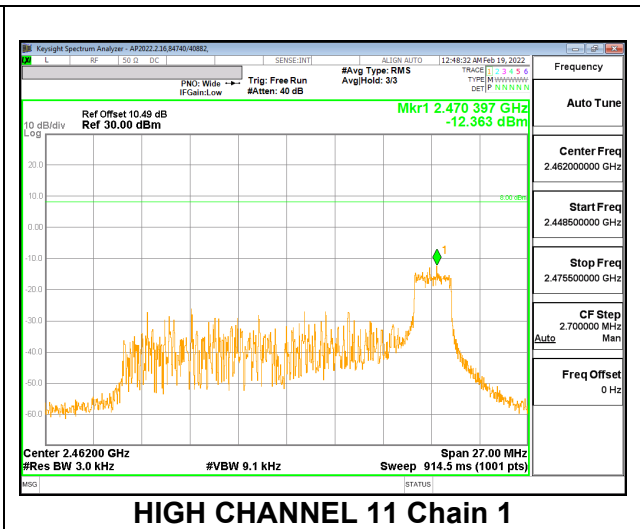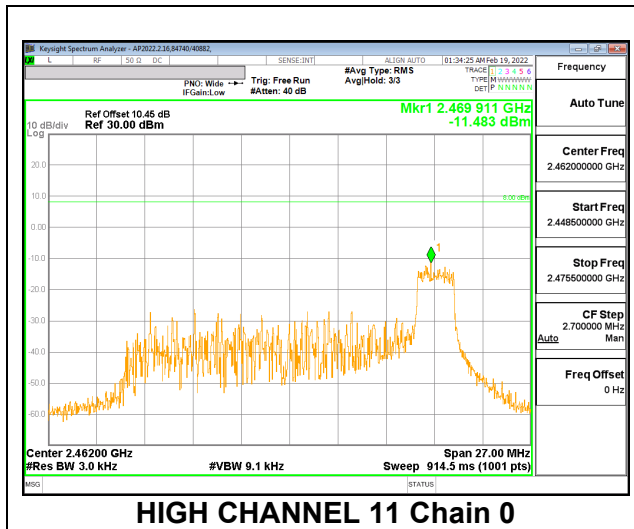



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 52-Tones, RU Index 37

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Antenna 1 Meas (dBm/ 3kHz)	Antenna 2 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-11.418	-11.602	-8.50	8.0	-16.5

LOW CHANNEL 1

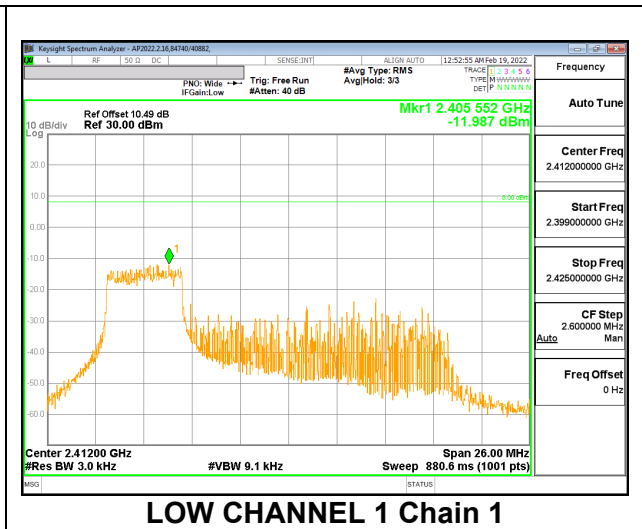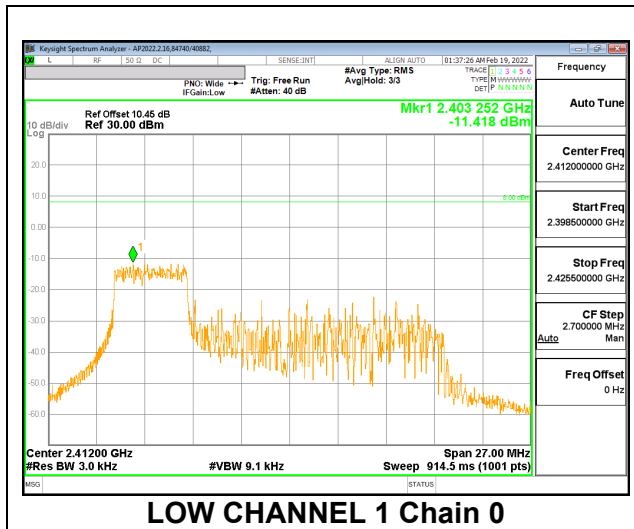



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 52-Tones, RU Index 38

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Antenna 1 Meas (dBm/ 3kHz)	Antenna 2 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Mid 6	2437	-10.397	-10.179	-7.28	8.0	-15.3

MID CHANNEL 6

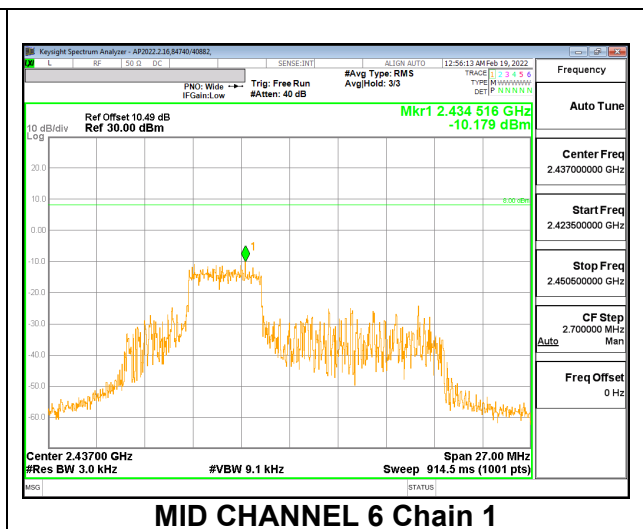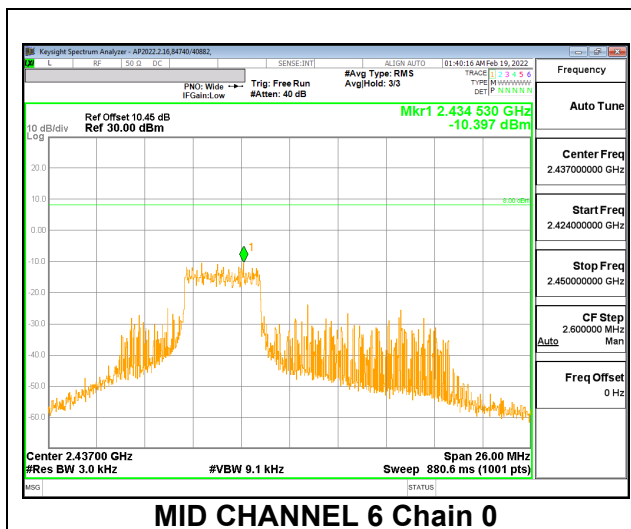



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 52-Tones, RU Index 40

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Antenna 1 Meas (dBm/ 3kHz)	Antenna 2 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
High 11	2462	-11.099	-11.916	-8.48	8.0	-16.5

HIGH CHANNEL 11

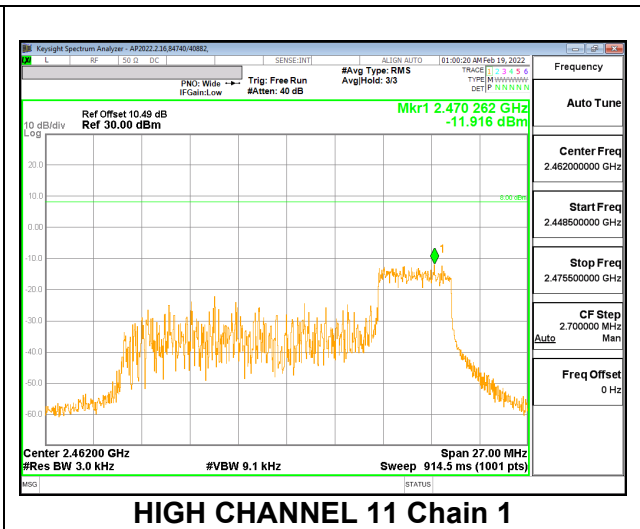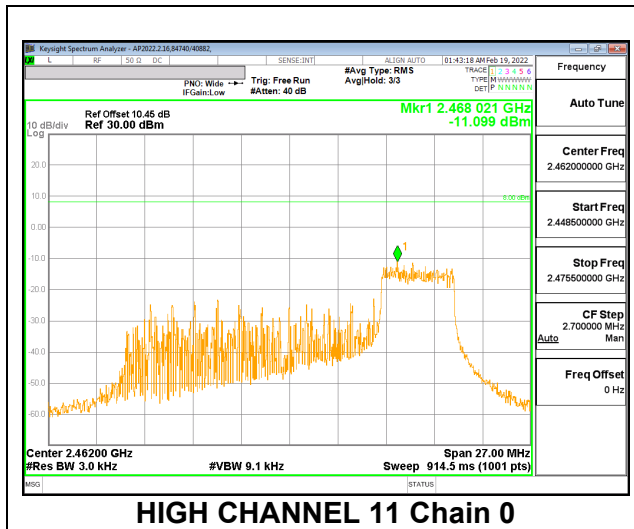



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 106-Tones, RU Index 53

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



PSD Results

Channel	Frequency (MHz)	Antenna 1 Meas (dBm/3kHz)	Antenna 2 Meas (dBm/3kHz)	Total Corr'd PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low 1	2412	-10.019	-10.731	-7.35	8.0	-15.4
Mid 6	2437	-11.067	-11.057	-8.05	8.0	-16.1

LOW CHANNEL 1

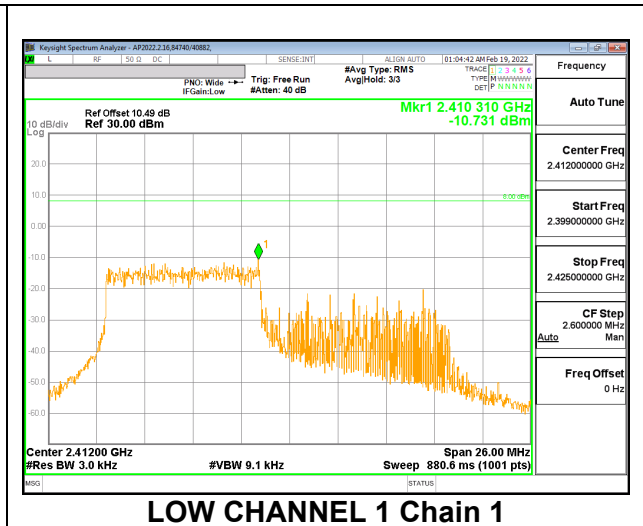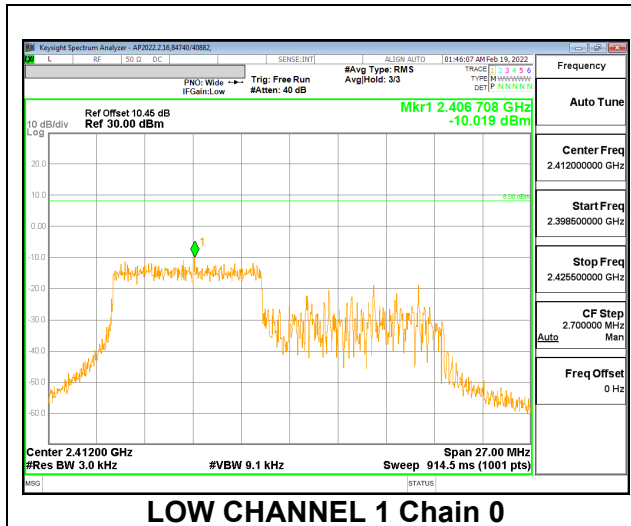

MID CHANNEL 6

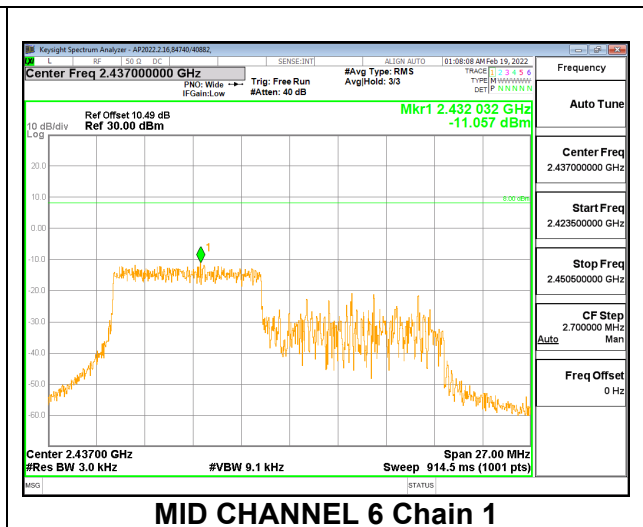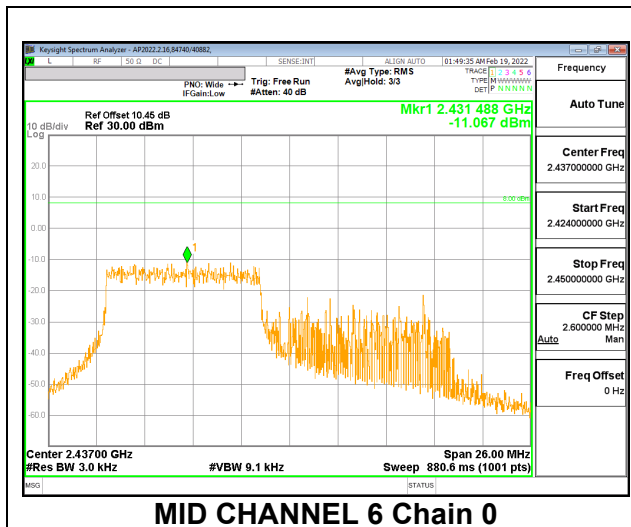



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 106-Tones, RU Index 54

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Antenna 1 Meas (dBm/ 3kHz)	Antenna 2 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
High 11	2462	-11.596	-10.620	-8.07	8.0	-16.1

HIGH CHANNEL 11

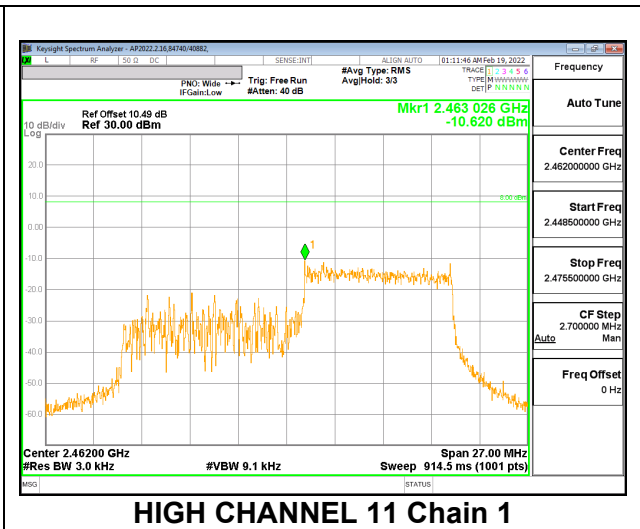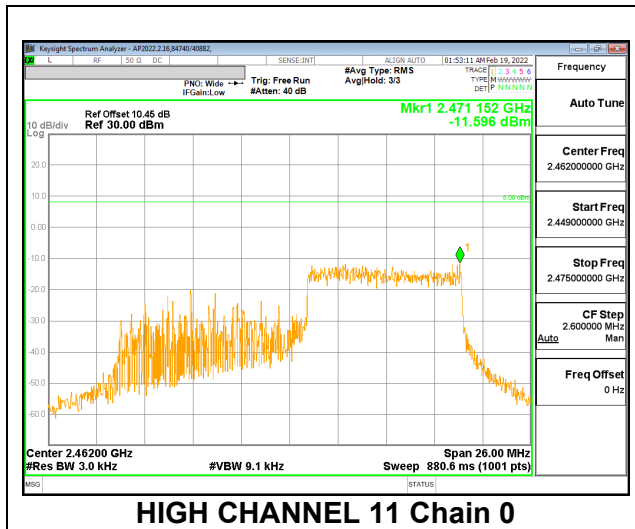



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 242-Tones, RU Index 61

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



PSD Results

Channel	Frequency (MHz)	Antenna 1 Meas (dBm/3kHz)	Antenna 2 Meas (dBm/3kHz)	Total Corr'd PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low 1	2412	-14.736	-14.190	-11.44	8.0	-19.4
Low 2	2417	-12.664	-11.795	-9.20	8.0	-17.2
Mid 6	2437	-13.618	-13.229	-10.41	8.0	-18.4
High 10	2457	-13.650	-13.450	-10.54	8.0	-18.5
High 11	2462	-16.310	-14.133	-12.08	8.0	-20.1



LOW CHANNEL 1

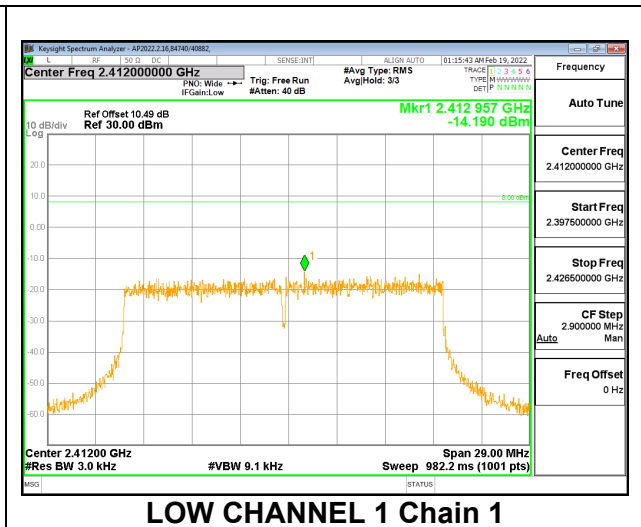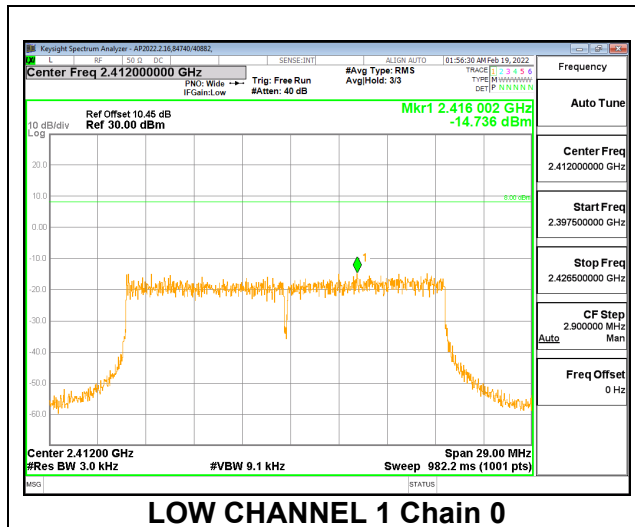



LOW CHANNEL 2

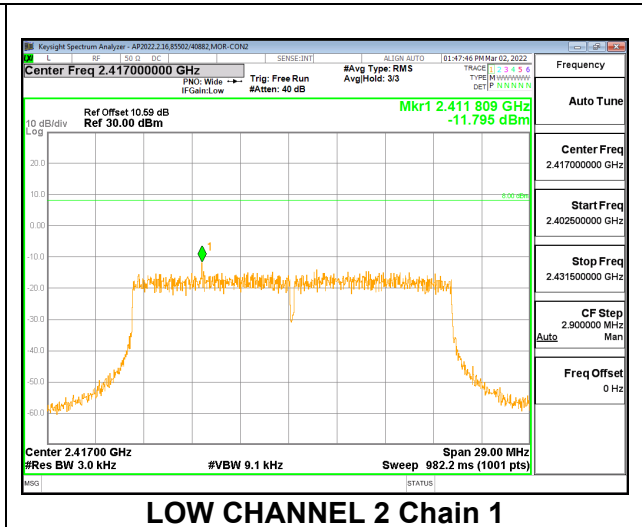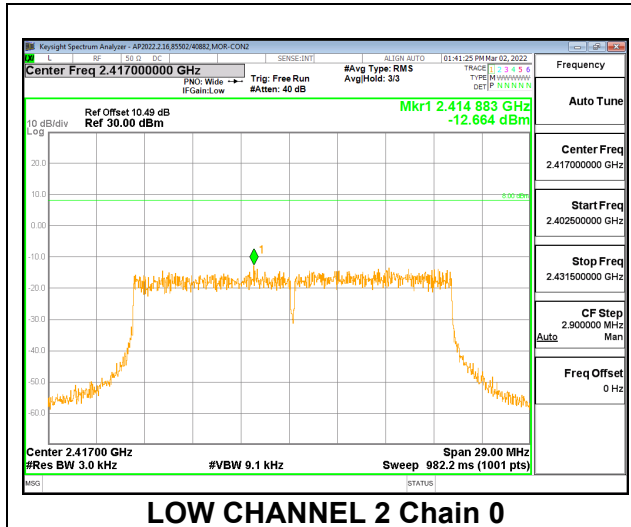



MID CHANNEL 6

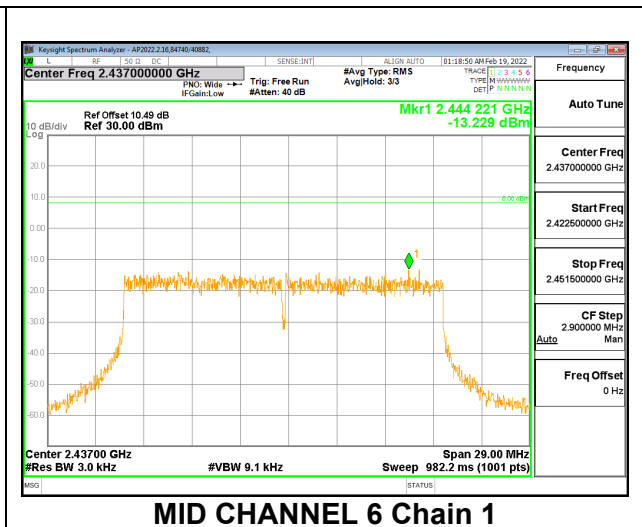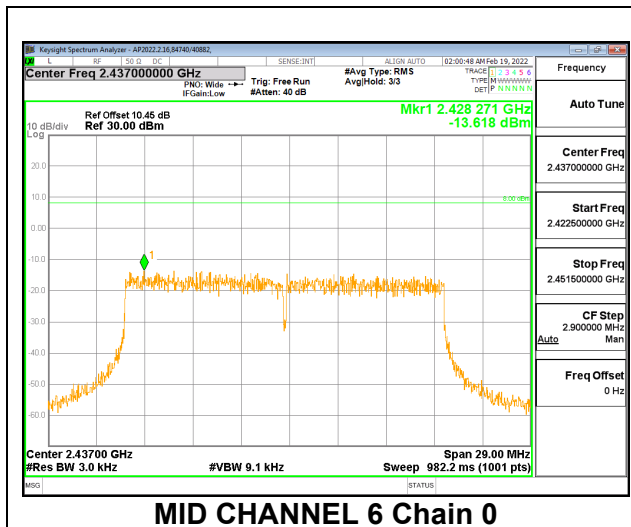

HIGH CHANNEL 10

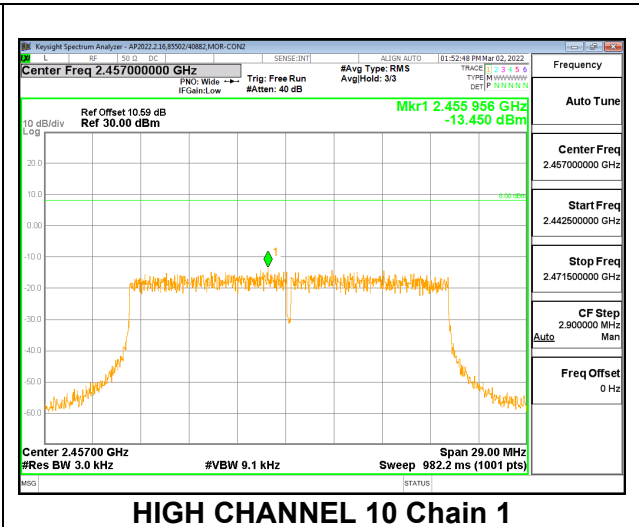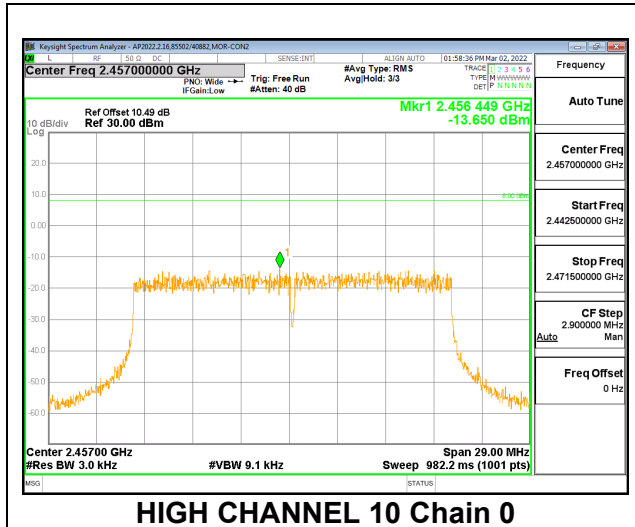

HIGH CHANNEL 11

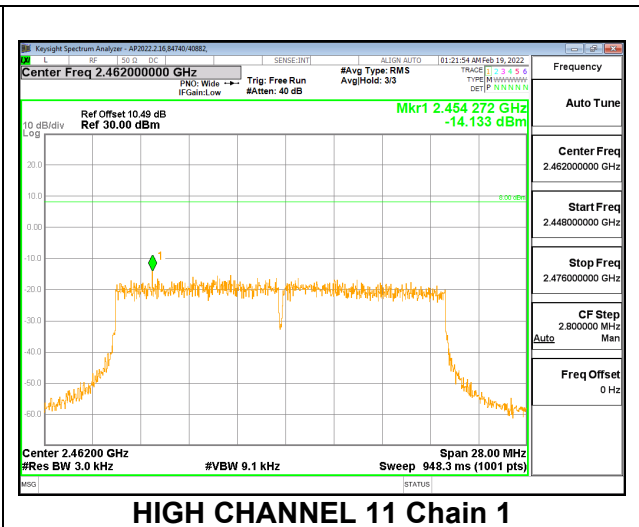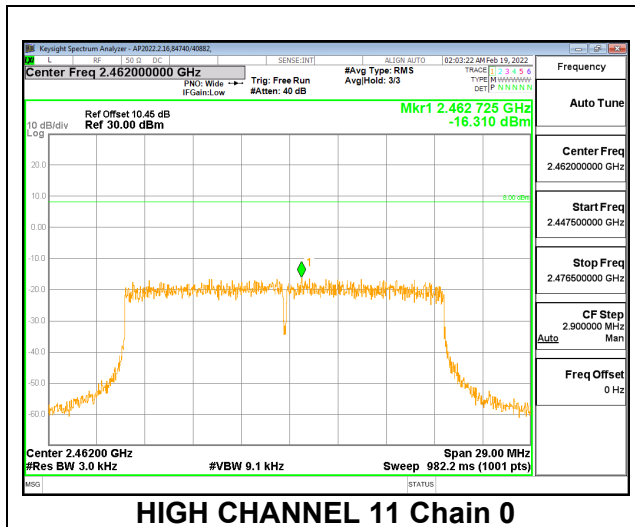

9.4. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.407 (d)

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


PROCEDURE

Output power was measured based on the use of peak measurement, therefore the required attenuation is -20 dBc.



RESULTS

9.4.1. 802.11ax HE20 MODE 2TX



2TX Chain 0 + Chain 1 CDD OFDMA MODE: 26-Tones, RU Index 0 LOW CHANNEL 1

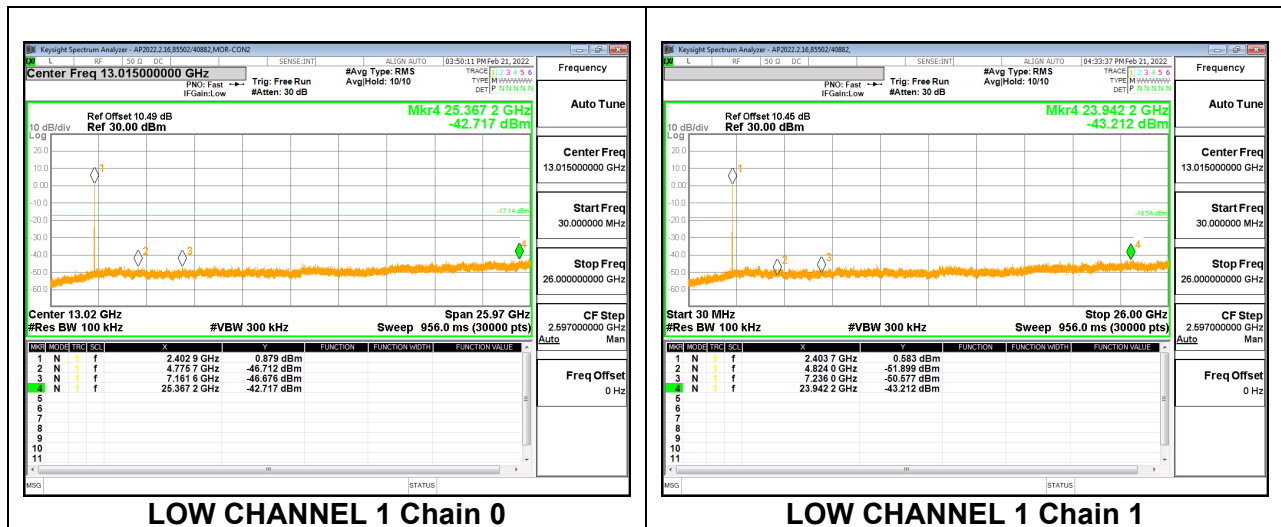



LOW CHANNEL 1

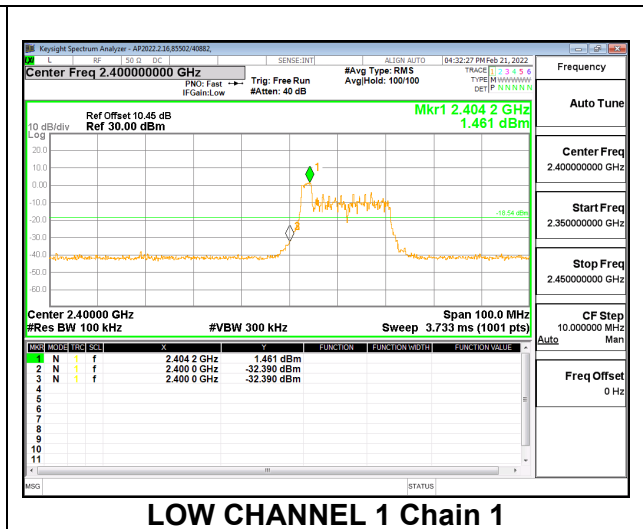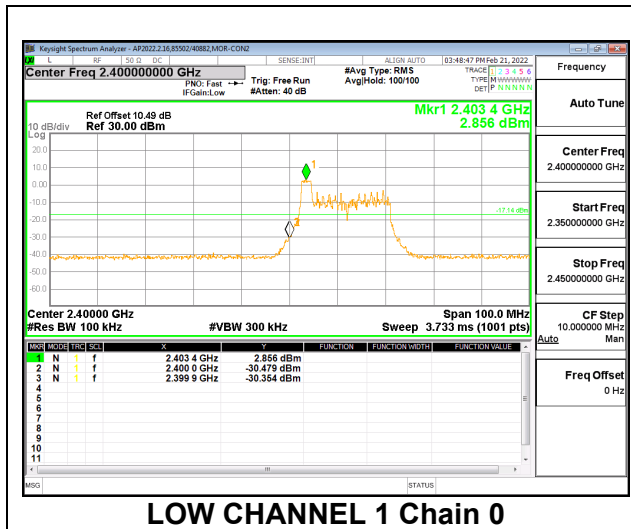

**2TX Chain 0 + Chain 1 CDD OFDMA MODE: 26-Tones, RU Index 4
 MID CHANNEL 6**

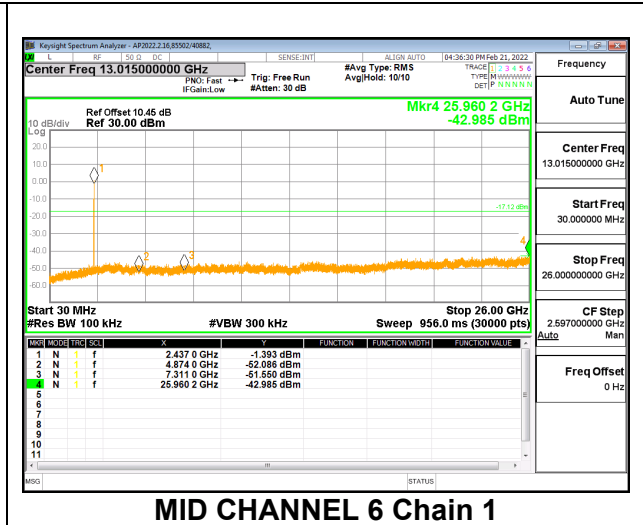
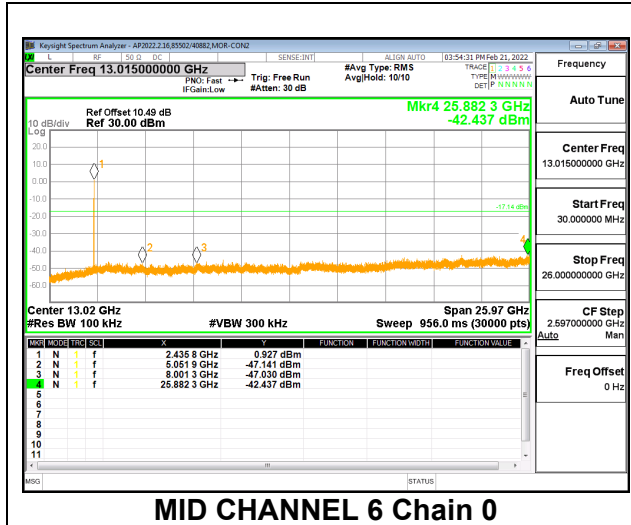


MID CHANNEL 6

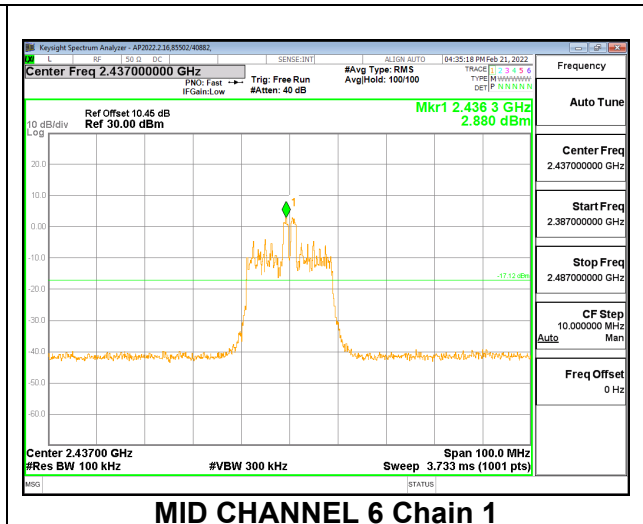
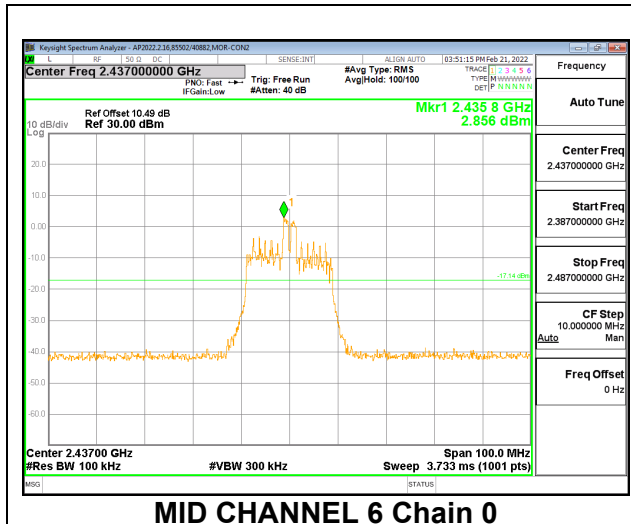


2TX Chain 0 + Chain 1 CDD OFDMA MODE: 26-Tones, RU Index 8



HIGH CHANNEL 11

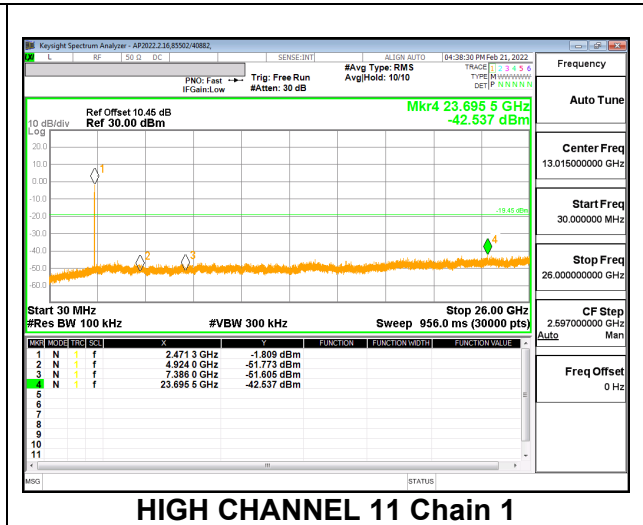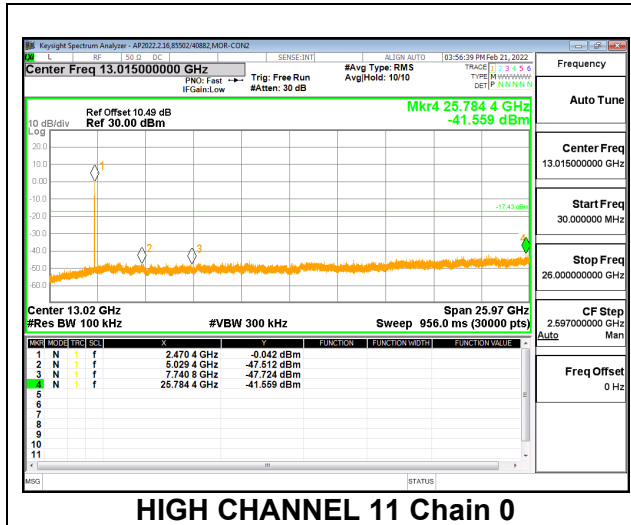



HIGH CHANNEL 11

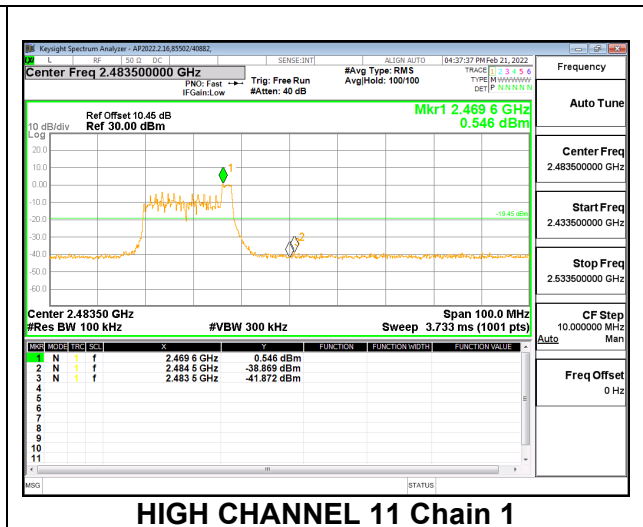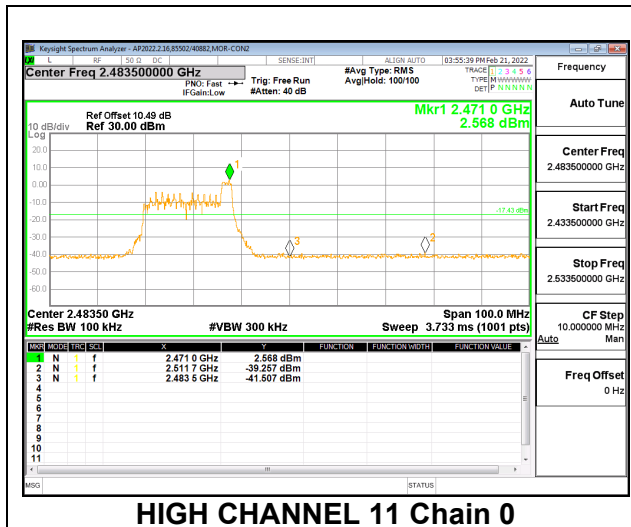

2TX Chain 0 + Chain 1 CDD OFDMA MODE: 52-Tones, RU Index 37
LOW CHANNEL 1

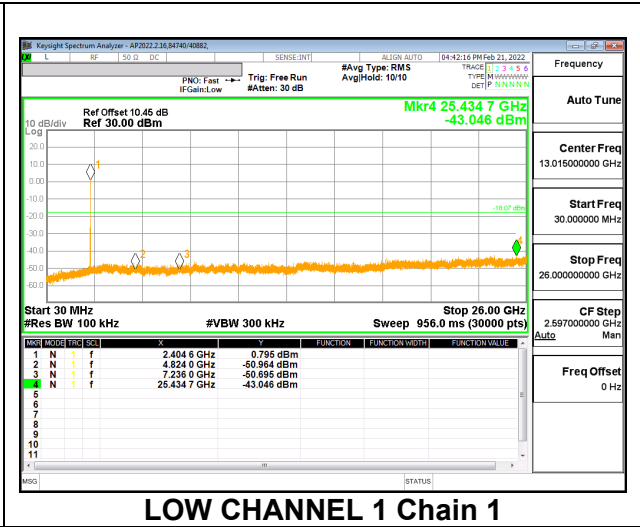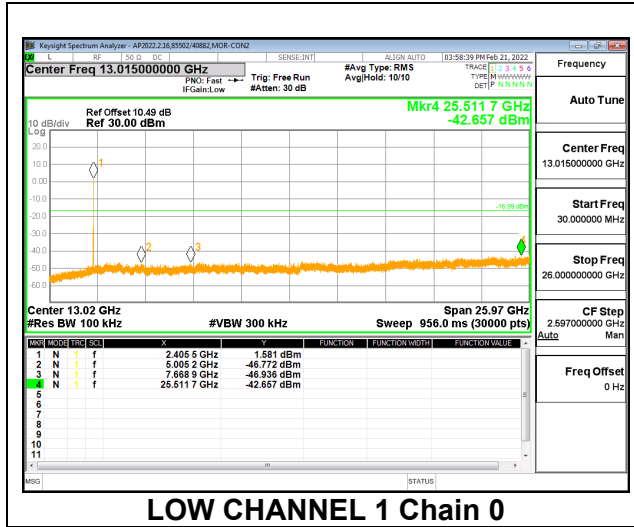


LOW CHANNEL 1

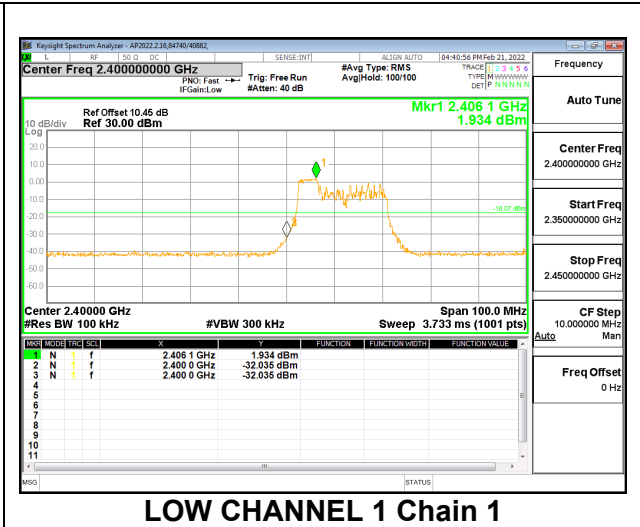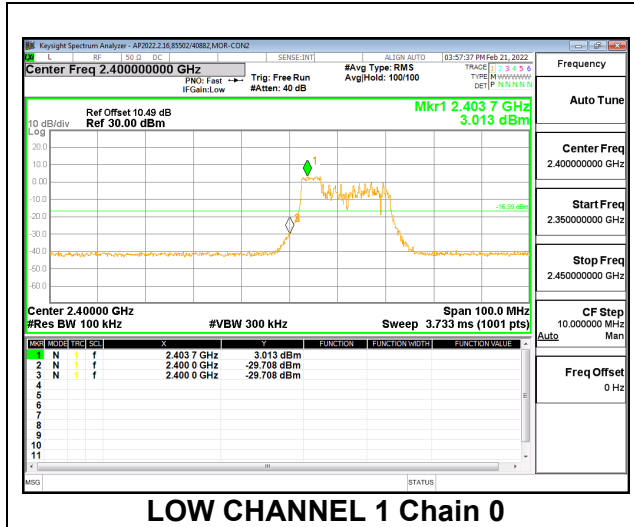


2TX Chain 0 + Chain 1 CDD OFDMA MODE: 52-Tones, RU Index 38

MID CHANNEL 6

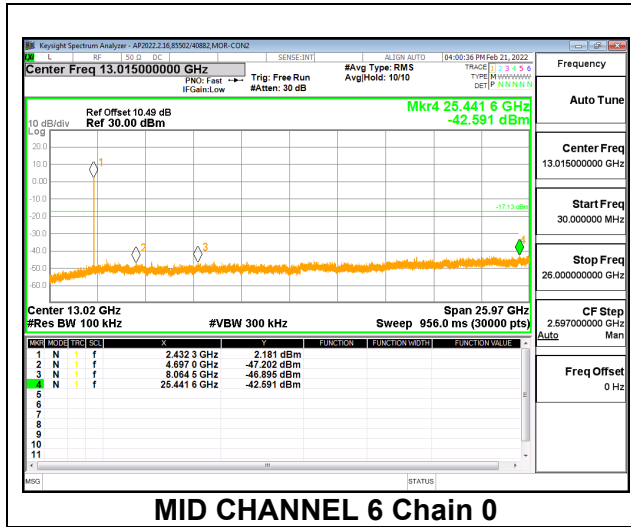


MID CHANNEL 6 Chain 0

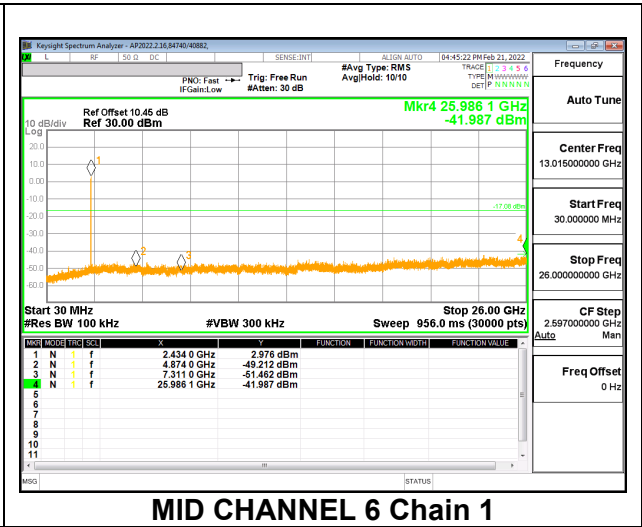


MID CHANNEL 6 Chain 1

MID CHANNEL 6


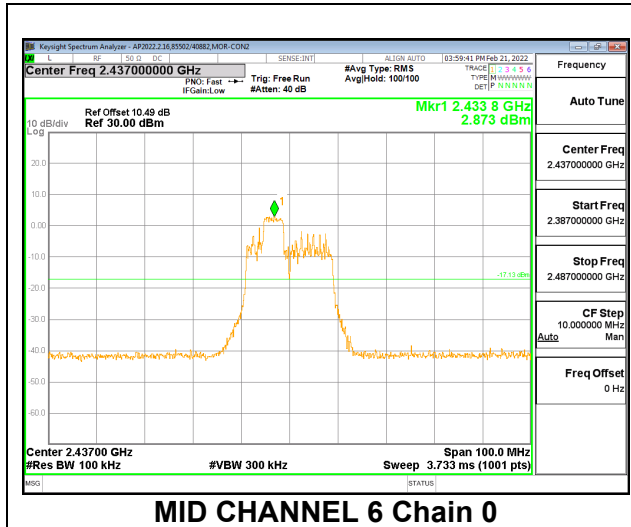


MID CHANNEL 6 Chain 0


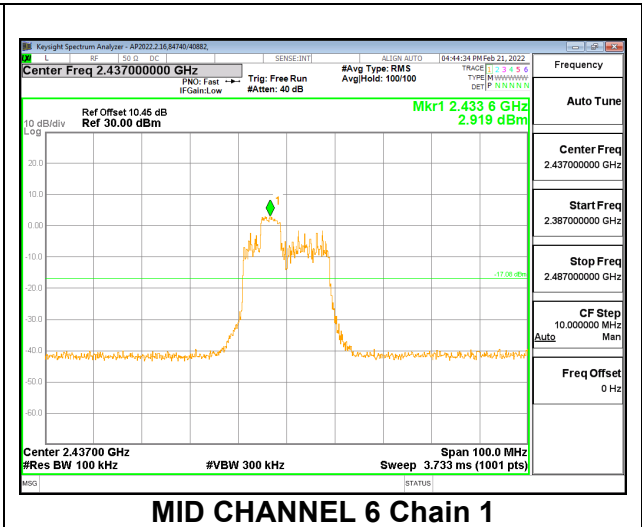


MID CHANNEL 6 Chain 1


2TX Chain 0 + Chain 1 CDD OFDMA MODE: 52-Tones, RU Index 40
HIGH CHANNEL 11

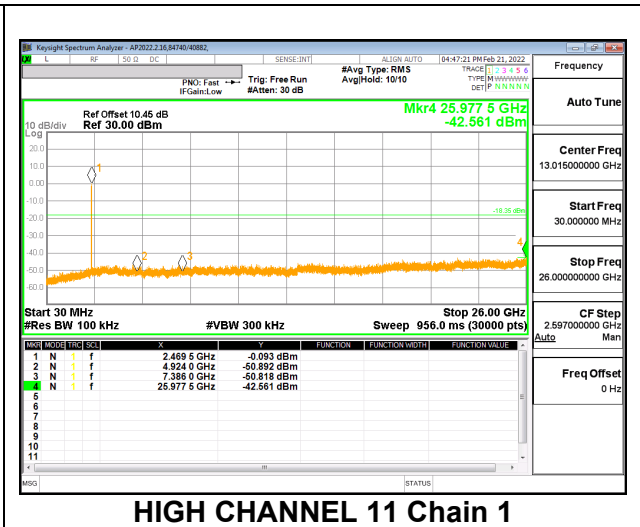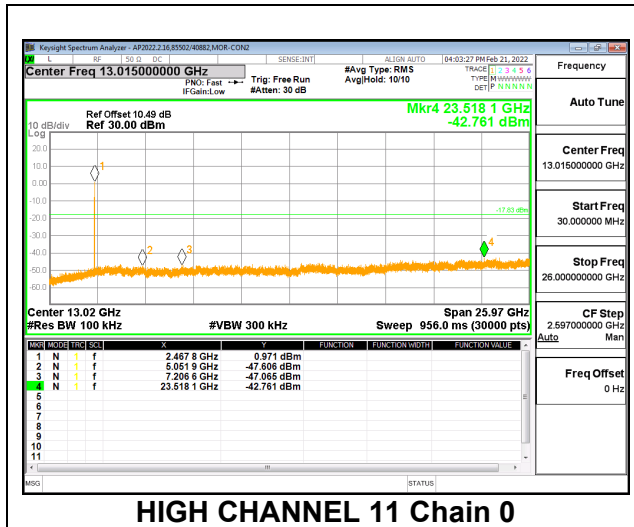


HIGH CHANNEL 11

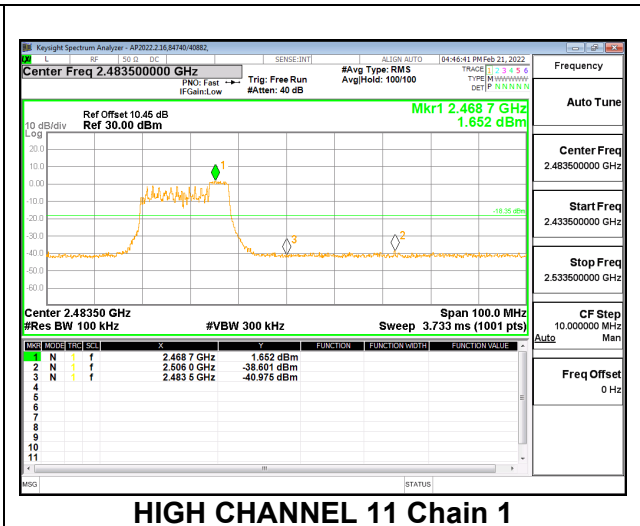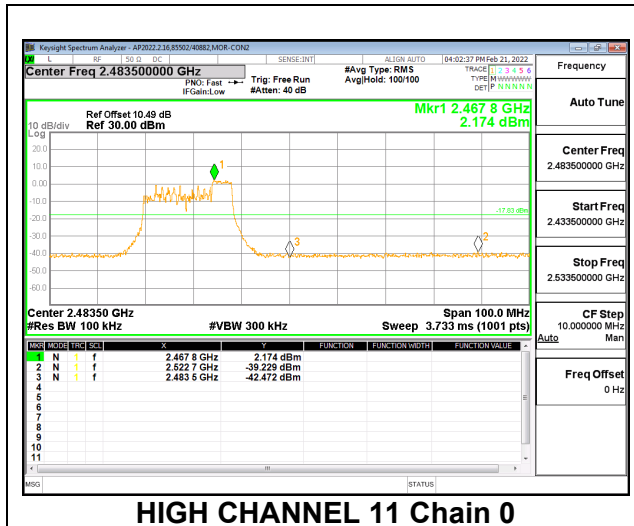

2TX Chain 0 + Chain 1 CDD OFDMA MODE: 106-Tones, RU Index 53
LOW CHANNEL 1

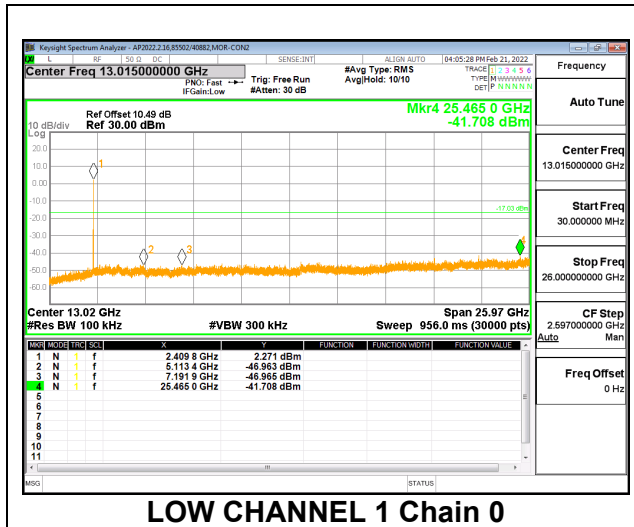


LOW CHANNEL 1 Chain 0

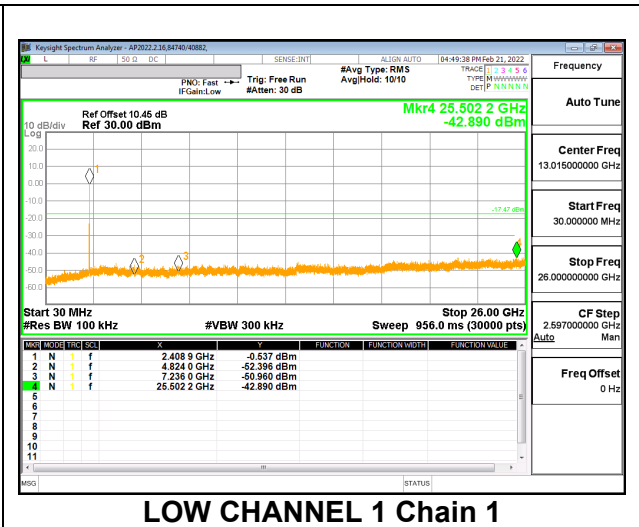


LOW CHANNEL 1 Chain 1

MID CHANNEL 6

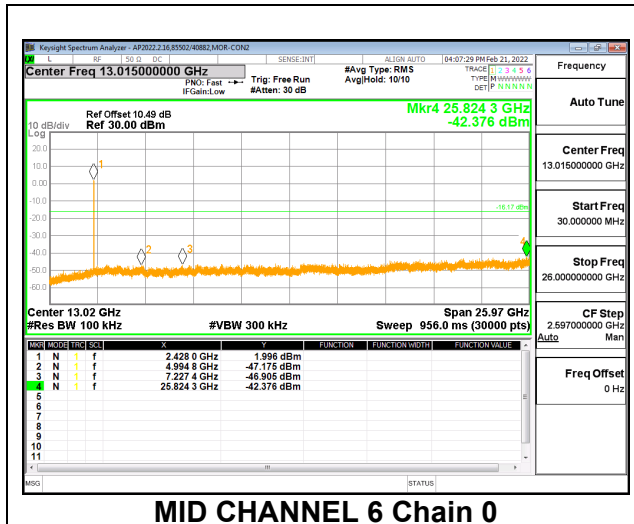

MID CHANNEL 6 Chain 0

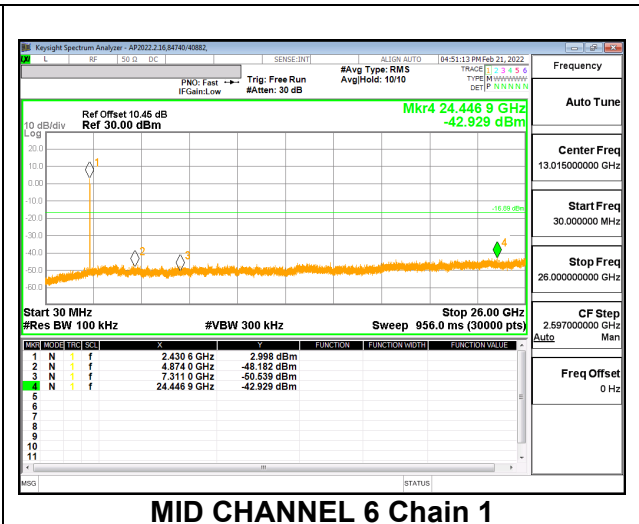

MID CHANNEL 6 Chain 1