

# FCC SAR TEST REPORT

FCC ID : PY7-34943G  
Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII  
a/b/g/n/ac, NFC and GNSS  
Brand Name : SONY  
Applicant : Sony Corporation  
1-7-1 Konan Minato-ku Tokyo, 108-0076 Japan  
Manufacturer : Sony Corporation  
1-7-1 Konan Minato-ku Tokyo, 108-0076 Japan  
Standard : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

*Tony Zhang*

Reviewed by: Tony Zhang / Supervisor

*Kat Yin*

Approved by: Kat Yin / Manager



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



Table of Contents

1. Statement of Compliance ..... 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information ..... 5
3.1 General Information ..... 5
3.2 Device IMEI Code ..... 5
3.3 General LTE SAR Test and Reporting Considerations ..... 6
4. RF Exposure Limits..... 7
4.1 Uncontrolled Environment..... 7
4.2 Controlled Environment..... 7
5. Specific Absorption Rate (SAR)..... 8
5.1 Introduction ..... 8
5.2 SAR Definition..... 8
6. System Description and Setup ..... 9
6.1 Test Site Location..... 9
6.2 E-Field Probe ..... 10
6.3 Data Acquisition Electronics (DAE) ..... 10
6.4 Phantom..... 11
6.5 Device Holder..... 12
7. Measurement Procedures ..... 13
7.1 Spatial Peak SAR Evaluation ..... 13
7.2 Power Reference Measurement..... 14
7.3 Area Scan ..... 14
7.4 Zoom Scan..... 15
7.5 Volume Scan Procedures ..... 15
7.6 Power Drift Monitoring..... 15
8. Test Equipment List..... 16
9. System Verification ..... 17
9.1 Tissue Verification ..... 17
9.2 System Performance Check Results..... 18
10. RF Exposure Positions ..... 19
10.1 Ear and handset reference point ..... 19
10.2 Definition of the cheek position ..... 20
10.3 Definition of the tilt position ..... 21
10.4 Body Worn Accessory ..... 21
10.5 Product Specific Exposure ..... 22
10.6 Wireless Router..... 22
11. GSM/UMTS/CDMA/LTE Output Power (Unit: dBm)..... 23
12. WiFi/Bluetooth Output Power (Unit: dBm) ..... 40
13. RF Exposure Conditions ..... 52
14. SAR Test Results ..... 52
14.1 Head SAR ..... 54
14.2 Hotspot SAR ..... 57
14.3 Body Worn Accessory SAR ..... 60
14.4 Product specific 10g SAR ..... 62
15. Simultaneous Transmission Analysis ..... 63
15.1 Head Exposure Conditions ..... 64
15.2 Hotspot Exposure Conditions..... 65
15.3 Body-Worn Accessory Exposure Conditions ..... 66
15.4 Product specific 10g SAR Exposure Conditions..... 66
16. Uncertainty Assessment ..... 67
17. References ..... 67
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos and Antenna Location





1. Statement of Compliance

Applicant Name	Sony Corporation			
EUT Description	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, NFC and GNSS			
Brand Name	SONY			
FCC ID	PY7-34943G			
HW Version	A			
SW Version	0.549			
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	NII	DSS
Head (1g SAR W/kg)	0.51	0.19	0.29	0.10
Body-Worn (1g SAR W/kg)	0.77	0.12	0.27	<0.10
Hotspot (1g SAR W/kg)	0.77	0.12	0.13	<0.10
Product Specific (10g SAR W/kg)			0.75	
Highest Simultaneous Transmission (1g SAR W/kg)	1.33	0.92	1.33	1.33
Highest Simultaneous Transmission (10g SAR W/kg)			1.27	
Date Tested	2022/1/10~2022/1/29			
Test Result	Pass			
<b>Remark:</b> This device 2.4GHz WLAN supports Hotspot operation and Bluetooth supports tethering applications.				

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Wireless Technologies	Frequency	Operating Mode	
GSM	850 1900	. GSM Voice . GPRS (GMSK) . EDGE (8PSK)	Multi-Slot Class: Class 33
	Does device support dual transfer mode? (No)		
W-CDMA (UMTS)	Band 4 Band 5	. AMR / RMC 12.2Kbps . HSDPA . HSUPA . DC-HSDPA . HSPA+	
LTE (FDD)	Band 4 Band 5	. QPSK	
LTE (TDD)	Band 41	. 16QAM . 64QAM	
WiFi	2.4GHz: 2412 MHz ~ 2462 MHz	. 11b . 11g . 11g/n (HT20)	
	5GHz: 5.2GHz: 5180 MHz ~ 5240 MHz 5.3GHz: 5260 MHz ~ 5320 MHz 5.5GHz: 5500 MHz ~ 5720 MHz 5.8GHz: 5745 MHz ~ 5825 MHz	. 11a . 11n (HT20) . 11n (HT40) . 11ac (VHT20) . 11ac (VHT40) . 11ac (VHT80)	
Bluetooth	2.4GHz	. BR / EDR / LE	
NFC	13.56MHz	. ASK	

#### 3.2 Device IMEI Code

Band	IMEI
WWAN/WLAN	SIM1: 004402543101608 SIM2: 004402543101616



**3.3 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	PY7-34943G																																																														
Equipment Name	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, NFC and GNSS																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz																																																														
Channel Bandwidth	LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R15, Cat 5																																																														
CA Support	Yes, Downlink only																																																														
LTE MPR permanently built-in by design	<b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b>																																																														
	<table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
	Modulation		Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )							MPR (dB)																																																					
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																								
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																							
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																							
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																							
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
LTE Carrier Aggregation Combinations	Intra-Band possible combinations and the detail power verification please referred to section 11.																																																														
LTE Carrier Aggregation Additional Information	This device supports maximum of 2 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5		
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.



## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

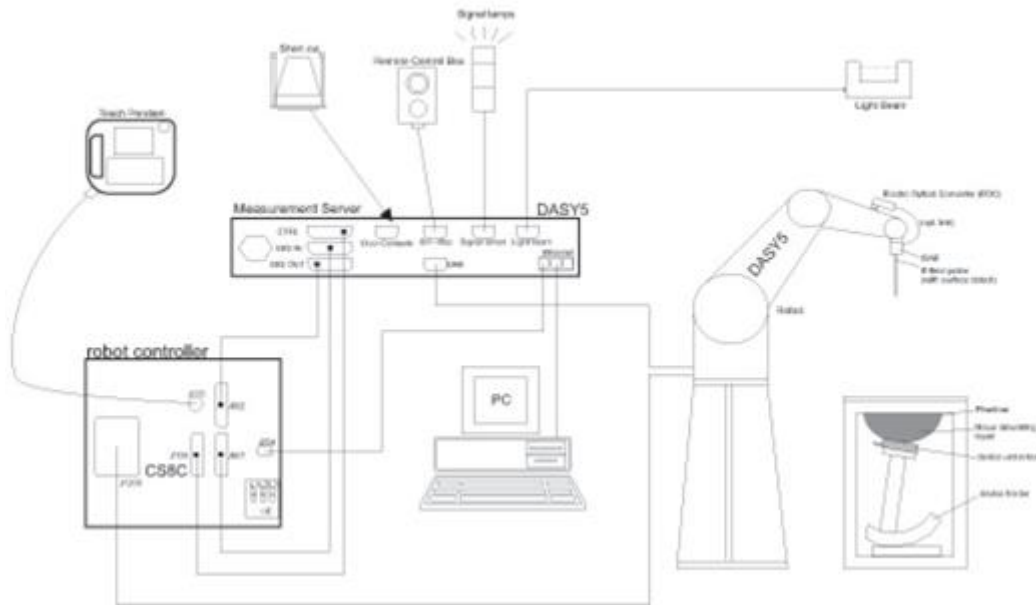

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 6.1 Test Site Location


Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR01-KS, SAR02-KS	CN1257	314309

**6.2 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
<b>Directivity</b>	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.3 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**6.4 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**
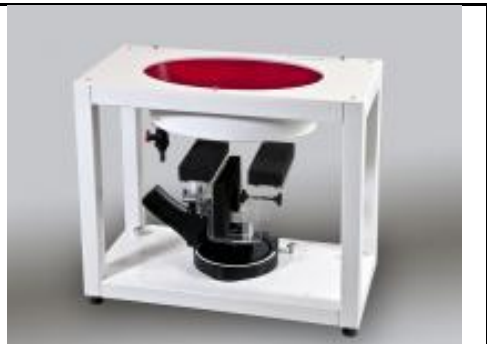
<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		$\leq 3$ GHz	$> 3$ GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
<p>Note: <math>\delta</math> is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is <math>\leq 1.4</math> W/kg, <math>\leq 8</math> mm, <math>\leq 7</math> mm and <math>\leq 5</math> mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>				

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.





**8. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d258	2020/5/7	2023/5/6
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2022/3/25
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2022/3/24
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2022/3/23
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2020/11/26	2023/11/25
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2019/9/24	2022/9/22
SPEAG	Data Acquisition Electronics	DAE4	690	2021/3/17	2022/3/16
SPEAG	Data Acquisition Electronics	DAE4	1649	2021/2/3	2022/2/2
SPEAG	Dosimetric E-Field Probe	EX3DV4	7627	2021/2/10	2022/2/9
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2021/11/24	2022/11/23
SPEAG	SAM Twin Phantom	SAM Twin	TP-1754	NCR	NCR
SPEAG	SAM Twin Phantom	SAM Twin	TP-2022	NCR	NCR
Testo	Thermo-Hygrometer	608-H1	1241332102	2022/1/6	2023/1/5
Testo	Thermo-Hygrometer	608-H1	1241332088	2022/1/6	2023/1/5
Testo	Thermo-Hygrometer	608-H1	1241332126	2022/1/6	2023/1/5
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2021/4/13	2022/4/12
Agilent	ENA Series Network Analyzer	E5071C	MY46106933	2021/7/31	2022/7/30
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2021/6/9	2022/6/8
Anritsu	Vector Signal Generator	MG3710A	6201682672	2022/1/6	2023/1/5
Rohde & Schwarz	Power Meter	NRVD	102081	2021/8/12	2022/8/11
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2021/8/12	2022/8/11
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2021/8/12	2022/8/11
R&S	CBT BLUETOOTH TESTER	CBT	101246	2021/4/12	2022/4/11
EXA	Spectrum Analyzer	FSV7	101632	2022/1/6	2023/1/5
FLUKE	DIGITAC THERMOMETER	51II	97240029	2021/8/13	2022/8/12
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.





## 9. System Verification

### 9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing


#### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
835	22.8	0.926	41.058	0.90	41.50	2.89	-1.07	$\pm 5$	2022/1/10
1750	22.7	1.351	40.010	1.37	40.10	-1.39	-0.22	$\pm 5$	2022/1/12
1900	22.9	1.432	39.779	1.40	40.00	2.29	-0.55	$\pm 5$	2022/1/14
2450	22.6	1.824	39.243	1.80	39.20	1.33	0.11	$\pm 5$	2022/1/22
2600	22.9	1.881	39.164	1.96	39.00	-4.03	0.42	$\pm 5$	2022/1/16
5250	22.8	4.601	35.834	4.71	35.90	-2.31	-0.18	$\pm 5$	2022/1/25
5600	22.7	5.004	35.267	5.07	35.50	-1.30	-0.66	$\pm 5$	2022/1/27
5750	22.6	5.171	35.076	5.22	35.40	-0.94	-0.92	$\pm 5$	2022/1/29

**9.2 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2022/1/10	835	50	4d258	7627	690	0.462	9.44	9.24	-2.12	0.298	6.13	5.96	-2.77
2022/1/12	1750	50	1090	7627	690	1.750	36.40	35	-3.85	0.921	19.20	18.42	-4.06
2022/1/14	1900	50	5d170	7627	690	1.980	39.00	39.6	1.54	1.020	20.30	20.4	0.49
2022/1/22	2450	50	908	3857	1649	2.510	52.80	50.2	-4.92	1.170	24.20	23.4	-3.31
2022/1/16	2600	50	1061	7627	690	2.620	56.60	52.4	-7.42	1.210	25.10	24.2	-3.59
2022/1/25	5250	50	1113	3857	1649	3.930	80.50	78.6	-2.36	1.120	23.10	22.4	-3.03
2022/1/27	5600	50	1113	3857	1649	4.140	83.40	82.8	-0.72	1.160	23.80	23.2	-2.52
2022/1/29	5750	50	1113	3857	1649	3.770	80.00	75.4	-5.75	1.060	22.80	21.2	-7.02

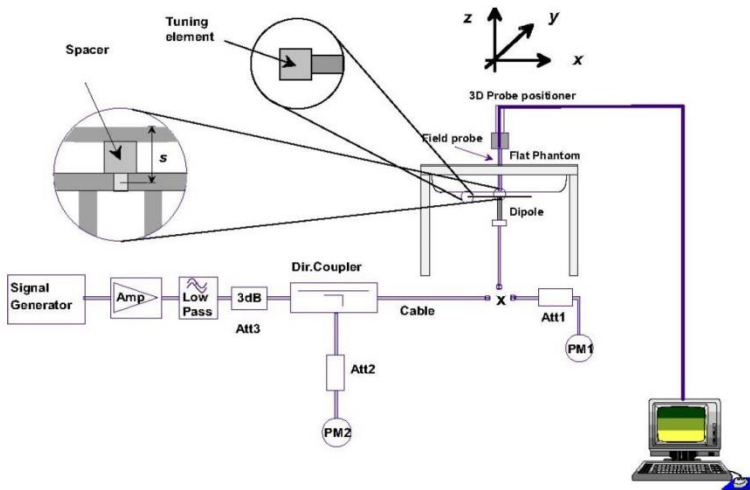

**Fig 9.2.1 System Performance Check Setup**



**Fig 9.2.2 Setup Photo**

## 10. RF Exposure Positions

### 10.1 Ear and handset reference point

Figure 10.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 10.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 10.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 10.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

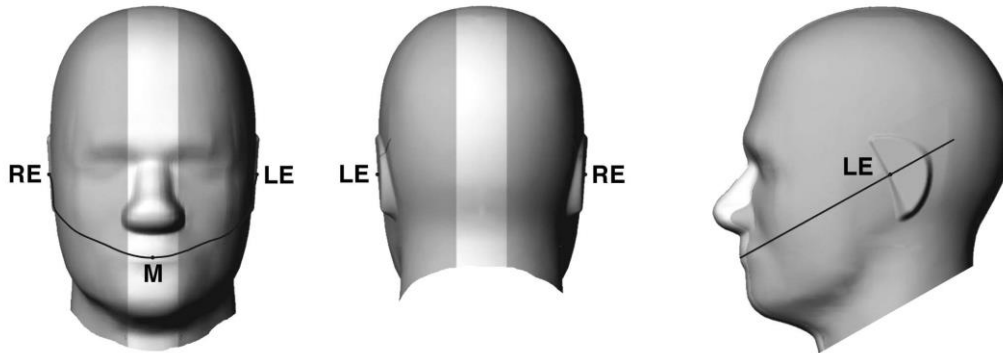


Fig 10.1.1 Front, back, and side views of SAM twin phantom

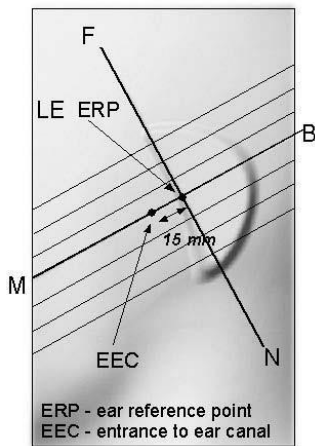


Fig 10.1.2 Close-up side view of phantom showing the ear region.


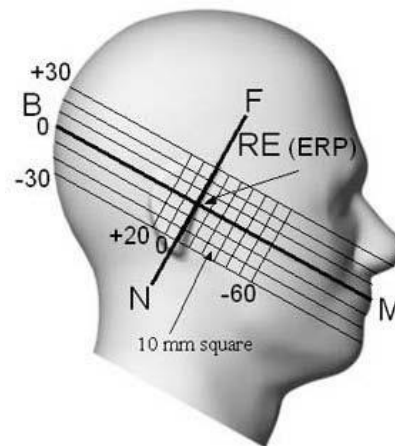



Fig 10.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**10.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 10.2.1 and Figure 10.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 10.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 10.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 10.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 10.2.3. The actual rotation angles should be documented in the test report.

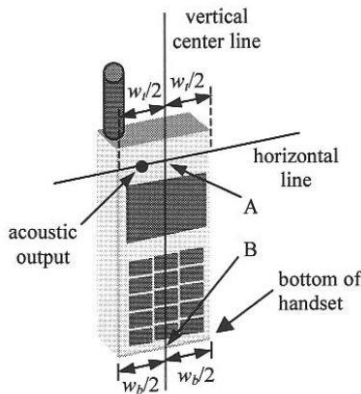

**Fig 10.2.1 Handset vertical and horizontal reference lines—“fixed case”**

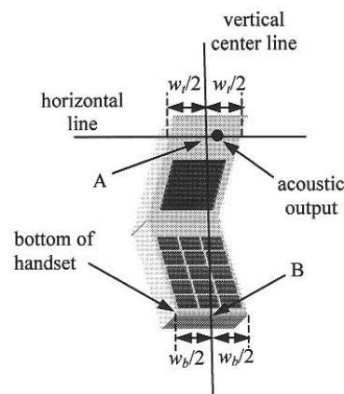


**Fig 10.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

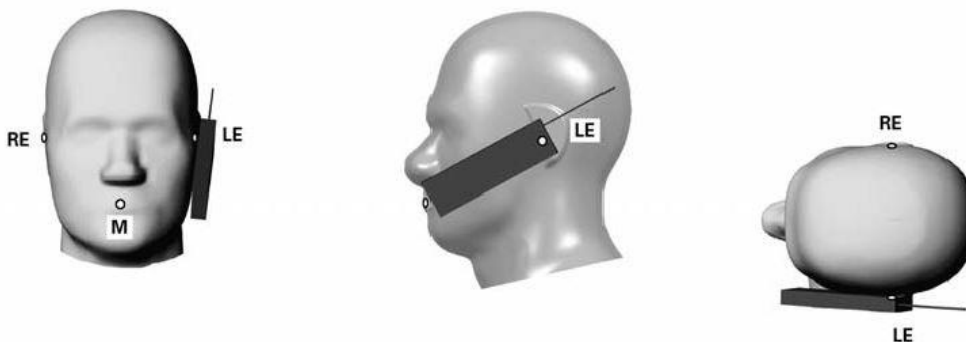

**Fig 10.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

**10.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 10.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

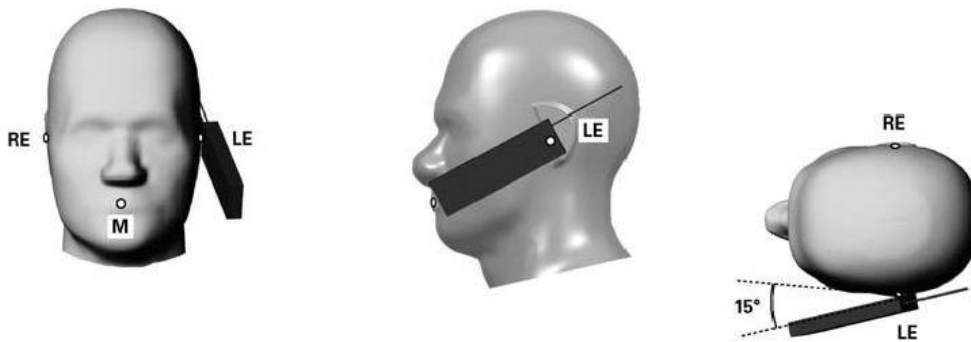


**Fig 10.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

**10.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 10.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

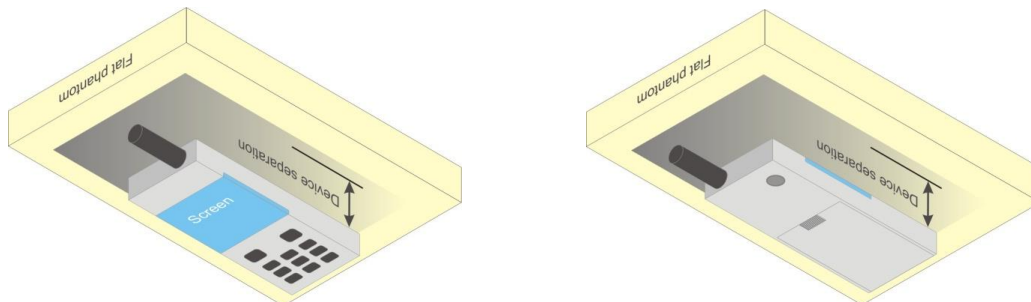

**Fig 10.4 Body Worn Position**



### **10.5 Product Specific Exposure**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### **10.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W  $\geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## **11. GSM/UMTS/CDMA/LTE Output Power (Unit: dBm)**

### **<GSM Conducted Power>**

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode respectively.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850-Ant 0	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.07	31.89	32.10	33.80	23.07	22.89	23.10	24.80
GPRS 1 Tx slot	32.08	31.95	32.13	33.80	23.08	22.95	23.13	24.80
GPRS 2 Tx slots	30.20	29.83	30.19	31.50	24.20	23.83	24.19	25.50
GPRS 3 Tx slots	28.74	28.52	28.56	30.00	24.48	24.26	24.30	25.74
GPRS 4 Tx slots	27.45	27.50	27.49	29.00	24.45	24.50	24.49	26.00
EDGE 1 Tx slot	25.72	25.64	25.65	27.00	16.72	16.64	16.65	18.00
EDGE 2 Tx slots	24.14	24.08	24.07	25.50	18.14	18.08	18.07	19.50
EDGE 3 Tx slots	23.09	22.93	22.86	24.50	18.83	18.67	18.60	20.24
EDGE 4 Tx slots	22.03	21.95	21.90	23.50	19.03	18.95	18.90	20.50

GSM1900-Ant 1	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	512	661		810	512	661	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	26.68	26.84	26.86	28.00	17.68	17.84	17.86	19.00
GPRS 1 Tx slot	26.61	26.76	26.79	28.00	17.61	17.76	17.79	19.00
GPRS 2 Tx slots	25.62	25.65	25.64	27.00	19.62	19.65	19.64	21.00
GPRS 3 Tx slots	23.41	23.58	23.76	25.00	19.15	19.32	19.50	20.74
GPRS 4 Tx slots	22.58	22.68	22.67	24.00	19.58	19.68	19.67	21.00
EDGE 1 Tx slot	23.08	23.31	23.30	24.50	14.08	14.31	14.30	15.50
EDGE 2 Tx slots	22.03	22.27	22.11	23.50	16.03	16.27	16.11	17.50
EDGE 3 Tx slots	20.06	20.02	20.14	21.50	15.80	15.76	15.88	17.24
EDGE 4 Tx slots	19.17	19.14	19.18	20.50	16.17	16.14	16.18	17.50

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**



**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

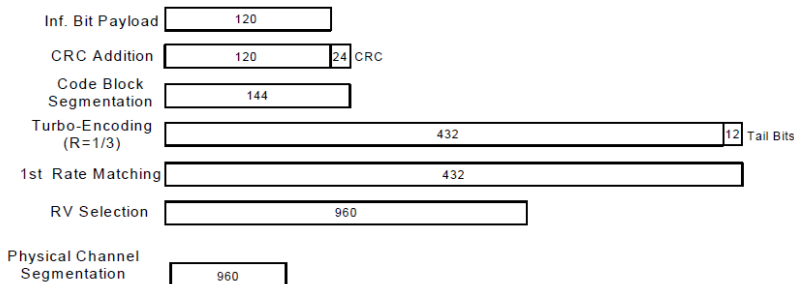

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**

**HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
  - iii. Set Channel Parmes
  - iv. Set Cell Power = -86 dBm
  - v. Set Channel Type = HSPA
  - vi. Set UE Target Power =21 dBm
  - vii. Power Ctrl Mode= All Up Bits
  - viii. Set Manual Uplink DPCH Bc/Bd = Manual
  - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
  - x. Set HSPA Conn DL Channel Levels
  - xi. Set HS-SCCH Configs
  - xii. Set RB Test Mode Setup
  - xiii. Set Common HSUPA Parameters
  - xiv. Set Serving Grant
  - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

**Table C.11.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM**

Sub-test	$\beta_c$ (Note 3)	$\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (2xSF2) (Note 4)	$\beta_{ed}$ (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}$ : 30/15 $\beta_{ed2}$ : 30/15	$\beta_{ed3}$ : 24/15 $\beta_{ed4}$ : 24/15	3.5	2.5	14	105	105

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d = 0$  by default.

Note 4:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+ , and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA, HSPA+) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.


Band		WCDMA IV-Ant 1			Tune-up Limit (dBm)
TX Channel		1312	1413	1513	
Rx Channel		1537	1638	1738	
Frequency (MHz)		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	22.28	22.32	22.16	23.00
3GPP Rel 99	RMC 12.2Kbps	22.34	22.37	22.27	23.00
3GPP Rel 6	HSDPA Subtest-1	21.43	21.35	21.27	21.50
3GPP Rel 6	HSDPA Subtest-2	21.26	21.35	21.17	21.50
3GPP Rel 6	HSDPA Subtest-3	20.93	20.94	20.82	21.00
3GPP Rel 6	HSDPA Subtest-4	20.78	20.90	20.81	21.00
3GPP Rel 8	DC-HSDPA Subtest-1	21.38	21.38	21.22	21.50
3GPP Rel 8	DC-HSDPA Subtest-2	21.40	21.34	21.29	21.50
3GPP Rel 8	DC-HSDPA Subtest-3	20.92	20.82	20.69	21.00
3GPP Rel 8	DC-HSDPA Subtest-4	20.89	20.88	20.78	21.00
3GPP Rel 6	HSUPA Subtest-1	21.32	21.35	21.27	22.00
3GPP Rel 6	HSUPA Subtest-2	19.44	19.29	19.24	20.00
3GPP Rel 6	HSUPA Subtest-3	20.39	20.40	20.19	21.00
3GPP Rel 6	HSUPA Subtest-4	19.28	19.41	19.35	20.00
3GPP Rel 6	HSUPA Subtest-5	21.38	21.42	21.37	22.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	18.78	18.81	18.77	20.50

Band		WCDMA V-Ant 0			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.55	23.63	23.47	24.50
3GPP Rel 99	RMC 12.2Kbps	23.67	23.69	23.56	24.50
3GPP Rel 6	HSDPA Subtest-1	22.65	22.68	22.54	23.00
3GPP Rel 6	HSDPA Subtest-2	22.70	22.65	22.49	23.00
3GPP Rel 6	HSDPA Subtest-3	22.25	22.23	22.06	22.50
3GPP Rel 6	HSDPA Subtest-4	22.27	22.12	21.97	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.69	22.74	22.51	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.64	22.69	22.61	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.09	22.18	22.15	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.18	22.12	22.16	22.50
3GPP Rel 6	HSUPA Subtest-1	22.60	22.60	22.48	23.50
3GPP Rel 6	HSUPA Subtest-2	20.72	20.60	20.57	21.50
3GPP Rel 6	HSUPA Subtest-3	21.71	21.65	21.63	22.50
3GPP Rel 6	HSUPA Subtest-4	20.58	20.75	20.53	21.50
3GPP Rel 6	HSUPA Subtest-5	22.61	22.61	22.64	23.50
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	20.21	20.27	20.16	22.00


**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

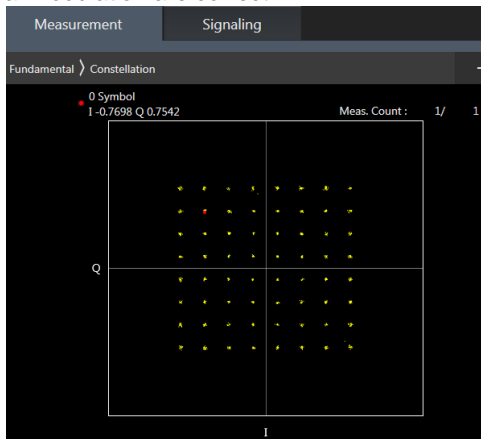

**64QAM**

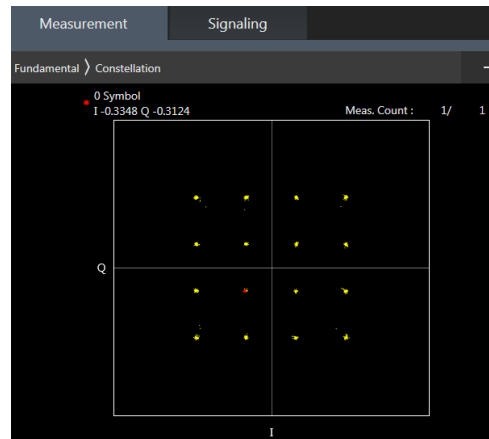

**16QAM**



<LTE Band 4-ANT1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.81	19.97	19.88	21	0
20	QPSK	1	49	19.70	19.82	19.64		
20	QPSK	1	99	19.83	19.95	19.84		
20	QPSK	50	0	18.71	18.85	18.73	20	1
20	QPSK	50	24	18.66	18.84	18.66		
20	QPSK	50	50	18.68	18.78	18.65		
20	QPSK	100	0	18.67	18.82	18.73	20	1
20	16QAM	1	0	19.14	19.26	19.22		
20	16QAM	1	49	19.00	19.20	19.03		
20	16QAM	1	99	18.95	19.01	18.87	19	2
20	16QAM	50	0	17.66	17.72	17.67		
20	16QAM	50	24	17.59	17.73	17.60		
20	16QAM	50	50	17.77	17.87	17.72	19	2
20	16QAM	100	0	17.61	17.70	17.66		
20	64QAM	1	0	18.66	18.82	18.78		
20	64QAM	1	49	18.64	18.78	18.73	19	2
20	64QAM	1	99	18.91	18.99	18.93		
20	64QAM	50	0	17.65	17.72	17.70		
20	64QAM	50	24	17.64	17.74	17.60	18	3
20	64QAM	50	50	17.69	17.80	17.73		
20	64QAM	100	0	17.51	17.72	17.58		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	19.66	19.95	19.82	21	0
15	QPSK	1	37	19.57	19.68	19.54		
15	QPSK	1	74	19.65	19.87	19.71		
15	QPSK	36	0	18.58	18.70	18.67	20	1
15	QPSK	36	20	18.53	18.73	18.51		
15	QPSK	36	39	18.66	18.64	18.49		
15	QPSK	75	0	18.58	18.71	18.54	20	1
15	16QAM	1	0	19.09	19.10	19.17		
15	16QAM	1	37	18.85	19.01	18.89		
15	16QAM	1	74	18.75	18.92	18.80	19	2
15	16QAM	36	0	17.59	17.59	17.52		
15	16QAM	36	20	17.38	17.69	17.41		
15	16QAM	36	39	17.67	17.78	17.61	19	2
15	16QAM	75	0	17.45	17.52	17.49		
15	64QAM	1	0	18.54	18.75	18.70		
15	64QAM	1	37	18.54	18.60	18.54	19	2
15	64QAM	1	74	18.75	18.95	18.77		
15	64QAM	36	0	17.45	17.54	17.58		
15	64QAM	36	20	17.51	17.55	17.52	18	3
15	64QAM	36	39	17.64	17.65	17.58		
15	64QAM	75	0	17.45	17.58	17.46		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.78	19.82	19.79	21	0
10	QPSK	1	25	19.58	19.76	19.60		
10	QPSK	1	49	19.75	19.82	19.75		
10	QPSK	25	0	18.58	18.71	18.63	20	1
10	QPSK	25	12	18.45	18.73	18.48		
10	QPSK	25	25	18.56	18.67	18.60		
10	QPSK	50	0	18.60	18.67	18.59	20	1
10	16QAM	1	0	18.97	19.16	19.11		
10	16QAM	1	25	18.91	19.02	19.01		
10	16QAM	1	49	18.91	18.95	18.85	19	2
10	16QAM	25	0	17.50	17.69	17.52		
10	16QAM	25	12	17.51	17.68	17.54		
10	16QAM	25	25	17.56	17.73	17.64	19	2
10	16QAM	50	0	17.55	17.52	17.45		
10	64QAM	1	0	18.61	18.75	18.73		
10	64QAM	1	25	18.48	18.68	18.56	19	2
10	64QAM	1	49	18.76	18.90	18.80		
10	64QAM	25	0	17.51	17.53	17.58		
10	64QAM	25	12	17.44	17.57	17.44	18	3
10	64QAM	25	25	17.62	17.66	17.63		
10	64QAM	50	0	17.45	17.62	17.56		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.71	19.88	19.79	21	0
5	QPSK	1	12	19.57	19.77	19.49		
5	QPSK	1	24	19.66	19.90	19.77		
5	QPSK	12	0	18.64	18.65	18.56	20	1
5	QPSK	12	7	18.53	18.65	18.61		
5	QPSK	12	13	18.57	18.70	18.48		
5	QPSK	25	0	18.49	18.78	18.68	20	1
5	16QAM	1	0	19.04	19.10	19.11		
5	16QAM	1	12	18.90	19.06	18.86		
5	16QAM	1	24	18.92	18.99	18.75	19	2
5	16QAM	12	0	17.52	17.69	17.49		
5	16QAM	12	7	17.49	17.56	17.41		
5	16QAM	12	13	17.72	17.68	17.66	19	2
5	16QAM	25	0	17.58	17.54	17.64		
5	64QAM	1	0	18.52	18.64	18.71		
5	64QAM	1	12	18.43	18.57	18.54	19	2
5	64QAM	1	24	18.79	18.85	18.92		
5	64QAM	12	0	17.45	17.70	17.67		
5	64QAM	12	7	17.53	17.60	17.47	18	3
5	64QAM	12	13	17.65	17.75	17.55		
5	64QAM	25	0	17.49	17.66	17.38		





**FCC SAR TEST REPORT**

**Report No. : FA1D0310**

Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.64	19.77	19.82	21	0
3	QPSK	1	8	19.58	19.66	19.50		
3	QPSK	1	14	19.67	19.81	19.79		
3	QPSK	8	0	18.51	18.74	18.62	20	1
3	QPSK	8	4	18.61	18.66	18.64		
3	QPSK	8	7	18.52	18.67	18.49		
3	QPSK	15	0	18.47	18.78	18.68		
3	16QAM	1	0	19.12	19.23	19.10	20	1
3	16QAM	1	8	18.98	19.05	18.85		
3	16QAM	1	14	18.81	18.85	18.80		
3	16QAM	8	0	17.47	17.53	17.47	19	2
3	16QAM	8	4	17.43	17.53	17.39		
3	16QAM	8	7	17.69	17.66	17.57		
3	16QAM	15	0	17.43	17.62	17.51		
3	64QAM	1	0	18.62	18.76	18.76	19	2
3	64QAM	1	8	18.47	18.68	18.69		
3	64QAM	1	14	18.83	18.93	18.89		
3	64QAM	8	0	17.60	17.70	17.61	18	3
3	64QAM	8	4	17.58	17.67	17.57		
3	64QAM	8	7	17.51	17.61	17.71		
3	64QAM	15	0	17.35	17.65	17.55		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.52	19.67	19.72	21	0
1.4	QPSK	1	3	19.45	19.48	19.41		
1.4	QPSK	1	5	19.58	19.68	19.69		
1.4	QPSK	3	0	19.45	19.73	19.63		
1.4	QPSK	3	1	19.41	19.65	19.33		
1.4	QPSK	3	3	19.51	19.65	19.63		
1.4	QPSK	6	0	18.72	18.87	18.75	20	1
1.4	16QAM	1	0	18.59	18.74	18.41	20	1
1.4	16QAM	1	3	18.60	18.73	18.88		
1.4	16QAM	1	5	18.63	18.83	18.81		
1.4	16QAM	3	0	18.71	18.84	18.76		
1.4	16QAM	3	1	18.52	18.70	18.58		
1.4	16QAM	3	3	18.61	18.83	18.79		
1.4	16QAM	6	0	17.72	17.82	17.74	19	2
1.4	64QAM	1	0	17.50	17.65	17.43	19	2
1.4	64QAM	1	3	17.66	17.84	17.72		
1.4	64QAM	1	5	17.63	17.76	17.86		
1.4	64QAM	3	0	17.68	17.82	17.81		
1.4	64QAM	3	1	17.59	17.60	17.51		
1.4	64QAM	3	3	17.73	17.75	17.85		
1.4	64QAM	6	0	16.67	16.76	16.83	18	3





<LTE Band 5-ANT0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.25	23.30	23.22	24.5	0
10	QPSK	1	25	23.06	23.22	23.02		
10	QPSK	1	49	23.19	23.23	23.18		
10	QPSK	25	0	22.38	22.44	22.26	23.5	1
10	QPSK	25	12	22.43	22.43	22.32		
10	QPSK	25	25	22.22	22.36	22.34		
10	QPSK	50	0	22.20	22.36	22.33	23.5	1
10	16QAM	1	0	22.51	22.68	22.52		
10	16QAM	1	25	22.53	22.57	22.39		
10	16QAM	1	49	22.65	22.70	22.59	22.5	2
10	16QAM	25	0	21.36	21.37	21.19		
10	16QAM	25	12	21.31	21.45	21.43		
10	16QAM	25	25	21.26	21.39	21.25	22.5	2
10	16QAM	50	0	21.31	21.51	21.33		
10	64QAM	1	0	21.32	21.42	21.28		
10	64QAM	1	25	21.33	21.35	21.28	22.5	2
10	64QAM	1	49	21.34	21.51	21.37		
10	64QAM	25	0	20.25	20.40	20.24		
10	64QAM	25	12	20.41	20.45	20.38	21.5	3
10	64QAM	25	25	20.34	20.37	20.29		
10	64QAM	50	0	20.27	20.42	20.28		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.15	23.14	23.10	24.5	0
5	QPSK	1	12	22.87	23.14	23.00		
5	QPSK	1	24	23.09	23.19	23.01		
5	QPSK	12	0	22.24	22.30	22.23	23.5	1
5	QPSK	12	7	22.38	22.43	22.31		
5	QPSK	12	13	22.13	22.31	22.15		
5	QPSK	25	0	22.18	22.34	22.31	23.5	1
5	16QAM	1	0	22.39	22.48	22.44		
5	16QAM	1	12	22.39	22.50	22.34		
5	16QAM	1	24	22.52	22.50	22.54	22.5	2
5	16QAM	12	0	21.31	21.22	21.03		
5	16QAM	12	7	21.21	21.30	21.27		
5	16QAM	12	13	21.20	21.33	21.15	22.5	2
5	16QAM	25	0	21.25	21.39	21.15		
5	64QAM	1	0	21.23	21.29	21.16		
5	64QAM	1	12	21.14	21.32	21.22	22.5	2
5	64QAM	1	24	21.16	21.34	21.26		
5	64QAM	12	0	20.09	20.23	20.07		
5	64QAM	12	7	20.37	20.36	20.23	21.5	3
5	64QAM	12	13	20.24	20.21	20.29		
5	64QAM	25	0	20.24	20.23	20.24		




Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.18	23.11	23.14	24.5	0
3	QPSK	1	8	22.87	23.12	23.02		
3	QPSK	1	14	23.13	23.17	23.07		
3	QPSK	8	0	22.24	22.28	22.14	23.5	1
3	QPSK	8	4	22.42	22.33	22.30		
3	QPSK	8	7	22.22	22.26	22.31		
3	QPSK	15	0	22.10	22.27	22.23	23.5	1
3	16QAM	1	0	22.33	22.51	22.32		
3	16QAM	1	8	22.39	22.55	22.22		
3	16QAM	1	14	22.61	22.68	22.45	22.5	2
3	16QAM	8	0	21.34	21.22	21.09		
3	16QAM	8	4	21.26	21.44	21.29		
3	16QAM	8	7	21.07	21.35	21.07	22.5	2
3	16QAM	15	0	21.26	21.42	21.16		
3	64QAM	1	0	21.17	21.22	21.15		
3	64QAM	1	8	21.25	21.35	21.08	22.5	2
3	64QAM	1	14	21.18	21.49	21.25		
3	64QAM	8	0	20.18	20.23	20.16		
3	64QAM	8	4	20.30	20.27	20.28	21.5	3
3	64QAM	8	7	20.19	20.31	20.29		
3	64QAM	15	0	20.10	20.29	20.09		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.13	22.99	22.95	24.5	0
1.4	QPSK	1	3	22.74	23.07	22.94		
1.4	QPSK	1	5	22.97	22.99	23.05		
1.4	QPSK	3	0	23.09	22.94	22.99		
1.4	QPSK	3	1	22.84	23.04	22.92		
1.4	QPSK	3	3	23.10	23.15	22.97		
1.4	QPSK	6	0	22.15	22.09	22.15	23.5	1
1.4	16QAM	1	0	21.85	22.10	22.00	23.5	1
1.4	16QAM	1	3	22.04	22.11	22.05		
1.4	16QAM	1	5	22.24	22.08	22.09		
1.4	16QAM	3	0	22.14	22.15	22.14		
1.4	16QAM	3	1	21.80	22.09	21.99		
1.4	16QAM	3	3	22.05	22.24	22.00		
1.4	16QAM	6	0	21.14	21.07	21.15	22.5	2
1.4	64QAM	1	0	20.82	21.04	20.92	22.5	2
1.4	64QAM	1	3	21.09	21.24	21.02		
1.4	64QAM	1	5	21.12	21.16	21.05		
1.4	64QAM	3	0	21.14	21.10	21.07		
1.4	64QAM	3	1	20.92	21.03	20.94		
1.4	64QAM	3	3	21.18	21.24	21.14		
1.4	64QAM	6	0	19.88	20.04	20.08	21.5	3

**<TDD LTE SAR Measurement>**

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

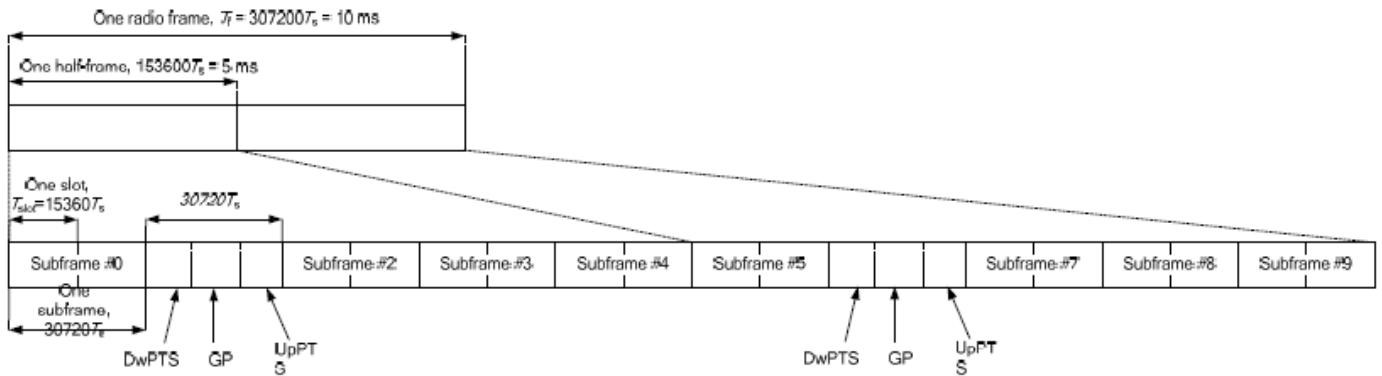

**Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).**

**Table 4.2-2: Uplink-downlink configurations.**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts
1	19760 · Ts			20480 · Ts		
2	21952 · Ts			23040 · Ts		
3	24144 · Ts			25600 · Ts		
4	26336 · Ts			7680 · Ts	4384 · Ts	5120 · Ts
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts		
6	19760 · Ts			23040 · Ts		
7	21952 · Ts			12800 · Ts		
8	24144 · Ts			-	-	
9	13168 · Ts			-	-	-

<b>Special subframe (30720·T<sub>s</sub>): Normal cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~4</b>	7.13%	8.33%
	<b>5~9</b>	14.3%	16.7%

<b>Special subframe(30720·T<sub>s</sub>): Extended cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~3</b>	7.13%	8.33%
	<b>4~7</b>	14.3%	16.7%

The highest duty factor is resulted from:

For LTE Band 41 Power class 3

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.



<LTE Band 41-ANT0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	20.66	20.49	20.68	20.51	20.60	22	0
20	QPSK	1	49	20.51	20.38	20.55	20.54	20.37		
20	QPSK	1	99	20.55	20.49	20.61	20.48	20.57		
20	QPSK	50	0	19.73	19.70	19.77	19.57	19.60	21	1
20	QPSK	50	24	19.73	19.56	19.74	19.65	19.67		
20	QPSK	50	50	19.50	19.67	19.68	19.63	19.52		
20	QPSK	100	0	19.57	19.64	19.73	19.70	19.69	21	1
20	16QAM	1	0	19.66	19.60	19.68	19.68	19.55		
20	16QAM	1	49	19.64	19.62	19.69	19.68	19.66		
20	16QAM	1	99	19.74	19.72	19.76	19.62	19.62	20	2
20	16QAM	50	0	18.65	18.67	18.81	18.67	18.67		
20	16QAM	50	24	18.61	18.65	18.80	18.72	18.65		
20	16QAM	50	50	18.64	18.69	18.71	18.58	18.57	20	2
20	16QAM	100	0	18.70	18.69	18.77	18.61	18.62		
20	64QAM	1	0	18.23	18.27	18.28	18.17	18.23		
20	64QAM	1	49	18.45	18.43	18.15	18.10	18.43	20	2
20	64QAM	1	99	18.29	18.14	18.17	18.14	18.13		
20	64QAM	50	0	17.62	17.67	17.77	17.66	17.76		
20	64QAM	50	24	17.68	17.66	17.78	17.68	17.67	19	3
20	64QAM	50	50	17.52	17.60	17.68	17.57	17.61		
20	64QAM	100	0	17.58	17.57	17.76	17.67	17.69		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	20.56	20.38	20.57	20.46	20.49	22	0
15	QPSK	1	37	20.31	20.35	20.50	20.39	20.26		
15	QPSK	1	74	20.38	20.38	20.55	20.41	20.53		
15	QPSK	36	0	19.53	19.53	19.68	19.45	19.52	21	1
15	QPSK	36	20	19.69	19.52	19.72	19.58	19.60		
15	QPSK	36	39	19.45	19.50	19.64	19.56	19.51		
15	QPSK	75	0	19.42	19.49	19.71	19.62	19.66	21	1
15	16QAM	1	0	19.57	19.56	19.51	19.58	19.46		
15	16QAM	1	37	19.57	19.46	19.59	19.50	19.53		
15	16QAM	1	74	19.56	19.68	19.73	19.61	19.48	20	2
15	16QAM	36	0	18.50	18.49	18.70	18.49	18.66		
15	16QAM	36	20	18.52	18.48	18.76	18.66	18.54		
15	16QAM	36	39	18.60	18.63	18.53	18.42	18.43	20	2
15	16QAM	75	0	18.56	18.57	18.61	18.49	18.53		
15	64QAM	1	0	18.12	18.13	18.22	18.16	18.19		
15	64QAM	1	37	18.21	18.12	18.20	18.20	18.02	20	2
15	64QAM	1	74	18.10	18.18	18.29	18.29	18.15		
15	64QAM	36	0	17.53	17.60	17.72	17.52	17.70		
15	64QAM	36	20	17.60	17.59	17.58	17.65	17.50	19	3
15	64QAM	36	39	17.45	17.44	17.53	17.41	17.57		
15	64QAM	75	0	17.58	17.46	17.56	17.49	17.63		



**FCC SAR TEST REPORT**

**Report No. : FA1D0310**

Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	20.52	20.42	20.58	20.33	20.41	22	0
10	QPSK	1	25	20.46	20.27	20.46	20.52	20.20		
10	QPSK	1	49	20.52	20.31	20.45	20.40	20.50		
10	QPSK	25	0	19.62	19.62	19.72	19.38	19.53	21	1
10	QPSK	25	12	19.69	19.52	19.65	19.49	19.62		
10	QPSK	25	25	19.42	19.54	19.64	19.47	19.46		
10	QPSK	50	0	19.43	19.61	19.71	19.65	19.53		
10	16QAM	1	0	19.51	19.52	19.58	19.54	19.41	21	1
10	16QAM	1	25	19.56	19.44	19.65	19.66	19.51		
10	16QAM	1	49	19.66	19.69	19.63	19.48	19.46		
10	16QAM	25	0	18.56	18.58	18.73	18.49	18.62	20	2
10	16QAM	25	12	18.58	18.52	18.61	18.64	18.64		
10	16QAM	25	25	18.49	18.62	18.65	18.46	18.54		
10	16QAM	50	0	18.67	18.55	18.69	18.43	18.56		
10	64QAM	1	0	18.04	18.18	18.20	18.06	18.10	20	2
10	64QAM	1	25	18.13	18.06	18.25	18.16	18.06		
10	64QAM	1	49	18.02	18.17	18.26	18.18	18.27		
10	64QAM	25	0	17.53	17.63	17.58	17.53	17.72	19	3
10	64QAM	25	12	17.53	17.57	17.69	17.59	17.58		
10	64QAM	25	25	17.37	17.44	17.48	17.49	17.50		
10	64QAM	50	0	17.42	17.52	17.62	17.51	17.63		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	20.65	20.48	20.67	20.35	20.55	22	0
5	QPSK	1	12	20.47	20.29	20.43	20.51	20.30		
5	QPSK	1	24	20.46	20.44	20.56	20.38	20.52		
5	QPSK	12	0	19.54	19.69	19.68	19.54	19.44	21	1
5	QPSK	12	7	19.64	19.46	19.73	19.63	19.64		
5	QPSK	12	13	19.43	19.66	19.51	19.44	19.49		
5	QPSK	25	0	19.55	19.45	19.65	19.52	19.62		
5	16QAM	1	0	19.48	19.45	19.62	19.52	19.48	21	1
5	16QAM	1	12	19.47	19.45	19.60	19.54	19.55		
5	16QAM	1	24	19.62	19.54	19.65	19.47	19.53		
5	16QAM	12	0	18.46	18.65	18.68	18.50	18.63	20	2
5	16QAM	12	7	18.41	18.47	18.67	18.67	18.49		
5	16QAM	12	13	18.45	18.65	18.66	18.55	18.45		
5	16QAM	25	0	18.52	18.57	18.65	18.42	18.46		
5	64QAM	1	0	18.19	18.20	18.12	18.15	18.04	20	2
5	64QAM	1	12	18.30	18.42	18.18	18.15	18.07		
5	64QAM	1	24	18.15	18.28	18.22	18.16	18.25		
5	64QAM	12	0	17.57	17.67	17.64	17.54	17.61	19	3
5	64QAM	12	7	17.52	17.61	17.62	17.61	17.54		
5	64QAM	12	13	17.49	17.48	17.54	17.44	17.59		
5	64QAM	25	0	17.47	17.53	17.71	17.64	17.63		



**<LTE Carrier Aggregation>**

**General Note:**

1. This device supports Carrier Aggregation on downlink for inter. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. All permutations exist. No restrictions on Pcell & Scell combinations.

Index	2CC
2CC #1	41C

**LTE Carrier Aggregation Conducted Power (Downlink)**

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

**<Two Carrier power verification>**

Configure	PCC								SCC				Power	
	LTE	Ant	BW	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA	
	Band		(MHz)	Freq. (MHz)		Channel	RB	RB Offset	Band	(MHz)	Freq. (MHz)	Channel	Tx. Power (dBm)	Tx. Power (dBm)
CA_41C	Band 41	4	20M	2593	40620	QPSK	1	0	Band 41	20M	2612.8	40818	20.59	20.68

## **12. WiFi/Bluetooth Output Power (Unit: dBm)**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.





<WLAN>

2.4GHz WLAN				Ant 6		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
2.4GHz WLAN 802.11b 1Mbps	1	2412	13.73	15.00	100.00	
	6	2437	13.87	15.00		
	11	2462	13.75	15.00		
802.11g 6Mbps	1	2412	13.77	15.00	97.93	
	6	2437	13.85	15.00		
	11	2462	13.82	15.00		
802.11n-HT20 MCS0	1	2412	13.88	15.00	98.52	
	6	2437	13.64	15.00		
	11	2462	13.93	15.00		

2.4GHz WLAN				Ant 7		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
2.4GHz WLAN 802.11b 1Mbps	1	2412	13.05	15.00	100.00	
	6	2437	13.06	15.00		
	11	2462	13.02	15.00		
802.11g 6Mbps	1	2412	13.04	15.00	97.95	
	6	2437	13.07	15.00		
	11	2462	13.01	15.00		
802.11n-HT20 MCS0	1	2412	13.11	15.00	98.52	
	6	2437	13.08	15.00		
	11	2462	13.12	15.00		

2.4GHz WLAN				Ant 6+7		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
2.4GHz WLAN 802.11b 1Mbps	1	2412	16.18	18.00	100.00	
	6	2437	16.29	18.00		
	11	2462	16.20	18.00		
802.11g 6Mbps	1	2412	16.22	18.00	97.95	
	6	2437	16.32	18.00		
	11	2462	16.25	18.00		
802.11n-HT20 MCS0	1	2412	16.43	18.00	98.52	
	6	2437	16.16	18.00		
	11	2462	16.48	18.00		



5.2GHz WLAN				Ant 6		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.2GHz WLAN	802.11a 6Mbps	36	5180	11.98	13.00	98.28
		40	5200	11.99	13.00	
		44	5220	11.83	13.00	
		48	5240	11.81	13.00	
	802.11n-HT20 MCS0	36	5180	11.95	13.00	98.16
		40	5200	11.93	13.00	
		44	5220	11.75	13.00	
		48	5240	11.79	13.00	
	802.11n-HT40 MCS0	38	5190	10.69	12.00	96.32
		46	5230	10.75	12.00	
	802.11ac-VHT20 MCS0	36	5180	11.98	13.00	98.16
		40	5200	11.96	13.00	
44		5220	11.79	13.00		
48		5240	11.80	13.00		
802.11ac-VHT40 MCS0	38	5190	10.71	12.00	96.35	
	46	5230	10.78	12.00		
802.11ac-VHT80 MCS0	42	5210	9.99	11.00	93.00	

5.2GHz WLAN				Ant 7		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.2GHz WLAN	802.11a 6Mbps	36	5180	11.97	13.00	98.28
		40	5200	11.71	13.00	
		44	5220	11.13	13.00	
		48	5240	11.03	13.00	
	802.11n-HT20 MCS0	36	5180	11.81	13.00	98.16
		40	5200	11.61	13.00	
		44	5220	11.02	13.00	
		48	5240	11.01	13.00	
	802.11n-HT40 MCS0	38	5190	10.44	12.00	96.32
		46	5230	10.05	12.00	
	802.11ac-VHT20 MCS0	36	5180	11.93	13.00	98.16
		40	5200	11.66	13.00	
44		5220	11.06	13.00		
48		5240	11.04	13.00		
802.11ac-VHT40 MCS0	38	5190	10.48	12.00	96.35	
	46	5230	10.09	12.00		
802.11ac-VHT80 MCS0	42	5210	9.07	11.00	93.04	



5.2GHz WLAN				Ant 6+7		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.98	16.00	98.28
		40	5200	14.86	16.00	
		44	5220	14.44	16.00	
		48	5240	14.35	16.00	
	802.11n-HT20 MCS0	36	5180	14.89	16.00	98.16
		40	5200	14.78	16.00	
		44	5220	14.32	16.00	
		48	5240	14.33	16.00	
	802.11n-HT40 MCS0	38	5190	13.58	15.00	96.32
		46	5230	13.43	15.00	
	802.11ac-VHT20 MCS0	36	5180	14.97	16.00	98.16
		40	5200	14.82	16.00	
44		5220	14.36	16.00		
48		5240	14.36	16.00		
802.11ac-VHT40 MCS0	38	5190	13.61	15.00	96.35	
	46	5230	13.46	15.00		
802.11ac-VHT80 MCS0	42	5210	12.57	14.00	93.04	

5.3GHz WLAN				Ant 6		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.3GHz WLAN	802.11a 6Mbps	52	5260	11.74	13.00	98.28
		56	5280	11.60	13.00	
		60	5300	11.89	13.00	
		64	5320	11.76	13.00	
	802.11n-HT20 MCS0	52	5260	11.73	13.00	98.16
		56	5280	11.60	13.00	
		60	5300	11.84	13.00	
		64	5320	11.69	13.00	
	802.11n-HT40 MCS0	54	5270	10.59	12.00	96.32
		62	5310	10.93	12.00	
	802.11ac-VHT20 MCS0	52	5260	11.75	13.00	98.16
		56	5280	11.63	13.00	
		60	5300	11.86	13.00	
		64	5320	11.71	13.00	
	802.11ac-VHT40 MCS0	54	5270	10.64	12.00	96.35
		62	5310	10.99	12.00	
802.11ac-VHT80 MCS0	58	5290	9.78	11.00	93.00	



5.3GHz WLAN				Ant 7		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.3GHz WLAN	802.11a 6Mbps	52	5260	11.07	13.00	98.28
		56	5280	11.15	13.00	
		60	5300	11.61	13.00	
		64	5320	11.52	13.00	
	802.11n-HT20 MCS0	52	5260	11.02	13.00	98.16
		56	5280	11.06	13.00	
		60	5300	11.45	13.00	
		64	5320	11.43	13.00	
	802.11n-HT40 MCS0	54	5270	10.18	12.00	96.32
		62	5310	10.38	12.00	
	802.11ac-VHT20 MCS0	52	5260	11.13	13.00	98.16
		56	5280	11.10	13.00	
60		5300	11.46	13.00		
64		5320	11.47	13.00		
802.11ac-VHT40 MCS0	54	5270	10.21	12.00	96.35	
	62	5310	10.40	12.00		
802.11ac-VHT80 MCS0	58	5290	9.39	11.00	93.04	

5.3GHz WLAN				Ant 6+7		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.3GHz WLAN	802.11a 6Mbps	52	5260	14.39	16.00	98.28
		56	5280	14.39	16.00	
		60	5300	14.76	16.00	
		64	5320	14.65	16.00	
	802.11n-HT20 MCS0	52	5260	14.37	16.00	98.16
		56	5280	14.35	16.00	
		60	5300	14.66	16.00	
		64	5320	14.57	16.00	
	802.11n-HT40 MCS0	54	5270	13.40	15.00	96.32
		62	5310	13.68	15.00	
	802.11ac-VHT20 MCS0	52	5260	14.40	16.00	98.16
		56	5280	14.38	16.00	
60		5300	14.68	16.00		
64		5320	14.60	16.00		
802.11ac-VHT40 MCS0	54	5270	13.44	15.00	96.35	
	62	5310	13.72	15.00		
802.11ac-VHT80 MCS0	58	5290	12.60	14.00	93.04	



5.5GHz WLAN				Ant 6		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.5GHz WLAN	802.11a 6Mbps	100	5500	11.95	13.00	98.28
		116	5580	11.82	13.00	
		124	5620	11.75	13.00	
		132	5660	11.68	13.00	
		140	5700	11.82	13.00	
		144	5720	11.87	13.00	
	802.11n-HT20 MCS0	100	5500	11.97	13.00	98.16
		116	5580	11.82	13.00	
		124	5620	11.74	13.00	
		132	5660	11.70	13.00	
		140	5700	11.81	13.00	
		144	5720	11.85	13.00	
	802.11n-HT40 MCS0	102	5510	10.95	12.00	96.32
		110	5550	10.92	12.00	
		126	5630	10.68	12.00	
		134	5670	10.77	12.00	
		142	5710	10.82	12.00	
	802.11ac-VHT20 MCS0	100	5500	11.98	13.00	98.16
		116	5580	11.84	13.00	
		124	5620	11.75	13.00	
		132	5660	11.73	13.00	
140		5700	11.82	13.00		
144		5720	11.91	13.00		
802.11ac-VHT40 MCS0	102	5510	10.97	12.00	96.35	
	110	5550	10.96	12.00		
	126	5630	10.73	12.00		
	134	5670	10.80	12.00		
	142	5710	10.86	12.00		
802.11ac-VHT80 MCS0	106	5530	9.70	11.00	93.00	
	122	5610	9.83	11.00		
	138	5690	9.92	11.00		



5.5GHz WLAN				Ant 7		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	11.04	13.00	98.28	
	116	5580	11.01	13.00		
	124	5620	11.02	13.00		
	132	5660	11.03	13.00		
	140	5700	11.14	13.00		
	144	5720	11.04	13.00		
802.11n-HT20 MCS0	100	5500	11.03	13.00	98.16	
	116	5580	11.02	13.00		
	124	5620	11.04	13.00		
	132	5660	11.01	13.00		
	140	5700	11.11	13.00		
	144	5720	11.09	13.00		
802.11n-HT40 MCS0	102	5510	10.03	12.00	96.32	
	110	5550	10.02	12.00		
	126	5630	10.11	12.00		
	134	5670	10.13	12.00		
	142	5710	10.11	12.00		
802.11ac-VHT20 MCS0	100	5500	11.05	13.00	98.16	
	116	5580	11.03	13.00		
	124	5620	11.04	13.00		
	132	5660	11.02	13.00		
	140	5700	11.04	13.00		
	144	5720	11.02	13.00		
802.11ac-VHT40 MCS0	102	5510	10.04	12.00	96.35	
	110	5550	10.02	12.00		
	126	5630	10.01	12.00		
	134	5670	10.18	12.00		
	142	5710	10.15	12.00		
802.11ac-VHT80 MCS0	106	5530	9.08	11.00	93.04	
	122	5610	9.03	11.00		
	138	5690	9.34	11.00		



5.5GHz WLAN				Ant 6+7		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	14.44	16.00	98.28	
	116	5580	14.23	16.00		
	124	5620	14.30	16.00		
	132	5660	14.36	16.00		
	140	5700	14.50	16.00		
	144	5720	14.44	16.00		
802.11n-HT20 MCS0	100	5500	14.41	16.00	98.16	
	116	5580	14.19	16.00		
	124	5620	14.24	16.00		
	132	5660	14.38	16.00		
	140	5700	14.42	16.00		
	144	5720	14.41	16.00		
802.11n-HT40 MCS0	102	5510	13.44	15.00	96.32	
	110	5550	13.33	15.00		
	126	5630	13.33	15.00		
	134	5670	13.47	15.00		
	142	5710	13.49	15.00		
802.11ac-VHT20 MCS0	100	5500	14.42	16.00	98.16	
	116	5580	14.21	16.00		
	124	5620	14.25	16.00		
	132	5660	14.40	16.00		
	140	5700	14.46	16.00		
	144	5720	14.47	16.00		
802.11ac-VHT40 MCS0	102	5510	13.45	15.00	96.35	
	110	5550	13.36	15.00		
	126	5630	13.38	15.00		
	134	5670	13.51	15.00		
	142	5710	13.53	15.00		
802.11ac-VHT80 MCS0	106	5530	12.16	14.00	93.04	
	122	5610	12.39	14.00		
	138	5690	12.65	14.00		





5.8GHz WLAN				Ant 6		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.8GHz WLAN	802.11a 6Mbps	149	5745	7.79	9.00	98.28
		157	5785	7.99	9.00	
		165	5825	7.85	9.00	
	802.11n-HT20 MCS0	149	5745	7.77	9.00	98.16
		157	5785	7.91	9.00	
		165	5825	7.86	9.00	
	802.11n-HT40 MCS0	151	5755	7.74	9.00	96.32
		159	5795	7.87	9.00	
	802.11ac-VHT20 MCS0	149	5745	7.78	9.00	98.16
		157	5785	7.94	9.00	
		165	5825	7.89	9.00	
	802.11ac-VHT40 MCS0	151	5755	7.87	9.00	96.35
159		5795	7.98	9.00		
802.11ac-VHT80 MCS0	155	5775	7.93	9.00	93.04	

5.8GHz WLAN				Ant 7		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.8GHz WLAN	802.11a 6Mbps	149	5745	7.40	9.00	98.28
		157	5785	7.45	9.00	
		165	5825	7.26	9.00	
	802.11n-HT20 MCS0	149	5745	7.27	9.00	98.16
		157	5785	7.53	9.00	
		165	5825	7.51	9.00	
	802.11n-HT40 MCS0	151	5755	7.24	9.00	96.32
		159	5795	7.42	9.00	
	802.11ac-VHT20 MCS0	149	5745	7.30	9.00	98.16
		157	5785	7.56	9.00	
		165	5825	7.55	9.00	
	802.11ac-VHT40 MCS0	151	5755	7.28	9.00	96.35
159		5795	7.52	9.00		
802.11ac-VHT80 MCS0	155	5775	7.40	9.00	93.04	



5.8GHz WLAN				Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	10.61	12.00	98.28
		157	5785	10.73	12.00	
		165	5825	10.57	12.00	
	802.11n-HT20 MCS0	149	5745	10.54	12.00	98.16
		157	5785	10.74	12.00	
		165	5825	10.70	12.00	
	802.11n-HT40 MCS0	151	5755	10.51	12.00	96.32
		159	5795	10.66	12.00	
	802.11ac-VHT20 MCS0	149	5745	10.56	12.00	98.16
		157	5785	10.77	12.00	
		165	5825	10.73	12.00	
	802.11ac-VHT40 MCS0	151	5755	10.60	12.00	96.35
		159	5795	10.77	12.00	
	802.11ac-VHT80 MCS0		155	5775	10.69	12.00




**<2.4GHz Bluetooth>**

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	9.94	7.11	6.98
	CH 39	2441	10.08	6.94	7.09
	CH 78	2480	9.89	7.16	7.13
Tune-up Limit			11.50	8.50	8.50

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	5.34	5.50
	CH 19	2440	5.08	5.38
	CH 39	2480	5.68	5.67
Tune-up Limit			6.50	6.50

**General Note:**

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power.

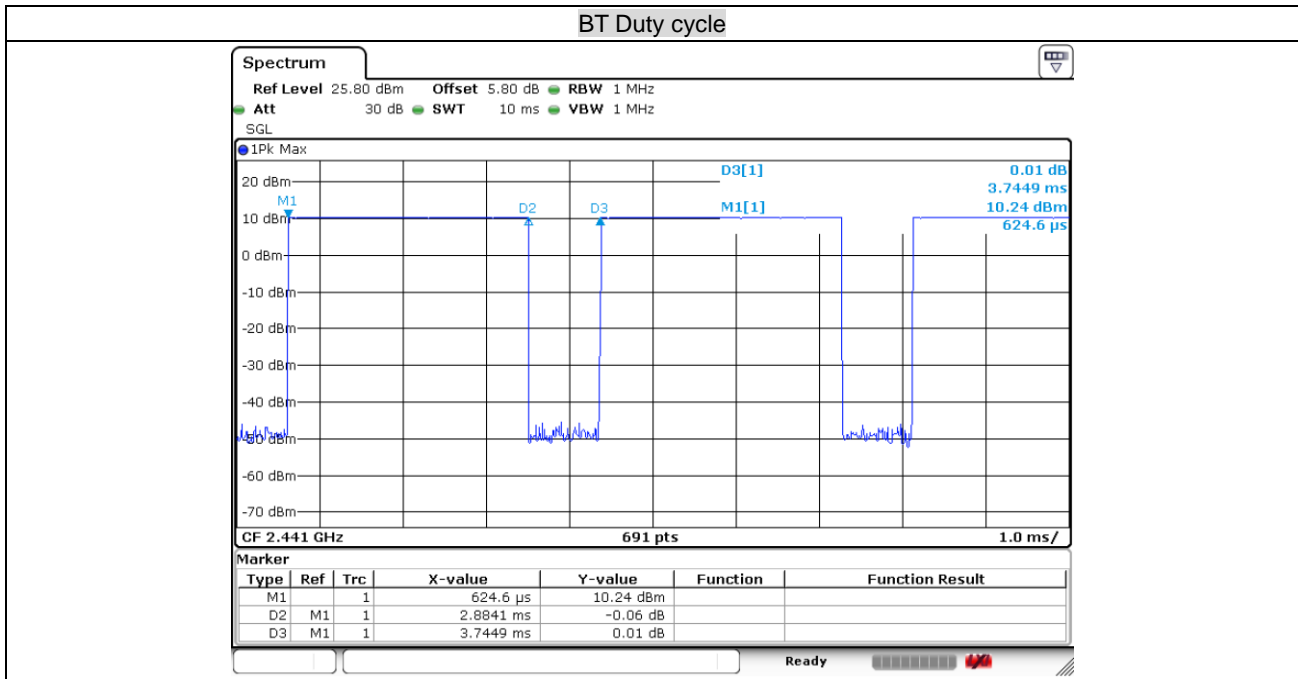

### 13. RF Exposure Conditions

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Ant 0	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Ant 1	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm
BT & 2.4GHz& 5GHz WLAN Ant 6	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
2.4GHz & 5GHz WLAN Ant 7	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Ant 0	Yes	Yes	No	Yes	Yes	Yes
WWAN Ant 1	Yes	Yes	No	Yes	No	Yes
BT & 2.4GHz& 5GHz WLAN Ant 6	Yes	Yes	Yes	No	No	Yes
2.4GHz & 5GHz WLAN Ant 7	Yes	Yes	No	No	Yes	No

**General Note:**

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge, The detail antenna location please refers to Appendix D.

### 14. SAR Test Results

**General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
  - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR (W/kg) = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
  - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. For 5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16cm.
6. For WLAN Ant 6 and WLAN Ant 7 at hotspot and extremity exposure condition, SAR testing is not required at WLAN Ant 6 right side and WLAN Ant 7 top side, but we still perform additional testing for WLAN Ant 6 right side and WLAN Ant 7 top side which keeps for more conservatively for simultaneous transmission analysis.

**GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode respectively.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

**UMTS Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA, HSPA+) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band. But we still perform additional testing for U-NII-1 at body-worn exposure condition which keeps for more conservatively for simultaneous transmission analysis.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 0	189	836.4	27.50	29.00	1.413	0.02	0.360	0.509
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 0	189	836.4	27.50	29.00	1.413	0.1	0.225	0.318
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	Ant 0	189	836.4	27.50	29.00	1.413	-0.07	0.308	0.435
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	Ant 0	189	836.4	27.50	29.00	1.413	0.07	0.205	0.290
02	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 1	661	1880	22.68	24.00	1.355	0.09	0.083	0.112
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	661	1880	22.68	24.00	1.355	0.08	0.053	0.072
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	Ant 1	661	1880	22.68	24.00	1.355	0.07	0.077	0.104
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	Ant 1	661	1880	22.68	24.00	1.355	0.12	0.053	0.072

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	4182	836.4	23.69	24.50	1.205	0.02	0.269	0.324
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	4182	836.4	23.69	24.50	1.205	-0.12	0.154	0.186
03	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	4182	836.4	23.69	24.50	1.205	0.01	0.277	0.334
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	4182	836.4	23.69	24.50	1.205	-0.17	0.158	0.190
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	1413	1732.6	22.37	23.00	1.156	-0.08	0.130	0.150
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	1413	1732.6	22.37	23.00	1.156	0.13	0.108	0.125
04	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	1413	1732.6	22.37	23.00	1.156	-0.01	0.132	0.153
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	1413	1732.6	22.37	23.00	1.156	0.06	0.118	0.136

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Right Cheek	0mm	Ant 1	20175	1732.5	19.97	21.00	1.268	0.07	0.071	0.090
	LTE Band 4	20M	QPSK	50	0	Right Cheek	0mm	Ant 1	20175	1732.5	18.85	20.00	1.303	0.19	0.057	0.074
	LTE Band 4	20M	QPSK	1	0	Right Tilted	0mm	Ant 1	20175	1732.5	19.97	21.00	1.268	0.01	0.062	0.079
	LTE Band 4	20M	QPSK	50	0	Right Tilted	0mm	Ant 1	20175	1732.5	18.85	20.00	1.303	0.19	0.050	0.065
05	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	Ant 1	20175	1732.5	19.97	21.00	1.268	0.01	0.073	0.093
	LTE Band 4	20M	QPSK	50	0	Left Cheek	0mm	Ant 1	20175	1732.5	18.85	20.00	1.303	0.08	0.058	0.076
	LTE Band 4	20M	QPSK	1	0	Left Tilted	0mm	Ant 1	20175	1732.5	19.97	21.00	1.268	0.08	0.064	0.081
	LTE Band 4	20M	QPSK	50	0	Left Tilted	0mm	Ant 1	20175	1732.5	18.85	20.00	1.303	0.01	0.052	0.068
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	Ant 0	20525	836.5	23.30	24.50	1.318	0.02	0.223	0.294
	LTE Band 5	10M	QPSK	25	0	Right Cheek	0mm	Ant 0	20525	836.5	22.44	23.50	1.276	0.05	0.198	0.253
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	Ant 0	20525	836.5	23.30	24.50	1.318	0.05	0.145	0.191
	LTE Band 5	10M	QPSK	25	0	Right Tilted	0mm	Ant 0	20525	836.5	22.44	23.50	1.276	-0.16	0.112	0.143
06	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	Ant 0	20525	836.5	23.30	24.50	1.318	-0.03	0.245	0.323
	LTE Band 5	10M	QPSK	25	0	Left Cheek	0mm	Ant 0	20525	836.5	22.44	23.50	1.276	0.12	0.187	0.239
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	Ant 0	20525	836.5	23.30	24.50	1.318	-0.1	0.127	0.167
	LTE Band 5	10M	QPSK	25	0	Left Tilted	0mm	Ant 0	20525	836.5	22.44	23.50	1.276	0.07	0.101	0.129



**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	0mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	-0.07	0.021	0.029
	LTE Band 41	20M	QPSK	50	0	Right Cheek	0mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	0.05	0.011	0.015
	LTE Band 41	20M	QPSK	1	0	Right Tilted	0mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	0.14	0.008	0.011
	LTE Band 41	20M	QPSK	50	0	Right Tilted	0mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	-0.14	0.006	0.008
07	LTE Band 41	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	-0.06	0.035	<b>0.048</b>
	LTE Band 41	20M	QPSK	50	0	Left Cheek	0mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	0.12	0.031	0.041
	LTE Band 41	20M	QPSK	1	0	Left Tilted	0mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	-0.05	0.012	0.016
	LTE Band 41	20M	QPSK	50	0	Left Tilted	0mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	-0.05	0.008	0.011

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	-0.17	0.142	0.184
08	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	0.08	0.147	<b>0.191</b>
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	0.07	0.080	0.104
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	-0.18	0.083	0.108
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 7	6	2437	13.06	15.00	1.563	100	1.000	0.06	0.004	0.006
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 7	6	2437	13.06	15.00	1.563	100	1.000	-0.15	0.003	0.005
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 7	6	2437	13.06	15.00	1.563	100	1.000	0.07	0.011	0.017
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 7	6	2437	13.06	15.00	1.563	100	1.000	0.09	0.008	0.013
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	0.07	0.140	0.184
09	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	0.03	0.161	<b>0.212</b>
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	0.05	0.086	0.113
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	0.02	0.106	0.139
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 7	60	5300	11.61	13.00	1.377	98.28	1.018	0.07	0.045	0.063
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 7	60	5300	11.61	13.00	1.377	98.28	1.018	-0.07	0.048	0.067
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 7	60	5300	11.61	13.00	1.377	98.28	1.018	0.01	0.054	0.076
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	60	5300	11.61	13.00	1.377	98.28	1.018	0.01	0.083	0.116
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	0.02	0.201	0.261
10	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	-0.09	0.220	<b>0.285</b>
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	0.14	0.139	0.180
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	0.05	0.166	0.215
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 7	140	5700	11.14	13.00	1.535	98.28	1.018	0.12	0.103	0.161
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 7	140	5700	11.14	13.00	1.535	98.28	1.018	0.01	0.102	0.159
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 7	140	5700	11.14	13.00	1.535	98.28	1.018	-0.11	0.060	0.094
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	140	5700	11.14	13.00	1.535	98.28	1.018	0.18	0.054	0.084
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	0.09	0.019	0.026
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	0.16	0.011	0.015
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	0.07	0.011	0.015
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	0.13	0.013	0.018
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 7	155	5775	7.40	9.00	1.445	93.04	1.075	0.17	0.042	0.065
11	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 7	155	5775	7.40	9.00	1.445	93.04	1.075	0.02	0.100	<b>0.155</b>
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 7	155	5775	7.40	9.00	1.445	93.04	1.075	0.09	0.064	0.099
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 7	155	5775	7.40	9.00	1.445	93.04	1.075	0.16	0.071	0.110



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	-0.09	0.050	0.090
12	Bluetooth	1Mbps	Right Tilted	0mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	-0.1	0.057	0.103
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	-0.09	0.031	0.056
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	-0.11	0.028	0.050



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	Ant 0	189	836.4	27.50	29.00	1.413	0.05	0.354	0.500
13	GSM850	GPRS (4 Tx slots)	Back	10mm	Ant 0	189	836.4	27.50	29.00	1.413	-0.06	0.545	0.770
	GSM850	GPRS (4 Tx slots)	Left Side	10mm	Ant 0	189	836.4	27.50	29.00	1.413	-0.06	0.282	0.398
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	Ant 0	189	836.4	27.50	29.00	1.413	0.11	0.391	0.552
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	Ant 0	189	836.4	27.50	29.00	1.413	-0.07	0.279	0.394
	GSM1900	GPRS (4 Tx slots)	Front	10mm	Ant 1	661	1880	22.68	24.00	1.355	0.07	0.195	0.264
14	GSM1900	GPRS (4 Tx slots)	Back	10mm	Ant 1	661	1880	22.68	24.00	1.355	-0.02	0.274	0.371
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	Ant 1	661	1880	22.68	24.00	1.355	-0.05	0.108	0.146
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	Ant 1	661	1880	22.68	24.00	1.355	-0.13	0.147	0.199

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	10mm	Ant 0	4182	836.4	23.69	24.50	1.205	0.04	0.213	0.257
15	WCDMA V	RMC 12.2Kbps	Back	10mm	Ant 0	4182	836.4	23.69	24.50	1.205	0.01	0.486	0.586
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	Ant 0	4182	836.4	23.69	24.50	1.205	-0.12	0.064	0.077
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	Ant 0	4182	836.4	23.69	24.50	1.205	0.06	0.183	0.221
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	Ant 0	4182	836.4	23.69	24.50	1.205	0.16	0.052	0.063
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Ant 1	1413	1732.6	22.37	23.00	1.156	-0.01	0.339	0.392
16	WCDMA IV	RMC 12.2Kbps	Back	10mm	Ant 1	1413	1732.6	22.37	23.00	1.156	-0.05	0.475	0.549
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	Ant 1	1413	1732.6	22.37	23.00	1.156	-0.15	0.263	0.304
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	Ant 1	1413	1732.6	22.37	23.00	1.156	-0.03	0.371	0.429

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Front	10mm	Ant 1	20175	1732.5	19.97	21.00	1.268	0.05	0.192	0.243
	LTE Band 4	20M	QPSK	50	0	Front	10mm	Ant 1	20175	1732.5	18.85	20.00	1.303	0.06	0.153	0.199
17	LTE Band 4	20M	QPSK	1	0	Back	10mm	Ant 1	20175	1732.5	19.97	21.00	1.268	-0.02	0.268	0.340
	LTE Band 4	20M	QPSK	50	0	Back	10mm	Ant 1	20175	1732.5	18.85	20.00	1.303	-0.17	0.216	0.281
	LTE Band 4	20M	QPSK	1	0	Left Side	10mm	Ant 1	20175	1732.5	19.97	21.00	1.268	-0.13	0.106	0.134
	LTE Band 4	20M	QPSK	50	0	Left Side	10mm	Ant 1	20175	1732.5	18.85	20.00	1.303	0.18	0.084	0.109
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	Ant 1	20175	1732.5	19.97	21.00	1.268	0.05	0.162	0.205
	LTE Band 4	20M	QPSK	50	0	Bottom Side	10mm	Ant 1	20175	1732.5	18.85	20.00	1.303	0.07	0.132	0.172
	LTE Band 5	10M	QPSK	1	0	Front	10mm	Ant 0	20525	836.5	23.30	24.50	1.318	0.03	0.223	0.294
	LTE Band 5	10M	QPSK	25	0	Front	10mm	Ant 0	20525	836.5	22.44	23.50	1.276	0.05	0.182	0.232
18	LTE Band 5	10M	QPSK	1	0	Back	10mm	Ant 0	20525	836.5	23.30	24.50	1.318	-0.05	0.343	0.452
	LTE Band 5	10M	QPSK	25	0	Back	10mm	Ant 0	20525	836.5	22.44	23.50	1.276	-0.11	0.272	0.347
	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	Ant 0	20525	836.5	23.30	24.50	1.318	0.06	0.164	0.216
	LTE Band 5	10M	QPSK	25	0	Left Side	10mm	Ant 0	20525	836.5	22.44	23.50	1.276	0.04	0.127	0.162
	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	Ant 0	20525	836.5	23.30	24.50	1.318	0.07	0.235	0.310
	LTE Band 5	10M	QPSK	25	0	Right Side	10mm	Ant 0	20525	836.5	22.44	23.50	1.276	0.04	0.168	0.214
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	Ant 0	20525	836.5	23.30	24.50	1.318	-0.03	0.187	0.247
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10mm	Ant 0	20525	836.5	22.44	23.50	1.276	0.07	0.153	0.195

**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	0.18	0.157	0.214
	LTE Band 41	20M	QPSK	50	0	Front	10mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	0.08	0.129	0.172
19	LTE Band 41	20M	QPSK	1	0	Back	10mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	0.08	0.397	<b>0.541</b>
	LTE Band 41	20M	QPSK	50	0	Back	10mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	0.11	0.319	0.426
	LTE Band 41	20M	QPSK	1	0	Left Side	10mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	0.08	0.103	0.140
	LTE Band 41	20M	QPSK	50	0	Left Side	10mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	0.07	0.069	0.092
	LTE Band 41	20M	QPSK	1	0	Right Side	10mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	0.05	0.081	0.110
	LTE Band 41	20M	QPSK	50	0	Right Side	10mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	0.08	0.063	0.084
	LTE Band 41	20M	QPSK	1	0	Bottom Side	10mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	-0.09	0.302	0.412
	LTE Band 41	20M	QPSK	50	0	Bottom Side	10mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	-0.07	0.248	0.331

**<WLANSAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	0.07	0.002	0.003
20	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	-0.02	0.091	<b>0.118</b>
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	0.18	0.005	0.006
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	0.08	0.003	0.004
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	0.04	0.003	0.004
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 7	6	2437	13.06	15.00	1.563	100.00	1.000	-0.07	0.003	0.005
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	6	2437	13.06	15.00	1.563	100.00	1.000	-0.01	0.017	0.027
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 7	6	2437	13.06	15.00	1.563	100.00	1.000	0.12	0.011	0.017
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 7	6	2437	13.06	15.00	1.563	100.00	1.000	-0.11	0.002	0.003
	WLAN5.2GHz	802.11a 6Mbps	Front	10mm	Ant 6	40	5200	11.99	13.00	1.262	98.28	1.018	0.18	0.055	0.071
21	WLAN5.2GHz	802.11a 6Mbps	Back	10mm	Ant 6	40	5200	11.99	13.00	1.262	98.28	1.018	-0.08	0.103	<b>0.132</b>
	WLAN5.2GHz	802.11a 6Mbps	Left Side	10mm	Ant 6	40	5200	11.99	13.00	1.262	98.28	1.018	0.03	0.048	0.062
	WLAN5.2GHz	802.11a 6Mbps	Right Side	10mm	Ant 6	40	5200	11.99	13.00	1.262	98.28	1.018	0.03	0.045	0.058
	WLAN5.2GHz	802.11a 6Mbps	Top Side	10mm	Ant 6	40	5200	11.99	13.00	1.262	98.28	1.018	-0.16	0.053	0.068
	WLAN5.2GHz	802.11a 6Mbps	Front	10mm	Ant 7	36	5180	11.97	13.00	1.268	98.28	1.018	-0.02	0.040	0.052
	WLAN5.2GHz	802.11a 6Mbps	Back	10mm	Ant 7	36	5180	11.97	13.00	1.268	98.28	1.018	-0.01	0.055	0.071
	WLAN5.2GHz	802.11a 6Mbps	Right Side	10mm	Ant 7	36	5180	11.97	13.00	1.268	98.28	1.018	-0.09	0.033	0.043
	WLAN5.2GHz	802.11a 6Mbps	Top Side	10mm	Ant 7	36	5180	11.97	13.00	1.268	98.28	1.018	0.05	0.031	0.040
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	0.11	0.040	0.055
22	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	-0.03	0.067	<b>0.092</b>
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Side	10mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	-0.09	0.059	0.081
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	0.13	0.053	0.073
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	0.04	0.044	0.061
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 7	155	5775	7.40	9.00	1.445	93.04	1.075	-0.03	0.020	0.031
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 7	155	5775	7.40	9.00	1.445	93.04	1.075	0.09	0.019	0.030
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 7	155	5775	7.40	9.00	1.445	93.04	1.075	-0.04	0.018	0.028
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 7	155	5775	7.40	9.00	1.445	93.04	1.075	0.13	0.016	0.025



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	0.11	0.033	0.059
23	Bluetooth	1Mbps	Back	10mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	0.08	0.042	0.076
	Bluetooth	1Mbps	Left Side	10mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	0.02	0.037	0.067
	Bluetooth	1Mbps	Right Side	10mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	0.08	0.027	0.049
	Bluetooth	1Mbps	Top Side	10mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	0.08	0.022	0.040

**14.3 Body Worn Accessory SAR**
**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	Ant 0	189	836.4	27.50	29.00	1.413	0.05	0.354	0.500
24	GSM850	GPRS (4 Tx slots)	Back	10mm	Ant 0	189	836.4	27.50	29.00	1.413	-0.06	0.545	<b>0.770</b>
	GSM1900	GPRS (4 Tx slots)	Front	10mm	Ant 1	661	1880	22.68	24.00	1.355	0.07	0.195	0.264
25	GSM1900	GPRS (4 Tx slots)	Back	10mm	Ant 1	661	1880	22.68	24.00	1.355	-0.02	0.274	<b>0.371</b>

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	10mm	Ant 0	4182	836.4	23.69	24.50	1.205	0.04	0.213	0.257
26	WCDMA V	RMC 12.2Kbps	Back	10mm	Ant 0	4182	836.4	23.69	24.50	1.205	0.01	0.486	<b>0.586</b>
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Ant 1	1413	1732.6	22.37	23.00	1.156	-0.01	0.339	0.392
27	WCDMA IV	RMC 12.2Kbps	Back	10mm	Ant 1	1413	1732.6	22.37	23.00	1.156	-0.05	0.475	<b>0.549</b>

**<FDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Front	10mm	Ant 1	20175	1732.5	19.97	21.00	1.268	0.05	0.192	0.243
	LTE Band 4	20M	QPSK	50	0	Front	10mm	Ant 1	20175	1732.5	18.85	20.00	1.303	0.06	0.153	0.199
28	LTE Band 4	20M	QPSK	1	0	Back	10mm	Ant 1	20175	1732.5	19.97	21.00	1.268	-0.02	0.268	<b>0.340</b>
	LTE Band 4	20M	QPSK	50	0	Back	10mm	Ant 1	20175	1732.5	18.85	20.00	1.303	-0.17	0.216	0.281
	LTE Band 5	10M	QPSK	1	0	Front	10mm	Ant 0	20525	836.5	23.30	24.50	1.318	0.03	0.223	0.294
	LTE Band 5	10M	QPSK	25	0	Front	10mm	Ant 0	20525	836.5	22.44	23.50	1.276	0.05	0.182	0.232
29	LTE Band 5	10M	QPSK	1	0	Back	10mm	Ant 0	20525	836.5	23.30	24.50	1.318	-0.05	0.343	<b>0.452</b>
	LTE Band 5	10M	QPSK	25	0	Back	10mm	Ant 0	20525	836.5	22.44	23.50	1.276	-0.11	0.272	0.347

**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	0.18	0.157	0.214
	LTE Band 41	20M	QPSK	50	0	Front	10mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	0.08	0.129	0.172
30	LTE Band 41	20M	QPSK	1	0	Back	10mm	Ant 0	40620	2593	20.68	22.00	1.355	62.9	1.006	0.08	0.397	<b>0.541</b>
	LTE Band 41	20M	QPSK	50	0	Back	10mm	Ant 0	40620	2593	19.77	21.00	1.327	62.9	1.006	0.11	0.319	0.426

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	0.07	0.002	0.003
31	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 6	6	2437	13.87	15.00	1.297	100	1.000	-0.02	0.091	<b>0.118</b>
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 7	6	2437	13.06	15.00	1.563	100.00	1.000	-0.07	0.003	0.005
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	6	2437	13.06	15.00	1.563	100.00	1.000	-0.01	0.017	0.027
	WLAN5.2GHz	802.11a 6Mbps	Front	10mm	Ant 6	40	5200	11.99	13.00	1.262	98.28	1.018	0.18	0.055	0.071
32	WLAN5.2GHz	802.11a 6Mbps	Back	10mm	Ant 6	40	5200	11.99	13.00	1.262	98.28	1.018	-0.08	0.103	<b>0.132</b>
	WLAN5.2GHz	802.11a 6Mbps	Front	10mm	Ant 7	36	5180	11.97	13.00	1.268	98.28	1.018	-0.02	0.040	0.052
	WLAN5.2GHz	802.11a 6Mbps	Back	10mm	Ant 7	36	5180	11.97	13.00	1.268	98.28	1.018	-0.01	0.055	0.071
	WLAN5.3GHz	802.11a 6Mbps	Front	10mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	0.07	0.023	0.030
33	WLAN5.3GHz	802.11a 6Mbps	Back	10mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	0.04	0.116	<b>0.152</b>
	WLAN5.3GHz	802.11a 6Mbps	Front	10mm	Ant 7	60	5300	11.61	13.00	1.377	98.28	1.018	0.05	0.050	0.070
	WLAN5.3GHz	802.11a 6Mbps	Back	10mm	Ant 7	60	5300	11.61	13.00	1.377	98.28	1.018	-0.09	0.062	0.087
	WLAN5.5GHz	802.11a 6Mbps	Front	10mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	0.16	0.064	0.083
	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	0.06	0.166	0.215
	WLAN5.5GHz	802.11a 6Mbps	Front	10mm	Ant 7	140	5700	11.14	13.00	1.535	98.28	1.018	0.09	0.057	0.089
34	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 7	140	5700	11.14	13.00	1.535	98.28	1.018	0.05	0.171	<b>0.267</b>
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	0.11	0.040	0.055
35	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 6	155	5775	7.93	9.00	1.279	93.04	1.075	-0.03	0.067	<b>0.092</b>
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 7	155	5775	7.40	9.00	1.445	93.04	1.075	-0.03	0.020	0.031
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 7	155	5775	7.40	9.00	1.445	93.04	1.075	0.09	0.019	0.030

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	0.11	0.033	0.059
36	Bluetooth	1Mbps	Back	10mm	Ant 6	39	2441	10.08	11.50	1.387	77.01	1.299	0.08	0.042	<b>0.076</b>



**14.4 Product specific 10g SAR**

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	0.03	0.064	0.084
	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	-0.13	0.311	0.409
	WLAN5.3GHz	802.11a 6Mbps	Left Side	0mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	0.05	0.013	0.017
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	0.08	0.014	0.018
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	60	5300	11.89	13.00	1.291	98.28	1.018	0.05	0.013	0.017
	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 7	60	5300	11.61	13.00	1.377	98.28	1.018	0.02	0.013	0.018
37	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 7	60	5300	11.61	13.00	1.377	98.28	1.018	0.01	0.328	<b>0.460</b>
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0mm	Ant 7	60	5300	11.61	13.00	1.377	98.28	1.018	0.03	0.045	0.063
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	60	5300	11.61	13.00	1.377	98.28	1.018	-0.11	0.013	0.018
	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	0.08	0.096	0.124
38	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	0.05	0.578	<b>0.749</b>
	WLAN5.5GHz	802.11a 6Mbps	Left Side	0mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	-0.07	0.009	0.012
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	0.17	0.014	0.018
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	100	5500	11.95	13.00	1.274	98.28	1.018	0.18	0.018	0.023
	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Ant 7	140	5700	11.14	13.00	1.535	98.28	1.018	-0.15	0.022	0.034
	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 7	140	5700	11.14	13.00	1.535	98.28	1.018	0.06	0.335	0.523
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0mm	Ant 7	140	5700	11.14	13.00	1.535	98.28	1.018	0.19	0.017	0.027
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	140	5700	11.14	13.00	1.535	98.28	1.018	0.08	0.018	0.028

**15. Simultaneous Transmission Analysis**

No.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	WWAN + WLAN 2.4GHz SISO/MIMO	Yes	Yes	Yes
2.	WWAN + WLAN 5GHz SISO/MIMO	Yes	Yes	Yes
3.	WLAN 5GHz SISO/MIMO + Bluetooth	Yes	Yes	Yes
4.	WWAN + WLAN 5GHz SISO/MIMO + Bluetooth	Yes	Yes	Yes

**General Note:**

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
4. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
5. WLAN 2.4GHz ANT6 and Bluetooth ANT6 share the same antenna so can't transmit simultaneously.
6. According to the EUT characteristic, WLAN 2.4GHz ANT7 and Bluetooth Ant6 can't transmit simultaneously.
7. According to the EUT characteristic, WLAN 5GHz and Bluetooth can transmit simultaneously.
8. According to the EUT characteristic, WLAN 5GHz and WLAN 2.4GHz can't transmit simultaneously.
9. For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
10. Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
11. The reported SAR summation is calculated based on the same configuration and test position.
12. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) 1g Scalar SAR summation < 1.6W/kg and.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$  for 1g SAR, simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg.



**15.1 Head Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WLAN2.4GHz Ant 6 1g SAR (W/kg)	WLAN2.4GHz Ant 7 1g SAR (W/kg)	WLAN5GHz Ant 6 1g SAR (W/kg)	WLAN5GHz Ant 7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)		
GSM850 Ant 0	Right Cheek	0.509	0.184	0.006	0.261	0.161	0.090	0.70	1.02
	Right Tilted	0.318	0.191	0.005	0.285	0.159	0.103	0.51	0.87
	Left Cheek	0.435	0.104	0.017	0.180	0.099	0.056	0.56	0.77
	Left Tilted	0.290	0.108	0.013	0.215	0.116	0.050	0.41	0.67
WCDMA V Ant 0	Right Cheek	0.324	0.184	0.006	0.261	0.161	0.090	0.51	0.84
	Right Tilted	0.186	0.191	0.005	0.285	0.159	0.103	0.38	0.73
	Left Cheek	0.334	0.104	0.017	0.180	0.099	0.056	0.46	0.67
	Left Tilted	0.190	0.108	0.013	0.215	0.116	0.050	0.31	0.57
LTE Band 5 Ant 0	Right Cheek	0.294	0.184	0.006	0.261	0.161	0.090	0.48	0.81
	Right Tilted	0.191	0.191	0.005	0.285	0.159	0.103	0.39	0.74
	Left Cheek	0.323	0.104	0.017	0.180	0.099	0.056	0.44	0.66
	Left Tilted	0.167	0.108	0.013	0.215	0.116	0.050	0.29	0.55
LTE Band 41 Ant 0	Right Cheek	0.029	0.184	0.006	0.261	0.161	0.090	0.22	0.54
	Right Tilted	0.011	0.191	0.005	0.285	0.159	0.103	0.21	0.56
	Left Cheek	0.048	0.104	0.017	0.180	0.099	0.056	0.17	0.38
	Left Tilted	0.016	0.108	0.013	0.215	0.116	0.050	0.14	0.40
WCDMA IV Ant 1	Right Cheek	0.150	0.184	0.006	0.261	0.161	0.090	0.34	0.66
	Right Tilted	0.125	0.191	0.005	0.285	0.159	0.103	0.32	0.67
	Left Cheek	0.153	0.104	0.017	0.180	0.099	0.056	0.27	0.49
	Left Tilted	0.136	0.108	0.013	0.215	0.116	0.050	0.26	0.52
LTE Band 4 Ant 1	Right Cheek	0.090	0.184	0.006	0.261	0.161	0.090	0.28	0.60
	Right Tilted	0.079	0.191	0.005	0.285	0.159	0.103	0.28	0.63
	Left Cheek	0.093	0.104	0.017	0.180	0.099	0.056	0.21	0.43
	Left Tilted	0.081	0.108	0.013	0.215	0.116	0.050	0.20	0.46
GSM1900 Ant 1	Right Cheek	0.112	0.184	0.006	0.261	0.161	0.090	0.30	0.62
	Right Tilted	0.072	0.191	0.005	0.285	0.159	0.103	0.27	0.62
	Left Cheek	0.104	0.104	0.017	0.180	0.099	0.056	0.23	0.44
	Left Tilted	0.072	0.108	0.013	0.215	0.116	0.050	0.19	0.45

**15.2 Hotspot Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WLAN2.4GHz Ant 6 1g SAR (W/kg)	WLAN2.4GHz Ant 7 1g SAR (W/kg)	WLAN5GHz Ant 6 1g SAR (W/kg)	WLAN5GHz Ant 7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)		
GSM850 Ant 0	Front	0.500	0.003	0.005	0.071	0.052	0.059	0.51	0.68
	Back	0.770	0.118	0.027	0.132	0.071	0.076	<b>0.92</b>	1.05
	Left side	0.398	0.006		0.081		0.067	0.40	0.55
	Right side	0.552	0.004	0.017	0.073	0.043	0.049	0.57	0.72
	Top side		0.004	0.003	0.068	0.040	0.040	0.01	0.15
	Bottom side	0.394						0.39	0.39
GSM1900 Ant 1	Front	0.264	0.003	0.005	0.071	0.052	0.059	0.27	0.45
	Back	0.371	0.118	0.027	0.132	0.071	0.076	0.52	0.65
	Left side	0.146	0.006		0.081		0.067	0.15	0.29
	Right side		0.004	0.017	0.073	0.043	0.049	0.02	0.17
	Top side		0.004	0.003	0.068	0.040	0.040	0.01	0.15
	Bottom side	0.199						0.20	0.20
WCDMA V Ant 0	Front	0.257	0.003	0.005	0.071	0.052	0.059	0.27	0.44
	Back	0.586	0.118	0.027	0.132	0.071	0.076	0.73	0.87
	Left side	0.077	0.006		0.081		0.067	0.08	0.23
	Right side	0.221	0.004	0.017	0.073	0.043	0.049	0.24	0.39
	Top side		0.004	0.003	0.068	0.040	0.040	0.01	0.15
	Bottom side	0.063						0.06	0.06
WCDMA IV Ant 1	Front	0.392	0.003	0.005	0.071	0.052	0.059	0.40	0.57
	Back	0.549	0.118	0.027	0.132	0.071	0.076	0.69	0.83
	Left side	0.304	0.006		0.081		0.067	0.31	0.45
	Right side		0.004	0.017	0.073	0.043	0.049	0.02	0.17
	Top side		0.004	0.003	0.068	0.040	0.040	0.01	0.15
	Bottom side	0.429						0.43	0.43
LTE Band 4 Ant 1	Front	0.243	0.003	0.005	0.071	0.052	0.059	0.25	0.43
	Back	0.340	0.118	0.027	0.132	0.071	0.076	0.49	0.62
	Left side	0.134	0.006		0.081		0.067	0.14	0.28
	Right side		0.004	0.017	0.073	0.043	0.049	0.02	0.17
	Top side		0.004	0.003	0.068	0.040	0.040	0.01	0.15
	Bottom side	0.205						0.21	0.21
LTE Band 5 Ant 0	Front	0.294	0.003	0.005	0.071	0.052	0.059	0.30	0.48
	Back	0.452	0.118	0.027	0.132	0.071	0.076	0.60	0.73
	Left side	0.216	0.006		0.081		0.067	0.22	0.36
	Right side	0.310	0.004	0.017	0.073	0.043	0.049	0.33	0.48
	Top side		0.004	0.003	0.068	0.040	0.040	0.01	0.15
	Bottom side	0.247						0.25	0.25
LTE Band 41 Ant 0	Front	0.214	0.003	0.005	0.071	0.052	0.059	0.22	0.40
	Back	0.541	0.118	0.027	0.132	0.071	0.076	0.69	0.82
	Left side	0.140	0.006		0.081		0.067	0.15	0.29
	Right side	0.110	0.004	0.017	0.073	0.043	0.049	0.13	0.28
	Top side		0.004	0.003	0.068	0.040	0.040	0.01	0.15
	Bottom side	0.412						0.41	0.41

**15.3 Body-Worn Accessory Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3	1+4+5+6
		WWAN	WLAN2.4GHz Ant 6	WLAN2.4GHz Ant 7	WLAN5GHz Ant 6	WLAN5GHz Ant 7	Bluetooth Ant 6	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
GSM850 Ant 0	Front	0.500	0.003	0.005	0.083	0.089	0.059	0.51	0.73
	Back	0.770	0.118	0.027	0.215	0.267	0.076	0.92	1.33
GSM1900 Ant 1	Front	0.264	0.003	0.005	0.083	0.089	0.059	0.27	0.50
	Back	0.371	0.118	0.027	0.215	0.267	0.076	0.52	0.93
WCDMA V Ant 0	Front	0.257	0.003	0.005	0.083	0.089	0.059	0.27	0.49
	Back	0.586	0.118	0.027	0.215	0.267	0.076	0.73	1.14
WCDMA IV Ant 1	Front	0.392	0.003	0.005	0.083	0.089	0.059	0.40	0.62
	Back	0.549	0.118	0.027	0.215	0.267	0.076	0.69	1.11
LTE Band 4 Ant 1	Front	0.243	0.003	0.005	0.083	0.089	0.059	0.25	0.47
	Back	0.340	0.118	0.027	0.215	0.267	0.076	0.49	0.90
LTE Band 5 Ant 0	Front	0.294	0.003	0.005	0.083	0.089	0.059	0.30	0.53
	Back	0.452	0.118	0.027	0.215	0.267	0.076	0.60	1.01
LTE Band 41 Ant 0	Front	0.214	0.003	0.005	0.083	0.089	0.059	0.22	0.45
	Back	0.541	0.118	0.027	0.215	0.267	0.076	0.69	1.10

**15.4 Product specific 10g SAR Exposure Conditions**

Exposure Position	1	2	1+2
	WLAN5GHz Ant 6	WLAN5GHz Ant 7	Summed
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
Front	0.124	0.034	0.16
Back	0.749	0.523	1.27
Left side	0.017		0.02
Right side	0.018	0.063	0.08
Top side	0.023	0.028	0.05
Bottom side			0.00

**Remark:**

1. For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

**Test Engineer:** Bruce Li, Martin Li, Ricky Gu



## **16. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

### Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## **17. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.



---

***Appendix A. Plots of System Performance Check***

The plots are shown as follows.



### System Check\_Head\_835MHz

**DUT: D835V2 - SN:4d258**

Communication System: UID 0, CW (0); Frequency: 835 MHz;Duty Cycle: 1:1

Medium: HSL\_835 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.926 \text{ S/m}$ ;  $\epsilon_r = 41.058$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.21, 10.21, 10.21); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.634 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 27.18 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.724 W/kg

**SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.298 W/kg**

Maximum value of SAR (measured) = 0.633 W/kg

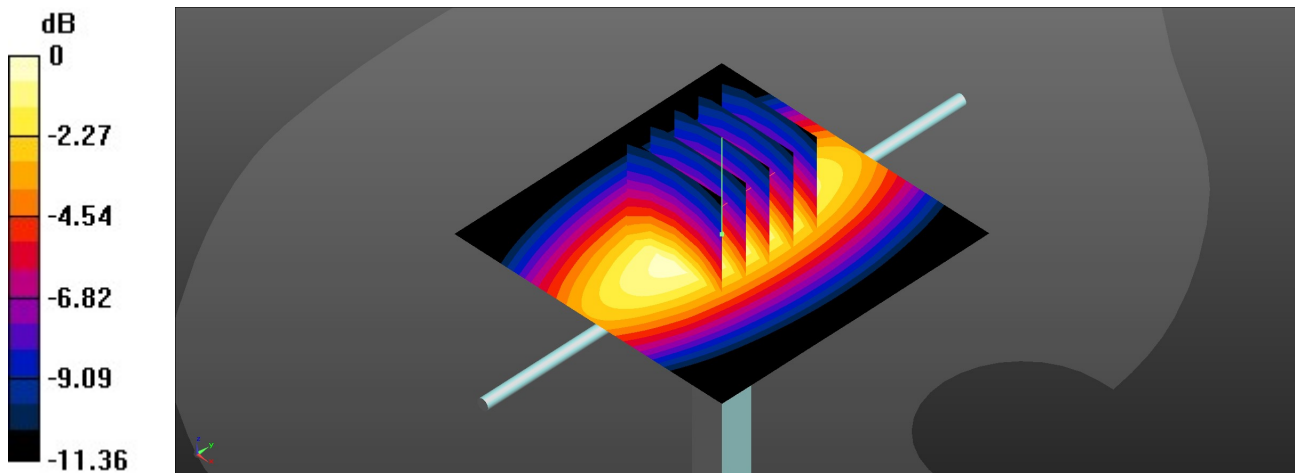

### System Check\_Head\_1750MHz

**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW (0); Frequency: 1750 MHz;Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.351$  S/m;  $\epsilon_r = 40.01$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.73, 8.73, 8.73); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.75 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.33 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.27 W/kg

**SAR(1 g) = 1.75 W/kg; SAR(10 g) = 0.921 W/kg**

Maximum value of SAR (measured) = 2.74 W/kg

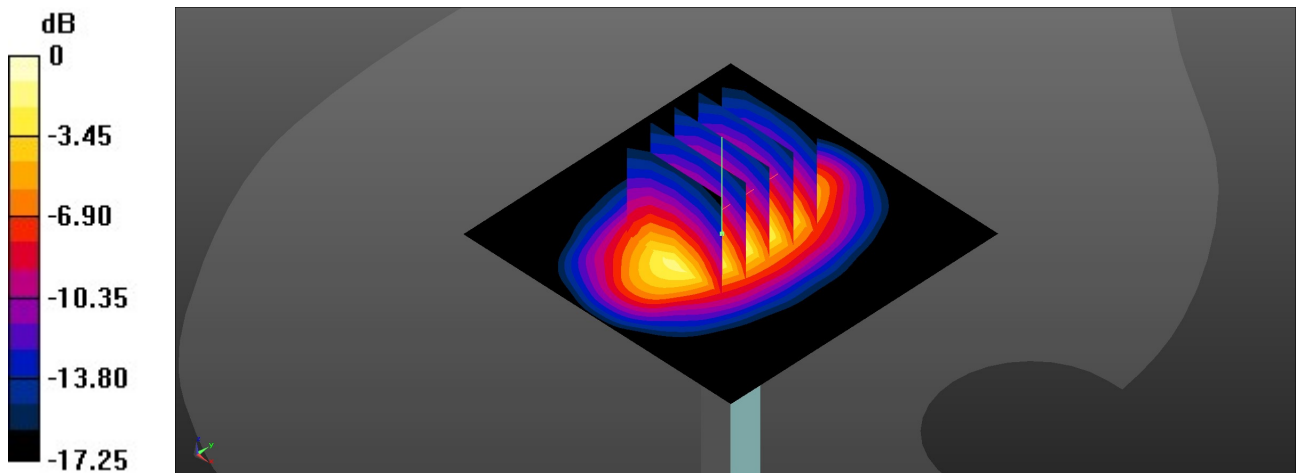

0 dB = 2.74 W/kg = 4.38 dBW/kg

### System Check\_Head\_1900MHz

**DUT: D1900V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.432$  S/m;  $\epsilon_r = 39.779$ ;  $\rho = 1000$  kg/m<sup>3</sup>



Ambient Temperature : 23.1 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.46, 8.46, 8.46); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.18 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 47.65 V/m; Power Drift = -0.00 dB  
Peak SAR (extrapolated) = 3.84 W/kg  
**SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.02 W/kg**  
Maximum value of SAR (measured) = 3.14 W/kg

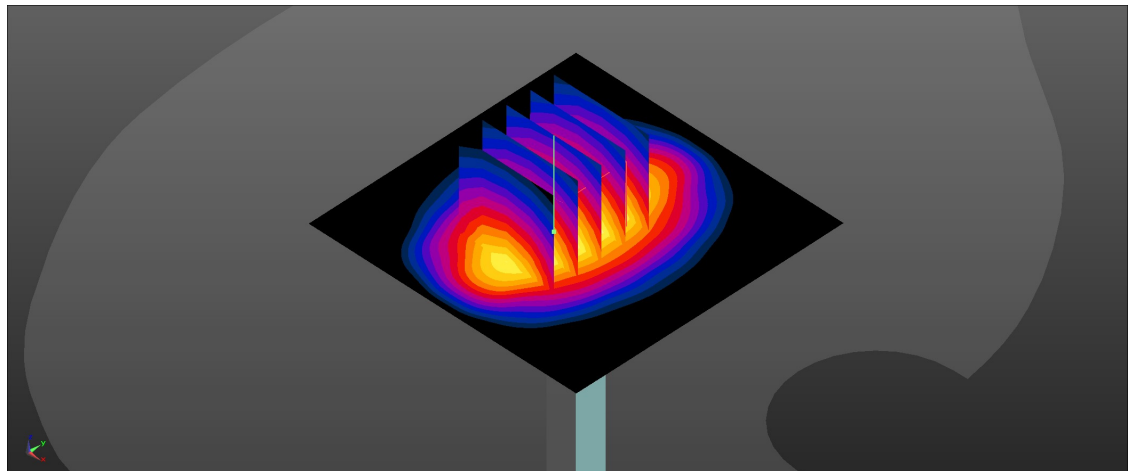

0 dB = 3.14 W/kg = 4.97 dBW/kg

### System Check\_Head\_2450MHz

**DUT: D2450V2 - SN:908**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.824$  S/m;  $\epsilon_r = 39.243$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.53, 7.53, 7.53); Calibrated: 2021.11.24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


**Pin=50mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 3.42 W/kg

**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 42.16 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 5.22 W/kg

**SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.17 W/kg**

Maximum value of SAR (measured) = 3.33 W/kg

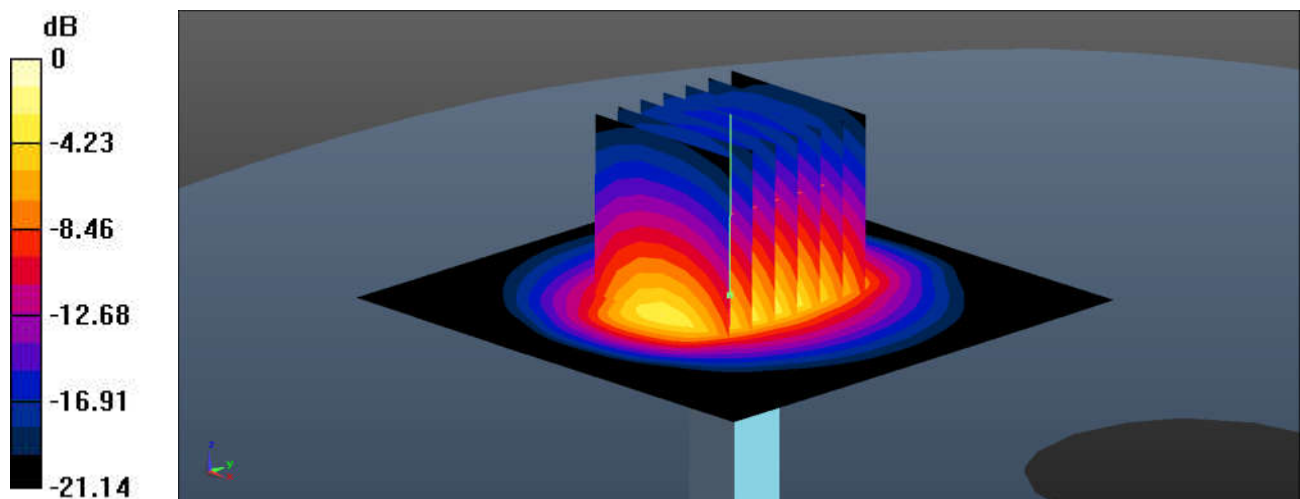

0 dB = 3.33 W/kg = 5.22 dBW/kg

### System Check\_Head\_2600MHz

**DUT: D2600V2 - SN:1061**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL\_2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.881$  S/m;  $\epsilon_r = 39.164$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.71, 7.71, 7.71); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 3.93 W/kg

**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 48.39 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 5.01 W/kg  
**SAR(1 g) = 2.62 W/kg; SAR(10 g) = 1.21 W/kg**  
Maximum value of SAR (measured) = 3.99 W/kg

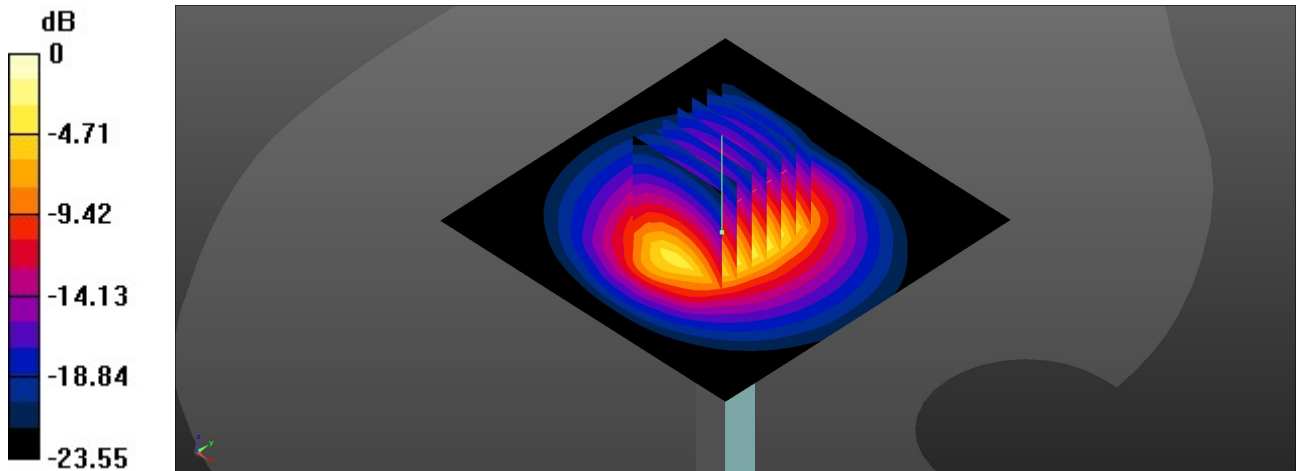

### System Check\_Head\_5250MHz

#### DUT: D5GHzV2-SN:1113

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL\_5000 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.601$  S/m;  $\epsilon_r = 35.834$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.05, 5.05, 5.05); Calibrated: 2021.11.24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (81x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 9.32 W/kg


**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 48.65 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 15.6 W/kg

**SAR(1 g) = 3.93 W/kg; SAR(10 g) = 1.12 W/kg**

Maximum value of SAR (measured) = 9.80 W/kg

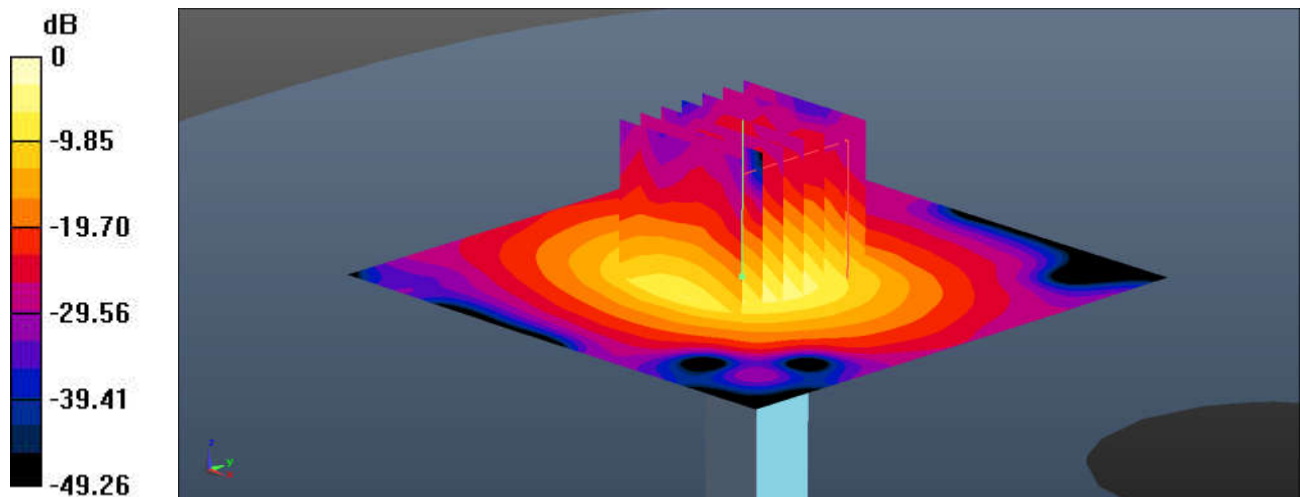

0 dB = 9.80 W/kg = 9.91 dBW/kg

### System Check\_Head\_5600MHz

#### DUT: D5GHzV2-SN:1113

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1  
Medium: HSL 5000 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.004$  S/m;  $\epsilon_r = 35.267$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.69, 4.69, 4.69); Calibrated: 2021.11.24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (81x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 10.2 W/kg

**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 48.87 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 18.4 W/kg  
**SAR(1 g) = 4.14 W/kg; SAR(10 g) = 1.16 W/kg**  
Maximum value of SAR (measured) = 10.8 W/kg

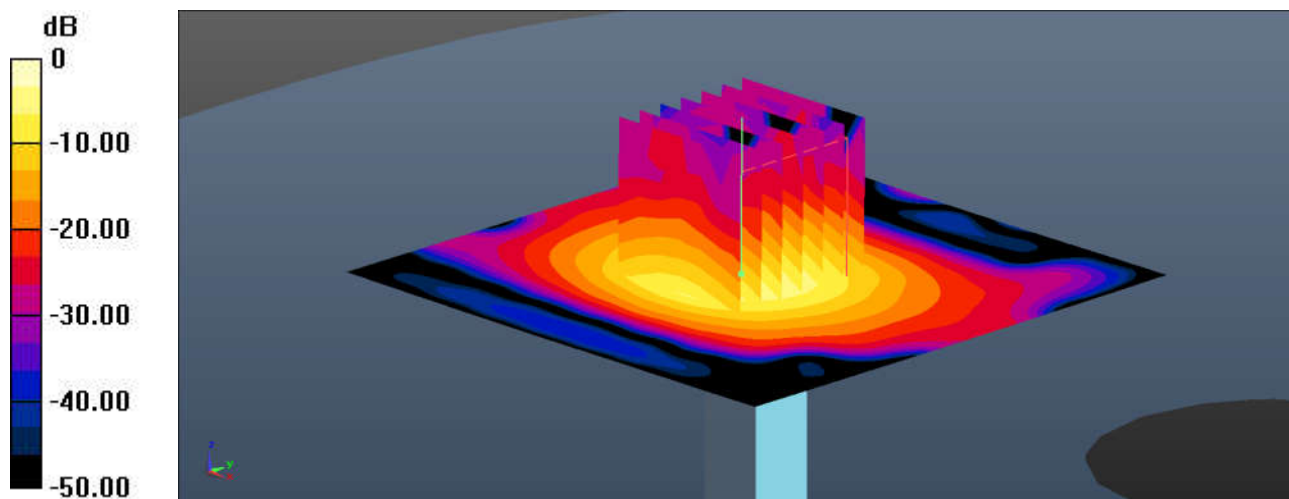

0 dB = 10.8 W/kg = 10.33 dBW/kg

### System Check\_Head\_5750MHz

#### DUT: D5GHzV2-SN:1113

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL 5000 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.171$  S/m;  $\epsilon_r = 35.076$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.92, 4.92, 4.92); Calibrated: 2021.11.24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (81x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 9.42 W/kg


**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 46.57 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 17.2 W/kg

**SAR(1 g) = 3.77 W/kg; SAR(10 g) = 1.06 W/kg**

Maximum value of SAR (measured) = 9.98 W/kg

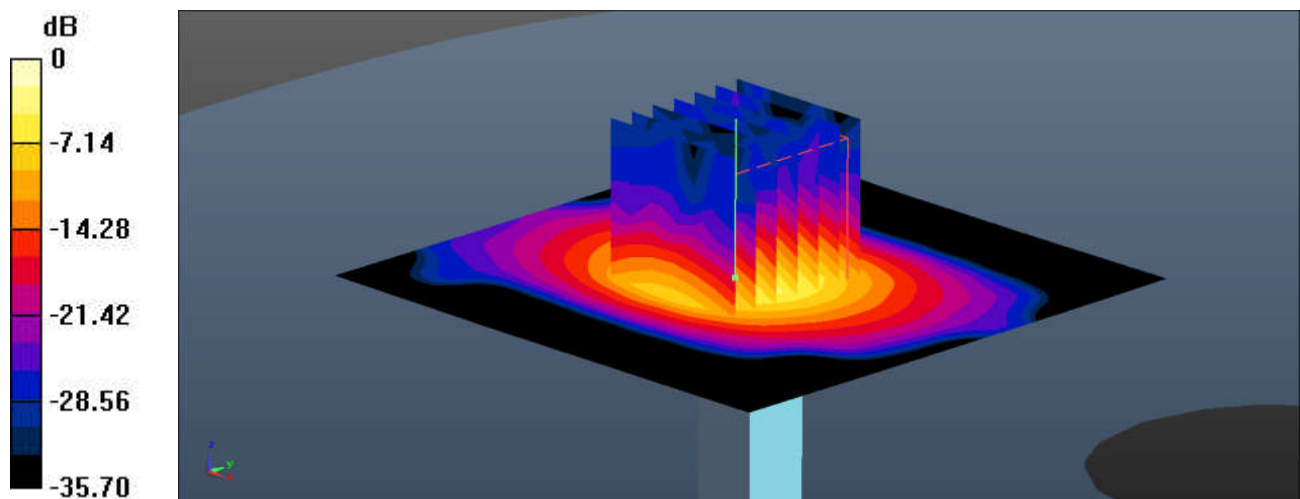

0 dB = 9.98 W/kg = 9.99 dBW/kg





***Appendix B. Plots of SAR Measurement***

The plots are shown as follows.

### 01\_GSM850\_GPRS 4 Tx slots\_Right Cheek\_0mm\_Ch189

Communication System: UID 0, GSM850 (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_835 Medium parameters used5:  $f = 836.4$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.047$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.21, 10.21, 10.21); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.421 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 1.738 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.444 W/kg  
**SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.284 W/kg**  
Maximum value of SAR (measured) = 0.415 W/kg

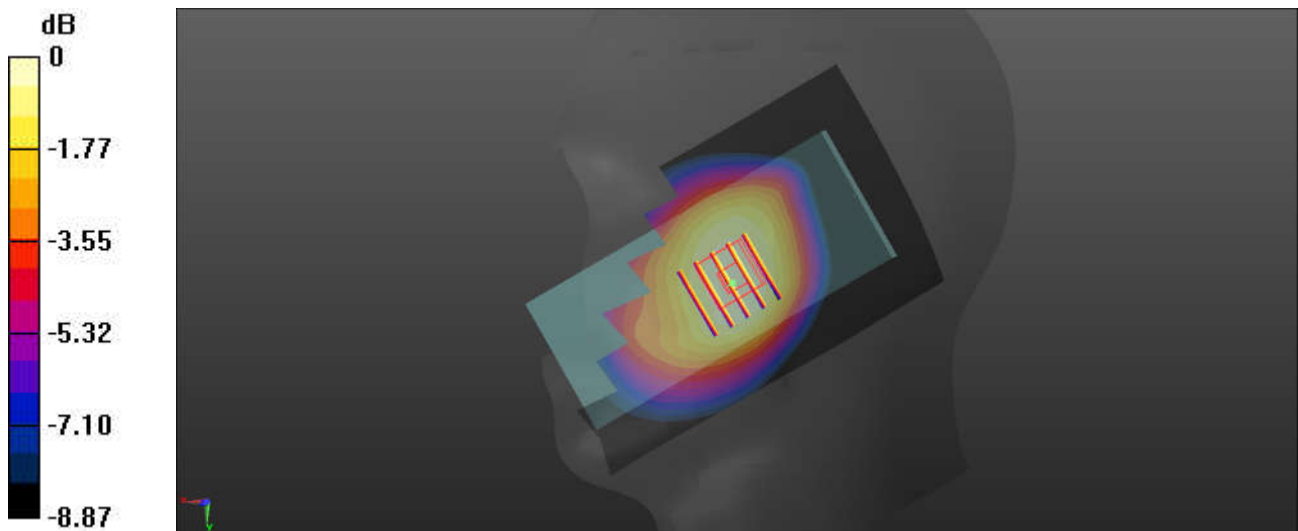

0 dB = 0.415 W/kg = -3.82 dBW/kg

## 02\_GSM1900\_GPRS 4 Tx slots\_Right Cheek\_0mm\_Ch661

Communication System: UID 0, PCS (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: HSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 39.809$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.46, 8.46, 8.46); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.119 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.127 W/kg

**SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.109 W/kg

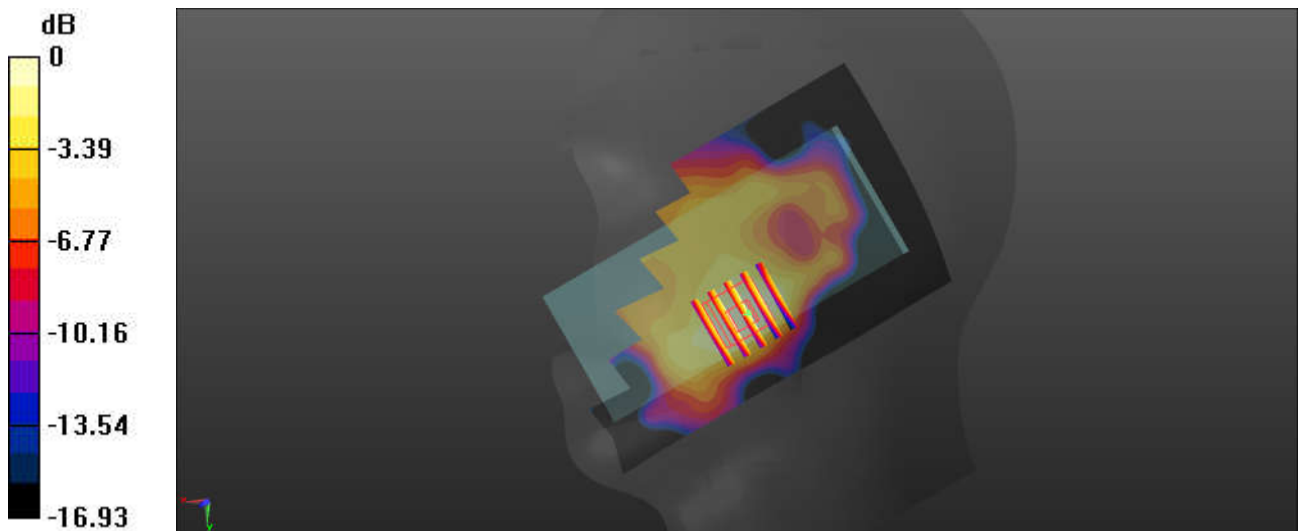

0 dB = 0.109 W/kg = -9.63 dBW/kg

### 03\_WCDMA V\_RMC 12.2Kbps\_Left Cheek\_0mm\_Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_835 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.047$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.21, 10.21, 10.21); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.312 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.37 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.341 W/kg

**SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.216 W/kg**

Maximum value of SAR (measured) = 0.320 W/kg

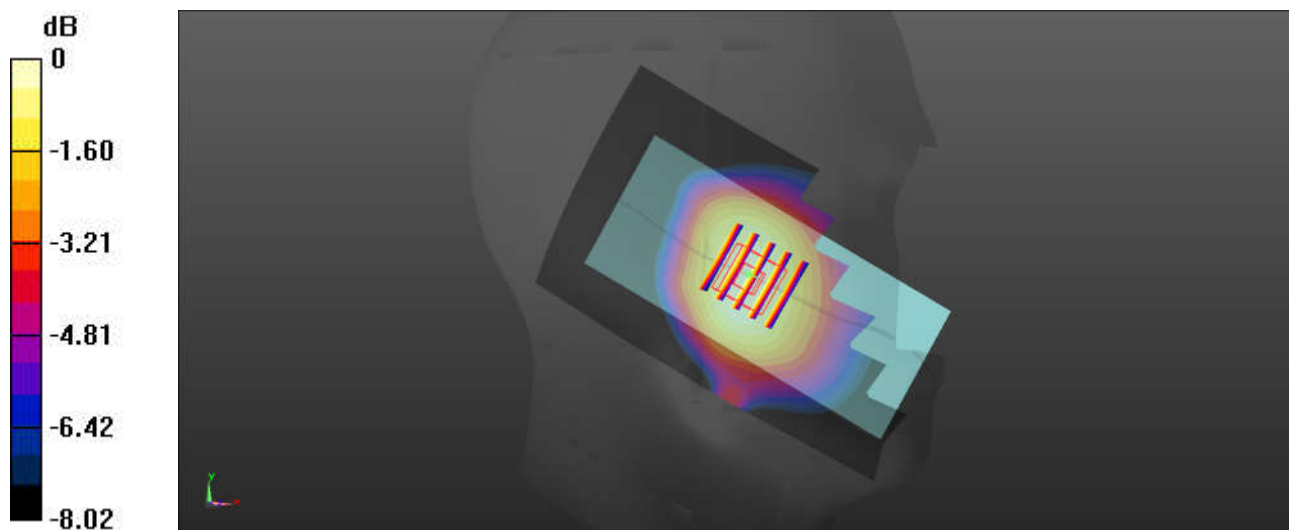

0 dB = 0.320 W/kg = -4.95 dBW/kg

### 04\_WCDMA IV\_RMC 12.2Kbps\_Left Cheek\_0mm\_Ch1413

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 40.041$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.73, 8.73, 8.73); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.175 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 11.94 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 0.199 W/kg  
**SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.088 W/kg**  
Maximum value of SAR (measured) = 0.171 W/kg

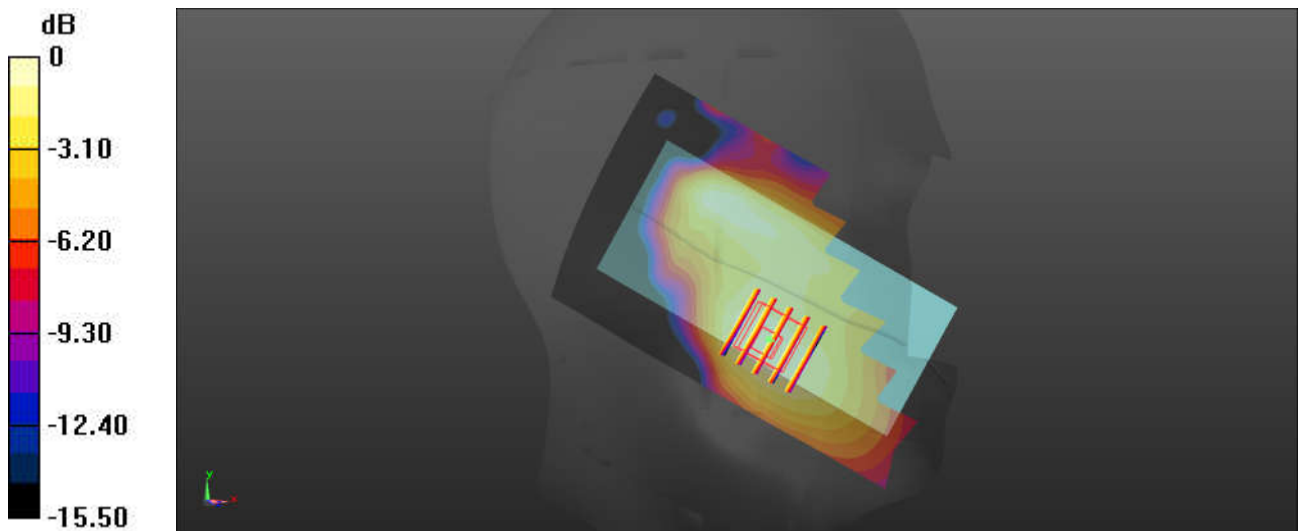

0 dB = 0.171 W/kg = -7.67 dBW/kg

### 05\_LTE Band 4\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch20175

Communication System: UID 0, LTE-FDD (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 40.041$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.73, 8.73, 8.73); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0979 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.763 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.111 W/kg

**SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.0941 W/kg

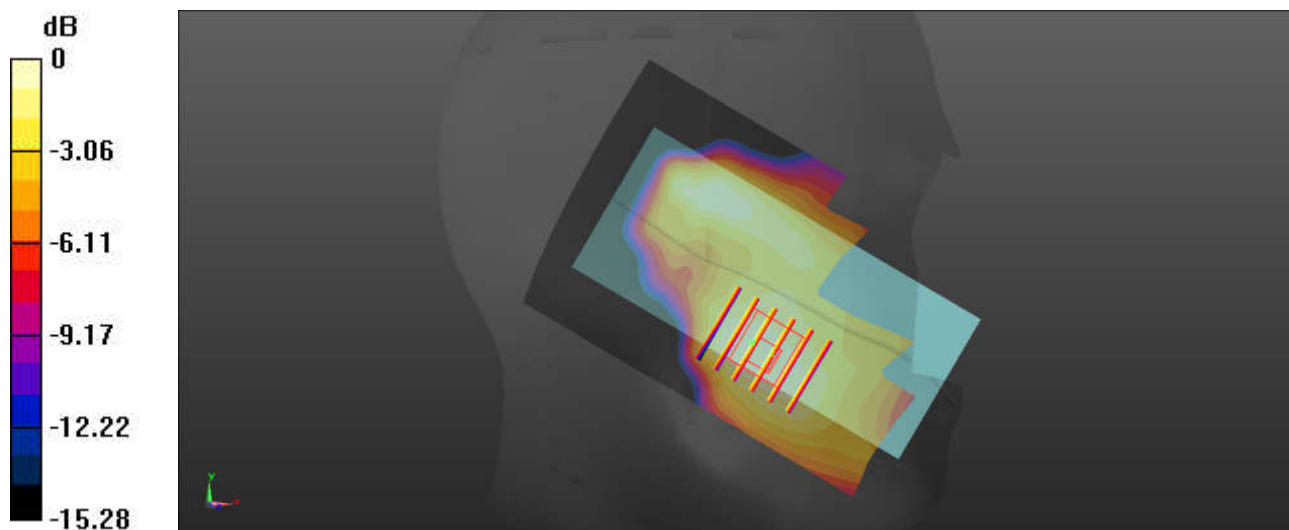

0 dB = 0.0941 W/kg = -10.26 dBW/kg

### 06\_LTE Band 5\_10M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch20525

Communication System: UID 0, LTE-FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_835 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.046$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.21, 10.21, 10.21); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.282 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.29 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.302 W/kg

**SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.191 W/kg**

Maximum value of SAR (measured) = 0.282 W/kg

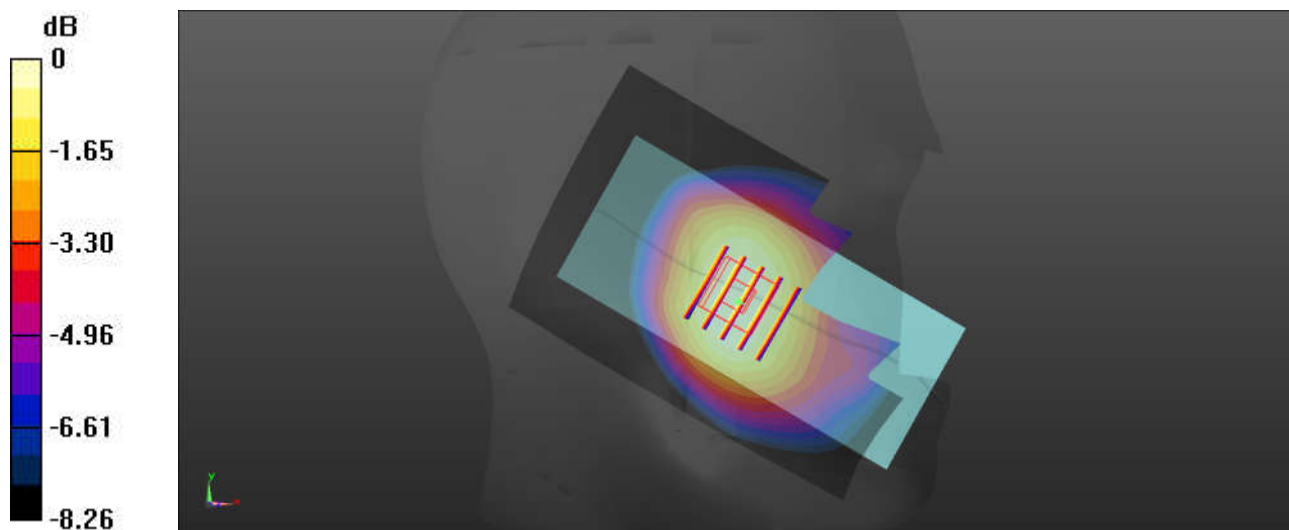

0 dB = 0.282 W/kg = -5.50 dBW/kg

**07\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch40620**

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_2600 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 39.166$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7627; ConvF(7.71, 7.71, 7.71); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.158 W/kg

**Zoom Scan (9x10x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 6.860 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 0.156 W/kg  
**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.012 W/kg**  
Maximum value of SAR (measured) = 0.0830 W/kg

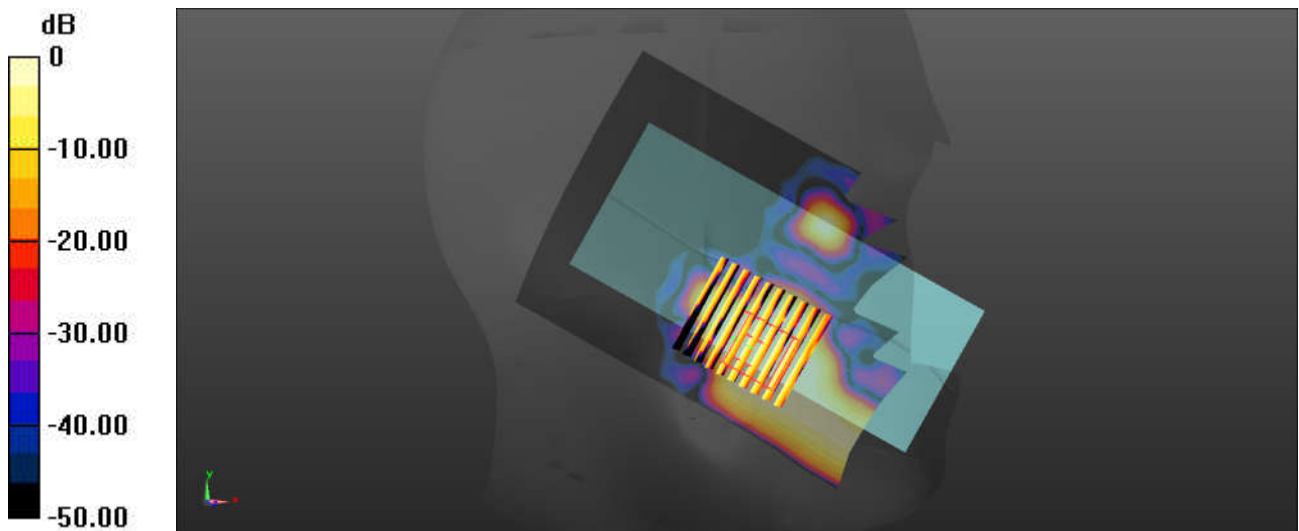

0 dB = 0.0830 W/kg = -10.81 dBW/kg



### 08\_WLAN2.4GHz\_802.11b 1Mbps\_Right Tilted\_0mm\_Ch6

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2437 MHz;Duty Cycle: 1:1  
Medium: HSL\_2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.812$  S/m;  $\epsilon_r = 39.282$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.53, 7.53, 7.53); Calibrated: 2021.11.24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.342 W/kg

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 10.68 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 0.370 W/kg  
**SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.071 W/kg**  
Maximum value of SAR (measured) = 0.275 W/kg

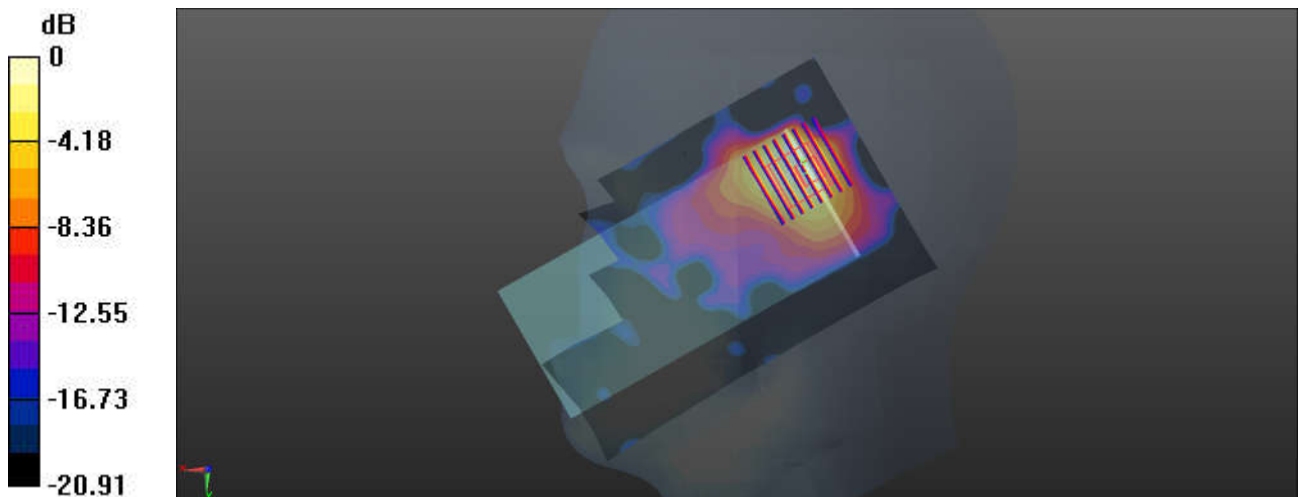

0 dB = 0.275 W/kg = -5.61 dBW/kg

### 09\_WLAN5GHz\_802.11a 6Mbps\_Right Tilted\_0mm\_Ch60

Communication System: UID 0, WLAN5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1.018  
Medium: HSL\_5000 Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.676$  S/m;  $\epsilon_r = 35.775$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.05, 5.05, 5.05); Calibrated: 2021.11.24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.713 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.458 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.633 W/kg

**SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.401 W/kg

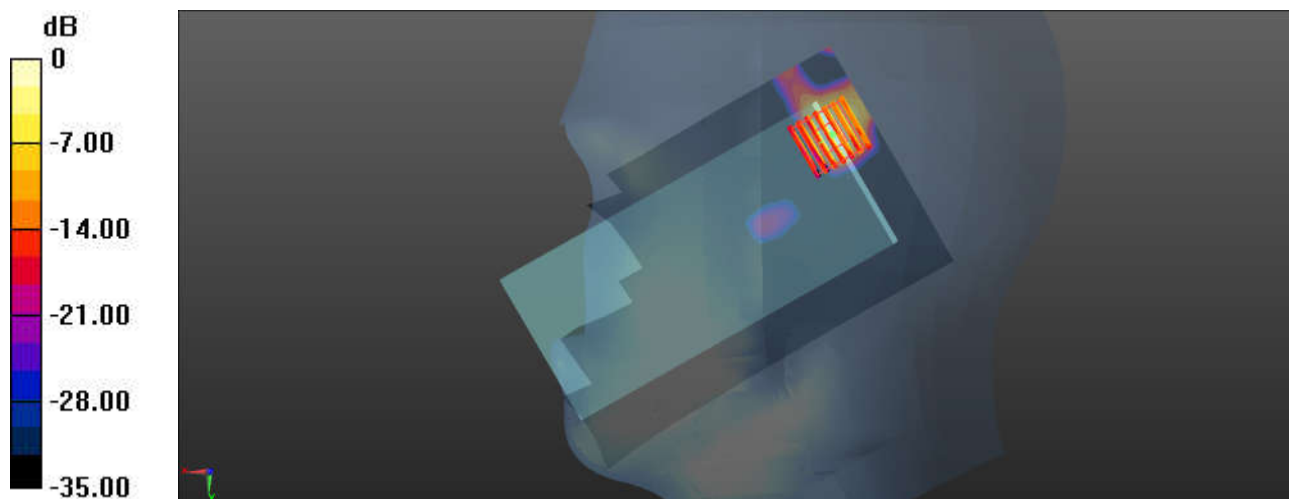

0 dB = 0.401 W/kg = -3.97 dBW/kg

### 10\_WLAN5GHz\_802.11a 6Mbps\_Right Tilted\_0mm\_Ch100

Communication System: UID 0, WLAN5GHz (0); Frequency: 5500 MHz; Duty Cycle: 1:1.018  
Medium: HSL\_5000 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.893$  S/m;  $\epsilon_r = 35.429$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.69, 4.69, 4.69); Calibrated: 2021.11.24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (101x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.470 W/kg


**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.511 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.769 W/kg

**SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.059 W/kg**

Maximum value of SAR (measured) = 0.339 W/kg

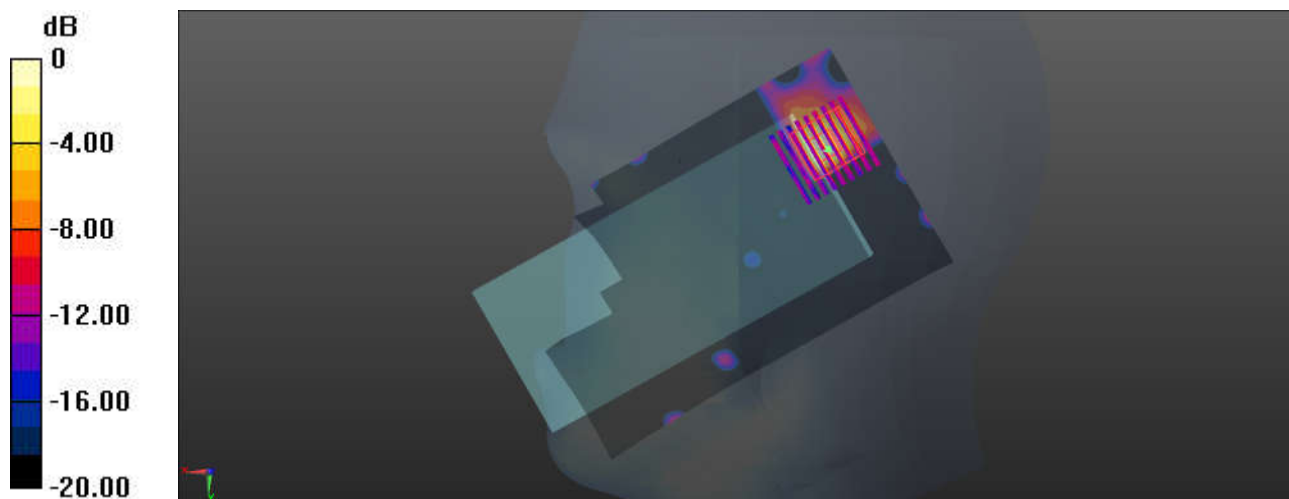

0 dB = 0.339 W/kg = -4.70 dBW/kg

### 11\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Tilted\_0mm\_Ch155

Communication System: UID 0, WLAN5GHz (0); Frequency: 5775 MHz; Duty Cycle: 1:1.075  
Medium: HSL\_5000 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.203$  S/m;  $\epsilon_r = 35.074$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.92, 4.92, 4.92); Calibrated: 2021.11.24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (11x151x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.384 W/kg


**Zoom Scan (11x11x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 24.11 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 5.986 W/kg

**SAR(1 g) = 0.1 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.399 W/kg

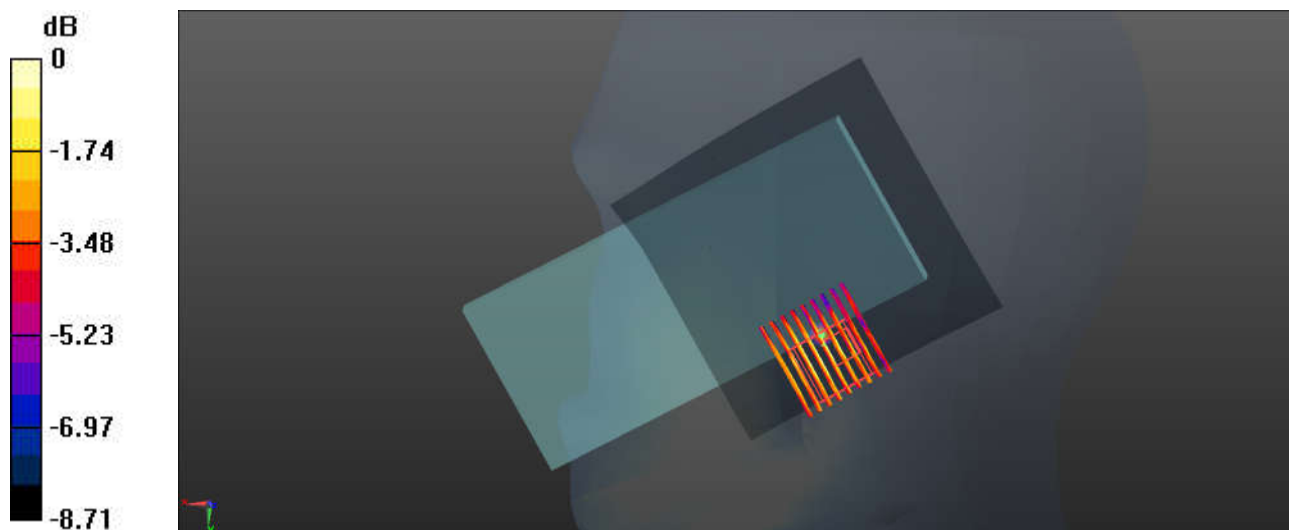

0 dB = 0.399 W/kg = -3.99 dBW/kg

### 12\_Bluetooth\_1Mbps\_Right Tilted\_0mm\_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.299  
Medium: HSL\_2450 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.815$  S/m;  $\epsilon_r = 39.273$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.53, 7.53, 7.53); Calibrated: 2021.11.24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (81x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.132 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.572 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 0.147 W/kg  
**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.028 W/kg**  
Maximum value of SAR (measured) = 0.110 W/kg

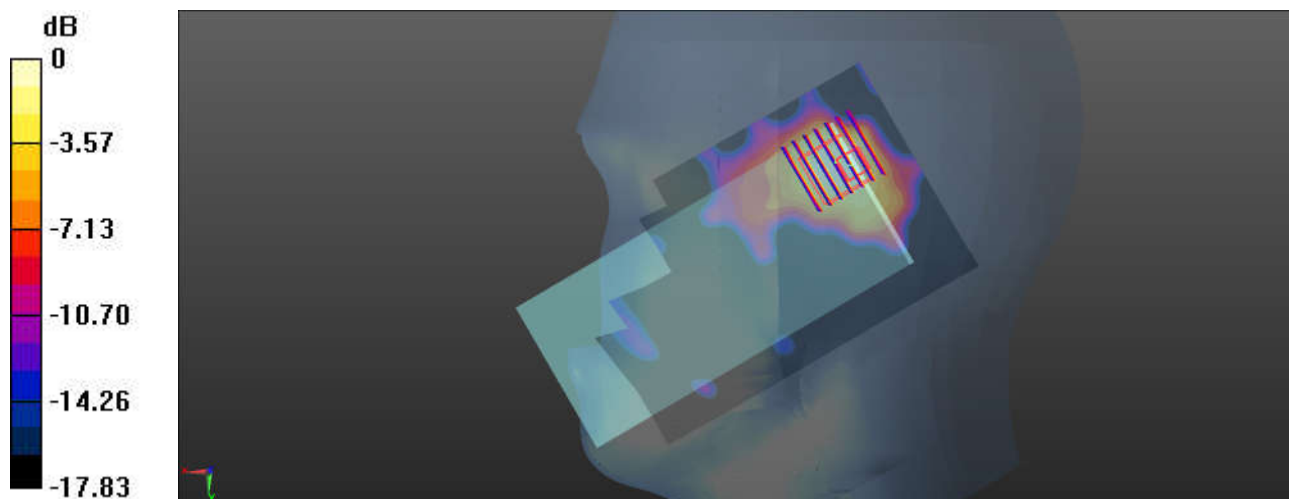

0 dB = 0.110 W/kg = -9.59 dBW/kg

### 13\_GSM850\_GPRS 4 Tx slots\_Back\_10mm\_Ch189

Communication System: UID 0, GSM850 (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_835 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.047$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.21, 10.21, 10.21); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.658 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.79 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.716 W/kg

**SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.414 W/kg**

Maximum value of SAR (measured) = 0.651 W/kg

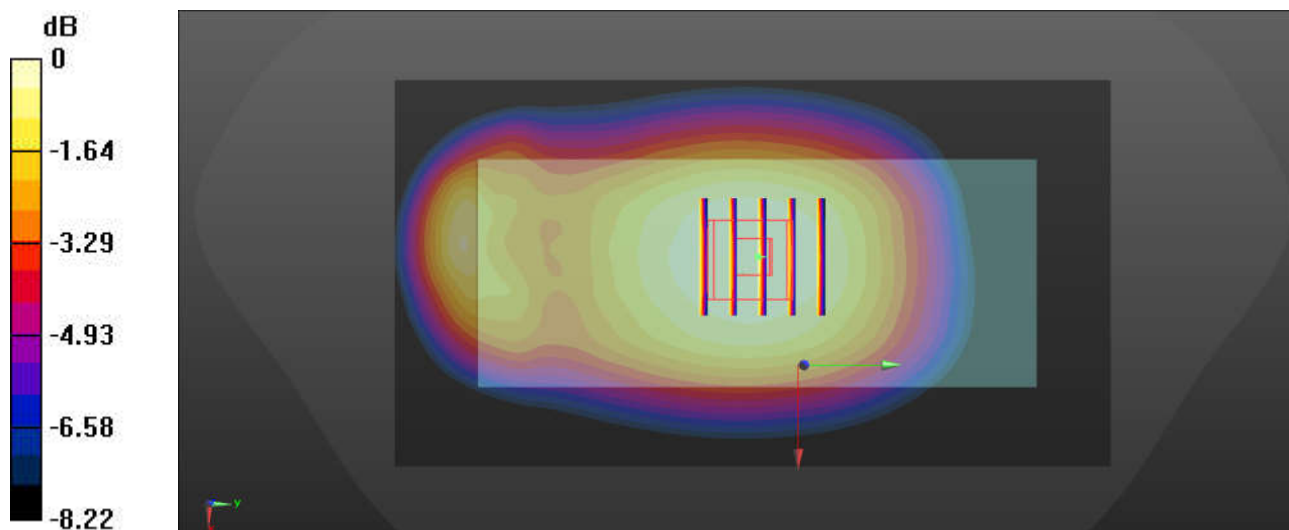

0 dB = 0.651 W/kg = -1.86 dBW/kg

### 14\_GSM1900\_GPRS 4 Tx slots\_Back\_10mm\_Ch661


Communication System: UID 0, PCS (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 39.809$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.46, 8.46, 8.46); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.420 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 16.31 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.482 W/kg  
**SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.168 W/kg**  
Maximum value of SAR (measured) = 0.390 W/kg

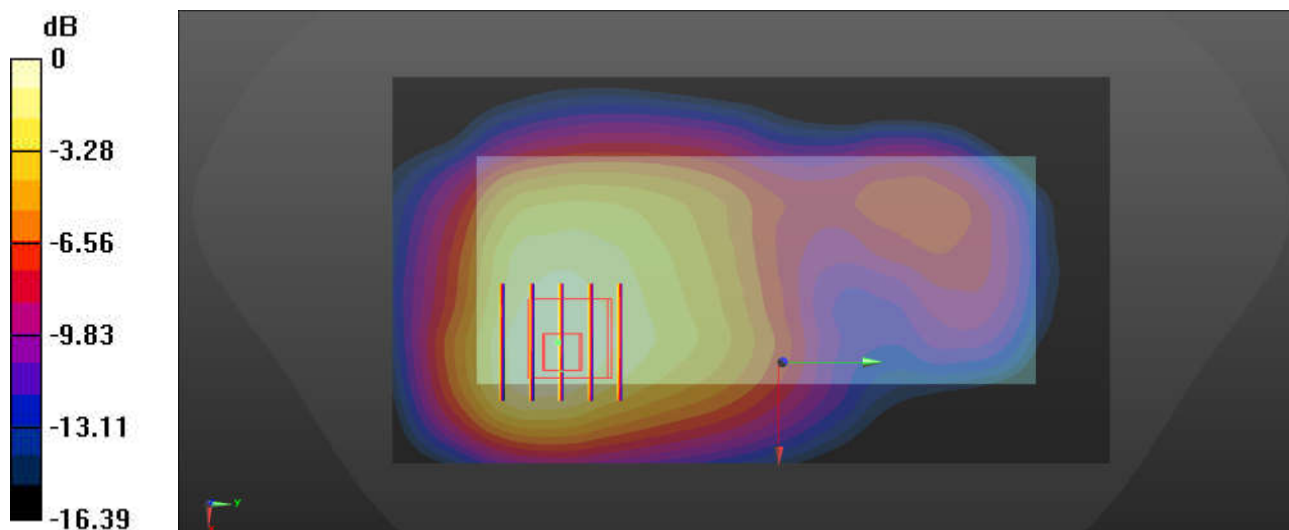

0 dB = 0.390 W/kg = -4.09 dBW/kg

### 15\_WCDMA V\_RMC 12.2Kbps\_Back\_10mm\_Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1  
 Medium: HSL\_835 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.047$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7627; ConvF(10.21, 10.21, 10.21); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.590 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 26.27 V/m; Power Drift = 0.01 dB  
 Peak SAR (extrapolated) = 0.643 W/kg  
**SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.369 W/kg**  
 Maximum value of SAR (measured) = 0.588 W/kg

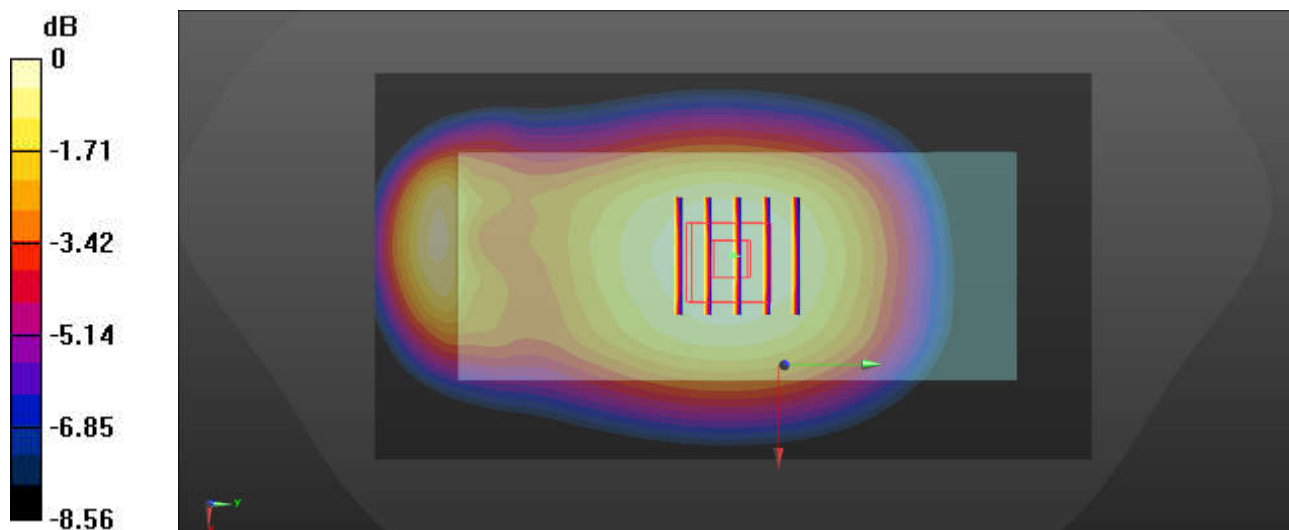

0 dB = 0.588 W/kg = -2.31 dBW/kg



### 16\_WCDMA IV\_RMC 12.2Kbps\_Back\_10mm\_Ch1413

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 40.041$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.73, 8.73, 8.73); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.677 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.62 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.770 W/kg  
**SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.300 W/kg**  
Maximum value of SAR (measured) = 0.656 W/kg

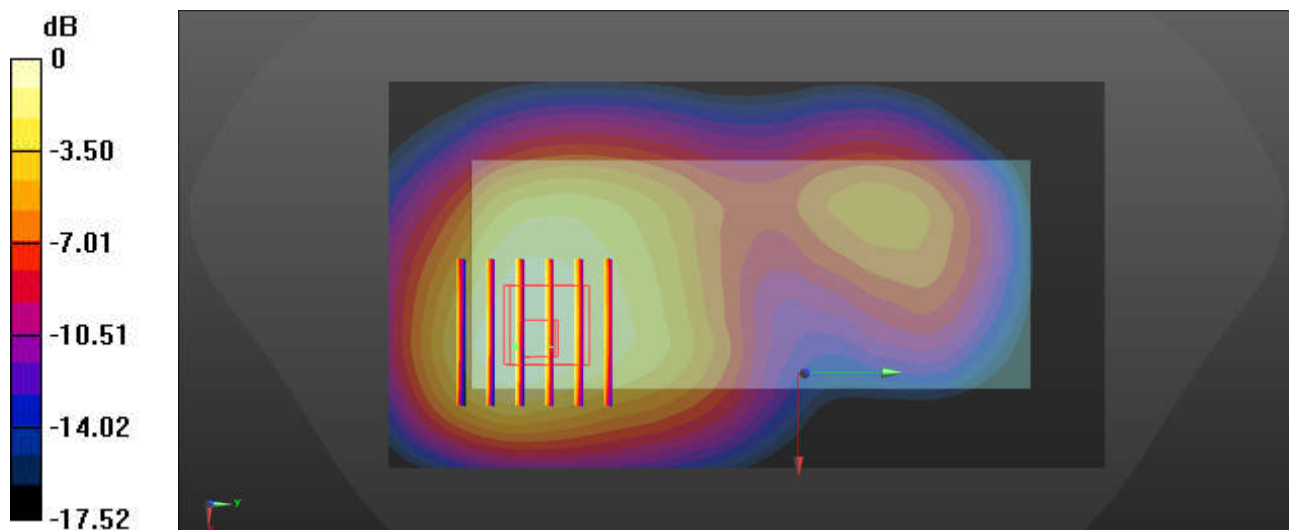

0 dB = 0.656 W/kg = -1.83 dBW/kg

### 17\_LTE Band 4\_20M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch20175

Communication System: UID 0, LTE-FDD (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 40.041$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.73, 8.73, 8.73); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.397 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.02 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.428 W/kg

**SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.172 W/kg**

Maximum value of SAR (measured) = 0.364 W/kg

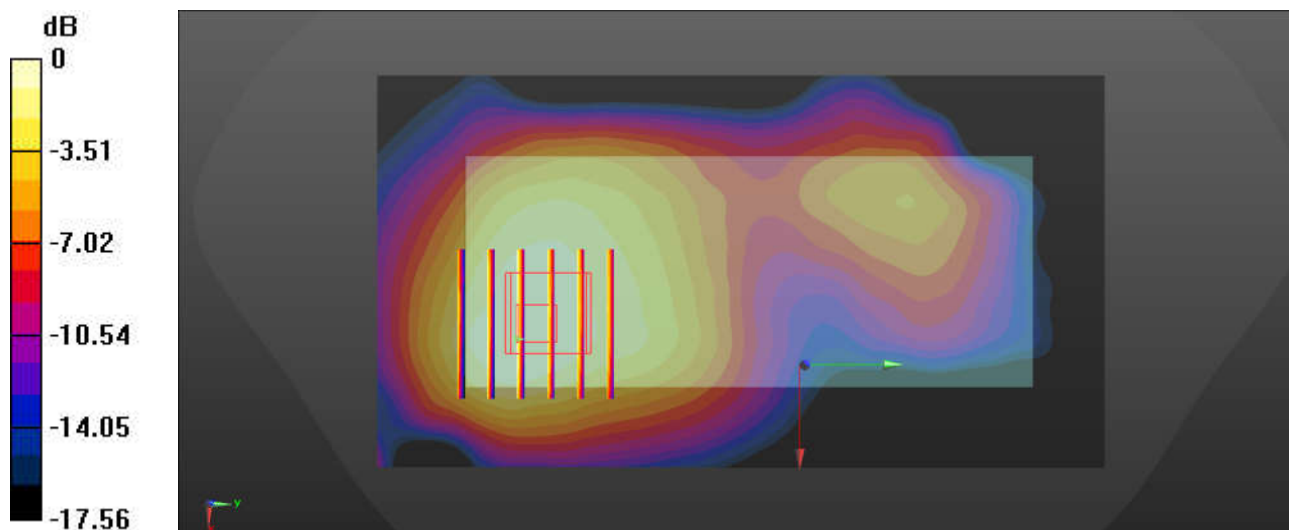

0 dB = 0.364 W/kg = -4.39 dBW/kg

### 18\_LTE Band 5\_10M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch20525

Communication System: UID 0, LTE-FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_835 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.046$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.21, 10.21, 10.21); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.516 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.72 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.633 W/kg

**SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.203 W/kg**

Maximum value of SAR (measured) = 0.516 W/kg

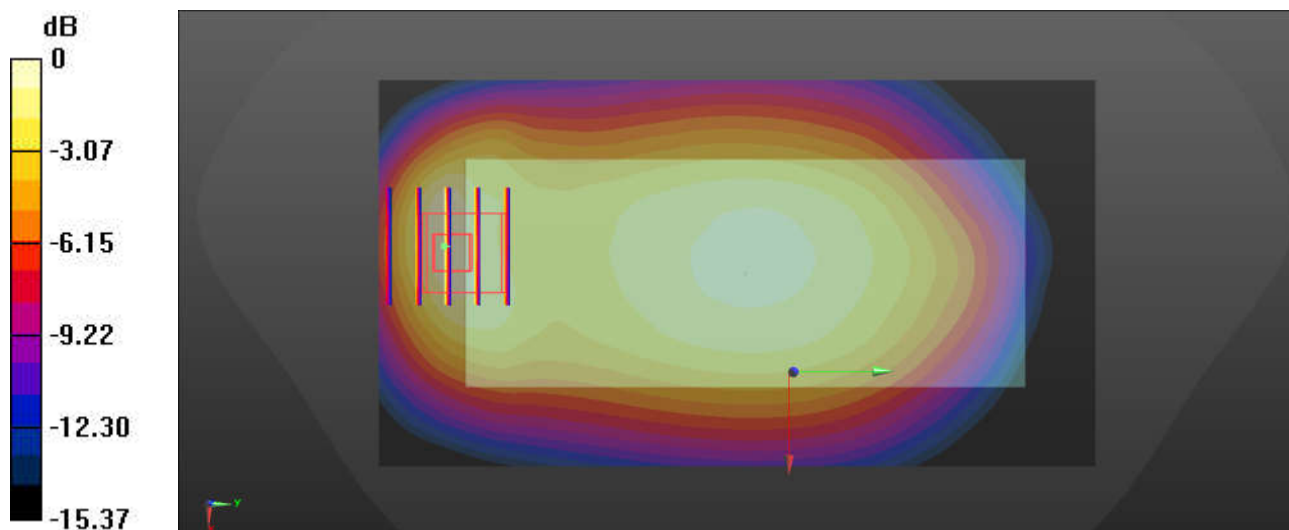

0 dB = 0.516 W/kg = -2.87 dBW/kg

### 19\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch40620

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_2600 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 39.166$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.71, 7.71, 7.71); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2021.3.17
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2022
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x171x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.644 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.57 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.811 W/kg

**SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.182 W/kg**

Maximum value of SAR (measured) = 0.655 W/kg

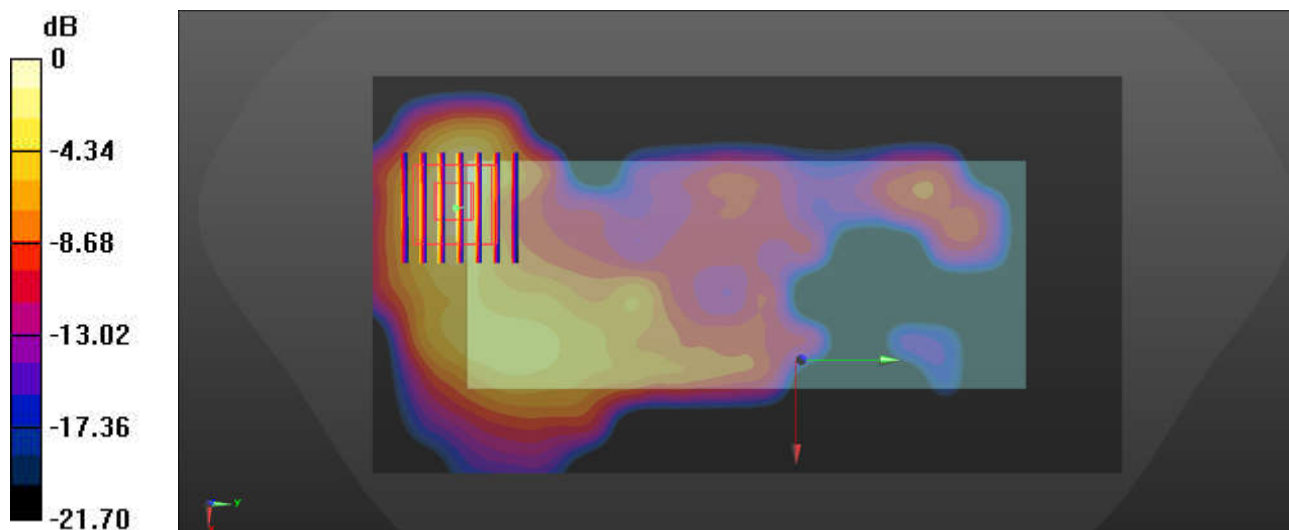

0 dB = 0.655 W/kg = -1.84 dBW/kg