

Report No.: SEWM2212000308RG01

Rev.: 02 Page: 1 of 32

TEST REPORT

Application No.: SEWM2212000308RG

Applicant: Sony Corporation

Address of Applicant: 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Manufacturer: Sony Corporation

Address of Manufacturer: 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

EUT Description: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, NFC and GNSS

Trade Mark: Sony

FCC ID: PY7-51629L
Standards: 47 CFR Part 2

47 CFR Part 22 47 CFR Part 24 47 CFR Part 27

Date of Receipt: 2022/11/30

Date of Test: 2022/12/20 to 2023/01/10

Date of Issue: 2023/02/23

Test Result : PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above

Authorized Signature:

Panta Sun Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx. Actention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 2 of 32

1 Version

	Revision Record			
Version	Chapter	Date	Modifier	Remark
01		2023/01/12		Original
02		2023/02/23		Added the plots to the report annexes

This report supersedes our previous report SEWM2212000308RG01, issued on 2023/01/12, which is hereby deemed null and void.

Prepared By	weller lin
	(Weller Liu) / Test Engineer
Checked By	well wei'
	(Well Wei) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document comment cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 3 of 32

Contents

1	Versi	on	2
2	Test \$	Summary	5
	2.1	GSM850/UMTS Band 5/LTE Band 5	5
	2.2	GSM 1900	6
	2.3	UMTS Band 4 /LTE Band 4	7
	2.4	LTE Band 41	8
3	Gene	eral Information	9
	3.1	Details of Client	9
	3.2	Test Location	9
	3.3	Test Facility	9
	3.4	General Description of EUT	10
	3.5	Test Mode	11
	3.6	Test Environment	11
	3.7	Description of Support Units	11
	3.8	Technical Specification	12
	3.9	Test Frequencies	14
4	Desc	ription of Tests	17
	4.1	Conducted Output Power	17
	4.2	Effective (Isotropic) Radiated Power of Transmitter	18
	4.3	Occupied Bandwidth	19
	4.4	Band Edge at Antenna Terminals	20
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	21
	4.6	Peak-Average Ratio	22
	4.7	Field Strength of Spurious Radiation	23
	4.8	Frequency Stability / Temperature Variation	24
	4.9	Test Setups	25
	4	4.9.1 Test Setup 1	25
	4	4.9.2 Test Setup 2	25
		4.9.3 Test Setup 3	
	4.10	Test Conditions	27



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printeverleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aps, and, for electronic format documents ubject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx tention is drawn to the limitation of liability, indemnification and jurisdiction issues defineten. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of lient's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to ansaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproducetocept in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content of ppearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the sults shown in this test report refer only to the sample(s) tested and such sample(s) are retained of 30 days only

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Donart No.	CEMMADA ADDODODO
Report No.:	SEWM2212000308RG0 ⁻

Rev.:	02
Page:	4 of 32

5	Main Test Instruments	29
6	Measurement Uncertainty	31
7	Appendixes	32



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic forms documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsteing Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 5 of 32

2 Test Summary

2.1 GSM850/UMTS Band 5/LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix B.1&B.2&B.4	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.1&B.2&B.4	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.1&B.2&B.4	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.1&B.2&B.4	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1&B.2&B.4	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.1&B.2&B.4	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.1&B.2&B.4	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §22.355	≤ ±2.5ppm.	Section 8 of Appendix B.1&B.2&B.4	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic formard documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the contents or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.s t (86–512) 62992980 sgs.ch



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 6 of 32

2.2 GSM 1900

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.1	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 2 of Appendix B.1	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.1	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.1	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.1	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.1	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §24.235	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.1	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration (orgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Ploti Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www t (86–512) 62992980 sgs.



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 7 of 32

2.3 UMTS Band 4 /LTE Band 4

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.2&B.3	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.2&B.3	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.2&B.3	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.2&B.3	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.2&B.3	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.2&B.3	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.2&B.3	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.2&B.3	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document comment cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 8 of 32

2.4 LTE Band 41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.5	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.5	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.5	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.5	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 5 of Appendix B.5	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz × MHz 10 th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B.5	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz X MHz 10th harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B.5	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.5	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic formard documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the contents or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www t (86–512) 62992980 sgs.



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 9 of 32

3 General Information

3.1 Details of Client

Applicant:	Sony Corporation
Address of Applicant:	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer:	Sony Corporation
Address of Manufacturer:	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Weller Liu, Tizzy Song

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf, for electronic format documents subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 10 of 32

3.4 General Description of EUT

EUT Description:	GSM/WCDMA/LT	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, NFC and GNSS					
Trade Mark:	Sony	Sony					
Hardware Version:	Α	A					
Software Version:	0.256	0.256					
SN:	RF Conducted	HQ62B	2040A				
SIN.	RSE	HQ62B	2030D				
Antenna Type:	PIFA Antenna						
	GSM850: -1.3dBi(Ant0)		Bi(Ant0)	GSM1900:	1.8dBi(Ant1)		
Antenna Gain:	WCDMA Band IV: 1.7dBi(Ant1)		WCDMA Bar	nd V: -1.3dBi(Ant0)			
Antenna Gam.	LTE Band 4:	1.7dB	i(Ant1)	LTE Band 5:	-1.3dBi(Ant0)		
	LTE Band 41:	LTE Band 41: 0.5dBi(Ant0)					
RF Cable:	0.8dB(Below 1GH	z)	1.0dB(1.0~2.4GHz) 1.2dB(2.4~3.4GHz		1.2dB(2.4~3.4GHz)		
NE Gable.	1.5dB(Above 3.40	SHz)		·			

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic forms documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 11 of 32

3.5 Test Mode

Test Mode	Test Modes Description				
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation				
GSM/TM2	GSM system, EGPRS, 8PSK modulation				
UMTS/TM1	UMTS system, WCDMA, QPSK modulation				
UMTS/TM2	UMTS system, WCDMA, 16QAM modulation				
LTE/TM1	LTE system, QPSK modulation				
LTE/TM2	LTE system, 16QAM modulation				
LTE/TM3 LTE system, 64QAM modulation					
Remark: The test mode(Remark: The test mode(s) are selected according to relevant radio technology specifications.				

3.6 Test Environment

Environment Parameter		101.0 kPa Selected Values During Tests				
Relative Humidity		44-46 % RH Ambient				
Value		Temperature(°C)	Voltage(V)			
NTNV		22~23	3.89			
LTLV		-30	3.40			
LTHV		-30	4.48			
HTLV		50	3.40			
HTHV		50	4.48			
Remark:						
NV: Normal Voltage LV: Low		Extreme Test Voltage	HV: High Extreme Test Voltage			
NT: Normal Temperature	LT: Low	Extreme Test Temperature	HT: High Extreme Test Temperature			

3.7 Description of Support Units

The EUT has been tested as an independent unit.



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed worled a vailable on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.sapx and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.sapx tkention is drawn to the limitation of liability, indeminification and jurisdiction issues defined therein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of illent's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content on ppearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the seults shown in this test report refer only to the sample(s) serve and such sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 12 of 32

3.8 Technical Specification

Characteristics	Description					
Radio System Type	⊠ GSM	☑ UMTS	⊠ LT	Έ		
	Band		TX		RX	
	GSM850		824 to 84	19 MHz	869 to 8	94 MHz
	GSM1900		1850 to 1	910 MHz	1930 to	1990 MHz
Cupported Fraguency Dance	UMTS Band IV	1	1710 to 1	755 MHz	2110 to	2155 MHz
Supported Frequency Range	UMTS Band V		824 to 84	19 MHz	869 to 8	94 MHz
	LTE Band 4		1710 to 1	755 MHz	2110 to	2155 MHz
	LTE Band 5		824 to 84	19 MHz	869 to 8	94 MHz
	LTE Band 41		2496 to 2	2690MHz	2496 to	2690MHz
	GSM system:		⊠0.2 MH	Z		
	UMTS system:		⊠5 MHz			
Supported Channel Bandwidth	LTE Band 4		⊠1.4 MH	z ⊠3 MHz	⊠5 MHz	⊠10 MHz
			⊠15 MHz	z ⊠20 MHz	<u>*</u>	
	LTE Band 5		⊠1.4 MH	z ⊠3 MHz	⊠5 MHz	⊠10 MHz
	LTE Band41		⊠5 MHz	⊠10 MHz	z ⊠15 MHz	⊠20 MHz
	Note1: WCDMA supports HSUPA, HSDPA, DC-HSDPA,HSPA+, but only the worst case was tested and the data displayed in this report.					
Characteristics	Description					
	GSM:	GM	ISK	8PSK		
	GSM850	246	KGXW	246KG7W		
	GSM1900	248	KGXW	248KG7W		
	UMTS:	QP	SK			
Designation of Emissions	Band IV	4M	15F9W			
(Remark: the necessary	Band V	4M	15F9W			
bandwidth of which is the worst value from the	E-UTRA:	QP	SK	16QAM	64QAM	
measured occupied		1M	08G7D	1M09W7D	1M09W7D	
bandwidths for each type of channel bandwidth		2M	70G7D	2M69W7D	2M69W7D	
configuration.)	ITE Band 1	4M	47G7D	4M47W7D	4M48W7D	
	LTE Band 4	8M	95G7D	8M93W7D	8M94W7D	
	1;					
		131	//5G7D	13M5W7D	13M5W7D	
				13M5W7D 17M9W7D	13M5W7D 17M9W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one one exore exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www t (86–512) 62992980 sgs.



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 13 of 32

Parameter 1 and 1				
		2M70G7D	2M69W7D	2M69W7D
		4M47G7D	4M47W7D	4M48W7D
		8M96G7D	8M94W7D	8M95W7D
	LTE Band 41	4M48G7D	4M47W7D	4M48W7D
		8M93G7D	8M93W7D	8M94W7D
		13M5G7D	13M5W7D	13M5W7D
		17M9G7D	17M9W7D	17M9W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic format document subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 14 of 32

3.9 Test Frequencies

Test Mode TX / RX		RF Channel				
rest wode	IA/ NA	Low (L)	Middle (M)	High (H)		
GSM850	TX	Channel 128	Channel 190	Channel 251		
		824.2MHz	836.6 MHz	848.8 MHz		
	RX	Channel 128	Channel 190	Channel 251		
		869.2 MHz	881.6 MHz	893.8 MHz		

Test Mode	TX / RX	RF Channel				
rest Mode	IA/ NA	Low (L)	Middle (M)	High (H)		
	TX	Channel 512	Channel 661	Channel 810		
CSM1000		1850.2MHz	1880.0 MHz	1909.8 MHz		
GSM1900	DV	Channel 512	Channel 661	Channel 810		
	RX	1930.2 MHz	1960.0 MHz	1989.8 MHz		

Test Mode	TX / RX	RF Channel				
rest wode	IX/IX	Low (L)	Middle (M)	High (H)		
		Channel 1312	Channel 1413	Channel 1513		
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz		
WCDIVIA Ballu IV	RX	Channel 1537	Channel 1638	Channel 1738		
	KA	2112.4 MHz	2132.6 MHz	2152.6 MHz		

Test Mode	TX / RX		RF Channel		
rest wode	IA/IX	Low (L)	Middle (M)	High (H)	
WCDMA Band V	TX	Channel 4132	Channel 4182	Channel 4233	
		826.4MHz	836.4 MHz	846.6 MHz	
	RX	Channel 4357	Channel 4407	Channel 4458	
		871.4 MHz	881.4 MHz	891.6 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions Terms - Documents as https://www.sgs.com/en/Terms-and-Conditions/Terms-Document.aspx. Subject to Terms and Conditions Terms - Document.aspx and the subject of the subject o



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 15 of 32

· · · · · · · · · · · · · · · · · · ·			r ay e .	13 01 32	
Test Mode	Bandwidth	TX / RX		RF Channel	
1 63t IVIOUE	Danuwiuii	17/107	Low (L)	Middle (M)	High (H)
		TX	Channel 19957	Channel 20175	Channel 20393
			1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		KΛ	2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
_		KΛ	2115 MHz	2132.5MHz	2150 MHz
	5MHz		Channel 19975	Channel 20175	Channel 20375
		TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTC Donal 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LTE Band 4	10MHz		Channel 20000	Channel 20175	Channel 20350
		TX	1715 MHz	1732.5 MHz	1750 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
		KΛ	2115 MHz	2132.5MHz	2150 MHz
			Channel 20025	Channel 20175	Channel 20325
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
		100	2117.5 MHz	2132.5MHz	2147.5 MHz
Ţ			Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	DV	Channel 2050	Channel 2175	Channel 2300
		RX	2120 MHz	2132.5MHz	2145 MHz

Toot Mode	Dondwidth	TV / DV	RF Channel			
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)	
			Channel 20407	Channel 20525	Channel 20643	
		TX	824.7 MHz	836.5 MHz	848.3 MHz	
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643	
		KA	869.7 MHz	881.5 MHz	893.3 MHz	
			Channel 20415	Channel 20525	Channel 20635	
	3MHz	TX	825.5 MHz	836.5 MHz	847.5 MHz	
		RX	Channel 2415	Channel 2525	Channel 2635	
LTE Day LE			870.5 MHz	881.5 MHz	892.5 MHz	
LTE Band 5			Channel 20425	Channel 20525	Channel 20625	
	CMI I	TX	826.5 MHz	836.5 MHz	846.5 MHz	
	5MHz	DV	Channel 2425	Channel 2525	Channel 2625	
		RX	871.5 MHz	881.5 MHz	891.5 MHz	
			Channel 20450	Channel 20525	Channel 20600	
		TX	829 MHz	836.5 MHz	844 MHz	
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600	
		IVA	874 MHz	881.5 MHz	889 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration (orgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 16 of 32

Test Mode	Bandwidth	TX / RX	RF Channel			
rest Mode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)	
LTE Band 41 (2496-2690)			Channel 39675	Channel40620	Channel 41565	
	5MHz TX / RX		2498.5 MHz	2593 MHz	2687.5 MHz	
			Channel 39700	Channel40620	Channel 41540	
	10MHz	TX / RX	2501 MHz	2593 MHz	2685 MHz	
			Channel 39725	Channel40620	Channel 41515	
,	15MHz	TX / RX	2503.5 MHz	2593 MHz	2682.5 MHz	
			Channel 39750	Channel40620	Channel 41490	
	20MHz	TX / RX	2506 MHz	2593 MHz	2680 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic forms documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. F Plant, No. 1, Purasheng Toad, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜商1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 17 of 32

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic forms documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区消胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 18 of 32

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf, for electronic format documents subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industria Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区消胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 wv t (86–512) 62992980 sg



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 19 of 32

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.appx.and, for electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-and-Documents spx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上版区 第一次 1000年 10

15000 t (86–512) 62992980 15000 t (86–512) 62992980



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 20 of 32

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 21 of 32

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings





Report No.: SEWM2212000308RG01

Rev.: 02 22 of 32 Page:

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service f, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format doct to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-an



Report No.: SEWM2212000308RG01

Rev.: 02 23 of 32 Page:

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel, the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics

had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service proverleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.app.and, for electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-e-Document. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the lim Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties transaction from exercising all their rights and obligations under the transaction document. This document cannot be reprocedured to the company of the Company. Any unauthorized alteration, forgery or falsification of the company appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise state results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 24 of 32

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3



t (86-512) 62992980




Report No.: SEWM2212000308RG01


Rev.: 02 Page: 25 of 32

4.9 Test Setups

4.9.1 Test Setup 1

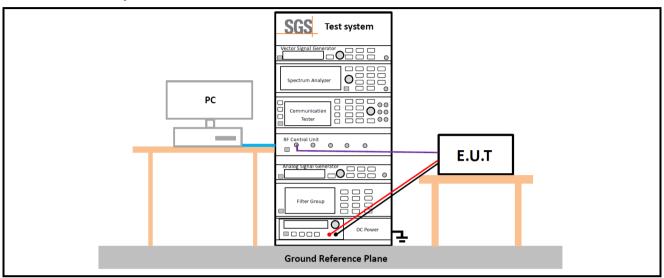

4.9.2 Test Setup 2

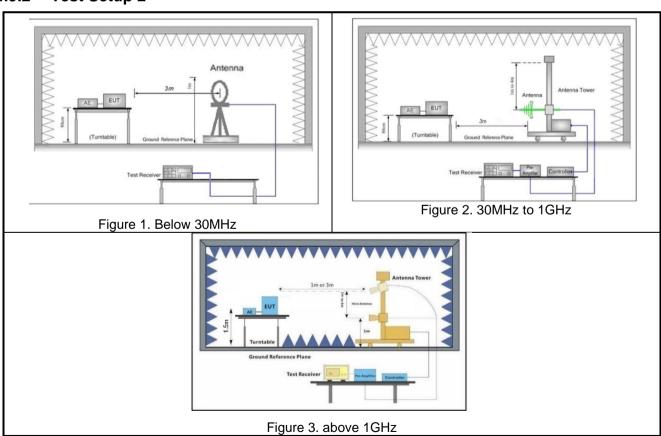



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-a


South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www t (86–512) 62992980 sgs.



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 26 of 32

4.9.3 Test Setup 3

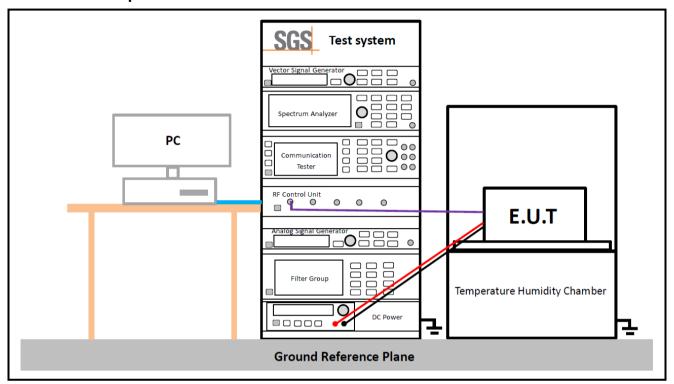



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law Luness otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing rinspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 27 of 32

4.10Test Conditions

Transmit Output Power Data - Average Power, Total				
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	GSM/TM1;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3			
Peak-to-Average Ratio				
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3			
	Modulation Characteristics			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	M (M= middle channel)			
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3			
	Bandwidth - Occupied Bandwidth			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3			
	Bandwidth - Emission Bandwidth			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3			
Band Edges Compliance				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 sgs.china@sgs.com

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 28 of 32

	<u> </u>		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, H (L= low channel, H= high channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1		
	Spurious Emission at Antenna Terminals		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1		
Field Strength of Spurious Radiation			
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 2		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1;UMTS/TM1;LTE/TM1 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.		
Frequency Stability			
Test Case	Test Conditions		
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage		
	(2) VL, VN and VH of Rated Voltage at Ambient Climate.		
Test Setup	Test Setup 3		
RF Channels (TX)	M (M= middle channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions-And-Ferms-and-Conditions/Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Con

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 29 of 32

5 Main Test Instruments

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2022/02/16	2023/02/15
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2022/02/14	2023/02/13
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2022/02/15	2023/02/14
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2022/02/15	2023/02/14
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf, for electronic format documents subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

215000 t (86–512) 62992980 215000 t (86–512) 62992980



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 30 of 32

RSE Test System					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2021/11/25	2024/11/24
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-15	2022/02/16	2023/02/15
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2022/11/23	2023/11/22
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2022/02/19	2023/02/18
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-04	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2022/11/23	2023/11/22
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2022/02/14	2023/02/13
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions/Ferms-and-Conditions-And-Ferms-and-Conditions/Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Conditions-and-Ferms-and-Con

South of No. F Plant, No. 1, Purasheng Toad, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜商1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 31 of 32

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty	
1	Total RF power, conducted	±0.54dB	
2	RF power density, conducted	±1.03dB	
3	Spurious emissions, conducted	±0.54dB	
4	Radio Frequency	±1.0 %	
5	Duty Cycle	±0.37%	
6	Occupied Bandwidth	±1.0 %	
		± 3.13dB (9k -30MHz)	
7	Dadiated Emission	± 4.88dB (30M -1GHz)	
	Radiated Emission	± 4.75dB (1GHz to 18 GHz)	
		± 4.77dB (Above 18GHz)	

Remark:

The Ulab (lab Uncertainty) is less than Ucispr/ETSI (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic forms documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000308RG01

Rev.: 02 Page: 32 of 32

7 Appendixes

Appendix A.3	WWAN Setup Photos
Appendix B.1	GSM 850 & 1900
Appendix B.2	WCDMA Band IV & V
Appendix B.3	LTE Band 4
Appendix B.4	LTE Band 5
Appendix B.5	LTE Band 41

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf, for electronic format documents subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. F Plant, No. 1, Purchang Tead, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜商(号的6号厂房商部 邮编: 215000