
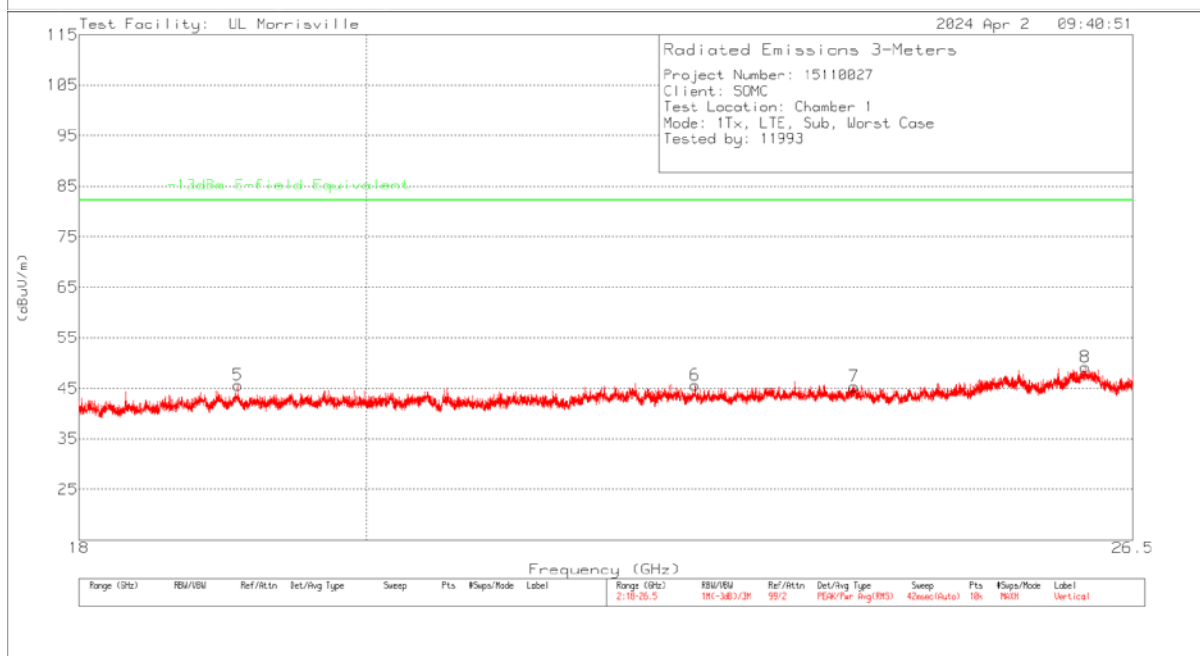


18GHz – 26.5GHz Worst-Case Emissions

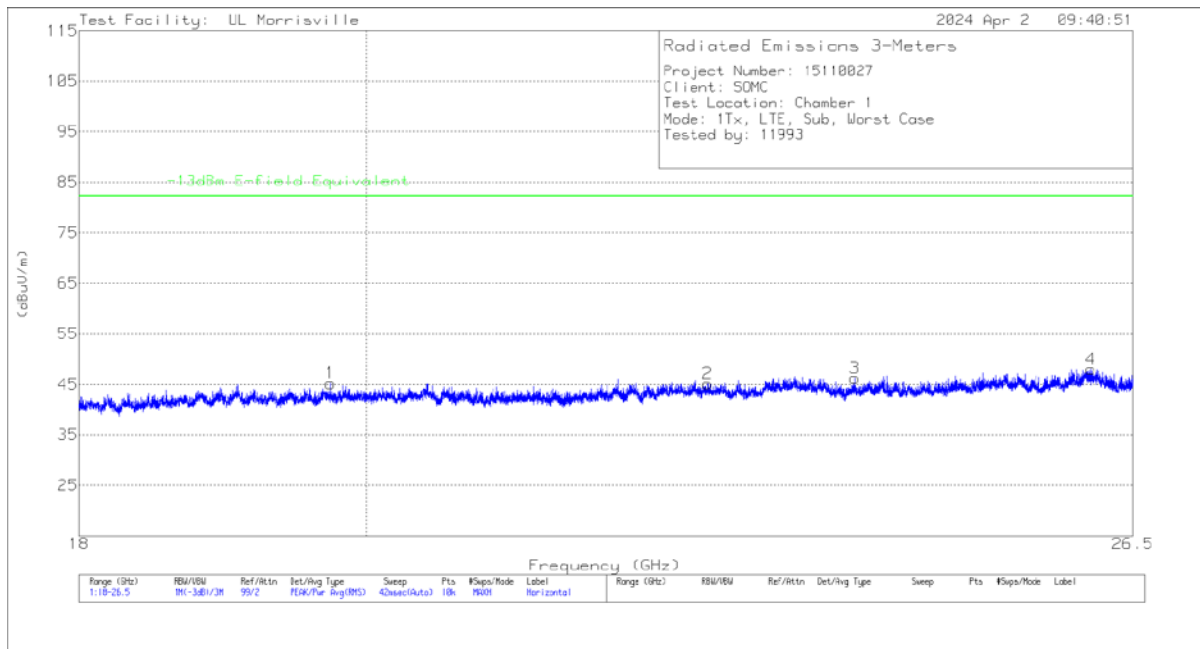

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	204704 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	-13dBm E-field Equivalent	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	19.08024	49.89	Pk	33.7	-38	45.59	82.2	-36.61	0-360	250	V
1	19.74318	50	Pk	33.2	-38	45.2	82.2	-37	0-360	150	H
6	22.56914	49.02	Pk	34.3	-37.7	45.62	82.2	-36.58	0-360	101	V
2	22.67113	48.46	Pk	34.2	-37.5	45.16	82.2	-37.04	0-360	101	H
7	23.92221	47.95	Pk	34.4	-37	45.35	82.2	-36.85	0-360	151	V
3	23.93156	49.15	Pk	34.4	-37.3	46.25	82.2	-35.95	0-360	200	H
8	26.04105	50.05	Pk	35.3	-36.1	49.25	82.2	-32.95	0-360	151	V
4	26.09459	48.75	Pk	35.2	-36	47.95	82.2	-34.25	0-360	250	H

Pk - Peak detector

11. SETUP PHOTOS

See R15110027-EP1 for Setup Photos.

END OF REPORT