

PCTEST

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



PART 24 MEASUREMENT REPORT

Applicant Name: Sony Mobile Communications Inc 4-12-3 Higashi-Shinagawa Shinagawa-ku Tokyo, 140-0002, Japan

Date of Testing: 7/9/2020 - 9/18/2020 **Test Site/Location:** PCTEST Lab. Columbia, MD, USA **Test Report Serial No.:** 12M007070106-17-R2.PY7

FCC ID: PY7-57441Y

Sony Mobile Communications Inc Applicant Name:

Application Type: Certification **EUT Type:** Portable Handset

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168

D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M2007070106-17-R2.FCC Report SNs) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Råndy Ortanez President





FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 1 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	rage 101131



TABLE OF CONTENTS

1.0	INTF	RODUCTION	4
	1.1	Scope	4
	1.2	PCTEST Test Location	4
	1.3	Test Facility / Accreditations	4
2.0	PRC	DDUCT INFORMATION	5
	2.1	Equipment Description	5
	2.2	Device Capabilities	5
	2.3	Test Configuration	5
	2.4	EMI Suppression Device(s)/Modifications	5
3.0	DES	SCRIPTION OF TESTS	6
	3.1	Evaluation Procedure	6
	3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEA	ASUREMENT UNCERTAINTY	7
5.0	TES	T EQUIPMENT CALIBRATION DATA	8
6.0	SAM	IPLE CALCULATIONS	g
7.0	TES	T RESULTS	11
	7.1	Summary	11
	7.2	Conducted Power Output Data	12
	7.3	Occupied Bandwidth	18
	7.4	Spurious and Harmonic Emissions at Antenna Terminal	38
	7.5	Band Edge Emissions at Antenna Terminal	59
	7.6	Peak-Average Ratio	91
	7.7	Radiated Power (ERP/EIRP)	111
	7.8	Radiated Spurious Emissions Measurements	115
	7.9	Frequency Stability / Temperature Variation	126
8.0	CON	NCLUSION	131

FCC ID: PY7-57441Y	Proud to be part of @ element	PARI 24 MEASUREMENT REPORT	
Test Report S/N:	Test Dates:	EUT Type:	Page 2 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 2 01 131





PART 24 MEASUREMENT REPORT



			T. F	EII	RP	- :
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Max. Power [W]	Max. Power [dBm]	Emission Designator
GSM/GPRS	N/A	GMSK	1850.2 - 1909.8	0.550	27.40	243KGXW
EDGE	IN/A	8-PSK	1850.2 - 1909.8	0.171	22.32	247KG7W
WCDMA	N/A	Spread Spectrum	1852.4 - 1907.6	0.240	23.81	4M15F9W
		QPSK	1860 - 1905	0.163	22.13	18M0G7D
	20 MHz	16QAM	1860 - 1905	0.136	21.32	18M0W7D
		64QAM	1860 - 1905	0.110	20.41	18M0W7D
		QPSK	1857.5 - 1907.5	0.110	20.41	13M5G7D
	15 MHz	16QAM	1857.5 - 1907.5	0.170	22.31	13M5W7D
		64QAM	1857.5 - 1907.5	0.169	22.27	13M5W7D
		QPSK	1855 - 1910	0.169	22.27	9M01G7D
	10 MHz	16QAM	1855 - 1910	0.139	21.44	9M02W7D
LTE Band 25/2		64QAM	1855 - 1910	0.108	20.32	9M00W7D
LIE Dana 25/2		QPSK	1852.5 - 1912.5	0.167	22.22	4M54G7D
	5 MHz	16QAM	1852.5 - 1912.5	0.133	21.25	4M53W7D
		64QAM	1852.5 - 1912.5	0.098	19.90	4M55W7D
	3 MHz	QPSK	1851.5 - 1913.5	0.170	22.30	2M72G7D
		16QAM	1851.5 - 1913.5	0.136	21.32	2M71W7D
		64QAM	1851.5 - 1913.5	0.106	20.25	2M71W7D
		QPSK	1850.7 - 1914.3	0.168	22.26	1M10G7D
	1.4 MHz	16QAM	1850.7 - 1914.3	0.125	20.95	1M10W7D
		64QAM	1850.7 - 1914.3	0.096	19.84	1M10W7D
		π/2 BPSK	1860 - 1905	0.066	18.20	18M0G7D
	00.141.1-	QPSK	1860 - 1905	0.068	18.30	19M0G7D
	20 MHz	16QAM	1860 - 1905	0.056	17.51	19M0W7D
		64QAM	1860 - 1905	0.043	16.37	19M0W7D
		π/2 BPSK	1857.5 - 1907.5	0.062	17.91	13M5G7D
	45 MH-	QPSK	1857.5 - 1907.5	0.064	18.07	14M2G7D
	15 MHz	16QAM	1857.5 - 1907.5	0.052	17.16	14M2W7D
ND DI-O		64QAM	1857.5 - 1907.5	0.047	16.68	14M2W7D
NR Band n2		π/2 BPSK	1855 - 1910	0.062	17.95	8M98G7D
	40.041.1-	QPSK	1855 - 1910	0.067	18.26	9M35G7D
	10 MHz	16QAM	1855 - 1910	0.051	17.05	9M36W7D
		64QAM	1855 - 1910	0.045	16.54	9M40W7D
		π/2 BPSK	1852.5 - 1912.5	0.062	17.96	4M50G7D
	E N411-	QPSK	1852.5 - 1912.5	0.066	18.16	4M52G7D
	5 MHz	16QAM	1852.5 - 1912.5	0.050	17.00	4M51W7D
		64QAM	1852.5 - 1912.5	0.045	16.52	4M54W7D

FCC ID: PY7-57441Y	Proud to be part of @ element	→\————— PARI 24 MEASUREMENT REPORT □		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 2 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 3 of 131



1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: PY7-57441Y	PCTEST* Proud to be port of @ element	PART 24 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 4 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 4 of 131
© 2020 PCTEST	•	•		•



2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the SONY **Portable Handset FCC ID:PY7-57441Y**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: 83174, 81811, 64264

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900, WCDMA/HSPA, Multi-band LTE, 5G NR (n5, n66, n2, n260, n261), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo F of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 5 of 131
© 2020 PCTEST			•	



3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-E-2016) and "Measurement Guidance for Certification of Licensed Digital Transmitters" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure......None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

 $P_{d [dBm]} = P_{g [dBm]} - cable loss [dB] + antenna gain [dBd/dBi];$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_{g \, [dBm]}$ – cable loss $_{[dB]}$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

 $E_{[dB\mu V/m]}$ = Measured amplitude level_[dBm] + 107 + Cable Loss_[dB] + Antenna Factor_[dB/m]
And

 $EIRP_{fdBml} = E_{fdBuV/ml} + 20logD - 104.8$; where D is the measurement distance in meters.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: PY7-57441Y	Proud to be part of element	PART 24 MEASUREMENT REPORT SC	ONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 6 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		rage o or 131



4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of k=2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: PY7-57441Y	Proud to be point of @ element	PART 24 MEASUREMENT REPORT SO	NY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 7 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 7 of 131
© 2020 PCTEST	•			



5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	4/9/2020	Annual	4/9/2021	LTx2
-	LTx3	Licensed Transmitter Cable Set	10/30/2019	Annual	10/30/2020	LTx3
Anritsu	MT8821C	Radio Communication Analyzer	3/10/2020	Annual	3/10/2021	6200901190
Anritsu	MT8821C	Radio Communication Analyzer	6/15/2020	Annual	6/15/2021	6201381794
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
ETS-Lindgren	3115	Double Ridged Guide Horn 750MHz - 18GHz	3/12/2020	Biennial	3/12/2022	150693
Hewlett-Packard	8648D	(9kHz-4GHz) Signal Generator	6/23/2020	Annual	6/23/2021	3613A00315
Keysight Technologies	N9020A	MXA Signal Analyzer	8/14/2020	Annual	8/14/2021	US46470561
Keysight Technologies	N9038A	MXE EMI Receiver	8/11/2020	Annual	8/11/2021	MY51210133
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Mini Circuits	TVA-11-422	RF Power Amp	N/A		QA1317001	
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator		N/A		11208010032
Rohde & Schwarz	CMU200	Base Station Simulator		N/A		836536/0005
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	7/8/2020	Biennial	7/8/2022	101058
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol Science	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 5-1. Test Equipment

Notes:

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: PY7-57441Y	Proud to be port of @element	PART 24 MEASUREMENT REPORT	ONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 9 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 8 of 131
© 2020 PCTEST				



6.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz G = Phase Modulation X = Cases not otherwise covered W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz G = Phase Modulation 7 = Quantized/Digital Info W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz F = Frequency Modulation 9 = Composite Digital Info W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

FCC ID: PY7-57441Y	Proud to be part of element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 9 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 9 01 131



Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm -(-24.80) = 50.3 dBc.

FCC ID: PY7-57441Y	Proud to be port of @ element	PART 24 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dog 10 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 10 of 131
© 2020 PCTEST		•		



7.0 TEST RESULTS

7.1 Summary

Company Name: Sony Mobile Communications Inc

FCC ID: <u>PY7-57441Y</u>

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

Mode(s): <u>GSM/GPRS/EDGE/WCDMA/LTE/NR</u>

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
	Occupied Bandwidth	2.1049	RSS-133(2.3)	N/A	PASS	Section 7.3
СТЕБ	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	RSS-133(6.5)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of- band emissions	PASS	Sections 7.4/7.5
CONDUCTED	Transmitter Conducted Output Power	2.1046	RSS-133(4.1)	N/A	PASS	See Section 7.2 / RF Exposure Report
	Frequency Stability	2.1055, 24.235	RSS-133(6.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.9
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power	24.232(c)	RSS-132(5.4)	< 7 Watts max. ERP	PASS	Section 7.7
RADI	Radiated Spurious Emissions	2.1053, 24.238(a)	RSS-133(6.5)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.8

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST 2G/3G Automation Version 4.5, LTE Automation Version 5.3.

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 11 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	rage 11 01 131



7.2 Conducted Power Output Data

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers is measured by means of a calibrated spectrum analyzer. All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 - Section 6.0

Test Settings

- 1. Detector = RMS
- 2. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 3. Sweep time = auto couple
- 4. The trace was allowed to stabilize
- 5. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

- 1. Uplink carrier aggregation is only supported in this EUT while operating in Power Class 3.
- 2. Conducted power measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
- 3. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz.
- 4. All other conducted power measurements are contained in the RF exposure report for this filing.

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 12 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 12 01 131



LTE Band 25/2

				LTE Band 25 (PCS)			
				20 MHz Bandwidth			
			Low Channel	Mid Channel	High Channel		
Modulation	RB Size	RB Offset	26140	26365	26590	MPR Allowed per	MPR [dB]
	1.2 5.25		(1860.0 MHz)	(1882.5 MHz)	(1905.0 MHz)	3GPP [dB]	
				Conducted Power [dBm			
	1	0	24.15	23.98	24.00] [0
	1	50	24.21	24.08	24.08	0	0
	1	99	24.20	24.04	24.01		0
QPSK	50	0	23.21	23.26	23.29		1
	50	25	23.40	23.39	23.36	0-1	1
	50	50	23.29	23.36	23.38	0-1	1
	100	0	23.30	23.36	23.32		1
	1	0	23.30	23.56	23.51		1
	1	50	23.32	23.62	23.54	0-1	1
	1	99	23.29	23.61	23.54		1
16QAM	50	0	21.97	22.48	22.00		2
	50	25	22.10	22.61	22.06	0-2	2
	50	50	22.08	22.55	22.10	0-2	2
	100	0	21.99	22.58	22.11		2
	1	0	22.30	22.37	22.21		2
	1	50	22.40	22.61	22.28	0-2	2
	1	99	22.37	22.65	21.89		2
64QAM	50	0	21.42	20.95	21.07		3
	50	25	21.55	21.10	21.15	0-3	3
	50	50	21.52	21.07	21.19		3
	100	0	21.57	21.10	21.09		3

Table 7-2. LTE Band 25 (PCS) Measured Pmax for DSI = 2 (Free Space State) - 20 MHz Bandwidth

				LTE Band 25 (PCS) 15 MHz Bandwidth			
Modulation	RB Size	RB Offset	Low Channel 26115 (1857.5 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26615 (1907.5 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
			, i	Conducted Power [dBm]	1 1	
	1	0	24.02	24.01	24.20		0
	1	36	24.10	24.08	24.30	0	0
	1	74	24.05	24.03	24.22	1 [0
QPSK	36	0	23.63	23.59	23.60		1
	36	18	23.68	23.61	23.67	0-1	1
	36	37	23.59	23.62	23.67] 0-1	1
	75	0	23.61	23.63	23.62] [1
	1	0	23.30	23.78	23.61		1
	1	36	23.40	23.85	23.72	0-1	1
	1	74	23.37	23.80	23.67		1
16QAM	36	0	22.29	22.28	22.35		2
	36	18	22.34	22.32	22.42	0-2	2
	36	37	22.28	22.35	22.43	0-2	2
	75	0	22.33	22.34	22.31		2
	1	0	22.16	22.31	22.62		2
	1	36	22.24	22.43	22.73	0-2	2
	1	74	22.16	22.36	22.46		2
64QAM	36	0	21.44	21.40	21.32		3
	36	18	21.44	21.41	21.40	0-3	3
	36	37	21.42	21.45	21.42		3
	75	0	21.38	21.31	21.40		3

Table 7-3. LTE Band 25 (PCS) Measured Pmax for DSI = 2 (Free Space State) - 15 MHz Bandwidth

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 13 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 13 01 131



				LTE Band 25 (PCS)			
Modulation	RB Size	RB Offset	Low Channel 26090 (1855.0 MHz)	10 MHz Bandwidth Mid Channel 26365 (1882.5 MHz)	High Channel 26640 (1910.0 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
				Conducted Power [dBm			
	1	0	24.10	24.07	24.04		0
	1	25	23.99	24.03	24.11	0	0
	1	49	24.02	24.09	24.09		0
QPSK	25	0	23.64	23.52	23.54		11
	25	12	23.65	23.61	23.58	0-1	1
	25	25	23.64	23.64	23.67	0-1	1
	50	0	23.64	23.64	23.62		1
	1	0	23.58	23.34	23.80		1
	1	25	23.53	23.33	23.81	0-1	1
	1	49	23.57	23.33	23.77]	1
16QAM	25	0	22.46	22.28	22.31		2
	25	12	22.42	22.34	22.38	0-2	2
	25	25	22.46	22.41	22.48	0-2	2
	50	0	22.35	22.32	22.30]	2
	1	0	22.46	22.01	22.23		2
	1	25	22.52	22.19	22.39	0-2	2
	1	49	22.49	22.18	22.18	1	2
64QAM	25	0	21.48	21.33	21.34		3
	25	12	21.50	21.48	21.38	0-3	3
	25	25	21.48	21.46	21.44		3
	50	0	21.41	21.38	21.33] [3

Table 7-4 LTE Band 25 (PCS) Measured P_{max} for DSI = 2 (Free Space State) - 10 MHz Bandwidth

				LTE Band 25 (PCS) 5 MHz Bandwidth			
Modulation	RB Size	RB Offset	Low Channel 26065 (1852.5 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26665 (1912.5 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
				Conducted Power [dBm	1]		
	1	0	24.15	24.10	24.06		0
	1	12	24.15	24.28	24.04	0	0
	1	24	24.15	24.20	24.08		0
QPSK	12	0	23.61	23.50	23.63		1
	12	6	23.65	23.65	23.68	0-1	1
	12	13	23.65	23.64	23.71] "-1	1
	25	0	23.61	23.62	23.66]	1
	1	0	23.34	23.59	23.54		1
	1	12	23.44	23.70	23.53	0-1	1
	1	24	23.42	23.73	23.53	1	1
16QAM	12	0	22.27	22.41	22.28		2
	12	6	22.35	22.52	22.39	0-2	2
	12	13	22.37	22.59	22.44	0-2	2
	25	0	22.34	22.31	22.43		2
	1	0	22.64	22.83	22.49		2
	1	12	22.67	22.91	22.52	0-2	2
	1	24	22.68	22.95	22.18		2
64QAM	12	0	21.35	21.23	21.26		3
	12	6	21.45	21.37	21.31	0-3	3
	12	13	21.45	21.42	21.21] 0-3	3
	25	0	21.34	21.43	21.42]	3

Table 7-5. LTE Band 25 (PCS) Measured Pmax for DSI = 2 (Free Space State) - 5 MHz Bandwidth

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 14 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 14 01 131



				LTE Band 25 (PCS) 3 MHz Bandwidth			
Modulation	RB Size	RB Offset	Low Channel 26055 (1851.5 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26675 (1913.5 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
				Conducted Power [dBm	-		
	1	0	24.01	23.95	24.06		0
	1	7	24.16	24.08	24.07	0	0
	1	14	24.13	24.19	24.12		0
QPSK	8	0	23.61	23.47	23.58		1
	8	4	23.64	23.63	23.71	0-1	1
	8	7	23.64	23.62	23.68	0-1	1
	15	0	23.66	23.60	23.66		1
	1	0	23.54	23.29	23.80		1
	1	7	23.52	23.37	23.79	0-1	1
	1	14	23.60	23.45	23.87	1	1
16QAM	8	0	22.35	22.23	22.39		2
	8	4	22.41	22.40	22.50	0-2	2
	8	7	22.38	22.37	22.48	0-2	2
	15	0	22.45	22.24	22.41	1	2
	1	0	22.56	22.09	22.36		2
	1	7	22.59	22.20	22.29	0-2	2
	1	14	22.62	22.34	22.07		2
64QAM	8	0	21.36	21.21	21.41		3
	8	4	21.46	21.34	21.48	0-3	3
	8	7	21.43	21.37	21.30		3
	15	0	21.37	21.43	21.38	1	3

Table 7-6. LTE Band 25 (PCS) Measured Pmax for DSI = 2 (Free Space State) - 3 MHz Bandwidth

				LTE Band 25 (PCS) 1.4 MHz Bandwidth			
Modulation	RB Size	RB Offset	Low Channel 26047 (1850.7 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26683 (1914.3 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
				Conducted Power [dBm		_ SOFF [UD]	
	1	0	23.95	23.95	24.15		0
	1	2	24.02	24.03	24.22	1 [0
	1	5	23.99	24.03	24.24]	0
QPSK	3	0	24.02	24.02	24.07	1	0
	3	2	24.11	24.07	24.14	1	0
	3	3	24.05	24.07	24.11		0
	6	0	23.51	23.45	23.52	0-1	1
	1	0	23.37	23.23	23.38		1
	1	2	23.53	23.34	23.44	1 [1
	1	5	23.49	23.40	23.43	0-1	1
16QAM	3	0	23.21	23.33	23.43] ⁰⁻¹ [1
	3	2	23.27	23.42	23.49	1 [1
	3	3	23.24	23.39	23.47	1 [1
	6	0	22.19	22.19	22.34	0-2	2
	1	0	22.43	22.13	22.44		2
	1	2	22.49	22.23	22.47	1	2
	1	5	22.54	22.22	22.26	0-2	2
64QAM	3	0	22.37	22.36	22.36	J -2	2
	3	2	22.46	22.46	22.34] [2
	3	3	22.45	22.42	22.24		2
	6	0	21.27	21.25	21.04	0-3	3

Table 7-7. LTE Band 25 (PCS) Measured P_{max} for DSI = 2 (Free Space State) - 1.4 MHz Bandwidth

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N: Test Dates:		EUT Type:	Dogo 15 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 15 of 131



LTE Band 25/2

NR Band n2 20 MHz Bandwidth							
			372000	Channel 376000	380000	MPR Allowed per 3GPP	
Modulation	RB Size	RB Offset	(1860 MHz)	(1880 MHz)	(1900 MHz)		MPR [dB]
			Cor	ducted Power [di	Bm]	[dB]	
	1	1	23.99	23.92	23.90		0.0
	1	53	24.28	24.16	24.26	0	0.0
DFT-s-OFDM	1	104	23.84	23.96	23.79		0.0
π/2 BPSK	50	0	23.46	23.39	23.33	0-0.5	0.5
n/2 bi sic	50	28	23.97	23.89	23.81	0	0.0
	50	56	23.44	23.40	23.29	0-0.5	0.5
	100	0	23.39	23.44	23.26		0.5
	1	1	23.89	23.86	23.74		0.0
	1	53	24.41	24.34	24.22	0	0.0
DFT-s-OFDM	1	104	23.79	23.83	23.78		0.0
QPSK	50	0	22.87	22.87	22.75	0-1	1.0
Qi Oit	50	28	23.91	23.88	23.77	0	0.0
	50	56	22.87	22.88	22.79	0-1	1.0
	100	0	22.85	22.86	22.80	0-1	1.0
DFT-s-OFDM 16QAM	1	1	23.11	23.15	23.08	0-1	1.0
CP-OFDM QPSK	1	1	22.69	22.47	22.59	0-1.5	1.5

Table 7-8. NR Band n2 Measured Pmax for DSI = 2 (Free Space State) - 20 MHz Bandwidth

NR Band n2 15 MHz Bandwidth							
				Channel		_	
Modulation	RB Size	RB Offset	371500 (1857.5 MHz)	376000 (1880 MHz)	380500 (1902.5 MHz)	MPR Allowed per 3GPP	MPR [dB]
			Cor	nducted Power [d	Bm]	[dB]	
	1	1	23.80	23.81	23.70		0.0
	1	40	23.83	23.94	23.69	0	0.0
DFT-s-OFDM	1	77	23.87	23.85	23.77		0.0
π/2 BPSK	36	0	23.46	23.34	23.27	0-0.5	0.5
n/2 DI SIX	36	22	23.92	23.78	23.76	0	0.0
	36	43	23.45	23.28	23.21	0-0.5	0.5
	75	0	23.42	23.33	23.24		0.5
	1	1	24.02	23.95	23.75		0.0
	1	40	24.04	23.90	23.86	0	0.0
DFT-s-OFDM	1	77	23.97	23.96	23.88		0.0
QPSK	36	0	23.00	22.82	22.63	0-1	1.0
QFSK	36	22	23.91	23.81	23.72	0	0.0
	36	43	22.97	22.83	22.70	0-1	1.0
	75	0	23.03	22.88	22.40] 0-1	1.0
DFT-s-OFDM 16QAM	1	1	23.13	22.79	22.81	0-1	1.0
CP-OFDM QPSK	1	1	22.59	22.46	22.22	0-1.5	1.5

Table 7-9. NR Band n2 Measured Pmax for DSI = 2 (Free Space State) - 15 MHz Bandwidth

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N: Test Dates:		EUT Type:	Page 16 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 10 01 131



NR Band n2 10 MHz Bandwidth							
				Channel		_	
Modulation	RB Size	RB Size RB Offset	371000 (1855 MHz)	376000 (1880 MHz)	381000 (1905 MHz)	MPR Allowed per 3GPP	MPR [dB]
			Coi	Bm]	[dB]		
	1	1	23.84	23.78	23.65		0.0
	1	26	23.99	23.86	23.88	0	0.0
DFT-s-OFDM	1	50	23.86	23.75	23.74		0.0
DF1-S-OFDINI π/2 BPSK	25	0	23.43	23.31	23.26	0-0.5	0.5
n/2 DI SIX	25	14	23.95	23.80	23.72	0	0.0
	25	27	23.40	23.27	23.21	0-0.5	0.5
	50	0	23.38	23.28	23.19	0-0.5	0.5
	1	1	23.92	23.86	23.68		0.0
	1	26	24.30	24.26	24.07	0	0.0
DFT-s-OFDM	1	50	23.88	23.89	23.63		0.0
QPSK	25	0	22.92	22.79	22.65	0-1	1.0
QI OIL	25	14	23.88	23.72	23.67	0	0.0
	25	27	22.87	22.75	22.70	0-1	1.0
	50	0	22.88	22.74	22.65	U-1	1.0
DFT-s-OFDM 16QAM	1	1	23.00	22.82	22.76	0-1	1.0
CP-OFDM QPSK	1	1	22.44	22.39	22.20	0-1.5	1.5

Table 7-10. NR Band n2 Measured Pmax for DSI = 2 (Free Space State) - 10 MHz Bandwidth

NR Band n2 5 MHz Bandwidth							
Channel							
Modulation	RB Size	RB Offset	370500 (1852.5 MHz)	376000 (1880 MHz)	381500 (1907.5 MHz)	MPR Allowed per 3GPP	MPR [dB]
			Cor	Bm]	[dB]		
	1	1	23.86	23.70	23.57		0.0
	1	13	23.87	23.71	23.74	0	0.0
DFT-s-OFDM	1	23	24.03	23.73	23.71		0.0
π/2 BPSK	12	0	23.39	23.19	23.18	0-0.5	0.5
W/Z BF SK	12	7	23.91	23.74	23.75	0	0.0
	12	13	23.43	23.22	23.28	0-0.5	0.5
	25	0	23.41	23.25	23.27		0.5
	1	1	23.92	23.73	23.76	0	0.0
	1	13	23.98	23.69	23.78		0.0
DFT-s-OFDM	1	23	23.96	23.76	23.83	1	0.0
QPSK	12	0	22.84	22.65	22.80	0-1	1.0
QF SN	12	7	23.91	23.71	23.79	0	0.0
	12	13	22.96	22.69	22.81	0-1	1.0
	25	0	22.88	22.64	22.75		1.0
DFT-s-OFDM 16QAM	1	1	22.91	22.77	22.86	0-1	1.0
CP-OFDM QPSK	1	1	22.49	22.16	22.32	0-1.5	1.5

Table 7-11. NR Band n2 Measured Pmax for DSI = 2 (Free Space State) - 5 MHz Bandwidth

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	Approved by: Quality Manager
Test Report S/N: Test Dates:		EUT Type:	Dago 17 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 17 of 131



7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 - Section 4.2

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. $VBW \ge 3 \times RBW$
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2-7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	Y	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 18 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		rage to of 131



LTE Band 25/2



Plot 7-1. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB Configuration)



Plot 7-2. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N: Test Dates: E		EUT Type:	Page 19 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 19 01 131






Plot 7-3. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 64-QAM - Full RB Configuration)



Plot 7-4. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 20 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 20 01 131



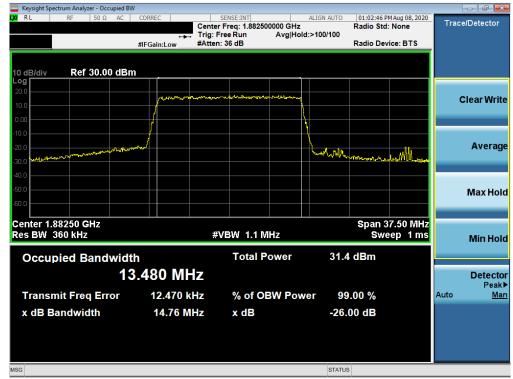

Plot 7-5. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 16-QAM - Full RB Configuration)



Plot 7-6. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 64-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 21 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 21 of 131





Plot 7-7. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz QPSK - Full RB Configuration)



Plot 7-8. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SOI	NY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 22 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Fage 22 01 131





Plot 7-9. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 64-QAM - Full RB Configuration)



Plot 7-10. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 23 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 23 01 131





Plot 7-11. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 16-QAM - Full RB Configuration)



Plot 7-12. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 64-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 24 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 24 01 131





Plot 7-13. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz QPSK - Full RB Configuration)



Plot 7-14. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 25 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 25 01 151





Plot 7-15. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 64-QAM - Full RB Configuration)



Plot 7-16. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 26 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 20 01 131





Plot 7-17. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 16-QAM - Full RB Configuration)



Plot 7-18. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 64-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Daga 27 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 27 of 131



NR Band n2




Plot 7-19. Occupied Bandwidth Plot (NR Band n2 - 20.0MHz DFT-s-OFDM BPSK - Full RB)



Plot 7-20. Occupied Bandwidth Plot (NR Band n2 - 20.0MHz CP-OFDM QPSK - Full RB)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT	BONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 28 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 20 01 131



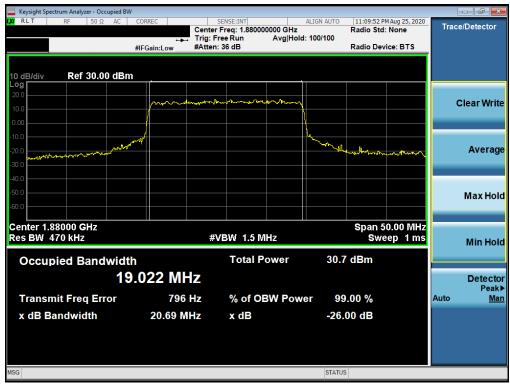

Plot 7-21. Occupied Bandwidth Plot (NR Band n2 - 20.0MHz CP-OFDM 16QAM - Full RB)



Plot 7-22. Occupied Bandwidth Plot (NR Band n2 - 20.0MHz CP-OFDM 64QAM - Full RB)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 29 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 29 01 131





Plot 7-23. Occupied Bandwidth Plot (NR Band n2 - 15.0MHz DFT-s-OFDM BPSK - Full RB)



Plot 7-24. Occupied Bandwidth Plot (NR Band n2 - 15.0MHz CP-OFDM QPSK - Full RB)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 30 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 30 01 131





Plot 7-25. Occupied Bandwidth Plot (NR Band n2 - 15.0MHz CP-OFDM 16QAM - Full RB)



Plot 7-26. Occupied Bandwidth Plot (NR Band n2 - 15.0MHz CP-OFDM 64QAM - Full RB)

FCC ID: PY7-57441Y	Proud to be part of @element	PART 24 MEASUREMENT REPORT SON	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 31 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 31 01 131





Plot 7-27. Occupied Bandwidth Plot (NR Band n2 - 10.0MHz DFT-s-OFDM BPSK - Full RB)



Plot 7-28. Occupied Bandwidth Plot (NR Band n2 - 10.0MHz CP-OFDM QPSK - Full RB)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 32 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 32 of 131






Plot 7-29. Occupied Bandwidth Plot (NR Band n2 - 10.0MHz CP-OFDM 16QAM - Full RB)




Plot 7-30. Occupied Bandwidth Plot (NR Band n2 - 10.0MHz CP-OFDM 64QAM - Full RB)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 33 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 33 01 131



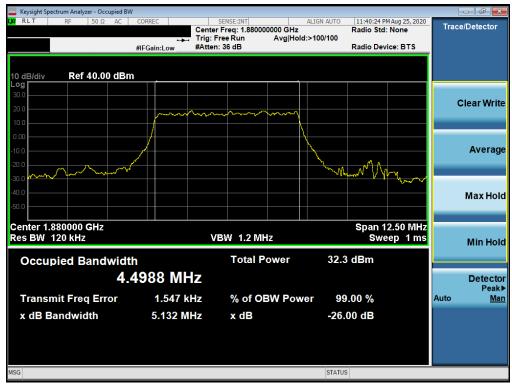


Plot 7-31. Occupied Bandwidth Plot (NR Band n2 - 5.0MHz DFT-s-OFDM BPSK - Full RB)

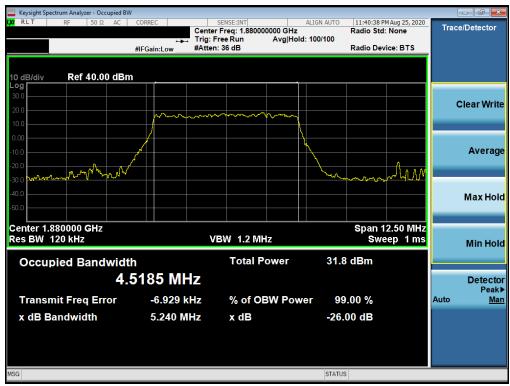

Plot 7-32. Occupied Bandwidth Plot (NR Band n2 - 5.0MHz CP-OFDM QPSK - Full RB)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 24 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 34 of 131



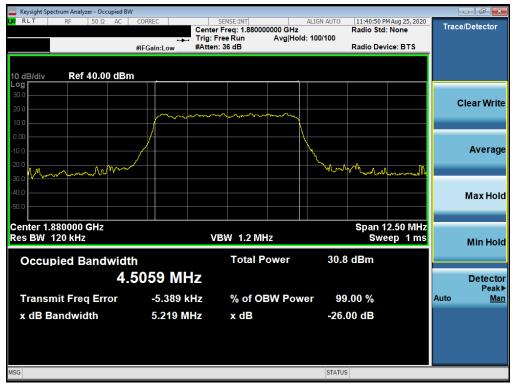

Plot 7-33. Occupied Bandwidth Plot (NR Band n2 - 5.0MHz CP-OFDM 16QAM - Full RB)



Plot 7-34. Occupied Bandwidth Plot (NR Band n2 - 5.0MHz CP-OFDM 64QAM - Full RB)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 35 of 131	
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 33 of 131	



GSM/GPRS PCS



Plot 7-35. Occupied Bandwidth Plot (GPRS, Ch. 661)




Plot 7-36. Occupied Bandwidth Plot (EDGE, Ch. 661)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 36 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	rage 30 or 131



WCDMA PCS

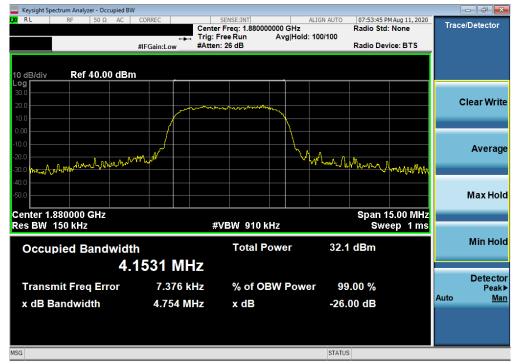

Plot 7-37. Occupied Bandwidth Plot (WCDMA, Ch. 9400)

FCC ID: PY7-57441Y	PCTEST* Proud to be port of @element	PART 24 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 27 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 37 of 131



7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + 10 $log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 - Section 6.0

Test Settings

- 1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup


Test Notes

- 1. Per Part 24 and RSS-133, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: PY7-57441Y	Proud to be part of element	PART 24 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 38 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		rage 30 01 131



LTE Band 25/2

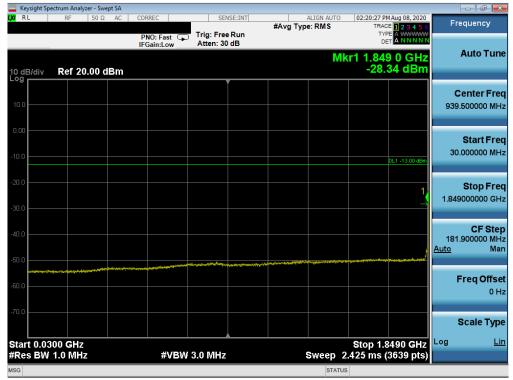


Plot 7-38. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)




Plot 7-39. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 39 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 39 01 13 1



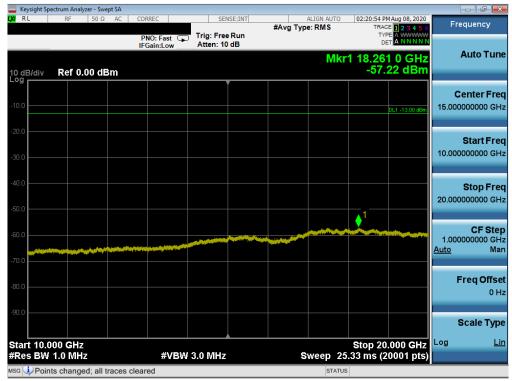

Plot 7-40. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

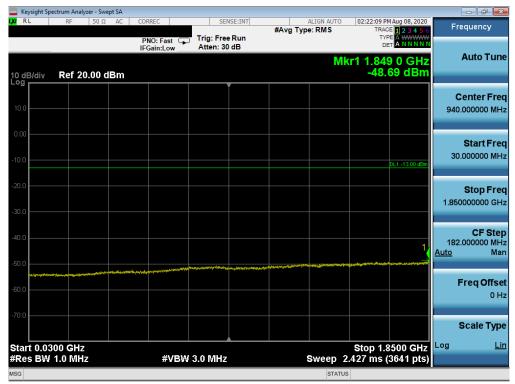


Plot 7-41. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	Approved Quality M	-
Test Report S/N:	Test Dates:	EUT Type:	Daga 40 4	of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 40 d	JI 131






Plot 7-42. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

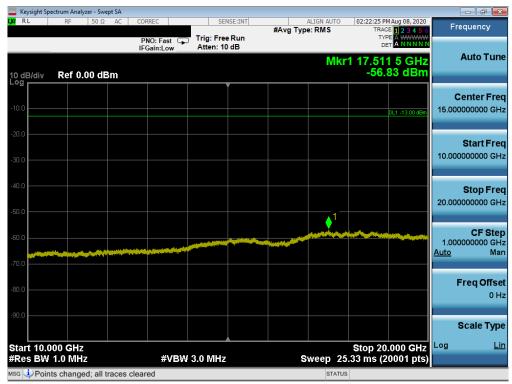

Plot 7-43. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	Ι¥	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 41 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Fage 41 01 131



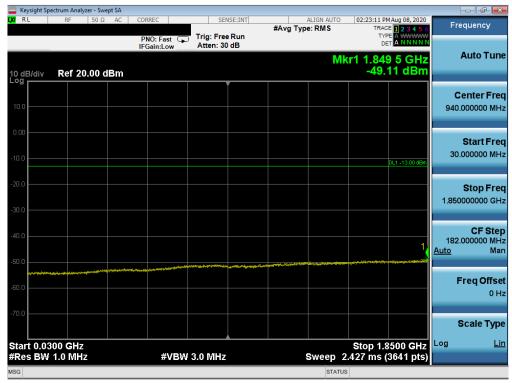


Plot 7-44. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)



Plot 7-45. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 42 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 42 01 131



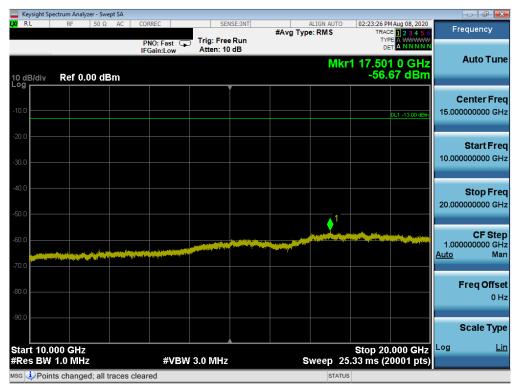

Plot 7-46. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: PY7-57441Y	Proud to be part of @element	PART 24 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 43 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Fage 43 01 131



NR Band n2



Plot 7-47. Conducted Spurious Plot (NR Band n2 -20.0MHz - RB Size 1, RB Offset 0 - Low Channel)

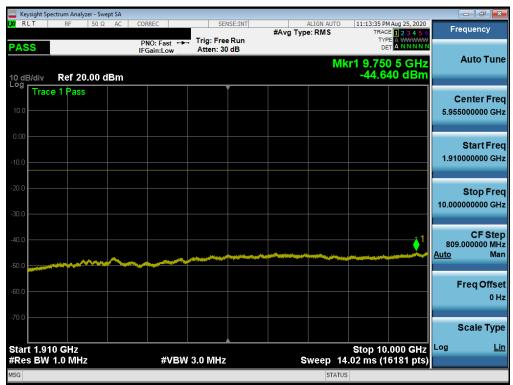


Plot 7-48. Conducted Spurious Plot (NR Band n2 - 20.0MHz - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 44 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 44 of 131





Plot 7-49. Conducted Spurious Plot (NR Band n2 - 20.0MHz - RB Size 1, RB Offset 0 - Low Channel)

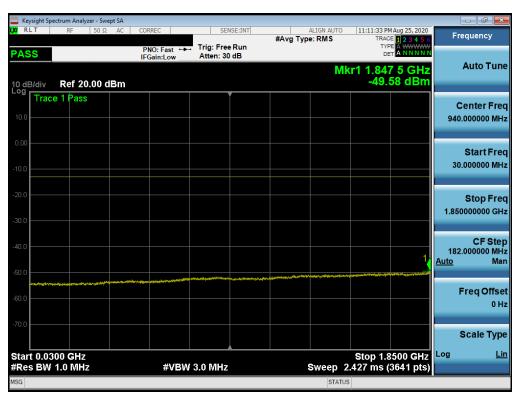


Plot 7-50. Conducted Spurious Plot (NR Band n2 - 20.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	Approved by Quality Mana	-
Test Report S/N:	Test Dates:	EUT Type:	Dogo 45 of 1	21
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 45 of 1	31





Plot 7-51. Conducted Spurious Plot (NR Band n2 - 20.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

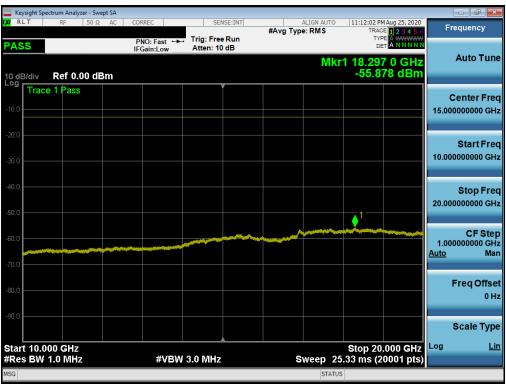


Plot 7-52. Conducted Spurious Plot (NR Band n2 - 20.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 46 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 40 01 131






Plot 7-53. Conducted Spurious Plot (NR Band n2 - 20.0MHz - RB Size 1, RB Offset 0 - High Channel)

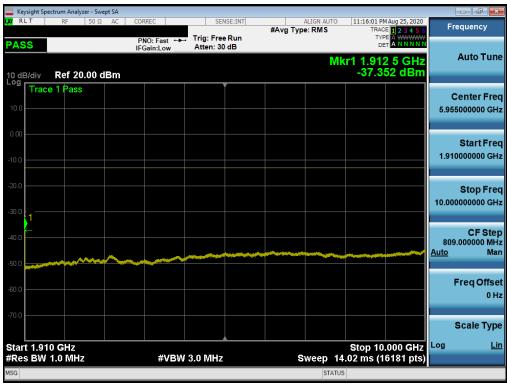

Plot 7-54. Conducted Spurious Plot (NR Band n2 - 20.0MHz - RB Size 1, RB Offset 0 - High Channel)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 47 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 47 Of 131



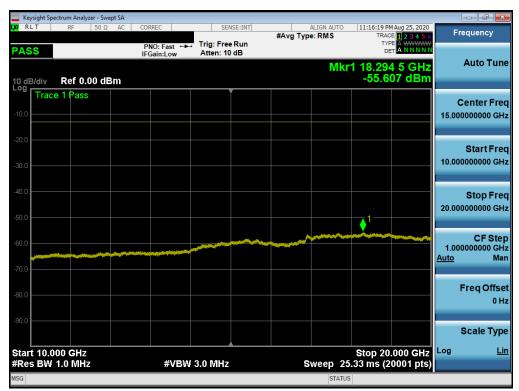


Plot 7-55. Conducted Spurious Plot (NR Band n2 - 20.0MHz - RB Size 1, RB Offset 0 - High Channel)


FCC ID: PY7-57441Y	Proud to be part of @element	PART 24 MEASUREMENT REPORT	ONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 48 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 40 01 131



GSM/GPRS PCS

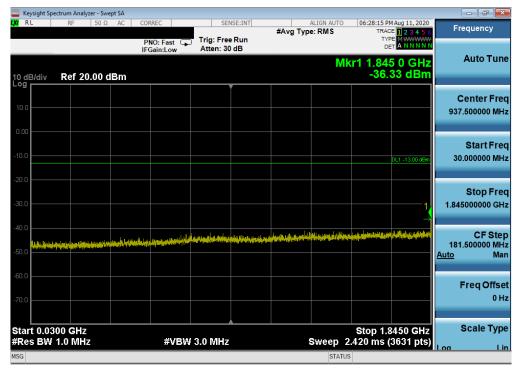


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 512)

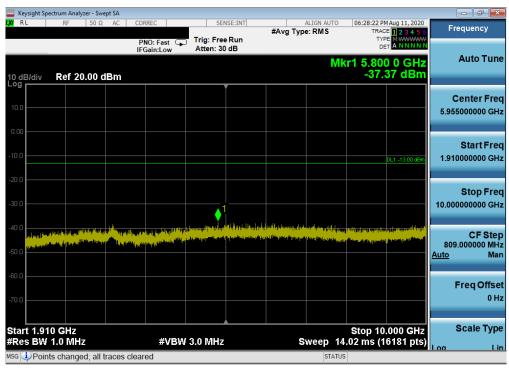


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 512)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 49 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 49 01 131



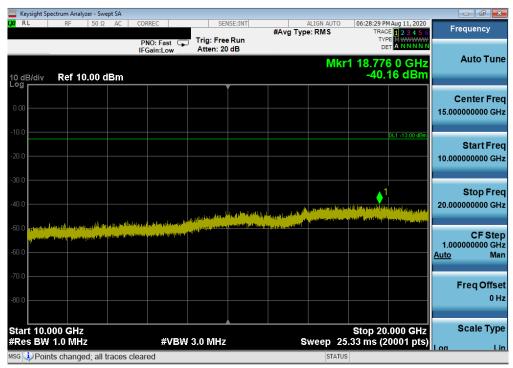


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 512)

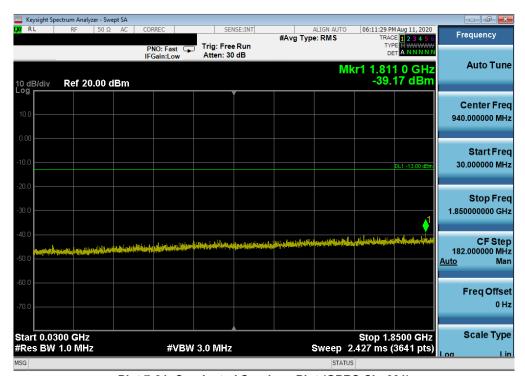


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 661)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 50 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 50 01 151



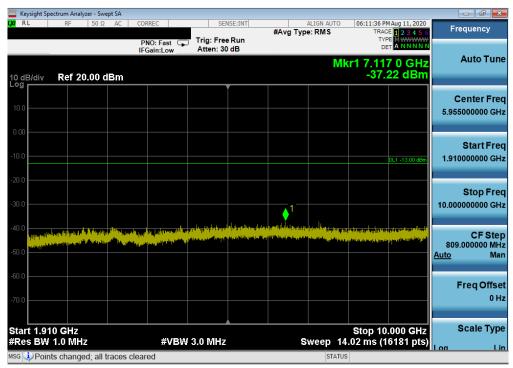


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 661)

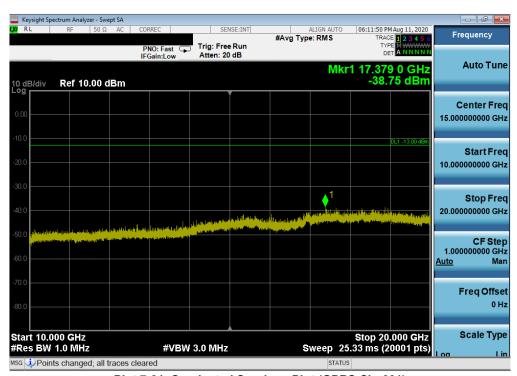


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 661)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 51 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	rage 51 01 151



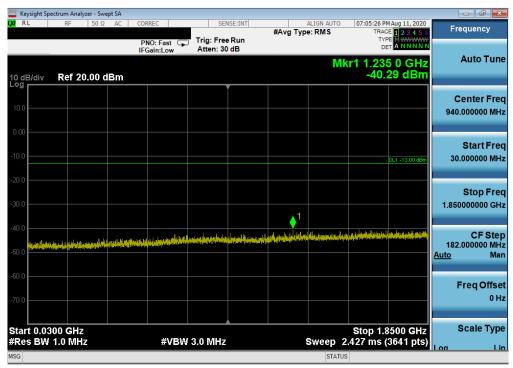


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 810)

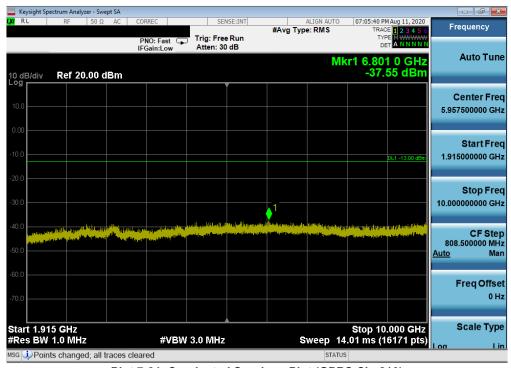

Plot 7-31. Conducted Spurious Plot (GPRS Ch. 810)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 52 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 52 01 131



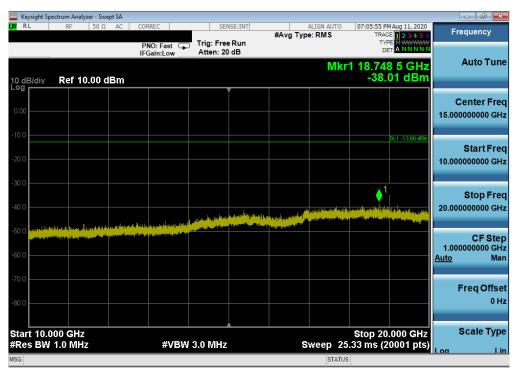


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 810)


FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 52 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 53 of 131



WCDMA PCS

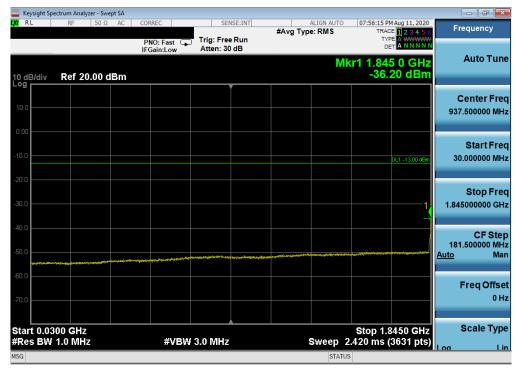


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9262)

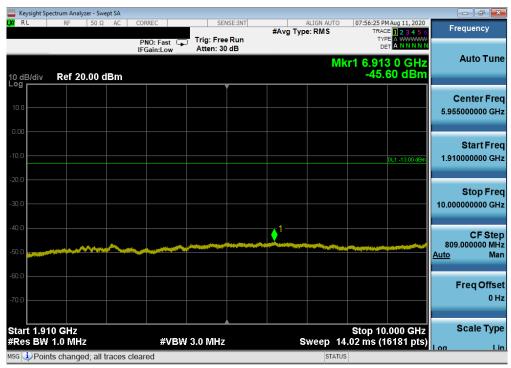


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9262)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 54 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 54 of 131



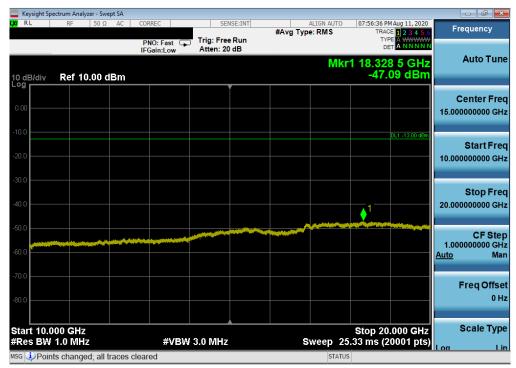


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9262)

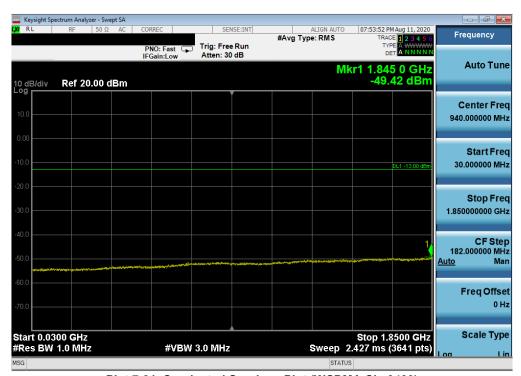

Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: PY7-57441Y	PCTEST* Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 55 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 55 of 151



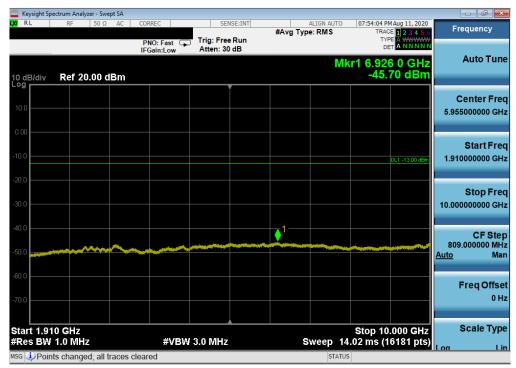


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9400)




Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 56 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	rage 50 of 151



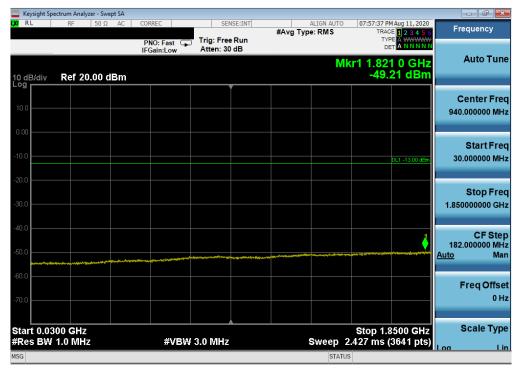


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9538)

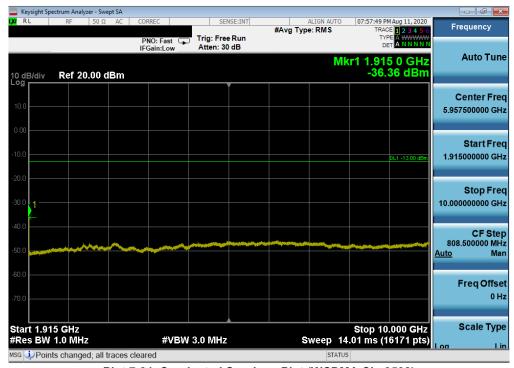

Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: PY7-57441Y	PCTEST* Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 57 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 37 of 131



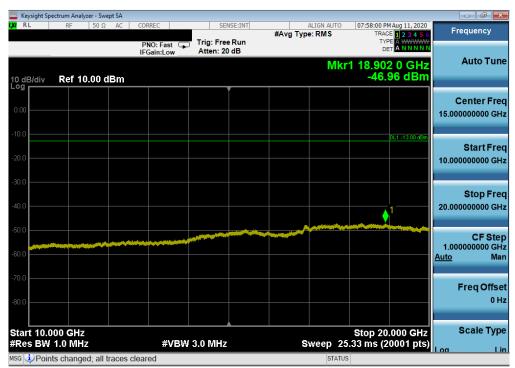

Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Daga 50 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 58 of 131



Band Edge Emissions at Antenna Terminal 7.5

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + 10 log₁₀(P_[Watts]), where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 - Section 6.0

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. VBW > 3 x RBW
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	ΝY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 59 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		rage 39 of 131




Test Notes

- 1. Per 24.238(b), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- 2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SO	NY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 60 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		rage ou or 131



LTE Band 25/2

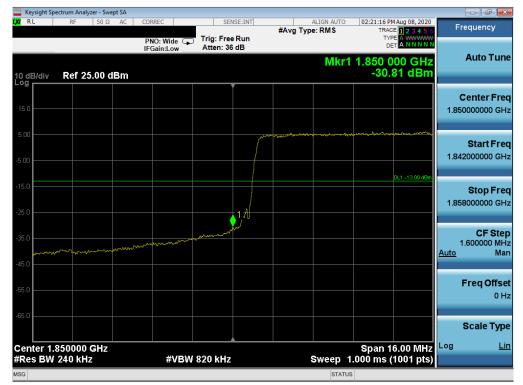


Plot 7-56. Lower Band Edge Plot (LTE Band 25/2 - 20MHz QPSK - Full RB Configuration)

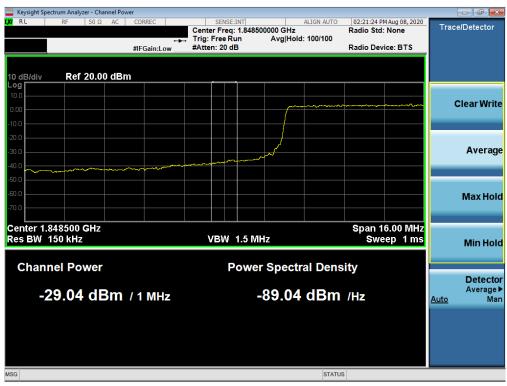


Plot 7-57. Extended Lower Band Edge Plot (LTE Band 25/2 - 20MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 61 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 01 01 131



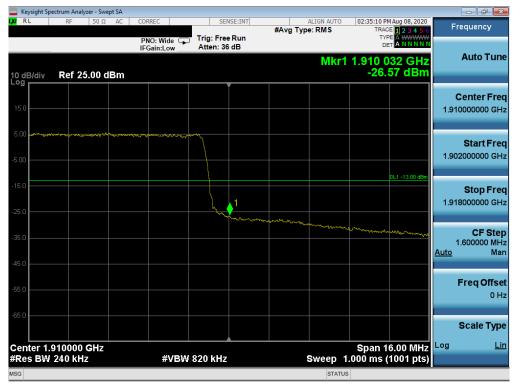

Plot 7-58. Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK - Full RB Configuration)

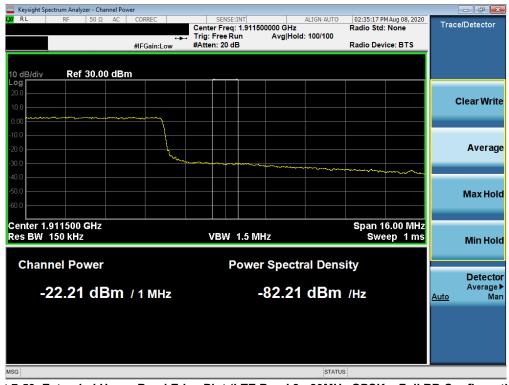

Plot 7-59. Extended Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 62 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 02 01 131






Plot 7-60. Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK - Full RB Configuration)




Plot 7-61. Extended Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 63 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 03 01 131



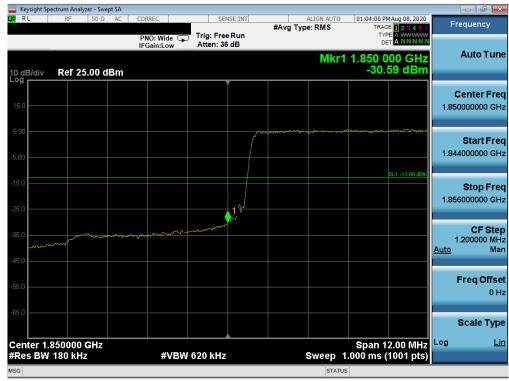

Plot 7-62. Lower Band Edge Plot (LTE Band 25/2 - 15MHz QPSK - Full RB Configuration)

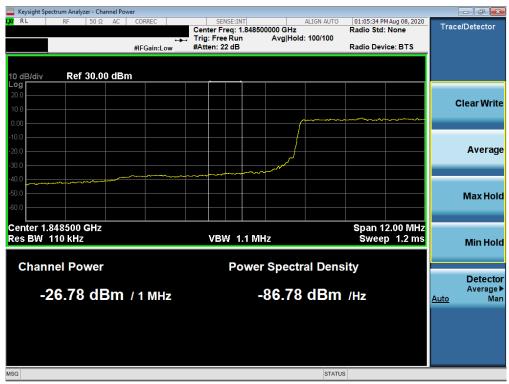


Plot 7-63. Extended Lower Band Edge Plot (LTE Band 25/2 - 15MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 64 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 64 of 131





Plot 7-64. Upper Band Edge Plot (LTE Band 2 - 15MHz QPSK - Full RB Configuration)

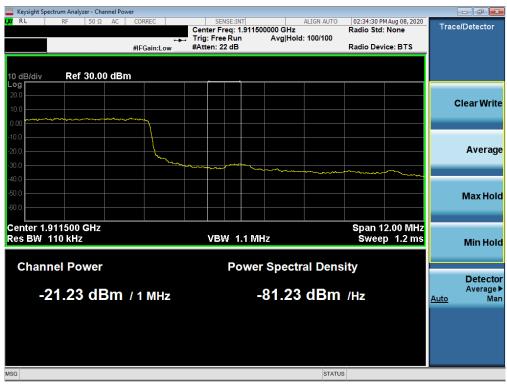


Plot 7-65. Extended Upper Band Edge Plot (LTE Band 2 - 15MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 65 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 05 01 151






Plot 7-66. Upper Band Edge Plot (LTE Band 25 - 15MHz QPSK - Full RB Configuration)

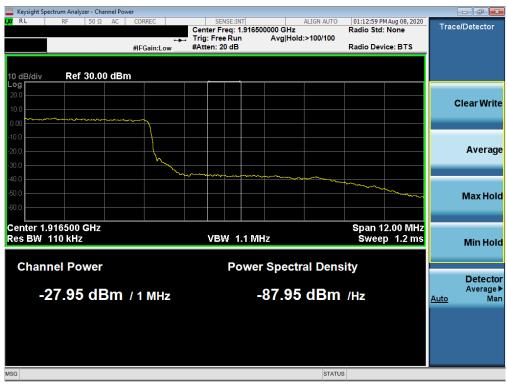


Plot 7-67. Extended Upper Band Edge Plot (LTE Band 25 - 15MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 66 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	rage oo or 131



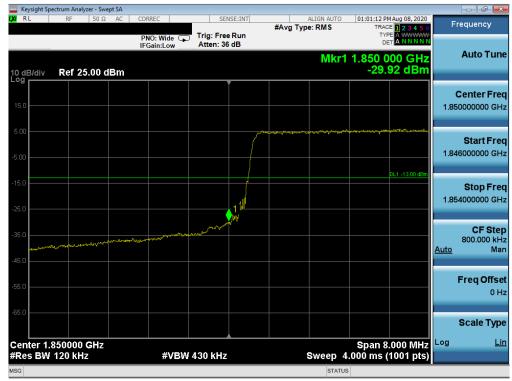


Plot 7-68. Lower Band Edge Plot (LTE Band 25/2 - 10MHz QPSK - Full RB Configuration)

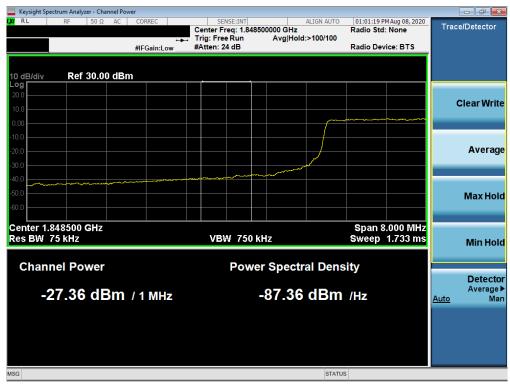


Plot 7-69. Extended Lower Band Edge Plot (LTE Band 25/2 - 10MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST* Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 67 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 07 01 131



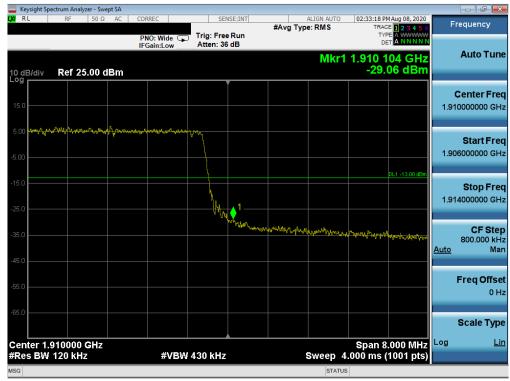


Plot 7-70. Upper Band Edge Plot (LTE Band 2 - 10MHz QPSK - Full RB Configuration)

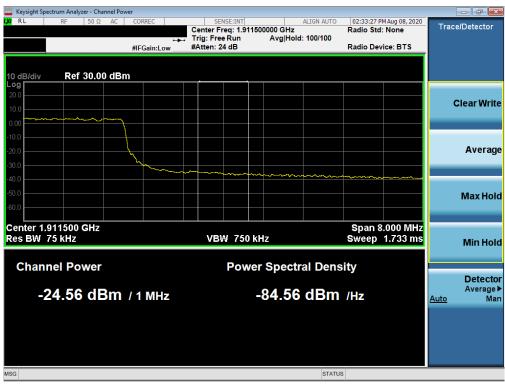


Plot 7-71. Extended Upper Band Edge Plot (LTE Band 2 - 10MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 68 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	rage oo or 131



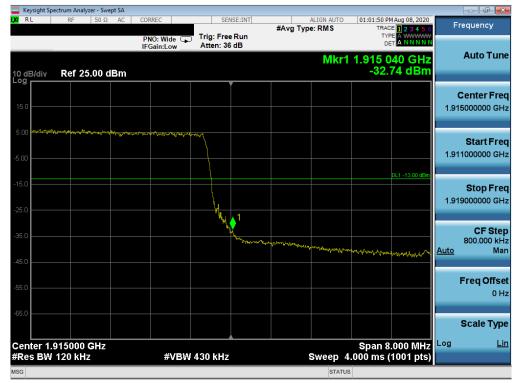


Plot 7-72. Upper Band Edge Plot (LTE Band 25 - 10MHz QPSK - Full RB Configuration)

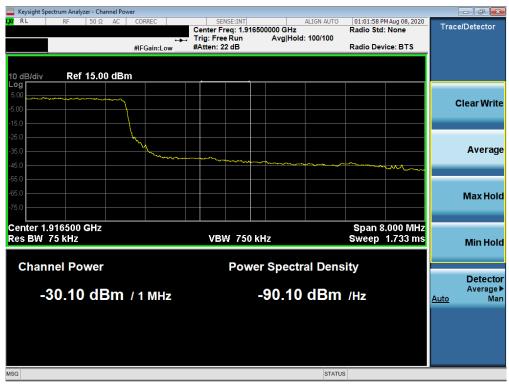


Plot 7-73. Extended Upper Band Edge Plot (LTE Band 25 - 10MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 69 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 09 01 131



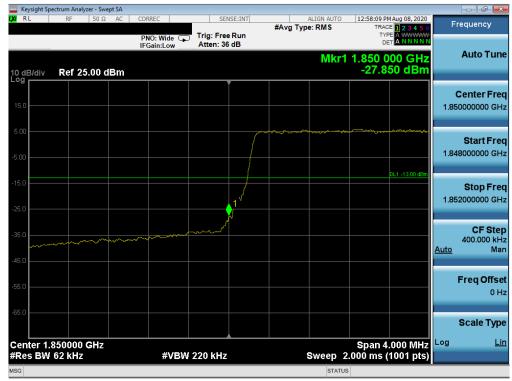


Plot 7-74. Lower Band Edge Plot (LTE Band 25/2 - 5MHz QPSK - Full RB Configuration)

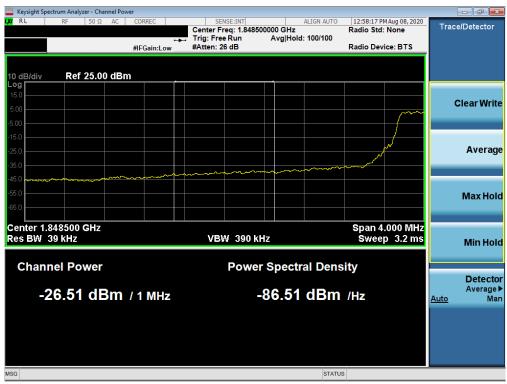


Plot 7-75. Extended Lower Band Edge Plot (LTE Band 25/2 - 5MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 70 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 70 of 131



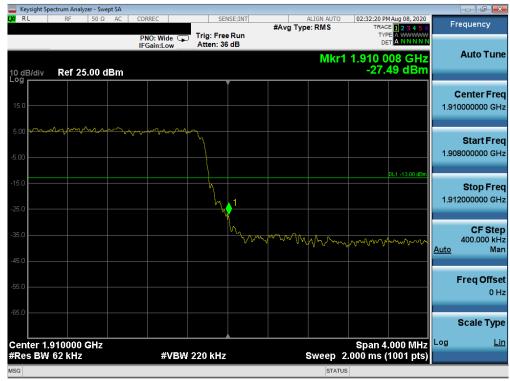

Plot 7-76. Upper Band Edge Plot (LTE Band 2 - 5MHz QPSK - Full RB Configuration)

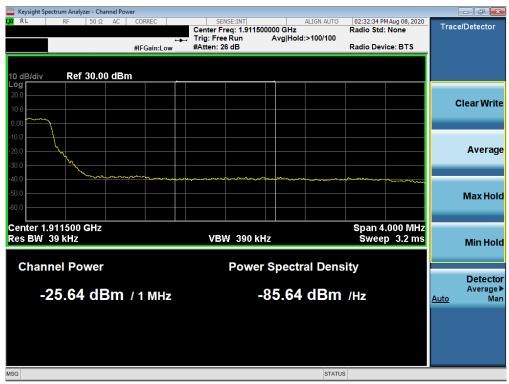


Plot 7-77. Extended Upper Band Edge Plot (LTE Band 2 - 5MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 71 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 71 of 131






Plot 7-78. Upper Band Edge Plot (LTE Band 25 - 5MHz QPSK - Full RB Configuration)

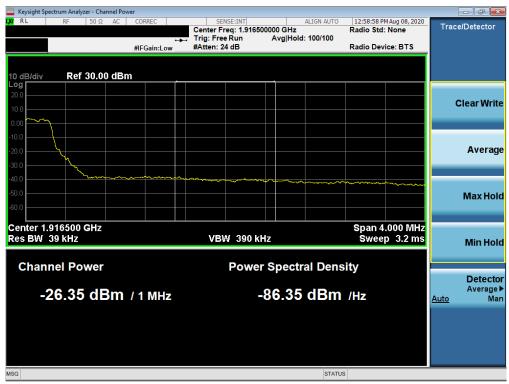


Plot 7-79. Extended Upper Band Edge Plot (LTE Band 25 - 5MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 72 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 72 01 131



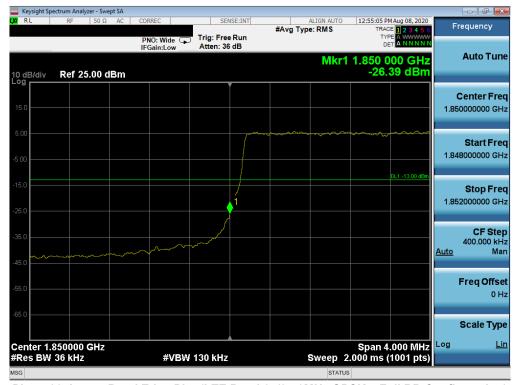


Plot 7-80. Lower Band Edge Plot (LTE Band 25/2 - 3MHz QPSK - Full RB Configuration)

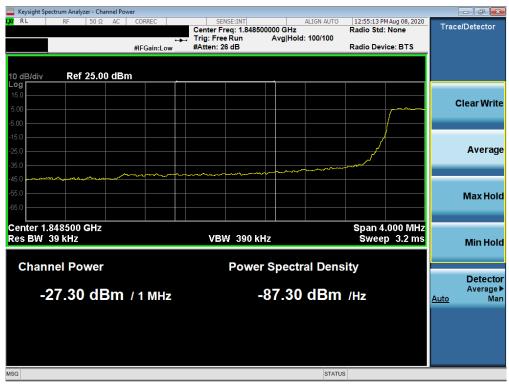


Plot 7-81. Extended Lower Band Edge Plot (LTE Band 25/2 - 3MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 72 of 121
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Page 73 of 131



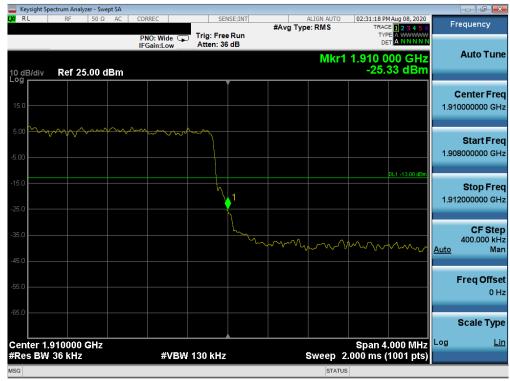

Plot 7-82. Upper Band Edge Plot (LTE Band 2 - 3MHz QPSK - Full RB Configuration)

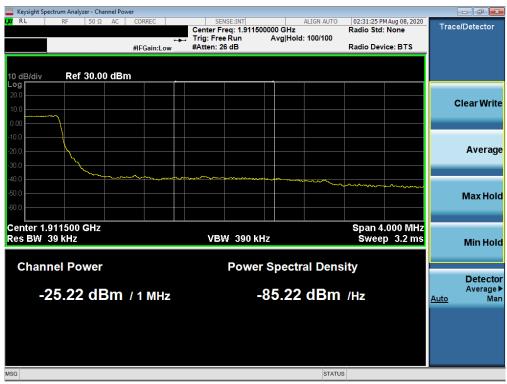


Plot 7-83. Extended Upper Band Edge Plot (LTE Band 2 - 3MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	Y	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dama 74 of 121	
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 74 of 131	






Plot 7-84. Upper Band Edge Plot (LTE Band 25 - 3MHz QPSK - Full RB Configuration)

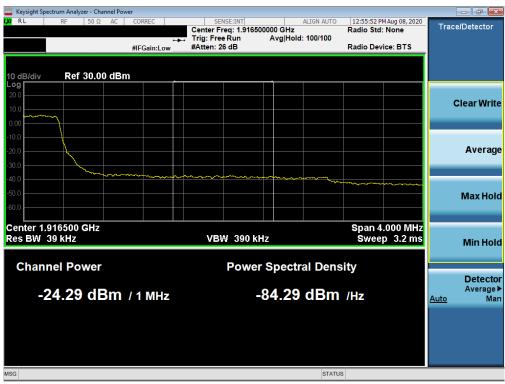


Plot 7-85. Extended Upper Band Edge Plot (LTE Band 25 - 3MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	Υ	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 75 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		rage 75 of 151



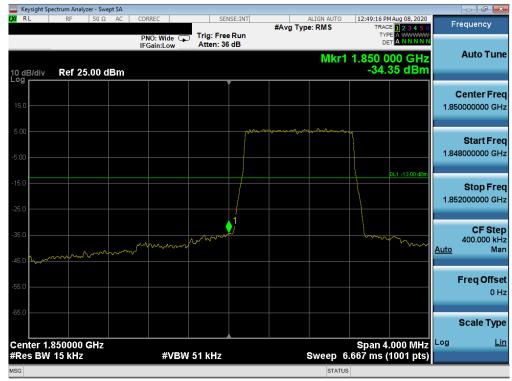


Plot 7-86. Lower Band Edge Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB Configuration)

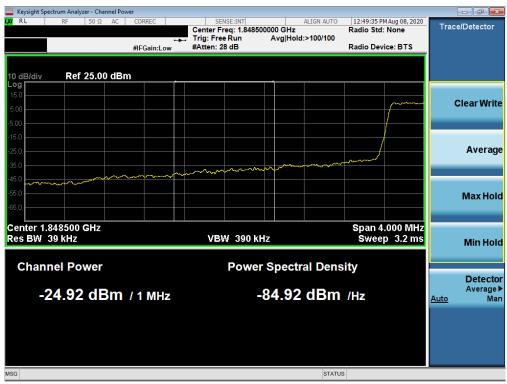


Plot 7-87. Extended Lower Band Edge Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	•	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 76 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Fage 70 of 131



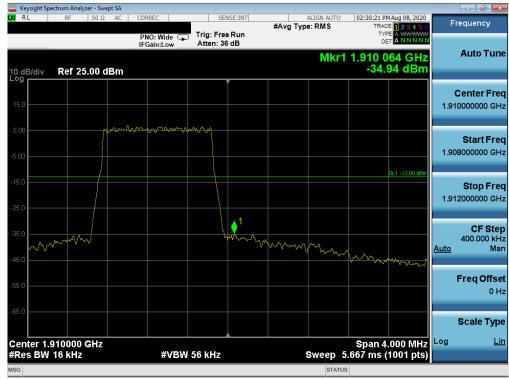


Plot 7-88. Upper Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)

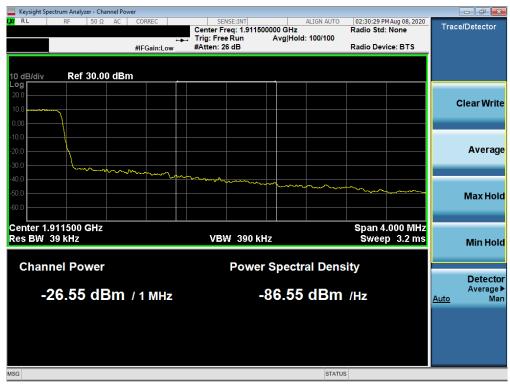


Plot 7-89. Extended Upper Band Edge Plot (LTE Band 2 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SOP	Y	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dogg 77 of 101	
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 77 of 131	



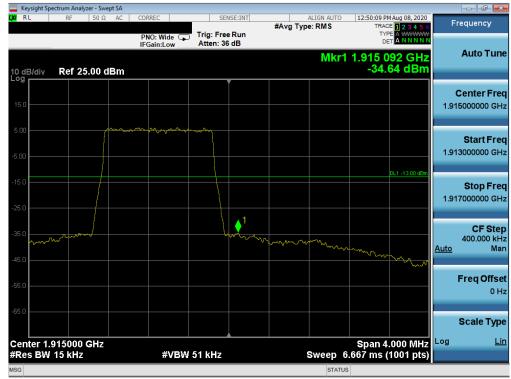

Plot 7-90. Upper Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)

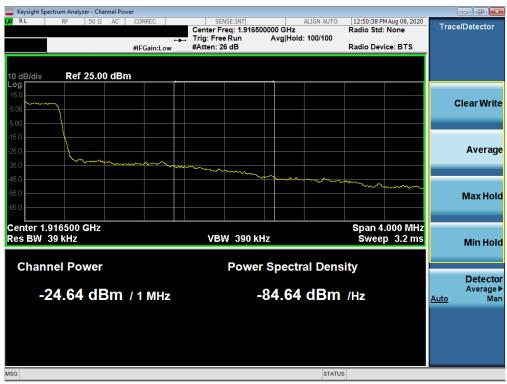

Plot 7-91. Extended Upper Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)


FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 78 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	rage 76 of 131



NR Band n2




Plot 7-92. Lower Band Edge Plot (NR Band n2 - 20.0MHz - Full RB)

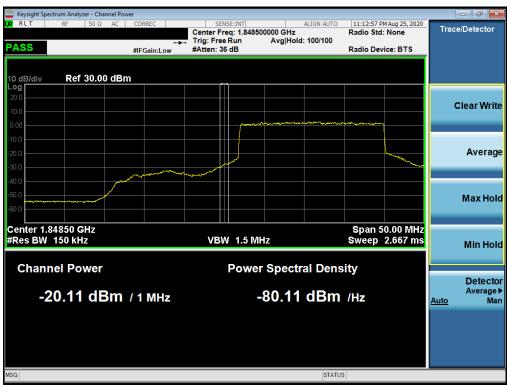


Plot 7-93. Lower Extended Band Edge Plot (NR Band n2 - 20.0MHz - Full RB)

FCC ID: PY7-57441Y	Proud to be part of @element	PART 24 MEASUREMENT REPORT	SONY	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dags 70 of 121	
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset		Page 79 of 131	



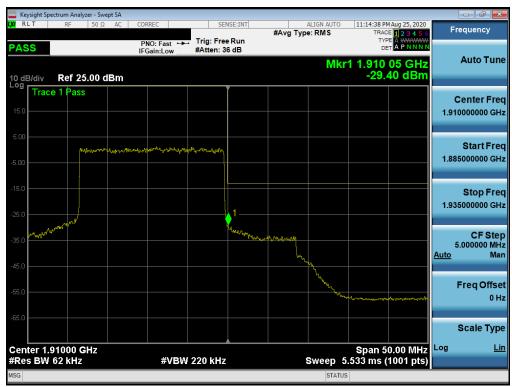

Plot 7-94. Upper Band Edge Plot (NR Band n2 – 20.0MHz - Full RB)

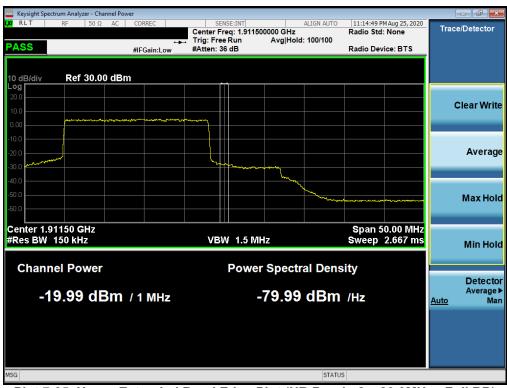


Plot 7-95. Upper Extended Band Edge Plot (NR Band n2 - 20.0MHz - Full RB)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 80 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	rage ou or 131





Plot 7-96. Lower Band Edge Plot (NR Band n2 – 15.0MHz - Full RB)

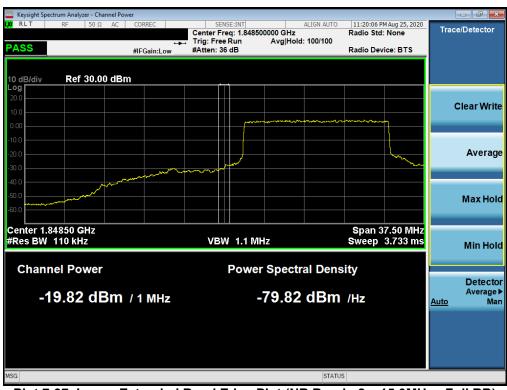


Plot 7-97. Lower Extended Band Edge Plot (NR Band n2 - 15.0MHz - Full RB)

FCC ID: PY7-57441Y	Proud to be part of @ element	PART 24 MEASUREMENT REPORT SON	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 81 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 81 01 131





Plot 7-98. Upper Band Edge Plot (NR Band n2 – 15.0MHz - Full RB)

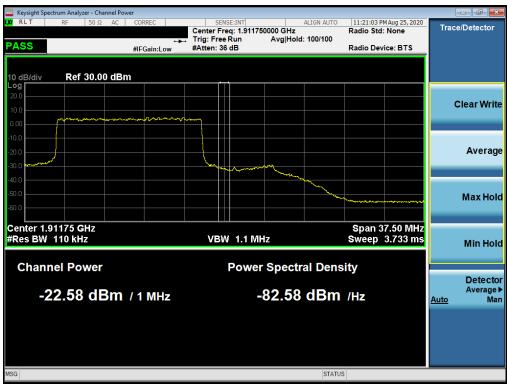


Plot 7-99. Upper Extended Band Edge Plot (NR Band n2 - 15.0MHz - Full RB)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 82 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	Fage 62 01 131





Plot 7-100. Lower Band Edge Plot (NR Band n2 – 10.0MHz - Full RB)

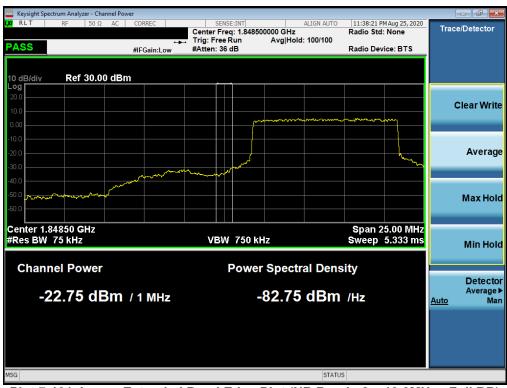

Plot 7-101. Lower Extended Band Edge Plot (NR Band n2 – 10.0MHz - Full RB)

FCC ID: PY7-57441Y	PCTEST° Proud to be part of @ element	PART 24 MEASUREMENT REPORT SONY	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 83 of 131
12M007070106-17-R2.PY7	7/9/2020 - 9/18/2020	Portable Handset	rage 65 01 151