

PART 27 MEASUREMENT REPORT

Applicant Name:
 Sony Mobile Communications Inc
 4-12-3 Higashi-Shinagawa
 Shinagawa-ku
 Tokyo, 140-0002, Japan

Date of Testing:
 7/28– 9/18/2020
Test Site/Location:
 PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
 1M2007070106-16-R2.PY7


FCC ID:	PY7-57441Y
Applicant Name:	Sony Mobile Communications Inc

Application Type: Certification
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: 27
Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M2007070106-16-R2.FCC Report SNs) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 Randy Ortanez
 President






FCC ID: PY7-57441Y		PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28– 9/18/2020	EUT Type: Portable Handset	Page 1 of 61	


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary	10
7.2	Conducted Power Output Data	11
7.3	Occupied Bandwidth	16
7.4	Spurious and Harmonic Emissions at Antenna Terminal	29
7.5	Band Edge Emissions at Antenna Terminal.....	40
7.6	Radiated Power (EIRP).....	50
7.7	Radiated Spurious Emissions Measurements.....	53
7.8	Frequency Stability / Temperature Variation	58
8.0	CONCLUSION.....	61


FCC ID: PY7-57441Y	 <small>Proud to be part of element</small>	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 – 9/18/2020	EUT Type: Portable Handset	Page 2 of 61	

© 2020 PCTEST



All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PART 27b MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 7	20 MHz	QPSK	2510.0 - 2560.0	0.043	16.32	18M0G7D
		16QAM	2510.0 - 2560.0	0.036	15.52	18M0W7D
		64QAM	2510.0 - 2560.0	0.032	15.09	18M0W7D
	15 MHz	QPSK	2507.5 - 2562.5	0.043	16.33	13M5G7D
		16QAM	2507.5 - 2562.5	0.035	15.50	13M5W7D
		64QAM	2507.5 - 2562.5	0.032	15.09	13M5W7D
	10 MHz	QPSK	2505.0 - 2565.0	0.044	16.41	9M01G7D
		16QAM	2505.0 - 2565.0	0.036	15.62	9M00W7D
		64QAM	2505.0 - 2565.0	0.032	15.04	9M02W7D
	5 MHz	QPSK	2502.5 - 2567.5	0.043	16.35	4M54G7D
		16QAM	2502.5 - 2567.5	0.037	15.65	4M53W7D
		64QAM	2502.5 - 2567.5	0.033	15.13	4M54W7D
LTE Band 41(PC3)	20 MHz	QPSK	2506.0 - 2680.0	0.108	20.35	18M1G7D
		16QAM	2506.0 - 2680.0	0.097	19.88	18M0W7D
		64QAM	2506.0 - 2680.0	0.076	18.79	17M9W7D
	15 MHz	QPSK	2503.5 - 2682.5	0.114	20.55	13M4G7D
		16QAM	2503.5 - 2682.5	0.088	19.45	13M4W7D
		64QAM	2503.5 - 2682.5	0.075	18.77	13M4W7D
	10 MHz	QPSK	2501.0 - 2685.0	0.120	20.78	8M95G7D
		16QAM	2501.0 - 2685.0	0.093	19.69	8M88W7D
		64QAM	2501.0 - 2685.0	0.075	18.74	8M84W7D
	5 MHz	QPSK	2498.5 - 2687.5	0.117	20.68	4M53G7D
		16QAM	2498.5 - 2687.5	0.097	19.86	4M52W7D
		64QAM	2498.5 - 2687.5	0.078	18.91	4M54W7D

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 3 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.


1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28– 9/18/2020	EUT Type: Portable Handset		Page 4 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the SONY **Portable Handset FCC ID:PY7-57441Y**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: 81811, 64264, 83171

2.2 Device Capabilities

This device contains the following capabilities:


850/1900 GSM/GPRS/EDGE, 850/1700/1900, WCDMA/HSPA, Multi-band LTE, 5G NR (n5, n66, n2, n260, n261), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset		Page 5 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: PY7-57441Y		PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28– 9/18/2020	EUT Type: Portable Handset	Page 6 of 61	


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: PY7-57441Y	 PCTEST <small>Proud to be part of element</small>	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 – 9/18/2020	EUT Type: Portable Handset		Page 7 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	4/9/2020	Annual	4/9/2021	LTx2
-	LTx3	Licensed Transmitter Cable Set	10/30/2019	Annual	10/30/2020	LTx3
Anritsu	MT8821C	Radio Communication Analyzer	3/10/2020	Annual	3/10/2021	6200901190
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
ETS-Lindgren	3115	Double Ridged Guide Horn 750MHz - 18GHz	3/12/2020	Biennial	3/12/2022	150693
Hewlett-Packard	8648D	(9kHz-4GHz) Signal Generator	6/23/2020	Annual	6/23/2021	3613A00315
Keysight Technologies	N9020A	MXA Signal Analyzer	8/14/2020	Annual	8/14/2021	US46470561
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Mini Circuits	TVA-11-422	RF Power Amp		N/A		QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator		N/A		11208010032
Rohde & Schwarz	CMU200	Base Station Simulator		N/A		836536/0005
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100040
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	7/8/2020	Biennial	7/8/2022	101058
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol Science	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 8 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

6.0 SAMPLE CALCULATIONS

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated



7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28– 9/18/2020	EUT Type: Portable Handset		Page 9 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.0 TEST RESULTS

7.1 Summary



Company Name: Sony Mobile Communications Inc
 FCC ID: PY7-57441Y
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	RSS-139(2.3)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (LTE Band 7)	2.1051, 27.53(m)	RSS-199(4.5)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (LTE Band 41)				PASS	Sections 7.4, 7.5
	Transmitter Conducted Output Power	2.1046	RSS-199(4.4)	N/A	PASS	Section 7.2 / See RF Exposure Report
	Frequency Stability	2.1055, 27.54	RSS-199(4.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.9
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 7)	27.50(h)(2)	RSS-199(4.4)	< 2 Watts max. EIRP	PASS	Section 7.7
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 41)				PASS	Section 7.7
	Radiated Spurious Emissions (LTE Band 7)	2.1053, 27.53(m)	RSS-199(4.5)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Section 7.8
	Radiated Spurious Emissions (LTE Band 41)				PASS	Section 7.8

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST 2G/3G Automation Version 4.5, LTE Automation Version 5.3.

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28- 9/18/2020	EUT Type: Portable Handset	Page 10 of 61	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.2 Conducted Power Output Data

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers is measured by means of a calibrated spectrum analyzer. All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Detector = RMS
2. Trace mode = trace average for continuous emissions, max hold for pulse emissions
3. Sweep time = auto couple
4. The trace was allowed to stabilize
5. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

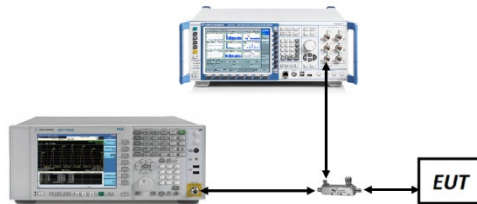


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. Uplink carrier aggregation is only supported in this EUT while operating in Power Class 3.
2. Conducted power measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
3. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz.
4. All other conducted power measurements are contained in the RF exposure report for this filing.

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset		Page 11 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



LTE Band 7

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	23.78	23.84	24.20	0	0
	1	50	23.84	23.93	24.17		0
	1	99	23.89	23.85	24.14		0
	50	0	23.08	23.15	23.24	0-1	1
	50	25	23.17	23.17	23.30		1
	50	50	23.15	23.21	23.24		1
100	0	23.17	23.18	23.21	1		
16QAM	1	0	23.30	23.30	23.36	0-1	1
	1	50	23.36	23.39	23.36		1
	1	99	23.33	23.32	23.23		1
	50	0	21.76	21.89	22.03	0-2	2
	50	25	21.89	21.93	22.09		2
	50	50	21.82	21.94	22.06		2
100	0	21.88	21.89	21.93	2		
64QAM	1	0	22.26	22.00	22.38	0-2	2
	1	50	22.36	22.17	22.21		2
	1	99	22.39	22.18	22.32		2
	50	0	20.79	20.99	20.84	0-3	3
	50	25	20.91	20.99	20.85		3
	50	50	20.87	21.00	20.95		3
100	0	20.89	20.89	20.98	3		

Table 7-2. LTE Band 7 Measured Pmax for DSI = 2 (Free Space State) - 20 MHz Bandwidth

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	23.58	23.80	23.89	0	0
	1	36	23.62	23.94	23.92		0
	1	74	23.60	23.84	23.84		0
	36	0	23.11	23.01	23.06	0-1	1
	36	18	23.18	23.05	23.10		1
	36	37	23.20	23.06	23.12		1
75	0	23.12	22.99	23.00	1		
16QAM	1	0	23.40	23.17	23.50	0-1	1
	1	36	23.48	23.30	23.50		1
	1	74	23.47	23.23	23.43		1
	36	0	21.82	21.77	21.79	0-2	2
	36	18	21.99	21.81	21.85		2
	36	37	21.95	21.83	21.85		2
75	0	21.90	21.74	21.74	2		
64QAM	1	0	22.13	22.08	22.18	0-2	2
	1	36	22.15	22.18	22.27		2
	1	74	22.20	22.12	22.14		2
	36	0	20.89	20.84	20.82	0-3	3
	36	18	20.97	20.85	20.87		3
	36	37	20.93	20.89	20.88		3
75	0	20.90	20.78	20.75	3		

Table 7-3. LTE Band 7 Measured Pmax for DSI = 2 (Free Space State) - 15 MHz Bandwidth



FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset	Page 12 of 61	

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.80	24.02	24.04	0	0
	1	25	23.72	23.94	23.99		0
	1	49	23.78	23.99	24.01		0
	25	0	22.88	23.01	23.03	0-1	1
	25	12	22.87	23.02	23.04		1
	25	25	22.87	23.07	23.10		1
16QAM	50	0	22.89	23.01	23.01	0-1	1
	1	0	22.94	23.28	23.50		1
	1	25	22.89	23.30	23.62		1
	1	49	22.99	23.31	23.53	0-2	1
	25	0	21.63	21.74	21.78		2
	25	12	21.66	21.73	21.80		2
64QAM	25	25	21.63	21.81	21.79	0-2	2
	50	0	21.60	21.71	21.73		2
	1	0	21.65	22.06	22.25		0-3
	1	25	21.66	22.13	22.29	2	
	1	49	21.73	22.10	22.25	2	
	25	0	20.64	20.80	20.82	0-3	3
25	12	20.68	20.81	20.86	3		
25	25	20.64	20.86	20.86	3		
	50	0	20.64	20.78	20.76		3

Table 7-4. LTE Band 7 Measured Pmax for DSI = 2 (Free Space State) - 10 MHz Bandwidth

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.80	23.94	23.96	0	0
	1	12	23.78	23.96	23.82		0
	1	24	23.74	24.01	23.96		0
	12	0	22.88	23.01	23.07	0-1	1
	12	6	22.84	23.02	23.10		1
	12	13	22.91	23.04	23.08		1
16QAM	25	0	22.85	22.98	23.10	0-1	1
	1	0	22.90	23.46	23.29		1
	1	12	22.85	23.47	23.19		1
	1	24	22.94	23.52	23.22	0-2	1
	12	0	21.69	21.86	21.86		2
	12	6	21.63	21.83	21.85		2
64QAM	12	13	21.62	21.94	21.87	0-2	2
	25	0	21.66	21.74	21.80		2
	1	0	22.01	22.22	22.29		0-3
	1	12	21.97	22.19	22.28	2	
	1	24	21.98	22.26	22.26	2	
	12	0	20.61	20.73	20.87	0-3	3
12	6	20.62	20.74	20.84	3		
12	13	20.58	20.78	20.83	3		
	25	0	20.62	20.75	20.78		3

Table 7-5. LTE Band 7 Measured Pmax for DSI = 2 (Free Space State) - 5 MHz Bandwidth

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28- 9/18/2020	EUT Type: Portable Handset		Page 13 of 61



LTE Band 41

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.27	23.42	23.58	23.51	23.76	0	0
	1	50	23.21	23.46	23.36	23.28	23.68		0
	1	99	23.34	23.36	23.39	23.49	23.75		0
	50	0	22.69	22.94	22.94	22.97	23.19	0-1	1
	50	25	22.77	23.00	22.91	22.98	23.20		1
	50	50	22.75	22.99	22.91	23.03	23.25		1
100	0	22.78	22.91	22.88	22.94	23.18	1		
16QAM	1	0	22.76	22.61	23.01	23.11	22.93	0-1	1
	1	50	22.74	22.58	22.86	22.91	22.88		1
	1	99	22.81	22.61	22.87	23.09	22.97		1
	50	0	21.40	21.70	21.61	21.67	21.89	0-2	2
	50	25	21.51	21.74	21.57	21.70	21.93		2
	50	50	21.48	21.72	21.58	21.68	21.98		2
100	0	21.50	21.64	21.56	21.69	21.86	2		
64QAM	1	0	21.23	21.66	21.72	21.52	21.89	0-2	2
	1	50	21.18	21.74	21.65	21.37	21.99		2
	1	99	21.25	21.75	21.67	21.50	22.03		2
	50	0	20.41	20.71	20.61	20.67	20.97	0-3	3
	50	25	20.50	20.78	20.59	20.70	20.96		3
	50	50	20.54	20.77	20.65	20.71	21.04		3
100	0	20.45	20.63	20.60	20.72	20.96	3		

Table 7-6. LTE Band 41 Measured Pmax for DSI = 2 (Free Space State) - 20 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.28	23.64	23.54	23.53	23.90	0	0
	1	36	23.35	23.64	23.59	23.51	23.93		0
	1	74	23.28	23.64	23.54	23.62	23.96		0
	36	0	22.79	23.06	23.05	23.08	23.45	0-1	1
	36	18	22.87	23.16	23.03	23.13	23.43		1
	36	37	22.86	23.10	23.07	23.05	23.43		1
75	0	22.87	23.10	23.01	23.08	23.35	1		
16QAM	1	0	22.09	22.79	22.38	22.78	22.68	0-1	1
	1	36	22.17	22.82	22.37	22.74	22.75		1
	1	74	22.08	22.86	22.37	22.78	22.74		1
	36	0	21.52	21.78	21.75	21.82	22.13	0-2	2
	36	18	21.60	21.88	21.76	21.82	22.12		2
	36	37	21.58	21.83	21.79	21.75	22.12		2
75	0	21.56	21.80	21.71	21.76	22.07	2		
64QAM	1	0	21.29	21.43	21.56	21.78	21.90	0-2	2
	1	36	21.39	21.46	21.64	21.73	21.93		2
	1	74	21.31	21.51	21.62	21.81	21.97		2
	36	0	20.57	20.76	20.84	20.73	21.18	0-3	3
	36	18	20.68	20.81	20.85	20.74	21.16		3
	36	37	20.63	20.81	20.84	20.69	21.22		3
75	0	20.65	20.80	20.75	20.81	21.14	3		

Table 7-7. LTE Band 41 Measured Pmax for DSI = 2 (Free Space State) - 15 MHz Bandwidth



FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset	Page 14 of 61	

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
Conducted Power [dBm]									
QPSK	1	0	23.48	23.77	23.90	23.61	24.19	0	0
	1	25	23.48	23.77	23.78	23.58	24.09		0
	1	49	23.42	23.69	23.63	23.61	23.84		0
	25	0	22.82	23.08	23.08	23.10	23.42	0-1	1
	25	12	22.92	23.17	23.09	23.13	23.40		1
	25	25	22.90	23.15	23.16	23.13	23.46		1
16QAM	50	0	22.89	23.20	23.10	23.11	23.44	0-1	1
	1	0	22.74	22.98	22.74	22.86	23.12		1
	1	25	22.33	22.89	22.63	22.84	22.99		1
	1	49	22.56	22.91	22.74	22.80	22.98	0-2	1
	25	0	21.64	21.84	21.84	21.85	22.16		2
	25	12	21.64	21.91	21.78	21.88	22.20		2
64QAM	25	25	21.66	21.87	21.88	21.82	22.21	0-2	2
	50	0	21.61	21.89	21.84	21.82	22.11		2
	1	0	21.24	21.55	21.48	21.81	21.94		0-2
	1	25	21.22	21.65	21.51	21.79	21.79	2	
	1	49	21.27	21.61	21.44	21.75	21.74	2	
	64QAM	25	0	20.50	20.81	20.81	20.80	21.14	0-3
25		12	20.54	20.90	20.83	20.76	21.19	3	
25		25	20.68	20.87	20.84	20.80	20.99	3	
50		0	20.63	20.89	20.75	20.81	21.10	3	

Table 7-8. LTE Band 41 Measured Pmax for DSI = 2 (Free Space State) - 10 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
Conducted Power [dBm]									
QPSK	1	0	23.40	23.69	23.71	23.58	23.99	0	0
	1	12	23.34	23.73	23.71	23.65	24.06		0
	1	24	23.50	23.74	23.73	23.61	24.09		0
	12	0	22.81	23.09	23.11	23.09	23.43	0-1	1
	12	6	22.86	23.19	23.13	23.13	23.40		1
	12	13	22.89	23.15	23.15	23.08	23.45		1
16QAM	25	0	22.89	23.15	23.09	23.12	23.38	0-1	1
	1	0	22.51	22.99	22.80	23.01	23.10		1
	1	12	22.51	23.08	22.79	22.98	23.15		1
	1	24	22.59	23.03	22.82	23.03	23.16	0-2	1
	12	0	21.50	21.82	21.84	21.87	22.12		2
	12	6	21.60	21.92	21.87	21.88	22.16		2
64QAM	12	13	21.62	21.87	21.85	21.83	22.18	0-2	2
	25	0	21.54	21.82	21.79	21.81	22.11		2
	1	0	21.46	21.55	21.74	21.89	22.07		0-2
	1	12	21.48	21.66	21.77	21.89	22.11	2	
	1	24	21.53	21.61	21.76	21.85	22.09	2	
	64QAM	12	0	20.51	20.92	20.85	20.83	21.13	0-3
12		6	20.61	21.00	20.84	20.81	21.18	3	
12		13	20.60	20.98	20.87	20.79	21.18	3	
25		0	20.59	20.91	20.80	20.79	21.12	3	

Table 7-9. LTE Band 41 Measured Pmax for DSI = 2 (Free Space State) - 5 MHz Bandwidth

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset	Page 15 of 61	

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

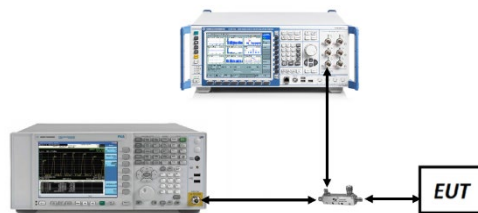


Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 – 9/18/2020	EUT Type: Portable Handset		Page 16 of 61


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 7

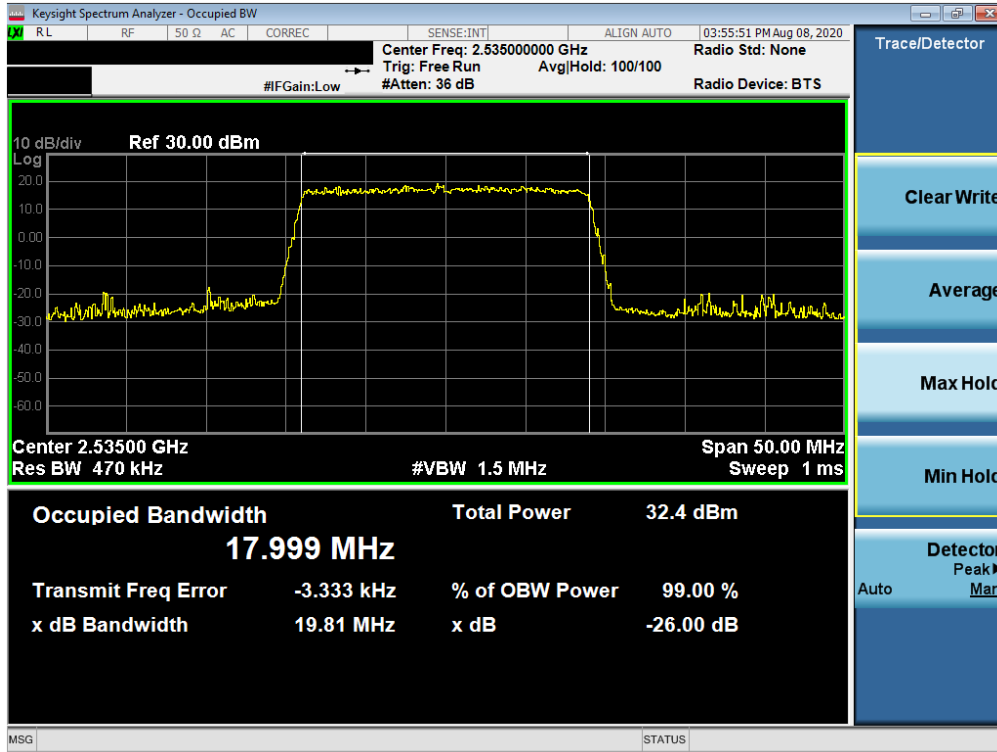

Plot 7-1. Occupied Bandwidth Plot (LTE Band 7 - 20MHz QPSK - Full RB Configuration)

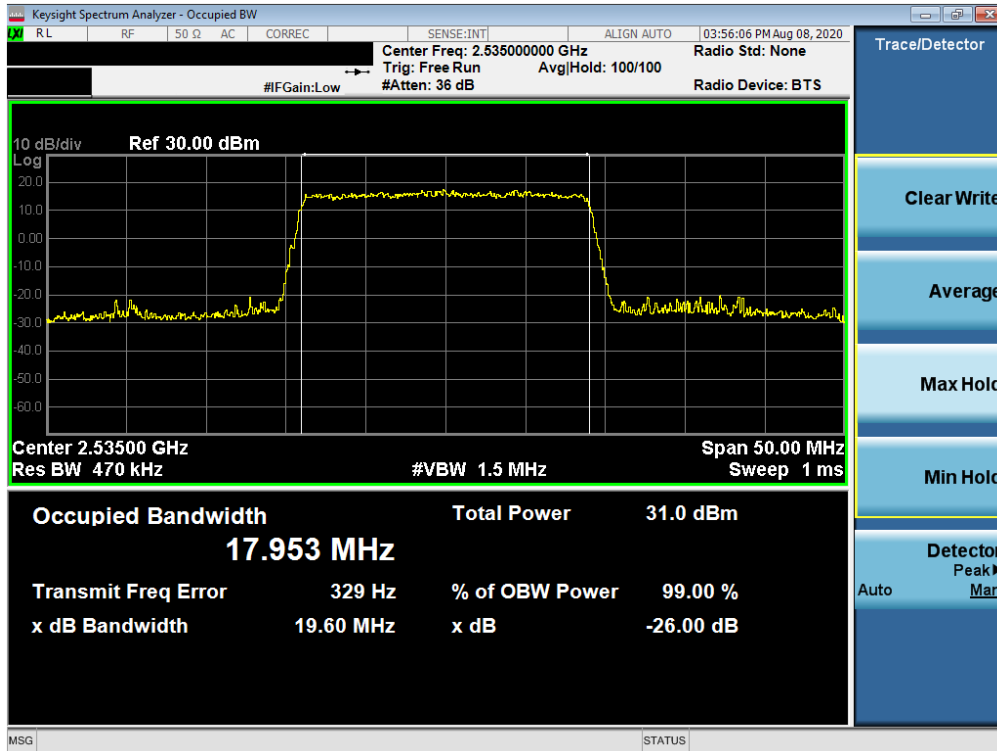


Plot 7-2. Occupied Bandwidth Plot (LTE Band 7 - 20MHz 16-QAM - Full RB Configuration)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 17 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

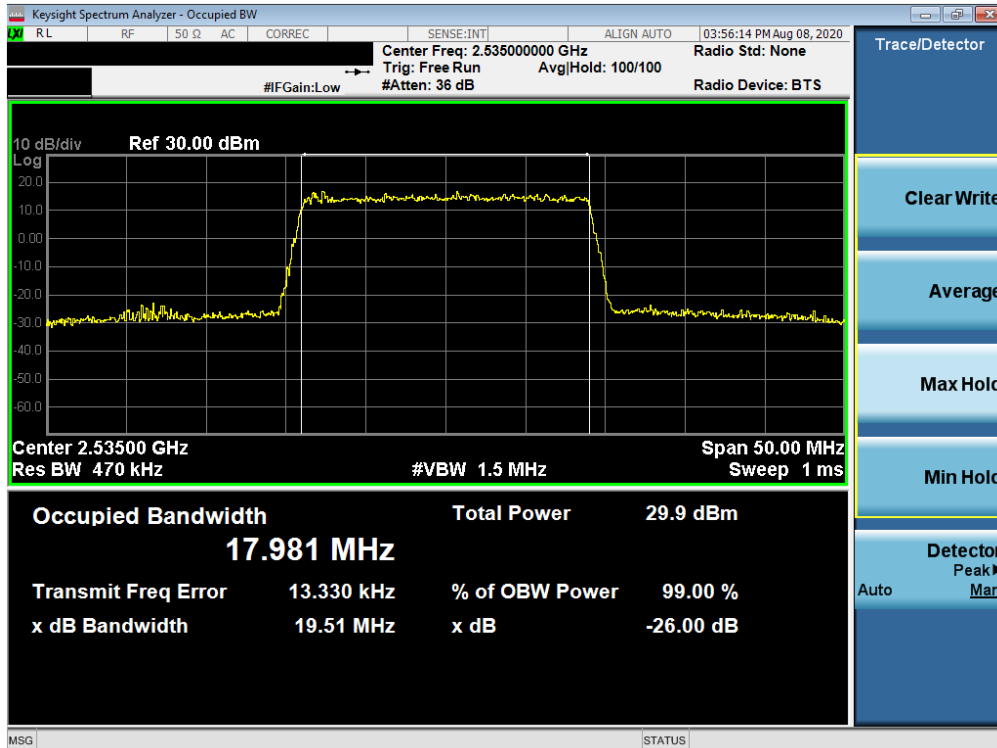


Plot 7-3. Occupied Bandwidth Plot (LTE Band 7 - 20MHz 64-QAM - Full RB Configuration)

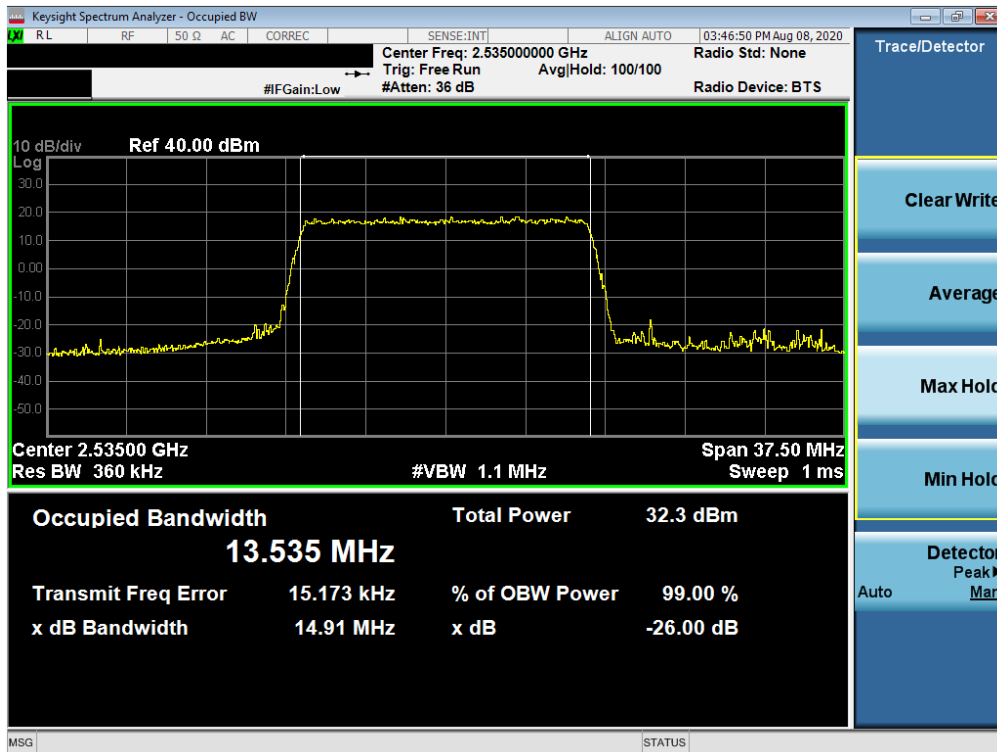


Plot 7-4. Occupied Bandwidth Plot (LTE Band 7 - 15MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 18 of 61

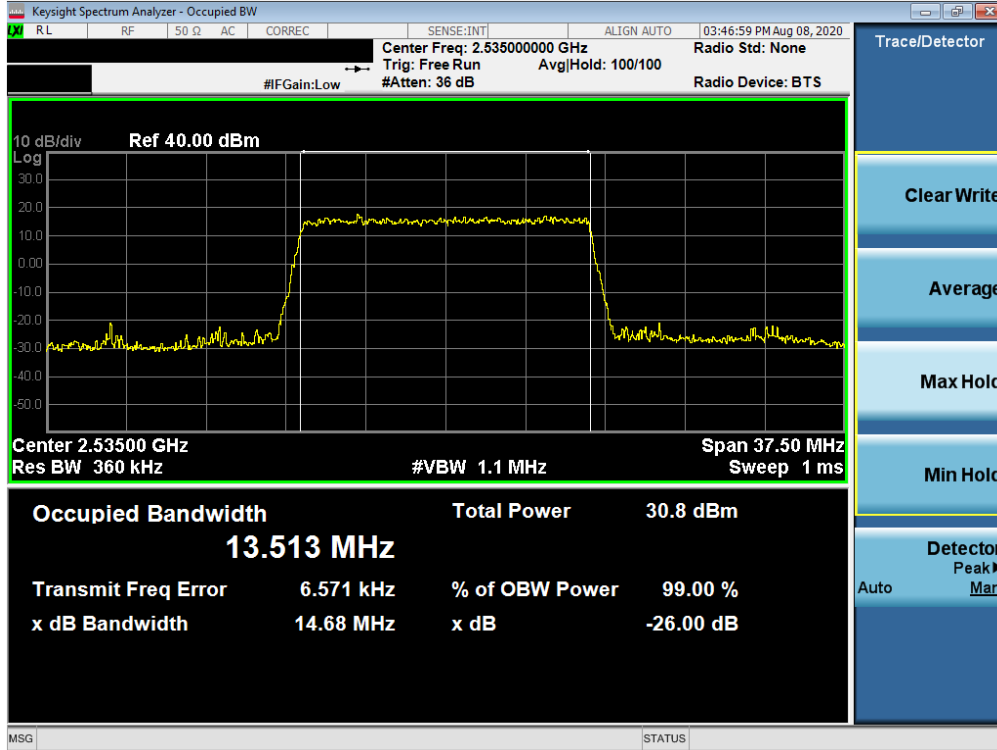


Plot 7-5. Occupied Bandwidth Plot (LTE Band 7 - 15MHz 16-QAM - Full RB Configuration)

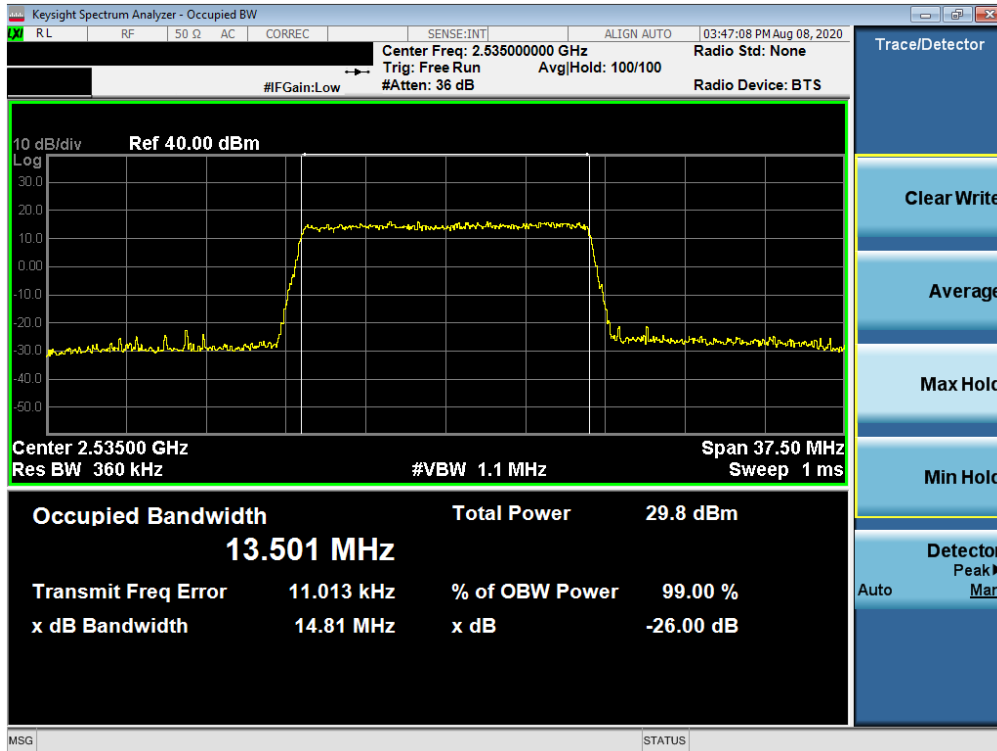


Plot 7-6. Occupied Bandwidth Plot (LTE Band 7 - 15MHz 64-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 19 of 61

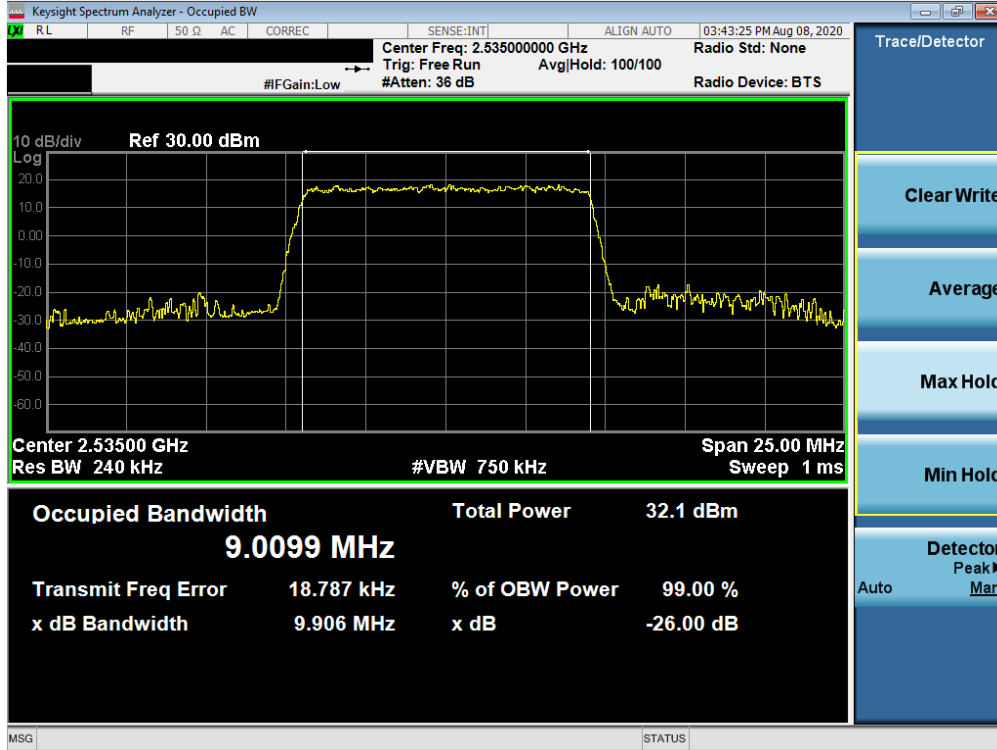


Plot 7-7. Occupied Bandwidth Plot (LTE Band 7 - 10MHz QPSK - Full RB Configuration)

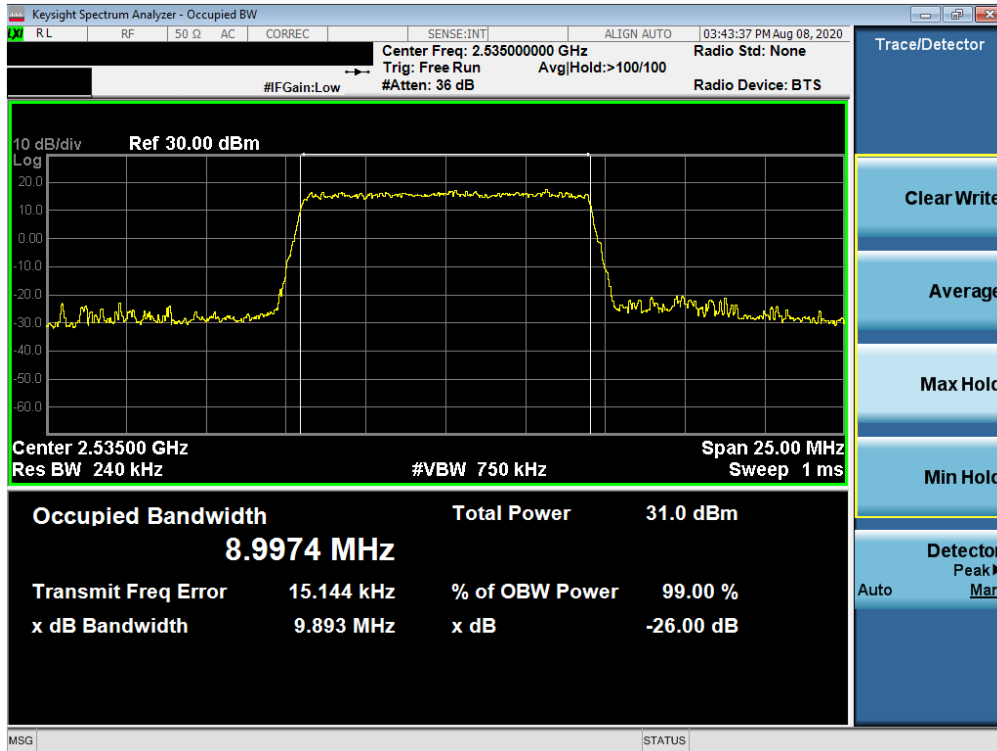


Plot 7-8. Occupied Bandwidth Plot (LTE Band 7 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 20 of 61

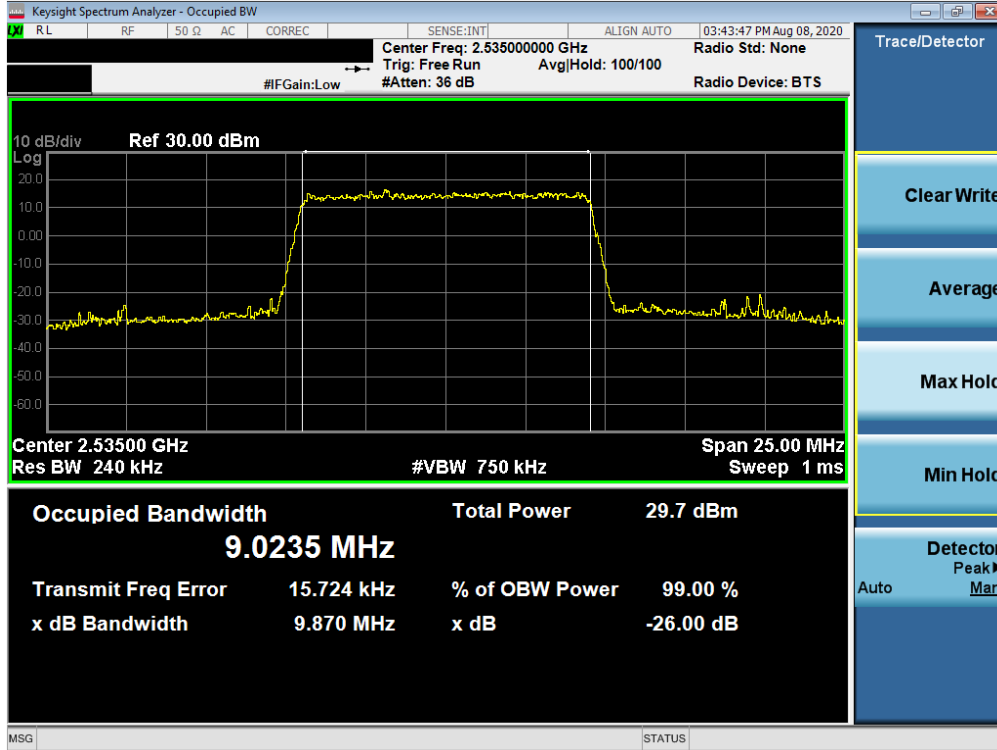


Plot 7-9. Occupied Bandwidth Plot (LTE Band 7 - 10MHz 64-QAM - Full RB Configuration)

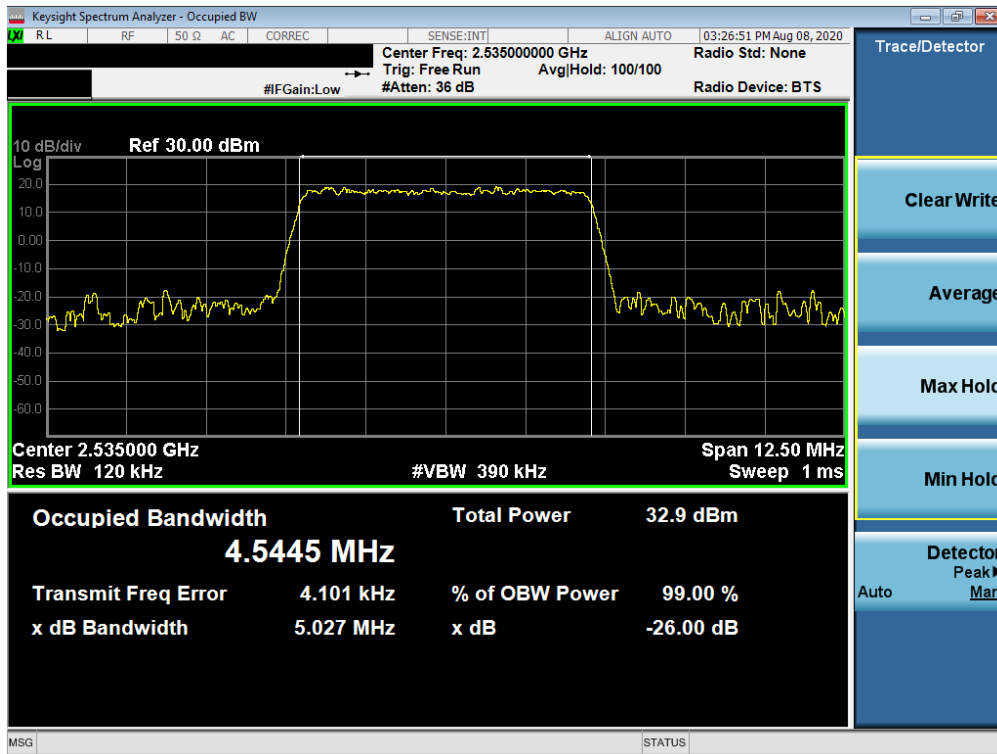

Plot 7-10. Occupied Bandwidth Plot (LTE Band 7 - 5MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 21 of 61

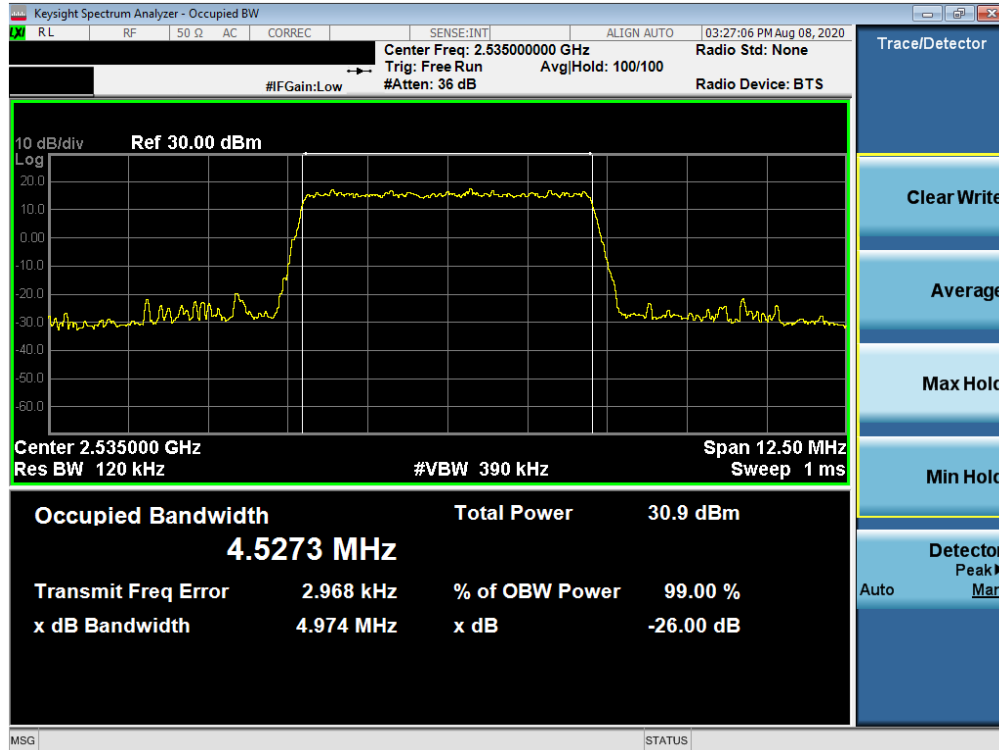


Plot 7-11. Occupied Bandwidth Plot (LTE Band 7 - 5MHz 16-QAM - Full RB Configuration)




Plot 7-12. Occupied Bandwidth Plot (LTE Band 7 - 5MHz 64-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 22 of 61

LTE Band 41(PC3)

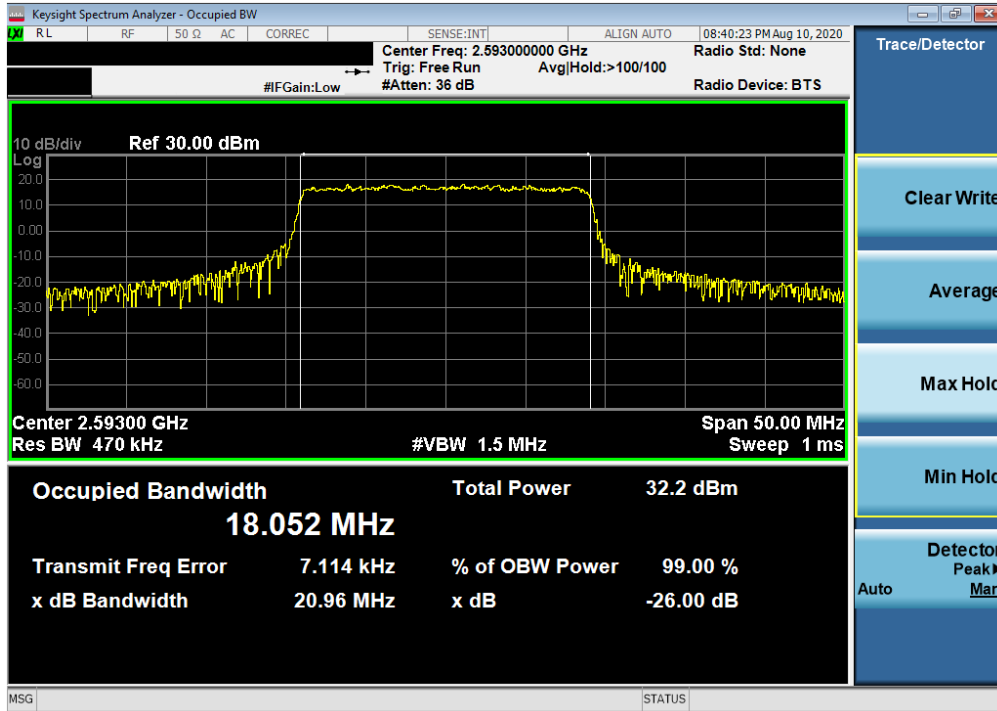


Plot 7-13. Occupied Bandwidth Plot (LTE Band 41(PC3) - 20MHz QPSK - Full RB Configuration)

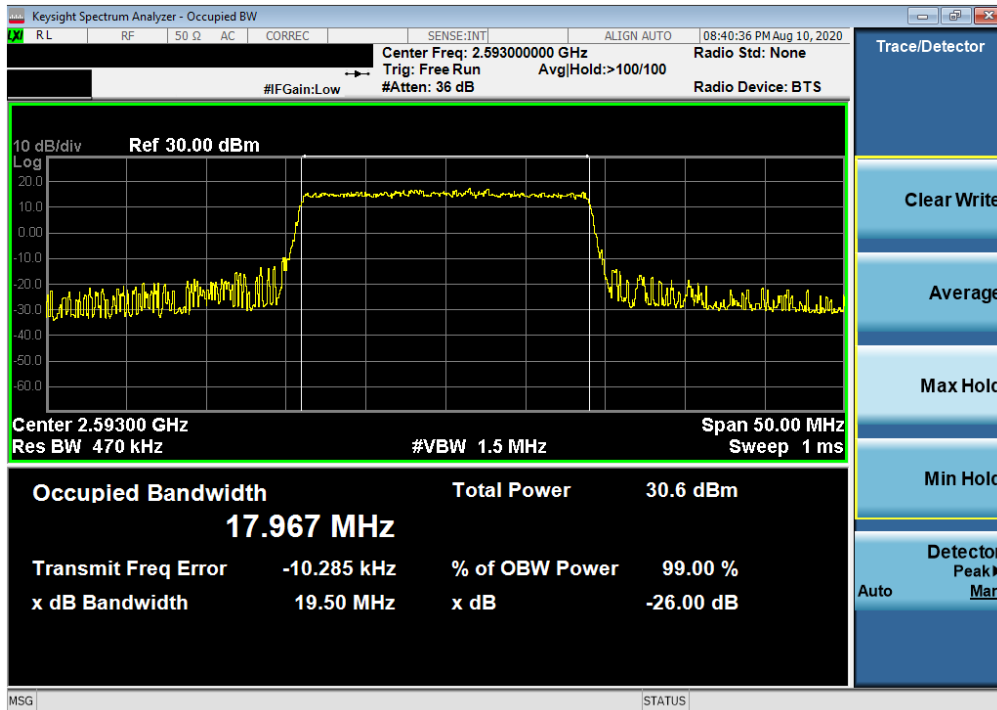


Plot 7-14. Occupied Bandwidth Plot (LTE Band 41(PC3) - 20MHz 16-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 23 of 61

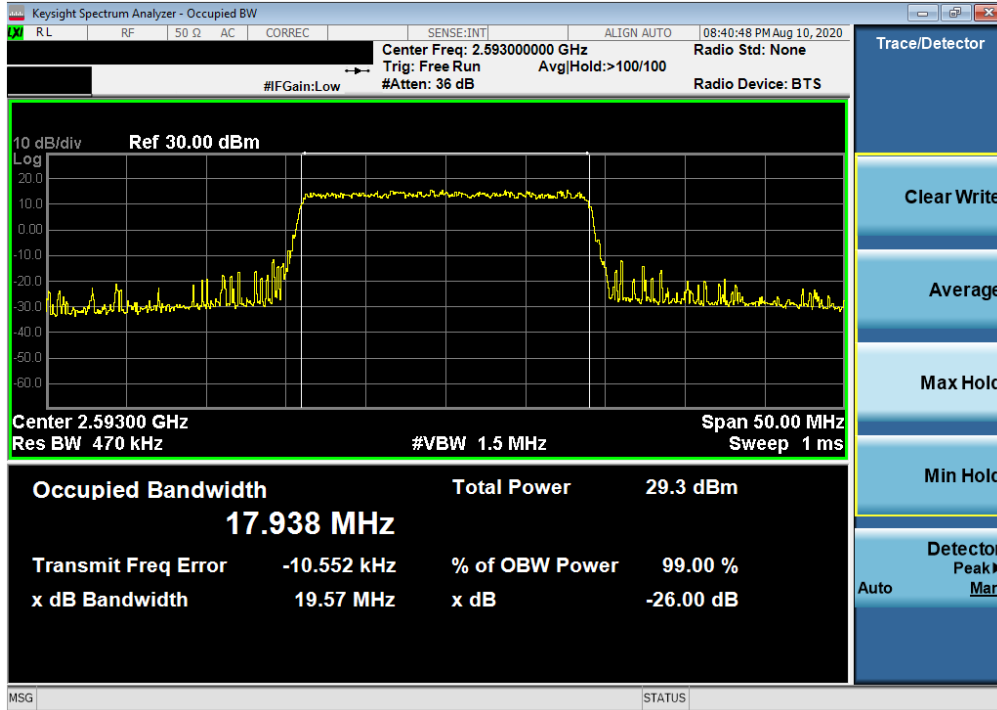


Plot 7-15. Occupied Bandwidth Plot (LTE Band 41(PC3) - 20MHz 64-QAM - Full RB Configuration)

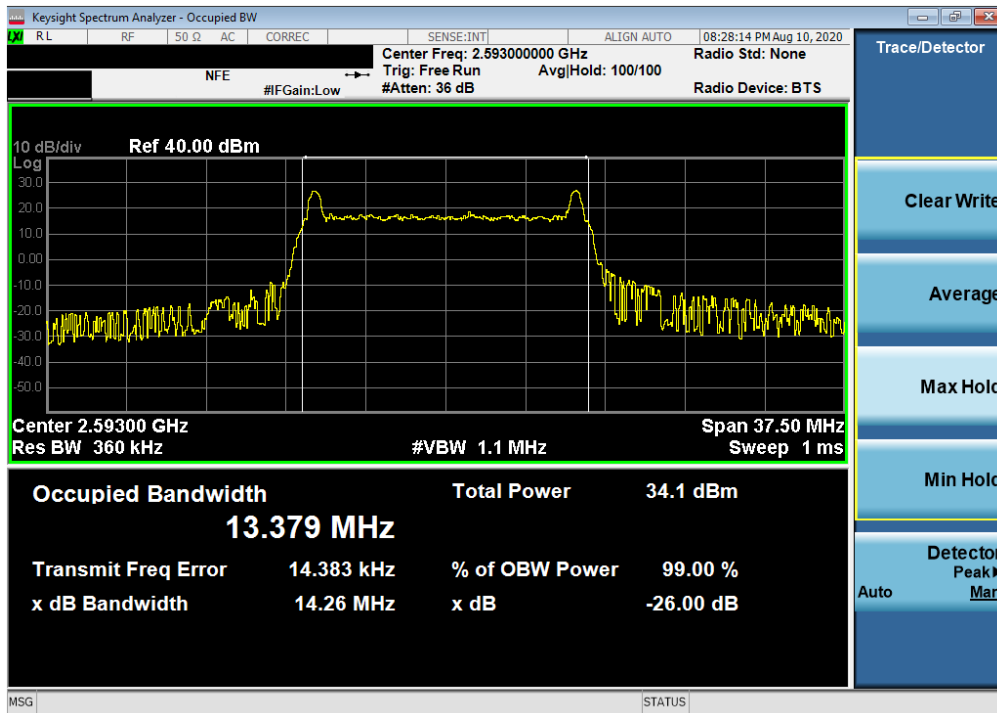


Plot 7-16. Occupied Bandwidth Plot (LTE Band 41(PC3) - 15MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 24 of 61

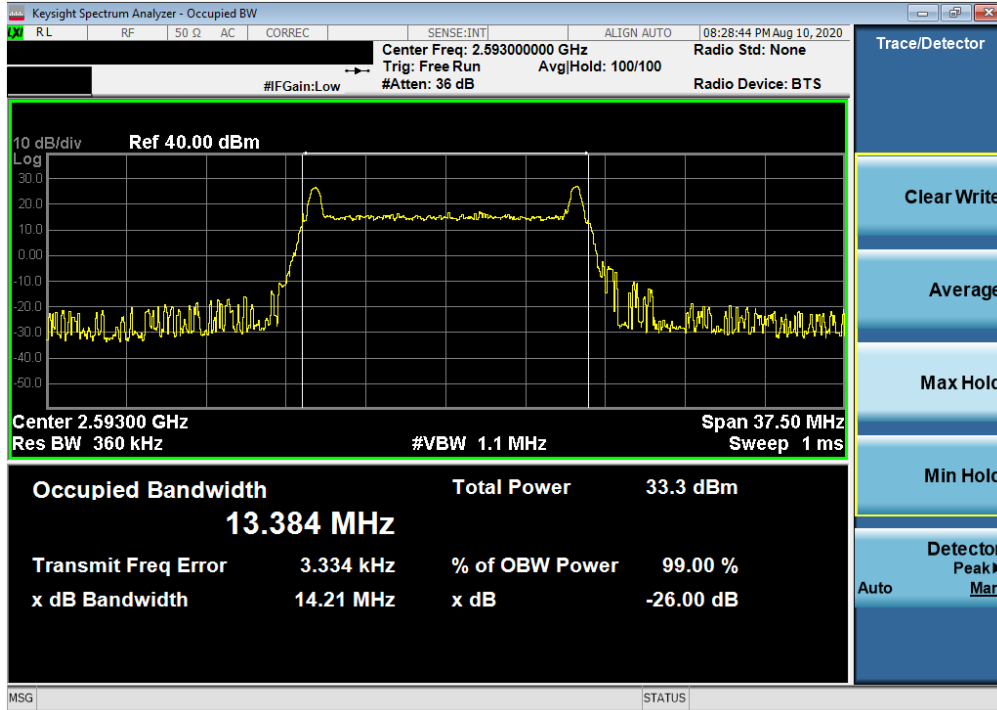


Plot 7-17. Occupied Bandwidth Plot (LTE Band 41(PC3) - 15MHz 16-QAM - Full RB Configuration)

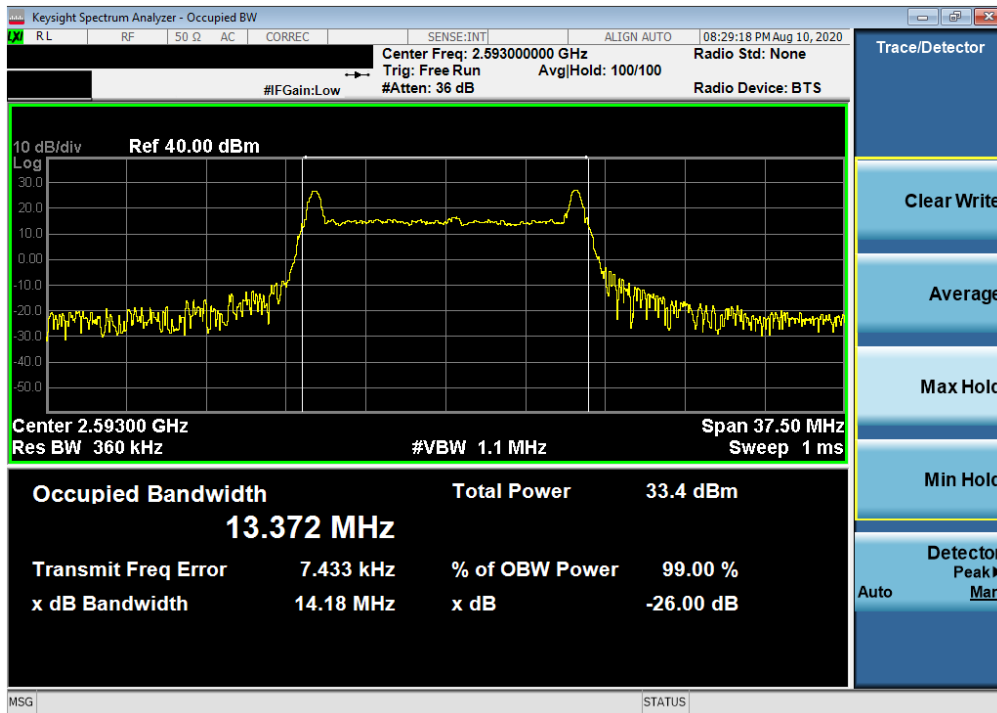


Plot 7-18. Occupied Bandwidth Plot (LTE Band 41(PC3) - 15MHz 64-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 25 of 61

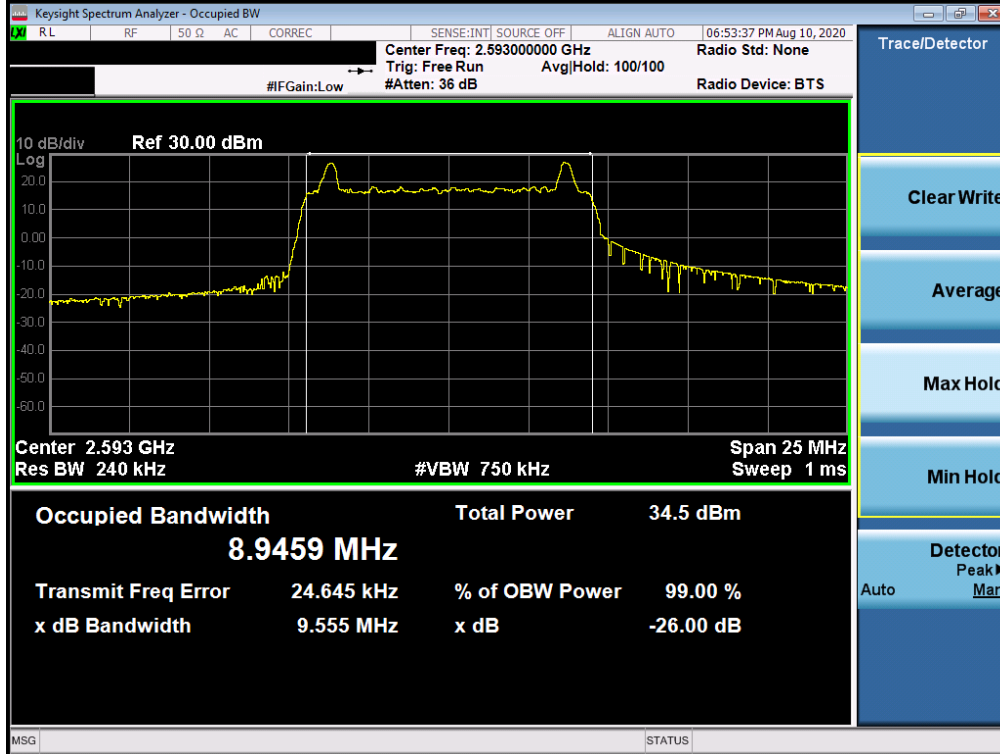


Plot 7-19. Occupied Bandwidth Plot (LTE Band 41(PC3) - 10MHz QPSK - Full RB Configuration)

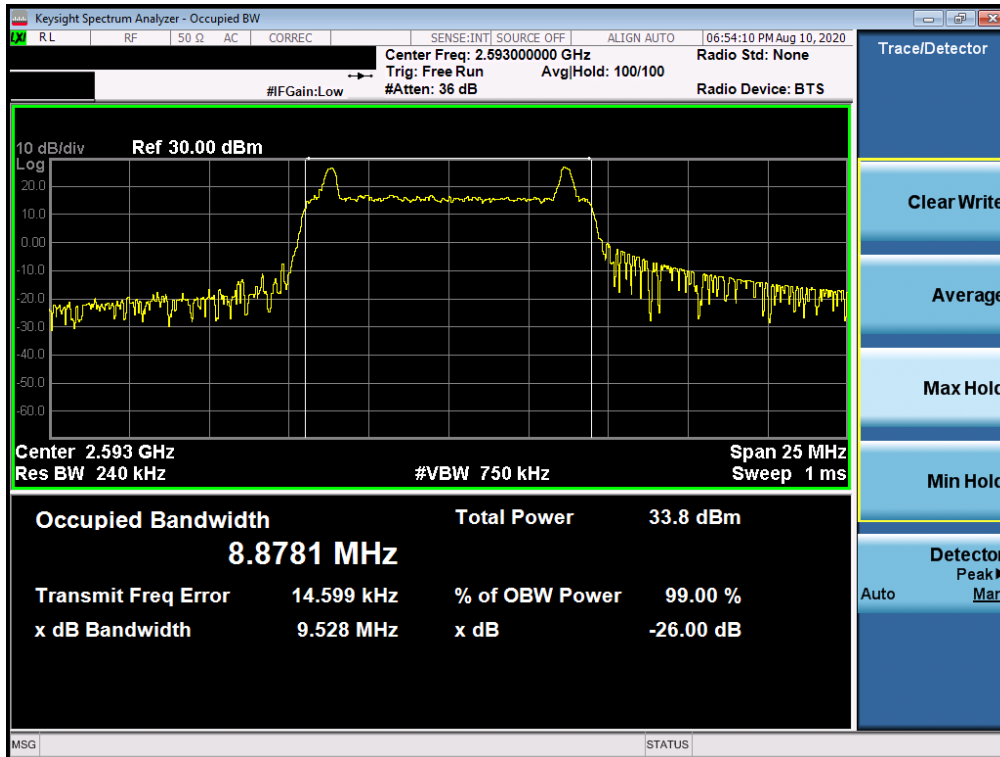


Plot 7-20. Occupied Bandwidth Plot (LTE Band 41(PC3) - 10MHz 16-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 26 of 61

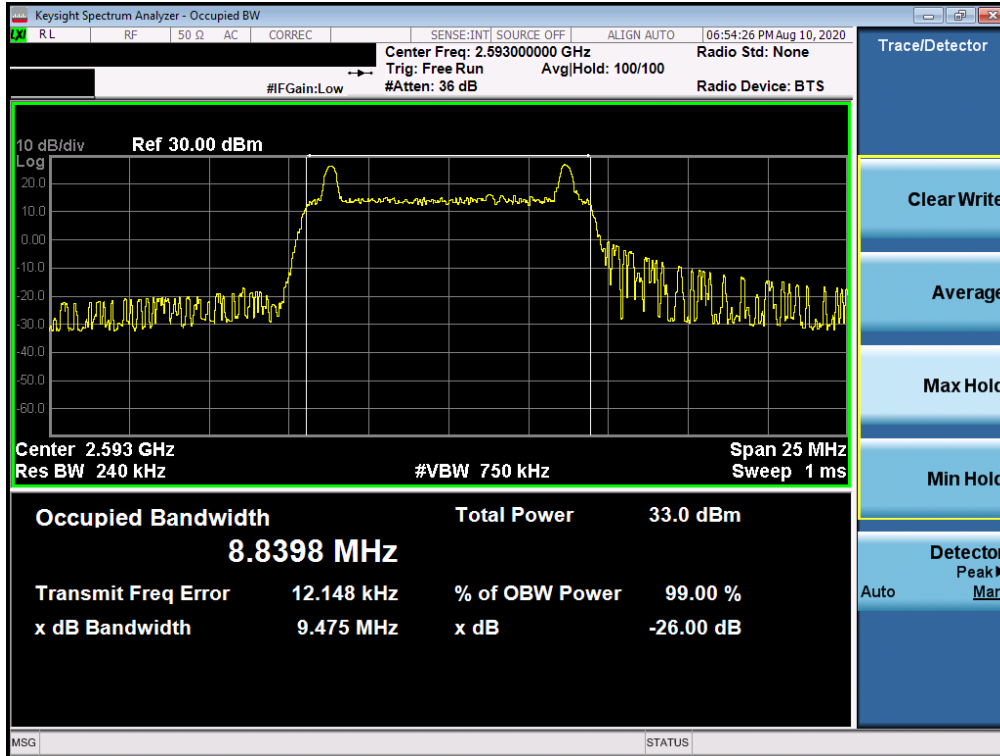


Plot 7-21. Occupied Bandwidth Plot (LTE Band 41(PC3) - 10MHz 64-QAM - Full RB Configuration)

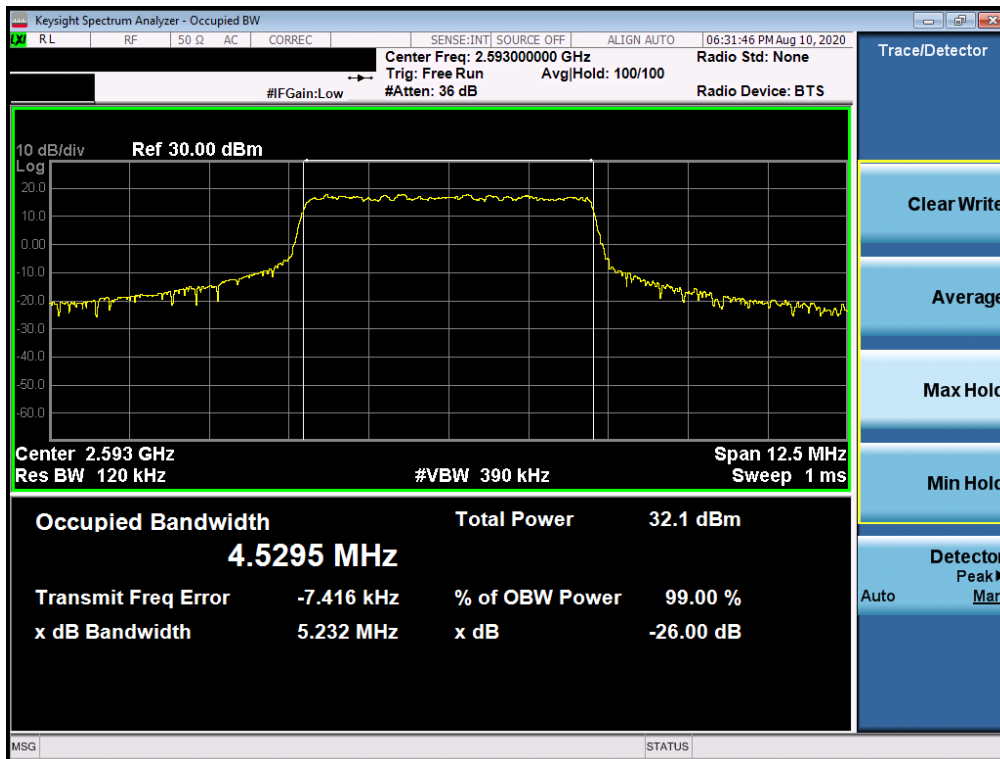


Plot 7-22. Occupied Bandwidth Plot (LTE Band 41(PC3) - 5MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 27 of 61

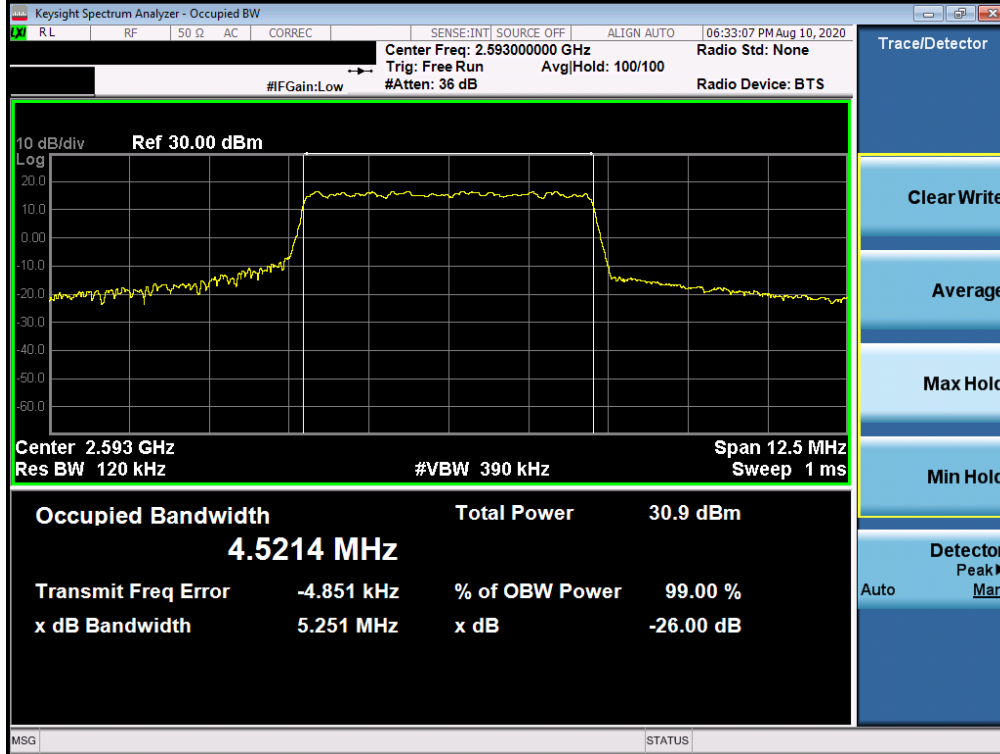

Plot 7-23. Occupied Bandwidth Plot (LTE Band 41(PC3) - 5MHz 16-QAM - Full RB Configuration)

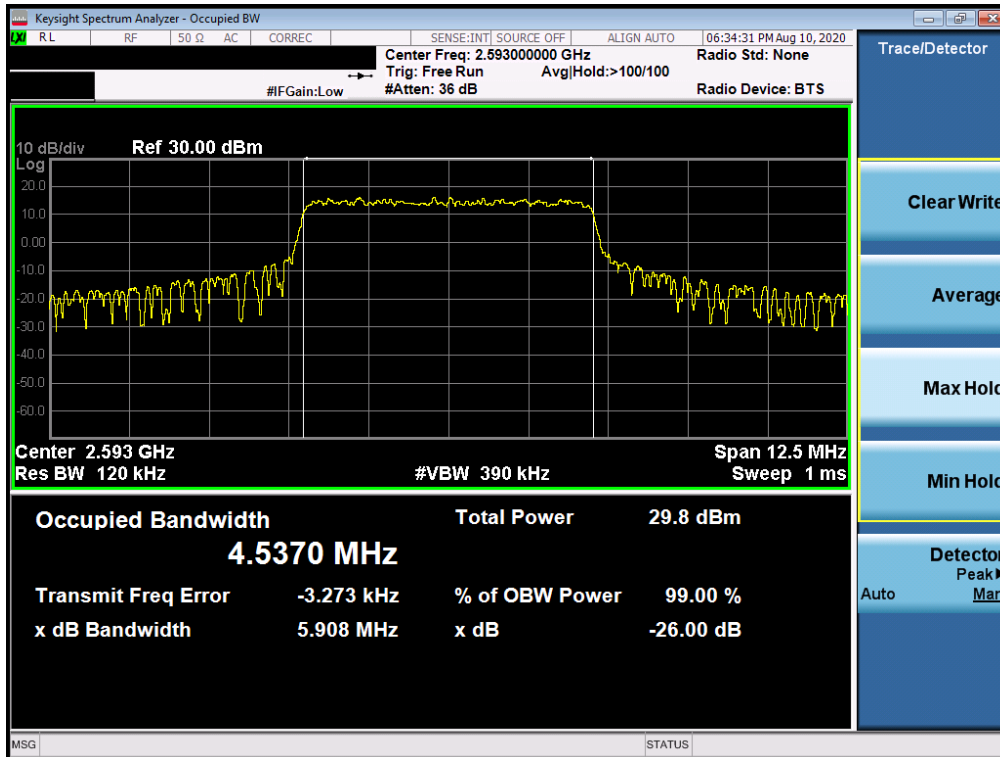

Plot 7-24. Occupied Bandwidth Plot (LTE Band 41(PC3) - 5MHz 64-QAM - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 28 of 61

7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

For Band 7 and 41, the minimum permissible attenuation level of any spurious emission is $55 + 10 \log_{10}(P_{[Watts]})$.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

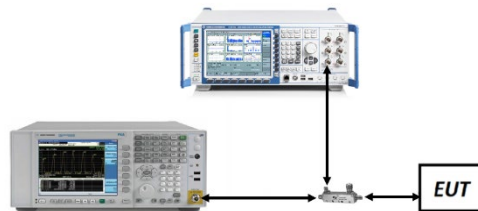



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Per Part 27 and RSS-199, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28– 9/18/2020	EUT Type: Portable Handset		Page 29 of 61


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 7

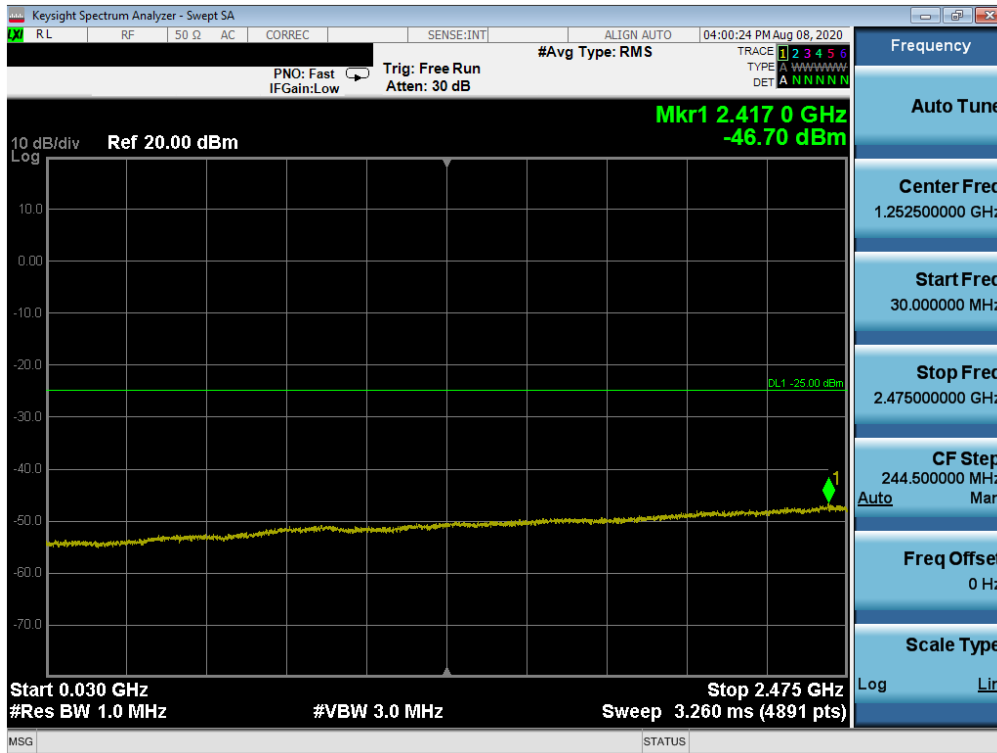

Plot 7-25. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

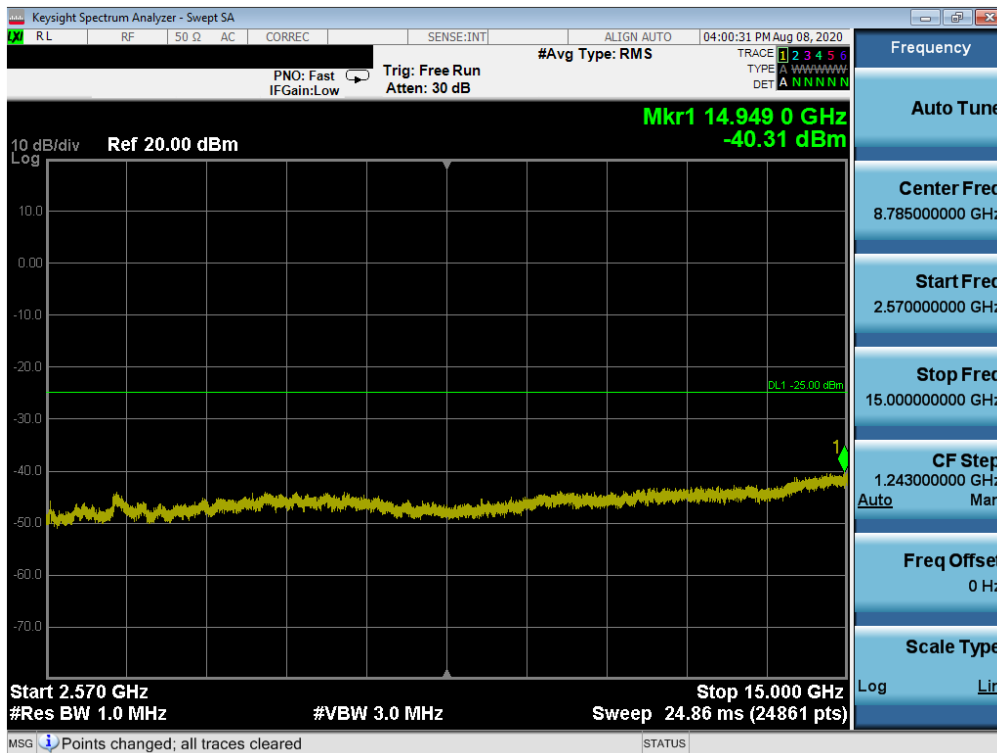

Plot 7-26. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 30 of 61



Plot 7-27. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)




Plot 7-28. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 31 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

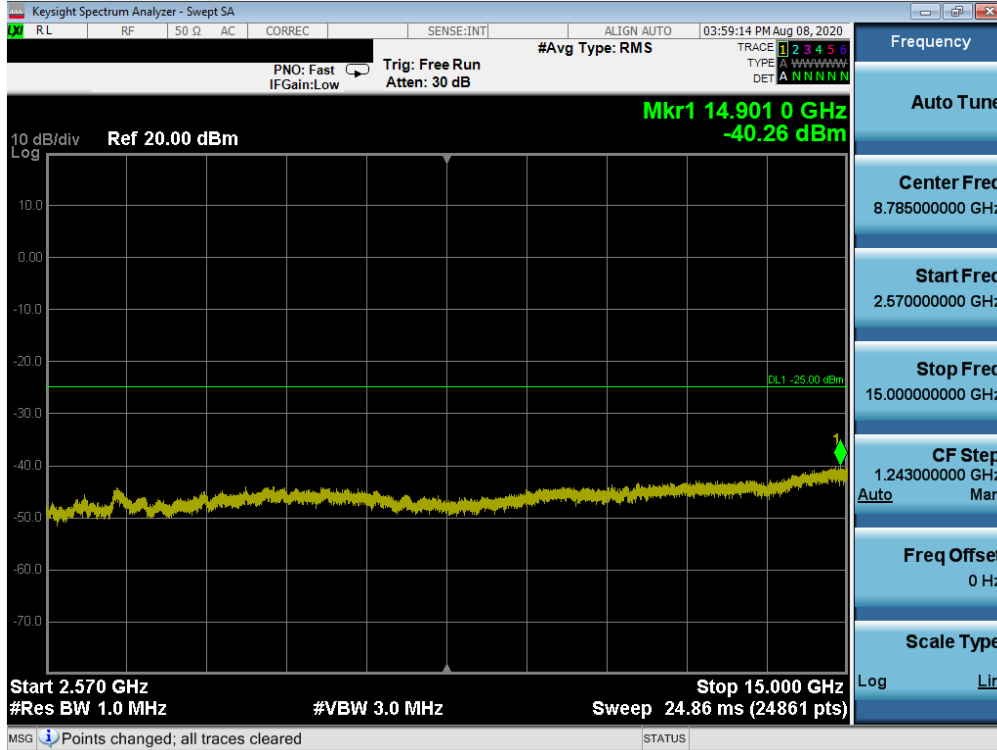


Plot 7-29. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)




Plot 7-30. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 32 of 61

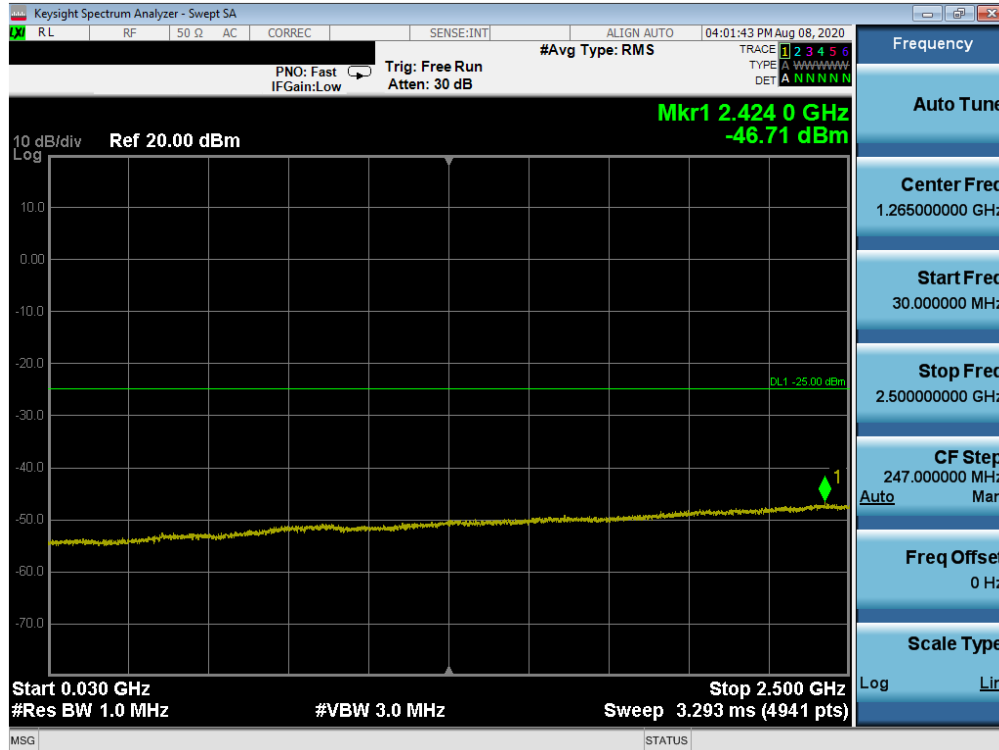

Plot 7-31. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

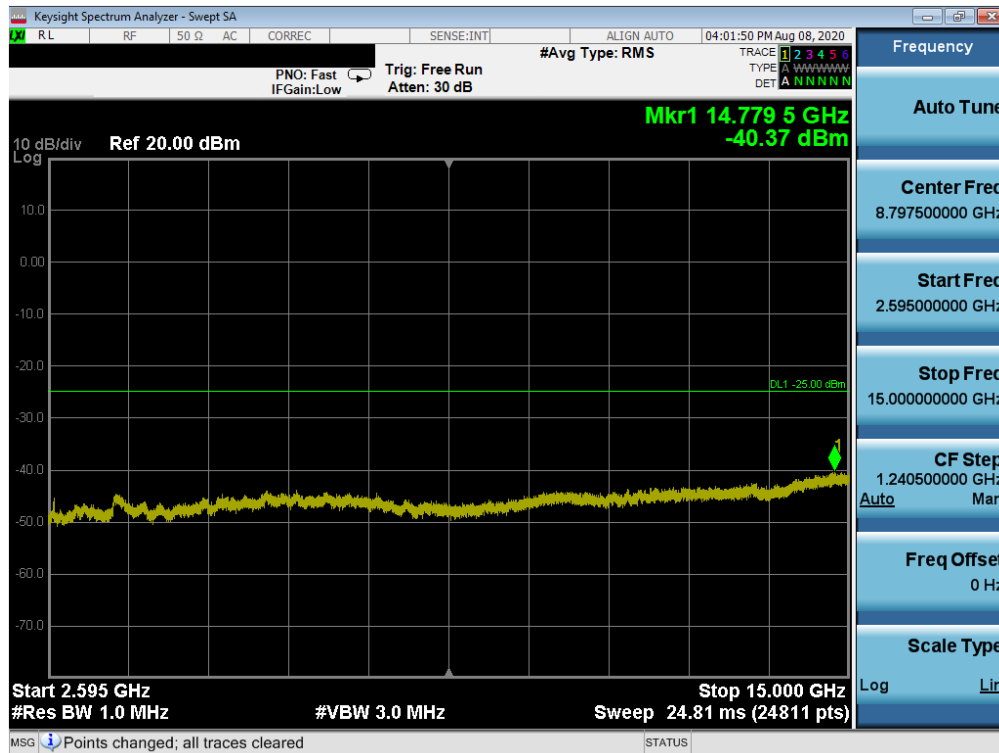

Plot 7-32. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 33 of 61




Plot 7-33. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset		Page 34 of 61


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 41(PC3)

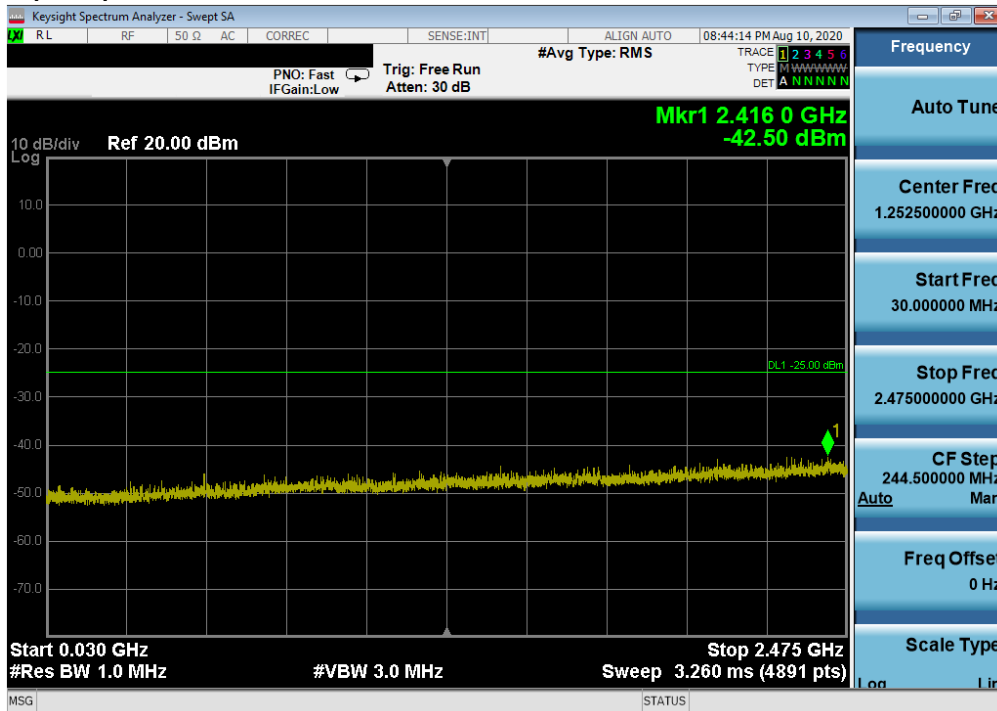

Plot 7-34. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

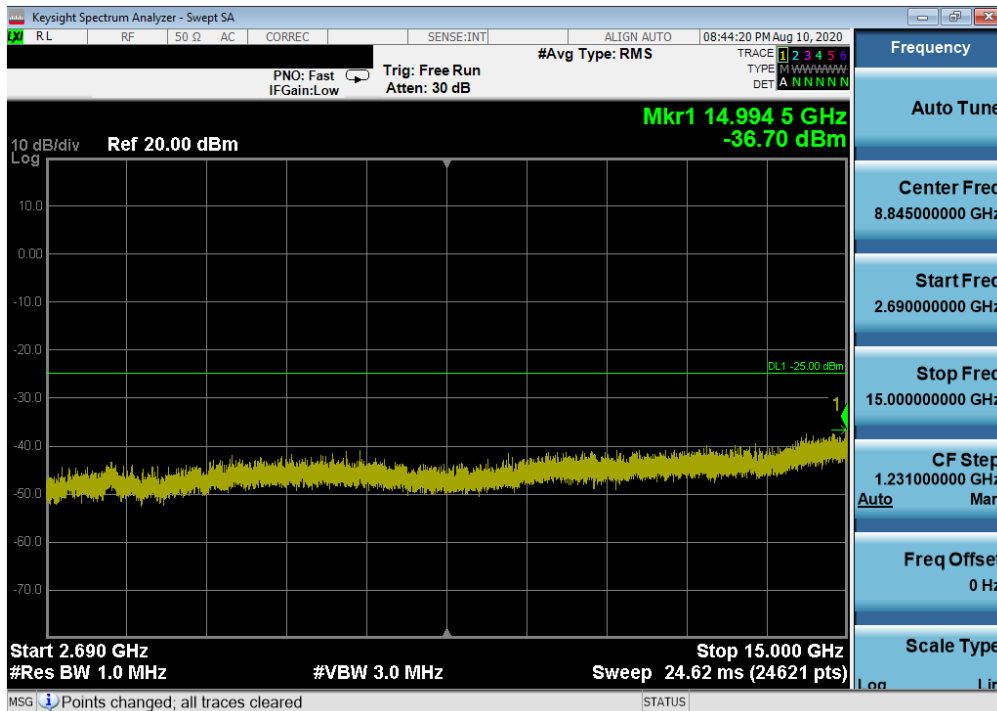


Plot 7-35. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 35 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

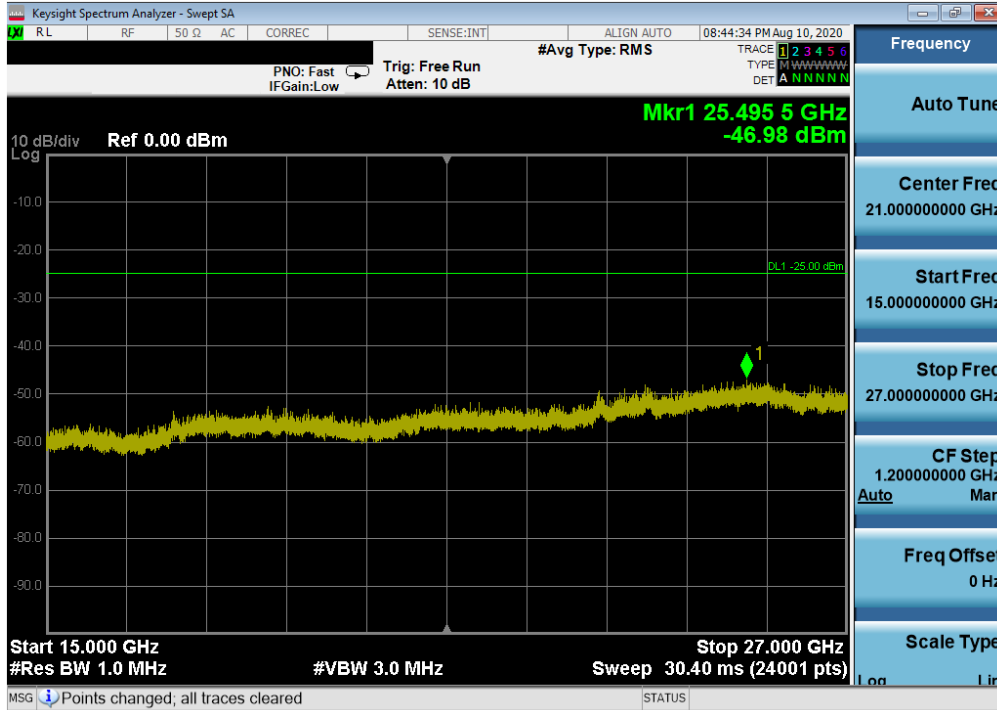


Plot 7-36. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

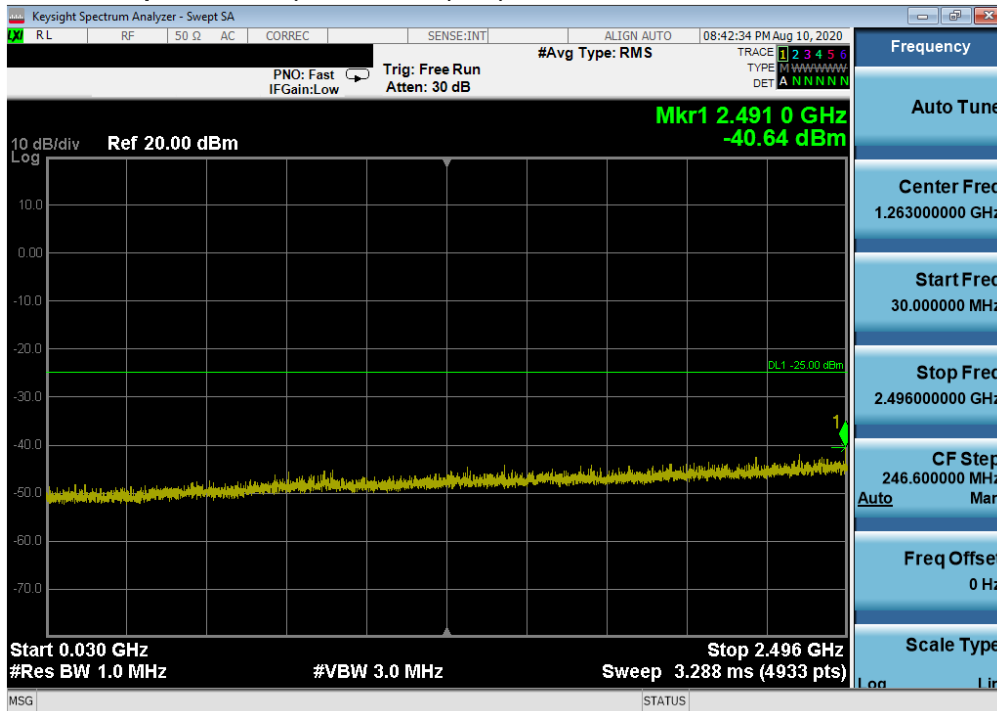


Plot 7-37. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 36 of 61

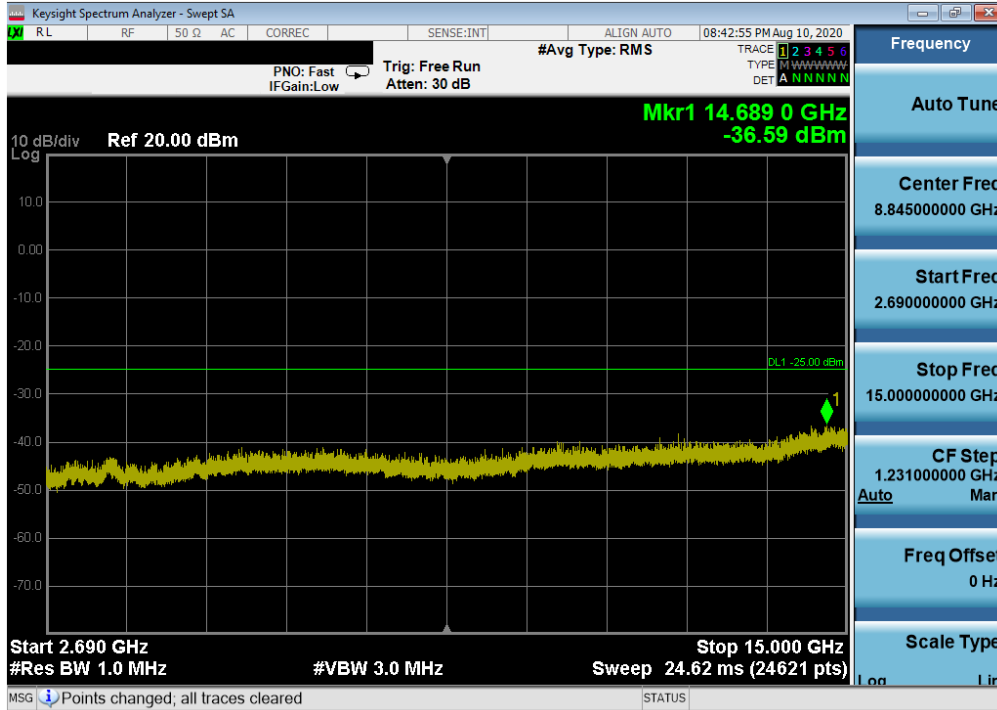


Plot 7-38. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

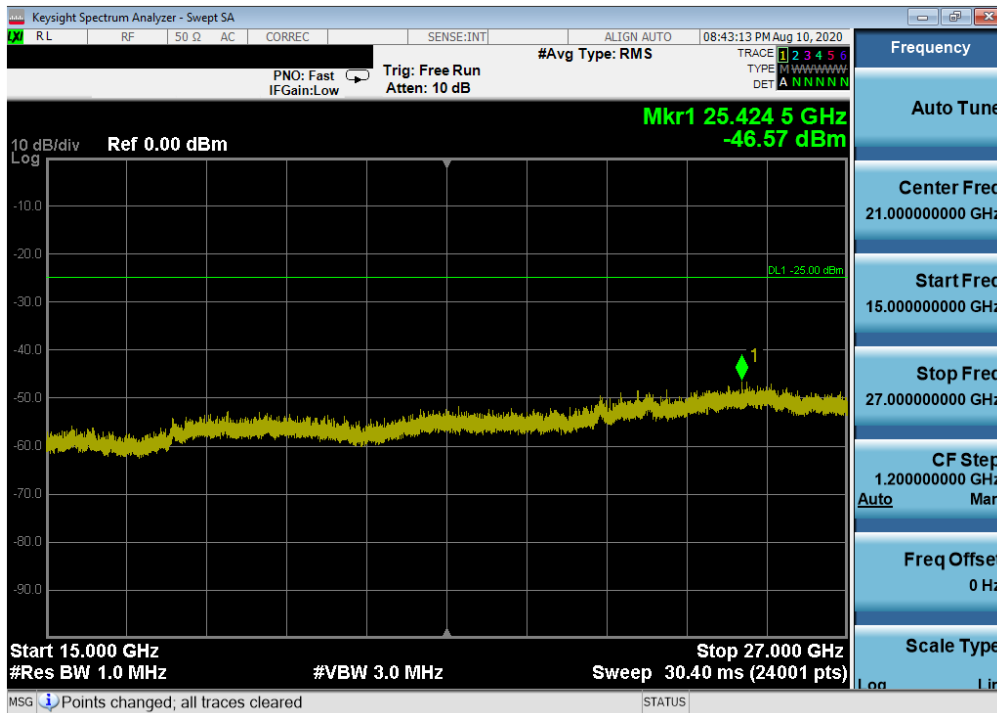


Plot 7-39. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 37 of 61

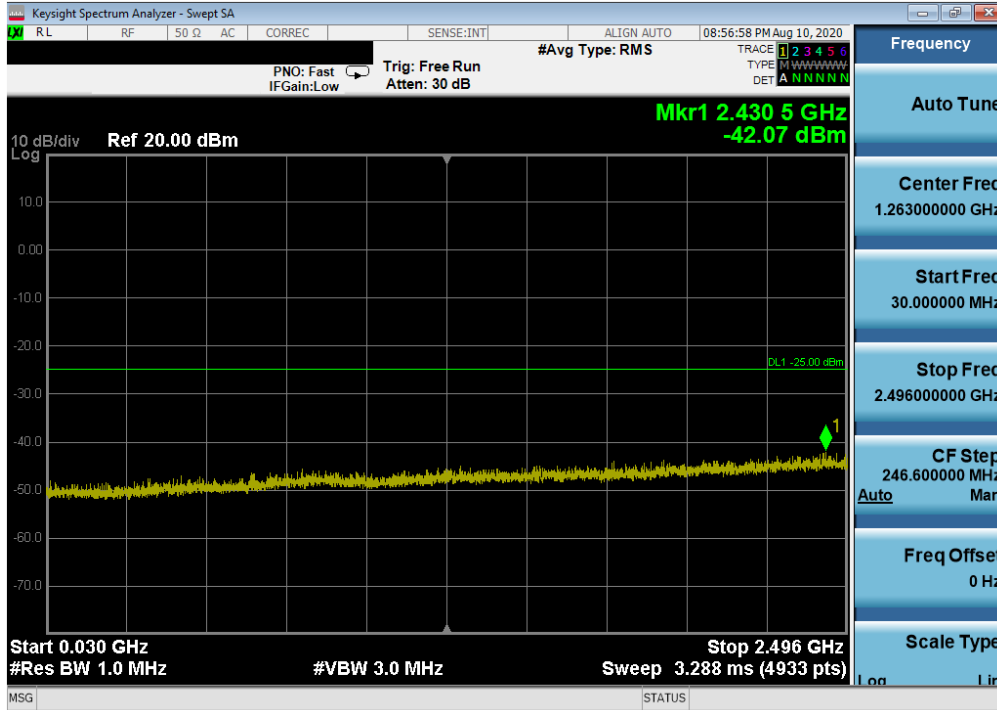


Plot 7-40. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

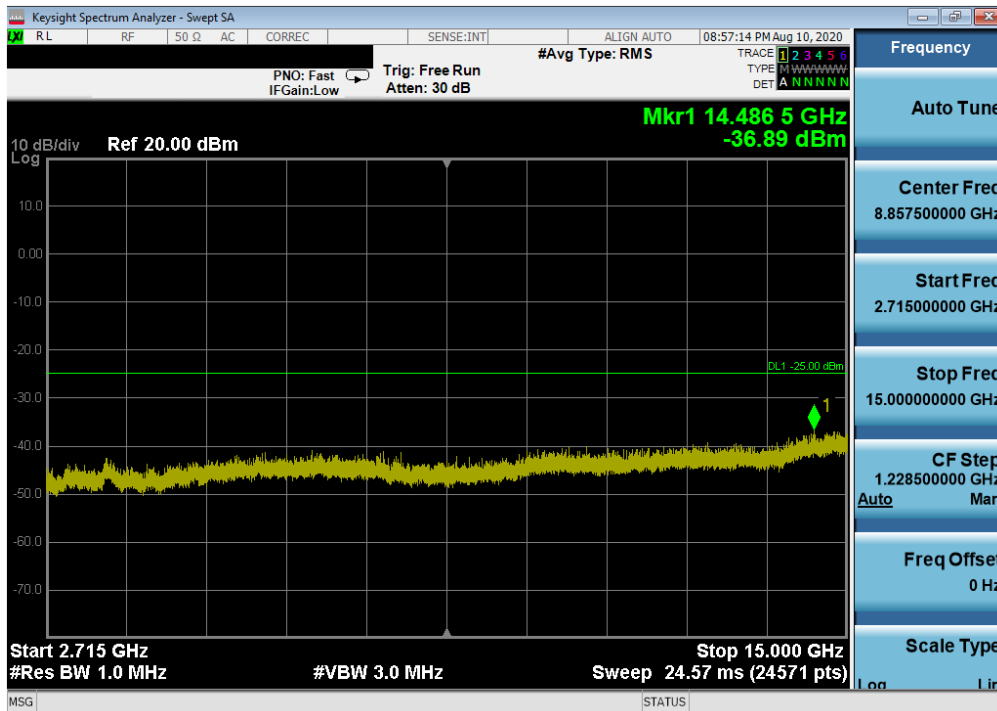



Plot 7-41. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

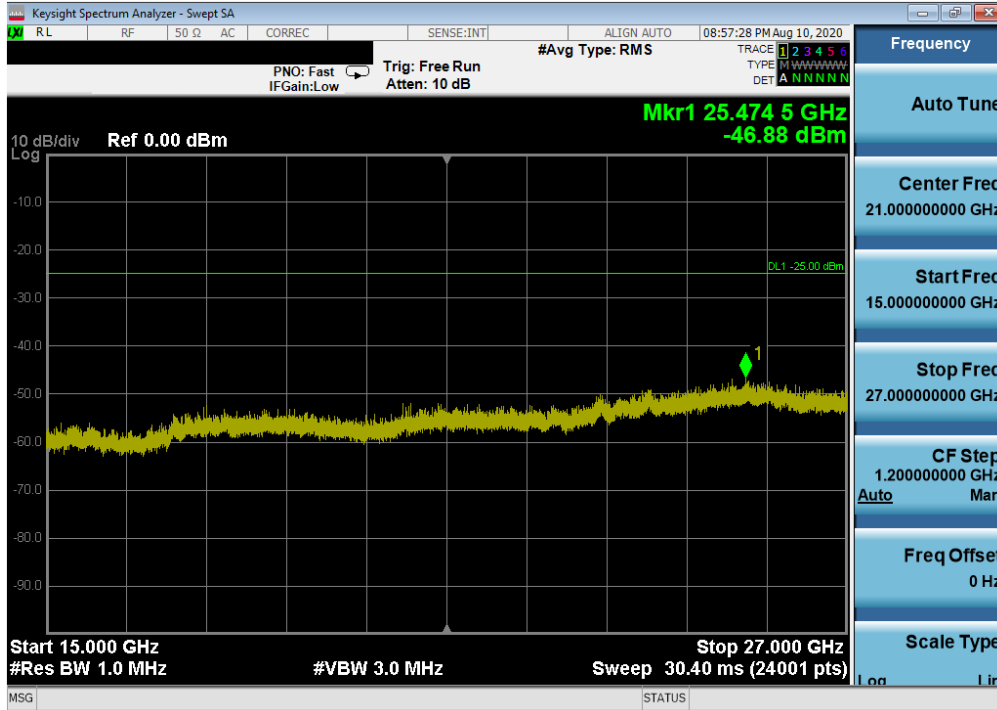FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 38 of 61



Plot 7-42. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset		Page 39 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.5 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 and 41 is as noted in the Test Notes on the following page.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

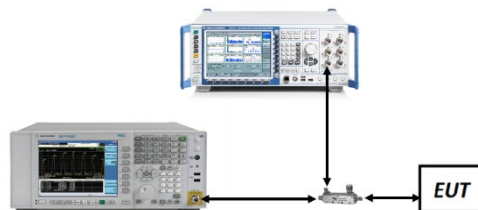




Figure 7-4. Test Instrument & Measurement Setup



FCC ID: PY7-57441Y	 PCTEST Proud to be part of 	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28– 9/18/2020	EUT Type: Portable Handset		Page 40 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Notes


1. Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.

FCC ID: PY7-57441Y	 PART 27 MEASUREMENT REPORT 		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset	Page 41 of 61


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 7

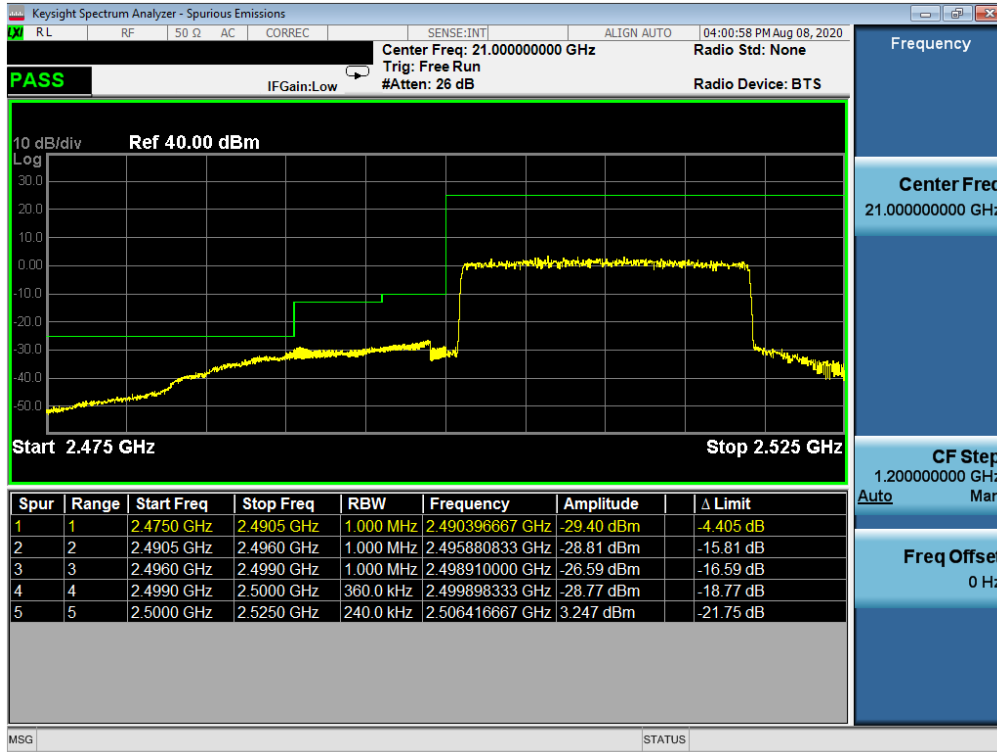

Plot 7-43. Lower ACP Plot (LTE Band 7 - 20MHz QPSK – Full RB Configuration)

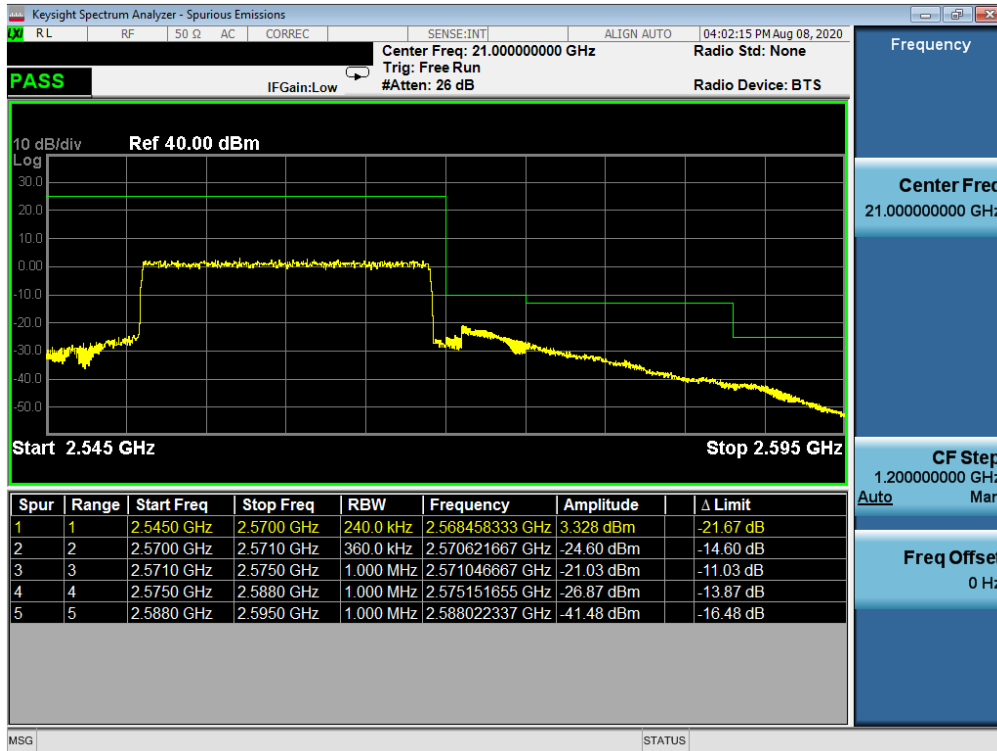


Plot 7-44. Upper ACP Plot (LTE Band 7 - 20MHz QPSK – Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 – 9/18/2020	EUT Type: Portable Handset		Page 42 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

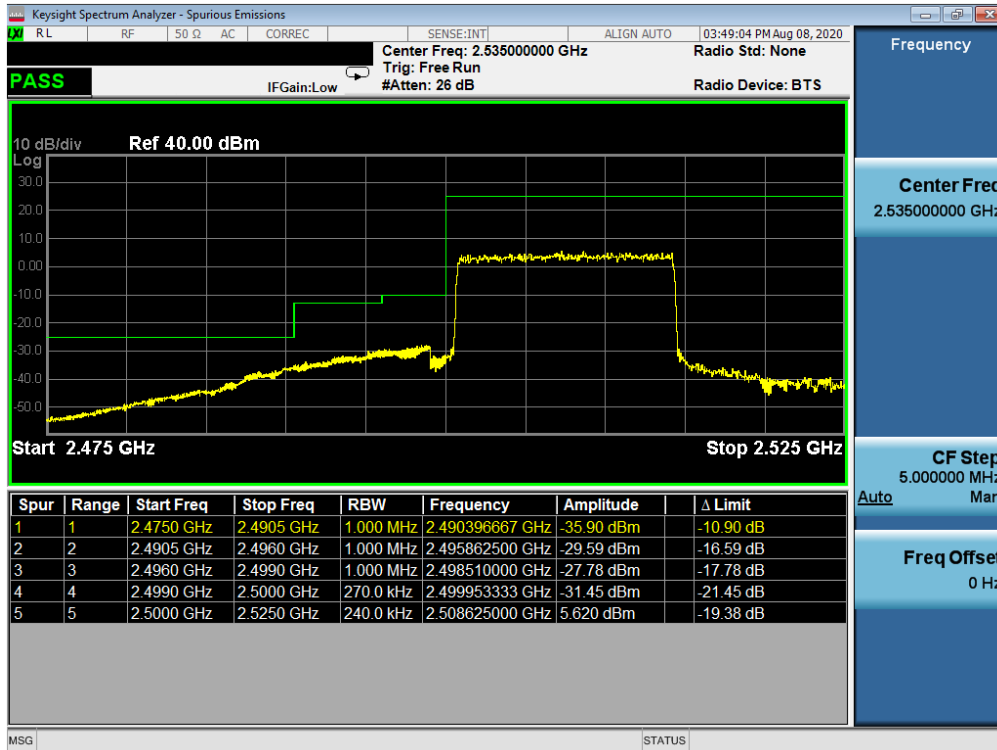

Plot 7-45. Lower ACP Plot (LTE Band 7 - 15MHz QPSK – Full RB Configuration)



Plot 7-46. Upper ACP Plot (LTE Band 7 - 15MHz QPSK – Full RB Configuration)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 – 9/18/2020	EUT Type: Portable Handset		Page 43 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.




Plot 7-47. Lower ACP Plot (LTE Band 7 - 10MHz QPSK – Full RB Configuration)

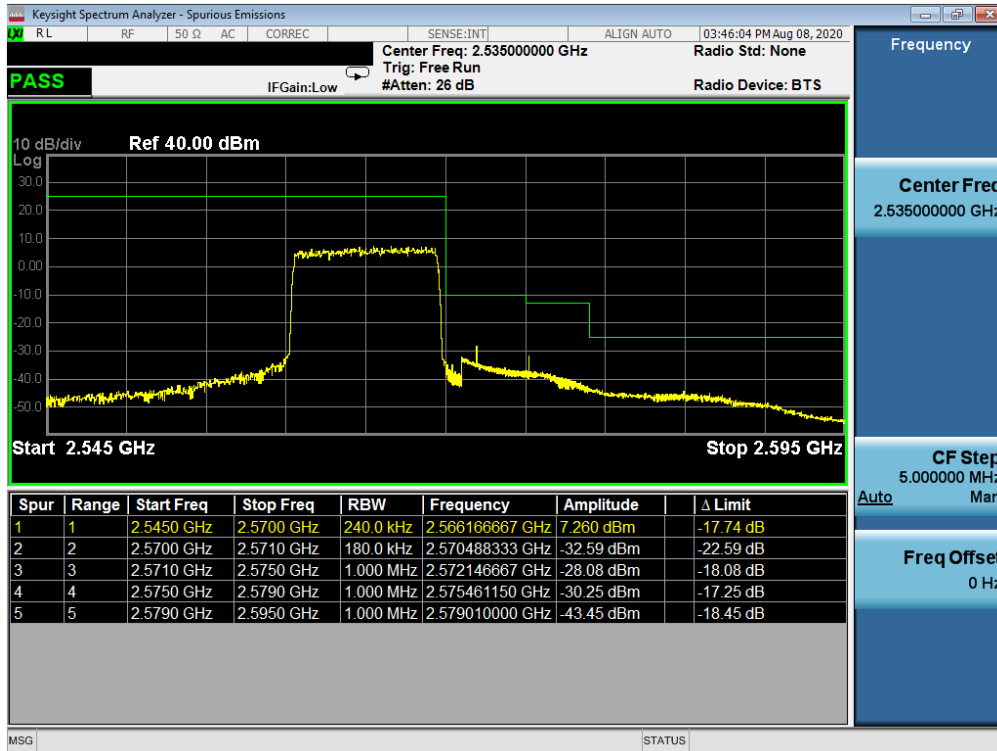


Plot 7-48. Upper ACP Plot (LTE Band 7 - 10MHz QPSK – Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset		Page 44 of 61

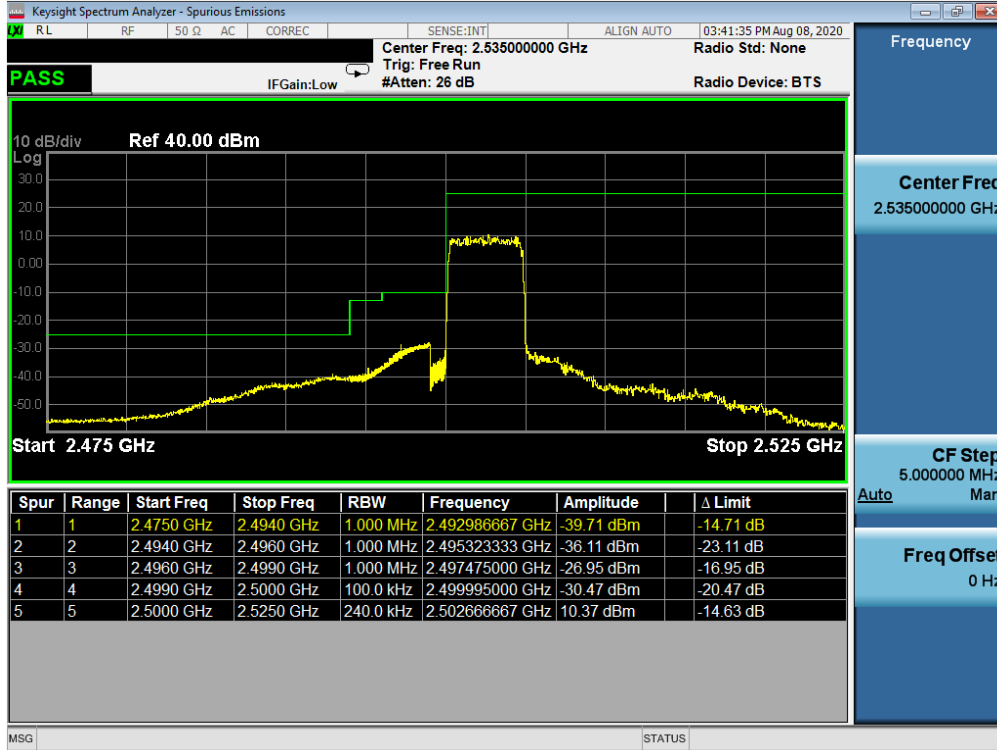


Plot 7-49. Lower ACP Plot (LTE Band 7 - 5MHz QPSK – Full RB Configuration)

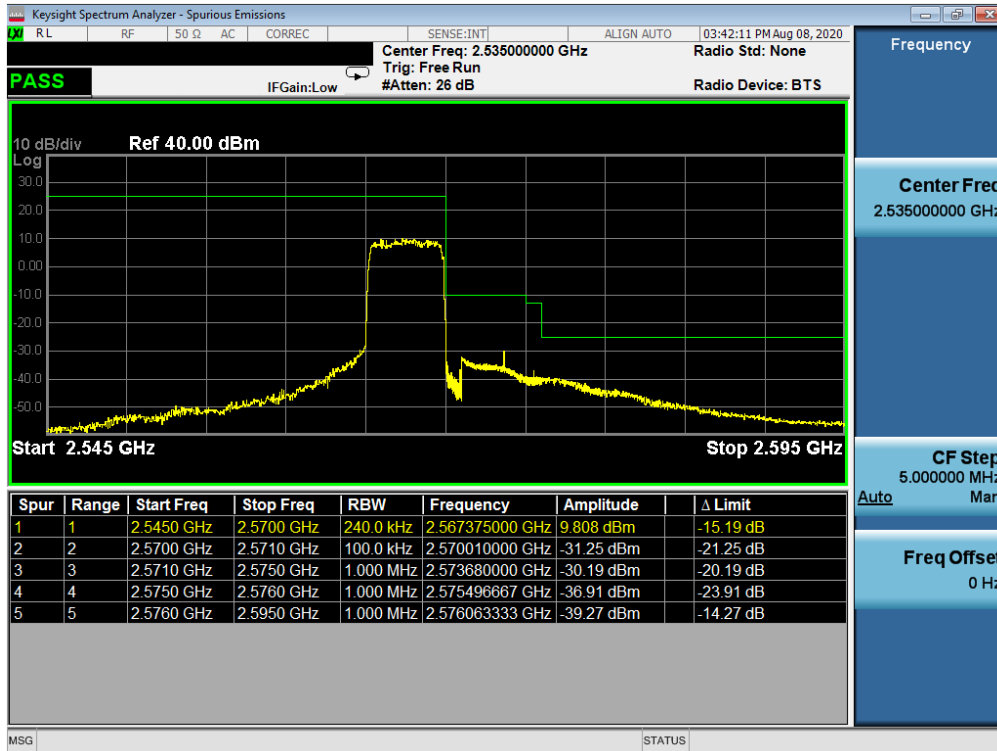


Plot 7-50. Upper ACP Plot (LTE Band 7 - 5MHz QPSK – Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset		Page 45 of 61

LTE Band 41(PC3)

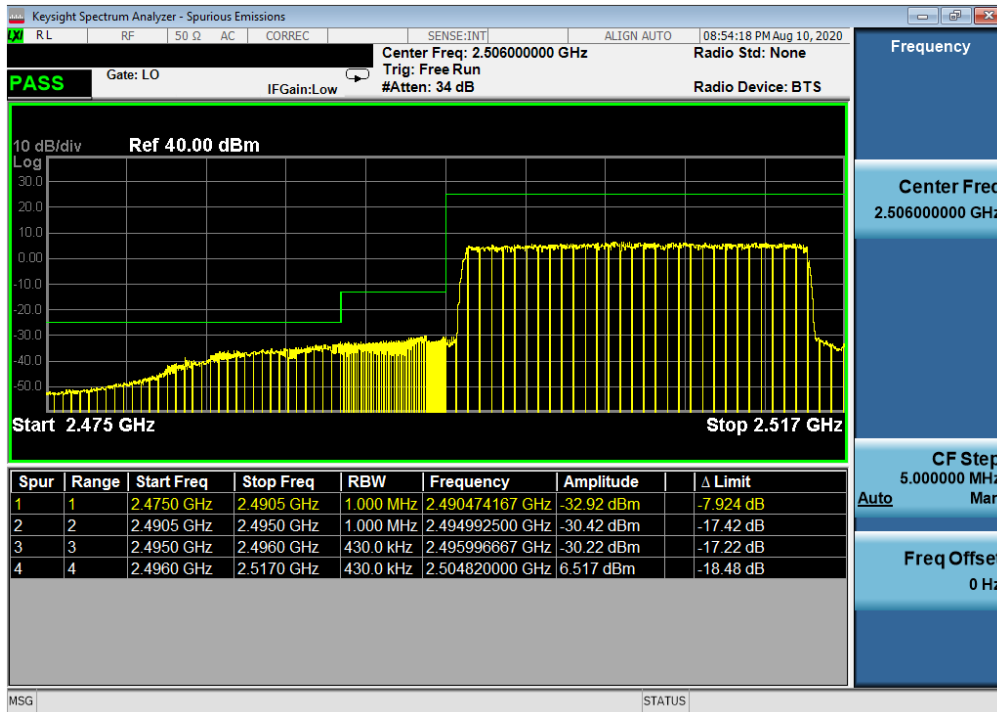

Plot 7-51. Lower ACP Plot (LTE Band 41(PC3) - 20MHz QPSK – Full RB Configuration)

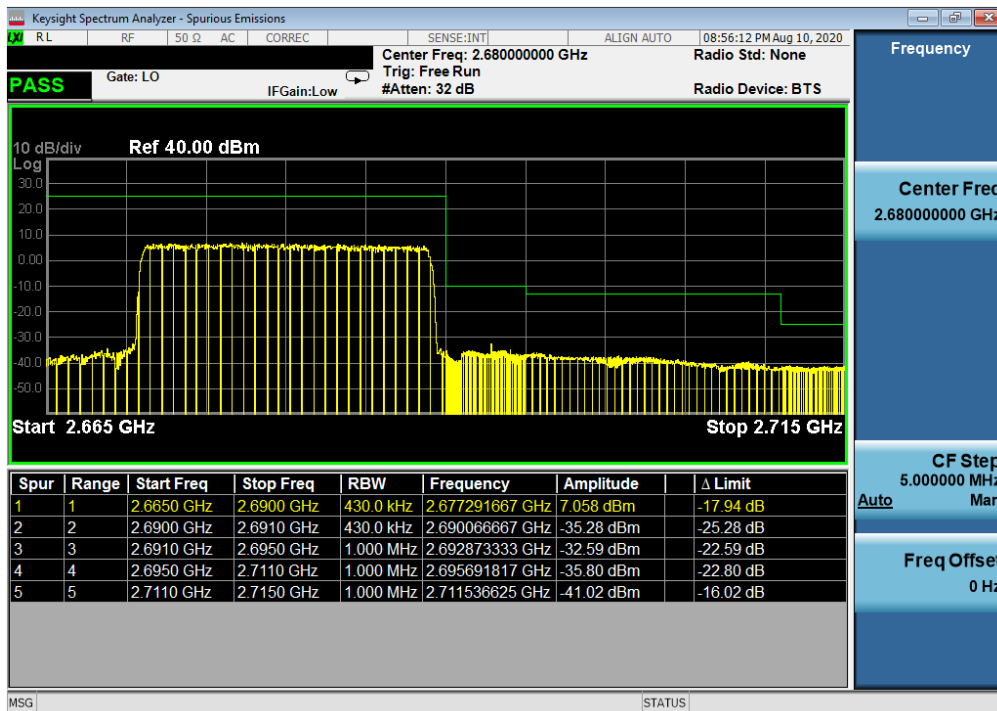


Plot 7-52. Upper ACP Plot (LTE Band 41(PC3) - 20MHz QPSK – Full RB Configuration)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28– 9/18/2020	EUT Type: Portable Handset		Page 46 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

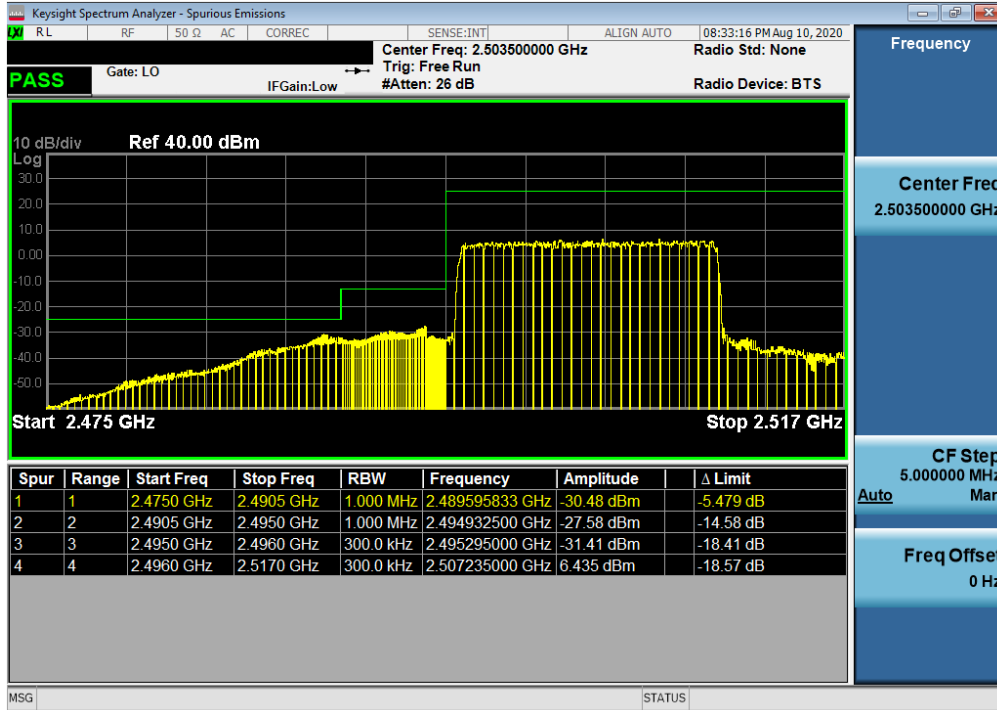


Plot 7-53. Lower ACP Plot (LTE Band 41(PC3) - 15MHz QPSK – Full RB Configuration)

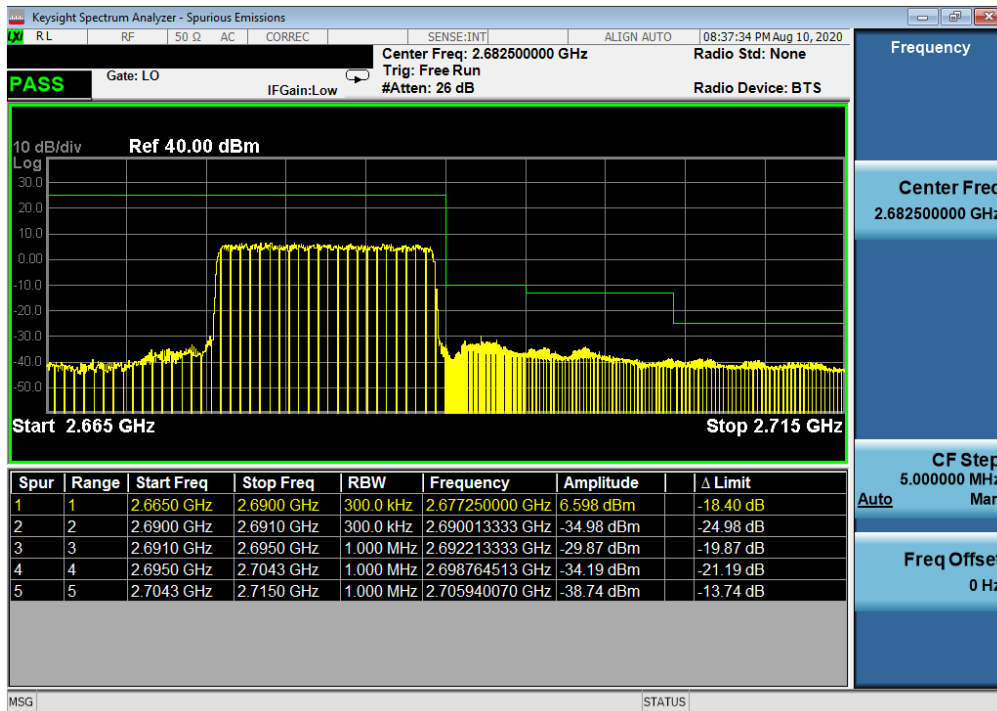


Plot 7-54. Upper ACP Plot (LTE Band 41(PC3) - 15MHz QPSK – Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset		Page 47 of 61

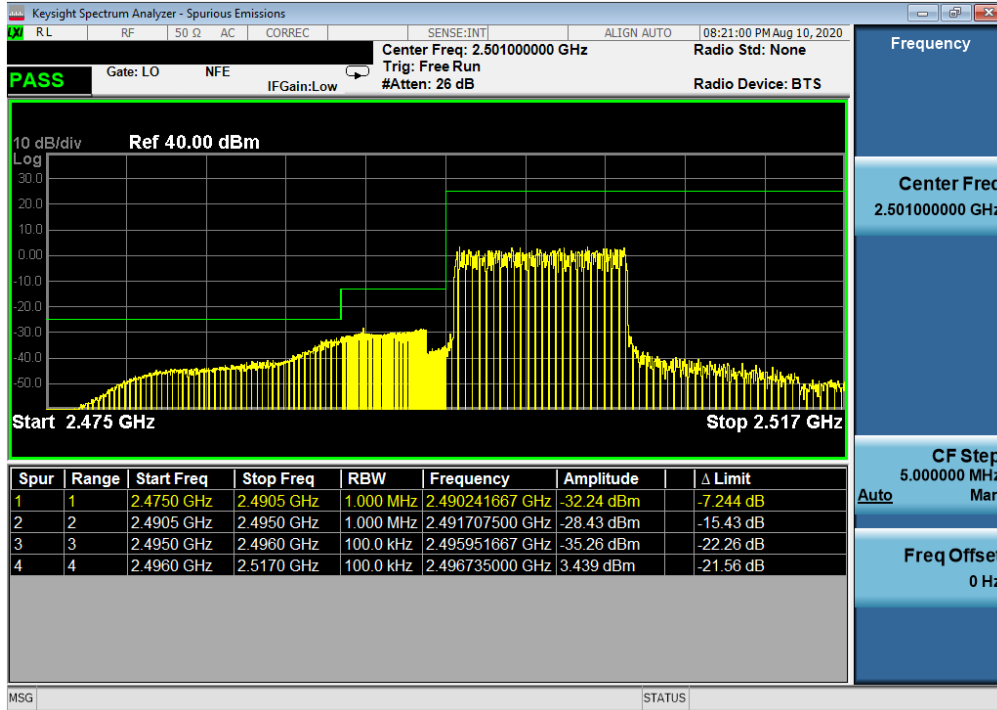

Plot 7-55. Lower ACP Plot (LTE Band 41(PC3) - 10MHz QPSK – Full RB Configuration)

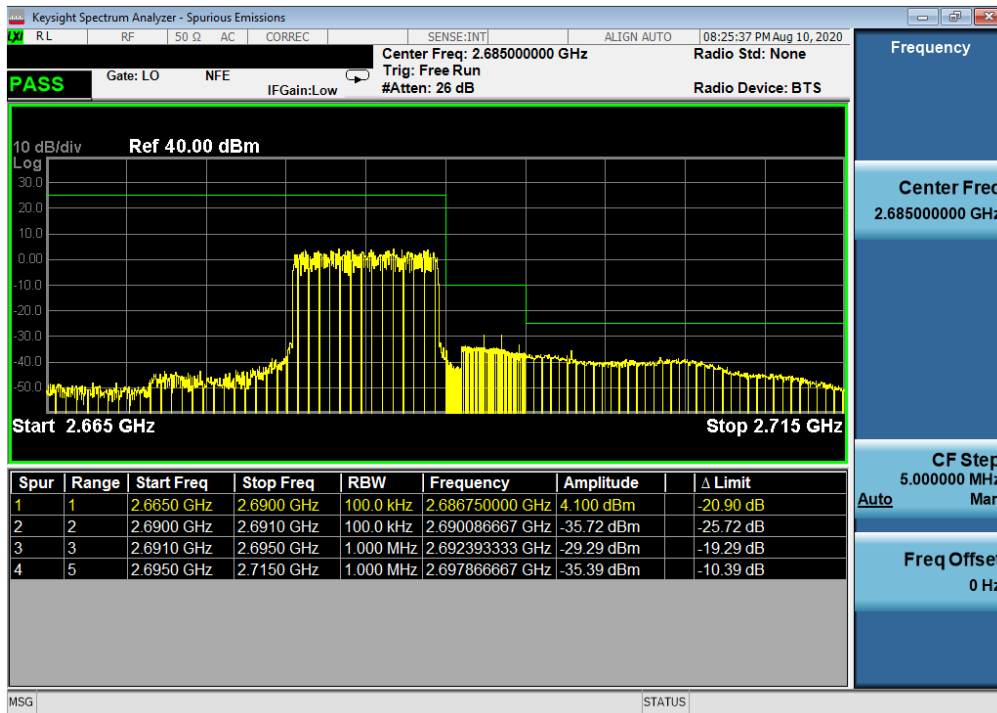


Plot 7-56. Upper ACP Plot (LTE Band 41(PC3) - 10MHz QPSK – Full RB Configuration)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset		Page 48 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

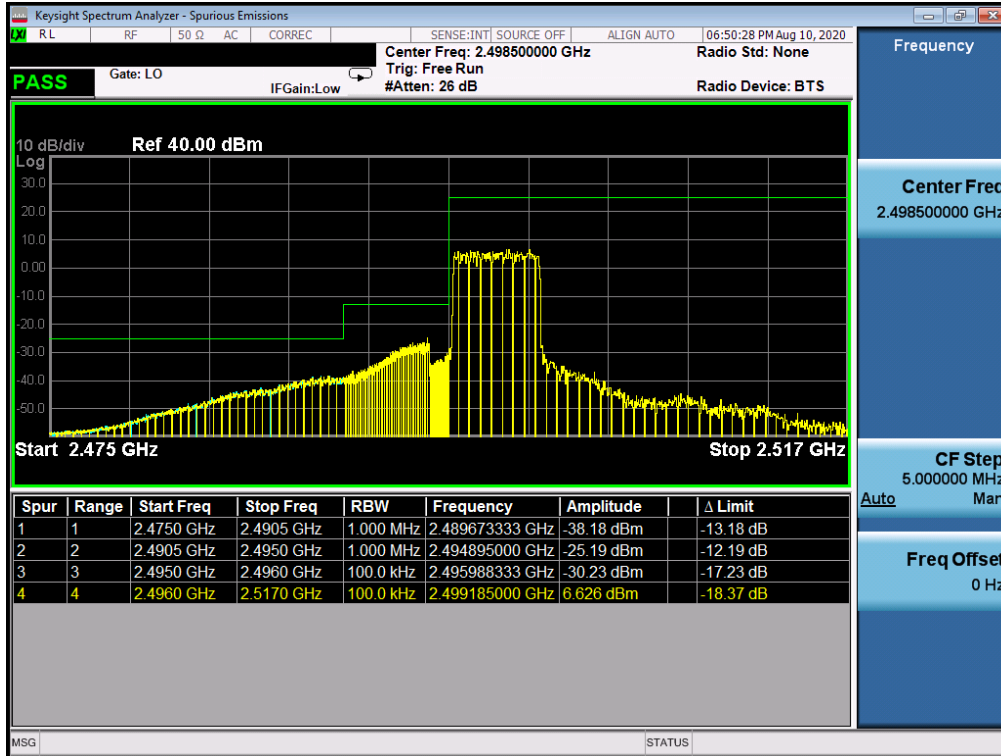

Plot 7-57. Lower ACP Plot (LTE Band 41(PC3) - 5MHz QPSK - Full RB Configuration)

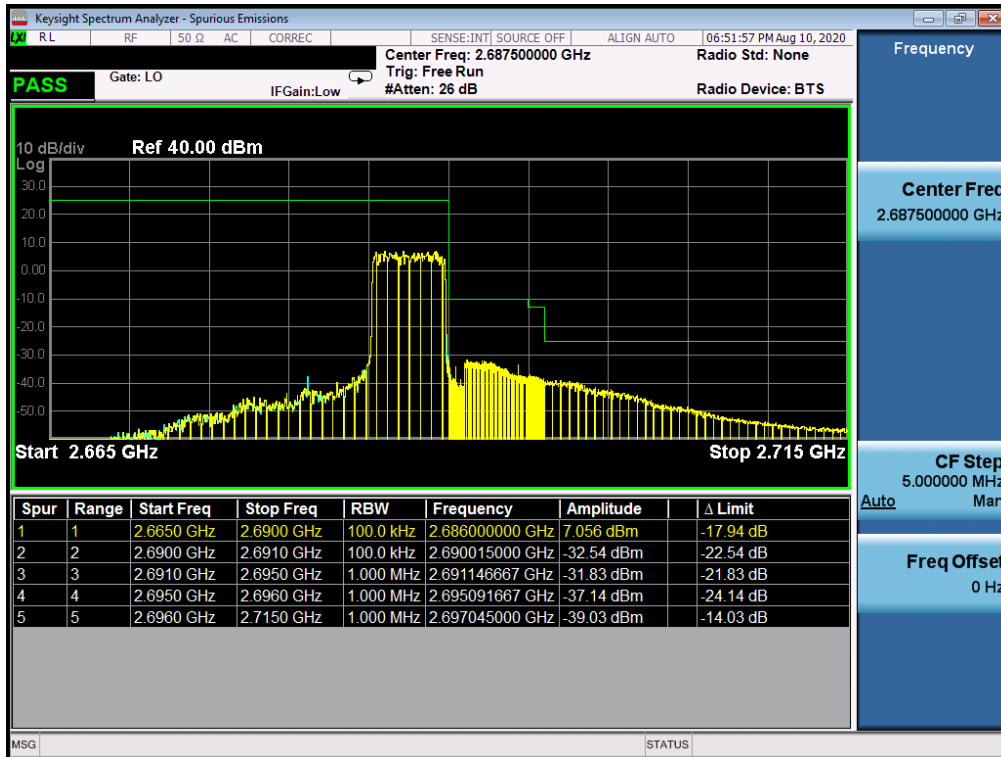

Plot 7-58. Upper ACP Plot (LTE Band 41(PC3) - 5MHz QPSK - Full RB Configuration)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 - 9/18/2020	EUT Type: Portable Handset		Page 49 of 61

7.6 Radiated Power (EIRP)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28– 9/18/2020	EUT Type: Portable Handset	Page 50 of 61	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

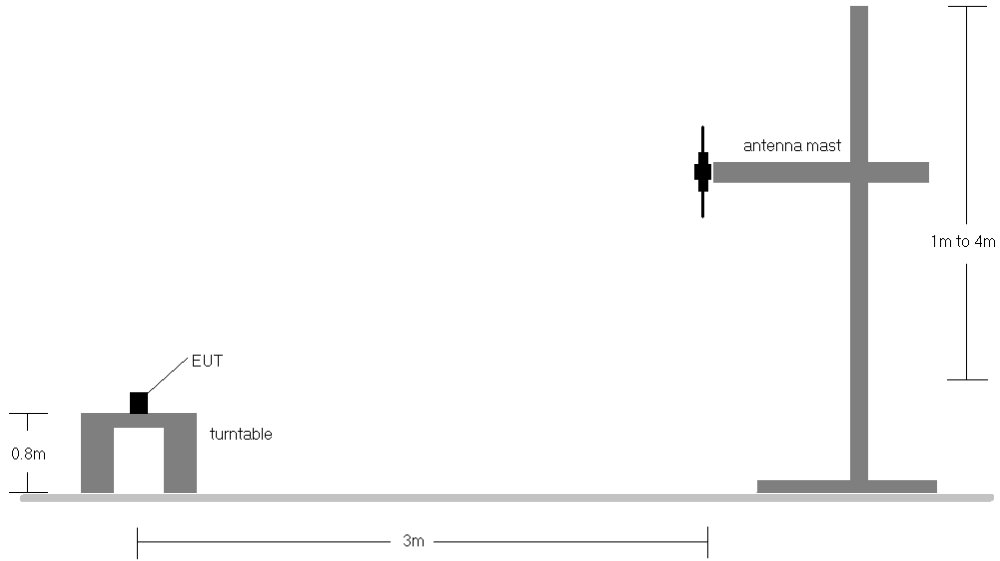


Figure 7-5. Radiated Test Setup <1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 – 9/18/2020	EUT Type: Portable Handset		Page 51 of 61

© 2020 PCTEST



All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	2510.0	V	130.0	100.0	9.42	1 / 99	4.81	14.23	0.026	33.01	-18.78
		2535.0	V	116.0	103.0	9.41	1 / 99	6.91	16.32	0.043	33.01	-16.69
		2560.0	V	104.0	85.0	9.45	1 / 99	6.70	16.15	0.041	33.01	-16.86
	16-QAM	2535.0	V	116.0	103.0	9.41	1 / 99	6.11	15.52	0.036	33.01	-17.49
64-QAM		2535.0	V	116.0	103.0	9.41	1 / 99	5.68	15.09	0.032	33.01	-17.92
15 MHz	QPSK	2507.5	V	130.0	100.0	9.42	1 / 36	4.54	13.96	0.025	33.01	-19.05
		2535.0	V	116.0	103.0	9.41	1 / 36	6.92	16.33	0.043	33.01	-16.68
		2562.5	V	104.0	85.0	9.46	1 / 74	6.41	15.87	0.039	33.01	-17.14
	16-QAM	2562.5	V	104.0	85.0	9.46	1 / 74	6.04	15.50	0.035	33.01	-17.51
	64-QAM	2535.0	V	116.0	103.0	9.41	1 / 36	5.68	15.09	0.032	33.01	-17.92
10 MHz	QPSK	2505.0	V	130.0	100.0	9.42	1 / 25	4.72	14.14	0.026	33.01	-18.87
		2535.0	V	116.0	103.0	9.41	1 / 0	7.00	16.41	0.044	33.01	-16.60
		2565.0	V	104.0	85.0	9.47	1 / 0	6.52	15.99	0.040	33.01	-17.02
	16-QAM	2565.0	V	104.0	85.0	9.47	1 / 0	6.15	15.62	0.036	33.01	-17.39
	64-QAM	2535.0	V	116.0	103.0	9.41	1 / 0	5.63	15.04	0.032	33.01	-17.97
5 MHz	QPSK	2502.5	V	130.0	100.0	9.42	1 / 24	4.72	14.14	0.026	33.01	-18.87
		2535.0	V	116.0	103.0	9.41	1 / 24	6.94	16.35	0.043	33.01	-16.66
		2567.5	V	104.0	85.0	9.48	1 / 24	6.43	15.91	0.039	33.01	-17.10
	16-QAM	2535.0	V	116.0	103.0	9.41	1 / 24	6.24	15.65	0.037	33.01	-17.36
	64-QAM	2535.0	V	116.0	103.0	9.41	1 / 24	5.72	15.13	0.033	33.01	-17.88
	Opposite Pol.	2535.0	H	104.0	7.0	9.41	1 / 99	6.57	15.98	0.040	33.01	-17.03

Table 7-59. EIRP Data (LTE Band 7)

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	2506.0	H	127.0	54.0	9.45	1 / 99	8.91	18.36	0.069	33.01	-14.65
		2593.0	H	117.0	53.0	9.58	1 / 99	9.98	19.56	0.090	33.01	-13.45
		2680.0	H	115.0	54.0	9.86	1 / 0	10.49	20.35	0.108	33.01	-12.66
	16-QAM	2680.0	H	115.0	54.0	9.86	1 / 0	10.02	19.88	0.097	33.01	-13.13
64-QAM	2680.0	H	115.0	54.0	9.86	1 / 0	8.93	18.79	0.076	33.01	-14.22	
15 MHz	QPSK	2503.5	H	127.0	54.0	9.45	1 / 36	8.92	18.37	0.069	33.01	-14.64
		2593.0	H	117.0	53.0	9.58	1 / 36	9.99	19.57	0.091	33.01	-13.44
		2682.5	H	115.0	54.0	9.86	1 / 74	10.70	20.55	0.114	33.01	-12.46
	16-QAM	2682.5	H	115.0	54.0	9.86	1 / 74	9.60	19.45	0.088	33.01	-13.56
64-QAM	2682.5	H	115.0	54.0	9.86	1 / 74	8.92	18.77	0.075	33.01	-14.24	
10 MHz	QPSK	2501.0	H	127.0	54.0	9.46	1 / 25	9.05	18.50	0.071	33.01	-14.51
		2593.0	H	117.0	53.0	9.58	1 / 0	10.30	19.88	0.097	33.01	-13.13
		2685.0	H	115.0	54.0	9.85	1 / 0	10.93	20.78	0.120	33.01	-12.23
	16-QAM	2685.0	H	115.0	54.0	9.85	1 / 0	9.84	19.69	0.093	33.01	-13.32
64-QAM	2685.0	H	115.0	54.0	9.85	1 / 0	8.89	18.74	0.075	33.01	-14.27	
5 MHz	QPSK	2498.5	H	127.0	54.0	9.46	1 / 24	8.96	18.42	0.070	33.01	-14.59
		2593.0	H	117.0	53.0	9.58	1 / 24	10.13	19.71	0.094	33.01	-13.30
		2687.5	H	115.0	54.0	9.85	1 / 24	10.84	20.68	0.117	33.01	-12.33
	16-QAM	2687.5	H	115.0	54.0	9.85	1 / 24	10.02	19.86	0.097	33.01	-13.15
	64-QAM	2687.5	H	115.0	54.0	9.85	1 / 24	9.07	18.91	0.078	33.01	-14.10
	Opposite Pol.	2680.0	V	109.0	303.0	9.86	1 / 0	8.37	18.23	0.067	33.01	-14.78

Table 7-60. EIRP Data (LTE Band 41(PC3))

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset		Page 52 of 61

7.7 Radiated Spurious Emissions Measurements

Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: PY7-57441Y	 PCTEST® Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 – 9/18/2020	EUT Type: Portable Handset	Page 53 of 61	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

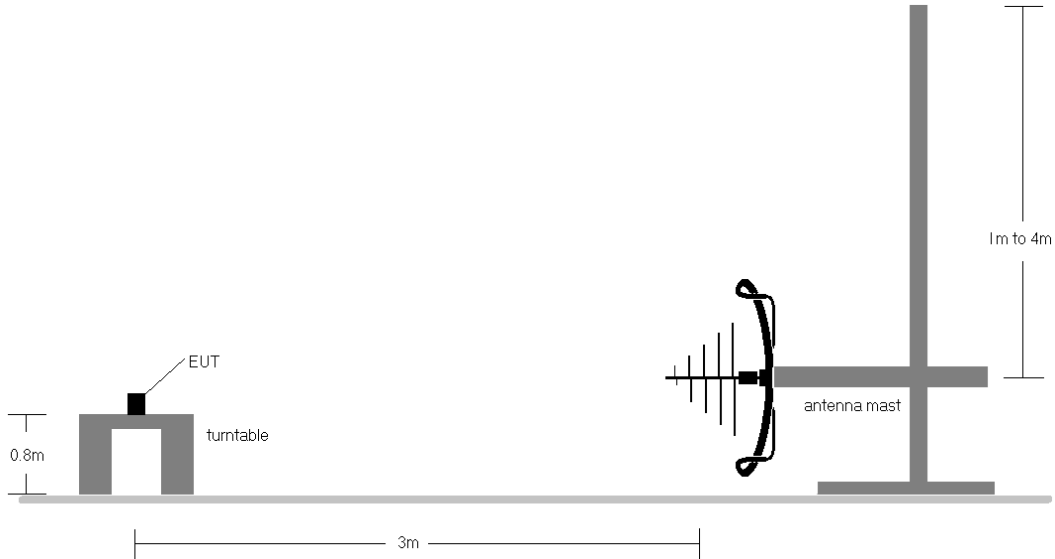


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

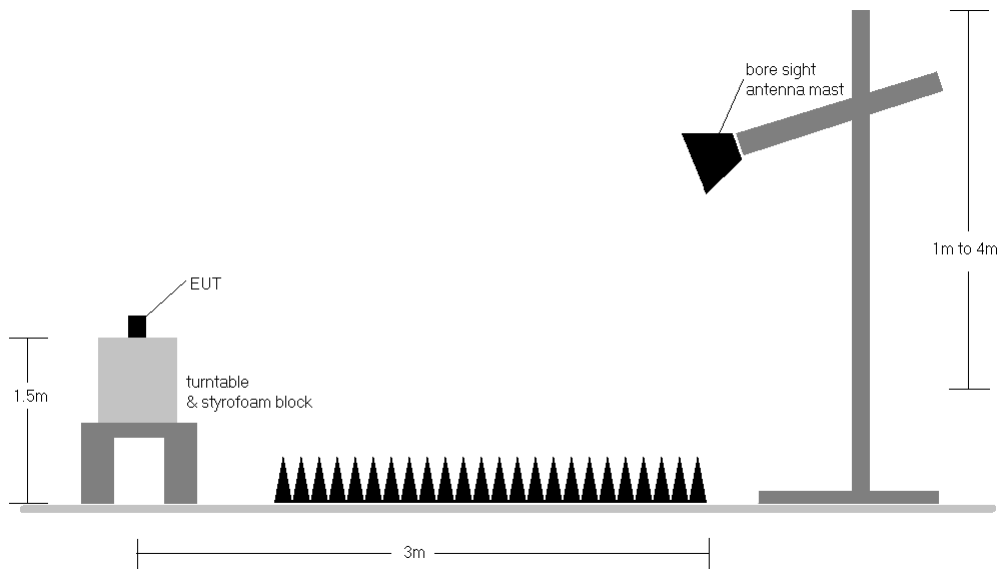


Figure 7-7. Test Instrument & Measurement Setup >1 GHz


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 – 9/18/2020	EUT Type: Portable Handset		Page 54 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - b) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - d) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 – 9/18/2020	EUT Type: Portable Handset		Page 55 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 7

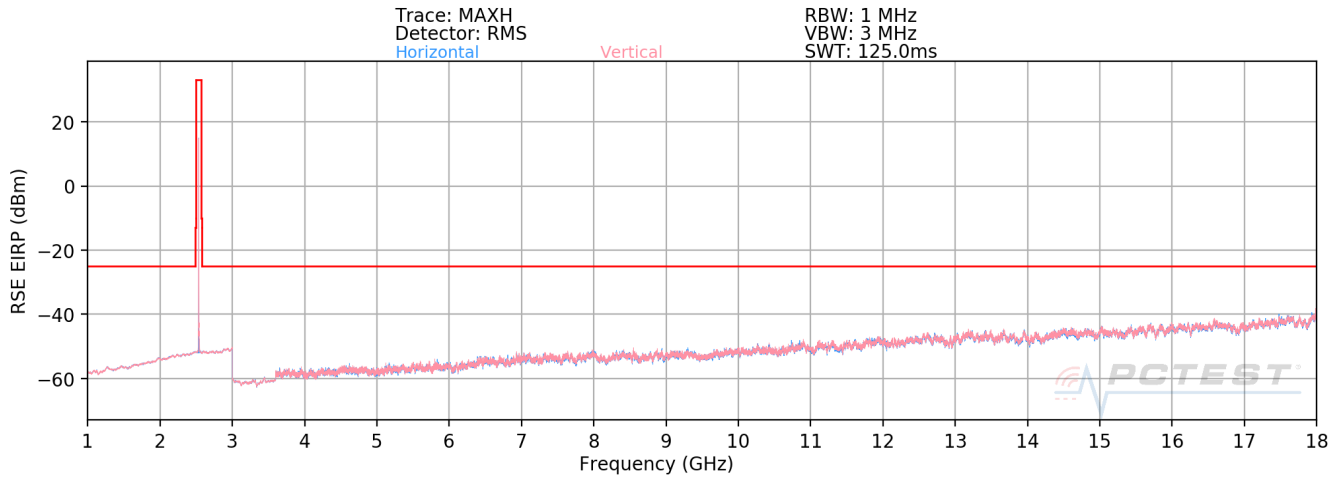

Plot 7-61. Radiated Spurious Plot (LTE Band 7)

Bandwidth (MHz):	20
Frequency (MHz):	2510.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5020.0	V	-	-	-80.16	7.21	34.05	-70.75	-25.00	-45.75
7530.0	V	-	-	-80.97	12.50	38.53	-66.27	-25.00	-41.27

Table 7-10. Radiated Spurious Data (LTE Band 7 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2535.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5070.0	V	-	-	-80.06	7.41	34.35	-70.45	-25.00	-45.45
7605.0	V	-	-	-80.41	13.19	39.78	-65.02	-25.00	-40.02

Table 7-11. Radiated Spurious Data (LTE Band 7 – Mid Channel)


Bandwidth (MHz):	20
Frequency (MHz):	2560.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5120.00	V	-	-	-79.94	7.84	34.90	-69.90	-25.00	-44.90
7680.00	V	-	-	-79.93	12.67	39.74	-65.06	-25.00	-40.06

Table 7-12. Radiated Spurious Data (LTE Band 7 – High Channel)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2-PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset	Page 56 of 61	

LTE Band 41(PC3)

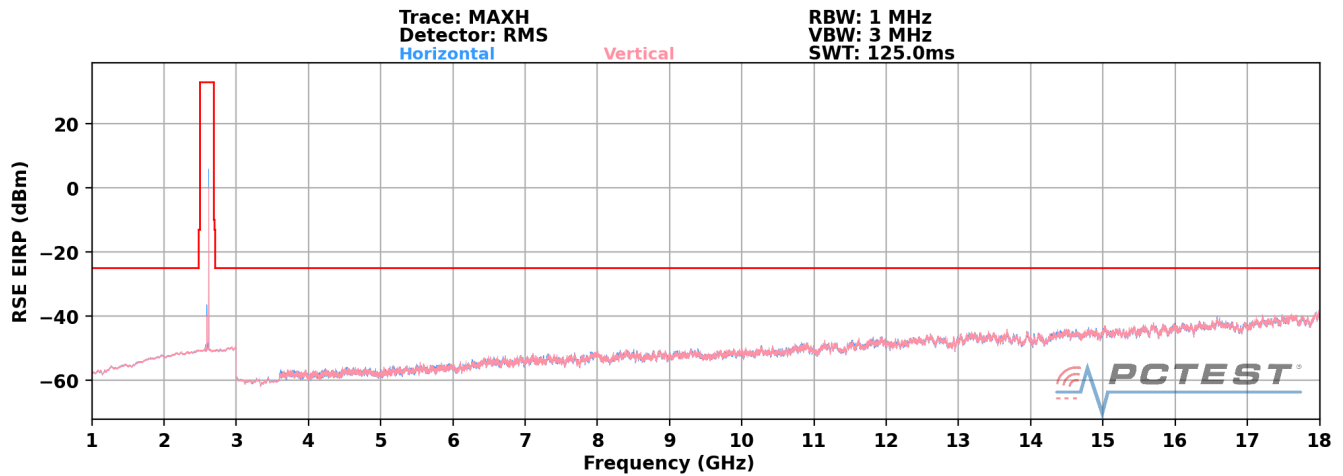

Plot 7-62. Radiated Spurious Plot (LTE Band 41(PC3))

Bandwidth (MHz):	20
Frequency (MHz):	2506.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.0	V	-	-	-71.83	7.08	42.25	-62.55	-25.00	-37.55
7518.0	V	-	-	-72.60	11.88	46.28	-58.52	-25.00	-33.52
10024.0	V	-	-	-75.36	13.64	45.28	-59.52	-25.00	-34.52

Table 7-13. Radiated Spurious Data (LTE Band 41(PC3) – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.0	V	-	-	-70.65	7.00	43.35	-61.45	-25.00	-36.45
7779.0	V	-	-	-69.77	12.23	49.46	-55.34	-25.00	-30.34
10372.0	V	-	-	-74.93	15.76	47.83	-56.97	-25.00	-31.97

Table 7-14. Radiated Spurious Data (LTE Band 41(PC3) – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2680.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.0	V	-	-	-72.25	8.24	42.99	-61.81	-25.00	-36.81
8040.0	V	-	-	-75.38	12.27	43.89	-60.91	-25.00	-35.91

Table 7-15. Radiated Spurious Data (LTE Band 41(PC3) – High Channel)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2-PY7	Test Dates: 7/28–9/18/2020	EUT Type: Portable Handset	Page 57 of 61	

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings


1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: PY7-57441Y	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28– 9/18/2020	EUT Type: Portable Handset		Page 58 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 7

LTE Band 7					
Operating Frequency (Hz):		2,535,000,000			
Ref. Voltage (VDC):		4.18			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.18	- 30	2,535,000,265	55	0.0000022
		- 20	2,534,999,917	-293	-0.0000116
		- 10	2,534,999,925	-285	-0.0000112
		0	2,534,999,619	-591	-0.0000233
		+ 10	2,534,999,774	-436	-0.0000172
		+ 20 (Ref)	2,535,000,210	0	0.0000000
		+ 30	2,534,999,811	-399	-0.0000157
		+ 40	2,534,999,886	-324	-0.0000128
Battery Endpoint	3.20	+ 20	2,535,000,156	-54	-0.0000021

Table 7-9. LTE Band 7 Frequency Stability Data

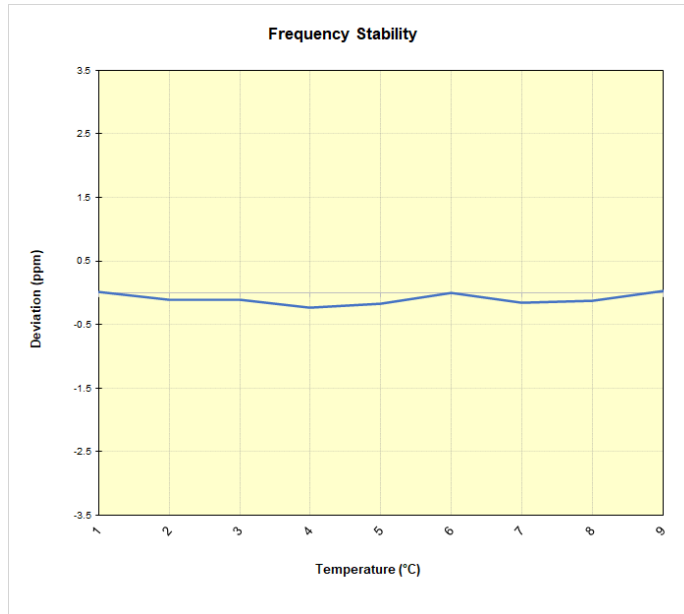


Table 7-9. LTE Band 7 Frequency Stability Chart

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28-9/18/2020	EUT Type: Portable Handset	Page 59 of 61	

LTE Band 41

LTE Band 41					
Operating Frequency (Hz):		2,593,000,000			
Ref. Voltage (VDC):		4.18			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.18	- 30	2,592,999,802	-370	-0.0000143
		- 20	2,593,000,010	-162	-0.0000062
		- 10	2,593,000,298	126	0.0000049
		0	2,592,999,782	-390	-0.0000150
		+ 10	2,592,999,857	-315	-0.0000121
		+ 20 (Ref)	2,593,000,172	0	0.0000000
		+ 30	2,592,999,777	-395	-0.0000152
		+ 40	2,592,999,963	-209	-0.0000081
Battery Endpoint	3.20	+ 20	2,593,000,083	-89	-0.0000034

Table 7-9. LTE Band 41 Frequency Stability Data

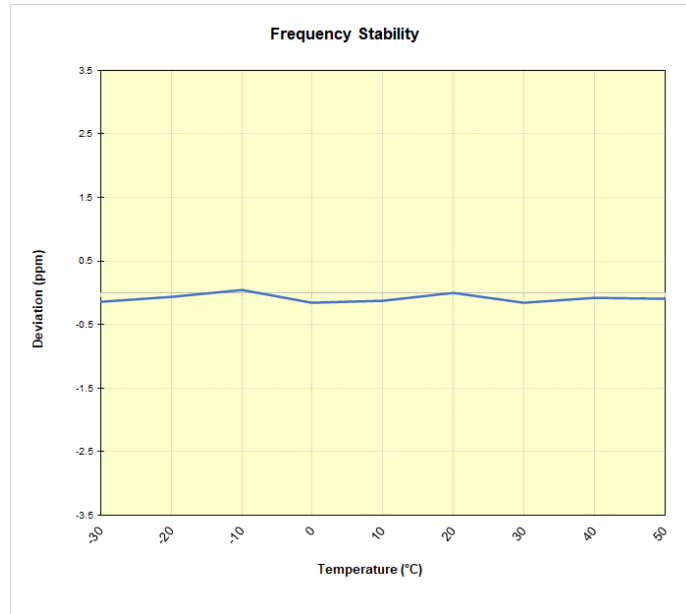




Table 7-9. LTE Band 41 Frequency Stability Chart

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28- 9/18/2020	EUT Type: Portable Handset	Page 60 of 61	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **SONY Portable Handset FCC ID: PY7-57441Y** complies with all the requirements of Part 27 of the FCC rules.

FCC ID: PY7-57441Y	 PART 27 MEASUREMENT REPORT 		Approved by: Quality Manager
Test Report S/N: 1M2007070106-16-R2.PY7	Test Dates: 7/28 – 9/18/2020	EUT Type: Portable Handset	Page 61 of 61

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.